


PRECURSOR SSF UTILIZATION: THE MODE EXPERIMENTS

Presented by Edward Crawley
Space Engineering Research Center
Massachusetts Institute of Technology

ABSTRACT

The MIT Space Engineering Research Center is the principal investigator for a series of experiments which utilize the Shuttle Middeck as an engineering dynamics laboratory. The first, which flew on STS-48 in September 1991, was the Middeck O-gravity Dynamics Experiment (MODE). This experiment focused on the dynamics of a scaled deployable truss, similar to that of SSF, and of contained liquids in tanks. MODE will be reflown in the fall of 1993. In mid-1994, the Middeck Active Control Experiment (MACE) will examine the issues associated with predicting and verifying the closed loop behavior of a controlled structure in zero gravity. The paper will present experiment background, planning, operational experience, results and lessons learned from these experiments which are pertinent to SSF utilization.



MIT
Space
Engineering
Research
Center

PRECURSOR SSF UTILIZATION: THE MODE/MACE EXPERIMENTS

Edward F. Crawley
Director, MIT SERC
August 5, 1992

MIT Space Engineering Research Center


APPROACH

- Experimental background and philosophy
- MODE STA experience
- MODE FTA experience
- MACE planning
- Lessons learned

PRECEDING PAGE BLANK NOT FILMED

MIT Space Engineering Research Center


THE MODE FAMILY OF EXPERIMENTS

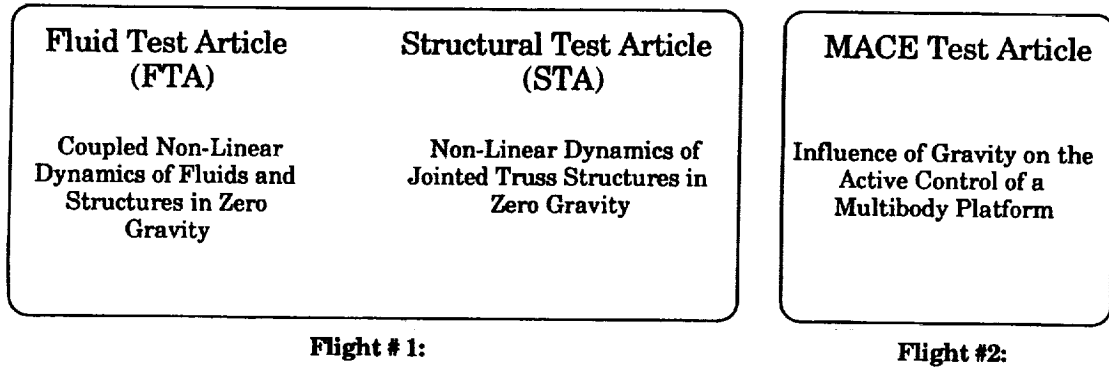

EXPERIMENTAL PHILOSOPHY

- Use the shuttle/station for engineering research (as opposed to demonstration or verification)
- Investigate (dynamics) phenomena which are influenced by gravity
- Use the Middeck Laboratory Module as a shirt sleeve lab environment with heavy reliance on crew interaction
- Use scaling laws to build model which capture the essential physics of the problem and yield results of practical value, at modest size and cost

THE MIDDECK 0-GRAVITY DYNAMICS EXPERIMENT (MODE)

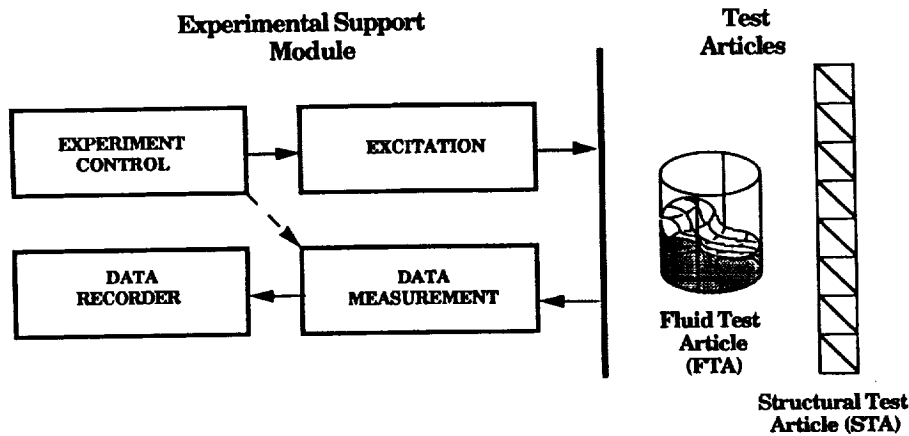


MODE provides a reusable dynamics test facility which will be used on the first flight to test two rather different types of test articles.

STA OBJECTIVES, REQUIREMENTS & APPROACH

- Engineering science objectives are to characterize the fundamental changes in dynamics in 0-g due to absence of gravity on joints, to quantify the changes due to the absence of suspension and gravity load on members, and to obtain quantitative data for correlation with numerical models.
- Requirements
 - Truss structure containing elements of future space structures.
 - Nonlinear joints with variable pre-load to test nonlinear behavior in several gravity/joint pre-load conditions.
 - Reconfigurable truss with deployable and erectable bays.
- Modelling approach
 - Develop global linear model using FEM and modal test data.
 - Develop Force-State Map of non-linear sub-components.
 - Develop describing functions from Force-State Map.
 - Insert describing functions into global model and solve for forced response using Harmonic Balance Method.
 - Verify predictions with MODE flight and ground test results.


COMPARISON OF GROUND TO ORBITAL DATA FOR THE BASELINE CONFIGURATION

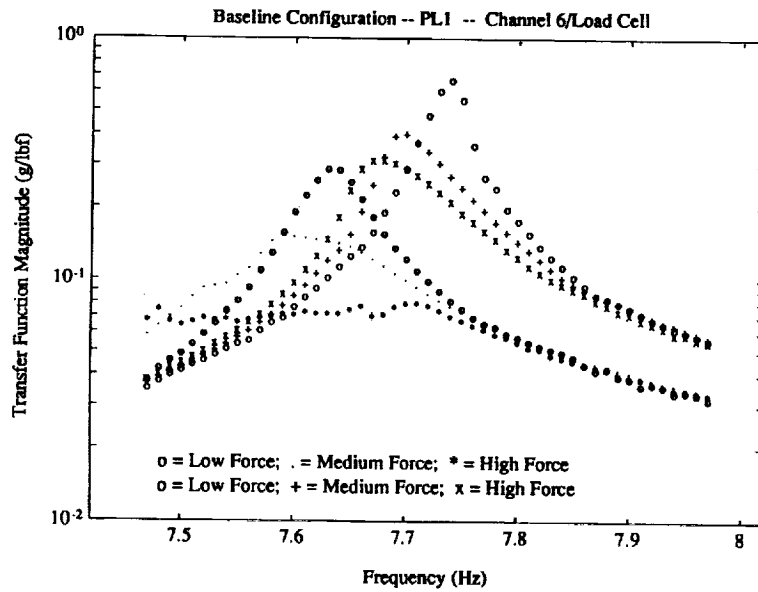

NOTE: Torsion Mode Only. High Pre-Load.

Space Engineering Research Center 10

TORSION MODE ALPHA LOOSE

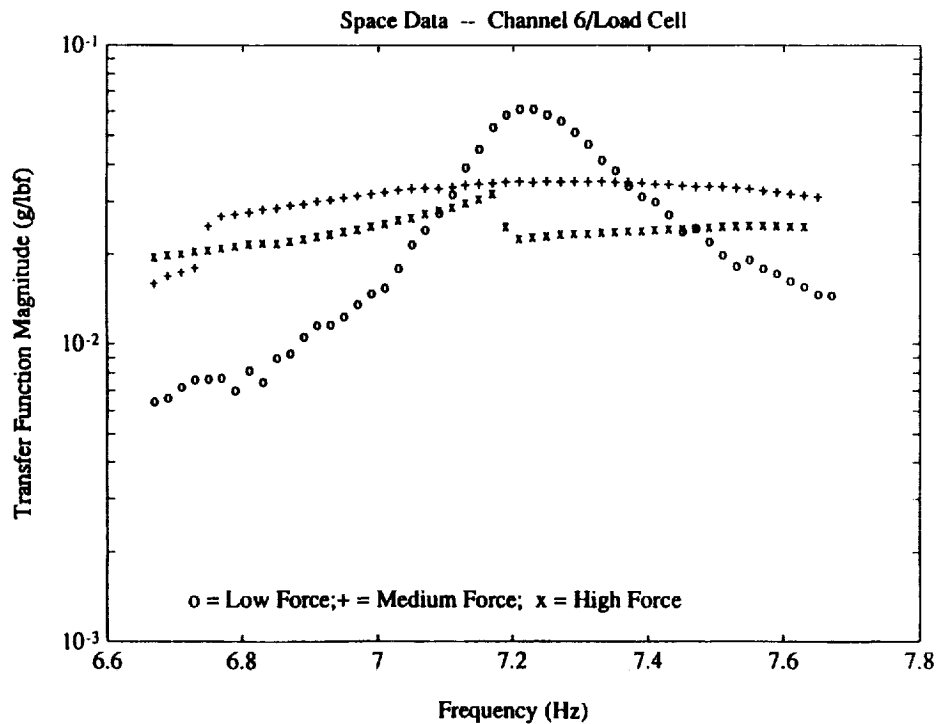

CONCLUSIONS OF ORBITAL TESTING


- Variation measured for erectable, deployable and articulated hardware as a function of force amplitude, joint preload and gravity loading
- Nonlinearities of the STA are more apparent in 0-gravity, especially the alpha loose, which loses resonant behavior
- Modes generally soften with increasing force, but increase in damping is significantly more pronounced
- Changes in frequency between earth and space are generally within the variance of ground testing for the baseline, but outside the variance for the alpha and L configurations.
- Changes in damping are well outside the variance of ground testing

Space Engineering Research Center

FTA OBJECTIVES, REQUIREMENTS AND APPROACH

- Engineering science objective is to characterize fundamental 0-g slosh behavior and obtain quantitative data on slosh force and spacecraft response for correlation of numerical model.
- Requirements
 - Scaled tank
 - Properly modelled fluid
 - Simulation of coupled spacecraft mode
 - Harmonic excitation
 - Measurement of slosh force
- Modelling approach
 - Find fluid flow potential and free surface motion solutions.
 - Express kinetic and potential energies in terms of generalized coordinates.
 - Derive governing differential equations by applying Lagrange's Principle.
 - Solve nonlinear equations subject to harmonic excitation.
 - Verify predictions with MODE flight and ground test results.


SPACE RESULTS

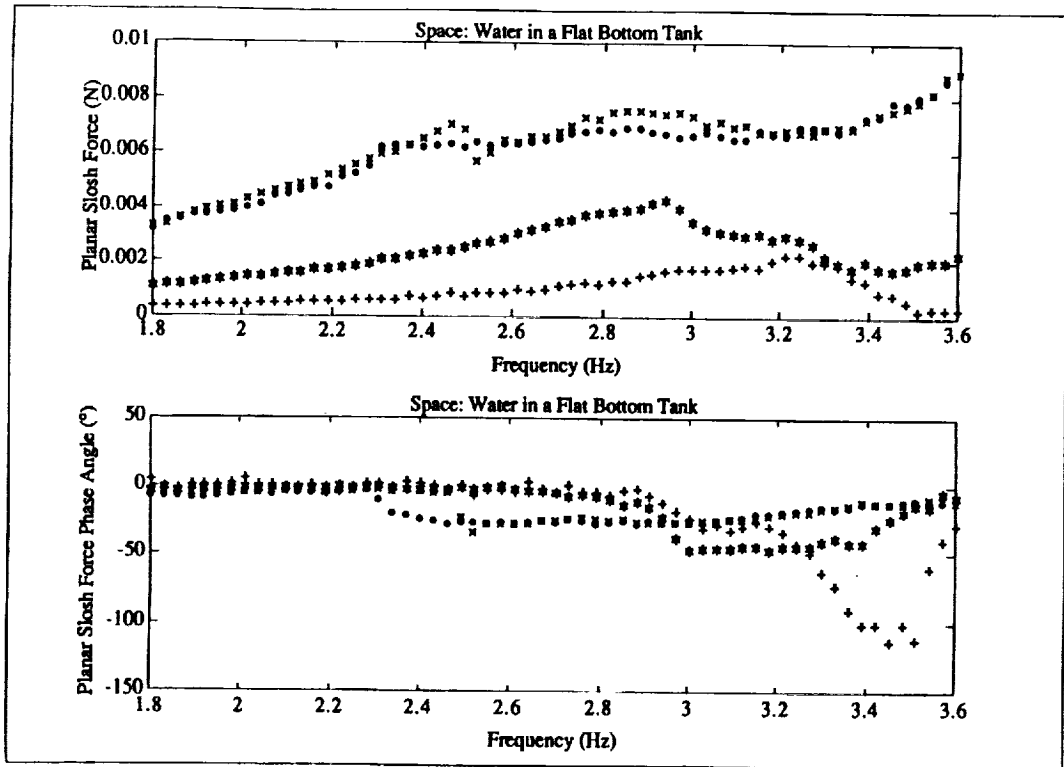

Uncoupled Test with Distilled Water as Test Fluid in a 3.1 cm Flat Bottom Cylindrical Tank .
Planar Slosh Force.

16

Space Engineering Research Center

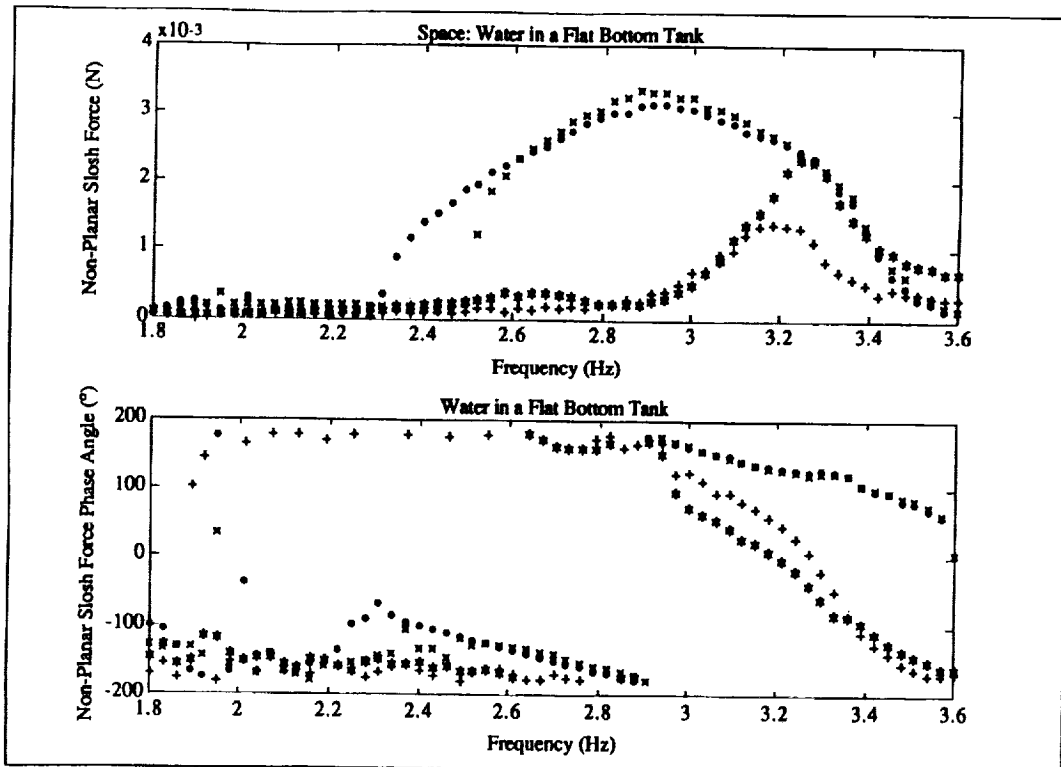

Uncoupled Test with Distilled Water as Test Fluid in a 3.1 cm Flat Bottom Cylindrical Tank .
Non-planar Slosh Force.

10

Space Engineering Research Center

SUMMARY AND CONCLUSIONS

Space Experiments:

- More benign nonlinear behavior in space than observed on earth
- Modal damping ratios and frequencies significantly different from earth tests
- Demonstrated the ability to investigate fluid slosh in micro-gravity

Analytical Model

- Model more accurate for one-gravity conditions
- Nonlinear solution required that can find "all" the solutions
- Accurate prediction of slosh damping ratios a pre-requisite for an accurate prediction

Future

- Improve nonlinear solution technique
- More space experiments required to investigate effects of contact angle hysteresis, contact angles and dissipation rates.

MODE RESOURCE SUMMARY

Mode pushed the current Middeck capabilities:

- 115 Watts
- 3 1/2 lockers
- 60 lbs in a single locker
- 16 hours of on orbit testing
- about 25% of Middeck volume during STA testing

MACE SCIENCE OBJECTIVE


To develop a well verified set of Control Structure Interaction - Controlled Structures Technology (CSI/CST) methods and approaches that will allow designers of future CST spacecraft, which cannot be dynamically tested on the ground in a sufficiently realistic zero-gravity simulation, to have confidence in the eventual orbital performance of such spacecraft.

MIT Space Engineering Research Center

THE MACE APPROACH


- Select a test article of interest to NASA, which has near-term mission relevancy, is CSI challenging, and is sensitive to gravity perturbations.
- Dynamically scale the test article to fit in middeck in order to integrate at low cost.
- Become a pathfinder for CSI Qualification scenario:
 - Develop analytical models to incorporate the predicted gravity effects. This will lead to development of analytical CSI tools for use by future spacecraft.
 - Perform an extensive ground test program using state-of-the-art suspension systems to identify ground test limitations.
 - Perform a flight test with controllers derived from ground testing/modeling as well as from on-orbit testing.
- Transfer technology to the government/industrial sector
- Educate the next generation of engineers with a challenging, scientifically relevant project.

THE MIDDECK ACTIVE CONTROL EXPERIMENT (MACE)

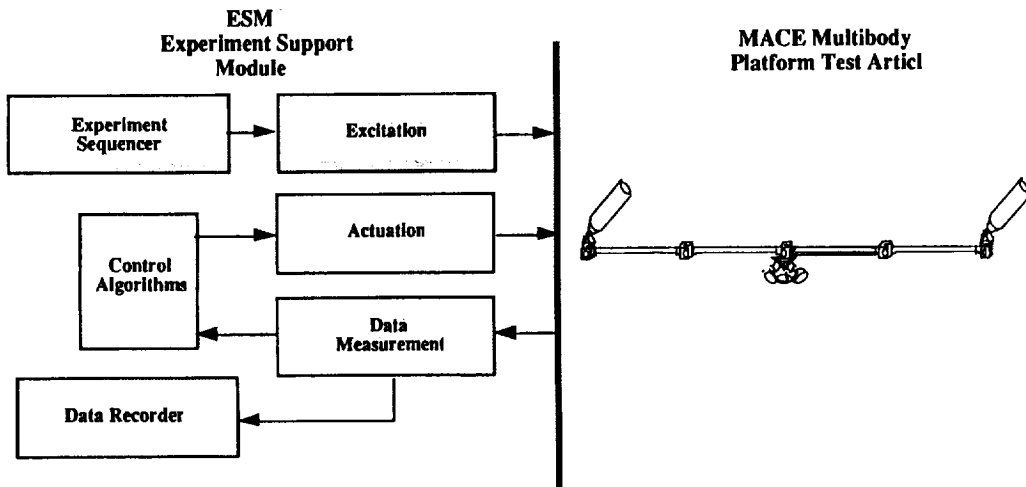

- Substantial commonality of ESM hardware/software
- Significant savings in integration/certification process.

MULTIBODY PLATFORM - CONFIGURATION #1

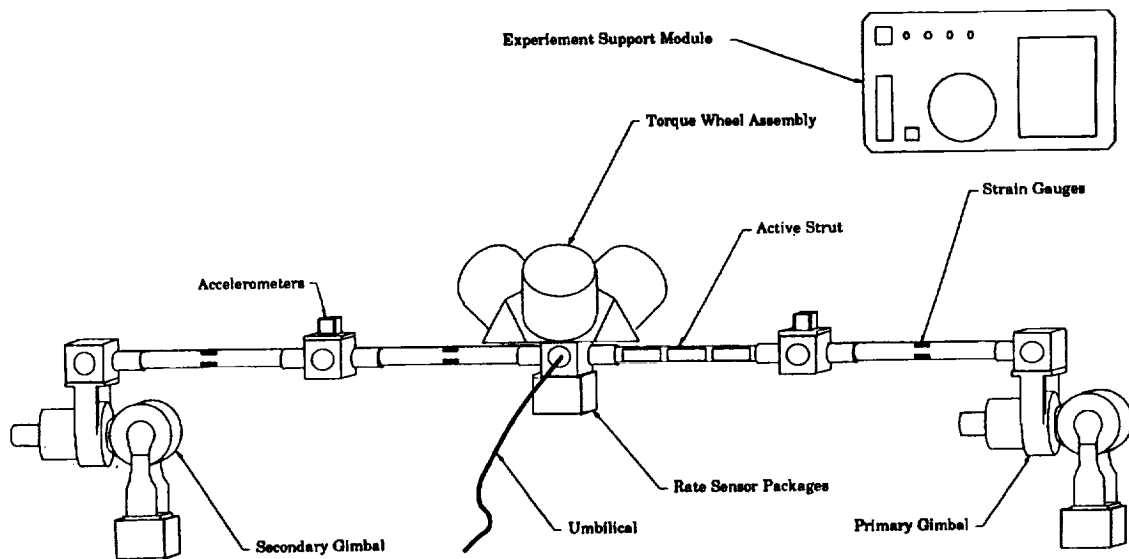

ON-ORBIT OPERATIONS SUMMARY

- Operations require one crew member for three eight-hour days.
- First day operations include:
 - test article assembly and electronics check-out;
 - open-loop system identification;
 - implementation of pre-programmed control protocols;
 - system ID data reduction in preparation for downlink;
 - downlink of system identification data;
 - disassembly and storage of hardware.
- Second day operations include:
 - test article assembly and electronics check-out;
 - implementation of pre-programmed control protocols;
 - disassembly and storage of hardware.
- Third day operations include:
 - test article assembly and electronics check-out;
 - uplink of system identification data-based controllers;
 - implementation of uplinked control protocols;
 - disassembly and storage of hardware.

MIT Space Engineering Research Center

RESOURCE SUMMARY

RESOURCE	ACTUAL	TARGET	SSP LIMIT
Power	470 Watts	600 Watts	1000 Watts
Mass			
ESM	57.3 lbs	59.0 lbs	68 lbs
Test Article	86 lbs	100 lbs	162 lbs
Volume			
Stowed	4 lockers	5 lockers	negotiable
Operational	70 ft ³	70 ft ³	negotiable
Operations			
Crew Members	1	1	negotiable
Crew Time	3x8 hr days	3x8 hr days	negotiable
Crew Training	?	28 days	negotiable
Uplink (modem)	1 hr.	1 hr.	negotiable
Downlink (Ku band)	4 mins.	8 mins.	negotiable
Downlink (modem)	2 hrs.	2 hrs.	negotiable

MODE/MACE LESSONS LEARNED

- Low cost experiments happen
- Integration is an art, not a science
- PI should be responsible for payload mission success, ?
intergrating center
- Crew can be vesitile contributor, if well prepared
- Investigator team must be prepared for mission operations, and
their limitations
- Hardware shortcuts are penny-wise and pound foolish
- Scaling laws can be exploited to do small/low cost research
experiments
- Flight experiments are fun, but take a significant fraction of a
career

MIT Space Engineering Research Center

