

- Abstract -

**Workshop for Computational Fluid Dynamic Applications
in Rocket Propulsion**

511-34
1995117003
43786
p- 19

**Three-Dimensional Navier-Stokes Analysis and Redesign of an
Imbedded Bellmouth Nozzle in a Turbine Cascade Inlet Section**

P. W. Giel,
J. R. Sirbaugh

Sverdrup Technology, Inc.
NASA LeRC Group
2001 Aerospace Parkway
Brook Park, OH 44142

(216) 826-6686

Verification of proposed turbopump blading performance will involve evaluation of candidate blades in cascade test facilities. It is necessary to be able to predict the flow fields within these cascades for the results to be applicable to actual engine environments. This work presents the results of a study to predict the flow field for the NASA Lewis Transonic Turbine Blade Cascade Facility, which is similar to those used to evaluate rocket propulsion turbines. A pitchwise non-uniform total pressure distribution was observed at the blade row leading edge plane. A CFD analysis was used to show that the cause of the flow non-uniformity was a pair of vortices that originated in an embedded bellmouth inlet. Further CFD analysis was used to verify that a redesigned inlet section resulted in a flow with acceptable uniformity.

A computational analysis was chosen because physical accessibility to the inlet section was limited, and because a computational approach also allows one to examine design changes cheaper and more quickly than an experimental approach would. The PARC code, a general purpose, three-dimensional, Navier-Stokes code with multi-block solution capability, was chosen for the present study. Results are presented detailing the computational requirements needed to accurately predict flows of this nature.

Calculations of the original geometry showed total pressure loss regions consistent in strength and in location to experimental measurements. An examination of the results shows that the distortions are caused by a pair of vortices that originate as a result of the interaction of the flow with the imbedded bellmouth. Computations were performed for an inlet geometry which eliminated the imbedded bellmouth by bridging the region between it and the upstream wall. This analysis indicated that eliminating the imbedded bellmouth eliminates the troublesome pair of vortices, resulting in a flow with much greater pitchwise uniformity.

Transonic Turbine Blade Cascade Inlet Analysis



Three-Dimensional Navier-Stokes Analysis and Redesign of an Imbedded Bellmouth Nozzle in a Turbine Cascade Inlet Section

Paul Giel,

**Sverdrup Technology, Inc.
NASA LeRC Group**

Jim Sirbaugh,

U.S. Army Aviation Systems Command

Isaac Lopez,

Jim Van Fossen NASA Lewis Research Center

April 1993


Transonic Turbine Blade Cascade Inlet Analysis – Outline of Presentation



- **Motivation and objectives**
- **Computational methods and models**
 - **geometry and grids**
 - **boundary conditions**
 - **computational time and convergence**
- **Results of computations**
- **Proposed geometry modifications**
- **Ongoing and future work**
 - **8:1 upstream contraction section**
 - **off-design incidence case**




Transonic Turbine Blade Cascade Inlet Analysis - Overall View of Cascade Inlet Section

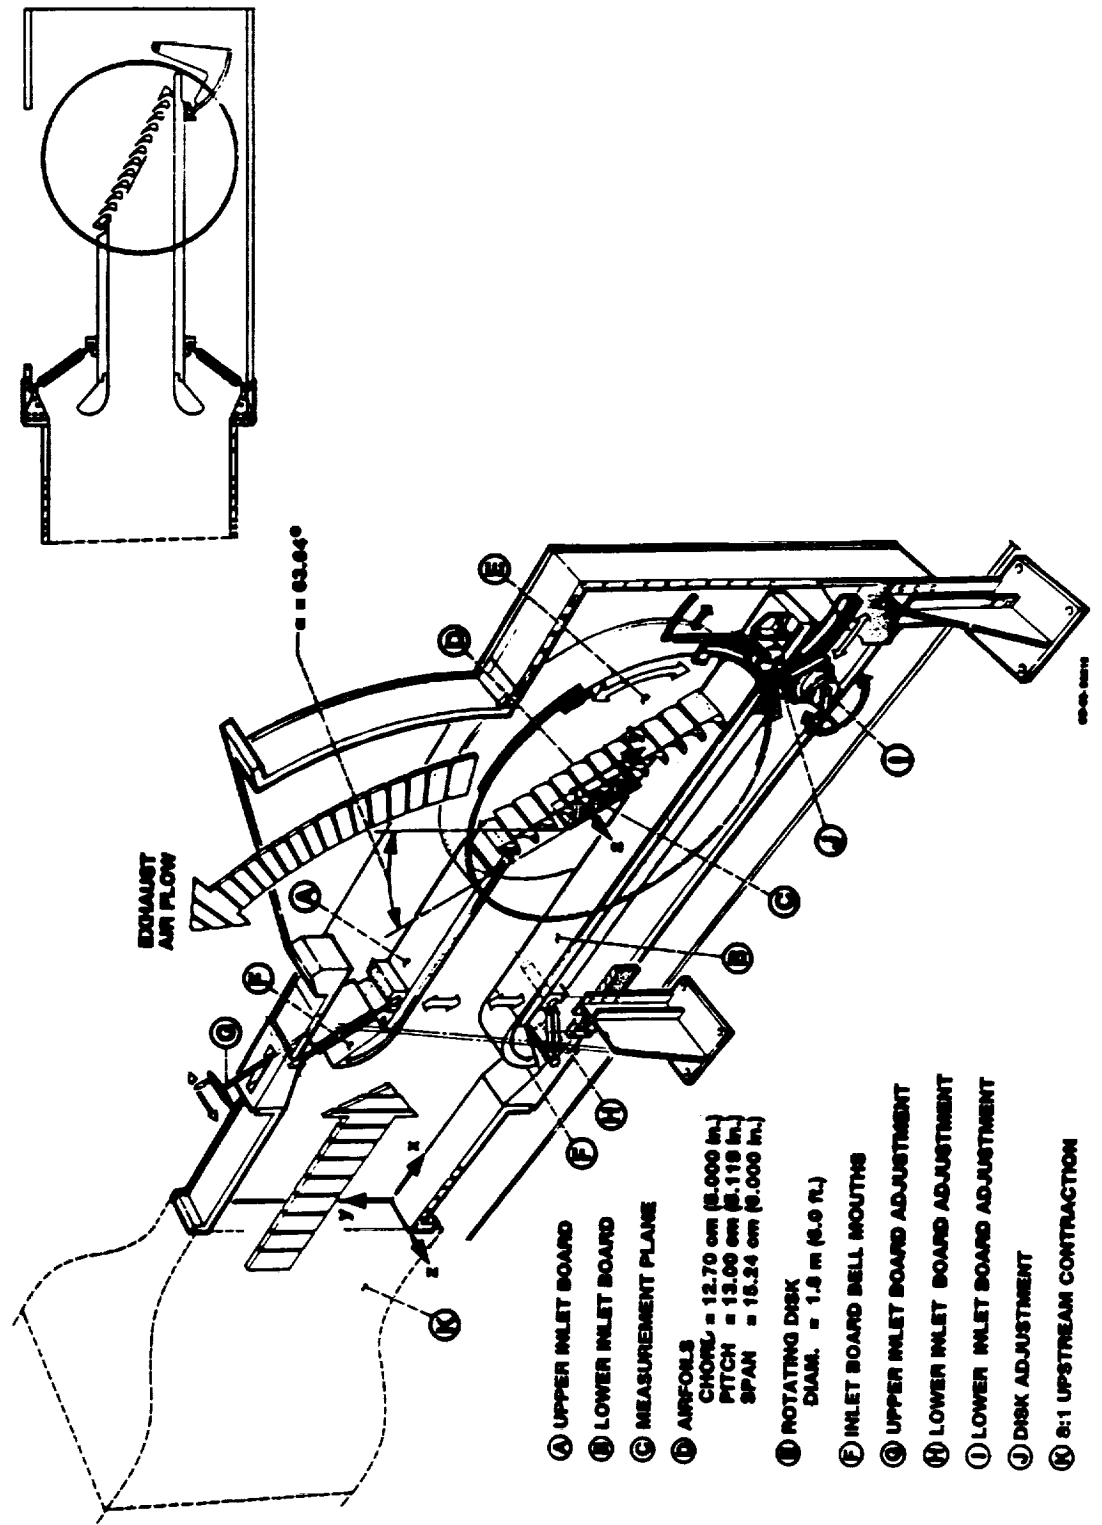




Transonic Turbine Blade Cascade Inlet Analysis - Preliminary Experimental Measurements

Total Pressure Coefficient, $\frac{P' - P_{in}}{P_{in} - P_{in}}$

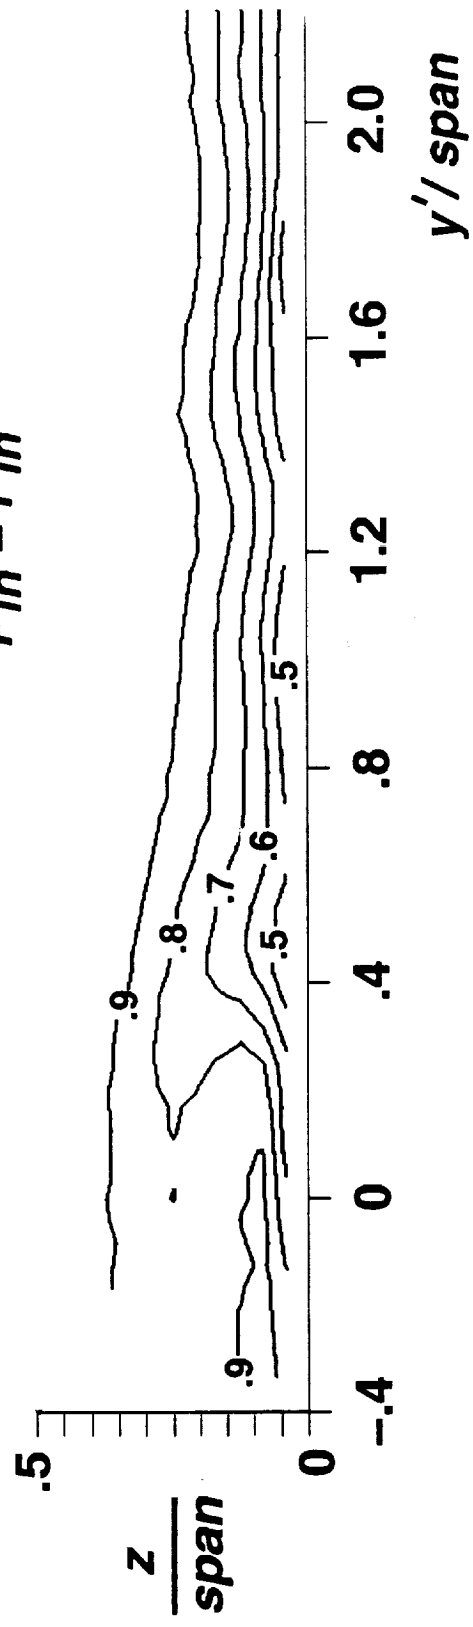

Flow Angle, α

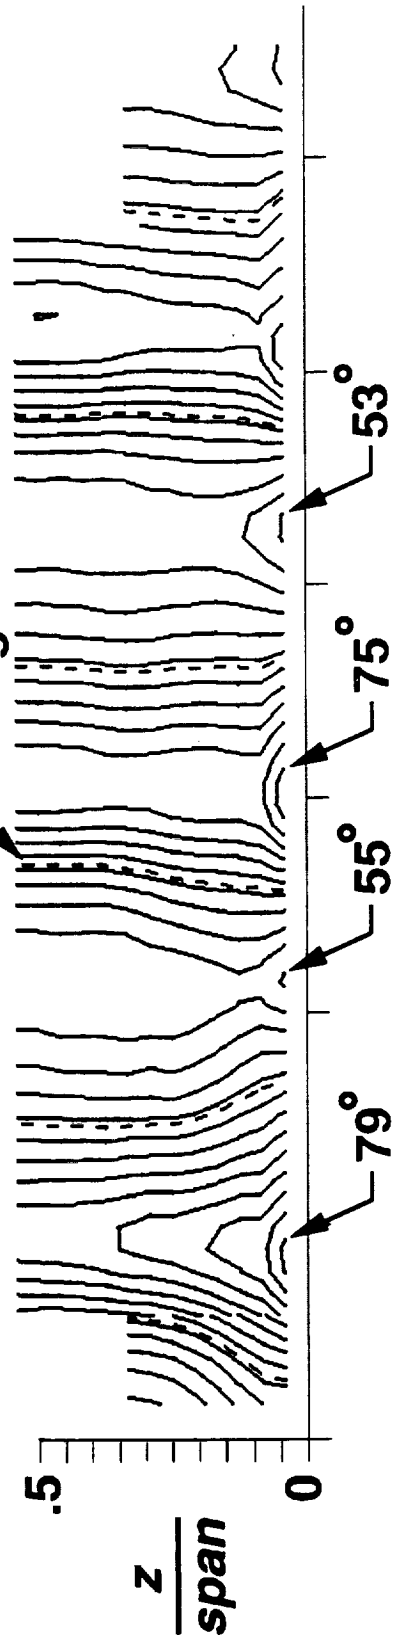

Transonic Turbine Blade Cascade Inlet Analysis – Code Descriptions




- **PARC code, NASA Lewis version 7.2**
 - **General purpose Reynolds Averaged Navier–Stokes solver**
 - **Multi–block solution capability**
 - **Second–order accurate finite–differences**
 - **Blended second– and fourth–difference artificial dissipation**
 - **Beam & Warming solution algorithm**
 - **Baldwin–Lomax algebraic turbulence model used**
 - **No laminar–to–turbulent transition model used**

- **RVC3D**
 - **Turbomachinery Reynolds Averaged Navier–Stokes solver**
 - **Second–order accurate finite–differences**
 - **Blended second– and fourth–difference artificial dissipation**
 - **Four–stage Runge–Kutta solution algorithm**
 - **Baldwin–Lomax or Cebeci–Smith algebraic turbulence models**




Transonic Turbine Blade Cascade Inlet Analysis - Original Geometry and Grids

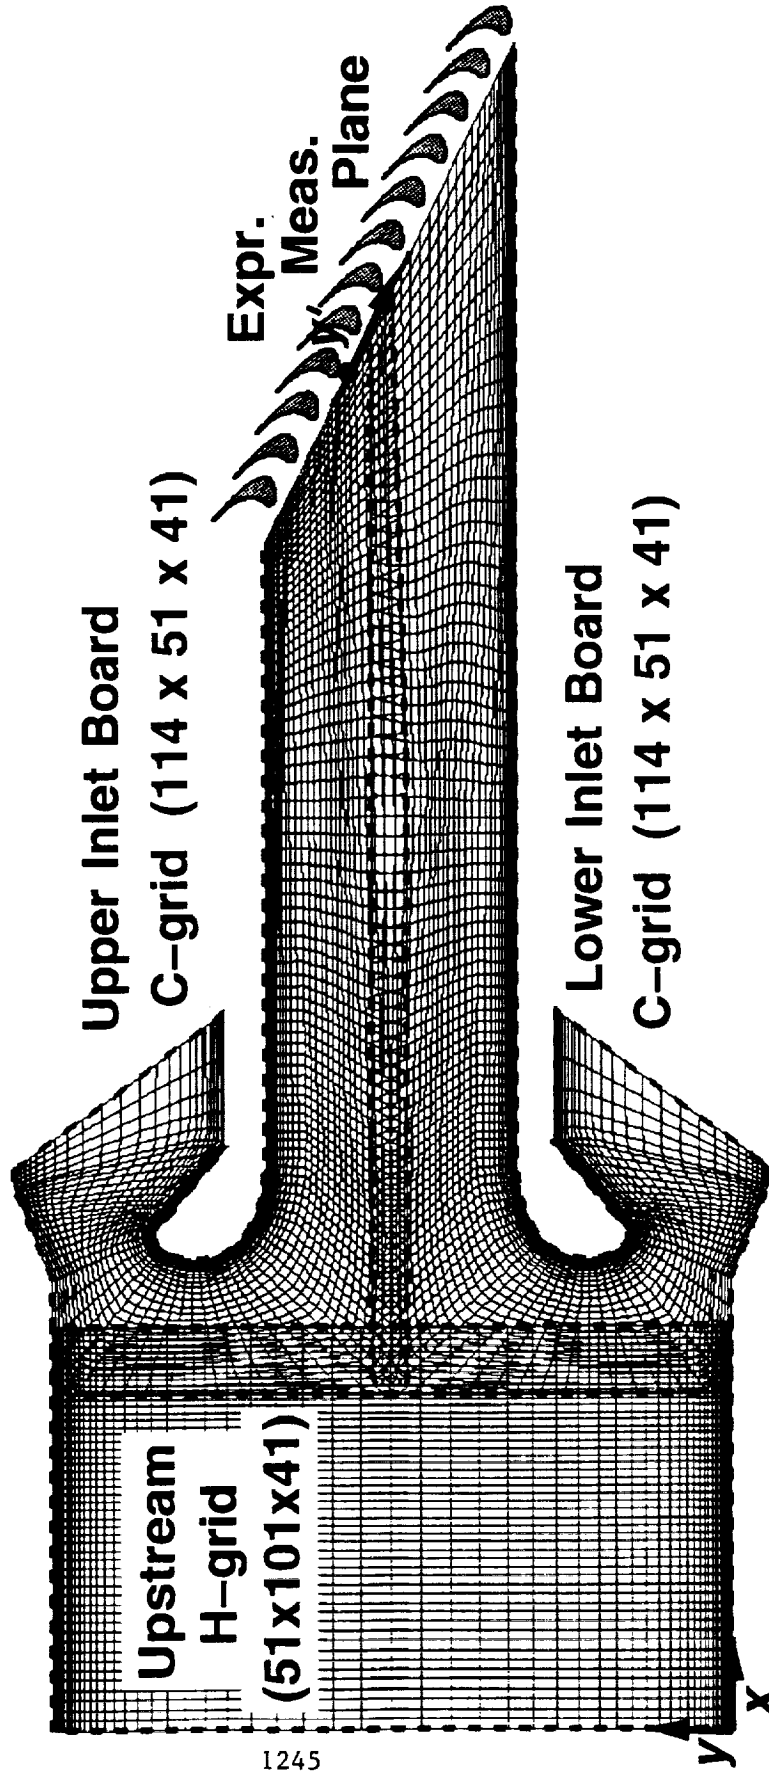




Transonic Turbine Blade Cascade Inlet Analysis - Calculations of Original Geometry (uniform exit)

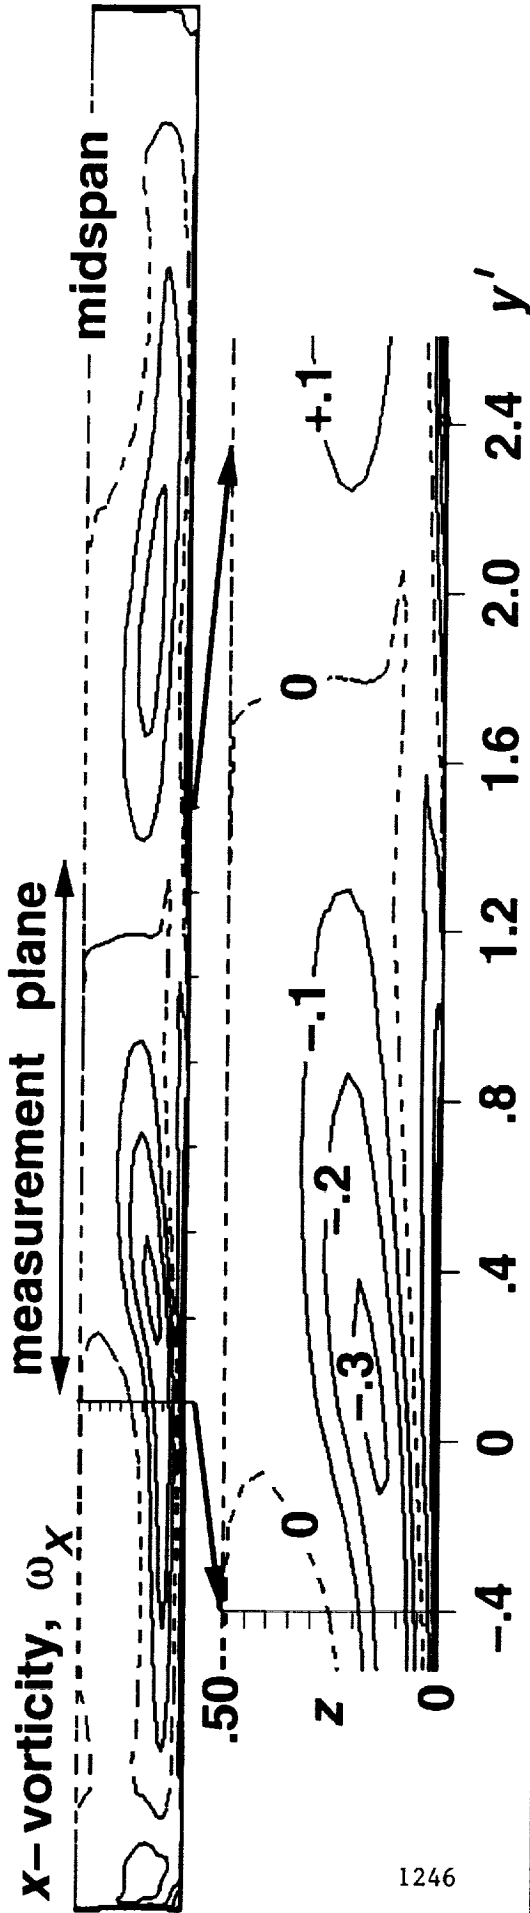

1246

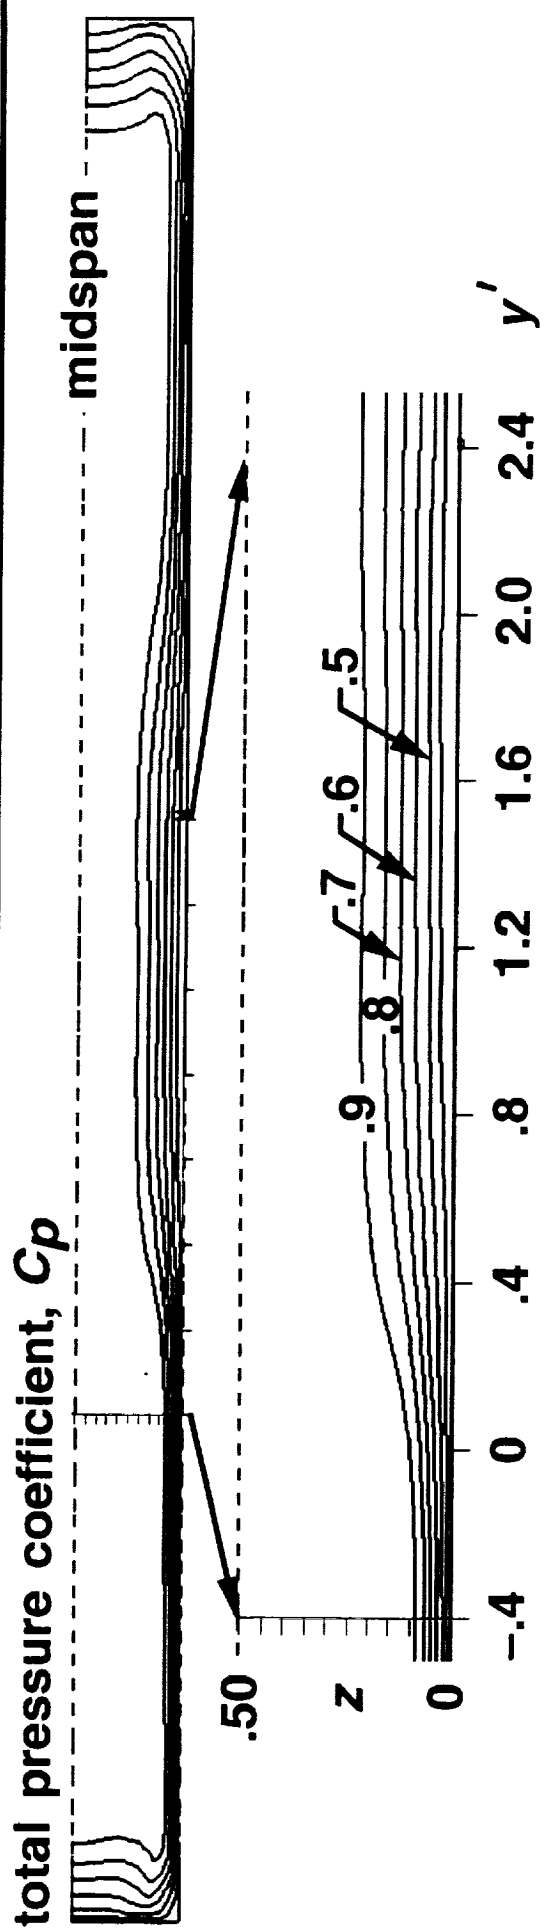



Transonic Turbine Blade Cascade Inlet Analysis - RVC3D Isolated Blade Calculations - Loading



$Re_{C_x} = 0.497 \times 10^6$; $\alpha_{in} = 63.64^\circ$ (design);
 $\delta_{hub} = 1.8$ in.; $\delta_{tip} = 1.0$ in.; subsonic exit - $M_{exit} = 0.9$


$\delta_{hub} = 1.8$ in.

$\delta_{tip} = 1.0$ in.

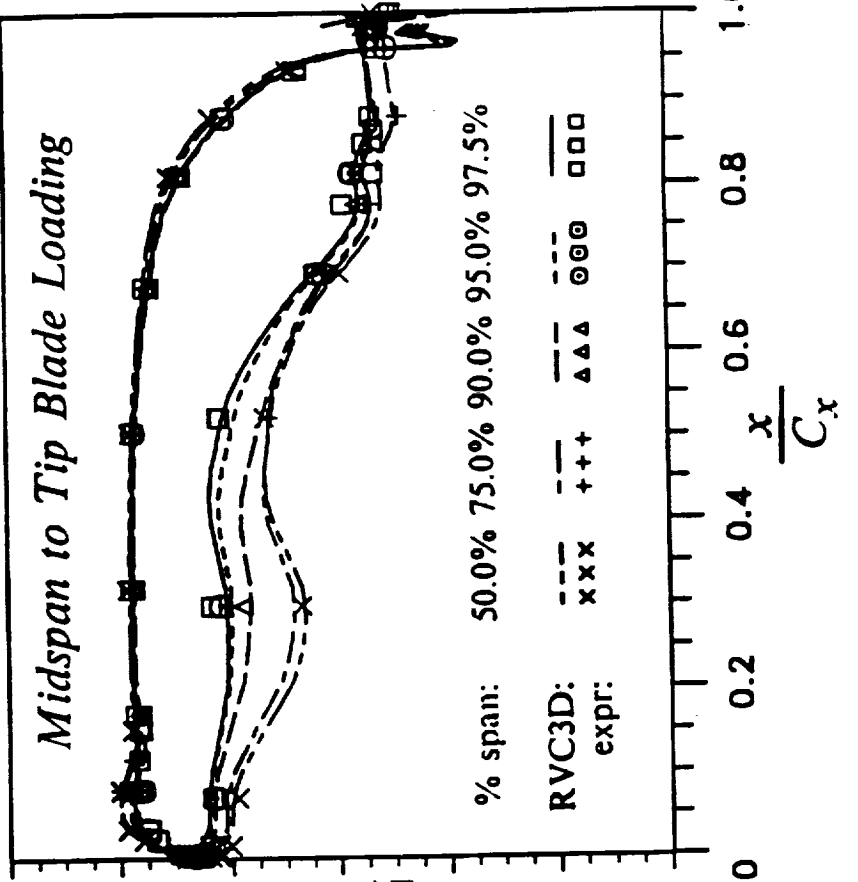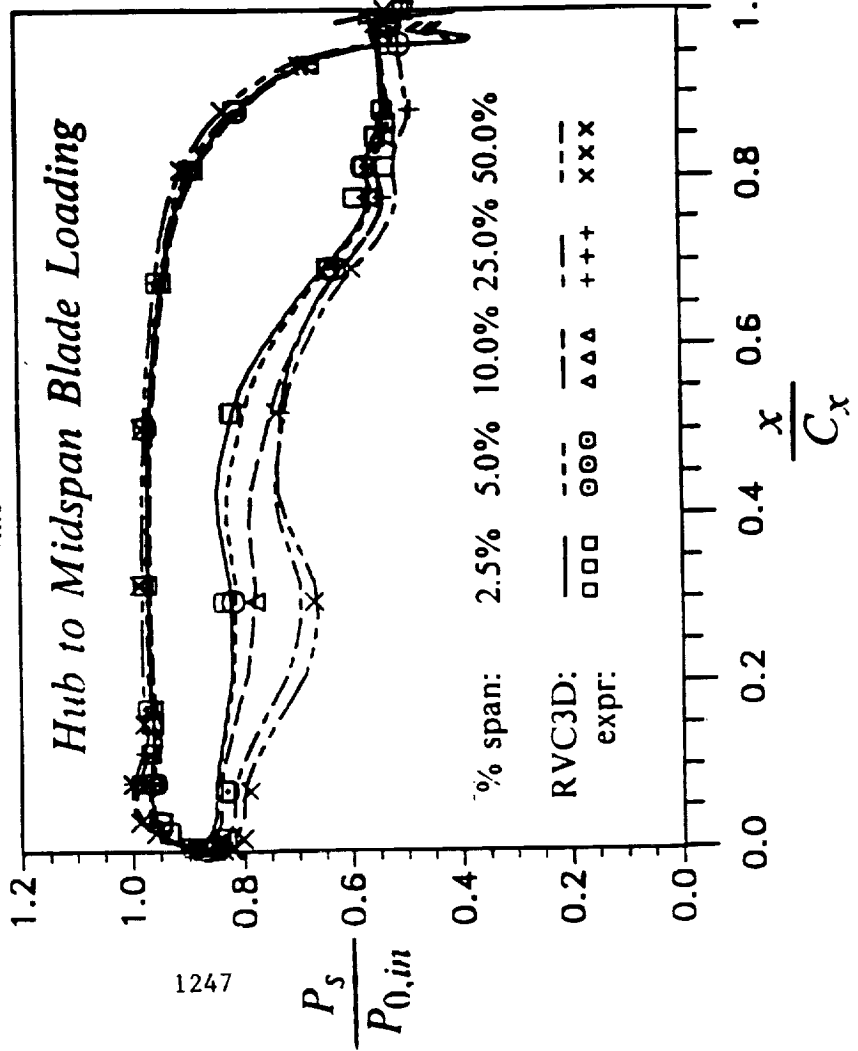




Transonic Turbine Blade Cascade Inlet Analysis - Non-uniform Exit Pressure Boundary Condition

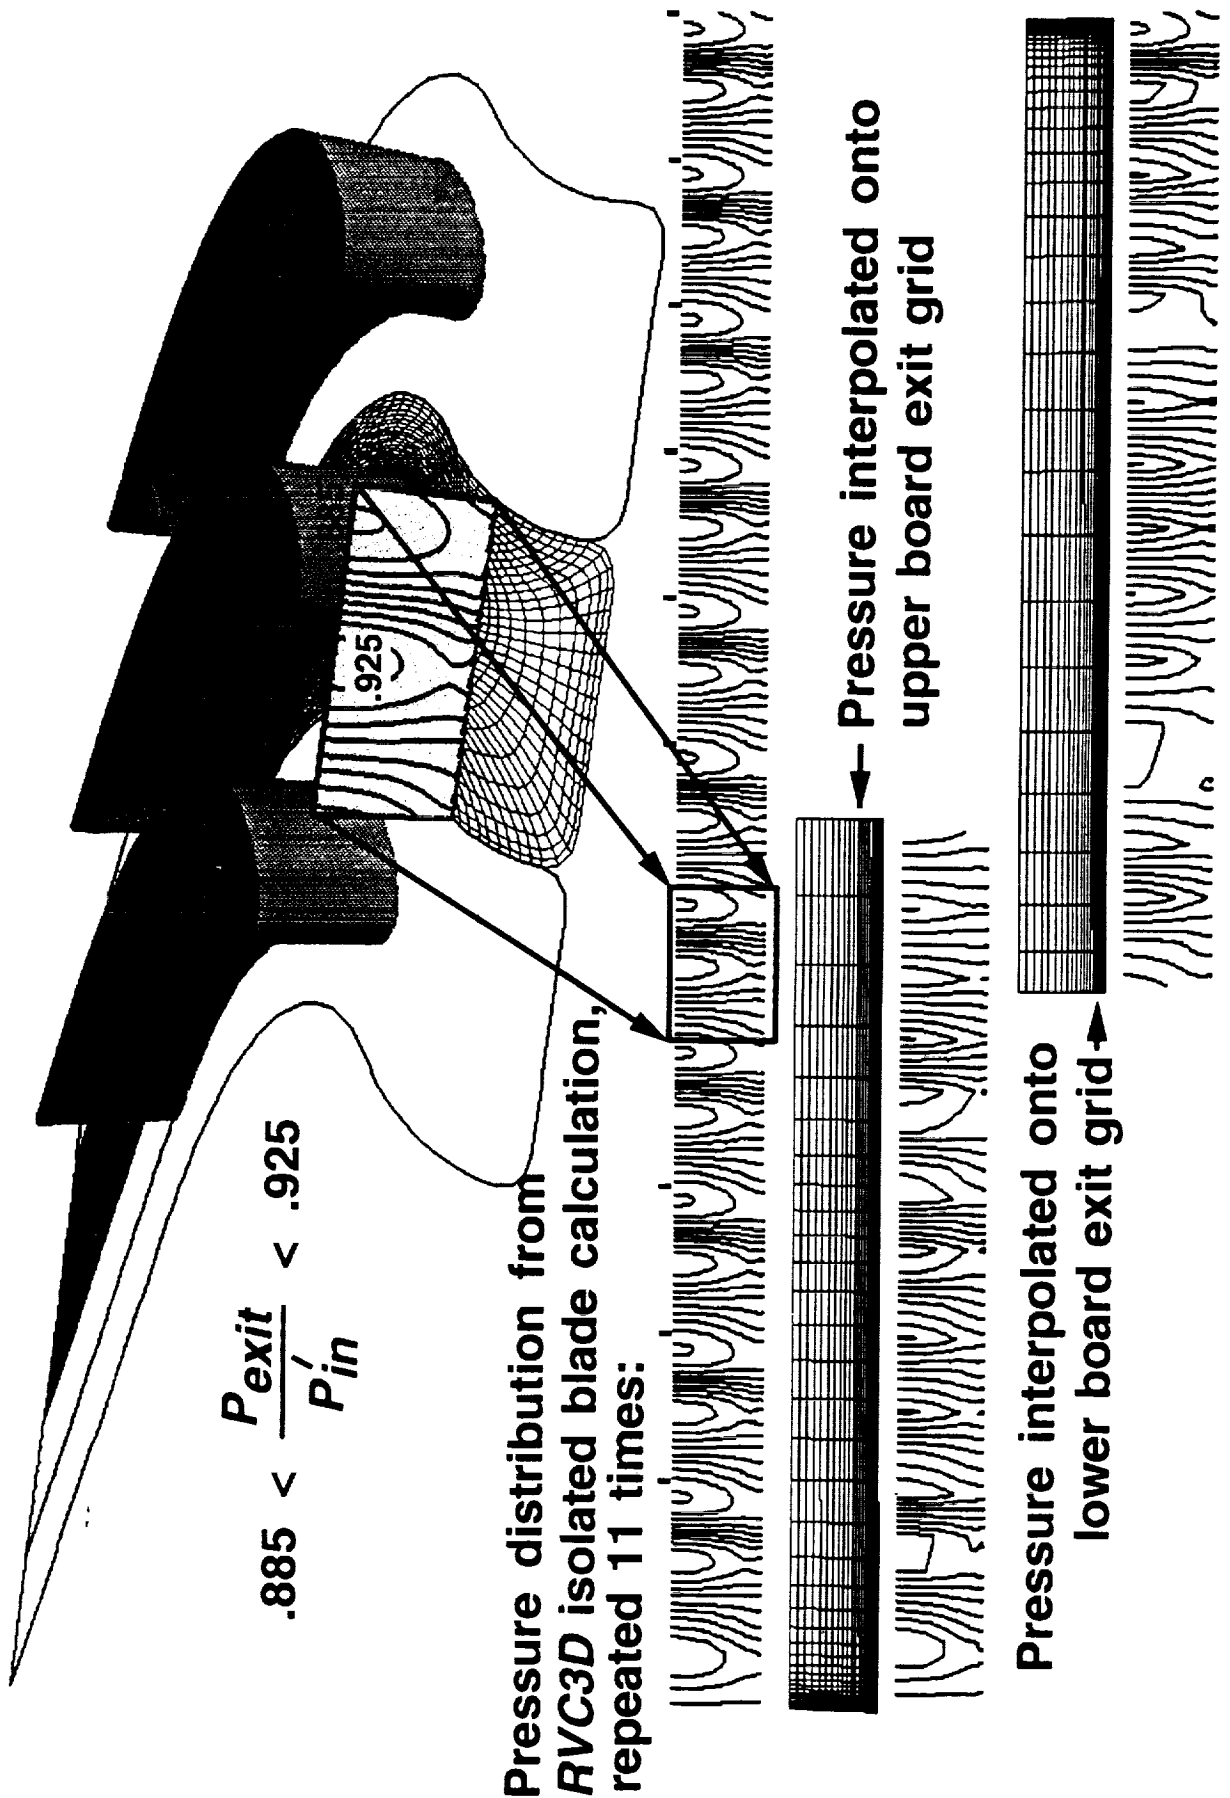




Transonic Turbine Blade Cascade Inlet Analysis - Calculations of Original Geometry (non-uniform exit)

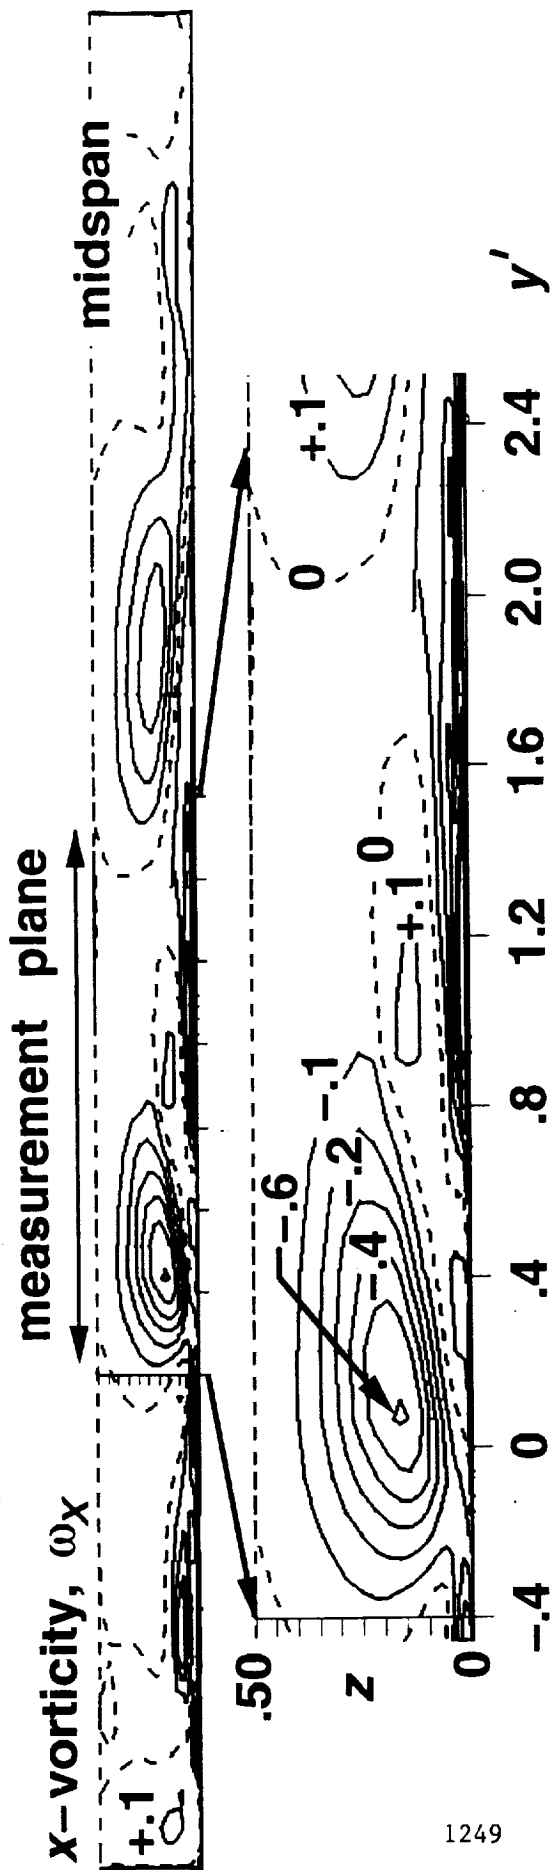


1249

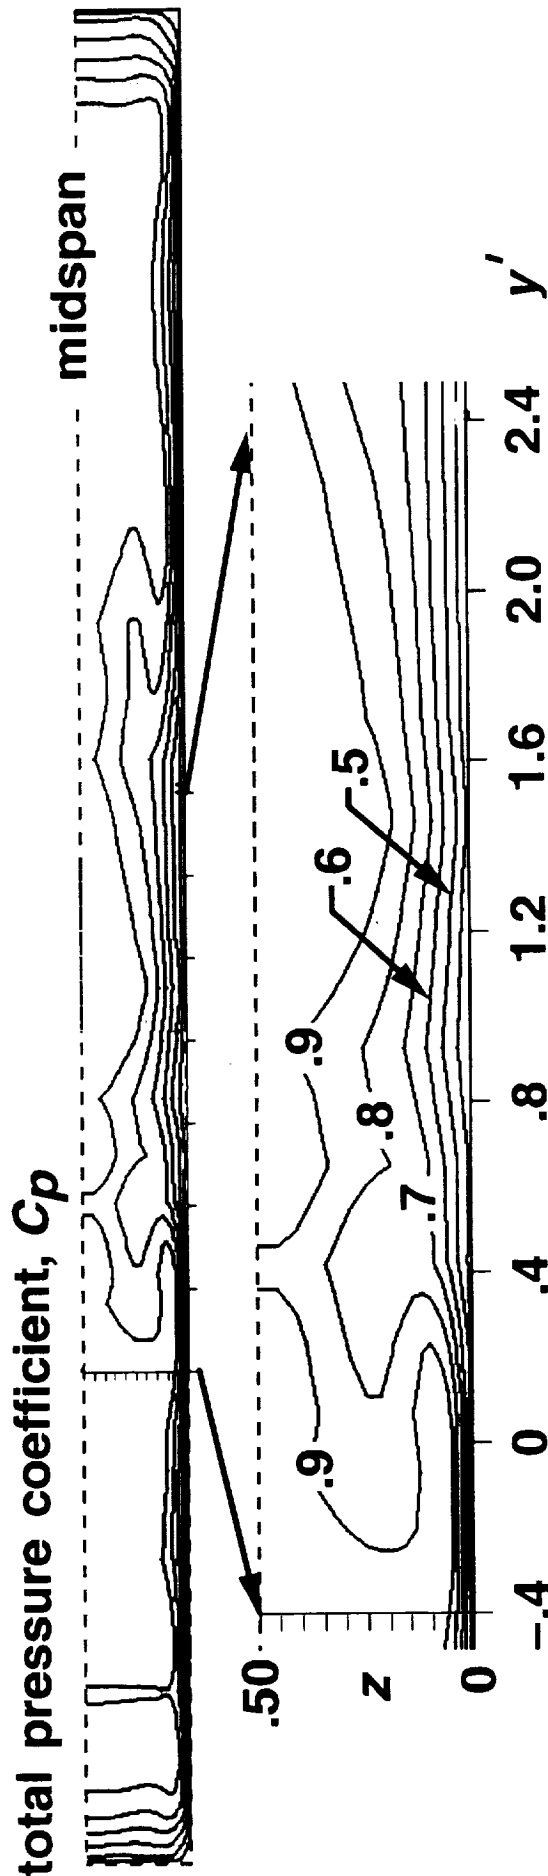


Transonic Turbine Blade Cascade Inlet Analysis – Calculations of Original Geometry (non-uniform exit)



- contours of total pressure coefficient
- particles released from midspan
- design inlet flow angle

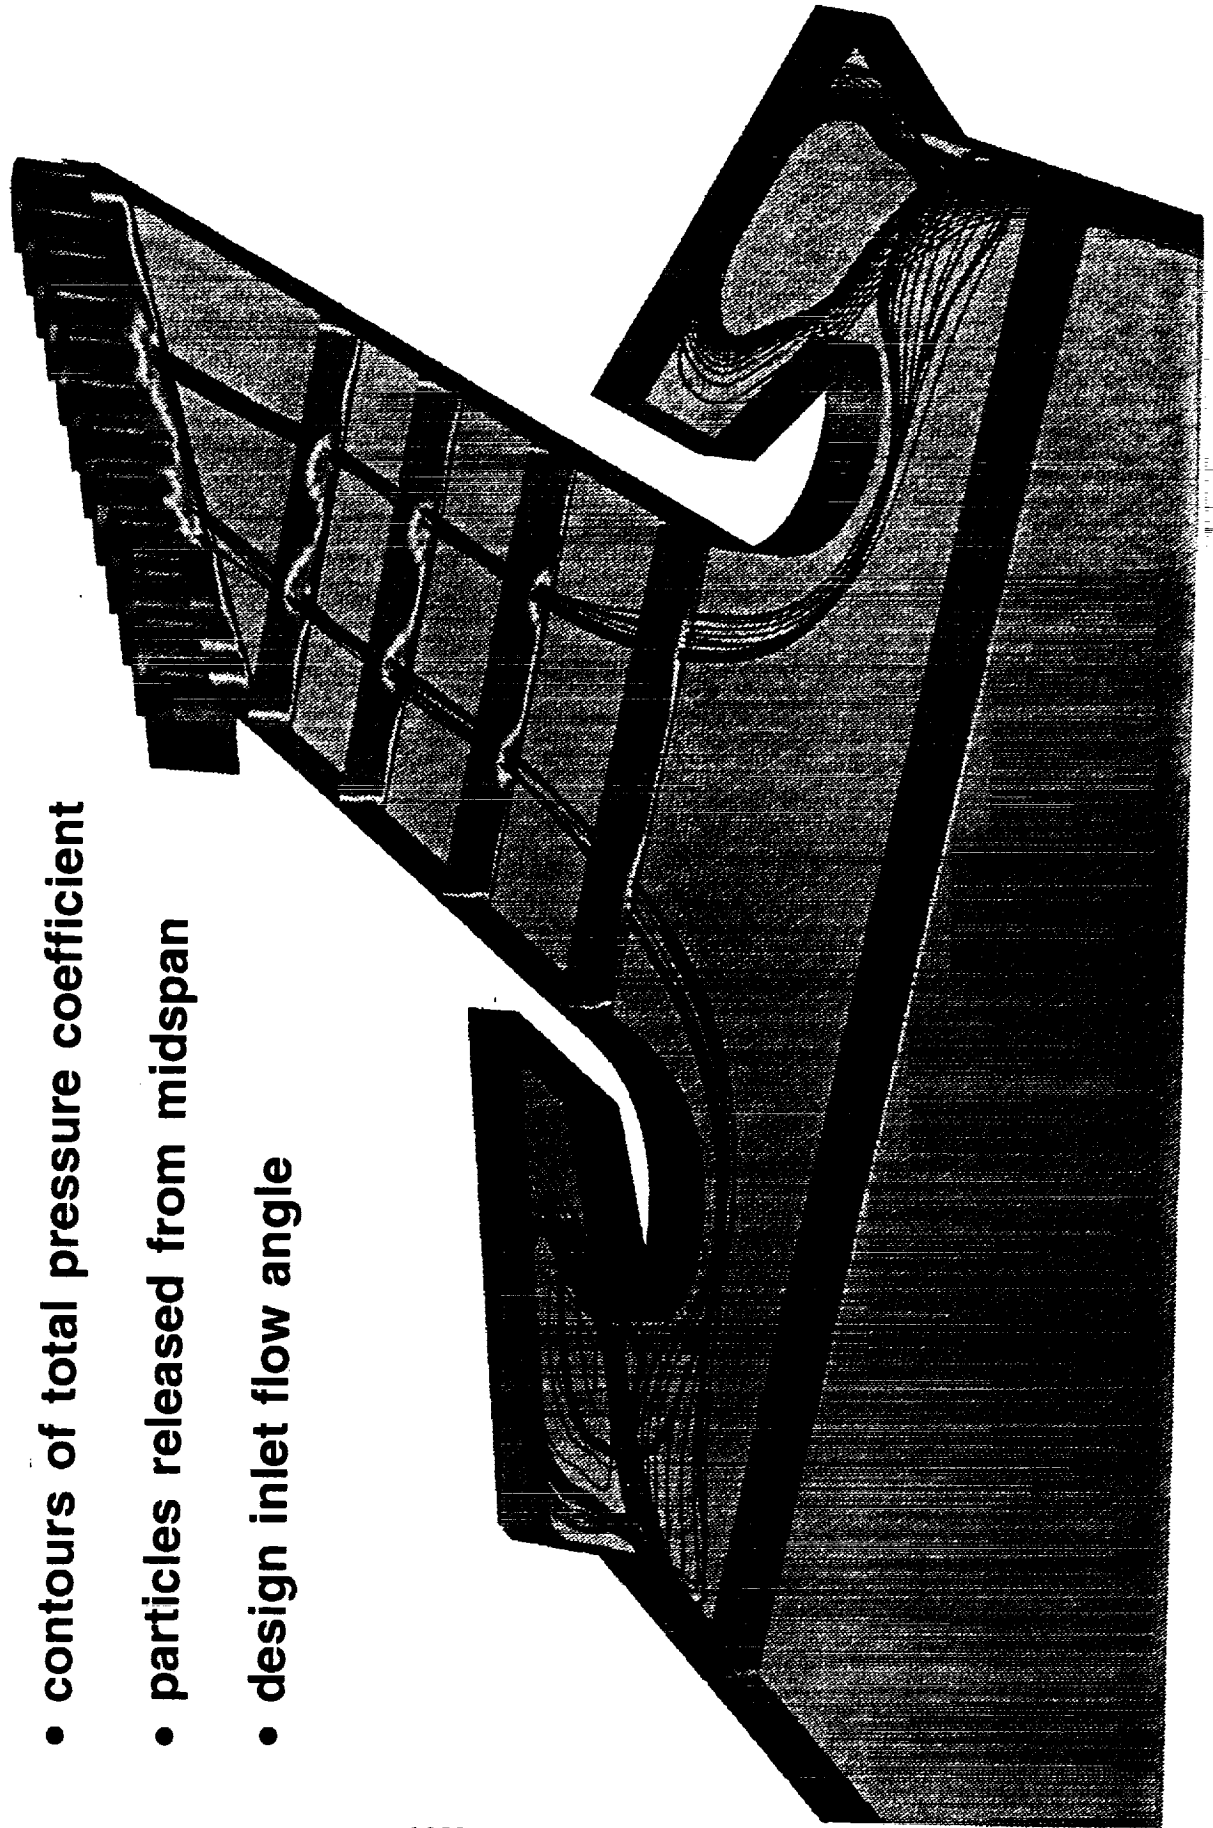


Transonic Turbine Blade Cascade Inlet Analysis - Calculations of Original Geometry (non-uniform exit)

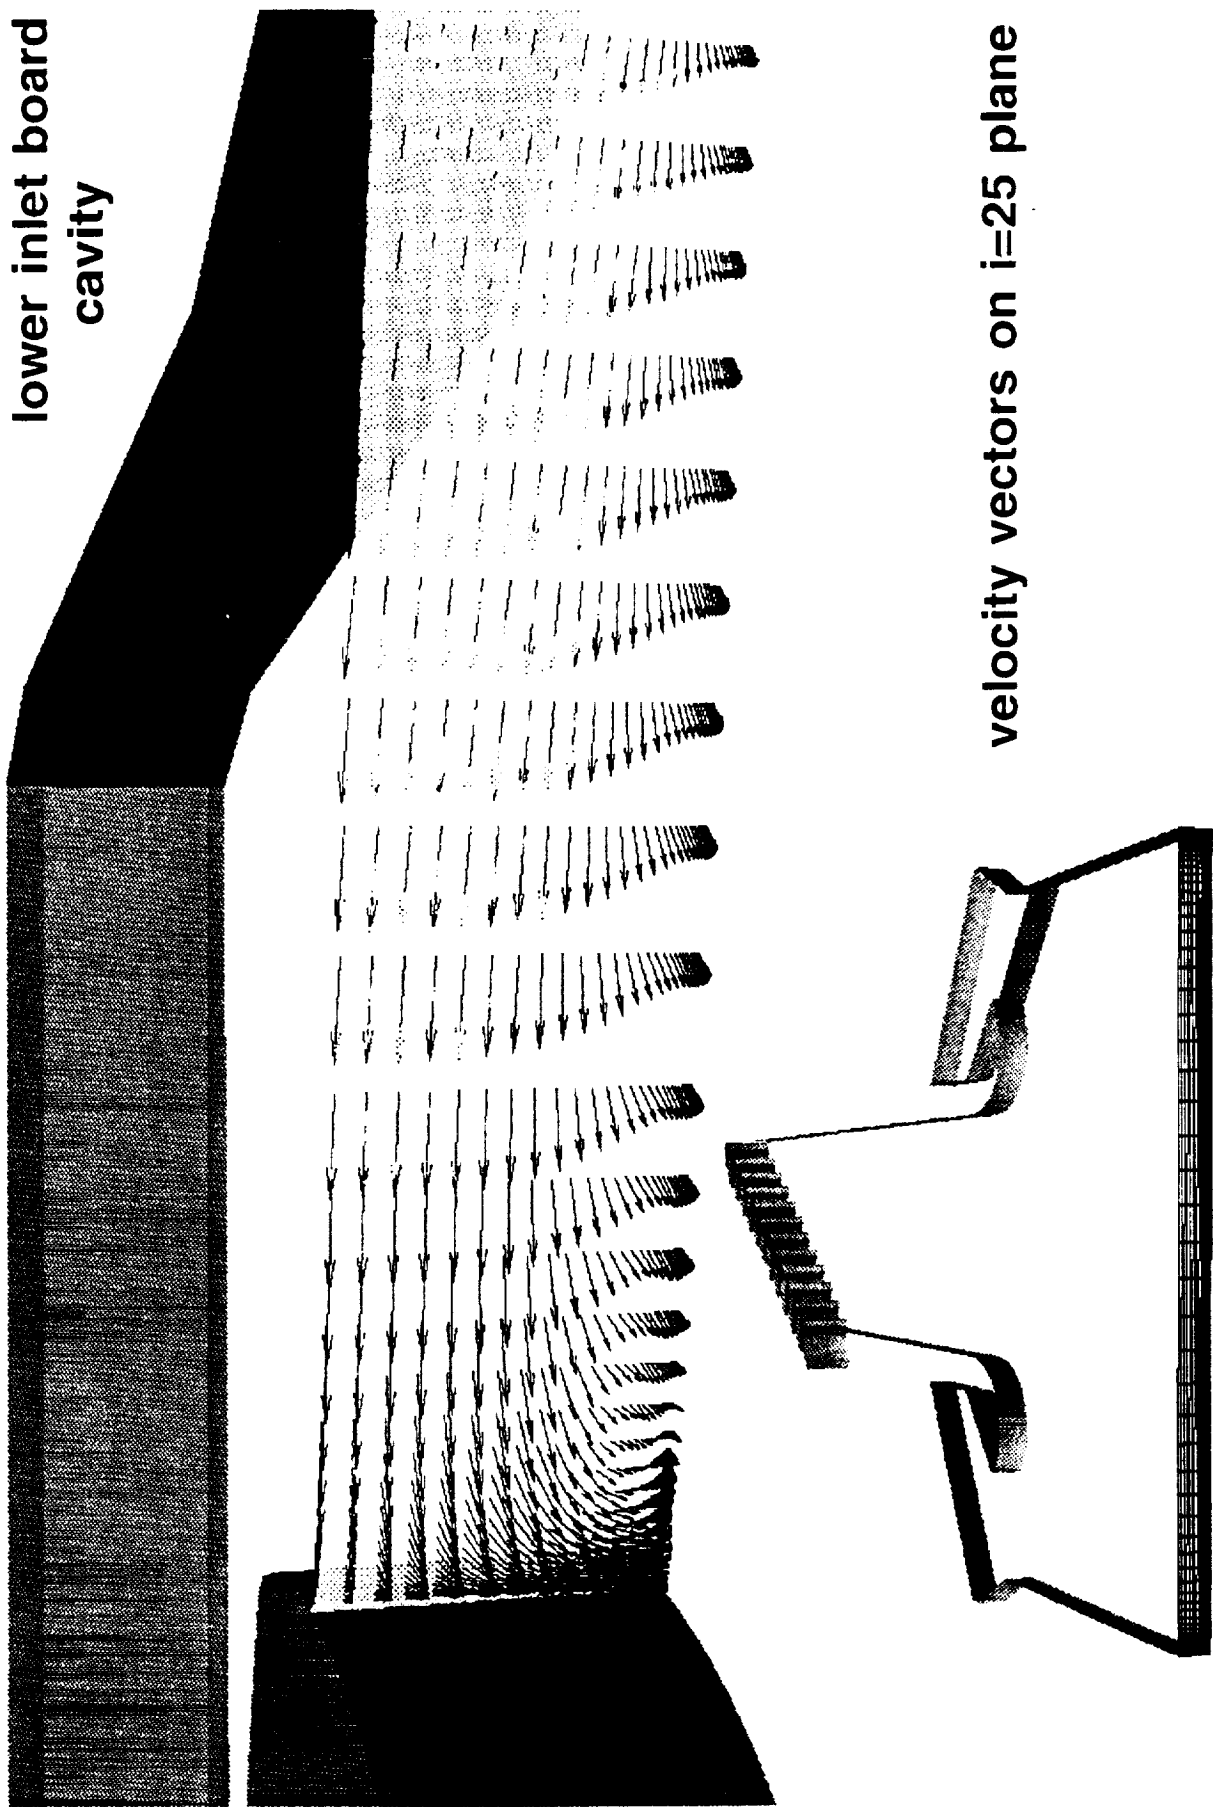




Transonic Turbine Blade Cascade Inlet Analysis – Modified Geometry and Grids

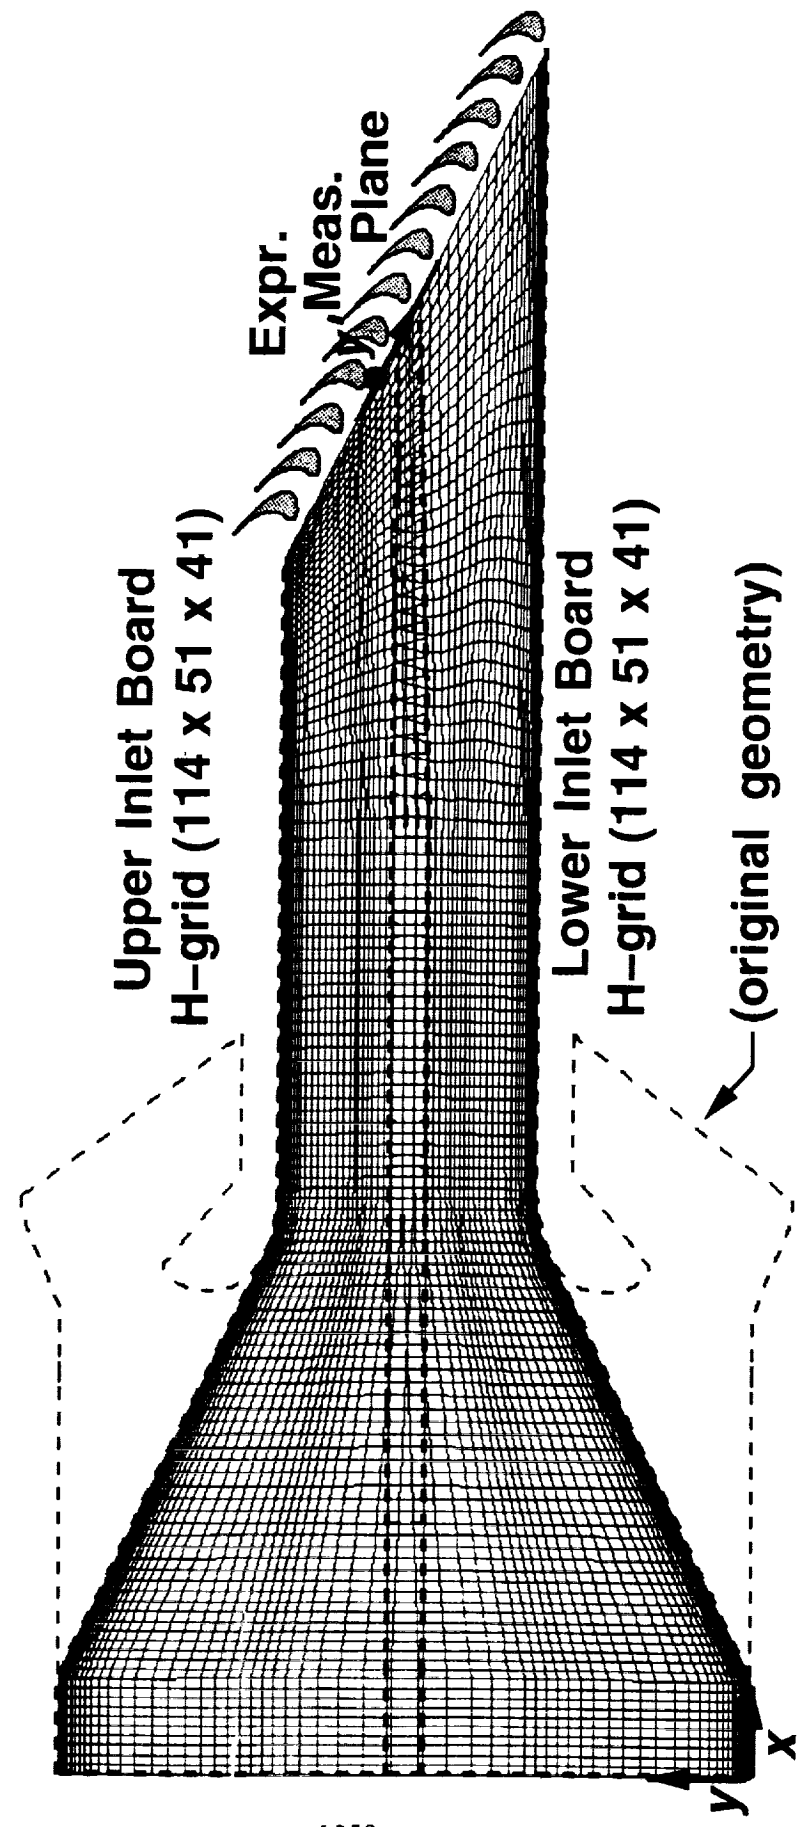




Transonic Turbine Blade Cascade Inlet Analysis - Calculations of Modified Geometry (non-uniform exit)

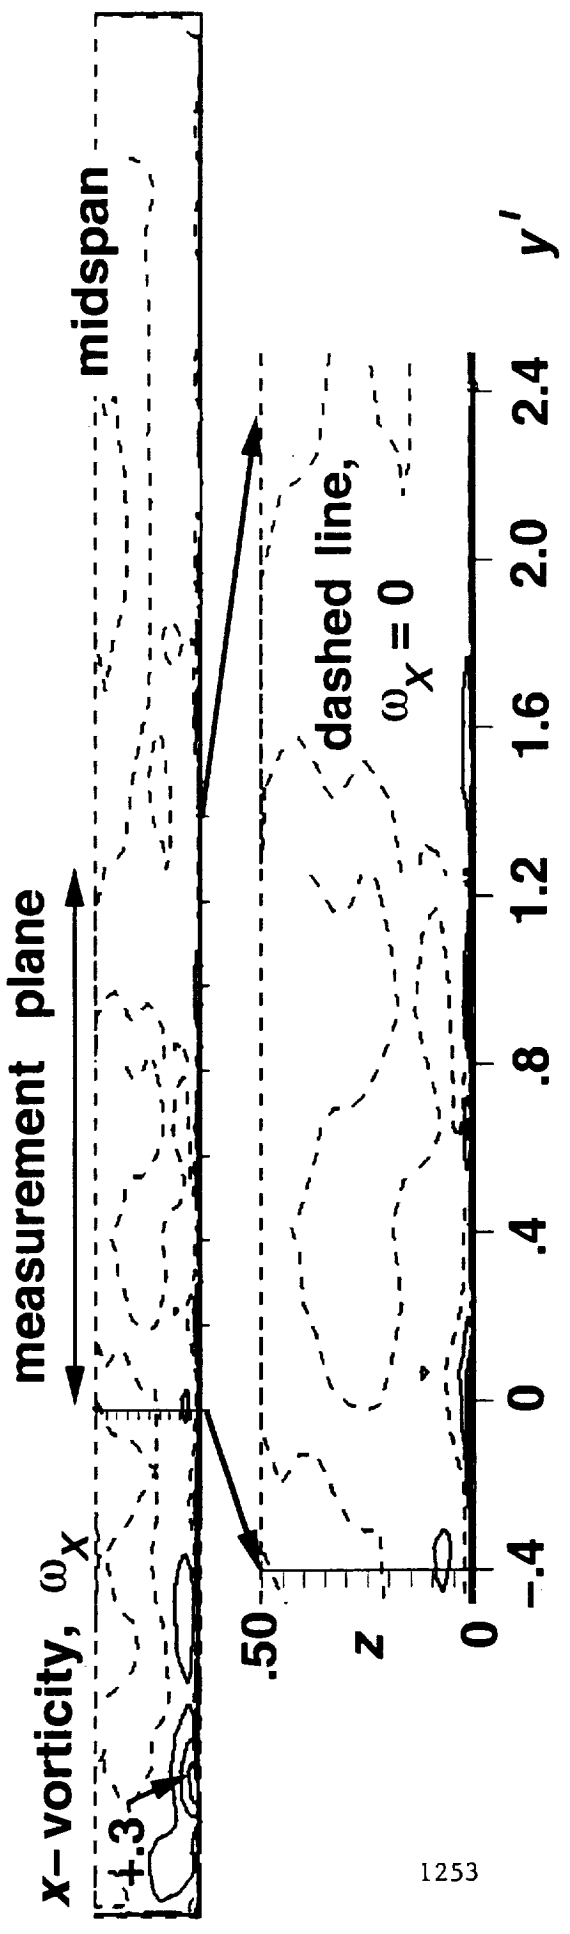


1253

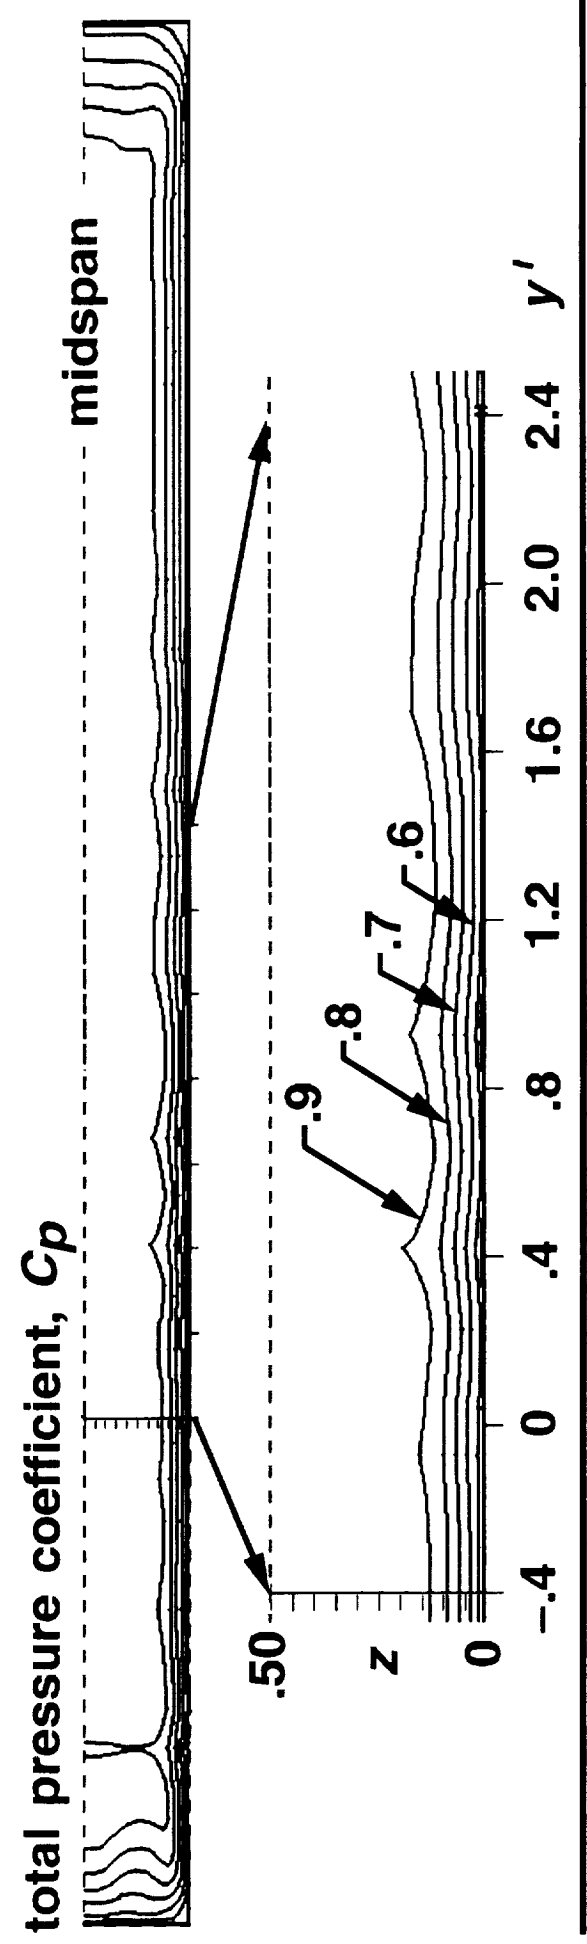


196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400

Transonic Turbine Blade Cascade Inlet Analysis – Upstream 8:1 Contraction; geometry and grid

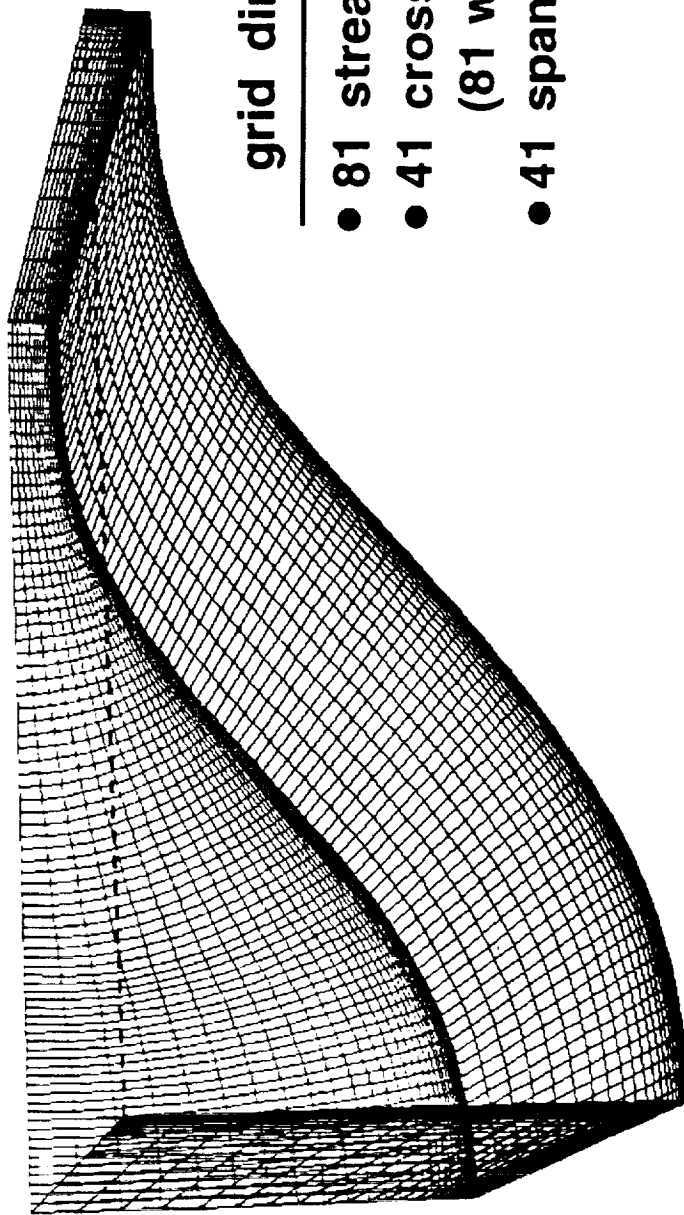


grid dimensions



- 81 streamwise
- 41 cross-channel (81 when doubled)
- 41 spanwise

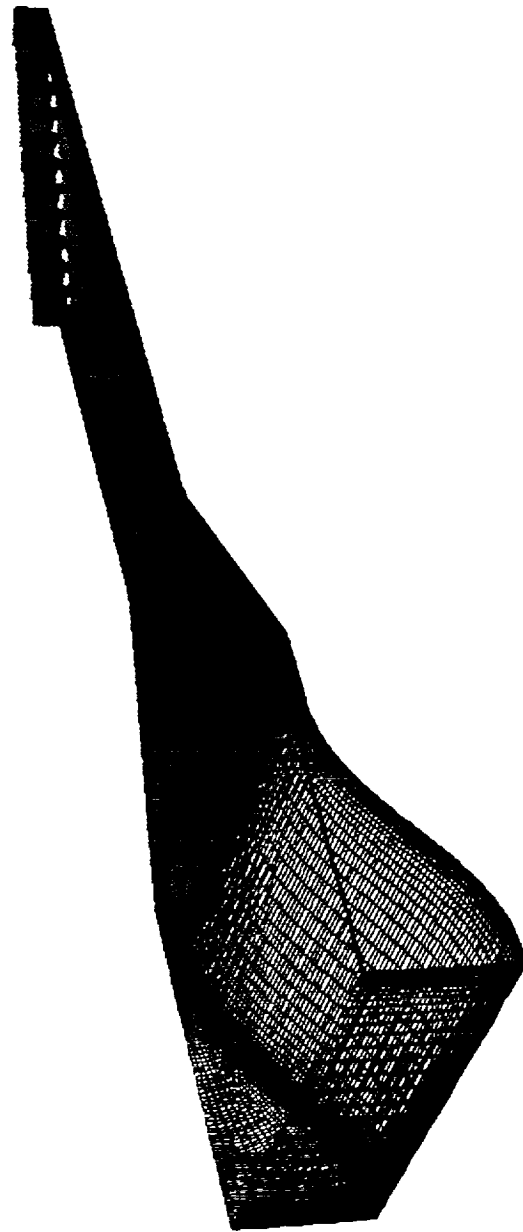


Transonic Turbine Blade Cascade Inlet Analysis - Upstream 8:1 Contraction; preliminary results

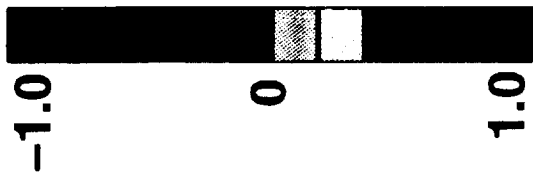



x-vorticity, ω_x

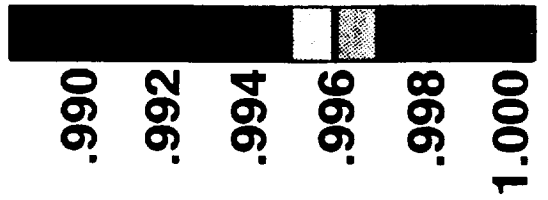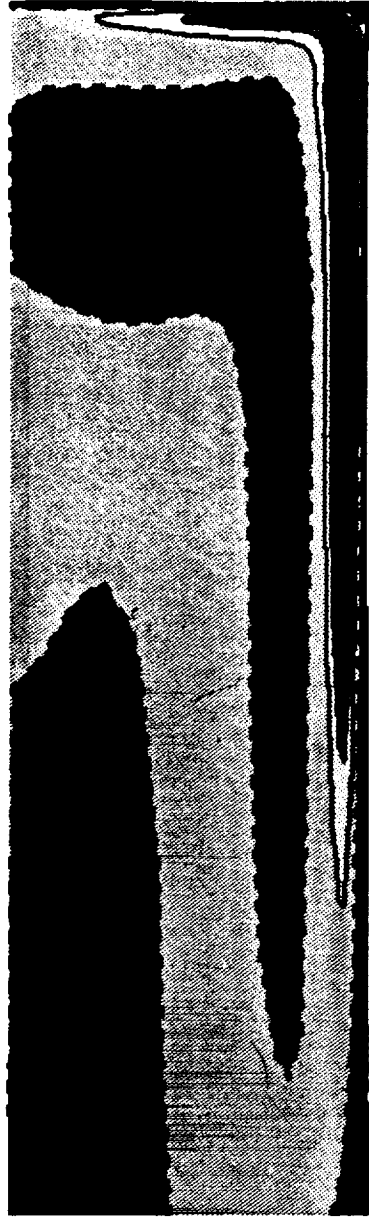

total pressure ratio, P'/P'_{in}

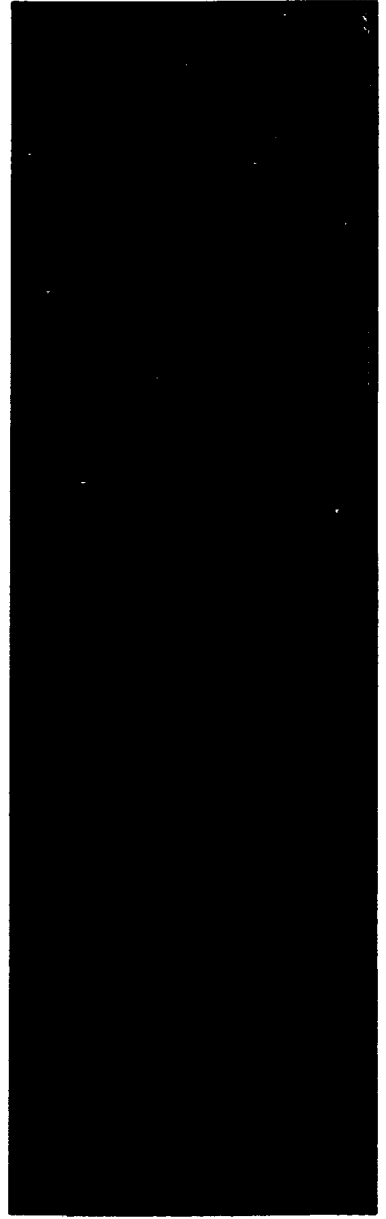

Transonic Turbine Blade Cascade Inlet Analysis - Calculations of Modified Geometry with Upstream 8:1 Contraction (non-uniform exit)

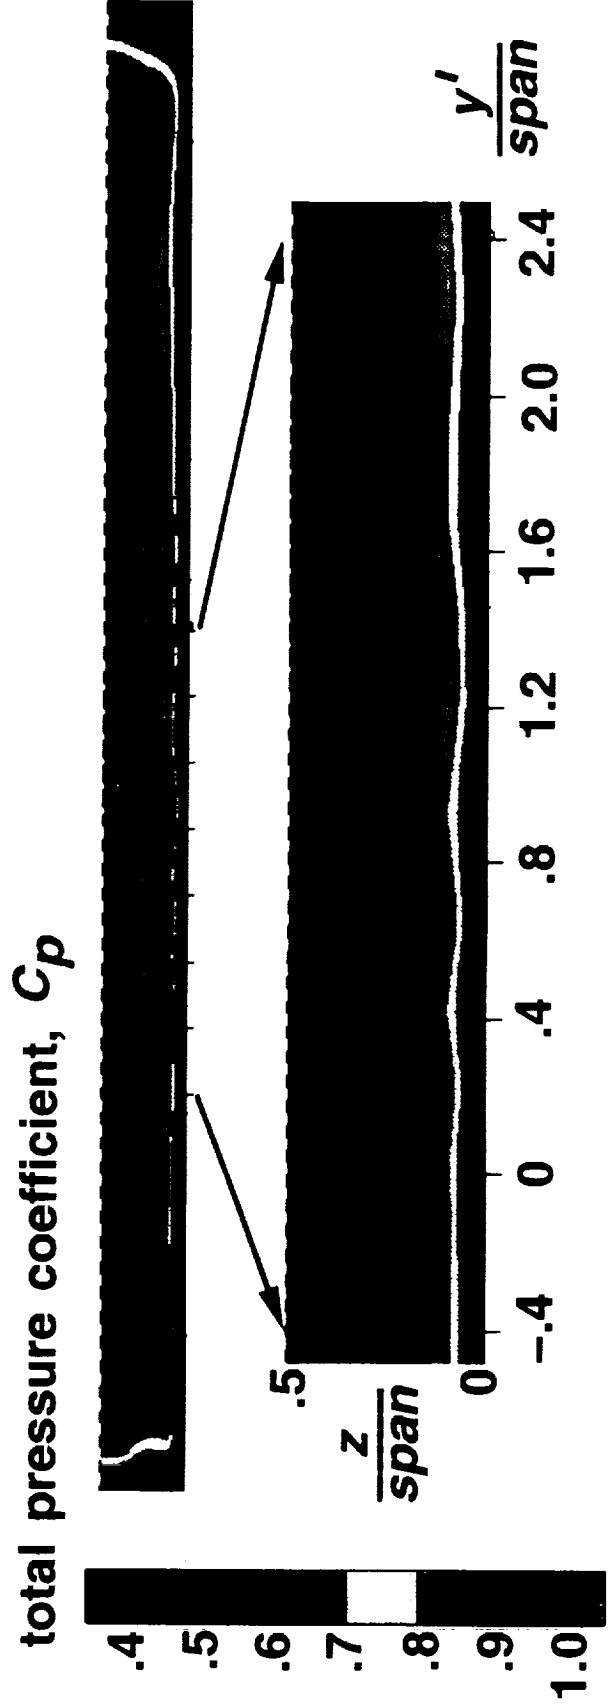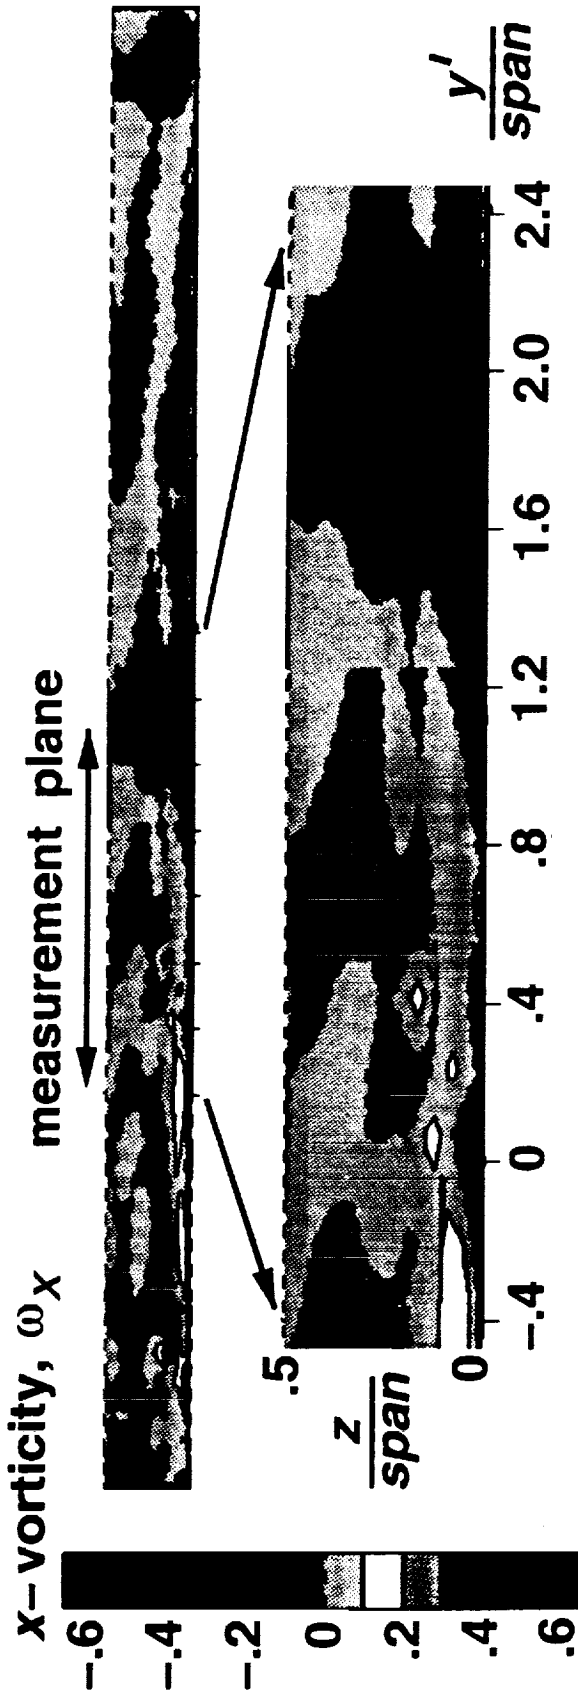


Transonic Turbine Blade Cascade Inlet Analysis -


Summary of Results



Experimental data from original geometry:

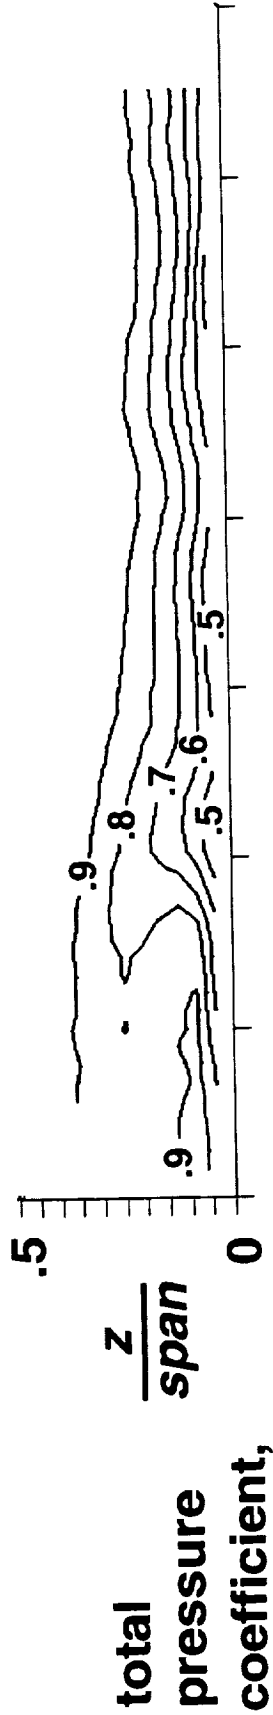

Calculation of original geometry:

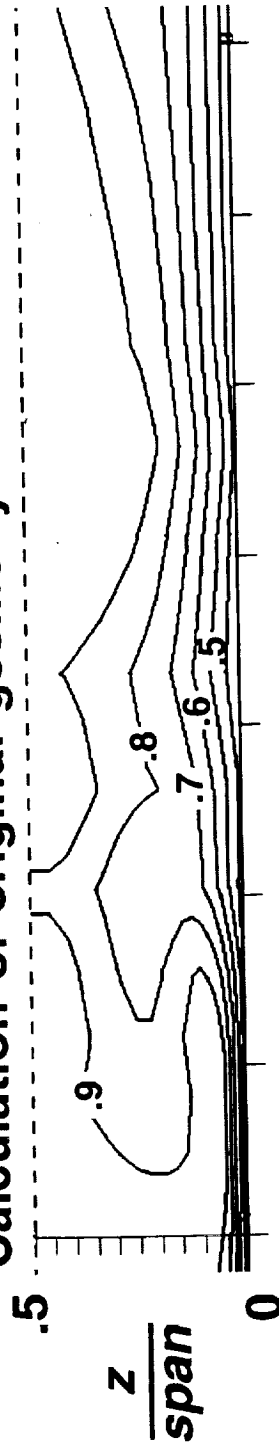

Calculation of modified geometry:

