



# Design and Measurement of Self-Matched, Dual-Frequency Coplanar-Waveguide-Fed Slot Antennas

*Amjad A. Omar*  
*Yarmouk University, Irbid, Jordan*

*Maximilian C. Scardelletti*  
*Glenn Research Center, Cleveland, Ohio*

*Zuhair M. Hejazi*  
*Yarmouk University, Irbid, Jordan*

*Nihad Dib*  
*Jordan University of Science and Technology, Irbid, Jordan*

## NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI Program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include creating custom thesauri, building customized databases, organizing and publishing research results.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to [help@sti.nasa.gov](mailto:help@sti.nasa.gov)
- Fax your question to the NASA STI Help Desk at 301-621-0134
- Telephone the NASA STI Help Desk at 301-621-0390
- Write to:  
NASA Center for AeroSpace Information (CASI)  
7115 Standard Drive  
Hanover, MD 21076-1320



# Design and Measurement of Self-Matched, Dual-Frequency Coplanar-Waveguide-Fed Slot Antennas

*Amjad A. Omar*  
*Yarmouk University, Irbid, Jordan*

*Maximilian C. Scardelletti*  
*Glenn Research Center, Cleveland, Ohio*

*Zuhair M. Hejazi*  
*Yarmouk University, Irbid, Jordan*

*Nihad Dib*  
*Jordan University of Science and Technology, Irbid, Jordan*

National Aeronautics and  
Space Administration

Glenn Research Center  
Cleveland, Ohio 44135

## Acknowledgments

We thank Elizabeth A. McQuaid and Nicholas C. Varaljay for their help with the fabrication of the antennas.

*Level of Review:* This material has been technically reviewed by an expert single reviewer.

Available from

NASA Center for Aerospace Information  
7115 Standard Drive  
Hanover, MD 21076-1320

National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161

Available electronically at <http://gltrs.grc.nasa.gov>

# Design and Measurement of Self-Matched, Dual-Frequency Coplanar-Waveguide-Fed Slot Antennas

Amjad A. Omar

Department of Communications Engineering  
Hijawi Faculty of Engineering Technology  
Yarmouk University  
Irbid, Jordan

Maximilian C. Scardelletti

National Aeronautics and Space Administration  
Glenn Research Center  
Cleveland, Ohio 44135

Zuhair M. Hejazi

Department of Communications Engineering  
Hijawi Faculty of Engineering Technology  
Yarmouk University  
Irbid, Jordan

Nihad Dib

Department of Electrical Engineering  
Jordan University of Science and Technology  
Irbid, Jordan

## Summary

This report presents two new designs of dual-frequency, coplanar-waveguide-fed, double-folded slot antennas. An important advantage of these antennas is that, because they are self-matched to the feeding coplanar waveguide, they do not need an external matching circuit. This reduces the antenna size and simplifies its design. To verify the designs, the authors measured and compared the return loss and radiation patterns with those obtained using available commercial software with good agreement.

## Introduction

Dual-frequency antennas are used in a variety of applications, including satellite communications, global positioning systems, synthetic aperture radar, and personal communications systems (refs. 1 to 3). Coplanar waveguide (CPW) feeds are attractive for microwave integrated circuits (MICs) and monolithic MIC applications because of their uniplanar structure, the ease of making shunt and series connections, and the wider degree of design freedom in comparison to microstrip.

For the designs described in this report, the CPW was used to feed two double-folded slot antennas of different lengths, resulting in dual-band operation. These folded slot antennas were chosen because they are conformal, have a low profile, and are easy to design.

One challenge in designing dual-band antennas is the need to match the antenna at both frequency bands. In a previous attempt, Omar and Antar (ref. 4) used seven matching stubs of different lengths to match both frequency bands. In the design work described in this report, the proposed antennas were self-matched at both frequency bands without an external matching circuit, which reduced the size of the antennas and considerably simplified the design procedure.

Two techniques were employed for self-matching. In design 1, the folded slot dipole was matched by increasing the number of slots from two for a regular folded dipole to  $N$ . This reduced the input impedance  $Z_{in}$  according to Babinet's principle as  $Z_{in} = Z_{slot}/N^2$  (ref. 5), where  $N$  is the number of slots. Therefore, frequency bands were matched by increasing the number of slots in a folded slot antenna so that the input impedance approached that of the feed line.

In design 2, use was made of a published study (refs. 6 and 7) that showed that the impedance can be lowered by increasing the width of the slot arm that is farther from the feed. Hence, the width of one of the dipole arms was increased without changing any other dimension.

## Design 1 Antenna on Alumina ( $\epsilon_r = 9.6$ )

### Design Procedure for the Design 1 Antenna

For the design 1 antenna, the chosen coplanar substrate was alumina with a thickness of 0.254 mm and a dielectric constant  $\epsilon_r$  of 9.6. Figure 1 shows the geometry.

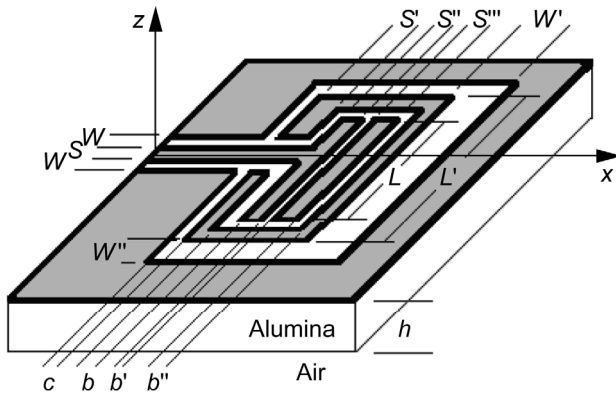


Figure 1.—Design 1 coplanar-waveguide-fed, dual-frequency slot antenna on alumina:  $W = 0.3$  mm,  $S = 1.7$  mm,  $S' = 0.1$  mm,  $S'' = 0.3$  mm,  $S''' = 0.1$  mm,  $W' = 0.85$  mm,  $c = 0.1$  mm,  $b = b' = b'' = w'' = 0.1$  mm,  $L = 11.26$  mm,  $L' = 18.46$  mm,  $h = 0.254$  mm, and dielectric constant  $\epsilon_r = 9.6$ .



Figure 2.—Experimental setup showing the transition from the coaxial connector to the coplanar waveguide feed.

The design procedure follows:

(1) The moment method simulator IE3D (Zeland Software, Inc.) was used to design the feed line to be a  $50\text{-}\Omega$  line on a  $0.254\text{-mm}$ -thick alumina substrate. Hence, the slot width  $W$  was chosen to be  $0.3$  mm and the strip width  $S$  to be  $1.7$  mm. These dimensions were chosen to give a better transition between the coaxial connector and the CPW feed, as shown in figure 2.

(2) The outer folded slot dipole was a regular folded slot dipole with two slot arms, each having a length of approximately  $\lambda_1/2$ , where  $\lambda_1$  is the guided wavelength of the CPW line at the lower resonant frequency  $f_1$  of  $5$  GHz. From IE3D,  $\lambda_1$  was  $34.7$  mm, hence the initial value of  $L'$  was  $17.35$  mm. The width of each slot was chosen to be  $0.1$  mm and could be slightly altered without affecting the design.

(3) The inner folded slot dipole was initially designed in the same way as for the outer loop using only two slot arms. Each arm had a length of approximately  $\lambda_2/2$ , where  $\lambda_2$  is the guided wavelength of the CPW line at the upper resonant frequency  $f_2$  of  $7$  GHz. From IE3D,  $\lambda_2$  was  $24.8$  mm, hence the initial value of  $L$  was  $12.4$  mm. The width of each slot was also chosen to be  $0.1$  mm.

(4) At this stage, IE3D was used to carry out an initial simulation of the design. This showed that  $f_1$  was  $4.7$  GHz, instead of  $5$  GHz, with a reflection coefficient  $|S_{11}|$  of  $-3.54$  dB;  $f_2$  was  $6.9$  GHz with an  $|S_{11}|$  of  $-5.18$  dB.

(5) To obtain a better match at  $f_2$ , a third slot was added to the inner smaller folded dipole, as shown in figure 1, reducing  $|S_{11}|$  at  $f_2$  ( $6.76$  GHz) from  $-5.18$  to  $-14.24$  dB. At  $f_1$ ,  $|S_{11}|$  worsened to  $-2.76$  dB.

(6) To obtain a better match at  $f_1$ , the width  $W'$  of the outer slot of the larger folded dipole was increased in repeated steps, as shown in table I. From this table,  $W'$  was chosen to be  $0.85$  mm.

(7) Matching at both frequencies could be further improved by shifting the center slot arm of the smaller folded dipole away from the feed. Hence  $S''$  was increased while  $S'''$  was decreased, as shown in figure 1. Taking  $S'' = 0.3$  mm, and  $S''' = 0.1$  mm gives  $|S_{11}| = -26.39$  dB at  $f_1 = 5.19$  GHz, and  $|S_{11}| = -37.79$  dB at  $f_2 = 6.73$  GHz.

(8) After a few repeated simulations using IE3D, we found that increasing  $L'$  to  $18.46$  mm and decreasing  $L$  to  $11.26$  mm resulted in more accurate resonant frequencies.

TABLE I.—EFFECT OF THE OUTER ARM WIDTH,  $W'$ , ON THE REFLECTION COEFFICIENT,  $S_{11}$ , AND THE LOWER AND UPPER RESONANT FREQUENCIES,  $f_1$  AND  $f_2$

$W'$ , mm	$f_1$ , GHz	$S_{11}$ at $f_1$ , dB	$f_2$ , GHz	$S_{11}$ at $f_2$ , dB
0.1	4.63	-2.76	6.76	-14.24
0.3	4.8	-5.52	6.76	-42.22
0.5	4.98	-9.38	6.73	-39.08
0.7	5.08	-15.28	6.73	-19.91
0.85	5.19	-23.58	6.69	-16.05
1.0	5.22	-20.35	6.69	-14.26
1.2	5.29	-13.72	6.66	-11.99

### Measured and Simulated Results for the Design 1 Antenna

The return loss was measured using the HP 8510 vector network analyzer (VNA) and HP 2.4 calibration standards. Figure 3 compares the measured and simulated results for the design 1 antenna on alumina. The return loss was obtained experimentally, using IE3D and the finite element simulator HFSS (Ansoft Corp.). The results are in very good agreement, verifying the design. The  $10\text{-dB}$  bandwidth at both frequency bands was about  $5$  percent.

The copolarization and cross-polarization gain patterns of this antenna in the E-plane ( $x\text{-}z$  plane) and H-plane ( $y\text{-}z$  plane) were also measured and are shown in figures 4 and 5 for the

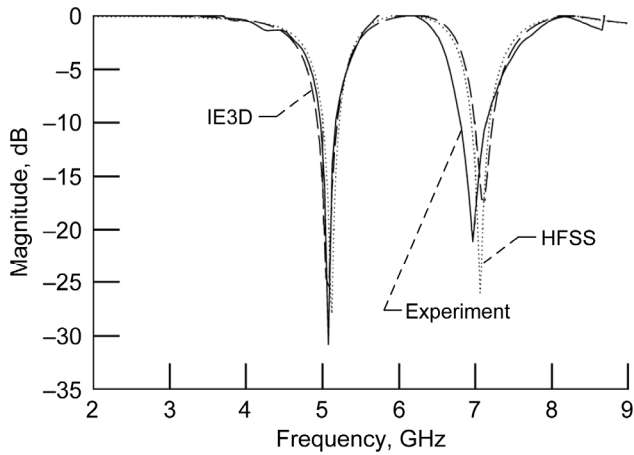


Figure 3.—Return loss of the design 1 dual-band antenna. Dimensions are shown in figure 1.

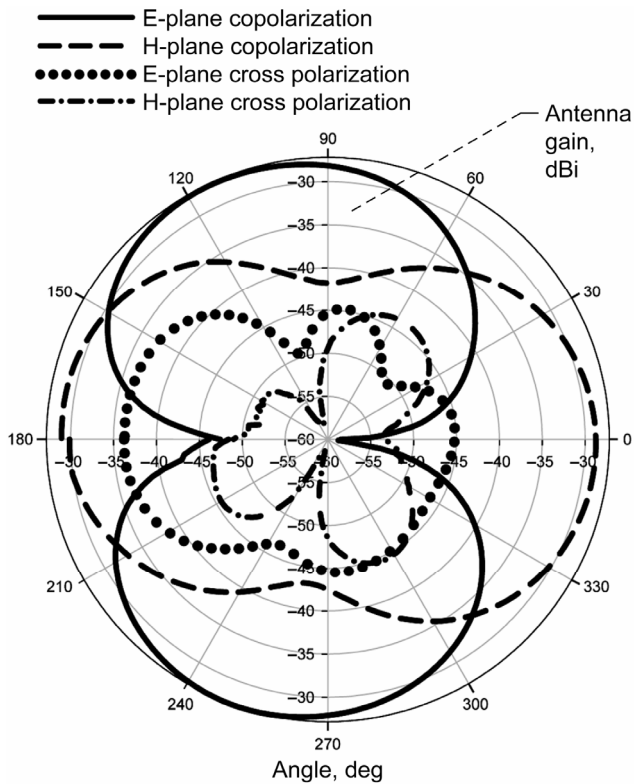


Figure 4.—Measured radiation pattern of the design 1 dual-band antenna at 5.0 GHz.

two measured center frequencies, 5.0 and 7.0 GHz, respectively. The antennas were measured in the far-field range in the Microwave Metrology Facility at the NASA Glenn Research Center. A 2- to -18-GHz broadband gain horn from Q-par Angus Ltd. (U.K.) was used to characterize the antenna gain patterns. These patterns show that the antenna possesses a linear polarization with a cross-polarization level that is more than 20 dBi (decibels isotropic) lower than the copolarization level. At 5.0 and 7.0 GHz, the antenna gain was about 3.5 dBi.

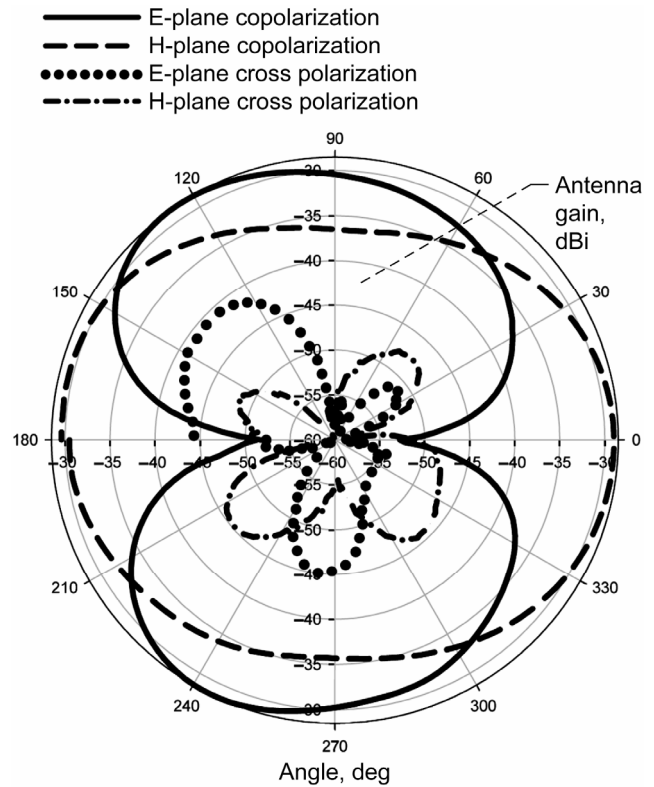


Figure 5.—Measured radiation pattern of the design 1 dual-band antenna at 7.0 GHz.

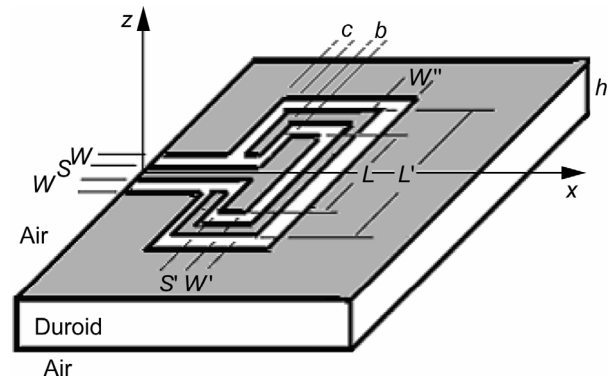


Figure 6.—Design 2 coplanar-waveguide-fed, dual-frequency slot antenna on Duroid:  $W = 0.3$  mm,  $S = 1.7$  mm,  $S' = 0.46$  mm,  $W' = 0.35$  mm,  $W'' = 1.36$  mm,  $L = 16.7$  mm,  $L' = 22.57$  mm,  $c = b = 0.15$  mm, dielectric constant  $\epsilon_r = 2.2$ , and  $h = 3.175$  mm.

## Design 2 Antenna on Duroid ( $\epsilon_r = 2.2$ )

### Design Procedure for the Design 2 Antenna

For the design 2 antenna, the chosen coplanar substrate was Duroid with a thickness of 3.18 mm and  $\epsilon_r$  of 2.2. Figure 6 shows the geometry of the design 2 antenna. The design

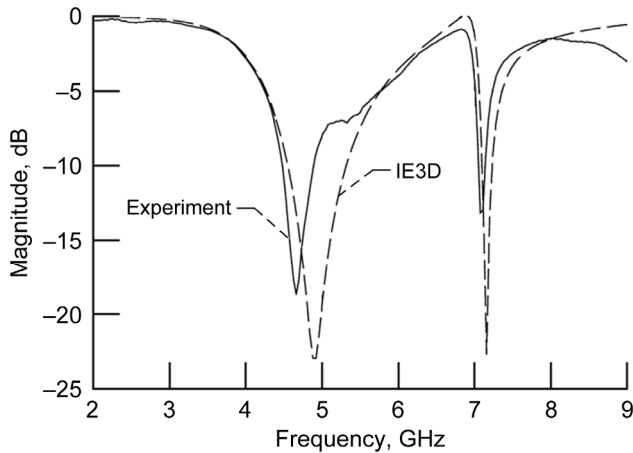


Figure 7.—Return loss of the design 2 dual-band antenna. Dimensions are shown in figure 6.

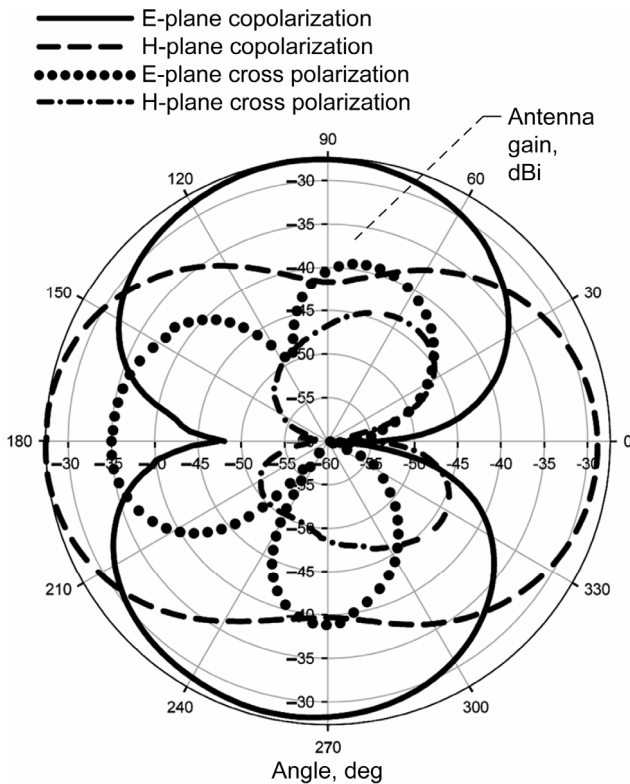


Figure 8.—Measured radiation pattern of the design 2 dual-band antenna at 7.0 GHz.

procedure was similar to that for design 1. The outer folded slot dipole is a regular folded slot dipole with two slot arms, each having a length  $L'$  of 22.57 mm and a width of 0.15 mm. This dipole resonates at 4.7 GHz and has an impedance of about 128  $\Omega$ . To match this antenna to the 70- $\Omega$  feeding CPW ( $S = 1.7$  mm and  $W = 0.3$  mm), the width of the external slot arm of the dipole  $W''$  was increased from 0.15 to 1.36 mm.

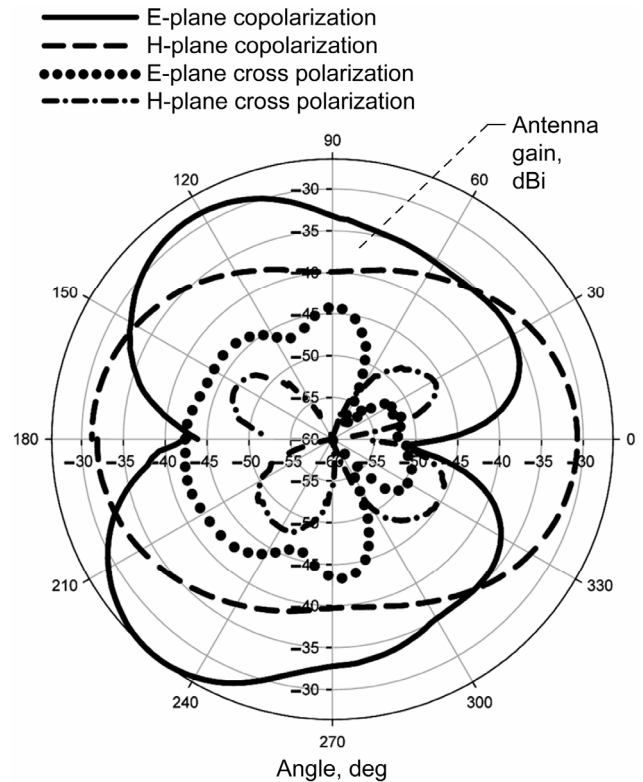


Figure 9.—Measured radiation pattern of the design 2 dual-band antenna at 7.1 GHz.

The difference between design 1 and 2 is that in the latter, the inner folded slot dipole consists of only two slot arms. Each arm has a length of 16.7 mm and a width of 0.15 mm. The width  $W'$  of the outer arm of the inner slot was increased from 0.15 to 0.35 mm for matching purposes. This dipole resonates at 7.1 GHz.

### Measured and Simulated Results for the Design 2 Antenna

Figure 7 shows the measured and IE3D simulated return loss of the design 2 antenna on Duroid. The two resonances are at 4.7 and 7.1 GHz, with measured return losses of 20 and 15 dB, respectively. The 10-dB bandwidth at both frequency bands was about 4 percent.

The measured gain patterns of this antenna in the E-plane and H-plane are shown in figures 8 and 9 for the two center frequencies, 4.7 and 7.1 GHz, respectively. At both frequencies, the gain was about 4.5 dBi and the cross polarization was about 20 dBi less than the copolarization.

### Conclusions

Two techniques for designing dual-band, coplanar-waveguide-fed, double-folded slot antennas that do not require



an external matching circuit were demonstrated. Using more internal slots inside the antenna, shifting the position of these slots, or increasing the width of one of the slot arms achieved matching at both frequency bands without significantly affecting the shape of the radiation pattern.

Two different designs, on alumina and Duroid, were fabricated and measured. The experimental results were compared with those obtained using commercial full-wave simulators with very good agreement. A full design procedure has been provided.

## References

1. Dachele, Jashwant S.; Lee, Kai-Fong; and Wong, D.P.: Dual-Frequency Stacked Annular-Ring Microstrip Antenna. *IEEE Trans. Antennas Propag.*, vol. AP-35, no. 11, 1987, pp. 1281–1285.
2. Nakano, H.; and Vichien, K.: Dual-Frequency Square Patch Antenna With Rectangular Notch. *Electr. Lett.*, vol. 25, no. 16, 1989, pp. 1067–1068.
3. Bennequeouche, J.; Damiano, J.P.; and Papiernik, A.: Original Multilayer Microstrip Disc Antenna Dual-Frequency Band Operation—Theory and Experiment. *IEE Proc. H, Microwaves, Antennas and Propagation*, vol. 140, no. 6, 1993, pp. 441–446.
4. Omar, A.A.; and Antar, Y.M.M.: Design of a Dual-Band Coplanar Waveguide-Fed Slot Antenna With Wide Frequency Separation. *Int. J. Electron.*, vol. 88, no. 12, 2001, pp. 1247–1255.
5. Tsai, Huan-Shang; and York, Robert A.: FDTD Analysis of CPW-Fed Folded-Slot and Multiple-Slot Antennas on Thin Substrates. *IEEE Trans. Antennas Propag.*, vol. 44, no. 2, 1996, pp. 217–226.
6. Lopez-Rivera, N.; and Rodriguez-Solis, R.A.: Impedance Matching Technique for Microwave Folded Slot Antennas. *Antennas Propag. Soc. Int. Symp.*, vol. 3, 2002, pp. 450–453.
7. Chen, J.S.: Dual-Frequency Slot Antennas Fed by Capacitive Coplanar Waveguide. *Microwave Optical Technol. Lett.*, vol. 32, no. 6, 2002, pp. 452–453.

Glenn Research Center  
National Aeronautics and Space Administration  
Cleveland, Ohio, December 10, 2007

**REPORT DOCUMENTATION PAGE**

*Form Approved*  
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

<b>1. REPORT DATE (DD-MM-YYYY)</b> 01-12-2007			<b>2. REPORT TYPE</b> Technical Paper		<b>3. DATES COVERED (From - To)</b>	
<b>4. TITLE AND SUBTITLE</b> Design and Measurement of Self-Matched, Dual-Frequency Coplanar-Waveguide-Fed Slot Antennas					<b>5a. CONTRACT NUMBER</b>	
					<b>5b. GRANT NUMBER</b>	
					<b>5c. PROGRAM ELEMENT NUMBER</b>	
<b>6. AUTHOR(S)</b> Omar, Amjad, A.; Scardelletti, Maximilian, C.; Hejazi, Zuhair, M.; Dib, Nihad					<b>5d. PROJECT NUMBER</b>	
					<b>5e. TASK NUMBER</b>	
					<b>5f. WORK UNIT NUMBER</b> WBS 953033.01.03.15	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191					<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> E-16181	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> National Aeronautics and Space Administration Washington, DC 20546-0001					<b>10. SPONSORING/MONITORS ACRONYM(S)</b> NASA	
					<b>11. SPONSORING/MONITORING REPORT NUMBER</b> NASA/TP-2007-214952	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Unclassified-Unlimited Subject Category: 32 Available electronically at <a href="http://gltrs.grc.nasa.gov">http://gltrs.grc.nasa.gov</a> This publication is available from the NASA Center for AeroSpace Information, 301-621-0390						
<b>13. SUPPLEMENTARY NOTES</b> Submitted to IEEE Antennas and Propagation Transactions.						
<b>14. ABSTRACT</b> This report presents two new designs of dual-frequency, coplanar-waveguide-fed, double-folded slot antennas. An important advantage of these antennas is that, because they are self-matched to the feeding coplanar waveguide, they do not need an external matching circuit. This reduces the antenna size and simplifies its design. To verify the designs, the authors measured and compared the return loss and radiation patterns with those obtained using available commercial software with good agreement.						
<b>15. SUBJECT TERMS</b> Dual-frequency slot antennas; Self impedance matching; Duroid; Alumina; Coplanar waveguide; Multiple band antennas						
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>	<b>18. NUMBER OF PAGES</b>	<b>19a. NAME OF RESPONSIBLE PERSON</b>	
<b>a. REPORT</b>	<b>b. ABSTRACT</b>	<b>c. THIS PAGE</b>			STI Help Desk (email:help@sti.nasa.gov)	
U	U	U	UU	11	<b>19b. TELEPHONE NUMBER (include area code)</b> 301-621-0390	



