



# Ka-Band Waveguide Hybrid Combiner for MMIC Amplifiers With Unequal and Arbitrary Power Output Ratio

*Rainee N. Simons*

*Glenn Research Center, Cleveland, Ohio*

*Christine T. Chevalier*

*Analex Corporation, Cleveland, Ohio*

*Edwin G. Wintucky and Jon C. Freeman*

*Glenn Research Center, Cleveland, Ohio*

## NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI Program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.
- **CONFERENCE PUBLICATION.** Collected

papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.

- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include creating custom thesauri, building customized databases, organizing and publishing research results.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to [help@sti.nasa.gov](mailto:help@sti.nasa.gov)
- Fax your question to the NASA STI Help Desk at 301-621-0134
- Telephone the NASA STI Help Desk at 301-621-0390
- Write to:  
NASA Center for AeroSpace Information (CAST)  
7115 Standard Drive  
Hanover, MD 21076-1320



# Ka-Band Waveguide Hybrid Combiner for MMIC Amplifiers With Unequal and Arbitrary Power Output Ratio

*Rainee N. Simons*  
*Glenn Research Center, Cleveland, Ohio*

*Christine T. Chevalier*  
*Analex Corporation, Cleveland, Ohio*

*Edwin G. Wintucky and Jon C. Freeman*  
*Glenn Research Center, Cleveland, Ohio*

Prepared for the  
2009 International Microwave Symposium  
sponsored by the Institute of Electrical and Electronics Engineers  
Boston, Massachusetts, June 7–12, 2009

National Aeronautics and  
Space Administration

Glenn Research Center  
Cleveland, Ohio 44135

## Acknowledgments

The authors acknowledge the precision fabrication of the branch-line hybrid combiner by Astro Manufacturing & Design, Eastlake, Ohio. The authors thank James M. Downey for the hybrid combiner S-parameter measurements.

This report contains preliminary findings,  
subject to revision as analysis proceeds.

*Level of Review:* This material has been technically reviewed by technical management.

Available from

NASA Center for Aerospace Information  
7115 Standard Drive  
Hanover, MD 21076-1320

National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161

Available electronically at <http://gltrs.grc.nasa.gov>

# Ka-Band Waveguide Hybrid Combiner for MMIC Amplifiers With Unequal and Arbitrary Power Output Ratio

Rainee N. Simons

National Aeronautics and Space Administration  
Glenn Research Center  
Cleveland, Ohio 44135

Christine T. Chevalier

Analex Corporation  
Cleveland, Ohio 44135

Edwin G. Wintucky and Jon C. Freeman

National Aeronautics and Space Administration  
Glenn Research Center  
Cleveland, Ohio 44135

## Abstract

The design, simulation and characterization of a novel Ka-band ( $32.05 \pm 0.25$  GHz) rectangular waveguide branch-line hybrid unequal power combiner is presented. The manufactured combiner was designed to combine input signals, which are in phase and with an amplitude ratio of two. The measured return loss and isolation of the branch-line hybrid are better than 22 and 27 dB, respectively. The application of the branch-line hybrid for combining two MMIC power amplifiers with output power ratio of two is demonstrated. The measured combining efficiency is approximately 93 percent over the above frequency band.

## I. Introduction

NASA plans to return humans to the Moon as a part of the Exploration Program and is therefore developing a new Crew Exploration Vehicle (CEV), which is called Orion (ref. 1). In addition, a Lunar Lander is also being planned, which is called Altair (ref. 2). The Orion and the Altair require microwave power amplifiers for communications with the Tracking and Data Relay Satellite System (TDRSS)/International Space Station (ISS) and the Lunar Relay Satellite, respectively. Amplifiers with output power on the order of a few tens of watts at Ka-Band frequencies are adequate for the given data rates and distances that are involved. A solid-state power amplifier (SSPA) would be capable of meeting the above power requirements.

The highest power Ka-Band (31.8 to 32.3 GHz) SSPA to have flown in space had an output power of 2.6 watts and an overall efficiency of 14.3 percent (ref. 3). This SSPA was built around discrete GaAs pHEMT devices and flew on-board the Deep Space One spacecraft. Since that time monolithic microwave integrated circuit (MMIC) power amplifier (PA) technology has significantly advanced. The state-of-the-art (SOA) GaAs pHEMT based MMICs are capable of delivering RF power

anywhere from 3 watts with a power added efficiency (PAE) of 32 percent to 6 watts with a PAE of 26 percent, at Ka-Band frequencies (ref. 4). To achieve power levels higher than 6 watts, the output from several MMIC PAs have to be combined using a power combiner. Conventional binary waveguide power combiners, such as the short slot and magic-T based, require MMIC PAs with identical amplitude and phase characteristics for high combining efficiency. However, due to manufacturing process variations, the output power of the MMIC PAs tends to be unequal. In the past, several researchers have investigated rectangular waveguide unequal power combiners, which are based on hybrid ring (ref. 5), shunt/series coupling slots (ref. 6), E-plane septums (ref. 7), H-plane T-junctions (ref. 8), and an asymmetric magic-T (ref. 9). The unequal power combiners surveyed above operated at or below X-Band frequencies.

In this paper, we present a novel Ka-Band branch-line hybrid with arbitrary power combining ratio and port impedance. These features result in several advantages, which are as follows: first, the design is very flexible. The flexibility allows the combiner to be customized for combining the power from MMIC PAs with arbitrary power output ratio. In addition, it also allows combining a low power GaAs MMIC with a high power GaN MMIC. Second, the arbitrary port impedance allows matching the output impedance of the MMIC PA directly to the waveguide impedance without transitioning first into a transmission line with characteristic impedance of  $50 \Omega$ . Thus by eliminating the losses associated with a transition, the overall SSPA efficiency is enhanced. Third, for reducing the cost and weight when required in very large quantities, such as in the beam forming networks of phased array antenna systems, the combiner can be manufactured using metal-plated plastic (ref. 10). Fourth, two hybrid unequal power combiners can be cascaded to realize a non-binary combiner (for e.g., a 3-way) and can be synergistically optimized for low VSWR, low insertion loss, high isolation and wide bandwidth using modern software design tools. However, for the purpose of this demonstration we have fabricated a branch-line hybrid with

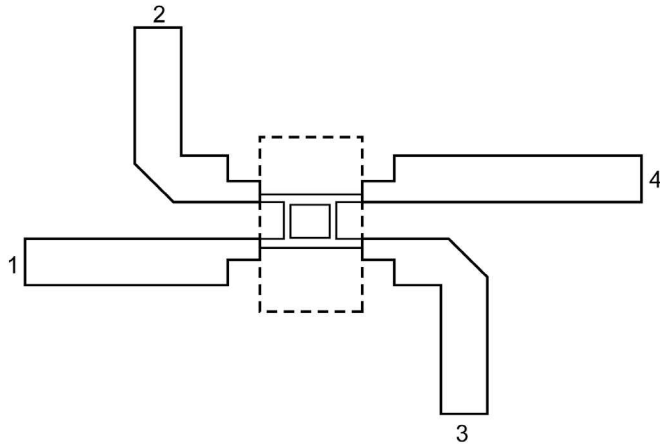


Figure 1.—Illustration of the lower half of the waveguide branch-line hybrid power combiner, which includes the E-plane stepped impedance transformers to standard WR-28 waveguide and mitered right-angled bends. The dotted area in the center is the basic hybrid combiner.

fixed power combining ratio of two and with port impedances matched to that of a standard WR-28 waveguide. The WR-28 waveguide facilitates characterization using standard off-the-shelf test and measurement equipment. The results presented for the branch-line hybrid include the measured and simulated return loss, power output ratio, isolation and efficiency. Lastly, we demonstrate high efficiency power combining of two Ka-Band GaAs pHEMT MMIC PAs with power output ratio of two.

## II. Ka-Band Waveguide Hybrid Power Combiner Layout

The branch-line hybrid combiner is constructed in an E-plane split-block arrangement. The lower half of the combiner is illustrated in figure 1. In this figure, the dashed box indicates the basic hybrid combiner with arbitrary power combining ratio and port impedance. The port impedances are matched to that of a standard WR-28 waveguide by using E-plane stepped impedance transformers. In the H-plane, the combiner dimensions are identical to that of the standard WR-28 waveguide. A mitered right angle bend is added to orient the ports along the four faces of the block for ease of characterization.

## III. Power Combiner Modeling and Simulation

For the purpose of this demonstration, we designed the circuit for operation over the 500 MHz bandwidth centered at 32.05 GHz which corresponds to the designated NASA deep space frequency band. The circuit is a 2:1 in-phase power combiner; that is, the ratio of the coherent power incident at ports 3 and 4 is 2. Port 1 is the combined output port and port 2 is isolated. Since the circuit is reciprocal, we initially

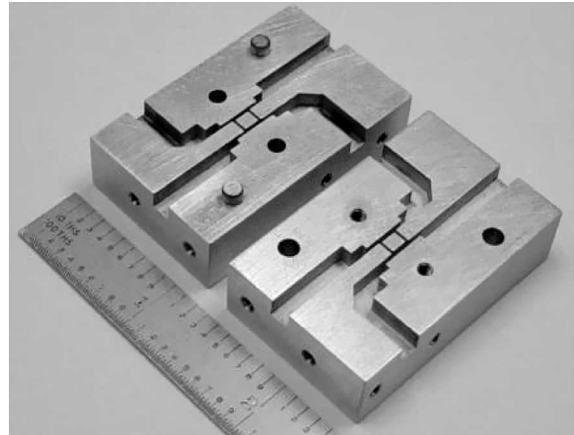


Figure 2.—Photograph of the fabricated 2:1 Ka-Band branch-line hybrid power combiner in an E-plane split block arrangement. The dimensions of the assembled combiner are 1.8 by 1.2 by 1 in.

modeled/simulated the basic hybrid combiner within the dashed box as a power divider by exciting port 1. The goal was to achieve a 2:1 power split between ports 3 and 4 with minimum reflection at port 1 and high isolation between ports 1 and 2. This was accomplished by using the transient solver of the software package CST Microwave Studio (ref. 11). Perfect electrical conductors were assumed. The solver varied the length and width of the waveguide sections in the branch-line hybrid to achieve the above goals. The solver assumed 15 mesh lines per wavelength, which resulted in a total of approximately 14,000 mesh cells. Each simulation took less than 1 min on a Hewlett-Packard xw6400 workstation.

Next, the transition to standard WR-28 waveguide using stepped impedance transformers and also mitered right-angled bends were added to the basic circuit. In addition, we lengthened the distance to port 4 from the junction so that the signals at ports 3 and 4 are in phase for maximum combining. The complete circuit was once again simulated and optimized as a power divider using CST Microwave Studio. The simulated  $S_{31}$  and  $S_{41}$  at the center frequency of 32.05 GHz are  $-1.79$  and  $-4.81$  dB, respectively, resulting in 99.3 percent efficiency. The fabricated branch-line hybrid combiner is shown in figure 2.

## IV. Measured and Modeled Results

The power combiner is characterized as a power divider using a calibrated Agilent Technologies Model E8363B network analyzer. Figure 3 presents the measured and simulated return loss ( $S_{11}$ ) at the excitation port 1 as a function of the frequency. The measured return loss is better than 22 dB across the 500 MHz bandwidth.

In figure 4, the measured and simulated amplitude of the signal coupled to the output port 3 ( $S_{31}$ ) and port 4 ( $S_{41}$ ) as a function of the frequency are presented. In figure 5, the measured and simulated phase difference between the signals

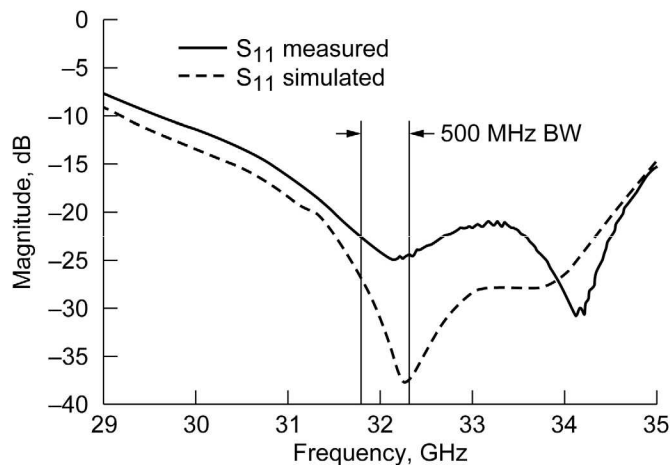


Figure 3.—Measured and simulated return loss ( $S_{11}$ ) at the excitation port 1 as a function of the frequency.

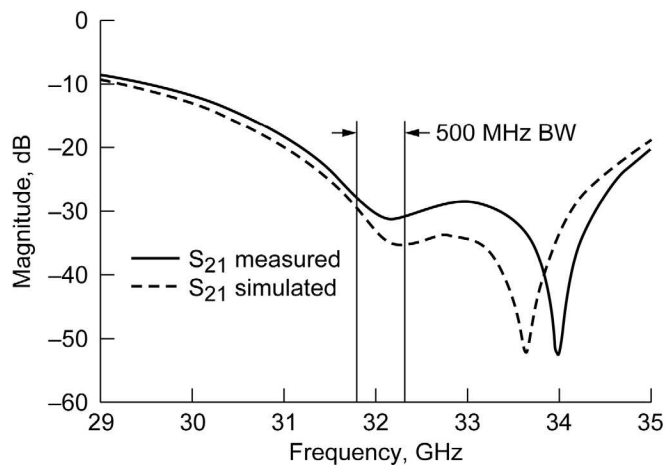


Figure 6.—Measured and simulated signal isolation between the excitation port 1 and the isolated port 2 ( $S_{21}$ ) as a function of the frequency.

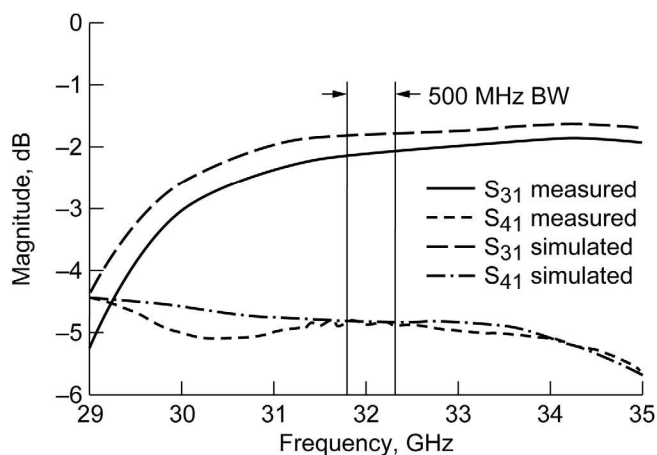


Figure 4.—Measured and simulated amplitude of the signal coupled to the output port 3 ( $S_{31}$ ) and port 4 ( $S_{41}$ ) as a function of the frequency.

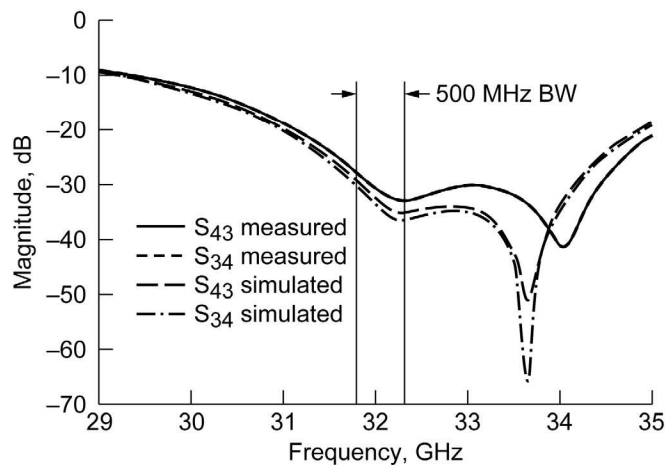


Figure 7.—Measured and simulated isolation between the output port 3 and port 4 ( $S_{43}$ ,  $S_{34}$ ) as a function of the frequency.

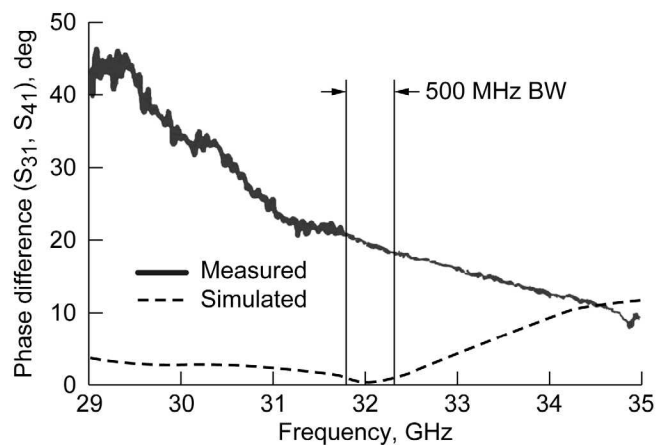


Figure 5.—Measured and simulated phase difference of the signal coupled to the output port 3 and port 4 (phase of  $S_{31}$  - phase of  $S_{41}$ ) as a function of the frequency.

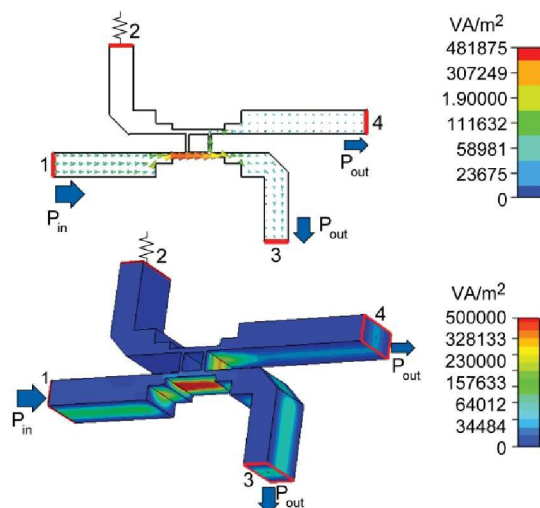


Figure 8.—Illustration of the unequal power flow in the branch-line hybrid.

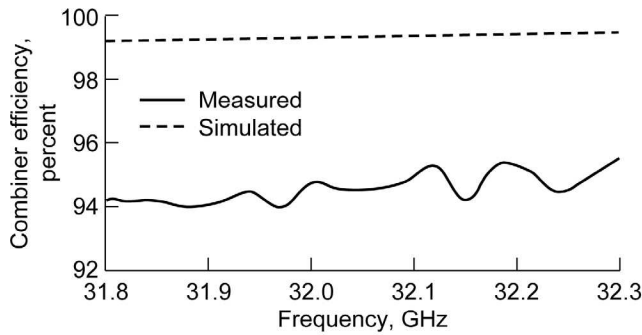


Figure 9.—Measured and simulated combiner efficiency as a function of the frequency.

coupled to the output port 3 and port 4 (phase of  $S_{31}$  – phase of  $S_{41}$ ) are presented. Across the 500 MHz bandwidth the measured signal amplitude deviates from the simulated values by a maximum of 0.35 dB and the measured phase difference deviates from the simulated values by  $20^\circ$ .

Figure 6 presents the measured and simulated signal isolation between the excitation port 1 and the isolated port 2 ( $S_{21}$ ). Figure 7 presents the measured and simulated signal isolation between the output port 3 and port 4 ( $S_{43}$  and  $S_{34}$ ). It is observed from these figures that across the 500 MHz bandwidth, the measured isolation is better than 27 dB, which is considered to be excellent. The simulated unequal power flow in the branch-line hybrid is shown in figure 8.

The low insertion loss, good phase characteristics, high isolation between ports 1 and 2, and between ports 3 and 4, make this circuit very efficient. If used as a combiner, with ports 3 and 4 as the inputs, then from the above measured data, the efficiency is approximately 94 percent over the 500 MHz bandwidth, as shown in figure 9.

## V. Combining of Ka-Band MMIC Power Amplifiers

The GaAs pHEMT MMIC amplifiers in our experimental set-up, illustrated in figure 10, are the model XP1026 and the model XP1027 manufactured by Mimix Broadband (ref. 12). For this experiment, the MMICs are mounted in coaxial test fixtures and include the bias circuitry. The MMIC PAs are then coupled via a coax-to-waveguide adapter to ports 3 and 4 of the branch-line hybrid, respectively. The input power ( $P_{in}$ ) to port 4 from XP1026 is 0.5 watt and to port 3 from XP1027 is 1.0 watt. The phase shifter is adjusted for maximum combined power ( $P_{out}$ ) at port 1. The combiner output power at port 1 is measured across the 31.8 to 32.3 GHz band. In figure 11, the combiner output power ( $P_{out}$ ) and the combiner efficiency are presented as a function of frequency. The combiner efficiency

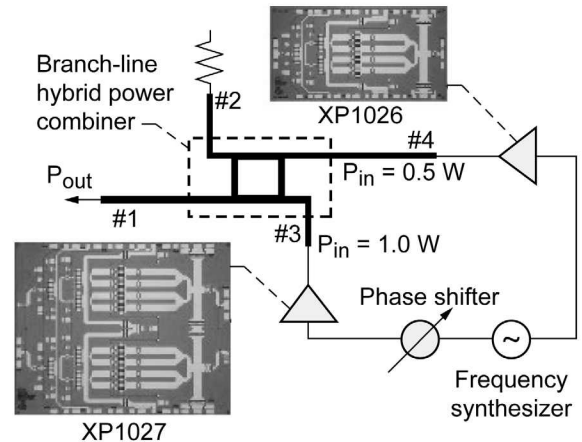


Figure 10.—Schematic of experimental set-up for demonstrating power combining of GaAs pHEMT MMIC amplifiers with unequal power output using the branch-line hybrid.

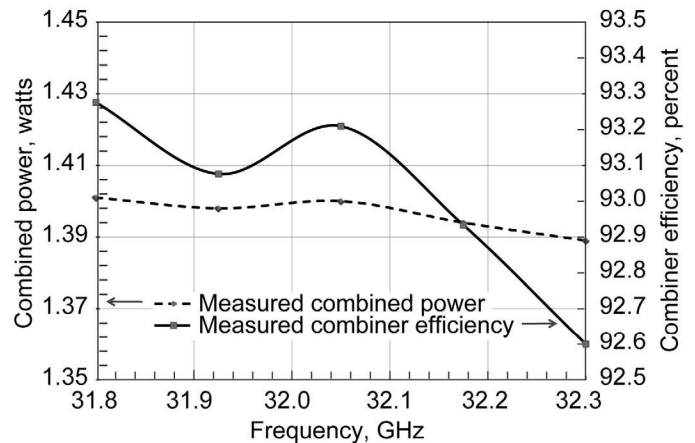


Figure 11.—Measured combiner output power and combiner efficiency as a function of frequency.

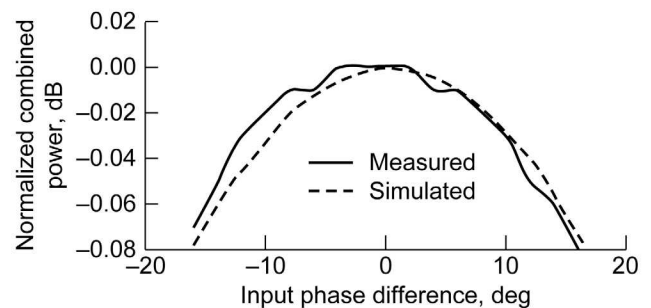


Figure 12.—Measured and simulated normalized combiner output power as a function of input phase difference at 32.05 GHz.



is approximately 93 percent over the above frequency range. Change in phase shifter setting by  $\pm 15^\circ$  was observed to result in <0.25 percent decrease in  $P_{\text{out}}$  at the center frequency of 32.05 GHz as shown in figure 12. Low sensitivity to phase variation implies potential applications in high bandwidth and high data rate communications.

## VI. Conclusions and Discussions

The design, modeling/simulation and characterization of a novel Ka-Band (32.05 $\pm$ 0.25 GHz) rectangular waveguide branch-line hybrid unequal power combiner are presented. The manufactured combiner is designed to combine input signals, which are in phase and with an amplitude ratio of two. The measured return loss and isolation of the branch-line hybrid are better than 22 and 27 dB, respectively over the above frequency range. The application of the branch-line hybrid for combining two MMIC power amplifiers with output power ratio of two is demonstrated. The combining efficiency is approximately 93 percent over the above frequency range. We have demonstrated high efficiency power combining. This permits the use of other than binary combining, which allows the use of fewer combiners to develop SSPAs with power levels in the tens of watts.

## References

1. [http://www.nasa.gov/mission\\_pages/constellation/orion/index.html](http://www.nasa.gov/mission_pages/constellation/orion/index.html)
2. [http://www.nasa.gov/mission\\_pages/constellation/altair/index.html](http://www.nasa.gov/mission_pages/constellation/altair/index.html)
3. M.K. Karnacewicz, W.J. Taft, S. Valenti, T. Renna, M. Hirokawa, S. Conway and L. Newman, "2.6 Watt Ka-Band Solid State Power Amplifier for Deep Space Communications," 1999 Government Microcircuit Applications Conference (GOMAC 1999) Digest of papers, Vol. XXIV, pp. 247–250, Monterey, CA, March 8–11, 1999.
4. P.M. Smith, "PHEMT and MHEMT Devices for Millimeter-Wave Power Amplifiers," Workshop (WMD) on Millimeter-Wave Power Amplifier Technology: Power, Linearity and Efficiency, 2008 IEEE MTT-S Int. Microwave Symp., Workshop Notes, Atlanta, Georgia, June 16, 2008.
5. C.Y. Pon, "Hybrid-Ring Directional Coupler for Arbitrary Power Divisions," IRE Trans Microwave Theory Techniques, Vol. 9, No. 6, pp. 529–535, Nov 1961.
6. P.K. Park, M.E. Slaterbeck, and S.E. Bradshaw, "Shunt/Series Coupling Slot in Rectangular Waveguides," 1984 IEEE Antennas & Propagation Society Int. Symp., pp. 62–65, Boston, MA, June 25–28, 1984.
7. S. Christopher, V.A. Abid Hussain, M.S. Easwaran and V.N. Dabade, "Design Aspects of Compact High Power Multiport Unequal Power Dividers," 1996 IEEE Int. Symp., on Phased Array Systems and Technology, pp. 63–67, Boston, MA, Oct. 15–18, 1996.
8. S. Yang and A.E. Fathy, "Synthesis of a Compound T-Junction for a Two-Way Splitter With Arbitrary Power Ratio," 2005 IEEE MTT-S Int. Microwave Symp., Dig., pp. 985–988, Long Beach, CA, June 12–17, 2005.
9. T. Takahashi, S. Sakanaka, and M. Izawa, "Development of an Asymmetric Power Divider for a High-Power RF Distribution System," IEEE Trans. Nuclear Science, Vol. 48, No. 4, Part 3, pp. 1592–1597, Aug. 2001.
10. H. Asao, K. Henmi, M. Mukuda, and N. Yoneda, "Ku-Band Power Combiner Composed of Metal-Plated Plastic Waveguide Hybrid," 2004 IEEE MTT-S Int. Microwave Symp., Dig., Vol. 2, pp. 625–628, Fort Worth, TX, June 6–11, 2004.
11. <http://www.cst-america.com>
12. <http://www.mimixbroadband.com>

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>				
1. REPORT DATE (DD-MM-YYYY) 01-06-2009		2. REPORT TYPE Technical Memorandum		3. DATES COVERED (From - To)
4. TITLE AND SUBTITLE Ka-Band Waveguide Hybrid Combiner for MMIC Amplifiers With Unequal and Arbitrary Power Output Ratio		5a. CONTRACT NUMBER		
		5b. GRANT NUMBER		
		5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Simons, Rainee, N.; Chevalier, Christine, T.; Wintucky, Edwin, G.; Freeman, Jon, C.		5d. PROJECT NUMBER		
		5e. TASK NUMBER		
		5f. WORK UNIT NUMBER WBS 806866.02.03.0645.01		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191		8. PERFORMING ORGANIZATION REPORT NUMBER E-16925-1		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001		10. SPONSORING/MONITORS ACRONYM(S) NASA		
		11. SPONSORING/MONITORING REPORT NUMBER NASA/TM-2009-215639		
12. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified-Unlimited Subject Category: 17 Available electronically at <a href="http://gltrs.grc.nasa.gov">http://gltrs.grc.nasa.gov</a> This publication is available from the NASA Center for AeroSpace Information, 301-621-0390				
13. SUPPLEMENTARY NOTES				
14. ABSTRACT The design, simulation and characterization of a novel Ka-band (32.05±0.25 GHz) rectangular waveguide branch-line hybrid unequal power combiner is presented. The manufactured combiner was designed to combine input signals, which are in phase and with an amplitude ratio of two. The measured return loss and isolation of the branch-line hybrid are better than 22 and 27 dB, respectively. The application of the branch-line hybrid for combining two MMIC power amplifiers with output power ratio of two is demonstrated. The measured combining efficiency is approximately 93 percent over the above frequency band.				
15. SUBJECT TERMS Telecommunications; Transmitters; Deep Space Network; Space communication; Satellite communications; Microwave transmission; Microwave amplifiers; Power amplifiers; Power efficiency; Hybrid junctions; Microwave communications; MMIC power amplifiers				
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES 11
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U		
				19a. NAME OF RESPONSIBLE PERSON STI Help Desk (email: <a href="mailto:help@sti.nasa.gov">help@sti.nasa.gov</a> )
				19b. TELEPHONE NUMBER (Include area code) 301-621-0390



