

(12) **United States Patent**
Pierrottet et al.

(10) **Patent No.:** **US 9,712,250 B2**
(45) **Date of Patent:** ***Jul. 18, 2017**

(54) **SYSTEM AND METHOD FOR GENERATING A FREQUENCY MODULATED LINEAR LASER WAVEFORM**

(71) Applicant: **The United States of America as represented by the Administrator of the National Aeronautics and Space Administration, Washington, DC (US)**

(72) Inventors: **Diego F. Pierrottet, Poquoson, VA (US); Larry B. Petway, Hampton, VA (US); Farzin Amzajerdian, Yorktown, VA (US); Bruce W. Barnes, Yorktown, VA (US); George E. Lockard, Newport News, VA (US); Glenn D. Hines, Yorktown, VA (US)**

(73) Assignee: **THE UNITED STATES OF AMERICA AS REPRESENTED BY THE ADMINISTRATOR OF THE NATIONAL AERONAUTICS AND SPACE ADMINISTRATION, Washington, DC (US)**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 18 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/550,028**

(22) Filed: **Nov. 21, 2014**

(65) **Prior Publication Data**

US 2015/0104193 A1 Apr. 16, 2015

Related U.S. Application Data

(62) Division of application No. 13/527,638, filed on Jun. 20, 2012, now Pat. No. 8,897,654.

(51) **Int. Cl.**
H04B 10/00 (2013.01)
H04B 10/556 (2013.01)

(Continued)

(52) **U.S. Cl.**
CPC **H04B 10/5563** (2013.01); **G01S 7/4911** (2013.01); **G01S 17/32** (2013.01); **H04B 10/2575** (2013.01); **H04B 10/548** (2013.01)

(58) **Field of Classification Search**
CPC H04B 10/548–10/5563
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,611,912 A * 9/1986 Falk G01S 17/58
356/28.5
4,856,010 A * 8/1989 Wissman H01S 3/134
372/28

(Continued)

OTHER PUBLICATIONS

Christer J. Karlsson, et al., "Linearization of the frequency sweep of a frequency-modulated continuous-wave semiconductor laser radar and the resulting ranging performance," *Applied Optics*, May 20, 1999, pp. 3378-3386, vol. 38, No. 15.

(Continued)


Primary Examiner — Agustin Bello

(74) *Attorney, Agent, or Firm* — Andrea Z. Warmbier

(57) **ABSTRACT**

A system for generating a frequency modulated linear laser waveform includes a single frequency laser generator to produce a laser output signal. An electro-optical modulator modulates the frequency of the laser output signal to define a linear triangular waveform. An optical circulator passes the linear triangular waveform to a band-pass optical filter to filter out harmonic frequencies created in the waveform during modulation of the laser output signal, to define a pure filtered modulated waveform having a very narrow bandwidth. The optical circulator receives the pure filtered modulated laser waveform and transmits the modulated laser waveform to a target.

4 Claims, 2 Drawing Sheets

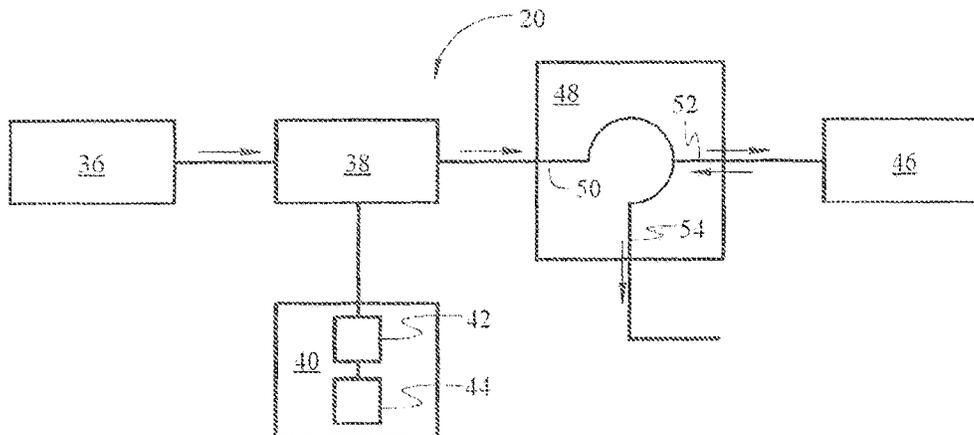

<p>(51) Int. Cl. <i>H04B 10/548</i> (2013.01) <i>G01S 17/32</i> (2006.01) <i>G01S 7/491</i> (2006.01) <i>H04B 10/2575</i> (2013.01)</p> <p>(58) Field of Classification Search USPC 398/182–201 See application file for complete search history.</p> <p>(56) References Cited U.S. PATENT DOCUMENTS</p> <p>5,289,252 A * 2/1994 Nourrcier G01S 7/497 356/28.5</p> <p>5,347,357 A * 9/1994 Nourrcier, Jr. G01S 7/4911 356/28.5</p> <p>5,534,993 A * 7/1996 Ball G01S 17/325 356/5.09</p> <p>5,850,303 A * 12/1998 Yamamoto H04B 10/504 398/76</p> <p>5,923,280 A * 7/1999 Farmer G01S 7/023 342/129</p> <p>6,072,615 A * 6/2000 Mamyshev H04B 10/508 398/1</p> <p>6,115,162 A * 9/2000 Graves H04B 10/50 398/1</p> <p>6,459,519 B1 * 10/2002 Sasai H04B 10/505 398/183</p> <p>6,643,046 B2 * 11/2003 Ibe H04B 10/505 359/238</p> <p>6,654,401 B2 * 11/2003 Cavalheiro Vieira H01Q 3/2676 372/12</p> <p>6,778,279 B2 * 8/2004 Lange G01B 11/16 356/483</p> <p>6,844,924 B2 * 1/2005 Ruff G01S 7/491 356/28.5</p> <p>6,850,713 B2 * 2/2005 Kikuchi H04B 10/505 359/237</p> <p>6,889,008 B2 * 5/2005 Ogusu H04J 14/02 398/183</p> <p>6,950,222 B2 * 9/2005 Ibe H04B 10/505 359/238</p> <p>6,970,655 B2 * 11/2005 Ono H04B 10/50572 398/186</p>	<p>7,148,469 B2 * 12/2006 Pearson H04B 10/63 250/221</p> <p>7,379,671 B2 * 5/2008 Shimomura H04B 10/505 398/188</p> <p>7,527,200 B2 * 5/2009 Tsikos G02B 26/10 235/454</p> <p>7,634,201 B2 * 12/2009 Maleki G02B 6/29341 356/484</p> <p>7,813,651 B2 * 10/2010 Ilchenko G02F 1/011 398/115</p> <p>7,894,725 B2 * 2/2011 Holman H04B 10/508 398/183</p> <p>7,954,719 B2 * 6/2011 Zhu G06K 7/10544 235/383</p> <p>7,974,534 B2 * 7/2011 Weiner H04B 1/40 398/149</p> <p>8,525,974 B2 * 9/2013 Turner G01S 7/4811 356/3.01</p> <p>8,897,654 B1 * 11/2014 Pierrottet H04B 10/548 398/183</p> <p>2003/0002121 A1 * 1/2003 Miyamoto H04B 10/5051 398/185</p> <p>2003/0030875 A1 * 2/2003 Barczyk H04B 10/505 398/187</p> <p>2003/0058519 A1 * 3/2003 Ibe H04B 10/505 359/279</p> <p>2005/0012978 A1 * 1/2005 Ibe H04B 10/505 359/279</p> <p>2007/0206190 A1 * 9/2007 Baillon H01S 5/0622 356/342</p> <p>2010/0266275 A1 * 10/2010 Xia H04B 10/0773 398/16</p> <p>2013/0243430 A1 * 9/2013 Hironishi H04B 10/0775 398/48</p> <p>2014/0036252 A1 * 2/2014 Amzajerdian G01S 17/325 356/28</p>
--	--

OTHER PUBLICATIONS

Farzin Amzajerdian, et al., "Coherent Doppler Lidar for Precision Navigation of Spacecrafts," 16th Coherent Laser Radar Conference, Jun. 20-24, 2011, pp. 1-4, Long Beach, CA.

Farzin Amzajerdian, et al., "Coherent Doppler Lidar for Precision Navigation of Spacecrafts," 16th Coherent Laser Radar Conference, Presentation Slides, Jun. 20-24, 2011, pp. 1-25, Long Beach, CA.

* cited by examiner

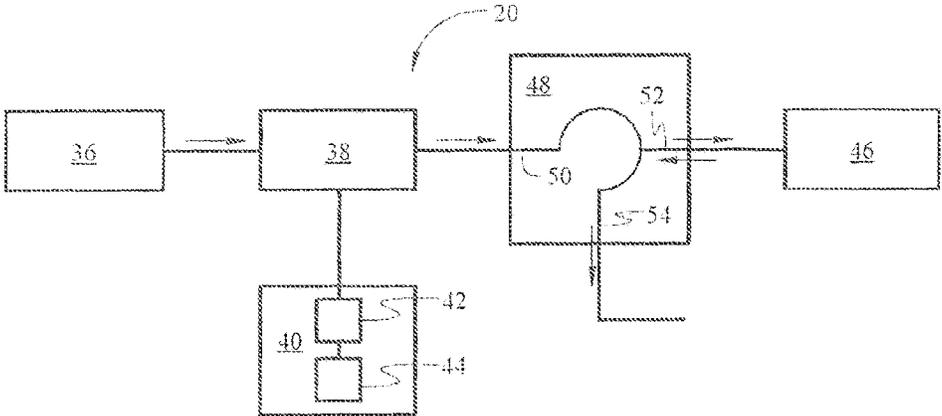


FIG. 1

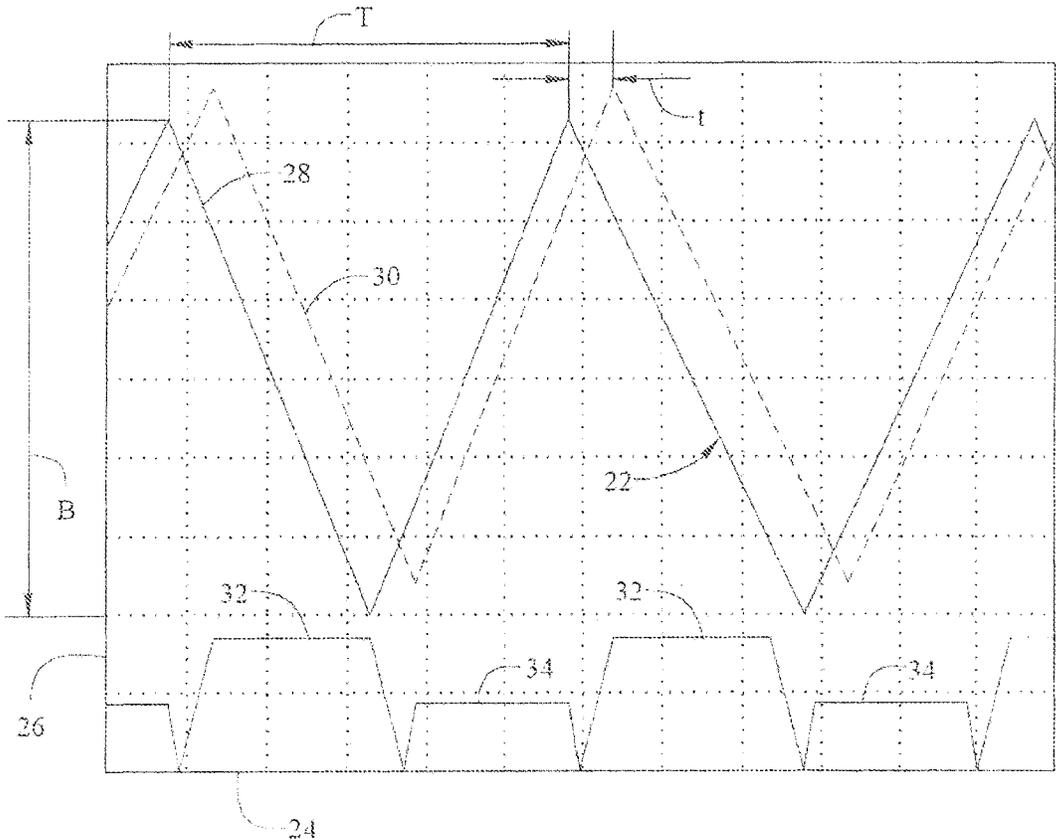


FIG. 2

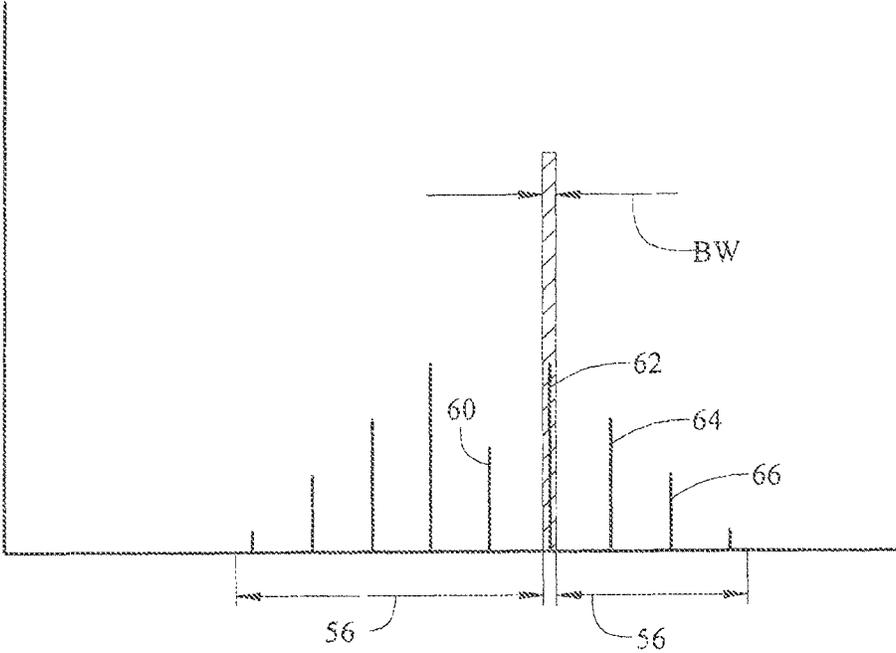


FIG. 3

1

SYSTEM AND METHOD FOR GENERATING A FREQUENCY MODULATED LINEAR LASER WAVEFORM

CROSS-REFERENCE TO RELATED APPLICATIONS

This patent application claims the benefit of priority to and is a continuation of U.S. patent application Ser. No. 13/527,638, filed on Jun. 20, 2012, the contents of which are hereby incorporated by reference in its entirety.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

The invention described herein was made in part by employees of the United States Government and may be manufactured and used by or for the Government for governmental purposes without payment of any royalties thereon or therefore.

TECHNICAL FIELD

The invention generally relates to a system and a method of generating a frequency modulated linear laser waveform.

BACKGROUND OF THE INVENTION

Frequency modulation of a single frequency laser with a linear triangular waveform is of great importance to many laser remote sensing and interferometry applications. An application of a linear frequency modulation may include a laser radar (e.g. light detection and ranging (LIDAR)) system for target ranging and three-dimensional profiling of surfaces. Linear frequency modulation of a continuous wave laser beam may enable such a LIDAR system to make precise target distance measurements. However, the frequency modulation must be nearly perfectly linear with time to provide high resolution and accuracy.

SUMMARY OF THE INVENTION

A system for generating a frequency modulated laser waveform is provided. The system includes a laser that is configured for producing a laser output signal. The laser output signal includes a single frequency and a linewidth centered at ω_o . An electro-optical modulator is coupled to the laser. The electro-optical modulator receives the laser output signal from the laser. An electric ramp generator is coupled to the electro-optical modulator. The electric ramp generator generates a ramp having a frequency chirp with a bandwidth B over a time period T, and a modulation offset frequency ω_m . The ramp controls the electro-optical modulator to modulate the laser output signal to define a modulated waveform. A band-pass optical filter is coupled to the electro-optical modulator. The band-pass optical filter receives the modulated waveform and filters out harmonic frequencies created by the electro-optical modulator during modulation of the laser output signal. The band-pass optical filter includes a bandwidth BW that is greater than the modulation bandwidth B and less than the modulation offset frequency ω_m , and is centered at the frequency of the laser output signal ω_o plus the modulation offset frequency ω_m .

A frequency modulated laser waveform generating system is also provided. The frequency modulated laser waveform generating system includes a single frequency laser that produces a laser output signal. The laser output signal

2

includes a single frequency having a narrow linewidth defining a sine wave centered at ω_o . An electro-optical modulator is coupled to the laser and receives the laser output signal from the laser. An electric ramp generator is coupled to the electro-optical modulator. The electric ramp generator generates a linear ramp having a frequency chirp with a bandwidth B between the range of 300 MHz and 3.0 GHz over a time period T between the range of 0.01 msec and 0.20 msec, a modulation offset frequency ω_m between the range of 5.0 GHz and 30 GHz, and a deviation less than or equal to 71 Khz. The linear ramp controls the electro-optical modulator to modulate the laser output signal to define a modulated waveform. A band-pass optical filter is coupled to the electro-optical modulator. The band-pass optical filter receives the modulated waveform and filters out harmonic frequencies created by the electro-optical modulator during modulation of the laser output signal to define a pure filtered modulated waveform. The band-pass optical filter includes a bandwidth BW that is greater than the modulation bandwidth B and less than the modulation offset frequency ω_m , and is centered at the frequency of the laser output signal ω_o plus the modulation offset frequency ω_m . An optical circulator interconnects the electric ramp generator and the band-pass optical filter. The optical circulator includes an input that receives the modulated waveform from the electric ramp generator, an output/input that sends and receives the modulated waveform to and from the band-pass optical filter, and an output leg that transmits the pure filtered modulated waveform.

A method of generating a laser frequency modulated waveform is also provided. The method includes generating a laser output signal having an ultra narrow linewidth defining a sine wave. A linear ramp having a frequency chirp with a bandwidth B over a time period T, and a modulation offset frequency ω_m is generated. The laser output signal from the single frequency laser is modulated with an electro-optical modulator driven by the linear ramp to define a modulated waveform. The modulated waveform from the electro-optical modulator is filtered with a band-pass optical filter to remove harmonic frequencies in the modulated waveform created by the electro-optical modulator during modulation of the laser output signal. The band-pass optical filter produces a pure filtered modulated waveform.

Accordingly, the output from the frequency modulated laser waveform generating system is a pure linear triangular frequency modulated waveform that is suitable for use in remote laser sensing applications, such as a LIDAR system, as well as other applications that may require a highly linear frequency modulated laser beam.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a system for generating a frequency modulated laser waveform.

FIG. 2 is a graph of a linear triangular frequency modulated waveform of a laser beam.

FIG. 3 is graph showing bandwidth over which the linear triangular frequency modulated waveform is filtered and the harmonic frequencies filtered out of the linear triangular frequency modulated waveform.

DETAILED DESCRIPTION OF THE INVENTION

Referring to the Figures, wherein like numerals indicate like parts throughout the several views, laser generating system is generally shown at 20 in FIG. 1. Referring to FIG.

2, the laser generating system **20** produces a frequency modulated linear laser waveform generally shown at **22**. Within FIG. 2, time is shown along a horizontal axis **24**, and the frequency of the modulated linear waveform is shown along a vertical axis **26**. The modulated linear waveform produced by the laser generating system **20** and shown in FIG. 2 is suitable for use in, but is not limited to, a laser radar (e.g. LIDAR) system for target ranging and three-dimensional profiling of surfaces. As shown in FIG. 2, the modulated linear waveform includes and/or defines a triangular or sawtooth shape. The modulated linear waveform is shown being transmitted at **28**, and is shown being received at **30** upon reflection off of a target. The modulated linear waveform is delayed between transmission and receipt by a light round trip time (t). The delay between the received modulated linear waveform and the transmitted modulated linear waveform causes the received modulated linear waveform to mix with the transmitted modulated linear waveform, thereby generating an interference signal. The frequency of the interference signal is equal to the difference between frequency of the transmitted modulated linear waveform and the frequency of the received modulated linear waveform. The frequency of the interference signal is directly proportional to a distance to the target. The frequency of the interference signal shifts due to the Doppler effect when the target and/or the laser generating system **20** moves relative to the other during time t . The relative velocity between the laser generating system **20** and the target may be determined by the frequency of the interference signal during “up chirp” periods, generally indicated at **32**, and during “down chirp” periods, generally indicated at **34**. In order for this targeting technique to work accurately, the frequency modulated laser waveform must be highly linear.

Referring to FIGS. 1 and 3, the laser generating system **20** includes a single output frequency laser **36** that produces a laser output signal having a single frequency. The laser output signal includes a very pure spectrum with an ultranarrow linewidth. The linewidth of the laser output signal is close to a perfect sine wave, and is centered at ω_o , shown at **60** in FIG. 3. The laser output signal ω_o **60** is unmodulated.

An electro-optical modulator **38** is coupled to the single output frequency laser **36**. The electro-optical modulator **38** receives the laser output signal from the single output frequency laser **36**, and modulates the frequency of the laser output signal. The electro-optical modulator **38** includes an electro-optical crystal that changes properties of the laser output signal when an electric field is applied.

An electric ramp generator **40** is coupled to the electro-optical modulator **38** and drives the electro-optical modulator **38** with a pre-defined modulation waveform to define a modulated waveform. For example, the electric ramp generator **40** may drive the electro-optical modulator **38** with a linear frequency modulation waveform. However, it should be appreciated that the pre-defined modulation waveform may differ from the linear frequency modulation waveform described herein. The electric ramp generator **40** includes a voltage controlled oscillator **42** controlled by a digital micro-controller **44**. The digital micro-controller **44** generates a pre-defined ramp, which is provided to the voltage controlled oscillator **42** to create the pre-defined modulation waveform. For example, the digital micro-controller **44** may generate a nearly perfect linear ramp to create the linear frequency modulation waveform.

The electric ramp generator **40** controls the electro-optical modulator **38** to modulate the laser output signal to define the modulated waveform. The linear ramp output from the digital micro-controller **44** includes a deviation from a

perfect ramp that is less than or equal to 71 Khz, or less than 0.001%. The linear ramp includes a frequency chirp with a bandwidth B over a time period T, and a modulation offset frequency ω_m that is offset from Direct Current, i.e., ω_o **60**. Preferably, the modulation offset frequency ω_m of the linear ramp is between the range of 5 GHz and 30 GHz, and more preferably is equal to 6.0 GHz, and the bandwidth B of the linear ramp is preferably between the range of 300 MHz and 3.0 GHz, and is more preferably equal to 600 MHz over a time period T between the range of 0.01 msec and 0.20 msec, and more preferably equal to 0.15 msec. However, it should be appreciated that the values of the modulation offset frequency ω_m , the bandwidth B of the linear ramp, and the time period T may differ from the preferred values described above. As shown in FIG. 3, the modulated waveform includes a first order sideband **62**, a second order sideband **64**, a third order sideband **66**, etc.

A band-pass optical filter **46** is coupled to the electro-optical modulator **38**. An optical circulator **48** interconnects the electric ramp generator **40** and the band-pass optical filter **46**. The optical circulator **48** includes an input leg **50** that receives the modulated waveform from the electric ramp generator **40**, an output/input **52** that sends the modulated waveform to the band-pass optical filter **46** and receives the reflected modulated waveform from the band-pass optical filter **46**, and an output leg **54** that transmits the pure filtered modulated waveform returned from the band-pass optical filter **46** to the target.

The very narrow band-pass optical filter **46** receives the modulated waveform and filters out other harmonic frequencies created by the electro-optical modulator **38** during modulation of the laser output signal. The harmonic frequencies are generally shown in the regions labeled by reference numeral **56**. The band-pass optical filter **46** may include but is not limited to a fiber optic-based reflective filter that reflects the pure filtered modulated waveform back to the optical circulator **48**, whereupon the optical circulator **48** directs the pure filtered modulated waveform to the output leg **54** of the optical circulator **48**. The band-pass optical filter **46** includes a bandwidth BW that is greater than the bandwidth B of the linear ramp and less than the modulation offset frequency ω_m . The bandwidth BW of the band-pass optical filter **46** is centered at the frequency of the laser output signal ω_o plus the modulation offset frequency ω_m , i.e., $(\omega_o + \omega_m)$. The band-pass optical filter **46** removes the harmonic frequencies, i.e., filters the harmonic frequencies (generally indicated by regions **56**) that are outside of the bandwidth BW of the band-pass optical filter **46**. Therefore, the modulated waveform output from the optical circulator **48** includes a pure linear frequency modulated waveform suited for transmission to the target.

As shown in FIG. 3, the band-pass optical filter **46** is centered at the first order sideband **62** at $\omega_o + \omega_m$, away from Direct Current, i.e., ω_o **60**. However, the band-pass optical filter **46** may alternatively be positioned at the second order sideband **64**, the third order sideband **66**, or some other higher order sideband. Positioning the band-pass optical filter **46** at a higher order sideband, i.e., the second order sideband **64** or higher, multiplies the modulation bandwidth B. For example, if the modulation bandwidth B is equal to 600 MHz when the band-pass optical filter **46** is centered at the first order sideband **62**, then the modulation bandwidth B will equal 1200 MHz when the band-pass optical filter **46** is centered at the second order sideband **64**, and will equal 1800 MHz when centered at the third order sideband **66**.

5

This allows for bandwidth multiplication of the linear ramp just by selecting the position of the band-pass optical filter 46 on the desired sideband.

A method of generating frequency modulated laser waveform is also provided. The method includes generating the laser output signal. The laser output signal is generated from the single output frequency laser 36 described above. As noted above, the laser output signal includes an ultra narrow linewidth defining a nearly perfect sine wave.

A pure linear ramp is generated with an electric ramp generator 40. The linear ramp is used to drive the electro-optical modulator 38 to modulate the frequency of the laser output signal. The linear ramp includes a frequency chirp with a bandwidth B over a time period T, and a modulation offset frequency ω_m . As noted above, the modulation offset frequency ω_m of the linear ramp is preferably between the range of 5 GHz and 30 GHz, the bandwidth B of the linear ramp is preferably between the range of 300 MHz and 3.0 GHz over a time period T between the range of 0.01 msec and 0.20 msec, and the linear ramp may include a deviation from a perfect ramp of less than or equal to 71 KHz, or less than 0.001%.

The laser output signal from the single output frequency laser 36 is modulated with the electro-optical modulator 38 to define the modulated waveform. As described above, the modulated waveform preferably includes linear triangular modulated waveform. The modulated waveform is then transmitted from the electro-optical modulator 38 to the band-pass optical filter 46 through an optical circulator 48.

The modulated waveform from the electro-optical modulator 38 is filtered with the band-pass optical filter 46 to remove harmonic frequencies in the modulated waveform that are created by the electro-optical modulator 38 during modulation of the laser output signal. Filtering out the harmonic frequencies from the modulated waveform produces a pure filtered modulated waveform. The pure filtered modulated waveform is reflected from the band-pass optical filter 46 back to the optical circulator 48; whereupon the optical circulator 48 may transmit the pure filtered modulated waveform to the target.

While some embodiments of the invention have been herein illustrated, shown and described, it is to be appreciated that various changes, rearrangements and modifications may be made therein, without departing from the scope of the invention as defined by the appended claims. It is intended that the specific embodiments and configurations are disclosed for practicing the invention, and should not be interpreted as limitations on the scope of the invention as defined by the appended claims and it is to be appreciated that various changes, rearrangements and modifications may be made therein, without departing from the scope of the invention as defined by the appended claims.

The invention claimed is:

1. A system generating a frequency modulated laser waveform, the system comprising:

- a laser capable of producing a laser output signal having a single frequency and a linewidth centered at ω_o ;
- an electro-optical modulator coupled to the laser and configured to receive the laser output signal from the laser;

- a electric ramp generator including a voltage controlled oscillator controlled by a digital micro-controller, the electric ramp generator coupled to the electro-optical modulator and capable of generating a ramp having a frequency chirp with a bandwidth B over a time period T, and a modulation offset frequency ω_m for controlling the electro-optical modulator to modulate the laser

6

output signal to define a modulated waveform including harmonic frequencies, wherein the digital micro-controller is capable of generating a linear ramp;

- a band-pass optical filter coupled to the electro-optical modulator and capable of receiving the modulated waveform and filtering out the harmonic frequencies created by the electro-optical modulator during modulation of the laser output signal and reflecting a filtered modulated waveform; and

- an optical circulator separate from the band-pass optical filter and interconnecting the electric ramp generator and the band-pass optical filter, the optical circulator being configured to transmit the filtered modulated waveform from the band-pass filter to a target;

wherein the band-pass optical filter includes a bandwidth BW greater than the modulation bandwidth B and less than the modulation offset frequency ω_m , and is centered at the frequency of the laser output signal ω_o plus the modulation offset frequency ω_m , wherein the linear ramp includes a deviation less than or equal to 71 KHz, and wherein the modulation offset frequency ω_m of the linear ramp is between the range of 5.0 GHz and 30 GHz, and the bandwidth B of the linear ramp is between the range of 300 MHz and 3.0 GHz over a time period T between the range of 0.01 msec and 0.20 msec.

2. A method of generating a laser frequency modulated waveform, the method comprising:

- generating a laser output signal having an ultra narrow linewidth defining a sine wave;
- generating a linear ramp having a frequency chirp with a bandwidth B over a time period T, and a modulation offset frequency ω_m ;

- modulating the laser output signal from the single frequency laser with an electro-optical modulator driven by the linear ramp to define a modulated waveform including harmonic frequencies;

- filtering the modulated waveform from the electro-optical modulator with a band-pass optical filter having a bandwidth BW that is greater than the modulation bandwidth B and less than the modulation offset frequency ω_m and is centered at a frequency of the laser output signal ω_o plus the modulation offset frequency ω_m to remove the harmonic frequencies in the modulated waveform created by the electro-optical modulator during modulation of the laser output signal to produce a pure filtered modulated waveform;

- reflecting the pure modulated waveform from the band-pass optical filter to an optical circulator separate from the band-pass optical filter and interconnecting the linear ramp and the band-pass optical filter; and

- transmitting the pure modulated waveform from the optical circulator to a target, wherein modulating the laser output signal includes modulating the laser output signal to define a linear triangular waveform, wherein the linear ramp includes a deviation less than or equal to 71 KHz and wherein the modulation offset frequency ω_m of the linear ramp is between the range of 5.0 GHz and 30 GHz, and the bandwidth B of the linear ramp is between the range of 300 MHz and 3.0 GHz over a time period T between the range of 0.01 msec and 0.20 msec.

3. The method as set forth in claim 2, further comprising transmitting the modulated waveform from the electro-optical modulator to the band-pass optical filter through the optical circulator.

4. The method as set forth in claim 3, further comprising reflecting the pure filtered modulated waveform from the band-pass optical filter back to the optical circulator.

* * * * *