Mi Paul S. Baker

RM No. L7122

ENGINEERING DEPT. LIBRARY CHANCE VOUGHT AIRCRAFT

NACA CONN.

RESEARCH MEMORANDUM

AERODYNAMIC CHARACTERISTICS OF A NUMBER OF MODIFIED

NACA FOUR-DIGIT-SERIES ATREOID SECTIONS

By

Laurence K. Loftin, Jr. and Kenneth S. Cohen

Langley Memorial Aeronautical Laboratory Langley Field, Va.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON

Mula

RESEARCH MEMORANDUM

AERODYNAMIC CHARACTERISTICS OF A NUMBER OF MODIFIED

NACA FOUR-DIGIT-SERIES AIRFOIL SECTIONS

By Laurence K. Loftin, Jr. and Kenneth S. Cohen

SUMMARY .

Theoretical pressure distributions have been calculated and the experimental aerodynamic characteristics determined at low speeds for a selected group of the NACA four-digit-series airfoil sections which had previously been modified for high-speed applications. The experimental investigation which was made in the Langley two-dimensional low-turbulence pressure tunnel consisted of measurements of the lift, drag, and pitching-moment characteristics of each of the plain airfoils at Reynolds numbers of 3.0 × 10°, 6.0 × 10°, and 9.0 × 10°. In addition, the effectiveness of flaps when applied to these airfoils and the effect upon the aerodynamic characteristics of standard leading-edge roughness were determined at a Reynolds number of 6.0 × 10°. Also tested were three conventional NACA four-digit-series airfoil sections which had not previously been investigated in the Langley two-dimensional low-turbulence pressure tunnel.

The results of the experimental investigation indicated that the maximum lift characteristics of the modified NACA four-digit-series sections having normal-size leading-edge radii and a maximum thickness of 12 percent chord located at 40 percent chord very closely approximated those of smooth NACA 64-series low-drag sections of corresponding thickness and camber. When the leading-edge radius was reduced to onequarter normal size, the maximum lift coefficients of the 10-percent-thick airfoils with maximum thickness located at 40 and 50 percent chord were about 35 percent lower than those of NACA 64-series sections of corresponding thickness and camber. For airfoils equipped with 20-percent-chord split flaps deflected 60°, the maximum lift of the airfoils with onequarter normal-size leading-edge radii more nearly approached that of NACA 64-series airfoils. Roughness had no appreciable effect upon the maximum lift of these airfoils. The minimum drag coefficients of the airfoils with maximum thickness at 40 percent chord and normal-size leading-edge radii were higher than those of the corresponding NACA 64-series sections. Reducing the leading-edge radius to one-quarter normal size and moving the position of maximum thickness to 40 and 50 percent chord caused the minimum drag coefficients to be reduced to

NACA RM No. LTI22

values about the same as those of corresponding NACA 64- and 66-series sections, respectively. Increases in the trailing-edge angle resulting from rearward movement of the position of maximum thickness caused sharp decreases in the lift-curve slope and pronounced forward movement of the aerodynamic center.

INTRODUCTION

The increasing demand for high speeds in modern airplanes has focused much attention upon airfoil sections capable of operation at high Mach numbers without suffering the adverse effects of compressibility. One of the first systematic series of airfoil sections developed with a view toward high-speed application consisted of modified NACA four-digit-series sections. Descriptions and high Mach number data obtained in the NACA 11-inch high-speed tunnel were presented in 1934 (reference 1) for these airfoil sections. Since the issuance of reference 1, the modified NACA four-digit-series sections have been employed rather extensively in Europe, particularly in Germany, and have recently received favorable consideration in this country.

Low-speed aerodynamic data obtained in the NACA Variable-Density Wind Tunnel are available for several of the modified NACA four-digit-series airfoil sections (reference 2). The range of airfoil types covered by these data, however, is very limited. In view of the meager amount of data available for the modified NACA four-digit-series sections and because of the recent interest shown in them, an investigation of the low-speed aerodynamic characteristics of a selected group was undertaken in the langley two-dimensional low-turbulence pressure tunnel. The airfoils chosen for test were those which appeared from theoretical pressure-distribution calculations to offer the best possibilities for high-speed applications. The results of the experimental investigation, together with the theoretical pressure-distribution data for a number of the modified NACA four-digit-series sections, are presented in this paper.

The aerodynamic characteristics of five of the modified sections are presented; three of these are symmetrical and two are cambered with the NACA mean line a = 0.8 (modified). (See reference 3.) Also presented are characteristics of three conventional NACA four-digit-series_sections, data for which are not included in the systematic results of reference 4 for this series.

COEFFICIENTS AND SYMBOLS

ed section drag coefficient

cdmin minimum section drag coefficient

cl	section lift coefficient
clusx,	maximum section lift coefficient
cli	design section lift coefficient
cma.c.	section pitching-moment coefficient about aerodynamic center
cmc/4	section pitching-moment coefficient about quarter-chord poin
a ₀	section angle of attack
œ ₁	section angle of attack corresponding to design lift coefficient
de;/da	section lift-curve slope
V	free-stream velocity
v .	local velocity
Δv	increment of local velocity
Δva	increment of local velocity corresponding to additional type of load distribution
PR	resultant pressure coefficient; difference between local upper-surface and lower-surface pressure coefficients
R	Reynolds number
Ra	boundary-layer Reynolds number based on boundary-layer thickness and local velocity outside the boundary layer
C	airfoil chord length
x	distance along chord from leading edge
У	distance perpendicular to chord
y _c	mean-line ordinate
8	mean-line designation, fraction of chord from leading edge over which design load is uniform

DESCRIPTION AND THEORETICAL CHARACTERISTICS OF AIRFOILS

Basic thickness forms. The modifications to the NACA four-digitseries basic thickness forms, completely described in reference 1, can perhaps be best described here by an explanation of the digits appearing in a typical airfoil designation. Consider, for example, the NACA 0012-64 airfoil section. The first four digits have the usual meaning attached to the numbers appearing in the designation of a conventional NACA four-digit-series airfoil section, in this case a 12-percent-thick symmetrical section. The two numbers following the dash describe the modifications.

The first number following the dash is an index to the size of the leading-edge radius. Leading-edge radii of three sizes, represented by the numbers 3, 6, and 9, were investigated in reference 1. The number 6 which appears in the illustrative example indicates the normal-size leading-edge radius employed with conventional four-digit-series sections; the number 3 represents a one-quarter normal-size leading-edge radius; and the number 9 indicates a leading-edge radius of three times normal size. The second number following the dash indicates the position of maximum thickness in tenths of the chord. Airfoils, which were derived in reference 1, have the position of maximum thickness located at 40, 50, and 60 percent chord.

In order to provide some basis upon which to choose the airfoils to be tested, theoretical pressure distributions were calculated by the methods of reference 5 for a group of modified NACA four-digit-series basic thickness forms. The results of these calculations are presented in figures 1 to 8 for the following airfoil sections:

NACA 0010-64 NACA 0012-64 NACA 0010-65 NACA 0010-66

MACA 0010-34 NACA 0012-34 NACA 0010-35

In addition to pressure distributions at zero lift, these data include incremental velocity ratios from which the pressure distribution at any lift coefficient may be calculated. The method of making this calculation is described in reference 4.

From the data of figures 1 to 8, the effect upon the pressure distribution of variations in the position of maximum thickness and size of the leading-edge radius are clearly evident. A decrease in both the peak negative pressure coefficient and in the variations of pressure over the forward part of the airfoil is effected by maintaining a normal-size leading-edge radius and moving the position of maximum thickness from 30 (original position) to 40 percent chord (fig. 2). Further rearward movement of the position of maximum thickness, however, appears to cause a second peak in the pressure distribution near the trailing edge (figs. 3 and 4) followed by a rather sharp, undesirable pressure recovery. With one-quarter normal-size leading-edge radius, the magnitude of the peak negative pressure coefficient is not changed much but its position is moved to the rear. The change in position of minimum pressure is particularly marked when the position of maximum thickness is moved from 40 percent to 50 percent of the chord (figs. 5

NACA RM No. L7122

and 6). This movement of the position of maximum thickness decreases the peak negative pressure coefficient slightly but results in an undesirably large pressure recovery near the trailing edge. On the basis of these theoretical data and from a consideration of the probable low-speed characteristics, the NACA 0010-34, 0010-35, and 0012-64 basic thickness forms were chosen for tests. The NACA 0010-34 and 0012-64 were also tested in combination with a cambered mean line.

Mean line. In the present investigation, the modified NACA four-digit-series basic thickness forms which were cambered employed the NACA a = 0.8 (modified) mean line (reference 3). This mean line is designed to have a uniform load distribution from the leading edge to the 80-percent-chord station and designed to be geometrically straight from about 85 percent chord to the trailing edge. The NACA a = 0.8 (modified) mean line was used because the peak induced velocities added by this mean line to the velocities over the basic thickness form are less than those associated with the older mean lines, such as the NACA 230 and 24 mean line; and the curvature of the airfoil surfaces near the trailing edge which results from the use of an NACA a = 1.0 mean line is eliminated.

Ordinates and load-distribution data corresponding to a design lift coefficient of 1.0 are presented in figure 9 for the NACA a = 0.8 (modified) mean line. If the ordinates and load are desired for a design lift coefficient other than 1.0, they may be obtained easily by linearly scaling the values presented. The method for combining the pressure-distribution data for the basic thickness forms and mean line to give the pressure distribution about a cambered airfoil at any lift coefficient is given in reference 4.

Designation of cambered airfoil sections. The method of designating modified NACA four-digit-series airfoil sections which employ the NACA a = 0.8 (modified) mean line is illustrated by the following example:

NACA 0012-64, a = 0.8 (modified), $c_{li} = 0.2$

This system of numbers designates an NACA 0012-64 basic thickness form laid off on an NACA a = 0.8 (modified) mean line cambered for a design lift coefficient of 0.2.

Conventional NACA four-digit-series airfoil sections. - Complete descriptions of the basic thickness forms and mean lines of the conventional NACA four-digit-series airfoil sections of which three were tested in the present investigation may be found in references 4 and 6.

APPARATUS AND TESTS

Wind tunnel. The experimental investigation was made in the Langley two-dimensional low-turbulence pressure tunnel. The test section of this tunnel measures 3 feet by 7.5 feet with the models, when mounted, completely spanning the 3-foot dimension and with the juncture between the model and tunnel walls sealed to prevent air leakage. Lift measurements were made by taking the difference between the pressure reaction upon the floor and ceiling of the tunnel, drag measurements were made by the wake-survey method, and pitching moments were determined with a torque balance. A more complete description of the tunnel and the methods of obtaining and reducing the data are contained in reference 7.

Models. - The eight airfoil sections for which the experimental aerodynamic characteristics were obtained are:

NACA 0010-35 NACA 0010-34 MACA 0010-34, a = 0.8 (modified), c_{7,5} = 0.2

NACA 0012-64 NACA 0012-64, a = 0.8 (modified), c₁₁ = 0.2

> NACA 2408 NACA 2410

The models representing the airfoil sections were of 24-inch chord and, with the exception of the 8-percent-thick section which was machined from steel, were constructed of laminated mahogany. The models were sprayed with lacquer and then sanded with No. 400 carborundum paper until aerodynamically smooth surfaces were obtained. The ordinates of the models tested are presented in table I.

Tests. The tests of each smooth mirroil section consisted of measurements of the lift, drag, and quarter-chord pitching moment at Reynolds numbers of $3.0 \times 10^{\circ}$, $6.0 \times 10^{\circ}$, and $9.0 \times 10^{\circ}$. In addition, the lift and drag characteristics of each section were determined at a Reynolds number of $6.0 \times 10^{\circ}$ with standard roughness applied to the leading edge of the model. The standard roughness employed on these 24-inch-chord models consisted of 0.011-inch-diameter carborundum grains spread over a surface length of 8 percent of the chord back from the leading edge on the upper and lower surfaces. The grains were thinly spread to cover from 5 to 10 percent of this area. In an effort to gain some idea of the effectiveness of flaps when applied to these

airfoils, each airfoil was fitted with a 0.20c simulated split flap deflected 60° . Lift measurements were made at a Reynolds number of $6.0 \times 10^{\circ}$ with the split flap, with the airfoil leading edge both smooth and rough.

RESULTS

The results obtained from tests of the eight airfoil sections are presented (figs. 10 to 17) as plots of standard aerodynamic coefficients representing the lift, drag, and quarter-chord pitching-moment characteristics of the airfoil sections. The position of the aerodynamic center, as determined from the experimental results, and the variation of the pitching-moment coefficient about this point are also included. The influence of the tunnel boundaries has been removed from all the aerodynamic data by means of the following equations (developed in reference 7):

where the primed quantities represent the measured coefficients.

DISCUSSION

The discussion is primarily concerned with an anlysis of the effects, as shown by tests of the five modified NACA four-digit-series airfoil sections, of variations in the leading-edge radius and position of maximum thickness upon the aerodynamic characteristics. In this analysis, frequent use is made of cross plots (figs. 18 to 21) showing the characteristics of the modified sections as compared with those of the conventional NACA four-digit-series sections and NACA 6-series low-drag sections. The comparative results for the NACA 6-series and four-digit-series sections are shown in the form of curves representing faired data taken from reference 4, whereas the results of the present

investigation appear in the cross plots as experimental points.

Little mention is made of the results obtained for the three conventional NACA four-digit-series sections tested inasmuch as they follow closely the trends indicated in reference 4 for this series of airfoil sections.

Drag

Minimum drag. The previously mentioned influence upon the pressure gradients over the forward part of the airfoil of a reduction in size of the leading-edge radius and a rearward movement of the position of maximum thickness has, as might be expected, a favorable effect upon the value of the minimum drag coefficient. An indication of the magnitude of this effect may be gained from figure 18, which shows the minimum section drag coefficient corresponding to a Reynolds number of 6.0 x 100 as a function of airfoil thickness ratio for the five modified NACA four-digit-series airfoils, for the conventional NACA four-digit series, and for the NACA 64- and 66-series low-drag airfoils.

In the smooth condition, the minimum drag of the 10-percent-thick airfoils having leading-edge radii of one-quarter normal size and maximum thickness at 40 and 50 percent chord was of the same order, respectively, as that obtained for NACA 64- and 66-series low-drag airfoils of comparable thickness. This similarity in drag indicates the existence of considerable laminar flow over the airfoil surfaces. The small, though rather extensive, positive pressure gradient, which occurs over the surfaces of the 12-percent-thick airfoils having leading-edge radii of normal size and maximum thickness at 40 percent chord, gives rise to a minimum drag coefficient which lies between those of the NACA 64-series low-drag section and NACA four-digit-series section of comparable thickness. The addition of the NACA a = 0.8 (modified) mean line to the NACA 0010-34 and 0012-64 basic thickness forms does not appreciably effect the value of the minimum drag coefficient. The faired data of reference 4, which are presented in figure 18, indicate that airfoil thickness form and mean line have little effect upon the value of the minimum drag coefficient when the airfoil leading edges are in the rough condition; and the results of the present investigation (fig. 18) follow the same trend.

The airfoil basic thickness distribution appears to have a marked effect upon the manner in which the minimum drag coefficient varies with Reynolds number (figs. 10 to 14). The centrolling action of the airfoil pressure distribution upon the extent to which the opposite effects of a thinning boundary layer and a forward movement of the point of transition balance each other as the Reynolds number is increased suggests itself as a possible explanation. Some insight into the mechanism by which the airfoil pressure distribition influences the movement of the transition point with Reynolds number may be gained from the theoretical work of Schlichting and Ulrich (reference 8). The results of this work show the existence of a critical boundary-layer Reynolds number Recrit above which the laminar boundary

layer is no longer stable and may become turbulent. Furthermore, the value of the critical boundary-layer Reynolds number is shown to decrease rapidly and the laminar boundary layer to become increasingly unstable as the pressure gradient along the surface becomes positive. In the presence of an unfavorable pressure gradient, the transition point is, therefore, most likely to move rapidly forward once the critical boundary-layer Reynolds number has been reached.

In consideration of the ideas of Schlicting and Ulrich in relation to the increase of minimum drag with Reynolds number shown by the NACA 0012-64 section (fig. 13), the unfavorable pressure gradient over this airfoil (fig. 8) would seem to be responsible for a rapid forward movement of transition which overbalances the normal thinning of the boundary layer and consequent reduction in drag that usually accompany an increase in Reynolds number. On the other hand, the MACA 0010-34 (fig. 10) and NACA 0010-35 (fig. 12) airfoils which possess more favorable pressure gradients have a negligible scale effect between Reynolds numbers of 3.0×10^{6} and 9.0×10^{6} . This fact indicates that the opposite effects of a thinning boundary layer and a forward movement of transition nearly counterbalance each other. The uniformly favorable influence upon the minimum drag of NACA 6-series sections of increasing the Reynolds number from 3.0×10^6 to 9.0×10^6 indicates that Roceit of these airfoil sections, which have marked negative pressure gradients, is sufficiently high so that no appreciable forward movement of transition occurs between these Reynolds numbers: and, thus, the favorable effect of a thinning boundary layer predominates.

Low-drag range. The range of lift coefficients over which low drag is obtained and the manner in which this range varies with Reynolds number are about the same for the NACA 0010-34 and 0010-35 airfoil sections (figs. 10 and 12) as for the NACA 6-series sections of comparable thickness (reference 4). The low drag range for the NACA 0012-64 section (fig. 13), however, is quite small at a Reynolds number of 3.0×10^{6} and is practically nonexistent at a Reynolds number of 9.0×10^{6} . The more positive pressure gradients on the NACA 0012-64 section are probably responsible for the behavior of the low drag range on this airfoil section.

The relationship between the drag and lift outside the low drag range of lift coefficients is about the same for the NACA 0010-34 and NACA 0012-64 airfoils, both cambered and uncambered, as for the NACA 64-series low-drag sections of comparable thickness; a somewhat less marked correspondence exists between the drag characteristics of the NACA 0010-35 section and a comparable NACA 66-series low-drag section. These comparisons are valid for the airfoils in both the smooth and rough conditions.

Lift

Lift-curve slope - Rearward movement of the position of maximum thickness of the NACA four-digit-series sections is accompanied by an increase in trailing-edge angle. In accordance with previous experimental work (references 9 and 10), the lift-curve slope decreases with increasing trailing-edge angle. The results of the present investigation (fig. 19) for the 10-percent-thick and 12-percent-thick sections having maximum thickness at various positions indicate the same trend, with the greatest decrease in the lift-curve slope being about 16 percent.

From theoretical considerations, the lift-curve slope should increase with increasing airfoil thickness ratio; and the comparative data from reference 4 (fig. 19) for NACA 64-series low-drag sections, which have very small trailing-edge angles, indicate that such is the case. If, however, the trailing-edge angle is large and increases rapidly with increasing airfoil thickness ratio, the theoretical increase in lift-curve slope with thickness will be overbalanced by the opposite effect of increasing trailing-edge angle. The NACA four-digit series sections, data for which are presented in figure 19, have this characteristics. Since, with increasing thickness, the trailingedge angles of the modified NACA four-digit-series sections become progressively larger than those of the conventional NACA four-digit-series sections, a more rapid decrease in lift-curve slope with increasing thickness would be expected for these modified airfoils. The amount of data available for the modified NACA four-digit-series sections does not appear to be sufficient, however, to define adequately this trend or to permit any definite statements as to the relative effects of roughness on the lift-curve slopes of the modified and conventional NACA four-digit-series sections.

Angle of zero lift. There appears to be no appreciable difference in the section angles of zero lift of the NACA 0010-34 and NACA 0012-64 airfoil sections cambered with the NACA a = 0.8 (modified) mean line (figs. 11 and 14). The values are slightly more negative than those predicted from the theoretical mean-line data presented in figure 9 but agree quite well with the experimental values obtained for cambered NACA 6A-series airfoil sections employing the NACA a = 0.8 (modified) mean line (reference 3).

Maximum lift. Some idea of the effect upon the maximum lift coefficient of variations of the position of maximum thickness and leading-edge radius may be gained from figure 20. This figure shows the maximum section lift coefficients (R = 6.0 × 10°) for the modified NACA four-digit-series airfoils as a function of airfoil thickness ratio, with comparative data from reference 4 for NACA 64-series low-drag airfoils. As might be expected from previous investigations, the lowest maximum lift coefficients were obtained for the airfoils having one-quarter normal-size leading-edge radii. The maximum lift coefficients of the

two symmetrical sections (NACA 0010-34 and 0010-35) are about the same and do not appear to vary as the leading-edge condition is changed from smooth to rough. These results show that if the leading edge is sufficiently sharp, the usual important influence of surface condition is negligible. The extremely low value of the maximum lift obtained under these conditions is shown by comparison with results for the NACA 64-010 section. The maximum lift coefficients of the two modified NACA four-digit-series sections are about 35 percent lower than that of the NACA 64-010 section in the smooth condition and about 15 percent lower when the leading edges of the airfoils are rough. The increment in maximum lift caused by cambering the NACA 0010-34 section is about the same as that observed for the addition of approximately the same amount of camber to the NACA 64-010 section. Even with camber, the maximum lift of the NACA 0010-34 section is about 23 percent lower than that of the NACA 64-010 section; but with rough leading edge, the NACA 64-010 section has a maximum lift coefficient which is about the same as that of the cambered NACA 0010-34 section.

The maximum lift of the three airfoils having one-quarter normalsize leading-edge radii with smooth leading edges and equipped with 0.20c split flaps deflected 60°, more nearly approaches that of NACA 64-series low-drag sections of corresponding thickness and camber. The decrement in maximum lift coefficient caused by leading-edge roughness is, however, so small for these three sections that in the rough condition the maximum lift of the three modified NACA four-digit-series sections is as good as or better than that of corresponding NACA 64-series airfoils.

Moving the position of maximum thickness from 30 percent to 4) percent chord while maintaining a normal-size leading-edge radius reduces the maximum lift coefficient of the plain airfoil about 15 percent, as shown by the comparative data for the NACA 0012 and NACA 0012-64 sections. Clearly illustrated here is the important point that a reduction in thickness of the airfoil near the leading edge, such as occurred in this case, has a definitely adverse effect upon the maximum lift coefficient although the leading-edge radius itself may not be decreased. The maximum lift coefficients of the cambered and symmetrical NACA 0012-64 airfoil sections in both the smooth condition and with standard leading-edge roughness are nearly the same as those of the corresponding cambered and symmetrical NACA 64-series low-drag sections (fig. 20).

The value of the maximum lift coefficient presented in figure 20 for the NACA 0012-64 section is about 13 percent lower than that indicated by tests of the same airfoil in the NACA Variable-Density Wind Tunnel (reference 2). The value obtained in the present investigation, however, was very carefully checked and is believed to be correct. The discrepancy between the values obtained in the two tunnels may possibly have been caused by turbulence effects not fully accounted for on this sensitive airfoil by the effective Reynolds number correction applied to the Variable-Density Wind-Tunnel results.

The results presented in figure 20 show that, in the smooth condition at least, the maximum lift coefficients of the cambered and symmetrical NACA 0012-64 airfoil sections, when equipped with 0.20c split flaps deflected 60°, are somewhat higher than those of corresponding NACA 64-series sections. This result may be explained by the fact that the trailing-edge angle of the NACA 0012-64 airfoil is larger than that of the NACA 64-012 airfoil since the experimental results presented in reference 3 indicate a slight improvement in the maximum lift of NACA 6-series sections with split flaps when the trailing-edge cusp is removed. The results for the cambered and symmetrical NACA 0012-64 airfoil with rough leading edges do not form a consistent comparison with results for the NACA 64-series sections. In neither case, however, is the modified NACA four-digit-series section worse than the corresponding NACA 64-series airfoil.

Between Reynolds numbers of 3.0×10^5 and 9.0×10^6 , none of the modified NACA four-digit-series sections show any appreciable scale effect on maximum lift.

Pitching Moment

Quarter-chord point. The two airfoils cambered with the NACA a = 0.8 (modified) mean line have quarter-chord pitching moments (figs. 11 and 14) which agree closely with those predicted from the theoretical pitching-moment data (fig. 9).

Aerodynamic center. - The chordwise position of the serodynamic center for the modified NACA four-digit-series sections is shown in figure 21 as a function of airfoil thickness ratio, together with similar data taken from reference 4 for the conventional NACA four-digit-series sections and the NACA 64-series low-drag sections. The forward movement of the serodynamic center which is seen to accompany rearward movement of the position of maximum thickness on the modified NACA four-digit-series sections is in agreement with the trends of reference 11 which show that such a forward movement follows an increase in trailing-edge angle. Theoretical considerations indicate a rearward movement of the serodynamic center with increasing airfoil thickness ratio, and the data for NACA 64-series sections follow this trend; but the effect of increasing trailing-edge angle predominates in the case of the conventional NACA four-digit-series . sections as evidenced by the forward movement of the aerodynamic center. (See fig. 20.) Since the trailing-edge angles of the modified NACA four-digit-series sections become progressively larger with increasing airfoil thickness than those of the conventional NACA four-digit-series sections, a more pronounced forward movement of the aerodynamic center with increasing thickness would be expected for these airfoil sections; and the comparative results for the NACA 0012-64 and 0010-34 sections seem to show this trend.

CONCLUSIONS

Based upon a two-dimensional investigation of the aerodynamic characteristics of five modified NACA four-digit-series airfoil sections at Reynolds numbers from 3.0×10^6 to 9.0×10^6 , the following conclusions may be drawn:

- 1. The maximum lift characteristics of the airfeil sections having normal-size leading-edge radii and a maximum thickness of 12 percent chord located at 40 percent chord very closely approximated those of NACA 64-series low-drag sections of corresponding thickness and camber.
- 2. The maximum lift coefficients of the 10-percent-thick airfoils with one-quarter normal-size leading-edge radii and maximum thickness located at 40 and 50 percent chord were about 35 percent lower than those of smooth MACA 64-series sections of corresponding thickness and camber. For airfoils equipped with 20-percent-chord split flaps deflected 60°, the maximum lift of the airfoils with one-quarter normal-size leading-edge radii more nearly approached that of NACA 64-series airfoils. Roughness had no appreciable effect upon the maximum lift of these airfoils.
- 3. The minimum drag coefficients of the airfoils with maximum thickness at 40 percent chord and normal-size leading-edge radii were higher than those of the corresponding NACA 64-series sections. Reducing the leading-edge radius to one-quarter normal size and moving the position of maximum thickness to 40 and 50 percent chord caused the minimum drag coefficients to be reduced to values about the same as those for corresponding NACA 64- and 66-series sections, respectively.

4. Increases in the trailing-edge angle resulting from rearward movement of the position of maximum thickness caused sharp decreases in the lift-curve slope and pronounced forward movements of the aerodynamic center.

Langley Memorial Aeronautical Laboratory
National Advisory Committee for Aeronautics
Langley Field, Va.

Laurence K. Loftin, Jr. Aeronautical Engineer

Laurence King

Kenneth S. Cohen Aeronautical Engineer

Approved:

Clinton H. Dearborn

Chief of Full-Scale Research Division

CJB

REFERENCES

- 1. Stack, John, and von Doenhoff, Albert E.: Tests of 16 Related Airfoil Sections at High Speeds. NACA Rep. No. 492, 1934.
- 2. Jacobs, Eastman N., Pinkerton, Robert M., and Greenberg, Harry: Tests of Related Forward-Camber Airfoils in the Variable-Density Wind Tunnel. NACA Rep. No. 610, 1937.
 - 3. Loftin, Laurence K., Jr.: Theoretical and Experimental Data for a Number of NACA 6A-Series Airfeil Sections. NACA TN No. 1368, 1947.
 - 4. Abbott, Ira H., von Doenhoff, Albert E., and Stivers, Louis S., Jr.: Summary of Airfoil Data. NACA ACR No. L5005, 1945.
 - 5. Theodorsen, Theodore: Theory of Wing Sections of Arbitrary Shape.
 NACA Rep. No. 411, 1931.
 - 6. Jacobs, Eastman N., Ward, Kenneth E., and Pinkerton, Robert M.: The Characteristics of 78 Related Airfoil Sections from Tests in the Variable-Density Wind Tunnel. NACA Rep. No. 460, 1933.
 - 7. von Doenhoff, Albert E., and Abbott, Frank T., Jr.: The Langley
 Two-Dimensional Low-Turbulence Pressure Turnel. NACA TN No. 1283,
 1947.
 - 8. Schlichting, H., and Ulrich, A.: Zur Berechnung des Umschlages laminar turbulent. Jahrb. 1942 der deutschen Luftfahrtforschung, R. Oldenbaurg (Munich), pp. I 8 - I 35.
 - 9. Purser, Paul E., and McKee, John W.: Wind-Tunnel Investigation of a Plain Aileron with Thickened and Bevelod Trailing Edges on a Tapered Low-Drag Wing. NACA ACR. Jan. 1943.
 - 10. Jones, Robert T., and Ames, Milton B., Jr.: Wind-Tunnel Investigation of Control-Surface Characteristics. V - The Use of a Beveled Trailing Edge to Reduce the Hinge Moment of a Control Surface. NACA ARR, March 1942.
 - 11. Purser, Paul E., and Johnson, Harold S.: Effects of Trailing-Edge Modifications on Pitching-Moment Characteristics of Airfoils. NACA CB No. 14130, 1944.

TABLE I ORDINATES OF NACA AIRFOIL SECTIONS TESTED

NACA 0010-34

Stations and ordinates given in percent of airfoil chord

-	Upper	Surface	Lower	Surface		
	Station	Ordinate	Station	Ordinate		
	0 ·75 1.55 2.50 7.05 10 10 10 10 10 10 10 10 10 10 10 10 10	0 714 9400 1.400 2.614 1.444 4.8330 4.8333 4.8333 4.4337 6.644 4.3333 1.5566 8.100	0 .75 1.25 2.50 7.5 10 20 30 40 50 60 70 80 90 100	0 - 714 - 1944 - 1 408 - 2 0 0 11 - 3 7 7 14 - 4 8 3 3 0 - 4 8 3 3 0 - 4 1 7 7 6 5 6 - 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
1	L.E. radius: 0.272					

NACA 0012-64

[Stations and ordinates given in percent of airfoil chord]

(
Upper Surface		Lower S	Surface		
Station	Ordinate	Station	Ordinate		
25.05 25.05 10500000000000000000000000000000000	0 1.813 3.4267 3.4267 3.2820 4.2867 5.563 5.543 4.2800 5.543 6.8200 7.000 7.00	25 2.50 5.05 105 105 105 105 105 105 105 105 105 1	0 -1.813 -2.453 -3.8140 -4.867 -5.827 -6.827 -6.827 -6.827 -7.4320 -1.867 -1.027		

L.E. radius: 1.582

NACA 0010-34 a = 0.8 (modified), c_{l1} = 0.2

Stations and ordinates given in percent of airfoil chord

Upper Surface Lower Surface				
opper .	5421400	201102	Jul 1 4 0 0	
Station	Ordinate	Station	Ordinate	
0 .687 1.176 2.497 4.887 7.378 9.875 14.876 19.886 29.917 39.955 49.931 70.064 80.100 90.076 95.042	0 1.0622 1.6086 2.4934 2.6523 5.523 5.927 6.1735 5.927 6.1735 4.7014 1.100	0 .813 1.324 2.593 5.113 7.622 10.125 15.124 20.114 30.085 40.045 50.066 59.936 79.924 94.958 100.000	0632820 -1.186 -1.714 -2.122 -2.445 -2.549 -1.830 -1.064100	

L.E. radius: 0.272 Slope of radius through L.E.: 0.095

NACA 0012-64 a = 0.8 (modified), $c_{l_1} = 0.2$

[Stations and ordinates given in percent of airfoil chord]

Upper Surface Lower Surface			urface	
Stati	on	Ordinate	Station	Ordinate
0 1247999999999999999999999999999999999999	36 32 32 32 32 35 36 36 36 36 36 36 36 36 36 36 36 36 36	0 12 3 4 4 5 6 6 2 9 2 1 4 6 6 2 5 5 7 2 2 1 6 6 2 5 5 7 2 1 2 1 1 1 2 1 1 1 1 2 1 1 1 1 1 1 1	0 1.364 2.664 5.167 7.678 10.175 15.142 30.100 40.0507 59.9880 99.99500 89.99500	0 -1.686 -2.2901 -3.6083 -3.6083 -4.36721 -4.4918 -2.33751 -2.33751 -1.20

L.E. radius: 1.582 Slope of radius through L.E.: 0.095




TABLE I - Concluded

ORDINATES OF NACA AIRFOIL SECTIONS TESTED

NACA 0010-35

Stations and ordinates given in percent of airfoil chord

Upper Surface Lower Surface

Station Ordinate Station Ordinate

0 0 0 0 0 0 0 0 1.75 -.674 1.25 -.878 1.25 -.878 2.5 1.267 2.5 -1.267 5.0 1.844 5.0 -1.844 7.5 2.289 7.5 -2.289 10 2.667 10 -2.667 15 3.289 15 -3.289 20 3.789 20 -3.789 20 3.789 20 -3.789 20 3.789 20 -3.789 20 4.478 30 -4.478 30 -4.4878 40 4.878 40 4.878 40 4.878 40 4.878 40 4.878 40 4.878 40 4.878 60 50 5.000 50 -5.000 60 4.867 60 -4.389 7

NACA 0012

Stations and ordinates given in percent of airfoil chord

Upper S	Surface	Lower	Surface			
Station	Ordinate	Station	Ordinate			
0 25 2.50 5.05 10 150 2.50 10 150 2.50 10 150 2.50 10 150 2.50 70 0 90 0 90 0 90 0 90 0	0123445434343443445555566244802	0 12.50 25 57 10 50 00 00 00 00 00 00 00 00 00 00 00 00	0 -1.891550 891550 891550 891550 891550 891550 891562 891562 891562 891562 891562 891562 891562 891562 891562 891562 891562 891562 891562 891550 891562 8915			

NACA 21.08

Stations and ordinates given in percent of airfoil chord

Upper S	Surface	Lower S	Surface		
Station	Ordinate	Station	Ordinate		
0 1.128 2.337 4.794 7.273 9.768 19.809 24.852 29.900 40.000 50.039 60.068 70.081 80.078 90.054 95.033 100.000	011233745555554321 01123374555554321	0 1.372 2.663 5.266 7.727 10.222 15.222 20.148 30.100 40.9961 59.932 69.99192 89.99192 89.99192 89.99192	0 -1.134 -1.493 -1.891 -2.111 -2.237 -2.320 -2.329 -2.125 -1.5869 -1.5869 -1.5864 9436 3533 217 084		

L.E. radius: 0.70 Slope of radius through L.E.: 0.1 NACA 2410

[Stations and ordinates given in percent of airfoil chord]

Upper S	Surface	Lower S	Surface
Station	Ordinate	Station	Ordinate
0 1.098 2.297 4.742 7.217 9.710 14.722 19.761 24.8375 40.000 50.049 60.085 70.132 80.097 90.067 95.041 100.000	0 1.4.169 6.4.1269 4.1.662687.55 6.6.8.355 6.8.355 6.8.355 6.8.355 6.8.355 90 90 90 90 90	0 1.102 2.7038 5.2258 70.2278 20.2278 20.125 15.22386 30.000 49.9515 69.933 89.933 94.950 100.000	0 -1.48 -1.927 -2.4809 -3.2276

L.E. radius: 1.10 Slope of radius through L.E.: 0.1

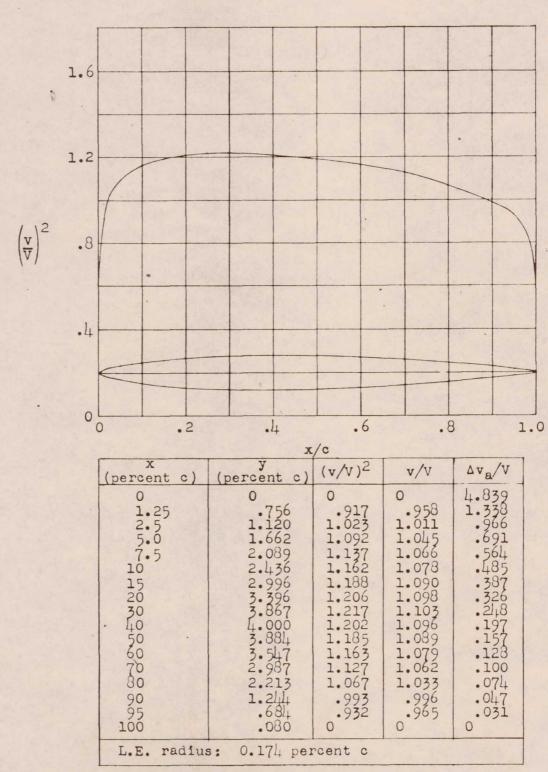


Figure 1.- NACA 0008-34 basic thickness form.



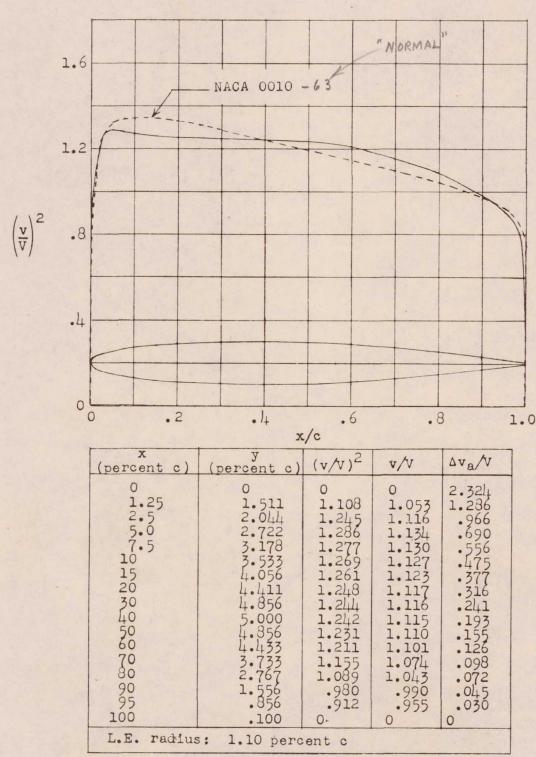



Figure 2.- NACA 0010-64 basic thickness form.

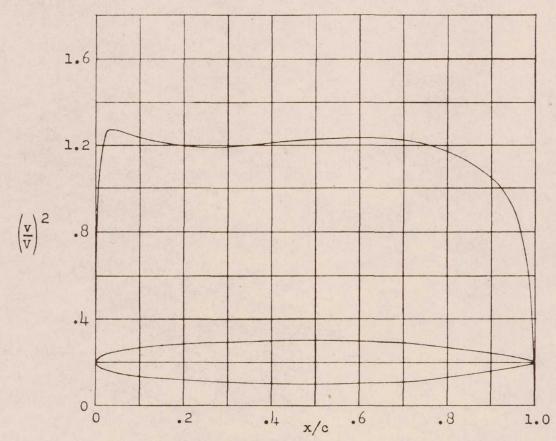

(percent c)	(percent c)	(v/V)2	v/v	Δva/V
0 1.25 2.5 5.0 7.5 10 15 20 30 40 50 70 80 90 100	0 1.467 1.967 2.589 3.7589 3.7589 3.7589 3.7589 3.8890 4.889 3.890 4.889 3.500 1.170	0 1.140 1.273 1.271 1.252 1.236 1.213 1.200 1.196 1.212 1.229 1.234 1.226 1.173 1.049	0 1.068 1.128 1.127 1.119 1.112 1.101 1.095 1.094 1.101 1.109 1.111 1.107 1.083 1.024	2.584 1.295 .970 .684 .551 .470 .372 .312 .239 .158 .128 .103 .076 .029
L.E. radiu	us: 1.10 per	cent c		

Figure 3.- NACA 0010-65 basic thickness form.



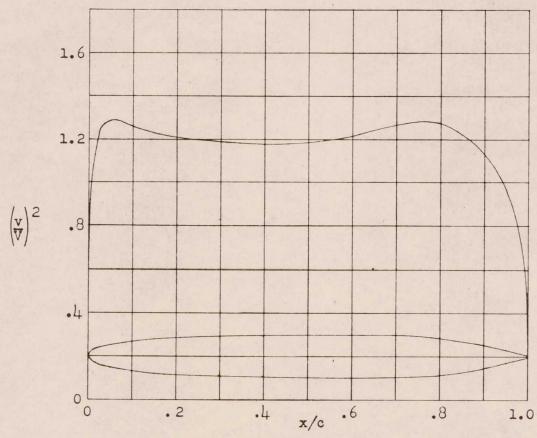

0 0 0 0 2.434 1.25 1.489 1.130 1.063 1.289 2.5 2.011 1.246 1.116 .959 5.0 2.656 1.286 1.134 .687 7.5 3.089 1.282 1.132 .554 10 3.400 1.258 1.122 .471 15 3.856 1.225 1.107 .372 20 4.178 1.209 1.100 .310 30 4.578 1.189 1.090 .236 40 4.822 1.178 1.085 1.90 50 4.956 1.184 1.088 1.53 60 5.000 1.214 1.102 129 70 4.889 1.265 1.125 1.04 80 4.300 1.278 1.130 .080 90 2.833 1.135 1.065 .049 95 1.656 .960 .980 .030 100 .00 0 0	(percent c)	(percent c)	$(v/V)^2$	v/V	Δv _a /V
	2.5 5.0 7.5 10 120 20 40 40 60 780 90 95	2.011 2.656 0890 3.858 1.578 4.900 8890 4.856 1.656	1.246 1.286 1.282 1.258 1.225 1.209 1.189 1.178 1.184 1.214 1.265 1.278 1.135	1.063 1.116 1.134 1.132 1.122 1.107 1.100 1.090 1.085 1.088 1.102 1.125 1.130 1.065	1.289 .959 .687 .554 .372 .310 .236 .190 .153 .129 .104 .049

Figure 4.- NACA 0010-66 basic thickness form.


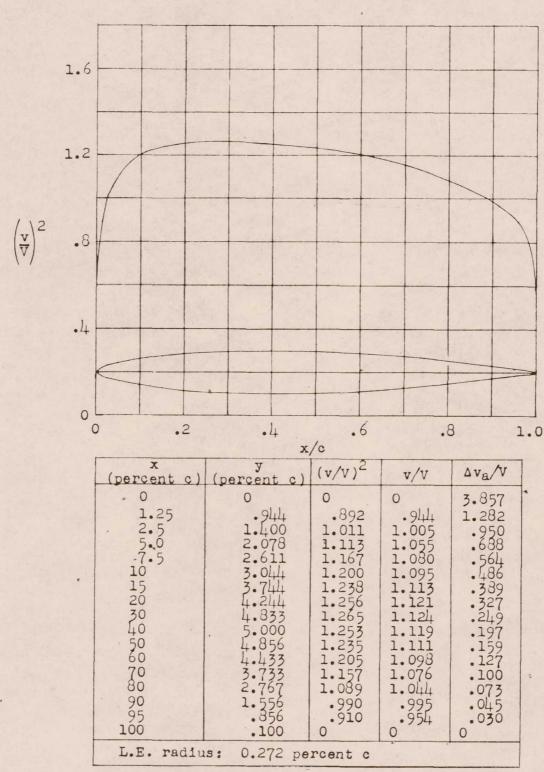


Figure 5.- NACA 0010-34 basic thickness form.

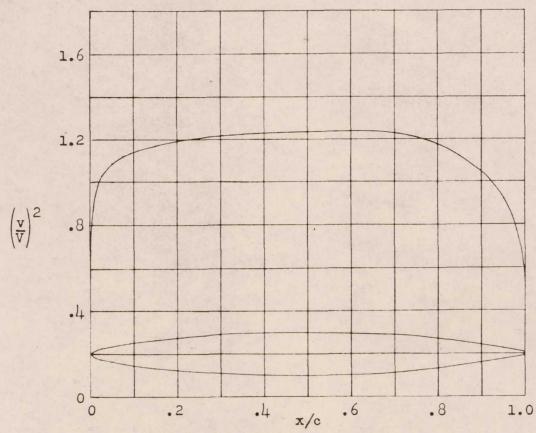

(percent c)	(percent c)	$(v/v)^2$	v/v	Δva/V
0 1.25 2.5 7.0 10 15 20 30 40 50 70 80 90 95	0 878 1.267 1.844 2.289 2.6667 3.789 4.378 4.378 4.378 4.389 3.500 4.389 3.500 4.178	0 954 1.032 1.087 1.122 1.141 1.172 1.1914 1.229 1.235 1.240 1.227 1.176 1.046 920	0 .977 1.016 1.043 1.059 1.083 1.093 1.102 1.109 1.111 1.114 1.1084 1.023 .959	4.068 1.309 .952 .679 .556 .476 .382 .247 .198 .162 .131 .104 .076 .048 .030
L.E. radiu	.100 s: 0.272 pe:	rcent c	0	9

Figure 6.- NACA '0010-35 basic thickness form.


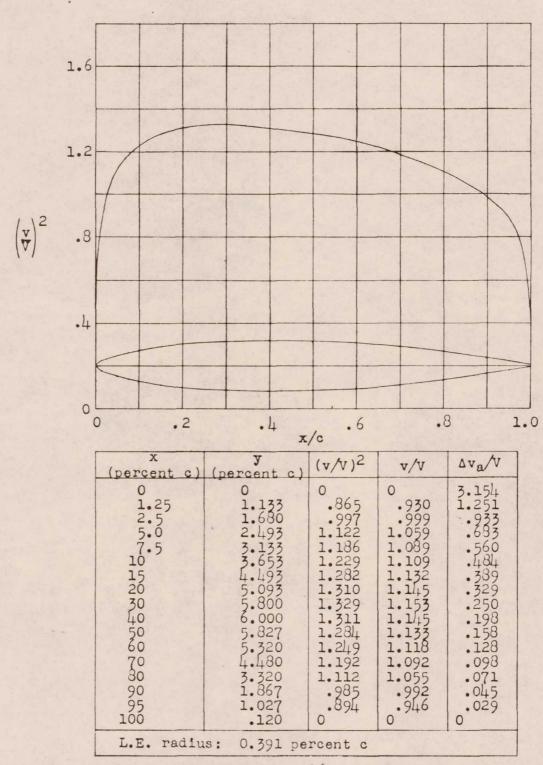


Figure 7.- NACA 0012-34 basic thickness form.

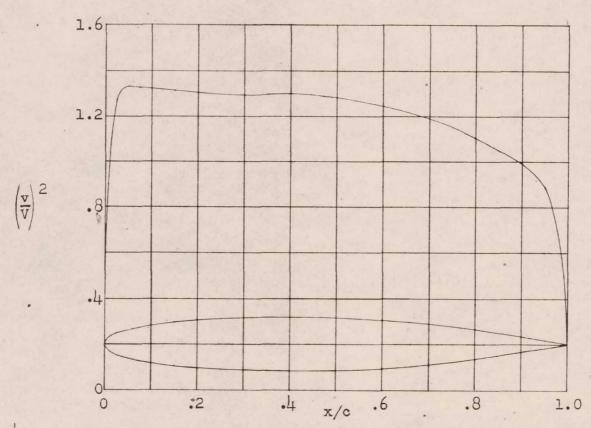

(percent c)	(percent c)	$(v/v)^2$	v/v	Δva/V
0 1.5 2.5 7.0 10 15 20 30 40 50 70 80 90 90 100	0 1.813 2.453 3.267 3.813 4.240 4.867 5.827 6.93 5.320 4.480 3.320 4.480 3.320 1.867 1.027 1.20	0 1.072 1.270 1.330 1.325 1.313 1.303 1.297 1.300 1.214 1.189 1.102 .993 .889	0 1.035 1.127 1.153 1.151 1.150 1.141 1.139 1.140 1.131 1.115 1.090 1.050 .943	2.019 1.2352 .6554 .472 .315 .1541 .1546 .0970 .028
L.E. radius: 1.582 percent c				

Figure 8.- NACA 0012-64 basic thickness form.

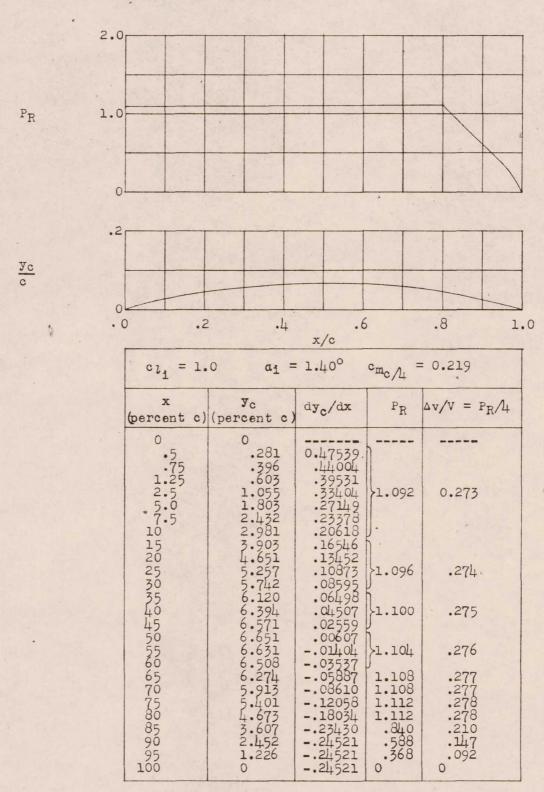


Figure 9.- Data for NACA mean line a = 0.8 (modified).

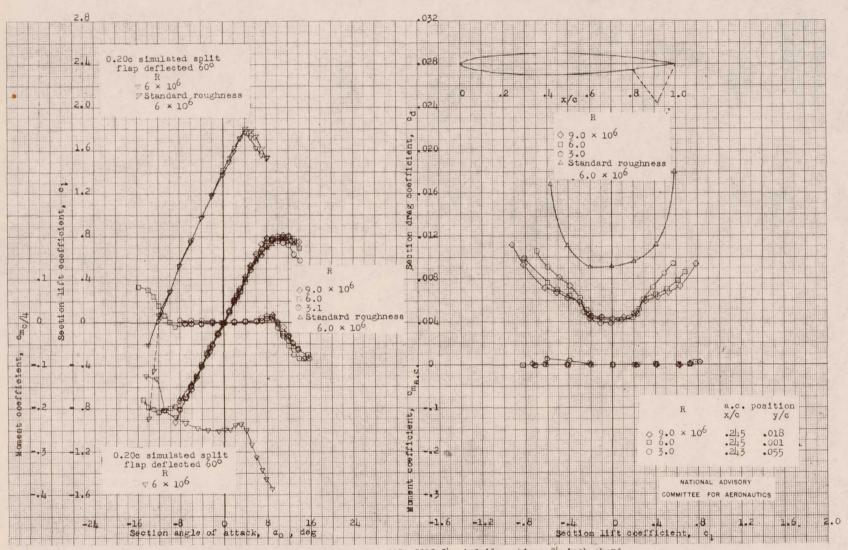


Figure 10.- Aerodynamic characteristics of the NACA 0010-34 airfoil section, 24-inch chord.



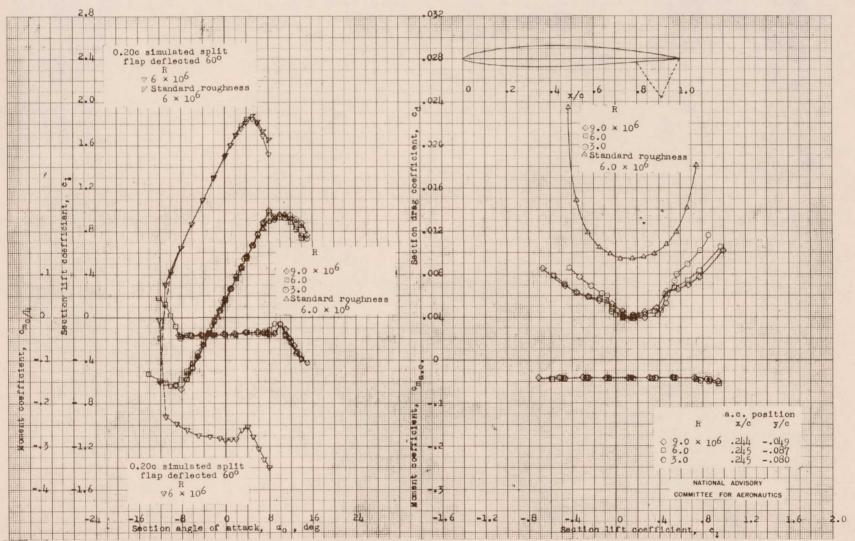



Figure 11.- Aerodynamic characteristics of the NACA 0010-34, a = 0.8 (modified), c21 = 0.2 airfoil section, 24-inch chord.



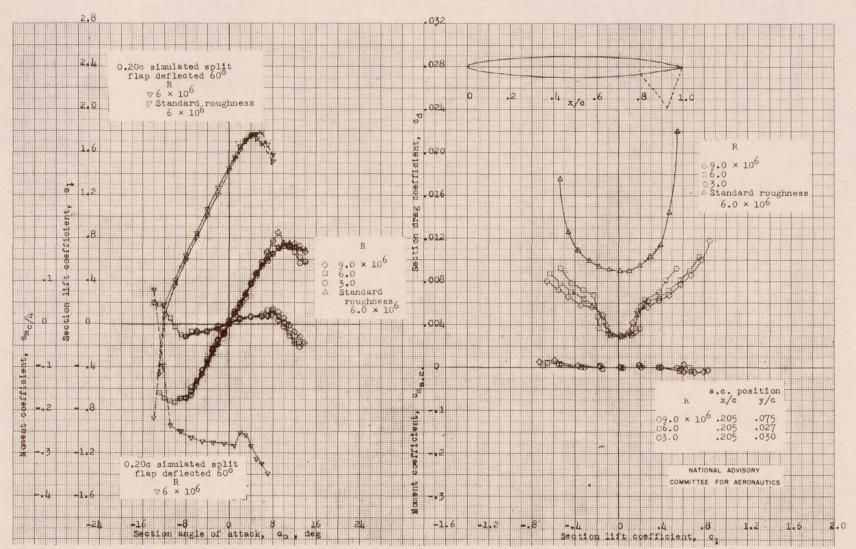



Figure 12.- Aerodynamic characteristics of the NACA 0010-35 airfoil section, 24-inch chord.



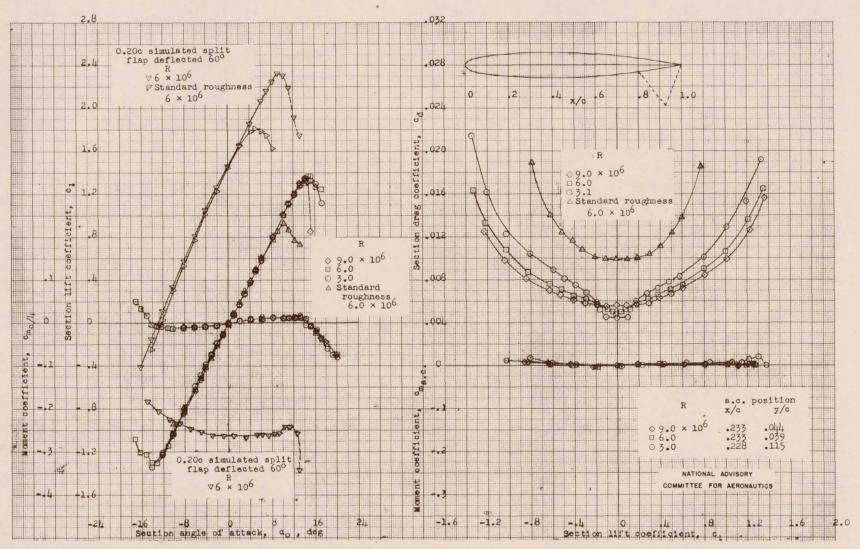



Figure 13.- Aerodynamic characteristics of the NACA 0012-64 airfoil section, 24-inch chord:



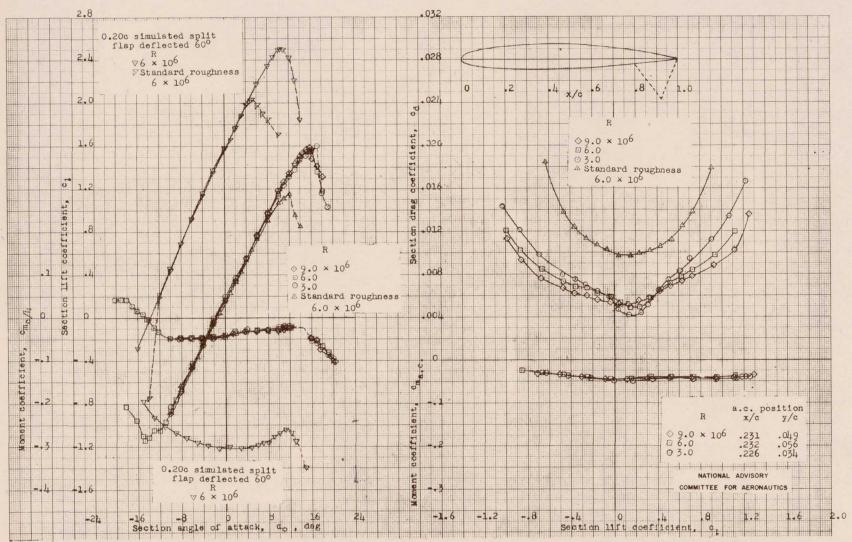



Figure 14.- Aerodynamic characteristics of the NACA 0012-64, a = 0.8 (modified), c21 = 0.2 airfoil section, 24-inch chord.



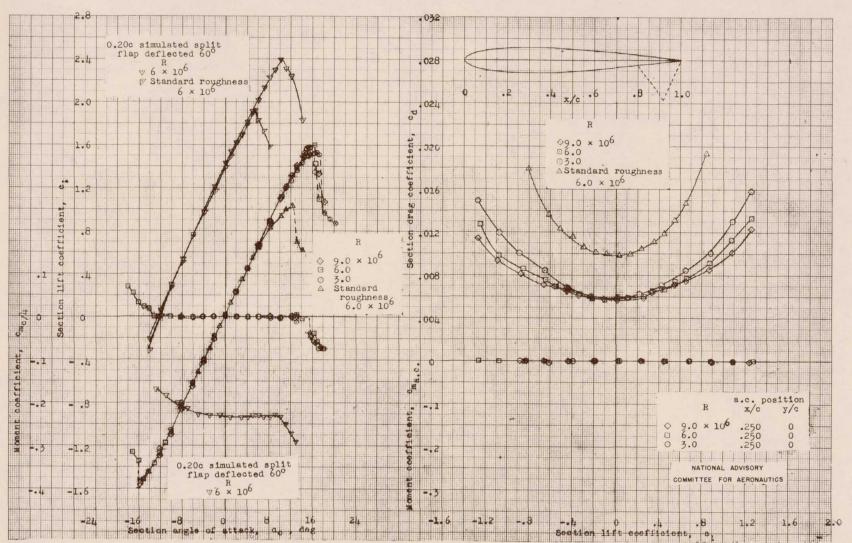


Figure 15.- Aerodynamic characteristics of the NACA 0012 airfoil section, 24-inch chord.



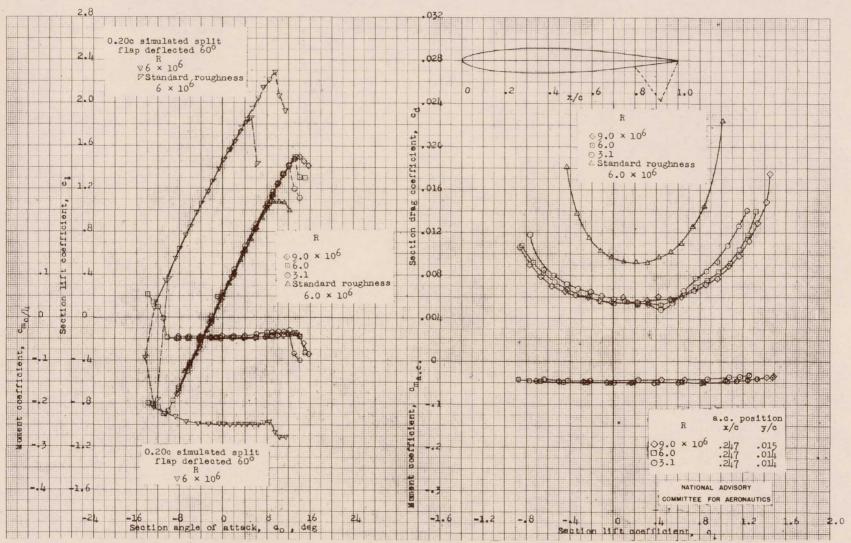



Figure 16 .- Aerodynamic characteristics of the NACA 2408 airfoil section, 24-inch chord.



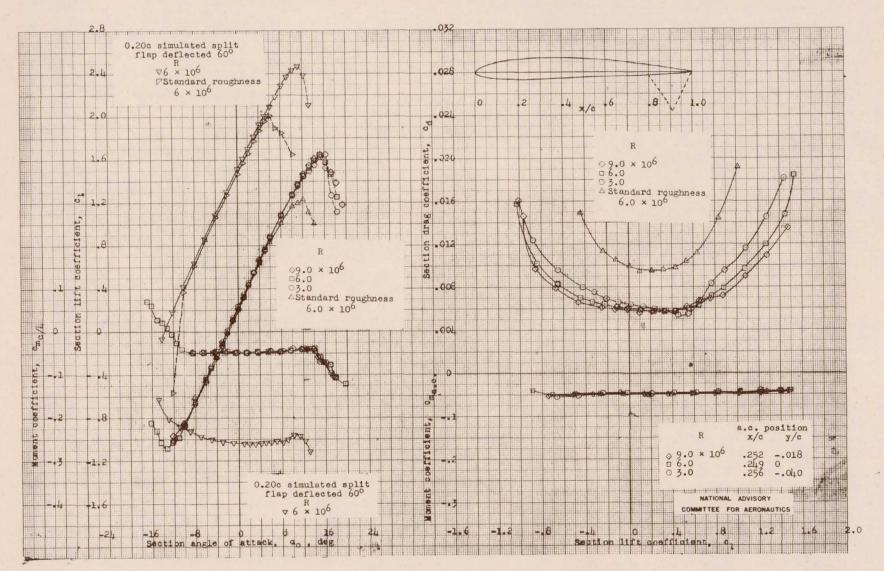


Figure 17.- Aerodynamic characteristics of the NACA 2410 airfoil section, 24-inch chord.



Modified NACA 4-digit series

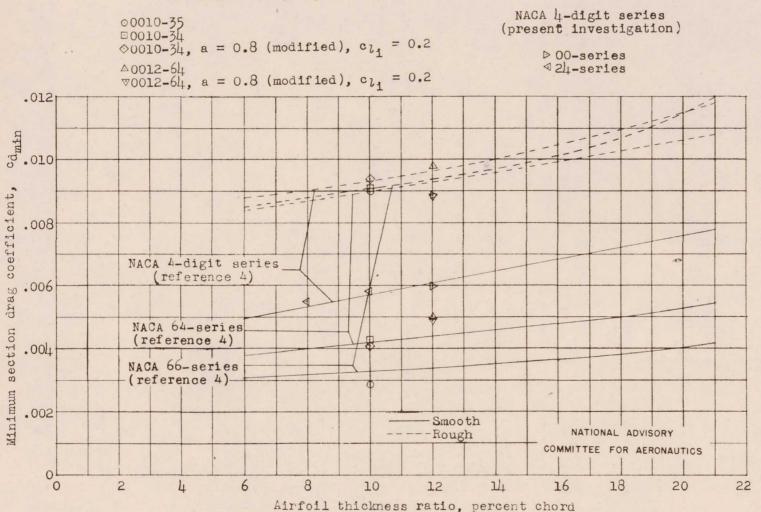




Figure 18.- Minimum section drag coefficients of several modified NACA four-digit-series airfoil sections, both with and without standard roughness, as compared with those of a number of NACA 6-series and NACA four-digit-series airfoil sections. $R = 6.0 \times 10^6$.








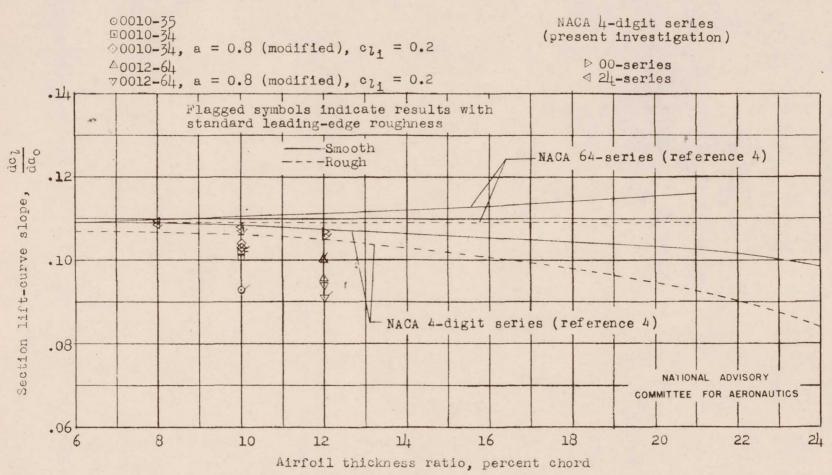


Figure 19.- Section lift-curve slopes of several modified NACA four-digit-series airfoil sections, both with and without standard roughness, as compared with those of a number of NACA 64-series and NACA four-digit-series airfoil sections. R = 6.0 x 106.



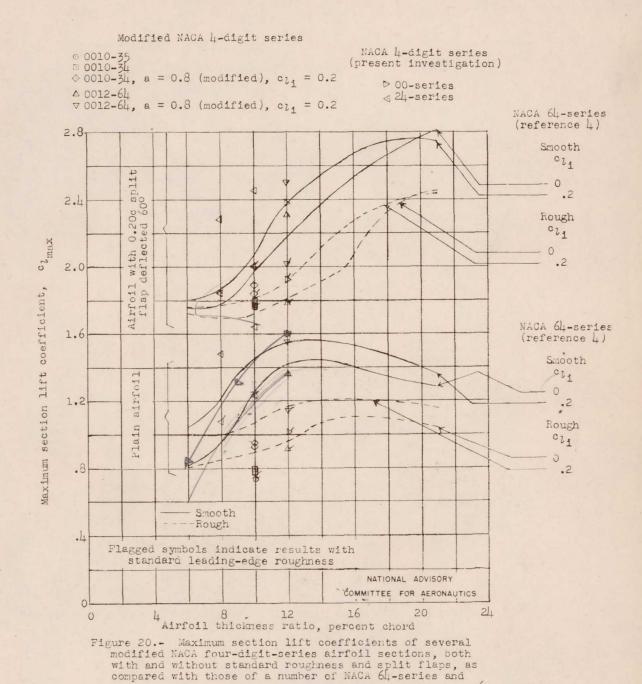

NACA four-digit-series airfoil sections. $R = 6.0 \times 10^6$.



Modified NACA 4-digit series

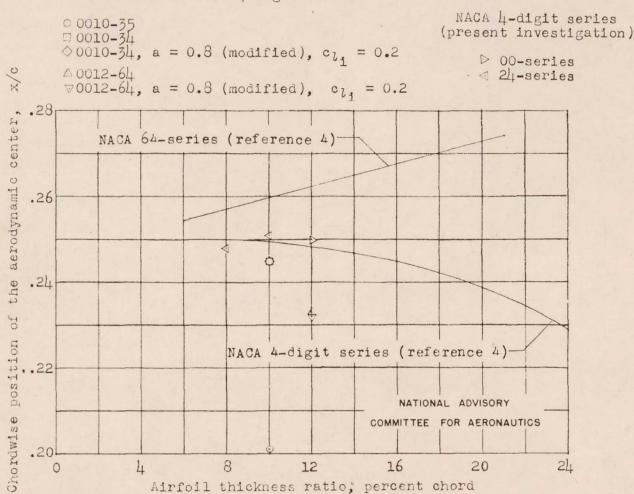


Figure 21.- Chordwise position of the aerodynamic center of several modified NACA four-digit-series airfoil sections as compared with those of a number of NACA 64-series and NACA four-digit-series airfoil sections. R = 6.0 x 106.

NACA RM No. L7122

INDEX

Subject	Number
Wing Sections - Profile Variables	1.2.1.2
Thickness - Wing Sections	1.2.1.2.2
Thickness Distribution - Wing Sections	1.2.1.2.3
Surface Conditions - Wing Sections	1.2.1.2.5
Profiles, Designated - Wing Sections	1.2.1.3
Flaps, Split - Wing Sections	1.2.1.4.2
Reynolds Number Effects - Wing Sections	1.2.1.7

ABSTRACT

Theoretical pressure distributions and measured lift, drag, and pitching moment characteristics at three values of Reynolds number are presented for a group of NACA four-digit-series airfoil sections modified for high-speed applications. The effectiveness of flaps applied to these airfoils and the effect of standard leading-edge roughness were also investigated at one value of Reynolds number.

Results are also presented of tests of three conventional NACA four-digit-series airfoil sections.