


# Spatial Resolution Characterization for Aerial Digital Imagery

Slawomir Blonski, Kenton Ross, Mary Pagnutti  
*Science Systems and Applications, Inc.*

Thomas Stanley  
*NASA Stennis Space Center, Mississippi*

## Acknowledgements


Robert Ryan, SSAI SSC  
Vicki Zanoni, NASA GSFC



# Spatial Characterization Approach

*Stennis Space Center*

- NASA and the U.S. Geological Survey (USGS) have jointly developed capability for characterization of aerial digital imagery:
  - USGS defines characterization requirements and interfaces with industry.
  - NASA performs characterizations of image products using the Stennis Space Center (SSC) test range.
- Analysis includes geositional accuracy and spatial response:
  - Radiometric characterization is to be performed in the future.
- Spatial response is characterized based on measurements of Relative Edge Response (RER):
  - RER is one of the engineering parameters used in the General Image Quality Equation (GIQE) to provide predictions of imaging system performance expressed in terms of the National Imagery Interpretability Rating Scale (NIIRS).
- RER is estimated using the SSC edge targets and the tilted edge technique:
  - RER is a geometric mean of normalized edge response differences measured in two directions of image pixels (X and Y) at points distanced from the edge by -0.5 and 0.5 ground sample distance (GSD).




# SSC Edge Targets


Stennis Space Center





Image of the SSC edge targets acquired by the QuickBird satellite (60 cm GSD).

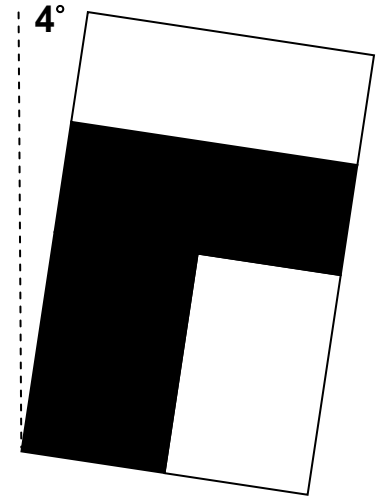

- Two pairs of edge targets painted on a concrete surface
- Orientation differs by 4 degrees to accommodate images with various pixel directions (Universal Transverse Mercator (UTM)-projected and others)

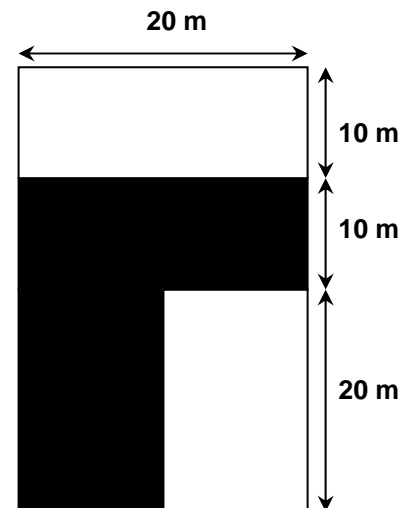


# Tilted Edge Technique

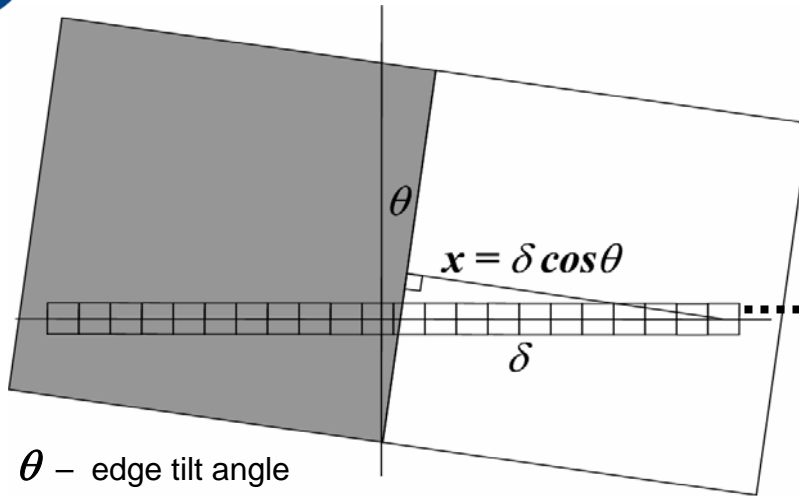

$\theta$  – edge tilt angle


$\delta$  – pixel index

$x$  – pixel's distance from edge (in GSD)

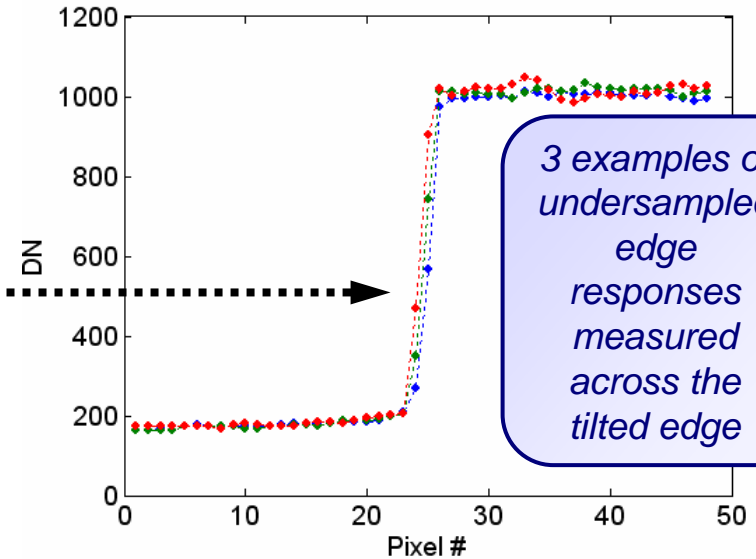


**Problem:** Digital cameras undersample edge target


**Solution:** Image tilted edge to improve sampling

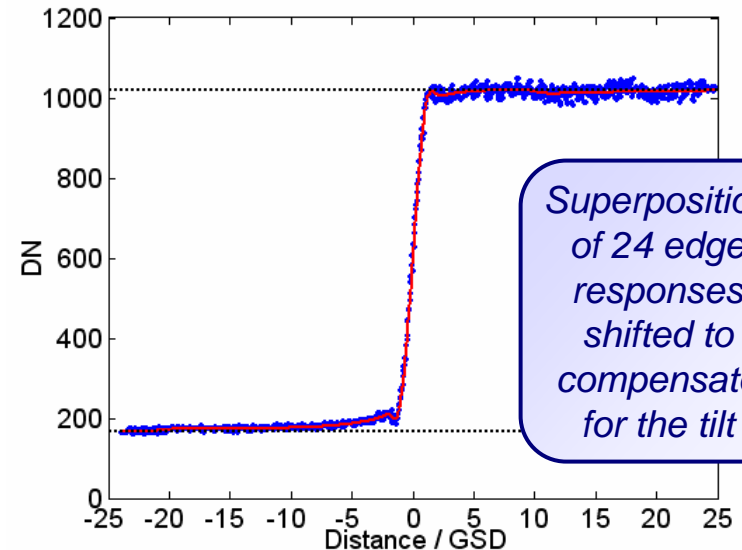


# Relative Edge Response



$$RER = \sqrt{[ER_X(0.5) - ER_X(-0.5)][ER_Y(0.5) - ER_Y(-0.5)]}$$

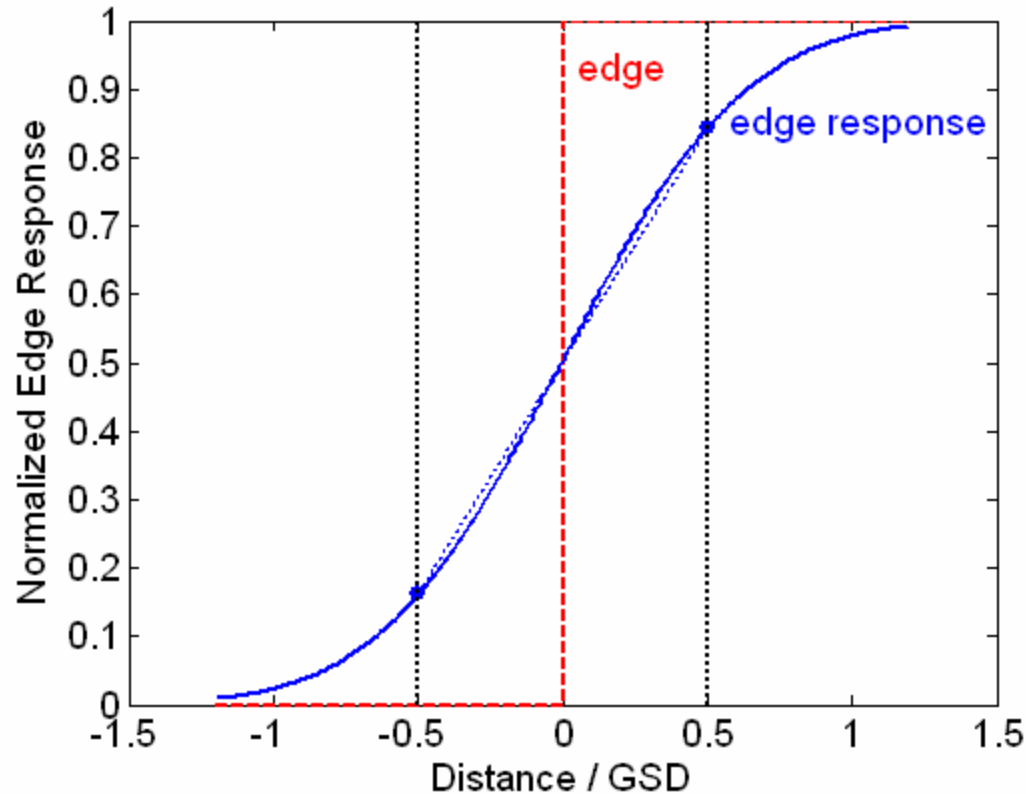


*RER estimates effective slope of the imaging system's edge response, since the distance between the points for which the differences are calculated is always equal to the GSD.*



# Effects of RER on Civil NIIRS

Stennis Space Center


NIIRS estimates based on GIQE  
(assuming no MTF compensation).

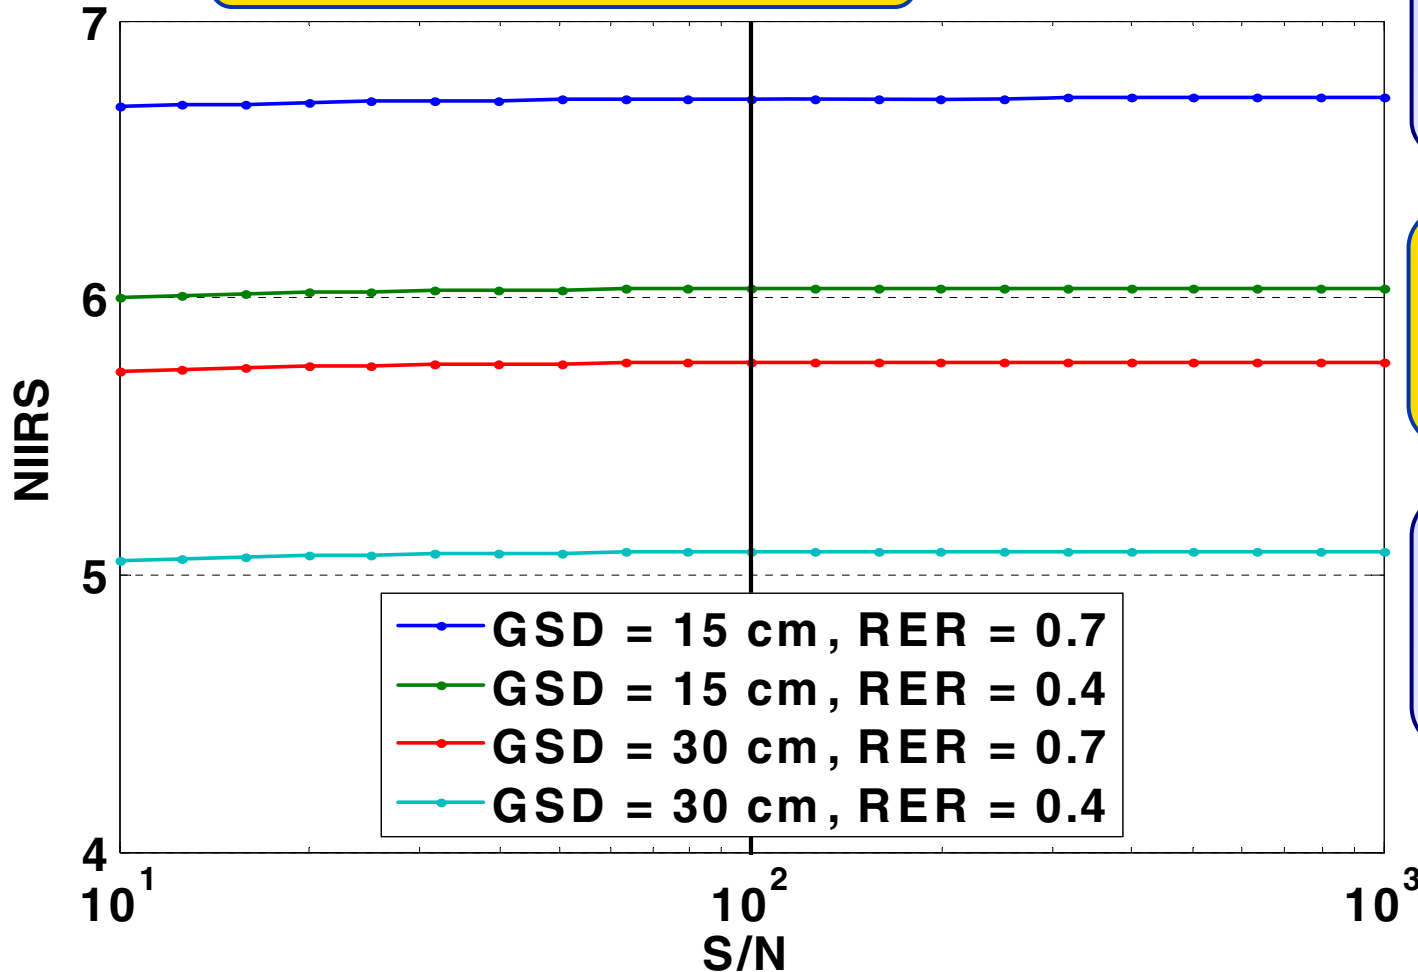

Identify large farm animals by type (e.g., horses, cows) (NIIRS 6.7).

Smaller RER can degrade interpretability, despite finer GSD.

Detect individual large domesticated animals (e.g., horses, cattle) in grazing pastures (NIIRS 5.3).



# Meaning of RER in Remote Sensing

Stennis Space Center

Radiance measured for each pixel is assumed to come from the Earth's surface area represented by that pixel. However, because of many factors, actual measurements integrate radiance  $L$  from the entire surface with a weighting function provided by a system's point spread function (PSF):

$$L_T = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} PSF(x, y)L(x, y)dxdy$$

Part of radiance that originates in the pixel area is given by:

$$L_P = \int_{-0.5}^{0.5} \int_{-0.5}^{0.5} PSF(x, y)L(x, y)dxdy$$




One can show that the Relative Edge Response squared ( $RER^2$ ) can be used to assess the percentage of the measured pixel radiance that actually originates from the Earth's surface area represented by the pixel:


$$L_P / L_T \approx RER^2$$

*A simple example:  
Box PSF  
Width = 2 GSD*

$$ER(0.5) - ER(-0.5) = 0.75 - 0.25 = 0.50$$
$$RER = 0.50$$

*$RER^2 = 0.25$  means that 25% of information collected with the pixel PSF (blue square) comes from the actual pixel area (shadowed square)*

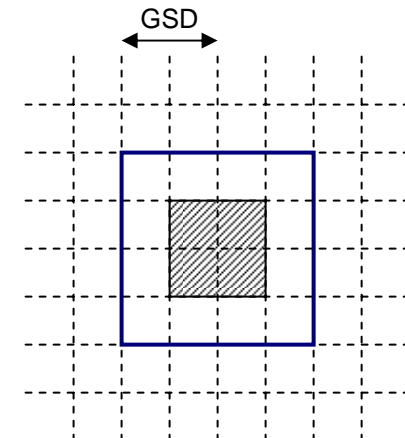
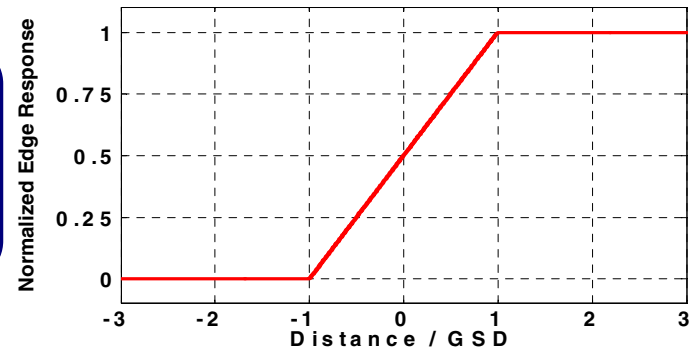
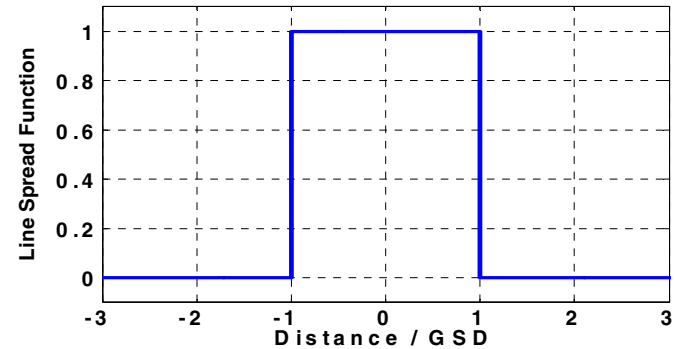





# Example: 15 cm GSD Panchromatic Image

Stennis Space Center

Image area selected for the spatial resolution measurement in the Northing direction.

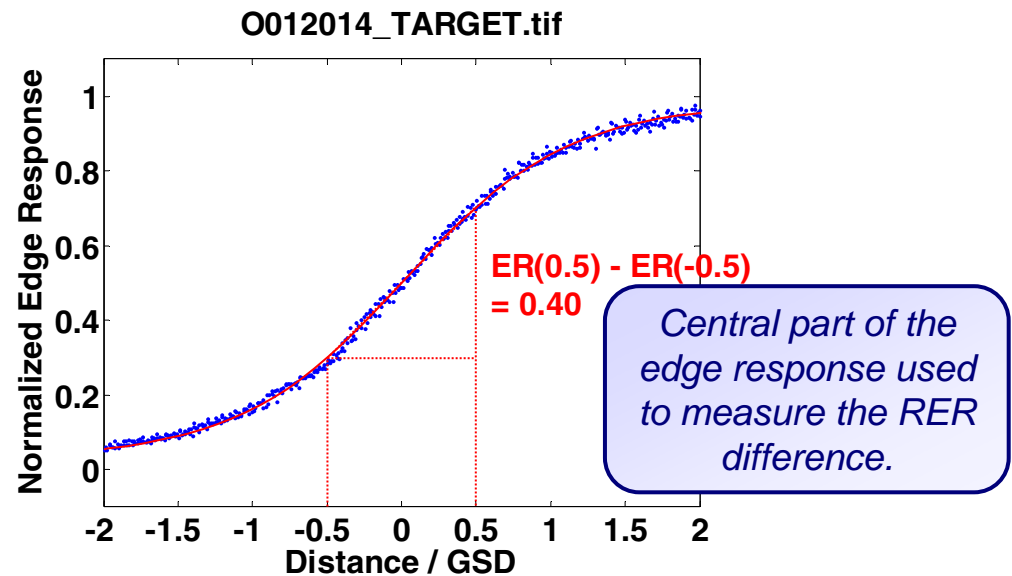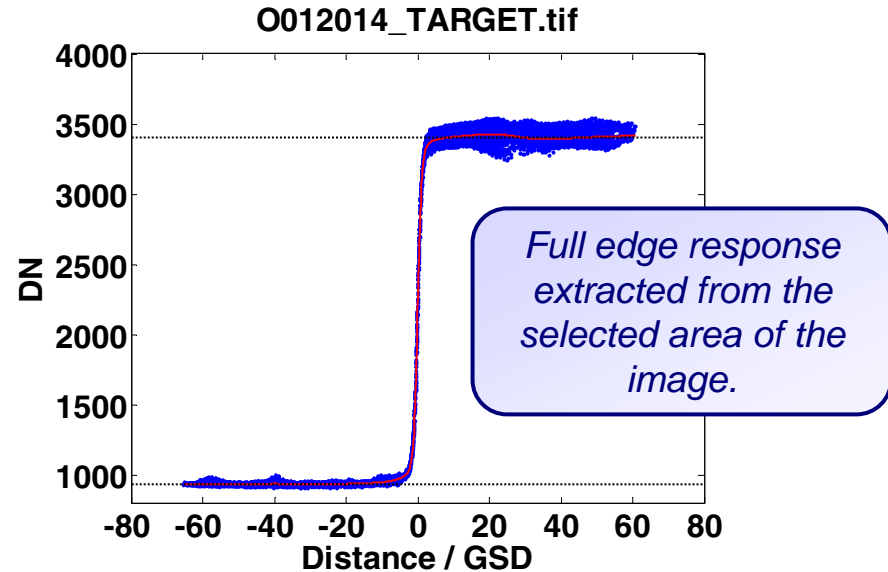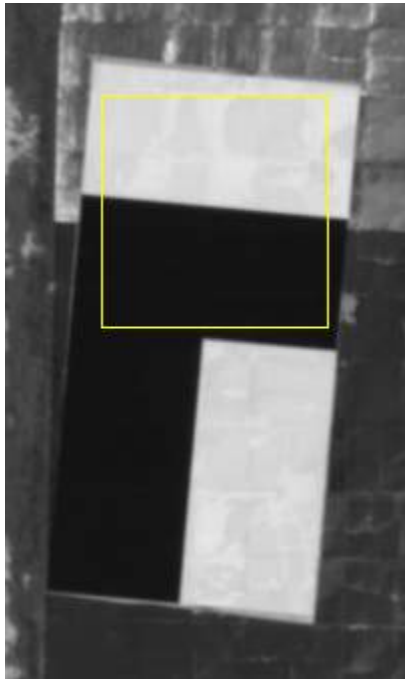








# Example: 30 cm GSD Multispectral Image

Stennis Space Center

Section of the characterized image showing the SSC edge targets.

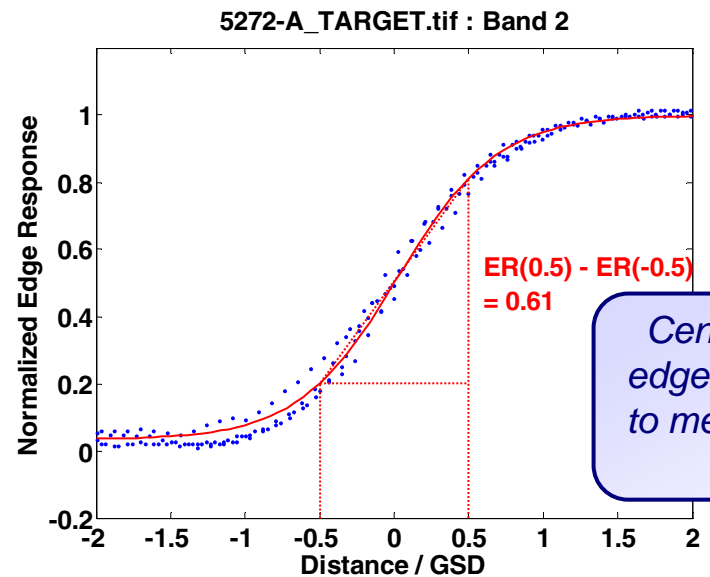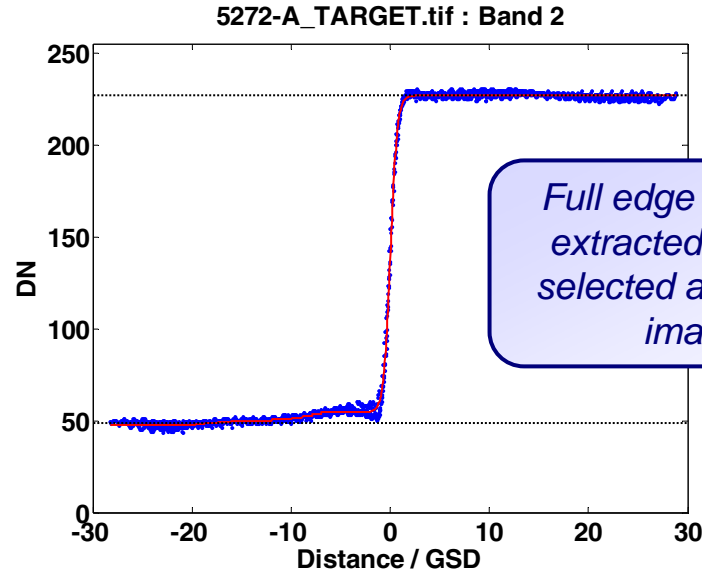



# Spatial Characterization Results

Stennis Space Center

Image Acquisition Date	Sensor	Company	GSD (cm)	RER
22-Nov-2002	Leica ADS40	EarthData International®	25	0.5 (BW) 0.6 (IR) 0.5 (RGB)
24-Nov-2003	DAIS	Space Imaging® (GeoEye™)	50	0.7 (VNIR)
5-Dec-2003	IKONOS*	Space Imaging (GeoEye)	100	0.7 (pan)
18-Feb-2004	Z/I Imaging DMC	AERO-METRIC, INC.®	15	0.4 (pan)
8-Nov-2004	Z/I Imaging DMC	3001, Inc.®	15 30	0.5 (RGB), 0.4 (CIR) 0.6 (RGB), 0.5 (CIR)
23-Feb-2005	Z/I Imaging DMC	Florida Department of Transportation	30	0.6 (RGB)

\*satellite

GSD – Ground Sample Distance  
 RER – Relative Edge Response  
 BW – Black, White  
 IR – Infrared  
 RGB – Red, Green, Blue  
 VNIR – Visible/Near Infrared  
 CIR – Color Infrared

*Reports with the characterization results have been delivered by NASA to USGS.*