

AWiFS Radiometric Assessment

3 Presentations:

University of Arizona

Kurt Thome

South Dakota State University

David Aaron

SSC: Science Systems and Applications, Inc

Mary Pagnutti

Civil Commercial Imagery Evaluation Workshop

Laurel, MD

March 14-16, 2006

Kurt Thome

College of Optical Sciences, University of Arizona

kurt.thome@optics.arizona.edu



College of Optical Sciences

THE UNIVERSITY OF ARIZONA
TUCSON ARIZONA

Background



A wide range of sensor data has become available over the past five years

- The data from these sensors must be characterized to understand their quality and how they compare with other sensor's data
- The Indian Remote Sensing (IRS) P6 Advanced Wide Field Sensor (AWiFS) sensor is one of these
 - USDA Foreign Agriculture Service (FAS) approached NASA to perform an initial characterization (*Nov. 2004*)
 - Space Imaging was granted a license to receive and distribute AWiFS imagery from their ground station in Oklahoma (*Jan. 2005*)
 - Space Imaging agreed to provide 16 of images to Stennis Space Center for characterizations and USDA FAS agreed to share a portion of their AWiFS image archive



Background

SSC coordinating with multiple groups to assess radiometric and spatial quality of AWiFS data

- Reduces duplication of effort while improving product characterizations and hopefully leading to improved products
- “This” talk covers the radiometric results obtained by the groups at South Dakota State University, SSC, and University of Arizona
- All groups use the reflectance-based approach
 - Determine surface reflectance
 - Characterize atmospheric conditions
 - At-sensor radiance from radiative transfer code
 - Compare with radiance reported by sensor



Talk outline

- Overview of AWiFS sensor
- Description of University of Arizona approach
 - Reflectance-based approach
 - Ground-monitor radiometer approach
 - Results for AWiFS
- Description of South Dakota State approach and results
- Description of Stennis Space Center approach and results
- Summary of results for all groups



AWiFS description

AWiFS (Advanced Wide Field Sensor) is a multispectral camera on the IRS-P6 platform

- IRS-P6 (Indian Remote Sensing) Satellite also known as RESOURCESAT-1 is a multiple sensor platform
- IRS-P6 was launched on October 17, 2003 into a polar orbit from Satish Space Center by the Indian PSLV-C5
- Polar sun-synchronous orbit (altitude of 817 km)
- Platform carries
 - LISS-III
 - LISS-IV (mono and mx modes)
 - AWiFS A and B sensors



AWiFS description



While spatial resolution is slightly poorer than Landsat the wider swath is an advantage

- Pushbroom-based sensor
- Four bands: 0.52-0.59, 0.62-0.68, 0.77-0.86, 1.55-1.70 μm
- Spatial Resolution is 56 m at nadir (70 m near edge of swath)
- Radiometric Resolution is 10 bit
- Swath is 740 km
- Repeat time is 5 days
- Design life is 5 years

AWiFS Collection Approach



The AWiFS camera is split into two separate electro-optic modules (AWiFS-A and AWiFS-B) tilted by 11.94 degrees with respect to nadir

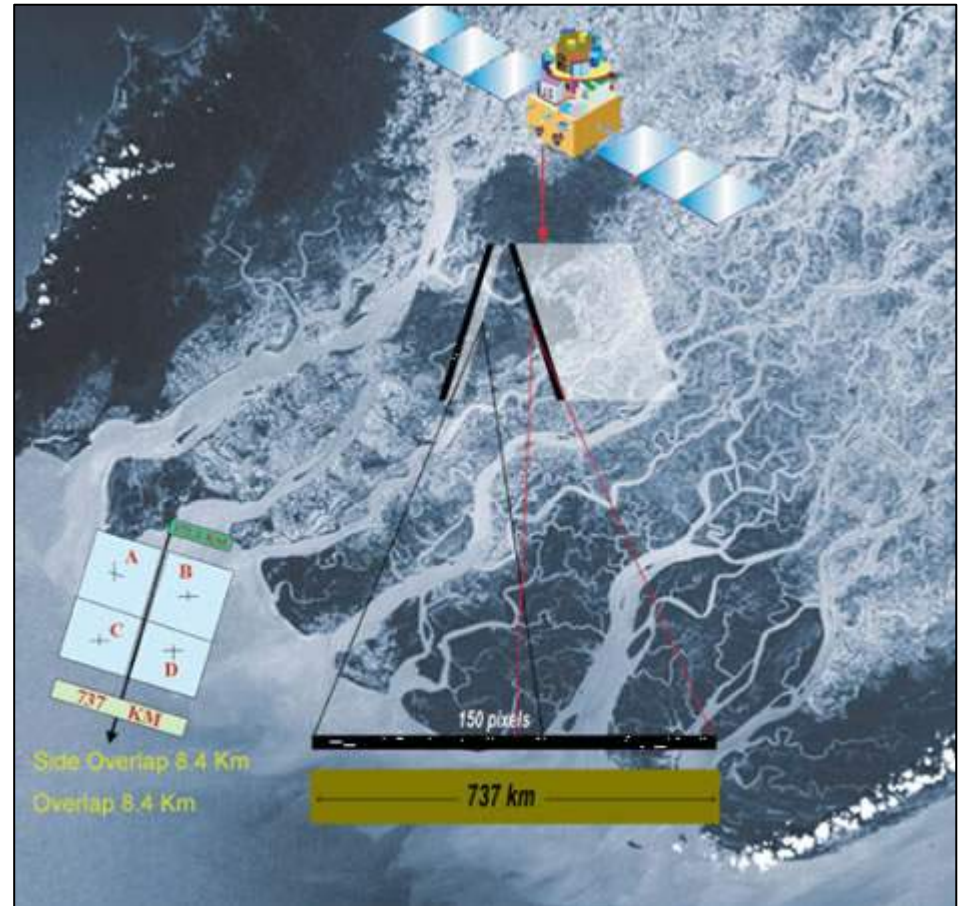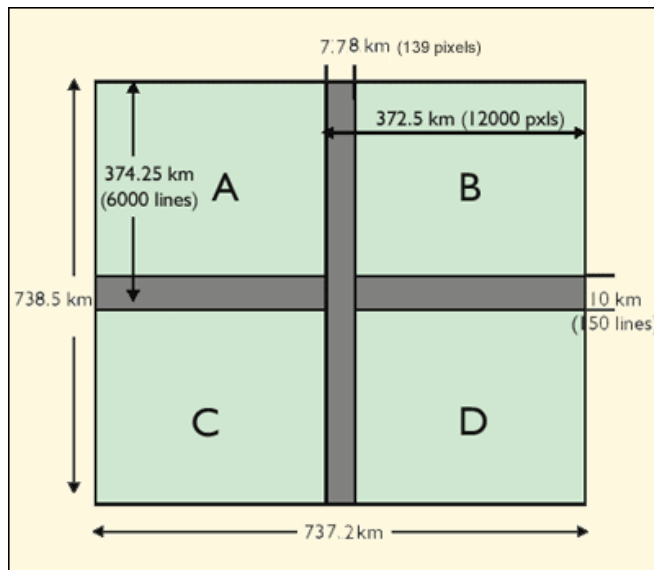



AWiFS – ETM+ comparison

Number of Samples


- ETM+: ~144 points per 40 acre field
- AWiFS: ~36 points per 40 acre field

Repeat Coverage

- Landsat 7: 16 days
- AWiFS: 5 days

Swath

- Landsat 7: 185 km
- AWiFS: 737 km

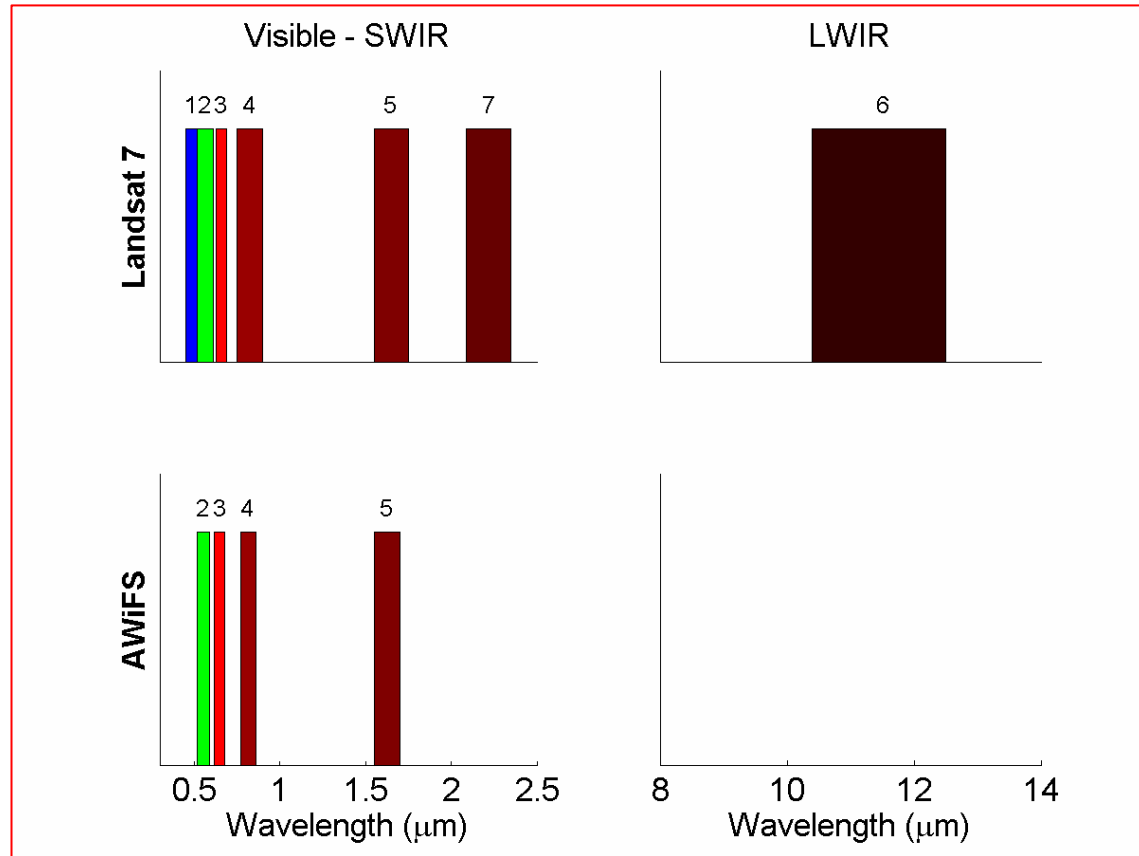

Bands

- Landsat 7 ETM+: 7 bands
- AWiFS: 4 bands (no blue, 2.2μm, thermal)




Reflectance-based approach

Measurements of surface reflectance of a homogeneous test site



Predict at-sensor radiance for a selected area of the site and compare to imagery

RTC
Code

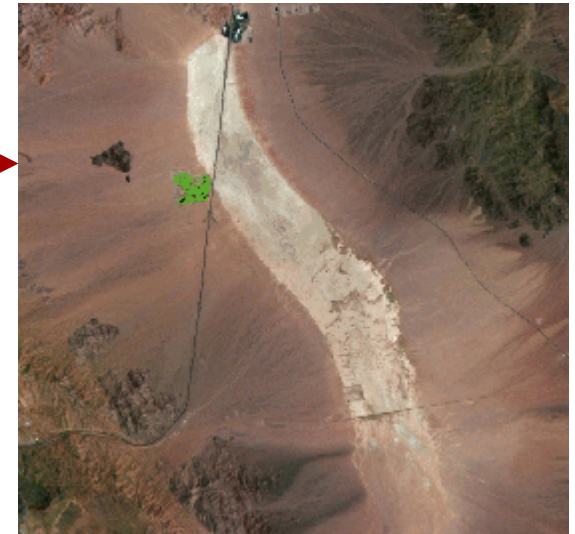


Measurements of atmospheric conditions



Atmospheric retrievals

Solar radiometer data provides optical depths as a function of wavelength and time

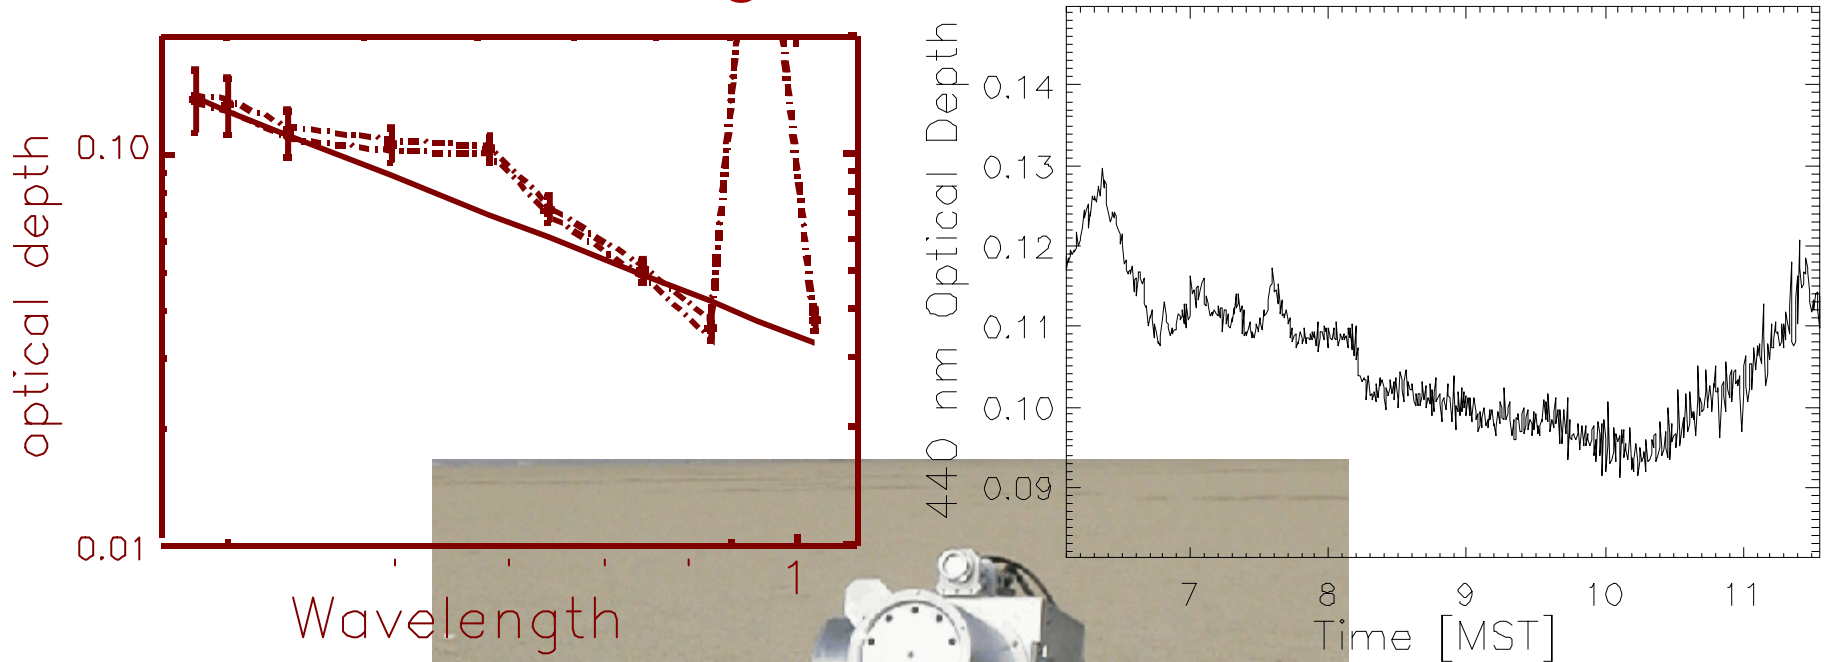



Reflectance retrieval

Characterized a 300 m by 80 m area in fashion similar to that used by other sensors


- Measurements of the site are made with reference to a panel of known reflectance
- Confidence that sampling approach is still valid since several 50-m sensors have been done previously for other projects
- Location of site relies on the geolocation information with the imagery







UofA Test Sites

Ivanpah Playa (3 km by 5 km) on the bottom right and RRV Playa (about 35 km in size) at top right

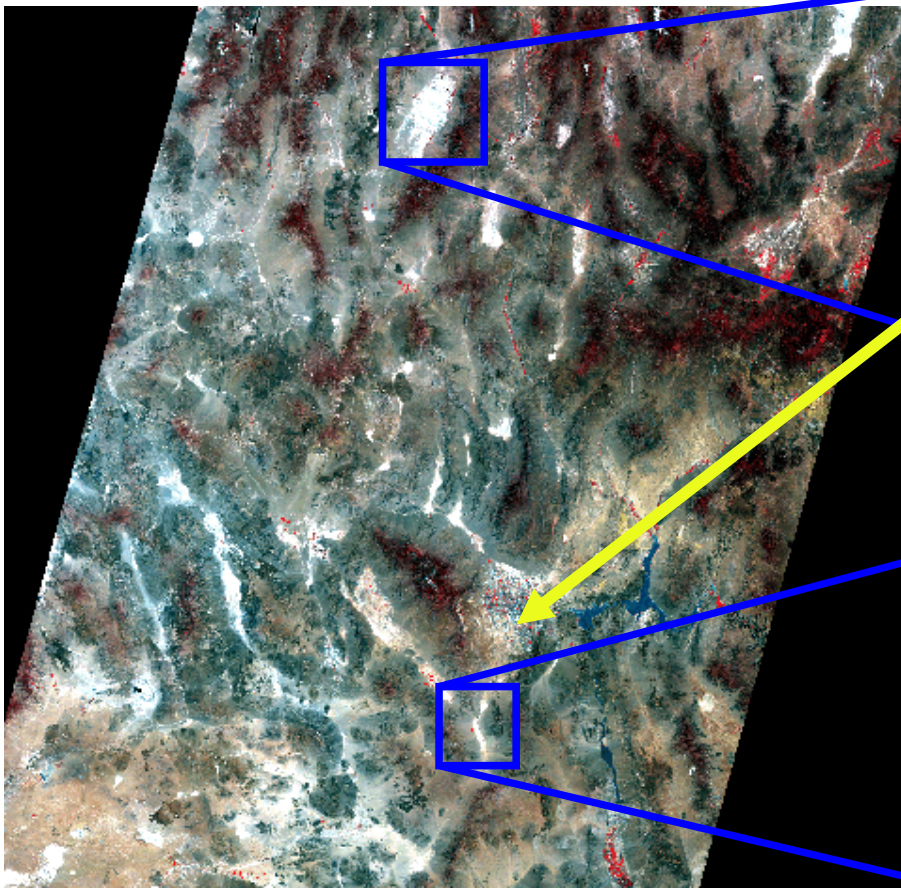

Las Vegas

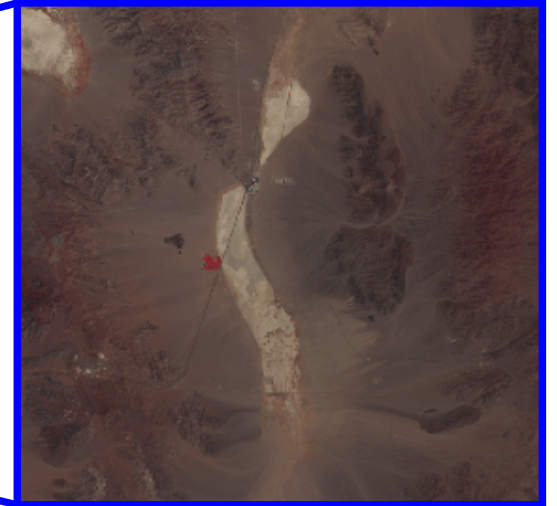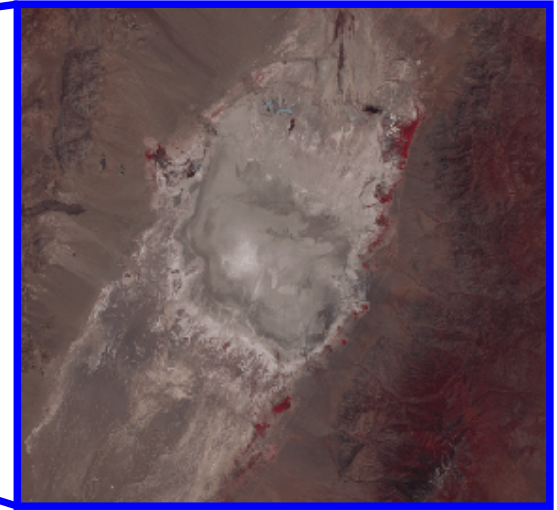



Data sets

Three attempts were made in summer 2005 to collect data for AWiFS

- June 18 at Ivanpah Playa
 - ETM+ and Terra on June 18
 - Landsat-5 overpass on June 17 at RRV Playa
 - Aqua overpass on June 19 at RRV Playa
- June 23 at Ivanpah Playa
 - Ikonos also on June 23
 - Smoke-filled skies
- August 10 at Railroad Valley Playa
 - ETM+ and Terra overpass on August 12
 - Orbview overpass on August 10
 - Landsat-5 overpass on August 13 at Ivanpah



Alternate approach

Wide swath of AWiFS allowed for an alternative data collection approach

- Sensor images both Ivanpah and Railroad Valley Playas on same date
- Offers an opportunity to obtain two calibrations on the same date between the two sites
 - One option is to have two groups deployed simultaneously
 - Other option is to have automated instrumentation operating at one site
- UofA has deployed automated sensors to characterize the surface and atmospheric conditions since 2003
 - Atmospheric characterization derived from AERONET data
 - Meteorological data collected with a met station
 - Site reflectance monitored with LED-based radiometers


Automated instrumentation



- AERONET instrument provides identical style inputs as obtained by on-site personnel operating similar instruments
- LED-based radiometer is a stationary, multi-spectral sensor
 - Built in house with green, red, and NIR bands
 - Currently have five such instruments deployed at RRV Playa



Radiometer evolution

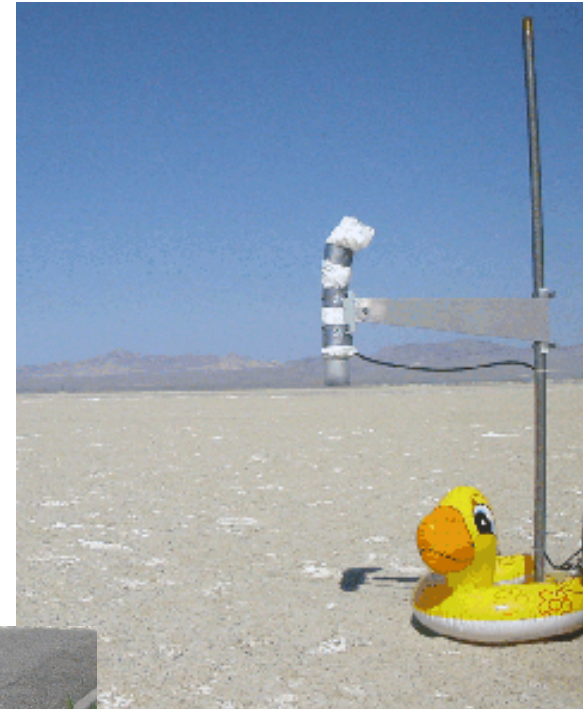




Added data set

Automated data provided an opportunity to add two additional data sets for evaluation

- No added cost for imagery
- June 18 and 23 were targeted as Ivanpah Playa collections
 - Group was at Railroad Valley Playa just prior to these dates
 - Goal was to modify those collections based on the automated data
- Unfortunately, June 23 was cloudy at RRV Playa

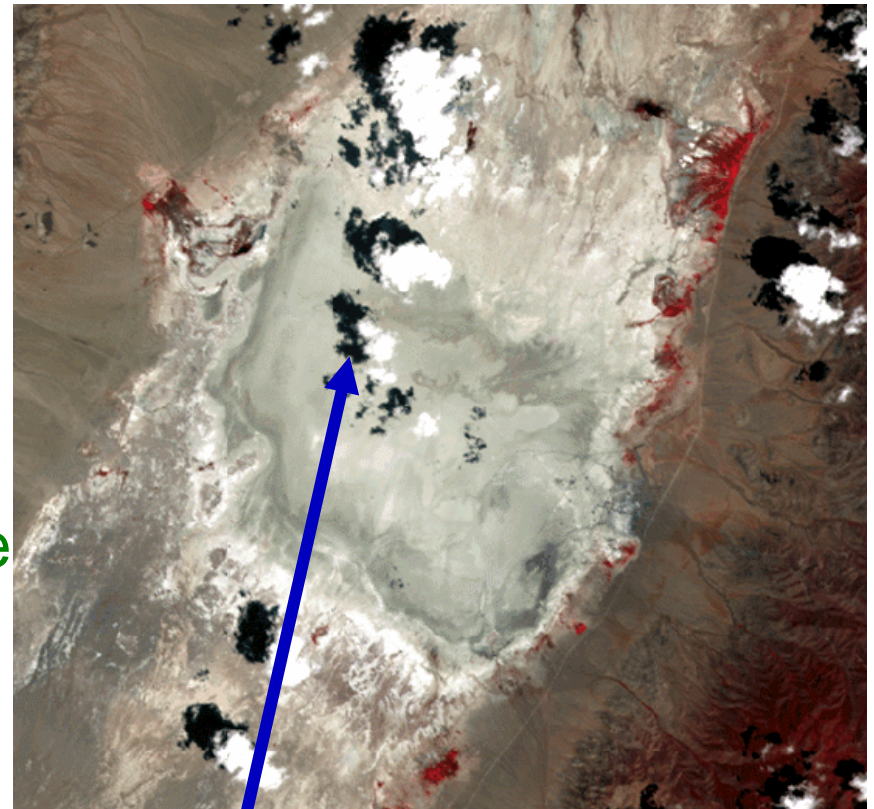


Test site

June 18 automated data




Raw data from automated radiometers operating at RRV Playa (green band)

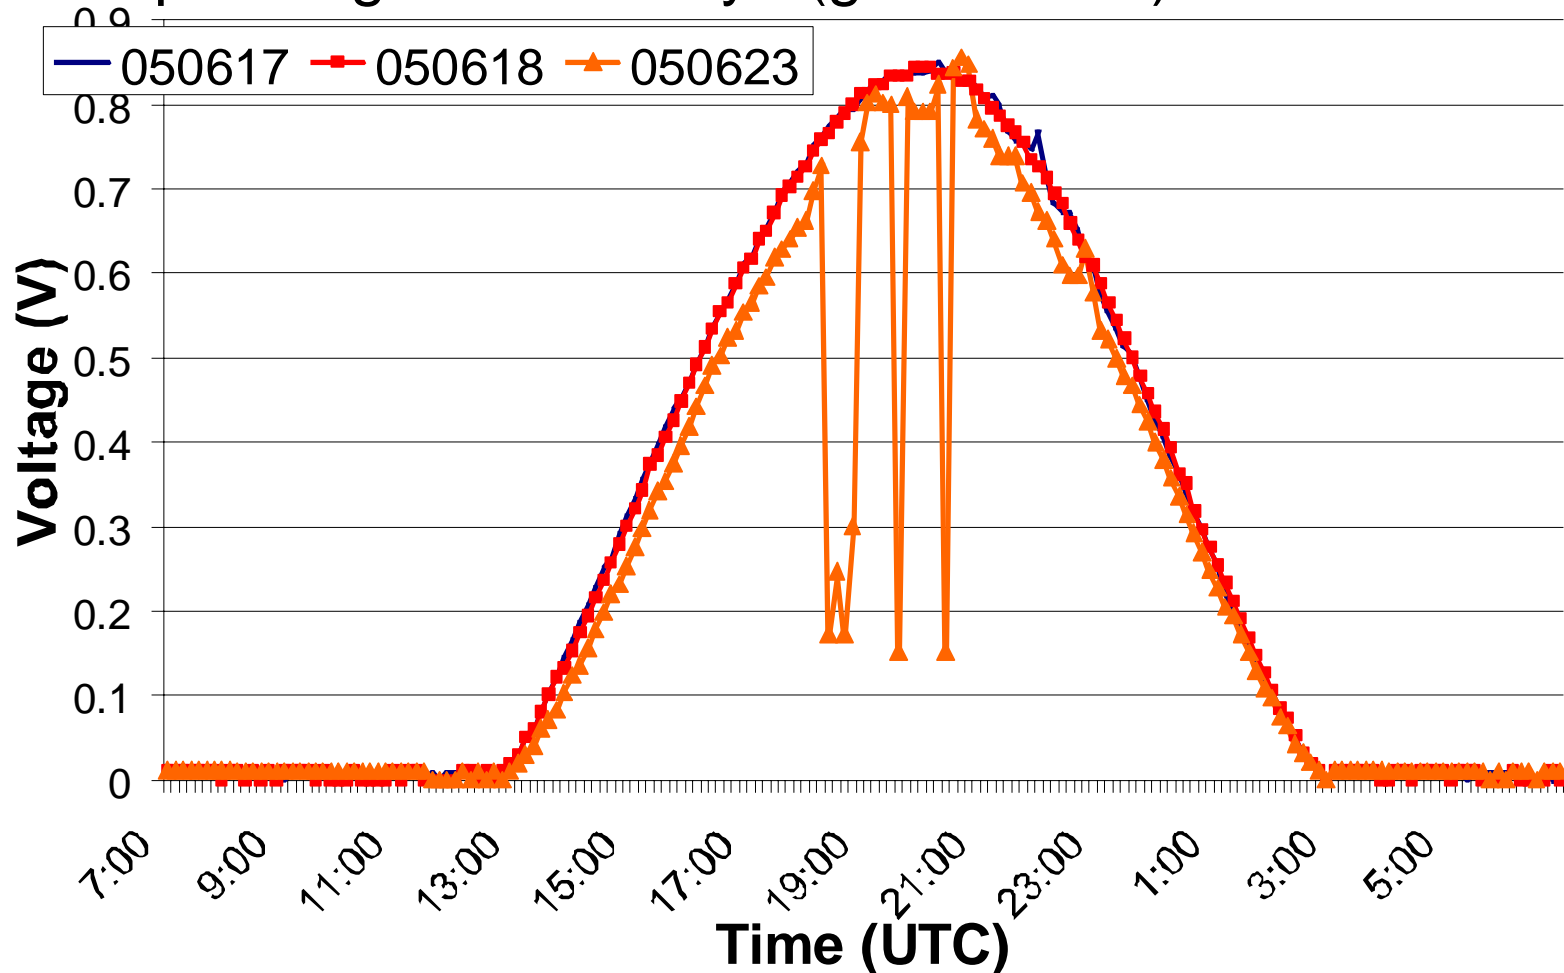



Reflectance change

- Computed reflectance from LED radiometers for both June 17 and 18
- Compute percent difference between days by band
- Scale the June 17 hyperspectral reflectance by the average percent difference

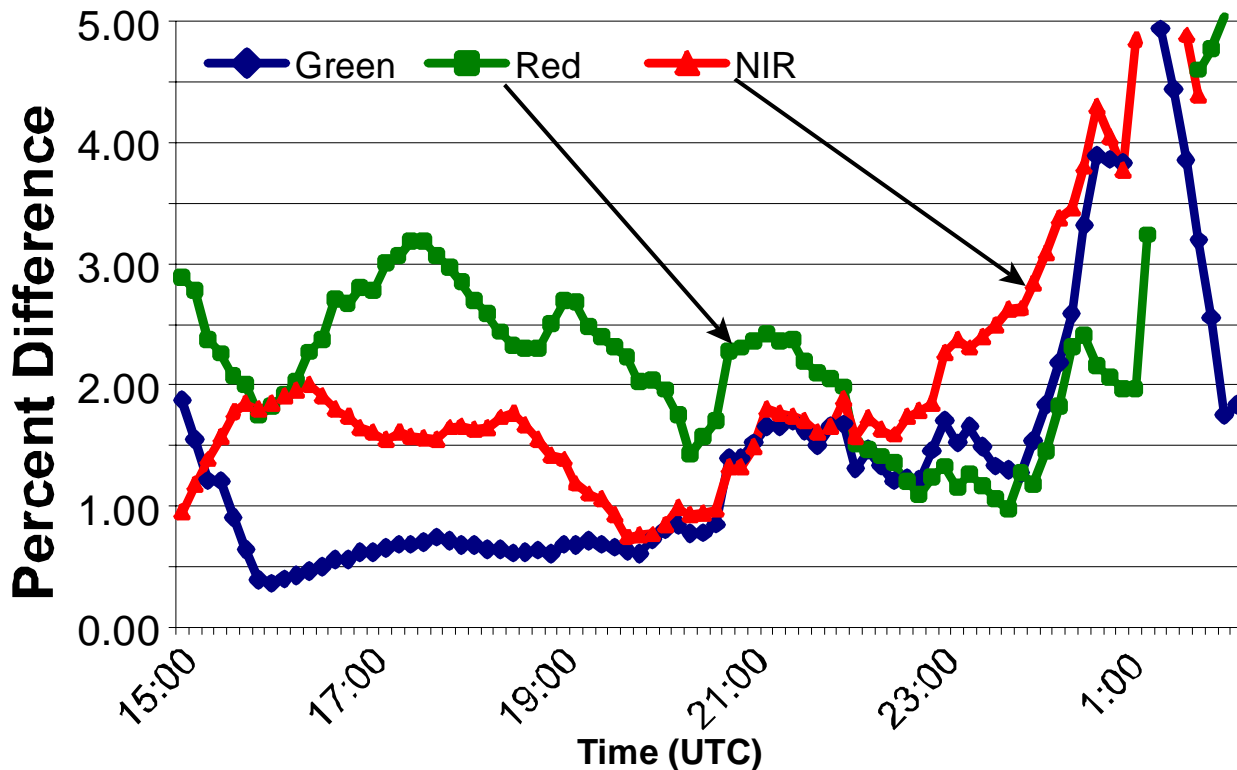


Results



Graph below shows results from all three dates including the automated results

- Results below show the percent difference between the predicted radiance and that based on supplied calibration
- Positive percent difference implies that the predicted radiance is greater than the reported

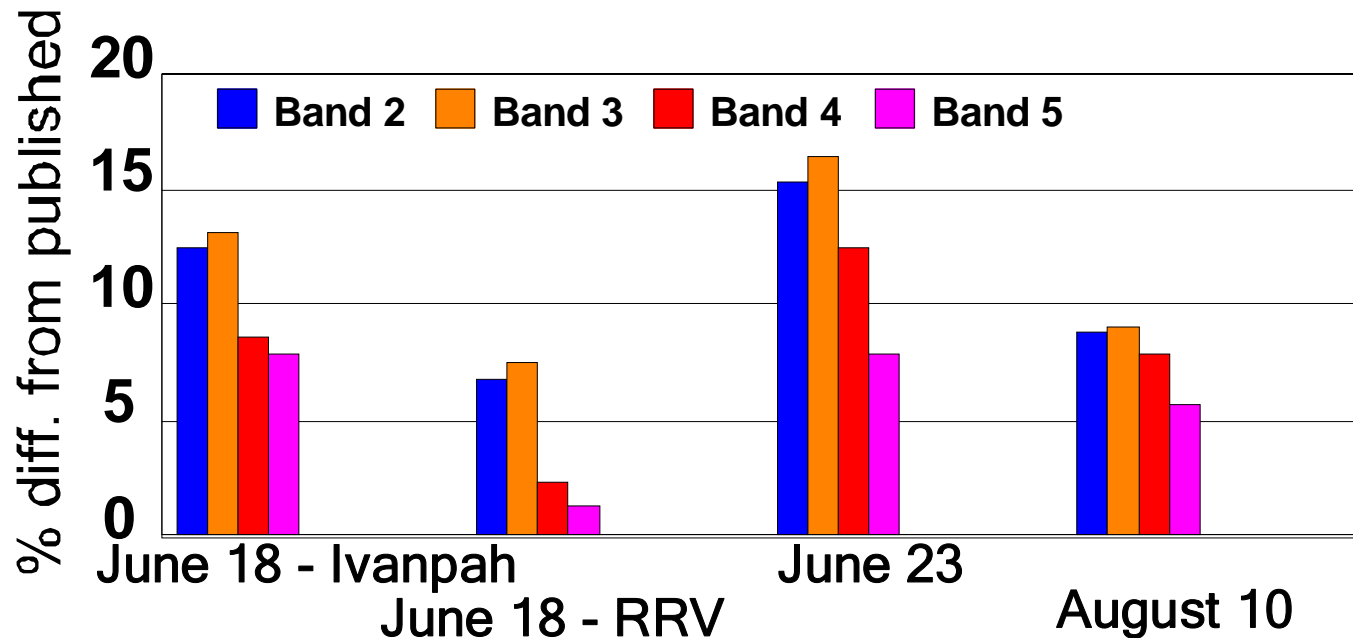





Confidence Level

Examine the AWIFS results relative to results from other sensors near in time



- Results show the difference between average for a given sensor and the results for a given date

June 18
Ivanpah

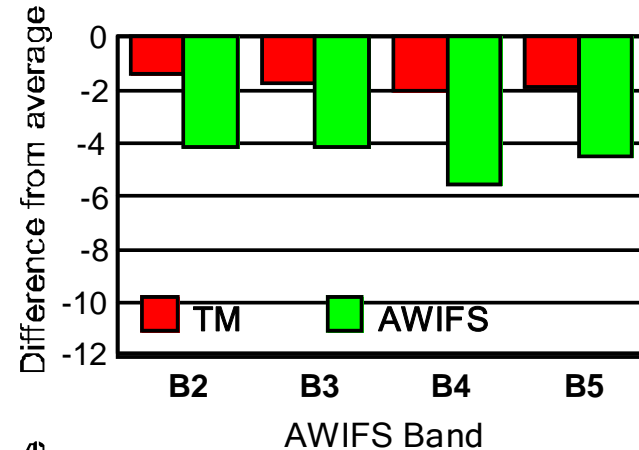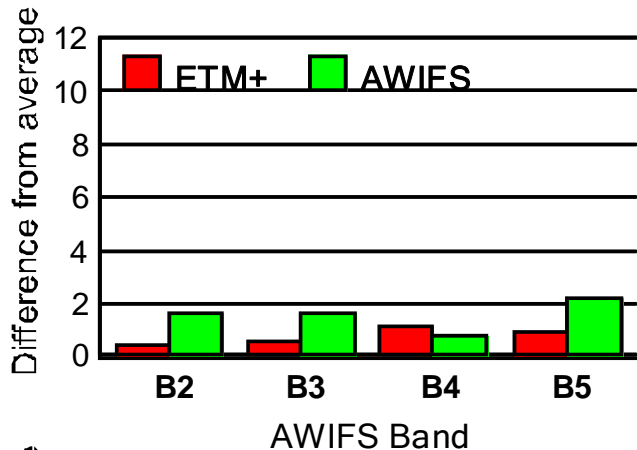

June 18
RRV

June 23

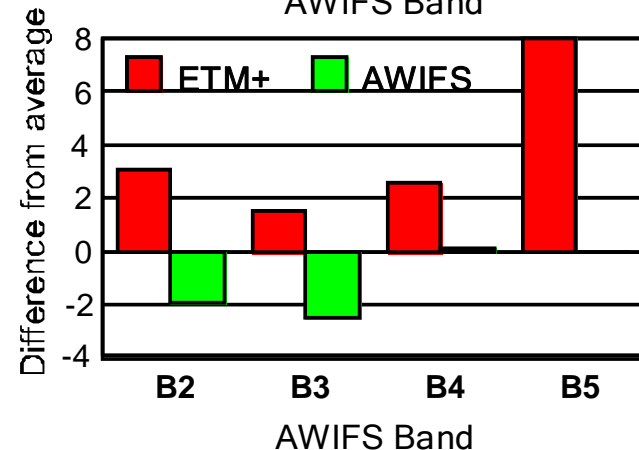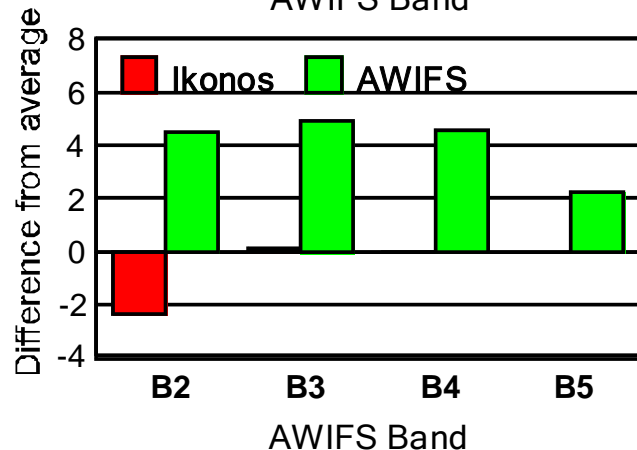

Aug. 10

Summary



Standard deviation of the average is similar to that for other sensors giving confidence to results

- Results are slightly better without LED results
 - 1.3 to 3.7% standard deviations (for three data sets)
 - Other sensor results typically show <3%
 - Implies self consistency within the data set
- Previous graph also implies that AWIFS results are of similar absolute uncertainty as for other sensors (<3% in VNIR)

