An Overview of Astronaut Photography

Dr. William L. Stefanov Image Science & Analysis Laboratory NASA Johnson Space Center Houston, TX 77058 USA

william.l.stefanov@nasa.gov

Overview

✤ The Data

Basic Remote Sensing Theory International Space Station Platform Astronaut Photography Data Characteristics

 Astronaut Training and Operations Crew Earth Observations Group Targeting Sites and Acquisition Cataloging and Database




* all images in this presentation courtesy of NASA unless otherwise noted*






Basic Theory

- Earth's atmosphere defines "windows" useable for remote sensing
- Different information is obtained using different wavelengths
- Most sensors are passive (radar and LIDAR are active)
- Information obtained is directly related to material chemistry and physics

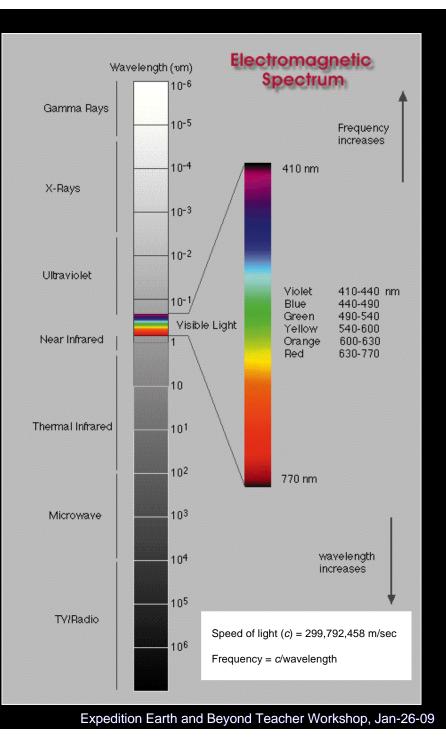

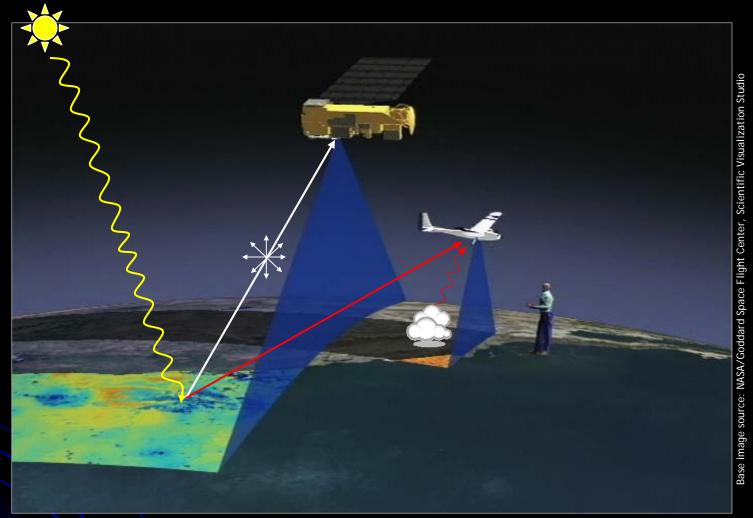

Incident energy is reflected, transmitted, or emitted from surficial materials; sensor sees mixture of energy from multiple surface materials and atmosphere

For passive systems, information is obtained from only the uppermost surface (~130 microns); no depth profiles!





International Space Station




Multinational space effort including Canada, Japan, Russia, Brazil, Belgium, Denmark, France, Germany, Italy, Netherlands, Norway, Spain, Sweden, Switzerland, UK, USA

Crews have included astronauts from NASA, ESA, JAXA, CSA, BSA; Russian cosmonauts; and "space tourists" over 18 Expeditions

Crew rotation is typically six months;6-person crews slated to begin 2009

Station provides zero-g facility for science, engineering, and biomedical experiments vital for future long-duration missions to the Moon and Mars

ISS Orbital Parameters

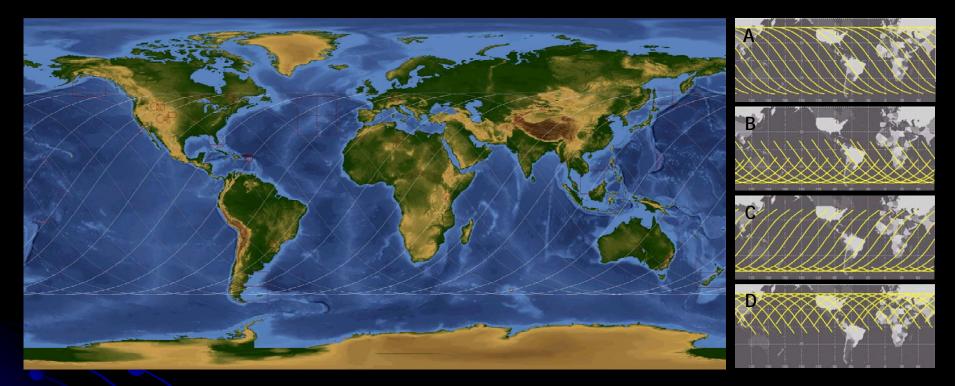


Unlike polar-orbiting satellites such as Landsat or Terra, the International Space Station (ISS) has an inclined equatorial orbit that is not sun-synchronous.

This type of orbit limits nadir viewing opportunities to approximately 52N and 52S latitudes, and results in variable ground illumination.

250 /





A - Successive orbit paths,

B - Daylight illumination in

C - Successive orbit paths,

ascending ISS passes.


D - Daylight illumination in


descending ISS passes.

Southern Hemisphere only.

Northern Hemisphere only.

Data Characteristics

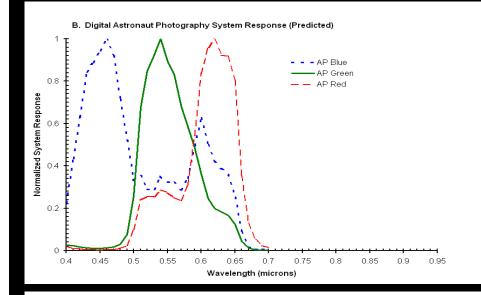

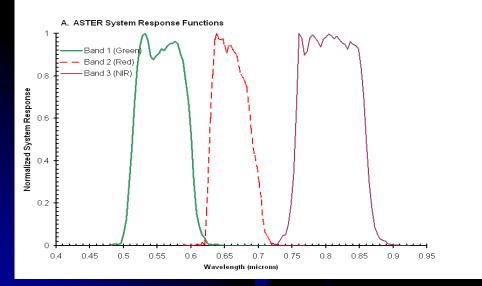

• AP acquired since 1960s as part of crewed missions

• System response for digital cameras is comprised of CCD response, optical filters (NIR) and transmissivity of ISS window.

• Response curves typically exhibit significant overlap below the 60 % incident energy level

Theoretical maximum resolution approaching
4 m/pixel confirmed in ISS digital imagery

| | | Station Altitude | |
|------------|--------|------------------|---------|
| | | Minimum | Maximum |
| Camera | Lens | 368 km | 386 km |
| Hasselblad | 110 mm | 35.4 | 37.1 |
| | 250 mm | 15.6 | 16.3 |
| | 350 mm | 11.1 | 11.6 |
| Nikon | 300 mm | 13.0 | 13.6 |
| | 400 mm | 9.7 | 10.2 |
| DSC | 300 mm | 11.0 | 11.6 |
| | 400 mm | 8.3 | 8.7 |
| | 800 mm | 4.2 | 4.4 |
| | | | |

Nikon D2Xs Camera



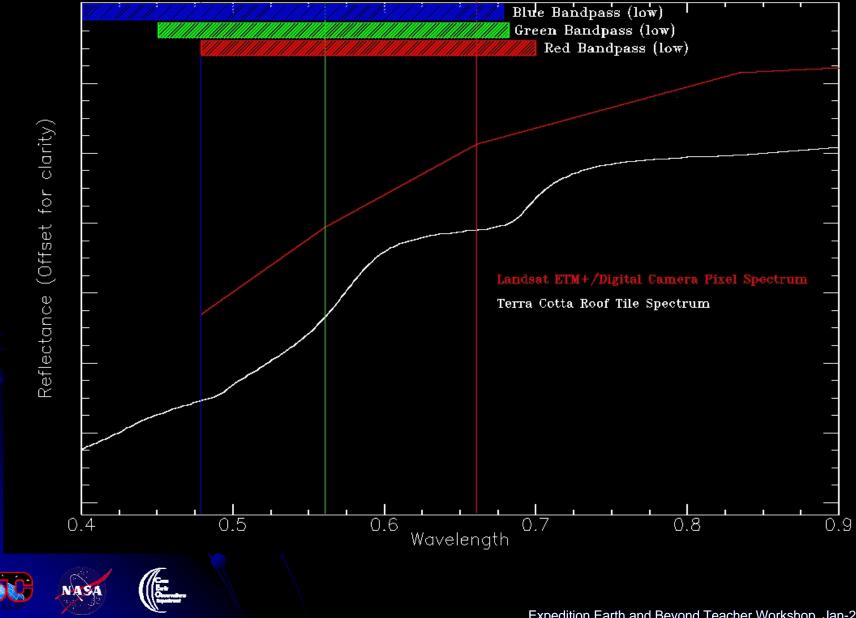


Image source: Nikon

| Effective pixels | 12.4 million | |
|------------------|---|--|
| Image sensor | CMOS sensor, 23.7 x 15.7mm size, 12.84 million total pixels | |
| Image size | Full Image: [L] 4,288 x 2,848-pixel / [M] 3,216 x 2,136-pixel / [S] 2,144 x 1,424-pixel | |




Spectral Resolution



Spatial Resolution Reliant Stadium, Houston, TX






ASTER Band 2 - visible green 15 meters/pixel

ASTER data acquired 15-October-2003








ASTER Band 6 - shortwave IR 30 meters/pixel



ASTER Band 11 - thermal IR 90 meters/pixel

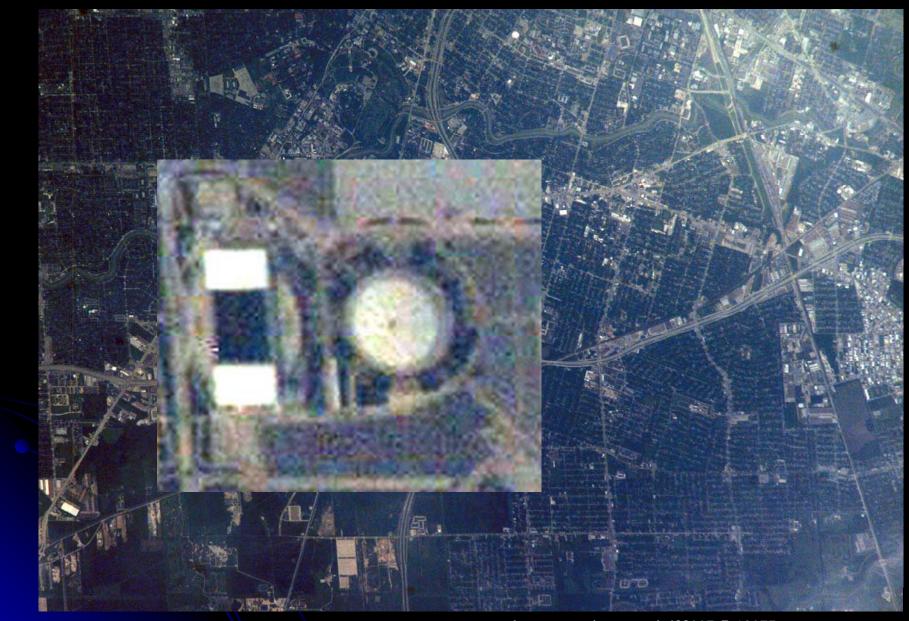

Astronaut photograph ISS007-E-13075 Acquired 20-August-2003, ~ 7 meters/pixel

High-resolution astronaut photography - Munich Airport, Germany



Overview

✤ The Data

Basic Remote Sensing Theory International Space Station Platform Astronaut Photography Data Characteristics

Astronaut Training and Operations

Crew Earth Observations Group Targeting Sites and Acquisition Cataloging and Database



* all images in this presentation courtesy of NASA unless otherwise noted*






Crew Earth Observations (CEO)

- Science team based at NASA Johnson Space Center
- Currently tasked with performance of Crew Earth Observations experiment payload aboard the ISS
- Astronaut training for specific science objectives (includes urban areas, ecological monitoring sites, glaciers, deltas, megafans, volcanoes, impact craters)
- Download and cataloging of images for entry into database, curation of astronaut photography database
- Distribution of data to collaborating scientists and performance of research
- Educational outreach (NASA Earth Observatory, Public Affairs Office, NASA Hurricane Resource web site)






Payload Workflow

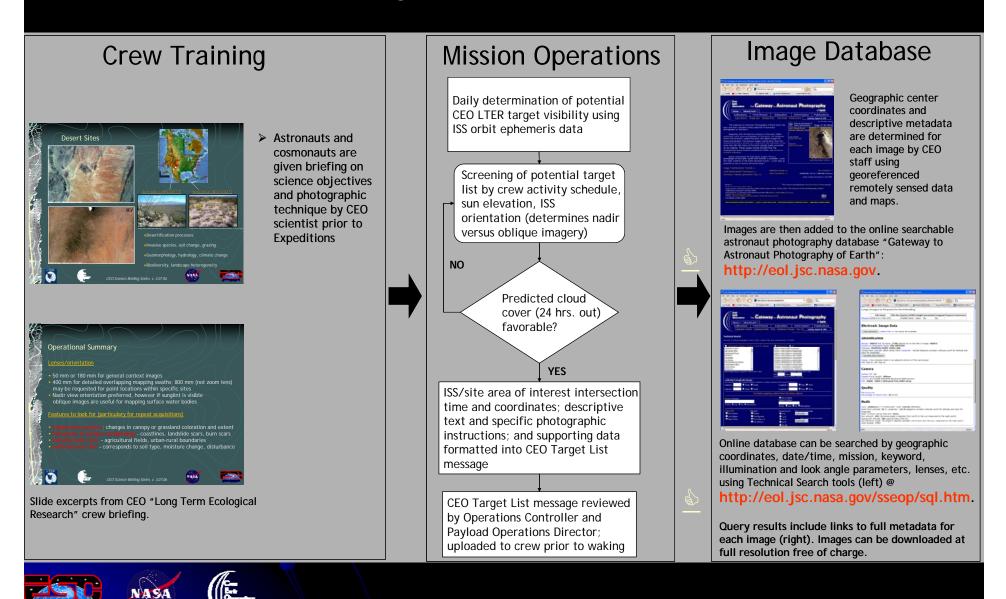

The View From Above

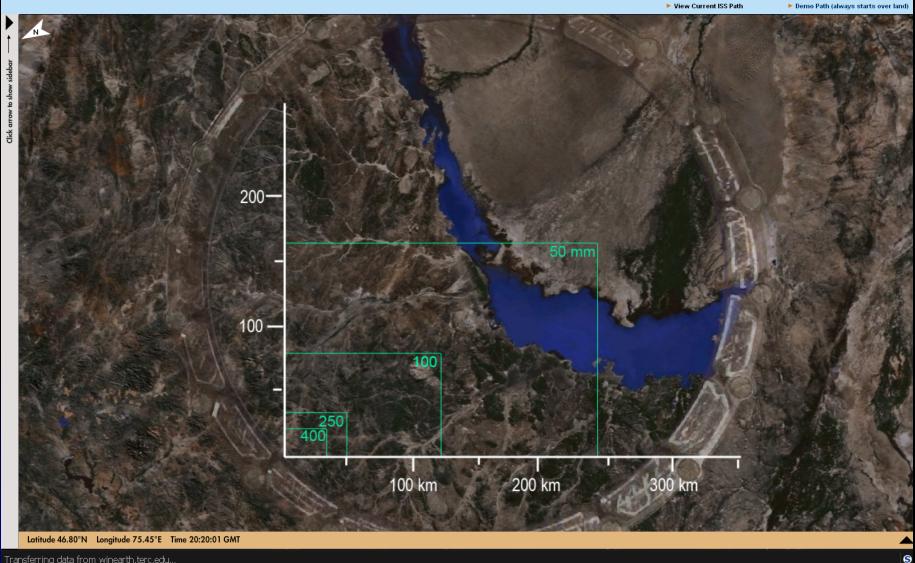

Transferring data from winearth.terc.edu...


Windows on Earth software - http://winearth.terc.edu/appISSFlight





CEO operations





Earth Observations Station Message for 16-JAN-2009/GMT Day 016 Message Generated: 15-JAN-2009


16-JAN-2009/GMT Day 016

GMTSiteLatLonLens06:47:56Perth, Australia33.7S115.0E800Weather is predicted to be clear over the capital city of Western Australia. Look slightly to theleft of track for the city (Fig. 1) located along the Swan River. We request overlapping mappingframes, taken along track, of the southeastern urban-rural fringe of the metropolitan area totrack land use and land cover change.



Figure 1. Landsat true-color image mosaic of the Perth target region as viewed from an altitude of 356 km. The red arrow indicates your approximate orbit track, and the dashed ellipse indicates the area of interest for photography.

Payload Workflow

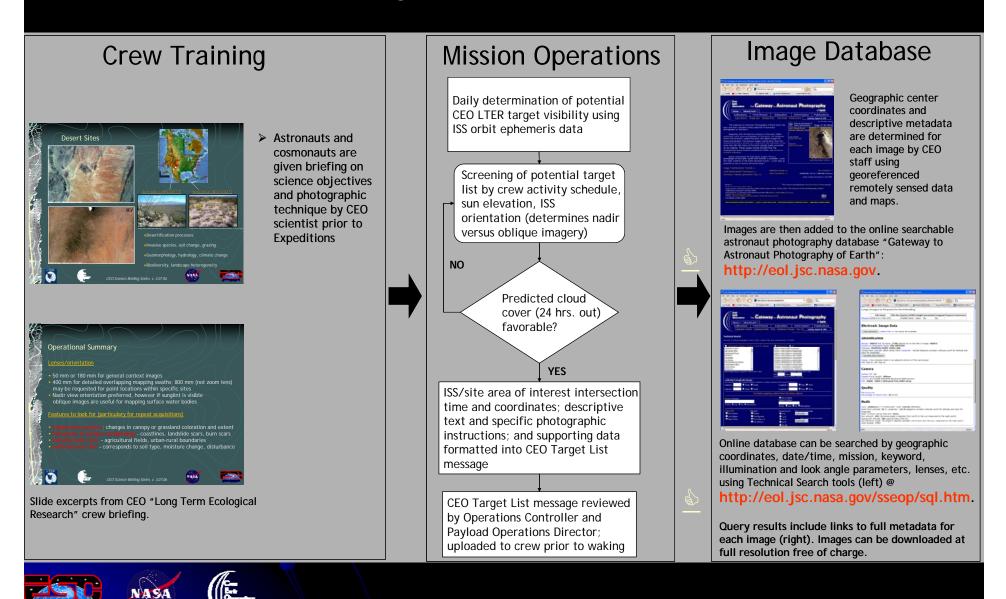

So Why Use Astronaut Photographs?

| <u>Advantages</u> | Disadvantages | |
|---|--|--|
| Variable look angles, sun illumination, and acquisition time can provide new information on surface reflectance processes | Variability of human-acquired data makes direct comparison difficult, both within time series of photographs and with other datasets | |
| Extensive database represents longest image record for many portions of the globe | Repeat acquisition cycle typically not regular | |
| Spatial resolutions as high as 4 m/pixel can be acquired under ideal conditions | Bandpasses of cameras are broad and overlap at low intensity levels - makes spectral analysis of data difficult | |
| Ability to acquire high oblique imagery allows for photography of surface and atmospheric features (hurricanes, aurora) | Several outside factors can contribute to nonacquisition of data (weather, lighting, operational constraints) | |
| Data are easily interpreted without need for sophisticated software | Data require preprocessing (georeferencing) for quantitative analysis | |
| Data are freely available to user community | | |
| | Expedition Earth and Beyond Teacher Workshop, Jan-26 | |

- 🖌 🍇

Astronaut photography could be used for...

Geologic Mapping bedrock, structure **Economic Resource Assessment** structure, vegetation Hazard Assessment •volcanoes, earthquakes, floods, Land Cover Mapping/Change •patch dynamics, urbanization, vegetation Geomorphology/Landscape Characterization topography, visualization Soil Mapping •agriculture, soil moisture Hydrology •drainage networks, vegetation, land cover, floods Climatology/Surface Fluxes albedo Environmental Monitoring •anthropogenic contaminants, air quality





Selected References

Gebelein, J., and Eppler, D. (2006) How Earth remote sensing from the International Space Station complements current satellite-based sensors. International Journal of Remote Sensing 27 (13):2613-2629.

Robinson, J.A., Liddle, D., Evans, C., and Amsbury, D. (2002) Astronaut-acquired orbital photographs as digital data for remote sensing: spatial resolution. International Journal of Remote Sensing 23:4403-4438.

Stefanov, W.L. (2008) Astronaut photography: "Hands-on" remote sensing of the Earth. Phi Kappa Phi Forum 88 (1):2-7.

