Materials


Cleaning Carbon Nanotubes by Use of Mild Oxygen Plasmas Mildness of the plasmas is the key to cleaning without destruction.

NASA's Jet Propulsion Laboratory, Pasadena, California

Experiments have shown that it is feasible to use oxygen radicals (specifically, monatomic oxygen) from mild oxygen plasmas to remove organic contaminants and chemical fabrication residues from the surfaces of carbon nanotubes (CNTs) and metal/CNT interfaces. A capability for such cleaning is essential to the manufacture of reproducible CNT-based electronic devices.

The use of oxygen radicals to clean surfaces of other materials is fairly well established. However, previously, cleaning of CNTs and of graphite by use of oxygen plasmas had not been attempted because both of these forms of carbon were known to be vulnerable to destruction by oxygen plasmas. The key to success of the present technique is, apparently, to ensure that the plasma is mild — that is to say, that the kinetic and internal energies of the oxygen radicals in the plasma are as low as possible.

The plasma oxygen-radical source used in the experiments was a commercial one marketed for use in removing hydrocarbons and other organic contaminants from vacuum systems and from electron microscopes and other objects placed inside vacuum systems. In use, the source is installed in a vacuum system and air is leaked into the system at such a rate as to maintain a background pressure of ~0.56 torr (~75 Pa). In the source, oxygen from

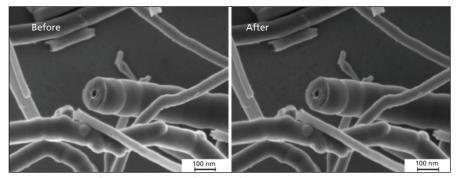

These **SEM Images of CNTs** were taken before and after cleaning in a mild oxygen plasma. Unlike an oxygen plasma of the type used in dry etching, this plasma seems not to have damaged the CNTs.

the air is decomposed into monatomic oxygen by radio-frequency excitation of a resonance of the O_2 molecule (N_2 is not affected). Hence, what is produced is a mild (non-energetic) oxygen plasma. The oxygen radicals are transported along with the air molecules in the flow created by the vacuum pump.

In the experiments, exposure to the oxygen plasma in this system was shown to remove organic contaminants and chemical fabrication residues from several specimens. Many high-magnification scanning electron microscope (SEM) images of CNTs were taken before and after exposure to the oxygen plasma. As in the example shown in the figure, none of these images showed evidence of degradation of CNT structures.

This work was done by Mihail Petkov of Caltech for NASA's Jet Propulsion Laboratory. Further information is contained in a TSP (see page 1).

In accordance with Public Law 96-517, the contractor has elected to retain title to this invention. Inquiries concerning rights for its commercial use should be addressed to:

Innovative Technology Assets Management [PL

Mail Stop 202-233 4800 Oak Grove Drive Pasadena, CA 91109-8099 (818) 354-2240 E-mail: iaoffice@jpl.nasa.gov Refer to NPO-41846, volume and number of

this NASA Tech Briefs issue, and the page number.

Generating Aromatics From CO₂ on Mars or Natural Gas on Earth

The terrestrial version may make it economical to recover some natural-gas deposits.

John F. Kennedy Space Center, Florida

"Methane to aromatics on Mars" ("METAMARS") is the name of a process originally intended as a means of converting Martian atmospheric carbon dioxide to aromatic hydrocarbons and oxygen, which would be used as propellants for spacecraft to return to Earth. The process has been demonstrated on Earth on a laboratory scale. A truncated version of the process could be used on Earth to convert natural gas to aromatic hydrocarbon liquids. The greater (relative to natural gas) density of aromatic hydrocarbon liquids makes it more economically feasible to ship them to distant markets. Hence, this process makes it feasible to exploit some reserves of natural gas that, heretofore, have been considered as being "stranded" too far from markets to be of economic value.

In the full version of METAMARS, carbon dioxide is frozen out of the atmosphere and fed to a Sabatier reactor along with hydrogen (which, on Mars, would have been brought from Earth). In the Sabatier reactor, these feedstocks are converted to methane and water. The water is condensed and electrolyzed to oxygen (which is liquefied) and hydrogen (which is recycled to the Sabatier reactor). The methane is sent to an aromatization reactor, wherein, over a molybdenum-on-zeolite catalyst at a temperature 700 °C, it is partially converted