

# NASA TECH BRIEF

*Ames Research Center*



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D. C. 20546.

## Heart-Rate Pulse-Shift Detector

Advances in the state of the art of biotelemetry suggest that a single telemeter implanted in a small animal can be used to monitor not only body temperature but also animal movement and heart rate. In a program of research involving the design of electronic

becomes a more significant deviation in the time preceding the next pulse and eventually the deviation is converted to usable heart-rate data. Ignoring the first 90% of each pulse period substantially reduces output noise arising from spurious pulses.

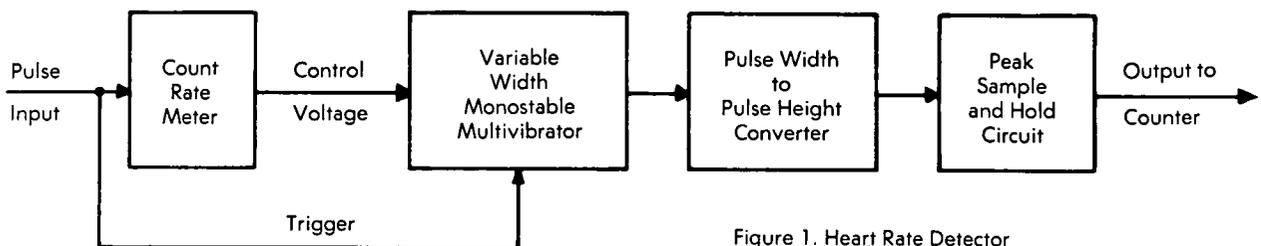


Figure 1. Heart Rate Detector

circuitry and a data-processing system to monitor simultaneously the three circadian periods, a heart-rate detector circuit was developed which accurately separates and counts phase-shift pulses over a wide range of basic pulse-rate frequency, and also provides a reasonable representation of the full repetitive EKG waveform.

As indicated by the block diagram of the heart-rate detector (figure 1), telemeter pulse inputs in the range of 200 to 1000 pps, with phase-shifted heart-rate information, are first directed to a count-rate meter circuit which controls a variable-width monostable multivibrator; then the included EKG waveform is reconstructed. Circuit characteristics are selected to give a pulse width of about 90% of the basic pulse period over the required frequency range. At each input pulse, the multivibrator is triggered for 90% of the basic frequency; any small deviation in frequency

The source of input to the heart-rate detector is indicated in the block diagram of the system for monitoring several small animals (figure 2). The implanted biotelemeter is basically a relaxation oscillator which operates in the low-frequency rf band. The pulse repetition frequency is a calibrated function of animal body temperature, and is further phase-modulated by animal heart beats. The modulated rf signals are received by three orthogonally-oriented loop antennas, then separately amplified and directed to broadly-tuned AM detectors. The amplifiers employ dual-gate FET's with circuit gain suitable for subsequent signal processing. Diode switching then selects the strongest detected signal for further distribution to demodulators for separation of temperature-dependent pulse frequency, periodic heart-beat pulse shift, and signal strength indications which are indicative of animal activity.

(continued overleaf)

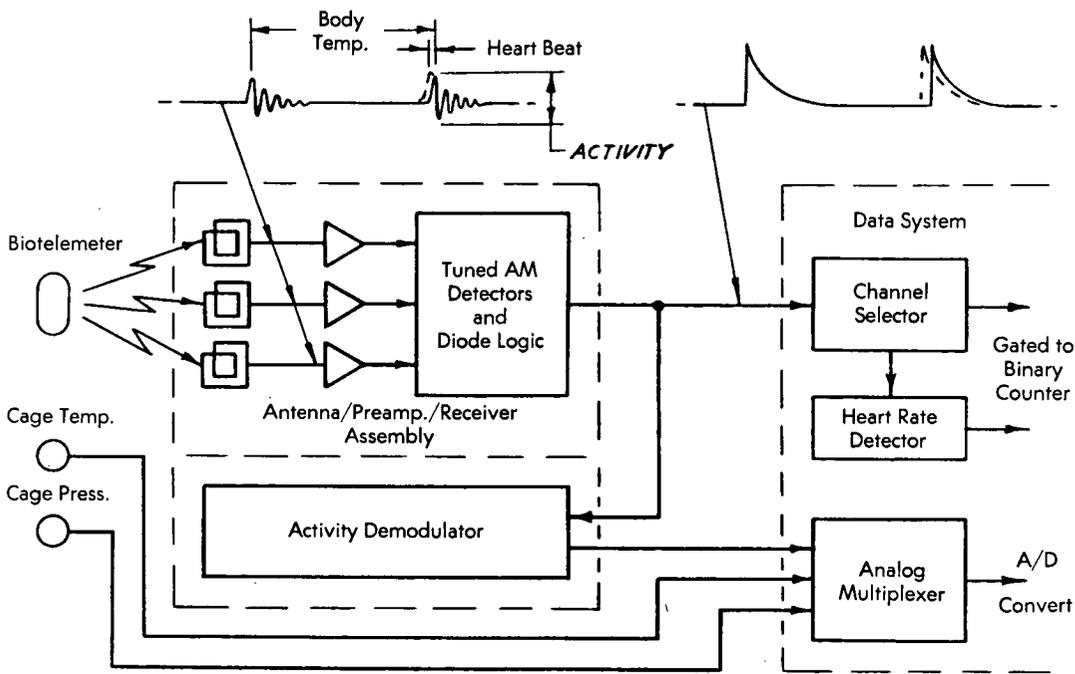


Figure 2. Monitor System

**Note:**

Requests for further information may be directed to:

Technology Utilization Officer  
 Ames Research Center  
 Moffett Field, California 94035  
 Reference: TSP 74-10196

**Patent status:**

NASA has decided not to apply for a patent.

Source: Mark Anderson of  
 Northrop Corp./Electronics Division  
 under contract to  
 Ames Research Center  
 (ARC-10729)