

Traveling-Wave Tube Amplifier Second Harmonic as Millimeter-Wave Beacon Source for Atmospheric Propagation Studies

*Rainee N. Simons and Edwin G. Wintucky
Glenn Research Center, Cleveland, Ohio*

NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI Program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include creating custom thesauri, building customized databases, organizing and publishing research results.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question to help@sti.nasa.gov
- Fax your question to the NASA STI Information Desk at 443-757-5803
- Phone the NASA STI Information Desk at 443-757-5802
- Write to:
STI Information Desk
NASA Center for AeroSpace Information
7115 Standard Drive
Hanover, MD 21076-1320



Traveling-Wave Tube Amplifier Second Harmonic as Millimeter-Wave Beacon Source for Atmospheric Propagation Studies

*Rainee N. Simons and Edwin G. Wintucky
Glenn Research Center, Cleveland, Ohio*

Prepared for the
International Symposium on Antennas and Propagation and USNC/URSI National Radio Science Meeting
sponsored by the Institute of Electrical and Electronics Engineers
Memphis, Tennessee, July 6–12, 2014

National Aeronautics and
Space Administration

Glenn Research Center
Cleveland, Ohio 44135

Acknowledgments

The support from the 2012 NASA GRC Center Innovation Fund (CIF) is gratefully acknowledged.

This report contains preliminary findings,
subject to revision as analysis proceeds.

Level of Review: This material has been technically reviewed by technical management.

Available from

NASA Center for Aerospace Information
7115 Standard Drive
Hanover, MD 21076-1320

National Technical Information Service
5301 Shawnee Road
Alexandria, VA 22312

Available electronically at <http://www.sti.nasa.gov>

Traveling-Wave Tube Amplifier Second Harmonic as Millimeter-Wave Beacon Source for Atmospheric Propagation Studies

Rainee N. Simons and Edwin G. Wintucky
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Abstract

This paper presents the design and test results of a CW millimeter-wave satellite beacon source, based on the second harmonic from a traveling-wave tube amplifier and utilizes a novel waveguide multimode directional coupler. A potential application of the beacon source is for investigating the atmospheric effects on Q-band (37 to 42 GHz) and V/W-band (71 to 76 GHz) satellite-to-ground signals.

1.0 Introduction

Because of increasing congestion in available spectrum at the currently used frequency band (3 to 30 GHz) for space-to-ground data communications, there is now an effort by NASA, other United States Government agencies and the commercial broadband satellite communications industry to develop the millimeter-wave (mm-wave) frequency band for this purpose. The mm-wave band includes frequencies in the Q-band (37 to 42 GHz) and the V/W-band (71 to 76 GHz). Prior to the use of these frequency bands for space communications, it is necessary to first rigorously characterize the many atmospheric effects, including rainfall, cloud coverage and gaseous absorption, on RF signal propagation from a space-based beacon source. For high data rate wide band communications, it will also be necessary to characterize the group delay effects. The design of any operational satellite communication system is intimately tied with the results of the propagation studies.

In the past, NASA Glenn Research Center (GRC) pioneered the development of Ka-band (20 to 30 GHz) communications by deploying the Advanced Communications Technology Satellite (ACTS) (Refs. 1 and 2). The ACTS served as a test bed in space for several of the new technologies needed for an operational Ka-band system. In addition, the ACTS propagation experiments were instituted to investigate the effect of Earth's atmosphere on the propagation of Ka-band satellite signals (Ref. 1).

In this paper, we present the design and test results of a CW satellite beacon source, based on the second harmonic from a space traveling-wave tube amplifier (TWTA). The key-enabling component is a rugged, easily constructed, more efficient waveguide based multimode directional coupler (Ref. 3) that extracts the second harmonic signal from the RF output of a high power space TWTA (Ref. 4). The application

of the beacon source is for atmospheric propagation studies at Q-band and V/W-band frequencies leading towards the design of robust space-to-ground satellite communications links. A Q-band space TWTA is presently under development at L-3 Communications Electron Technologies Inc., under a contract from NASA GRC.

2.0 Beacon Architecture

A simplified schematic of the beacon source is presented in Figure 1.

2.1 Waveguide Multimode Directional Coupler Design

The waveguide multimode directional coupler used in the test demonstration is designed and fabricated from two sections of dissimilar waveguides, a primary or larger cross section waveguide for the fundamental frequency and a secondary or smaller cross section waveguide for the second harmonic as illustrated in Figure 2. The two waveguides are joined together and share a common wall. In the primary waveguide, the signal at the fundamental frequency propagates as the dominant TE_{10} mode. However, the power in the second harmonic signal propagates as higher order modes. If an aperture is cut in the shape of a narrow rectangular slot parallel to the y-axis along the primary waveguide narrow wall the coupling to the TE_{10} mode will be negligibly small. However, the slot aperture will couple strongly to the TM_{11} type higher order mode. Thus the power in the second harmonic signal is selectively coupled to the secondary waveguide and can be amplified to the power level needed for atmospheric propagation studies.

2.2 Multimode Directional Coupler Fabrication

For the initial proof-of-concept (POC) demonstration, the primary and the secondary waveguides were chosen as the WR-62 and WR-28, respectively. Thus, the fundamental frequency is at Ku-band (13.25 to 18 GHz) and the second harmonic is at Ka-band (26.5 to 36 GHz). Figure 3 shows the fabricated POC multimode directional coupler used in the demonstrations.

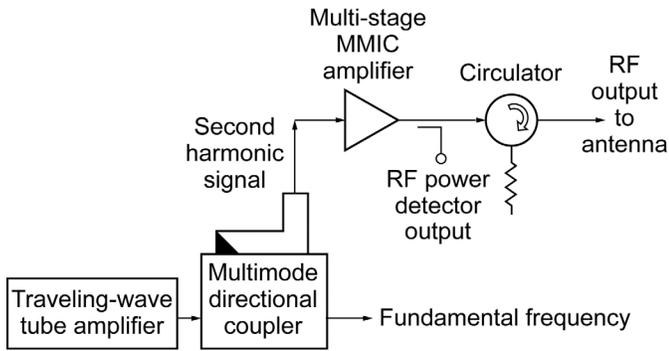


Figure 1.—Simplified schematic of a satellite borne beacon source for RF propagation studies.

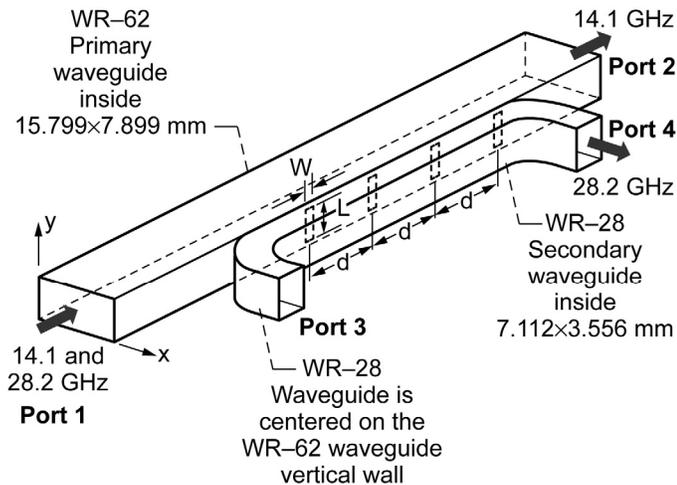


Figure 2.—Schematic of waveguide multimode directional coupler.

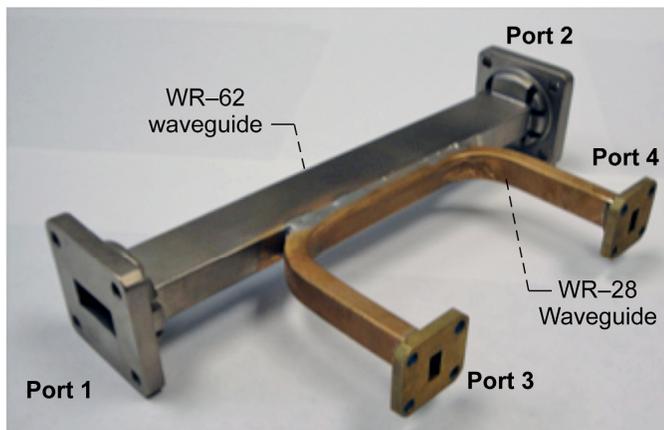


Figure 3.—Fabricated proof-of-concept Ku-band/Ka-band waveguide multimode directional coupler.

2.3 Multimode Directional Coupler Test Data

Figure 4 shows the test setup used for the measurement of power at the second harmonic frequencies at the Ka-band secondary waveguide output port of the multimode directional coupler, when the TWTA is operating at saturation and maximum efficiency. The measured power at the second harmonic frequencies over a broad range extending from 27.0 to 30.0 GHz is shown in Figure 5. The test data indicates that there is a significant amount of power in the second harmonic. Typically, beacons used in radio wave propagation studies are narrow band sources (Ref. 1). Hence, a desired beacon signal frequency can be selected from the above range of frequencies and amplified to the desired EIRP level (Ref. 5). It is worth mentioning that the fundamental signal is below the cutoff frequency of the Ka-band secondary waveguide and hence propagates unperturbed in the Ku-band primary waveguide, which is a major advantage over traditional harmonic filters.

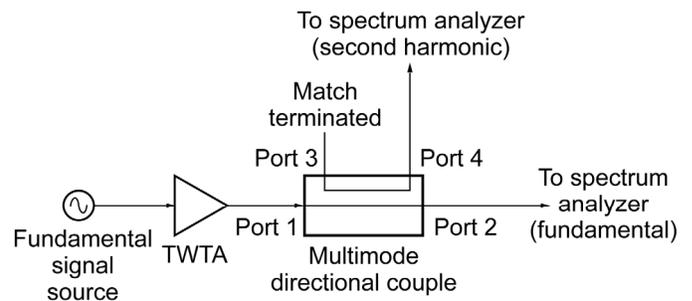


Figure 4.—Test setup for measurement of power at the second harmonic frequencies at port 4 of the multimode directional coupler.

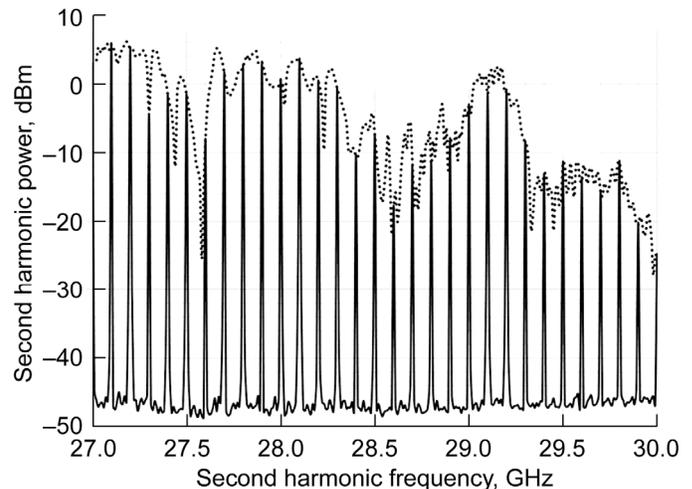


Figure 5.—Measured power at the second harmonic frequencies at port 4 of the multimode directional coupler.

3.0 Conclusions

The design, fabrication and characterization of a novel waveguide multimode directional coupler is presented. An application of the coupler is in a space borne beacon source for atmospheric propagation studies at millimeter-wave frequencies.

References

1. R. Bauer, "Ka-band Propagation Measurements: An Opportunity with the Advanced Communications Technology Satellite (ACTS)," *Proc. IEEE*, vol. 85, no. 6, pp. 853–862, June 1997.
2. R.J. Acosta, R. Bauer, R.J. Krawczyk, R.C. Reinhart, M.J. Zernic, F. Gargione, "Advanced Communications Technology Satellite (ACTS): Four-Year System Performance," *IEEE Jour. Selected Areas in Communications*, vol. 17, no. 2, pp. 193–203, Feb. 1999.
3. Patent Application Filed with the U.S.P.T.O.
4. R.N. Simons, J.D. Wilson, and D.A. Force, "High power and efficiency space traveling-wave tube amplifiers with reduced size and mass for NASA missions," *2008 IEEE MTT-S International Microwave Symposium Digest*, pp. 319–322, Atlanta, GA, June 15–20, 2008.
5. R.N. Simons and E.G. Wintucky, "Q-Band (37–41 GHz) Satellite Beacon Architecture for RF Propagation Experiments," *2012 IEEE Antennas and Propagation International Symposium Digest*, Chicago, IL, July 8–14, 2012.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>					
1. REPORT DATE (DD-MM-YYYY) 01-04-2014	2. REPORT TYPE Technical Memorandum		3. DATES COVERED (From - To)		
4. TITLE AND SUBTITLE Traveling-Wave Tube Amplifier Second Harmonic as Millimeter-Wave Beacon Source for Atmospheric Propagation Studies			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Simons, Rainee, N.; Wintucky, Edwin, G.			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER WBS 295670.01.04		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-18863		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING/MONITOR'S ACRONYM(S) NASA		
			11. SPONSORING/MONITORING REPORT NUMBER NASA/TM-2014-218121		
12. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified-Unlimited Subject Category: 17 Available electronically at http://www.sti.nasa.gov This publication is available from the NASA Center for AeroSpace Information, 443-757-5802					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT This paper presents the design and test results of a CW millimeter-wave satellite beacon source, based on the second harmonic from a traveling-wave tube amplifier and utilizes a novel waveguide multimode directional coupler. A potential application of the beacon source is for investigating the atmospheric effects on Q-band (37 to 42 GHz) and V/W-band (71 to 76 GHz) satellite-to-ground signals.					
15. SUBJECT TERMS Telecommunications; Space communication; Satellite communications; Microwave transmission					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			STI Help Desk (email:help@sti.nasa.gov)
U	U	U	UU	10	19b. TELEPHONE NUMBER (include area code) 443-757-5802

