


NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Improved DC Voltage Multiplier

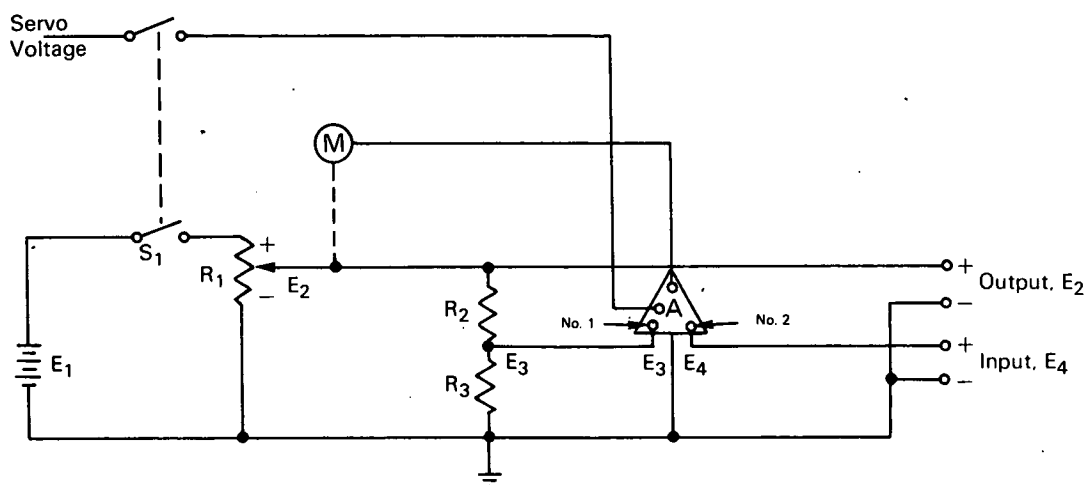

This circuit multiplies (amplifies) a dc input voltage in the millivolt range to yield a larger dc output voltage bearing a fixed ratio to the input voltage. The voltage multiplication ratio depends only on the inherent accuracy and stability of the voltage divider ratio $(R_2 + R_3)/R_3$. This circuit has a number of advantages over other dc voltage multipliers in that the supply voltage, E_1 , need not be precisely regulated, the potentiometer, R_1 , need not be linear, and the gain of servo amplifier A is not critical.

A positive voltage (relative to ground) applied to input No. 1 of the servo amplifier will cause the servo motor, M, to drive the arm of the potentiometer toward the (-) end, and a positive voltage at input No. 2 of the amplifier will bring the potentiometer arm toward the (+) end of R_1 . The potentiometer arm will not move when equal voltages are applied to both amplifier inputs simultaneously. The servo amplifier receives power and dc voltage E_1 is developed across R_1 when switch S_1 is closed. Output voltage E_2 varies

from 0 to E_1 as a function of the arm position along R_1 and is developed across the voltage divider $(R_2 + R_3)$. The ratio of E_3 (at the junction of R_2 and R_3) to E_2 is equal to the fixed ratio $R_3/(R_2 + R_3)$. The potentiometer arm comes to rest when $E_3 = E_4$, and as a result $E_2 = E_4 (R_2 + R_3)/R_3$. Thus the output voltage, E_2 , is a fixed product of the input voltage, E_4 .

This circuit can be readily calibrated to give a direct reading (on an output voltmeter) of the temperature sensed by a thermocouple connected to the input terminals. It can also be readily adapted to function as a current-to-voltage converter or as a current multiplier.

Note:

Further details may be obtained from:
Technology Utilization Officer
Marshall Space Flight Center
Huntsville, Alabama 35812
Reference: B68-10074

Patent status:

Inquiries about obtaining rights for the commercial use of this invention may be made to NASA, Code GP, Washington, D.C. 20546.

Source: C. R. Savelle, Jr.
of SPACO, Inc.
under contract to
Marshall Space Flight Center
(MFS-14042)