

Driving Factors for Achieving Safe, High Performing Li-ion Battery Designs

By
Matthew Keyser, NREL
and
Eric Darcy, NASA-JSC

More Electric Aircraft USA
Seattle, WA, USA
August 29-30, 2016

5 Design Driving Factors for Reducing Hazard Severity from a Single Cell TR

- **Reduce risk of cell can side wall ruptures**
 - Without structural support most high energy density (>600 Wh/L) designs are very likely to experience side wall ruptures during TR
- **Provide adequate cell spacing**
 - Direct contact between cells without alternate heat dissipation paths nearly assures propagation
- **Individually fuse parallel cells**
 - TR cell becomes an external short to adjacent parallel cells and heats them up
- **Protect the adjacent cells from the hot TR cell ejecta (solids, liquids, and gases)**
 - TR ejecta is electrically conductive and can cause circulating currents
- **Prevent flames and sparks from exiting the battery enclosure**
 - Provide tortuous path for the TR ejecta before hitting battery vent ports equipped flame arresting screens




Current Spacesuit Battery Design



Solid Al side panels
block cell vents


Design Features

- 80 Li-ion cells (16p-5s)
- ICR-18650J from E-one Moli Energy (2.4Ah)

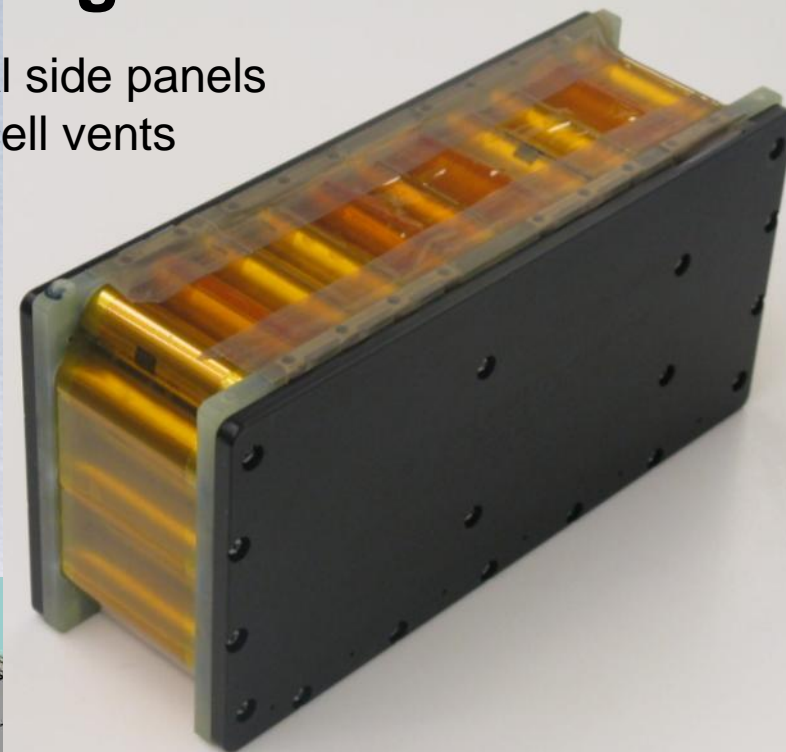

Compliance with the 5 rules

- Minimize side wall ruptures ✓
- No direct cell-cell contact ✓
- Individually fusing cell in parallel X
- Protecting adjacent cells from TR ejecta X
- Include flame arresting vent ports X

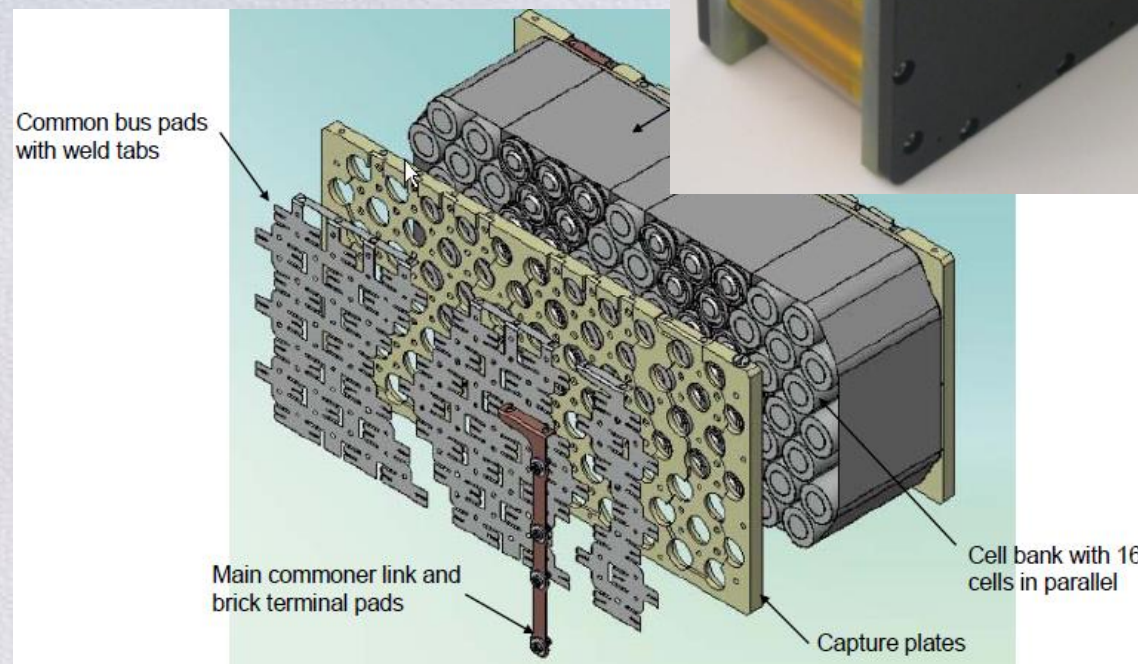

Design Propagates TR – Catastrophic Hazard



No place
for the cell
TR effluent
to vent




Safer, Higher Performing Battery Design

Compliance with the 5 rules

- **Minimize side wall ruptures** ✓
 - Al interstitial heat sink
- **No direct cell-cell contact** ✓
 - 0.5mm cell spacing, mica paper sleeves on each cell
- **Individually fusing cell in parallel** ✓
 - 12A fusible link
- **Protecting adjacent cells from TR ejecta** ✓
 - Ceramic bushing lining cell vent opening in G10 capture plate
- **Include flame arresting vent ports** ✓
 - Tortious path with flame arresting screens
 - Battery vent ports lined with steel screens

Features


- 65 LG (INR18650 MJ1) 3.5Ah cells (13P-5S)
- 37Ah and 686 Wh at BOL (in 16-20.5V window)
- Cell design likely to side wall rupture, but supported

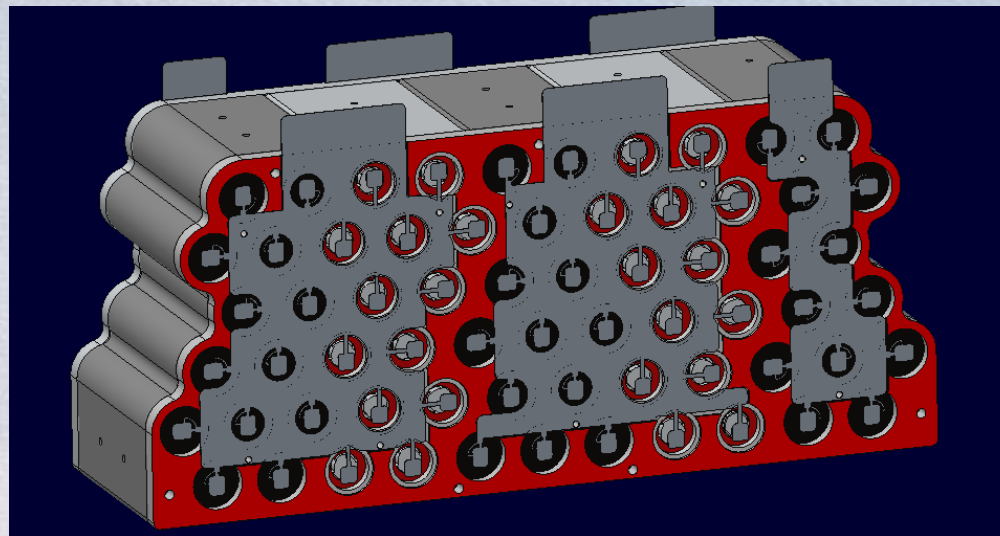


65-Battery Brick

LLB2 Heat Sinks



No corner cells - Every cell has at least 3 adjacent cells

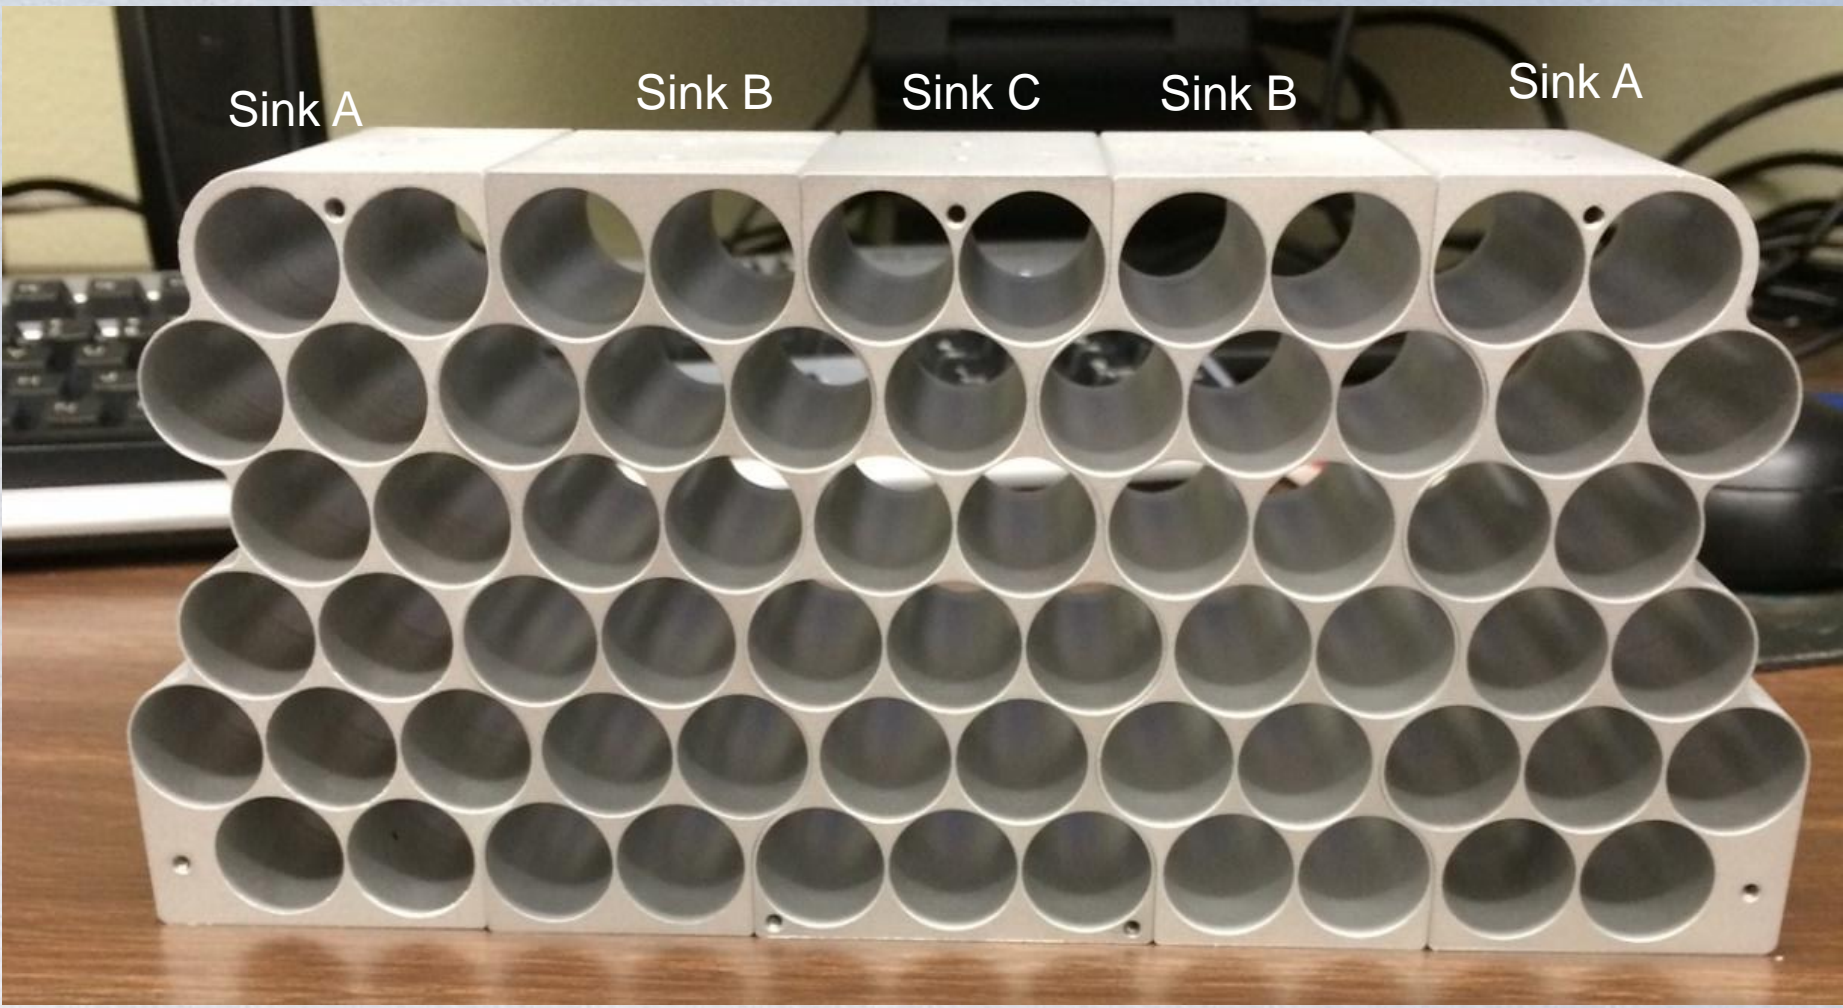

0.5mm cell spacing, Al 6061T6

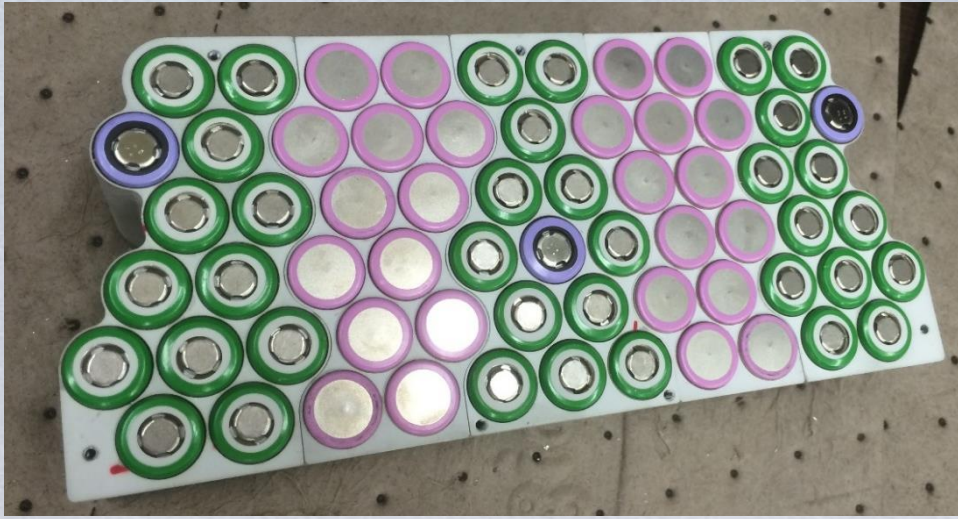


- 13P-5S Configuration with 3.5 Ah LG INR MJ1 cells. 37 Ah at 3.8 A mission rate.
- Aluminum interstitial heat sink, 0.5 mm spacing between cells
- Mica sleeves around shrink wrap, 2 FT
- The G10 capture plate houses the + and - ends of the cells and prevents the Ni bussing from shorting to the heat sinks.
- The ceramic Macor bushing acts as a chimney to direct ejecta outwards and protect the G10/FR4 capture plate

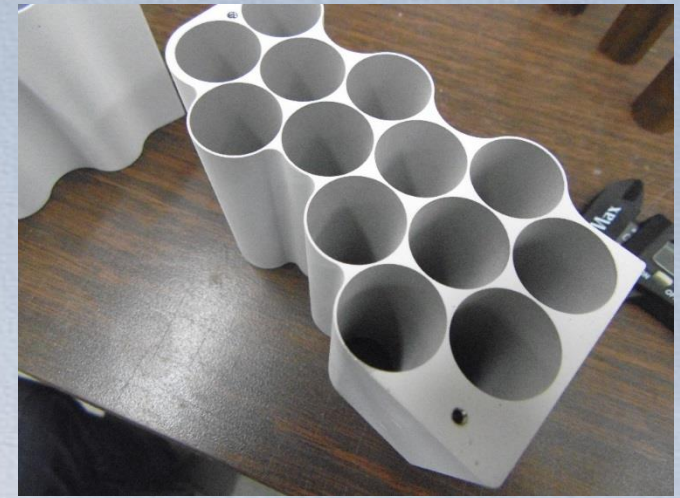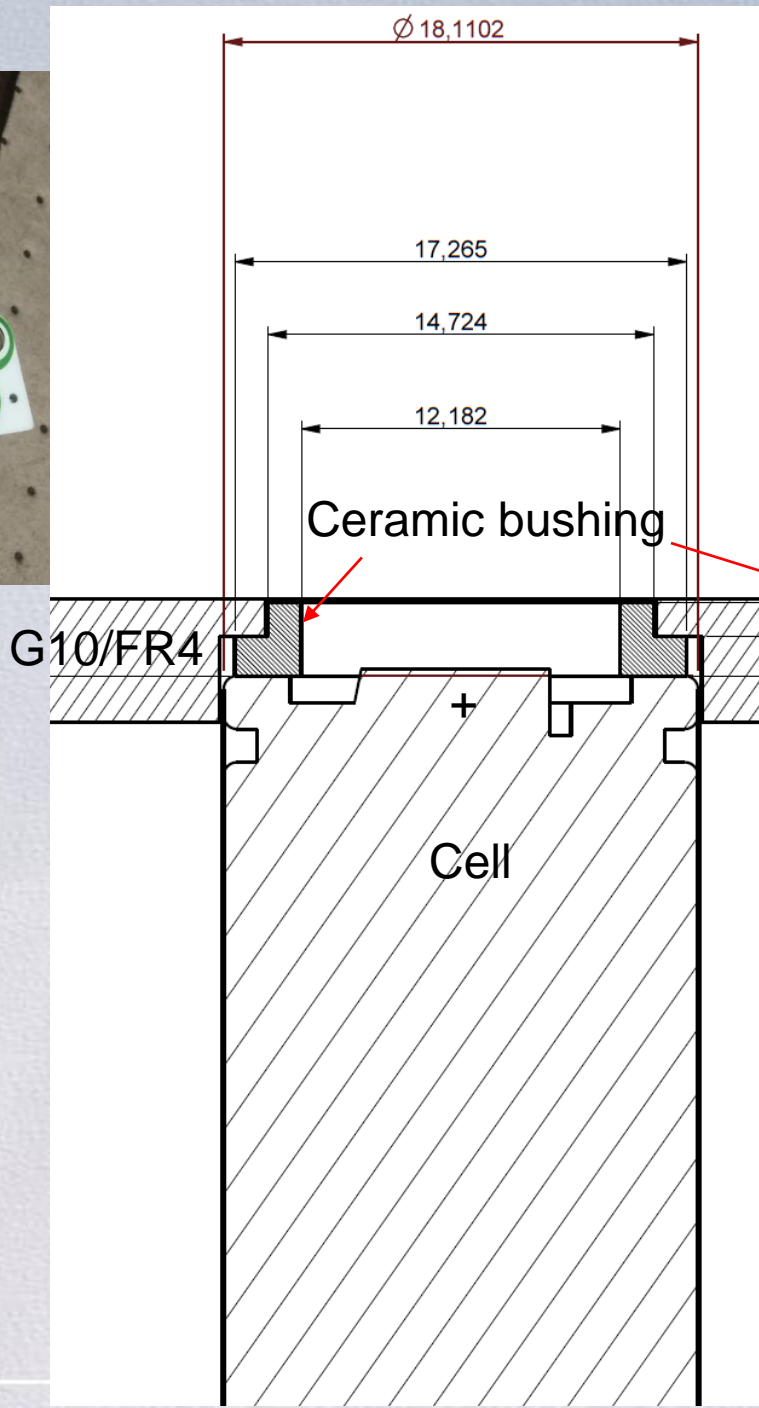


Cell Brick Assembly > 180 Wh/kg

Mass Categories	g	%
LG MJ1 Cells	3012.75	71.3%
Heat sinks	824.95	19.5%
Mica sleeves	182.31	4.3%
Capture plates	115.81	2.7%
Ceramic bushings	60.15	1.4%
Ni-201 bussing	29.71	0.7%
Total	4225.7	

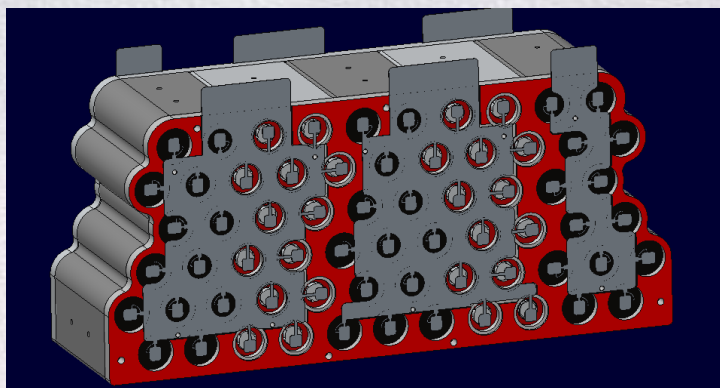


- With 12.41 Wh/cell, cell brick assembly achieves **191 Wh/kg**
 - Assuming 12.41Wh per cell
- Design has 1.4 parasitic mass factor
 - Cell mass x 1.4 = Brick mass

Mass Distribution

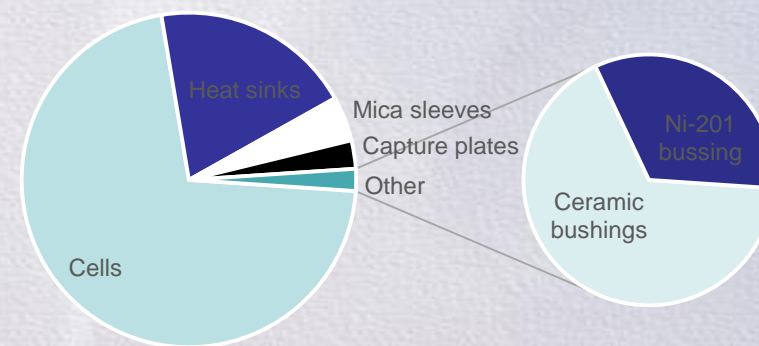



■ Cells
 ■ Heat sinks
 ■ Mica sleeves
 ■ Capture plates
 ■ Ceramic bushings
 ■ Ni-201 bussing

Attempts to Drive TR with Cell Bottom Heater Fails

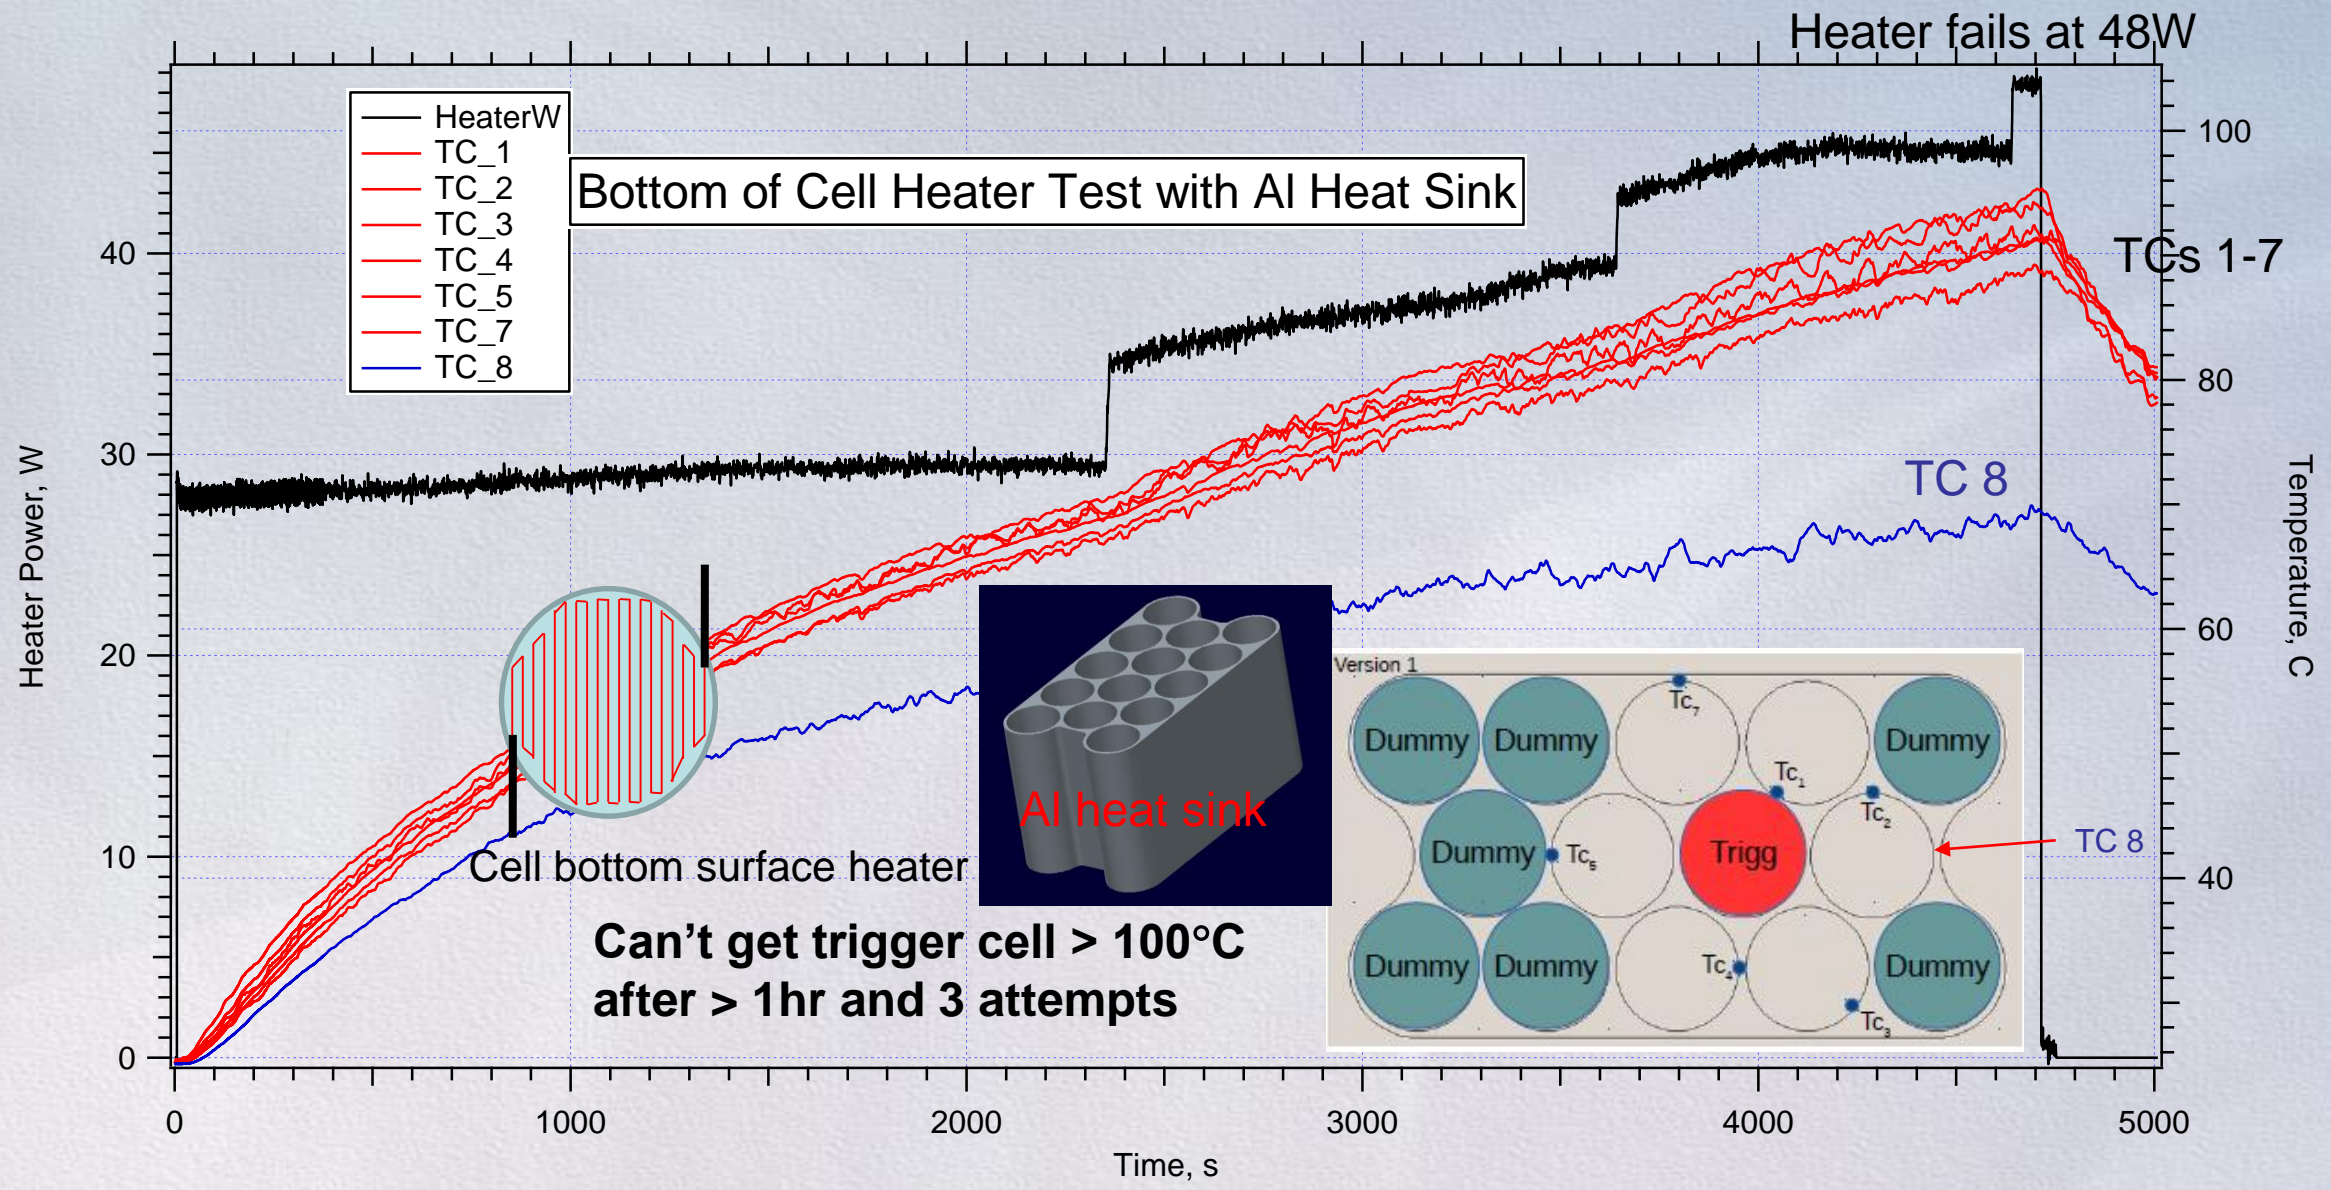


NREL/NASA ISC Device Design

Active anode to cathode collector short

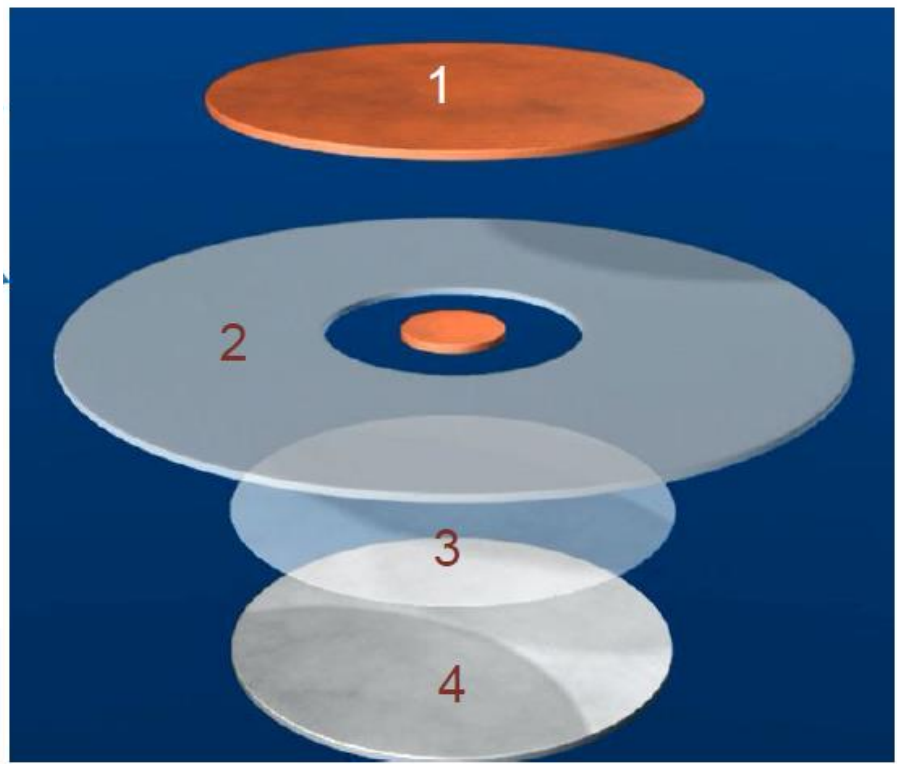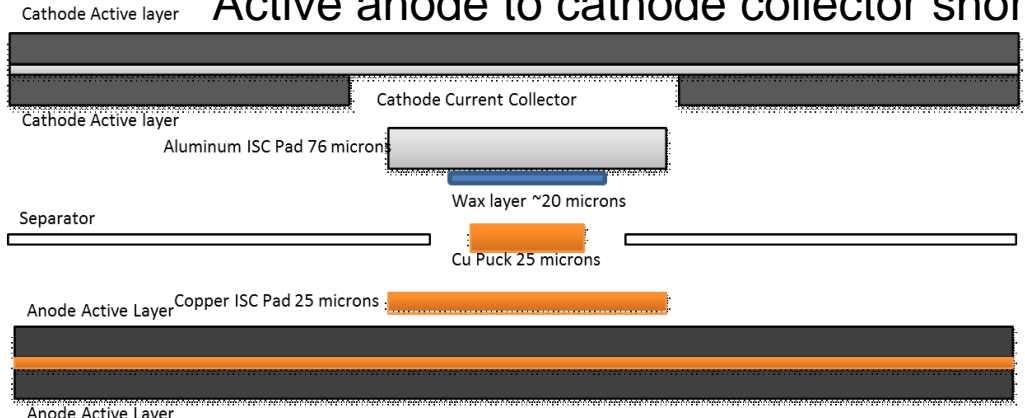

Graphic credits: NREL

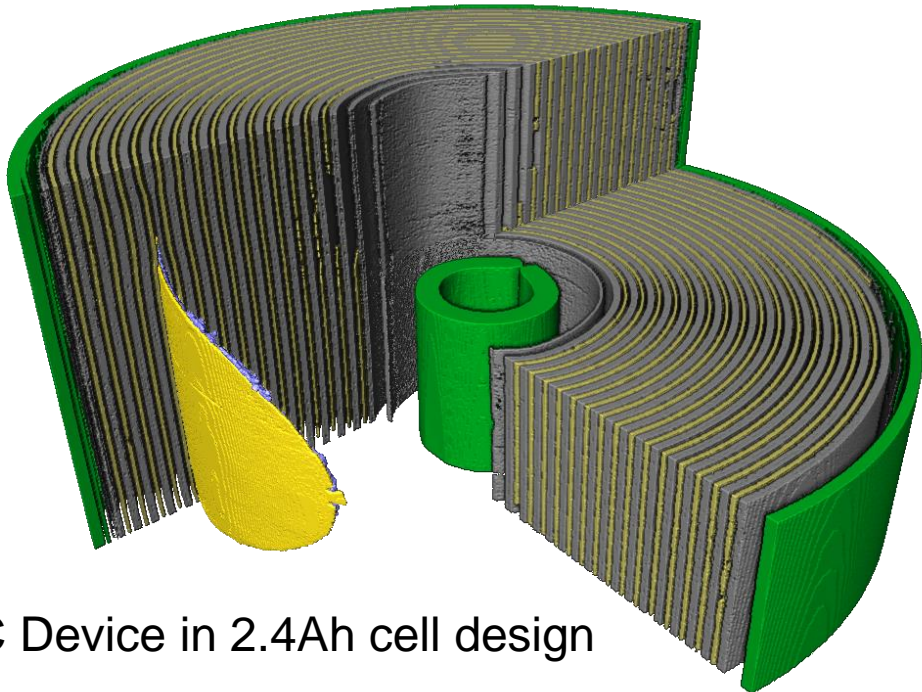

ISC Device in 2.4Ah cell design

5 mm

Tomography credits: University College of London

- 2010 Inventors:
- Matthew Keyser, Dirk Long, and Ahmad Pesaran at NREL
 - Eric Darcy at NASA


US Patent # 9,142,829

Wax formulation used melts ~57°C

Thin (10-20 μm) wax layer is spin coated on Al foil pad


- Top to Bottom:
1. Copper Pad
 2. Battery Separator with Copper Puck
 3. Wax – Phase Change Material
 4. Aluminum Pad

Single Cell TR – Moli 2.4Ah with ISC Device

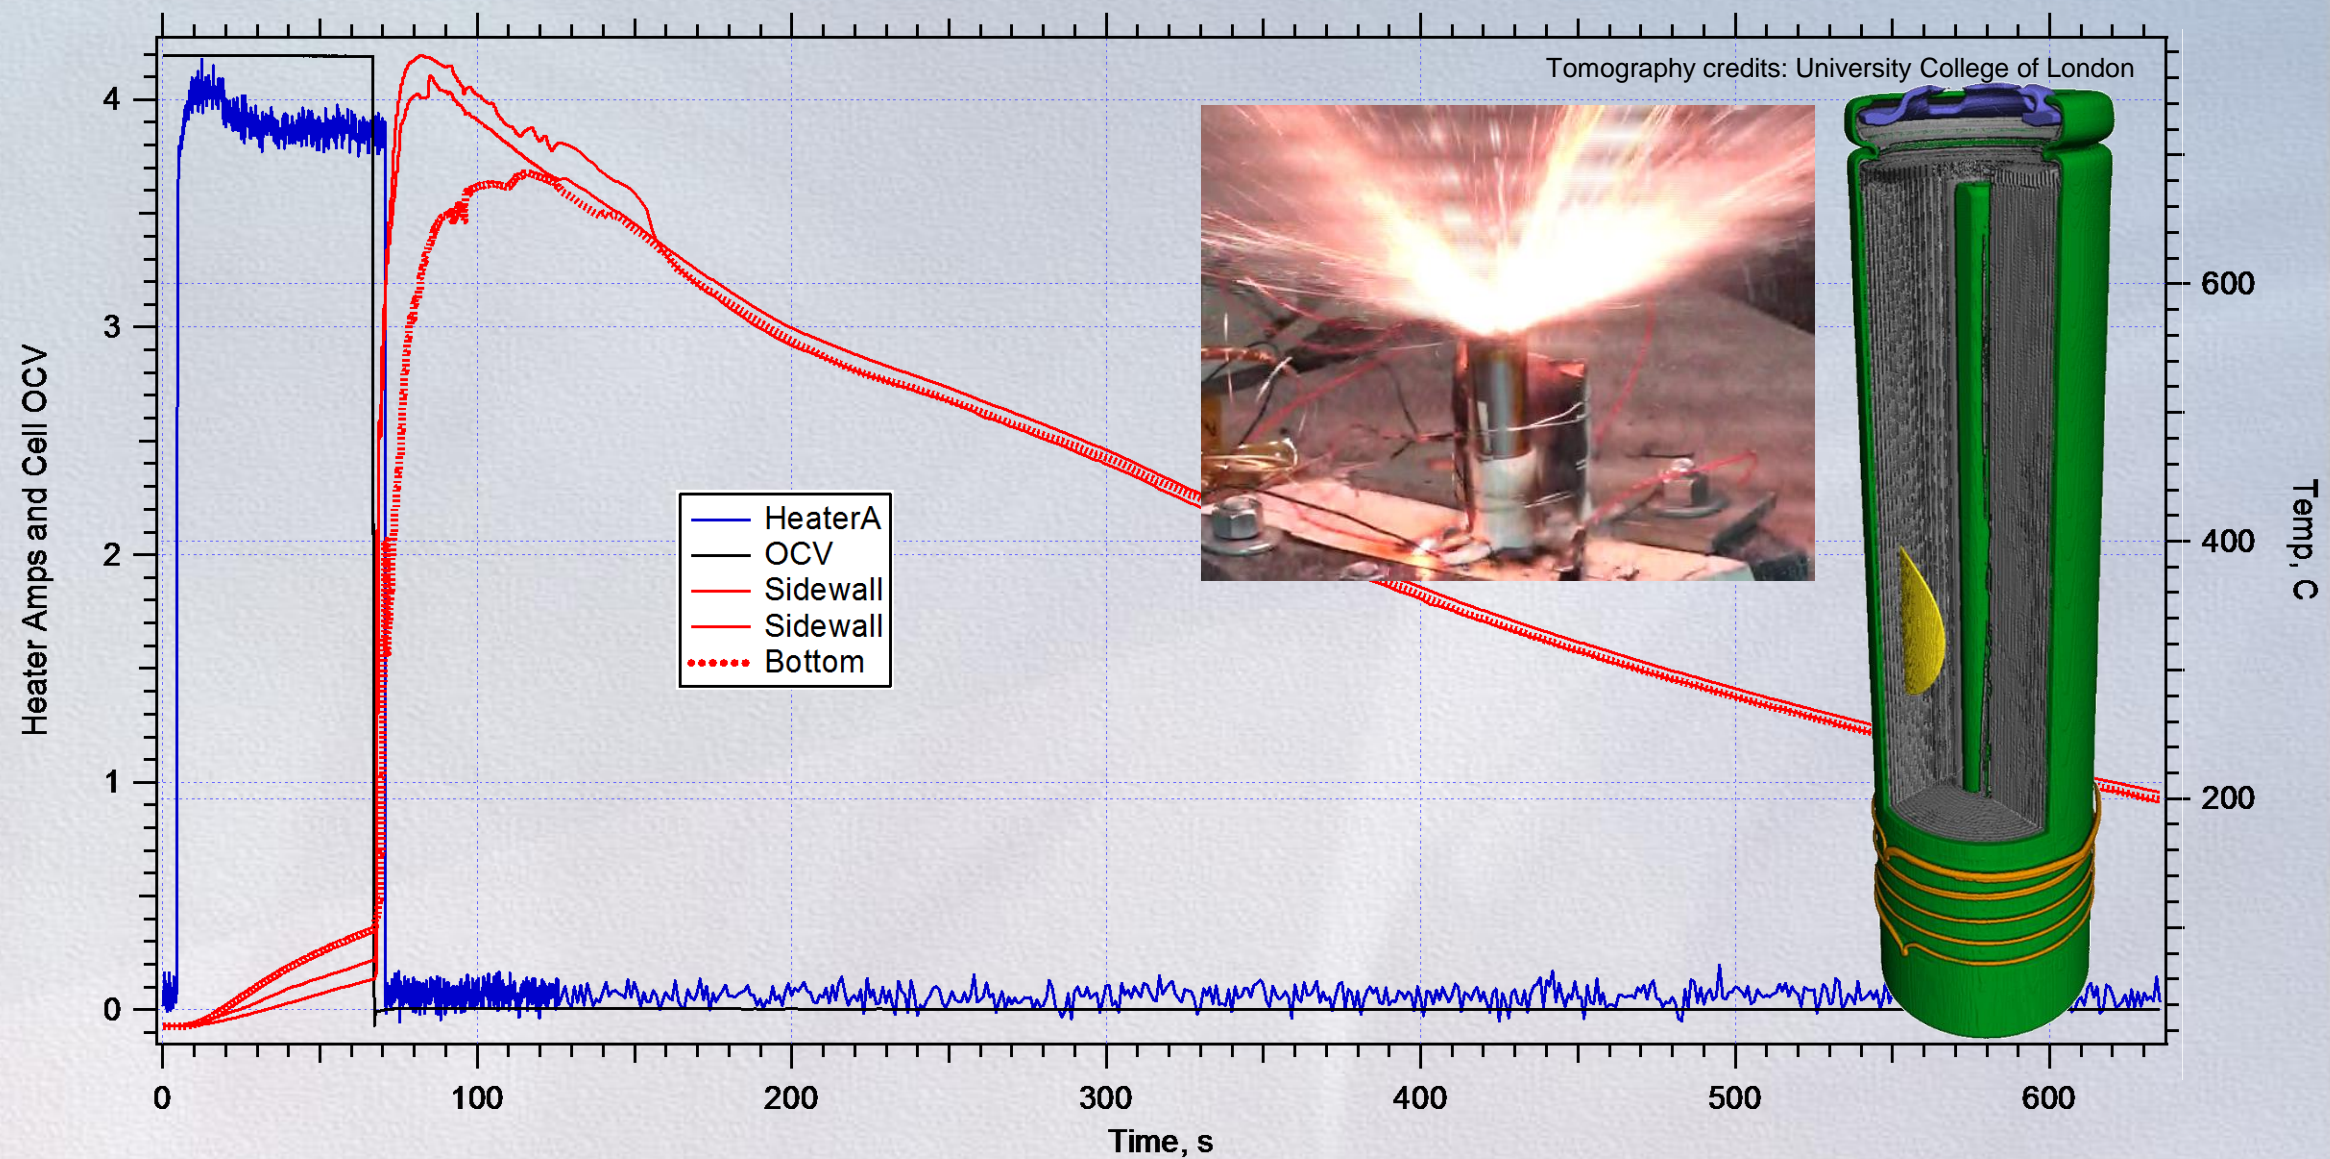


Open air test with cell charged to 4.2V and with TCs welded to cell side wall (2) and bottom (1)

High Speed 2D X-ray Video of ISC Device

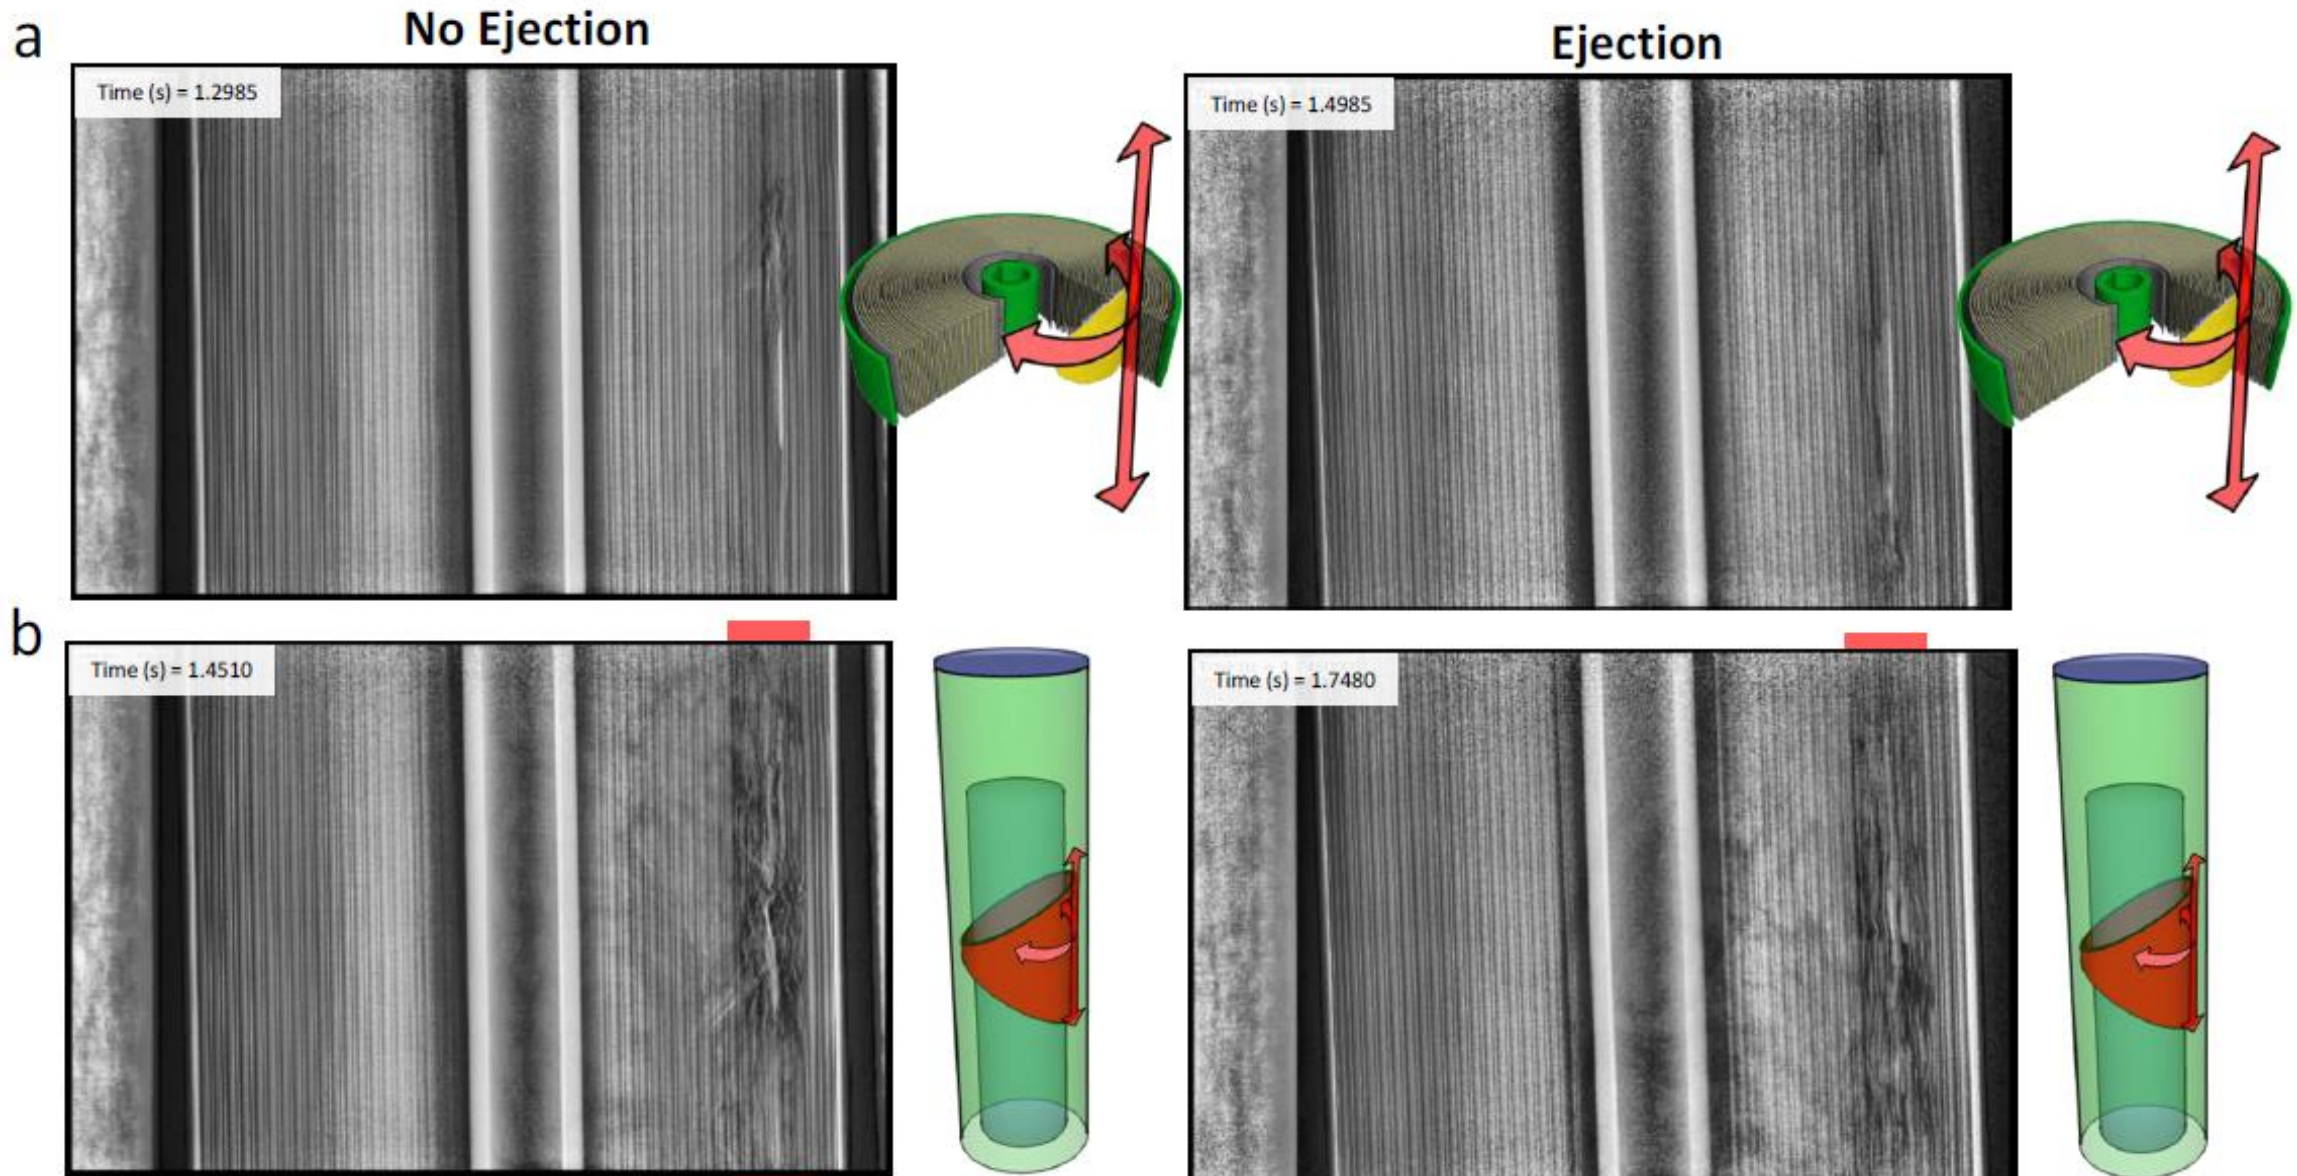


Stages of thermal runaway progression with the ISC device resulting in (left) nominal venting and (right) ejection of JR

Nominal venting (left) and JR ejection (right)


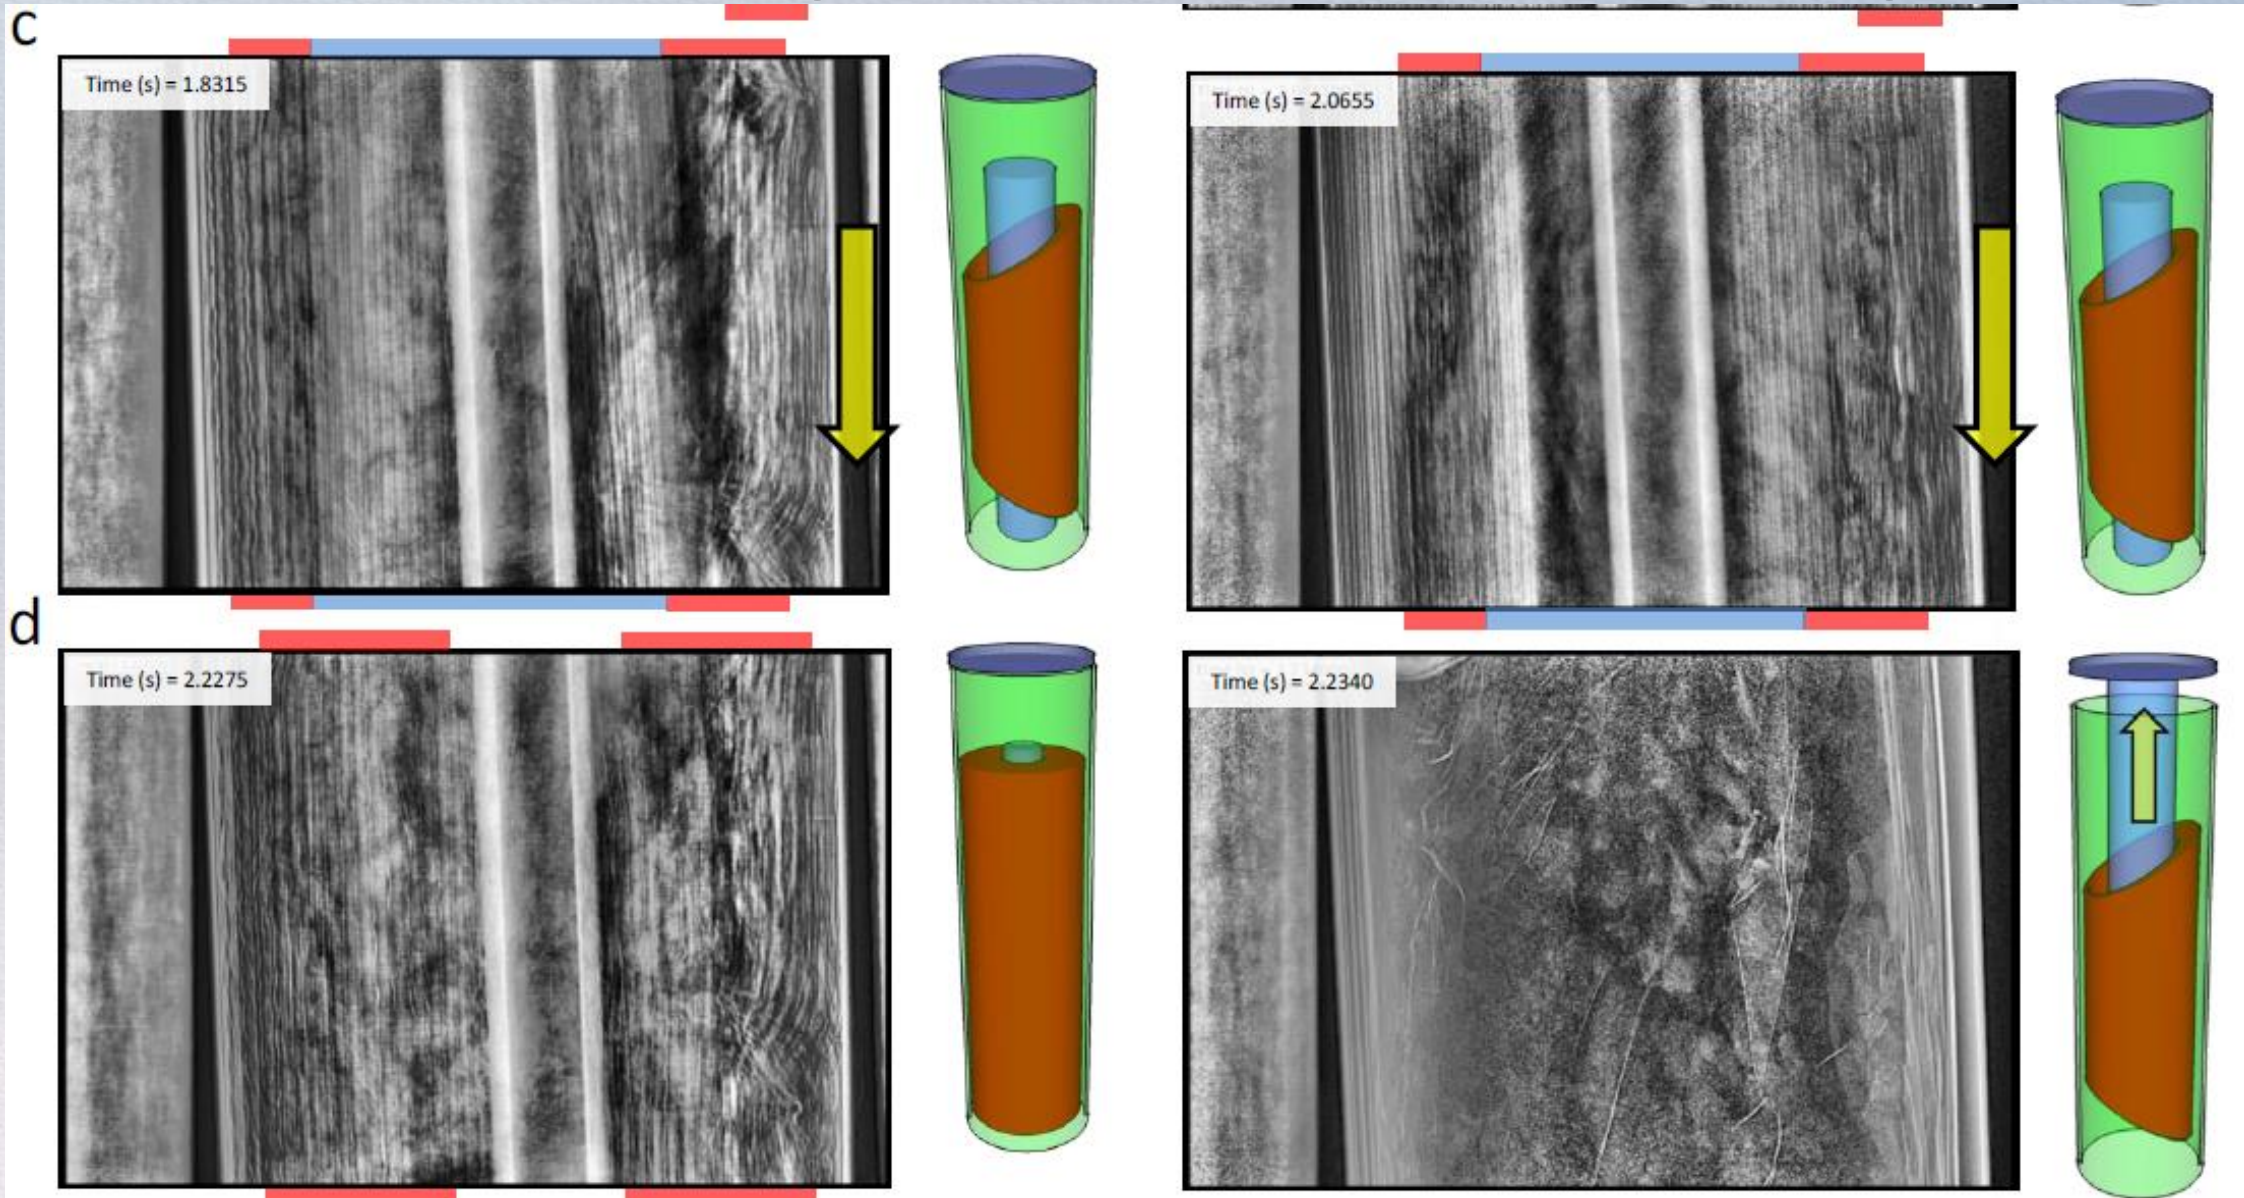


Full Scale Battery TR Test – MoliJ ISC Cell

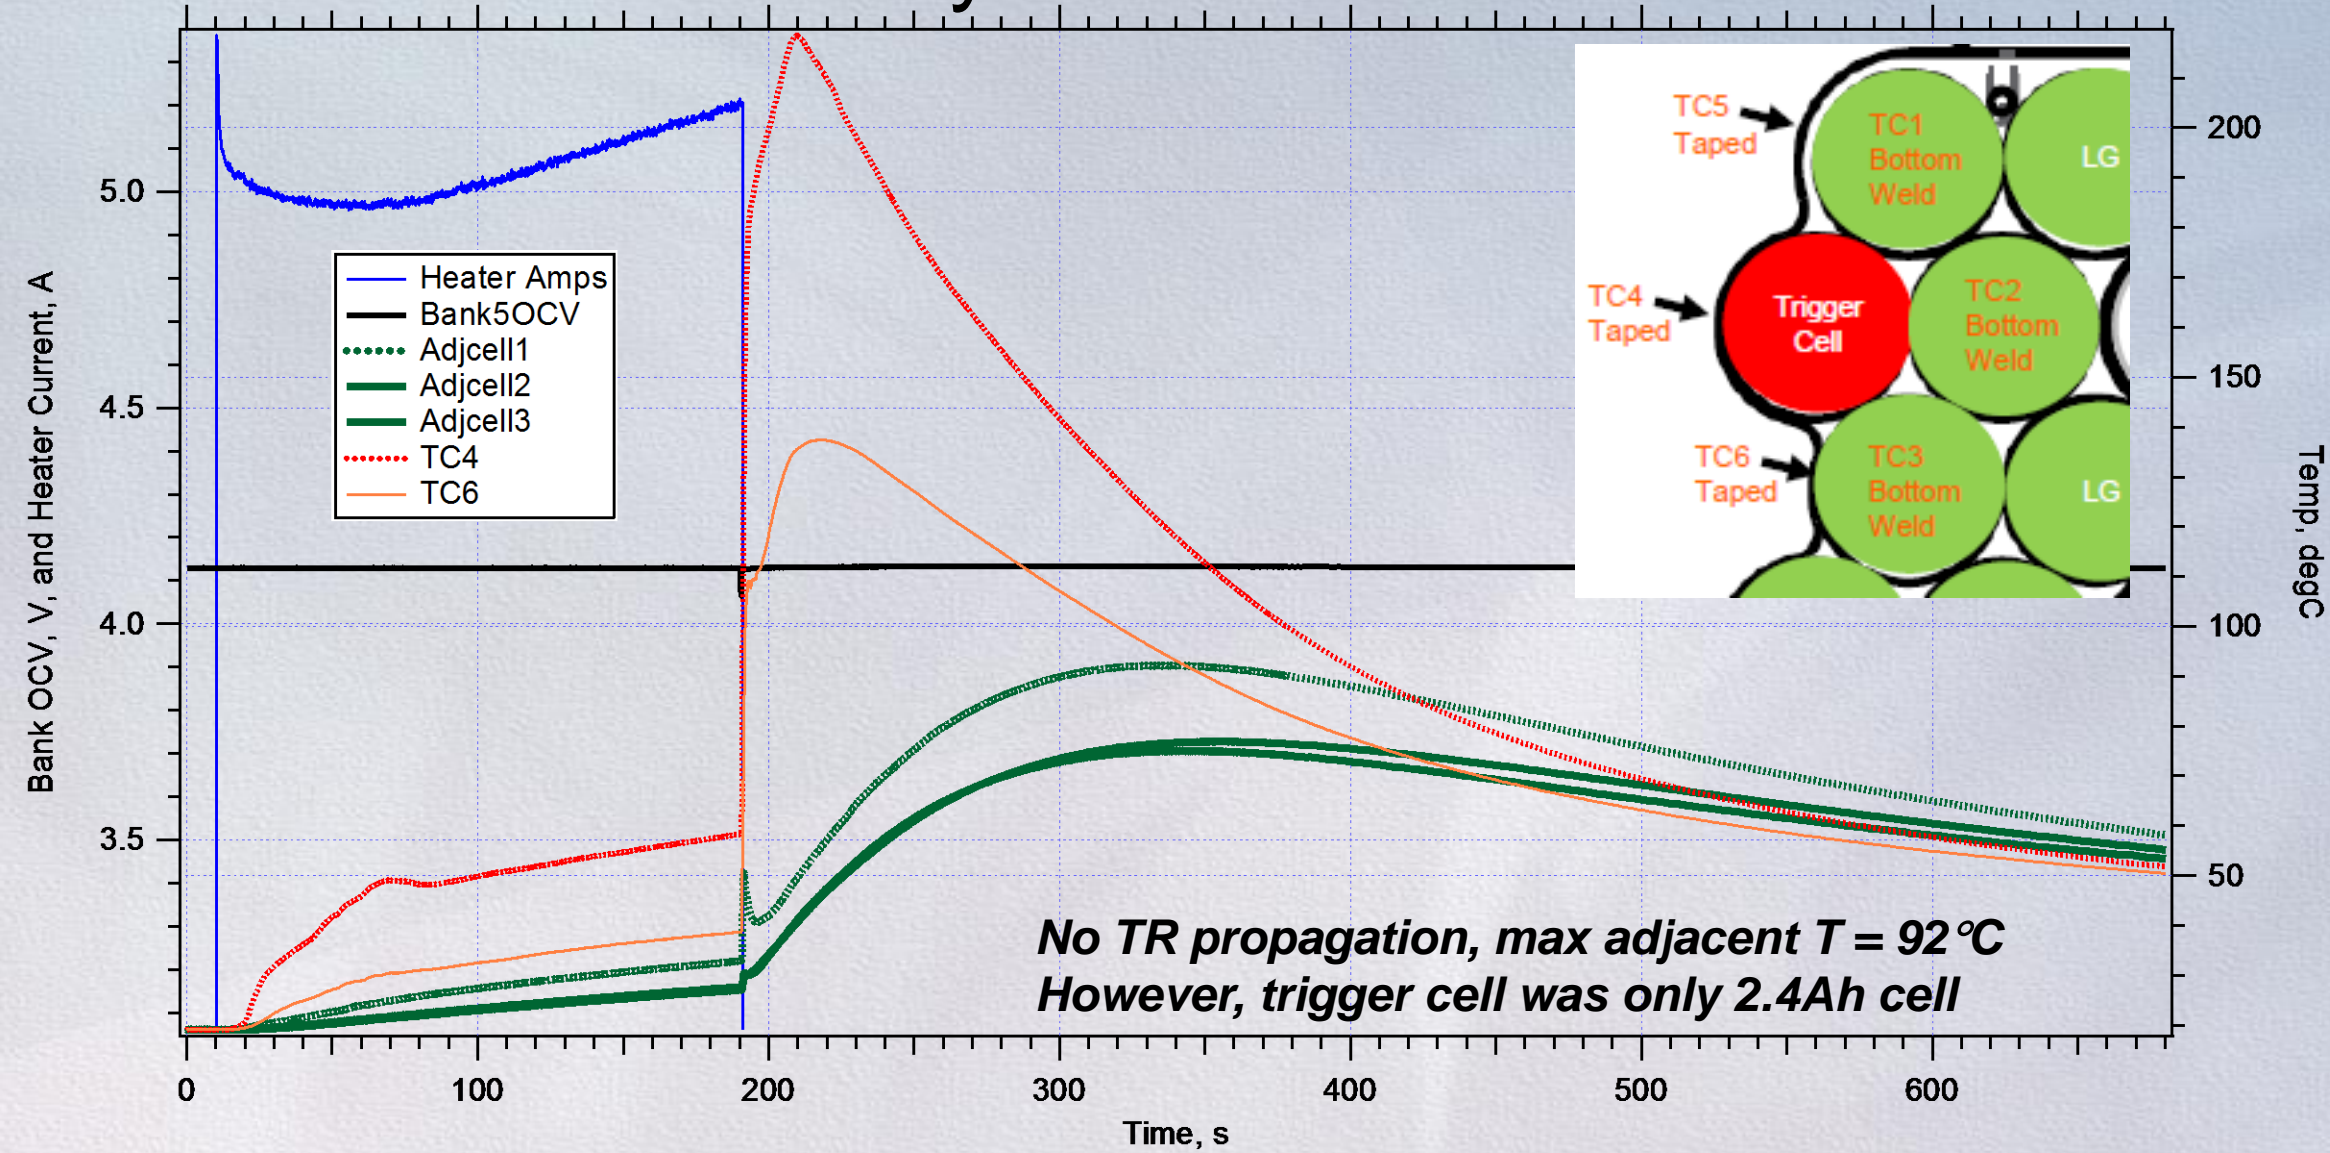


Heater power ~42W for 180s. Onset of TR (OTR) occurs 180s after power on and coincides with trigger bank OCV dip. Adjacent cell1 has $\Delta T = 58.9^{\circ}\text{C}$ to max of 92.0°C , while adjacent cells 2 & 3 have $\Delta T = 48^{\circ}\text{C}$ to max of 76.0°C


No TR Propagation, Only Smoke Exits Battery

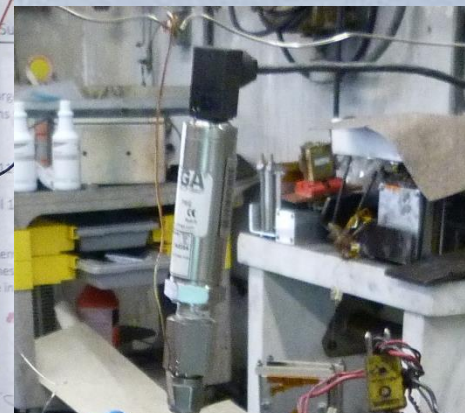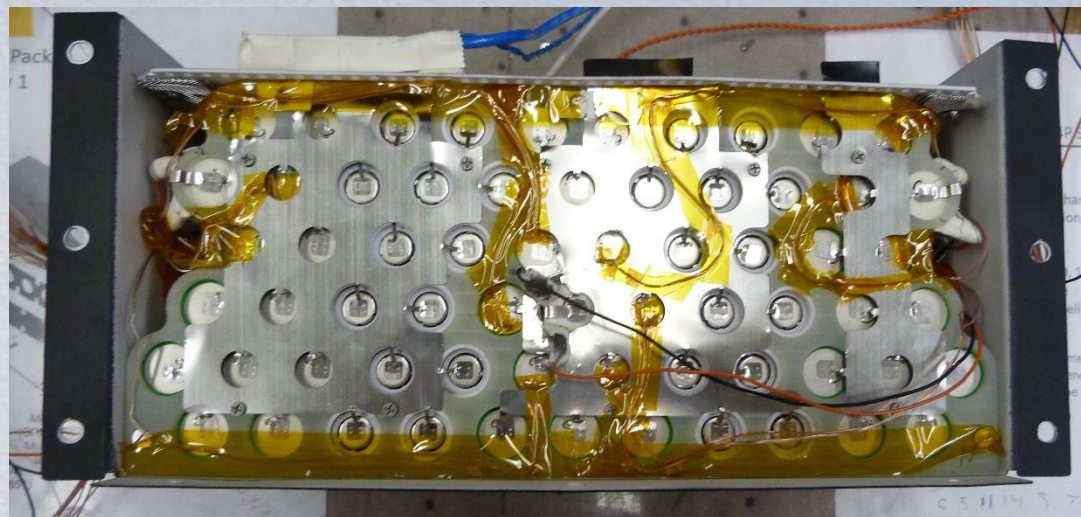


Mesh 40 & 30 steel screens arrest flames and sparks

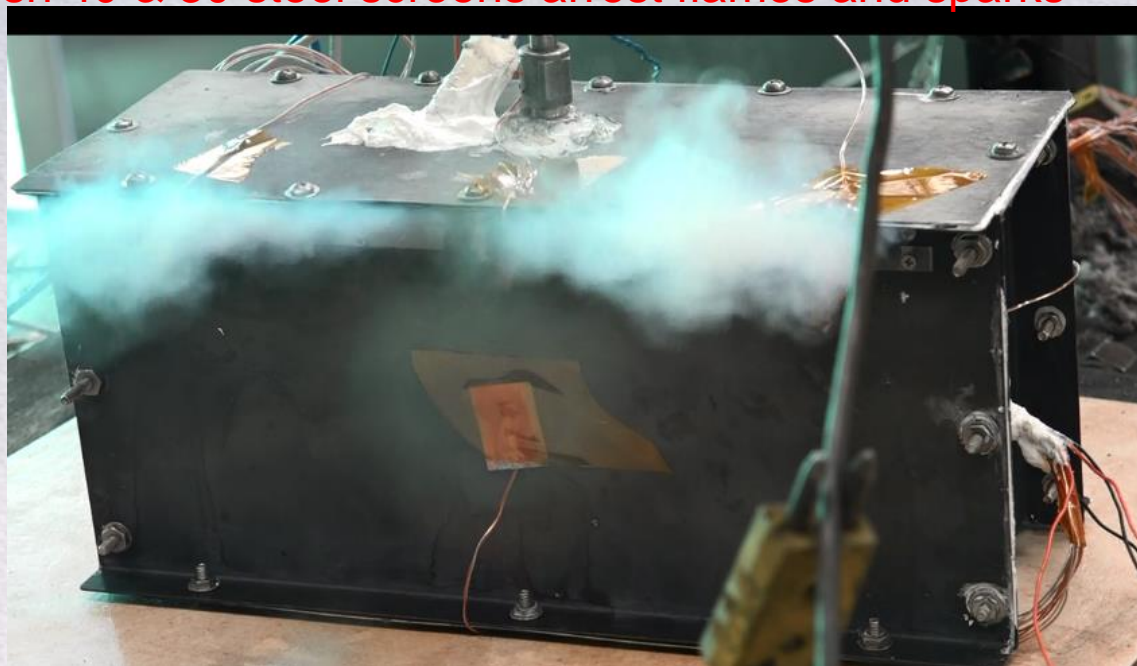

However, trigger cell was only 2.4Ah cell

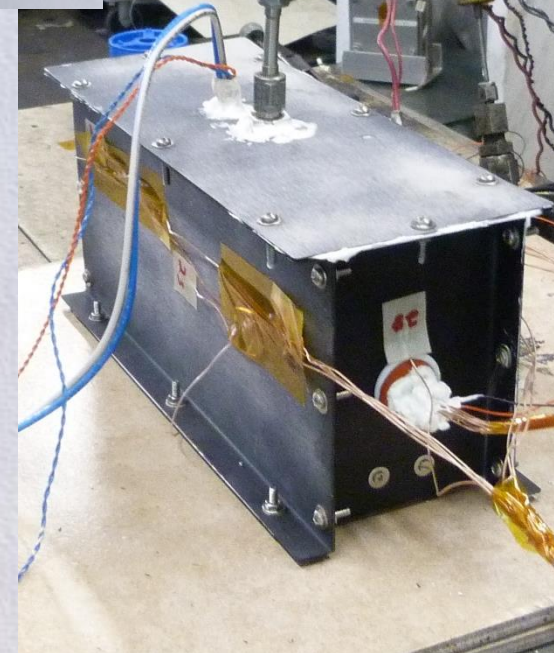


Full Scale Battery TR Test – 3.5Ah LG MJ1 ISC Cell




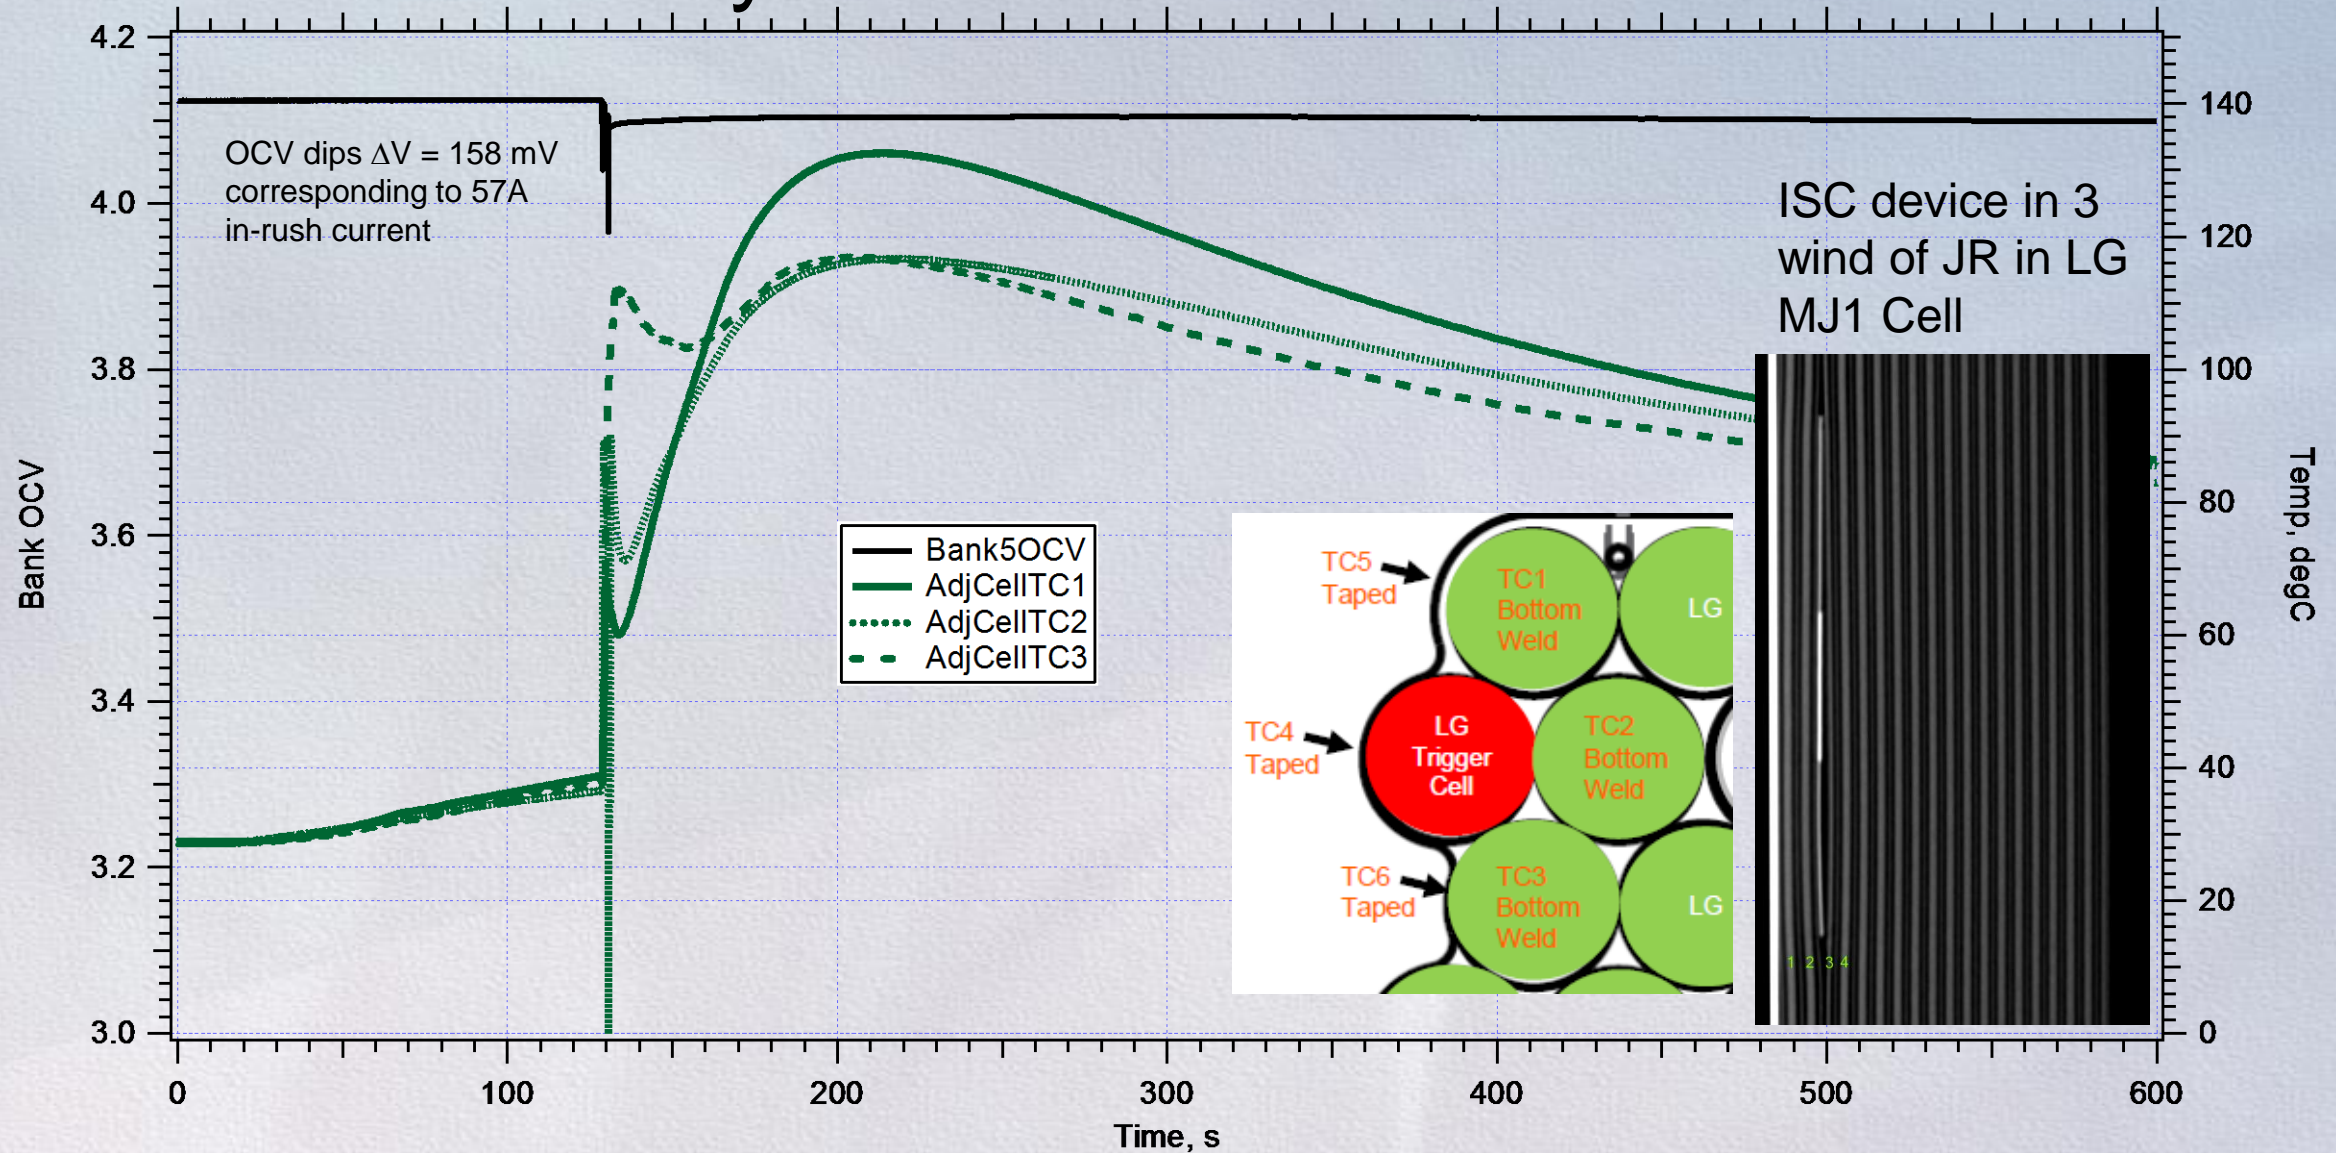


Adjacent cell temperatures TC1, TC2, and TC3 peak at 133°C, 117°C, and 117°C in 77-87s from onset temperatures of 39°C, 37°C, and 38°C for $\Delta T = 94^\circ\text{C}$, 77°C , and 78°C , respectively.


Gore Fabric Vent – Design Details

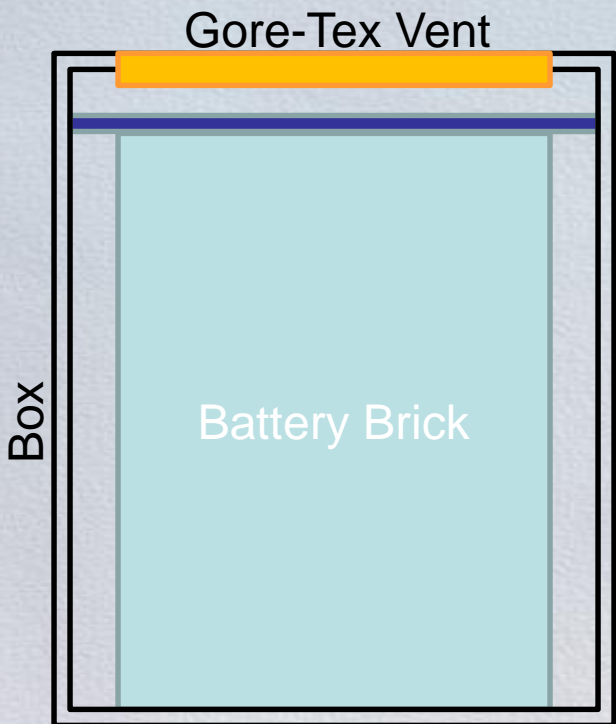

Inside lid with flame arrestors

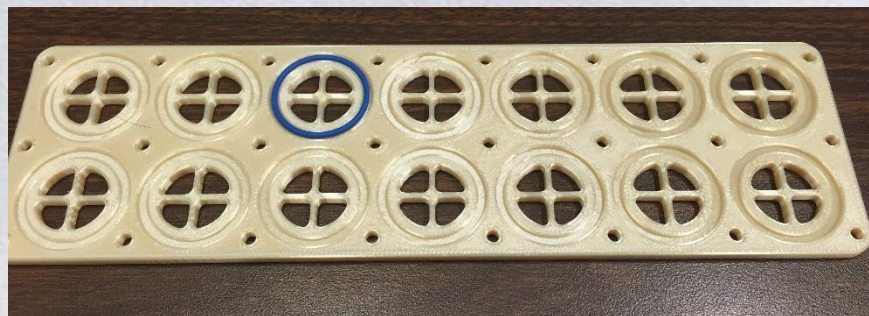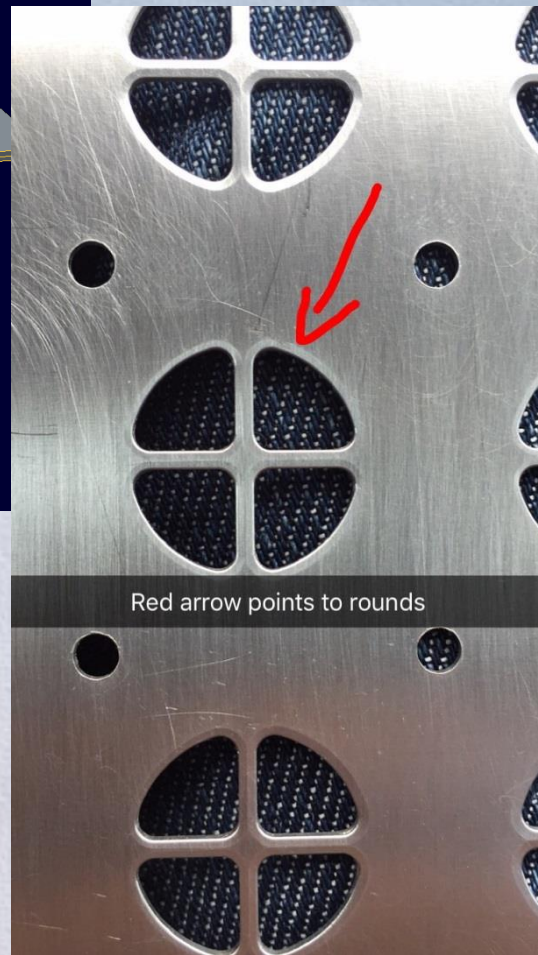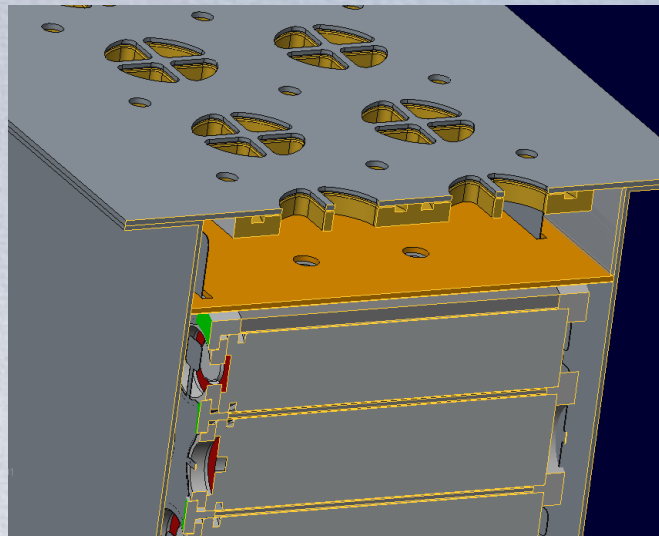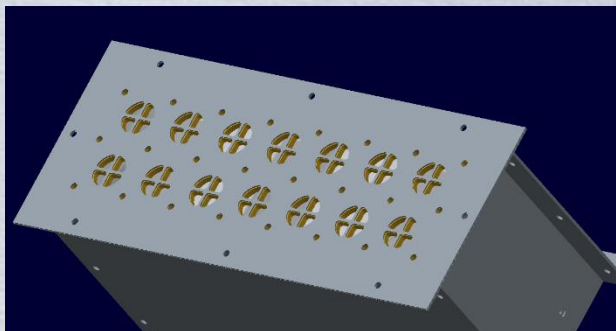


3D printer plastic for the Gore backer plate

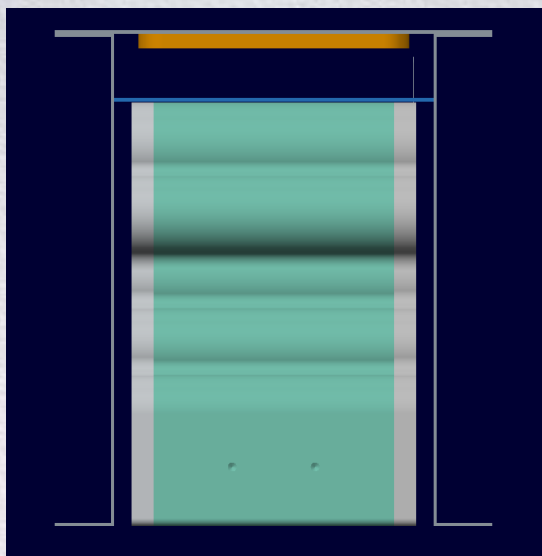

- We will test if the box can hold pressure with an air test before we do battery test
- New boxes with slightly increased void volume and wall thickness are in



Gore Vent Testing

Maximum Pressure Seen Inside the Box

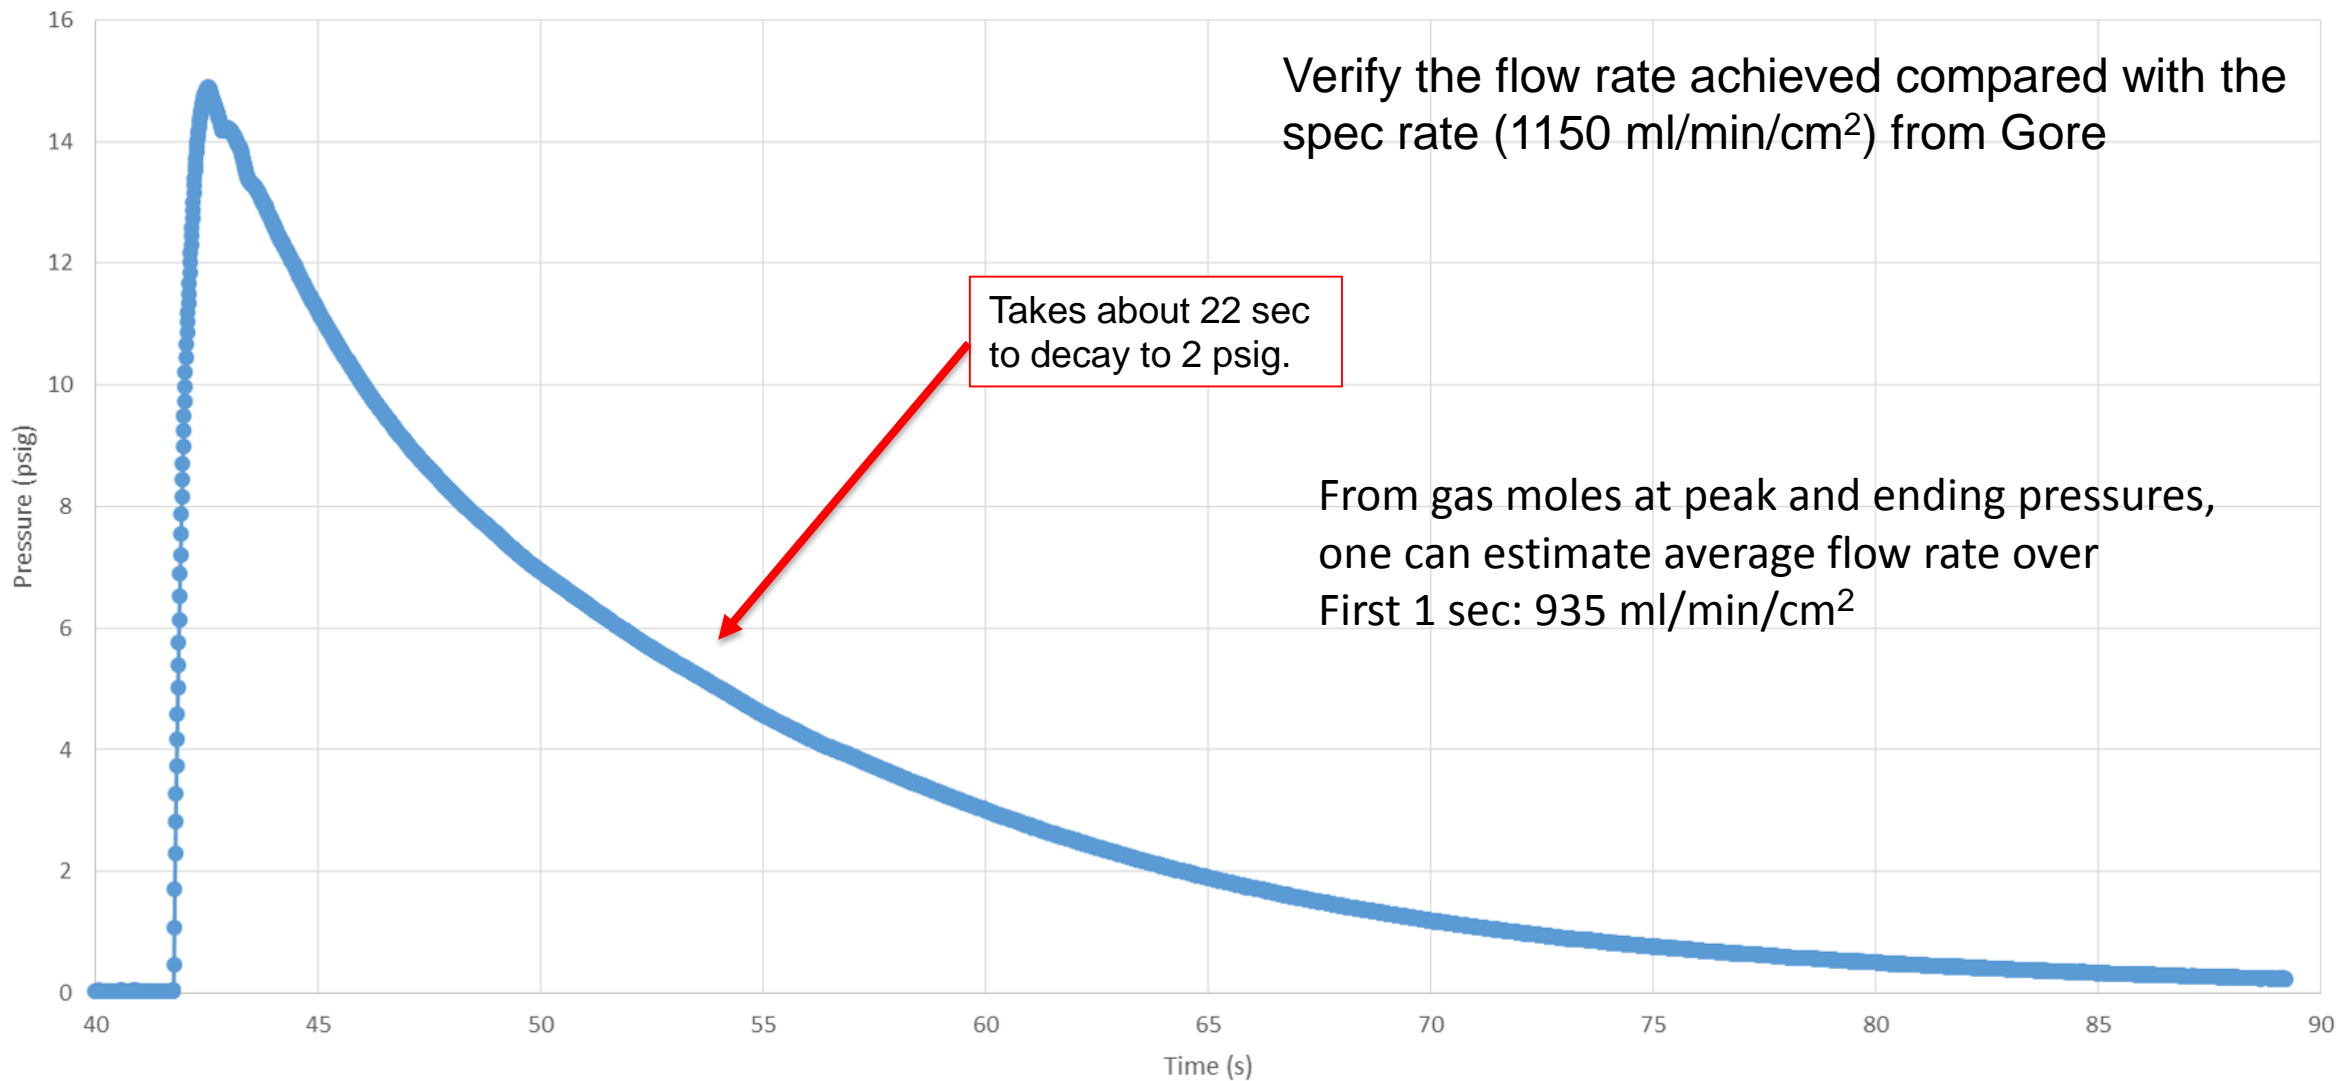


No TR Propagation – Only Clean Smoke Exits Battery


LG MJ1 ISC device trigger cell (3.5Ah)

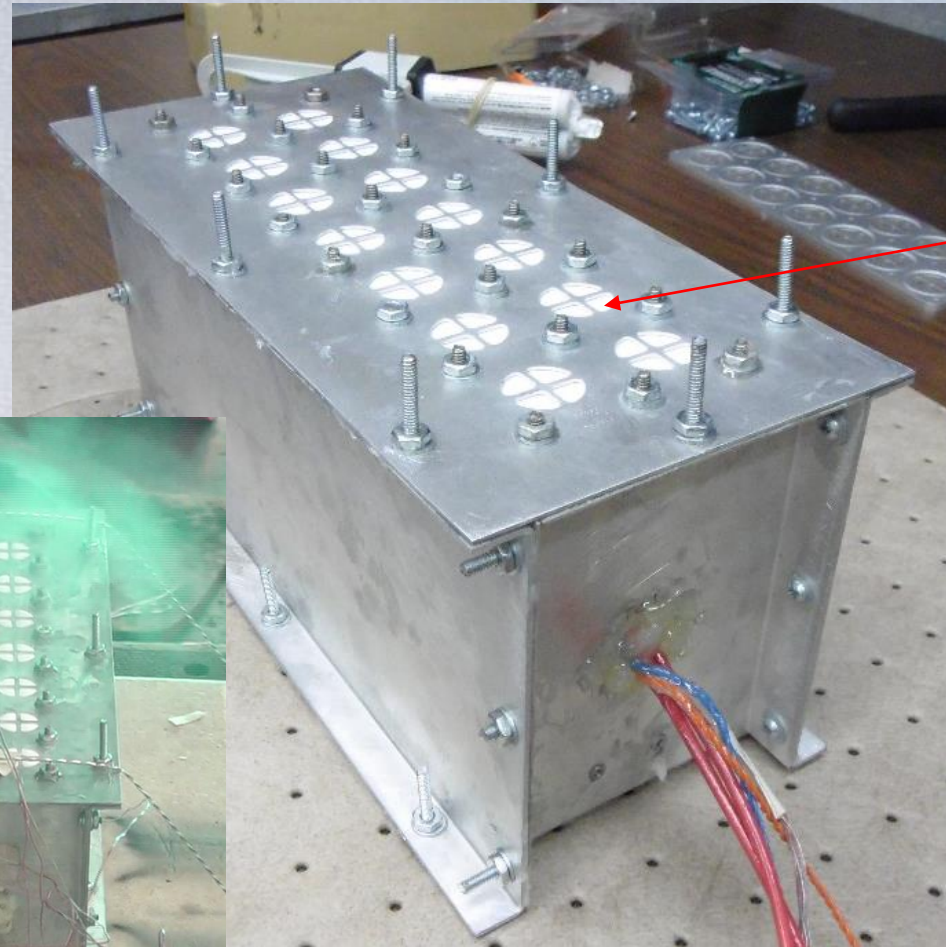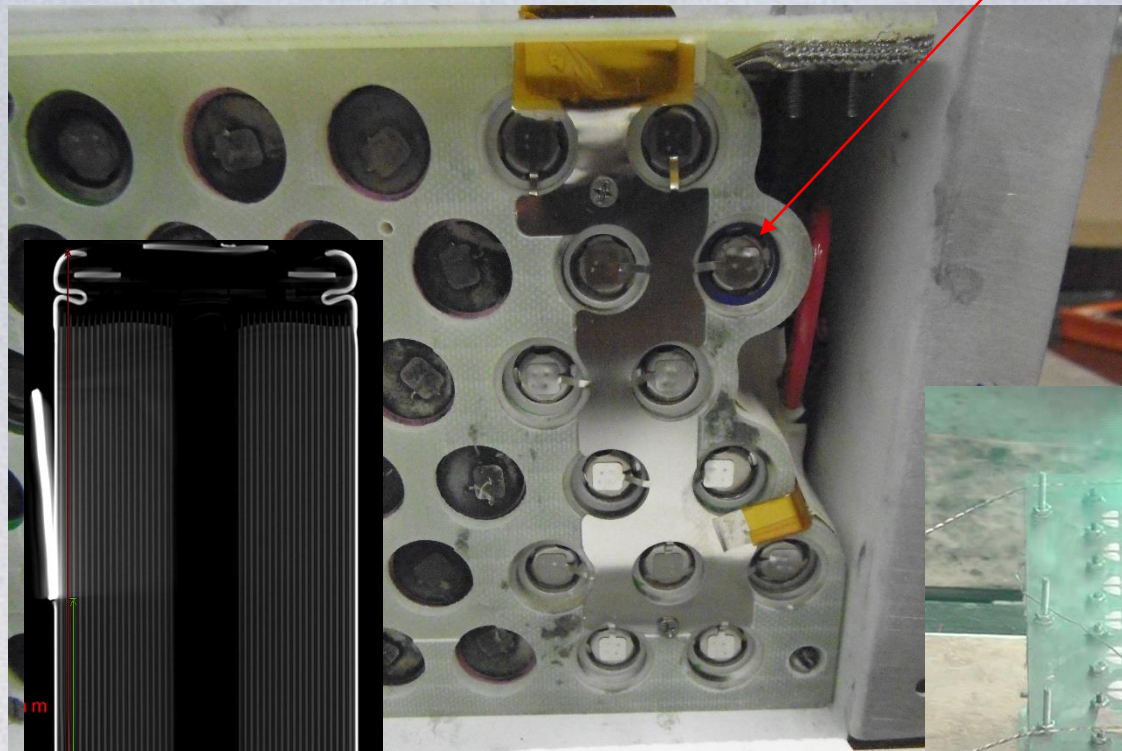

Gore fabric
Vent design

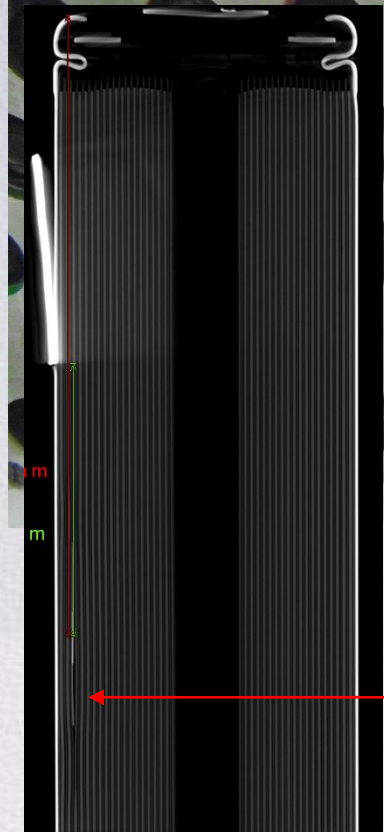


LG 3.5Ah MJ1 cell
with ISC device in
3rd JR wind

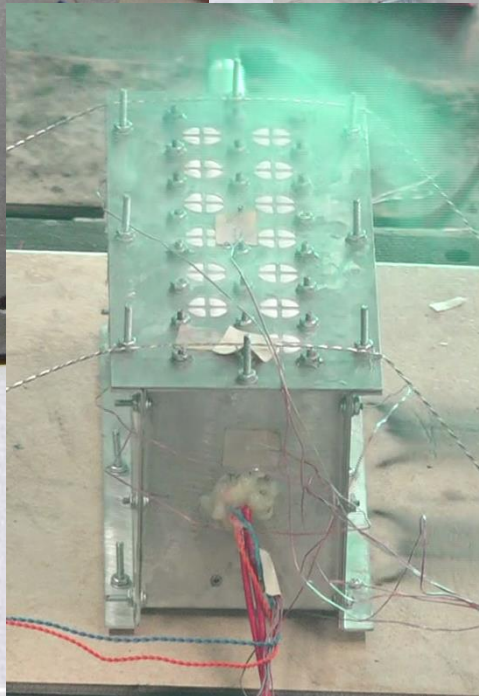

3.5 Ah Trigger Cell Experienced a Side Wall Rupture

Trigger cell was a struggle to extract from heat sink.
The mica insulation was severely damaged adjacent to rupture



Cell	OCV (V)	Mass (g)
Trigger	0	17.161
1	3.474	46.801
2	0.336	46.691
3	0	46.671

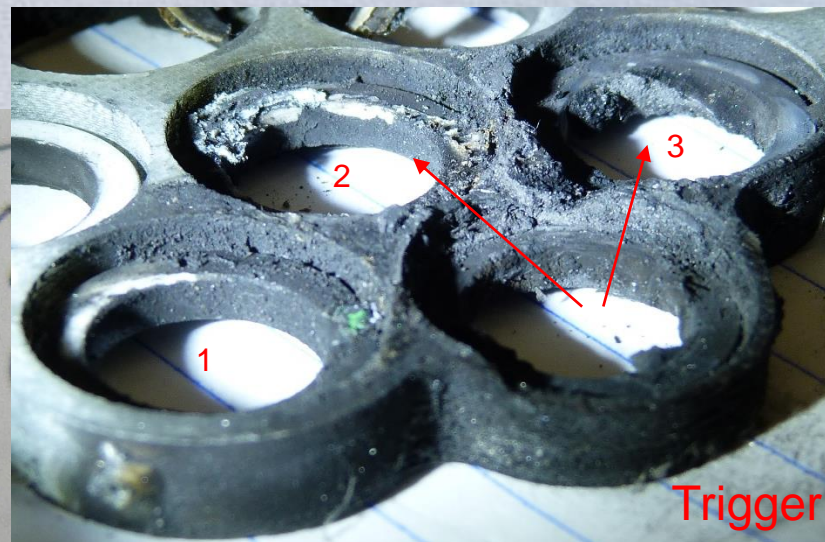


Zircar RS-200 Refractory Material

- Can it withstand a side wall rupture?
 - Replace the G10/FR4 capture plate and Macor® ceramic bushings with a redesigned RS-200 capture plate
 - Downside is that its harder to machine and not as strong

MACOR BUSHING
REMOVED AND
COUNTERBORE DEPTH
DECREASED

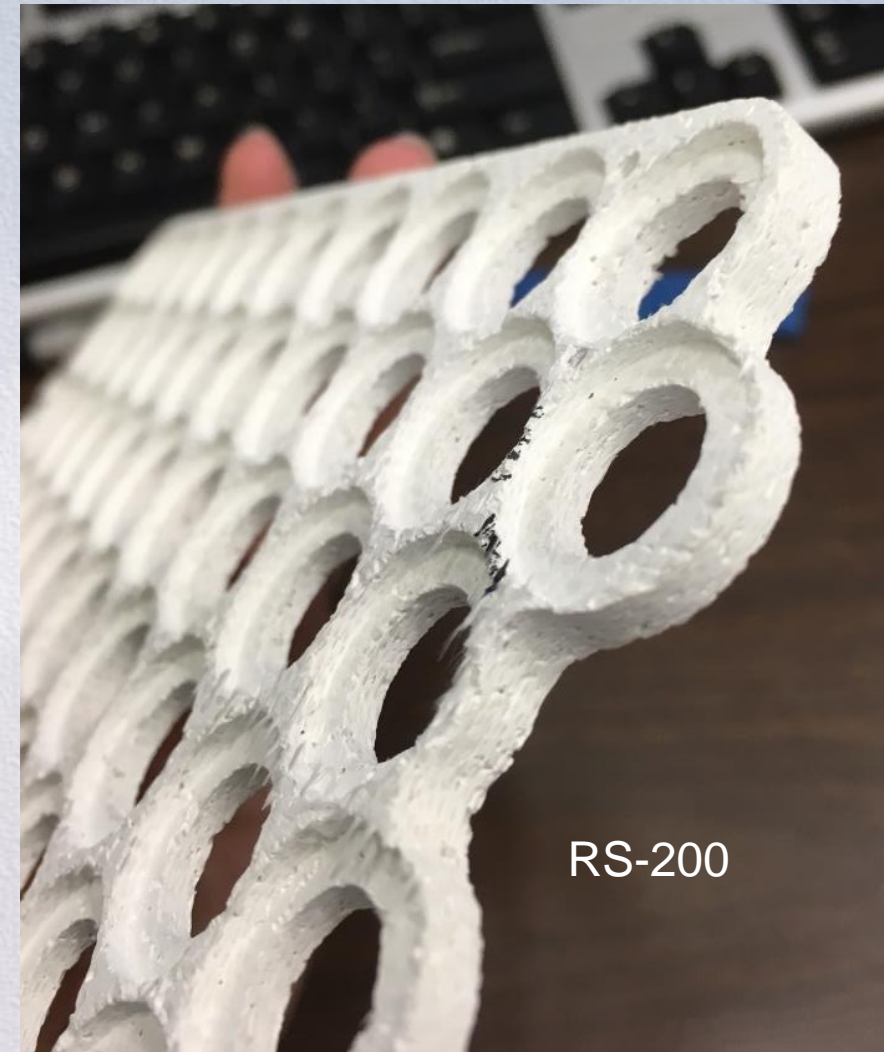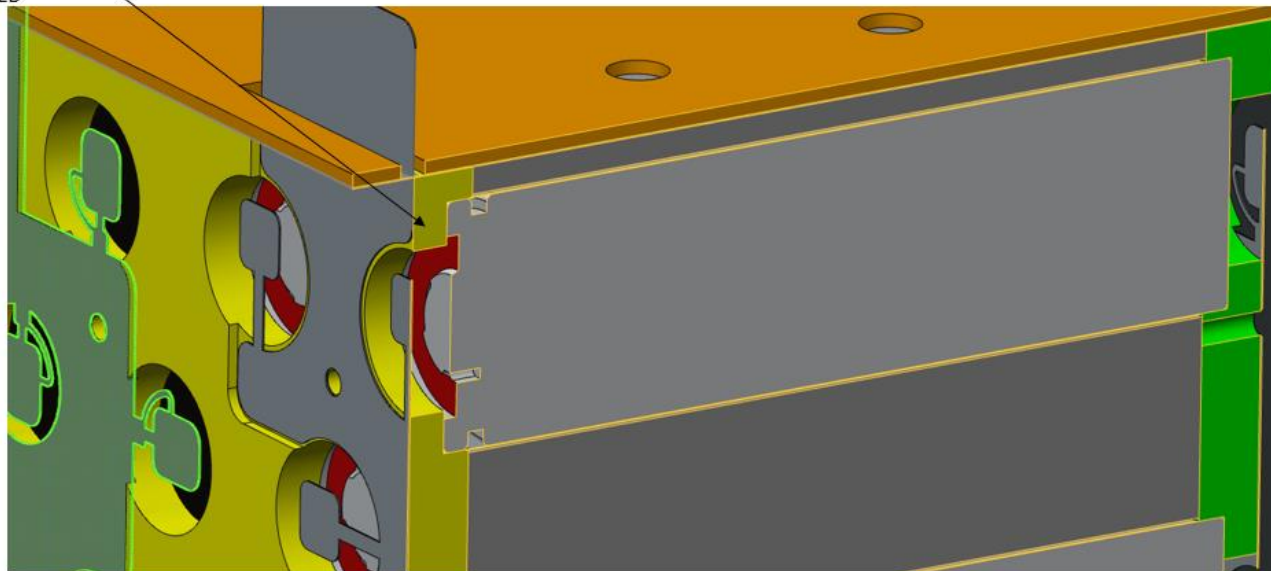

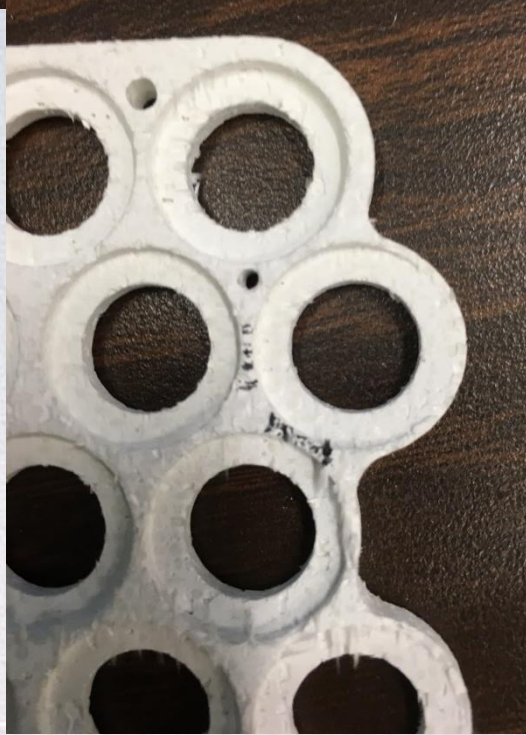

Capture Plate #1


Investigation of Bottom Vent Cell Designs

Sony US18650VC7 Cell Design

Venting area
(Engraved)



a) Top view

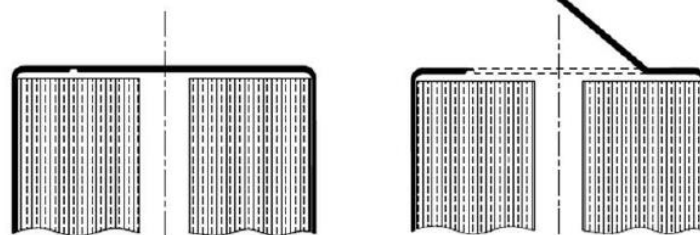


Before rupture

After rupture

b) X-section view

Discharge Load Characteristics (US18650VC7)

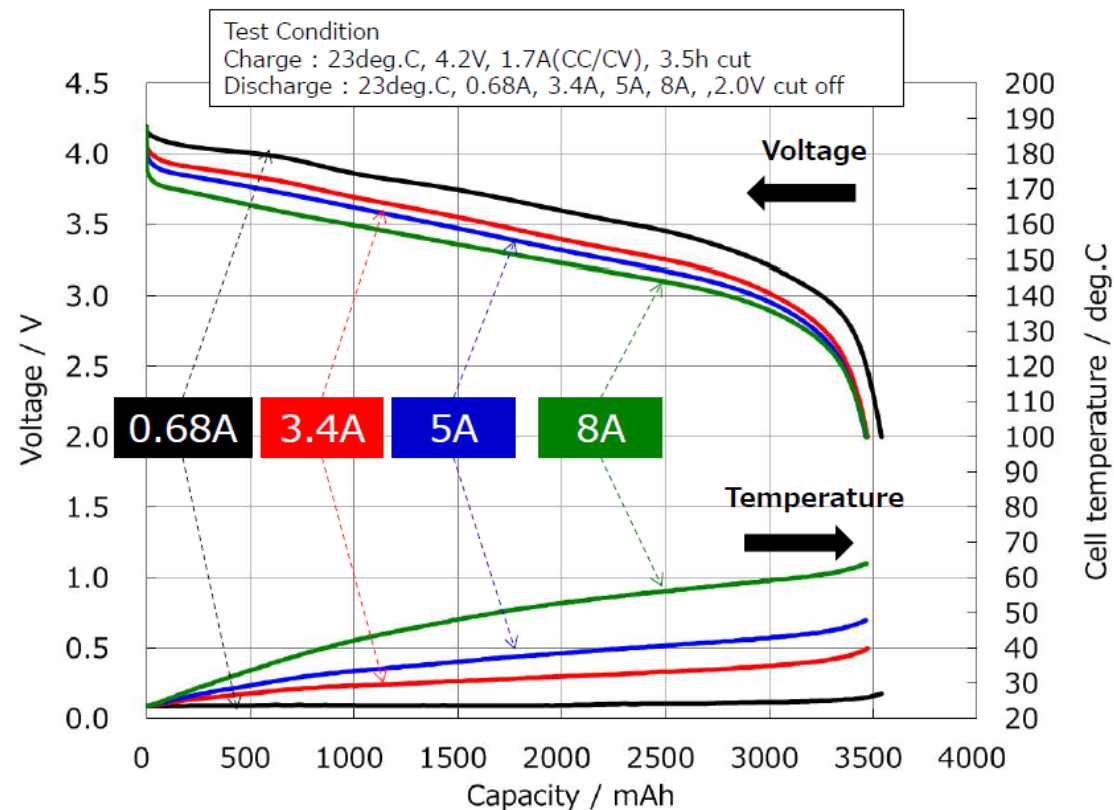

This feature could greatly reduce the risk of side wall rupture during thermal runaway

Summary Findings

- ISC device enables critical battery safety verification
 - With the aluminum interstitial heat sink between the cells, normal trigger cells can't be driven into TR without excessive temperature bias of adjacent cells
 - With an implantable, on-demand ISC device, TR tests show that the conductive heat sinks protected adjacent cells from propagation
 - Very well protected (max T < 92°C) with a 2.4Ah cell design
 - Marginally protected (max T < 133°C) with a 3.5Ah cell design
 - Interior cells are more protected than edge or corner cells
 - High heat dissipation and structural support of Al heat sinks show high promise for safer, higher performing batteries
 - Battery brick design achieving > 190Wh/kg demonstrated to be safe
 - Battery design that doesn't emit flames or sparks achieves > 160 Wh/kg
 - Future work
 - Moving to a cell design with bottom vent to reduce side wall rupture risk
 - Refractory material for the capture plate to better protect adjacent cells from TR ejecta
- Acknowledgements
 - M. Shoesmith, E-one Moli Energy for successfully implantation of ISC device in their 2.4Ah cell design
 - J.Y. Park, LG Chem for successfully implantation of ISC device in their 3.5Ah cell design