


NASA/TM—20230009762



Single-Event Effects Test Report Texas Instruments, OPA691 Current Feedback Operational Amplifier

Kaitlyn L. Ryder

Jonathan D. Barth

Michael J. Campola

Thomas A. Carstens

Richard J. Hare

November 2022

NASA STI Program Report Series

The NASA STI Program collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NTRS Registered and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- TECHNICAL PUBLICATION. Reports of completed research or a major significant phase of research that present the results of NASA Programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- TECHNICAL MEMORANDUM. Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- CONTRACTOR REPORT. Scientific and technical findings by NASA-sponsored contractors and grantees.
- CONFERENCE PUBLICATION. Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or co-sponsored by NASA.
- SPECIAL PUBLICATION. Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- TECHNICAL TRANSLATION. English-language translations of foreign scientific and technical material pertinent to NASA's mission.


Specialized services also include organizing and publishing research results, distributing specialized research announcements and feeds, providing information desk and personal search support, and enabling data exchange services.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- Help desk contact information:

<https://www.sti.nasa.gov/sti-contact-form/> and select the "General" help request type.

NASA/TM—20230009762



Single-Event Effects Test Report Texas Instruments, OPA691 Current Feedback Operational Amplifier

Kaitlyn L. Ryder
Goddard Space Flight Center, Greenbelt, MD

Jonathan D. Barth
Goddard Space Flight Center, Greenbelt, MD

Michael J. Campola
Goddard Space Flight Center, Greenbelt, MD

Thomas A. Carstens
Goddard Space Flight Center, Greenbelt, MD

Richard J. Hare
NASA Langley Research Center, Hampton, VA

Test Date: 11/11/2022
Report Date: 3/3/2023

National Aeronautics and
Space Administration

Goddard Space Flight Center
Greenbelt, MD 20771

November 2022

Acknowledgments

This work was sponsored by the NASA GSFC Radiation Effects and Analysis Group and supported by the Atmosphere Observing System (AOS) program.

Trade names and trademarks are used in this report for identification only. Their usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

Level of Review: This material has been technically reviewed by technical management.

Available from

NASA STI Program
Mail Stop 148
NASA's Langley Research Center
Hampton, VA 23681-2199

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
703-605-6000

This report is available in electronic form at
<https://radhome.gsfc.nasa.gov/>

1. Introduction and Purpose

Testing was done to characterize the Texas Instruments Operational Amplifiers OPA691 single event effects (SEE) response. The primary SEE concerns for this device are single event latchup (SEL) and single event transients (SETs). Testing focused on determining susceptibility to SEL and characterizing the SET response. Testing occurred on November 11, 2022.

2. Device Description

The OPA691 is a wideband, current feedback amplifier with bipolar inputs. It operates on a low 5.1 mA supply current, while supplying a high slew rate of 2100 V/ μ s. The OPA691 can deliver an output voltage swing of 1 V to 4 V using a single +5 V supply. The OPA691 can be used in applications such as xDSL line driver, broadband video and analog-to-digital converter (ADC) buffers, and as active filters. Three (3) parts were delidded and available for SEE testing. All specifications and descriptions are according to the datasheet. More information can be found in Table 1.

Table I. Part description

| | |
|------------------------|--------------------------------|
| Part Number | OPA691 |
| Manufacturer | Texas Instruments |
| Quantity Tested | 3 |
| Part Function | Wideband Operational Amplifier |
| Part Technology | Complementary bipolar |
| Package | SOIC (8 pins) |

3. Test Setup

Table II. Pinout guide for OPA691

| Pinout | Function |
|--------|--------------------|
| 1 | No connection |
| 2 | Inverting input |
| 3 | Noninverting input |
| 4 | -V _s |
| 5 | No connection |
| 6 | Output |
| 7 | +V _s |
| 8 | Disable |

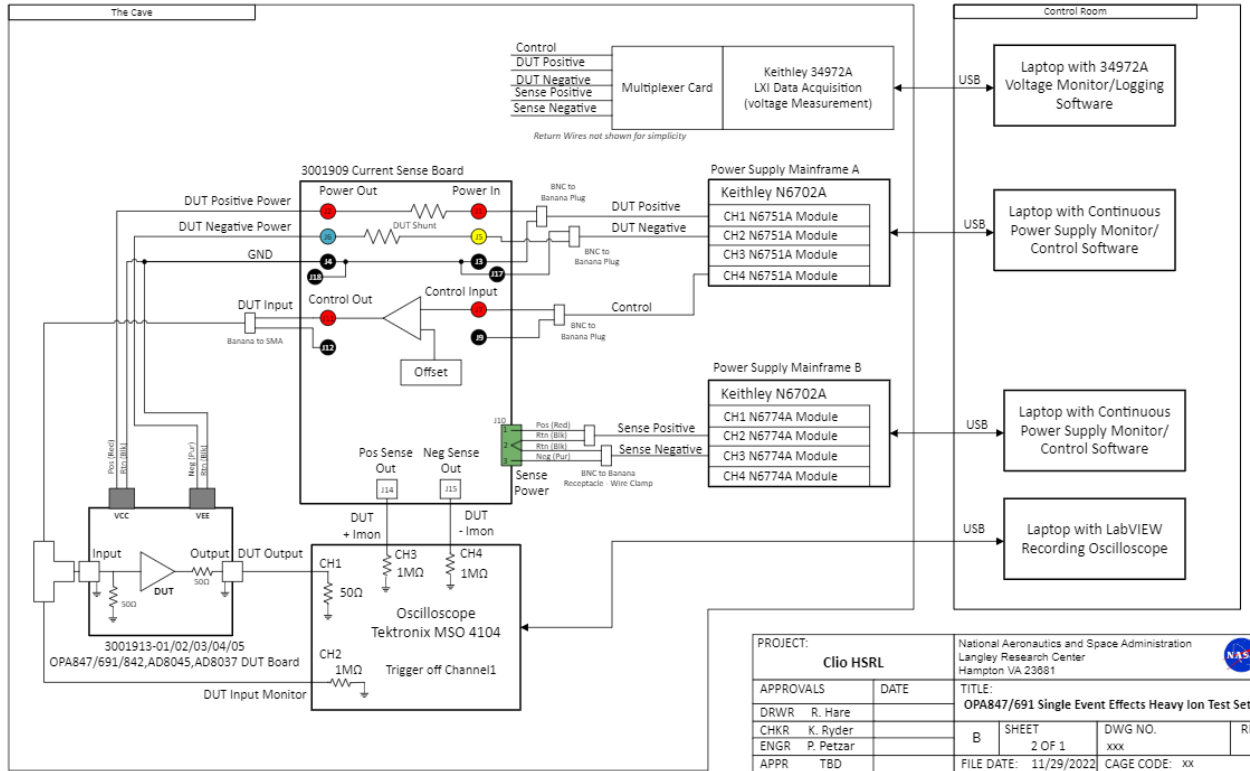


Figure 1. Test setup for the OPA691.

4. Test Facility

| | |
|--------------------------------|---|
| Facility: | Lawrence Berkeley Nation Laboratory's 88" Cyclotron facility |
| Type of Radiation: | Heavy ions |
| Facility Configuration: | 16 MeV/amu tune |
| Flux: | Varied between 8.6×10^4 and $1.1 \times 10^5 \text{ cm}^{-2} \cdot \text{s}^{-1}$ |
| Fluence: | A total effective fluence of $1 \times 10^7 \text{ cm}^{-2}$ was achieved for each run to screen for destructive SEL. |
| Beams / LET: | Ag was used during testing at 0° and 45° . This provided LETs of 45.8 and 69.9 MeV·cm ² /mg. |

5. Test Conditions

| | |
|--------------------------|----------------------------|
| Temperature: | 51 °C, 58 °C, 68 °C, 70 °C |
| In-Air or Vacuum: | In-air |
| Supply Voltage: | ±5 V |
| Input Voltage | 2.5 V |

6. Test Methods

The operational amplifier was powered with a nominal supply voltage of ± 5 V and an input voltage of either 2.5 V. The nominal supply current during testing was 80 mA and was monitored during testing for SEL. The amplifier's output voltage was monitored for SETs using an oscilloscope, which saved the waveforms of any observed SET. Elevated temperatures were used during SEL testing. If SEEs were observed, they were counted and recorded in the run log.

6.1. Single-Event Transients

SETs in the operational amplifier manifest as self-recovering changes in the output voltage. SETs can be either positive-going, negative-going, or have more complex features, and can be as large as the rail-to-rail voltage. The oscilloscope was used to observe and count all SETs with an amplitude above the nominal noise floor were observed (between 1.3 V and 1.5 V). The counts were recorded in the run log and waveforms were captured by the oscilloscope.

6.2. Single-Event Latchup

SEL occurs when the supply current instantaneously increases to the compliance current set on the power supplies and is sustained until power is cycled. If SEL occurred the run was ended, and the operational amplifier was power cycled. SEL count was recorded in the run log.

7. Test Procedure

Testing was completed to an effective fluence of at least 1×10^7 cm⁻² at LETs of 45.8 and 69.9 MeV·cm²/mg to screen for SEL. SETs were observed and captured during these runs.

8. Data Requirements

The counts for SET and SEL were recorded by on-site personnel during testing and stored in the run log. Supply current was monitored and recorded by the power supplies and the oscilloscope captured any SETs. Relevant facility data (e.g., flux, fluence, LET, ion, air gap, angle, electrical setup) was recorded in real time and stored in the run log.

9. Equipment List

Table III. Equipment List

| Manufacturer and P/N | Function | S/N or ECN |
|----------------------|--------------|------------|
| Agilent N6702A | Power supply | M161871 |
| Agilent N6702A0 | Power supply | M163374 |
| Tektronix MSO5104 | Oscilloscope | B010131 |

10. Run Log

Table IV. Run Log

| Run # | Ion | Surface LET (MeV·cm ² /mg) | Temp (C) | Air Gap (cm) | Angle (°) | Eff. LET (MeV·cm ² /mg) | Avg. Flux (cm ⁻² ·s ⁻¹) | Fluence (cm ⁻²) | Eff. Fluence (cm ⁻²) |
|-------|-----|---------------------------------------|----------|--------------|-----------|------------------------------------|--|-----------------------------|----------------------------------|
| 22 | Ag | 39.17 | 70 | 5.715 | 45 | 69.9 | 8.7E+04 | 1.4E+07 | 1.0E+07 |
| 23 | Ag | 39.17 | 68 | 5.715 | 45 | 69.9 | 8.64E+04 | 1.4E+07 | 1.0E+07 |
| 24 | Ag | 39.17 | 58 | 5.715 | 45 | 69.9 | 1.05E+05 | 1.4E+07 | 1.0E+07 |
| 25 | Ag | 39.17 | 58 | 1 | 0 | 45.8 | 1.06E+05 | 1.0E+07 | 1.0E+07 |
| 26 | Ag | 39.17 | 51 | 5.715 | 45 | 69.9 | 1.09E+05 | 1.0E+07 | 7.1E+06 |
| 27 | Ag | 39.17 | 51 | 5.715 | 45 | 69.9 | 1.09E+05 | 1.4E+07 | 1.0E+07 |

11. Results

11.1. Single-Event Latchup

SEL was not observed during testing at any of the test conditions, including elevated temperature and an LET of 69.9 MeV·cm²/mg up to an effective fluence of 1.0×10⁷ cm⁻².

11.2. Single-Event Transients

Positive- and negative-going SETs were observed in the operational amplifier during testing. All test conditions resulted in SET cross-sections on the order of 10⁻⁵ to 10⁻⁴ cm². Amplitudes were less than rail-to-rail, with extremes of roughly $V_{out} \pm 1.25$ V. Negative going SETs were longer in duration than positive going SETs, and all observed SETs were less than 0.2 μs in duration. Figures 2 – 4 provide examples of SETs with peak positive amplitudes, negative amplitudes, and durations, respectively.

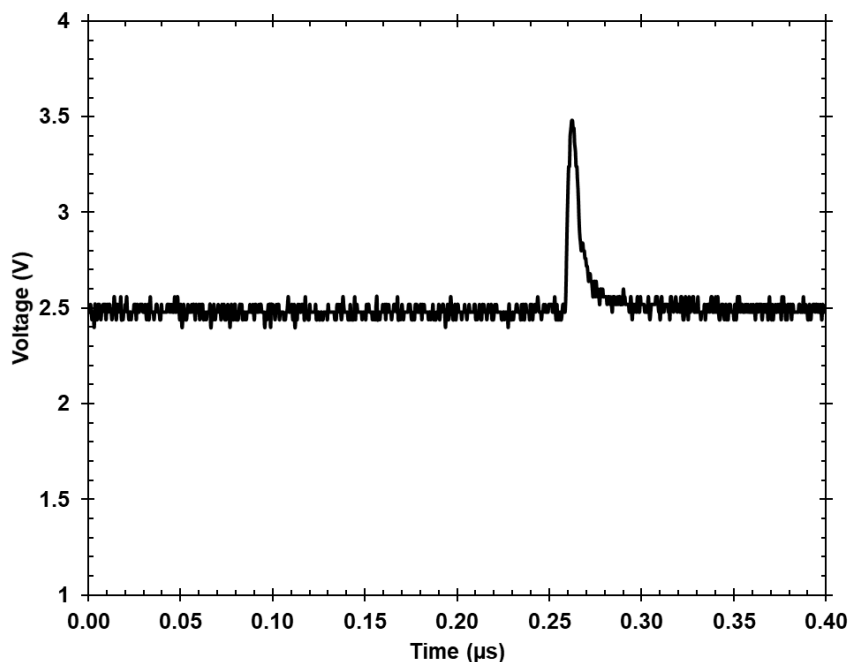


Figure 2. Example of a positive-going SET with roughly the maximum observed amplitude.

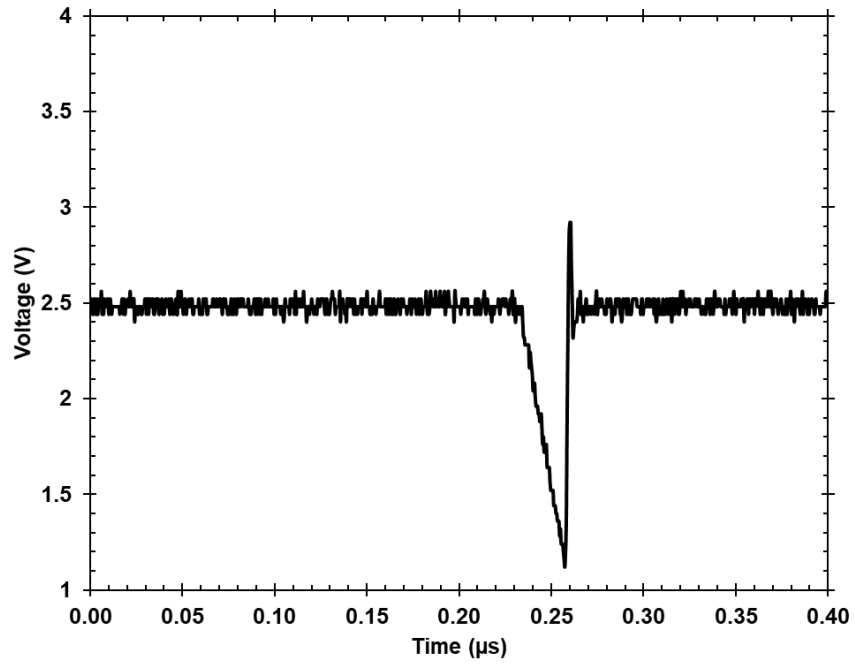


Figure 3. Example of a negative-going SET with roughly the maximum observed negative amplitude.

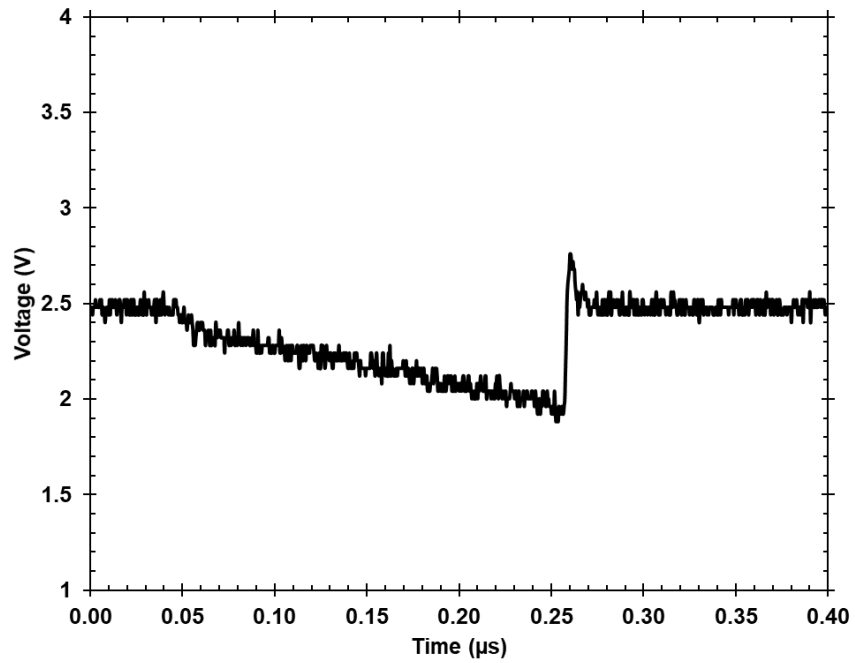


Figure 4. Example of an SET with roughly the maximum observed width.

