


NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U. S. space program and to encourage their commercial application. Copies are available to the public from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Circuit Prevents Overcharging of Secondary Cell Batteries

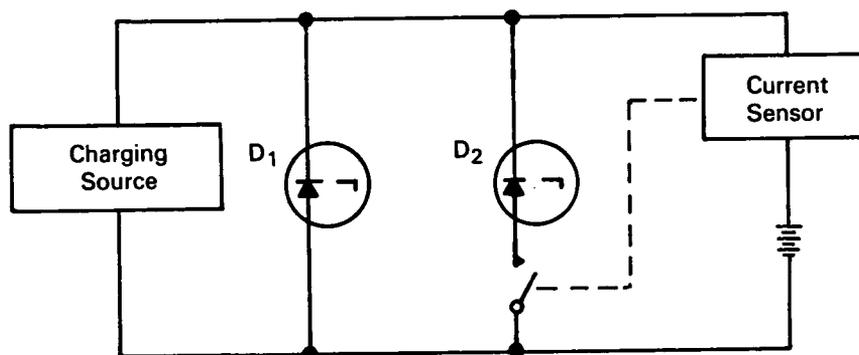

The problem:

To design a circuit that will prevent any cell, such as a sealed silver-cadmium or silver-zinc cell, in a series battery from overcharging, with consequent internal gas buildup. The resulting pressure can cause a sealed cell to leak electrolyte and thereby lead to failure of the entire battery.

While it is relatively simple to limit the charging voltage on a single cell, it is difficult to limit the charging voltage on each cell of a number connected in series. When charging voltage is applied to a battery, varying potential differences will occur across the individual cells. This cell unbalance may lead to overcharging of one or more cells of a series. Systems which have attempted to solve this problem by first charging at a high current and then at a trickle rate have not been entirely satisfactory. These systems only allow a longer time before overcharging can occur.

The solution:

A circuit that detects the battery charging current and reduces the charging voltage to the open-circuit

voltage of the battery when this current falls to a predetermined value. The voltage control depends on the experimentally observed fact that the charging current falls significantly when the battery nears its fully charged state.

How it's done:

The circuit includes a current sensor connected in series with the battery to be charged and a voltage regulator connected in parallel with this series combination. The regulator consists of two parallel-connected zener diodes, D_1 and D_2 . Diode D_2 , which has a lower breakdown voltage than D_1 , is connected in series with a switch.

In operation, the charging source applies a voltage at the breakdown value of D_1 . As the battery approaches its fully charged state, the current drops. The current sensor detects this current drop and closes the switch. This closure provides a parallel path through D_2 . The breakdown voltage of D_2 is chosen so as to maintain the battery at its open-circuit value. Hence, this second path drops the applied voltage and thereby prevents the overcharge of the battery.

(continued overleaf)

Notes:

1. Various types of current sensor and voltage regulator can be used to prevent overcharging of a battery of secondary cells in accordance with the principle of dropping the charging voltage when the charging current falls to a predetermined value.
2. Inquiries concerning this invention may be directed to:

Technology Utilization Officer
Goddard Space Flight Center
Greenbelt, Maryland 20771
Reference: B66-10492

Patent status:

Inquiries about obtaining rights for the commercial use of this invention may be made to NASA, Code GP, Washington, D.C. 20546.

Source: Thomas J. Hennigan,
Nelson H. Potter, and Kenneth O. Sizemore
(GSFC-454)