## Technology Focus: Sensors


## **(a)** Gas-Tolerant Device Senses Electrical Conductivity of Liquid Bubbles are not trapped in this device.

Marshall Space Flight Center, Alabama

The figure depicts a device for measuring the electrical conductivity of a flowing liquid. Unlike prior such devices, this one does not trap gas bubbles entrained in the liquid.

Usually, the electrical conductivity of a liquid is measured by use of two electrodes immersed in the liquid. A typical prior device based on this concept contains large cavities that can trap gas. Any gas present between or near the electrodes causes a significant offset in the conductivity reading and, if the gas becomes trapped, then the offset persists.

Extensive tests on two-phase (liquid/gas) flow have shown that in the case of liquid flowing along a section of tubing, gas entrained in the liquid is not trapped in the section as long as the inner wall of the section is smooth and continuous, and the section is the narrowest tubing section along the flow path. The design of the device is based on the foregoing observation: The electrodes and the insulators separating the electrodes constitute adjacent parts of the walls of a tube. The bore of the tube is machined to make the wall smooth and to provide a straight flow path from the inlet to the outlet. The diameter of the electrode/insulator tube assembly is less than the diameter

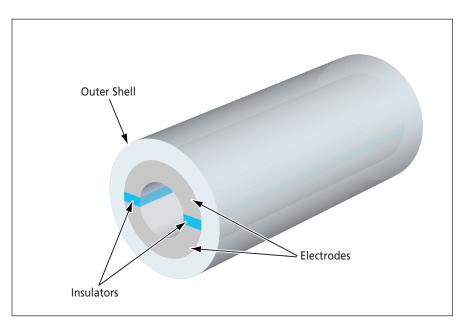

A **Straight Tube With a Smooth Inner Wall** is formed by an assembly of electrodes and insulators in a hollow cylindrical configuration. The electrical conductivity of a liquid flowing along the tube is measured by use of the electrodes.

of the inlet or outlet tubing. An outer shell contains the electrodes and insulators and constitutes a leak and pressure barrier. Any gas bubble flowing through this device causes only a momentary conductivity offset that is filtered out by software used to process the conductivity readings. This work was done by Edward W. O'Connor of Hamilton Sundstrand for Marshall Space Flight Center. For further information, contact Chris Flynn, Hamilton Sundstrand Company New Technology Representative, at chris.flynn@hs.utc.com. Refer to MSC-31931.

## Nanoactuators Based on Electrostatic Forces on Dielectrics

## Large force-to-mass ratios could be achieved at the nanoscale.

NASA's Jet Propulsion Laboratory, Pasadena, California

Nanoactuators of a proposed type would exploit the forces exerted by electric fields on dielectric materials. As used here, "nanoactuators" includes motors, manipulators, and other active mechanisms that have dimensions of the order of nanometers and/or are designed to manipulate objects that have dimensions of the order of nanometers.

The underlying physical principle can be described most simply in terms of the

example of a square parallel-plate capacitor in which a square dielectric plate is inserted part way into the gap between the electrode plates (see Figure 1). Using the conventional approximate equations for the properties of a parallel-plate capacitor, it can readily be shown that the electrostatic field pulls the dielectric slab toward a central position in the gap with a force, *F*, given by

 $F = V^2(\varepsilon_1 - \varepsilon_2)a/2d,$ 

where *V* is the potential applied between the electrode plates,  $\varepsilon_1$  is the permittivity of the dielectric slab,  $\varepsilon_2$  is the permittivity of air, *a* is the length of an electrode plate, and *d* is the thickness of the gap between the plates.

Typically, the force is small from our macroscopic human perspective. The above equation shows that the force depends on the ratio between the capacitor dimensions but does not depend on