NASA TECHNICAL NOTE

NASA TN D-8036 c. 1

2. u|u

NASA TN D-8036

LOAN COPY: R TO
AFWL TECHNIC ARY
KIRTLAND AF
0133856
TECH LIBRARY KAFB, NM

4.

EVALUATION OF A LINEAR WASHOUT FOR SIMULATOR MOTION CUE PRESENTATION DURING LANDING APPROACH

Russell V. Parrish and Dennis J. Martin, Jr.

Langley Research Center
Hampton, Va. 23665

3.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION • WASHINGTON, D. C. • OCTOBER 1975

5.

TECH LIBRARY KAFB, NM

0133856

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.
NASA TN D-8036		

4. Title and Subtitle	5. Report Date
EVALUATION OF A LINEAR WASHOUT FOR SIMULATOR MOTION CUE PRESENTATION DURING LANDING APPROACH	October 1975
	6. Performing Organization Code
7. Author(s)	8. Performing Organization Report No.
Russell V. Parrish and Dennis J. Martin, Jr.	L-9984
9. Performing Organization Name and Address	10. Work Unit No.
NASA Langley Research Center Hampton, Va. 23665	504-09-41-01
	11. Contract or Grant No.
12. Sponsoring Agency Name and Address	13. Type of Report and Period Covered
National Aeronautics and Space Administration Washington, D.C. 20546	Technical Note
	14. Sponsoring Agency Code

15. Supplementary Notes

Dennis J. Martin, Jr., is an employee of Electronic Associates, Inc., Hampton, Va.

16. Abstract

The comparison of a fixed-base versus a five-degree-of-freedom motion base simulation (the heave cue was not presented) of a 737 conventional take-off and landing (CTOL) aircraft performing instrument landing system (ILS) landing approaches has been used to evaluate a linear motion washout technique. The fact that the pilots felt that the addition of motion increased the pilot workload and this increase was not reflected in the objective data results, indicates that motion cues, as presented, are not a contributing factor to root-mean-square (rms) performance during the landing approach task. Subjective results from standard maneuvering about straight-and-level flight for specific motion cue evaluation revealed that the longitudinal channels (pitch and surge) and possibly the yaw channel produce acceptable motions. The roll cue representation, involving both roll and sway channels, was found to be inadequate for large roll inputs, as used for example, in turn entries.

17. Key Words (Suggested by Author(s))	18. Distribution Statement
Landing approach Washout system Coordinated washout	Unclassified – Unlimited Subject Category 05

19. Security Classif. (of this report)	20. Security Classif. (of this page)	21. No. of Pages	22. Price*
Unclassified	Unclassified	55	$4.25

*For sale by the National Technical Information Service, Springfield, Virginia 22161

EVALUATION OF A LINEAR WASHOUT FOR SIMULATOR MOTION CUE PRESENTATION DURING LANDING APPROACH

Russell V. Parrish and Dennis J. Martin, Jr.*
Langley Research Center

SUMMARY

The comparison of a fixed-base versus a five-degree-of-freedom motion base simulation (the heave cue was not presented) of a 737 conventional take-off and landing (CTOL) aircraft performing instrument landing system (ILS) landing approaches has been used to evaluate a linear motion washout technique. The fact that the pilots felt that the addition of motion increased the pilot workload and this increase was not reflected in the objective data results, indicates that motion cues, as presented, are not a contributing factor to root-mean-square (rms) performance during the landing approach task. Subjective results from standard maneuvering about straight-and-level flight for specific motion cue evaluation revealed that the longitudinal channels (pitch and surge) and possibly the yaw channel produce acceptable motions. The roll cue representation, involving both roll and sway channels, was found to be inadequate for large roll inputs, as used for example, in turn entries.

INTRODUCTION

The major factor affecting the quality of a motion simulation in comparison with a fixed-base simulation of an aircraft, aside from the physical characteristics of the hardware, is the washout scheme. The washout scheme is used to constrain the motion drives to be within the physical capabilities of the motion base and still maintain the fidelity of the motion cues provided to the simulator pilot.

The comparison of a fixed-base versus a five-degree-of-freedom motion base simulation of a 737 CTOL aircraft during landing approach has been used to evaluate a linear motion washout technique. The motion software utilized in the study is described in reference 1 and the hardware (the motion base) in references 2 and 3. The linear washout scheme was the Langley adapted version of Schmidt and Conrad's linear coordinated washout circuitry (refs. 4 and 5). The evaluation process consisted of the collection of objective

*Electronic Associates, Inc., Hampton, Va.

and subjective data from 90 simulated landing approaches, as well as subjective data from standard maneuvering about straight-and-level flight for specific motion cue evaluation.

The landing approach task was selected for the collection of the objective data, despite the suggestion in reference 4 that the task might be a poor one for motion evaluation, for several reasons:

(1) Objective performance measures are readily available

(2) Landing approach simulation with motion is widespread in use

(3) Statistical data could provide verification of the previous suggestion of reference 4

SYMBOLS

Values are given in both SI and U.S. Customary Units. The measurements and calculations were made in U.S. Customary Units.

A,B,C	main effects in analysis of variance
AB,AC,BC	two factor interactions in analysis of variance
ABC	three factor interaction in analysis of variance
A_1,A_2,A_3	acceleration lead parameters for translational channel lag compensation, sec^2
a_1,a_2,a_3	damping parameters for second-order translational washout filters, rad/sec
B_1,B_2,B_3	velocity lead parameters for translational channel lag compensation, sec
b_1,b_2,b_3	frequency parameters for second-order translational washout filters, rad/sec^2
C_1,C_2,C_3	translational acceleration braking parameters, sec^{-1}
$\bar{c}$	mean aerodynamic chord, m (ft)
f	scale factor, deg/rad

$f^*_{c,x}, f^*_{c,y}$	body-axis longitudinal and lateral accelerations at centroid location after low-pass filtering, m/sec^2 (ft/sec^2)
$f_{c,z}$	body-axis vertical acceleration (referenced about 1g) at centroid location after high-pass filtering, m/sec^2 (ft/sec^2)
$f_{i,x}, f_{i,y}, f_{i,z}$	inertial axis translational acceleration commands prior to translational washout, m/sec^2 (ft/sec^2)
$f^*_{i,x}, f^*_{i,y}$	inertial axis specific force error signals, m/sec^2 (ft/sec^2)
$f'_{i,x}, f'_{i,y}, f'_{i,z}$	components in inertial axis of filtered body-axis vertical acceleration centroid location, m/sec^2 (ft/sec^2)
$f''_{i,z}$	artificial yaw error signal, m/sec^2 (ft/sec^2)
$f_{s,x}, f_{s,y}$	body-axis longitudinal and lateral accelerations at centroid location, m/sec^2 (ft/sec^2) or g units; Fsx and Fsy in the computer plots
$f_{s,z}$	body-axis vertical acceleration (referenced about 1g) at centroid location, m/sec^2 (ft/sec^2) or g units; Fsz in the computer plots
f_x, f_y, f_z	aircraft-body-axis translational accelerations, m/sec^2 (ft/sec^2)
$f_{z,c}$	body-axis translational acceleration at centroid location, m/sec^2 (ft/sec^2)
G_1	glide-slope error gain
g	acceleration due to gravity, 1g = 9.8 m/sec^2 (32.2 ft/sec^2)
h	altitude, m (ft)
h_c	commanded altitude, m (ft)
h_o	height of aircraft c.g. at touchdown, m (ft)
K_0	heading error gain

K_1	gain parameter of roll flight director filter
K_2	damping parameter of roll flight director filter, deg/sec
K_3	frequency parameter of roll flight director filter, deg/sec^2
k_p,k_q,k_r	scaling parameters for angular rates
$k_{p,T,1},k_{q,T,1},k_{r,1}$	parameters of signal-shaping network, m^{-1} (ft^{-1})
$k_{p,T,2},k_{q,T,2},k_{r,2}$	parameters of signal-shaping network, sec
$k_{p,T,3},k_{q,T,3},k_{r,3}$	parameters of signal-shaping network, sec^{-1}
$k_{z,1},k_{z,2}$	gain parameters of vertical channel high-pass filter
$k_{\theta,1},k_{\theta,2}$	gain parameters of longitudinal channel low-pass filter
$k_{\phi,1},k_{\phi,2}$	gain parameters of lateral channel low-pass filter
$k_{\psi,l},k_{\theta,l},k_{\phi,l}$	lead parameters for rotational channel lag compensation, sec
L_y	localizer error rate limit, deg/sec
L_ϕ	flight director roll limit, deg/sec
p,q,r	body-axis angular velocity commands, rad/sec or deg/sec; P, Q, and R in computer plots
p',q',r'	body-axis angular tilt velocity, rad/sec
p'',q'',r''	scaled body-axis aircraft angular velocities, rad/sec
p_a,q_a,r_a	body-axis aircraft angular velocities, rad/sec
$\dot{p}_a$	body-axis aircraft roll acceleration, rad/sec
$\dot{p}_m$	body-axis roll acceleration as measured by instrument mounted on motion simulator, rad/sec^2 or deg/sec^2

R	range from runway, m (ft)
R_x, R_y, R_z	centroid location with respect to c.g., m (ft)
S_1	pitch input to pitch flight director, deg
S_2	output of first order pitch flight director, deg
s	Laplace operator
t	time, sec
t_o	starting time for roll flight director operation
V_ℓ	velocity limit, m/sec (ft/sec)
x_l	Earth-axis longitudinal coordinate of aircraft c.g., m (ft)
x, y, z	commanded inertial translational position of motion simulator, m (ft)
$\hat{x}, \hat{y}, \hat{z}$	commanded translational positions after compensation, m (ft)
x_{LF}, y_{LF}, z_{LF}	scale factors on position limits
$\ddot{x}_b, \ddot{y}_b, \ddot{z}_b$	intermediate inertial axis translational acceleration commands, m/sec^2 (ft/sec^2)
x_d, y_d, z_d	inertial-axis translational position commands, m (ft)
x_z, y_z, z_z	inertial-axis position limits for translational channels, m (ft)
$\ddot{x}_l, \ddot{y}_l, \ddot{z}_l$	inertial-axis acceleration limits for translational channels, m/sec^2 (ft/sec^2)
x_o	longitudinal coordinate of runway touchdown point, m (ft)
x_p, y_p, z_p	coordinates of pilot's station with respect to c.g. in body-axis system, m (ft)

$x_{p,c}, y_{p,c}, z_{p,c}$	coordinates of centroid location with respect to pilot's station in the body-axis system, m (ft)
x_r	x-distance of aircraft c.g. from runway, m (ft)
y_l	Earth-axis lateral coordinate of aircraft c.g., m (ft)
y_b	distance behind runway touchdown point of localizer beam origin, m (ft)
y_o	lateral coordinate of runway touchdown point, m (ft)
y_r	y-distance of aircraft c.g. from runway, m (ft)
z_{neut}	actuator extension for selected neutral point, m (ft)
γ_c	commanded glide-slope angle, deg
Δt	time step size, sec
δ_a	aileron deflection angle, rad
ϵ_h	vertical glide-slope error, m (ft)
ϵ_y	localizer error, deg
$\epsilon_{y,l}$	localizer error lag, deg
$\epsilon_{y,\ell}$	rate limited localizer error, deg
ϵ_γ	glide-slope error, deg
ϵ_ψ	heading error, deg
$\epsilon_{\psi,1}$	scaled heading error, deg
θ_a	actual aircraft pitch angle, deg
θ_c	commanded pitch angle, deg
θ_s	pitch command signal, deg

$\xi_{z,1}$	damping parameter for vertical channel high-pass filter
ξ_θ,ξ_ϕ	damping parameters for longitudinal and lateral channel low-pass filters
ϕ_a	actual aircraft roll angle, deg
ϕ_c	commanded roll angle, deg
ϕ_f	roll flight director filter input, deg
ϕ_i	intermediate roll command angle, deg
ϕ_s	roll command signal, deg
$\phi_1,\dot{\phi}_1,\ddot{\phi}_1$	variables of roll flight director filter, deg
ψ,θ,ϕ	commanded inertial angular position of motion simulator, rad
$\hat{\psi},\hat{\theta},\hat{\phi}$	commanded angular positions after compensation, rad
ψ_a	actual aircraft heading, deg
ψ_c	commanded heading, deg
$\dot{\psi}_T,\dot{\theta}_T,\dot{\phi}_T$	commanded inertial tilt rates, rad/sec
$\omega_{n,z,1}$	frequency parameter of vertical channel high-pass filter, rad/sec
$\omega_{n,\theta},\omega_{n,\phi}$	frequency parameter of longitudinal and lateral channel low-pass filters, rad/sec

A dot over a variable indicates the time derivative of the variable.

WASHOUT CIRCUITRY

The adapted version of Schmidt and Conrad's linear coordinated washout circuitry used in this study is shown in figure 1 in block diagram form. The detailed equations are presented in appendix A. The function of the circuitry is to represent the translational accelerations and the rotational rates of the simulated aircraft while constraining the motion commands to be within the hardware capabilities. The concept of this coordinated

washout circuitry is to represent longitudinal and lateral translational cues by utilizing both translational and rotational motions and to obtain rotational washout through elimination of the false gravitational g cues that would be induced by a rotational movement.

The selection of the parameters for the washout circuitry began with employment of the values suggested in figure A.7 of reference 5. A representative "worst case" ILS approach was made with the fixed-base simulator and the resulting translational accelerations and rotational rates were placed on tape. The tape was then used iteratively to drive the motion software for parameter variation.

Initial modification of the parameters was made to constrain the motions to remain within the motion limits of the hardware. Further modification of the parameters to improve the fidelity of the motion cues, in terms of time history comparisons of aircraft motion cues (simulated flight data) with washout commands to represent these cues, was made next. Final determination of the parameters was then made based on the subjective opinions of three participating research pilots. The major emphasis of this portion of the parameter selection process was placed on the roll channel parameters which will be discussed in a later section.

TASK CONDITIONS AND DATA BASE

Figure 2 illustrates the ILS task, which consisted of (1) a transition to the localizer beam, (2) a transition to the glide slope, and (3) the ensuing approach to about 76 m (250 ft). Three approach conditions were provided: the standard approach described above, the standard approach with instantaneous encounter of a weather front (a 10-knot cross wind with moderate turbulence), and the standard approach with the occurrence of an engine failure. Typical time histories of comparisons of aircraft motion cues (simulated flight data) with washout commands to represent those cues are presented in figures 3, 4, and 5 for the three approach conditions. These figures are intended to illustrate the levels of aircraft motion involved in the simulated task as well as the amount provided by the motion base.

The approaches were flown under fixed-base conditions and under moving-base conditions with the washout parameters of reference 1 as shown in table I. Five runs were made for each of the three pilots at each condition. Motion was restricted to five degrees of freedom because (1) extreme hydraulic noise is induced by the heave motion of the synergistic base (all six actuators have to move alike to present a heave cue) and (2) only a small amount of vertical cue was available.

The small amount of vertical cue available is due to a combination of the position limits of the motion base and the short-period frequency of the 737 aircraft in the landing approach configuration. Since the position limits of the synergistic motion base change as

the orientation of the base varies, the position limits used in determining the linear washout parameters must be conservative. For the motions involved in this study, the vertical position limits were chosen to be 0.45 m (1.5 ft). The low-frequency content of the normal acceleration of the aircraft (less than 1 rad/sec, neglecting turbulence) is due to the low short-period frequency. (See table II.) The amount of vertical cue available for motion simulation is thus less than 0.05g (the product of amplitude and frequency squared). The participating pilots felt that the vertical cue available was not worth the noise distraction.

During the performance of the landing approach task under the preceding conditions, root-mean-square (rms) data were collected over two regimes. A short-duration regime, intended to reflect the immediate effect of the weather front and the engine-failure conditions, and a long-duration regime, to evaluate total performance, were used. The rms values were obtained for deviations of the glide slope, localizer, pitch command bar, roll command bar, and speed command bar. The equations for the flight director used in this study are presented in appendix B.

Subjective data consisted of revised Cooper-Harper ratings of the ILS task as shown in table III (ref. 6) and pilot comments solicited during objective data collection. In addition, standard maneuvers about straight-and-level flight were also used to generate subjective pilot evaluation data of the motion cues.

OBJECTIVE DATA RESULTS

The design of the experiment for objective data consisted of the $2 \times 3 \times 3$ factorial design (ref. 7). The fixed-effect factors are pilots, approach conditions, and motion versus fixed-base operation. The results of the analysis of variance for each of the 10 separate rms measurements (deviations of glide slope, localizer, pitch command bar, roll command bar, and speed command bar for short and long durations) are shown in table IV. Significance of the one-tailed F-tests is indicated by an asterisk for the 5-percent level and a double asterisk for the 1-percent level.

The results indicate significant statistical differences in mean performances between pilots and also between approaches. No significant differences in mean performances are found between motion and fixed-base operation. The occasional statistical significance of the two factor interaction AC indicates that the differences between pilots varied with the approach condition over all motion conditions, or alternately, the differences in performance between approaches varied from pilot to pilot, regardless of the motion condition, for some of the performance measures.

SUBJECTIVE DATA RESULTS

Although the subjective data obtained from the pilots ranged the gamut from complete dislike of the motion used to something approaching delight, two points of agreement were shared by all three pilots: (1) the addition of motion increased the pilot workload (the pilots believed their ability to make the precision inputs required to null the flight director command bars was lessened under motion conditions) and (2) the roll motion is borderline, if not unacceptable, for large roll inputs. While the first point of agreement is not borne out by the objective data results, the revised Cooper-Harper ratings presented in table V clearly illustrate this belief (increased pilot workload is reflected in an increased Cooper-Harper rating), and possibly suggest that the selected ILS task is a poor one for motion evaluation in terms of objective data (substantiating the opinion expressed in ref. 4).

The second point of agreement, the poor representation of roll, can be substantiated with objective data. The problem is a combination of hardware weakness and software performance. The hardware weakness, a turn-around bump (a problem common to most motion systems), exists in all degrees of freedom, but was only noticed by the pilots in the roll channel, perhaps due to the frequency and amplitude of the roll inputs. This problem is documented in figure 6 with a time history taken from an accelerometer mounted on the motion-base cockpit to measure $\dot{p}_m$. The base was driven with a sine wave of 4° amplitude and at a frequency of 1.5 rad/sec.

The software performance problem is a result of the difficulty in presenting a roll cue on a motion base, as discussed in reference 8. A negative roll angle induces a positive sway force $f_{s,y}$ in a motion simulator, due to the gravity vector. As may be seen from the flight data of figures 3, 4, and 5, $f_{s,y}$ and p are in phase, and thus translational acceleration is necessary to (1) offset the misalinement of the gravity vector due to the roll cue and (2) present the side-force cue.

The parameters for the coordinated roll channel, as picked by the pilots involved, yield the results presented in figure 7 for a pulse input on the aileron. The fact that the negative peak of p is larger than the positive peak could give the pilot the impression that the net result of the maneuver was a left bank, rather than a right bank.

The parameters of the roll channel used in the study have an effective natural frequency of about 0.1 rad/sec. Figures 8 and 9 display the washout response for the pulse input of figure 7 for effective natural frequencies of 0.3 and 0.5 rad/sec, respectively. This range of frequency is typically employed in classical circuits (ref. 5). Subjectively, the pilots preferred the frequency of 0.1 rad/sec. All frequencies tried gave the impression of a left bank, rather than a right bank, to two of the three pilots. This impression

was obtained only for large roll inputs, such as used in turn entries, and the false bank was not noted during the control inputs required for the ILS task.

The lack of sufficient lateral travel for sway representation was not noticed subjectively by any of the participating pilots, even though $f_{s,y}$ is 180° out of phase for the chosen parameter values. Parameters that bring $f_{s,y}$ in phase result in p representation being 180° out of phase, a situation considered by the pilots to be intolerable.

Table VI presents the subjective ratings of the three pilots of the motion cues encountered during maneuvering about straight-and-level flight. Pilot 1 has had the only experience to date in the flight version of the simulated aircraft, and his general comments were that the motion felt like a long, narrow airplane that wallows, although large roll inputs felt "mechanical" (artificial). He felt that the yaw cue was the best of any motion simulator he had flown. Pilot 2 has had little experience in long-bodied airplanes and felt that generally the motions were jerky and confusing. Pilot 3 felt that the motions were unnatural and distracting, rather than helpful, and did not feel like an airplane. However, he would rather fly with motion because the confusion increases the workload level.

CONCLUDING REMARKS

The objective and subjective results of this study lead to two general conclusions, one of which is concerned with the ILS task and the other with the question of motion validation of the linear washout. The fact that the pilots all felt that the addition of motion increased the workload, and yet this increase in workload did not deteriorate the pilot performance of the task, indicates that motion cues, as presented, are not important in terms of rms performance measures during instrument landing system landing approaches.

The question of motion evaluation can best be discussed in terms of the subjective ratings of the individual cues. The roll representation must be improved by changes in either the software, the hardware, or both. The yaw cue may or may not be acceptable, with the issue of pilot experience in long-bodied aircraft intruding on the evaluation. The same factor could be in force on the evaluation of the pitch cue. The motion cues with throttle change were acceptable.

Langley Research Center
National Aeronautics and Space Administration
Hampton, Va. 23665
July 11, 1975

APPENDIX A

DETAILED EQUATIONS FOR THE WASHOUT CIRCUIT

The following is a block-by-block list of equations corresponding to figure 1:

Centroid transformation:

$$R_x = x_p + x_{p,c}$$

$$R_y = y_p + y_{p,c}$$

$$R_z = z_p + z_{p,c}$$

$$f_{s,x} = f_x - \left(q_a^2 + r_a^2\right)R_x + \left(q_a p_a - \dot{r}_a\right)R_y + \left(r_a p_a + \dot{q}_a\right)R_z$$

$$f_{s,y} = f_y + \left(p_a q_a + \dot{r}_a\right)R_x - \left(p_a^2 + r_a^2\right)R_y + \left(r_a q_a - \dot{p}_a\right)R_z$$

$$f_{z,c} = f_z + \left(p_a q_a - \dot{q}_a\right)R_x + \left(q_a r_a + \dot{p}_a\right)R_y - \left(p_a^2 + q_a^2\right)R_z$$

Variation about 1g:

$$f_{s,z} = f_{z,c} + g$$

High-pass filter:

$$f_{c,z} = \frac{k_{z,1}f_{s,z} - 2\xi_{z,1}\omega_{n,z,1}\int f_{c,z}\,dt - \omega_{n,z,1}^2\iint f_{c,z}\,dt\,dt}{k_{z,2}}$$

Low-pass filter:

$$k_{\theta,2}\ddot{f}_{c,x}^* = k_{\theta,1}f_{s,x} - 2\xi_\theta\omega_{n,\theta}\dot{f}_{c,x}^* - \omega_{n,\theta}^2 f_{c,x}^*$$

$$k_{\phi,2}\ddot{f}_{c,y}^* = k_{\phi,1}f_{s,y} - 2\xi_\phi\omega_{n,\phi}\dot{f}_{c,y}^* - \omega_{n,\phi}^2 f_{c,y}^*$$

APPENDIX A

Body to inertial transformation, high-frequency components:

$$f'_{i,x} = f_{c,z}(\cos\phi \sin\theta \cos\psi + \sin\phi \sin\psi)$$

$$f'_{i,y} = f_{c,z}(\cos\phi \sin\theta \sin\psi - \sin\phi \cos\psi)$$

$$f'_{i,z} = f_{c,z}(\cos\phi \cos\theta)$$

Body to inertial transformation, low-frequency components:

$$f^*_{i,x} = f^*_{c,x}(\cos\theta \cos\psi) + f^*_{c,y}(\sin\phi \sin\theta \cos\psi - \cos\phi \sin\psi)$$
$$- g(\cos\phi \sin\theta \cos\psi + \sin\phi \sin\psi)$$

$$f^*_{i,y} = f^*_{c,x}(\cos\theta \sin\psi) + f^*_{c,y}(\sin\phi \sin\theta \sin\psi + \cos\phi \cos\psi)$$
$$- g(\cos\phi \sin\theta \sin\psi - \sin\phi \cos\psi)$$

Sum of low- and high-frequency components:

$$f_{i,x} = f'_{i,x} + f^*_{i,x}$$

$$f_{i,y} = f'_{i,y} + f^*_{i,y}$$

$$f_{i,z} = f'_{i,z}$$

Signal-shaping network:

$$\dot{\theta}_T = k_{q,T,1}k_{q,T,2}f^*_{i,x} + k_{q,T,1}\int f^*_{i,x}\,dt + k_{q,T,1}k_{q,T,3}\iint f^*_{i,x}\,dt\,dt$$

$$\dot{\phi}_T = -k_{p,T,1}k_{p,T,2}f^*_{i,y} - k_{p,T,1}\int f^*_{i,y}\,dt - k_{p,T,1}k_{p,T,3}\iint f^*_{i,y}\,dt\,dt$$

$$\dot{\psi}_T = k_{r,1}k_{r,2}f''_{i,z} + k_{r,1}\int f''_{i,z}\,dt + k_{r,1}k_{r,3}\iint f''_{i,z}\,dt\,dt$$

APPENDIX A

Inertial to body transformation:

$$p' = \dot{\phi}_T(\cos\theta\cos\psi) + \dot{\theta}_T(\cos\theta\sin\psi) - \dot{\psi}_T(\sin\theta)$$

$$q' = \dot{\phi}_T(\sin\phi\sin\theta\cos\psi - \cos\phi\sin\psi) + \dot{\theta}_T(\sin\phi\sin\theta\sin\psi + \cos\phi\cos\psi)$$

$$+ \dot{\psi}_T(\sin\phi\cos\theta)$$

$$r' = \dot{\phi}_T(\cos\phi\sin\theta\cos\psi + \sin\phi\sin\psi) + \dot{\theta}_T(\cos\phi\sin\theta\sin\psi - \sin\phi\cos\psi)$$

$$+ \dot{\psi}_T(\cos\phi\cos\theta)$$

Scale airplane angular rates:

$$p'' = k_p p_a$$

$$q'' = k_q q_a$$

$$r'' = k_r r_a$$

Sum of airplane and tilt rates:

$$p = p'' + p'$$

$$q = q'' + q'$$

$$r = r'' + r'$$

Transformation to Euler rates:

$$\dot{\phi} = p + q\sin\phi\tan\theta + r\cos\phi\tan\theta$$

$$\dot{\theta} = q\cos\phi - r\sin\phi$$

$$\dot{\psi} = (q\sin\phi + r\cos\phi)\sec\theta$$

APPENDIX A

Angular lead compensation:

$$\hat{\psi} = \psi + k_{\psi,l}\dot{\psi}$$

$$\hat{\theta} = \theta + k_{\theta,l}\dot{\theta}$$

$$\hat{\phi} = \phi + k_{\phi,l}\dot{\phi}$$

Translational lead compensation:

$$\hat{x} = x_d + A_1\ddot{x}_d + B_1\dot{x}_d$$

$$\hat{y} = y_d + A_2\ddot{y}_d + B_2\dot{y}_d$$

$$\hat{z} = z_d + A_3\ddot{z}_d + B_3\dot{z}_d$$

Translational washout:

$$\ddot{x}_d = f_{i,x} - a_1\dot{x}_d - b_1x_d$$

$$\ddot{y}_d = f_{i,y} - a_2\dot{y}_d - b_2y_d$$

$$\ddot{z}_d = f_{i,z} - a_3\dot{z}_d - b_3z_d$$

Limit prediction based on current position:

See reference 1 for equations and derivation.

APPENDIX B

FLIGHT DIRECTOR EQUATIONS

The following is a list of the equations for the flight director used in this study:

Input equations:

$$x_r = \left(x_l - x_o\right) \cos \psi_c + \left(y_l - y_o\right) \sin \psi_c$$

$$y_r = -\left(x_l - x_o\right) \sin \psi_c + \left(y_l - y_o\right) \cos \psi_c$$

$$R = \left(x_l^2 + y_l^2\right)^{1/2}$$

$$h_c = R \tan \gamma_c + h_o$$

$$\epsilon_h = h - h_c$$

$$\epsilon_\gamma = f \tan^{-1} \frac{\epsilon_h}{R}$$

$$\epsilon_\psi = \psi_a - \psi_c$$

$$\epsilon_y = f \tan^{-1} \frac{y_r}{R + y}$$

Pitch flight director:

$$G_1 = \begin{cases} 0.14\ (h-50) & (h < 100) \\ h/15 & (h \geqq 100) \end{cases}$$

G_1 limited to $[0, 100]$

$$S_1 = -(\theta_a + 2)$$

$$\dot{S}_2 = \frac{S_1 - S_2}{15} \qquad \left(\text{Initial condition: } S_2 = S_1\right)$$

$$\theta_c = G_1 \epsilon_\gamma - S_2$$

θ_c limited to $[-12, 12]$

$$\theta_s = \theta_c + S_1$$

Roll flight director:

$$\epsilon_{y,\ell} = \frac{\epsilon_y - \epsilon_{y,\ell}}{\Delta t} \qquad \left(\text{Initial condition: } \epsilon_1 = 0\right)$$

$\epsilon_{y,\ell}$ limited to $\left[-L_y, L_y\right]$

$$\epsilon_{y,\ell} = \epsilon_{y,\ell} + \Delta t \epsilon_{y,\ell}$$

$$\epsilon_{\psi,1} = K_0 \epsilon_\psi$$

$$\phi_f = \epsilon_\psi - 65\epsilon_{y,\ell} + 1.6\psi_a$$

$$\ddot{\phi}_1 = K_1\phi_f - K_2\dot{\phi}_1 - K_3\phi_1 \qquad \left(\text{Initial conditions: } \dot{\phi}_1 = 0 \text{ and } \phi_1 = 8.499\phi_f\right)$$

$$\phi_i = 21.2\epsilon_{y,\ell} + \epsilon_\psi - \dot{\phi}_1$$

ϕ_i limited to $\left[-30, 30\right]$

$$\phi_c = \phi_i - \epsilon_\psi$$

ϕ_c limited to $\left[-L_\phi, L_\phi\right]$

$$\phi_s = \phi_c - \phi_a$$

$t - t_o \leq 90$	$t - t_o > 90$
$L_y = 0.4$	$L_y = 0.12$
$L_\phi = 25$	$L_\phi = 15$
$K_0 = 2.8$	$K_0 = 3.8$
$K_1 = 2.833$	$K_1 = 3.5714$
$K_2 = 2.867$	$K_2 = 3.534$
$K_3 = 0.3333$	$K_3 = 0.7518$

REFERENCES

1. Parrish, Russell V.; Dieudonne, James E.; and Martin, Dennis J., Jr.: Motion Software for a Synergistic Six-Degree-of-Freedom Motion Base. NASA TN D-7350, 1973.
2. Dieudonne, James E.; Parrish, Russell V.; and Bardusch, Richard E.: An Actuator Extension Transformation for a Motion Simulator and an Inverse Transformation Applying Newton-Raphson's Method. NASA TN D-7067, 1972.
3. Parrish, Russell V.; Dieudonne, James E.; Martin, Dennis J., Jr.; and Copeland, James L.: Compensation Based on Linearized Analysis for a Six-Degree-of-Freedom Motion Simulator. NASA TN D-7349, 1973.
4. Schmidt, Stanley F.; and Conrad, Bjorn: Motion Drive Signals for Piloted Flight Simulators. NASA CR-1601, 1970.
5. Schmidt, Stanley F.; and Conrad, Bjorn: A Study of Techniques for Calculating Motion Drive Signals for Flight Simulators. Rep. No. 71-28, Analytical Mechanics Associates, Inc., July 1971. (Available as NASA CR-114345.)
6. Harper, Robert P., Jr.; and Cooper, George E.: A Revised Pilot Rating Scale for the Evaluation of Handling Qualities. Stability and Control, Pt. I, AGARD CP No. 17, Sept. 1966, pp. 227-245.
7. Steel, Robert G. D.; and Torrie, James H.: Principles and Procedures of Statistics. McGraw-Hill Book Co., Inc., 1960.
8. Parrish, Russell V.; Dieudonne, James E.; Martin, Dennis J.; and Bowles, Roland L.: Coordinated Adaptive Filters for Motion Simulators. Proceedings of the 1973 Summer Computer Simulation Conference, Simulation Councils, Inc., c.1973, pp. 295-300.

TABLE I.- WASHOUT PARAMETER VALUES USED IN SIMULATION

Variable	Value in SI units	Program value (U.S. units)
$k_{z,1}$	0	0
$\xi_{z,1}$	0.7	0.7
$\omega_{n,z,1}$, rad/sec	0.1	0.1
$k_{z,2}$	1.0	1.0
$k_{p,T,1}$, per m (per ft)	0.0033	0.001
$k_{p,T,2}$, sec	30.0	30.0
$k_{p,T,3}$, per sec	0.05	0.05
$k_{q,T,1}$, per m (per ft)	0.0033	0.001
$k_{q,T,2}$, sec	30.0	30.0
$k_{q,T,3}$, per sec	0.05	0.05
$k_{r,1}$, per m (per ft)	0.0131	0.004
$k_{r,2}$, sec	3.8	3.8
$k_{r,3}$, per sec	0.05	0.05
a_1, rad/sec	1.414	1.414
a_2, rad/sec	2.1	2.1
a_3, rad/sec	2.1	2.1
b_1, rad/sec^2	1.0	1.0
b_2, rad/sec^2	2.25	2.25
b_3, rad/sec^2	2.25	2.25
$\ddot{x}_l$, m/sec^2 (ft/sec^2)	5.8840	19.3044
$\ddot{y}_l$, m/sec^2 (ft/sec^2)	5.8840	19.3044
$\ddot{z}_l$, m/sec^2 (ft/sec^2)	7.8453	25.7392
A_1, sec^2	0.0069	0.0069
A_2, sec^2	0.0069	0.0069
A_3, sec^2	0.0069	0.0069

Variable	Value in SI units	Program value (U.S. units)
B_1, sec	0.14	0.14
B_2, sec	0.14	0.14
B_3, sec	0.14	0.14
$k_{\psi,l}$, sec	0.12	0.12
$k_{\theta,l}$, sec	0.12	0.12
$k_{\phi,l}$, sec	0	0
k_p	0.4	0.4
k_q	0.5	0.5
k_r	0.2	0.2
C_1, per sec	0.5	0.5
C_2, per sec	0.2	0.2
C_3, per sec	0.5	0.5
$k_{\theta,1}$	0.5	0.5
$k_{\theta,2}$	0.04	0.04
ξ_θ	0.14	0.14
$\omega_{n,\theta}$, rad/sec	1.0	1.0
$k_{\phi,1}$	0.04	0.04
$k_{\phi,2}$	0.04	0.04
ξ_ϕ	0.14	0.14
$\omega_{n,\phi}$, rad/sec	0.2	0.2
z_{neut}, m (ft)	0.6487	2.128
V_ℓ, m/sec (ft/sec)	0.3048	1.0
x_{LF}	2.5	2.5
y_{LF}	2.5	2.5
z_{LF}	3.0	3.0

TABLE II.- 737 FLIGHT CHARACTERISTICS

Weight, N (lb)	400 341 (90 000)
Center of gravity	$0.31\bar{c}$
Flap deflection, deg	40
Landing gear	Down
Damping ratio for –	
Short period	0.562
Long period	0.089
Dutch roll	0.039
Period, sec, for –	
Short period	6.30
Long period	44.3
Dutch roll	5.12

TABLE III.- REVISED COOPER-HARPER RATINGS

CONTROLLABLE Capable of being controlled or managed in context of mission, with available pilot attention.	ACCEPTABLE May have deficiencies which warrant improvement, but adequate for mission. Pilot compensation, if required to achieve acceptable performance, is feasible.	SATISFACTORY Meets all requirements and expectations; good enough without improvement. Clearly adequate for mission.	Excellent, highly desirable.	A1
			Good, pleasant, well behaved.	A2
			Fair. Some mildly unpleasant characteristics. Good enough for mission without improvement.	A3
		UNSATISFACTORY Reluctantly acceptable. Deficiencies which warrant improvement. Performance adequate for mission with feasible pilot compensation.	Some minor but annoying deficiencies. Improvement is requested. Effect on performance is easily compensated for by pilot.	A4
			Moderately objectionable deficiencies. Improvement is needed. Reasonable performance requires considerable pilot compensation.	A5
			Very objectionable deficiencies. Major improvements are needed. Requires best available pilot compensation to achieve acceptable performance.	A6
	UNACCEPTABLE Deficiencies which require improvement. Inadequate performance for mission even with maximum feasible pilot compensation.		Major deficiencies which require improvement for acceptance. Controllable. Performance inadequate for mission, or pilot compensation required for minimum acceptable performance in mission is too high.	U7
			Controllable with difficulty. Requires substantial pilot skill and attention to retain control and continue mission.	U8
			Marginally controllable in mission. Requires maximum available pilot skill and attention to retain control.	U9
UNCONTROLLABLE Control will be lost during some portion of mission.			Uncontrollable in mission.	10

TABLE IV.- COMPUTED F-DISTRIBUTION VALUES FOR THE ANALYSES OF VARIANCE

Factors	Degrees of freedom	Root-mean-square performance measures									
		Deviation of –									
		Localizer		Glide slope		Speed		Pitch bar		Roll bar	
		Short duration	Long duration	Short duration	Long duration	Short duration	Long duration	Short duration	Long duration	Short duration	Long duration
Pilots, A	2	0.0578	0.0619	**11.56	**25.89	**11.08	**13.18	**15.24	**34.50	**5.343	**7.635
Motion, B	1	0.1463	0.1065	0.0199	0.0186	0.6034	0.0610	0.6817	0.1202	0.2363	3.850
Approaches, C	2	**42.55	**36.31	**9.414	**5.574	0.2739	*3.399	*3.943	1.5999	**132.0	**152.2
Replicates	4	0.7615	0.4040	0.6267	0.4790	0.3059	0.2240	1.126	0.9488	1.802	0.7457
AB	2	0.0346	0.3428	0.0334	0.2791	0.0845	0.0689	1.037	1.549	2.392	1.311
AC	4	0.4077	0.5740	*2.902	2.429	**3.734	**3.940	2.192	1.683	**5.259	**9.056
BC	2	0.0718	0.0415	0.5605	1.731	1.518	1.101	0.4292	0.8435	1.906	1.963
ABC	4	0.4217	0.6464	0.2776	0.7830	0.6870	0.2644	0.1638	0.5340	1.105	0.4287
Error	68	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

*Indicates 5% significance level.

**Indicates 1% significance level.

TABLE V.- COOPER-HARPER RATINGS FOR THE ILS TASK

Pilot	Rating for –	
	Fixed base	Moving base
1	A4.0	A4.5
2	A3.5	A4.5
3	A1.5	A6.0

TABLE VI.- SUBJECTIVE PILOT RATINGS OF MOTION CUES

Cue	Rating of pilot				
	Excellent	Good	Fair	Poor	Unacceptable
Pitch	1	2	3		
Roll			1	3	2
Yaw		1		2,3	
Throttle		1,2,3			

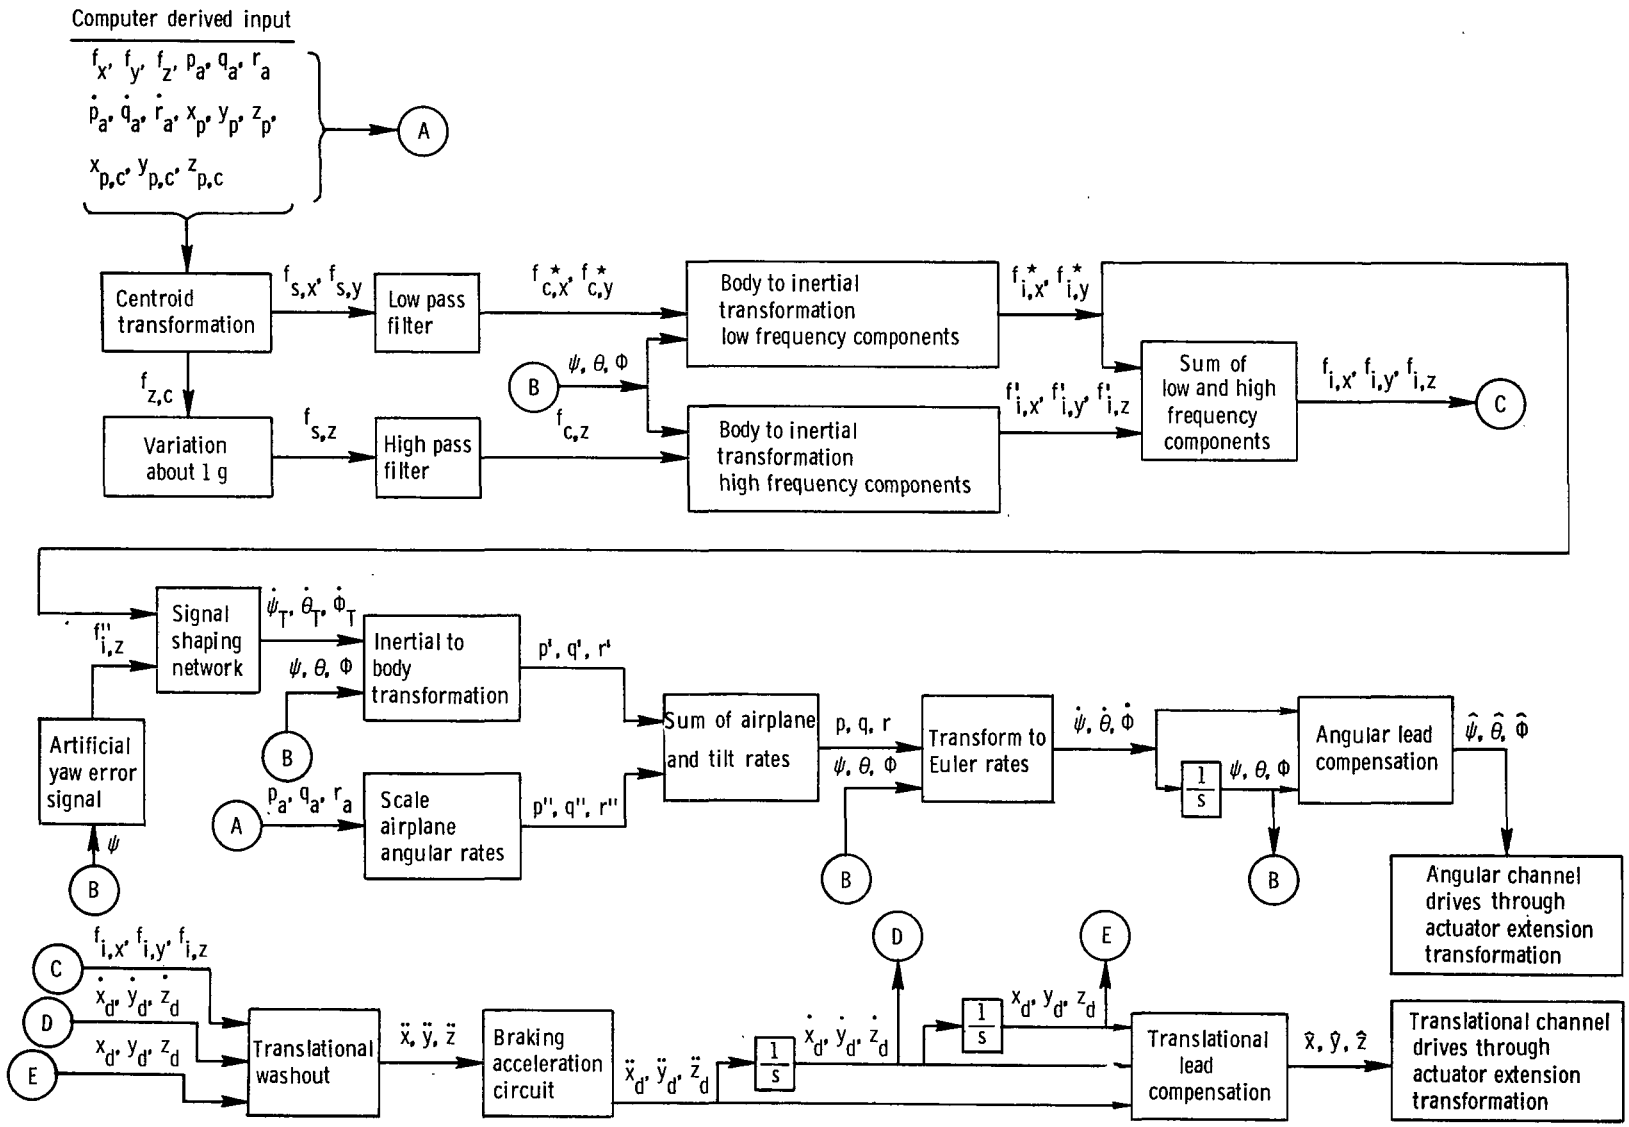

(a) Complete diagram.

Figure 1.- Detailed block diagram of washout circuitry.

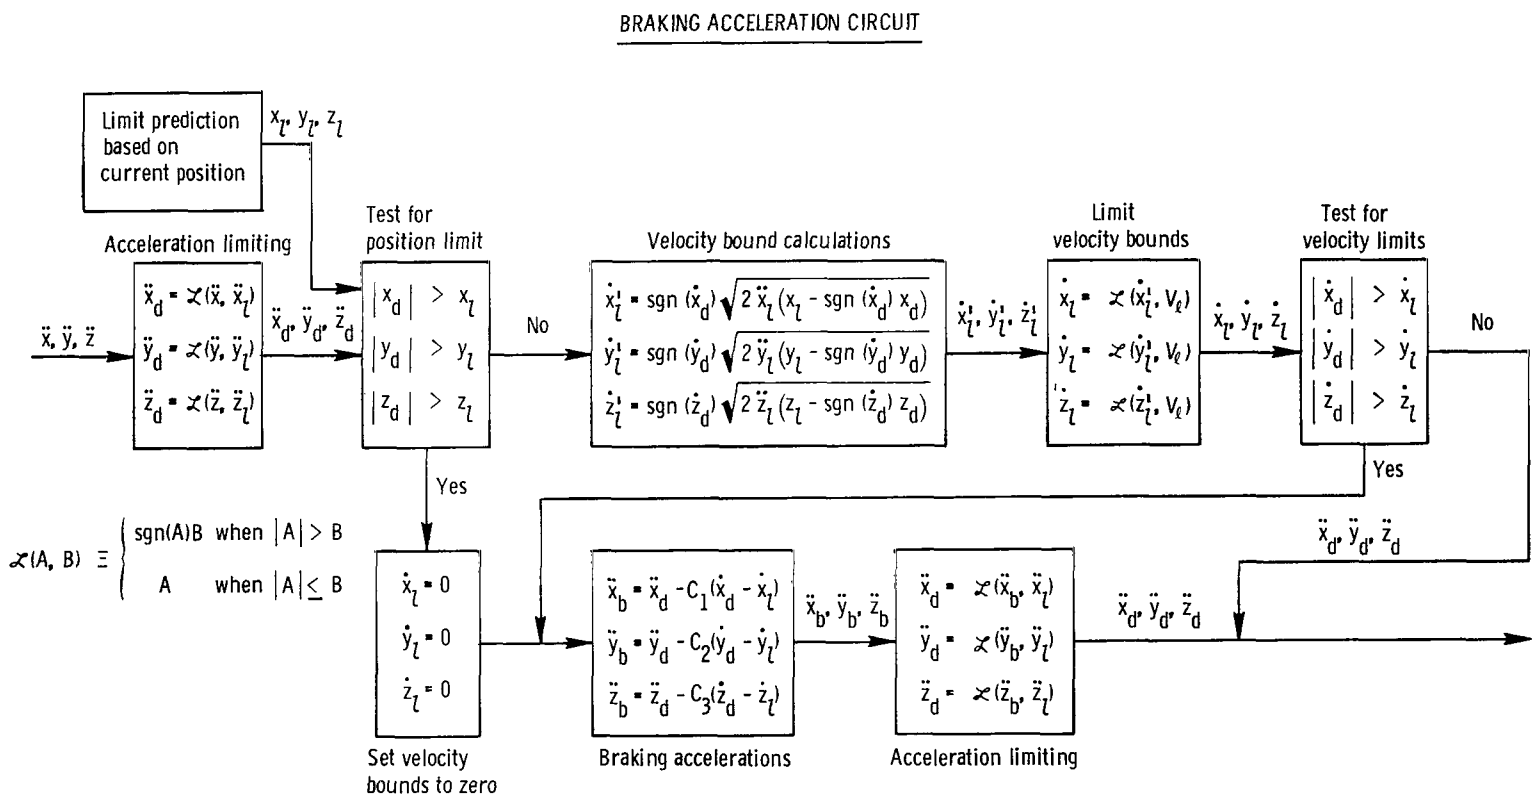

(b) Braking acceleration circuit.

Figure 1.- Concluded.

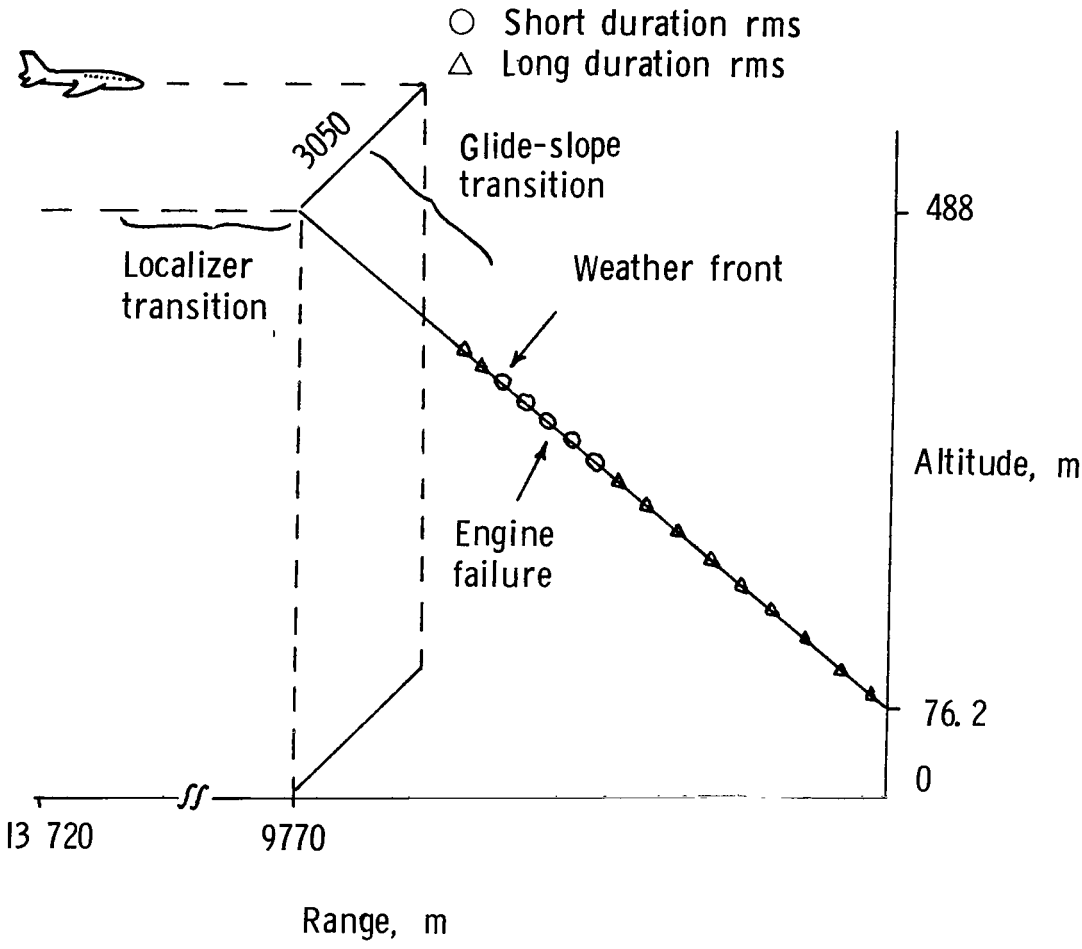

Figure 2.- Approach conditions.

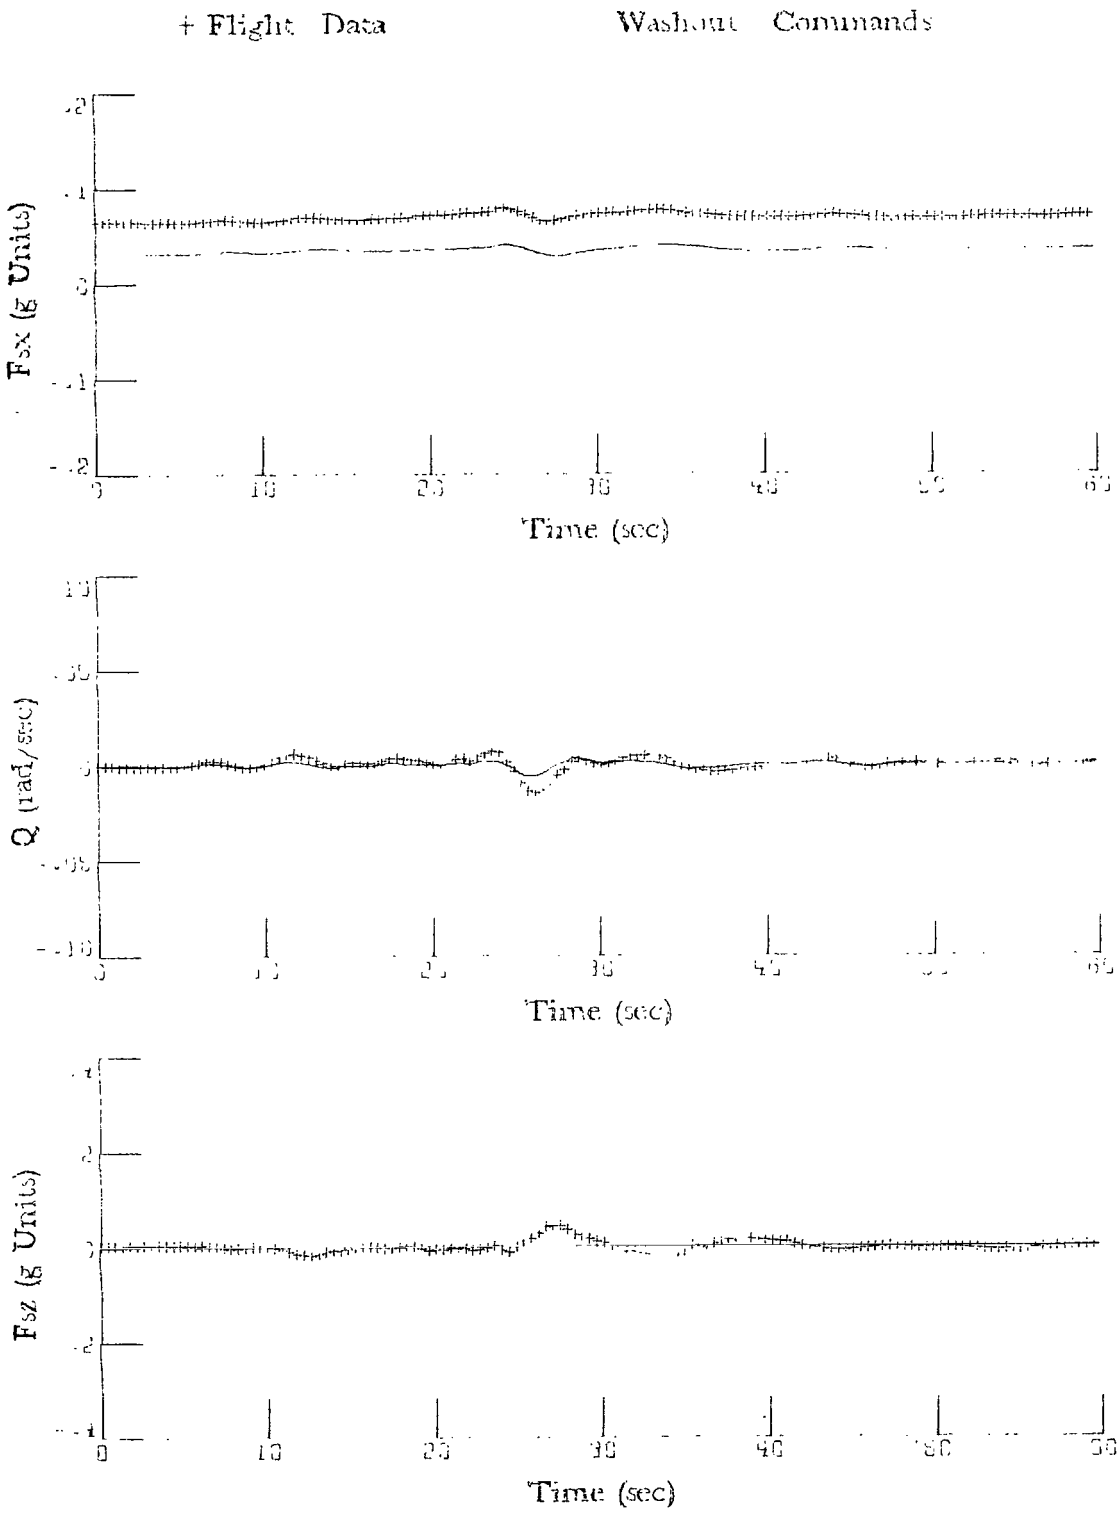

Figure 3.- Standard approach condition time histories.

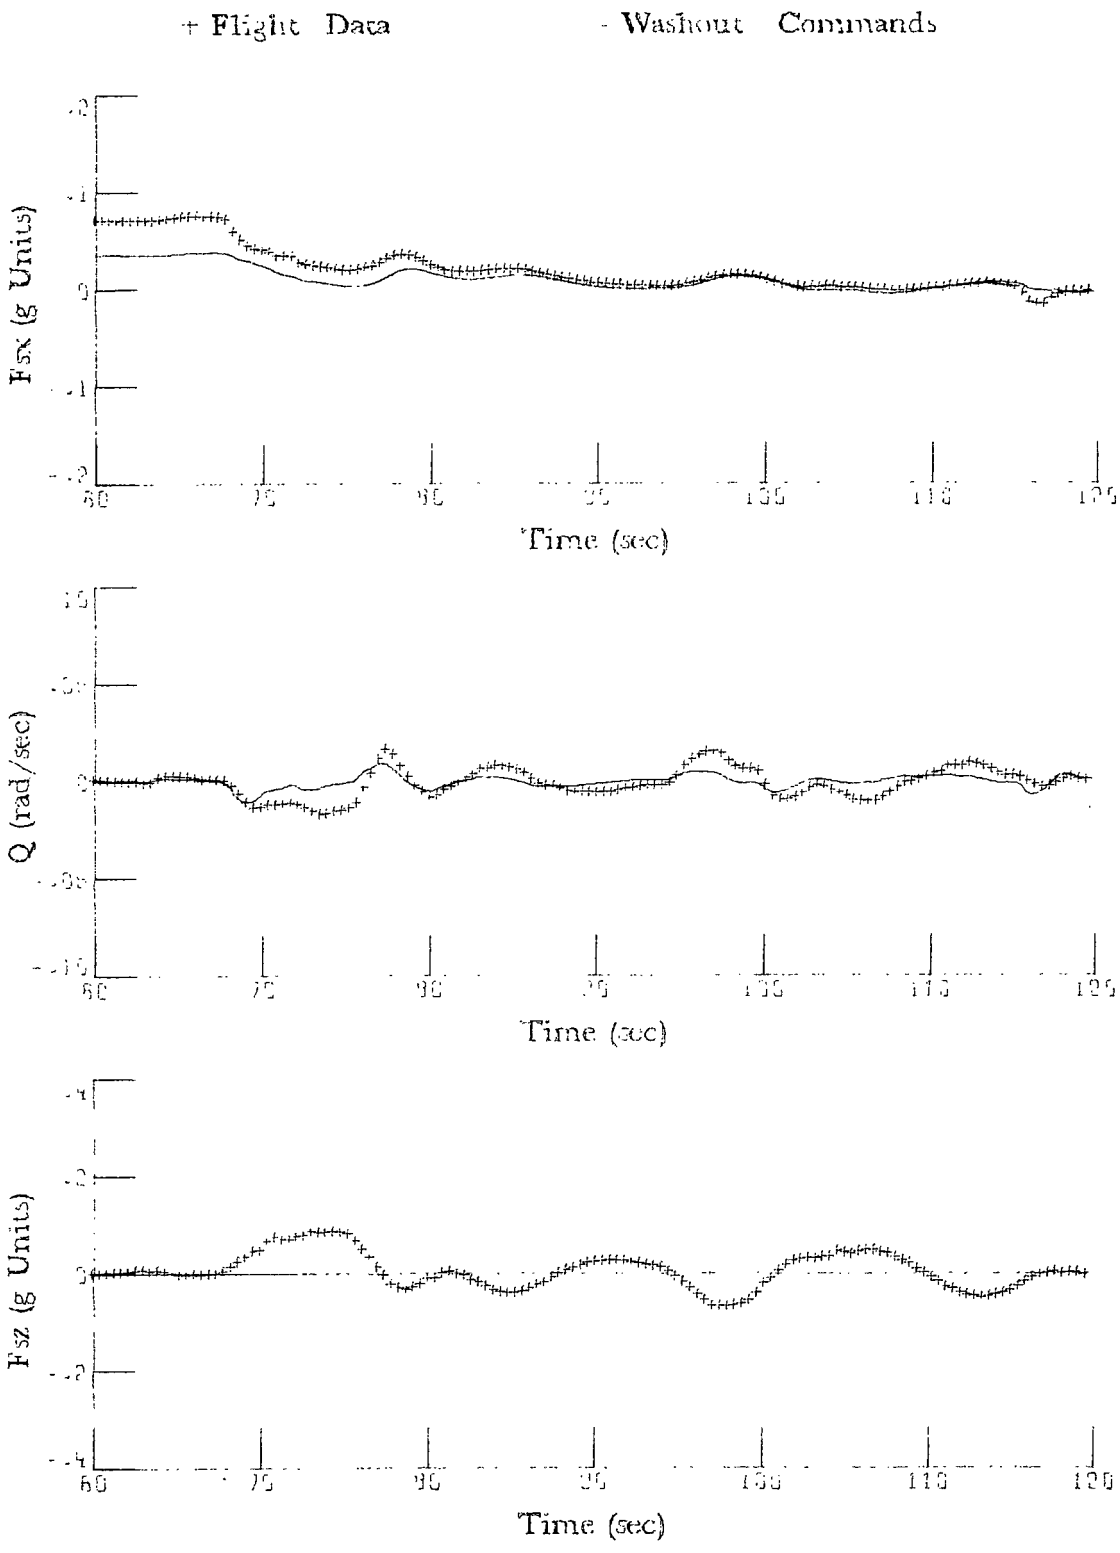

Figure 3.- Continued.

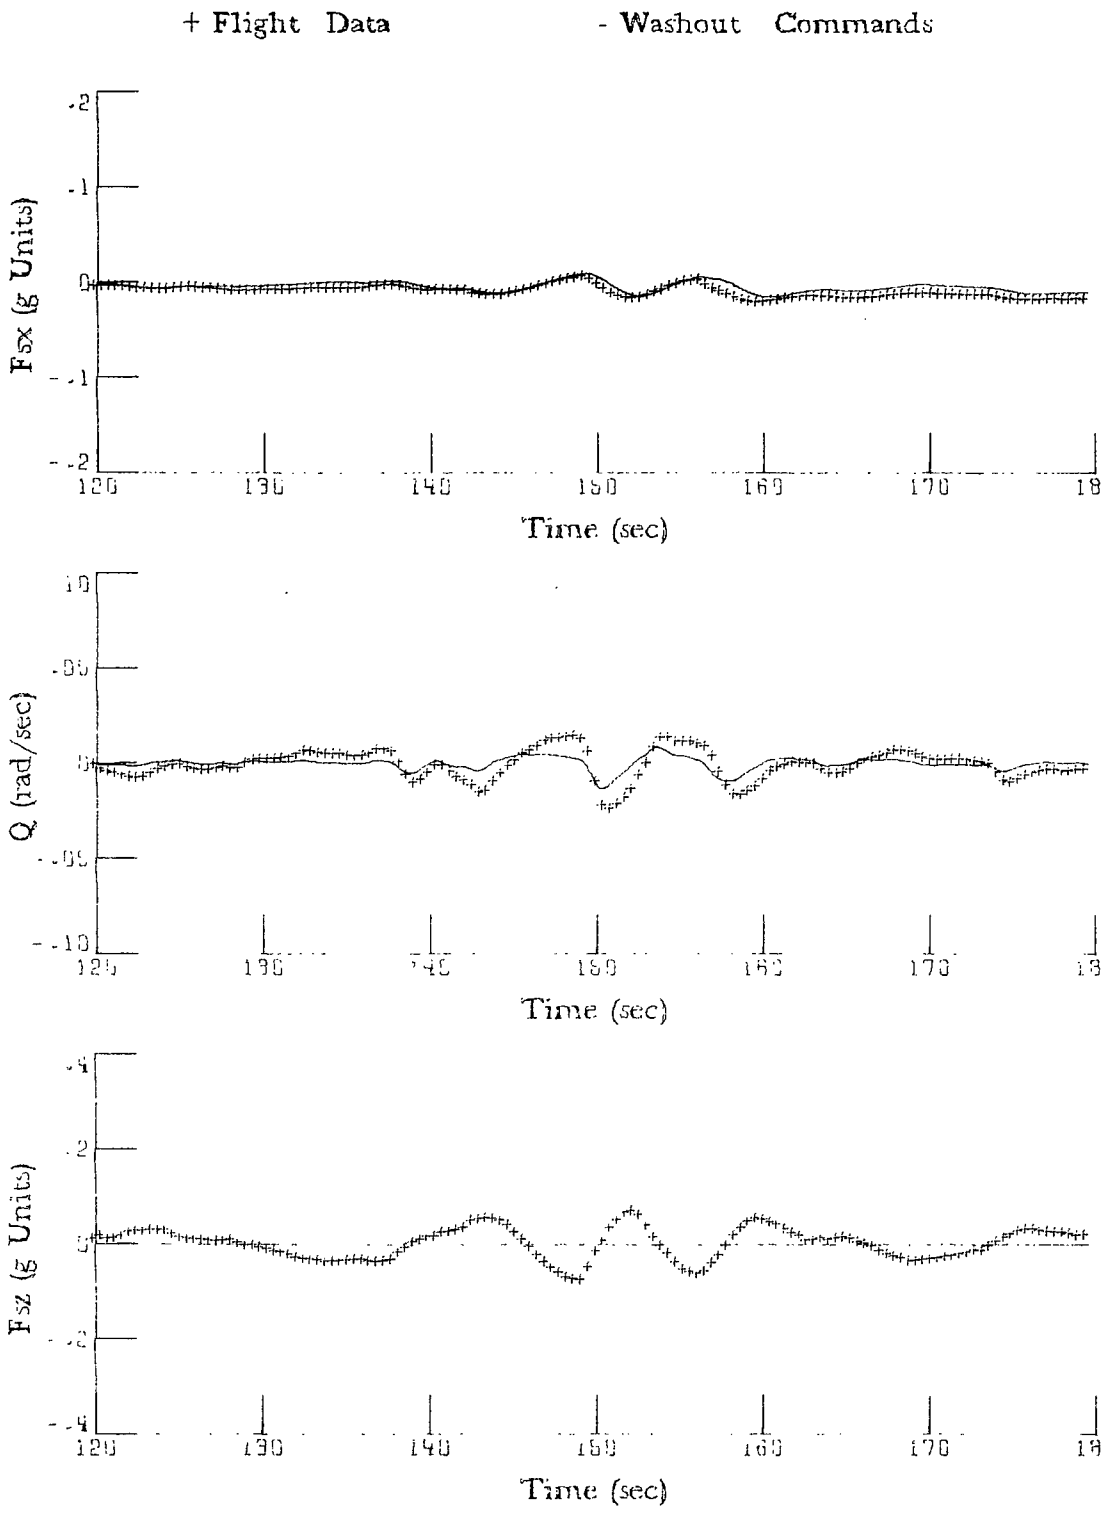

Figure 3.- Continued.

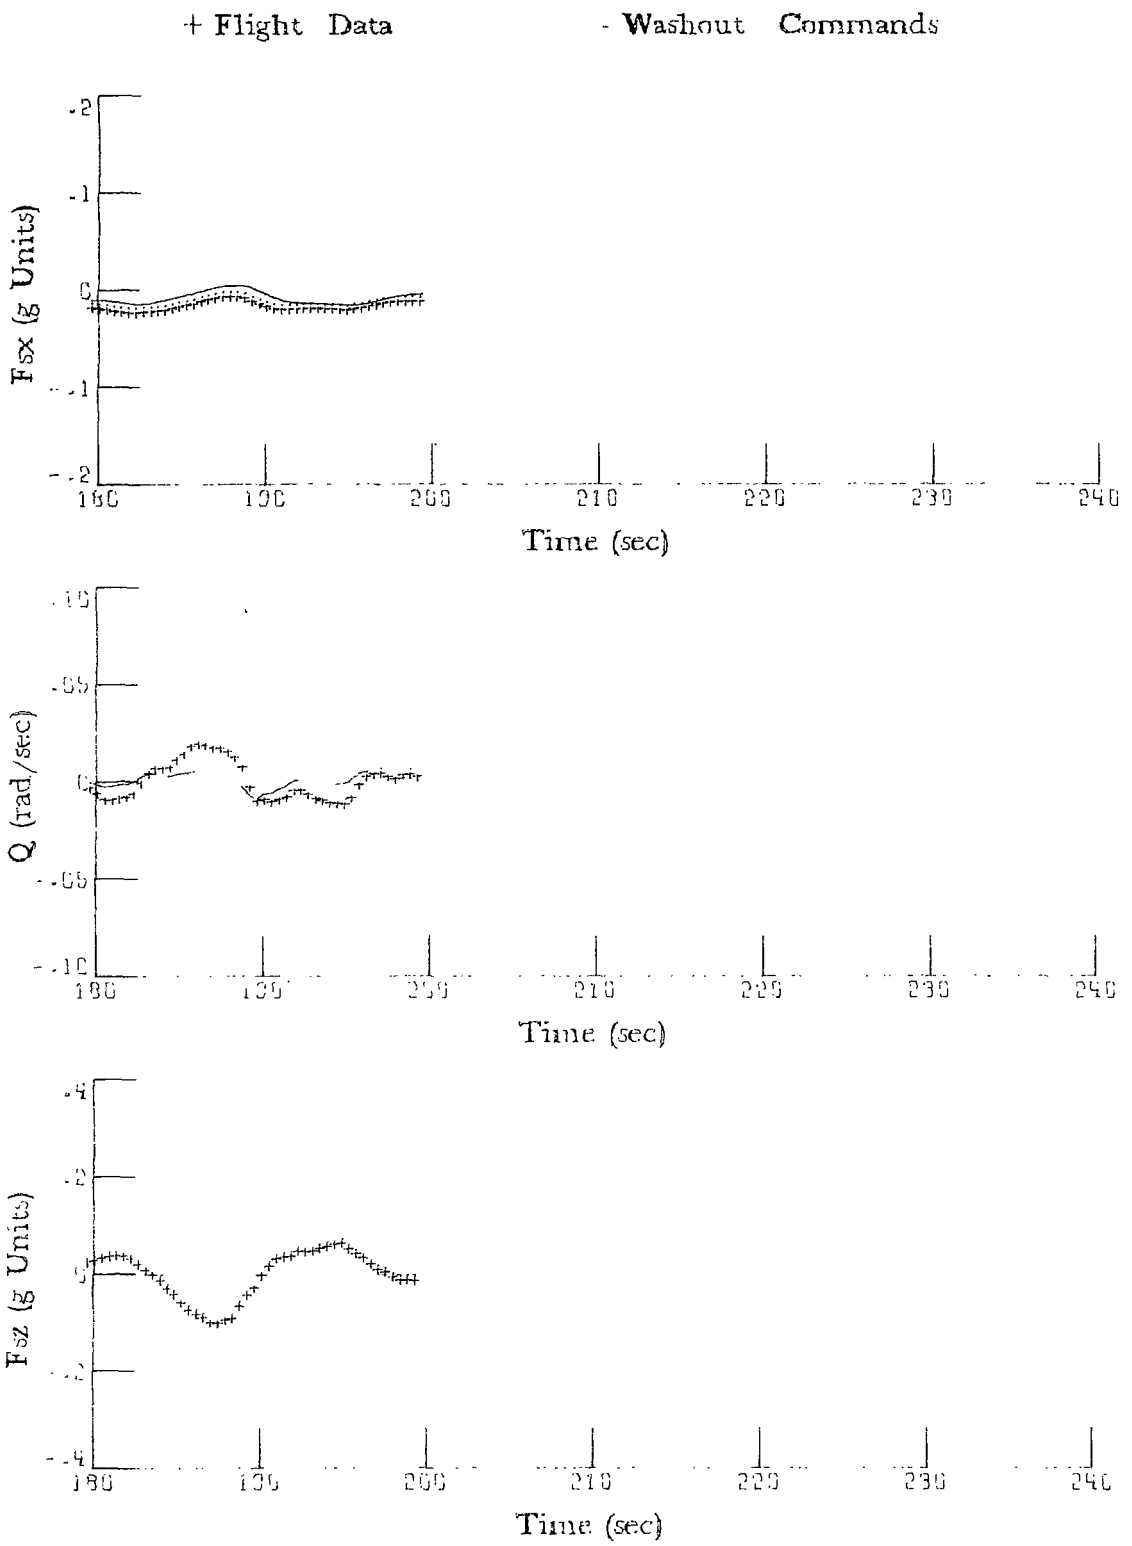

Figure 3.- Continued.

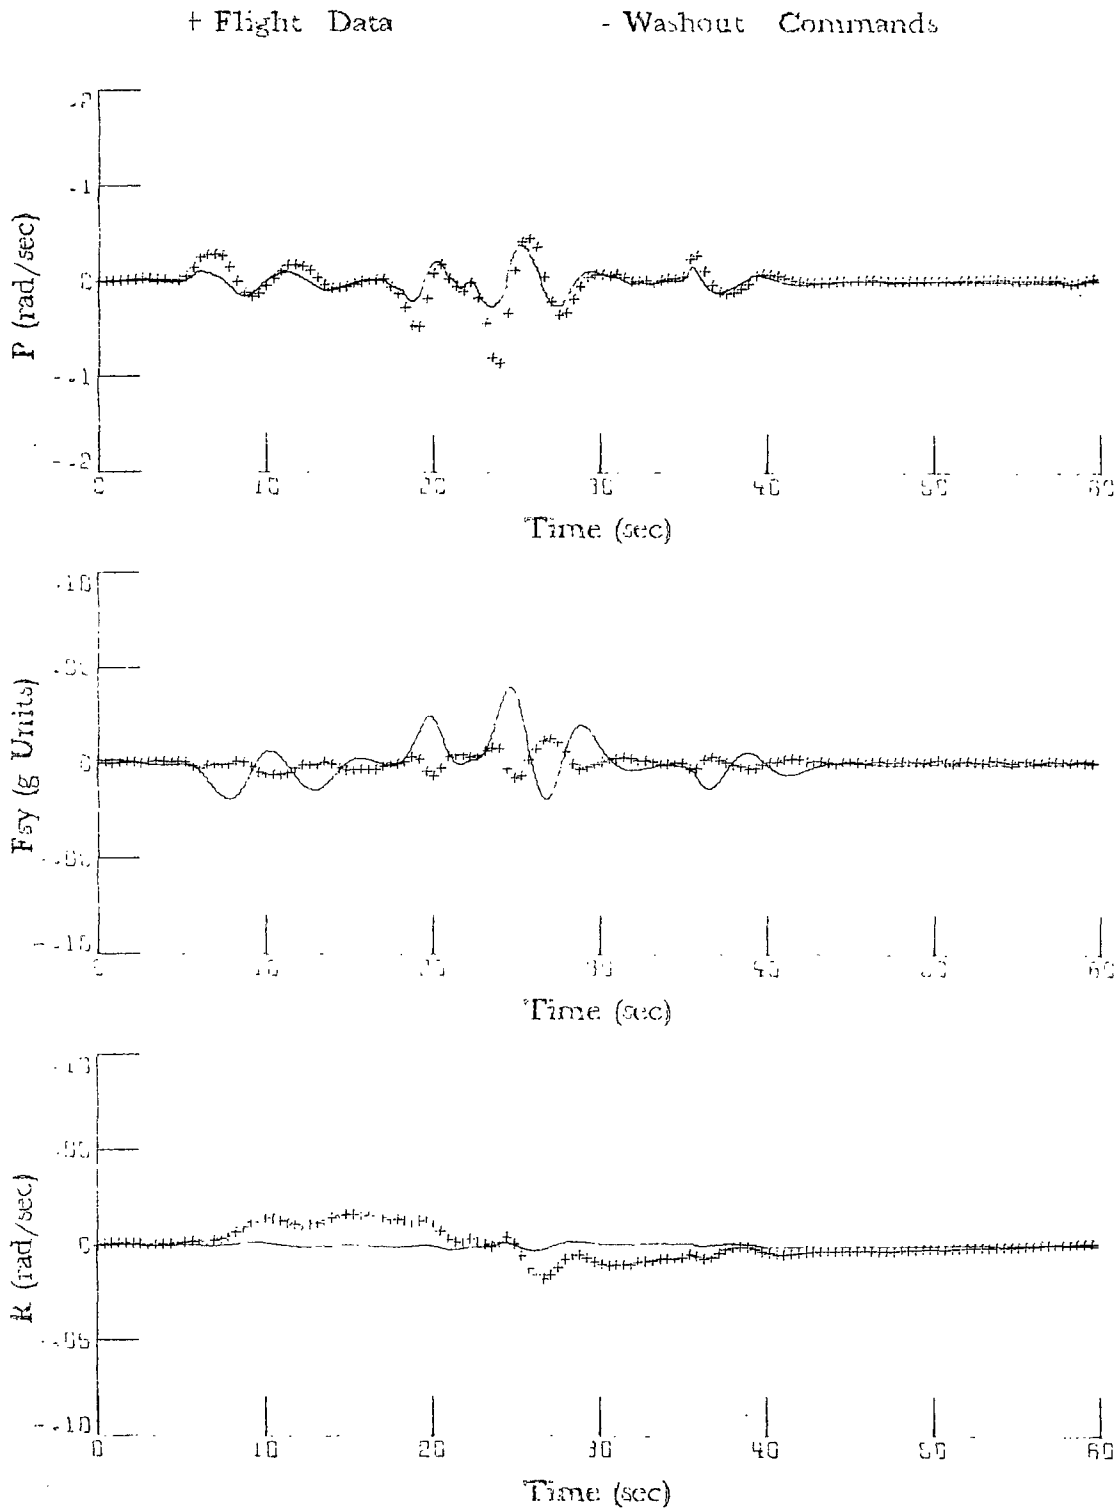

Figure 3.- Continued.

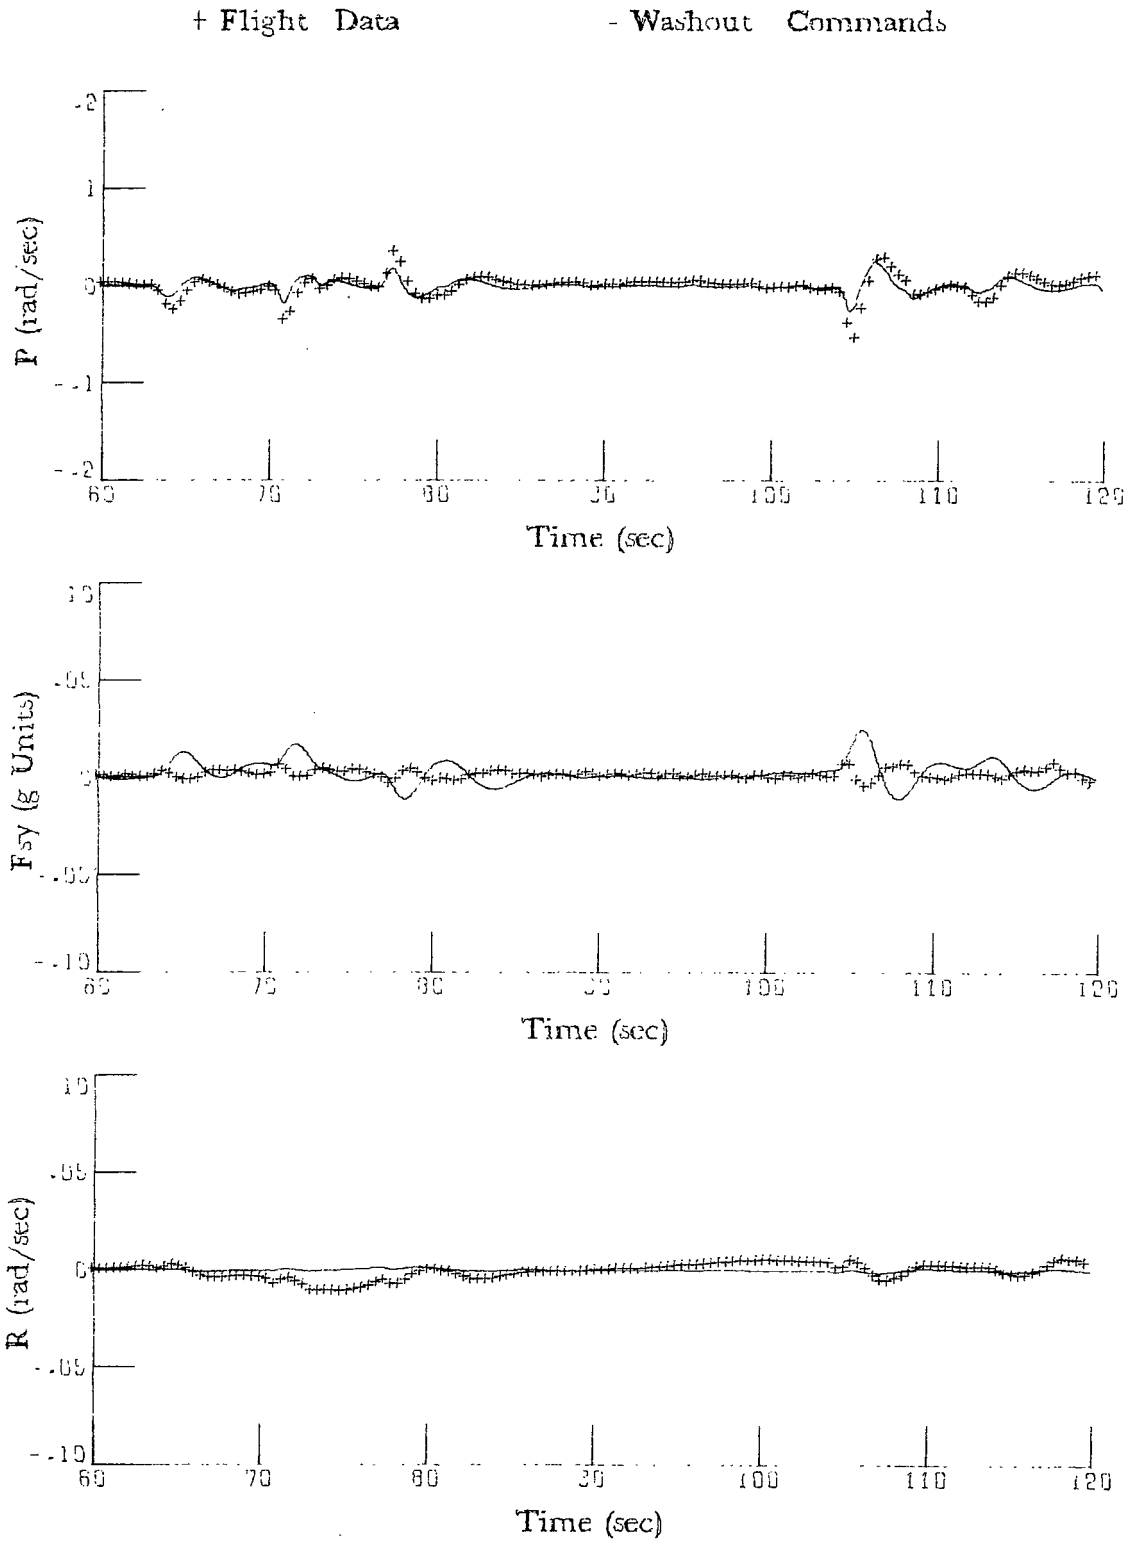

Figure 3.- Continued.

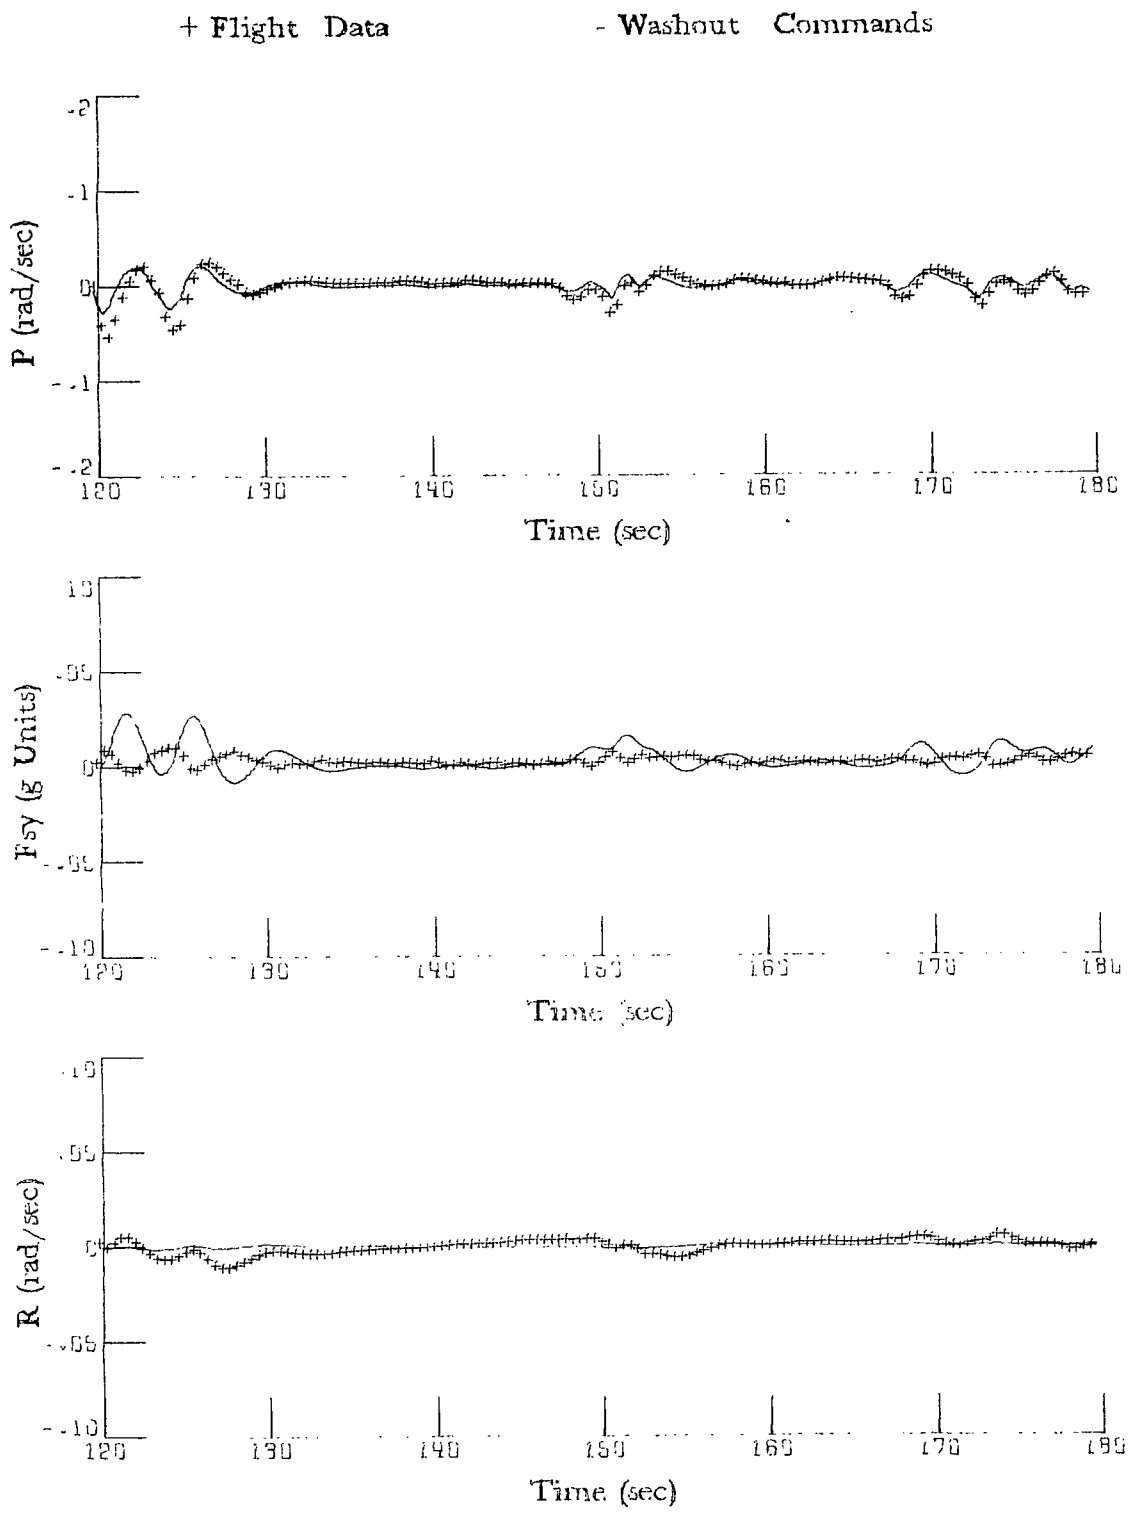

Figure 3.- Continued.

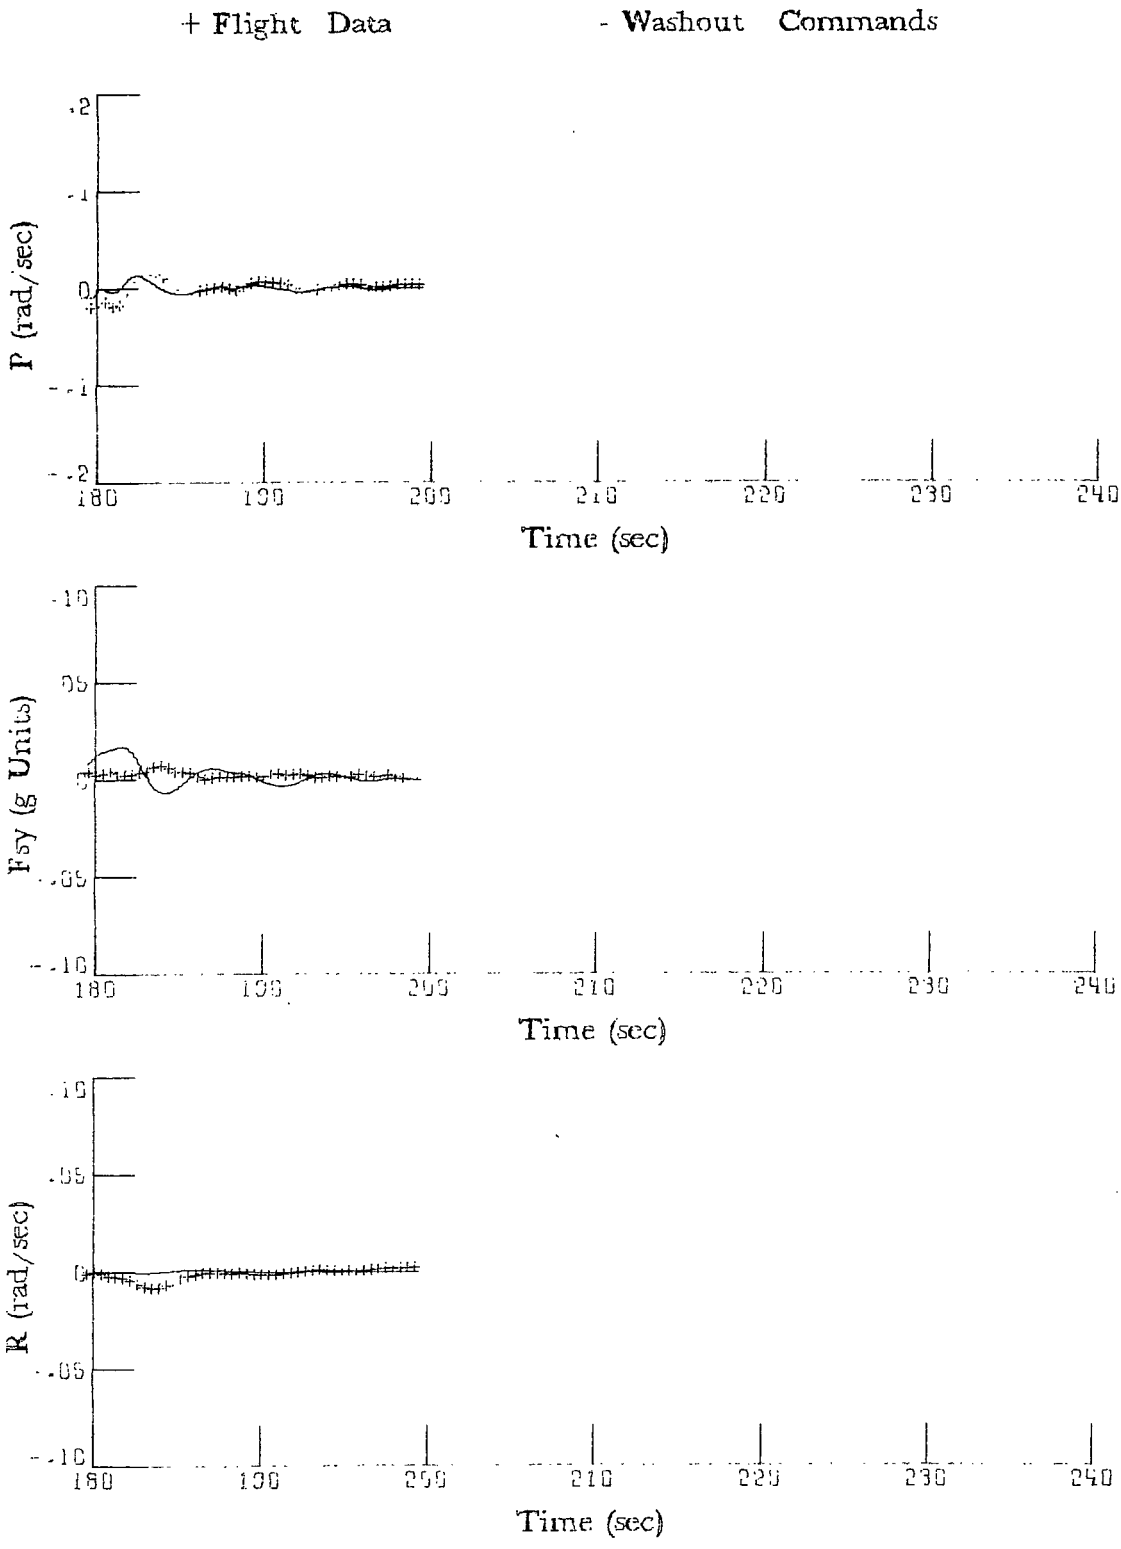

Figure 3.- Concluded.

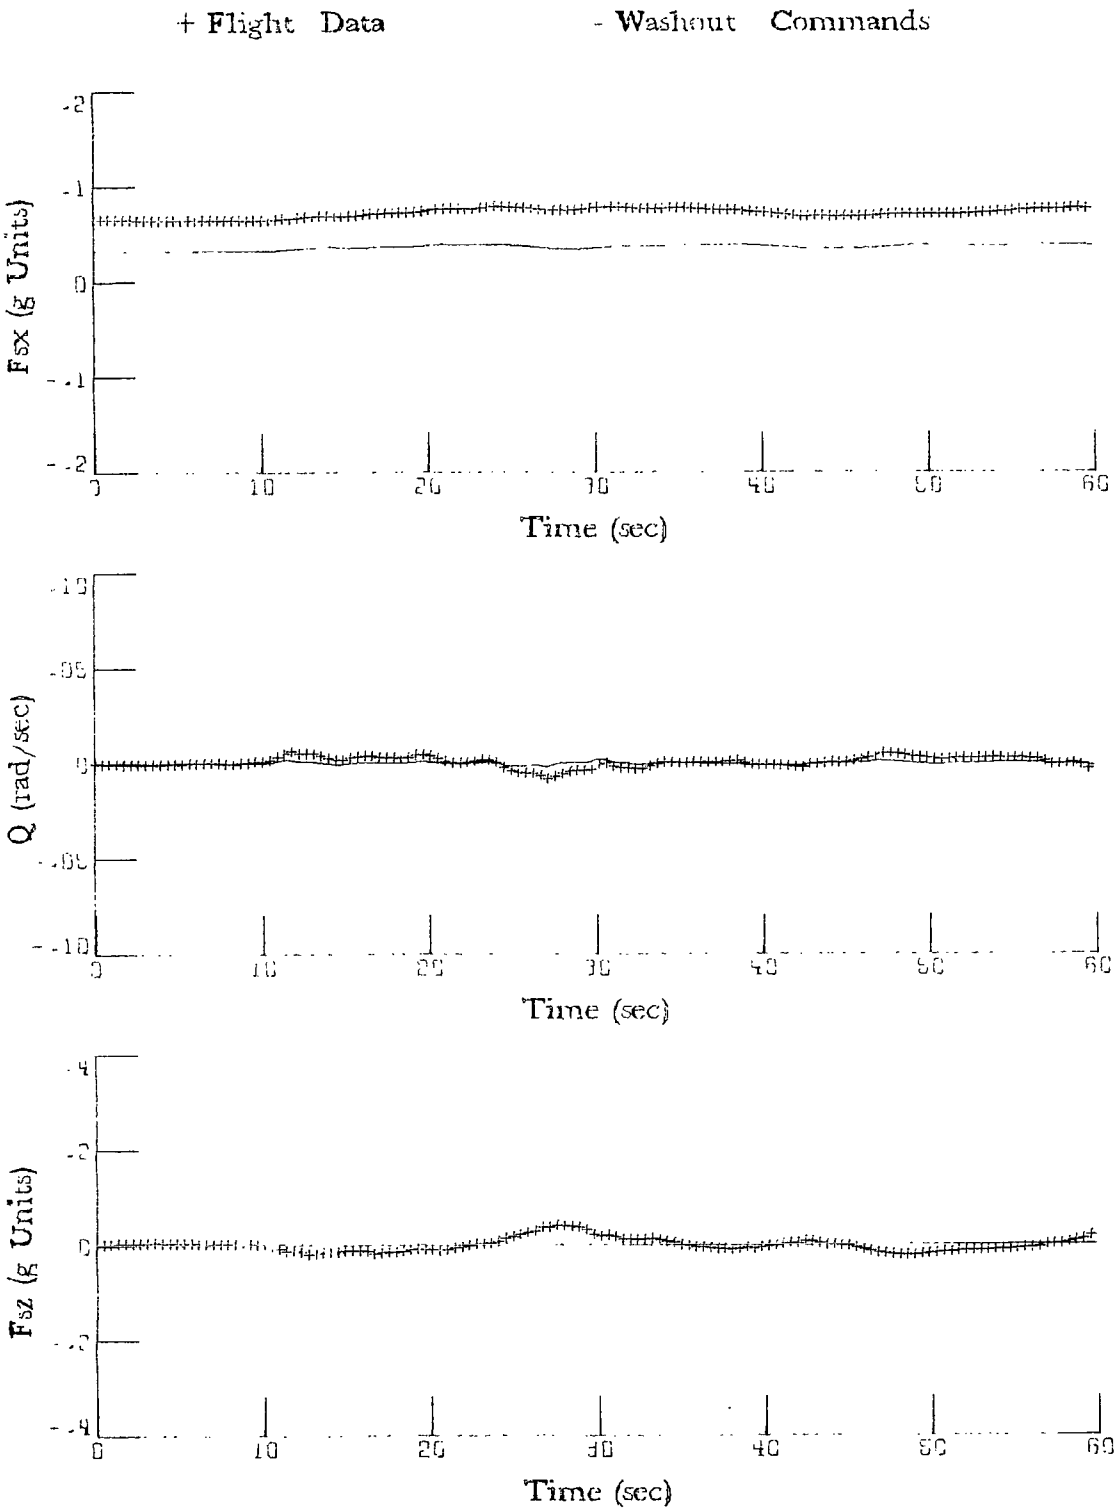

Figure 4.- Weather front approach condition time histories.

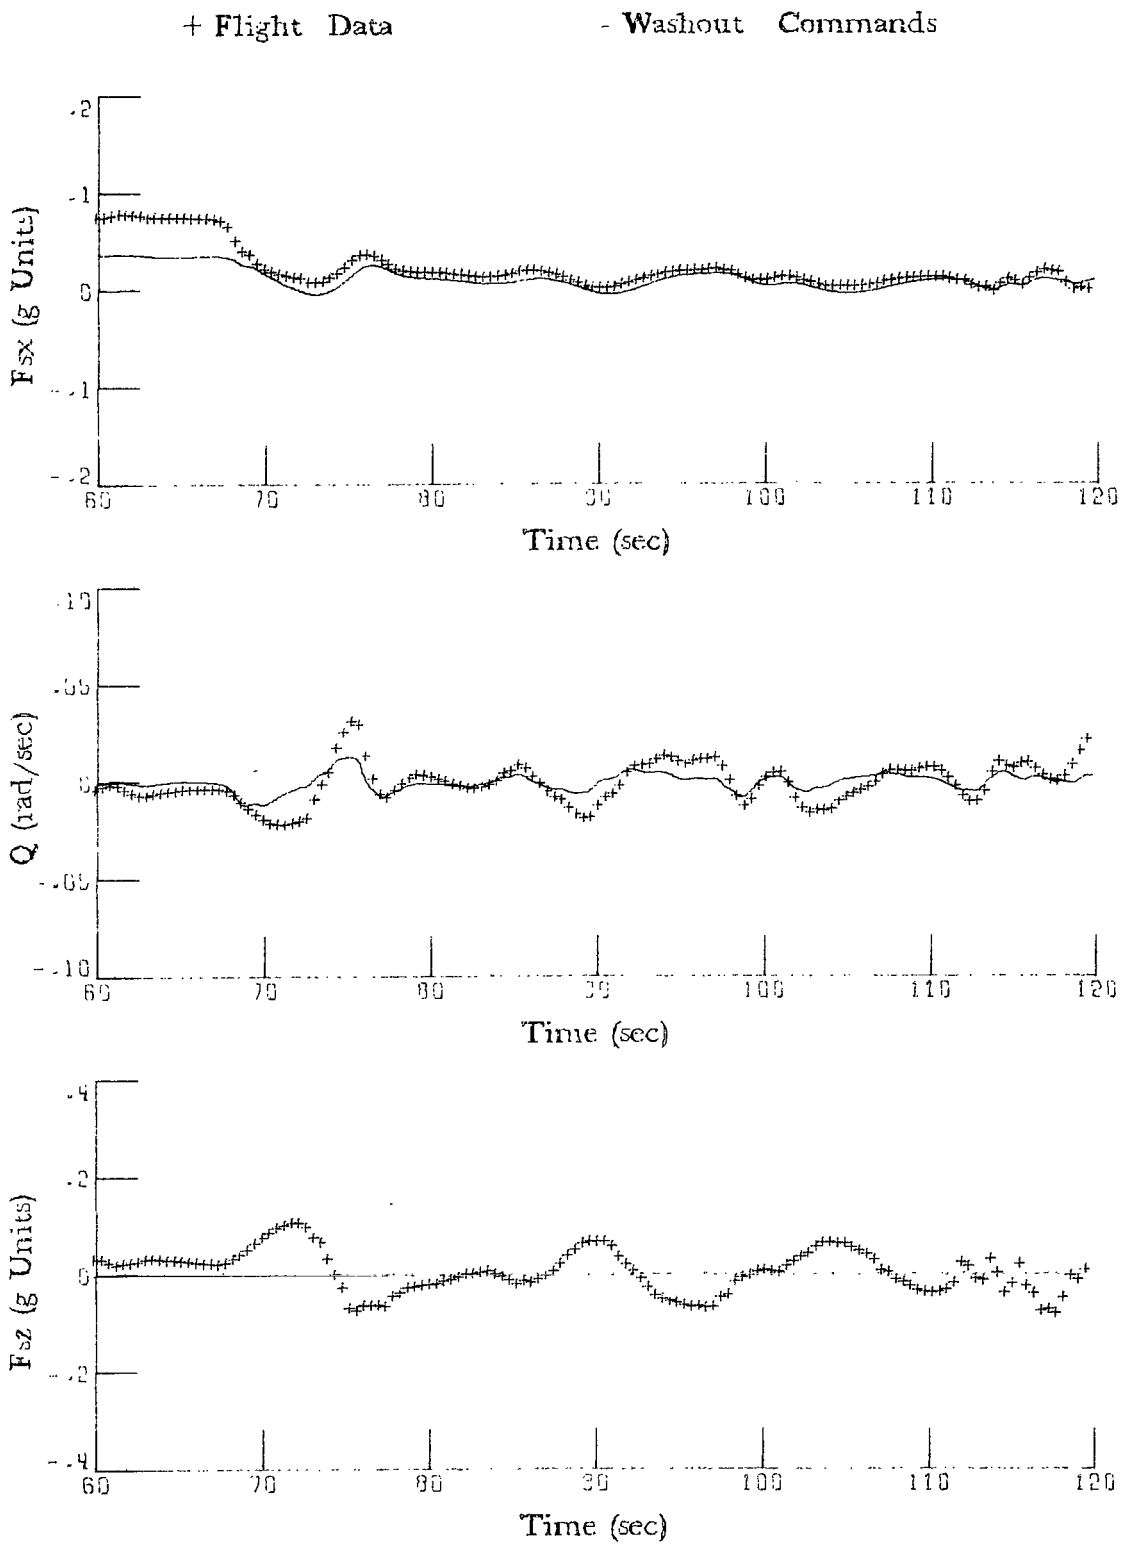

Figure 4.- Continued.

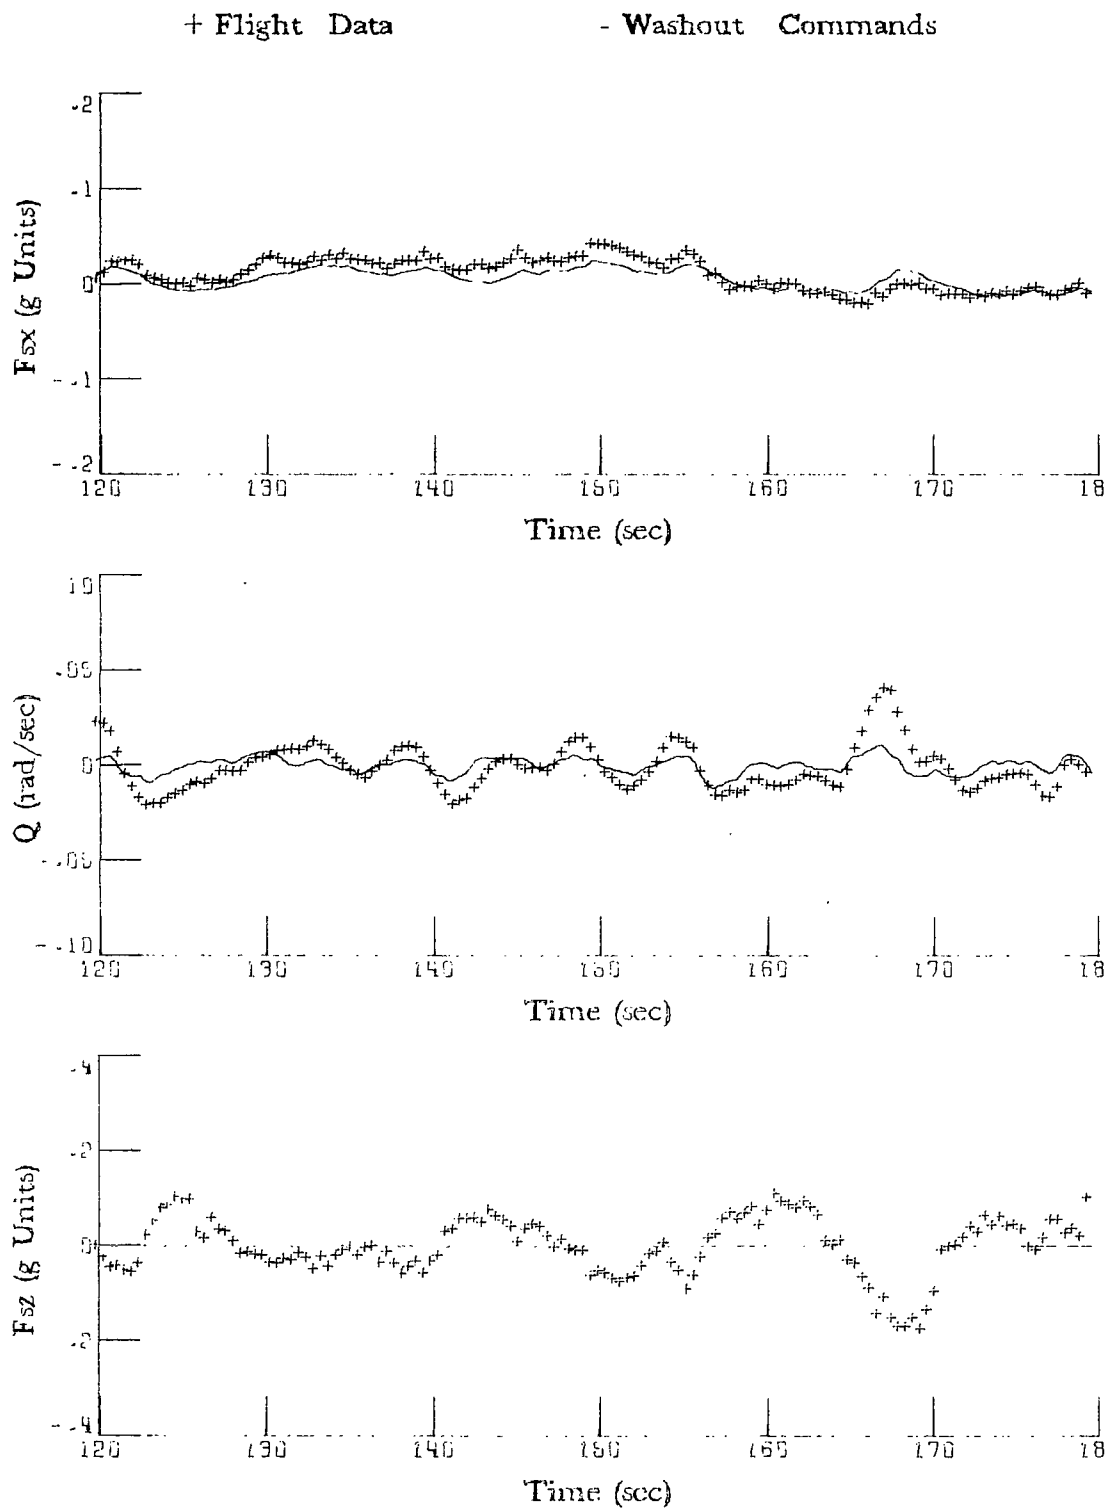

Figure 4.- Continued.

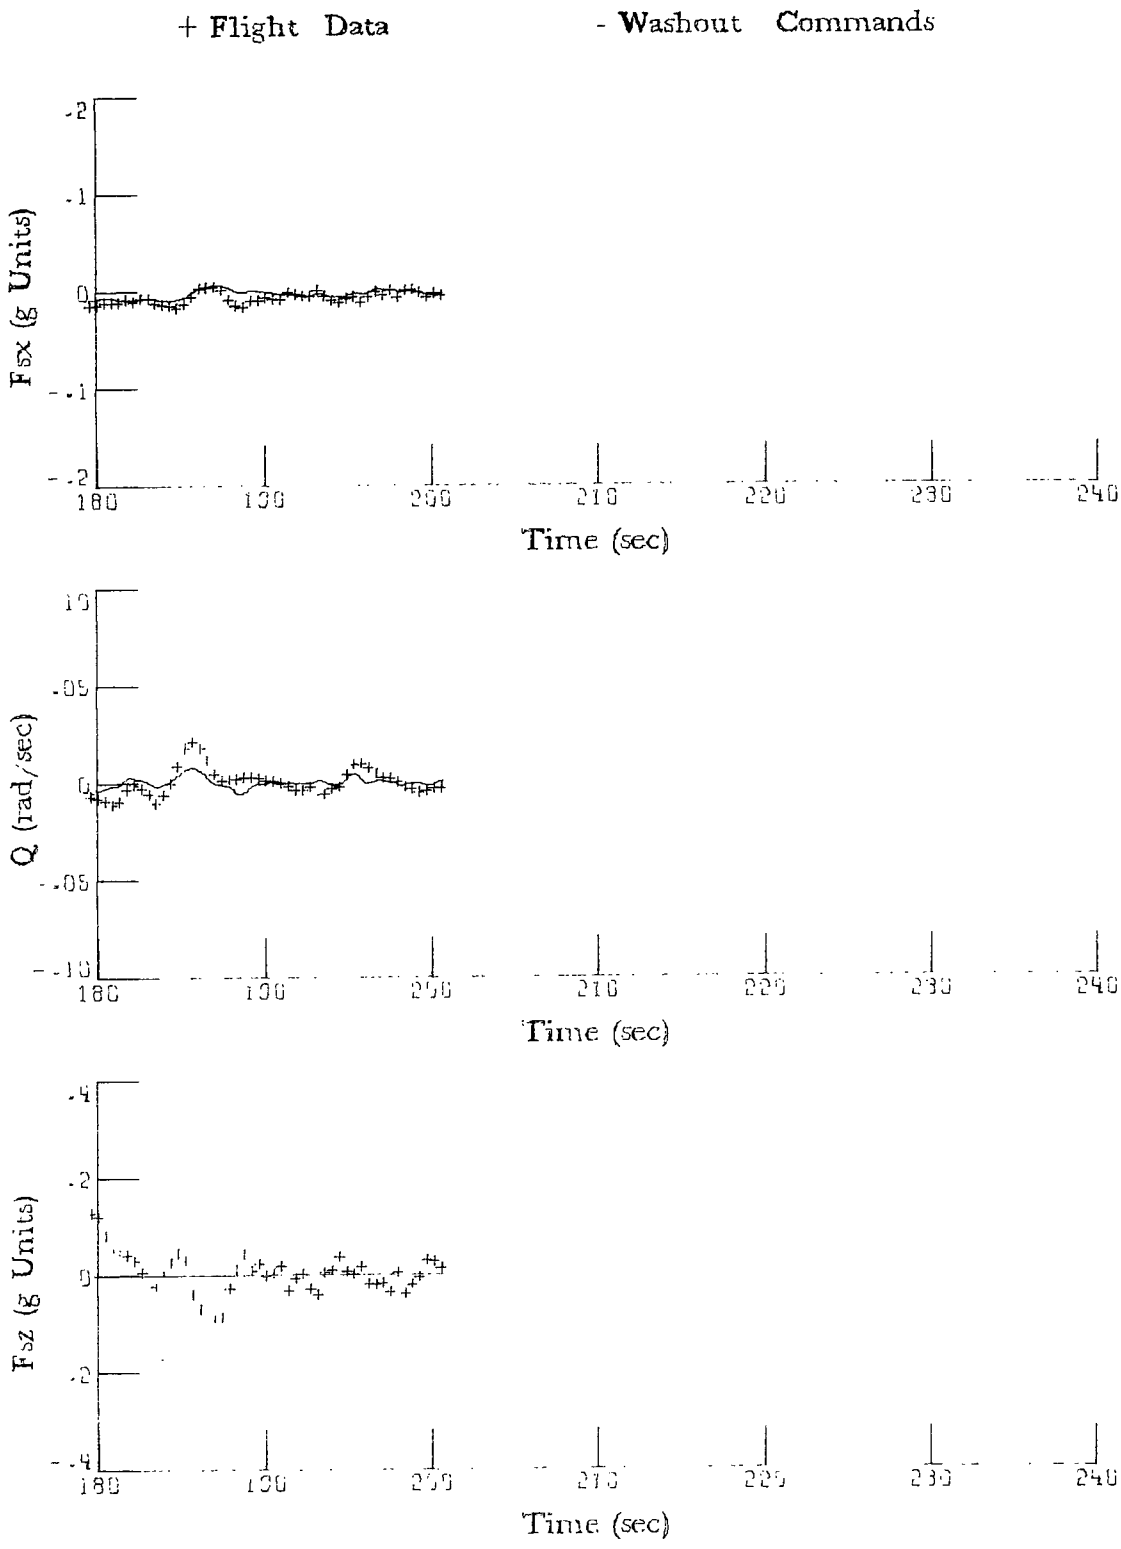

Figure 4.- Continued.

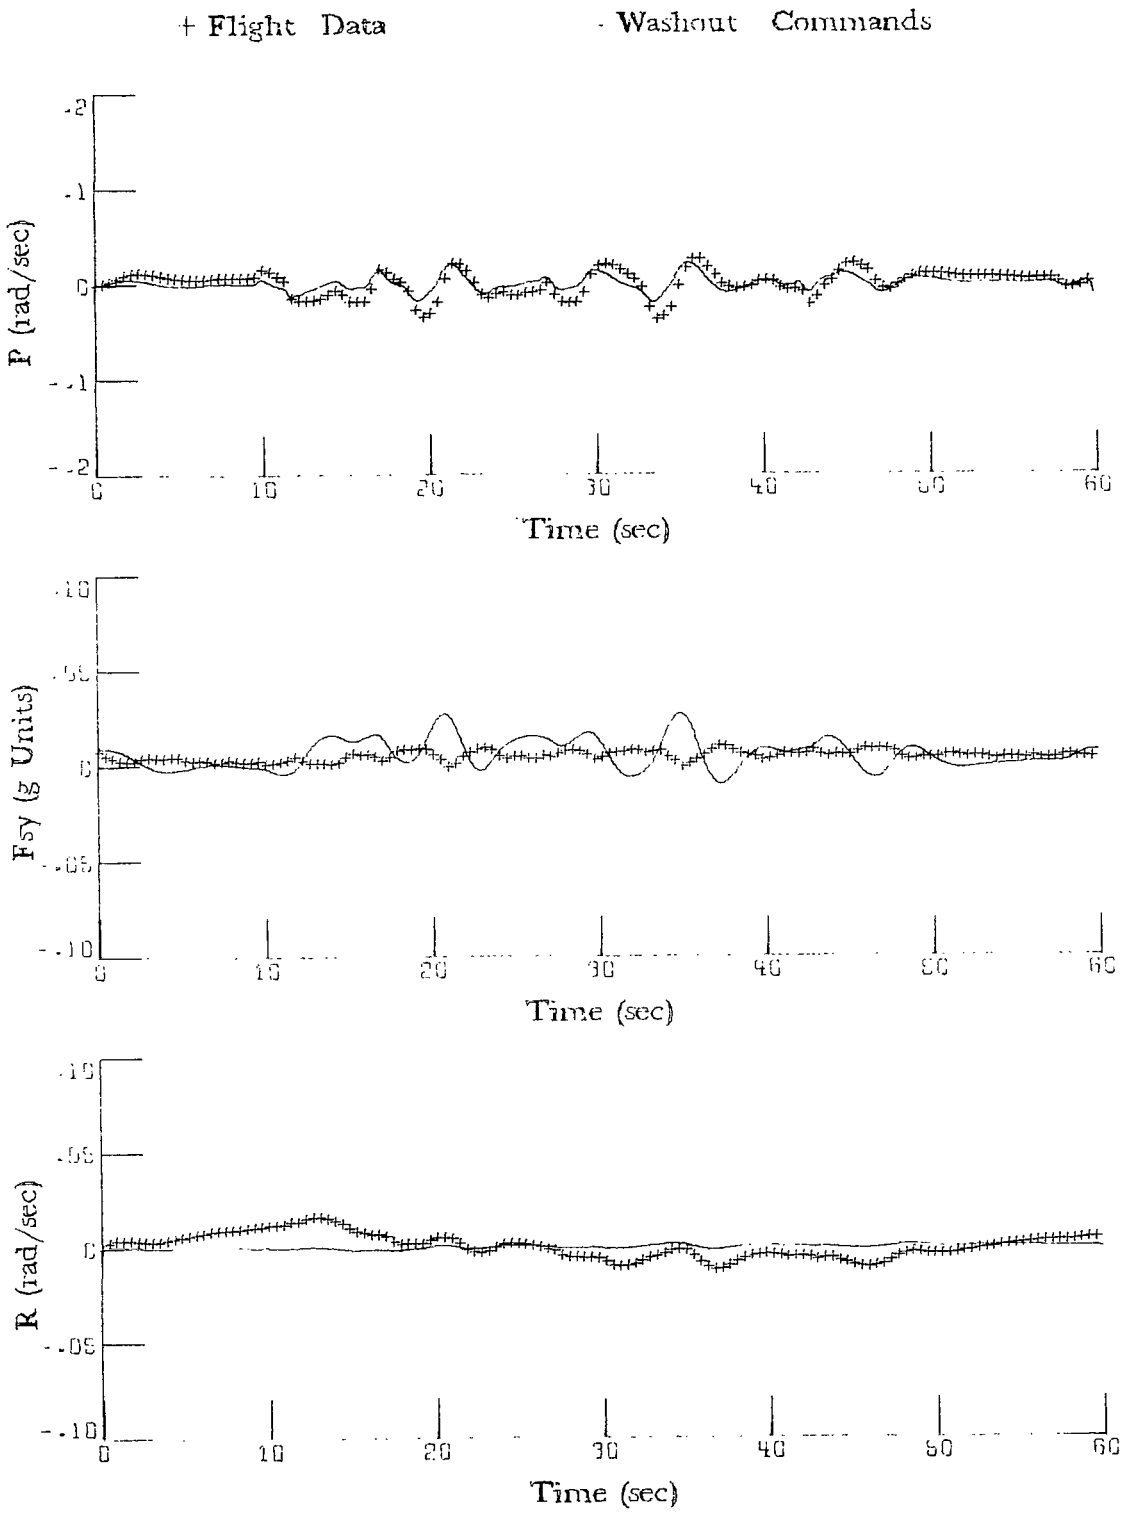

Figure 4.- Continued.

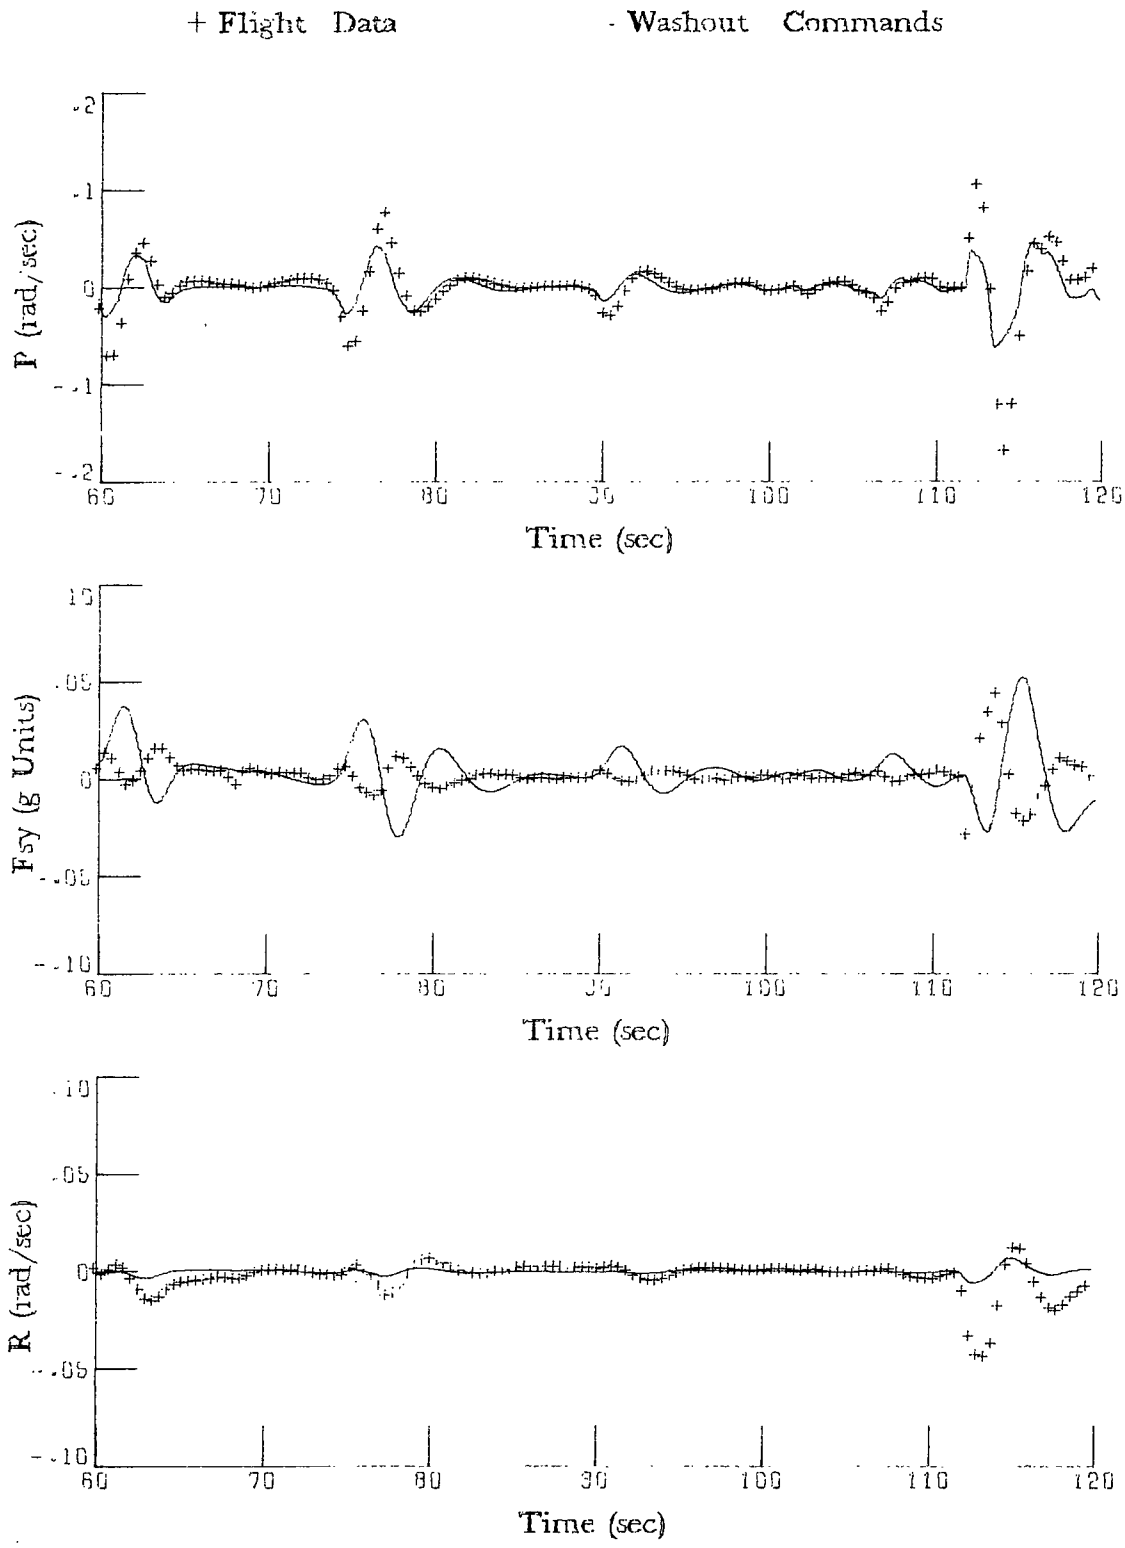

Figure 4.- Continued.

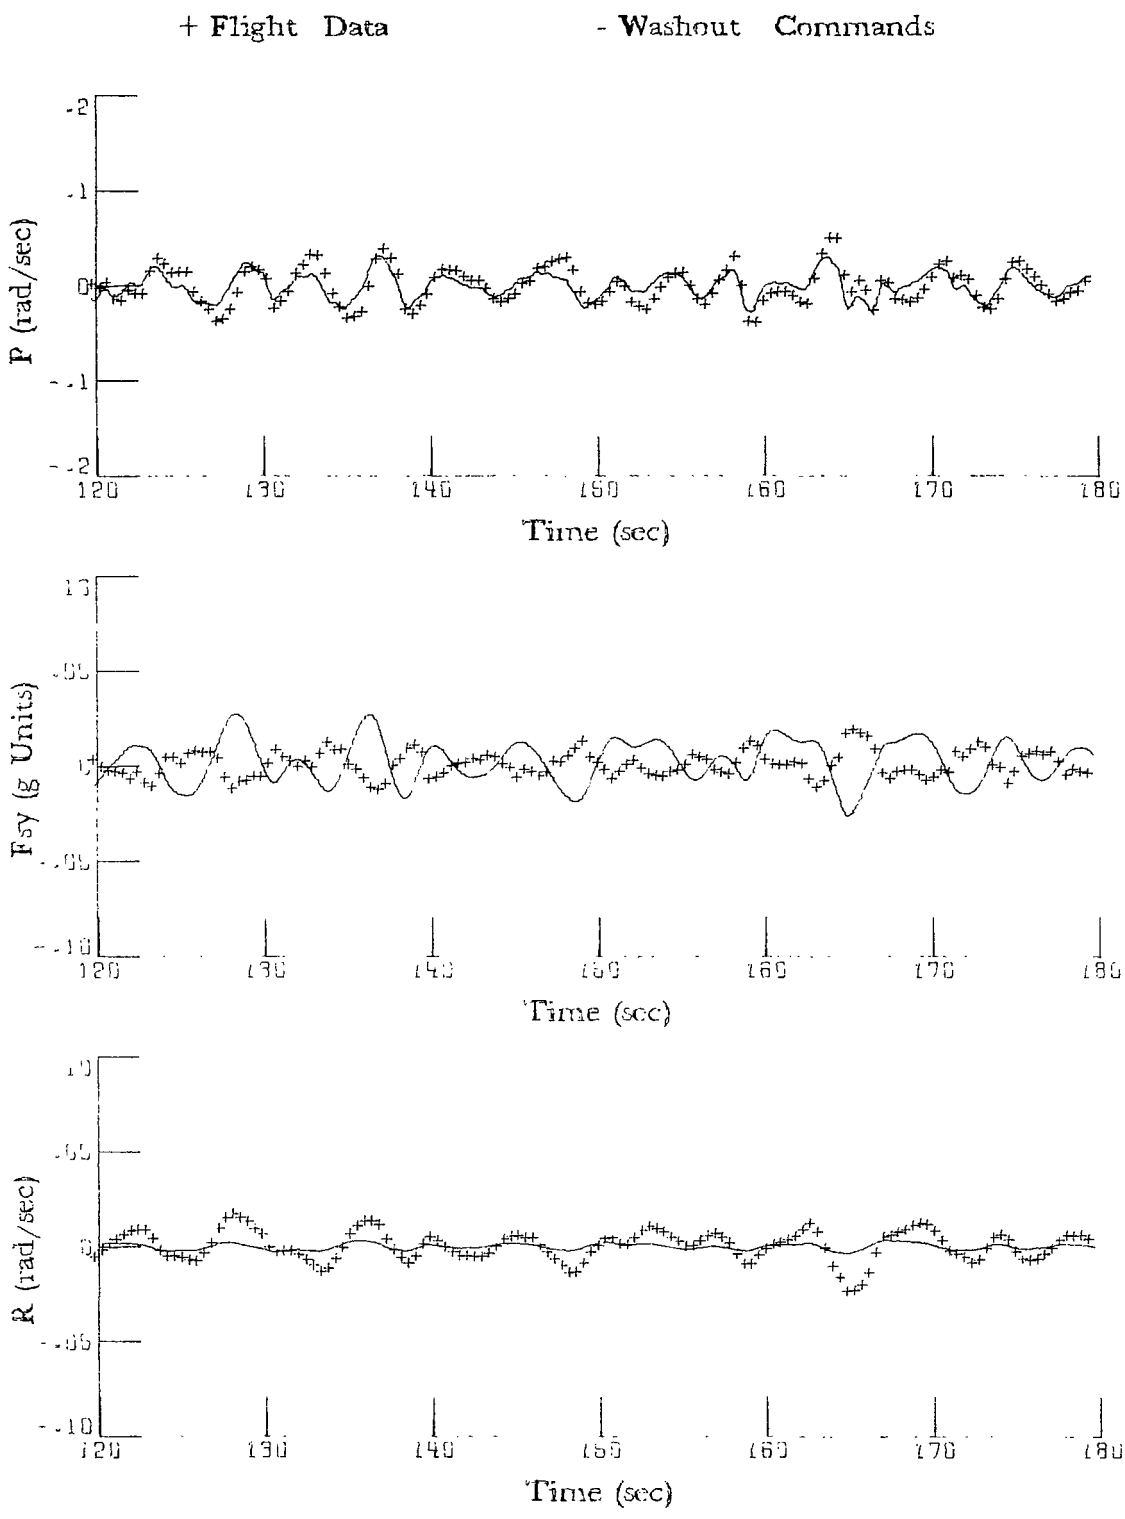

Figure 4.- Continued.

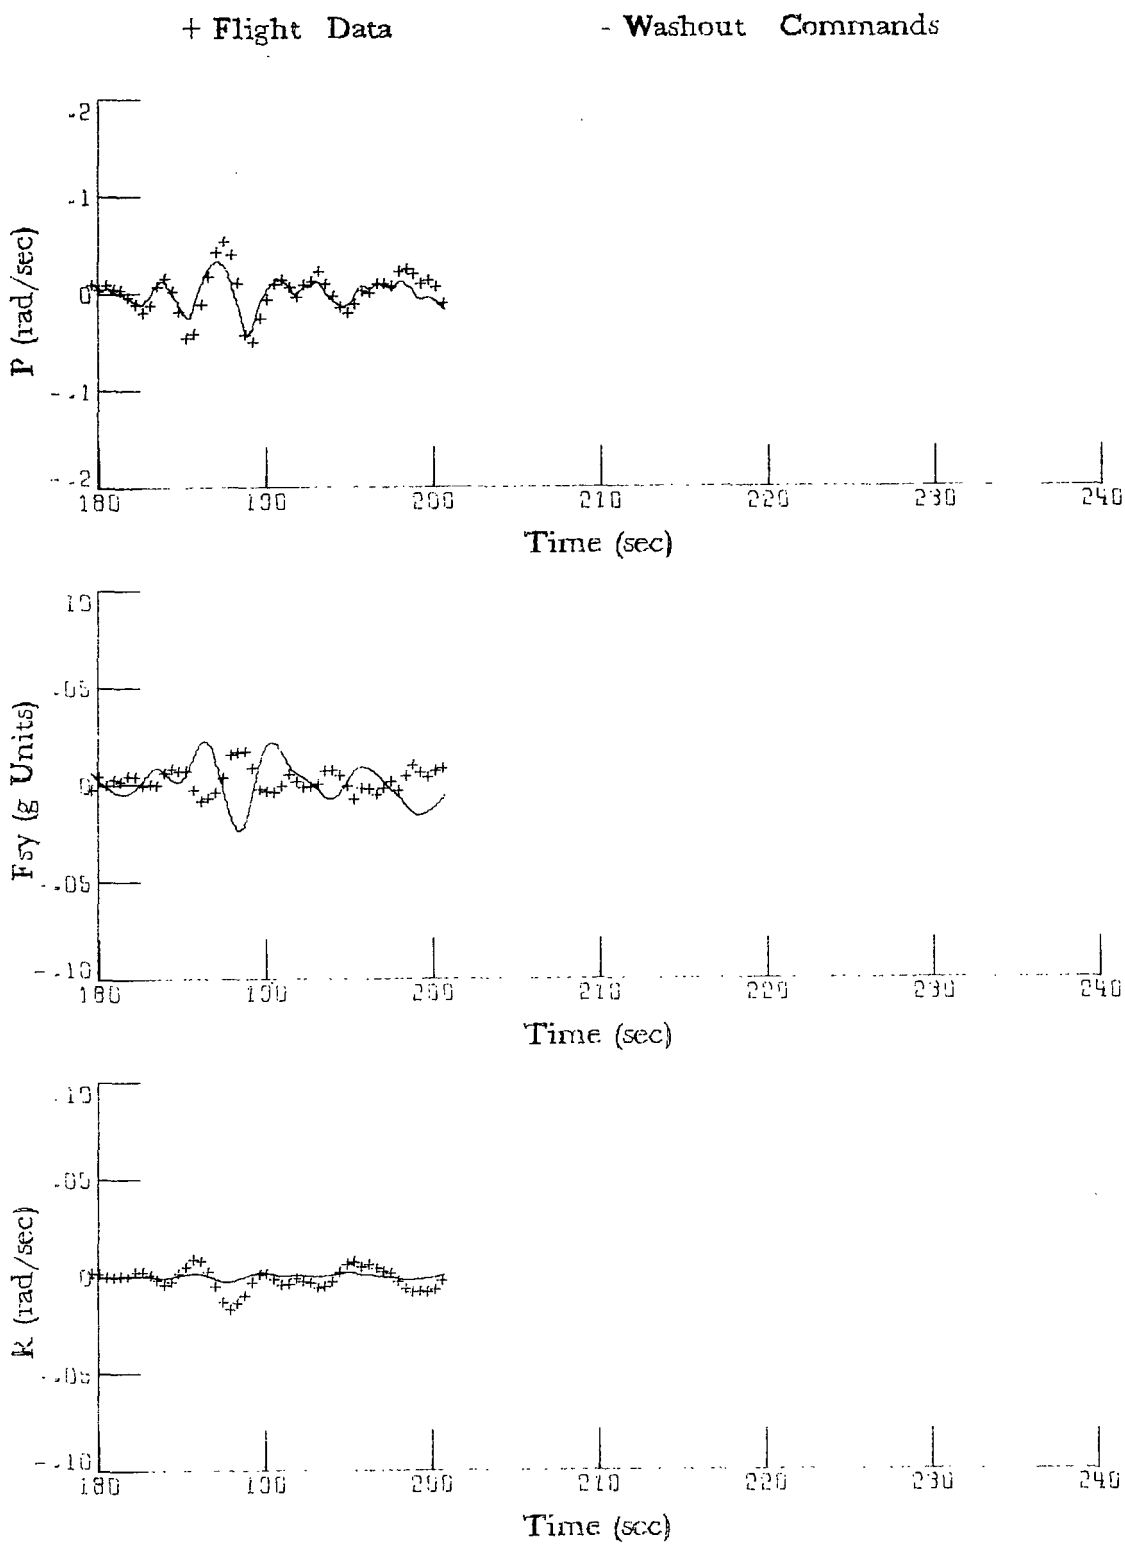

Figure 4.- Concluded.

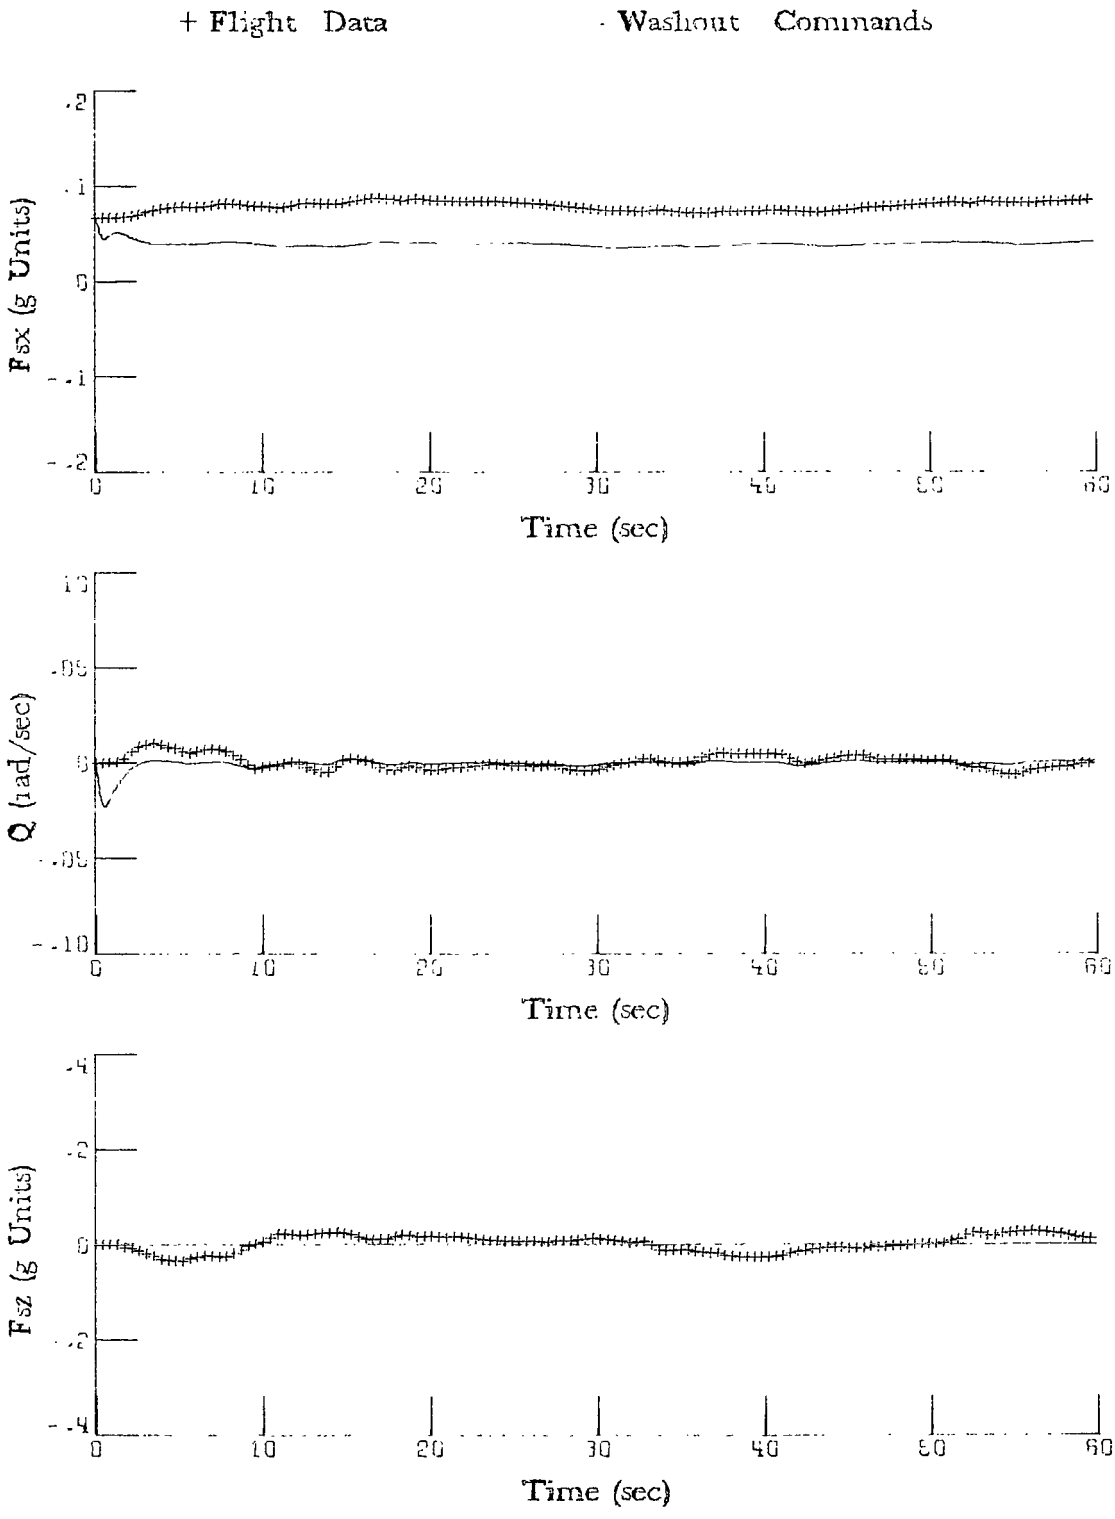

Figure 5.- Engine-out approach condition time histories.

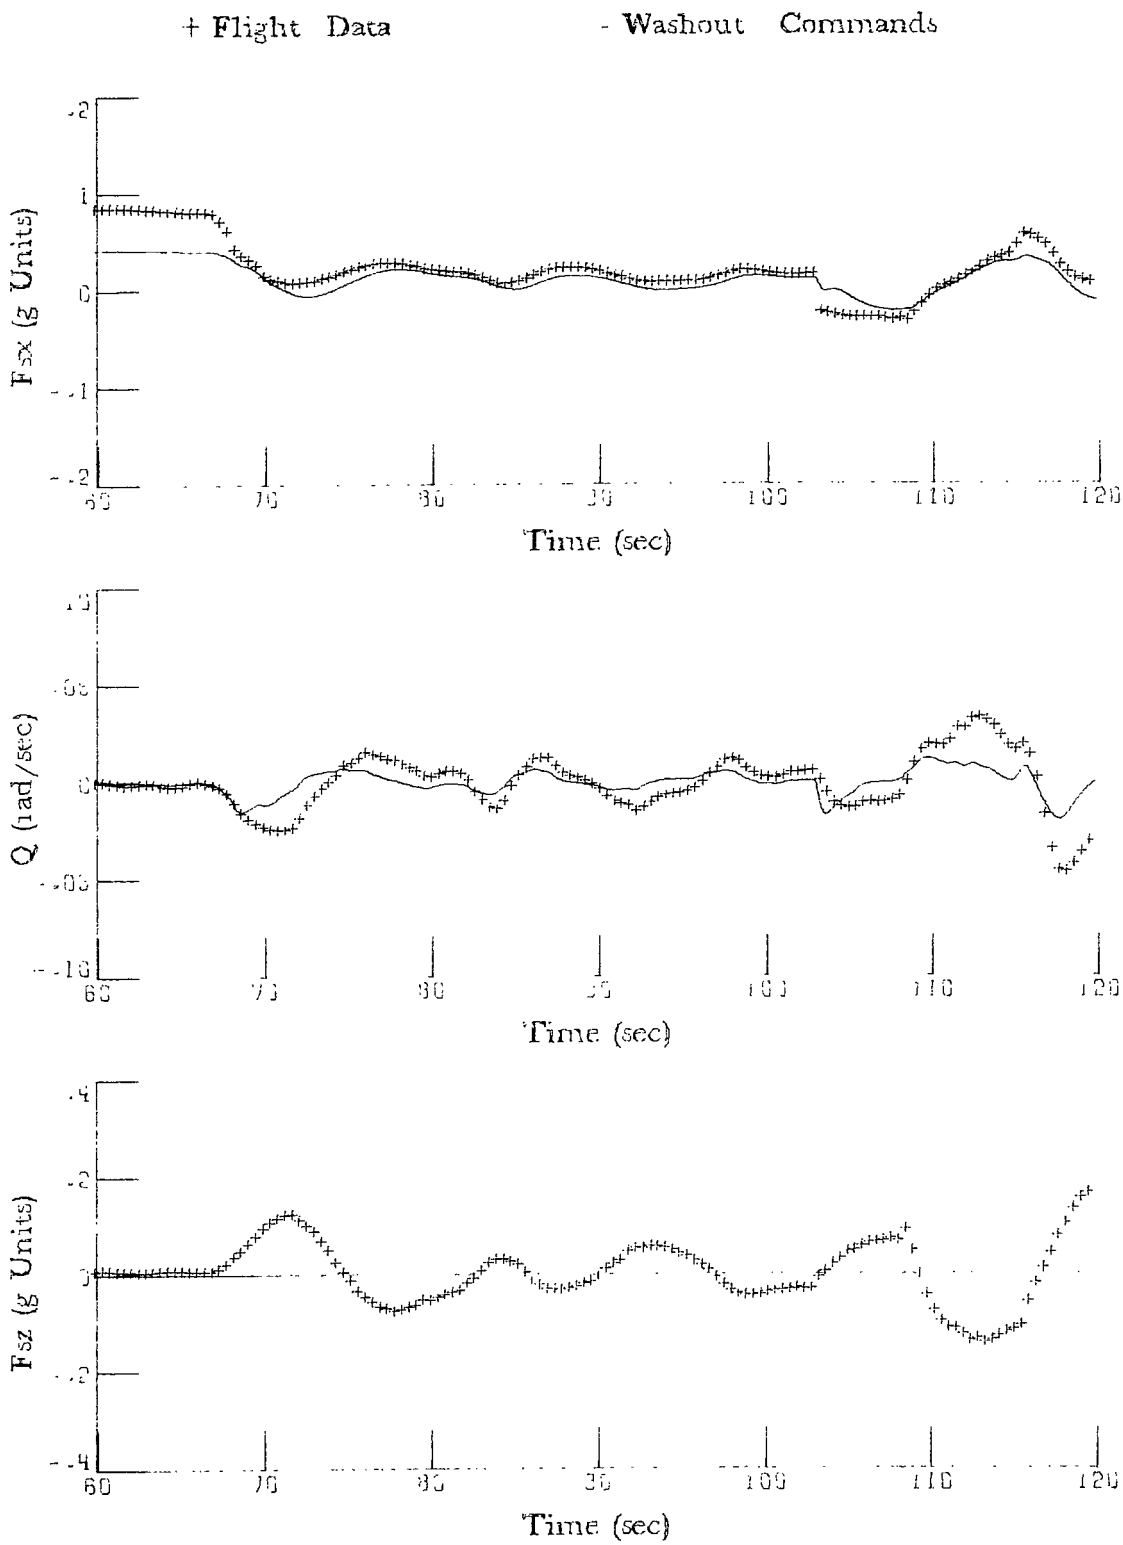

Figure 5.- Continued.

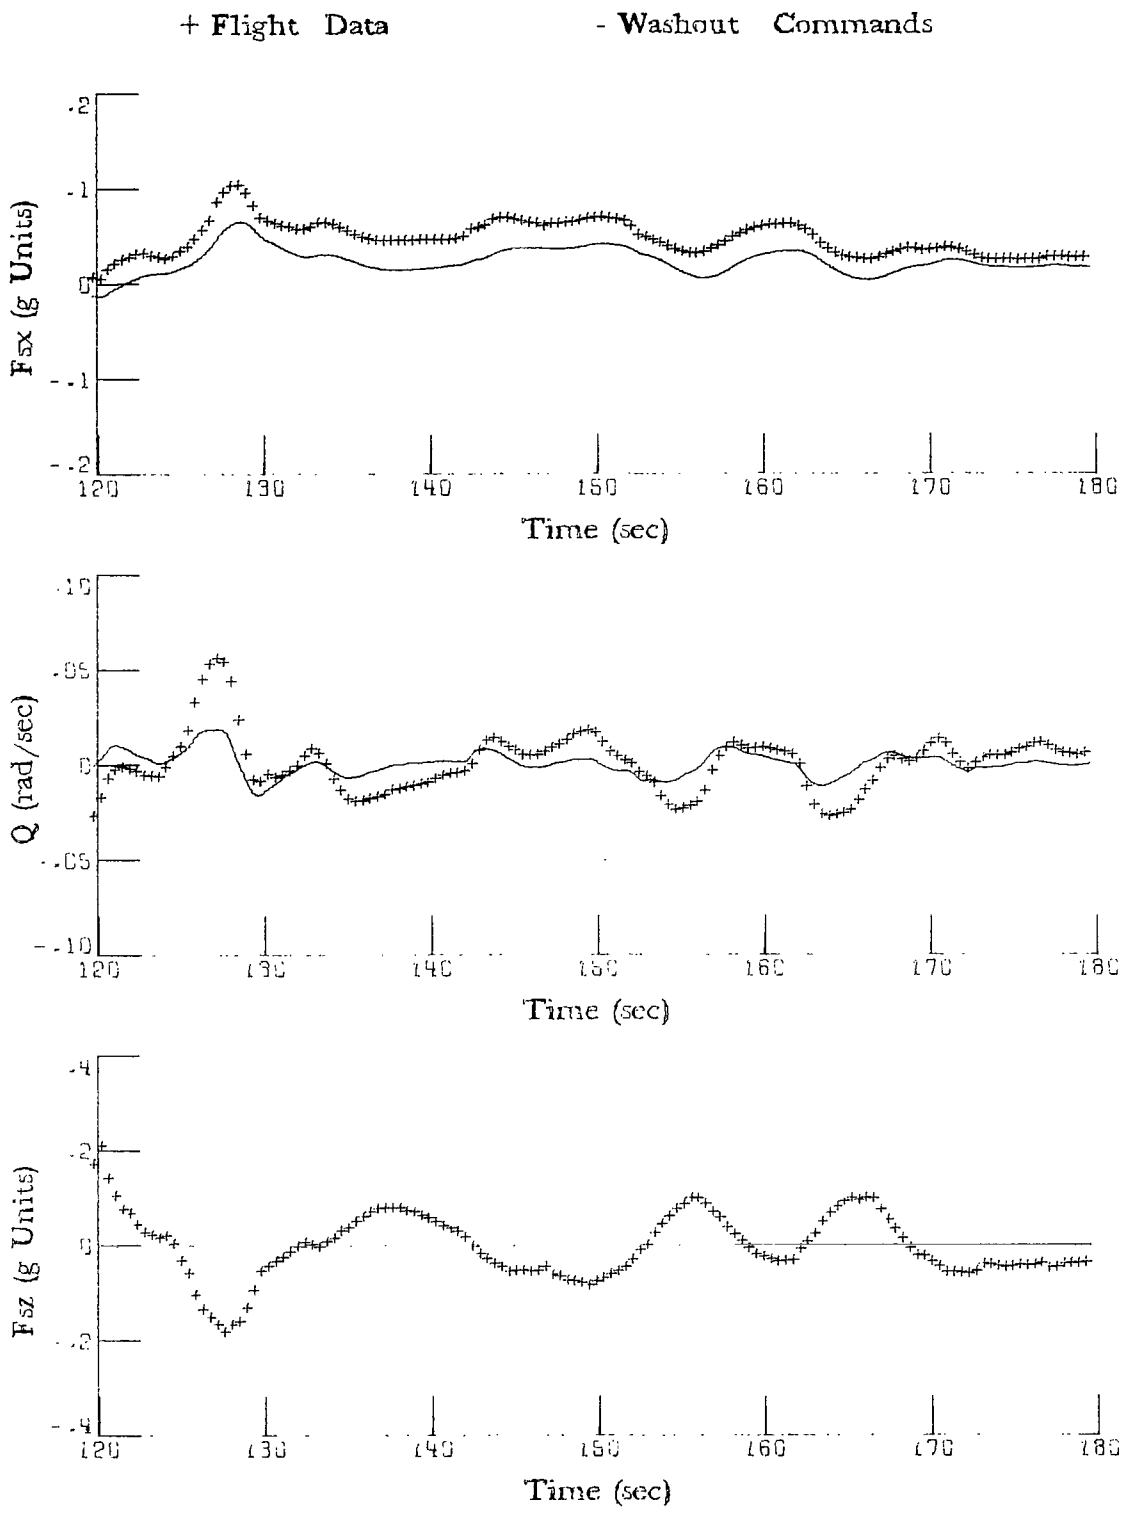

Figure 5.- Continued.

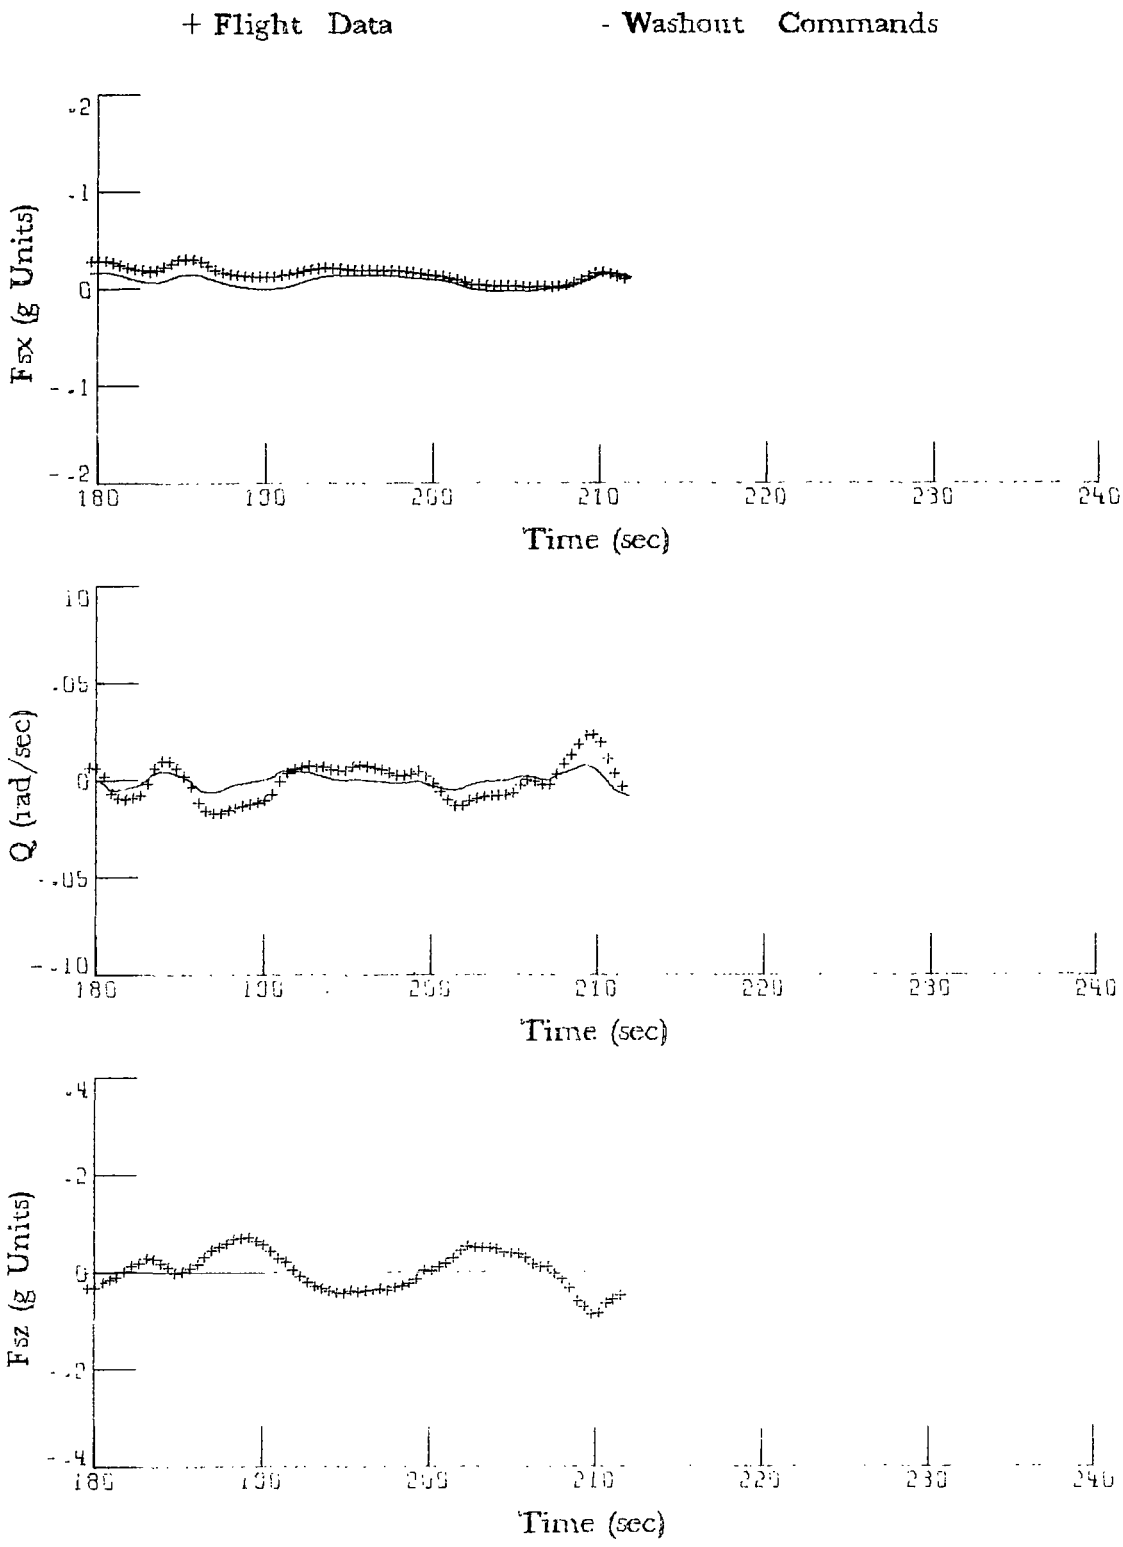

Figure 5.- Continued.

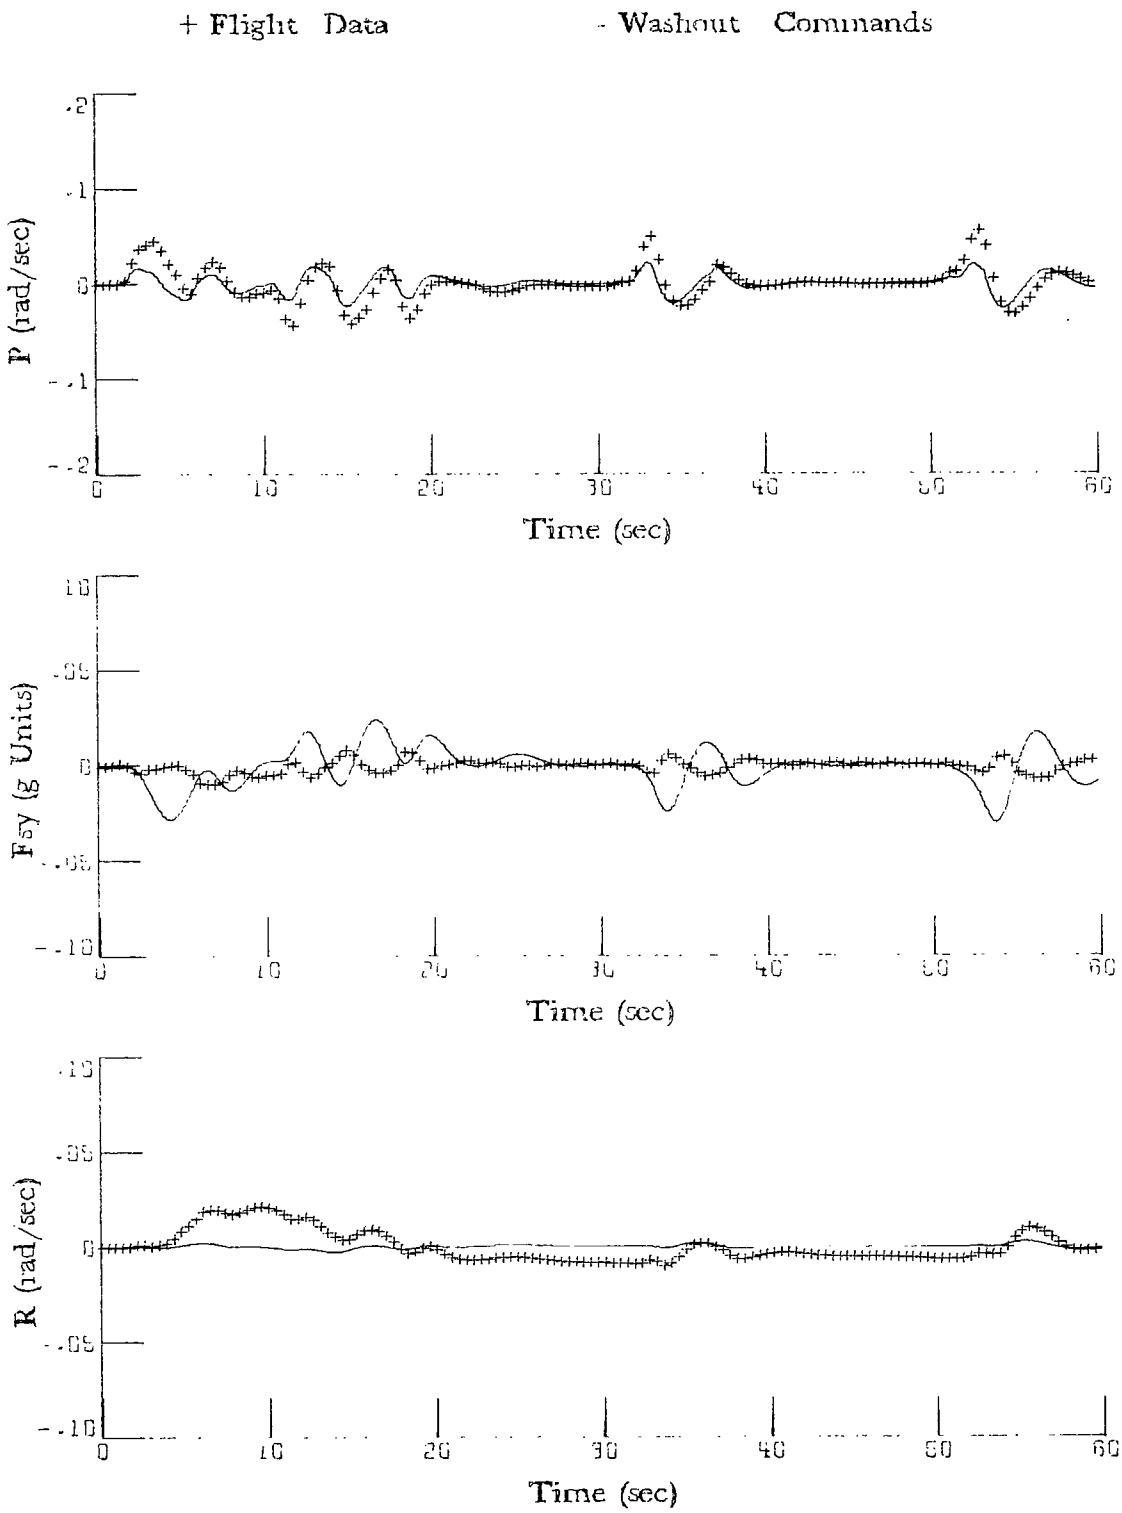

Figure 5.- Continued.

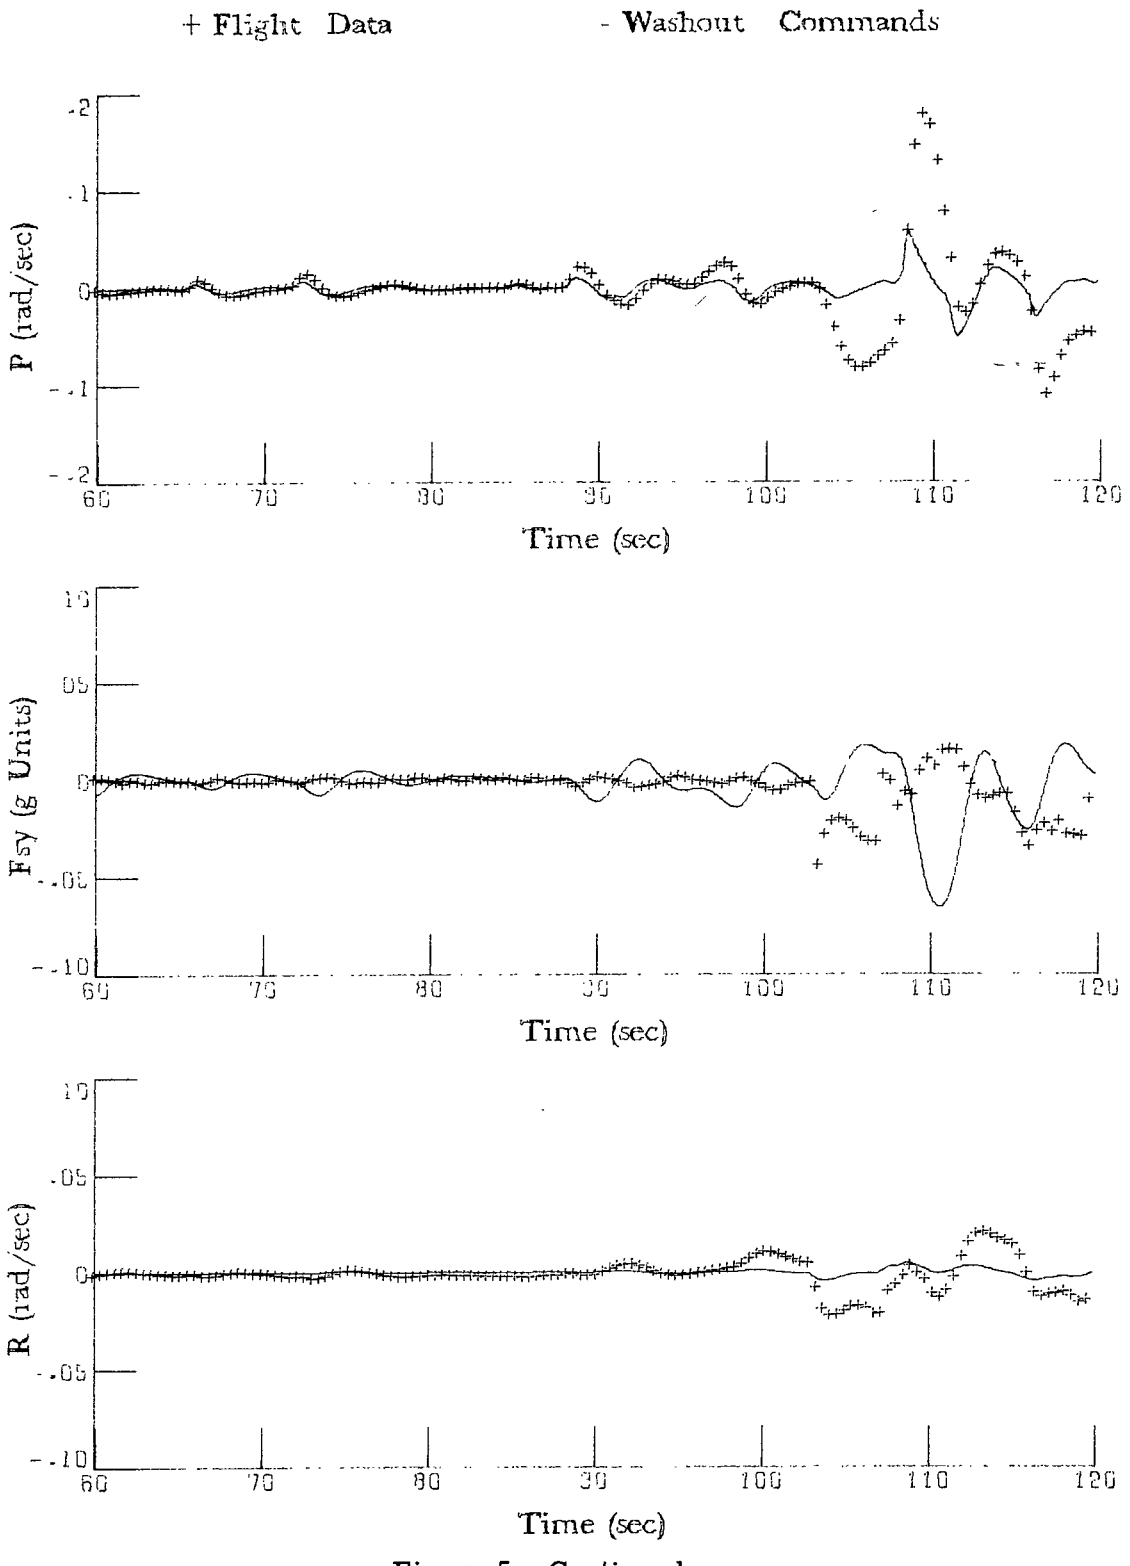

Figure 5.- Continued.

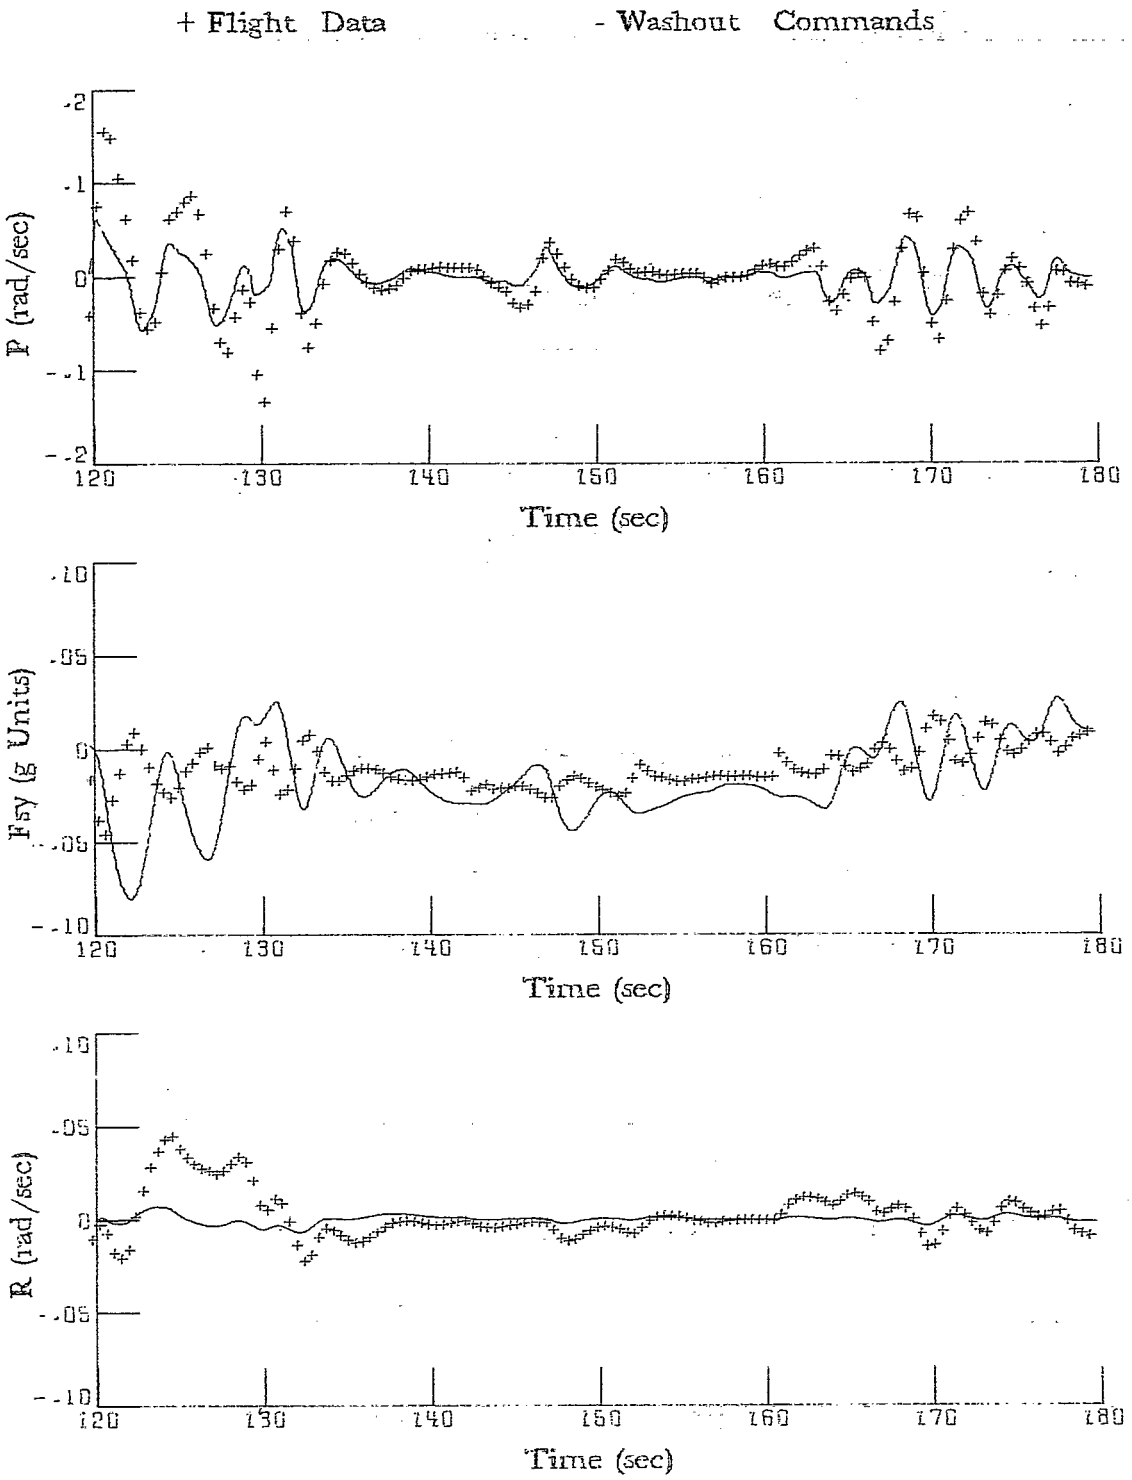

Figure 5.- Continued.

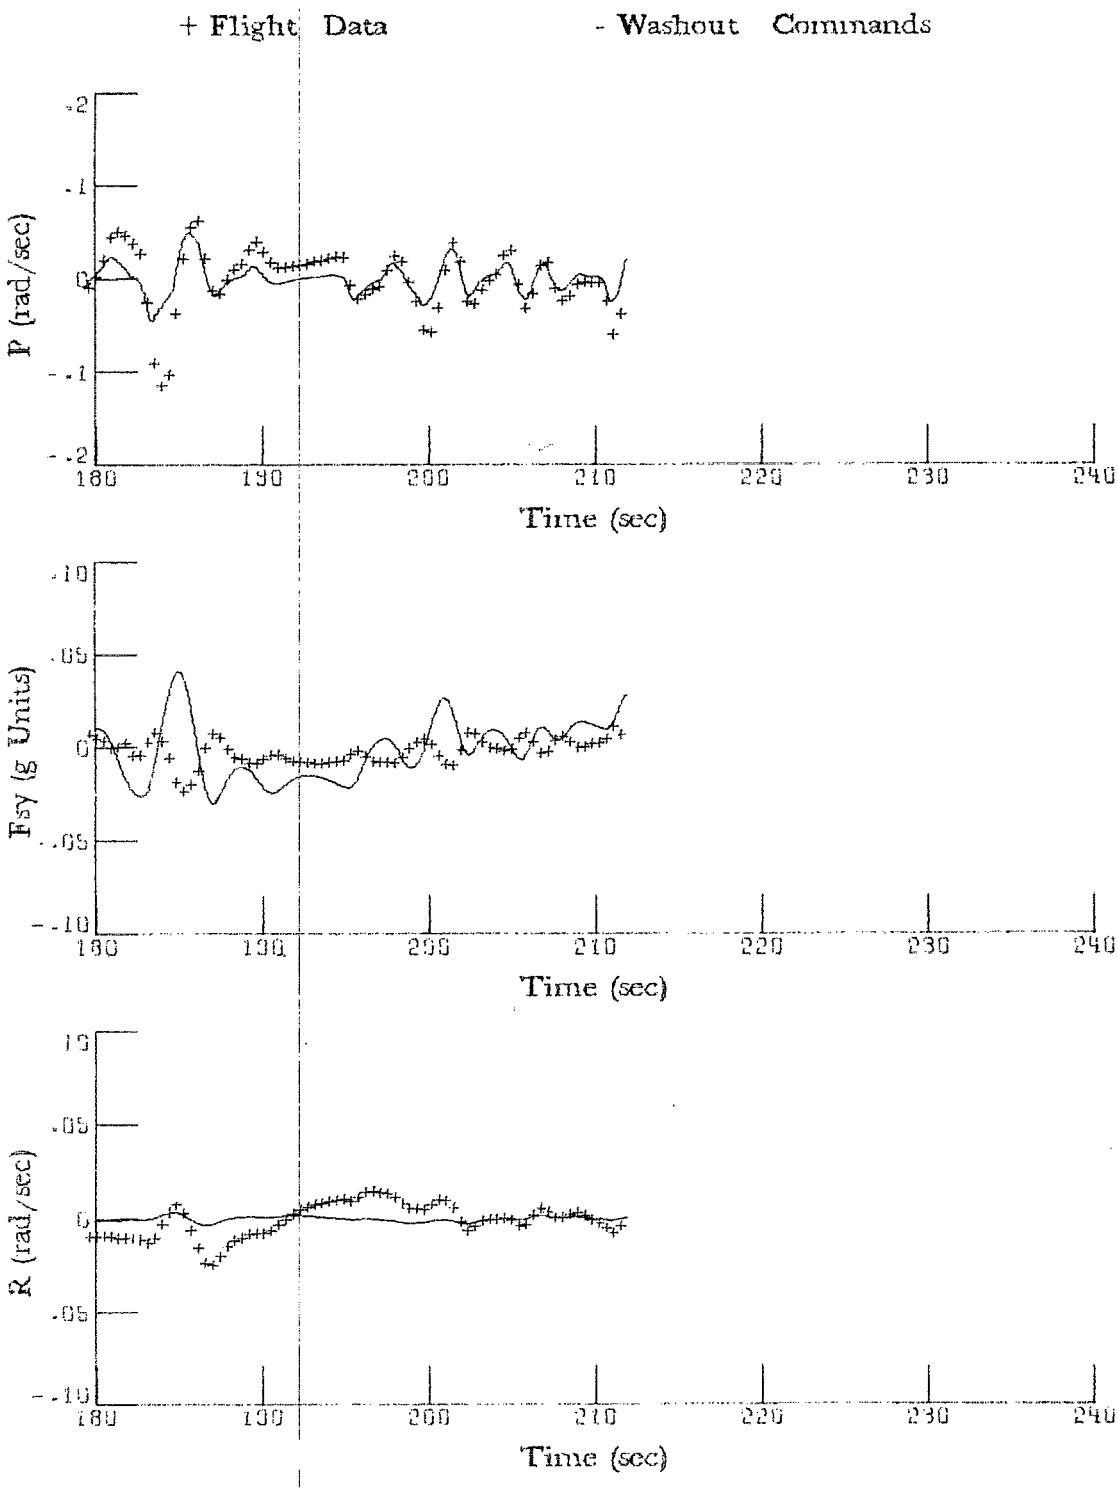

Figure 5.- Concluded.

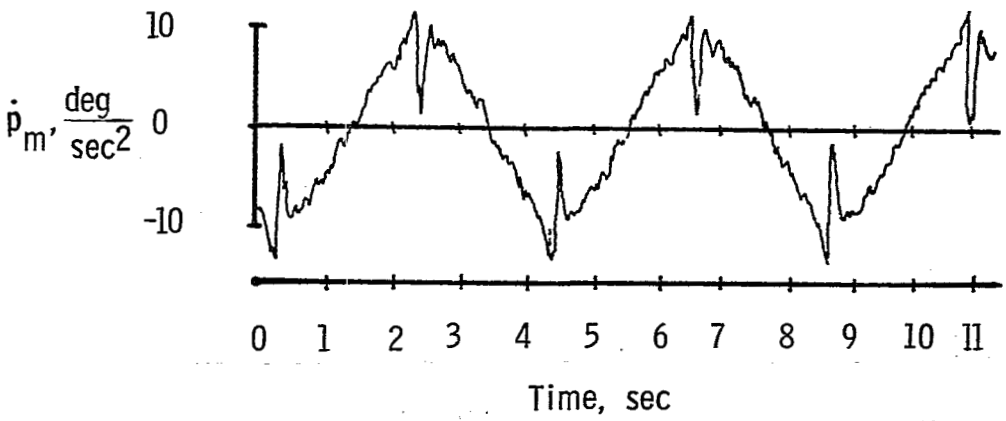

Figure 6.- Accelerometer output documenting turn-around bump in roll.

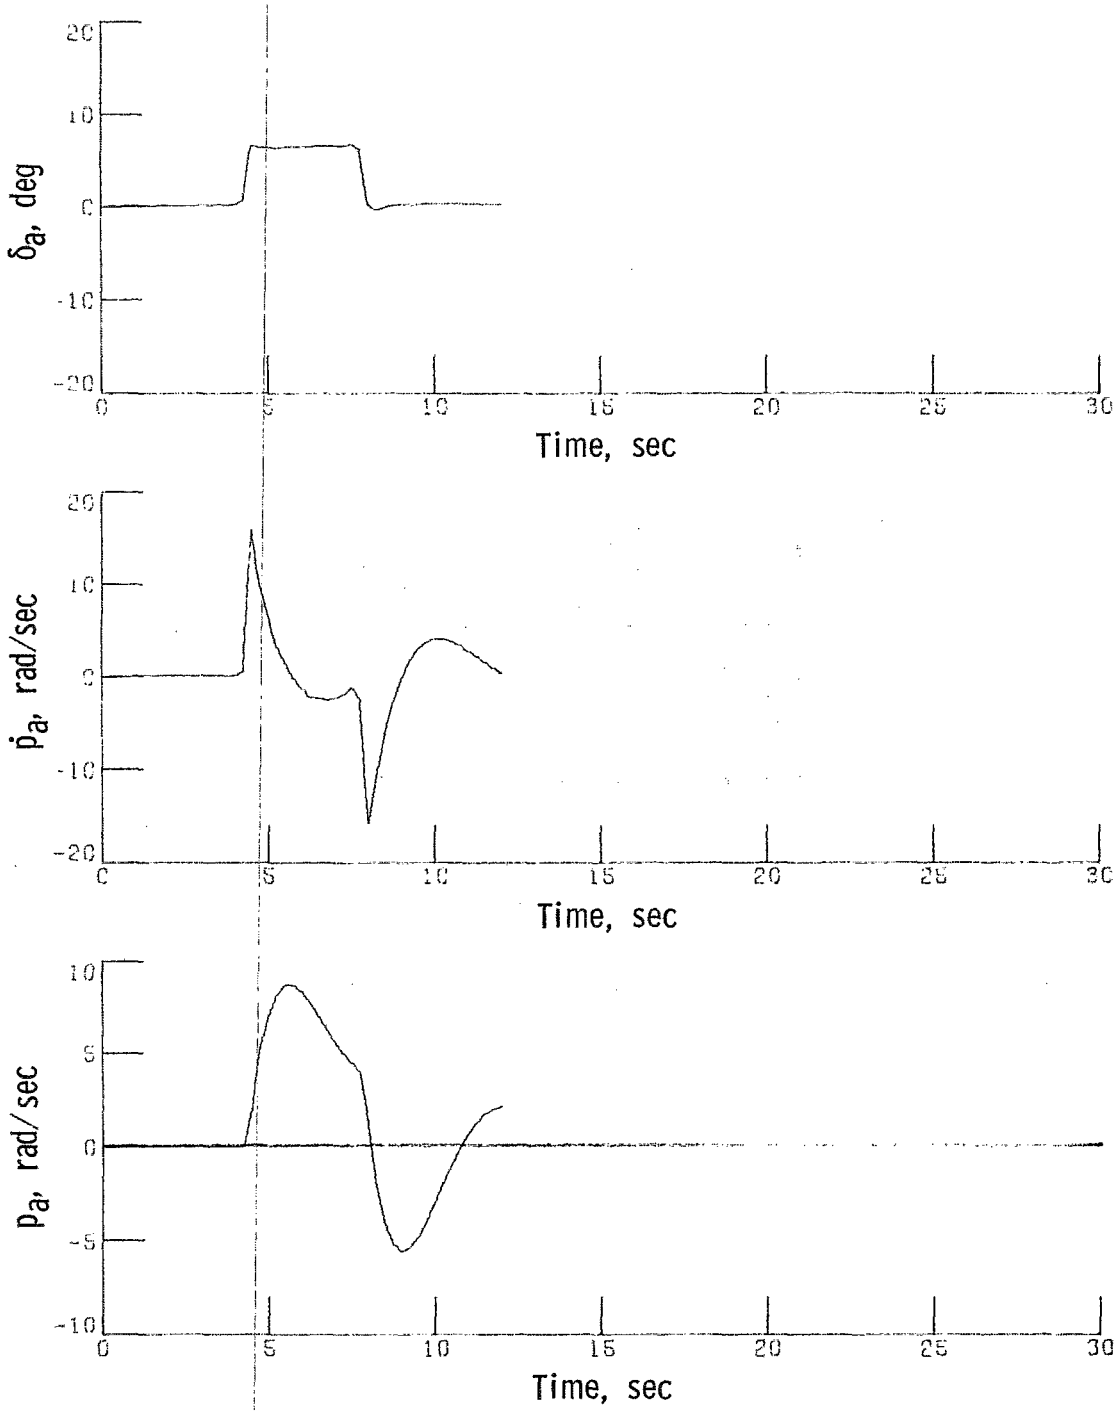

(a) Simulated aircraft response.

Figure 7.- Response to an aileron pulse input.

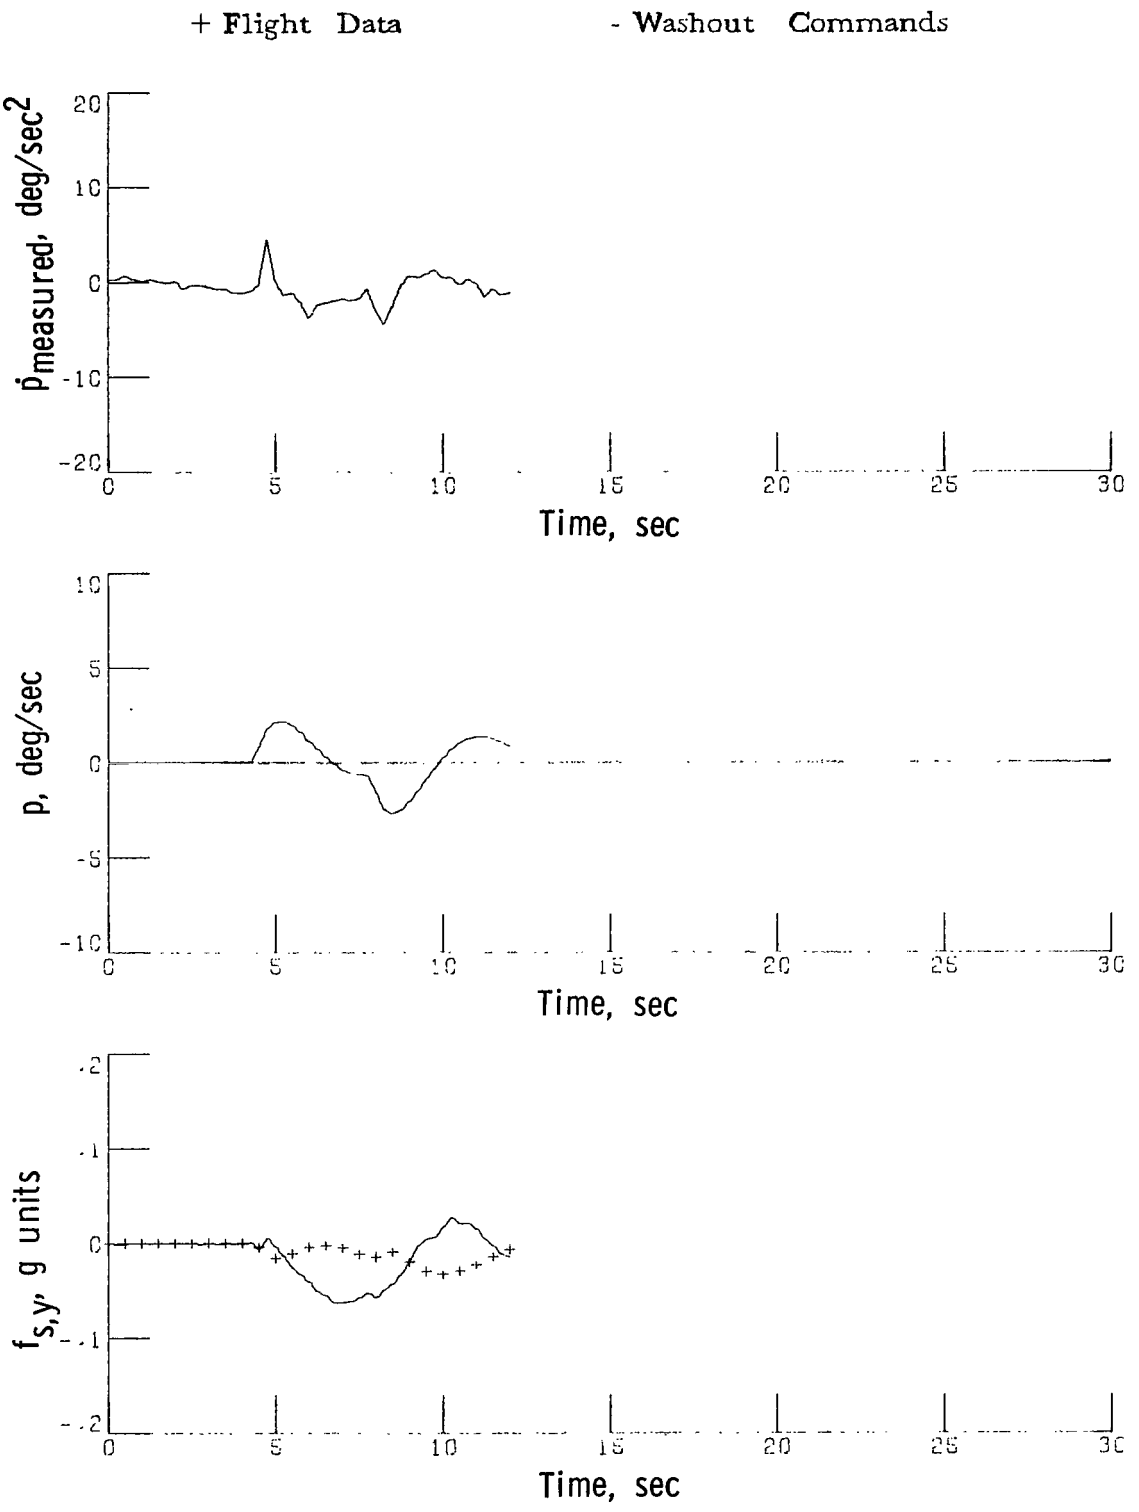

(b) Washout response with 0.1 rad/sec frequency.

Figure 7.- Concluded.

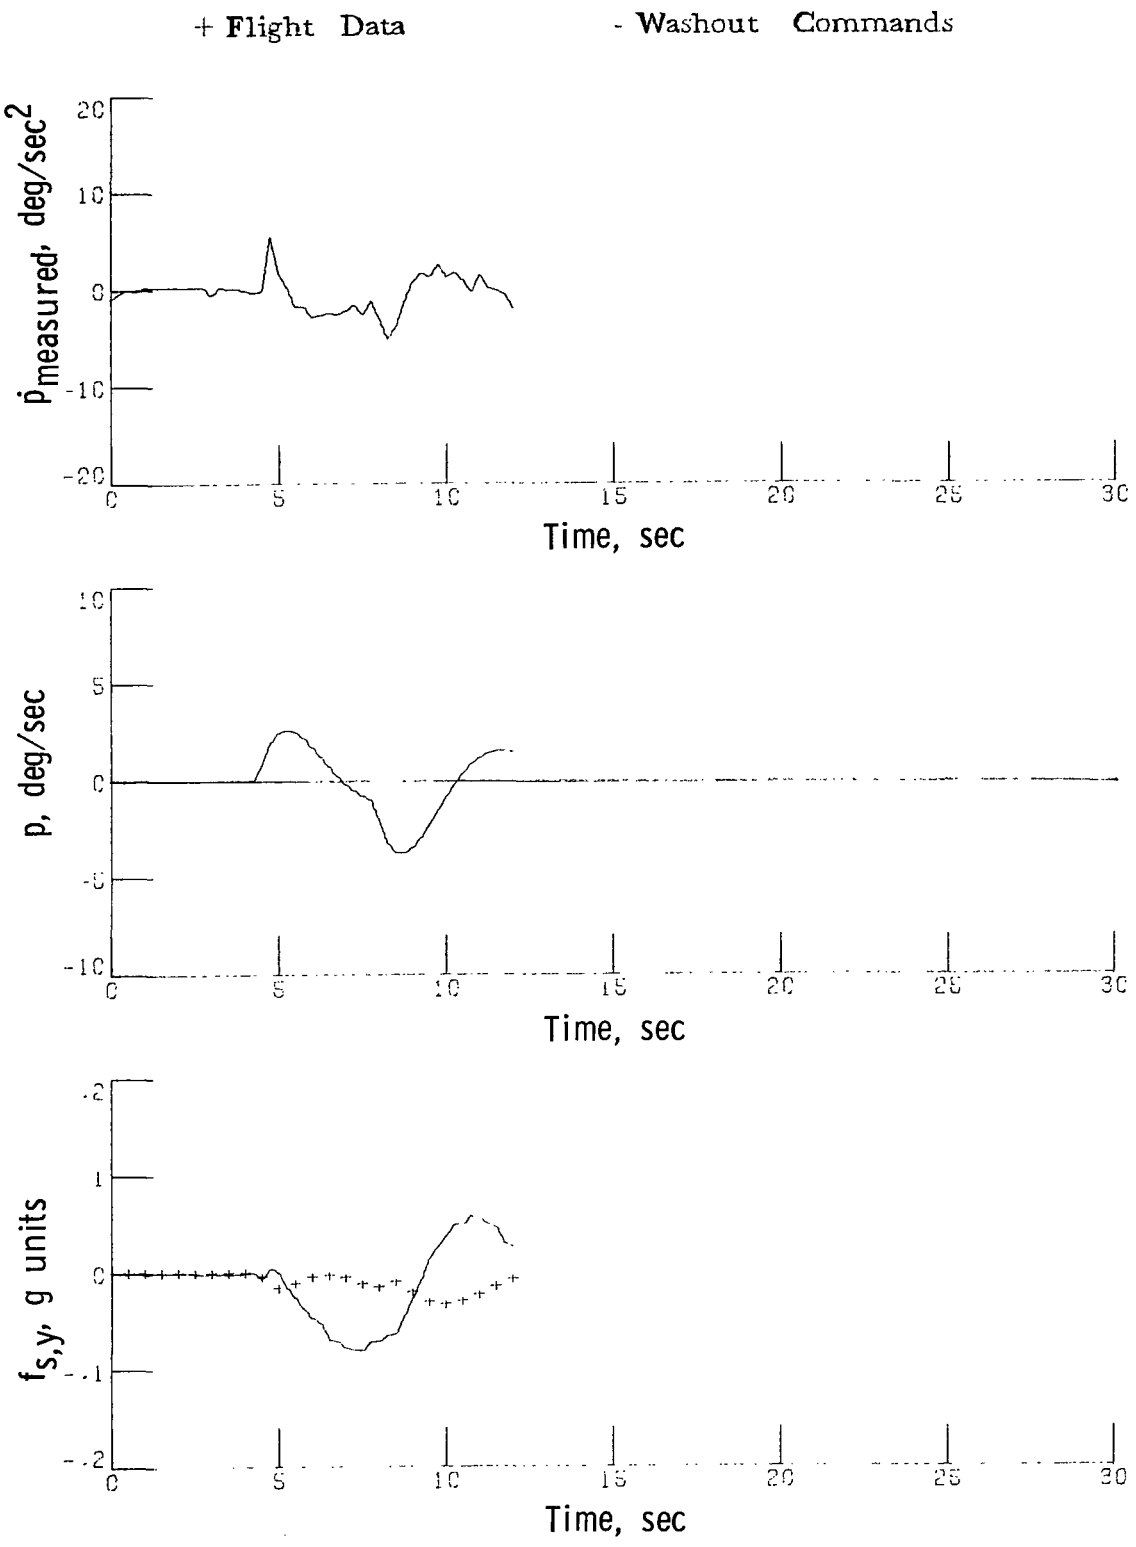

Figure 8.- Washout response with 0.3 rad/sec frequency.

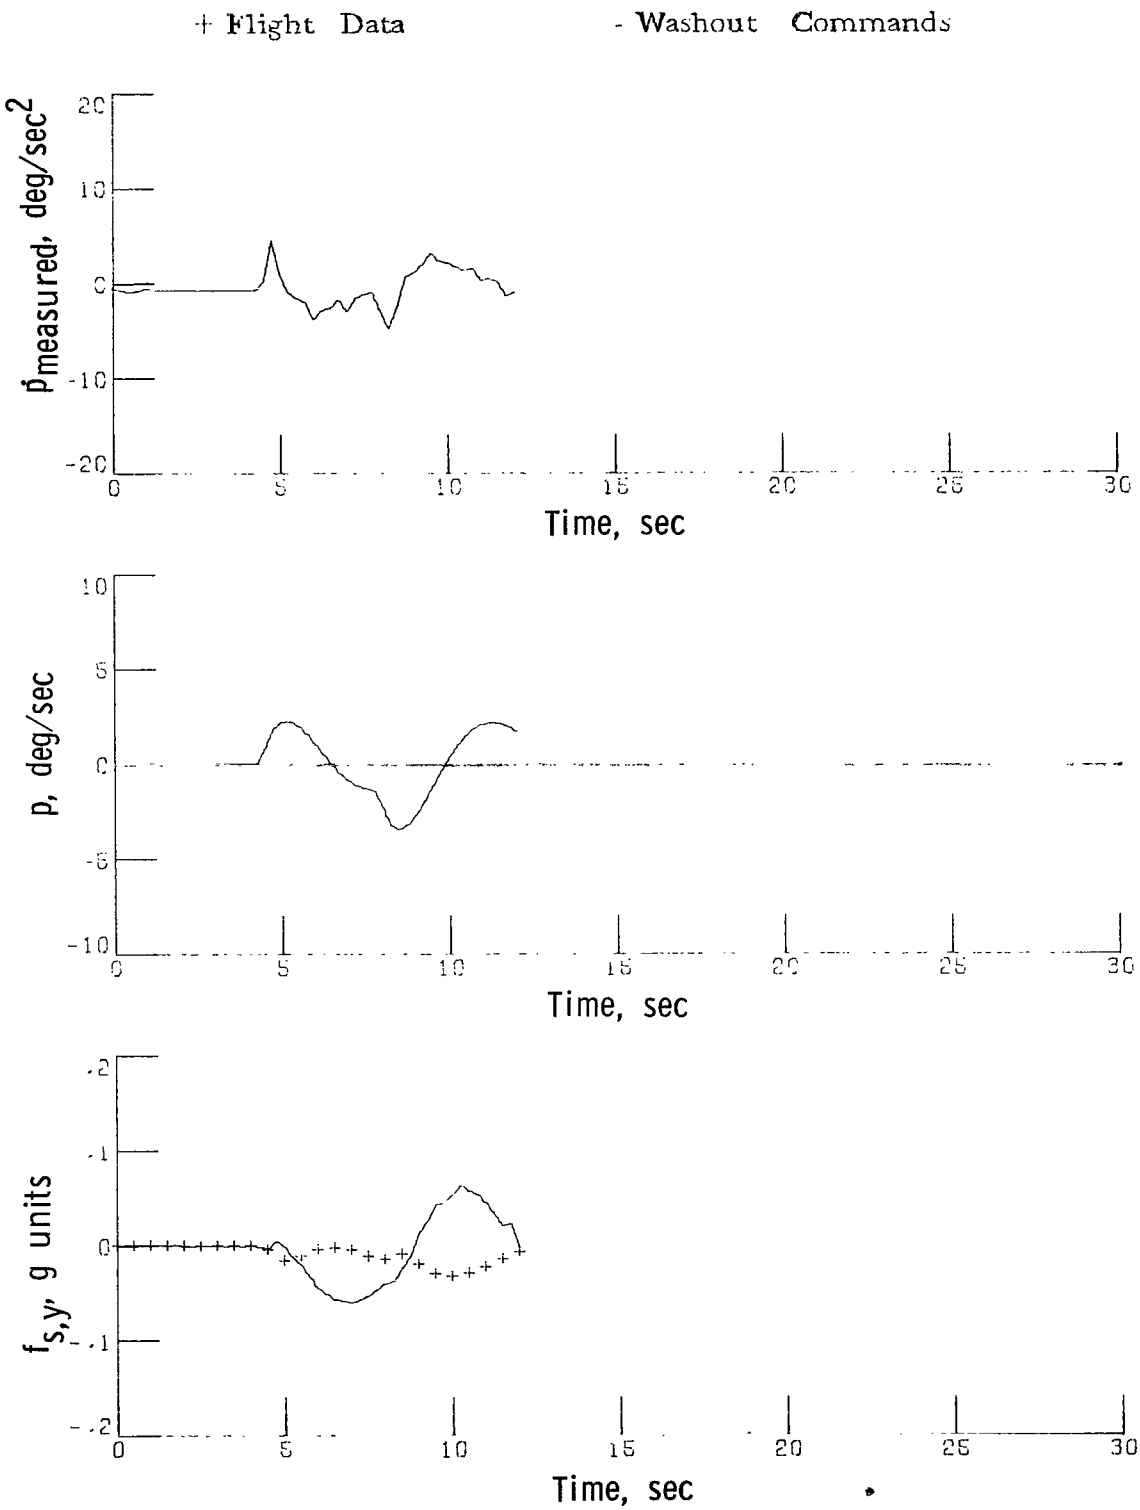

Figure 9.- Washout response with 0.5 rad/sec frequency.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
WASHINGTON, D.C. 20546

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

SPECIAL FOURTH-CLASS RATE
BOOK

POSTAGE AND FEES PAID
NATIONAL AERONAUTICS AND
SPACE ADMINISTRATION
451

U.S.MAIL

959 001 C1 U A 751003 S00903DS
DEPT OF THE AIR FORCE
AF WEAPONS LABORATORY
ATTN: TECHNICAL LIBRARY (SUL)
KIRTLAND AFB NM 87117

POSTMASTER: If Undeliverable (Section 158 Postal Manual) Do Not Return

"The aeronautical and space activities of the United States shall be conducted so as to contribute . . . to the expansion of human knowledge of phenomena in the atmosphere and space. The Administration shall provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof."

—NATIONAL AERONAUTICS AND SPACE ACT OF 1958

NASA SCIENTIFIC AND TECHNICAL PUBLICATIONS

TECHNICAL REPORTS: Scientific and technical information considered important, complete, and a lasting contribution to existing knowledge.

TECHNICAL NOTES: Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

TECHNICAL MEMORANDUMS: Information receiving limited distribution because of preliminary data, security classification, or other reasons. Also includes conference proceedings with either limited or unlimited distribution.

CONTRACTOR REPORTS: Scientific and technical information generated under a NASA contract or grant and considered an important contribution to existing knowledge.

TECHNICAL TRANSLATIONS: Information published in a foreign language considered to merit NASA distribution in English.

SPECIAL PUBLICATIONS: Information derived from or of value to NASA activities. Publications include final reports of major projects, monographs, data compilations, handbooks, sourcebooks, and special bibliographies.

TECHNOLOGY UTILIZATION PUBLICATIONS: Information on technology used by NASA that may be of particular interest in commercial and other non-aerospace applications. Publications include Tech Briefs, Technology Utilization Reports and Technology Surveys.

Details on the availability of these publications may be obtained from:

SCIENTIFIC AND TECHNICAL INFORMATION OFFICE

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Washington, D.C. 20546