



# Preliminary Results from the AFRL-NASA W/V-Band Terrestrial Link Experiment in Albuquerque, NM

Wave Propagation in Terrestrial, Oceanic and Atmospheric Environments

Michael Zemba, James Nessel, Jacquelynne Houts, Nicholas Tarasenko, Steven Lane, David Murrell

Presented by Michael Zemba NASA Glenn Research Center Advanced High Frequency Branch

+1.216.433.5357 michael.j.zemba@nasa.gov

2016 IEEE International Symposium on Antennas and Propagation


Fajardo, Puerto Rico


June 29<sup>th</sup>, 2016



### Presentation Overview



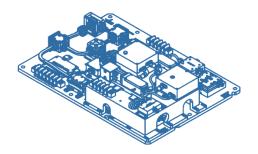

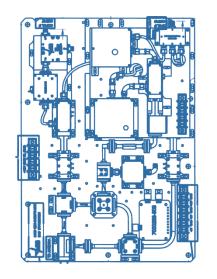

Wireframe schematic of the WTLE receiver front end electronics.

- 1. Motivation & Experiment Goals
- 2. Site of Study
- 3. Receiver Site (COSMIAC)
- 4. Transmitter Site (Sandia Crest)
- 5. Instrumentation
- 6. Preliminary Results
- 7. Solar Influence
- 8. Concluding Remarks

### Motivation & Goals





WTLE transmitter front end electronics and lens antennas.

#### **Experiment Motivation & Goals**

- To **assess the impact** of atmospheric effects on links operating in the V and W-band (rain attenuation, scintillation, depolarization, etc.).
- To **develop physical models** to improve predictions of atmospheric attenuation within the V/W-band.
- To provide a **testbed** for RF propagation measurement instruments & techniques.
- To assess **optical link** performance with a side-by-side link in tandem with the existing RF link.

## Site of Study





11	
Receiver	



Receiver					
Site	UNM / COSMIAC (Roof)				
Latitude	35.054031° N				
Longitude	106.619443° W				
Altitude	1.596 km				
Installation Date	September 2015				

Transmitter					
Site	Sandia Crest				
Latitude	35.215128° N				
Longitude	106.451245° W				
Altitude	3.239 km				
Beacon Freqs.	72 GHz 84 GHz				
Installation Date	September 2015				

Path	
Azimuth	40.444°
Elevation	3.984°
Path Length	23.55 km

COSMIAC (University of New Mexico) (Photo: Google Earth)

Sandia Crest (Photo: Google Earth)

## Receiver Site (COSMIAC)







## Transmitter Site (Sandia Crest)







### Instrumentation




#### **Beacon Receivers**



Antenna Gain	45.6 dBi (V / W-band)
Dynamic Range	70 dB (V) /68 dB (W)
Co/Cross-Polarization Isolation	13 dB (V) / 20 dB (W)
Polarization	LHCP
Sampling Period	0.1 sec (10 Hz)

#### **Weather Instrumentation**

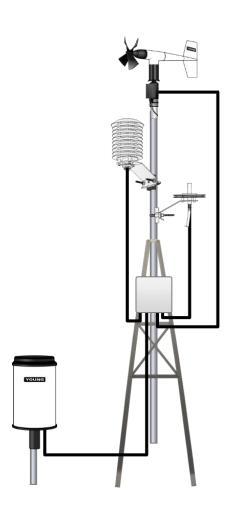

Anemometer:

Young 05178A

**Temperature/Humidity Sensor:** 

Young 41382VC

**Pressure Sensor:** 

Young BPV3000

**Tipping Bucket:** 

Young 52203

**Laser Disdrometer** 


Thies Clima 5.4110




## Block Diagram






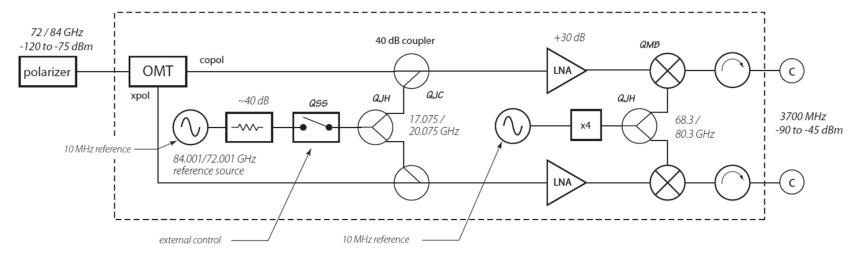

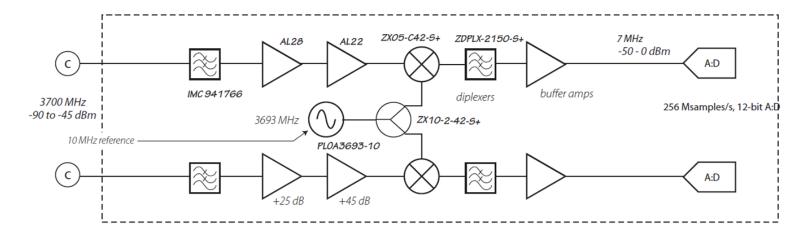

### System Performance



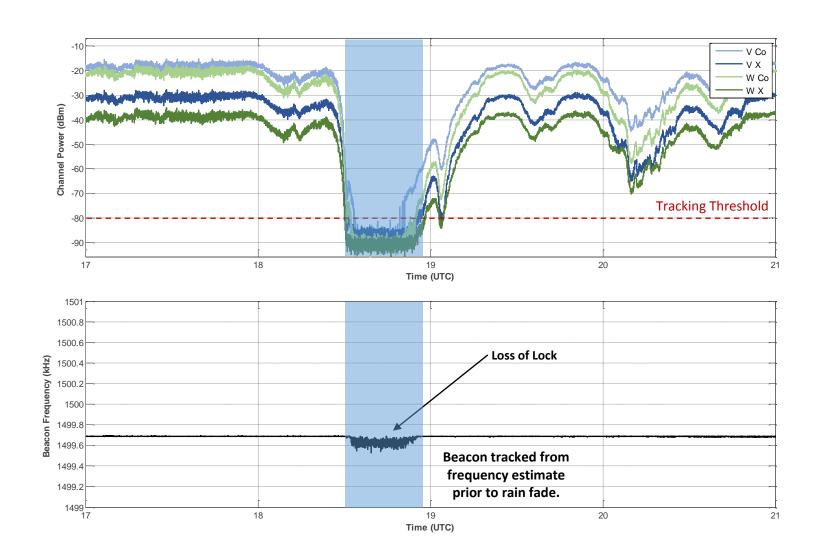


Under normal operating conditions, the V and W-band receivers track their respective beacon signals using a modified Quinn-Fernandes frequency estimation algorithm. The cross-polarization signal is tracked from the current co-polarization frequency

When attenuation approaches the noise floor (below a given power threshold), the frequency estimate is replaced by an average of the frequency estimate prior to the fade. This allows for a slight improvement in dynamic range during the beginning and end of deep fades.

Signal lock is immediately regained when the signal reappears above the noise floor.

## Clear Sky Day (2015-09-30)



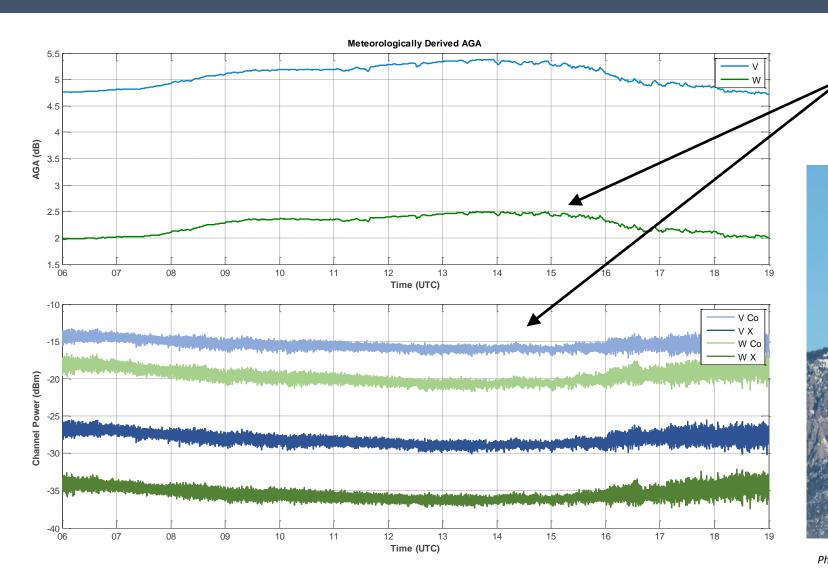


Diurnal variations in atmospheric gaseous absorption (AGA) observed in timeseries attenuation on clear-sky days.



## Deep Rain Fade (2015-11-04)



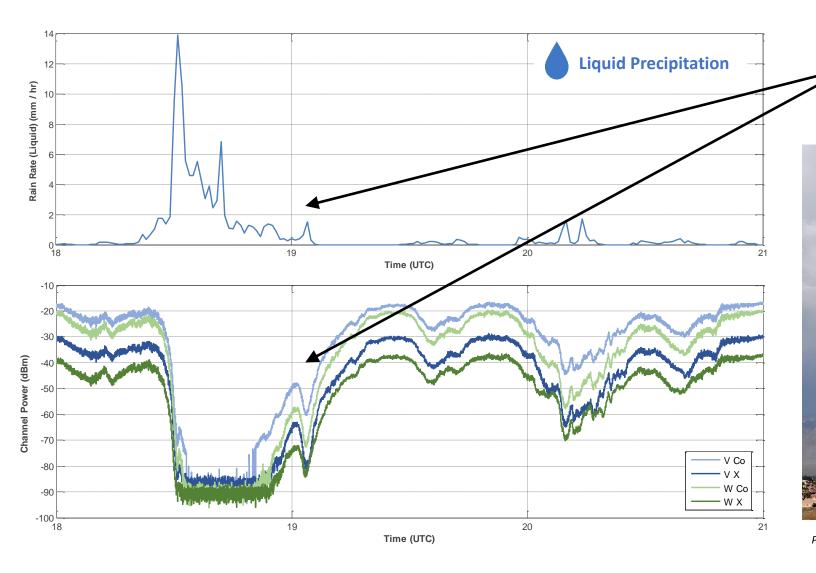


Strong rain event exceeds dynamic range of receiver on all channels.

Photo Credit: Albuquerque Journal

## Rain on Path (2015-10-03)



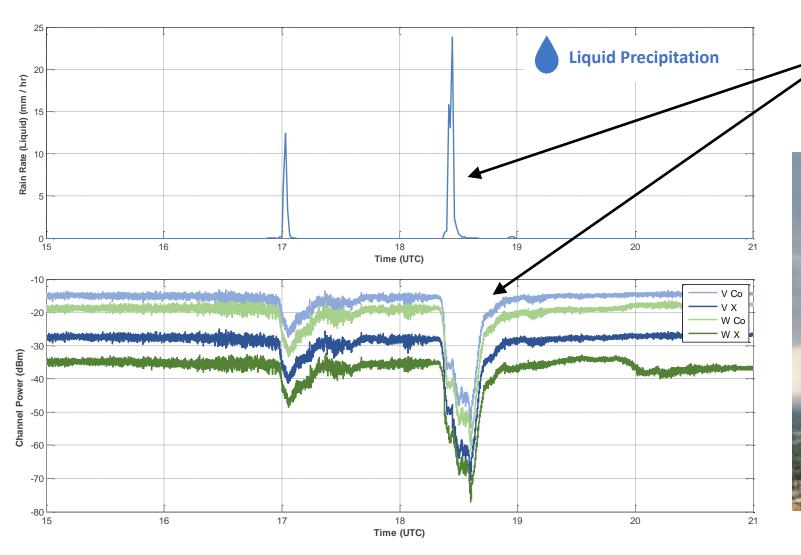


Rain at receiver subsides while rain fade continues, indicating continued rain along the path.

Photo Credit: NOAA

### Snow / Depolarization (2015-12-26)



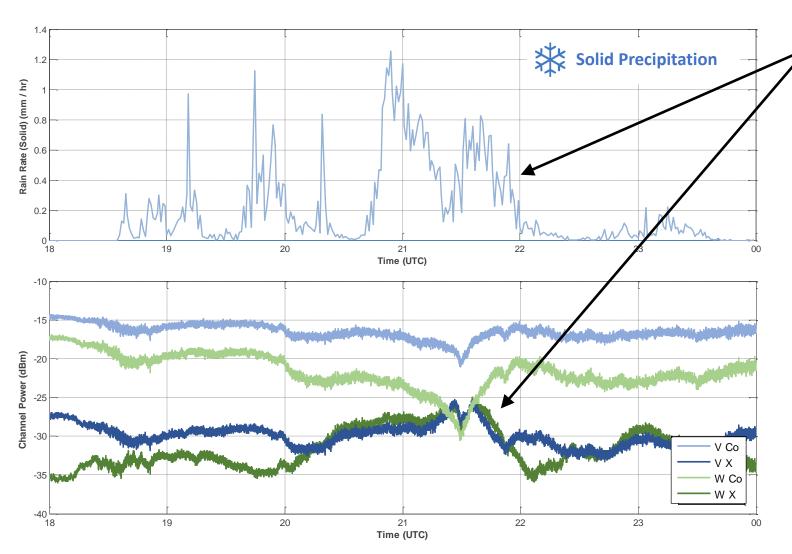


Strong depolarizing effects observed on both V and W-band channels during solid precipitation (snow) event.



Photo Credit: Albuquerque Journal

## Cloud Event (2016-01-09)



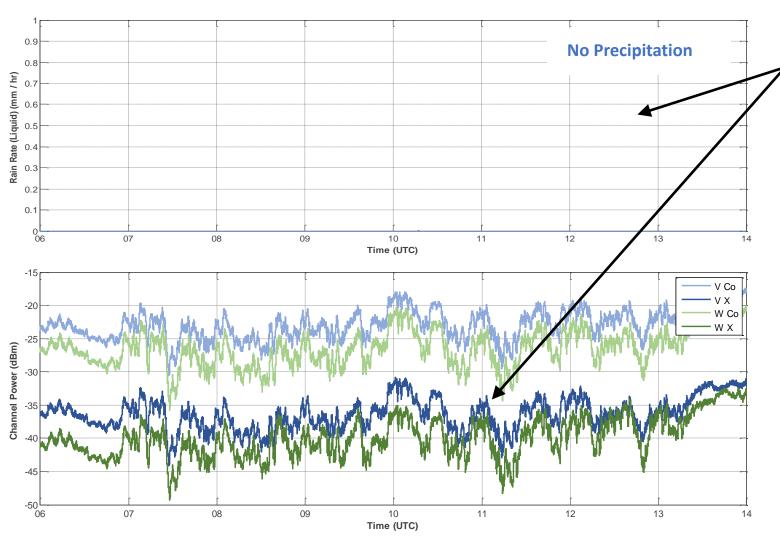


Strong fluctuations on both V and W-band channels with no precipitation while clouds obscure the peak of Sandia Crest.



Photo Credit: NASA


### Measurement Spectral Density




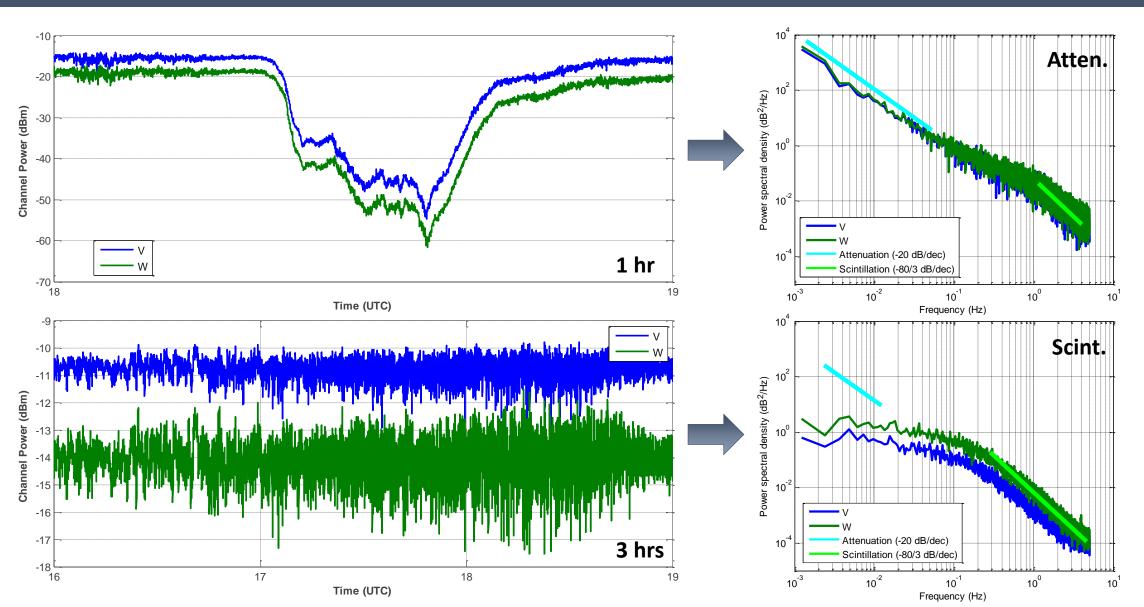

### **Attenuation Statistics**



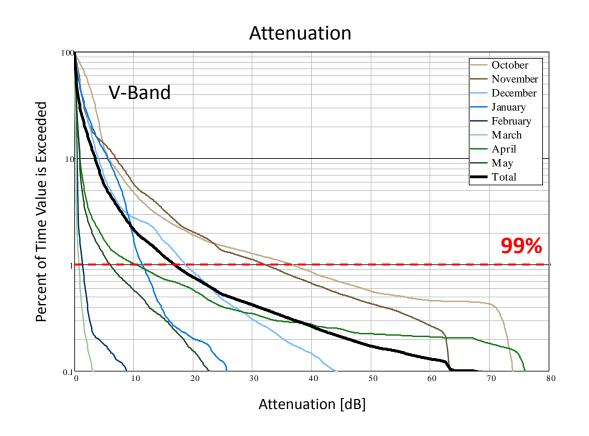

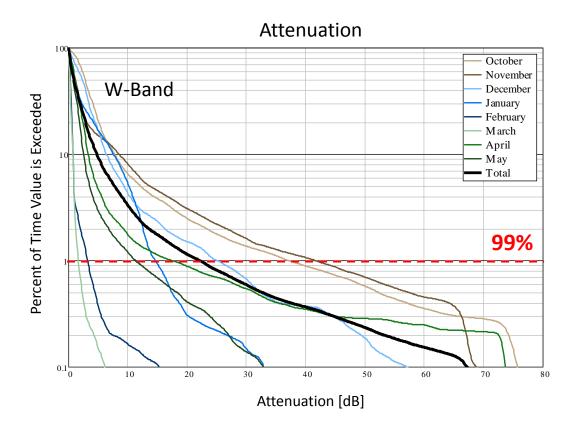

99% Attenuation
(Exceeded 1% of the Time)

	Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May.	Total
V	36.533 dB	31.983 dB	18.722 dB	11.457 dB	1.379 dB	0.763 dB	10.247 dB	5.971 dB	16.845 dB
w	36.967 dB	41.500 dB	24.953 dB	14.614 dB	3.249 dB	1.686 dB	17.278 dB	11.264 dB	22.065 dB

Large month-to-month variability, up to 35.8 dB (V) and 39.8 dB (W) between the best and worst months.


<sup>\*</sup> Worst Month

<sup>\*</sup> Best Month

### Rain Rate Statistics



#### Measured Rain Rate (Liquid Precipitation)

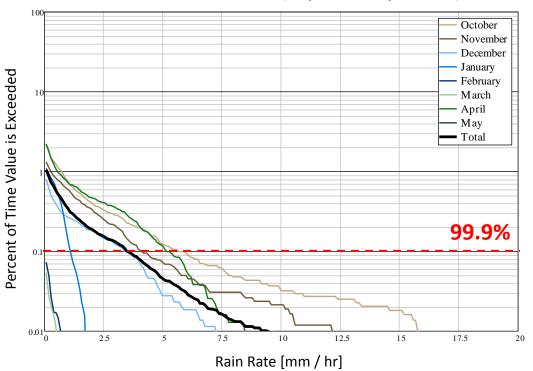

In total, rain was observed 1.05% of the time over the 7 month period (approx. 61.48 hours).

99.9% of the 7 month period, the rain rate was less than 3.513 mm / hr.

In other words, the rain rate was less than 3.513 mm/hr for 90.48% of times when rain was measured.

Occurrence of Rain

99.9% Rain Rate (Exceeded 0.1% of the Time)


Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May.	Total
2.14%	1.31%	0.79%	1.08%	0.07%	0.05%	2.19%	3.22%	1.05%
5.656 mm/hr	4.106 mm/hr	3.399 mm/hr	1.112 mm/hr	0.000 mm/hr	0.000 mm/hr	5.179 mm/hr	0.197 mm/hr	<b>3.513</b> mm/hr

<sup>\*</sup> Worst Month

\* Best Month(s)

### Radome Warming (2015-10-12)



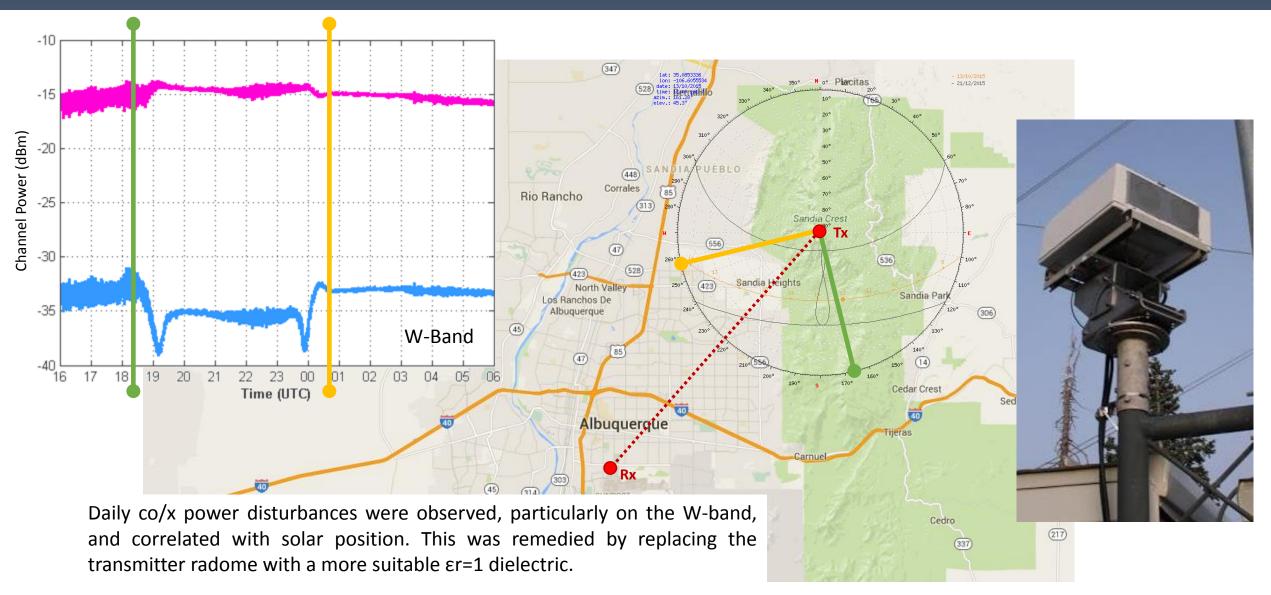

### Concluding Remarks & Future Work





#### **Conclusions**

- The WTLE terminal has been operational since October 2015, collecting attenuation, scintillation, and depolarization data across a 26 km link in Albuquerque, NM. As of this presentation, **nearly nine months of data have been collected**.
- For **99% of the time, the observed attenuation was less than 16.845 dB (V)** and **22.065 dB (W)**. The worst months in terms of the attenuation were October (V) and November (W), while the best month for both was March (V and W).
- Large monthly variability was observed, with a difference of up to 35.8 dB (V) and 39.8 dB (W) month-to-month.
- Rain was observed **1.05%** of the time over the analyzed 7 months (61.5 hrs). The rain rate only exceeded 3.5 mm/hr for **5.8 hrs** over the 7 months.

#### **Future Work**

- Weather station along the path is currently being installed to assess weather conditions along the link.
- Tandem optical link is planned for the near future to characterize optical propagation with concurrent RF data.

## Thank You!







## **Appendix Charts**

### **Contact Information**





NASA Glenn Research Center 21000 Brookpark Rd. MS 54-1 Cleveland, Ohio 44135, USA

#### **James Nessel**

Principal Investigator, RF Propagation Task

216.433.2546

james.a.nessel@nasa.gov

#### Michael Zemba

Research Engineer

216.433.5357

michael.j.zemba@nasa.gov

### Jacquelynne Morse


Research Engineer

216.433.5468

jacquelynne.r.morse@nasa.gov






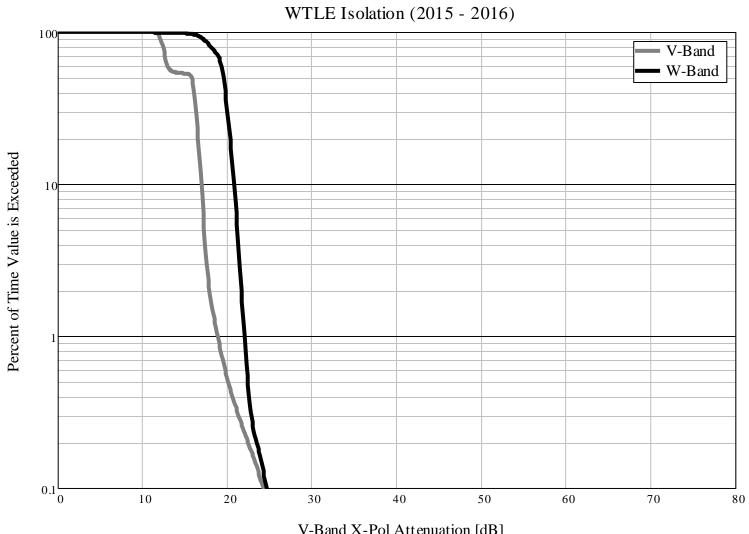

V-Band X-Pol Attenuation [dB]


### Tx Air & Plate Temperatures and PWM Output



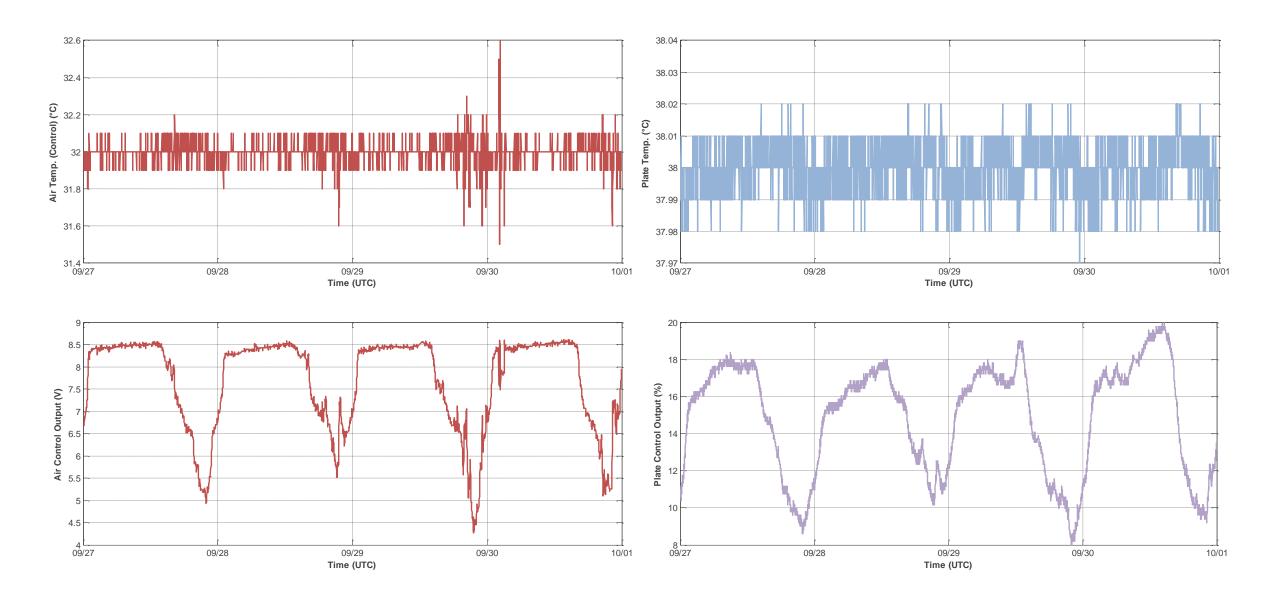


### Power Detector Variance & PWM Outputs



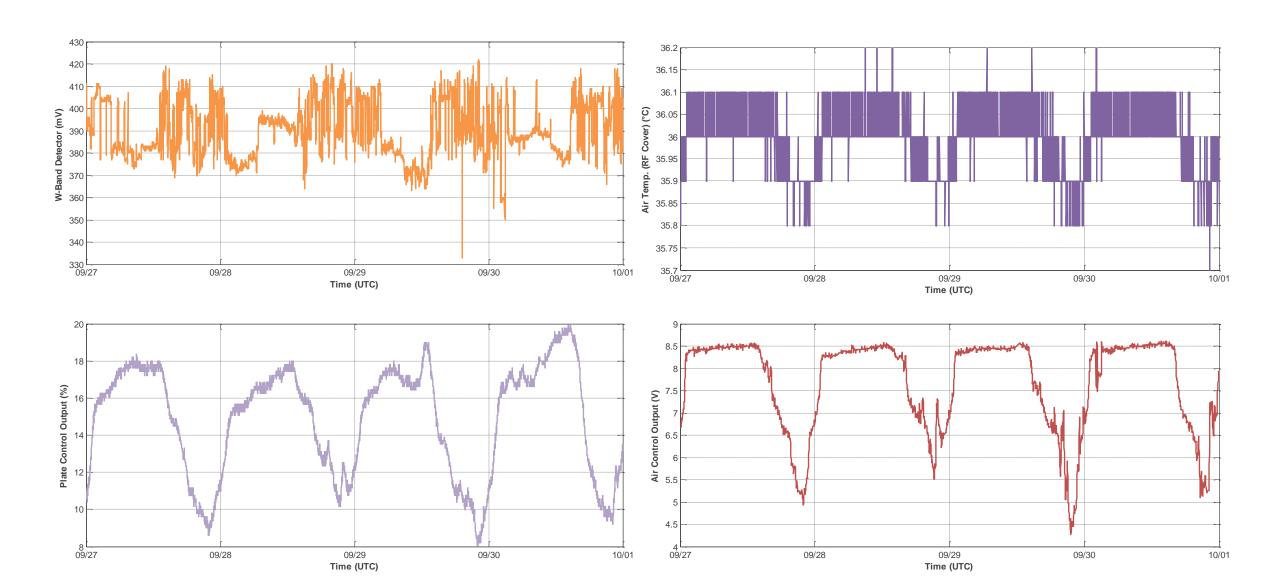

### Receiver Software



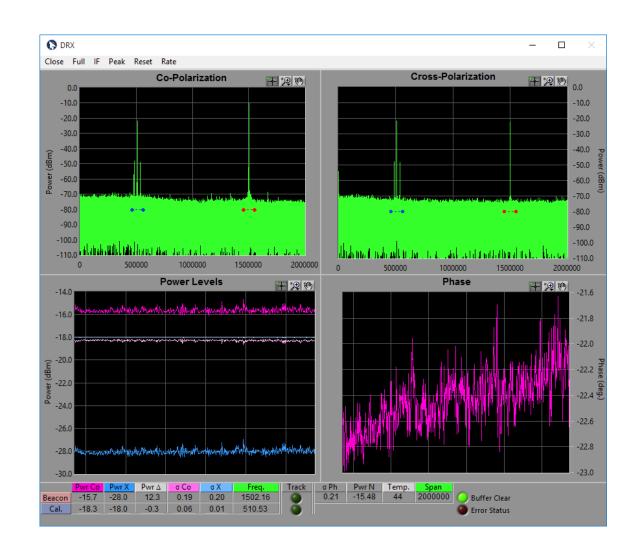



## Tx Power vs. Rx Power (2015-09-29 0600 - 1200)



