

# Factors Influencing Configuration and Performance of Multipurpose Manned Entry Vehicles

EUGENE S. LOVE

NASA Langley Research Center, Hampton, Va.

N64-18323\*

CODE NONE

## Nomenclature

$A$	= ablation as primary heat protection method
$C_L$	= lift coefficient
$C_D$	= drag coefficient
$g$	= deceleration, earth referenced
$L/D$	= lift-drag ratio
$M$	= entry mode involving pitch modulation in pullout (see text)
$Q$	= heat load
$\dot{q}$	= maximum heat rate
$r$	= nose radius
$R$	= radiative cooling as primary heat protection method
$S$	= reference area
$T$	= temperature
$U$	= entry mode having no pitch modulation in pullout (see text)
$V$	= velocity
$V_E$	= entry velocity
$W$	= weight
$\gamma$	= flight-path angle
$\gamma_E$	= entry angle
$\Delta\gamma_E$	= difference in entry angle between undershoot and overshoot, i.e., corridor width

## Subscripts

lim	= limiting value
max	= maximum value
rad	= radiative heating
conv	= convective heating
$A$	= ablative
$R$	= radiating metallic
eq	= radiation equilibrium
0	= at $L/D = 0$
$P$	= payload
26	= at $V_E = 26,000$ fps
$T$	= total, i.e., radiative plus convective

## Introduction

MANNED space missions are now moving beyond their infancy and into an area of more sophisticated activities. Mercury experience is in hand, and ahead are Gemini, X-20, and Apollo, each of which may be expected to contribute significantly to the advancement of technology for manned entry vehicles. In anticipation of requirements beyond these programs, we are led to inquire if each new space mission will continue to require a new entry vehicle.

For a number of reasons, among which are included the several years that transpire from conception to flight for any new entry vehicle, the acceleration that could possibly be afforded manned space activities, and in interests of economy, there appears to be a place in the future for a reusable, multipurpose, manned entry vehicle. By multipurpose is meant a vehicle that would satisfy the essential requirements of a variety of missions, conceivably including not only peaceful and scientific endeavors but possible military applications as well. This is perhaps not so visionary as it may seem if one accepts the idea of using an entry vehicle that, although not ideally suited for a particular mission, would be sufficiently versatile to do the job without undue compromise to the mission objectives. A well-founded choice of the class of vehicle best suited for multipurpose use requires, in some respects, a more detailed definition of future missions than is currently available. But even should such information be available, anything approaching universal agreement among the proponents of various entry vehicles is unlikely in view of the existing divergence of opinion exhibited for specific, well-defined missions of the past and present. There is recognition, of course, that in the spectrum of foreseeable manned space activities, certain missions will require specialized entry vehicles, even if a multipurpose vehicle were a reality.

With these thoughts in mind, we will take a cursory look at some of the factors that might influence the design of a multipurpose entry vehicle with the hope of indicating a general class of entry vehicle that shows promise of affording this versatility without large penalties for aerodynamic performance.

An extensive survey of the literature was part of this study, as will be evident from the compilation of data in some of the figures. The list of references and the general bibliography should be regarded as typical rather than exhaustive.

## Discussion

### Entry Velocity

Low earth orbits will continue to be attractive for a number of future missions, such as the near-earth manned space station. High earth orbits, circular and highly elliptic, are being studied for both military and exploratory objectives, in which altitude flexibility may be desired from mission to mission. As orbit or apogee altitude is increased to conform to these mission requirements, entry velocity may increase decidedly (as illustrated in Fig. 1), approaching 34,000 fps at

E. S. Love joined NASA Langley Research Center in 1947 and since 1959 has been Assistant Chief of its Aero-Physics Division. He also heads the Langley committee that serves in an advisory capacity on the Center's research in entry technology. In 1940 he graduated from North Georgia College, where he pursued premed studies, and in 1947 he received his degree in aeronautical engineering from the Georgia Institute of Technology. From 1942 to 1945 he served with the Air Force as a pilot and flight-test engineer. Mr. Love has served on committees of the former ARS and IAS and currently is a member of the AIAA Entry Vehicles Committee and the NASA Research Advisory Committee on Space Vehicle Aerodynamics. He is an Associate Fellow of the AIAA. In 1960 he was one of ten to receive the NCSL National Career Service Award in recognition of his contributions in the field of supersonic aerodynamics.

Reprint

Presented at the AIAA-NASA Second Manned Spacecraft Meeting, Dallas, Texas, April 22-24, 1963. <sup>2d</sup> revision received November 12, 1963. The author is indebted to E. B. Pritchard for his contributions and assistance.

Eugene S. Love

Reprinted from JOURNAL OF SPACECRAFT AND ROCKETS, 1964 v.1, no.1, Jan. 1964 p 3-12

Copyright, 1964, by the American Institute of Aeronautics and Astronautics, and reprinted by permission of the copyright owner

refo Presented

C. S. Love

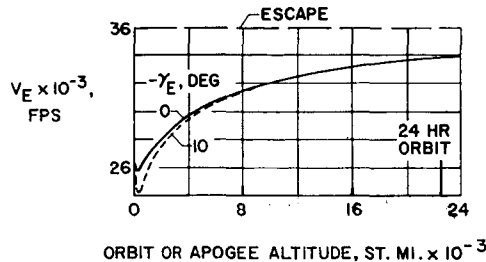


Fig. 1 Effect of orbit or apogee altitude on entry velocity.

the altitude for a 24-hr orbit. The range of entry angles of interest for manned operations (about 0 to 10°, as will be shown later) is seen to have little effect upon entry velocity, except when orbit or apogee altitude is within about 1000 miles or less of the earth.

At escape velocity and beyond we encounter the regime of lunar and planetary missions. Figure 2 presents the familiar picture of minimum entry speeds to Earth in return from Mars and Venus as a function of transit time.<sup>1</sup> Velocities at least as high as 45,000 fps are of interest because of the large reduction in return time afforded by small increases in velocity above the minimum. On the other hand, justification for velocities in the upper hyperbolic regime will be more difficult unless there is a major breakthrough in propulsion systems, primarily because of the small decrease in return time associated with large and costly increases in velocity. A more important question, perhaps, is what entry velocity can man endure without exceeding his deceleration tolerance. An upper limit is obtained by letting  $L/D = \infty$ . This limiting velocity is shown in Fig. 3 as a function of the deceleration that is permitted. In the real case, the entry velocity will have to be less than that given by this curve.

Clearly, in the absence of propulsive braking prior to entry, future manned space missions stimulate interest in entry velocities extending from circular well into the hyperbolic regime. The ability to enter over this range of velocities would be a most desirable feature of a multipurpose entry vehicle. Accordingly, entry velocity has been selected along with the hypersonic lift-drag ratio as a primary variable in this review.

### Entry Modes

The material involving trajectory calculations that is presented here deals primarily with two entry modes. Discussion of these two should serve the purpose of this paper in bringing out salient features of the environment and vehicle performance.

In mode *U*, entry is initiated with the vehicle in the trimmed positive lift condition for either  $(L/D)_{\max}$  or  $C_{L_{\max}}$ . (Use of negative lift in the initial entry phase is considered here to be a procedure to which one resorts in emergency only.) A constant  $L/D$  trajectory is flown from entry to pullout. At this point the vehicle is rolled so as to maintain a constant altitude flight path, including the use of negative lift, i.e., roll or lift

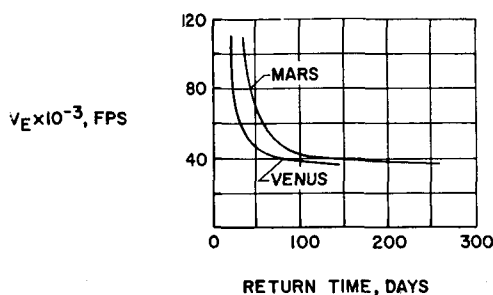


Fig. 2 Relation of transit time from Mars and Venus to minimum earth entry velocity.

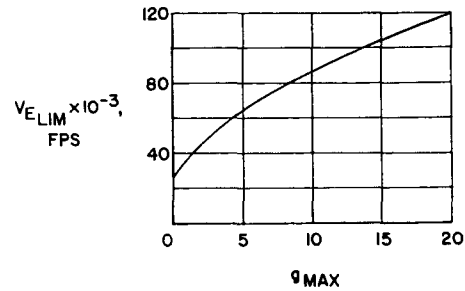


Fig. 3 Effect of deceleration on limiting entry velocity.

vector modulation is assumed in this phase of the trajectory. This maneuver is maintained until the vehicle is unable to generate sufficient lift to sustain flight at that particular altitude. An equilibrium glide maneuver at either  $(L/D)_{\max}$  or  $C_{L_{\max}}$  is then initiated and flown to the landing point. The assumed limit on decelerations is 12g. The overshoot criterion is a no-skip entry within one pass, and the use of negative lift after pullout is permitted.

In mode *M*, the overshoot criterion is the same as for mode *U*. Otherwise, mode *M* employs pitch modulation in pullout. In undershoot, pitch modulation is employed once 12g is reached so as to maintain this  $g$  level through  $C_L = 0$ , and into the negative lift phase until negative  $(L/D)_{\max}$  is reached, following which roll modulation at constant altitude is employed. The remaining flight is the same as for mode *U*.

In all cases entry is assumed to begin at 400,000 ft and the earth is considered spherical and nonrotating.

Simulator studies of mode *U* have indicated it to be feasible. Mode *M* introduces additional complexities that have not been exercised to the same extent, particularly that portion of the entry immediately after the point for  $C_L = 0$  during which minor excursions from the required maneuver could introduce excessive deceleration. Otherwise, mode *M* appears reasonable and should serve to demonstrate the influence of pitch modulation during pullout. Reference 2 provides a summary of pertinent guidance and control studies.

### Deceleration

Once the upper limit on permissible deceleration has been fixed, there is a natural tendency to exhibit little interest in  $g$  alleviation below this limit which may be derived from increased  $L/D$ . Nevertheless, it is instructive to take a somewhat broader look at the deceleration picture. An indication of the scope and general trends of decelerations to be experienced during entry (by mode *U*) is presented in Fig. 4. In the left-hand side of the figure, peak  $g$ 's are shown as a function of entry angle for two entry vehicles, one with an  $(L/D)_{\max}$  of 0.5 and the other with an  $(L/D)_{\max}$  of 2. The solid curves are for entry at 26,000 fps and the dashed curves for 46,000 fps; the peak  $g$ 's given by these curves are those ex-

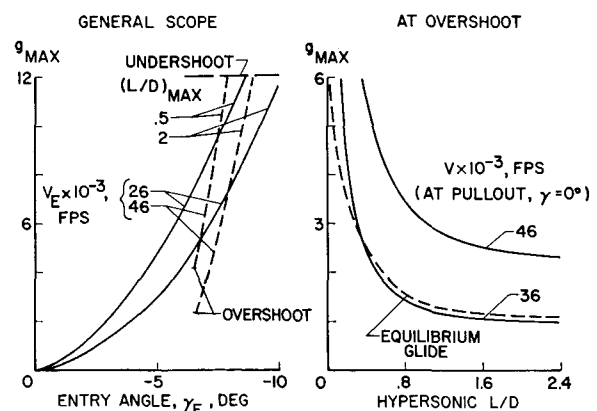


Fig. 4 Deceleration during entry; mode *U*.

CASE FILE COPY

perienced during the course of deceleration prior to establishing the equilibrium glide. It is evident that as orbital speed is exceeded, peak  $g$  becomes increasingly sensitive to change in entry angle, thus requiring close attention to possible sources of error in flight-path angle just prior to entry. For manned entry that employs atmospheric braking only, entry angle will be limited to between  $0^\circ$  and about  $10^\circ$ .

A closer inspection of the peak  $g$ 's experienced at overshoot is afforded on the right in Fig. 4 (actually at pullout, but essentially peak values). The dashed curve represents peak  $g$ 's encountered in an equilibrium glide following deceleration to orbital speeds and is shown for reference. The solid curves serve to illustrate that increasing entry velocity brings about marked increase in peak  $g$ 's at overshoot, particularly at low  $L/D$ . At much higher velocities, the peak  $g$ 's at overshoot are sizeable even for high  $L/D$ ; for example, at 60,000 fps the peak  $g$ 's at overshoot would approach 5 at values of  $L/D$  of about 2. The important implication is that in the event of an emergency in which it would be desirable to avoid the higher peak  $g$ 's near undershoot by entering nearer the overshoot boundary, the peak  $g$ 's cannot be substantially reduced below those indicated without resorting to entry modes that generally involve skip. Such emergencies and, in fact, the peak  $g$  that would be experienced in the average entry between undershoot and overshoot lead to an interest in the alleviation in peak  $g$  that can be brought about by  $L/D$ . These considerations, although, at best, of secondary importance in vehicle choice, turn interest toward an  $L/D$  at least as high as 1 because of the sizeable reductions in peak  $g$ 's with increasing  $L/D$  that occur in the low  $L/D$  range at overshoot and at any given value of entry angle between undershoot and overshoot.

All of the results in Fig. 4 are for entry at  $(L/D)_{\max}$ ; however, the general conclusions are essentially the same for entry at  $C_{L\max}$ .<sup>3</sup>

### Corridor Width

The width of the entry corridor between undershoot and overshoot is of interest primarily from the standpoint of guidance requirements and flexibility of operation. Figure 5 gives some idea of the width of corridor as a function of hypersonic  $(L/D)_{\max}$ . On the left, corridor width for entry mode  $U$  only is presented in terms of the difference in entry angle between undershoot and overshoot,  $\Delta\gamma_E$ . Increasing entry velocity is shown to reduce the width of the corridor from about  $10^\circ$  maximum at orbital entry speeds to about a  $2^\circ$  maximum at 46,000 fps; the loss in corridor width from entering at  $C_{L\max}$  rather than  $(L/D)_{\max}$  is relatively small. A value of  $\Delta\gamma_E$  of about  $1^\circ$  is generally considered to be the minimum acceptable without excessive demands on guidance requirements. On this basis, entry by mode  $U$  has a velocity potential somewhat beyond 46,000 fps for vehicles with  $(L/D)_{\max}$  of about 1 or greater.

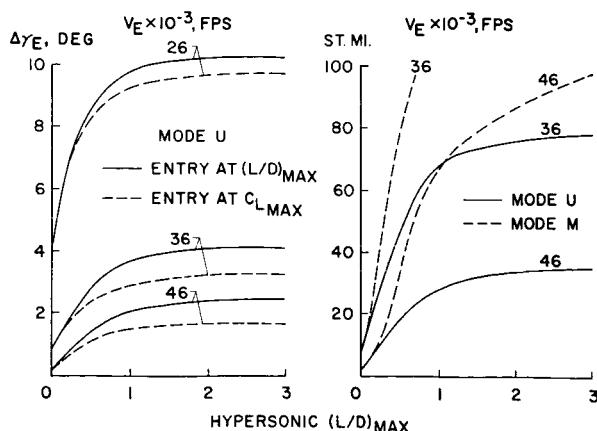


Fig. 5 Entry corridor width.

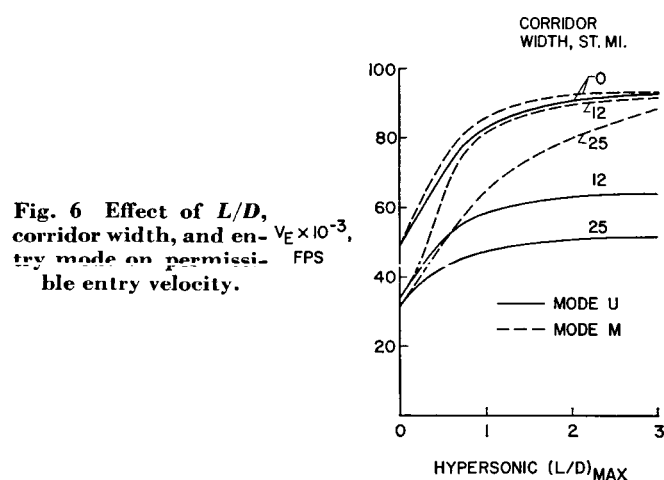


Fig. 6 Effect of  $L/D$ , corridor width, and entry mode on permissible entry velocity.

The advantages to corridor width in entering by mode  $M$  as compared to mode  $U$  are shown on the right in Fig. 5. Here the corridor width is given in terms of statute miles to afford some insight into the relation of miles to  $\Delta\gamma_E$  (compare mode  $U$  curves). Major increases in corridor width can be realized by resorting to mode  $M$  provided hypersonic  $(L/D)_{\max}$  is in excess of about 0.3. Figure 6 shows that the use of such a mode also extends the permissible entry velocity for a given  $L/D$  and specified corridor requirement, low  $L/D$  and extremely small corridor widths excepted.

The advantages from  $L/D$  again direct attention toward an  $(L/D)_{\max}$  of about 1 or greater, although  $L/D$  as low as  $\frac{1}{2}$  cannot be ruled out for mode  $M$  on a corridor-width basis for velocities less than about 50,000 fps or so.

### Relation of $(L/D)_{\max}$ to $C_{L\max}$ and to $L/D$ at $C_{L\max}$

An attractive goal in the design of a multipurpose vehicle would be the capability of having simultaneously high  $C_L$  and good  $L/D$ . This would afford the advantages of operation at high  $C_L$  (e.g., reduction of heat loads) while avoiding undue compromise to lateral ranging resulting from a possible major reduction in  $L/D$  caused by operation at high  $C_L$ . The extent to which this goal may be realized in practice gives rise to an interest in the relation of  $(L/D)_{\max}$  to  $C_{L\max}$  capability, and the relation of  $(L/D)_{\max}$  to  $L/D$  capability at  $C_{L\max}$ . Figure 7 gives some insight into these relations. The effect of  $(L/D)_{\max}$  on  $C_{L\max}$  is considered at the top. An estimate labeled Newtonian envelope is shown along with a compilation of experimental data for a variety of entry vehicle shapes. These data are restricted to those shapes showing relatively good  $C_{L\max}$  capability (see Ref. 3 for a more complete picture). The main point to note is that the estimate and the experimental data direct interest toward an  $(L/D)_{\max}$  near  $\frac{3}{4}$  or greater. The peak near  $(L/D)_{\max}$  of  $\frac{3}{4}$  is partly realistic and partly deceptive in that at these and lower values of  $(L/D)_{\max}$ , the vehicles are chunky and tend to shift the more realistic reference area from planform area (as used here) to base area. However, use of base area in the low  $(L/D)_{\max}$  regime would not alter the conclusion.<sup>3</sup>

The effect of  $(L/D)_{\max}$  on  $L/D$  at  $C_{L\max}$  is shown at the bottom of Fig. 7. The experimental data and the estimate<sup>3</sup> direct interest toward an  $(L/D)_{\max}$  of about 1 or greater when considered solely in the light of having good  $L/D$  potential at  $C_{L\max}$ . On the other hand, if a high  $C_L$  roll-modulation mode of entry is employed, interest is confined to an  $(L/D)_{\max}$  in the vicinity of 1, since it would be difficult to justify the penalties for building in a high hypersonic  $(L/D)_{\max}$  capability that would not be used.

### Heating

In considering a multipurpose vehicle one must face the possibility that radiative heating may have a major contribu-

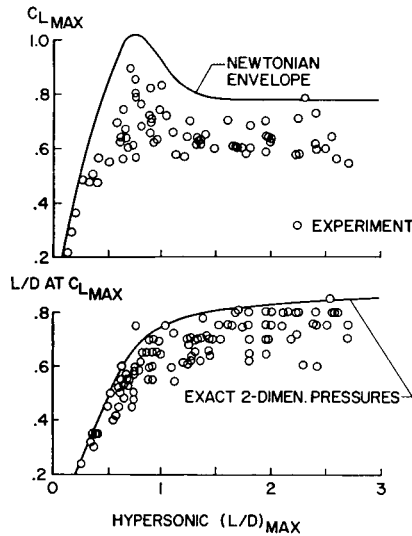


Fig. 7 Relation of  $(L/D)_{\max}$  to  $C_{L\max}$  and to  $L/D$  at  $C_{L\max}$  for entry vehicles.

tion to the heat input when the entry velocities are considerably in excess of orbital speed. Figure 8 illustrates the relation of hypersonic  $(L/D)_{\max}$  and entry mode to maximum stagnation-point heat rates and heat loads for both radiative and convective heating at entry velocities of 36,000 and 46,000 fps. Related information on the heating at near-orbital speeds at which the input is essentially all convective may be found in Ref. 3. The results shown here assume a loading  $W/S$  of 35 and a nose radius of 1 ft unless otherwise specified. The value of  $W/SC_L$  corresponding to entry at  $(L/D)_{\max}$  is approximately twice that for entry at  $C_{L\max}$ , and in each case the value of  $W/SC_L$  is assumed to be invariant with  $(L/D)_{\max}$ . The results in Fig. 8 are for entry at  $(L/D)_{\max}$ .

Entry mode  $M$  is seen to produce heating rates (top of figure) greatly in excess of those for entry mode  $U$  for both radiative and convective heating. Increasing  $(L/D)_{\max}$  accentuates this difference. No heating rate results are shown for overshoot, but they fall well below the undershoot values.

The bottom of the figure shows that, in undershoot, entry mode  $M$  reduces the convective head load slightly but increases the radiative, markedly so at 46,000 fps. In overshoot, the heat load is seen to be dominantly convective; at 36,000

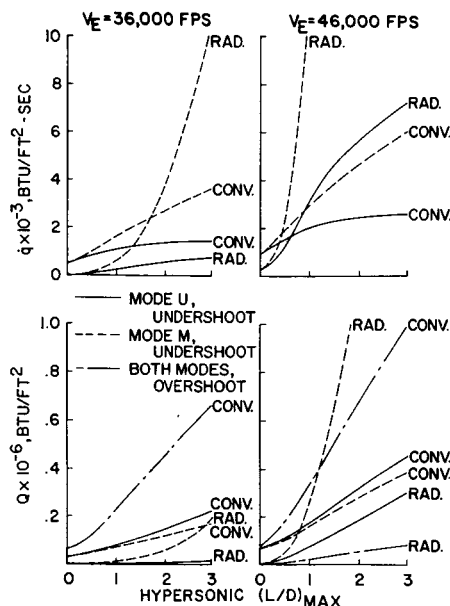


Fig. 8 Maximum stagnation-point heat rates and heat loads; entry at  $(L/D)_{\max}$ .

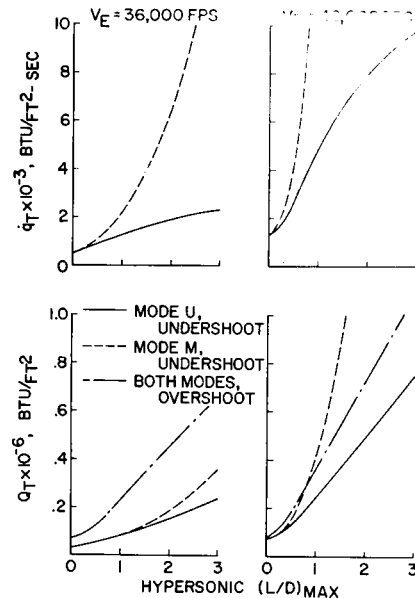


Fig. 9 Total maximum stagnation-point heat rates and heat loads (radiative plus convective); entry at  $(L/D)_{\max}$ .

fps the radiative contribution in overshoot is too small to be indicated.

Figure 9 sums the radiative and convective contributions shown in Fig. 8 to obtain total heat rates and total heat loads. Except at low  $(L/D)_{\max}$ , the total rates in undershoot are seen to be much higher for mode  $M$  than for mode  $U$ . Similarly, the total heat loads for mode  $M$  exceed those for mode  $U$ . This is not of major importance at 36,000 fps and lower, since the overshoot condition calls for a higher design heat load. However, at 46,000 fps, the undershoot total heat load for mode  $M$  exceeds the overshoot total heat load at other than low  $(L/D)_{\max}$ . Thus, the wider corridors shown earlier for mode  $M$  come at the expense of a more severe heating environment whose effects upon heat protection, weight, etc. must be weighed against the necessity for the increased corridor width. The contents of Figs. 8 and 9 also serve to indicate that from a heating standpoint, high  $(L/D)_{\max}$  is not an attractive approach to a multipurpose vehicle.

The heating results presented thus far have dealt with entry at  $(L/D)_{\max}$ . Entry at high  $C_L$  is also of interest. An example of the effect upon stagnation-point heat load is given in Fig. 10. A vehicle with  $(L/D)_{\max}$  of 1 is assumed to be entering by mode  $U$  along the overshoot boundary, and the entry velocity is varied between orbital velocity and the maximum permissible entry velocity (zero corridor width and  $12g$  at overshoot). Entry at high  $C_L$  is seen to reduce both the radiative and the convective contribution, and to delay the onset of major radiative input to higher velocities. The reduction in the convective and radiative inputs is associated with both the

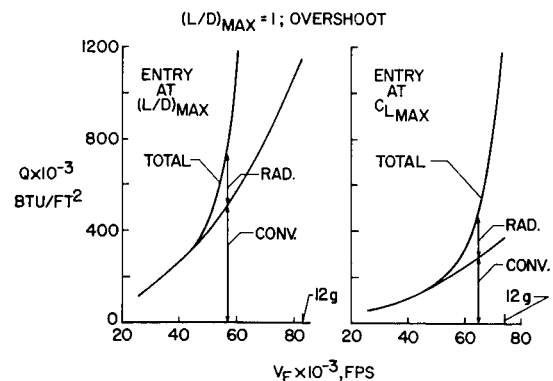


Fig. 10 Comparison of stagnation-point heat load for entry at  $(L/D)_{\max}$  and at  $C_{L\max}$ ; entry mode  $U$ .

reduced  $W/SC_L$  and the reduced  $L/D$ ; however, the reduction in the radiative input is primarily associated with the reduced  $W/SC_L$ . In this example, entry at  $C_{Lmax}$  reduced the  $L/D$  by about 30% while  $W/SC_L$  was approximately halved.

These results, particularly those for entry at  $(L/D)_{max}$ , also demonstrate the formidable increase in heat inputs that can be expected in the upper hyperbolic velocity regime. In this regime heating may very well exert the major influence on, if not dictate, the vehicle design; moreover, in this regime we are relatively ignorant as to both problems and solutions. Thus it seems wise to focus attention at present on velocities below about 50,000 fps as the potential realm of a multipurpose vehicle. This still admits of velocities sufficiently high to be of interest in planetary missions (Fig. 2), yet not so high as to reduce the corridor width below minimum limits for entry mode  $U$  (Fig. 5).

Since radiative heating is the source of the abrupt rise in total heat input at the higher entry velocities, the interplay of vehicle type and entry velocity as they may contribute to the radiative input will be considered briefly. Figure 11 presents an estimate of the ratio of the radiative to the convective heat load for three vehicles as a function of entry velocity.<sup>3</sup> The  $L/D = 0$  vehicle is a hemisphere with a short cylindrical afterbody, the  $L/D = \frac{1}{2}$  vehicle is of the Apollo type, and the  $L/D = 1$  vehicle is a highly swept delta-planform lifting body entering at high  $C_L$ . The over-all results indicate that the importance of the radiative input is reduced as nose radius is decreased and high lift is employed.

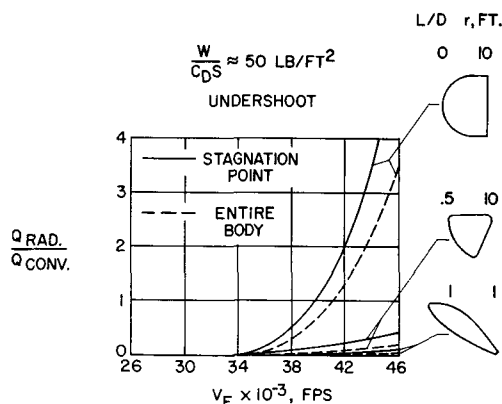


Fig. 11 Effect of entry velocity and vehicle type on radiative heating contribution.

### Heat Protection

Figure 12 presents a portion of the heating results in the form of heat load vs heat rate so as to establish in a general way the relation of the stagnation point heating to the materials picture. It is sufficient to use entry mode  $U$  for this purpose, since mode  $M$  produces a more severe environment. The left end of each shaded band corresponds to entry at 26,000 fps and the right end to 46,000 fps. The boundary below and to the left of these data bands is that suggested by Roberts<sup>4</sup> for approximating the limits to which metallic shields can operate; for example, the refractory metals can be expected to cope with some 40 to 50 Btu/ft<sup>2</sup>/sec, and a copper heat sink approach would be so heavy in handling heat loads greater than about 10,000 Btu/ft<sup>2</sup> that it would probably not be feasible. Ablation materials of one type or another are capable of handling essentially all heat inputs covered by the figure, although they are not the best approach throughout. The current state of heat protection technology is such that, barring unforeseen developments, ablation materials will be the most likely choice for the stagnation region of a multipurpose vehicle.

Of greater concern, perhaps, than the heating of the nose or stagnation region is the heating of the major surface areas of the vehicle. Estimates of the maximum radiation equilibrium

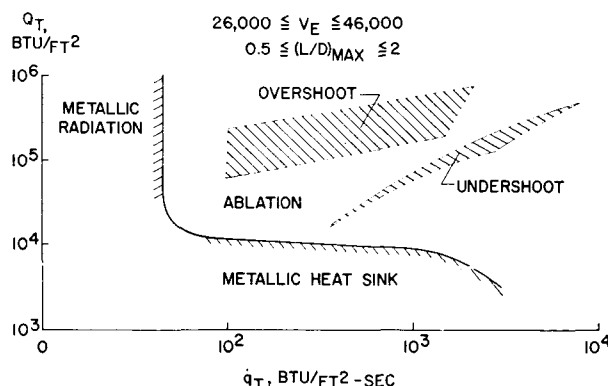


Fig. 12 Total stagnation-point heating in relation to heat protection. Entry at  $(L/D)_{max}$ , mode  $U$ .

temperatures (emissivity of 0.85) that would exist along the streamwise centerline of a delta-planform lifting body with  $(L/D)_{max} = 1$ , and entering at  $C_{Lmax}$  by mode  $U$ , are shown in the left-hand portion of Fig. 13. Only the convective input is considered. The hatched bands indicate the range of temperatures to be expected on the lower surface between undershoot (top of band) and overshoot (bottom of band) for the velocities indicated. Note that there is a drop of only a few hundred degrees in progressing 20 ft rearward from the tangency point of the surface with the hemispherical nose.

The curves showing the rapid decay in temperature with distance rearward are for the upper surface centerline and the condition of overshoot. These estimates are subject to greater uncertainty, but they should give some feel for the near-minimum temperatures to be expected on the vehicle.

In the right-hand portion of the figure is given the status of the life of coated refractory metal sheet as summarized by Mathauser.<sup>5</sup> The different curves represent different refractory metals including tungsten, tantalum, molybdenum, and columbium, and they represent a generally optimistic average of test information. The broad result is that present-day coatings can provide protection under continuous exposure of at least 1 hr at 3000°F to 100 hr at 2500°F, and that a decrease of an order of magnitude or greater in coating life is obtained under cyclic exposure conditions. This serious degradation under cyclic temperature exposure reflects directly on the reusability of refractory metal components in entry vehicles. Added to Mathauser's compilation is a band indicating a probable improvement in the picture from future coatings and/or ceramics. However, this hoped-for gain has been promisory for several years now, and has not yet been realized for sheet-type application. Indications are that its achievement will be accompanied by short material life or inherent erosion, thereby inferring refurbishment after each entry flight; in this respect a refurbishing technique somewhat akin to that for a surface protected by ablation material would be required.

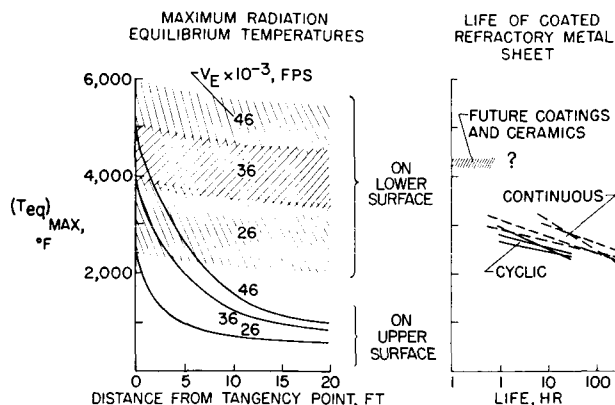


Fig. 13 Surface temperatures and material capability.

A comparison of the two sides of Fig. 13 shows that methods of heat protection using other than refractory metals will be required over much of the surface area of an entry vehicle if it is to have the prime requisite of multipurpose capability, i.e., good growth potential in entry velocity. (Recall that any radiative input to the surface temperatures that might occur at the higher velocities has been neglected.) At this time, a refurbishable ablation covering appears to offer the best heat protection approach for the multipurpose vehicle concept. A desirable goal is refurbishment by a technique that lends itself to use of coverings of different thickness as mission requirements may dictate. Hopefully the technique would be able to capitalize readily on new and more efficient ablation materials as they are developed. Refurbishment for lifting vehicles appears to be within the capability of current technology; refurbishable ablation shields have already performed successfully in unmanned ballistic entry.

The effect upon vehicle aerodynamics of the shape changes that accompany ablation might be an area of concern in considering vehicles that are for the most part ablation-protected. However, for vehicles with low to moderate  $L/D$  which do not involve overly small leading-edge radii nor invade the upper hyperbolic velocity regime, preliminary examinations indicate that adverse effects can be largely circumvented through appropriate design. The same remarks apply to the question of "hinge-line freeze" from possible downstream deposition of ablation products.

Much remains to be learned about the performance of all thermal protection schemes during prolonged exposure to space environment. No insurmountable problems have been uncovered for the more promising approaches outside of those created by the impact of meteoritic particles. In this connection, the "ream-and-plug" repair technique currently used on ablation shields appears to offer a reliable solution for these materials. An equally promising technique for repairing the damage to the thin coatings that prevent oxidation of the higher-temperature refractory metals is not available.

### Weight of Entry Vehicles

Over the past few years, numerous system studies of entry vehicles have been made by industrial organizations. Much of this information is of a proprietary nature or is classified. However, some indications of the results may be presented here if confined in form owing to the sources of the data which, in the compilations that follow, may not be identified.

Figure 14 presents the results of a literature survey of entry vehicle system studies. The studies encompass 1 to 3 man vehicles and 1 to 14 day missions, with entry at or near orbital speed. At the top is shown the variation in the ratio of total entry vehicle weight at finite  $L/D$  to that at  $L/D = 0$ , i.e.,  $W/W_0$ . The spread in the band formed by the data at any value of  $(L/D)_{\max}$  is far less an effect of the crew size and mission time variables than it is a reflection of differing vehicle

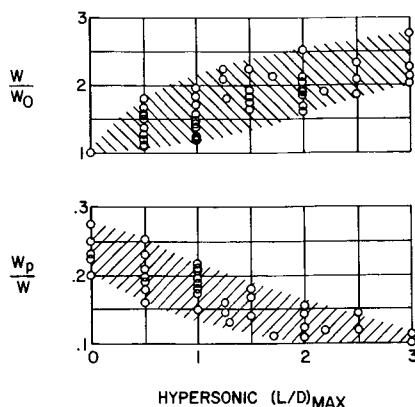


Fig. 14 Effect of hypersonic  $(L/D)_{\max}$  on entry vehicle weight; literature survey;  $V_E \approx 26,000$  fps.

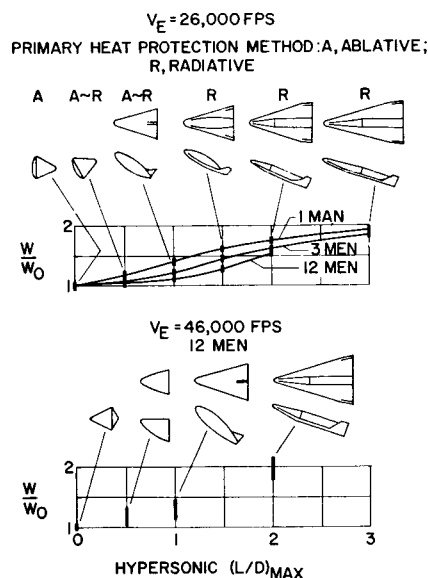


Fig. 15 Effect of hypersonic  $(L/D)_{\max}$  on entry vehicle weight.

types and differing structural and equipment weights. Although all studies support the general indication of increasing weight with increasing  $(L/D)_{\max}$ , data from most of the more recent studies fall in the lower part of the data band; this is particularly true at the lower values of  $(L/D)_{\max}$ .

The bottom half of Fig. 14 gives the variation of the ratio of payload weight to total vehicle weight. The quantitative values are not overly important, since these are dependent on what one defines as payload.<sup>3</sup> The important feature is that the trend of the data reflects the drop in payload efficiency with increasing  $(L/D)_{\max}$ .

Following this survey of the literature an attempt was made to refine the picture of the variation of  $W/W_0$  with  $(L/D)_{\max}$ . The results of these weight estimates are shown in Fig. 15, along with sketches of the vehicles used (see Ref. 3 for additional information). It is doubtful that the values of  $W/W_0$  can be defended more closely than the height of the symbol bars; however, the over-all results convey a reasonably accurate picture of the relative positions of the vehicles.

For the results at  $V_E = 26,000$  fps, two primary heat-protection methods were considered—ablation and radiating metallic. The method indicated for each vehicle was found to be the lightest approach; the designation  $A \sim R$  implies that the choice was not clearly indicated but tended toward the ablative. The reduction in the values of  $W/W_0$  with increasing crew size is generally a reflection of the larger values of  $W_0$ ; however, crew size does appear to have a significant effect on the variation of  $W/W_0$  with  $(L/D)_{\max}$ . Multiman requirements appear in most studies of future manned missions, the upper range of interest currently centering on about 12 men. A capacity of this order is considered desirable in a multipurpose vehicle, together with the flexibility to interchange crew size with cargo or equipment as the mission requires. If a 12-man capacity is assumed, the present results indicate that values of  $(L/D)_{\max}$  of about 1 or slightly higher can be realized without major increase in weight.

The lower part of Fig. 15 presents results for an entry velocity of 46,000 fps. All vehicles use ablation as the primary heat-protection approach. The low  $L/D$  vehicles selected here tend toward conical types, which are probably more suitable for this velocity (e.g., see Refs. 1 and 6). For reasons given earlier, it is doubtful that vehicles with  $(L/D)_{\max}$  less than about 0.5 will be considered for manned entry at this velocity. With this in mind, the weight penalty for increasing  $(L/D)_{\max}$  to about 1 does not appear to be too large.

As an adjunct to these examinations of entry vehicle weight, Fig. 16 presents results of a literature search conducted with

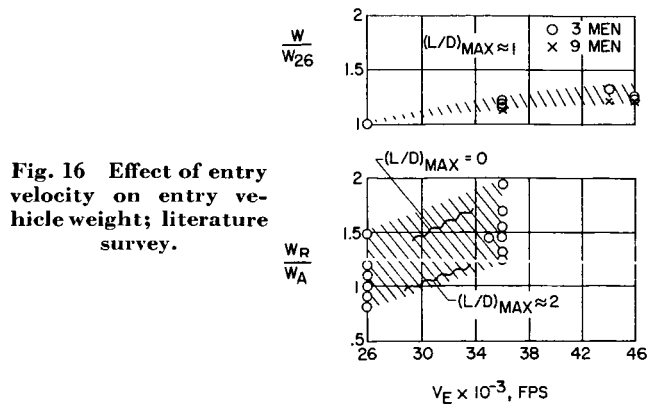


Fig. 16 Effect of entry velocity on entry vehicle weight; literature survey.

the aim of exposing effects of entry velocity and heat-protection approach on entry vehicle weight. At the bottom of the figure is shown the ratio of total vehicle weight for a radiating metallic approach to that for an all- or nearly all-ablative approach. As expected, the trend in moving toward higher entry speeds is to shift the advantage to the ablative approach. As roughly indicated by the wavy lines, the higher the  $(L/D)_{\max}$ , the higher the entry velocity for which the radiating metallic approach remains competitive. These results are restricted to a maximum longitudinal ranging during entry of 10,000 miles. Although this seems ample for a multipurpose vehicle, longer ranging would encourage a direction somewhat more favorable to the radiating approach.

At the top of the figure is shown the increase in weight associated with increasing velocity for ablation-protected vehicles having  $(L/D)_{\max} \approx 1$ . The indication that the weight penalty for increased velocity potential is within the realm of practical consideration is at least reassuring in the concept of a multipurpose vehicle.

### Lateral Ranging

No attempt will be made to summarize the many facets of lateral ranging at supercircular entry velocities. It seems sufficient to look briefly at the lateral ranging associated with entry at circular velocity, recognizing that increasing entry velocity appears to offer no outstanding difficulty in reaching a prescribed landing point, and that it generally increases the accessible landing area (e.g., see Refs. 2 and 7). The material that is presented herein is taken directly from Ref. 8 in which return from a near-earth orbit is treated. The assumed value

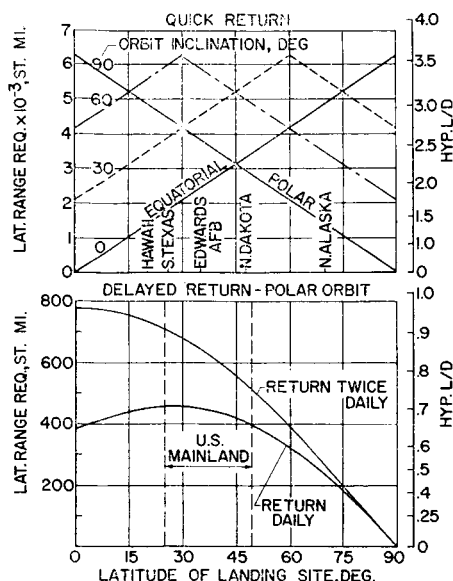


Fig. 17 Lateral range and hypersonic  $L/D$  required for return from near-earth orbit.

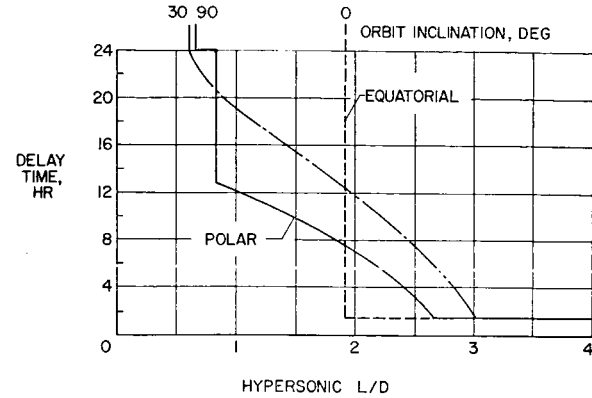


Fig. 18 Maximum delay time for return to Edwards Air Force Base.

of  $W/C_D S$  is 200 lb/ft<sup>2</sup>; however, the results are relatively insensitive to this parameter, at least to as low as  $W/C_D S = 75$ . The entry mode is essentially mode U.

At the top of Fig. 17 is shown the maximum lateral range and hypersonic  $L/D$  required for quick return to a specified landing site. By quick return is meant a return with a delay time between decision to enter and initiation of entry of less than one orbit. The ability to reach any point on the globe once each orbit from any orbit inclination is seen to require a hypersonic  $L/D$  of about 3.6. On the other hand a variety of interesting combinations of orbit inclination and landing site require considerably less  $L/D$ .

If we accept reasonable delay times in orbit, the required hypersonic  $L/D$  can be reduced considerably. For example, consider the polar orbit, which is of interest because of the complete earth coverage it affords. In this case, the bottom part of Fig. 17 shows that a vehicle with a hypersonic  $L/D$  of about 0.9 can reach any point on the U. S. mainland twice daily, whereas an  $L/D$  of about 0.7 assures at least once-a-day return.

The relation between delay time and hypersonic  $L/D$  required to return to a specified landing site is a strong function of orbit inclination and involves discontinuities, as illustrated in Fig. 18, for the case of return to Edwards Air Force Base. In this example, as  $L/D$  is decreased the equatorial orbit is either a quick-return or no-return proposition, whereas the polar orbit goes from quick return, to a steady increase in holding time, to a discontinuous jump in holding time. The 30° orbit shows some of the characteristics of each of these limiting orbits. Other examinations show that an  $L/D$  of about 1 will provide at least once-a-day return to the U. S. mainland from an orbit of any inclination which passes over the mainland (i.e., for the lowly inclined orbits any spot within the southern half of the U. S. would be accessible, and as orbit inclination increases the accessible area increases, until the entire U. S. mainland is accessible for orbits inclined greater than 37°).

The preceding discussions in areas other than lateral ranging tend to direct attention toward entry vehicles with hypersonic  $(L/D)_{\max}$  in the vicinity of 1. Unless quick return capability can be shown to be an essential feature of most future missions, which does not seem likely, this same class of vehicles appears to have adequate range capability. For a multipurpose vehicle quick return is of decreasing interest as entry velocity is increased, since the latter usually implies missions longer in duration and more remote from earth.

Some mention of the use of space propulsion or air-breathing propulsion to improve lateral ranging seems in order. Briefly, the former appears to be of interest only for small ranging requirements and vehicles having low hypersonic  $L/D$ . Use of the latter presents a conflict: the primary interest in range augmentation for entry vehicles occurs for the lower  $L/D$  vehicles, but in general the lower  $L/D$  vehicles do



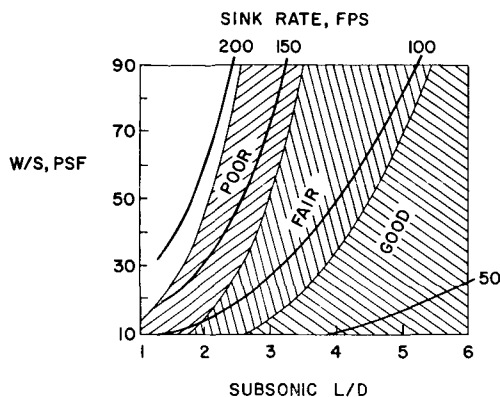


Fig. 19 Landing approach criteria from pilots' evaluations;  $C_L = 0.2$ .

not lend themselves to good inlet performance. Further study is needed to clarify the role of air-breathing propulsion in application to entry vehicles. In any event, neither space propulsion nor air-breathing propulsion seems essential to a multipurpose vehicle having moderate hypersonic  $L/D$  capability.

#### Conventional Landing

Low- $g$  impact at landing is desirable for an entry vehicle intended for reuse. Moreover, once hypersonic  $L/D$  as high as about 1 is established as a requirement for an entry vehicle, there is the possibility of having conventional landing capability without major weight penalties or severe compromises to hypersonic performance. Therefore it is of interest to consider the requirements for conventional landing in subsonic performance. One aspect of the landing problem is considered in Fig. 19, in which a summary of landing approach criteria (just prior to flare) derived from pilots' evaluations is presented in terms of wing loading and subsonic  $L/D$ . These results are for a  $C_L$  of 0.2, which is representative of the lower values of  $C_L$  encountered at this point in the landing approach. One must recognize that everything is relative in defining the zones poor, fair, and good, the boundaries between the zones being fuzzy at best. Nevertheless, these results show logical trends and should be adequate for approximating desirable objectives. For example, a multipurpose 12-man entry vehicle with hypersonic  $L/D$  of about 1 would likely have a wing loading no less than 35 and probably higher; in this case a subsonic  $L/D$  of about 4 would be desirable but not necessarily essential.

The ratio of  $C_L$  at touchdown to  $C_L$  at subsonic  $(L/D)_{\max}$  is also important in determining the ease with which the landing flare may be accomplished. Similar evaluations of this criterion show a preference for a subsonic  $L/D$  of about 4 or greater.

The availability of a modest amount of rocket-thrust augmentation appears to offer attractive possibilities for increasing the effective subsonic  $L/D$  during approach to landing, and for executing a go-around if required. However, the use of rocket propulsion to increase ranging potential beyond that involved in a go-around soon involves major weight penalties. The potential of variable-geometry schemes for increasing subsonic  $L/D$  at small expense in weight deserves consideration.<sup>9</sup>

#### $(L/D)_{\max}$ and Volume

The foregoing discussion raises the question: Is conventional landing attainable without severe compromise to volumetric efficiency? One facet of this question is considered in Fig. 20, in which a literature survey of experimental studies of fixed-geometry entry vehicles gives an idea of the

interplay of hypersonic and subsonic  $(L/D)_{\max}$  with volumetric efficiency. The boundaries denoting constant values of the volumetric efficiency parameter are maxima in the following sense: a given valued boundary could move down or to the left, but it is highly unlikely that it could move up or to the right. The form of the boundaries in the transition from horizontal to vertical is open to question. The over-all results show that hypersonic  $(L/D)_{\max}$  comes at greater expense to volumetric efficiency than does subsonic  $(L/D)_{\max}$ . Of particular interest with regard to landing conventionally is the indication that a fixed geometry entry vehicle with hypersonic  $(L/D)_{\max}$  near 1 is capable of achieving subsonic  $(L/D)_{\max}$  in excess of 4 while retaining good volumetric efficiency. Other examinations have indicated that reasonably good volume distribution can be achieved in a vehicle that has these characteristics.

#### 18323 Concluding Remarks

The areas touched upon in this review demonstrate that the factors influencing the design of a multipurpose manned entry vehicle that is capable of entry at circular to moderately hyperbolic velocities are numerous and varied, and on occasion lead to conflicting interests. Although in some respects better definitions of future missions are needed before a well-founded recommendation can be made of the vehicle class that is best suited for multipurpose use, the results that have been presented here, when viewed in their entirety, tend to draw attention toward vehicles having a hypersonic  $(L/D)_{\max}$  in the vicinity of 1. The concept of a multipurpose manned entry vehicle appears to be technically feasible, at least to the degree that such a vehicle merits further consideration in assessing how best to meet the requirements that future manned space missions will place upon entry vehicles.

Author

#### References

- Allen, H. J., "Gas dynamics problems of space vehicles," *NASA-University Conference on the Science and Technology of Space Exploration* (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 2, pp. 251-267.
- Wingrove, R. C., "Survey of atmospheric re-entry guidance and control methods," *AIAA J.* 1, 2019-2029 (1963).
- Love, E. S. and Pritchard, E. B., "A look at manned entry at circular to hyperbolic velocities," *Proceedings of the Second Manned Space Flight Meeting* (AIAA, New York, 1963), pp. 167-180.
- Roberts, L., "Ablation materials for atmospheric entry," *NASA-University Conference on the Science and Technology of Space Exploration* (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 2, pp. 461-468.
- Mathauser, E. E., "Research, design considerations and technological problems of structures for winged aerospace vehicles," *NASA-University Conference on the Science and Technology of Space Exploration* (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 2, pp. 499-510.
- Bobbitt, P. J., "Effects of shape on total radiative and convective heat inputs at hyperbolic entry speeds," *Ninth Ann.*

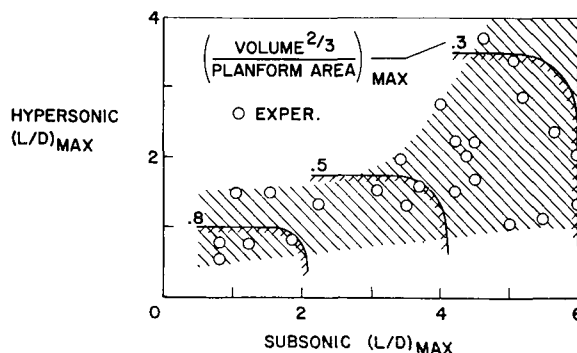


Fig. 20 Relation of hypersonic to subsonic  $(L/D)_{\max}$  for entry vehicles.



Am. Astronaut. Soc. Meeting, Los Angeles, Calif. (January 1963).

<sup>7</sup> Baradell, D. L., "Lateral range control by banking during initial phases of supercircular reentries," NASA TN D-1511 (1962).

<sup>8</sup> Baradell, D. L. and McLellan, C. H., "Lateral range and hypersonic lift-drag ratio for efficiency ferry service from a near-earth manned space station," *Proceedings of the Second Manned Space Flight Meeting* (AIAA, New York, 1963), pp. 159-166.

<sup>9</sup> Gray, E. Z., "Future spacecraft design requirements and trends—manned systems," *Proceedings of the Second Manned Space Flight Meeting* (AIAA, New York, 1963), pp. 351-359.

### General Bibliography

<sup>1</sup> Allen, H. J. and Eggers, A. J., Jr., "A study of the motion and aerodynamic heating of missiles entering the earth's atmosphere at high supersonic speeds," NACA TN 4047 (1957).

<sup>2</sup> Eggers, A. J., Jr., Allen, H. J., and Neice, S. E., "A comparative analysis of the performance of long-range hypervelocity vehicles," NACA TN 4046 (1957).

<sup>3</sup> Lees, L., Hartwig, F. W., and Cohen, C. B., "Use of aerodynamic lift during entry into the earth's atmosphere," ARS J. 29, 633-641 (1959).

<sup>4</sup> Luidens, W. R., "Flight path characteristics for decelerating from supercircular speed," NASA TN D-1091 (December 1961).

<sup>5</sup> Loh, W. H. T., "Dynamics and thermodynamics of reentry," J. Aerospace Sci. 27, 748-762 (1960).

<sup>6</sup> Wong, H. E. and Chu, S. T., "Variable-lift reentry at super-orbital and orbital speeds," Aerospace Corp. Rept. TDR-930 (5270-20) TN-2 (May 1962).

<sup>7</sup> Chapman, D. R., "An approximate analytical method for studying entry into planetary atmospheres," NACA TN 4276 (1958).

<sup>8</sup> Chapman, D. R., "An analysis of the corridor and guidance requirements for supercircular entry into planetary atmospheres," NASA R R-55 (1959).

<sup>9</sup> Gazely, C., Jr., "Deceleration and heating of a body entering a planetary atmosphere from space," Rand Rept. P-955 (1957).

<sup>10</sup> Becker, J. V., "Reentry from space," Sci. Am. 204, 49-57 (January 1961).

<sup>11</sup> Becker, J. V., Baradell, D. L., and Pritchard, E. B., "Aerodynamics of trajectory control for reentry at escape speed," Astronaut. Acta VII, 334-358 (1961).

<sup>12</sup> Rose, P. H., "Future problems in reentry physics," *Proceedings of the Second Manned Space Flight Meeting* (AIAA, New York, 1963).

<sup>13</sup> Papers presented at Manned Planetary Mission Technology Conference, Lewis Res. Center, Cleveland, Ohio (May 1963): "Mission examples," NASA TM X-50123 (July 1963); "Trajectories and mission analysis," NASA TM X-50122 (July 1963); "Space and planetary environment," NASA TM X-50116 (July 1963); "Atmospheric entry and gas thermodynamics," NASA TM X-50119 (July 1963); and "Spacecraft technology and design problems," NASA TM X-50118 (July 1963).

<sup>14</sup> Grant, F. C., "Modulated entry," NASA TN D-452 (August 1960).

<sup>15</sup> Grant, F. C., "Analysis of low-acceleration lifting entry from escape speed," NASA TN D-249 (1960).

<sup>16</sup> Becker, J. V., "Heating associated with modulated entry into earth's atmosphere," ARS J. 30, 504 (1960).

<sup>17</sup> Hildebrand, R. B., "Manned return from space," Second Intern. Cong. Intern. Council Aeronaut. Sci., Zurich, Switzerland (September 1960).

<sup>18</sup> Trimpi, R. L., Grant, F. C., and Cohen, N. B., "Aerodynamic and heating problems of advanced reentry vehicles," NASA-University Conference on the Science and Technology of Space Exploration (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 2, pp. 235-248.

<sup>19</sup> Wick, B. H., "Radiative heating of vehicles entering the earth's atmosphere," AGARD Specialists' Meeting at T.C.E.A. Rhode-Saint-Genese, Belgium (April 1962).

<sup>20</sup> Wong, T. J. and Slye, R. E., "The effect of lift on entry corridor depth and guidance requirements for the return lunar flight," NASA TR R-80 (1960).

<sup>21</sup> Ferri, A. and Ting, L., "Practical aspects of reentry problems," Astronaut. Acta VIII, 63-81 (1962).

<sup>22</sup> Slye, R. E., "An analytical method for studying the lateral motion of atmosphere entry vehicles," NASA TN D-325 (1960).

<sup>23</sup> Eggers, A. J. and Wong, T. J., "Motion and heating of lifting vehicles during atmosphere entry," ARS J. 31, 1364-1375 (1961).

<sup>24</sup> Mandell, D. S., "Maneuvering performance of lifting reentry vehicles," ARS J. 32, 346-354 (1962).

<sup>25</sup> Eggers, A. J., Jr., Wong, T. J., Hornby, H., and Wyss, J. A., "Some general considerations of manned lunar return missions," ARS Lunar Missions Conference, Cleveland, Ohio (July 1962).

<sup>26</sup> Anon, "Lift entry of manned space vehicles: generalized determination of the aerodynamics and thermodynamics associated with the lift-vector modulation technique," Douglas Rept. SM-42120, Douglas Aircraft Co., Inc. (August 1962).

<sup>27</sup> Rose, P. H., "Reentry from lunar missions," Am. Astronaut. Soc. Preprint 7 (December 1961).

<sup>28</sup> Vaglio-Laurin, R. and Trella, M., "A study of flow fields about some typical blunt-nosed slender bodies," Rept. 623, PIB Aeronaut. Lab. (December 1960).

<sup>29</sup> Eckert, E. R. G., "Survey of boundary-layer heat transfer at high velocities and high temperatures," Wright Air Dev. Center Tech. Rept. 59-624 (1960).

<sup>30</sup> Scala, S. M., "Heating problems of entry into planetary atmospheres from supercircular orbiting velocities," General Electric Space Sci. Lab. R61SD176 (1961).

<sup>31</sup> Howe, J. T., Viegas, J. R., and Schaeffer, Y. S., "Study of the nonequilibrium flow field behind normal shock waves in carbon dioxide," NASA TN D-1885 (1963).

<sup>32</sup> Offenhartz, E., Weisblatt, H., and Flagg, R. F., "Stagnation point heat transfer measurements at super satellite speeds," J. Roy. Aeronaut. Soc. 66, 53, no. 613 (January 1962).

<sup>33</sup> Canning, T. N., "Recent developments in the chemistry and thermodynamics of gases at hypervelocities," NASA-University Conference on the Science and Technology of Space Exploration (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 2, pp. 283-290.

<sup>34</sup> Goodwin, G. and Howe, J. T., "Recent developments in mass, momentum and energy transfer at hypervelocities," NASA-University Conference on the Science and Technology of Space Exploration (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 2, pp. 291-301.

<sup>35</sup> Cohen, N. B., "Boundary-layer similar solutions and correlation equations for laminar heat-transfer distribution in equilibrium air at velocities up to 41,000 feet per second," NASA TR R-118 (1961).

<sup>36</sup> Hansen, C. F., "Approximations for the thermodynamic and transport properties of high temperature air," NASA TR R-50 (1959).

<sup>37</sup> Kivel, B. and Bailey, K., "Tables of radiation from high temperature air," Res. Rept. 21, Avco-Everett Res. Lab. (1957).

<sup>38</sup> Lees, L., "Convective heat transfer with mass addition and chemical reactions," Third Combustion and Propulsion Colloquium, AGARD, NATO, Palermo, Sicily (March 17-21, 1958).

<sup>39</sup> Meyerott, R. E., "Radiation heat transfer to hypersonic vehicles," Lockheed Rept. LMSD-2264 (November 1957).

<sup>40</sup> Kivel, B., "Radiation from hot air and stagnation heating," Avco Res. Rept. 79 (October 1959).

<sup>41</sup> Rose, P. H. and Stankevics, J. O., "Stagnation point heat transfer measurements in partially ionized air," IAS Preprint 63-61 (1963).

<sup>42</sup> Pallone, A. and Van Tassell, W., "The effects of ionization on stagnation point heat transfer in air and in nitrogen," Avco-RAD Rept. Contract No. AF 04(694)-239 (August 1962).

<sup>43</sup> Fay, J. A. and Riddell, F. R., "Theory of stagnation point heat transfer in dissociated air," J. Aerospace Sci. 25, no. 2, 73-85, 121 (February 1958).

<sup>44</sup> Teare, J. D., Georgiev, S., and Allen, R. A., "Radiation from the non-equilibrium shock front," Res. Rept. 11, Avco-Everett Res. Lab. (October 1961).

<sup>45</sup> Beckwith, I. E. and Cohen, N. B., "Application of similar solutions to calculation of laminar heat transfer on bodies with yaw and large pressure gradient in high-speed flow," NASA TN D-625 (1961).

<sup>46</sup> Yoshikawa, K. K. and Chapman, D. R., "Radiative heat transfer and absorption behind a hypersonic normal shock wave," NASA TN D-1424 (1962).

<sup>47</sup> Reinikka, E. A. and Wells, P. B., "Charring ablators in lifting reentry," J. Spacecraft Rockets 1, 73-78 (January 1964).

<sup>48</sup> Swann, R. T. and Pittman, C. M., "Numerical analysis of the transient response of advanced thermal protection systems for atmospheric reentry," NASA TN D-1370 (July 1962).

<sup>49</sup> Advance Papers of the Air-to-Surface Missile 1962 Golden

Gate Metals Conference on Materials Science and Technology for Advanced Applications, San Francisco, Calif. (February 1962).

<sup>50</sup> Anderson, R. A., "Research, design considerations, and technological problems of structures for planetary entry vehicles," *NASA-University Conference on the Science and Technology of Space Exploration* (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 2, pp. 511-520.

<sup>51</sup> Styer, E. F. and Zimmerman, D. K., "Thermal protection structure for lifting super-orbital entry," IAS Preprint 62-103 (June 1962).

<sup>52</sup> Adams, M. C., "Recent advances in ablation," *ARS J.* **29**, 625-632 (September 1959).

<sup>53</sup> Schmidt, D., "Ablative thermal protection for aerospace vehicles," Wright Air Dev. Div. TN 61-48 (March 1961).

<sup>54</sup> Swann, R. T., "Composite thermal protection systems for manned reentry vehicles," *ARS J.* **32**, 221-226 (1962).

<sup>55</sup> Scala, S. M. and Gilbert, L. M., "The thermal degradation of a char-forming plastic during hypersonic flights," *ARS J.* **32** 917-924 (1962).

<sup>56</sup> Steg, L., "Materials for reentry heat protection of satellites," *ARS J.* **30**, 815-822 (1960).

<sup>57</sup> Brooks, W. A., Jr., Swann, R. T., and Wadlin, K. L., "Thermal protection for spacecraft entering at escape velocity," Soc. Automotive Eng. Preprint 513F (April 1962).

<sup>58</sup> Yoler, Y. A., "Dyna-soar—A review of the technology," *Aerospace Eng.* **20**, 8-9, 56-67 (August 1961).

<sup>59</sup> Krier, C. A., "Coatings for the protection of refractory metals from oxidation," DMIC Rept. 162, Battelle Memorial Inst. (November 1961).

<sup>60</sup> Nicholas, M. G., Pranates, A. L., Dickinsin, C. D., and Whitman, C. I., "The analysis of the basic factors involved in the protection of tungsten against oxidation," Aeronaut. Systems Div. ASD-TRR-62-205, U. S. Air Force (June 1962).

<sup>61</sup> Lawthers, D. D. and Sama, L., "High temperature oxidation resistant coatings for tantalum base alloys," Aeronaut. Systems Div. Tech. Rept. 61-233, U. S. Air Force (1961).

<sup>62</sup> Rummeler, D. R., Stein, B. A., and Pride, R. A., "Preliminary results of a comparative study of several commercially available oxidation resistant coatings on  $M_0 - 0.5Ti$  alloy sheet," 6th Meeting of Refractory Composites Working Group, Dayton, Ohio (June 1962).

<sup>63</sup> Jaffe, L. D. and Rittenhouse, J. B., "Behavior of materials in space environments," *ARS J.* **32**, 320-346 (1962).

<sup>64</sup> Hurwicz, H., Munson, T., Mascola, R. E., and Cordero, J., "Glide vehicle thermal-protection performance," *Astronautics Aerospace Eng.*, 66-74 (August 1963).

<sup>65</sup> Vojvodich, N. S., "The performance of ablative materials in a high-energy, partially dissociated frozen nitrogen stream," NASA TN D-1205 (1962).

<sup>66</sup> Eggleston, J. M., "Some abort techniques and procedures for manned spacecraft," *Aerospace Eng.*, 17-26 (November 1962).

<sup>67</sup> Slye, R. E., "Velocity requirements for abort from the boost trajectory of a manned lunar mission," NASA TN D-1038 (July 1961).

<sup>68</sup> Bryant, J. P. and Frank, M. P., "Supercircular reentry guidance for a fixed  $L/D$  vehicle employing a skip for extreme ranges," *ARS Preprint* 2489-62 (1962).

<sup>69</sup> Moul, M. T., White, E. J., and Schy, A. A., "Analog simulation of piloted earth reentry at parabolic velocity," Intern. Symp. on Analogue and Digital Techniques Applied to Aeronautics, Liege, Belgium (September 1963).

<sup>70</sup> McLean, J. D., "A survey of midcourse guidance and navigation techniques for lunar and planetary missions," *NASA-University Conference on the Science and Technology of Space Exploration* (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 1, pp. 347-352.

<sup>71</sup> McLean, J. D., Schmidt, S. F., and McGee, L. A., "Optional filtering and linear prediction applied to mid-course navigational system for the circumlunar mission," NASA TN D-1208 (1962).

<sup>72</sup> Harry, D. P., III and Friedlander, A. L., "An analysis of errors and requirements of an optical guidance technique for approaches to atmospheric entry with interplanetary vehicles," NASA TR R-102 (1961).

<sup>73</sup> Gerathewohl, S. J. and Gernandt, B. E., "Physiological and behavioral sciences," *NASA-University Conference on the Science and Technology of Space Exploration* (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 1, pp. 399-413.

<sup>74</sup> Bjork, B. L., "Meteoroids vs. space vehicles," *ARS J.* **31**, 803 (1961).

<sup>75</sup> Whipple, F. L., "On meteoroids and penetration," Ninth Ann. Am. Astronaut. Soc. Meeting, Los Angeles, Calif. (1963).

<sup>76</sup> Campbell, J. P., "Low-speed aerodynamic research related to the landing of space vehicles," *NASA-University Conference on the Science and Technology of Space Exploration* (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 2, pp. 203-214.

<sup>77</sup> Knip, G., Jr. and Zola, C. L., "Three-dimensional trajectory analysis for round-trip missions to Mars," NASA TN D-1316 (1962).

<sup>78</sup> "A study of early manned interplanetary missions—final summary report," NASA-Marshall Space Flight Center Contract No. NAS 8-5026; prepared by General Dynamics/Astronautics, Rept. AOK 63-0001 (January 1963).

<sup>79</sup> MacKay, J. S. and Rossa, L. G., "A variational method for the optimization of interplanetary round-trip trajectories," NASA TN D-1660 (1963).

<sup>80</sup> Moeckel, W. E., "Fast interplanetary missions with low thrust propulsion systems," NASA TR R-79 (1960).

<sup>81</sup> Ehricke, K. A., "A systems analysis of fast manned flights to venus and mars. Part I—Mission philosophy, life support, scientific reconnaissance and prototype vehicle layout," Rept. AZM-072, Convair-Astronautics (March 1959).

<sup>82</sup> Ragsac, R. V. and Titus, R. R., "Optimization of interplanetary missions," Lockheed Missiles and Space Co. Rept. A013231 (June 1962).

<sup>83</sup> Hyatt, A., "Planning for the future goals of NASA," *NASA-University Conference on the Science and Technology of Space Exploration* (U. S. Government Printing Office, Washington, D. C., 1962), Vol. 1, pp. 15-24.