

X-672-65-299

NASA TM X-55277

SECOND INTERIM STATUS REPORT INTERPLANETARY MONITORING PLATFORM IMP I - EXPLORER XVIII

FACILITY FORM 502

<u>N65-32594</u>	
ACCESSION NUMBER	(THRU)
<u>49</u>	<u>1</u>
(PAGES)	(CODE)
<u>INASA CR OR TMX OR AD NUMBER</u>	
<u>31</u>	
(CATEGORY)	

JULY 1965

GPO PRICE \$ _____

CSFTI PRICE(S) \$ _____

Hard copy (HC) 2.00

Microfiche (MF) .50

ff 653 July 65

NASA

GODDARD SPACE FLIGHT CENTER
GREENBELT, MARYLAND

**SECOND INTERIM STATUS REPORT
INTERPLANETARY MONITORING PLATFORM
IMP I - EXPLORER XVIII**

**FRANK A. CARR
IMP PROJECT OFFICE**

Note: The (first) Interim Status Report (GSFC Report X-672-64-33, February 1964) described the launch, orbit, and first three months of spacecraft operation.

This report presents additional information concerning the life of IMP I, extending the period of coverage through the end of useful satellite operation.

**SECOND INTERIM STATUS REPORT
INTERPLANETARY MONITORING PLATFORM
IMP I - EXPLORER XVIII**

SUMMARY

The first IMP spacecraft, launched on 26 November 1963, operated continuously and successfully for slightly more than 6 months. Intermittent operation began on 30 May 1964 due to a malfunction of the spacecraft battery. Thereafter, varying quantities of data were acquired during a three-week period beginning 17 September 1964, a one-month period beginning 12 November 1964, and a one-month period beginning 21 February 1965. In May, 1965 all efforts to acquire any further data were terminated since the satellite was only operating for a few minutes each day.

The highly elliptical orbit of IMP I, reaching 106,000 nautical miles into cislunar space provided the 9 scientific experiments with a unique opportunity to examine the outer limits of the Earth's Magnetosphere, the transition region, and interplanetary space. These experiments operated properly with but a few exceptions, returning nearly 6000 hours of scientific information.


The performance of the spacecraft systems—telemetry, power, thermal—was near normal and is discussed based on telemetered performance parameter data.

On 6 May 1964, the spacecraft entered the shadow of the earth shortly after passing apogee. The extended period of darkness plummeted the temperature of experiments and systems to -40°C and below, while solar paddles and other exterior parts reached about -150°C . The spacecraft resumed operation a little more than fifteen hours after entering darkness, surviving the longest shadow (8 hours, 39 minutes of darkness, exclusive of penumbra) and the coldest known environment to which any spacecraft has been exposed.

On 30 May 1964, the spacecraft began to operate intermittently; by the end of June, it was transmitting for only a few minutes each day. A detailed investigation concluded that the spacecraft battery had failed, probably due to a combination of an excessive amount of electrolyte in the cells and extended periods of warm temperatures.

CONTENTS

	Page
Summary	iii
INTRODUCTION	1
ORBIT	1
SPACECRAFT OPERATION SUMMARY	2
IN-FLIGHT TEMPERATURE DATA	4
APOGEE SHADOW	5
IN-FLIGHT POWER DATA	8
BATTERY PROBLEM	10
CONCLUDING REMARKS	12
REFERENCES	13
FIGURES AND ILLUSTRATIONS	14
APPENDIXES	
A. IMP I PERFORMANCE PARAMETER SYSTEM	37
B. IN-FLIGHT CALIBRATION DRIFT	39
C. IMP I PERFORMANCE PARAMETER DATA	43
D. BIBLIOGRAPHY OF EXPERIMENTER PUBLICATIONS	45

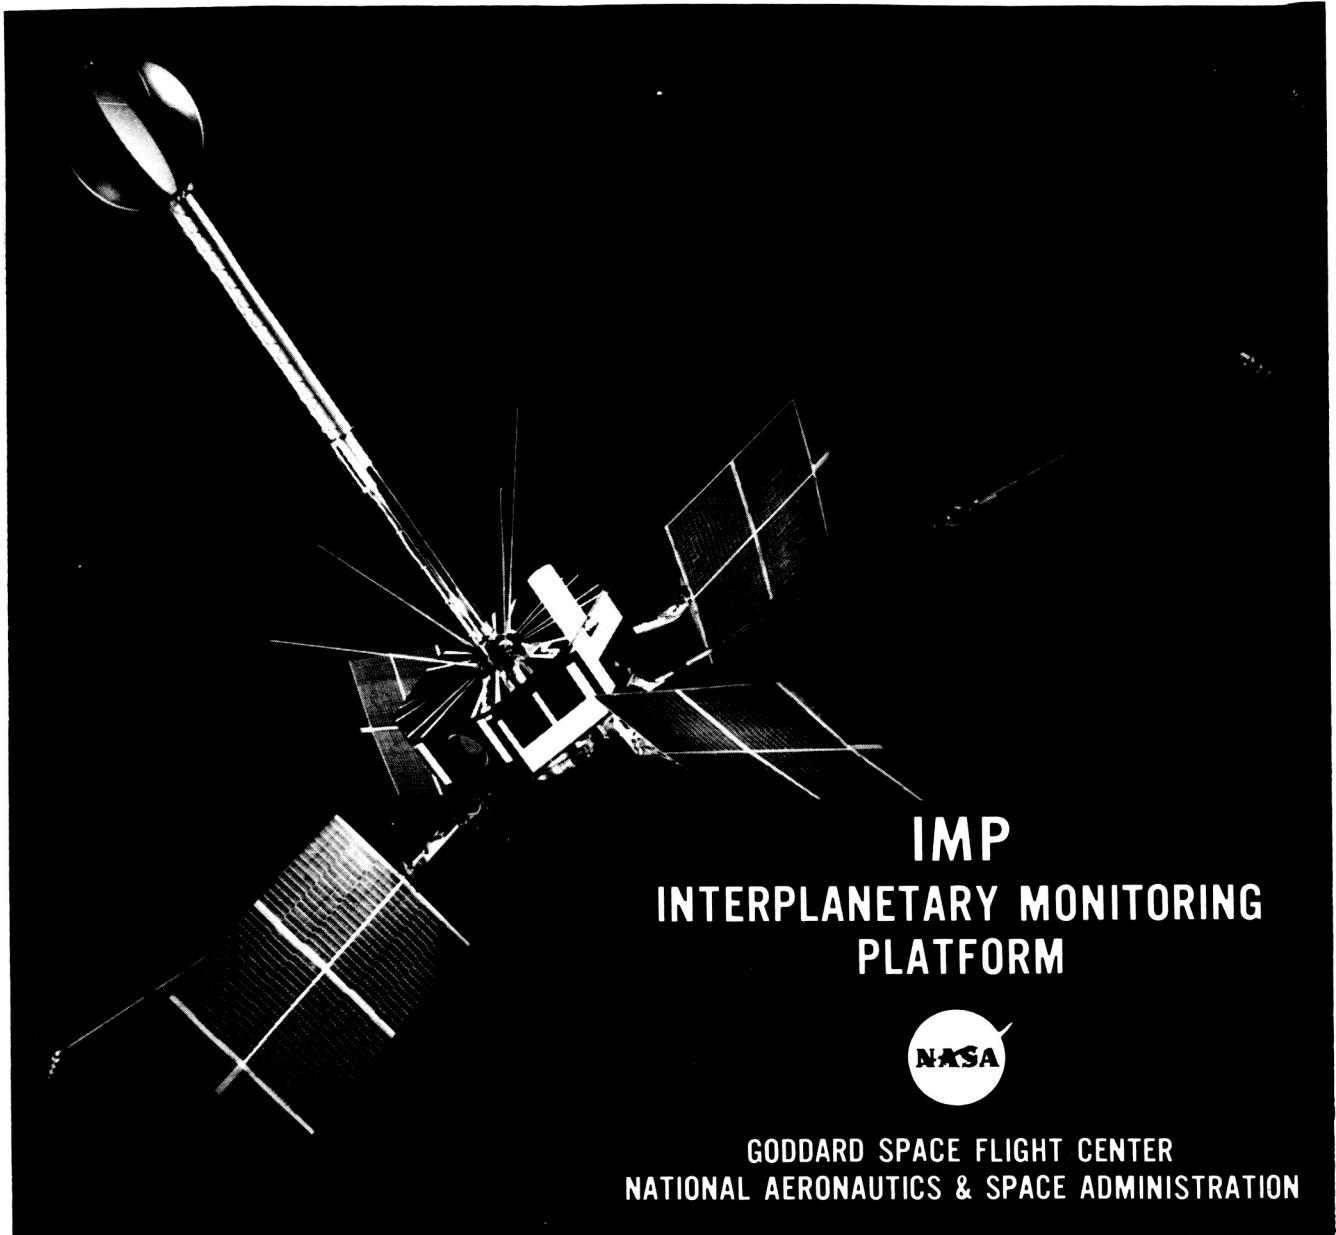

IMP
INTERPLANETARY MONITORING
PLATFORM



GODDARD SPACE FLIGHT CENTER
NATIONAL AERONAUTICS & SPACE ADMINISTRATION

SECOND INTERIM STATUS REPORT
INTERPLANETARY MONITORING PLATFORM
IMP I - EXPLORER XVIII

INTRODUCTION

The IMP I spacecraft was launched on November 26, 1963 (Figure 1) from the then Atlantic Missile Range. The Delta 21 launch vehicle performed satisfactorily^{1,2} placing the 138-pound spacecraft into an elliptical orbit ranging from 105 nautical miles to 105,600 nautical miles—or about half the distance to the Moon.

The achieved apogee was about 50,000 nautical miles less than nominal. However, the spacecraft data showed that it traveled well beyond the Earth's Magnetosphere and transition region during the early months of its lifetime, and all scientific objectives were achieved despite the lowered apogee.

Because of the eccentricity of the orbit, IMP I spent about two-thirds of its time outside the Earth's Magnetosphere.

The scientific experiments aboard IMP I provided excellent data, including the first direct evidence for the existence of a collisionless magneto-hydrodynamic shock wave in space enclosing the Earth and its magnetosphere. The spacecraft also investigated in considerable detail the energy spectra, velocities, fluxes, and variations of cosmic rays, the solar wind, the magnitude and variations of magnetic fields in cislunar space, and the nature of the boundary or transition region between the Earth's Magnetosphere and the shock front.³

ORBIT

The orbital parameters for the initial orbit were as follows:*

Apogee	195,552	km	(105,598 n.m.)
Perigee	197	km	(106 n.m.)
Period	5583.2	min	(93.05 hrs.)
Inclination	33.34	deg	
Eccentricity	.937		

*The elements for the initial conditions were computed and re-computed several times; those shown above were computed on 20 February 1964.

Figure 2 shows the orbital elements at selected times during the two years following launch.

At this writing, some 18 months after launch, the apogee position is 1000 n. miles lower while perigee has increased by about 1250 n. miles (Figure 3). The orbital period is 12 minutes longer than initially.

SPACECRAFT OPERATION SUMMARY

Following is a chronological summary of the performance of the spacecraft from launch through mid-November, 1964 (Figure 4). Performance of all experiments and systems was satisfactory unless noted:

1. The mechanical programmer of the Thermal Ion-Electron experiment began erratic operation 20 hours after launch. Most of the data from this experiment was subsequently lost.
2. A temporary power system problem occurred three days after launch. A short circuit on the +12v output of the Prime Converter is suspected. No permanent damage, nor reoccurrences were observed.
3. Beginning 3 February 1964, a failure in one of two redundant circuits in the Programmer Card 4 (Gated Telemetry Amplifier) caused a gradual degradation and subsequent loss of data in alternate fourth sequences. This loss of one-half of the Rb Magnetometer data continued but did not appreciably compromise the experimental results.
4. Beginning in mid-April 1964, the Ames Proton Analyzer data was intermittent. On occasion, the experiment data would read comb filter numbers of 108-109 representing a slightly negative input to the Encoder. On these occasions, occurring from 1 to 4 days apart, the data was lost for periods of from several hours to several days. A possible cause could be voltage transients, internal to the experiment, occurring during the data storage mode.
5. In April, intermittent anomalies were observed in the Range and Range Rate tracking messages. However, the data was usable and the problem was of no consequence.
6. On 6 May 1964, the spacecraft entered an extended apogee shadow (8-1/2 hours). As a result of the extreme cold, one channel of the E VS dE/dx was lost. The failure was probably due to the photomultiplier tube,

although a number of other in-line items are possibilities. Future data from this experiment was of little value.

7. On 11 May 1964, several days after the shadow, the spacecraft turned off. Strip charts of the Joburg tape (#361) indicated that turn-off may not have been instantaneous. However, due to the quality of the recording, a definite conclusion cannot be reached. Normal spacecraft operation resumed 12 hours and 38 minutes later. Spacecraft data before and after this period gives no indication of a possible cause.
8. On 30 May 1964, the spacecraft began a repetitive series of turn-offs and turn-ons. The duration of the on-times gradually decreased during the month of June from about 3/4 hours to a minute or less. On 14 July, Woomera, Australia claimed the acquisition of the IMP signal for two seconds. Thereafter, data acquisition efforts were substantially reduced and later temporarily abandoned.

The cause of this problem has been attributed to the degradation of the spacecraft battery⁴. Proper operation would have continued except that the spin-axis/sun-angle was such that the solar paddles were incapable of sustaining continuous operation without occasional assists from the Battery. Based on the estimate of power output vs. angle and the seasonal change of this angle, it was predicted that conditions would be favorable in mid-September and again in November to support continuous transmissions.

9. On 1 July 1964, the USAF Tracking Station at South Point, Hawaii reported that it had acquired an "intermittent, low level (-120 dbm) signal" during a 30-minute perigee pass; modulation was not detectable. This report is inconsistent with the presumed mode of operation of the spacecraft (i.e., off, with brief turn-ons every 8 hours).
10. STADAN* began a search for the IMP I signal on 17 September. The results were favorable: at 1245 UT, the MOJAVE (California) Station acquired and recorded an apparently normal signal. An on-off-on pattern was again evident. The duration of the on-periods were 30 minutes to several hours. During the following four weeks, over 200 hours of data was recorded.

*Space Tracking and Data Acquisition Network

The status of the spacecraft and experiments was essentially unchanged from that in May, except that noise was causing problems with some of the MIT data and the University of Chicago data was questionable.

After the first week of October, the duration of the operational periods decreased until only one minute was recorded on 15 October 1964. Tracking and data acquisition efforts were suspended until mid-November when the spin axis/sun angle was expected to be favorable once again.

11. On 12 November 1964, the Mojave Station acquired and recorded the IMP I signal for nearly six hours. Thereafter, and until 15 December 1964, the satellite operated about 90% of the time providing over 600 hours of data.

Status of the experiments was unchanged from the previous operational period except that the University of Chicago experiment (R VS dE/dx) was not operating properly and the data was of little value.

12. A fourth period of operation—from 21 February 1965 to 25 March 1965—provided intermittent and variable periods of operation. Small quantities of data were obtained. The operational status of experiments is not known at this time.

IN-FLIGHT TEMPERATURE DATA

The thermal control of the IMP spacecraft is a passive system consisting of varied geometrical patterns of white and black paints and polished aluminum surfaces. This configuration maintained internal temperatures from +15°C to +50°C during the active lifetime of the satellite. For the IMP orbit, the temperatures of the internal electronic subsystems vary as functions of the impinging sunlight angle (Figure 5) (since the IMP physical configuration is non-spherical), and the long-term characteristics of the external thermal coatings.

The IMP Performance Parameter System⁵ measured eight temperatures (in addition to 4 voltages and 3 currents) and the telemetered data during the launch phase as well as the first six months of operation are plotted in Figures 6 and 7 respectively.

Comparisons of the in-flight data with pre-launch predictions are shown in Figures 8 through 12.*

The predicted temperature of the Telemetry Encoder (which is also representative of an "average low power" location) is shown in Figure 13.

Some comparisons of temperatures at identical sun angles but different times after launch are given in Figure 14. For example, it can be seen that the temperature of the prime converter is consistently higher at later times. This is probably due to an increase in the effective α/ϵ of the radiating tube. The thermal control system performed satisfactorily throughout the lifetime of the satellite.

Because of the intermittent operation of the spacecraft beginning 6 months after launch, it was possible to determine the non-operational (i.e., power off) temperatures. This was done by observing the temperature data immediately after the spacecraft turned on. The following table summarizes this data:

Spin Axis-Sun Angle = 65°	T ON	T OFF (°Centrigade)	ΔT
Skin Temp #1	+ 44	+39	- 5
Skin Temp #2	20	15	- 5
Rb Gas Cell	50	7	-43
Rb Lamp	105	50	-55
Battery	24	17	- 7
Prime Converter	46	18	-28
Transmitter	30	12	-18
Solar Paddle	6	6	0

APOGEE SHADOW

One of the more interesting events in the life of IMP I was the satellite's traversal through the shadow of the Earth.

On May 6, 1964, shortly after passing apogee, the spacecraft entered the Earth's shadow for a period of 8 hours and 58 minutes (exclusive of penumbra**).

*Flight performance data mentioned in the text and graphs of this report have not been adjusted for any in-flight calibration drift—see Appendix B.

**Region of partial illumination.

IMP I APOGEE SHADOW		6-7 May 1964	
	Date	Time (UT)	Altitude (km)
Entrance	6 May	1557	190,794
Exit	7 May	0055	177,932
Source: Refined World Map			

Prior to launch, the possibility of an extended shadow was recognized. Because of the wide range of possible orbits, shadows from 6 to 10 or even 12 hours were forecast.

Of primary concern was the survivability of the spacecraft when exposed to extremely cold temperatures. Internal temperatures (experiments and electronics) were expected to fall to about -60°C while external locations (solar paddles, booms) would fall below -150°C.

A mock-up of the IMP power system was subjected to a simulated shadow test in April 1964 to investigate the effects of such temperature extremes. The results indicated that survival was possible, although recognizing the limitations of the test, there were a number of catastrophic possibilities as well as a far greater number of failure modes of lesser significance.

Data (see Figures 15, 16, and 17) indicated that the spacecraft entered the penumbra region at about 1521 ± 2 UT, 6 May 1964. At this time the telemetered current from the Solar Paddles began to decrease. The penetration of the penumbra consumed approximately 55 minutes, during which time the solar paddle current decreased, almost linearly, from 2.8 amps to 0 amps.

Total darkness was encountered at 1616 UT (estimated) and spacecraft turn-off occurred at 1620:43.5 UT (during Sequence 3, Frame 6, Channel 8).

The STADAN tracking station at Woomera, Australia, recorded the spacecraft signal from several hours prior to the shadow through spacecraft turn-off.

IMP I carried redundant recycle clocks designed to re-start the spacecraft approximately eight hours after turn-off. Because of the extreme cold, it was anticipated that these clocks would probably slow down, or temporarily stop until re-warming occurred.

The STADAN station at Santiago, Chile reported that the spacecraft turned-on at 0738 UT, 7 May 1964 (15 hours 17 minutes after turn-off).

IMP I SHADOW TIMES			
	Date (1964)	Time (UT)	Elapsed Time Hr:Min
Penumbra Entrance	6 May	1521	00:00
Complete Darkness	6 May	1616	00:55
Turn-Off	6 May	1621	01:00
Predicted Sunlight Entrance	7 May	0055	09:34
Turn-On	7 May	0738	16:17

Source: STADAN and IMP I Data

Examination of the performance parameter data as the spacecraft entered the shadow shows that the current from the solar paddles fell below the requirements of the spacecraft at approximately 1536 UT. The spacecraft continued to operate for only 45 minutes thereafter despite the fact that the nominal 5 ampere-hour battery should have been able to sustain at least 90 minutes of operation (longer with partial paddle current).

Taking into account the inaccuracies in the PP data (see Appendix B), the area under the PP4 vs. Time curve (1535 to 1621 UT) indicates a spacecraft requirement of about 1.9 ampere-hours while the area under the PP9 vs. Time curve (1535 to 1616 UT) indicates that the paddles supplied about 0.4 ampere-hours. The batteries then supplied only 1.5 ampere-hours.

The Silver Cadmium Battery used in IMP had a nominal capacity of about five ampere-hours. Ordinarily, this battery would be capable of operating the spacecraft for 1-1/2 to 2 hours. Since, at the entrance of this shadow, the effective or useful capacity of the IMP I Battery was only 1-1/2 ampere-hours, one can conclude with fair certainty that the Battery was substantially degraded at this time. In fact, it delivered only about 30% of its pre-launch capacity. This problem is discussed at length in a later section.

A review of the immediate post-shadow data indicated that the only casualty of the "big freeze" was a failure in the GSFC, E vs dE/dx experiment. All other

experiments and spacecraft systems returned to normal operation. From temperature and paddle output current data it appears that most if not all solar cells must have remained on the paddles, having survived close to liquid nitrogen temperatures.

As can be seen in Figures 16 and 17, the spacecraft temperatures begin to decrease rather rapidly even within the penumbra. Combining this data with the predicted cooling rates it appears that the Battery temperature reached about -45°C, the Transmitter -80°C, and the Prime Converter -90°C (see Figure 18.) Experiments and other internal items probably reached temperatures of -45°C to -80°C.

When the spacecraft resumed operation, after an estimated 6-3/4 hours in sunlight, the temperatures were as follows:

PP	Location	°C ($\pm 3^{\circ}\text{C}$)
PP5	Top of Octagon	+13°
PP6	Rb Gas Cell	- 5°
PP7	Battery	-15°
PP11	Side of Octagon	+ 4°
PP13	Rb Lamp	+50°
PP14	Prime Converter	- 7°
PP15	Transmitter	-12°

This extended shadow is thought to be the longest such period ever encountered by a spacecraft. Not only did IMP I survive and provide useful data thereafter, but it also traversed and survived a second shadow the following year (May 2, 3 1965, 7 hours and 4 minutes).

IN-FLIGHT POWER DATA

Seven parameters are telemetered which give an indication of the performance of the power system of the spacecraft. Included are the following voltages and currents (Figure 19):

- PP1 Primary System Voltage
- PP2 Prime Converter +50v $\pm 1\%$ Regulated Output
- PP8 Prime Converter +12v $\pm 1\%$ Regulated Output
- PP12 Multi-Converter + 7v $\pm 1\%$ Regulated Output

- PP3 Battery Charge Current
- PP4 Spacecraft Load Current
- PP9 Solar Paddle Output Current

Data for the six-month period following launch are plotted (daily averages) in Figure 20. There are a number of interesting items on this graph. For example, the four voltages appear to increase in value for some time after launch, reaching a plateau and remaining nearly constant thereafter. This upward drift has been attributed in most cases to telemetry calibration changes rather than out-of-tolerance performance of the converter-regulators.*

The extreme stability of the multi-converter +7v output is evident from Figure 20.

The solar paddle output current is also plotted and is discussed in a later paragraph.

The spacecraft load current is very uniform except for a slight discrepancy occurring three days after launch. At that time a power system problem developed (see Item 2 of the SPACECRAFT OPERATION SUMMARY). A comparison of the load current before and after shows a net reduction of about 100 milliamperes. No known failures occurred (which might have decreased the power consumption) and so this discrepancy remains unexplained.

The Battery charge current (PP3) shows a very unusual and unexpected trend toward high charge rates. This may be symptomatic of the Battery failure which began on 30 May 1964.

The Solar Paddle power supply flown on IMP I consisted of four paddles with P/N cells. Each paddle produced about 33.6 watts per side at 1.0 Solar Constant and no radiation damage.

Because of the geometrical placement of the paddles on the spacecraft, a variable power output is generated as the satellite spins and as the sun shines from different angles. The predicted power (averaged over a revolution and the minimum during a revolution) is plotted as a function of Spin axis-Sun angle in Figure 21. This data is based on "initial" power output—i.e., before radiation damage.

The actual solar paddle output (average) is shown in Figure 22. For ease of comparison the predicted power is also shown on this graph.

*See Appendix B for a complete discussion of this problem.

One year after launch, at the identical Spin axis-Sun angle which existed at launch, the solar paddles were producing exactly 75% of their initial capability. This 25% loss of capacity could be composed of failures (open circuits, etc.) of individual cells or strings of cells and degradation due to ultra-violet effects but the major portion is presumably due to energetic particle radiation damage.

BATTERY PROBLEM

As the IMP I spacecraft entered the apogee shadow about 5-1/3 months after launch, the effective capacity of the Battery was only 30% of its pre-launch nominal capacity of 5 ampere hours. After 6 months in orbit, the effective capacity was probably close to zero.

With regard to IMP I there are four primary factors which could have either caused, contributed to, amplified, or accelerated Battery degradation: temperature, "pulsing" (i.e., alternate charging and discharging as the satellite spins), the apogee shadow, and finally, excessive electrolyte in the Battery cells:

—High temperatures (in this case, +35°C and above) are known to substantially reduce the lifetime of Silver Cadmium Batteries. From telemetered data (Figure 7), the IMP I Battery was exposed to temperatures in excess of +35°C for 110 days (60%) of its first six months in orbit. There is strong evidence in ground test data to indicate that this could contribute to a shortening of the IMP I Battery lifetime.

—Pulsing of the Battery occurs when the satellite spins and presents varying paddle areas to the impinging sunlight. At certain roll positions, the illuminated paddle area is insufficient to produce enough power to operate the spacecraft. At this instant, the Battery is called upon to supply the deficiency. A few degrees later in the revolution, the area will increase providing the necessary power for the spacecraft as well as power to recharge the Battery. Consequently, alternate discharging and charging of the Battery occurs.

Ground tests under this mode of operation indicate that the effective capacity may be (at least temporarily) decreased or increased depending on the amplitude and period of the pulsing.

Pulsing of the Battery is known to have existed during April. There is no generally accepted conclusion as to the effect of pulsing on the IMP I Battery.

—The Apogee Shadow probably did not cause the Battery problem (based on the data at shadow entrance discussed previously). However, if the Battery was

already degraded (for example, cracked) the shadow would have served to further aggravate the problem.

—The electrolyte leakage problem has been intensely investigated by the Electrochemical Power Sources Section and has been reported in several documents including Reference 4 which is summarized herein with the permission of K. Sizemore.

"Leakage of electrolyte from Silver Cadmium Batteries is caused by an excess of free electrolyte in the cells which prevents gas recombination resulting in an internal pressure rise.

"The pressure build-up weakens the cell terminal-to-polystyrene interface eventually allowing the KOH electrolyte to leave the cell.

"The KOH leak rate is accelerated because of the magnetic compensating loops which run adjacent to, and sometimes in direct contact with, the cell terminals and intercell connectors. In short, the loops act as a path for the electrolyte to follow after leaving the cell.

"Epoxy cracks in high-stress areas of the battery occurring during temperature cycling probably would not substantially increase the leak rate." (However, severe cracking of the epoxy—which might have occurred during the apogee shadow of 6 May—could have accelerated the KOH leak rate.)

A review of the Battery charge current history (PP3 data, Figure 20) shows a gradual upward trend for the five months after launch and preceding the May 1964 apogee shadow. Part of this increase is due to analog oscillator calibration drift (Appendix B). However, part of the observed data (about 2/3 to 3/4) is not due to oscillator drift and hence must be a measure of an increase of the trickle charge rate of the Battery.

Silver cadmium batteries usually accept near zero current during long-term trickle charge. One Battery (IMP #15) which was placed on test following the IMP II launch began to degrade 75 days after the start of the test.⁶ One of the cells developed an internal short causing a higher voltage to be impressed on the remaining good cells which resulted in an increase of the Battery charge current. Eventually, some of the cells may rupture due to the internal gas pressure build-up and electrolyte leakage will occur.

The failure mode (Life test of IMP Battery #15) was attributed to +50°C operation which accelerates the reaction of silver oxide with the cellophane

separators. The build-up of silver on the separator layers eventually results in a shorted cell.⁶

In the case of IMP I, it seems likely that a cell could have shorted due to the warm temperatures experienced during the early months in orbit causing a higher voltage to be impressed on the remaining cells eventually causing rupture due to gas pressure. This, combined with excessive amounts of electrolyte in the cells and possible cracking of the epoxy due to the apogee shadow (Battery reached -40°C), could well have resulted in total Battery failure.

Many changes were incorporated into the IMP B&C Battery designs, including critical adjustment of electrolyte level, elimination of magnetic compensating loops, changes to the epoxy encapsulation techniques, and for IMP C, a Battery over-charge protection circuit to preclude the possibility of internal pressure build-up and a thermal change to reduce the temperature of the Battery.

CONCLUDING REMARKS

On May 10, 1965, 531 days after launch, STADAN recorded 11 minutes of IMP I data. If the sun angle had been optimum, or if radiation damage had not reduced the paddle output by more than 25%, or if the Battery had not failed, the spacecraft would have been operating full time.

Of course "IFs" don't count, but the 10 May data does prove the hardiness of the basic spacecraft system. The rf system, programmers, encoder, power system (excluding Battery)-paddles, converters and regulators, optical aspect and performance parameters all are presumed to be functioning properly after 1-1/2 years in space. In addition, the University of California, Geiger Telescope, Magnetometers and possibly the MIT experiments would have provided useful scientific data. One further word about the under voltage-recycle system: from May 1964 to May 1965 this system operated properly for more than 900 cycles—a record.

IMP I, the forerunner of a series of three launches, later expanded to seven, then eleven, successfully accomplished the following Mission Objectives:

- to study in detail the radiation environment of cislunar space.
- to study the properties of the interplanetary magnetic field and its dynamical relationship with solar particle fluxes.
- to extend knowledge of solar-terrestrial relationships.

- to further the technological development of relatively inexpensive spin-stabilized spacecraft for scientific investigations.

The value or successfulness of a satellite should not be measured in terms of days of operation or minutes or kilobits of telemetry recorded. Instead, one should ask the question "What has been learned?" Answers to this question can be found by referring Appendix D - a bibliography of papers published by experimenters based on IMP I data.

REFERENCES

1. Delta 21 Field Flight Report, 15 February 1964, NASA/GSFC Goddard Launch Operations.
2. Flight Report, Delta Program - Mission No. 21, DAC Report SM-43696, February 1964.
3. Initial Results from the First Interplanetary Monitoring Platform (IMP I), IG Bulletin No. 84, June 1964, National Academy of Sciences.
4. GSFC Memo from K. Sizemore, Code 636 "Status of IMP Silver Cadmium Battery Leak Problem" dated 2/5/65.
5. GSFC Report X-672-63-238 "Performance Parameter Measurements on IMP I," November 1963, F. A. Carr.
6. GSFC Memo from K. Sizemore, Code 636 "Life Test of IMP Battery #15," dated 20 April 1965.

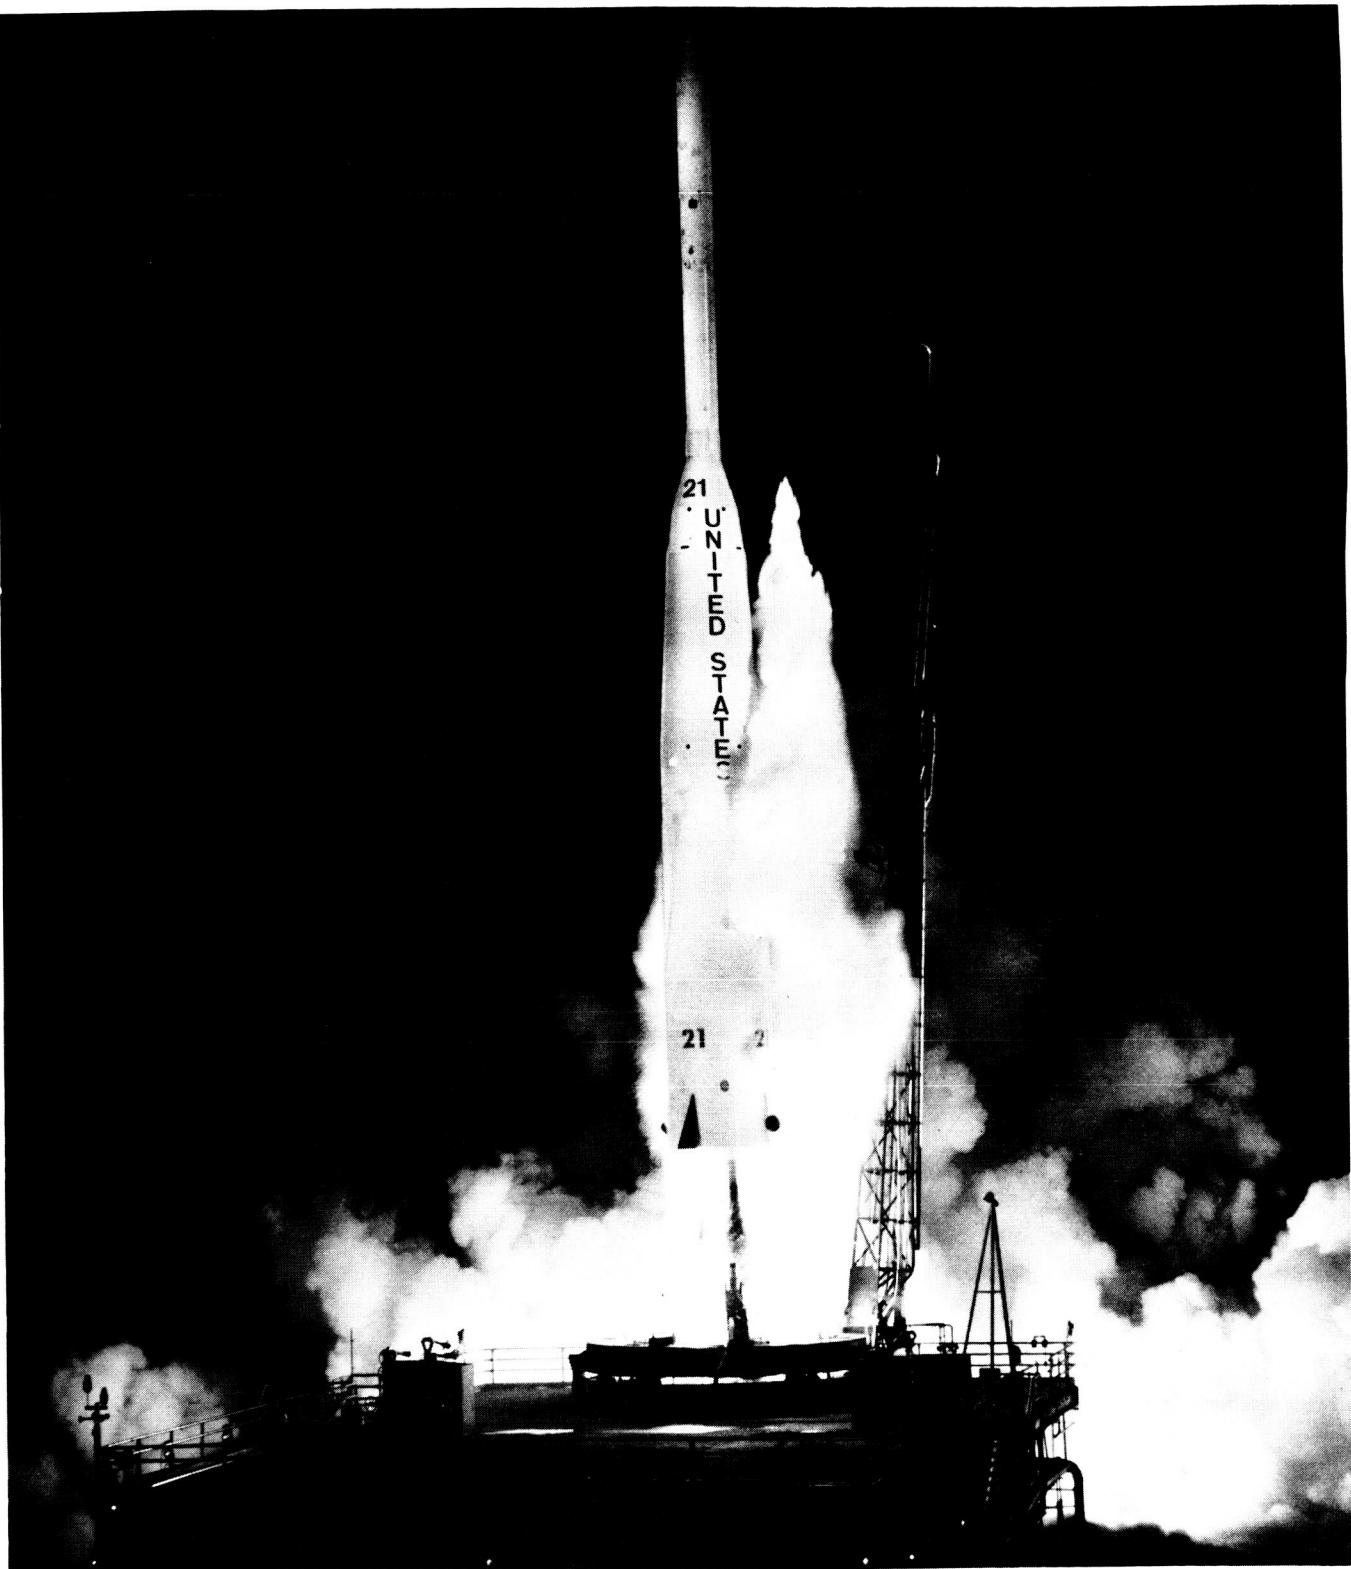


Figure 1

INTERPLANETARY MONITORING PLATFORM – IMP I
ORBITAL ELEMENTS AT SELECTED TIMES
AFTER LAUNCH

Date	Nominal	11/27/63	1/20/64	2/20/64	3/18/64	5/22/64	9/21/64	10/24/64	11/27/64	12/26/64	2/26/65	5/21/65	11/16/65
Days After Launch	–	0	55	86	113	178	299	333	365	396	459	542	721
Apogee Kilometers	277,184	195,552	194,134	193,832	193,694	194,068	192,461	192,764	192,839	192,349	192,182	193,721	187,075
Nautical Miles	149,700	105,598	104,832	104,669	104,703	104,797	103,929	104,092	104,133	103,868	103,778	104,639	101,020
Perigee Kilometers	190	197	1754	1993	1873	1911	3653	3249	3392	3747	3965	2494	162
Nautical Miles	103	106	947	1076	1011	1032	1973	1755	1832	2023	2141	1347	87.5
Period Minutes	91.64	5583.2	5588.7	5586.2	5583.8	5592.4	5597.8	5593.7	5602.5	5597.1	5599.1	5601.9	5244.8
Hours	1.52.7	93.05	93.15	93.10	93.05	93.21	93.99	93.22	93.37	93.28	93.31	93.36	87.41
Inclination (deg)	33.0	33.34	32.83	33.68	35.44	37.24	37.5	39.3	38.9	37.4	35.9	37.2	31.5
Eccentricity	.955	.937	.922	.920	.921	.921	.904	.908	.906	.903	.901	.915	.935
Date Computed	–	2/23/64	3/14/64	4/14/64	5/2/64	6/4/64	12/23/64	12/23/64	12/23/64	12/23/64	12/23/64	12/23/64	12/23/64
Source	Delta 21 DIO	(1)	(1)	(1)	(1)	(1)	(1)	(2)	(2)	(2)	(2)	(2)	(2)

SOURCES (1) GSFC Operational Control Reports

(2) IMP A Lifetime Study Per tape 12/23/64

NOTE: Re-Entry into Earth's Atmosphere
Predicted for 11/20/65

Figure 2

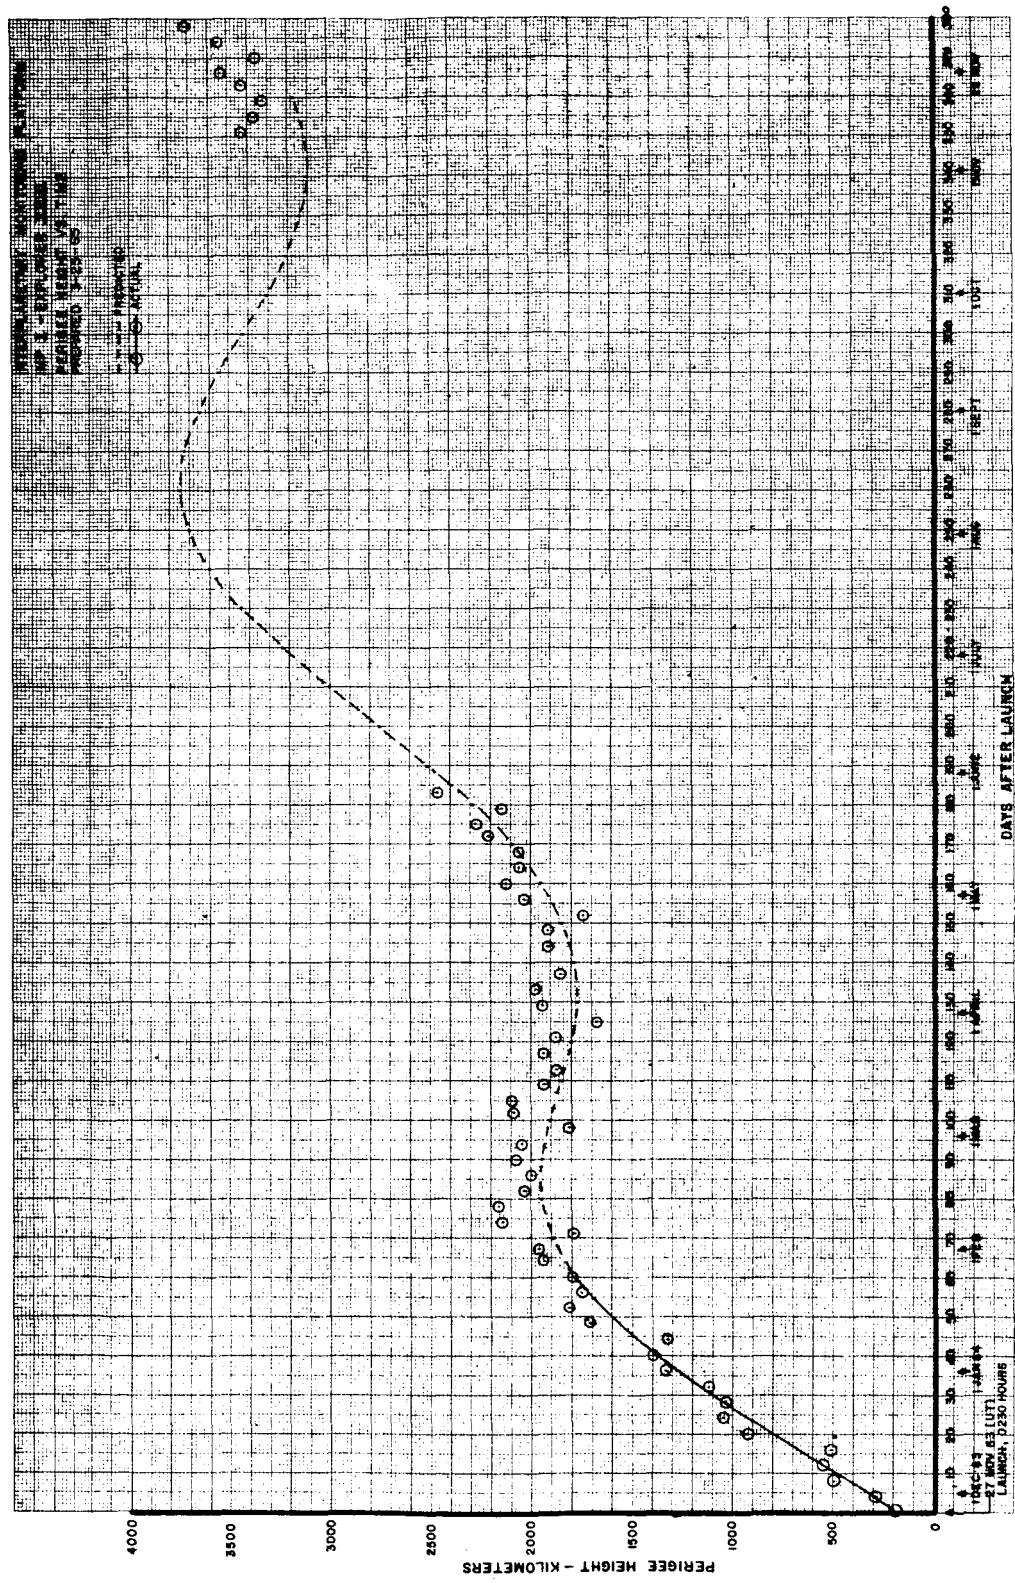


Figure 3

THE LIFE OF THE IMP I SATELLITE

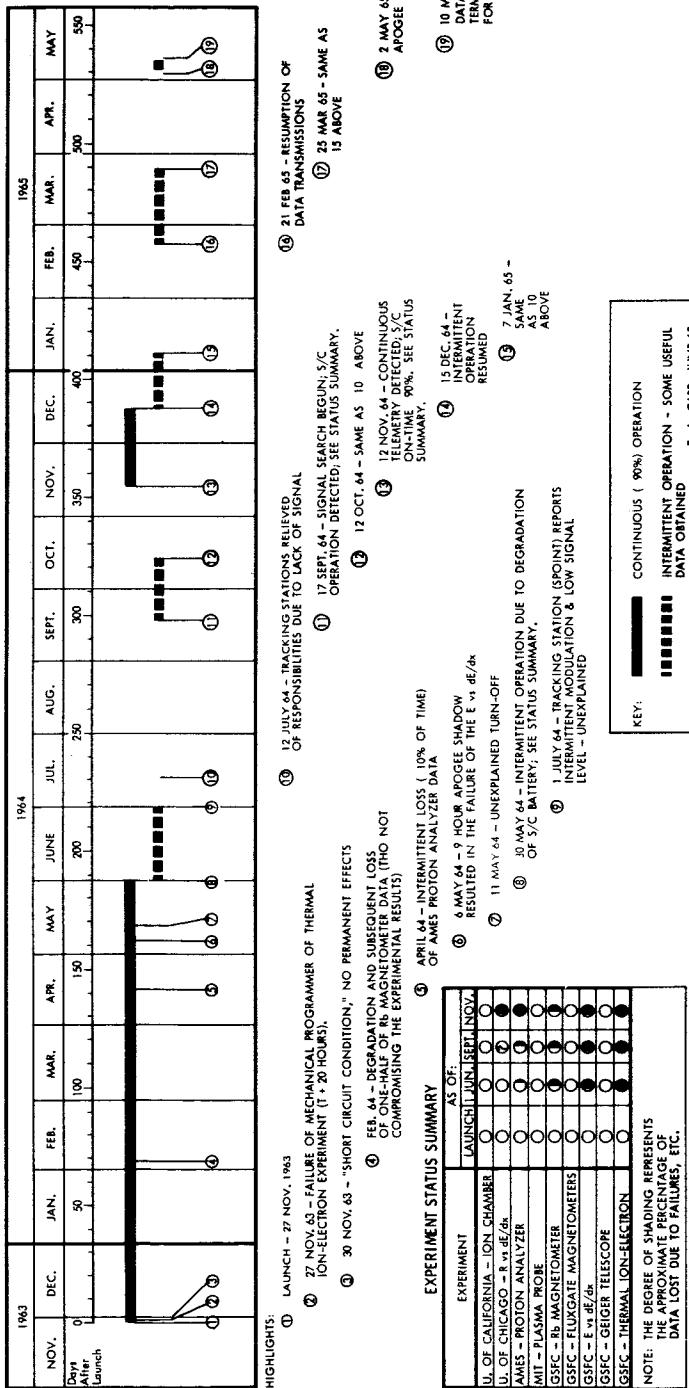


Figure 4

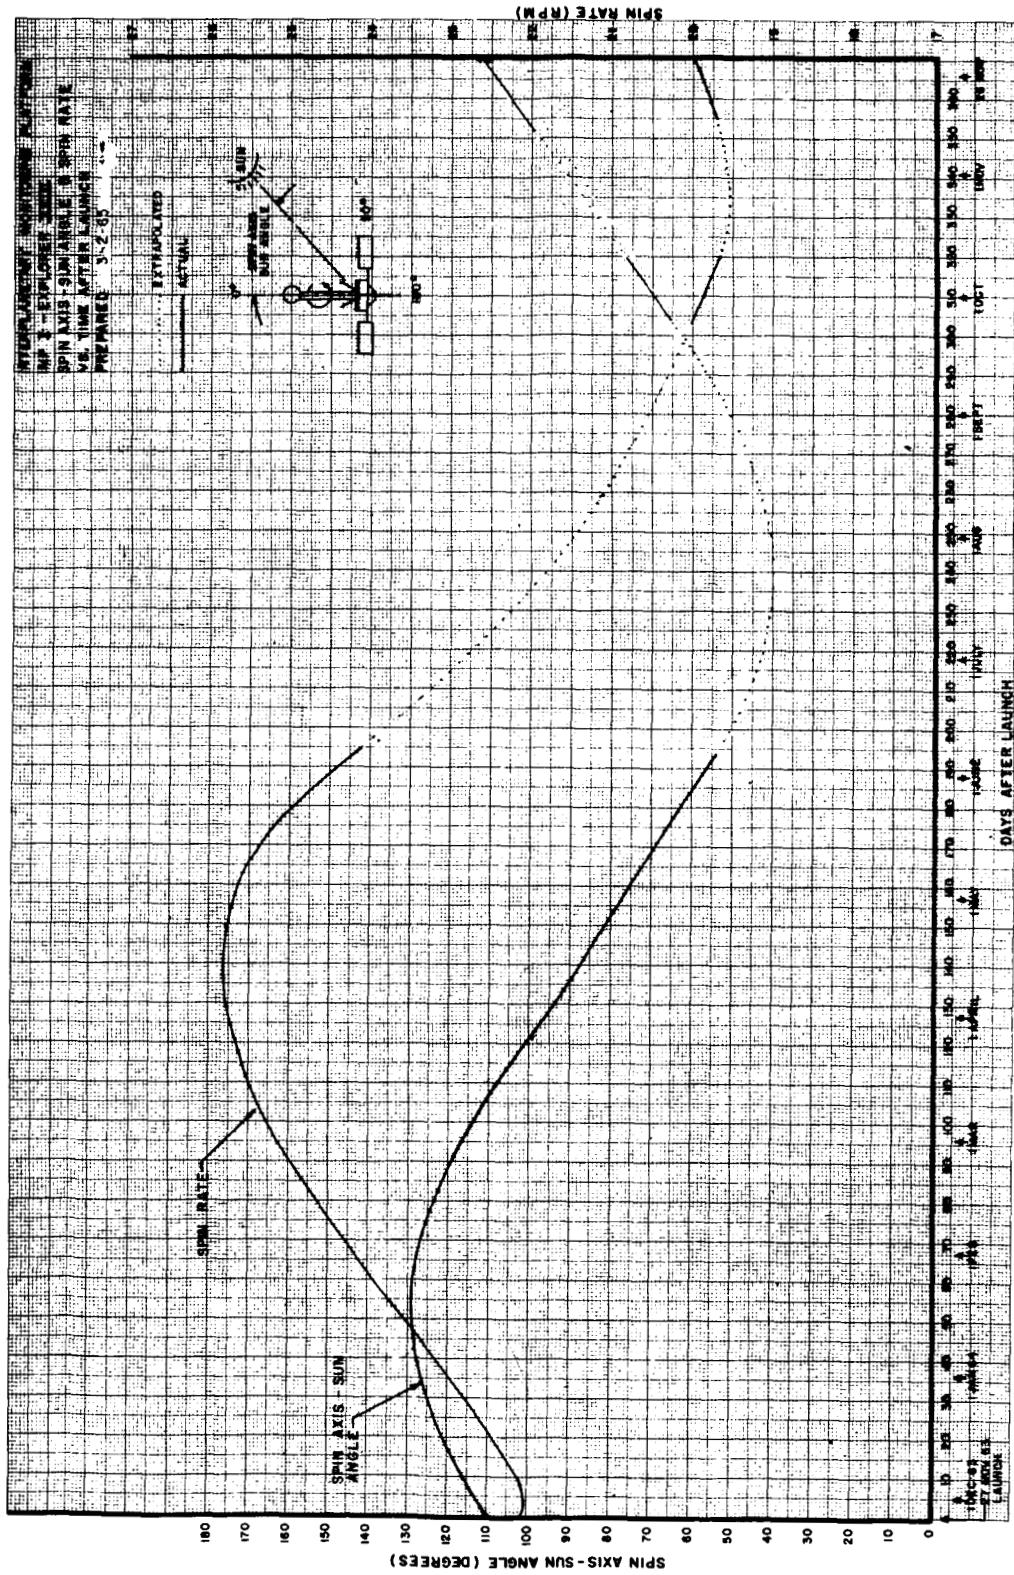


Figure 5

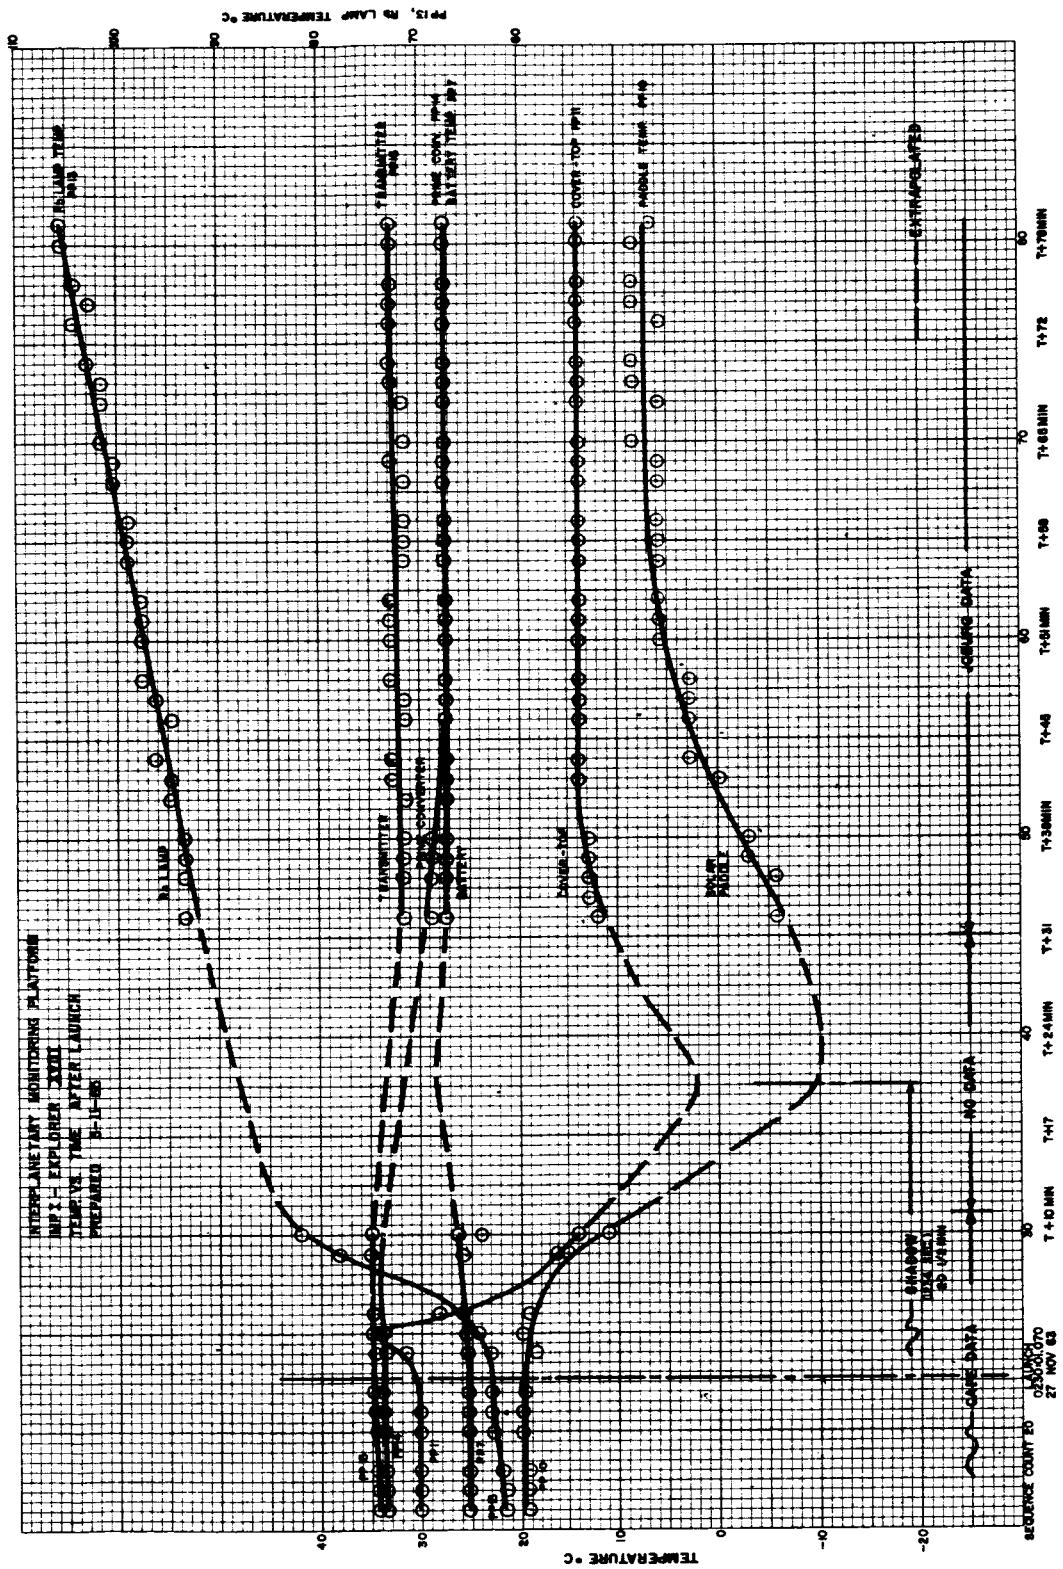


Figure 6

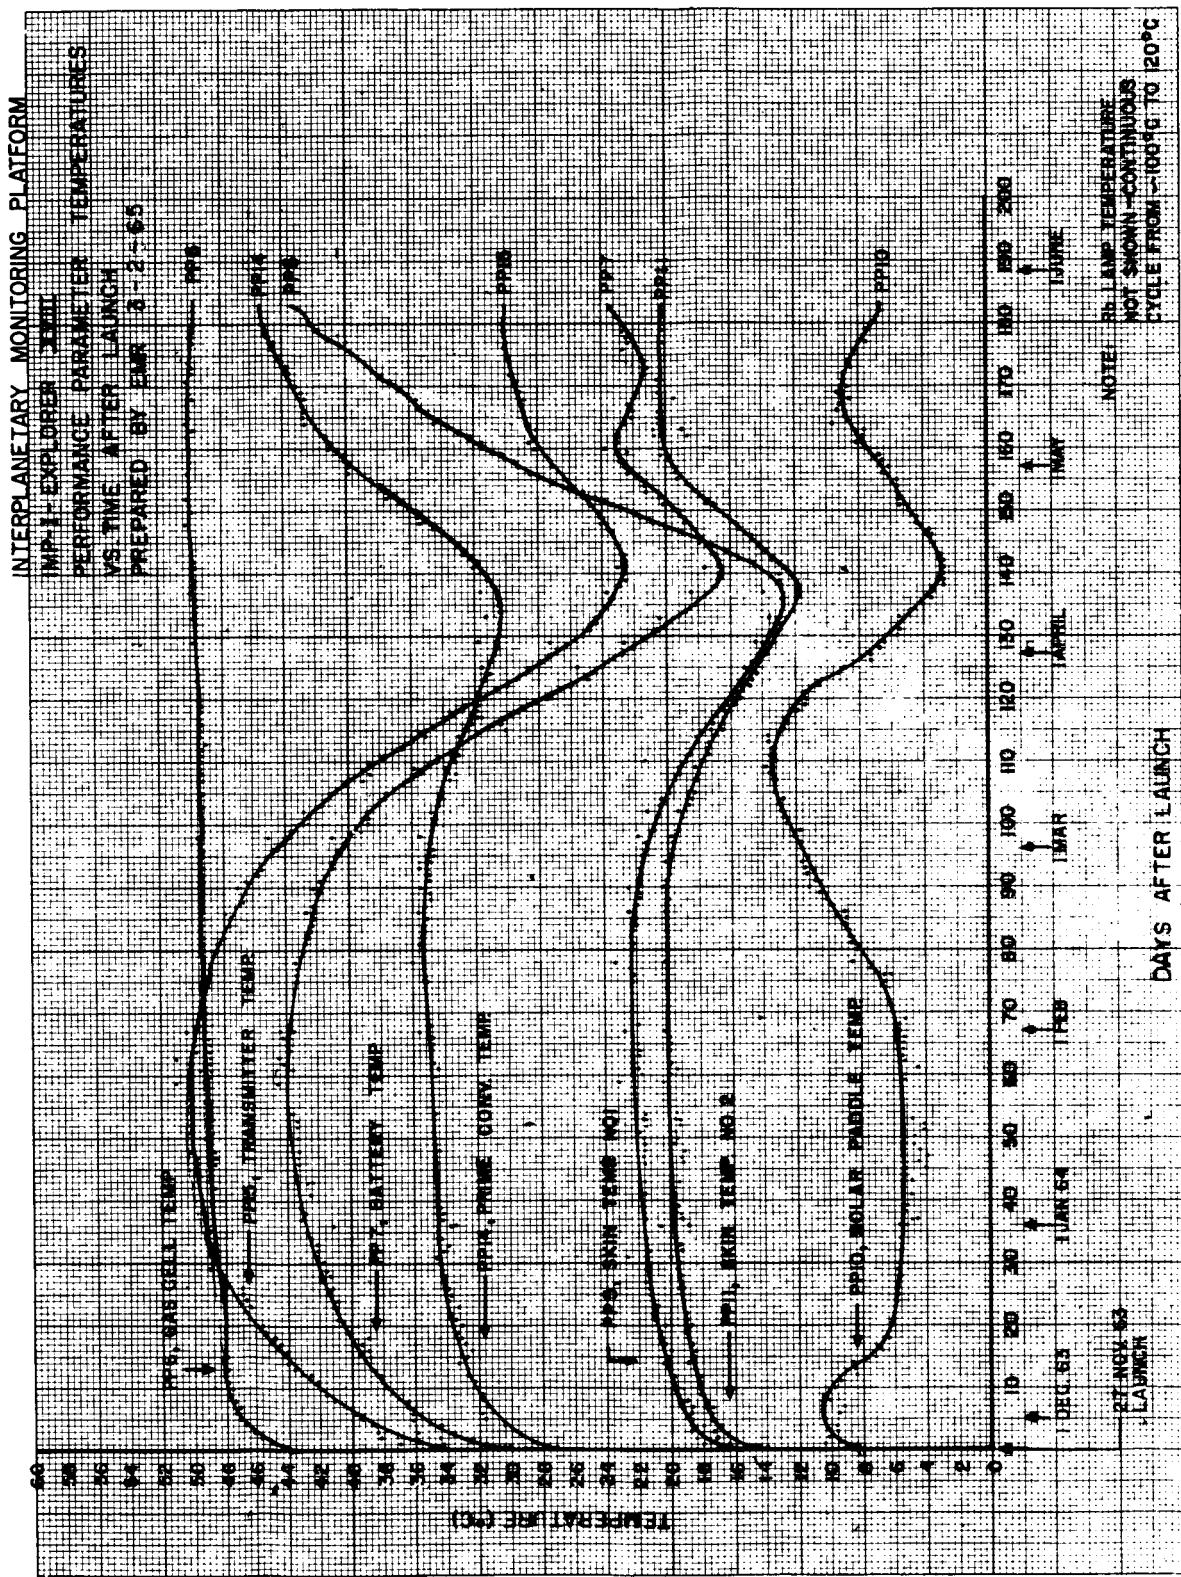


Figure 7

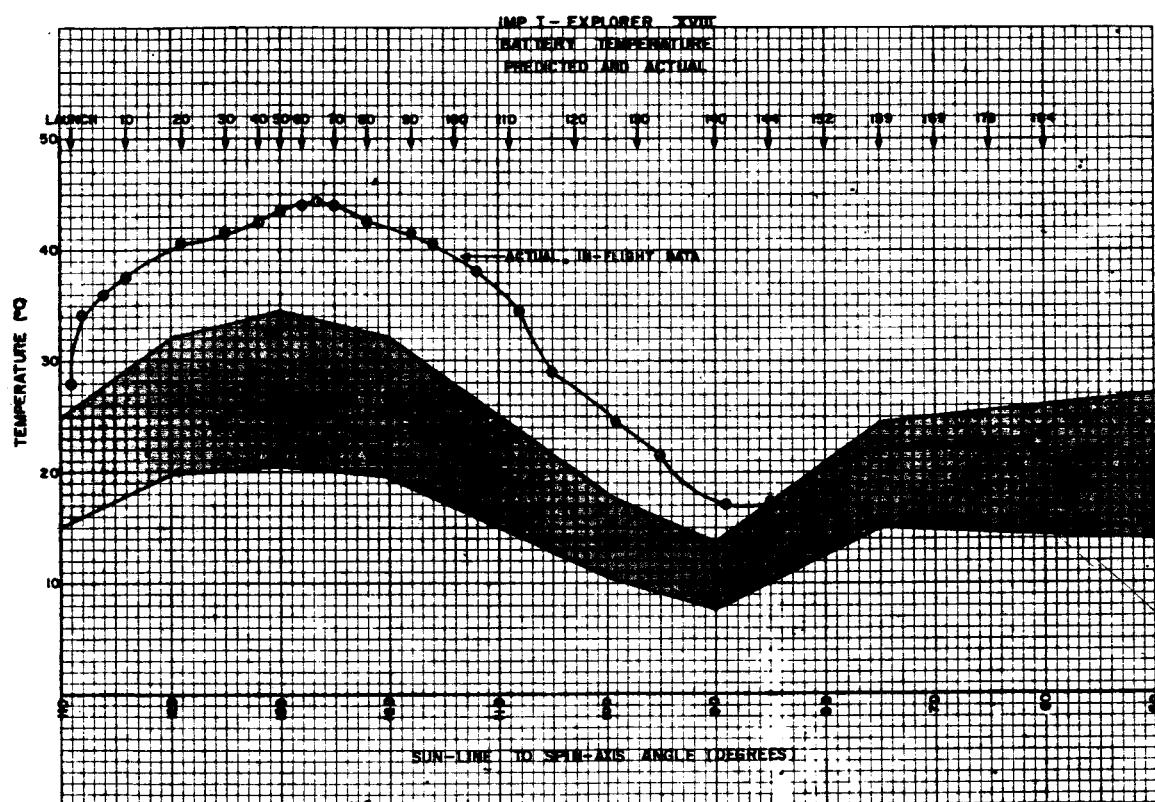


Figure 8

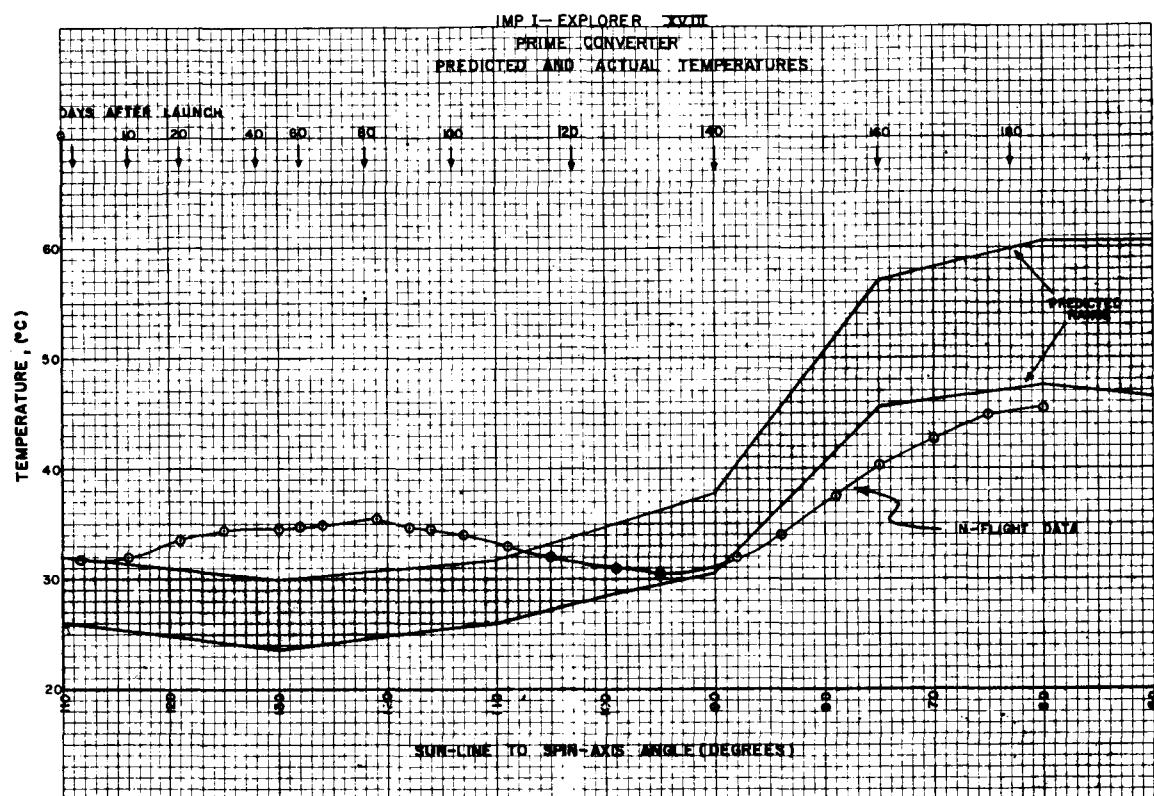


Figure 9

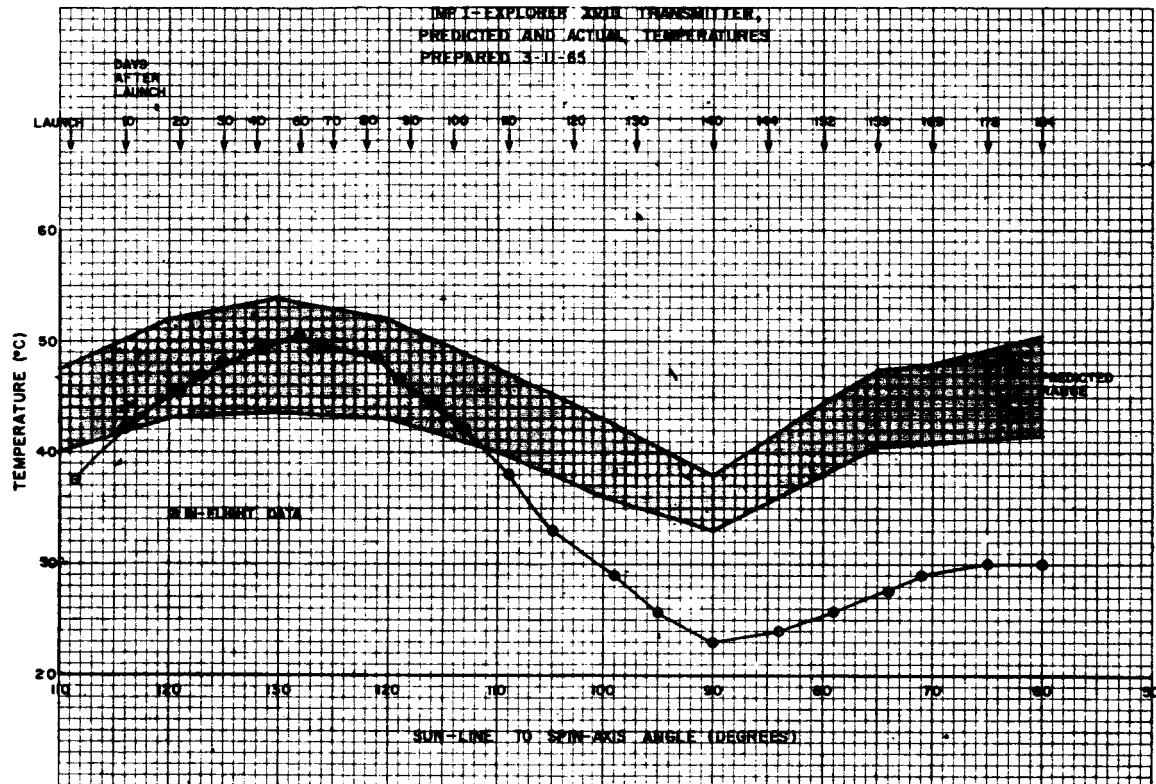


Figure 10

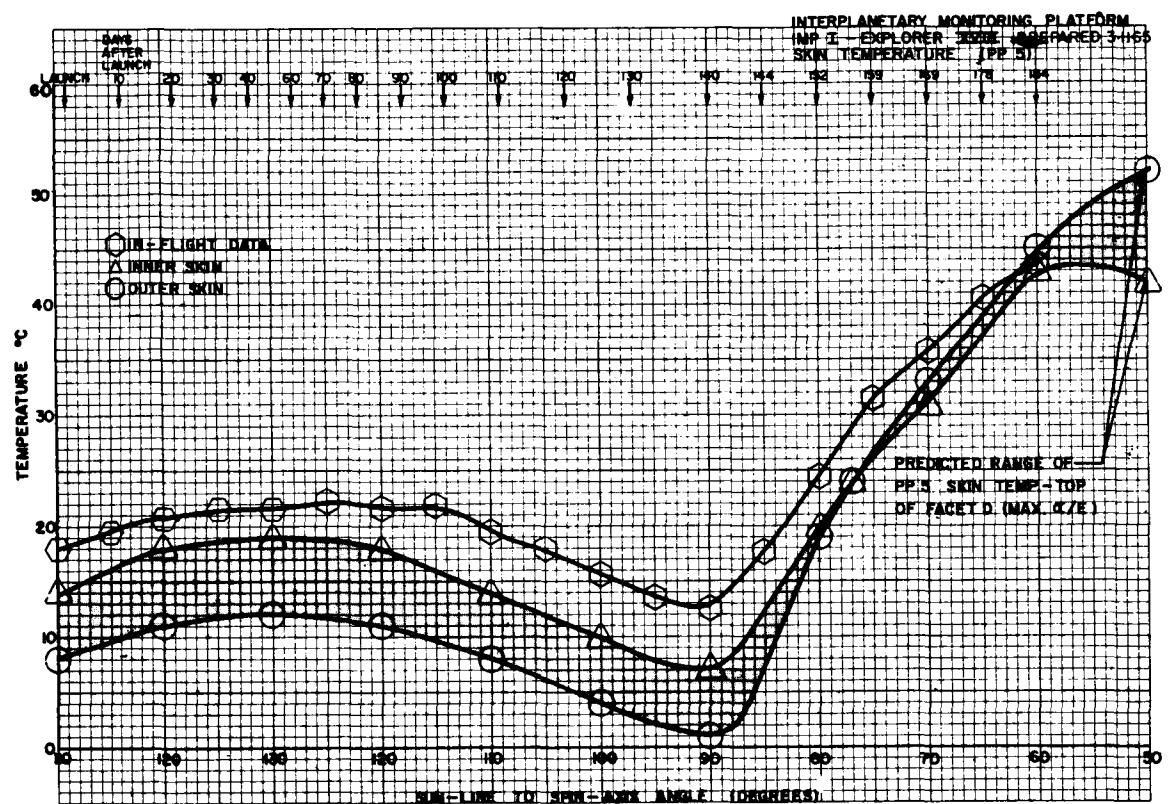


Figure 11

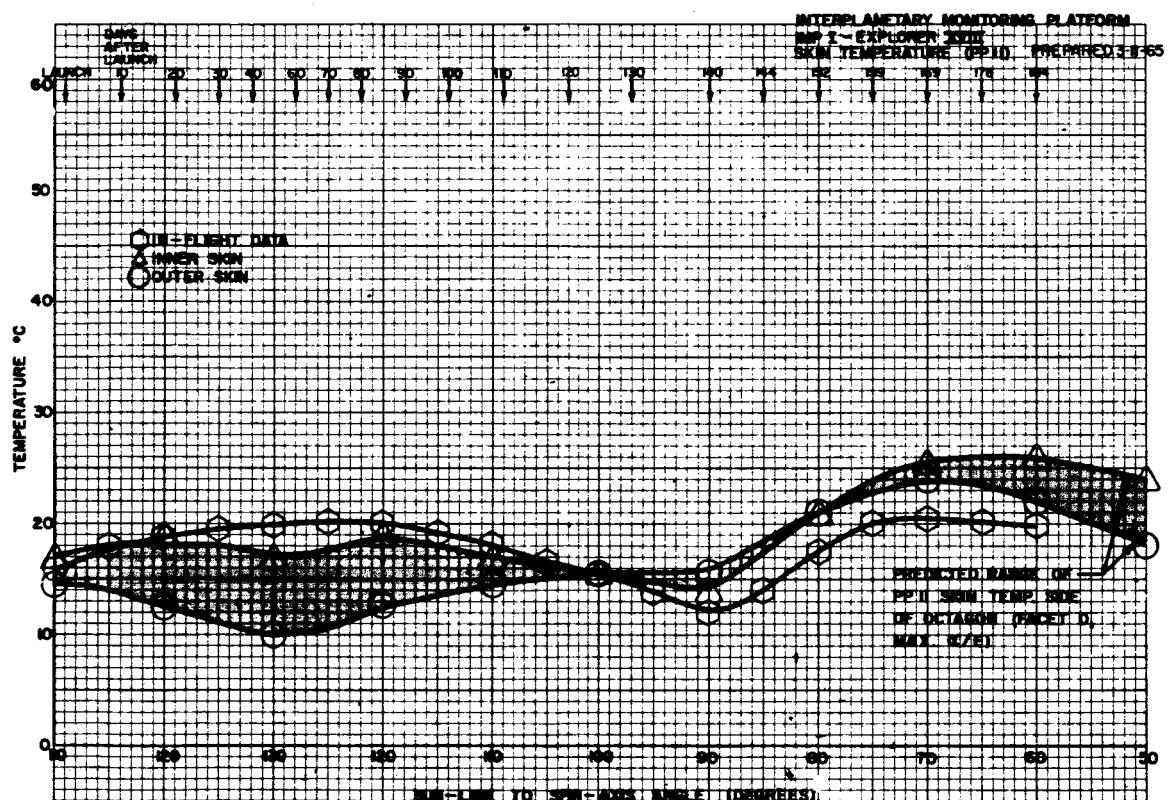


Figure 12

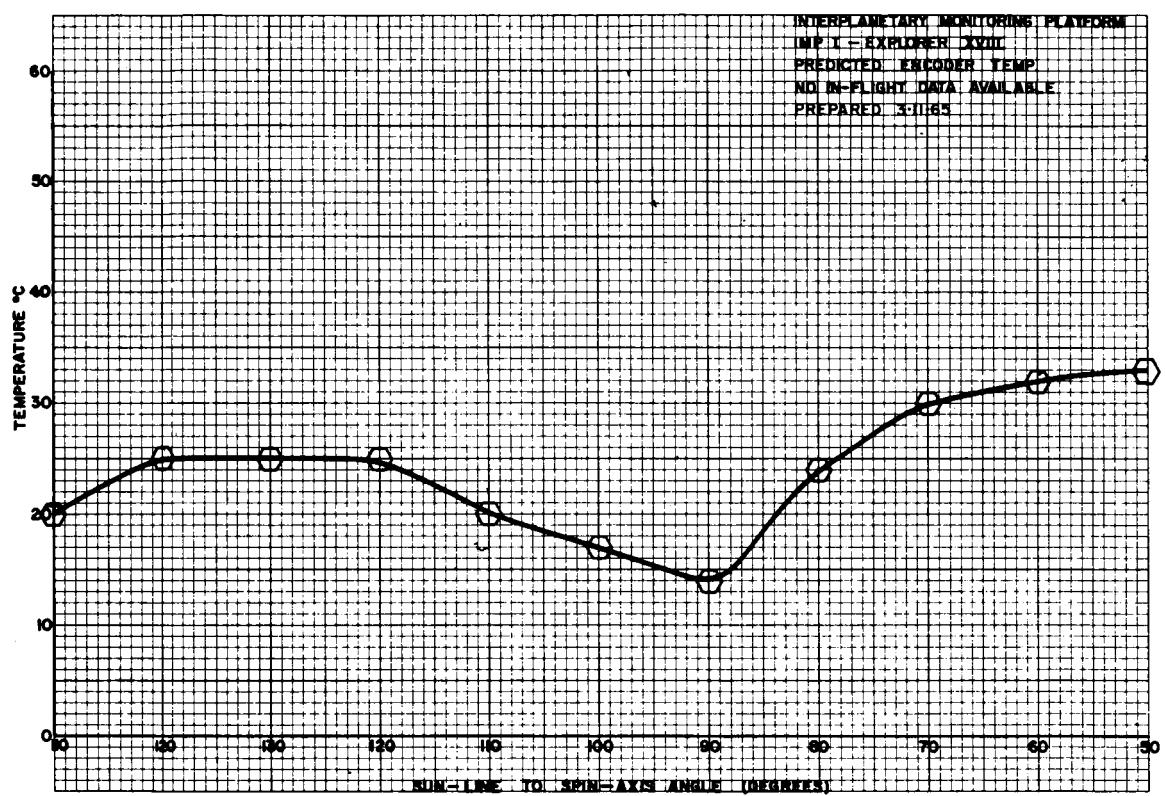


Figure 13

**TEMPERATURE COMPARISONS AT
SAME SUN ANGLES BUT DIFFERENT TIMES**

SPIN AXIS - SUN ANGLE = 115°			
LOCATION	TIME AFTER LAUNCH		
	8 days	98 days	360 days
SKIN # 1	19° C	21° C	20° C
SKIN # 2	18	19	19
PADDLE	10	12	15
BATTERY	37	40	34
PRIME CONV	32	35	39
TRANSMITTER	41	44	39

SPIN AXIS - SUN ANGLE = 120°		
LOCATION	TIME AFTER LAUNCH	
	17 days	88 days
SKIN # 1	20½° C	22° C
SKIN # 2	19	20
PADDLE	7	10
BATTERY	39.5	42
PRIME CONV	33	35
TRANSMITTER	45	47

SPIN AXIS - SUN ANGLE		
LOCATION	TIME AFTER LAUNCH	
	121 days	353 days
SKIN # 1	16° C	17½° C
SKIN # 2	15	17
PADDLE	11	13
BATTERY	27	27½
PRIME CONV	32	37
TRANSMITTER	31	33

Figure 14

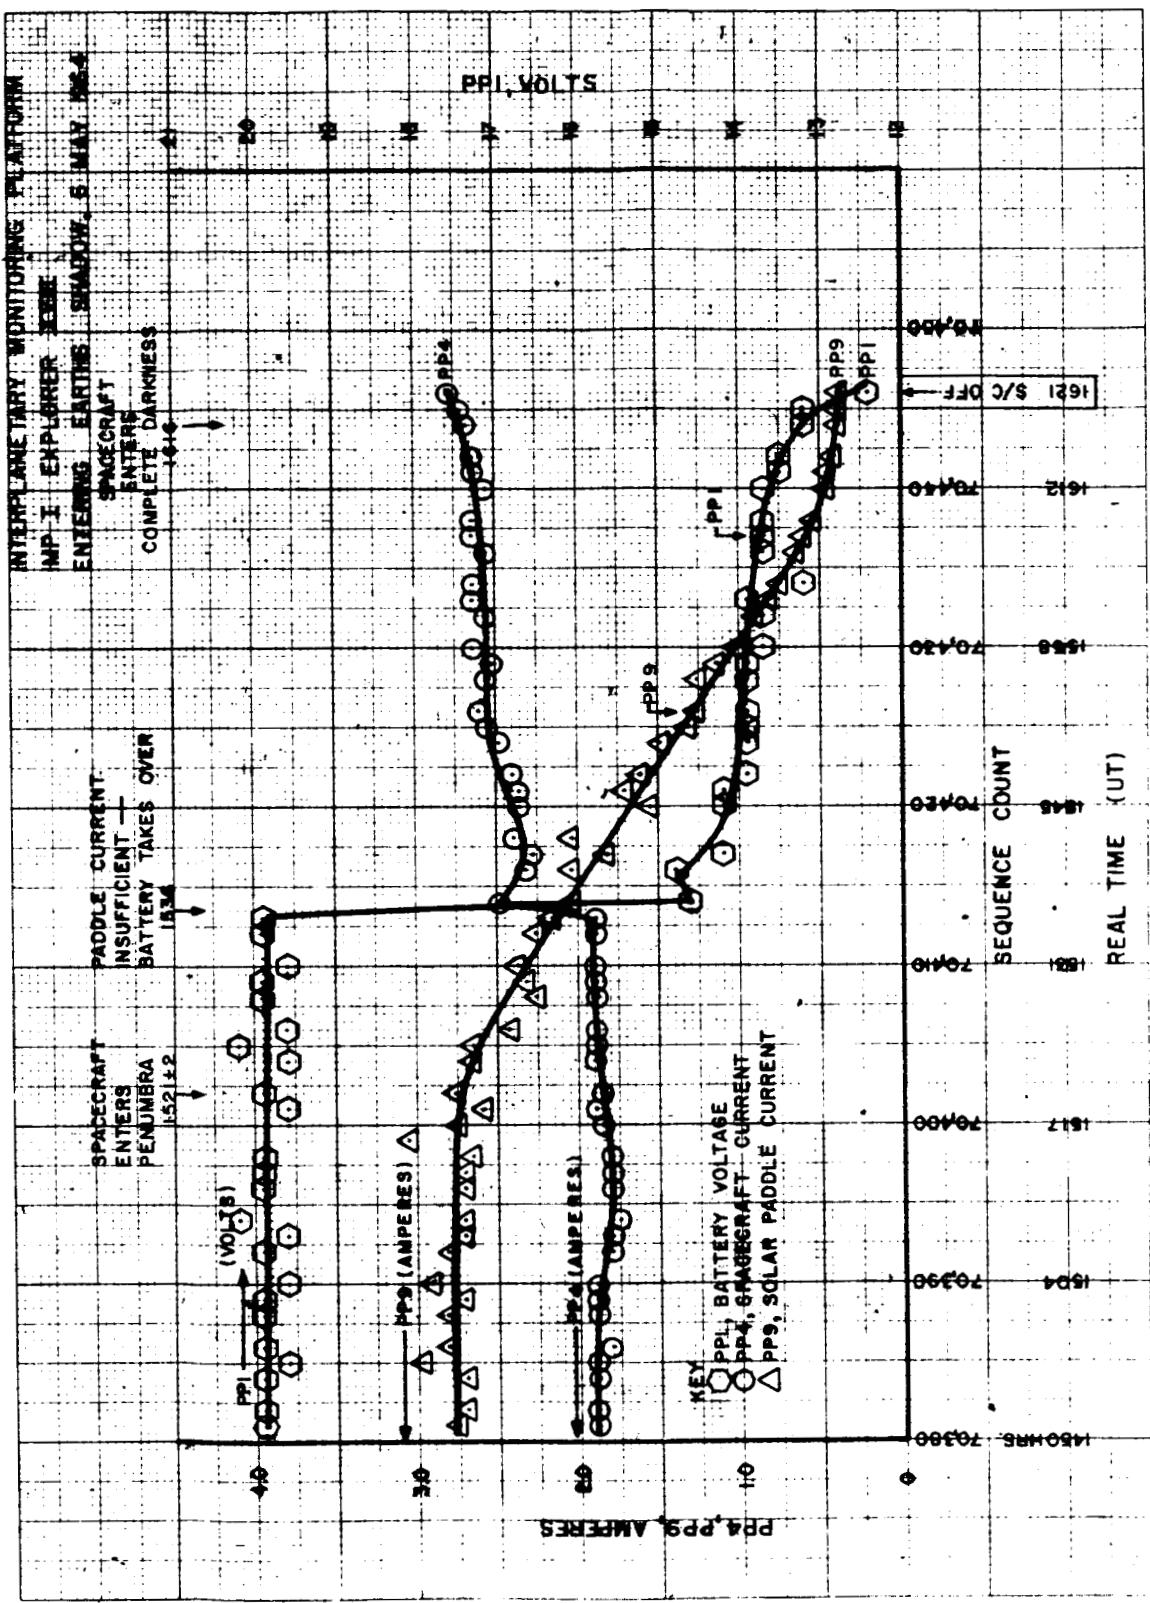
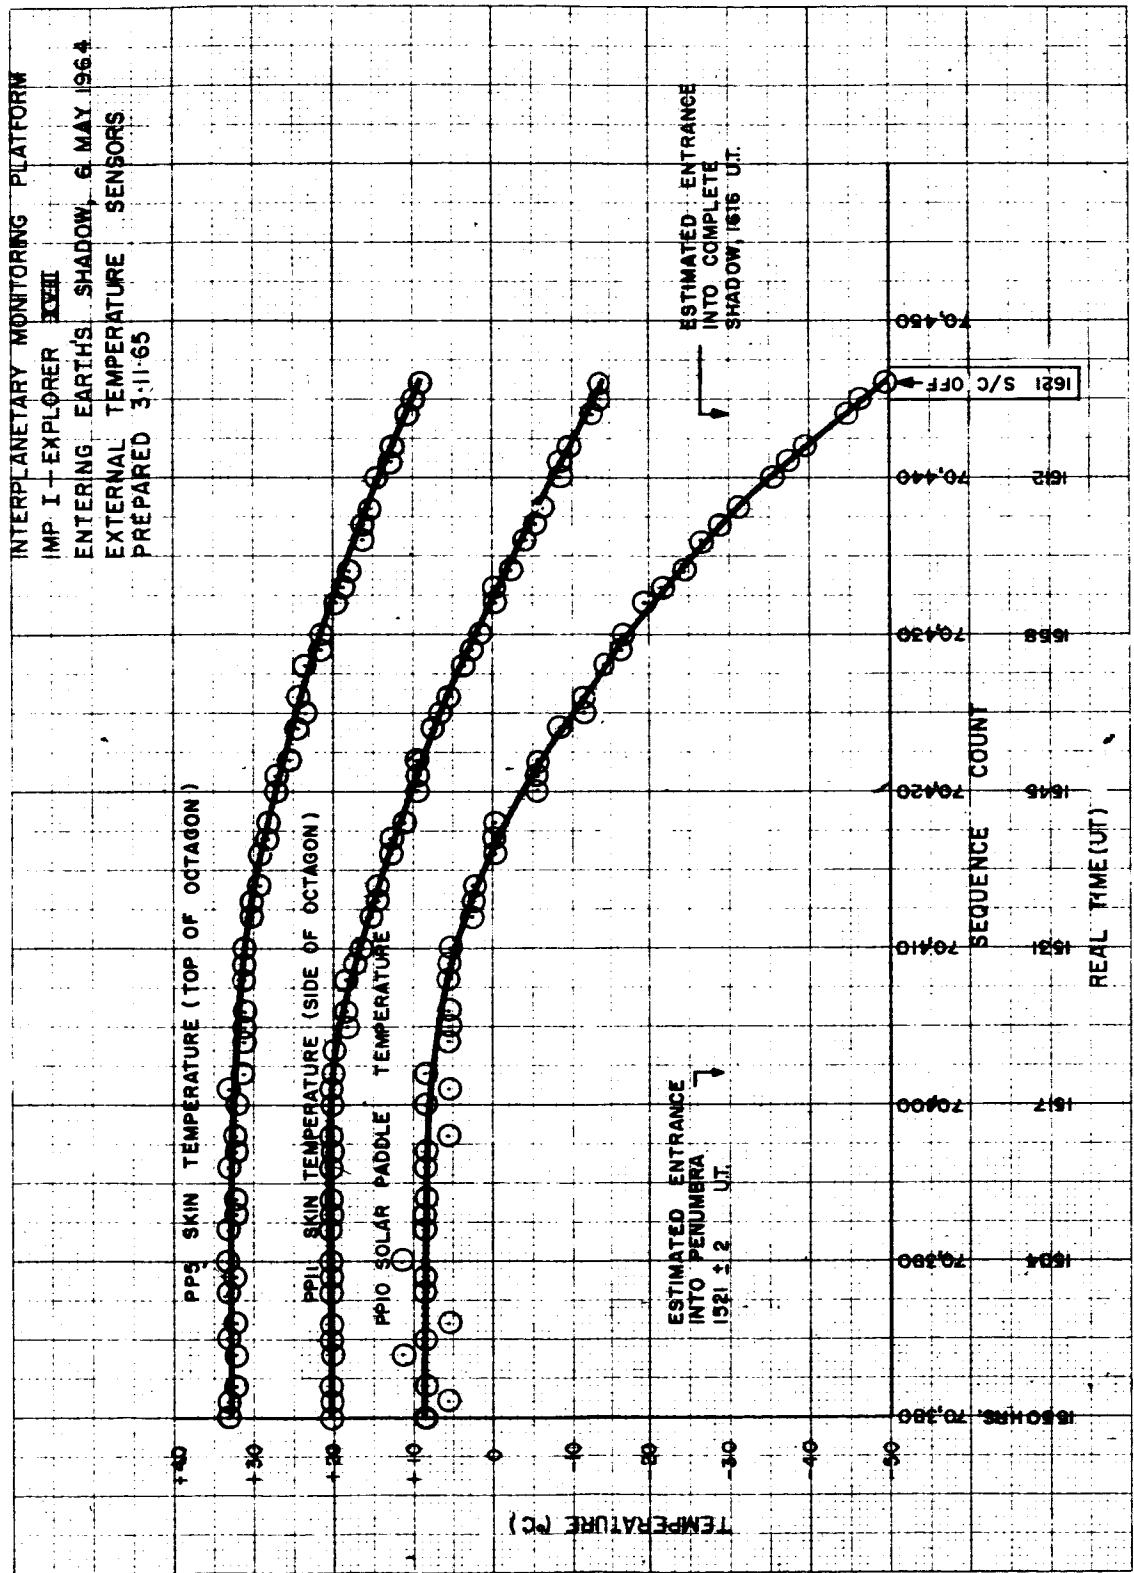


Figure 15



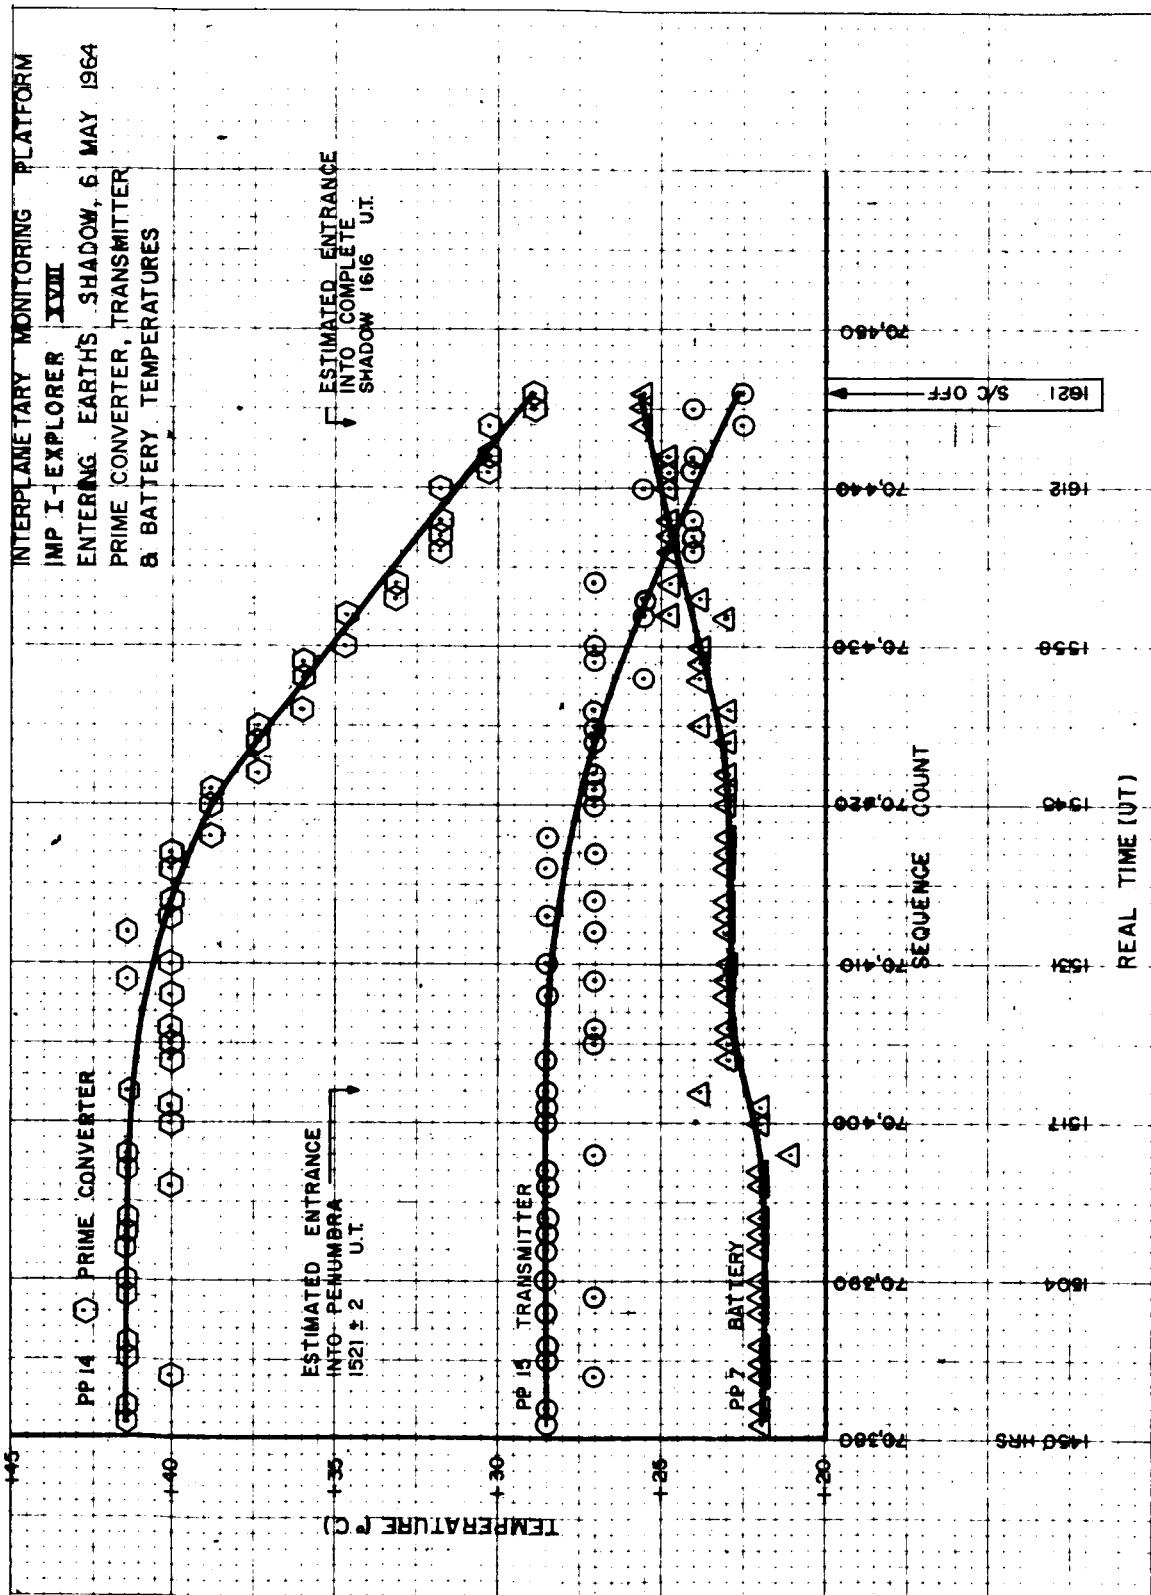


Figure 17


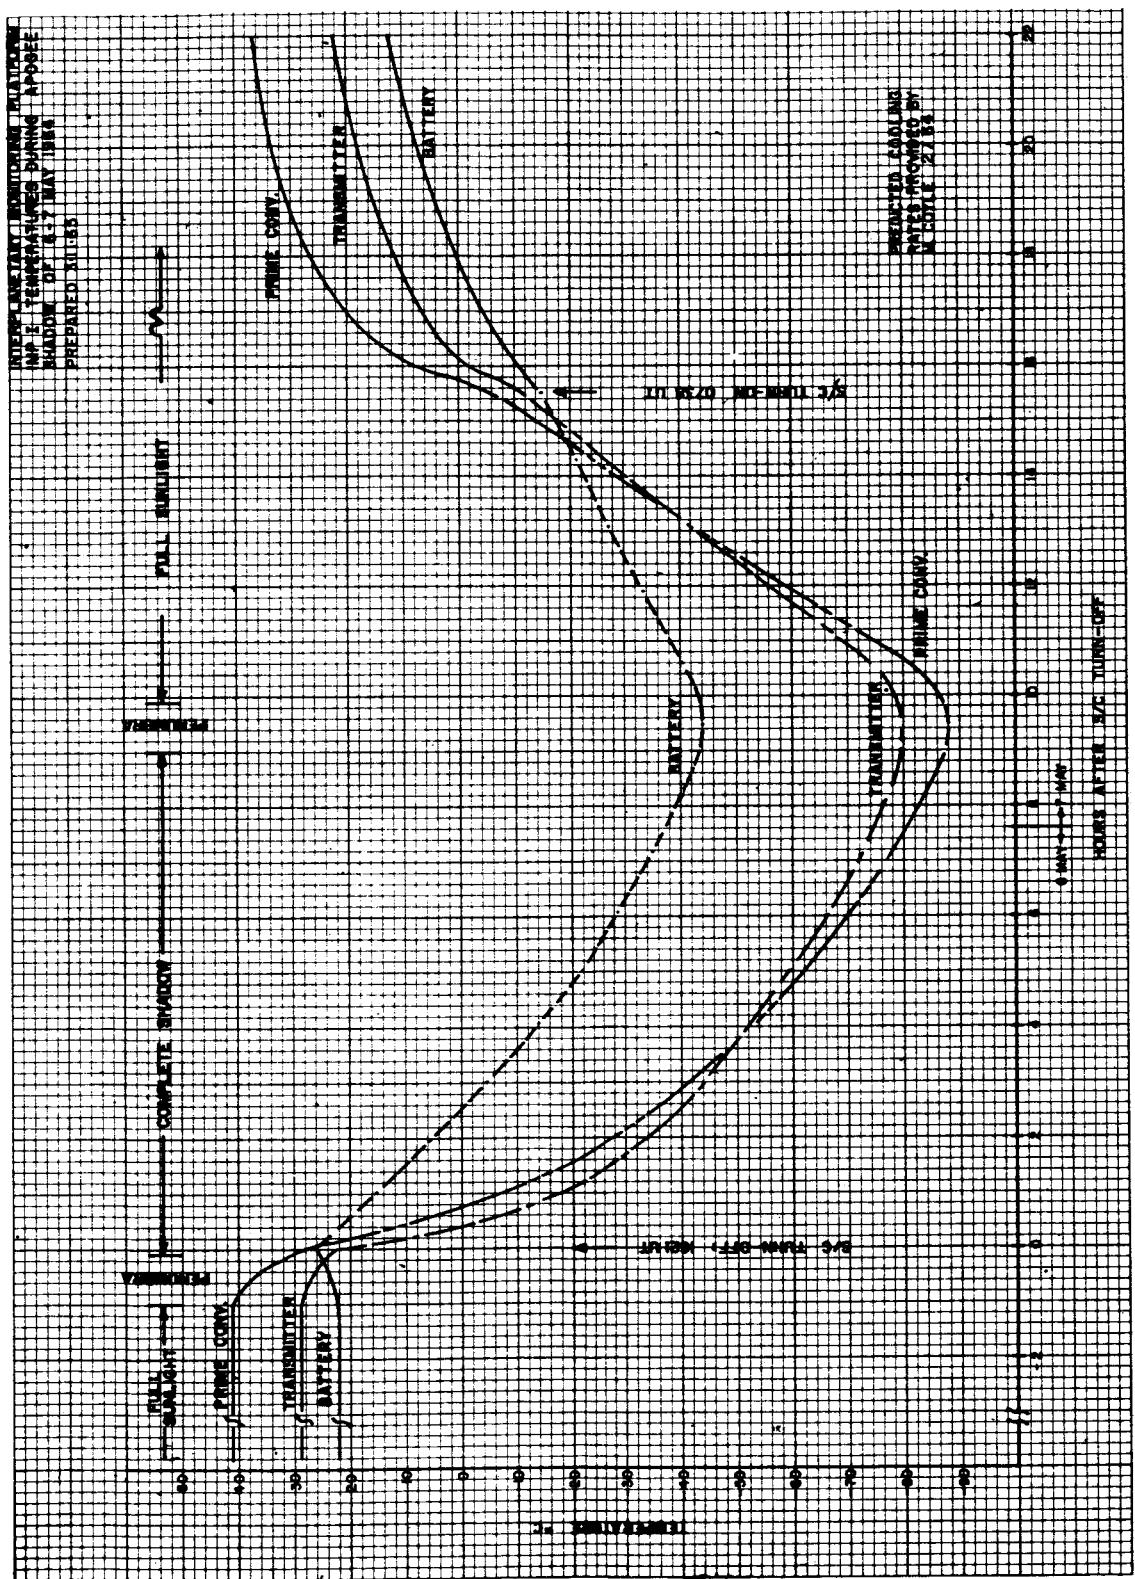


Figure 18

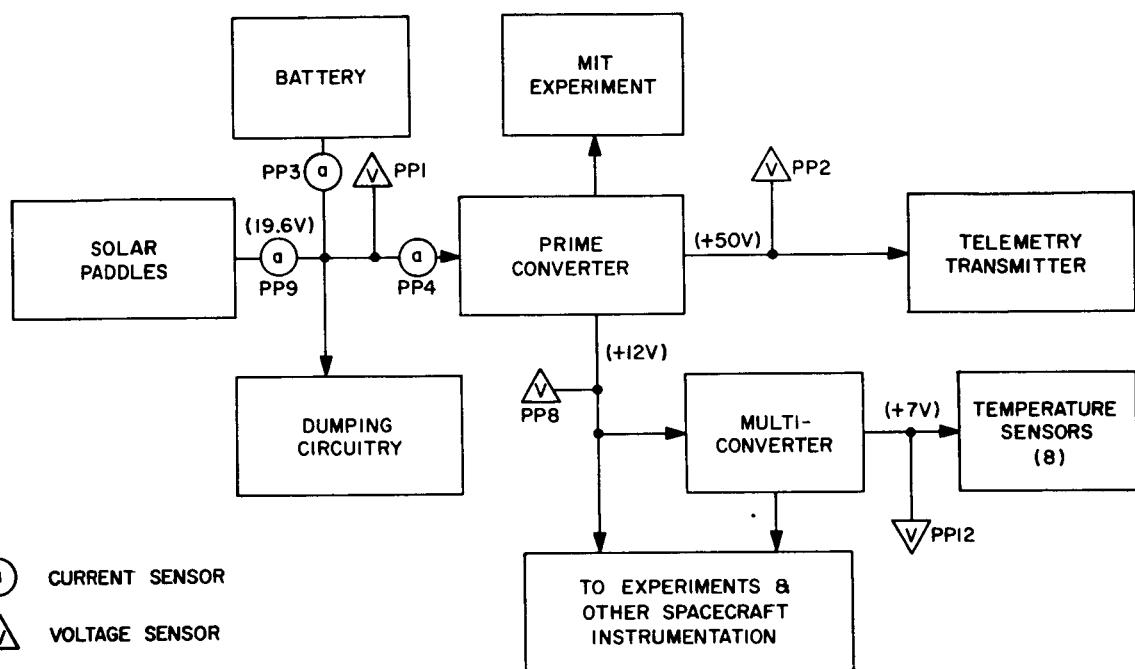

**IMP PRIMARY POWER SYSTEM
SIMPLIFIED BLOCK DIAGRAM**

Figure 19

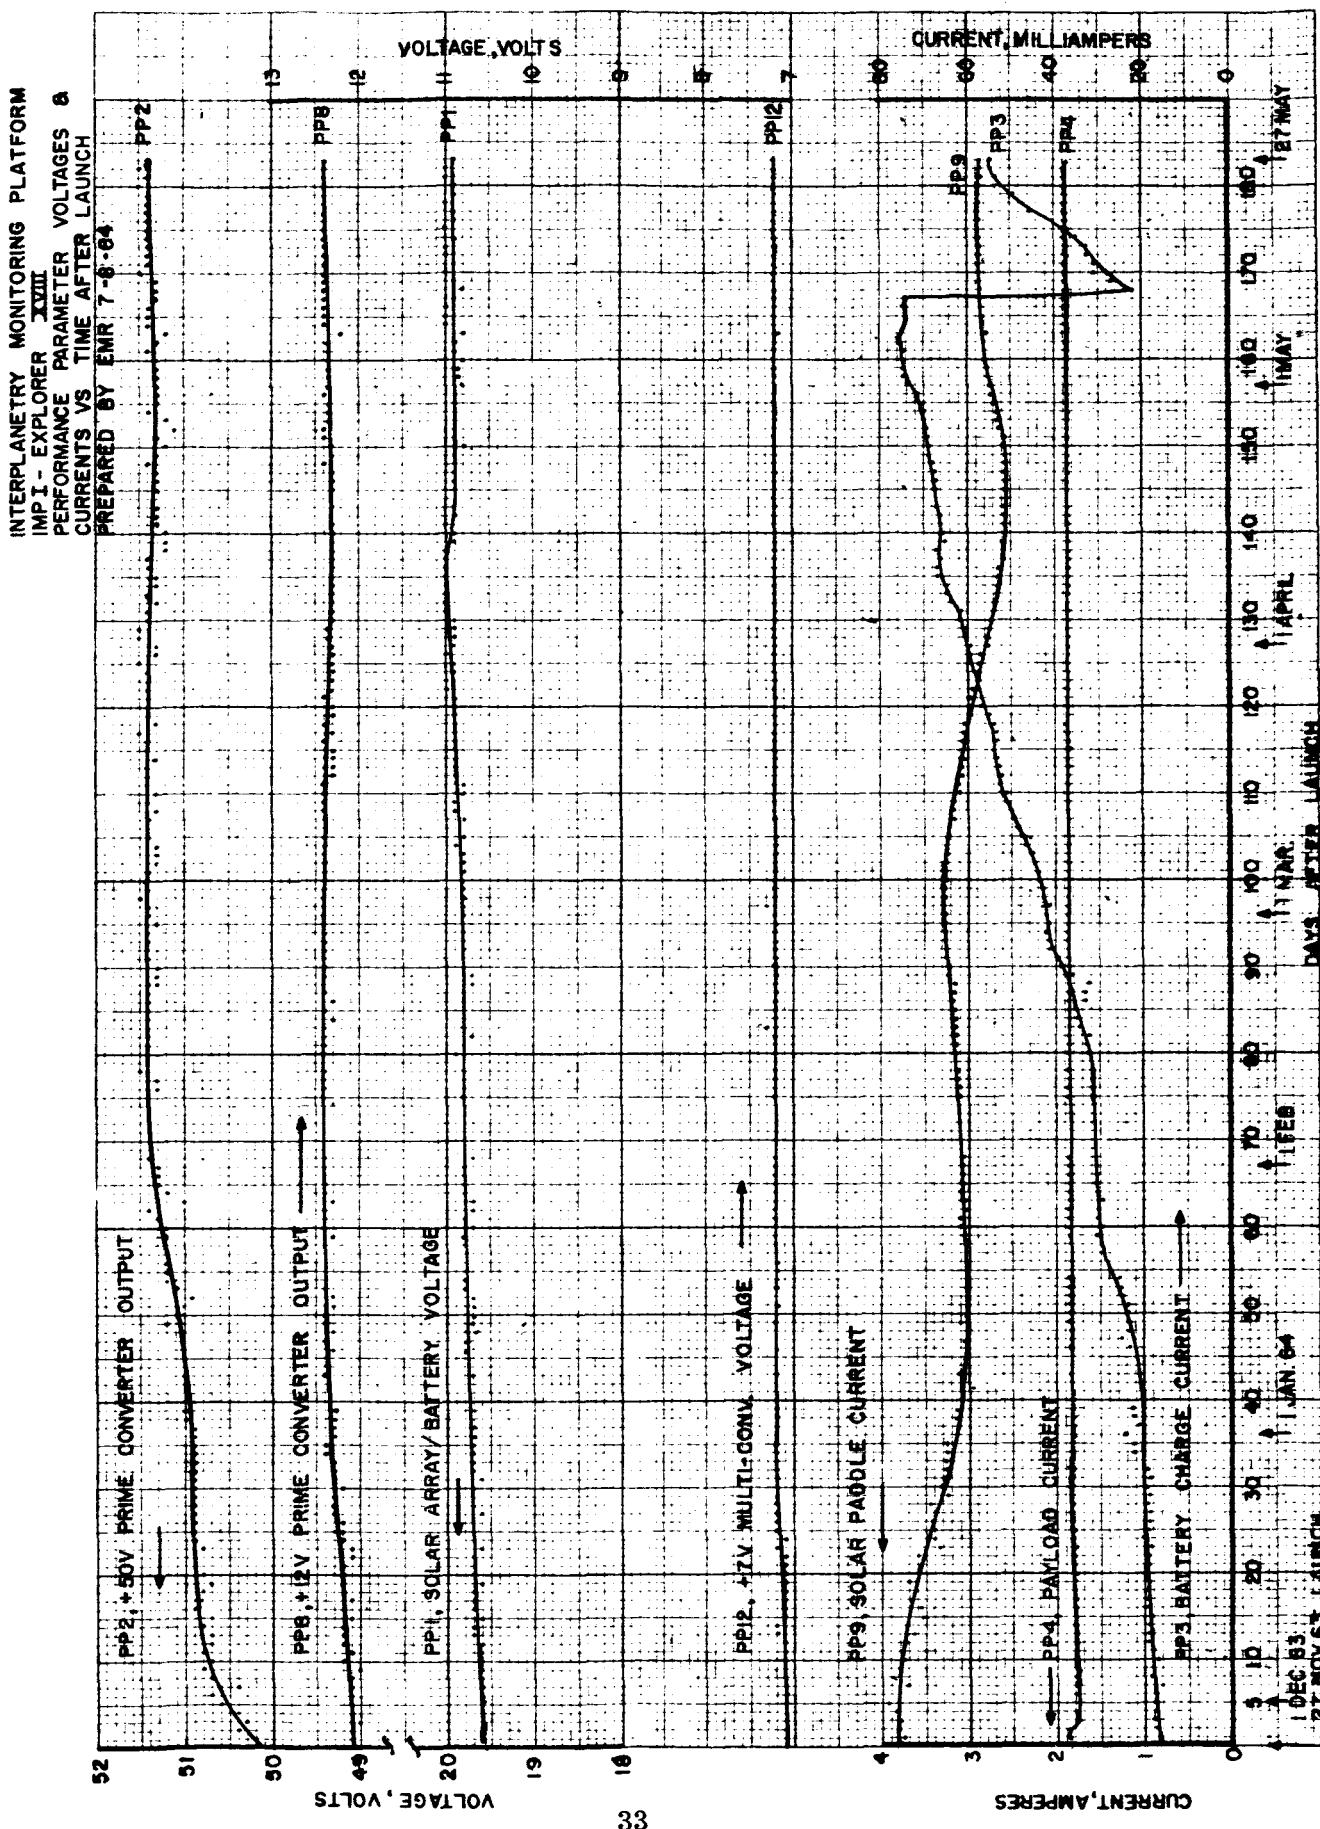


Figure 20

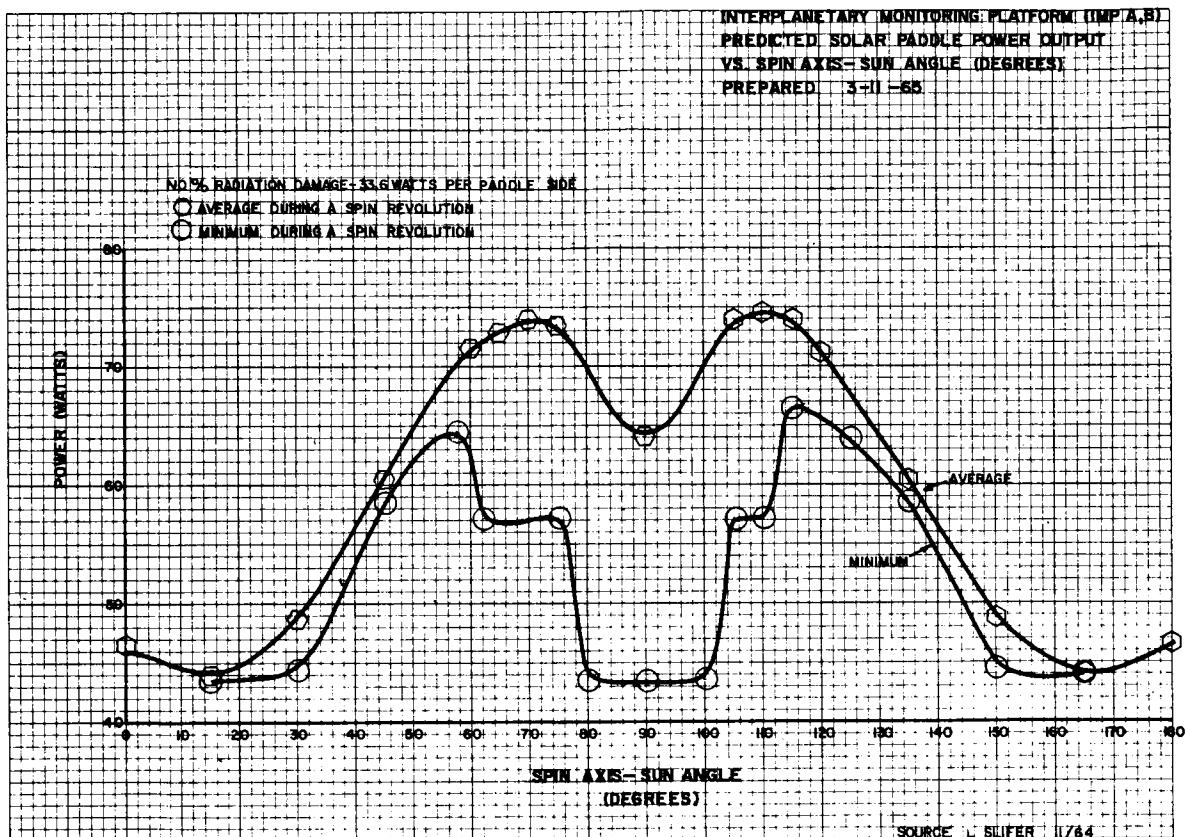


Figure 21

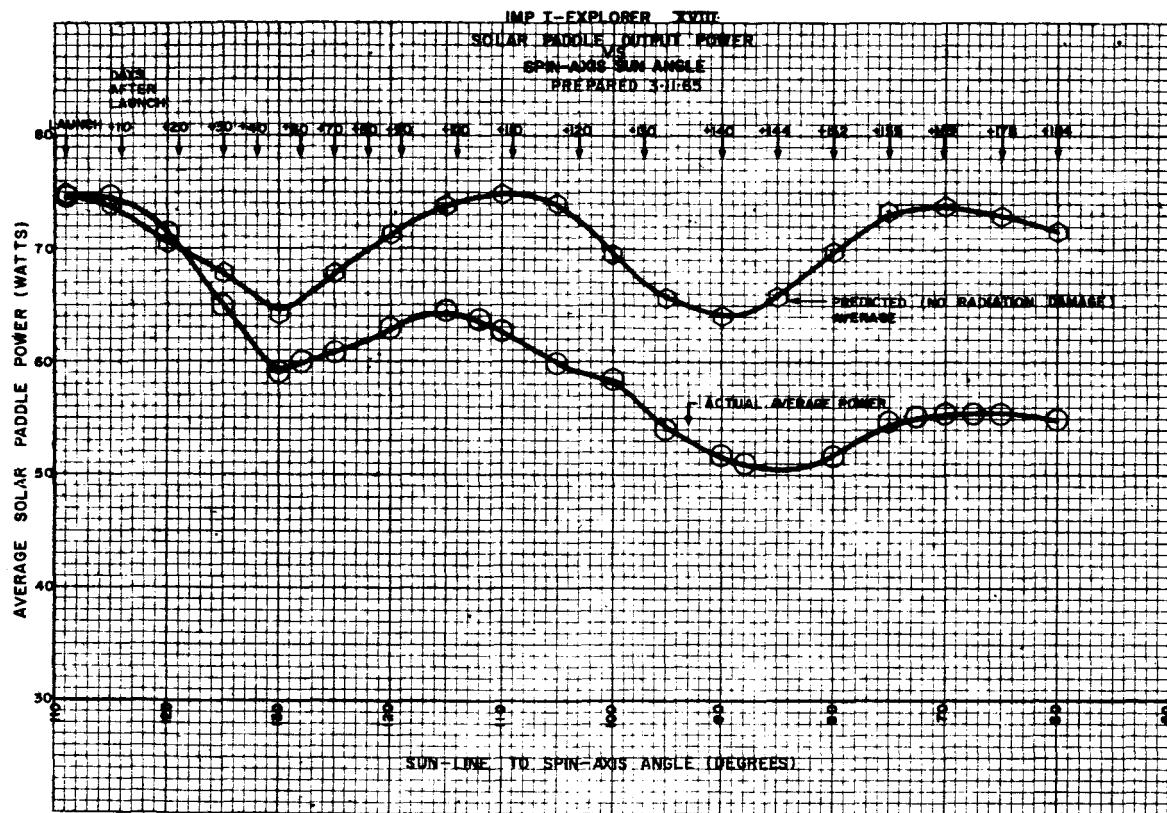


Figure 22

IMP I - EXPLORER XVIII
SOLAR PADDLE CURRENT: APRIL TO JUNE, 1964

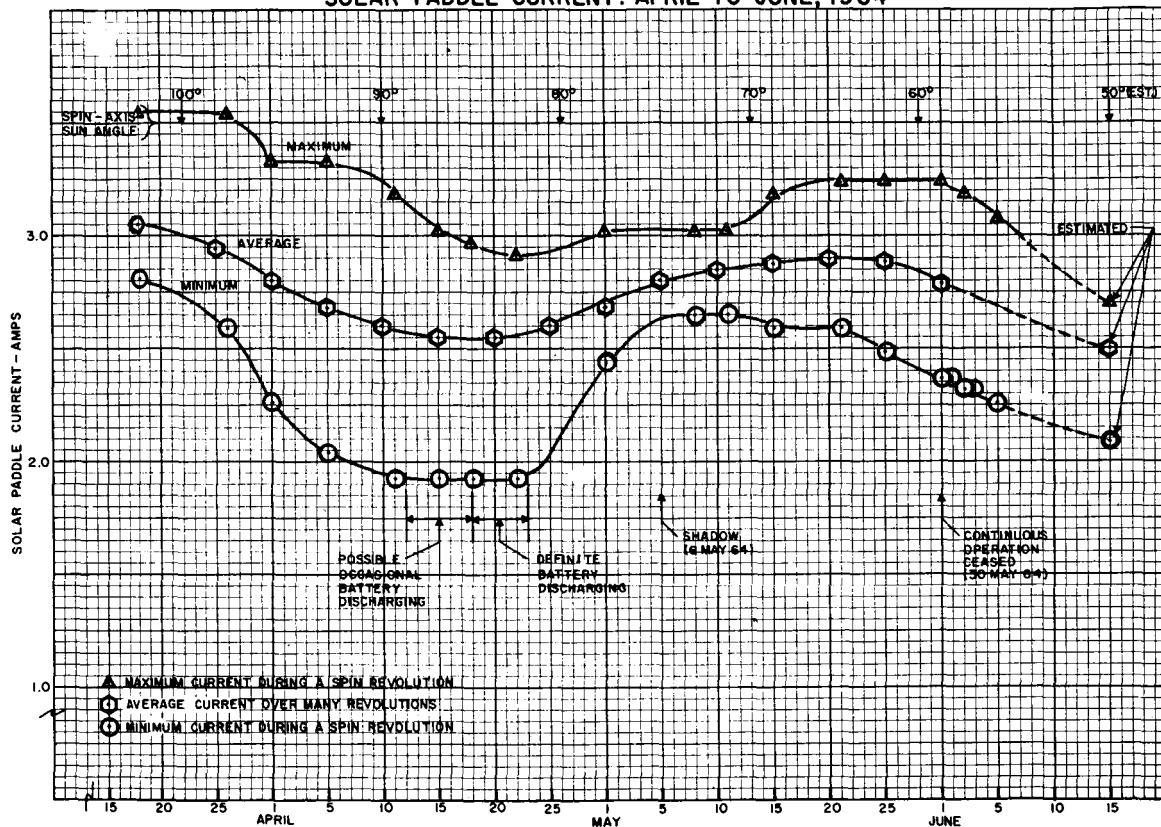


Figure 23

APPENDIX A - IMP I PERFORMANCE PARAMETER SYSTEM

The IMP I Performance Parameter (PP) System consists of on-board instrumentation to telemeter 15 measurements of temperatures, voltages and currents.

The design of the electronic instrumentation was the responsibility of the Flight Data Systems Branch. Thermistor networks were provided by the Thermal Systems Branch.

Each of the 15 parameters presents an output voltage of 0 to 5 vdc to the spacecraft Encoder. The first seven parameters are encoded through one analog oscillator while the remainder through a second oscillator. The output of the oscillators is 15kc to 5 kc which is divided by 16 and telemetered during frame 2 of sequences 1, 2, and 3 of the IMP format. This permits about 33 samples of each of the 15 parameters during each hour of operation.

The Performance Parameters are itemized in Figure A-1.

The processing of the IMP analog data utilizes "comb filters" whose function is to improve the S/N ratio by reducing the noise band width.* There are 100 comb filters that cover the telemetered frequency range of 5kc/16 (312.5 cps) to 15kc/16 (937.5 cps). The bandwidth of each comb filter, in this application, is 6-1/4 cps.

*Ness, N. F., IMP Information Processing System, 29 June 1962.

**PERFORMANCE PARAMETER MEASUREMENTS
INTERPLANETARY MONITORING PLATFORM (S-74/IMP I)**

PP	MEASUREMENT	CALIBRATION	NOMINAL SPACECRAFT OPERATING RANGE
I.	SOLAR ARRAY / BATTERY VOLTAGE	+10.5 TO +21V.	+11.8 TO 19.6 V
2.	PRIME CONVERTER, +50V OUTPUT	+20 TO +60V	+50.0V \pm 1%
3.	BATTERY CURRENT	0 TO 500 ma	\leq 50 ma
4.	SPACECRAFT CURRENT	0 TO 4 AMP.	\sim 2 AMP.
5.	SKIN TEMP. NO.1 (TOP OF FACET D)	-34°C TO +73°C	
6.	Rb GAS CELL TEMP.	+6°C TO +82°C	+42° \pm 5°C
7.	BATTERY TEMP.	-17°C TO +87°C	+10° TO +30°C
8.	PRIME CONVERTER, +12V OUTPUT	+9.5V TO +13V.	+12V \pm 1%
9.	SOLAR ARRAY CURRENT	0 TO 5 AMP.	\sim 2 TO 4 AMP.
10.	SOLAR PADDLE (ARM #1) TEMP. (1)	-138°C TO +80°C	
II.	SKIN TEMP. NO.2 (SIDE FACET 'D')	-34°C TO +73°C	
12.	MULTI CONVERTER, +7V OUTPUT	+4.0 TO +8.5 V	+7.0V \pm 1%
13.	Rb LAMP TEMP. (2)	+53°C TO +148°C	+100° TO +115°C
14.	PRIME CONVERTER TEMP.	-39°C TO +79°C	+45° TO +60°C
15.	TRANSMITTER TEMP.	-38°C TO +80°C	+40° TO +55°C

- (1) ALSO INDICATES SPACECRAFT SEPARATION FROM X-258 THIRD STAGE MOTOR.
- (2) ALSO INDICATES Rb MAGNETOMETER EXTENSION.
- (3) DATA FROM MIT EXPERIMENT WILL CONFIRM SOLAR PADDLE ERRECTION.

FIGURE A-1

APPENDIX B - IN-FLIGHT CALIBRATION DRIFT

An examination of the telemetered values of several performance parameters—especially the regulated voltage monitors—show a gradual increase over a period of weeks. (See Figure 20 in body of report.) These increases could be due to drifting of the regulated voltages or to calibration changes in the monitoring circuitry. Careful review of the telemetered data (as well as test data on analog oscillators) yields considerable evidence to indicate that the major portion of the apparent increases in flight is not due to out-of-tolerance operation of the regulators but rather inaccuracies in the data due to long term drift of the analog oscillators.

The following table summarizes the observed changes of the voltage monitors:

OBSERVED DRIFT OF PP VOLTAGE MONITORS			
	T + 30 Min.	T + 180 Days	%* Change
PP1 System Voltage	19.5v	20.0	2.7
PP2 Prime Conv. +50±1%v	50.2	51.4	2.7
PP8 Prime Conv. +12±1%v	12.06	12.4	3.6
PP12 Multi-Conv. + 7±1%v	7.07	7.15	2.6

* Percent change of telemetered frequency.

It is considered unlikely that the system voltage and the +50v output of the Prime Converter (PP1 and PP2 respectively) would actually drift upward to the values shown. Also, the drift rate (including the gradual leveling off) and percent frequency change is identical. This leads to the conclusion that the data is in error, probably due to aging characteristics of the analog oscillator which encodes these parameters.

The second two voltages, PP8 and PP12, drifted by different amounts and at different rates. To evaluate the portion due to oscillator drift, the data from another parameter—namely the solar paddle current (PP9)—was reviewed. The PP9 frequency when the spacecraft was within the shadow of the earth, i.e., corresponding to 0 amperes, was noted to have changed by slightly more than 2% over the first six months. This change is attributed to analog oscillator

drift and so it may be assumed that of the 3.6% change of the PP8, +12v \pm 1% volt line, 2% is due to oscillator drift. The remainder (1.6%) is due to actual change of the regulated output and/or aging of the voltage divider network in the Performance Parameter electronics.

Even if the +12v Prime Converter output did, in fact, exceed the \pm 1% design tolerance, there was no adverse effect on the operation of the spacecraft or experiments.

The spacecraft current monitor (PP4) indicated 1.89 amperes at 6 months after launch after having gradually increased from 1.75 amps at a few days after launch. This corresponds to a 2.7% frequency decrease lending additional support to the conclusions regarding analog oscillator drift noted above.

The Battery charge current, PP3, increased almost linearly until the extended shadow of 6 May. This increase cannot be attributed to data inaccuracies such as mentioned above. The total change corresponds to a 7% frequency decrease of which, perhaps 3% could be due to analog data drift (as discussed for PP1, PP2, and PP4). The remaining amount of increase of charge current is not understood fully at this time although it may be similar to the effect noticed on an IMP Battery which was ground tested during 1964/1965.

In summary, the observed performance parameter data begins to drift shortly after launch until, six months later, it is about 2 to 3% in error. The following table compares the performance parameter data at May, 1964 (5 months after launch) before and after applying an appropriate correction factor (2%):

PARAMETER	1 May 1964 Observed Data	Adjusted Data	Nominal
1. System Voltage, volts	20.0	19.5	19.6
2. +50v Regulated, volts	51.5	50.2	50.0
3. Battery Charge, ma	75	60	-
4. S/C Current, amps	1.89	1.80	\sim 1.8
5. Skin Temp. #1, °C	43.5	41.0	-
6. Rb Gas Cell, °C	50.0	48.5	-
7. Battery, °C	23.5	22.0	-
8. +12v Regulated, volts	12.4	12.1	12.0
9. Paddle Current, amps	2.85	2.75	-
10. Paddle Temp., °C	+7.0	+1.5	-
11. Skin Temp. #2, °C	+20.0	+18.5	-

PARAMETER	1 May 1964 Observed Data	Adjusted Data	Nominal
12. +7v Regulated, volts	7.2	7.0	7.0
13. Rb Lamp, °C	119* (max)	116* (max)	-
14. Prime Conv., °C	43*	40.5*	-
15. Transmitter, °C	30	27	-

It should be kept in mind that all curves appearing in the main text of this report are NOT corrected for the apparent analog oscillator drift but are based on the "observed" telemetered values.

APPENDIX C

IMP I PERFORMANCE PARAMETER DATA - SEPTEMBER 1964 TO MARCH 1965
 (Uncorrected for Analog Oscillator Drift)

		PP1	PP2	PP3	PP4	PP5	PP6	PP7	PP8	PP9 Min	PP9 Ave	PP9 Max	PP10	PP11	PP12	PP13	PP14	PP15	SASA	Spin Rate
Days After Launch	Date	volt	volt	ma	A	°C	°C	°C	volts	A	A	A	°C	°C	°C	volts	°C	°C	Deg	RPM
2	302	9/23/64	19.7	50.9	12	1.85	41	49.5	20.8	12.2	2.37	2.70	2.97	+8	22	7.1	110	48	30	65
	305	9/26/64	19.7	50.9	18	1.85	39.9	49.6	21.7	12.2	2.43	2.65	2.92	11	22.2	7.1	111	47.6	30	20.0
	309	9/30/64	19.7	50.9	18	1.87	35.4	49.5	18.8	12.2	2.43	2.64	2.92	10	21.3	7.1	112	45.1	27.4	
	*312	10/3/64	19.7	50.9	14	1.82	35.3	49.6	21.0	12.2	2.43	2.59	2.92	9	21.8	7.1	110	45.4	29.2	72
3	*352	11/12/64	19.7	50.8	16	1.81	16.8	49.5	26.9	12.1	2.37	2.63	3.13	12	16.5	7.1	109	37.3	32.9	~103
	*357	11/17/64	19.7	50.9	18	1.83	18.5	49.7	31.0	12.2	2.37	2.73	3.13	14	18.2	7.1	108	38	36.8	~105
	*360	11/20/64	19.7	50.9	18	1.82	19.7	49.6	33.5	12.2	2.43	2.75	3.13	15	18.6	7.1	108	38.5	38.5	~108
	*366	11/26/64	19.7	50.9	18.5	1.83	21.7	49.7	37.5	12.2	2.37	2.80	3.13	14.4	20.0	7.2	108	40.1	42.7	~19.8
	*369	11/29/64	19.8	51.0	18	1.84	22.0	49.6	38.7	12.3	2.37	2.83	3.18	14.5	20.3	7.2	108	40.4	44	112
	*372	12/2/64	19.7	50.9	18	1.84	22.6	49.6	39.4	12.2	2.37	2.82	3.13	14	20.5	7.2	107	40.7	46	115±2
	*375	12/5/64	19.75	51.0	18	1.84	22.9	49.6	40.5	12.2	2.43	2.82	3.28	12	20.5	7.2	107	40.6	46.5	20.1
	*379	12/9/64	19.8	51.1	18	1.85	23	49.6	42	12.2	2.37	-	3.07	11	22	7.15	~108	41	48	115±2
	*385	12/15/64	19.8	51.0	18	1.85	24	49.7	43.3	12.3	2.32	2.72	3.02	11	22	7.2	~109	42.6	50.4	120
	396	12/26/64	19.6	50.9	6	1.91	20	43	39.8	12.2	2.26	2.55	2.81	7	19	7.1	110	33	48	124
4	461	3/1/65	19.6	50.5	4	1.80	18	45	34	12.1	2.32	2.60	2.97	11	17	7.1	108	35	43	~115
	475	3/15/65	19.6	50.2	4	1.89	14.5	25	26	12.1	2.26	-	2.81	12	14	7.1	-	18	30	~108
	487	3/27/65	19.6	50.2	4	1.80	9	7	17	12.1	-	-	-	11	11	7.1	54	3	12	99
	533	5/12/65	One Minute of Data Recorded; thereafter, tracking efforts were terminated.																	23.7

SASA is Spin Axis-Sun Angle
 Temperatures are not stabilized (due to intermittent operation) unless noted by an asterisk (*).

APPENDIX D
BIBLIOGRAPHY OF EXPERIMENTER PUBLICATIONS

University of California, Ion Chamber:

1. Anderson, K. A., H. K. Harris, and R. J. Paoli, Energetic Electron Fluxes in and beyond the Earth's Outer Magnetosphere, J. Geophys. Res., 70, 1039-1050, 1965.

University of Chicago, R vs dE/dx:

1. Fan, C. Y., G. Gloecker, and J. A. Simpson, Evidence for >30 KeV electrons accelerated in the shock transition region beyond the Earth's magnetospheric boundary, Phys. Rev. letters, 13, 149-153, 1964.

Massachusetts Institute of Technology, Plasma Probe:

1. Bridge, H., A. Egidi, A. Lazarus, E. Lyon and L. Jacobson, Preliminary results of plasma measurements on IMP-A, in Space Research V, North-Holland Publ. Co. (1965), presented at COSPAR, Florence, Italy, 1964.

GSFC, Cosmic Ray and GM Counter Experiments:

1. Balasubramanyan, V. K., G. H. Ludwig, F. B. McDonald, and R. A. R. Palmeira; "Results from the IMP-I GM Counter Telescope Experiment," GSFC preprint X-611-65-49, 1965. Submitted to JGR January 1965.
2. Cline, T. L., G. H. Ludwig, F. B. McDonald; "Detection of Interplanetary 3 to 12 MeV Electrons," Phys. Rev. Letters, Vol. 13, No. 26, p. 786 (28 December 1964).
3. McDonald, F. B., G. H. Ludwig; "Measurement of Low Energy Primary Cosmic Ray Protons on the IMP I Satellite," Phys. Rev. Letters, Vol. 13, No. 26, p. 783 (28 Dec. 1964).

GSFC - Magnetic Field Experiment

1. Ness, N. F., C. S. Scearce and J. B. Seek, Initial results of the IMP-I Magnetic Field Experiment, J. Geophys. Res., 69, 3531-3570, 1964.
2. Ness, N. F. and J. M. Wilcox, The solar origin of the Interplanetary Magnetic Field, Phys. Rev. letters, 13 (15), 461-464, 1964.
3. Ness, Norman F., The Magnetohydrodynamic Wake of the Moon, J. Geophys. Res., 70, 517-534, 1965a.
4. Ness, Norman F., The Earth's Magnetic Tail, J. Geophys. Res., 70 (13), to appear, 1965b.
5. Ness, Norman F., Observations of the Geomagnetic Cavity Boundaries, C. U. Symposium on Plasmas in Space (1963), North-Holland Publ. Co., Amsterdam, 1965c.
6. Ness, N. F., and J. M. Wilcox, Extension of the Photospheric Magnetic Field into Interplanetary Space, GSFC preprint X-612-65-79, submitted to Astrophys. J., 1965a.
7. Ness, N. F. and J. M. Wilcox, Sector Structure of the Interplanetary Magnetic Field, GSFC preprint X-612-65-157, submitted to Science, 1965b.
8. Ness, N. F., C. S. Scearce, J. B. Seek and J. M. Wilcox, A Summary of Results From the IMP-I Magnetic Field Experiment, GSFC preprint X-612-65-180, presented at Buenos Aires, Argentina, COSPAR (May 1965).

GSFC - Retarding Potential Analyzer

1. Serbu, G. P., Results from the IMP-I Retarding Potential Analyzer, Space Research V, North Holland Publ. Co. (1965), presented at COSPAR Florence, Italy; May, 1964.
2. Serbu, G. P., Results from the IMP-I and IMP-II Retarding Potential Analyzer, presented at Winter meeting, A. G. U., Seattle, Washington, 1964.