

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Technical Memorandum 33-446

*Energy Levels and Transition Matrix Elements of
Paramagnetic Crystals for Maser Applications*

Robert W. Berwin

FACILITY FORM 602

N70-20771 (ACCESSION NUMBER)	(THRU)
20 (PAGES)	1
CR-109124 (NASA CR OR TMX OR AD NUMBER)	16 (CATEGORY)

JET PROPULSION LABORATORY
CALIFORNIA INSTITUTE OF TECHNOLOGY
PASADENA, CALIFORNIA

March 1, 1970



TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No. 33-446		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle ENERGY LEVELS AND TRANSITION MATRIX ELEMENTS OF PARAMAGNETIC CRYSTALS FOR MASER APPLICATIONS				5. Report Date March 1, 1970	
				6. Performing Organization Code	
7. Author(s) Robert W. Berwin				8. Performing Organization Report No.	
9. Performing Organization Name and Address JET PROPULSION LABORATORY California Institute of Technology 4800 Oak Grove Drive Pasadena, California 91103				10. Work Unit No.	
				11. Contract or Grant No. NAS 7-100	
				13. Type of Report and Period Covered Technical Memorandum	
12. Sponsoring Agency Name and Address NATIONAL AERONAUTICS AND SPACE ADMINISTRATION Washington, D.C. 20546				14. Sponsoring Agency Code	
15. Supplementary Notes					
16. Abstract Computer programs on the Univac 1108 have been developed at the Jet Propulsion Laboratory to give the energy levels and transition probabilities for ruby, emerald, iron-doped rutile, iron-doped zinc tungstate, and chromium-doped rutile. These programs also generate SC-4020 plots of energy levels vs an external dc magnetic field which is at any orientation with respect to the crystal magnetic axes.					
17. Key Words (Selected by Author(s)) Crystallography Masers and Lasers Quantum Theory and Relativity			18. Distribution Statement Unclassified -- Unlimited		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 15	
				22. Price	

HOW TO FILL OUT THE TECHNICAL REPORT STANDARD TITLE PAGE

Make items 1, 4, 5, 9, 12, and 13 agree with the corresponding information on the report cover. Use all capital letters for title (item 4). Leave items 2, 6, and 14 blank. Complete the remaining items as follows:

3. Recipient's Catalog No. Reserved for use by report recipients.
7. Author(s). Include corresponding information from the report cover. In addition, list the affiliation of an author if it differs from that of the performing organization.
8. Performing Organization Report No. Insert if performing organization wishes to assign this number.
10. Work Unit No. Use the agency-wide code (for example, 923-50-10-06-72), which uniquely identifies the work unit under which the work was authorized. Non-NASA performing organizations will leave this blank.
11. Insert the number of the contract or grant under which the report was prepared.
15. Supplementary Notes. Enter information not included elsewhere but useful, such as: Prepared in cooperation with... Translation of (or by)... Presented at conference of... To be published in...
16. Abstract. Include a brief (not to exceed 200 words) factual summary of the most significant information contained in the report. If possible, the abstract of a classified report should be unclassified. If the report contains a significant bibliography or literature survey, mention it here.
17. Key Words. Insert terms or short phrases selected by the author that identify the principal subjects covered in the report, and that are sufficiently specific and precise to be used for cataloging.
18. Distribution Statement. Enter one of the authorized statements used to denote releasability to the public or a limitation on dissemination for reasons other than security of defense information. Authorized statements are "Unclassified-Unlimited," "U.S. Government and Contractors only," "U.S. Government Agencies only," and "NASA and NASA Contractors only."
19. Security Classification (of report). NOTE: Reports carrying a security classification will require additional markings giving security and downgrading information as specified by the Security Requirements Checklist and the DoD Industrial Security Manual (DoD 5220.22-M).
20. Security Classification (of this page). NOTE: Because this page may be used in preparing announcements, bibliographies, and data banks, it should be unclassified if possible. If a classification is required, indicate separately the classification of the title and the abstract by following these items with either "(U)" for unclassified, or "(C)" or "(S)" as applicable for classified items.
21. No. of Pages. Insert the number of pages.
22. Price. Insert the price set by the Clearinghouse for Federal Scientific and Technical Information or the Government Printing Office, if known.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Technical Memorandum 33-446

*Energy Levels and Transition Matrix Elements of
Paramagnetic Crystals for Maser Applications*

Robert W. Berwin

JET PROPULSION LABORATORY
CALIFORNIA INSTITUTE OF TECHNOLOGY
PASADENA, CALIFORNIA

March 1, 1970

PRECEDING PAGE BLANK NOT FILMED.

Preface

The work described in this report was performed by the Telecommunications Division of the Jet Propulsion Laboratory. The subroutine which diagonalizes the Hermitian matrix was kindly furnished by R. J. Hanson of the Computation and Analysis Section.

PRECEDING PAGE BLANK NOT FILMED.

Contents

I. Introduction	1
II. Discussion	1
A. Spin Hamiltonian	1
B. Transition Probability Matrix Elements	2
C. Main Programs	2
1. RUBYCR	2
2. TIO2FE	3
3. EMERCR	5
4. ZNWOFE	5
5. TIO2CR	7
Appendix. Energy Levels and Computer Output for the Case of Cr(+3) in Beryl (Emerald) for $\theta = 90$ deg With External dc Magnetic Field as a Parameter	8
References	15

Figures

1. Orientation of H_{dc} and c axis	3
2. Orientation of H_{dc} and crystal magnetic axes x, y, z ; crystalline axes a, b, c shown with c axis along y direction; a and b axes in x-z plane	3
3. Orientation of H_{dc} and crystal magnetic axes $x, y, z; a, b, c$ crystalline axes with a and c axes in x-z plane	5
A-1. Plot of energy levels of Cr(+3) in beryl (emerald) vs external dc magnetic field for $\theta = 90$ deg	8

Abstract

Computer programs on the Univac 1108 have been developed at the Jet Propulsion Laboratory to give the energy levels and transition probabilities for ruby, emerald, iron-doped rutile, iron-doped zinc tungstate, and chromium-doped rutile. These programs also generate SC-4020 plots of energy levels vs an external dc magnetic field which is at any orientation with respect to the crystal magnetic axes.

Energy Levels and Transition Matrix Elements of Paramagnetic Crystals for Maser Applications

I. Introduction

Investigation of maser performance of paramagnetic crystals is a continuing program in the Microwave Electronics Group at the Jet Propulsion Laboratory (JPL). As the need arises for higher signal frequencies, it is necessary to evaluate the maser qualities of many crystals. Efficient study of maser crystal performance can be achieved by the use of a set of fine structure energy levels and transition probabilities. Such information allows the investigator to determine the optimum orientation of the crystal magnetic axes with respect to the external dc magnetic field and the polarization of the signal and pump frequencies.

To meet this goal, Fortran V language programs for the Univac 1108 computer at JPL have been implemented to diagonalize the spin Hamiltonians of ruby, emerald, iron-doped rutile, iron-doped zinc tungstate, and chromium-doped rutile. For each of these crystals, eigenvalues in GHz, normalized eigenvectors, and transition probabili-

ties are computed, and a plot by the Stromberg-Carlson SC-4020 Plotter is made of eigenvalues vs the external dc magnetic field.

II. Discussion

A. Spin Hamiltonian

The spin Hamiltonian for the case of ruby was derived in detail in Ref. 1. If H_s is the spin Hamiltonian which, because of the physical nature of the problem, is Hermitian then the equation to be solved is

$$H_s |\psi_i\rangle = E_i |\psi_i\rangle \quad i = 1, \dots, n = 2S + 1 \quad (1)$$

where eigenvalues E_i are real, and S is the effective total spin of the ion in the crystal, H_s can be diagonalized by a unitary matrix with the result that the eigenvalues occur along the diagonal of the transformed matrix. $|\psi_i\rangle$ is an

n -fold vector representing a linear combination of the n -pure spin states:

$$|\psi_i\rangle = a_i|S\rangle + b_i|S-1\rangle + c_i|S-2\rangle + \dots + x_i|-S\rangle$$

The $|S\rangle$, etc., are the base states corresponding to the $2S+1$ positions of the spin dipole in a magnetic field.

The diagonalization of H_s by computer methods can be conveniently handled by expanding the $n \times n$ Hermitian matrix into a $2n \times 2n$ real matrix.

Thus, if H_s and $|\psi_i\rangle$ are expressed as $H_s = H_{s1} + iH_{s2}$ and $|\psi_i\rangle = |\psi_i\rangle_1 + i|\psi_i\rangle_2$ then Eq. (1) takes the form

$$\begin{bmatrix} H_{s1} & -H_{s2} \\ H_{s2} & H_{s1} \end{bmatrix} \begin{bmatrix} |\psi_i\rangle_1 \\ |\psi_i\rangle_2 \end{bmatrix} = E_i \begin{bmatrix} |\psi_i\rangle_1 \\ |\psi_i\rangle_2 \end{bmatrix} \quad (2)$$

Eq. (3), for $S = 3/2$ becomes

$$\frac{\langle\psi_i|g\mathbf{H}_1 \cdot \mathbf{S}|\psi_j\rangle}{H_1^0} = [a_i^* b_i^* c_i^* d_i^*] \begin{bmatrix} 3\phi_3 & (3)^{1/2}(\phi_1 - i\phi_2) & 0 & 0 \\ (3)^{1/2}(\phi_1 + i\phi_2) & \phi_3 & 2(\phi_1 - i\phi_2) & 0 \\ 0 & 2(\phi_1 + i\phi_2) & -\phi_3 & (3)^{1/2}(\phi_1 - i\phi_2) \\ 0 & 0 & (3)^{1/2}(\phi_1 + i\phi_2) & -3\phi_3 \end{bmatrix} \begin{bmatrix} a_i \\ b_i \\ c_i \\ d_i \end{bmatrix}$$

$$\equiv \alpha_{ij}\phi_1 + i\beta_{ij}\phi_2 + \gamma_{ij}\phi_3$$

where

$$\alpha_{ij} = (3)^{1/2}(a_i^* b_j + b_i^* a_j + c_i^* d_j + d_i^* c_j) + 2(b_i^* c_j + c_i^* b_j)$$

$$\beta_{ij} = (3)^{1/2}(-a_i^* b_j + b_i^* a_j - c_i^* d_j + d_i^* c_j) + 2(-b_i^* c_j + c_i^* b_j)$$

$$\gamma_{ij} = 3(a_i^* a_j - d_i^* d_j) + b_i^* b_j - c_i^* c_j$$

Similar equations can be derived for the case of $S = 5/2$.

C. Main Programs

1. RUBYCR

a. Purpose

- (1) Calculate the eigenvalues of the spin Hamiltonian of chromium (+3) in Al_2O_3 (ruby).
- (2) Calculate the transition probability matrix elements.

B. Transition Probability Matrix Elements

From first order perturbation, the transition probability per unit time of a transition from state ψ_i to state ψ_j is

$$W_{ij} = \frac{1}{4} \gamma^2 G(f) |\langle\psi_i|H'|\psi_j\rangle|^2 \quad (3)$$

where $\gamma = g\beta\mu_0/h$, H' is the applied perturbation, and $G(f)$ is the density of states as a function of energy. When an RF magnetic field $\mathbf{H}_1 = H_1^0(\phi_1\mathbf{i} + \phi_2\mathbf{j} + \phi_3\mathbf{k})$ is applied to the crystal, the dipole interaction energy is $H' = \boldsymbol{\mu} \cdot \mathbf{H}_1 = g\beta\mathbf{S} \cdot \mathbf{H}_1$, where ϕ_1 , ϕ_2 , and ϕ_3 are the direction cosines of $\mathbf{H}_1$ with respect to the magnetic axes x, y, z of the crystal.

(3) Plot eigenvalues vs external dc magnetic field, H_{dc} .

b. Input data

THETA ($0 \text{ deg} \leq \theta \leq 90 \text{ deg}$) is the angle between c axis and external dc magnetic field (see Fig. 1).

HMIN, HMAX, DH defines respectively minimum, maximum, and incremental external dc magnetic field for calculations and plots.

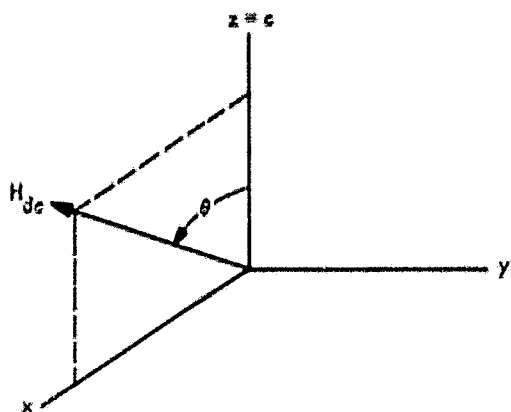


Fig. 1. Orientation of H_{dc} and c axis

c. Spin Hamiltonian (Ref. 2)

$$H_s = g\beta H_{dc} \cdot S + D \left[S_z^2 - \frac{1}{3} S(S+1) \right]$$

$$g = 1.99$$

$$D = -5.73 \text{ GHz}$$

$$H_{dc} = H_0 (\sin \theta i + \cos \theta j)$$

$$S = \frac{3}{2}$$

d. Spin Hamiltonian matrix

$\frac{3}{2} g\beta H_0 \cos \theta + D$	$\frac{3}{2} g\beta H_0 \sin \theta$	0	0
$\frac{3}{2} g\beta H_0 \sin \theta$	$\frac{1}{2} g\beta H_0 \cos \theta - D$	$g\beta H_0 \sin \theta$	0
0	$g\beta H_0 \sin \theta$	$-\frac{1}{2} g\beta H_0 \cos \theta - D$	$\frac{3}{2} g\beta H_0 \sin \theta$
0	0	$\frac{3}{2} g\beta H_0 \sin \theta$	$-\frac{3}{2} g\beta H_0 \cos \theta + D$

2. TiO₂FE

a. Purpose

- (1) Calculate the eigenvalues of the spin Hamiltonian of Fe(+3) in rutile (TiO₂).
- (2) Calculate the transition probability matrix elements.
- (3) Plot eigenvalues vs external dc magnetic field, H_{dc} .

b. Input data

THETA, PHI [$0 \text{ deg} \leq (\theta, \phi) \leq 90 \text{ deg}$] are the spherical coordinates of external dc magnetic field with respect to crystal magnetic axes x, y, z (see Fig. 2).

c. Spin Hamiltonian (Ref. 3)

$$H_s = g\beta H_{dc} \cdot S + D \left[S_z^2 - \frac{1}{3} s(s+1) \right] + E(S_x^2 - S_y^2) + \frac{a}{6} \left(S_x^4 + S_y^4 + S_z^4 - \frac{707}{16} \right) + \frac{7}{36} F \left(S_z^4 - \frac{75}{14} S_z^2 + \frac{81}{16} \right)$$

$$D = 20.35 \text{ GHz}$$

$$a = 1.1 \text{ GHz}$$

$$E = 2.21 \text{ GHz}$$

$$g = 2.0$$

$$F = -0.5 \text{ GHz}$$

$$S = 5/2$$

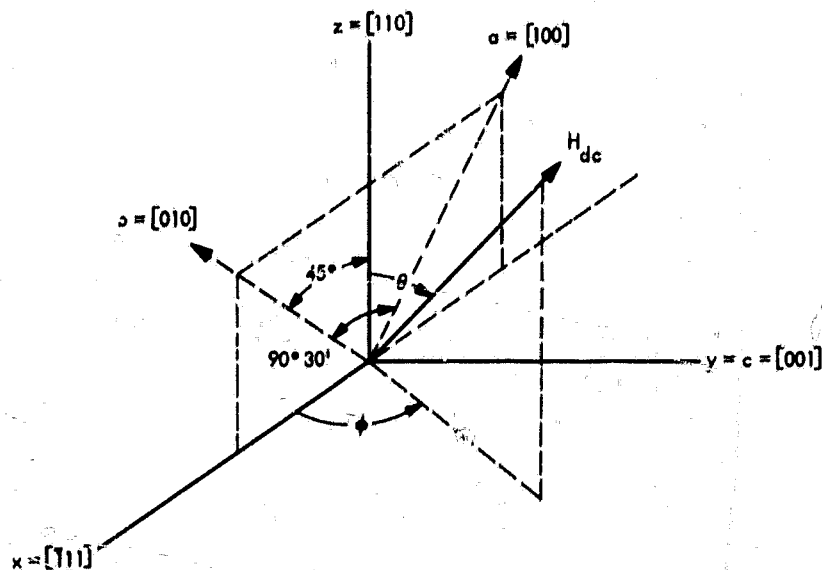


Fig. 2. Orientation of H_{dc} and crystal magnetic axes x, y, z ; crystalline axes a, b, c shown with c axis along y direction; a and b axes in x - z plane

d. Spin Hamiltonian matrix

$\frac{5}{2} \frac{g\beta H}{h} \cos \theta + \left(\frac{10}{3} D + \frac{a}{2} + \frac{F}{3} \right)$	$\frac{(5)^{1/2}}{2} \frac{g\beta H}{h} \sin \theta e^{i\phi}$	$(10)^{1/2} E$	0	$\frac{(5)^{1/2}}{2} a$	0
$\left(\frac{5}{2} \right)^{1/2} \frac{g\beta H}{h} \sin \theta e^{-i\phi}$	$\frac{3}{2} \frac{g\beta H}{h} \cos \theta - \left(\frac{2}{3} D + \frac{3}{2} a + F \right)$	$(2)^{1/2} \frac{g\beta H}{h} \sin \theta e^{i\phi}$	$3(2)^{1/2} E$	0	$\frac{(5)^{1/2}}{2} a$
$(10)^{1/2} E$	$\frac{1}{2} \frac{g\beta H}{h} \cos \theta + \left(-\frac{8}{3} D + a + \frac{2}{3} F \right)$	$\frac{3}{2} \frac{g\beta H}{h} \sin \theta e^{-i\phi}$	$\frac{3}{2} \frac{g\beta H}{h} \sin \theta e^{i\phi}$	$3(2)^{1/2} E$	0
0	$3(2)^{1/2} E$	$\frac{3}{2} \frac{g\beta H}{h} \sin \theta e^{-i\phi}$	$-\frac{1}{2} \frac{g\beta H}{h} \cos \theta + \left(-\frac{8}{3} D + a + \frac{2}{3} F \right)$	$(2)^{1/2} \frac{g\beta H}{h} \sin \theta e^{i\phi}$	$(10)^{1/2} E$
$\frac{(5)^{1/2}}{2} a$	0	$3(2)^{1/2} E$	$(2)^{1/2} \frac{g\beta H}{h} \sin \theta e^{-i\phi}$	$-\frac{3}{2} \frac{g\beta H}{h} \cos \theta - \left(\frac{2}{3} D + \frac{3}{2} a + F \right)$	$\frac{(5)^{1/2}}{2} \frac{g\beta H}{h} \sin \theta e^{i\phi}$
0	$\frac{(5)^{1/2}}{2} a$	0	$(10)^{1/2} E$	$\frac{(5)^{1/2}}{2} \frac{g\beta H}{h} \sin \theta e^{-i\phi}$	$-\frac{5}{2} \frac{g\beta H}{h} \cos \theta + \left(\frac{10}{3} D + \frac{a}{2} + \frac{F}{3} \right)$

3. EMERCR

a. Purpose

- (1) Calculate the eigenvalues of the spin Hamiltonian of chromium (+3) in beryl (emerald: $\text{Be}_3\text{Al}_2\text{Si}_6\text{O}_{18}$).
- (2) Calculate the transition probability matrix elements.
- (3) Plot eigenvalues vs external dc magnetic field, H_{dc} .

b. Input data

THETA ($0 \text{ deg} \leq \theta \leq 90 \text{ deg}$) is the angle between c axis and external dc magnetic field (see Fig. 1).

HMIN, HMAX, DH defines respectively minimum, maximum, and incremental external dc magnetic field for calculations and plots.

c. Spin Hamiltonian (Ref. 4)

$$H_s = g\beta H_{dc} \cdot \mathbf{S} + D \left[S_z^2 - \frac{1}{3} S(S+1) \right]$$

$$D = -26 \text{ GHz}$$

$$g = 1.97$$

$$S = 3/2$$

The Hamiltonian matrix is the same as that for ruby (see Case 1 in Section C1d).

An example of the computer printout and plot for $\theta = 90 \text{ deg}$ is given in the appendix.

4. ZNWOF

a. Purpose

- (1) Calculate the eigenvalues of the spin Hamiltonian of Fe(+3) in ZnWO_4 (zinc tungstate).

- (2) Calculate the transition probability matrix elements.

- (3) Plot eigenvalues vs external dc magnetic field, H_{dc} .

b. Input data

THETA, PHI [$0 \text{ deg} \leq (\theta, \phi) \leq 90 \text{ deg}$] are the spherical coordinates of external dc magnetic field with respect to crystal magnetic axes x, y, z (see Fig. 3). HMIN, HMAX, DH defines respectively minimum, maximum, and incremental dc external magnetic field for calculations and plots.

c. Spin Hamiltonian (Ref. 5)

$$H_s = \frac{g\beta H}{2} (2S_z \cos \theta + S_+ e^{-i\phi} \sin \theta + S_- e^{i\phi} \sin \theta) \\ + B_{02} [3S_z^2 - S(S+1)] + \frac{1}{2} B_{22} (S_+^2 + S_-^2) \\ + B_{04} [35S_z^4 - 30S(S+1)S_z^2 + 25S_z^2 - 6S(S+1) \\ + 3S^2(S+1)^2] \\ + \frac{1}{2} B_{24} \{ S_+^2 [7S_z^2 + 14S_z - S(S+1) + 9] \\ + S_-^2 [7S_z^2 - 14S_z - S(S+1) + 9] \} \\ + \frac{1}{2} B_{44} (S_+^4 + S_-^4)$$

$$B_{02} = -6.987 \text{ GHz}$$

$$S_{\pm} = S_x \pm iS_y$$

$$B_{22} = 4.935 \text{ GHz}$$

$$B_{04} = 0.00326 \text{ GHz}$$


$$g = 2.0019$$

$$B_{24} = -0.00178 \text{ GHz}$$

$$B_{44} = -0.0173 \text{ GHz}$$

$$S = 5/2$$

Fig. 3. Orientation of H_{dc} and crystal magnetic axes x, y, z ; a, b, c crystalline axes with a and c axes in x - z plane

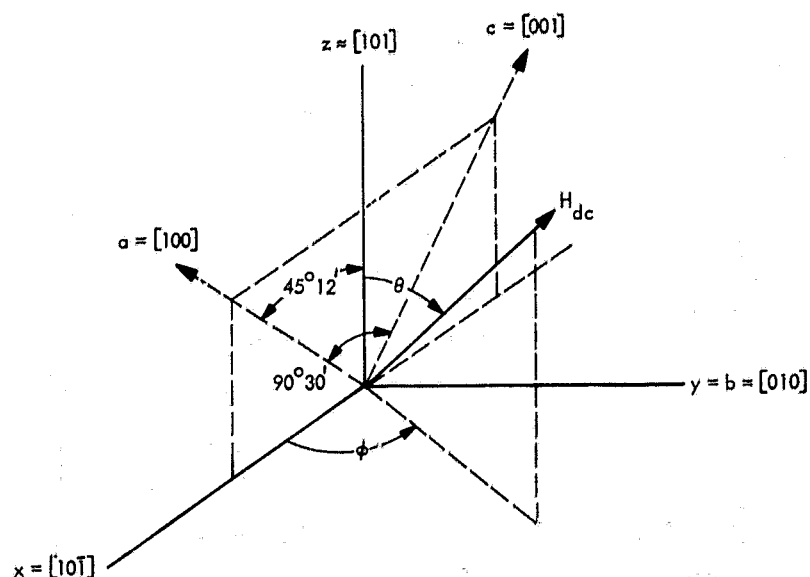

d. Spin Hamiltonian matrix

$10B_{02} + 60B_{04}$ $+ \frac{5}{2} g\beta H_0 \cos \theta$	$\frac{(5)^{1/2}}{2} g\beta H_0 \sin \theta e^{i\phi}$	$(10)^{1/2} (B_{22} + 9B_{24})$	0	$12(5)^{1/2} B_{44}$	0
$\frac{(5)^{1/2}}{2} g\beta H_0 \sin \theta e^{-i\phi}$	$-2B_{02} - 180B_{04}$ $+ \frac{3}{2} g\beta H_0 \cos \theta$	$(2)^{1/2} g\beta H_0 \sin \theta e^{i\phi}$	$3(2)^{1/2} (B_{22} - 5B_{24})$	0	$12(5)^{1/2} B_{44}$
$(10)^{1/2} (B_{22} + 9B_{24})$	$(2)^{1/2} g\beta H_0 \sin \theta e^{-i\phi}$	$-8B_{02} + 120B_{04}$ $+ \frac{1}{2} g\beta H_0 \cos \theta$	$\frac{3}{2} g\beta H_0 \sin \theta e^{i\phi}$	$3(2)^{1/2} (B_{22} - 5B_{24})$	0
0	$3(2)^{1/2} (B_{22} - 5B_{24})$	$\frac{3}{2} g\beta H_0 \sin \theta e^{-i\phi}$	$-8B_{02} + 120B_{04}$ $- \frac{1}{2} g\beta H_0 \cos \theta$	$(2)^{1/2} g\beta H_0 \sin \theta e^{i\phi}$	$(10)^{1/2} (B_{22} + 9B_{24})$
$12(5)^{1/2} B_{44}$	0	$3(2)^{1/2} (B_{22} - 5B_{24})$	$(2)^{1/2} g\beta H_0 \sin \theta e^{-i\phi}$	$-2B_{02} - 180B_{04}$ $- \frac{3}{2} g\beta H_0 \cos \theta$	$\frac{(5)^{1/2}}{2} g\beta H_0 \sin \theta e^{i\phi}$
0	$12(5)^{1/2} B_{44}$	0	$(10)^{1/2} (B_{22} + 9B_{24})$	$\frac{(5)^{1/2}}{2} g\beta H_0 \sin \theta e^{-i\phi}$	$10B_{02} + 60B_{04}$ $- \frac{5}{2} g\beta H_0 \cos \theta$

5. **TiO₂CR**

a. Purpose

- (1) Calculate the eigenvalues of the spin Hamiltonian of Cr(+3) in rutile (TiO₂).
- (2) Calculate the transition probability matrix elements.
- (3) Plot eigenvalues vs external dc magnetic field, H_{dc} .

b. Input data

THETA, PHI [0 deg $\leq$ (θ, ϕ) $\leq$ 90 deg] are the spherical coordinates of external dc magnetic field with respect to crystal magnetic axes x, y, z (see Fig. 2).

HMIN, HMAX, DH defines minimum, maximum, and incremental dc external magnetic field for calculations and plots.

c. Spin Hamiltonian

$$H_s = g\beta H_{dc} \cdot S + D \left[S_z^2 - \frac{1}{3} S(S+1) \right] + E(S_x^2 - S_y^2)$$

$$D = -20.4 \text{ GHz}$$

$$E = -4.2 \text{ GHz}$$

$$g = 1.97$$

$$S = 3/2$$

d. Spin Hamiltonian matrix

$\frac{3}{2} g\beta H_0 \cos \theta + D$	$\frac{(3)^{1/2}}{2} g\beta H_0 \sin \theta e^{-i\phi}$	$(3)^{1/2} E$	0
$\frac{(3)^{1/2}}{2} g\beta H_0 \sin \theta e^{i\phi}$	$\frac{1}{2} g\beta H_0 \cos \theta - D$	$g\beta H_0 \sin \theta e^{-i\phi}$	$(3)^{1/2} E$
$(3)^{1/2} E$	$g\beta H_0 \sin \theta e^{i\phi}$	$-\frac{1}{2} g\beta H_0 \cos \theta - D$	$\frac{(3)^{1/2}}{2} g\beta H_0 \sin \theta e^{-i\phi}$
0	$(3)^{1/2} E$	$\frac{(3)^{1/2}}{2} g\beta H_0 \sin \theta e^{i\phi}$	$-\frac{3}{2} g\beta H_0 \cos \theta + D$

Appendix

Energy Levels and Computer Output for the Case of Cr(+3) in Beryl (Emerald) for $\theta = 90$ deg With External dc Magnetic Field as a Parameter

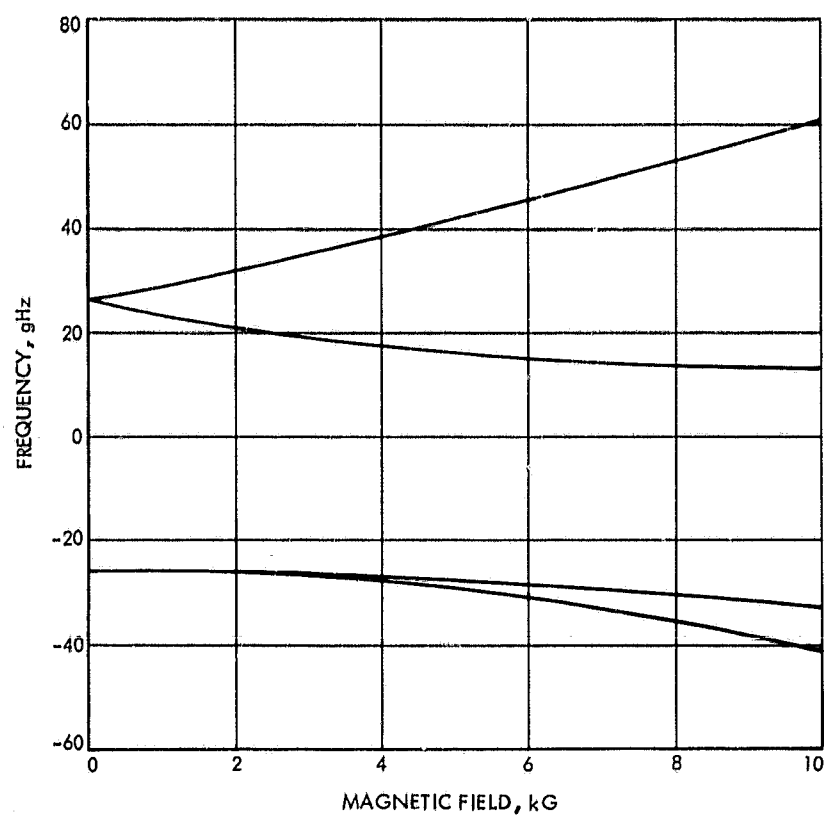


Fig. A-1. Plot of energy levels of Cr(+3) in beryl (emerald) vs external dc magnetic field for $\theta = 90$ deg

ENERGY LEVELS AND TRANSITION PROBABILITY MATRIX ELEMENTS
FOR CR(+3) IN BERYL(EMERALD)

THETA= 90.000 DEGREES H= .0 GAUSS

FIRST ROW OF EIGENVECTOR IS REAL PART, SECOND ROW IS IMAG. PART

EIGENVECTOR FOR E(4)= 26.00000

GHZ

A(4)	B(4)	C(4)	D(4)
.0000000	.0000000	.0000000	.0000000
.0000000	.0000000	.0000000	.1000000+0i

EIGENVECTOR FOR E(3)= 26.00000

GHZ

A(3)	B(3)	C(3)	D(3)
.0000000	.0000000	.1000000+0i	.0000000
.0000000	.0000000	.0000000	.0000000

EIGENVECTOR FOR E(2)= -26.00000

GHZ

A(2)	B(2)	C(2)	D(2)
.0000000	.0000000	.0000000	.7828822+00
.0000000	.0000000	.0000000	.6221700+00

EIGENVECTOR FOR E(1)= -26.00000

GHZ

A(1)	B(1)	C(1)	D(1)
.0000000	.0000000	.0000000	.8150723+00
.0000000	.0000000	.0000000	.15793593+00

E(4)-E(3)	E(4)-E(2)	E(4)-E(1)	E(3)-E(2)	E(3)-E(1)	E(2)-E(1)
.0000	52.0000	52.0000	52.0000	52.0000	.0000

TRANSITION PROBABILITY MATRIX ELEMENTS

TR(K,L)	ALPHA(K,L)			BETA(K,L)			GAMMA(K,L)		
	REAL	IMAG	ABS	REAL	IMAG	ABS	REAL	IMAG	ABS
(1,2)	.0000	.0000	.0000	.0000	.0000	.0000	-.8329	-2.8821	3.0000
(1,3)	1.4117	1.0035	1.7321	1.0035	-1.4117	1.7321	.0000	.0000	.0000
(1,4)	.0000	.0000	.0000	.0000	.0000	.0000	1.7321	-2.4452	3.0000
(2,3)	1.3560	-1.0776	1.7321	-1.0776	-1.3560	1.7321	.0000	.0000	.0000
(2,4)	.0000	.0000	.0000	.0000	.0000	.0000	-1.8665	-2.3486	3.0000
(3,4)	.0000	1.7321	1.7321	-1.7321	.0000	1.7321	.0000	.0000	.0000

TR(K,L) .25*(ALPHA**2+GAMMA**2) .25*(BETA**2)

TR(K,L)	ALPHA	BETA
(1,2)	2.2500	.0000
(1,3)	.7500	.7500
(1,4)	2.2500	.0000
(2,3)	.7500	.7500
(2,4)	2.2500	.0000
(3,4)	.7500	.7500

ENERGY LEVELS AND TRANSITION PROBABILITY MATRIX ELEMENTS
FOR CR(+3) IN BERYL(EMERALD)

THETA= 90.000 DEGREES H= 2000.0 GAUSS

FIRST ROW OF EIGENVECTOR IS REAL PART, SECOND ROW IS IMAG. PART

EIGENVECTOR FOR E(4)= 31.91875 GHZ
A(4) B(4) C(4) D(4)
.2064018=05 .2499050=04 .2499051=04 .2064018=05
.5820324=01 .7047073=00 .7047073=00 .5820325=01

EIGENVECTOR FOR E(3)= 20.96359 GHZ
A(3) B(3) C(3) D(3)
.6084697=07 .5973690=06 -.5973689=06 .6084697=07
-.7165393=01 -.7034669=00 .7034669=00 .7165393=01

EIGENVECTOR FOR E(2)= -26.39509 GHZ
A(2) B(2) C(2) D(2)
.2662049=08 -.2198635=09 -.2198705=09 .2662118=08
.7046982=00 .5820232=01 .5820417=01 .7047164=00

EIGENVECTOR FOR E(1)= -26.48735 GHZ
A(1) B(1) C(1) D(1)
.1789021=06 .1822262=07 -.1822224=07 .1788975=06
-.7034759=00 .7165467=01 -.7165319=01 .7034579=00

E(4)-E(3)	E(4)-E(2)	E(4)-E(1)	E(3)-E(2)	E(3)-E(1)	E(2)-E(1)
10.9552	58.3138	58.4060	47.3587	47.4508	.0922

TRANSITION PROBABILITY MATRIX ELEMENTS

TR(K,L)	ALPHA(K,L)			BETA(K,L)			GAMMA(K,L)		
	REAL	IMAG	ABS	REAL	IMAG	ABS	REAL	IMAG	ABS
(1,2)	-.0000	-.0000	.0000	.0000	-.0498	.0498	-2.9828	-.0000	2.9828
(1,3)	1.8981	.0000	1.8981	.0000	.0000	.0000	.0000	.0000	.0000
(1,4)	-.0000	.0000	.0000	-.0001	1.5298	1.5298	-.1447	.0000	.1447
(2,3)	.0000	.0000	.0000	.0000	1.8955	1.8955	-.2211	-.0000	.2211
(2,4)	1.5445	-.0001	1.5445	-.0000	-.0000	.0000	-.0000	.0000	.0000
(3,4)	-.0000	.0000	.0000	-.0001	-2.0160	2.0160	-1.0165	.0000	1.0165

TR(K,L) .25*(ALPHA**2+GAMMA**2) .25*(BETA**2)

(1,2)	2.2242	.0004
(1,3)	.9007	.0000
(1,4)	.0052	.5850
(2,3)	.0122	.8982
(2,4)	.5964	.0000
(3,4)	.2583	1.0161

ENERGY LEVELS AND TRANSITION PROBABILITY MATRIX ELEMENTS
FOR CR(3) IN BERYL(EMERALD)

THETA= 90.000 DEGREES H= 4000.0 GAUSS

FIRST ROW OF EIGENVECTOR IS REAL PART, SECOND ROW IS IMAG. PART

EIGENVECTOR FOR E(4)= 38.46715 GHZ
A(4) B(4) C(4) D(4)
.6479976-06 .4366408-05 .4366408-05 .6479977-06
.1038015+00 .6994464-00 .6994464-00 .1038015+00

EIGENVECTOR FOR E(3)= 17.07751 GHZ
A(3) B(3) C(3) D(3)
.3783482-07 .1703549-06 .1703549-06 .3783482-07
.1533087-00 .6902872-00 .6902872-00 .1533087-00

EIGENVECTOR FOR E(2)= -27.41983 GHZ
A(2) B(2) C(2) D(2)
.7070543-08 .1049304-08 .1049314-08 .7070590-08
.6994441-00 .1038010+00 .1038020+00 .6994487-00

EIGENVECTOR FOR E(1)= -28.12483 GHZ
A(1) B(1) C(1) D(1)
.1751704-07 .3890428-08 .3890411-08 .1751693-07
.6902895-00 .1533091-00 .1533084-00 .6902849-00

E(4)-E(3)	E(4)-E(2)	E(4)-E(1)	E(3)-E(2)	E(3)-E(1)	E(2)-E(1)
21.3896	65.8870	66.5920	44.4973	45.2023	7050

TRANSITION PROBABILITY MATRIX ELEMENTS

TR(K,L)	ALPHA(K,L)			BETA(K,L)			GAMMA(K,L)		
	REAL	IMAG	ABS	REAL	IMAG	ABS	REAL	IMAG	ABS
(1,2)	-.0000	.0000	.0000	-.0000	-.1869	.1869	-2.9287	.0000	2.9287
(1,3)	1.9925	.0000	1.9925	-.0000	.0000	.0000	.0000	.0000	.0000
(1,4)	-.0000	.0000	.0000	-.0000	-1.2987	1.2987	-.2155	.0000	.2155
(2,3)	.0000	.0000	.0000	.0000	-2.0143	2.0143	-.5001	-.0000	.5001
(2,4)	1.3670	-.0000	1.3670	-.0000	-.0000	.0000	-.0000	.0000	.0000
(3,4)	-.0000	.0000	.0000	-.0000	-2.0545	2.0545	1.0611	.0000	1.0611

TR(K,L) .25*(ALPHA**2+GAMMA**2) .25*(BETA**2)

(1,2)	2.1444	.0007
(1,3)	.9925	.0000
(1,4)	.0116	.4217
(2,3)	.0625	1.0103
(2,4)	.4672	.0000
(3,4)	.2815	1.0553

ENERGY LEVELS AND TRANSITION PROBABILITY MATRIX ELEMENTS FOR CR(+3) IN BERYL(EMERALD)

THETA= 90.000 DEGREES H= 6000.0 GAUSS

FIRST ROW OF EIGENVECTOR IS REAL PART; SECOND ROW IS IMAG. PART

EIGENVECTOR FOR E(4)= 45.45326 GHZ
A(4) B(4) C(4) D(4)
.5418089=07 .2697673=06 .2697674=06 .5418090=07
.1392370=00 .6932626=00 .6932627=00 .1392370=00

EIGENVECTOR FOR E(3)= 14.51256 GHZ
A(3) B(3) C(3) D(3)
.7813764=08 .2205826=07 .2205826=07 .7813765=08
.2361049=00 .6665242=00 .6665242=00 .2361049=00

EIGENVECTOR FOR E(2)= -28.88228 GHZ
A(2) B(2) C(2) D(2)
.1985148=06 .3987028=07 .3987049=07 .1985154=06
.6932616=00 .1392366=00 .1392374=00 .6932636=00

EIGENVECTOR FOR E(1)= -31.08356 GHZ
A(1) B(1) C(1) D(1)
.3057854=07 .1083192=07 .1083190=07 .3057844=07
.6665252=00 .2361051=00 .2361047=00 .6665232=00

E(4)-E(3)	E(4)-E(2)	E(4)-E(1)	E(3)-E(2)	E(3)-E(1)	E(2)-E(1)
30.9407	74.3355	76.5368	43.3949	45.5961	2.2013

TRANSITION PROBABILITY MATRIX ELEMENTS

TR(K,L)	ALPHA(K,L)			BETA(K,L)			GAMMA(K,L)		
	REAL	IMAG	ABS	REAL	IMAG	ABS	REAL	IMAG	ABS
(1,2)	.0000	.0000	.0000	.0000	-.3770	.3770	2.8382	.0000	2.8382
(1,3)	1.9753	-.0000	1.9753	.0000	.0000	.0000	.0000	-.0000	.0000
(1,4)	.0000	.0000	.0000	.0000	1.0598	1.0598	.2295	.0000	.2295
(2,3)	.0000	.0000	.0000	.0000	-2.0858	2.0858	.7965	.0000	.7965
(2,4)	1.2116	-.0000	1.2116	.0000	.0000	.0000	.0000	.0000	.0000
(3,4)	.0000	.0000	.0000	.0000	-2.0938	2.0938	1.1214	.0000	1.1214

TR(K,L) .25*(ALPHA**2+GAMMA**2) .25*(BETA**2)

(1,2)	2.0139	.0355
(1,3)	.9755	.0000
(1,4)	.0132	.2808
(2,3)	.1586	1.0676
(2,4)	.3670	.0800
(3,4)	.3144	1.0960

ENERGY LEVELS AND TRANSITION PROBABILITY MATRIX ELEMENTS FOR CR(+3) IN BERYL(EMERALD)

THETA = 90.000 DEGREES H = 8000.0 GAUSS

FIRST ROW OF EIGENVECTOR IS REAL PART, SECOND ROW IS IMAG. PART

EIGENVECTOR FOR E(4) = 52.74425 GHZ

A(4)	B(4)	C(4)	D(4)
.4980294=07	.2049539=06	.2049540=06	.4980295=07
.1669653=00	.6871118=00	.6871118=00	.1669653=00

EIGENVECTOR FOR E(3) = 13.23668 GHZ

A(3)	B(3)	C(3)	D(3)
.1376967=07	.2823567=07	-.2823567=07	-.1376967=07
-.3099427=00	-.6355592=00	.6355592=00	.3099427=00

EIGENVECTOR FOR E(2) = -30.64961 GHZ

A(2)	B(2)	C(2)	D(2)
.1230419=07	-.2989863=08	-.2989874=08	.1230421=07
.6871112=00	-.1669650=00	.1669656=00	.6871124=00

EIGENVECTOR FOR E(1) = -35.33132 GHZ

A(1)	B(1)	C(1)	D(1)
.3653815=06	-.1781853=06	.1781851=06	-.3653808=06
-.6355598=00	.3099429=00	-.3099426=00	.6355586=00

E(4)-E(3)	E(4)-E(2)	E(4)-E(1)	E(3)-E(2)	E(3)-E(1)	E(2)-E(1)
39.5076	83.3939	88.0756	43.8863	48.5680	4.6817

TRANSITION PROBABILITY MATRIX ELEMENTS

TR(K,L)	ALPHA(K,L)			BETA(K,L)			GAMMA(K,L)		
	REAL	IMAG	ABS	REAL	IMAG	ABS	REAL	IMAG	ABS
(1,2)	-.0000	.0000	.0000	-.0000	-.5771	.5771	-.27237	.0000	2.7237
(1,3)	1.8544	-.0000	1.8544	.0000	.0000	.0000	.0000	-.0000	.0000
(1,4)	-.0000	.0000	.0000	-.0000	-.8482	.8482	-.2108	.0000	.2108
(2,3)	.0000	.0000	.0000	.0000	-2.1165	2.1165	-.10656	-.0000	1.0656
(2,4)	1.0800	-.0000	1.0800	-.0000	.0000	.0000	-.0000	.0000	.0000
(3,4)	-.0000	.0000	.0000	-.0000	-2.1169	2.1169	-1.1839	.0000	1.1839

TR(K,L)	.25*(ALPHA**2+GAMMA**2)	.25*(BETA**2)
(1,2)	1.8546	.0833
(1,3)	.8597	.0000
(1,4)	.0111	.1765
(2,3)	.2839	1.1899
(2,4)	.2916	.0000
(3,4)	.3504	1.1204

ENERGY LEVELS AND TRANSITION PROBABILITY MATRIX ELEMENTS
FOR CR(+3) IN BERYL(EMERALD)

THETA=90.000 DEGREES H=10000.0 GAUSS

FIRST ROW OF EIGENVECTOR IS REAL PART, SECOND ROW IS IMAG. PART

EIGENVECTOR FOR E(4)= 60.25101 GHZ
A(4) B(4) C(4) D(4)
-.8310795-07 .2996948-06 .2996948-06 -.8310797-07
.1889560-00 .6813924-00 .6813924-00 .1889560-00

EIGENVECTOR FOR E(3)= 13.03661 GHZ
A(3) B(3) C(3) D(3)
-.9280882-06 -.1514725-05 .1514725-05 .9280883-06
-.3694228-00 .6029318-00 .6029318-00 .3694229-00

EIGENVECTOR FOR E(2)= -32.63271 GHZ
A(2) B(2) C(2) D(2)
-.3679710-07 .1020414-07 .1020417-07 .3679714-07
.6813920-00 -.1889557-00 -.1889563-00 .6813928-00

EIGENVECTOR FOR E(1)= -40.65491 GHZ
A(1) B(1) C(1) D(1)
-.3223433-07 .1975032-07 .1975031-07 .3223429-07
-.6029322-00 .3694230-00 .3694228-00 .6029314-00

E(4)-E(3)	E(4)-E(2)	E(4)-E(1)	E(3)-E(2)	E(3)-E(1)	E(2)-E(1)
47.2144	92.8637	100.9059	45.6693	53.6915	0.0222

TRANSITION PROBABILITY MATRIX ELEMENTS

TR(K,L)	ALPHA(K,L)			BETA(K,L)			GAMMA(K,L)		
	REAL	IMAG	ABS	REAL	IMAG	ABS	REAL	IMAG	ABS
(1,2)	-.0000	-.0000	.0000	.0000	-.7566	.7566	2.6046	-.0000	2.6046
(1,3)	1.6775	-.0000	1.6775	.0000	.0000	.0000	.0000	-.0000	.0000
(1,4)	-.0000	-.0000	.0000	.0000	-.8581	.8581	-.1801	-.0000	.1801
(2,3)	.0000	-.0000	.0000	-.0000	2.1207	2.1207	1.2825	.0000	1.2825
(2,4)	.9697	.0000	.9697	.0000	.0000	.0000	-.0000	-.0000	.0000
(3,4)	-.0000	-.0000	.0000	.0000	2.1207	2.1207	1.2405	-.0000	1.2405

TR(K,L) .25*(ALPHA**2+GAMMA**2) .25*(BETA**2)

(1,2)	1.6960	.1431
(1,3)	.7035	.0000
(1,4)	.0081	.1083
(2,3)	.4112	1.1243
(2,4)	.2351	.0000
(3,4)	.3847	1.1243

References

1. Berwin, R. W., *Paramagnetic Energy Levels of the Ground State of Cr^{+3} in Al_2O_3 (Ruby)*, Technical Memorandum 33-440, Jet Propulsion Laboratory, Pasadena, Calif., to be published.
2. Chang, W. S., and Siegman, A. E., *Characteristics of Ruby for Maser Applications*, Technical Report 156-2, Electron Devices Laboratory, Stanford Electronics Laboratories, Stanford, Calif., Sept. 30, 1958.
3. Lin, M. S., and Haddad, G. I., *Energy Levels and Transition Probability Matrix Elements of $\text{Fe}(3+)$ in TiO_2 (Rutile)*, Technical Report 89, Electron Physics Laboratory, University of Michigan, Feb. 1966.
4. Geusic, J. E., Peter, M., and Schulz-DuBois, E. O., "Paramagnetic Resonance Spectrum of Cr^{+3} in Emerald," *Bell System Tech. J.*, Vol. 38, p. 291, 1959.
5. Lin, M. S., and Haddad, G. I., *Energy Levels and Transition Matrix Elements of $\text{Fe}(3+)$ in Zinc Tungstate (ZnWO_4)*, Technical Report 90, Electron Physics Laboratory, University of Michigan, July 1966.
6. Gerritsen, H. J., Harrison, S. E., and Lewis, H. R., "Chromium-Doped Titania as a Maser Material," *J. Appl. Phys.*, Vol. 31, p. 1566, Sept. 1960.