

NOTICE

The invention disclosed in this document resulted from research in aeronautical and space activities performed under programs of the National Aeronautics and Space Administration. The invention is owned by NASA and is therefore available for licensing in accordance with the NASA Patent Licensing Regulation (14 Code of Federal Regulations 1245.200).

To encourage commercial utilization of NASA-owned inventions, it is NASA policy to grant nonexclusive, royalty-free, revocable licenses to any company or individual desiring to use the invention while the patent application is pending in the U.S. Patent Office and within a specified period, presently two years, after issuance of the patent to NASA. If commercial use of the invention does not occur during this period, NASA may grant a limited exclusive, royalty-free license thereby adding an incentive to further encourage commercial development. Any company desiring to make, use, or sell this invention is encouraged to obtain a royalty-free license from NASA.

Address inquiries and all requests for licenses to Assistant General Counsel for Patent Matters, Code GP-1, National Aeronautics and Space Administration, Washington DC 20546.

AWARDS ABSTRACT

Inventor: Stephen P. Vango NASA Case No. NPO-10682

Contractor: Jet Propulsion Laboratory

LIQUID JUNCTION AND METHOD
OF FABRICATING THE SAME

~~The present invention is embodied in~~ a junction element suitable for use as a glass electrode ^E and is fabricated by cracking a glass rod into a plurality of contiguous portions mated along a plane of cleavage and seated in a tubular conduit.

The junction element includes an elongated section of a glass rod 10 which is scored along lines 12 in a manner such that the score lines define opposite boundaries of a plane of cleavage extending transversely through the section. The section 10 is then divided along the plane by applying stress-developing pressures for fracturing the section along the region of the plane. A resulting crack thus is produced dividing the section into diametrically opposed portions. These portions are seated in a tubular glass conduit 20. Heat is applied to the external surfaces of the tubing 20 in the region of the cracked rod section 10 for fusing the periphery of the opposed portions of the section 10 to the internal surfaces of the tube 20. Consequently, a fusion barrier to the passage of fluid between the surface of the wall of the tube 20 and the periphery of the section 10 is achieved. If desired, additional heat may be applied for selectively fusing the portions along the plane of cleavage.

By employing the glass rod cracked along the planes of cleavage, a fluid junction capable of relatively easy and inexpensive fabrication is provided for achieving efficient fluid restriction over periods of extended duration.

S P E C I F I C A T I O N

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT STEPHEN P. VANGO, a citizen of the United States of America, residing at Los Angeles, in the County of Los Angeles, State of California, has invented a new and useful

LIQUID JUNCTION AND METHOD
OF FABRICATING THE SAME

of which the following is a specification:

ABSTRACT OF THE DISCLOSURE

ORIGIN OF THE INVENTION

The invention described herein was made in the performance of work under a NASA contract and is subject to the provisions of Section 305 of the National Aeronautics and Space Act of 1958, Public Law 85-568 (72 Stat. 435; 42 U.S.C. 2457).

1 BACKGROUND OF THE INVENTION

2 1. Field of the Invention:

3 The present invention relates to glass articles and
4 their manufacture, and more particularly to a fluid junction
5 suitable, for example, for use as a glass electrode or membrane in
6 pH meters, but generally useful in applications in which a highly
7 restricted fluid flow is to be provided for, and to a method of
8 making such junctions.

9
10
11 A standard device for the measurement of pH is an
12 electrolytic cell incorporating what is known as a "glass
13 electrode" or glass "membrane" disposed between a known solution
14 and the solution the pH of which is to be measured. The
15 principles of such devices are described in the Encyclopedia
16 Britannica, 1963 Edition, Volume 11, pages 981-2.

17
18
19 The glass electrodes or membranes incorporated in such
20 devices are essentially liquid junctions characterized by a high
21 degree of restriction of the liquid flow therethrough, and it is
22 to the improvement of such liquid junctions and a method of
23 making them that the present invention is directed.

1 2. Description of the Prior Art:

2 A variety of foraminous elements have been utilized as
3 the glass electrodes of pH meters of the type referred to above.
4 A membrane in the form of the thin wall of a bulb blown with a
5 special glass is described in the publication mentioned above.
6 Ultra-fine filtering elements, such as the capillary tube assembly
7 of Altosaar U.S. patent No. 2,752,731 and the centered glass
8 filter of Poad U.S. patent No. 3,414,394 are likewise capable
9 of being so employed. Such devices are, however, susceptible
10 of becoming plugged by contaminants as well as being difficult
11 and expensive to fabricate.

12
13
14
15
16 OBJECTS AND SUMMARY OF THE INVENTION

17 The device and method of the present invention has as
18 its principal object the provision of a fluid junction capable
19 of relatively easy and inexpensive fabrication, and particularly
20 useful in electrolytic applications such as described above, as
21 well as in applications in which a restricted discharge is to be
22 provided for small quantities of liquids over a long time period,
23 as, for instance, in instrumentation designed for vehicles used
24 in space exploration.

1 According to the invention, an homogenous section of
2 brittle and relatively chemically inert material, such as a
3 section of glass rod, is scored along lines defining a plane and
4 is then cracked by exerting pressures producing a fracturing
5 stress at the defined plane.
6
7

8 While the crack thus produced will be disposed generally
9 in the defined plane, all portions of the opposite surfaces
10 defining the crack will not be exactly in the same plane, and it
11 will be found that the separated portions of the rod section will
12 fit together well only when realigned in the relative positions
13 which they occupied before cracking.
14
15

16 After cracking, therefore, the separated portions of the
17 rod section are so realigned and maintained in such relative
18 orientation by fitting them within a glass tube having an inside
19 diameter closely matching the outside diameter of the cracked
20 rod section.
21
22

23 Heat is then applied to the tube in the region of the
24 rod sufficient only to fuse the inside wall of the tube with the
25 cylindrical peripheral surface of the cracked rod section at
26 least sufficiently to produce a fusion barrier to the passage of
27 fluid between the inside wall of the tube and the periphery of
28 the cracked rod section without fusing and thus sealing the crack
29 in the rod section.
30
31
32

1 If, however, it is desired to provide a fluid junction
2 having an even more restricted flow passage, the application of
3 additional heat is effected at the portions of the tube opposite
4 the edges of the crack in the rod section within the tube, thus
5 causing progressive sealing of the crack from the edges inwardly
6 and further restricting the flow passage. The extent of the
7 restriction thus effected is controlled by arresting such heating
8 when the desired degree of restriction has been effected.

9
10
11 These together with other objects and advantages of the
12 present invention will subsequently become more clearly apparent
13 upon reference to the following description in the specification
14 and accompanying drawing.

15
16
17
18
19 BRIEF DESCRIPTION OF THE DRAWING

20 Fig. 1 is a view in side elevation of a fluid junction
21 embodying the present invention;

22
23
24 Fig. 2 is a view in perspective of the device of
25 Fig. 1 with a portion of the tube wall cut away to disclose the
26 underlying rod section more clearly; and

27
28
29 Fig. 3 is a detail view of the cracked rod section
30 with a part of one portion thereof broken away to more clearly
31 show the surface produced by cracking.
32

1 DESCRIPTION OF THE PREFERRED EMBODIMENT

2 In fabricating a device embodying the present invention,
3 a homogenous section of brittle and relatively chemically inert
4 material, such as glass, generally designated 10 in Fig. 3 of the
5 drawing, is first longitudinally scored along lines 12 preferably
6 at diametrically opposite portions of the periphery of the rod
7 section 10, so that the score lines will define two boundaries
8 of a plane lying within the rod section. This plane defines an
9 intended plane of cleavage for the brittle material.

10
11
12
13 The portions of the rod section 10 lying on opposite
14 sides of the score lines 12 are then subjected to opposite
15 pressures producing a fracturing stress in the region of the plane
16 defined by the score lines 12, thus cracking the rod section 10
17 into two portions 14 and 16. While the crack thus produced will
18 be disposed generally in the defined plane, all portions of the
19 opposite surfaces, such as the surface 18 of the portion 16, will
20 not lie exactly in the same plane, and it will be found that the
21 separated portions of the rod section will fit together well only
22 when realigned in the relative positions which they occupied
23 before cracking.

1 In order to form a liquid junction according to the
2 present invention, therefore, the separated portions 14 and 16
3 of the rod section 10 are realigned into the same relative
4 positions which they occupied before cracking and are maintained
5 in such realignment by fitting them within a section of tubing 20
6 the inside diameter of which corresponds sufficiently closely
7 to the outside diameter of the realigned portions 14 and 16 of
8 the rod section 10 to prevent relative displacement thereof; the
9 irregularity of the surface 18 serving to prevent such displace-
10 ment when the aligned sections 14 and 16 are confined within
11 the tube 20.

12
13
14
15
16 Heat is then applied to the tubing 20 in the region of
17 the cracked rod section 10 sufficient to fuse the inside wall of
18 the tube 20 with the cylindrical peripheral surface of the
19 cracked rod section 10 at least sufficiently to produce a fusion
20 barrier to the passage of fluid between the inside wall of the
21 tube 20 and the periphery of the cracked rod section 10 without
22 fusing and thus sealing the crack in the rod section 10. During
23 such heating, the exterior walls of the tube 20 are preferably
24 subjected to slight pressure which may be supplied by rolling the
25 tubing between carbon flats to assure fusion between the glass
26 tube and the rod section.

1 If, however, it is desired to provide a fluid junction
2 having an even more restricted flow passage than provided by the
3 complete crack between the sections 14 and 16 of the rod section
4 10, additional heat is applied to the exterior wall of the
5 tubing 20 directly adjacent the meeting line of the sections 14
6 and 16 within the tube. The application of heat in this manner
7 causes progressive sealing of the crack between the sections 14
8 and 16 from the edges inwardly, thus further restricting the flow
9 passage. The extent of the restriction thus effected is
10 controlled by arresting such heating when the desired degree of
11 restriction has been effected.

12
13
14
15
16 The completed device thus produced is shown in Fig. 1.
17 Fluid entering the tube 20, for example, in the direction
18 indicated by the arrow in Fig. 1, encounters the face of the
19 cracked rod section 10 the periphery of which is fused to the
20 inside wall of the tube 20 so as to constitute a barrier to the
21 passage of fluid between the inside wall of the tube and the
22 periphery of the cracked rod section. Therefore, fluid can pass
23 beyond the cracked rod section 10 only by sweeping in a broad
24 thin film between the portions 14 and 16 of the cracked rod
25 section 10. This film of liquid is, in the case of an
26 electrolyte, sufficiently conductive to render the device useful
27 as a glass electrode or membrane in a pH meter, and in other
28 applications of the device very small volumes of liquid may be
29 fed slowly, as from a reservoir, through the crack between the
30 portions of the cracked rod section 10.

1 Although the invention has been herein shown and
2 described in what is conceived to be the most practical and
3 preferred embodiment, it is recognized that departures may be
4 made therefrom within the scope of the invention, which is not
5 to be limited to the illustrative details disclosed.

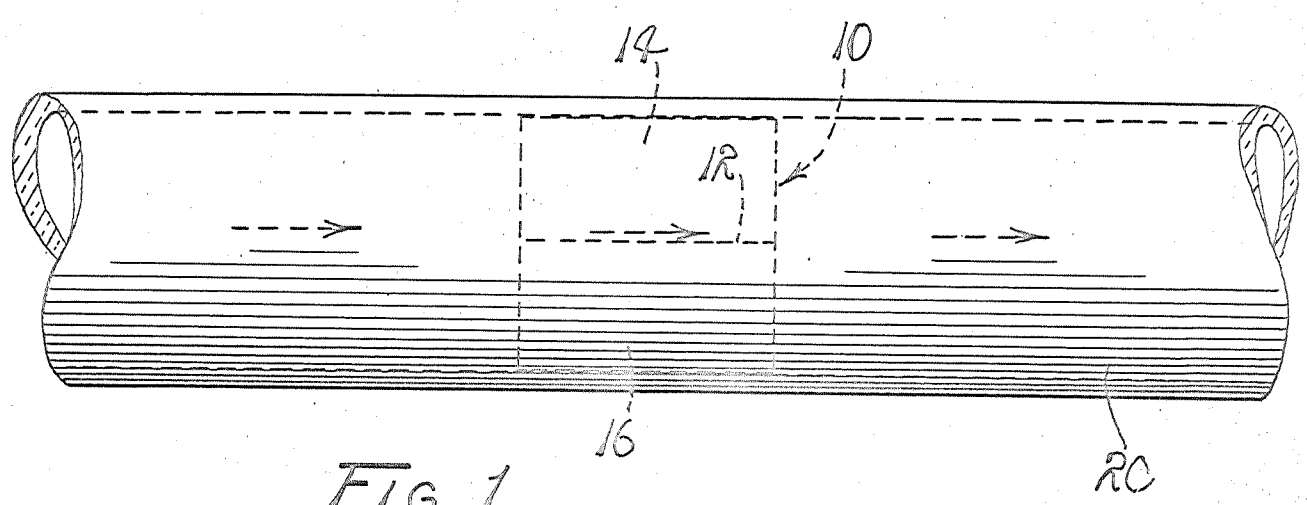


FIG. 1.

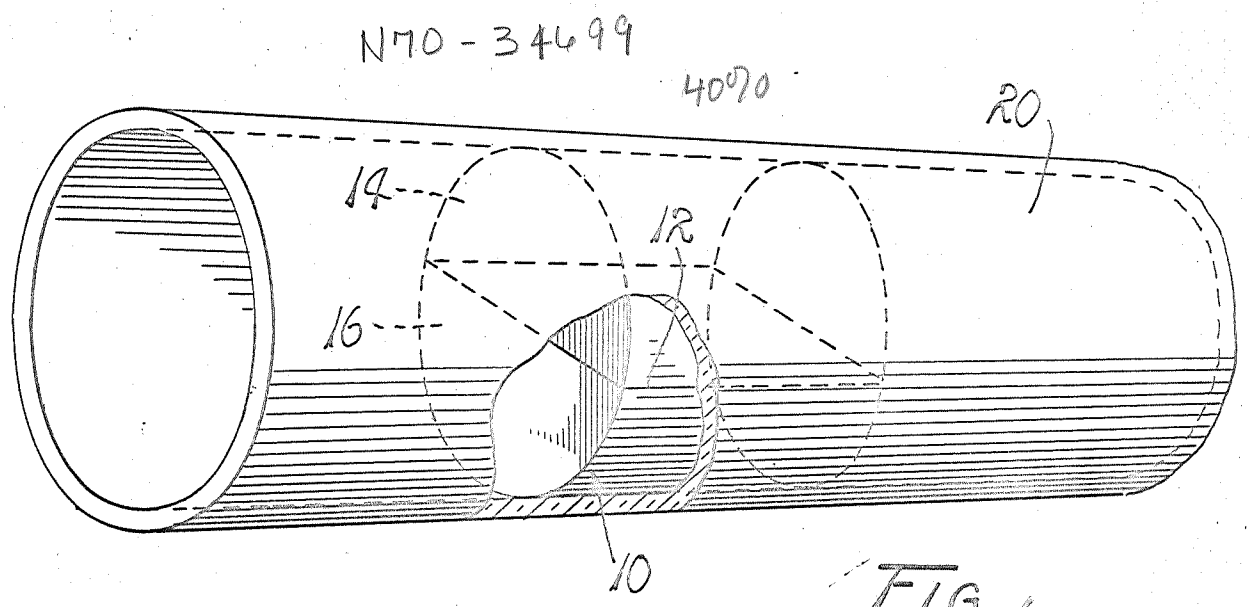


FIG. 1.

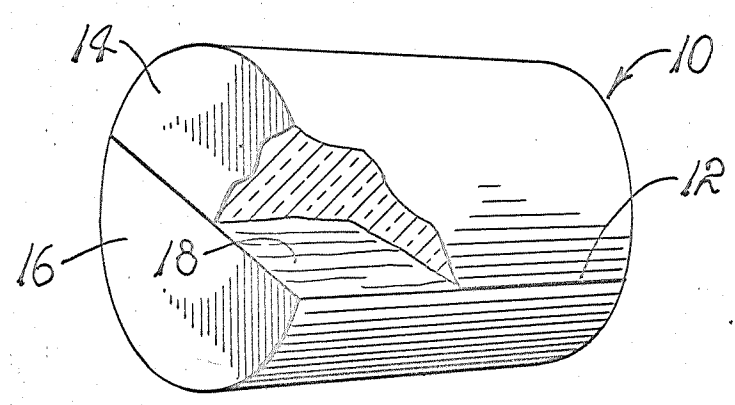


FIG. 3.

STEPHEN R VANGO
INVENTOR

A147

ATTORNEYS