

AUGUST 1971

—SPACE SHUTTLE—

**BASIC AERODYNAMIC CHARACTERISTICS
FOR THREE GAC REUSABLE ORBITAL
SPACEPLANE CONFIGURATIONS,
ROS-NB1, ROS-NB2, AND ROS-WB1
AT 0.17 MACH NUMBER**

by

W. Jung, GAC

F. Carlucci, GAC



GRUMMAN 7x10-FOOT
LOW SPEED WIND TUNNEL

**GRUMMAN
AEROSPACE CORPORATION**

SADSAC SPACE SHUTTLE
AEROTHERMODYNAMIC
DATA MANAGEMENT SYSTEM

CONTRACT NAS8-4016
MARSHALL SPACE FLIGHT CENTER

SPACE DIVISION  **CHRYSLER
CORPORATION**

FACILITY FORM 602

N71-38674
(ACCESSION NUMBER)

184
(PAGES)

CR-119982
(NASA CR OR TMX OR AD NUMBER)

(THRU)

63
(CODE)

31
(CATEGORY)

SADSAC/SPACE SHUTTLE
WIND TUNNEL TEST DATA REPORT

CONFIGURATION: GAC CONFIGURATION ROS-NB1, ROS-NB2, AND ROS-WB1

TEST PURPOSE: TO DETERMINE BASIC SUBSONIC AERODYNAMIC INFORMATION AT
0.17 MACH NUMBER

TEST FACILITY: GRUMMAN 7 x 10 FOOT LOW SPEED WIND TUNNEL

TESTING AGENCY: GRUMMAN AEROSPACE CORPORATION

TEST NO. & DATE: GWTT 290, March and April, 1971

FACILITY COORDINATOR: M. QUAN - GAC

PROJECT ENGINEER(S): W. JUNG - GAC
F. CARLUCCI - GAC

DATA MANAGEMENT SERVICES

LIAISON: John E. Vaughn DATA OPERATIONS: J. R. Ziler
John E. Vaughn J. R. Ziler

RELEASE APPROVAL: J. T. Glynn
N. D. Kemp, Supervisor
Aero Thermo Data Group

CONTRACT NAS 8-4016

AMENDMENT 153

DRL 184 - 58

This report has been prepared by Chrysler Corporation Space Division under a Data Management Contract to the NASA. Chrysler assumes no responsibility for the data presented herein other than its display characteristics.

FACILITY COORDINATOR:

Mr. M. Quan
Grumman Aerospace Corporation
Bethpage, Long Island, New York 11714
Phone: (516) 575-7044

PROJECT ENGINEERS:

Mr. W. Jung
Grumman Aerospace Corporation
Bethpage, Long Island, New York 11714
Phone: (516) 575-7044

Mr. F. Carlucci
Grumman Aerospace Corporation
Bethpage, Long Island, New York 11714
Phone: (516) 575-7044

SADSAC LIAISON:

Mr. John E. Vaughn
Chrysler Corporation Space Division
102 Wynn Drive
Huntsville, Alabama 35805
Phone: (205) 895-1560

SADSAC OPERATIONS:

Mr. J. R. Ziler
Chrysler Corporation Space Division
P. O. Box 29200
New Orleans, Louisiana 70129
Phone: (504) 255-2304

ABSTRACT

Three Grumman Aerospace Corporation (GAC) configurations of the Reusable Orbital Spaceplane (ROS) were tested in the GAC Low Speed Wind Tunnel during March and April, 1971. The tests were made with 1/25 scale models to obtain basic subsonic aerodynamic data. The models were pitched over selected angle of attack ranges at fixed sideslip angles of 0° and 3° and yawed from -15° to $+15^\circ$ at fixed angles of attack of 0° and 20° . The nominal test conditions were: Mach number, 0.17; Reynolds number, 1.6×10^6 per foot; dynamic pressure, 40 psf.

Most of the testing was done using the basic body-wing-vertical tail arrangement of configuration ROS-NB1. This configuration, with various elevon, aileron and rudder deflections, was tested with and without a ground board. Other test parameters included a split rudder, a body flap, turbojet engine pods and aft end body modifications. In addition, tests were performed on configurations ROS-NB2 and ROS-WB1; a short nose and wide body configuration respectively.

Several runs were also made to test the model in ground effect. The surface of the ground board was located 15 inches below the trunnion. This location of the ground board provided a value for the wing height parameter, $h/b = 0.295$, where h is the height of the 0.25 MAC above the ground board and b is the wing span.

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

	<u>PAGE NUMBER</u>
LIST OF FIGURES AND TABLES	2
SUMMARY	3
CONFIGURATIONS INVESTIGATED	5
DATASET COLLATIONS	6
TEST FACILITY DESCRIPTION	10
TEST CONDITIONS	12
DATA REDUCTION AND CORRECTIONS	13
SUMMARY DATA PLOT INDEX	16
FIGURES	21
MODEL COMPONENT DESCRIPTION SHEETS	35
GENERAL NOMENCLATURE	45
ADDITIONS TO STANDARD SADSAC NOMENCLATURE	50
TABULATED DATA LISTING	51
PLOTTED DATA	52

LIST OF FIGURES

<u>FIGURE NUMBER</u>	<u>TITLE</u>	<u>PAGE NUMBER</u>
1.	Axis System	22
2.	Photograph of ROS-NB1 Tunnel Installation with Ground Board	23
3.	Photograph of ROS-NB2 Tunnel Installation	24
4.	Photograph of ROS-WB1 Tunnel Installation	25
5.	General Arrangement, ROS-NB1	26
6.	General Arrangement, ROS-NB2	27
7.	General Arrangement, ROS-WB1	28
8.	Installation of Model With Ground Plane	29
~~9.~~	~~W₂ - Wing (Full Scale)~~	~~30~~
10.	Vertical Fin, V _{3B}	31
11.	Engine Nacelles, E ₁	32
12.	Engine Nacelles, E ₂	33
13.	Aft End Modifications	34

LIST OF TABLES

<u>TABLE NUMBER</u>	<u>TITLE</u>	<u>PAGE NUMBER</u>
I	SADSAC Nomenclature of Aerodynamic Coefficients	4
II.	Location of Nominal C.G., Trunnion Center and Reference Dimensions Used to Reduce Force Data	13
III.		
IV.		
V.		
VI.		
VII.		
VIII.		
IX.		

SUMMARY

This report presents the results of a second series of aerodynamic tests conducted on 1/25 scale models of three GAC Reusable Orbital Spaceplanes (ROS). This test, designated GWTT 290 was performed at the GAC Low Speed Wind Tunnel during the period 29 March - 13 April, 1971. The first series of tests have been reported in SADSAC reports DMS-DR-1081. The results presented herein supplement and extend the Series I test results.

The objectives of this test were to obtain low speed aerodynamic data on:

- 1) configuration ROS-NB1 with and without ground proximity for various conditions of pitch, yaw, elevon deflection and rudder deflection.
- 2) a modification of configuration ROS-NB1 at various angles of sideslip for $\alpha = 21$ degrees.
- 3) the effects of nose length, body flap deflection and engine pods.
- 4) configuration ROS-WB1, with and without twin tail fins, at various angles of sideslip for $\alpha = 21^\circ$.

Additionally, the effects of elevons and aft body modifications on base pressure were determined. Tufts were utilized on several test runs to ascertain the flow patterns over the model. It should be noted that the data in data sets RCW079 and RCW080 were recorded while the model had thread tufts attached.

TABLE I. SADSAC NOMENCLATURE OF AERODYNAMIC COEFFICIENTS

COEFFICIENT	COEFFICIENT NAME	SADSAC NOMENCLATURE		
		BODY AXIS	STABILITY AXIS	WIND AXIS
C_A	Total Axial Force	C_A	-	-
C_{AB}	Base Axial Force	C_{AB}	-	-
C_{AF}	Forebody Axial Force	C_{AF}	-	-
C_D	Total Drag Force	-	C_D	C_{DTOTL}
C_{DB}	Base Drag Force	-	C_{DB}	C_{DBASE}
C_{DF}	Forebody Drag Force	-	C_{DF}	C_{DFORE}
C_L	Lift Force	-	C_L	C_L
C_N	Normal Force	C_N	-	-
C_Y	Side Force	C_Y	C_Y	C_C
C_l	Rolling Moment	C_{BL}	C_{SL}	C_{WL}
C_m	Pitching Moment	C_{LM}	C_{LM}	C_{PM}
C_n	Yawing Moment	C_{YN}	C_{LN}	C_{LN}
L/D	Lift-To-Drag Force Ratio	-	L/D	C_L/C_D
L/D	Lift-To-Forebody Drag Force Ratio	-	L/DF	C_L/C_{DF}
N/A	Normal-To-Axial Force Ratio	N/A	-	-
N/A	Normal-To-Forebody Axial Force Ratio	C_N/C_{AF}	-	-

CONFIGURATIONS INVESTIGATED

Individual components tested in various combinations were:

- B₁ - basic ROS-NB1 fuselage
- $\left. \begin{array}{l} B_{1B} \\ B_{1C} \end{array} \right\}$ - basic ROS-NB1 fuselage with aft end modifications (see Figure 13)
- B₂ - basic ROS-WB1 fuselage
- B₃ - ROS-NB2 fuselage derived from mating short nose to the B₁ body at Fus. Sta. 1216.
- E₁ - turbojet engine nacelles (see Figure 11)
- E₂ - twin turbojet engine nacelles (see Figure 12)
- W₁ - basic wing (see Figure 9)
- W₂ - basic wing, W₁, with clipped tips (see Figure 9)
- V₁ - basic ROS-NB1, centerline vertical tail
- V₂ - basic ROS-WB1 twin body tails
- V₃ - wing tip fins
- V_{3B} - modified wing tip fins (see Figure 10)
- F₁ - body flap
- GB - ground board

Pertinent dimensional information for each of the above component is given in the Model Component Description Sheets which are located after the figures. The Data Set Collation Sheets, which follow immediately, give a complete test summary of configurations investigated.

LOW SPEED AERODYNAMIC FORCE TEST ON THE
1/25 SCALE GRUMMAN CONF. ROS-NB1, NB2, WB1☐ PRETEST☒ POSTTEST

PAGE 1 OF 4

DATA SET IDENTIFIER	CONFIGURATION	SCHD.		Mach Number			NO. of RUNS	Parameter/Values									
		α	β	0.17				S_{CL}	S_{CR}	S_P	S_E	S_A					
RCW002	$B, F^{-15} W, V_1$	0	B	2			1	0	0	0	0	0					
RCW004	$B, F^{-15} W, V_1$	A	0	4			1	0	0	0	0	0					
RCW005	$B, F^{-15} W, V_1 + GB^{15}$	C	0	5			1	0	0	0	0	0					
RCW007	$B, F^{-15} W, V_1 + GB^{15}$	C	3	7			1	0	0	0	0	0					
RCW008	$B, F^{-15} W, V_1 + GB^{15}$	C	0	8			1	0	-10	0	-5	-10					
RCW009	$B, F^{-15} W, V_1 + GB^{15}$	C	0	9			1	-10	-10	0	-5	-10					
RCW010	$B, F^{-15} W, V_1 + GB^{15}$	C	0	10			1	+5	-5	0	0	-10					
RCW011	$B, F^{-15} W, V_1 + GB^{15}$	C	0	11			1	+5	-15	0	-5	-20					
RCW012	$B, F^{-15} W, V_1 + GB^{15}$	C	0	12			1	-15	-15	0	-15	0					
RCW013	$B, F^{-15} W, V_1 + GB^{15}$	C	0	13			1	-5	-15	0	-10	-10					
RCW014	$B, F^{-15} W, V_1 + GB^{15}$	C	0	14			1	-5	-5	0	-5	0					
RCW015	$B, F^{-15} W, V_1 + GB^{15}$	C	0	15			1	0	0	-5	0	0					
RCW016	$B, F^{-15} W, V_1 + GB^{15}$	C	0	16			1	0	0	-10	0	0					
RCW017	$B, F^{-15} W, V_1 + GB^{15}$	C	0	17			1	0	0	-15	0	0					
RCW018	$B, F^{-15} W, V_1 + GB^{15}$	C	3	18			1	0	0	-15	0	0					
RCW019	$B, F^{-15} W, V_1 + GB^{15}$	C	0	19			1	0	0	-10	0	0					
RCW020	$B, F^{-15} W, V_1 + GB^{15}$	C	0	20			1	0	0	-5	0	0					
RCW021	$B, F^{-15} W, V_1 + GB^{15}$	C	3	21			1	0	0	0	0	0					
RCW022	$B, F^{-15} W, V_1 + GB^{15}$	C	3	22			1	0	-10	0	-5	-10					
RCW023	$B, F^{-15} W, V_1 + GB^{15}$	C	0	23			1	10	-10	0	-10	0					

1	7	13	19	25	31	37	43	49	55	61	67	75	76
CL	CD	CLY	CLN	CLN	CSL								

COEFFICIENTS:

 α or β

SCHEDULES

$\alpha, A = -4^\circ \pm 2^\circ \text{ by } 2^\circ$

$\beta, C = 0.1, \pm 2, \pm 3, \pm 5, \pm 7, \pm 9, \pm 12, \pm 15$

$\alpha, C = -4^\circ \pm 2^\circ \text{ by } 2^\circ$

IDPVAR(1) IDPVAR(2) NDV

TEST GN77 290 DATA SET COLLATION SHEET

☐ PRETEST

PAGE 2 OF 4

☒ POSTTEST

DATA SET IDENTIFIER	CONFIGURATION	SCHD.		Mach Number		NO. of RUNS	Parameters/Values									
		a	B	2.17			EL	FE	SR	SE	SA					
RCW024	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	0	B	24		1	+5	-5	0	0	-10					
RCW025	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	0	B	25		1	+5	-15	0	-5	-20					
RCW026	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	0	B	26		1	-5	-15	0	-10	-10					
RCW027	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	0	B	27		1	-5	-5	0	-5	0					
RCW029	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	29		1	-5	-5	0	-5	0					
RCW030	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	30		1	-5	-15	0	-10	-10					
RCW031	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	31		1	+5	-15	0	-5	-20					
RCW032	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	32		1	+5	-5	0	0	-10					
RCW033	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	33		1	-10	-10	0	-10	0					
RCW034	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	34		1	0	-10	0	-5	-10					
RCW035	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	35		1	0	0	0	0	0					
RCW036	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	36		1	0	0	-5	0	0					
RCW037	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	37		1	0	0	-10	0	0					
RCW038	$B_3 F_1^{-15} W_1^{+5} V_1^{+5} + GB^{15}$	20	B	38		1	0	0	-15	0	0					
RCW040	$B_3 F_1^{-15} W_1^{+5} V_1^{+5}$	20	B	40		1	0	0	0	0	0					
RCW042	$B_3 F_1^{-15} W_1^{+5} V_1^{+5}$	0	B	42		1	0	0	0	0	0					
RCW044	$B_3 F_1^{-15} W_1^{+5} V_1^{+5}$	0	B	44		1	—	—	—	—	—					
RCW046	$B_3 F_1^{-15} W_1^{+5} V_1^{+5}$	A	C	46		1	—	—	—	—	—					
RCW048	$B_3 F_1^{-15} W_1^{+5} V_1^{+5}$	A	O	48		1	0	0	0	0	0					
RCW049	$B_3 F_1^{-15} W_1^{+5} V_1^{+5}$	A	3	49		1	0	0	0	0	0					

1 7 13 19 25 31 37 43 49 55 61 67 7576

CL CD CY CLN CLN CSL

COEFFICIENTS: $\alpha A = -4^\circ$ to $+20^\circ$ by 2° IDPVAR(1) IDPVAR(2) NDV

a or B $\beta B = 0, \pm 1, \pm 2, \pm 3, \pm 5, \pm 7, \pm 9, \pm 12, \pm 15$

SCHEDULES $\alpha C = -4^\circ$ to 20° by 2°

☐ PRETEST

PAGE 3 OF 4

☒ POSTTEST

DATA SET IDENTIFIER	CONFIGURATION	SCHD.		Mach Number			NO. of RUNS	Parameters/Values											
		α	β	2	17			SEL	SER	GR	SE	SA							
RCW050	$B_1 F_1^{-9} W_1 V_1$	A	0	50			1	0	0	0	0	0							
RCW051	$B_1 F_1^{-15} W_1 V_1^{-5}$	A	0	51			1	0	0	-5	0	0							
RCW052	$B_1 F_1^{-15} W_1 V_1^{-15}$	A	0	52			1	0	0	-15	0	0							
RCW058	$B_1 F_1^{-15} W_1 V_1^{60-60}$	A	0	58			1	0	0	$60/-60$	0	0							
RCW059	$B_1 F_1^{-15} W_1 V_1^{30-30}$	A	0	59			1	0	0	$30/-30$	0	0							
RCW060	$B_1 F_1^{-15} W_1 V_1 E_1$	A	0	60			1	0	0	0	0	0							
RCW061	$B_1 F_1^{-15} W_1 V_1 E_1$	A	3	61			1	0	0	0	0	0							
RCW062	$B_1 F_1^{-15} W_1 V_1 E_1$	20	B	62			1	0	0	0	0	0							
RCW063	$B_1 F_1^{-15} W_1 V_1^{-5}$	20	B	63			1	0	0	-5	0	0							
RCW064	$B_1 F_1^{-15} W_1 V_1^{-5}$	20	B	64			1	0	0	-5	0	0							
RCW065	$B_1 F_1^{-15} W_1 V_1^{-15}$	20	B	65			1	0	0	-15	0	0							
RCW066	$B_1 F_1^{-15} W_1 V_1^{-15}$	20	B	66			1	0	0	-15	0	0							
RCW067	$B_1 F_1^{-15} W_1 V_1^{60-60}$	20	B	67			1	0	0	$60/-60$	0	0							
RCW068	$B_1 F_1^{-15} W_1 V_1^{60-60}$	20	B	68			1	0	0	$60/-60$	0	0							
RCW069	$B_1 F_1^{-15} W_1 V_1^{30-30}$	20	B	69			1	0	0	$30/-30$	0	0							
RCW070	$B_1 F_1^{-15} W_1 V_1^{30-30}$	20	B	70			1	0	0	$30/-30$	0	0							
RCW071	$B_2 W_1$	20	B	71			1	0	0	—	0	0							
RCW074	$B_2 W_1 V_2$	20	B	74			1	0	0	0	0	0							
RCW075	$B_1 F_1^{-15} W_1 V_3$	20	B	75			1	0	0	0	0	0							
RCW077	$B_1 F_1^{-15} W_2^{-15-15} V_3$	20	B	77			1	-15	-15	0	-15	0							

1	7	13	19	25	31	37	43	49	55	61	67	73	76
C.L.	C.D.	C.Y.	C.L.M.	C.L.N.	C.S.L.								

COEFFICIENTS:

 α or β

SCHEDULES

$$\alpha A = -1^\circ \text{ to } +24^\circ \text{ by } 2^\circ$$

$$\beta B = 0, \pm 1, \pm 2, \pm 3, \pm 5, \pm 7, \pm 9, \pm 12, \pm 15$$

$$\alpha C = -4^\circ \text{ to } 20^\circ \text{ by } 2^\circ$$

IDPVAR(1) IDPVAR(2) NDV

TEST GWTT 290

DATA SET COLLATION SHEET

POSTTEST

PAGE 4 of 4

COEFFICIENTS:

α or β

SCHEDULES

TEST FACILITY DESCRIPTION

Description: This is a continuous flow, open circuit, closed throat tunnel. The test section is 7 feet by 10 feet by 20 feet. A 12-foot diameter propeller is driven at speeds up to 1200 rpm by a 1750 HP induction electric motor.

PERFORMANCE PARAMETERS:

Speed Range (mph):	134 maximum
Reynolds Number ($\times 10^6$ /ft):	1.7 maximum
Operating Pressure:	Atmospheric
Dynamic Pressure (psf):	.46 maximum
Stagnation Temperature:	Ambient
Power (HP):	1750

TESTING CAPABILITIES:

The GAC Low Speed Wind Tunnel is equipped for aerodynamic force and pressure testing on 3-dimensional, 2-dimensional, and reflection plane models. Capability also exists for conducting powered model, flutter, jet flap, flow visualization, and wake survey tests.

A variable frequency power unit having a range from 0 to 660 HZ, and a maximum output of 100 KW is available for the 3 phase induction motors used in powered models.

Available model supports include: two and three point supports, a single mount with fixed linkages for setting model pitch attitude, wire supports, and a pedestal mount for half model tests. Special installations can be provided to sting support models. Image systems are available for evaluating model support tare and interference effects.

TEST FACILITY DESCRIPTION
(CONTINUED)

The tunnel primary balance is a six-component mechanical external yoke type. The balance incorporates a pitch arm with $\pm 45^\circ$ pitch capability and a yaw table which can provide $\pm 45^\circ$ of yaw. Capability also exists for conducting tests with internal strain gage balance installations.

Removable wall inserts are available for 2-dimensional tests and a stationary ground plane is available for investigating ground effects.

An IBM 1800 computer system serves as the facilities data acquisition and reduction center. It is dedicated to the facility and provides on-line data reduction capability. On-site plotting is also available on a Calcomp drum-type plotter.

The facility can provide photographic, closed-circuit and play-back television documentation. Manometers and scanivalves are available for pressure recording.

TEST CONDITIONS
TEST GWTT 290

[illegible]

BALANCE UTILIZED: YOKE-TYPE LOW SPEED WIND TUNNEL

CAPACITY:

ACCURACY:

COEFFICIENT
TOLERANCE:

NF	$\pm 4,000 \text{ lb. to } -2,000 \text{ lb.}$	$\pm .5 \text{ lb.}$	$\pm .002$
SF	$\pm 500 \text{ lbs.}$	$\pm .2 \text{ lb.}$	$\pm .001$
AF	$\pm 500 \text{ lbs.}$	$\pm .2 \text{ lb.}$	$\pm .0005$
PM	$\pm 1,200 \text{ ft. lbs.}$	$\pm 1 \text{ ft. lb.}$	$\pm .005$
YM	$\pm 1,200 \text{ ft. lbs.}$	$\pm 1 \text{ ft. lb.}$	$\pm .005$
RM	$\pm 1,200 \text{ ft. lbs.}$	$\pm 1 \text{ ft. lb.}$	$\pm .005$

COMMENTS:

Transition was fixed with strips of pinked electricians tape, 1.5 inches streamwise aft of the fuselage nose and 0.75 inches aft of the leading edge of the wing and tail surfaces. (see Figures 2, 3 and 4.)

DATA REDUCTION AND CORRECTIONS

Force Data - The force data were reduced with respect to a nominal C.G. The location of the nominal C.G., the trunnion center, and the reference dimensions used to reduce the force data are listed in Table II.

Table II. Location of Nominal C.G., Trunnion Center and Reference Dimensions Used to Reduce the Force Data.

		FULL SCALE VALUE	1/25 SCALE VALUE
NOMINAL C.G.	FS	1485 in.	59.40 in.
	WL	377 in.	15.08 in.
	BL	0	0
TRUNNION CENTER	FS	1314 in.	52.56 in.
	WL	333.2 in.	13.328 in.
	BL	0	0
	s_{REF}	5,747 ft. ²	9.1952 ft. ²
	l_{REF}	160.8 ft.	6.432 ft.
	b_{REF}	97.3 ft.	3.892 ft.

Corrections were applied to the data to compensate for effects due to tunnel flow misalignment and model support interference. These corrections were taken from the Series I tests (GWTT 289). They were obtained by taking force data under various conditions: (a) with body alone and with body-wing arrangements of the model, (b) with the model upright and with the model

DATA REDUCTION AND CORRECTIONS
(CONTINUED)

inverted, (c) with an image of the model support system and without, and (d) at various angles of pitch (with $\beta = 0$) and at various angles of yaw (with $\alpha = 0$).

The angle of attack was computed with an equation that included corrections for tunnel wall interference and flow misalignment. The tunnel wall interference correction was estimated to be $1.203 C_L$, and the flow misalignment correction was determined (from GWT 289) to be 0.35 deg. Hence, the angle of attack was computed as

$$\alpha = \theta_N + 1.203 C_L + 0.35 \text{ deg.}$$

where θ_N denotes the nominal angle of pitch.

The angle of sideslip was taken to be minus the nominal angle of yaw,

$$\beta = -\Psi_N$$

where Ψ_N denotes the nominal angle of yaw.

Tare, support system interference, tunnel wall and model blockage corrections were applied to the longitudinal components of the force data (C_L , C_D , $C_{m,s}$). Only model blockage corrections were applied to the lateral components of the force data ($C_{l,s}$, $C_{n,s}$, C_Y). The tunnel wall corrections applied to the data were:

$$\Delta C_D = 0.018 C_L^2, \text{ and}$$

$$\Delta C_{m,w} = 0.004 C_L$$

DATA REDUCTION AND CORRECTIONS
(CONTINUED)

The model blockage correction was made by computing a corrected free-stream dynamic pressure from one of the equations

$$q_{\infty} = 1.0189 q_N, \quad \text{if ground board was out, or}$$

$$q_{\infty} = 1.1448 q_N, \quad \text{if ground board was in.}$$

All force data were tabulated in standard NASA coefficient form in the stability axis systems.

Transition was fixed with strips of pinked electricians tape . . . 1.5 inches streamwise aft of the fuselage nose and 0.75 inches aft of the leading edges of the wing and tail surfaces.

SUMMARY DATA PLOT INDEX

SUMMARY DATA PLOT INDEX

PLOT TITLE	PLOTTED COEFFICIENTS SCHEDULE	CONDITIONS VARYING	NOMINAL MACH NUMBER	NOMINAL α SCHEDULE (DEGREES)	NOMINAL β SCHEDULE (DEGREES)	PAGES
Figure 1 Yaw Polar in Ground Effect	A	Angle of Sideslip	0.17	-4 - 21	0 and 3	1-6
Figure 2 Elevator Effectiveness in Ground Effect	B	Elevator Deflection Angle	0.17	-4 - 21	0	7-9
Figure 3 Aileron Effectiveness in Ground Effect - ELEVTR=0. Deg.	A	Aileron Deflection Angle	0.17	-4 - 21	0	10-15
Figure 4 Aileron Effectiveness in Ground Effect - ELEVTR=-5. Deg.	A	Aileron Deflection Angle	0.17	-4 - 21	0	16-21
Figure 5 Aileron Effectiveness in Ground Effect - ELEVTR=-10. Deg.	A	Aileron Deflection Angle	0.17	-4 - 21	0	22-27
Figure 6 Rudder Effectiveness in Pitch in Ground Effect	A	Rudder Deflection Angle	0.17	-4 - 21	0	28-33
Figure 7 Rudder Effectiveness in Yaw in Ground Effect, ALPHA=0. Deg.	C	Rudder Deflection Angle	0.17	0	-15 - 15	34-39
Figure 8 Aileron Effectiveness in Yaw in Ground Effect, ALPHA=0. Deg., ELEVTR=0. Deg.	C	Aileron Deflection Angle	0.17	0	-15 - 15	40-45
Figure 9 Aileron Effectiveness in Yaw in Ground Effect, ALPHA=0., ELEVTR=-5. Deg.	C	Aileron Deflection Angle	0.17	0	-15 - 15	46-51

SUMMARY DATA PLOT INDEX
(CONTINUED)

PLOT TITLE	PLOTTED COEFFICIENTS SCHEDULE	CONDITIONS VARYING	NOMINAL MACH NUMBER	NOMINAL α SCHEDULE (DEGREES)	NOMINAL β SCHEDULE (DEGREES)	PAGES
Figure 10 Aileron Effectiveness in Yaw in Ground Effect, ALPHA=0., ELEVT= -10. Deg.	C	Aileron Deflection Angle	0.17	0	-15 - 15	52-57
Figure 11 Aileron Effectiveness in Yaw in Ground Effect, ALPHA=21., ELEVT= -10. Deg.	C	Aileron Deflection Angle	0.17	21	-15 - 15	58-63
Figure 12 Aileron Effectiveness in Yaw in Ground Effect, ALPHA=21., ELEVT= -5. Deg.	C	Aileron Deflection Angle	0.17	21	-15 - 15	64-69
Figure 13 Aileron Effectiveness in Yaw in Ground Effect, ALPHA=21., ELEVT= 0. Deg.	C	Aileron Deflection Angle	0.17	21	-15 - 15	70-75
Figure 14 Rudder Effectiveness in Yaw in Ground Effect, ALPHA = 21. Deg.	C	Rudder Deflection Angle	0.17	21	-15 - 15	76-81
Figure 15 Effect of Short Nose in Yaw, ALPHA = 0. Deg.	C	Configuration	0.17	0	-15 - 15	82-87
Figure 16 Effect of Short Nose in Yaw, ALPHA = 21. Deg.	C	Configuration	0.17	21	-15 - 15	88-93
Figure 17 Effect of Short Nose in Yaw, (Body Alone), ALPHA=0. Deg.	C	Configuration	0.17	0	-15 - 15	94-99
Figure 18 Effect of Short Nose in Pitch	B	Configuration	0.17	-4 - 26	0	100-102

SUMMARY DATA PLOT INDEX
(CONTINUED)

PLOT TITLE	PLOTTED COEFFICIENTS SCHEDULE	CONDITIONS VARYING	NOMINAL MACH NUMBER	NOMINAL α SCHEDULE (DEGREES)	NOMINAL β SCHEDULE (DEGREES)	PAGES
Figure 19 Yaw Polar-Short Nose	A	Angle of Sideslip	0.17	-4 - 26	0 and 3	103-108
Figure 20 Effect of Body Flap (Long Nose)	B	Body Flap Deflec- tion Angle	0.17	-4 - 26	0	109-111
Figure 21 Rudder Effectiveness in Pitch	A	Rudder Deflection Angle	0.17	-4 - 26	0	112-117
Figure 22 Effect of Split Rudders in Pitch	D	Rudder Deflection Angle	0.17	-4 - 26	0	118-120
Figure 23 Effect of Engine Pods (El) in Pitch	D	Configuration	0.17	-4 - 26	0	121-123
Figure 24 Yaw Polars With Engine Pods (El)	A	Angle of Sideslip	0.17	-4 - 26	0 and 3	124-129
Figure 25 Effect of Engine Pods (El) in Yaw, ALPHA=21. Deg.	C	Configuration	0.17	21	-15 - 15	130-135
Figure 26 Rudder Effectiveness in Yaw, ALPHA=0.0 Deg.	C	Rudder Deflection Angle	0.17	0	-15 - 15	136-141
Figure 27 Rudder Effectiveness in Yaw, ALPHA=21. Deg.	C	Rudder Deflection Angle	0.17	21	-15 - 15	142-147
Figure 28 Effect of Split Rudders in Yaw, ALPHA=0. Deg.	C	Rudder Deflection Angle	0.17	0	-15 - 15	148-153
Figure 29 Effect of Split Rudders in Yaw, ALPHA=21. Deg.	C	Rudder Deflection Angle	0.17	21	-15 - 15	154-159
Figure 30 Effect of Twin Fins With Wide Body in Yaw, ALPHA=21. Deg.	E	Configuration	0.17	21	-15 - 15	160-162

SUMMARY DATA PLOT INDEX
(CONTINUED)

PLOT TITLE	PLOTTED COEFFICIENTS SCHEDULE	CONDITIONS VARYING	NOMINAL MACH NUMBER	NOMINAL α SCHEDULE (DEGREES)	NOMINAL β SCHEDULE (DEGREES)	PAGES
Figure 31 Effect of Wing Tip Fins in Yaw, ALPHA=21. Deg.	E	Configuration	0.17	21	-15 - 15	163-165
Figure 32 Wing Tip Fin Modified, ELEVATOR=-15. Deg.	F	Configuration	0.17	-4 - 25	0	166-167
Figure 33 Effect of Aft End Modi- fication	B	Configuration	0.17	-4 - 25	0	168-170
Figure 34 Effect of E2 Engine Pods	A	Engine Pods	0.17	-4 - 26	0	171-176
Figure 35 Yaw Polars With E2 Engine Pods	A	Angle of Sideslip	0.17	-4 - 26	0 and 3	177-182

PLOTTED COEFFICIENTS SCHEDULE:

SCHEDULE A

CL vs. α
CD vs. α
CLM vs. α
CY vs. α
CLN vs. α
CSL vs. α

SCHEDULE B

CL vs. α
CL vs. CLM
CL vs. CD

SCHEDULE C

CY vs. β
CLN vs. β
CSL vs. β
CL vs. β
CD vs. β
CLM vs. β

SCHEDULE D

CL vs. α
CD vs. α
CLM vs. α

SCHEDULE E

CY vs. β
CLN vs. β
CSL vs. β

SCHEDULE F

CL vs. α
CL vs. CLM

FIGURES

Notes:

1. Positive directions of force coefficients, moment coefficients, and angles are indicated by arrows.
2. For clarity, origins of wind and stability axes have been displaced from the center of gravity.

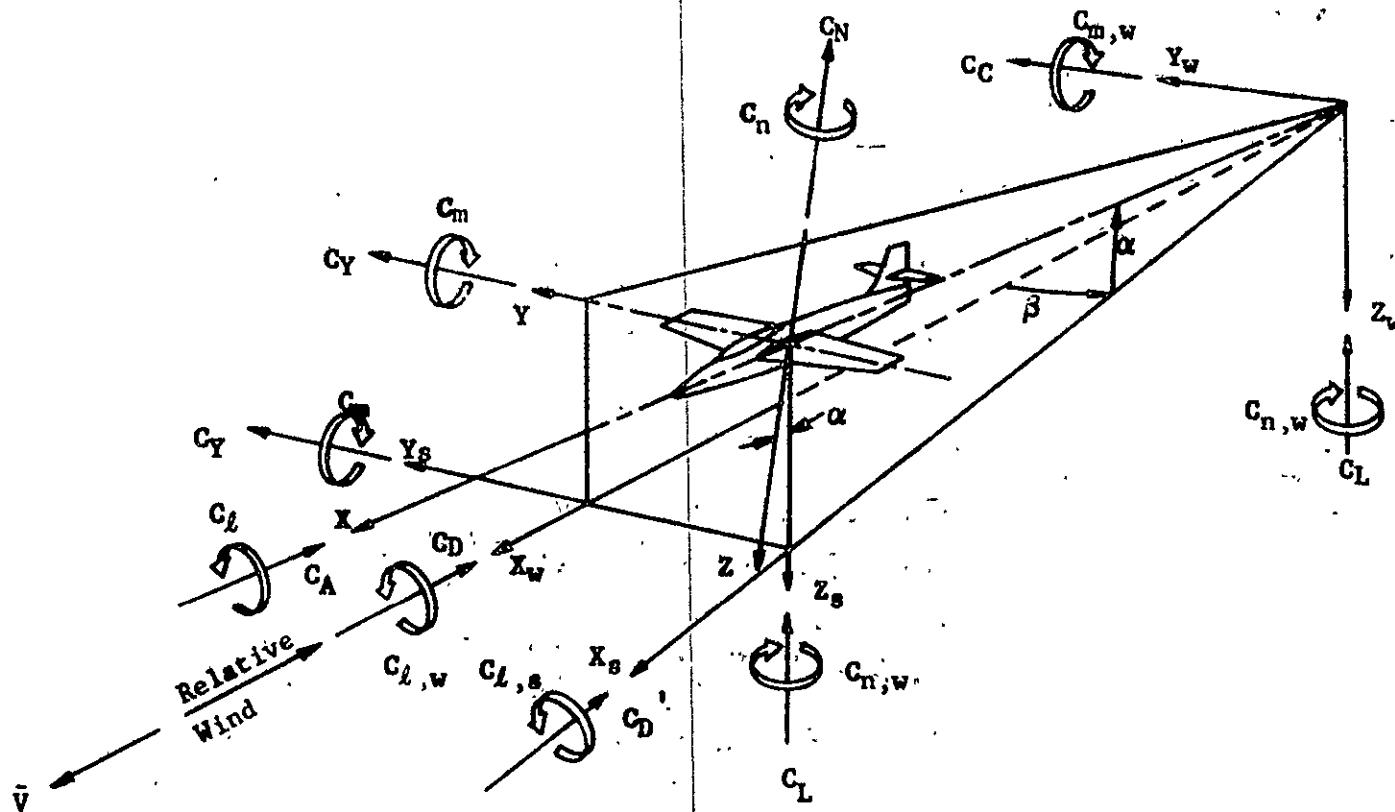


Figure 1. Axis systems, showing direction and sense of force and moment coefficients, angle of attack, and sideslip angle

NOT REPRODUCIBLE

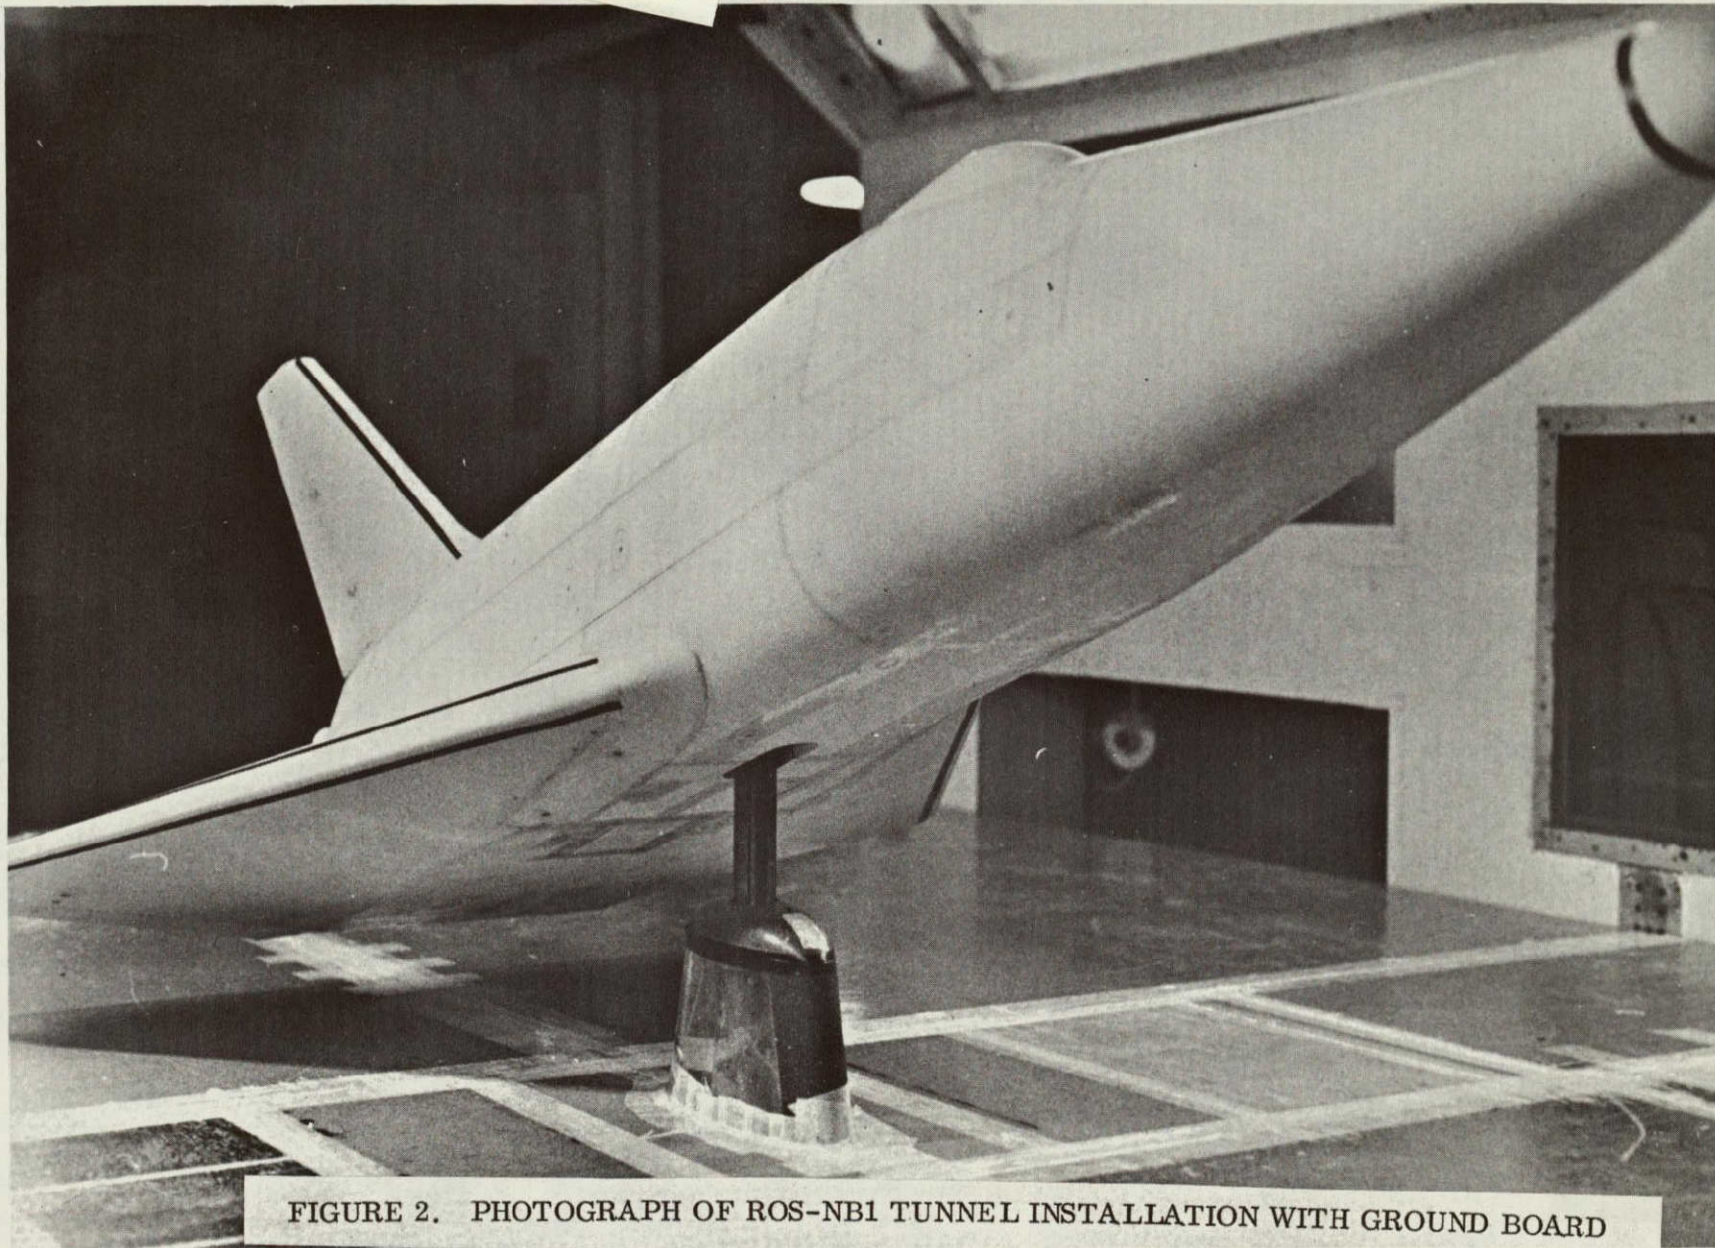


FIGURE 2. PHOTOGRAPH OF ROS-NB1 TUNNEL INSTALLATION WITH GROUND BOARD

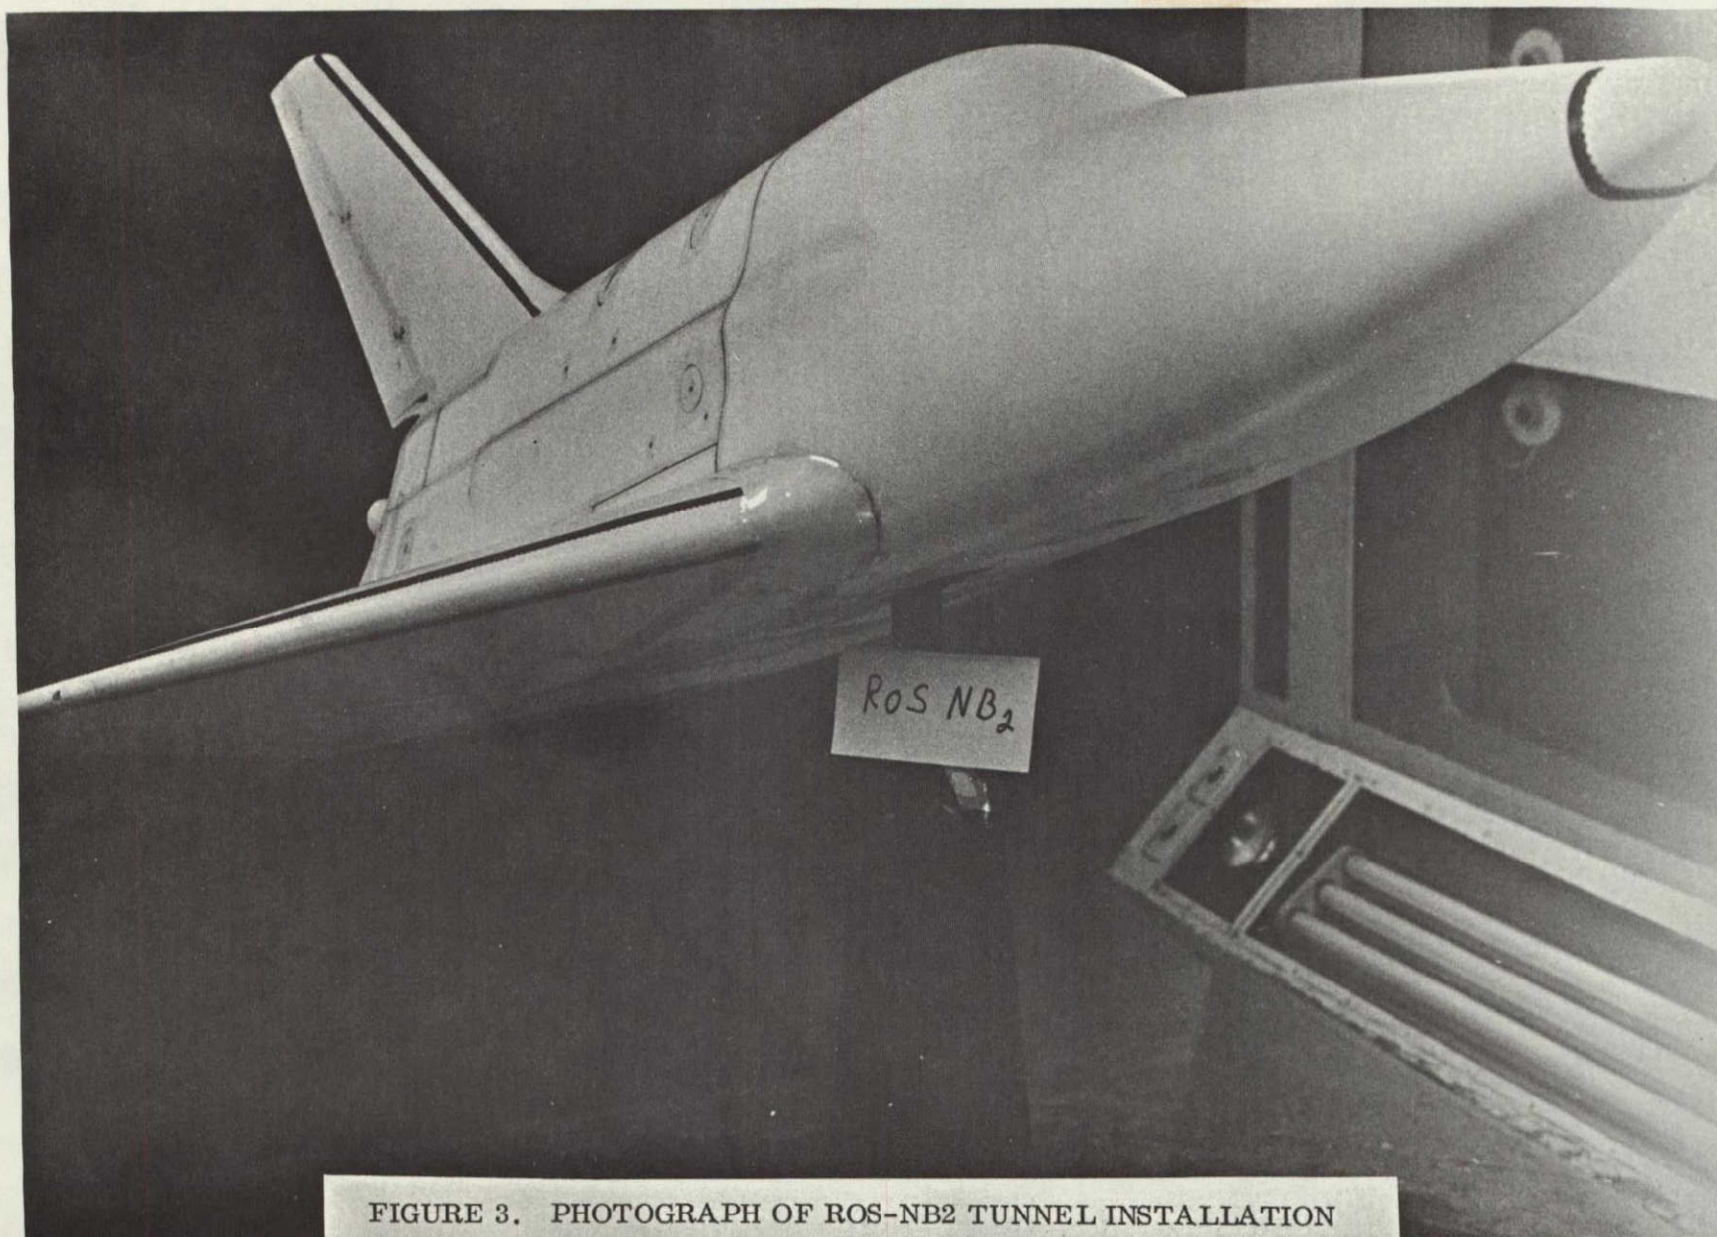


FIGURE 3. PHOTOGRAPH OF ROS-NB2 TUNNEL INSTALLATION

NOT REPRODUCIBLE

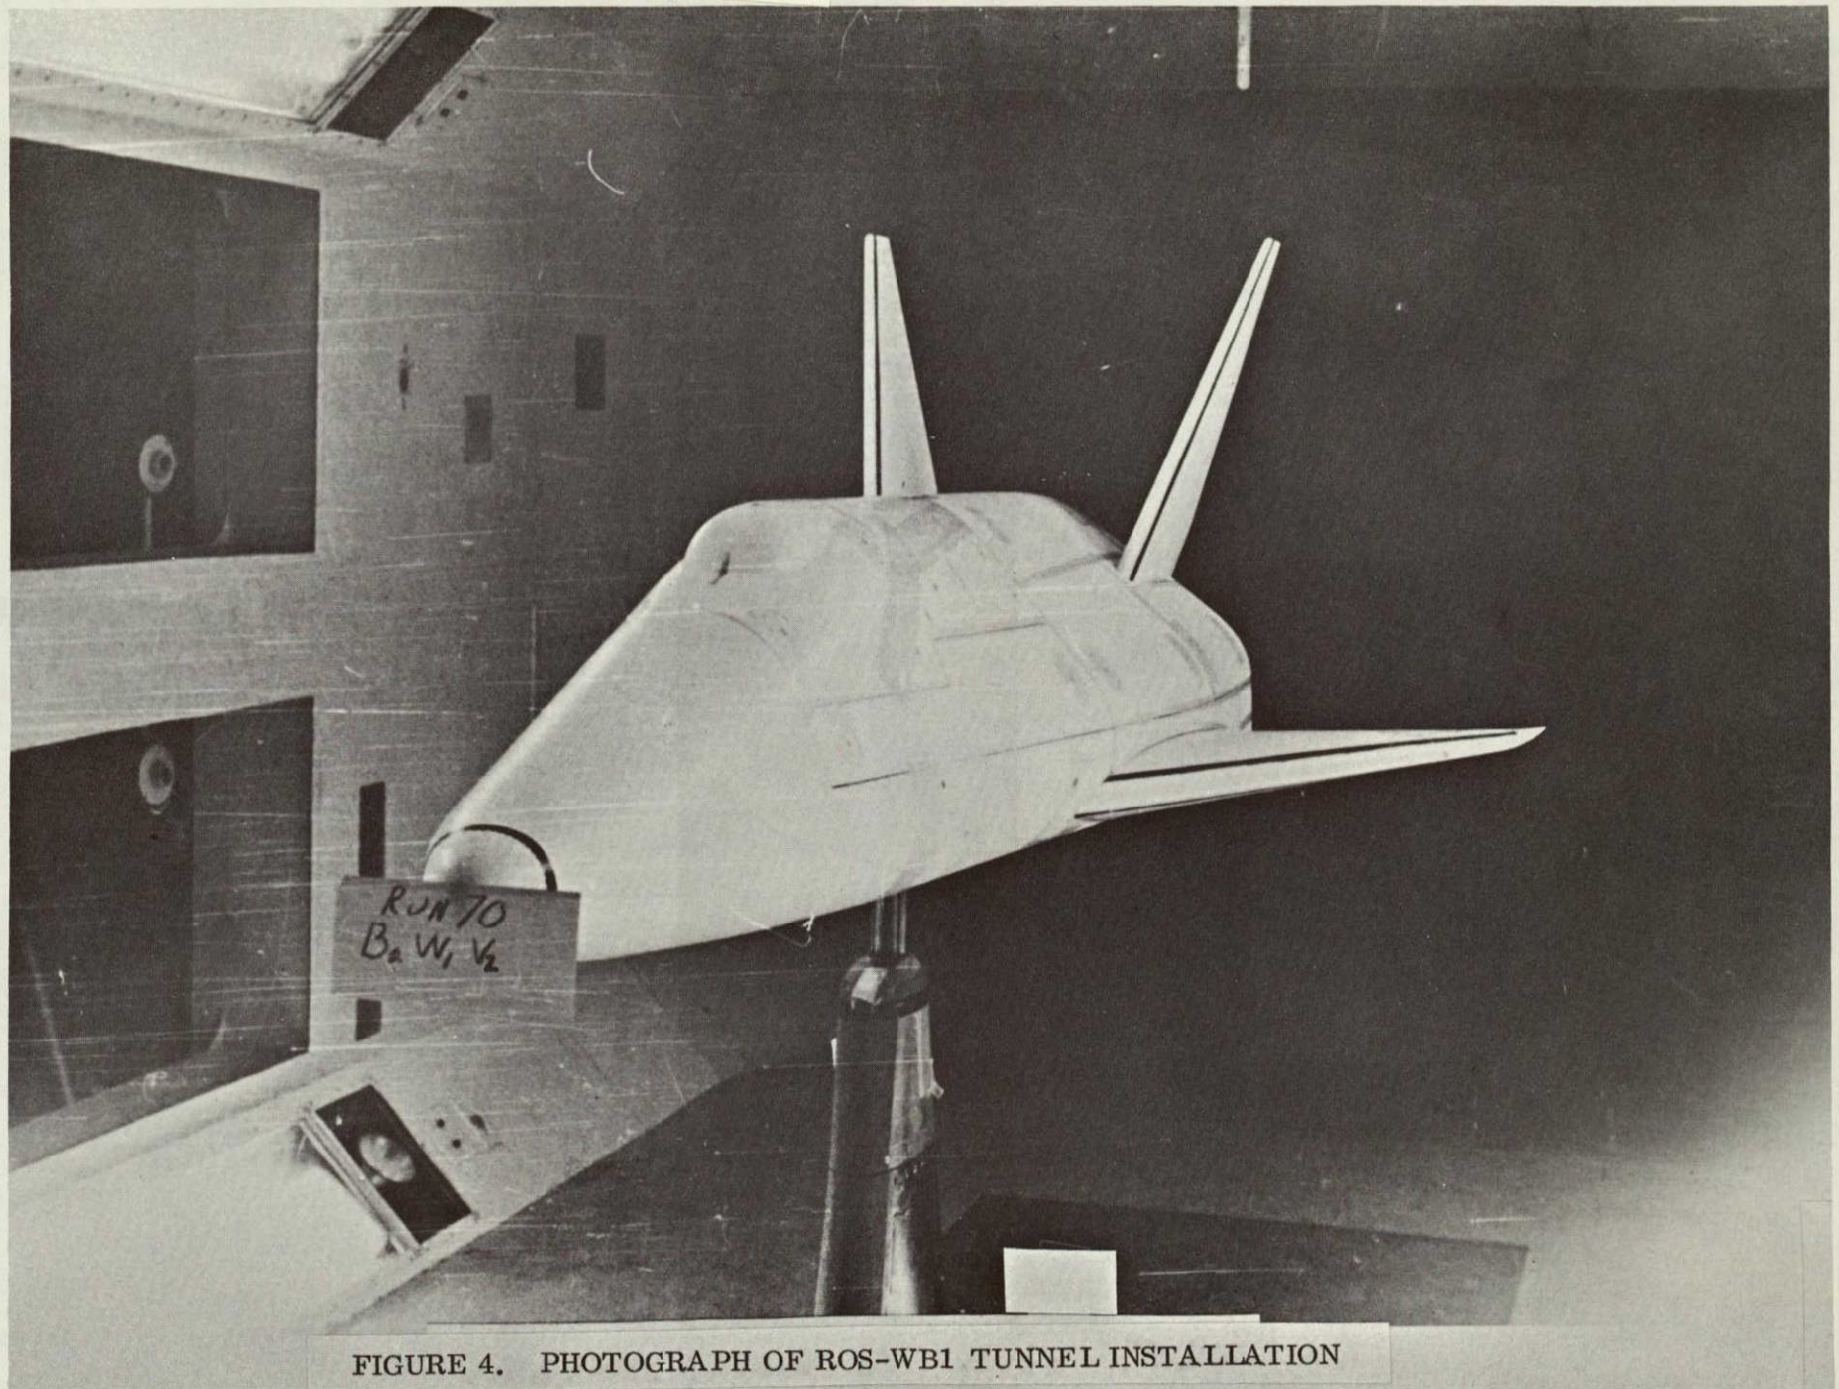


FIGURE 4. PHOTOGRAPH OF ROS-WB1 TUNNEL INSTALLATION

REFERENCE DIMENSIONS

$$S_{REF} = 5747 \text{ FT}^2$$

$$L_{REF} = 160.8 \text{ FT.}$$

$$b = 97.3 \text{ FT.}$$

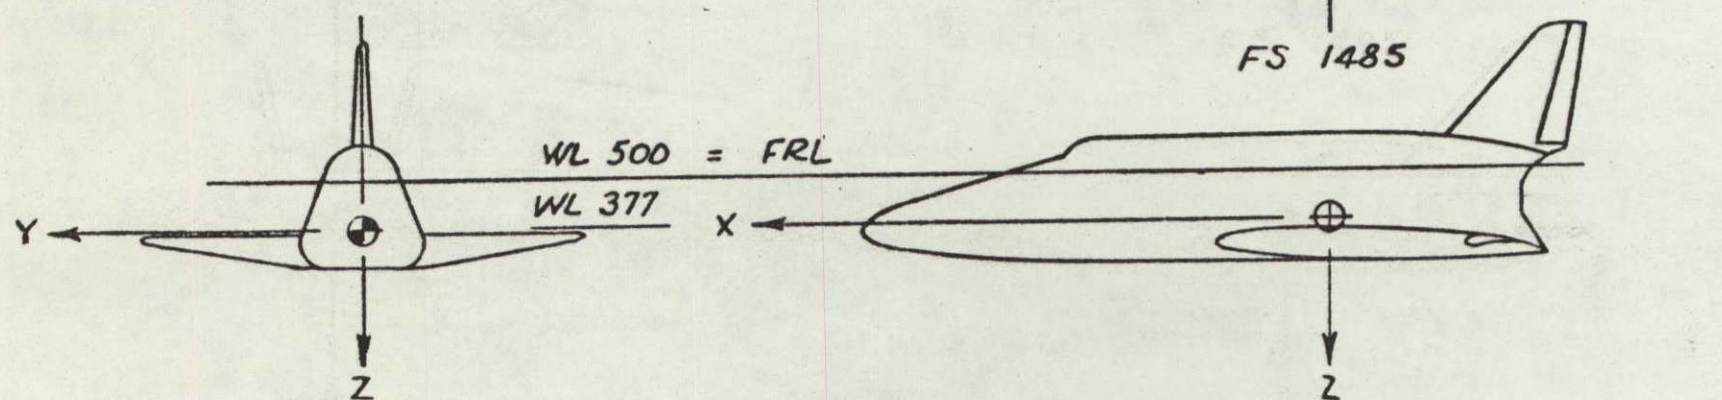


FIGURE 5. GENERAL ARRANGEMENT, ROS-NB1

REFERENCE DIMENSIONS

$$S_{REF} = 5747 \text{ FT}^2$$

$$L_{REF} = 160.8 \text{ FT}$$

$$b = 97.3 \text{ FT}$$

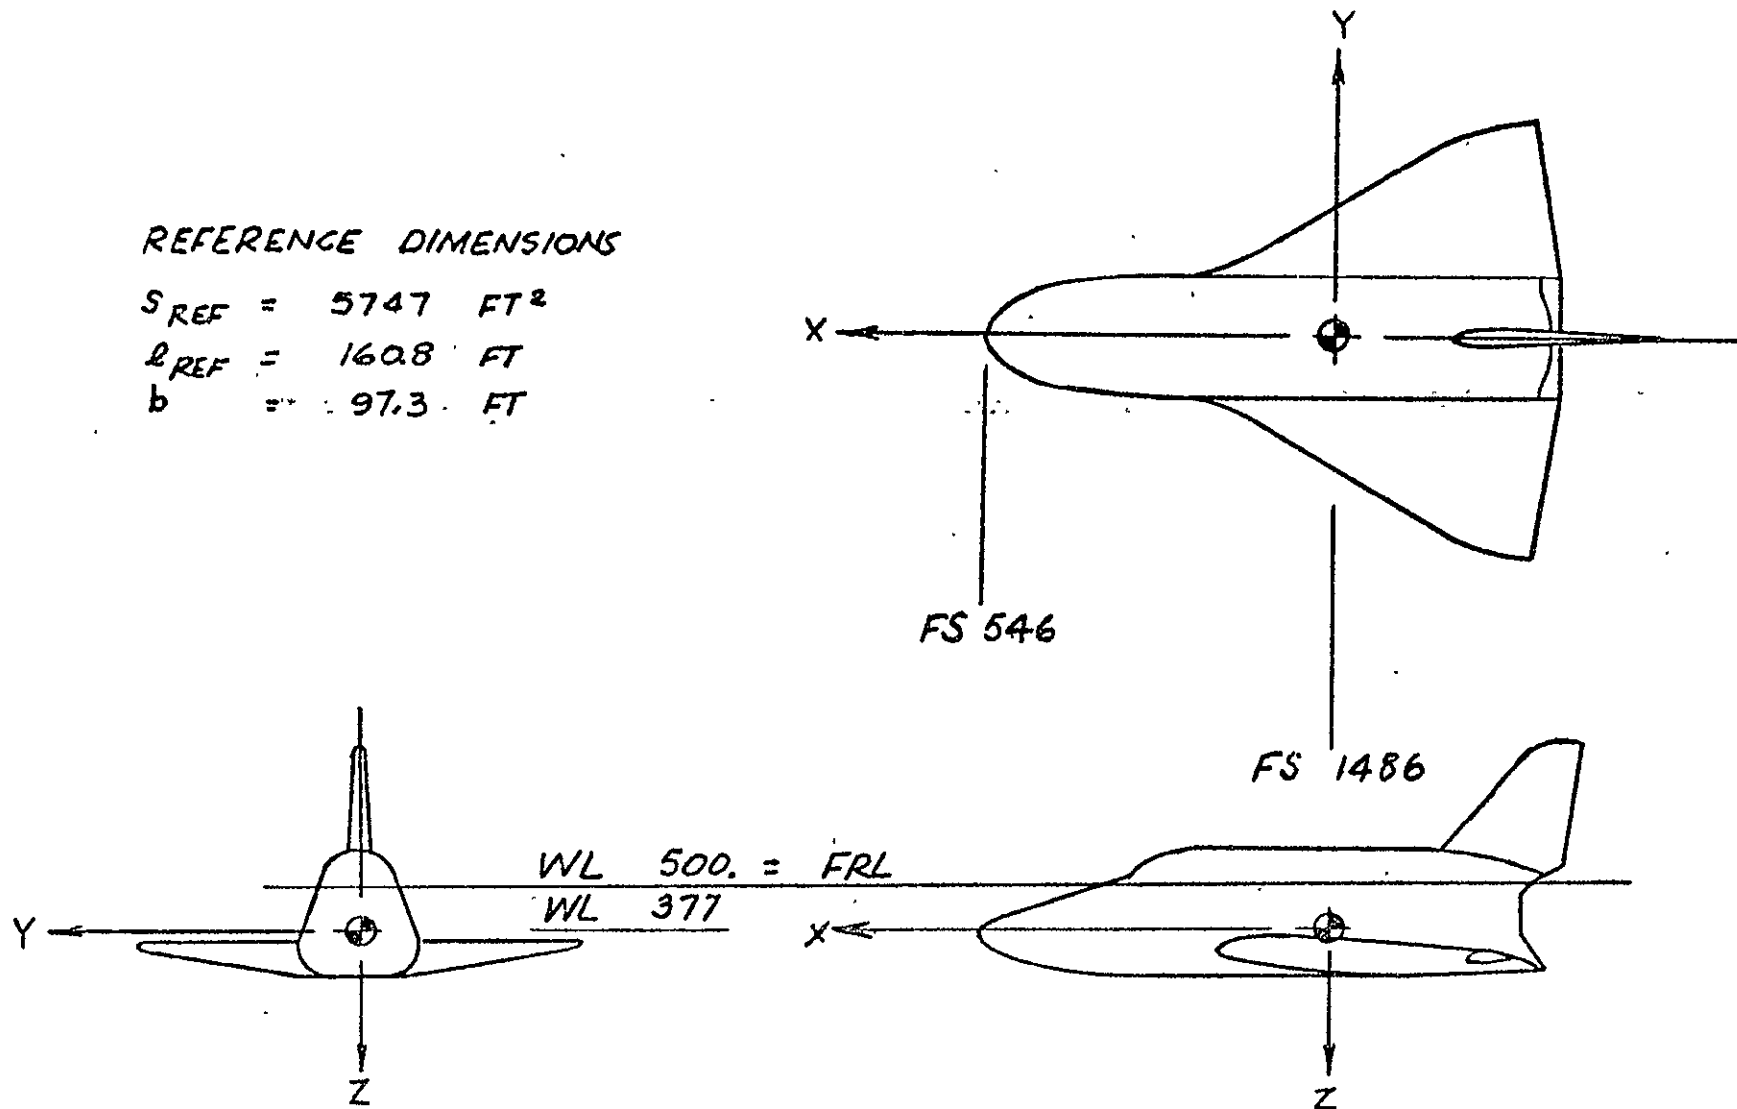


FIGURE 6. GENERAL ARRANGEMENT, ROS-NB2

REFERENCE DIMENSIONS

$$S_{REF} = 5747 \text{ FT}^2$$

$$L_{REF} = 160.8 \text{ FT}$$

$$b = 97.3 \text{ FT}$$

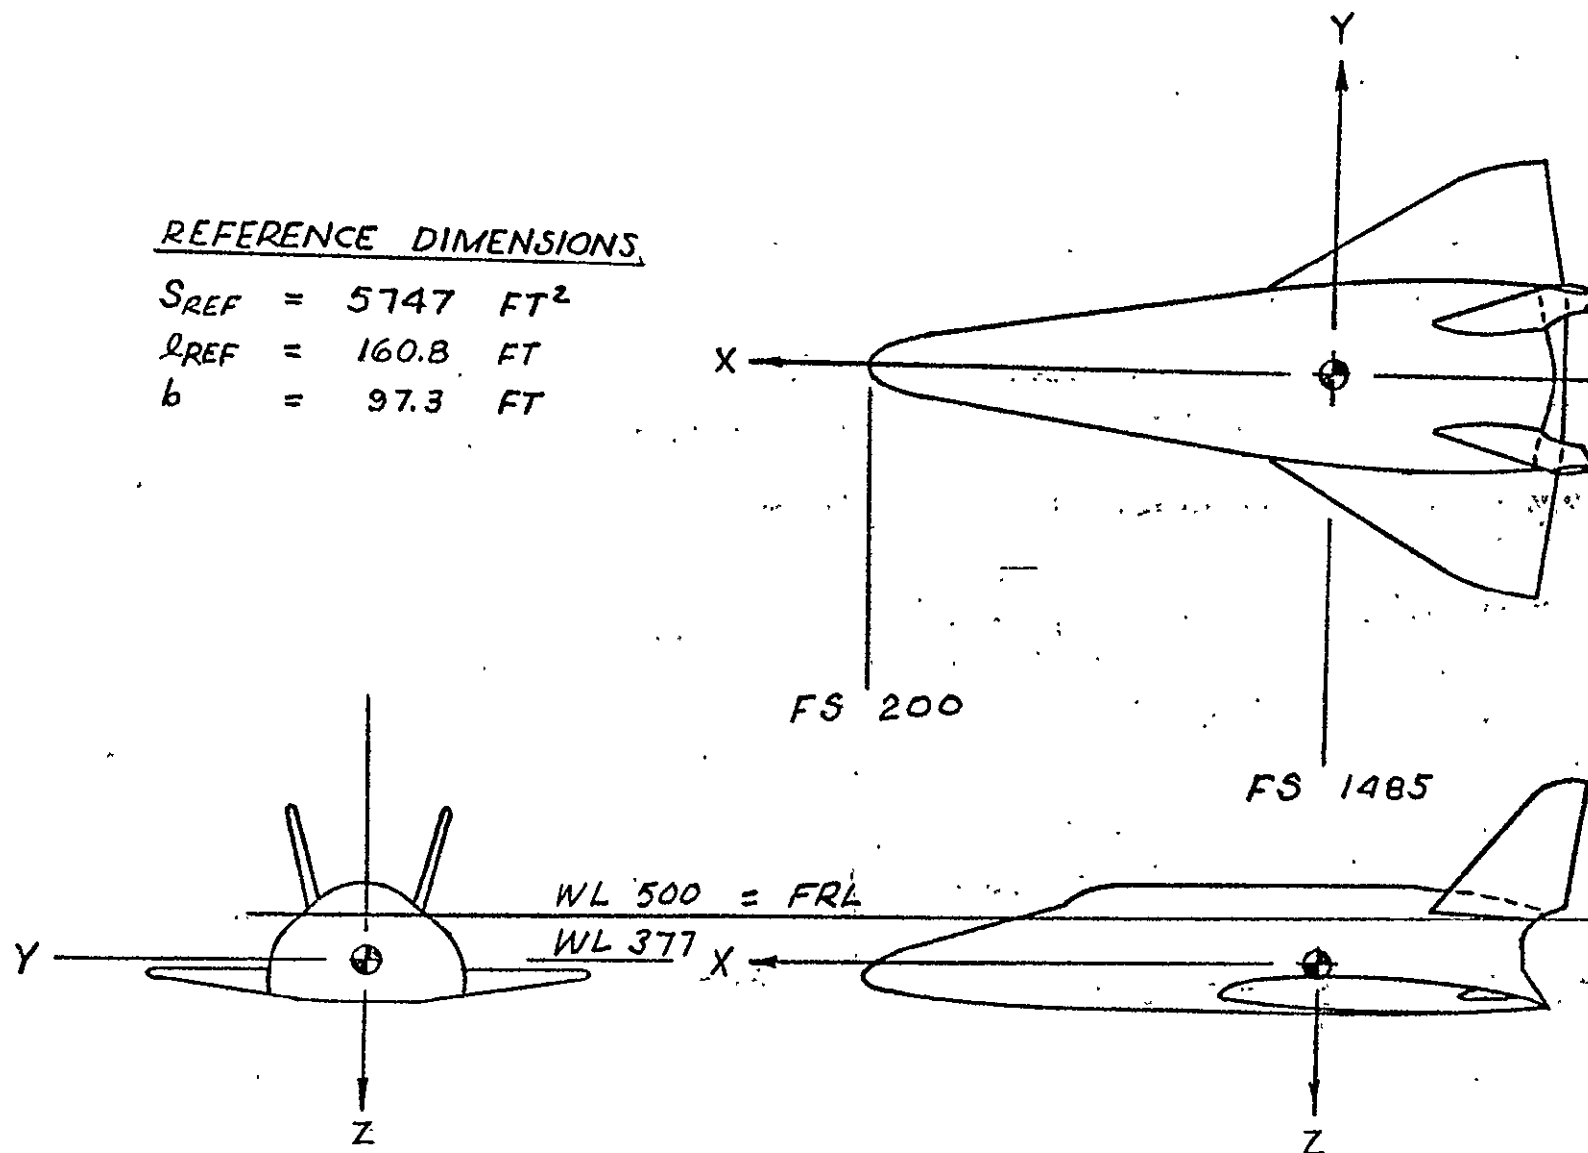


FIGURE 7. GENERAL ARRANGEMENT, ROS-WB1

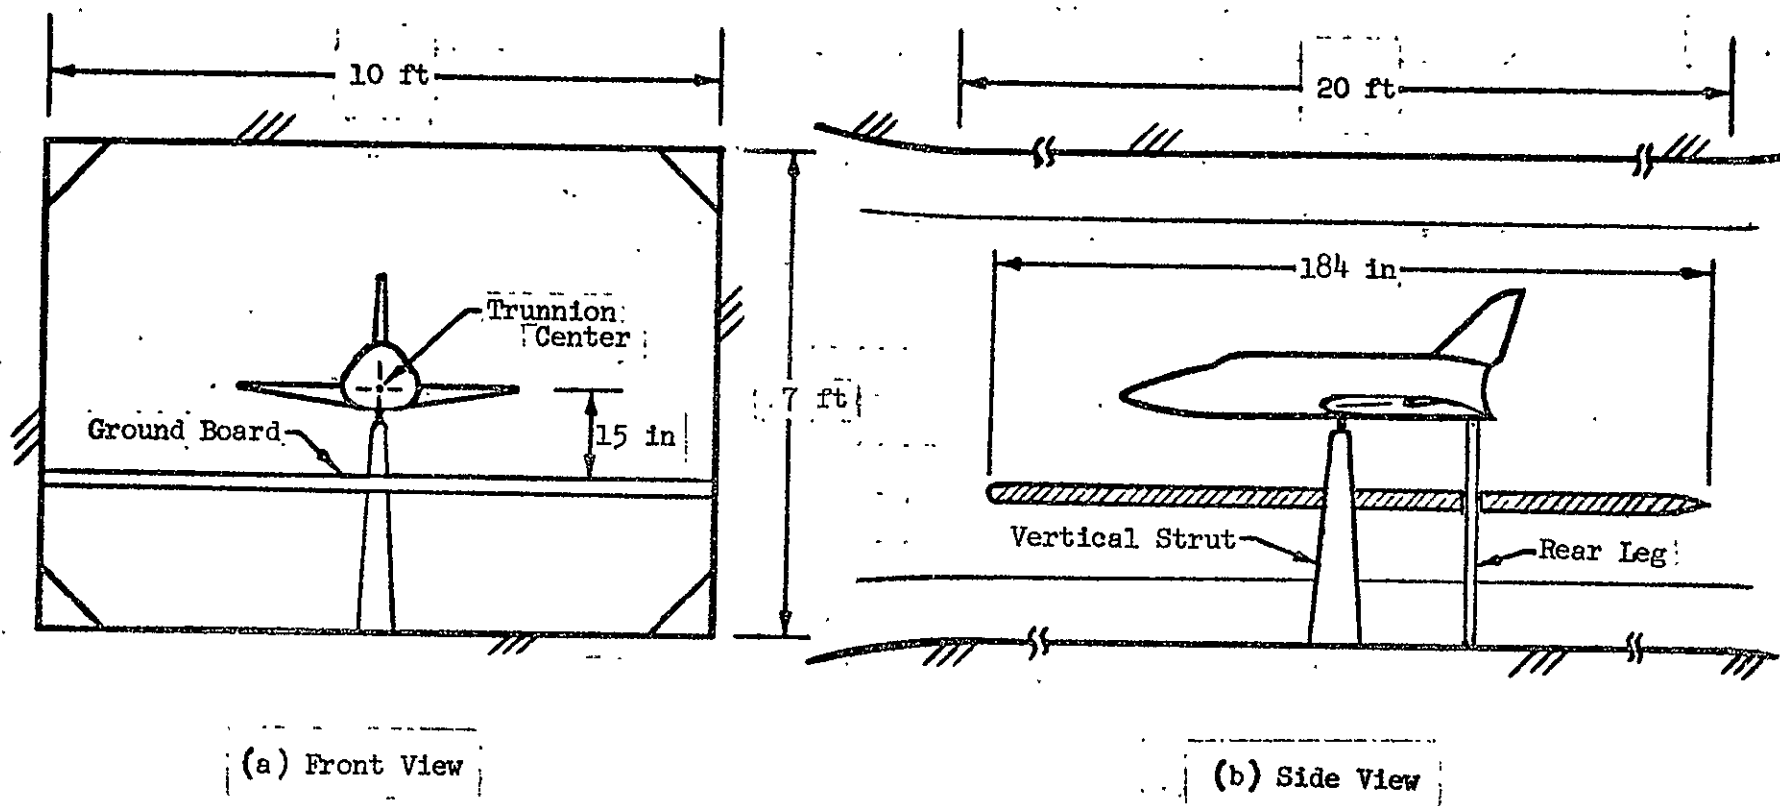


FIGURE 8. INSTALLATION OF MODEL WITH GROUND BOARD

W_2 Basic W_1 wing clipped to accomodate V_3 wing tip fins. Ref. drawing 518 MOD. 802.

— W_1
 - - - W_2

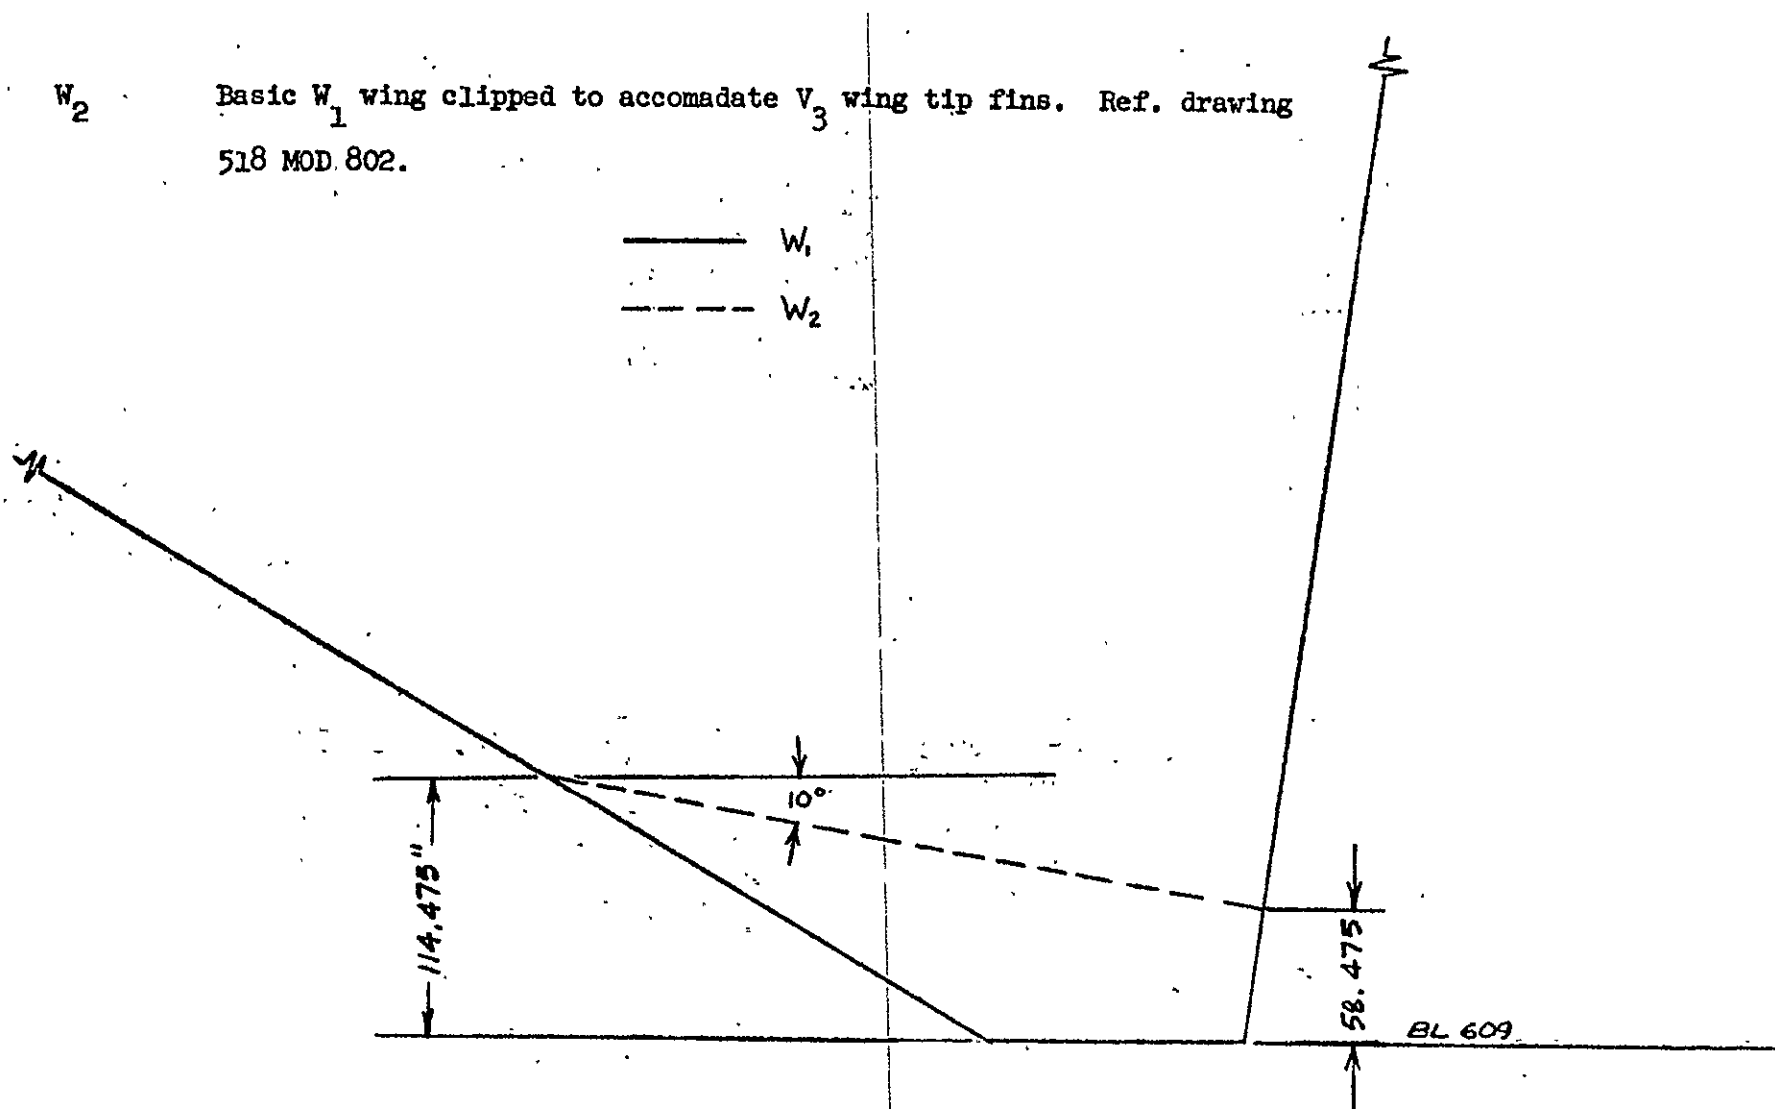


FIGURE 9.

W_2 - WING (FULL SCALE)

Outboard leading edge buildup on vertical fins consisting of
5/16" dowel and shimstock.

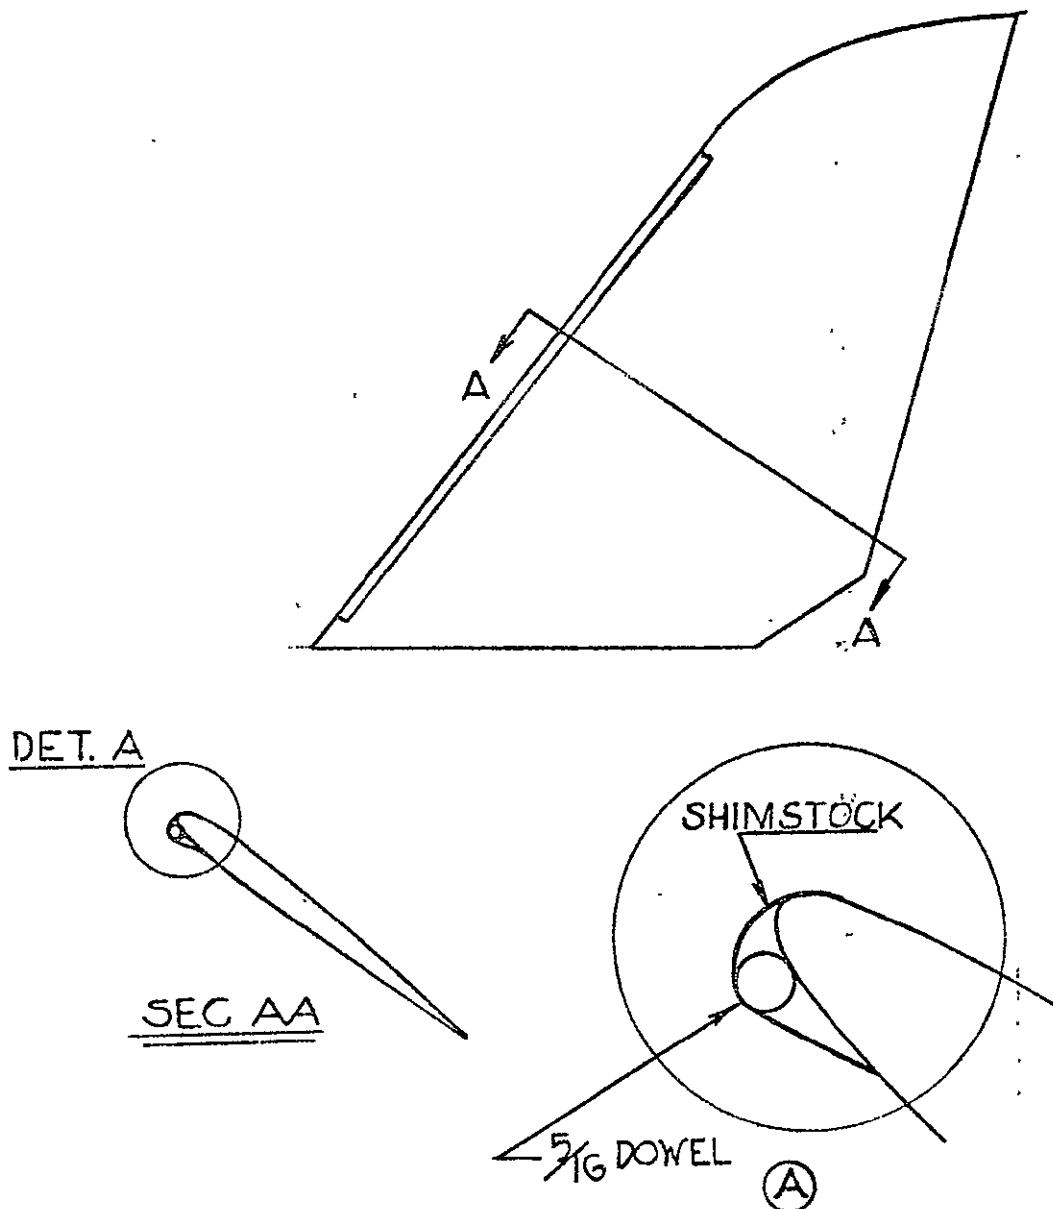


FIGURE 10. VERTICAL FIN, V3B

E₁ Flow through models of the four air-breathing engines that swing out of the fuselage. There are two on each side; the forward one under the $\bar{E}$ of the rear.

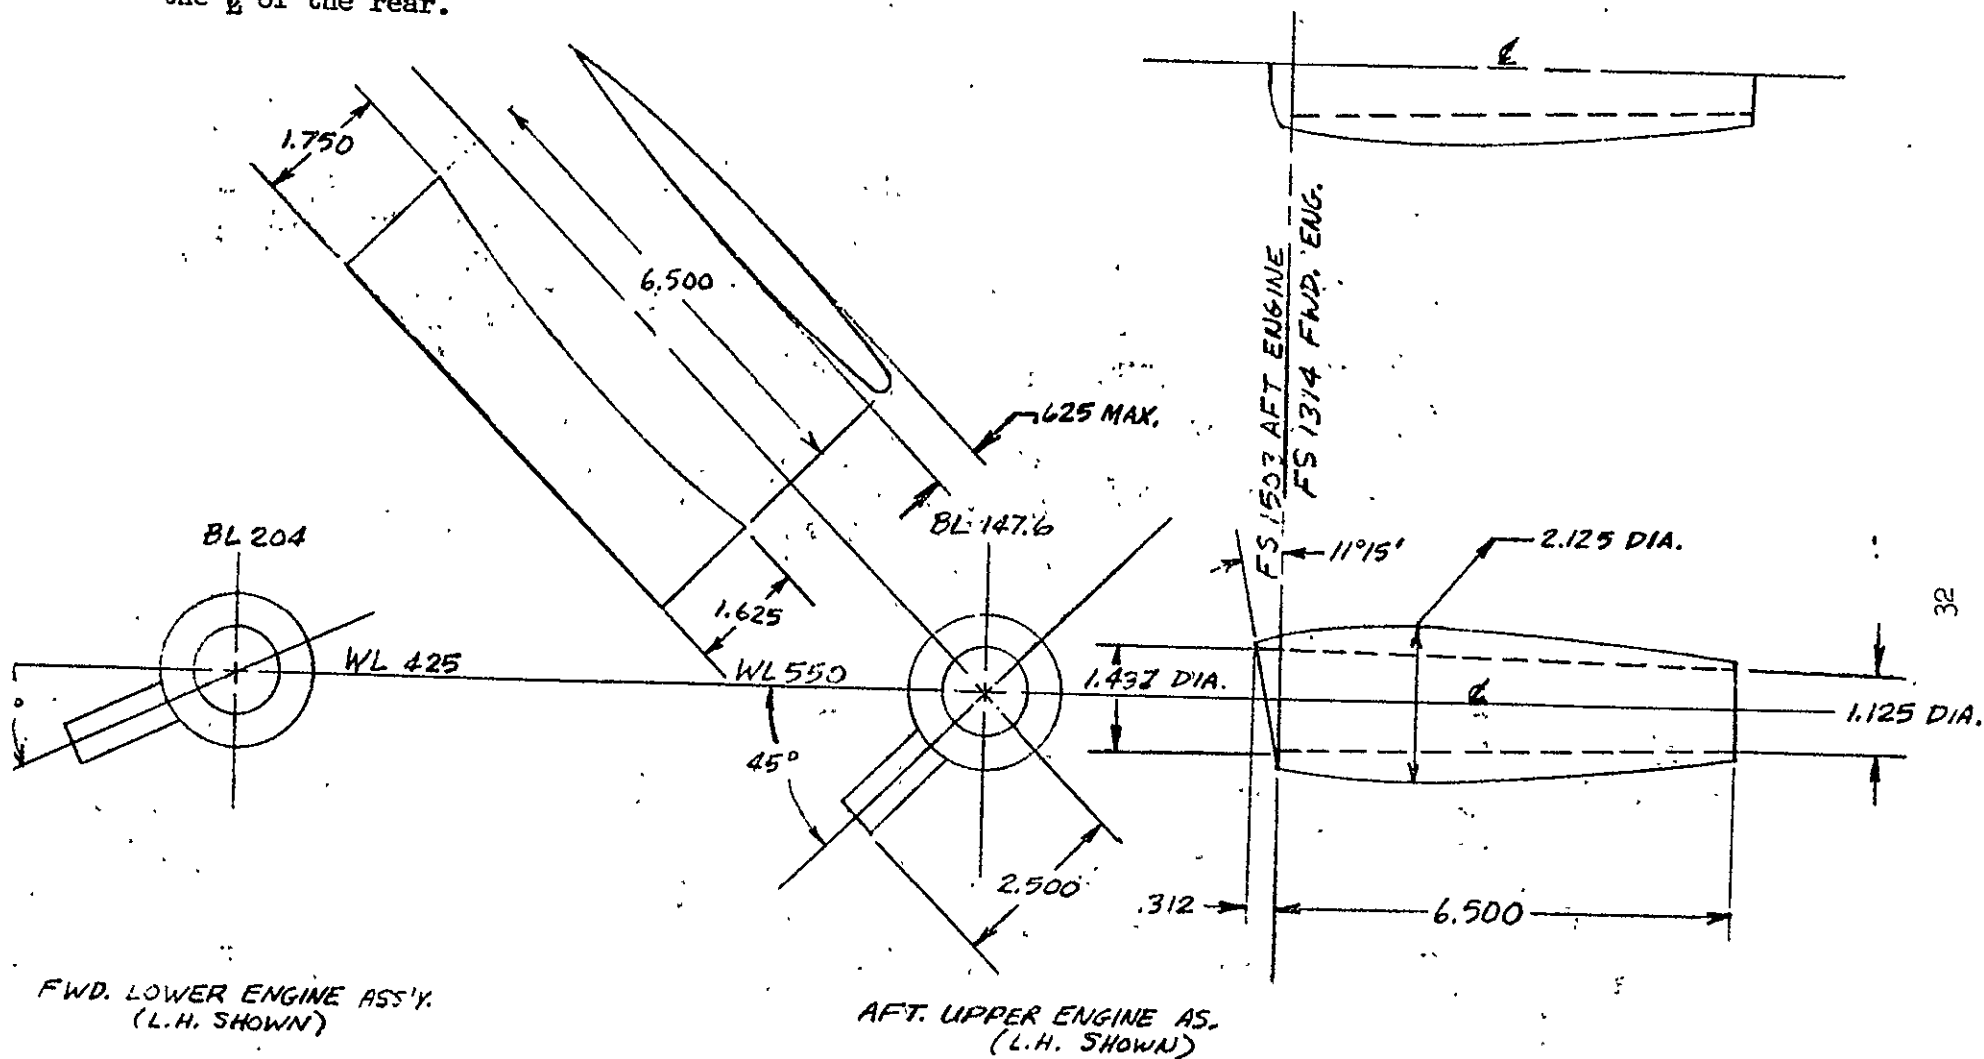


FIGURE 11. ENGINE NACELLES, E₁

SECT.
AA

Flow through models of the
twin turbojet engine pods,
one being on each side of
the model.

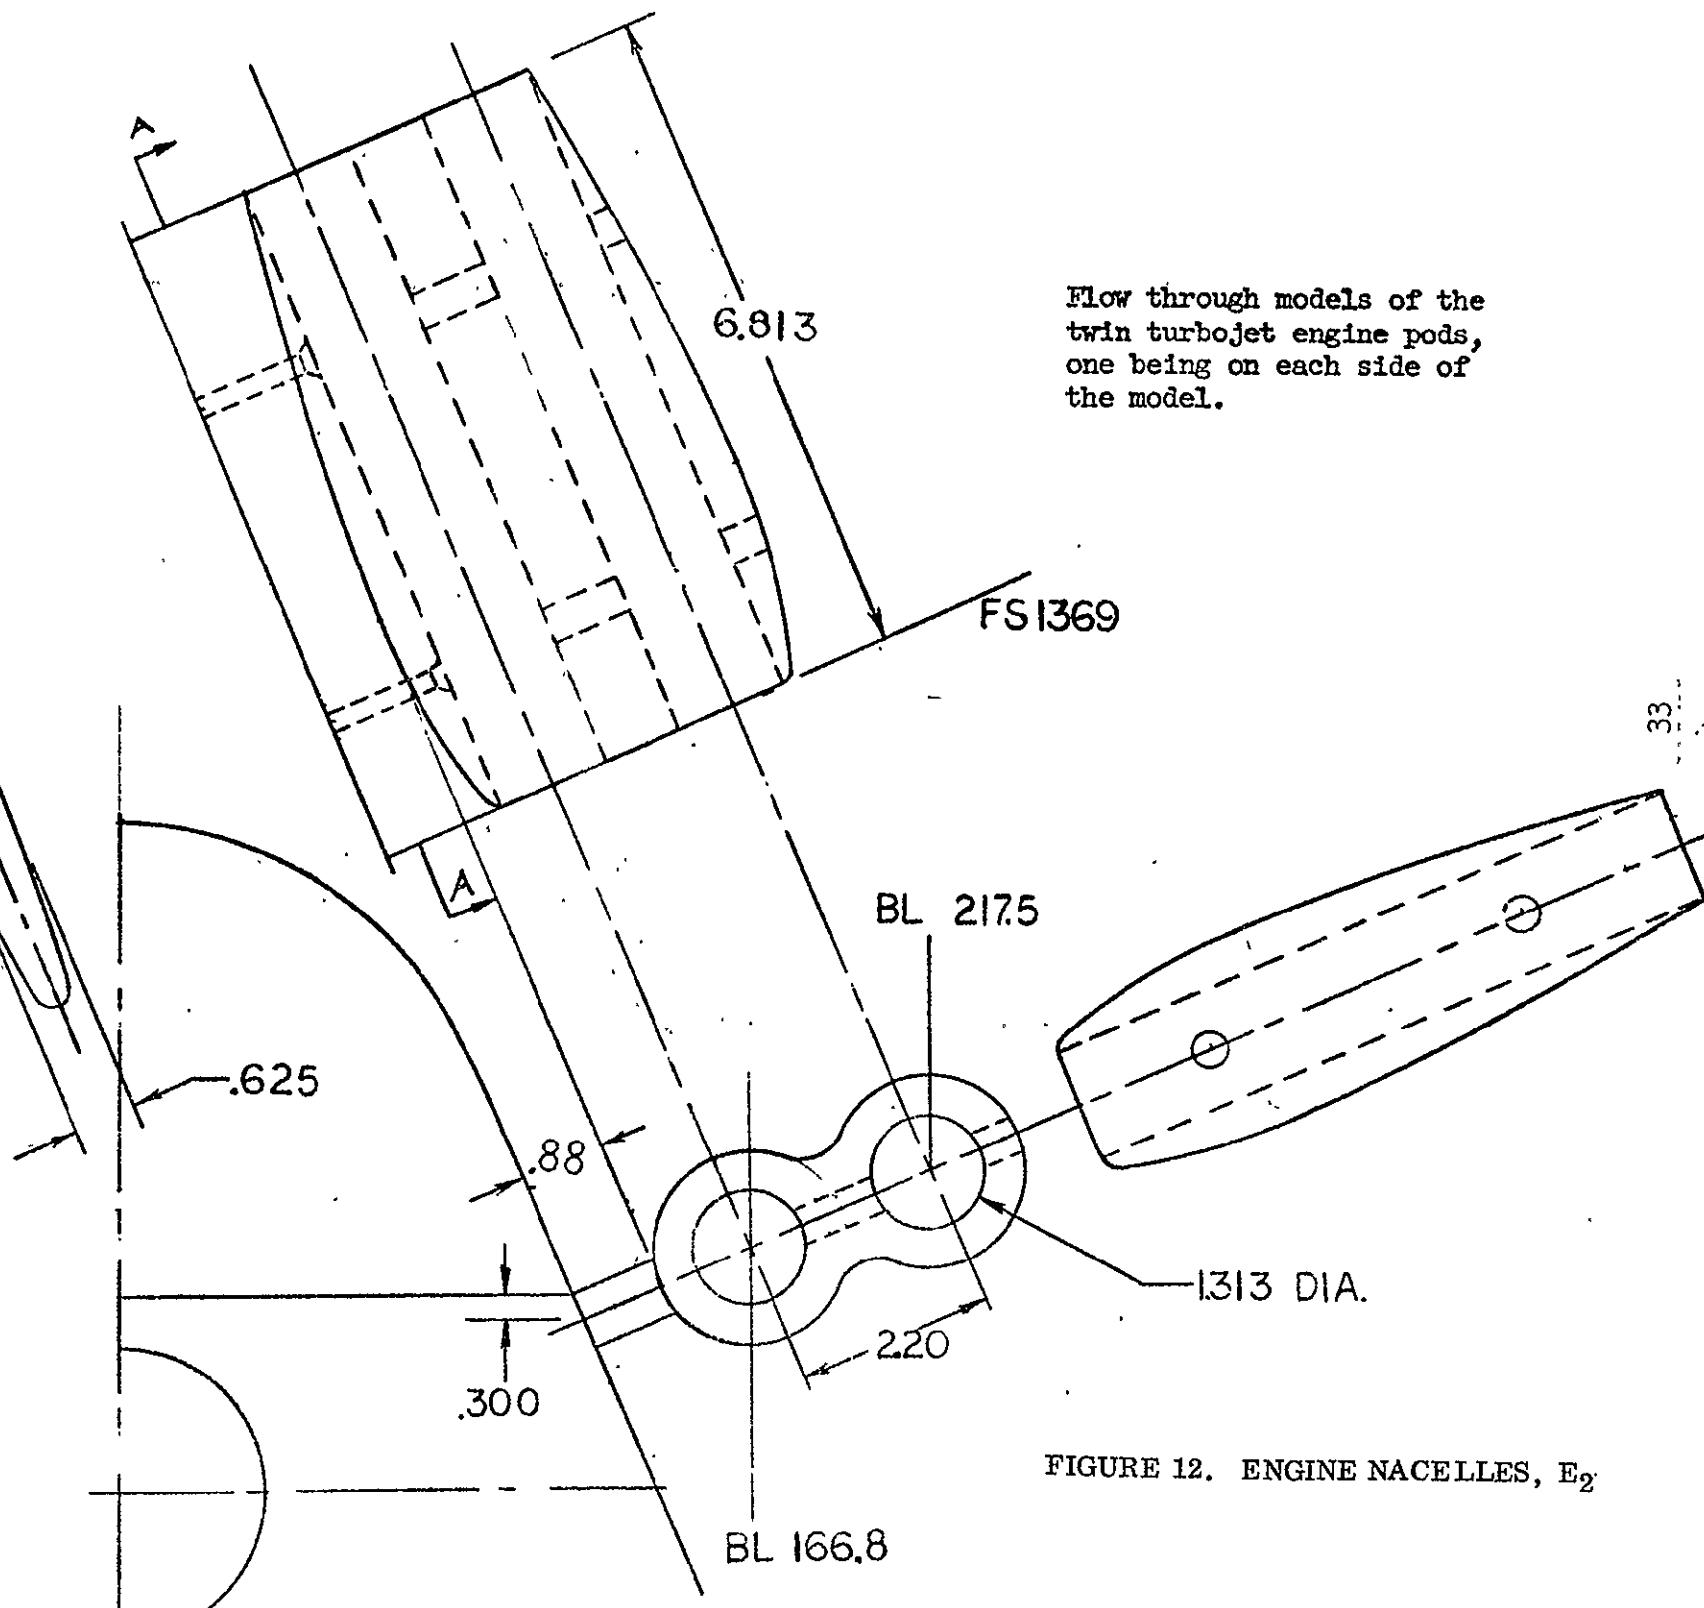


FIGURE 12. ENGINE NACELLES, E₂

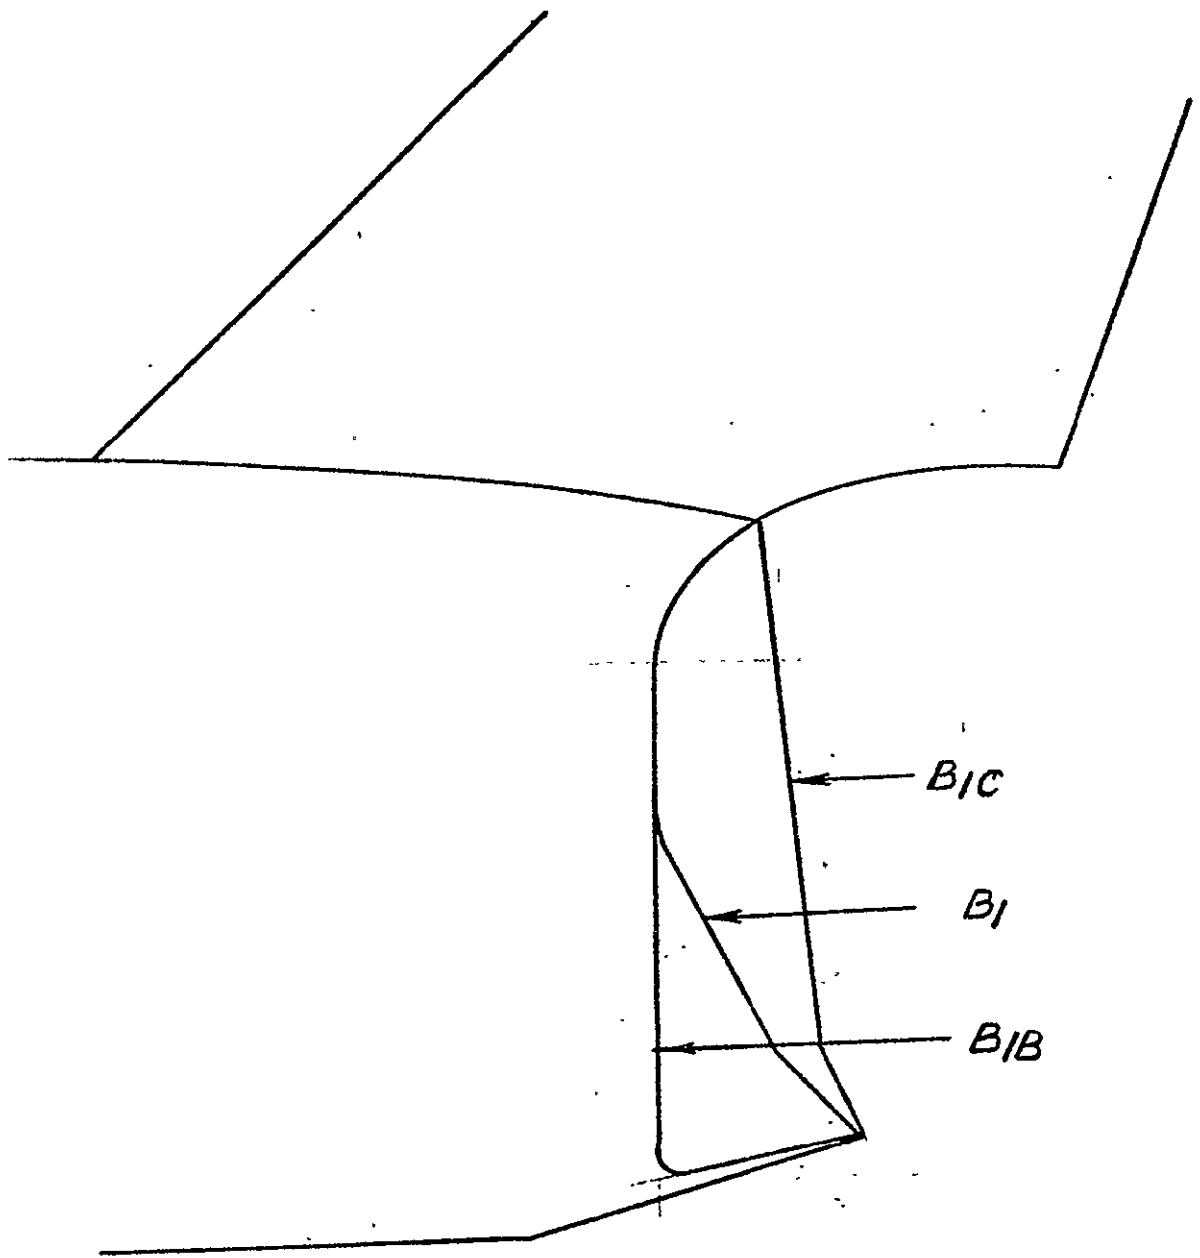


FIGURE 13. AFT END MODIFICATIONS

MODEL COMPONENT DESCRIPTION SHEETS

MODEL COMPONENT: BODY - B₁

GENERAL DESCRIPTION: BASIC ROS-NB1 BODY

DRAWING NUMBER: 518 MOD 800

DIMENSIONS:

	<u>FULL-SCALE</u> (FT. or FT ²)	<u>MODEL SCALE</u> (FT. or FT. ²)
Length	<u>160.8</u>	<u>6.43</u>
Max. Width	<u>28.0</u>	<u>1.12</u>
Max. Depth	<u>28.7</u>	<u>1.15</u>
Fineness Ratio	<u>5.61</u>	<u>5.61</u>
Area		
Max. Cross-Sectional	<u>616</u>	<u>.986</u>
Planform	<u>3990</u>	<u>6.38</u>
Wetted	<u>12,610</u>	<u>20.18</u>
Base	<u>590</u>	<u>.944</u>

MODEL COMPONENT: BODY - B₂

GENERAL DESCRIPTION: BASIC ROS-WBL BODY

DRAWING NUMBER: _____

DIMENSIONS:

	<u>FULL-SCALE</u> (FT. OR FT. ²)	<u>MODEL SCALE</u> (ft. or ft. ²)
Length	<u>160.8</u>	<u>6.13</u>
Max. Width	<u>44.8</u>	<u>1.79</u>
Max. Depth	<u>28.8</u>	<u>1.15</u>
Fineness Ratio	<u>3.6</u>	<u>3.6</u>
Area		
Max. Cross-Sectional	<u>956</u>	<u>1.53</u>
Planform	<u>5160</u>	<u>8.26</u>
Wetted	<u>13,230</u>	<u>21.17</u>
Base	<u>744</u>	<u>1.19</u>

MODEL COMPONENT: BODY - B₃

GENERAL DESCRIPTION: ROS-NB2 Body Derived From Mating a Short Nose to the B₁
Body at FS 1216

DRAWING NUMBER: 518 MOD 815

DIMENSIONS:

	<u>FULL-SCALE</u> (ft. or ft. ²)	<u>MODEL SCALE</u> (ft. or ft. ²)
Length	<u>132</u>	<u>5.28</u>
Max. Width	<u>28</u>	<u>1.12</u>
Max. Depth	<u>28.7</u>	<u>1.15</u>
Fineness Ratio	<u>4.6</u>	<u>4.6</u>
Area		
Max. Cross-Sectional	<u>616</u>	<u>.986</u>
Planform	<u> </u>	<u> </u>
Wetted	<u> </u>	<u> </u>
Base	<u>590</u>	<u>.944</u>

MODEL COMPONENT: WING - W₁

GENERAL DESCRIPTION: BASIC ROS-NB 1 WING

DRAWING NUMBER: 518 MOD 802

DIMENSIONS:

TOTAL DATA

FULL-SCALE
(FT. OR FT.²)

MODEL SCALE
(FT. OR FT.²)

Area

Planform

Wetted

Span (equivalent)

Aspect Ratio

Rate of Taper

Taper Ratio

Diehedral Angle, degrees

Incidence Angle, degrees

Aerodynamic Twist, degrees

Toe-In Angle

Cant Angle

Sweep Back Angles, degrees

Leading Edge

Trailing Edge

0.25 Element Line

Chords:

Root (Wing Sta. 0.0)

Tip, (equivalent)

MAC

Fus. Sta. of .25 MAC

W.P. of .25 MAC

B.L. of .25 MAC

Airfoil Section

Root

Tip

EXPOSED DATA

Area

Span, (equivalent)

Aspect Ratio

Taper Ratio

Chords

Root

Tip

MAC

Fus. Sta. of .25 MAC

W.P. of .25 MAC

B.L. of .25 MAC

5747

7780

97.3

1.65

1.87

.129

5°

+ 2° @body - 3° @tip

60°

-8.4°

42.9°

104.6

13.5

59.0

1580 in.

302.6 in.

9.195

12.45

3.89

1.65

1.87

.129

5°

60°

-8.4°

42.9°

4.18

.54

2.36

5.27

1.01

MODEL COMPONENT: Elevon (for the W₁ wing)

GENERAL DESCRIPTION: Moveable Control Surface Associated With the W₁ Wing

DRAWING NUMBER: 518 MOD 802

DIMENSIONS:

	<u>FULL-SCALE</u> (ft. or ft. ²)	<u>MODEL SCALE</u> (ft. or ft. ²)
Area	<u>364</u>	<u>.582</u>
Span (equivalent) :	<u>35.5</u>	<u>1.42</u>
^{Root} ~~Inb'd equivalent~~ chord	<u>12.75</u>	<u>.51</u>
Outb'd equivalent chord	<u>7.75</u>	<u>.31</u>
Ratio Elevator chord/horizontal tail chord		
At Inb'd equiv. chord	<u> </u>	<u> </u>
At Outb'd equiv. chord	<u> </u>	<u> </u>
Sweep Back Angles, degrees		
Leading Edge	<u>0°</u>	<u>0°</u>
Tailing Edge	<u>-8.4°</u>	<u>-8.4°</u>
Hingeline	<u> </u>	<u> </u>
Area Moment (Normal to hinge line)	<u> </u>	<u> </u>

MODEL COMPONENT: E VERTICAL TAIL - V₁

GENERAL DESCRIPTION: BASIC ROS-NB 1 VERTICAL TAIL

DRAWING NUMBER: 518 MOD 803

<u>DIMENSIONS:</u>	<u>FULL-SCALE</u> (FT. OR FT. ²)	<u>MODEL SCALE</u> (FT. OR FT. ²)
Area	<u>805</u>	<u>1.29</u>
Span (equivalent)	<u>33.3</u>	<u>1.33</u>
Inb'd equivalent chord	<u>34.6</u>	<u>1.38</u>
Outb'd equivalent chord	<u>13.75</u>	<u>.55</u>
Ratio movable surface chord/ total surface chord		
At Inb'd equiv. chord	<u>.3</u>	<u>.3</u>
At Outb'd equiv. chord	<u>.3</u>	<u>.3</u>
Sweep Back Angles, degrees		
Leading Edge	<u>45°</u>	<u>45°</u>
Tailing Edge	<u>19.7°</u>	<u>19.7°</u>
Hingeline	<u>28.7°</u>	<u>28.7°</u>
Area Moment (Normal to hinge line)	<u>945</u>	<u>1.51</u>
AIRFOIL SECTION	<u>64A010</u>	

MODEL COMPONENT: Rudder (for the V₁ vertical tail)

GENERAL DESCRIPTION: Moveable Control Surface Associated With the V₁
Vertical Tail

DRAWING NUMBER: 518 MOD 803

DIMENSIONS:

	<u>FULL-SCALE</u> (ft. or ft. ²)	<u>MODEL SCALE</u> (ft. or ft. ²)
Area	<u>240</u>	<u>.384</u>
Span (equivalent) ROOT	<u>33.3</u>	<u>1.33</u>
~~Inb'd equivalent chord~~	<u>10.4</u>	<u>.416</u>
Outb'd equivalent chord RUDDER	<u>4.02</u>	<u>.161</u>
Ratio ~~Elevator~~ chord/horizontal tail chord		
At Inb'd equiv. chord	<u>.3</u>	<u>.3</u>
At Outb'd equiv. chord	<u>.3</u>	<u>.3</u>
Sweep Back Angles, degrees		
Leading Edge	<u>29.5°</u>	<u>29.5°</u>
Tailing Edge	<u>19.7°</u>	<u>19.7°</u>
Hingeline	<u></u>	<u></u>
Area Moment (Normal to hinge line)	<u></u>	<u></u>

MODEL COMPONENT: TWIN BODY TAILS - V₂

GENERAL DESCRIPTION: BASIC ROS-WB1 VERTICAL TAILS

DRAWING NUMBER: 518 MOD 804

DIMENSIONS:

	<u>FULL-SCALE</u> (FT. OR FT. ²)	<u>MODEL SCALE</u> (FT. OR FT. ²)
Area	<u>670</u>	<u>1.07</u>
Span (equivalent)	<u>35.5</u>	<u>2.46</u>
Inb'd equivalent chord	<u>33.17</u>	<u>1.33</u>
Outb'd equivalent chord	<u>9.08</u>	<u>.36</u>
Ratio movable surface chord/ total surface chord		
At Inb'd equiv. chord	<u> </u>	<u> </u>
At Outb'd equiv. chord	<u> </u>	<u> </u>
Sweep Back Angles, degrees		
Leading Edge	<u>40°</u>	<u>40°</u>
Tailing Edge	<u>8.5°</u>	<u>8.5°</u>
Hingeline	<u> </u>	<u> </u>
Area Moment (Normal to hinge line)	<u> </u>	<u> </u>
AIRFOIL SECTION	<u>NACA 64A010</u>	
CANT ANGLE (OUTBOARD)	<u>15°</u>	

MODEL COMPONENT: WING TIP FINS - V₃

GENERAL DESCRIPTION: VERTICAL FINS LOCATED AT THE TIPS OF THE CLIPPED
BASIC WING (DESIGNATED W₂)

DRAWING NUMBER: 518 MOD 807

<u>DIMENSIONS:</u>	<u>FULL-SCALE</u> (FT. OR FT. ²)	<u>MODEL SCALE</u> (FT. OR FT. ²)
Area	<u>684</u>	<u>1.09</u>
Span (equivalent)	<u>30.17</u>	<u>1.21</u>
Inb'd equivalent chord	<u>30.25</u>	<u>1.21</u>
Outb'd equivalent chord	<u>15.17</u>	<u>0.61</u>
Ratio movable surface chord/ total surface chord		
At Inb'd equiv. chord	<u>.274</u>	<u>.274</u>
At Outb'd equiv. chord	<u>.546</u>	<u>.546</u>
Sweep Back Angles, degrees		
Leading Edge	<u>40°</u>	<u>40°</u>
Tailing Edge	<u>18.44°</u>	<u>18.44°</u>
Hingeline	<u>18.44°</u>	<u>18.44°</u>
Area Moment (Normal to hinge line)	<u>805</u>	<u>1.29</u>
CANT ANGLE	<u>15° (OUTBOARD)</u>	
TOE-IN ANGLE	<u>10°</u>	

NOMENCLATURE

(General)

<u>SYMBOL</u>	<u>SADSAC SYMBOL</u>	<u>DEFINITION</u>
α	ALPHA	angle of attack, angle between the projection of the wind X_w -axis on the body X, Z-plane and the body X-axis; degrees
β	BETA	sideslip angle, angle between the wind X_w -axis and the projection of this axis on the body X-Z-plane; degrees
ψ	PSI	yaw angle, angle of rotation about the body Z-axis, positive when the positive X-axis is rotated toward the positive Y-axis; degrees
ϕ	PHI	roll angle, angle of rotation about the body X-axis, positive when the positive Y-axis is rotated toward the positive Z-axis; degrees
ρ		air density; K_g/m^3 , slugs/ft ³
a		speed of sound; m/sec, ft/sec
V		speed of vehicle relative to surrounding atmosphere; m/sec, ft/sec
q	Q(PSI) Q(PSF)	dynamic pressure; $1/2\rho V^2$, psi, psf
M	MACH	Mach number; V/a
RN/L	RN/L	Reynolds number per unit length; million/ft
p		static pressure; psi
P		total pressure; psi
C_p	CP	pressure coefficient; $(p-p_\infty)/q$

NOMENCLATURE (Continued)

Reference & C. G. Definitions

<u>SYMBOL</u>	<u>SADSAC SYMBOL</u>	<u>DEFINITION</u>
S		wing area; m^2 , ft^2
S	SREF	reference area; m^2 , ft^2
$\bar{c}$		wing mean aerodynamic chord or reference chord; m, ft, in (see l_{ref} or LREF)
l_{ref}	LREF	reference length; m, ft, in.; (see $\bar{c}$)
b_{ref}	BREF	wing span or reference span; m, ft, in
A_b		base area; m^2 , ft^2 , in^2
c. g.		center of gravity
MRP	MRP	abbreviation for moment reference point
	XMRP	abbreviation for moment reference point on X-axis
	YMRP	abbreviation for moment reference point on Y-axis
	ZMRP	abbreviation for moment reference point on Z-axis

NOMENCLATURE (Continued)

Axis System Gener

<u>SYMBOL</u>	<u>DEFINITION</u>
F	force; F, lbs
M	moment; M, in-lb

<u>Subscript</u>	<u>Definition</u>
N	normal force
A	axial force
L	lift force
D	drag force
Y	force or moment about the Y axis
Z	moment about the Z axis
X	moment about the X axis
s	stability axis system
w	wind axis system
ref	reference conditions
∞	free stream conditions
t	total conditions
b	base

NOMENCLATURE (Continued)

Stability Axis System

<u>SYMBOL</u>	<u>SADSAC SYMBOL</u>	<u>DEFINITION</u>
C_L	CL	lift force coefficient; F_L/qS
C_D	CD	drag force coefficient; F_D/qS
C_{D_b}	CDB	base drag coefficient
C_{D_f}	CDF	forebody drag coefficient; $C_D - C_{D_b}$
C_m	CIM	pitching moment coefficient; $M_{Y,s}/qS \ell_{ref}$
C_y	CY	side force coefficient; F_Y/qS
C_n	CIN	yawing moment coefficient; $M_{Z,s}/qS b_{ref}$
C_l	CSL	rolling moment coefficient; $M_{X,s}/qS b_{ref}$
L/D	L/D	lift-to-drag ratio; C_L/C_D
L/D_f	L/DF	lift to forebody drag ratio; C_L/C_{D_f}

NOMENCLATURE (Continued)

Surface Definitions

<u>SYMBOL</u>	<u>SADSAC SYMBOL</u>	<u>DEFINITION</u>
i_t	HORIZT	horizontal tail incidence; positive when trailing edge down; degrees
δ		symmetrical surface deflection angle; degrees; positive deflections are:
	AILRON	aileron - total aileron deflection;
	CANARD	canard - trailing edge down
	ELEVON	elevon - trailing edge down
	ELEVTR	elevator - trailing edge down
	FLAP	flap - trailing edge down
	RUDDER	rudder - trailing edge to the left
	SPOILR	spoiler - trailing edge down
	TAB	tab - trailing edge down with respect to control surface
δ		antisymmetrical surface deflection angle, degrees; positive trailing edge down:
	AIL-L	left aileron - trailing edge down
	AIL-R	right aileron - trailing edge down
	ELVN-L	left elevon - trailing edge down
	ELVN-R	right elevon - trailing edge down
	SPLR-L	left spoiler - trailing edge down
	SPLR-R	right spoiler - trailing edge down

<u>SURFACE SUBSCRIPTS</u>	<u>DEFINITION</u>
a	aileron
b	base
c	canard
e	elevator or elevon
f	flap
r	rudder or ruddervator
s	spoiler
t	tail

ADDITIONS TO STANDARD SADSAC NOMENCLATURE
FOR
GRUMMAN GWTT TEST 290

<u>SYMBOL</u>	<u>SADSAC SYMBOL</u>	<u>DEFINITION</u>
δ_{EL}	LELEVW	left wing elevon deflection angle, positive in trailing edge down; degrees
δ_{ER}	RELEVW	right wing elevon deflection angle, positive in trailing edge down; degrees
δ_E	ELEVTR	elevator deflection angle, $(S_{EL} + S_{ER})/2$; degrees
δ_A	AILERON	aileron deflection angle, $(S_{ER} - S_{EL})$; degrees
	BODFLP	body flap deflection angle (negative is trailing edge up)

TABULATED DATA LISTING

A tabulated data listing, consisting of all aero data sets, both original and those created in arriving at the plotted material to be presented subsequently, is available as an addendum to this report. The tabular listing is made up in two sections:

- (a) a brief summary list of all data sets containing the identifier, the descriptor, and the resident dependent variables.
- (b) a full list of all data sets containing all resident or selected aerodynamic coefficients of the data sets as well as the above mentioned information.

The listing is currently sent on limited distribution to the following organizations:

NASA AMES	Mr. V. Stevens
NASA MSC	Mr. Ray Nelson
GAC	Mr. M. Quan


If copies of this listing are desired, please contact the above or the cognizant SADSAC personnel who, for this data, is:

Mr. J. R. Ziler
Department 2780
Chrysler Corporation Space Division
New Orleans, La. 70129

(504) 255-2304

PLOTTED DATA

FIG. 1 YAW POLAR IN GROUND EFFECT

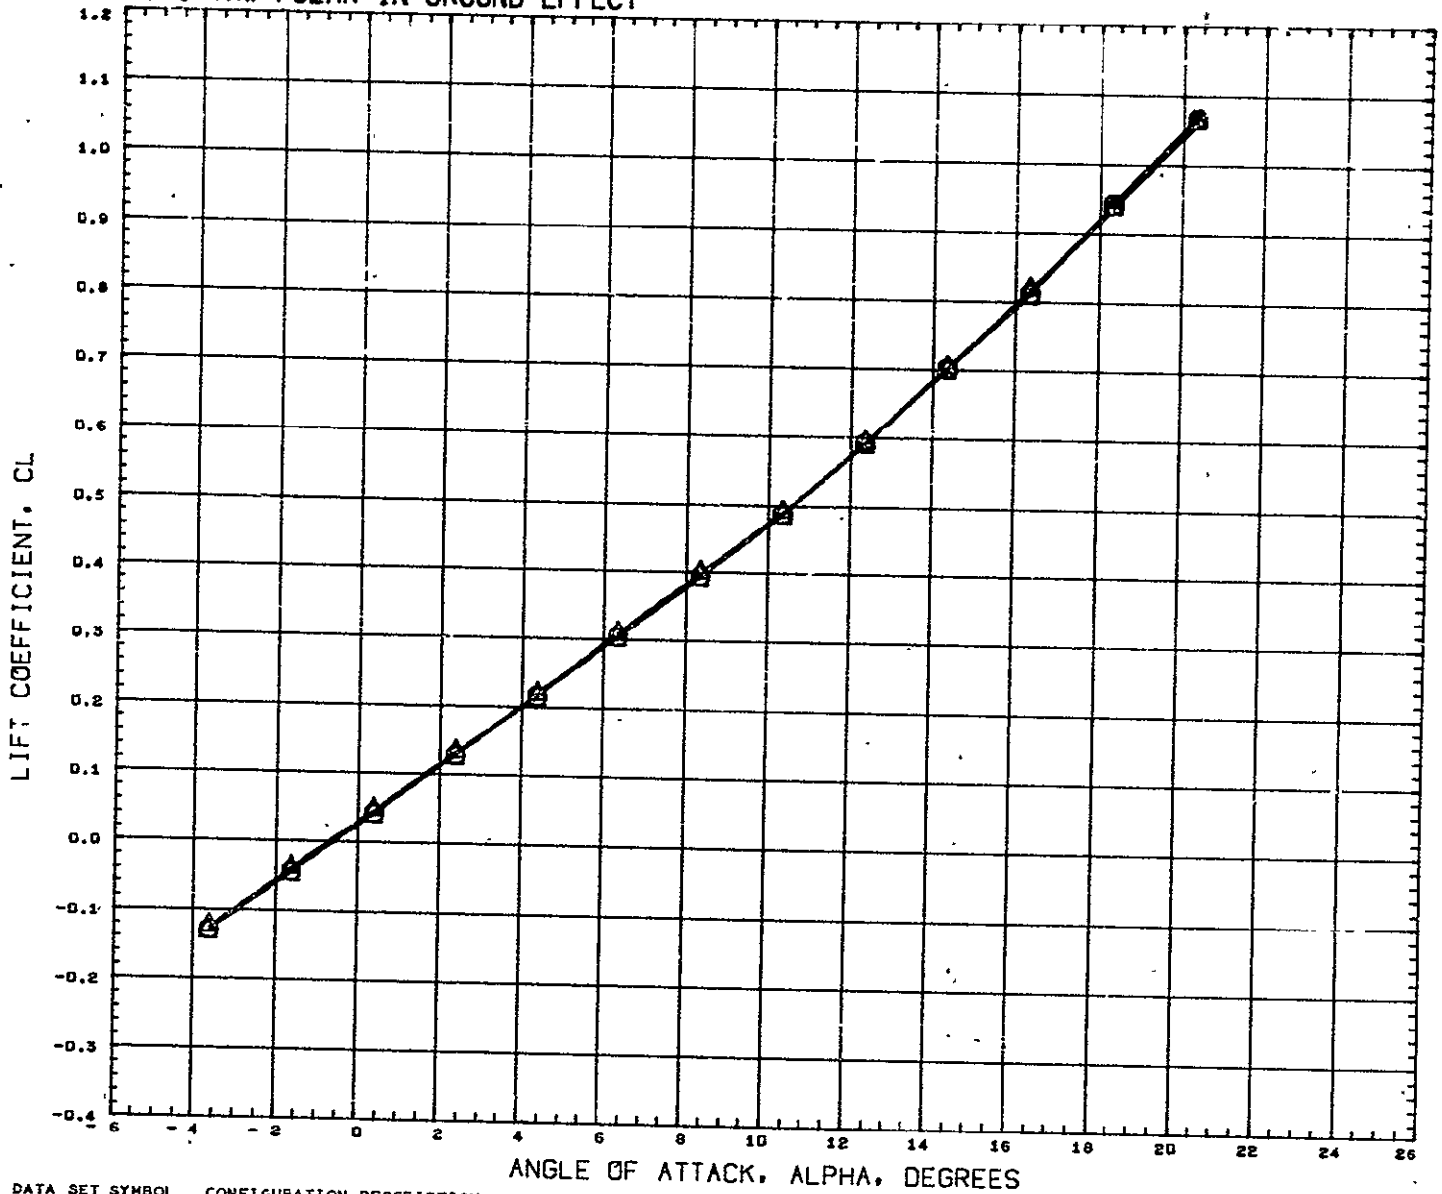


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW005) 6WTT 290-CONF ROS-NB1 B1F1W1V1GB
 (RCW007) 6WTT 290-CONF ROS-NB1 B1F1W1V1GB

BETA ELEVTR AILRON RUDDER
 0.000 0.000 0.000 0.000
 3.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

HACH 0.170

FIG. 1 YAW POLAR IN GROUND EFFECT

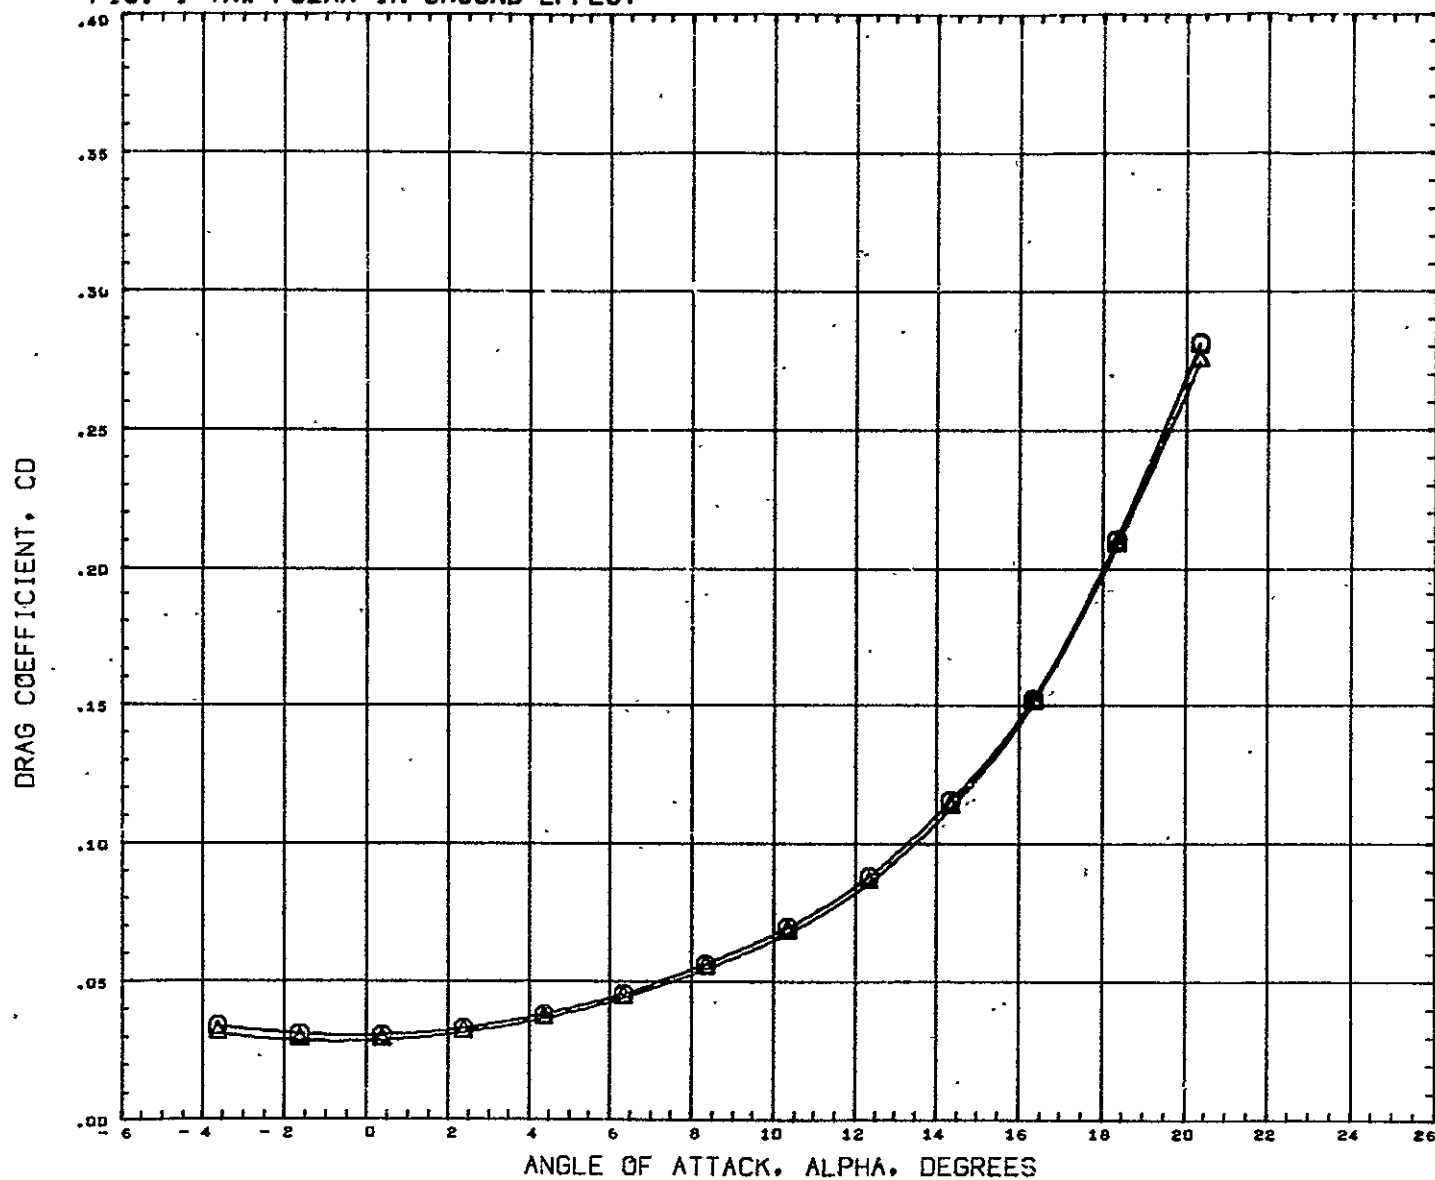


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW005) Q	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB
(RCW007) A	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB

BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
3.000	0.000	0.000	0.000	LREF 6.4320 FT
				BREF 3.8929 FT
				XNRP 1485.0040 IN
				YNRP 0.0000 IN
				ZNRP 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 1 YAW POLAR IN GROUND EFFECT

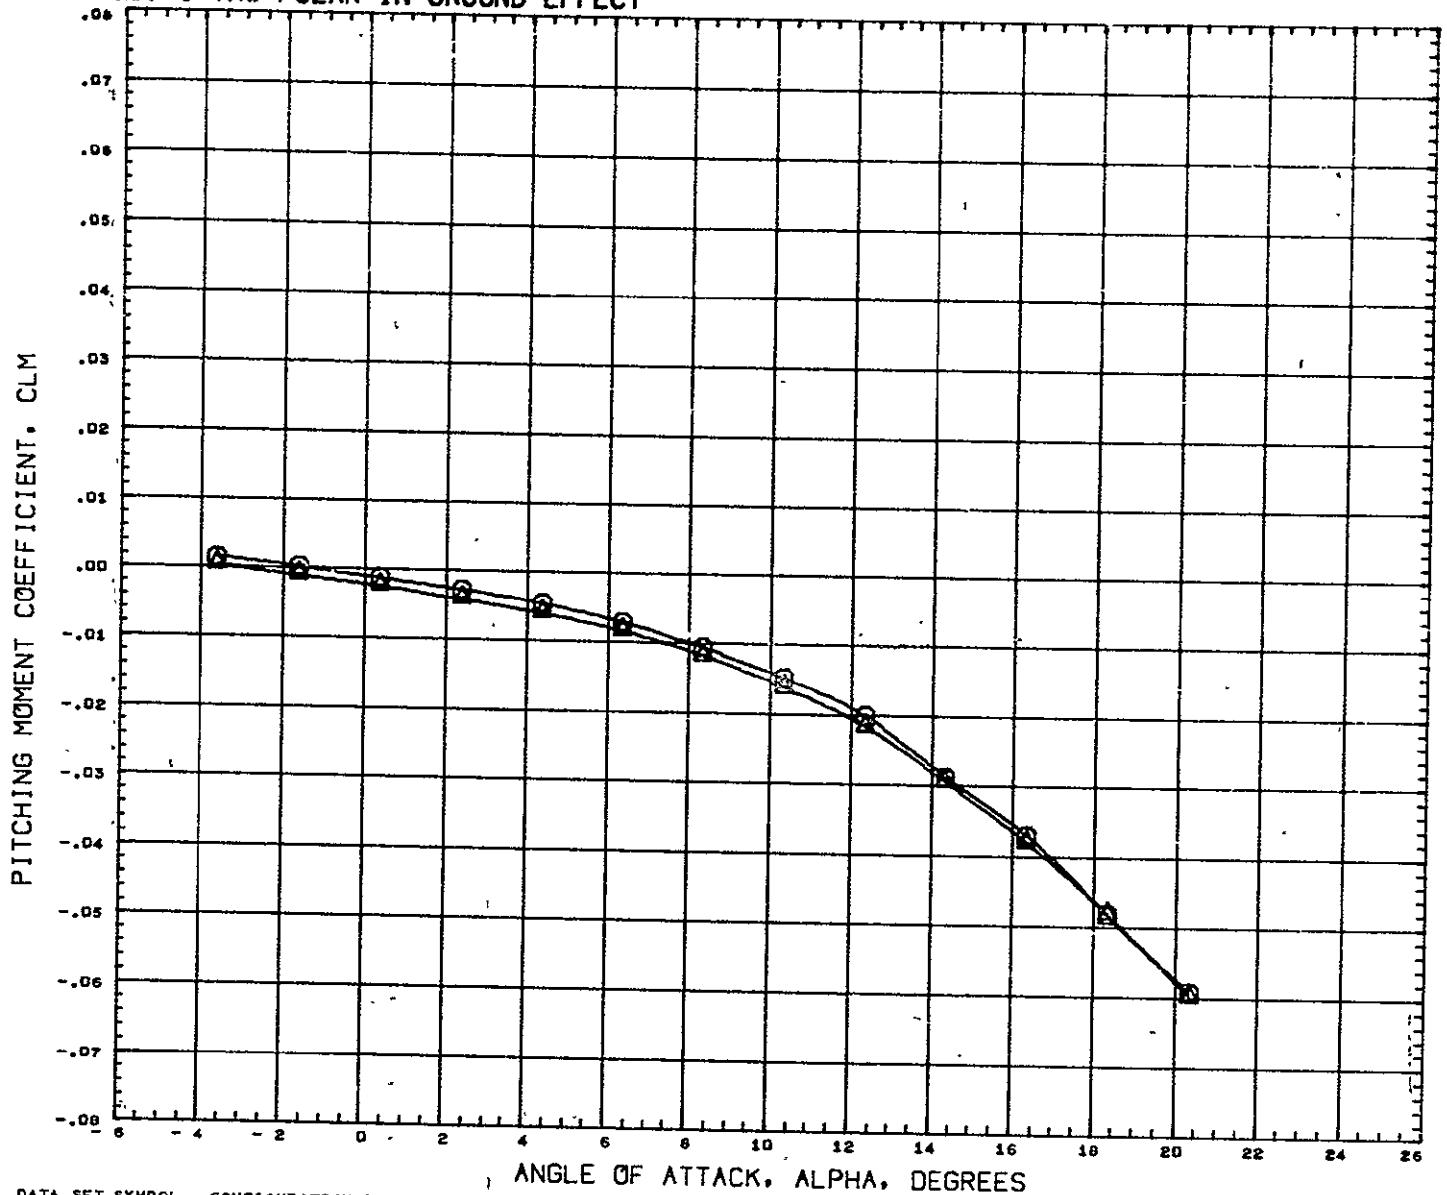


DATA SET SYMBOL CONFIGURATION DESCRIPTION
(RCW005) GWT1 29D-CONF ROS-NB1 B1F1W1V1GB
(RCW007) GWT1 29D-CONF ROS-NB1 B1F1W1V1GB

BETA 0.000 ELEVTR 0.000 AILRON 0.000 RUDDER 0.000
3.000 0.000 0.000 0.000

REFERENCE INFORMATION
SREF 9.1952 SQ FT
LREF .6.4320 FT
BREF 3.8925 FT
XMRP 1485.0040 IN
YMRP 0.0000 IN
ZMRP 377.0004 IN
SCALE 0.0400

MACH 0.170


FIG. 1 YAW POLAR IN GROUND EFFECT

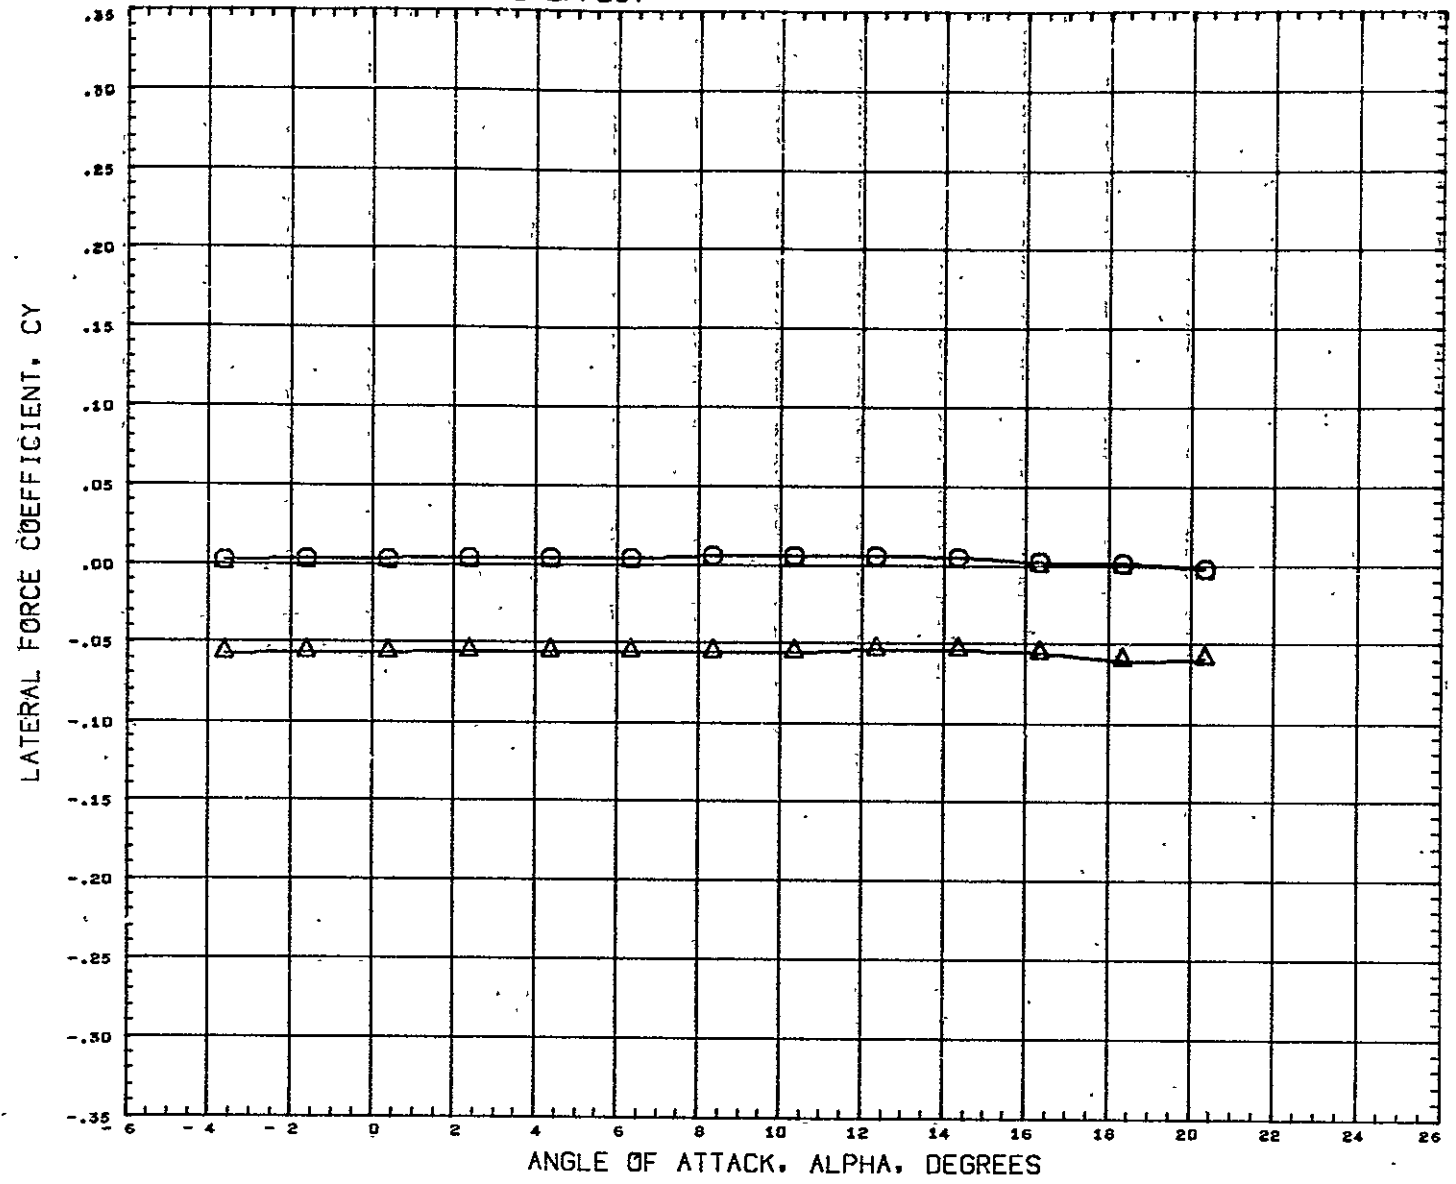

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW005)	○	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW007)	△	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	3.000	0.000	0.000	0.000	LREF	6.4320 FT
								BREF	3.8920 FT
								XMRP	1485.0040 IN
								YMRP	0.0000 IN
								ZMRP	377.0004 IN
								SCALE	0.0400

MACH 0.170

FIG. 1 YAW POLAR IN GROUND EFFECT

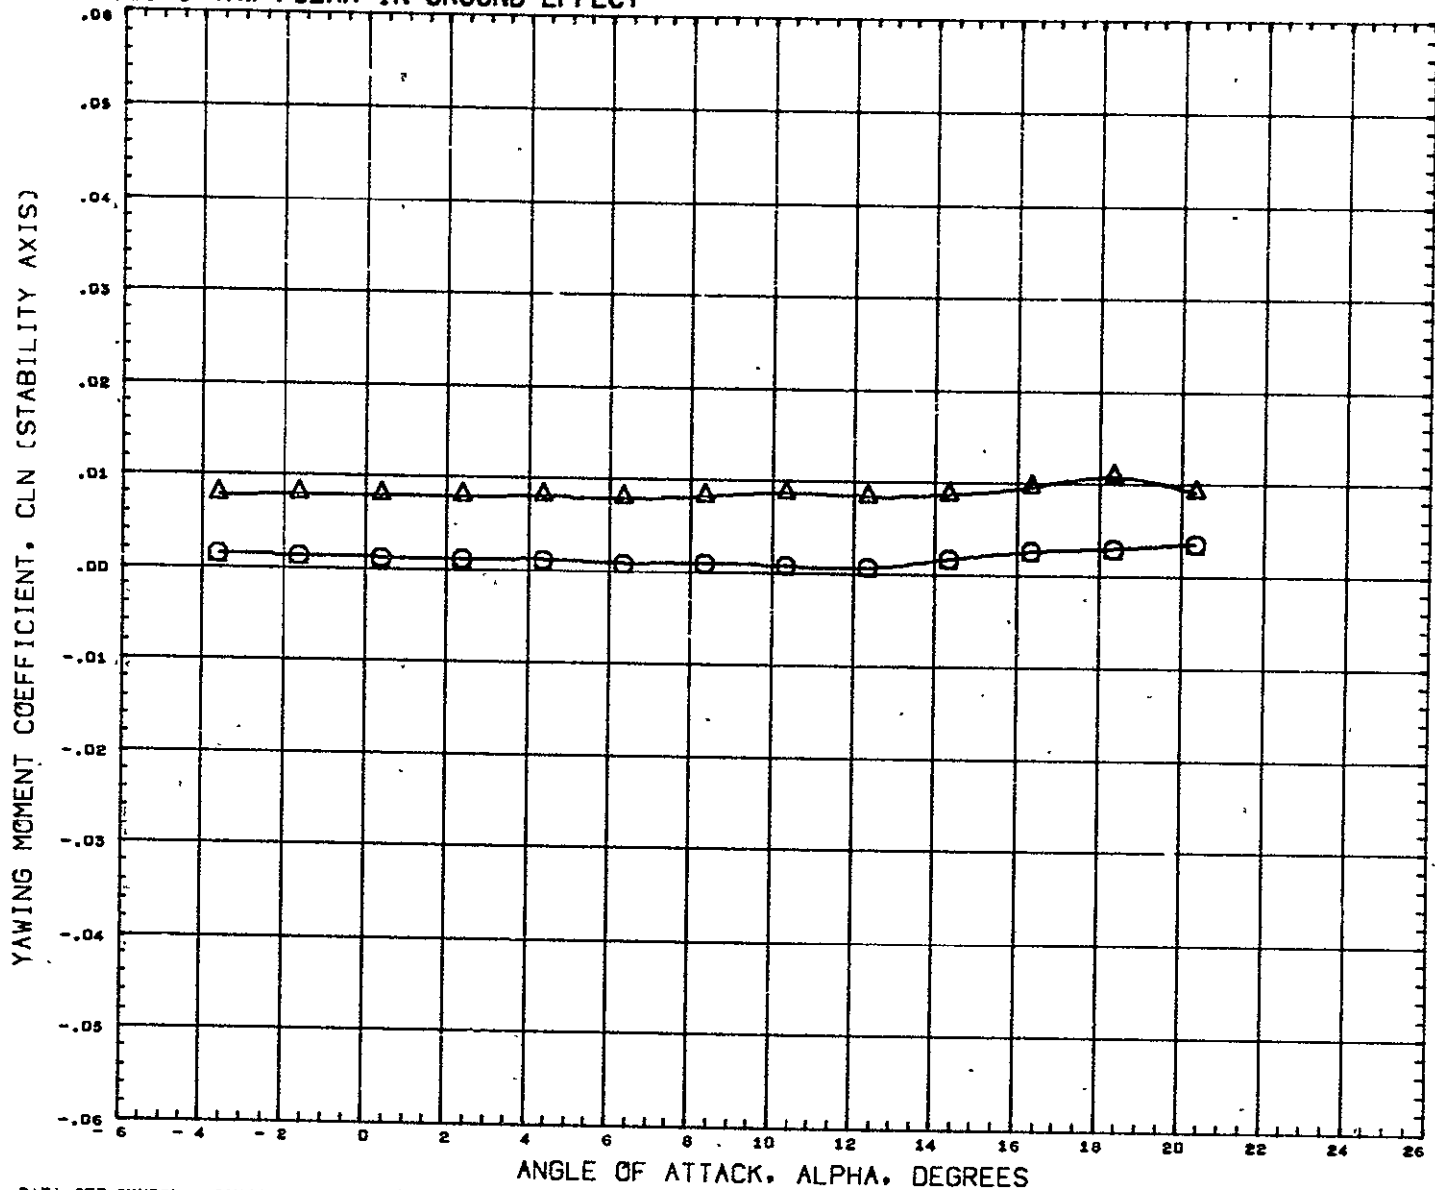


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCWD05)	GWTT 29G-CONF ROS-NB1 B1F1W1V1GB
(RCWD07)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
3.000	0.000	0.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170


FIG. 1 YAW POLAR IN GROUND EFFECT

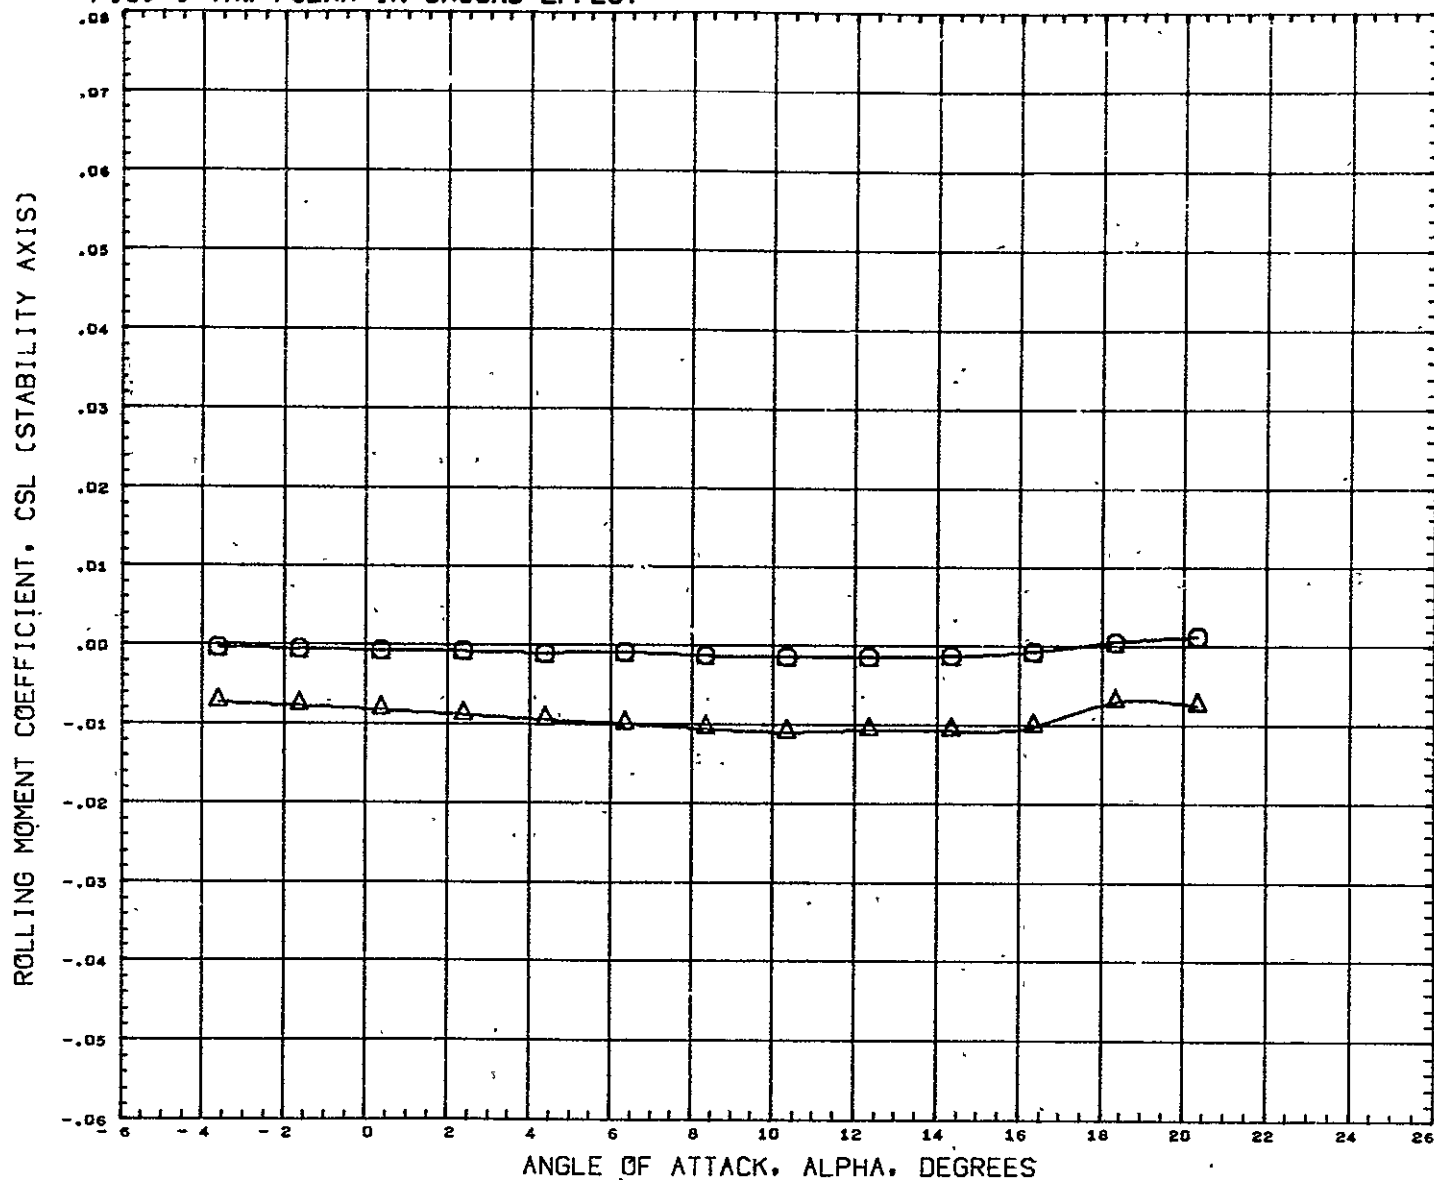

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW005)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW007)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	3.000	0.000	0.000	0.000	LREF	6.4320 FT
						BREF	3.8920 FT
						XMRP	1465.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 2 ELEVATOR EFFECTIVENESS IN GROUND EFFECT

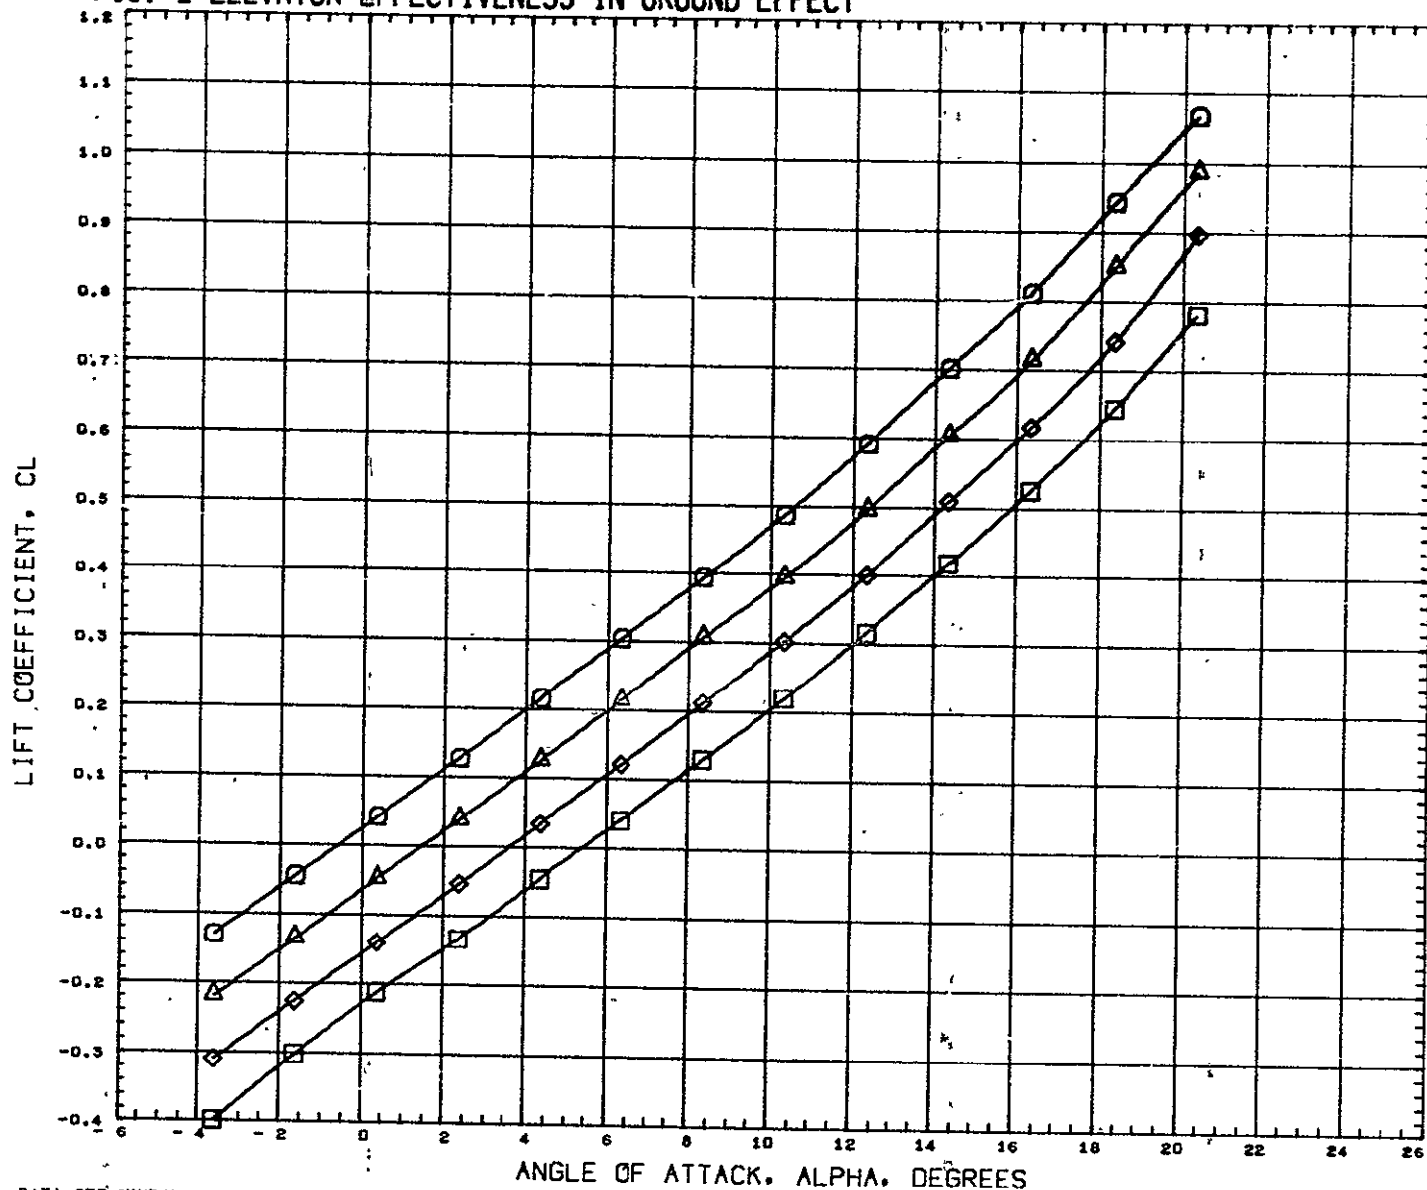

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW005)	○	GWTT 29D-CONF	ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW014)	△	GWTT 29D-CONF	ROS-NB1 B1F1W1V1GB	0.000	-5.000	0.000	0.000	LREF	6.4320 FT
(RCW009)	◇	GWTT 29D-CONF	ROS-NB1 B1F1W1V1GB	0.000	-10.000	0.000	0.000	BREF	3.8920 F1
(RCW012)	□	GWTT 29D-CONF	ROS-NB1 B1F1W1V1GB	0.000	-15.000	0.000	0.000	XMRP	1485.0040 IN
								YMRP	0.0000 IN
								ZMRP	377.0004 IN
								SCALE	0.0400

MACH 0.170


FIG. 2 ELEVATOR EFFECTIVENESS IN GROUND EFFECT

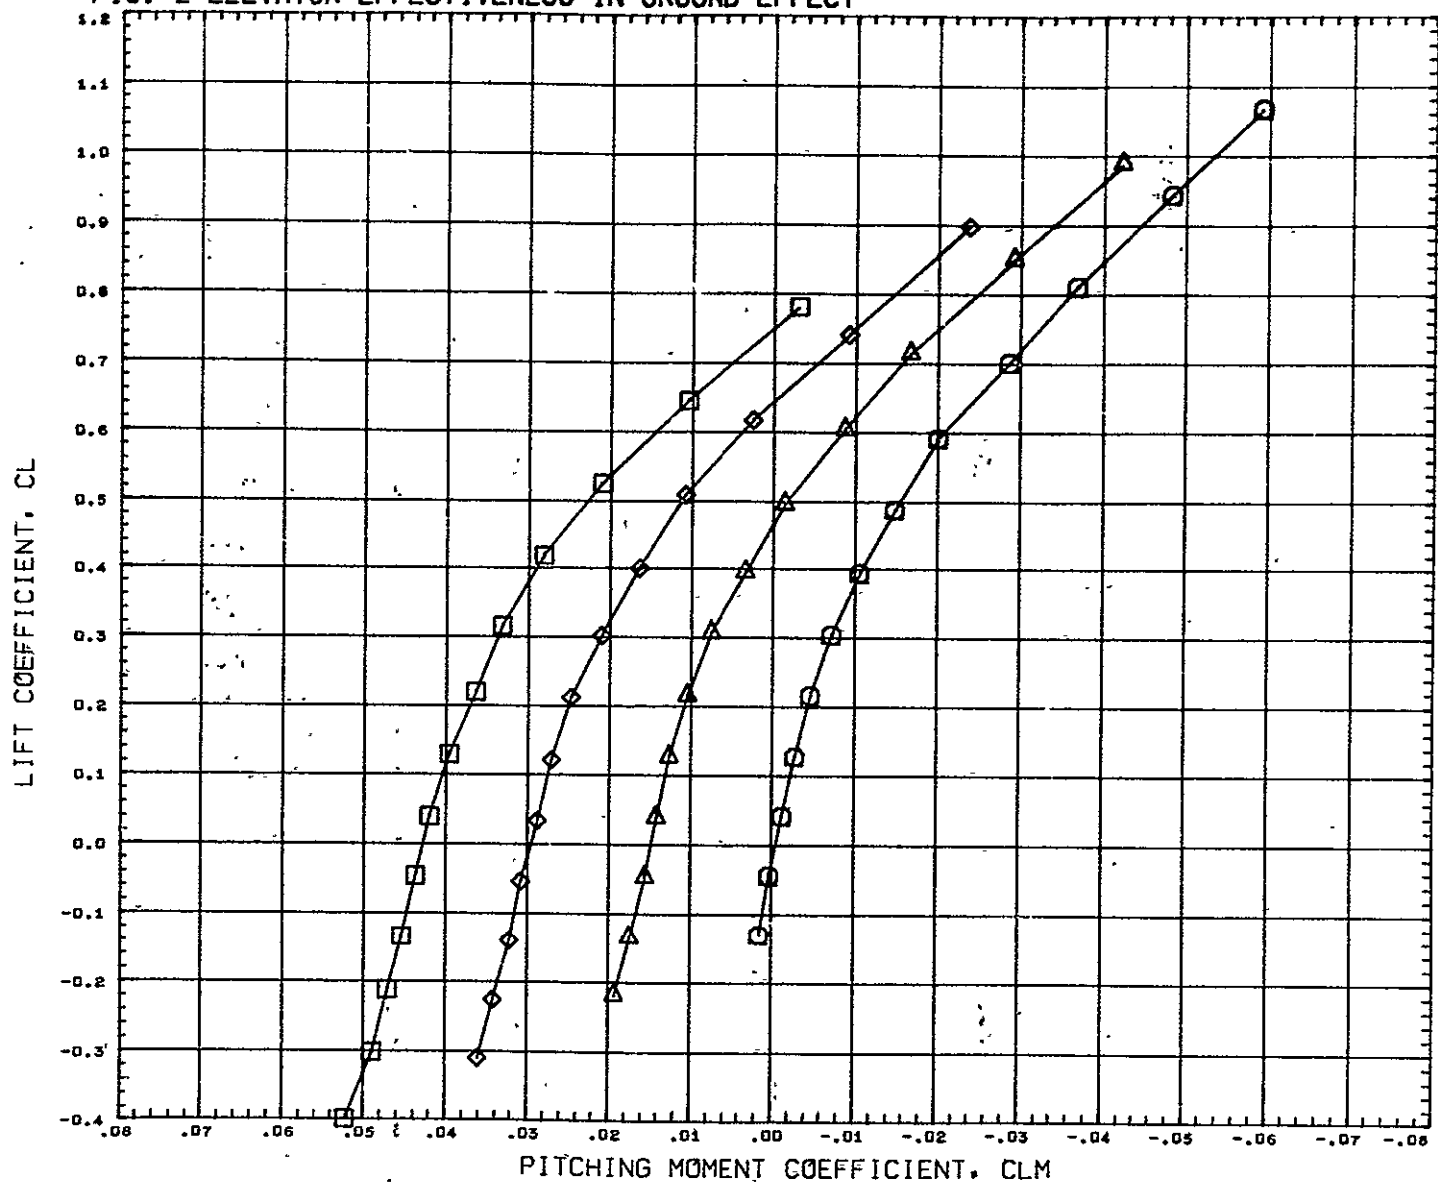

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW005)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW014)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-5.000	0.000	0.000	LREF	6.4320 FT
(RCW009)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-10.000	0.000	0.000	BREF	3.8920 FT
(RCW012)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-15.000	0.000	0.000	XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 2 ELEVATOR EFFECTIVENESS IN GROUND EFFECT

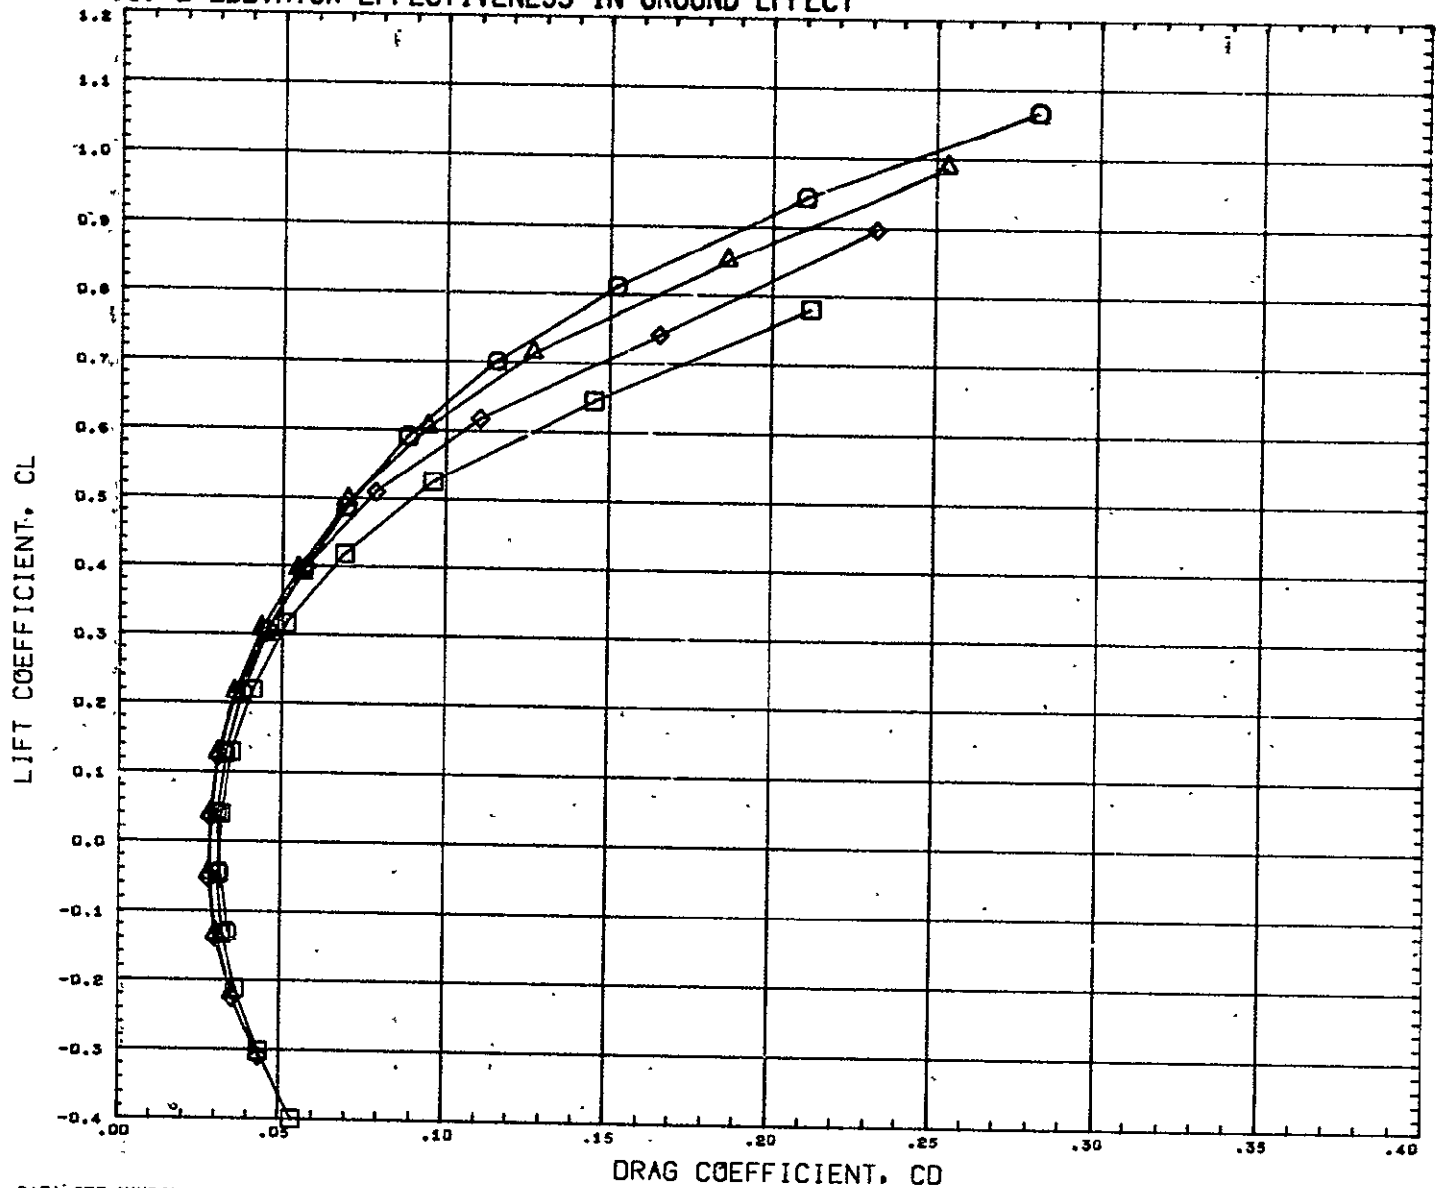

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW005)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW014)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-5.000	0.000	0.000	LREF	6.4320 FT
(RCW009)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-10.000	0.000	0.000	BREF	3.8920 FT
(RCW012)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-15.000	0.000	0.000	XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 3 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=0. DEG

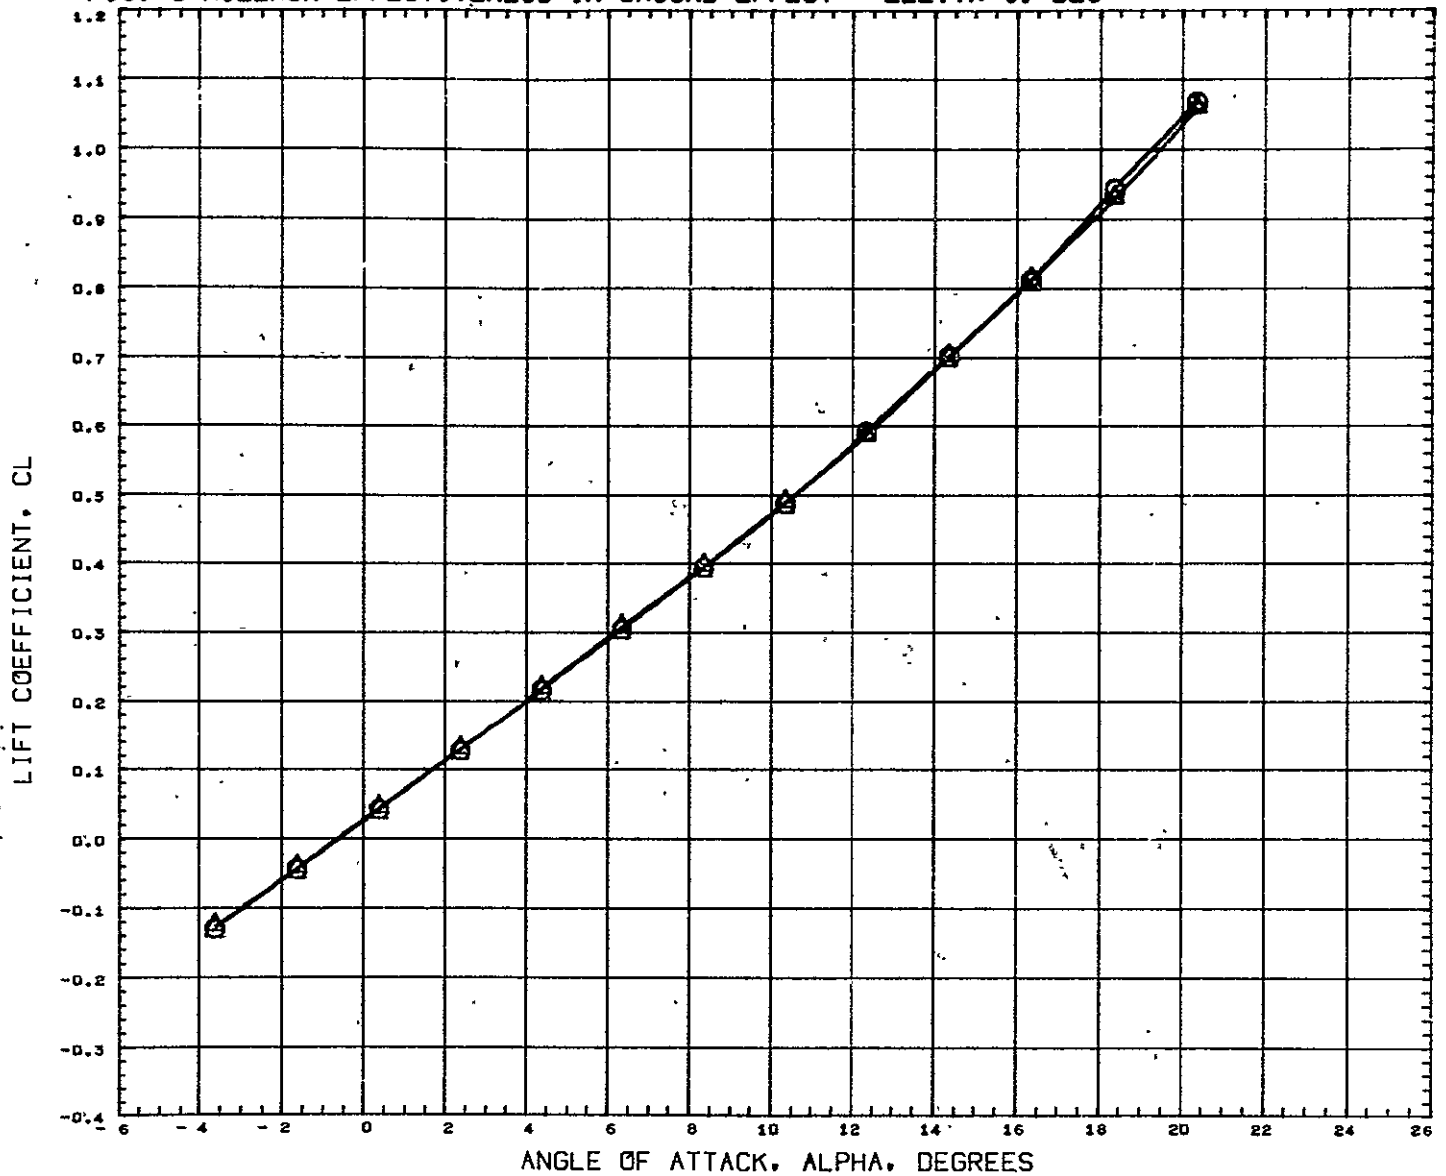


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW005) 	GWTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCW010) 	GWTT 290-CONF ROS-NB1 B1F1W1V1GB

BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION
0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
0.000	-10.000	5.000	-5.000	LREF 6.4320 FT
				BREF 3.8920 FT
				XNRP 1485.0040 IN
				YNRP 0.0000 IN
				ZNRP 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 3 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=0. DEG

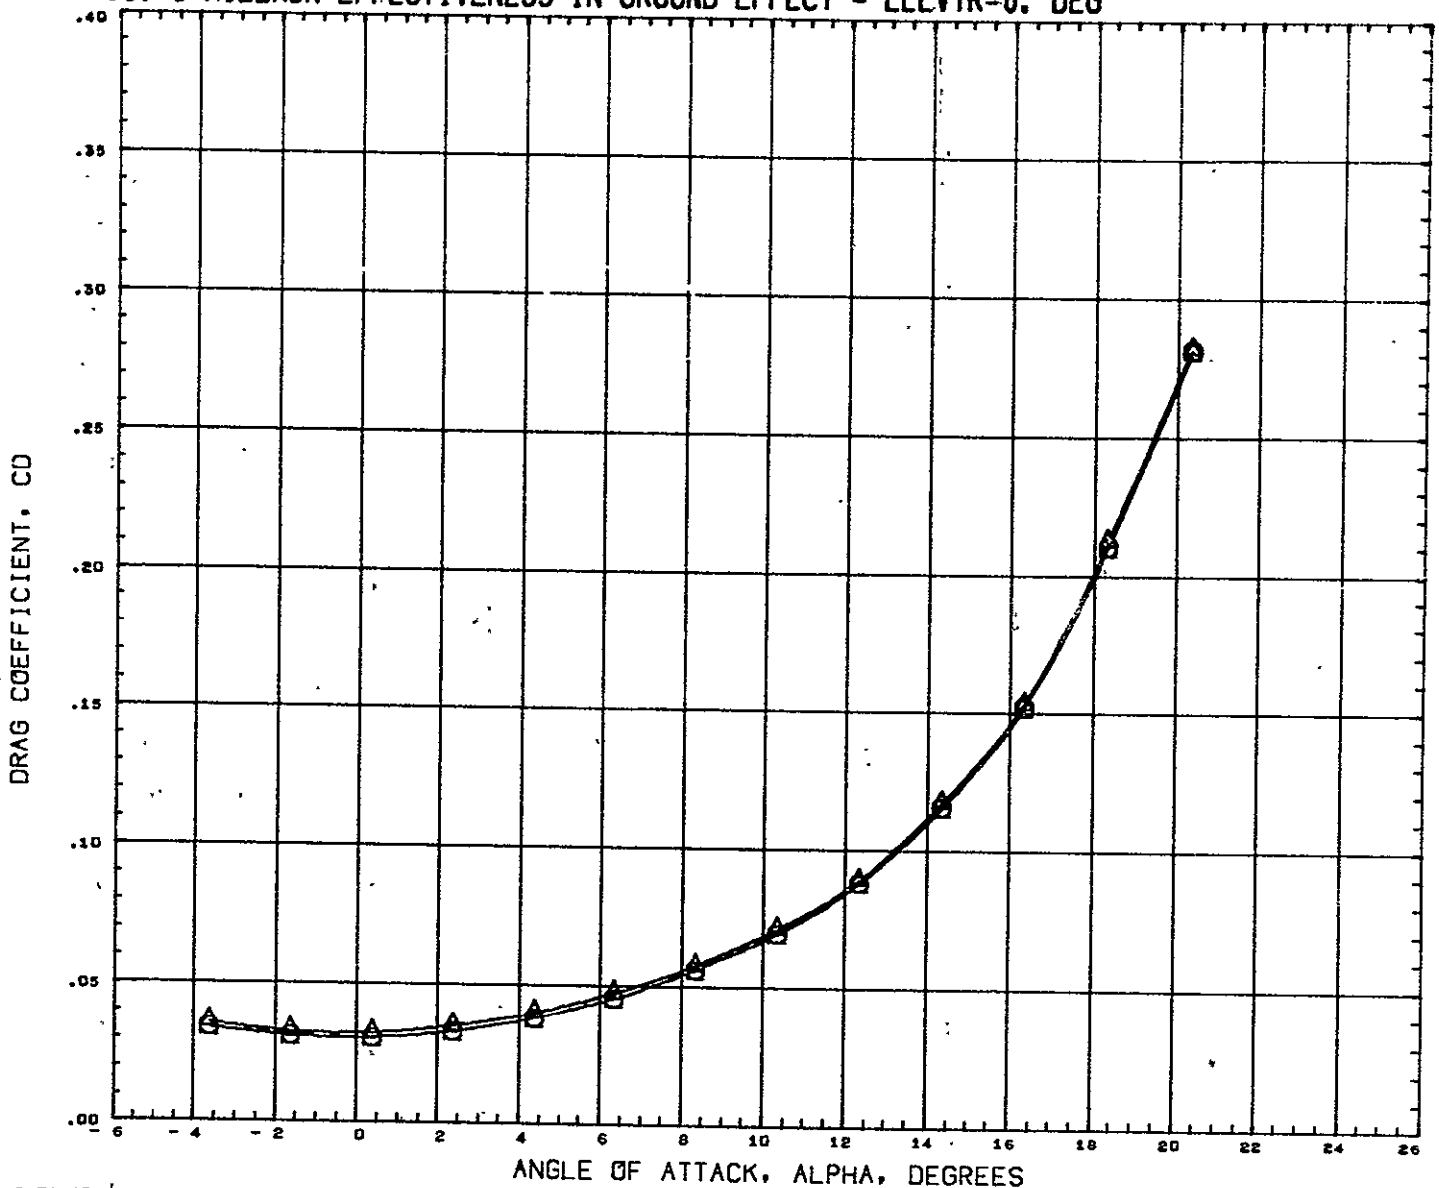


DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION
(RCWD05)	□	GWTT 29D-CONF	ROS-NB1 B1F1W1V1GB
(RCWD10)	△	GWTT 29D-CONF	ROS-NB1 B1F1W1V1GB

BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION
0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
0.000	-10.000	5.000	-5.000	LREF 6.4320 FT
				BREF 3.8920 FT
				XMRP 1485.0040 IN
				YMRP 0.0000 IN
				ZMRP 377.0004 IN
				SCALE 0.0400

MACH 0.170


FIG. 3 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=0. DEG

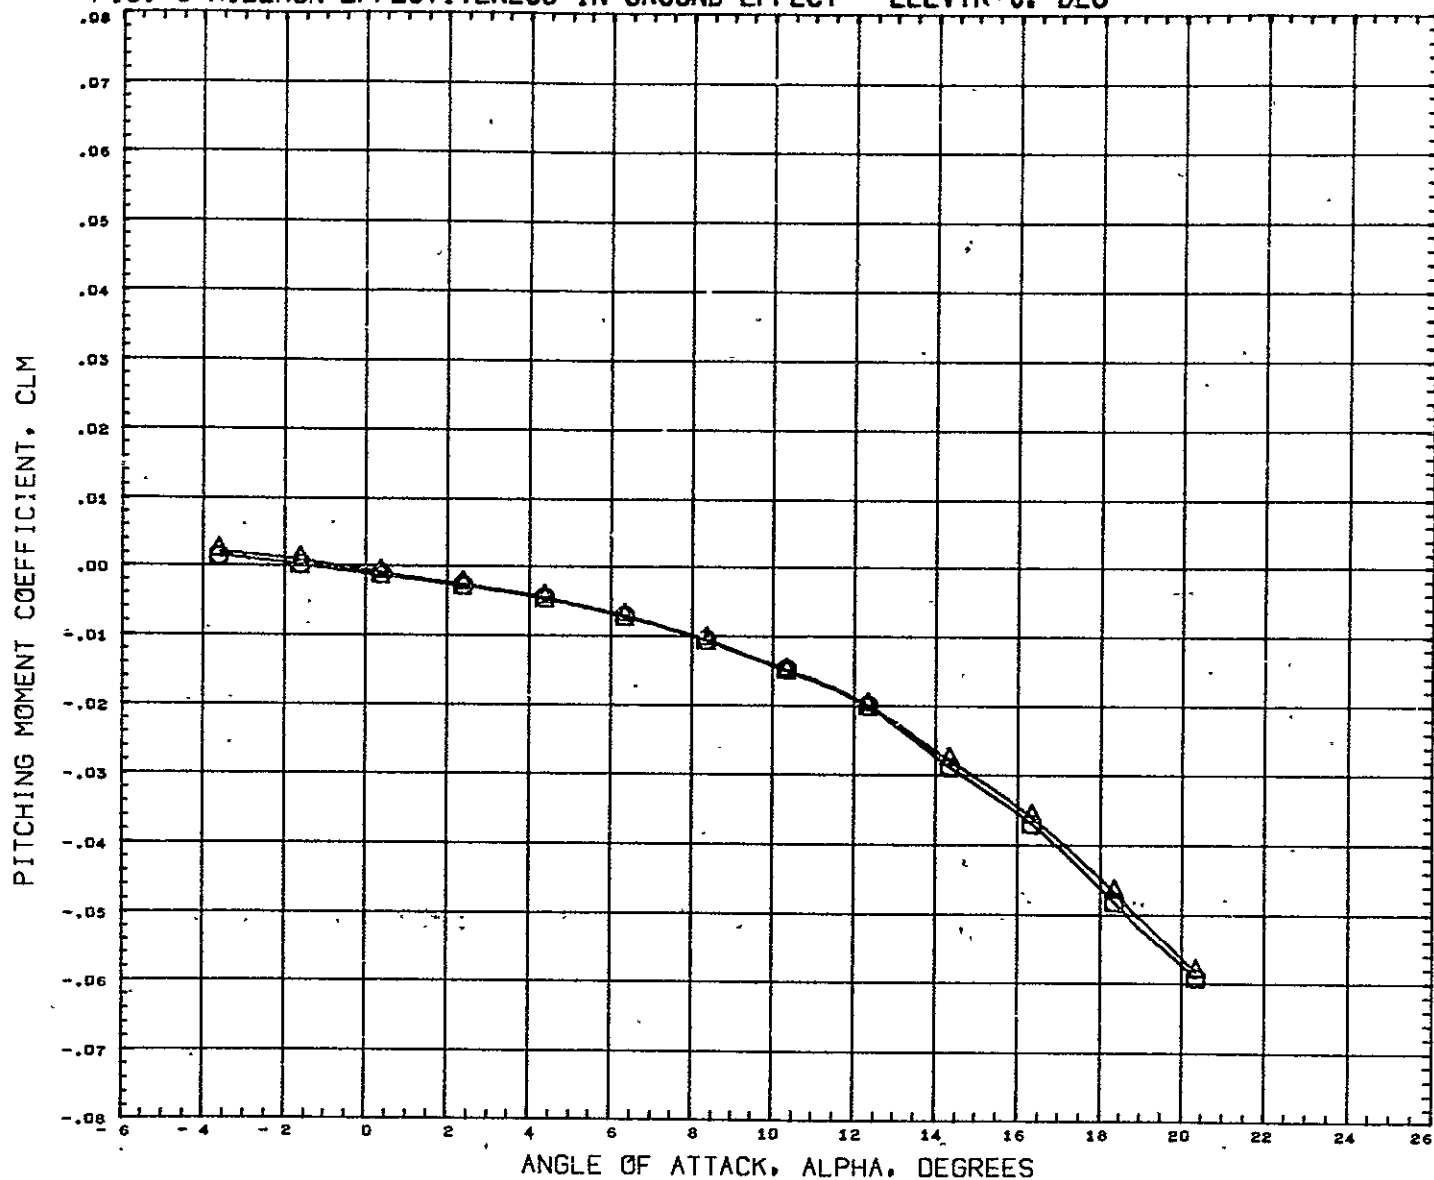

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
(RCW005)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW010)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-10.000	5.000	-5.000	LREF	6.4320 FT
						BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0490

MACH 0.170

FIG. 3 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=0. DEG

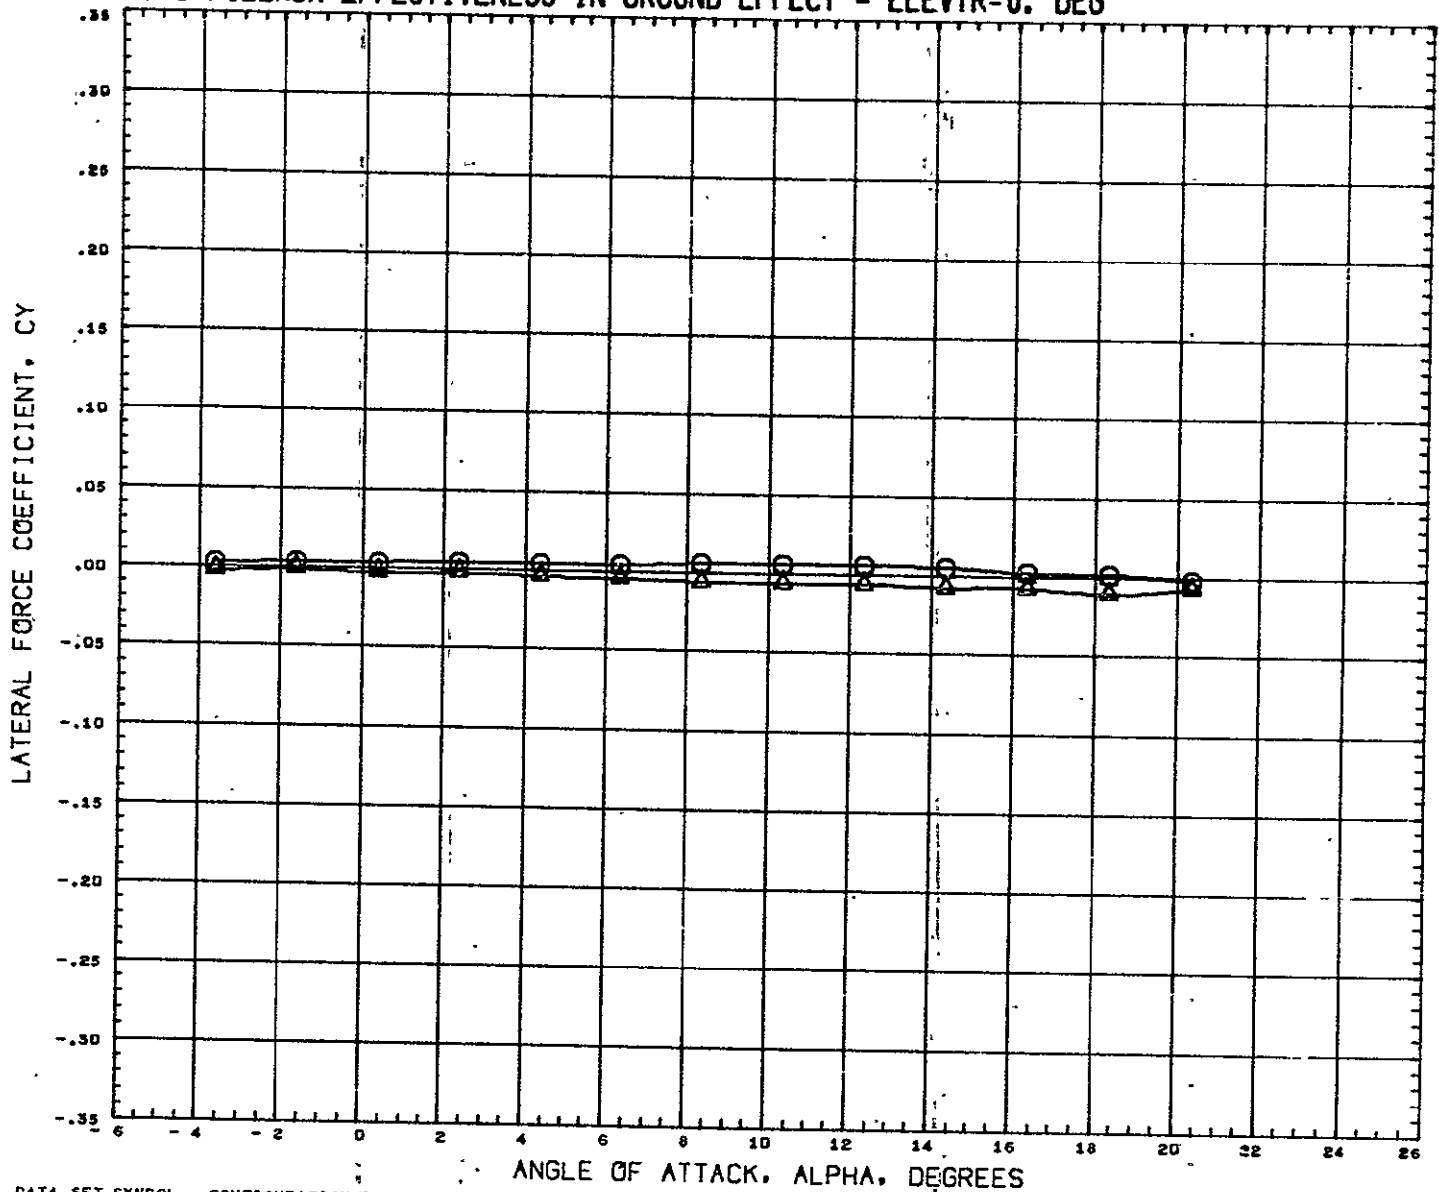


DATA SET SYMBOL	CONFIGURATION	DESCRIPTION
(RCW005)	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB
(RCW010)	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB

BETA	AILRON	ELEVTR	RELEVTR
0.000	0.000	0.000	0.000
0.000	-10.000	0.5000	-5.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170

FIG. 3 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=0. DEG

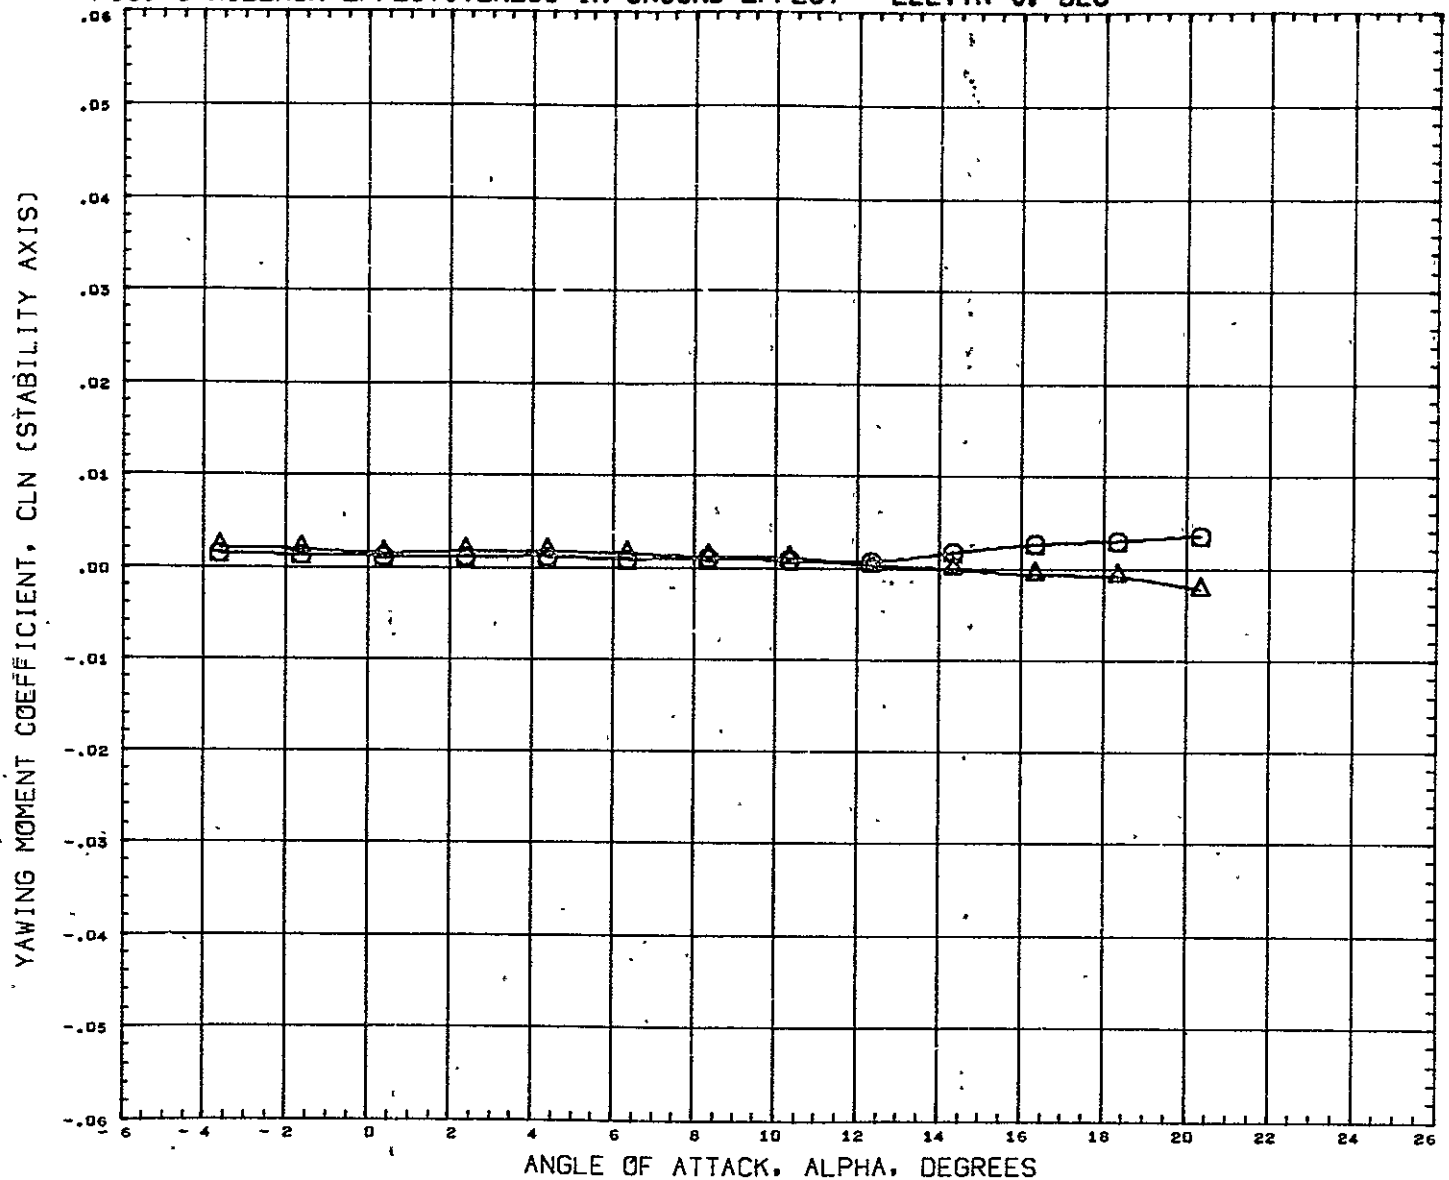


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW005)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCW010)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB

BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION
0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
0.000	-10.000	5.000	-5.000	LREF 6.4320 FT
				BREF 3.8920 FT
				XHRP 1485.0040 IN
				YHRP 0.0000 IN
				ZHRP 377.0004 IN
				SCALE 0.0400

MACH 0.170


FIG. 3 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=0. DEG

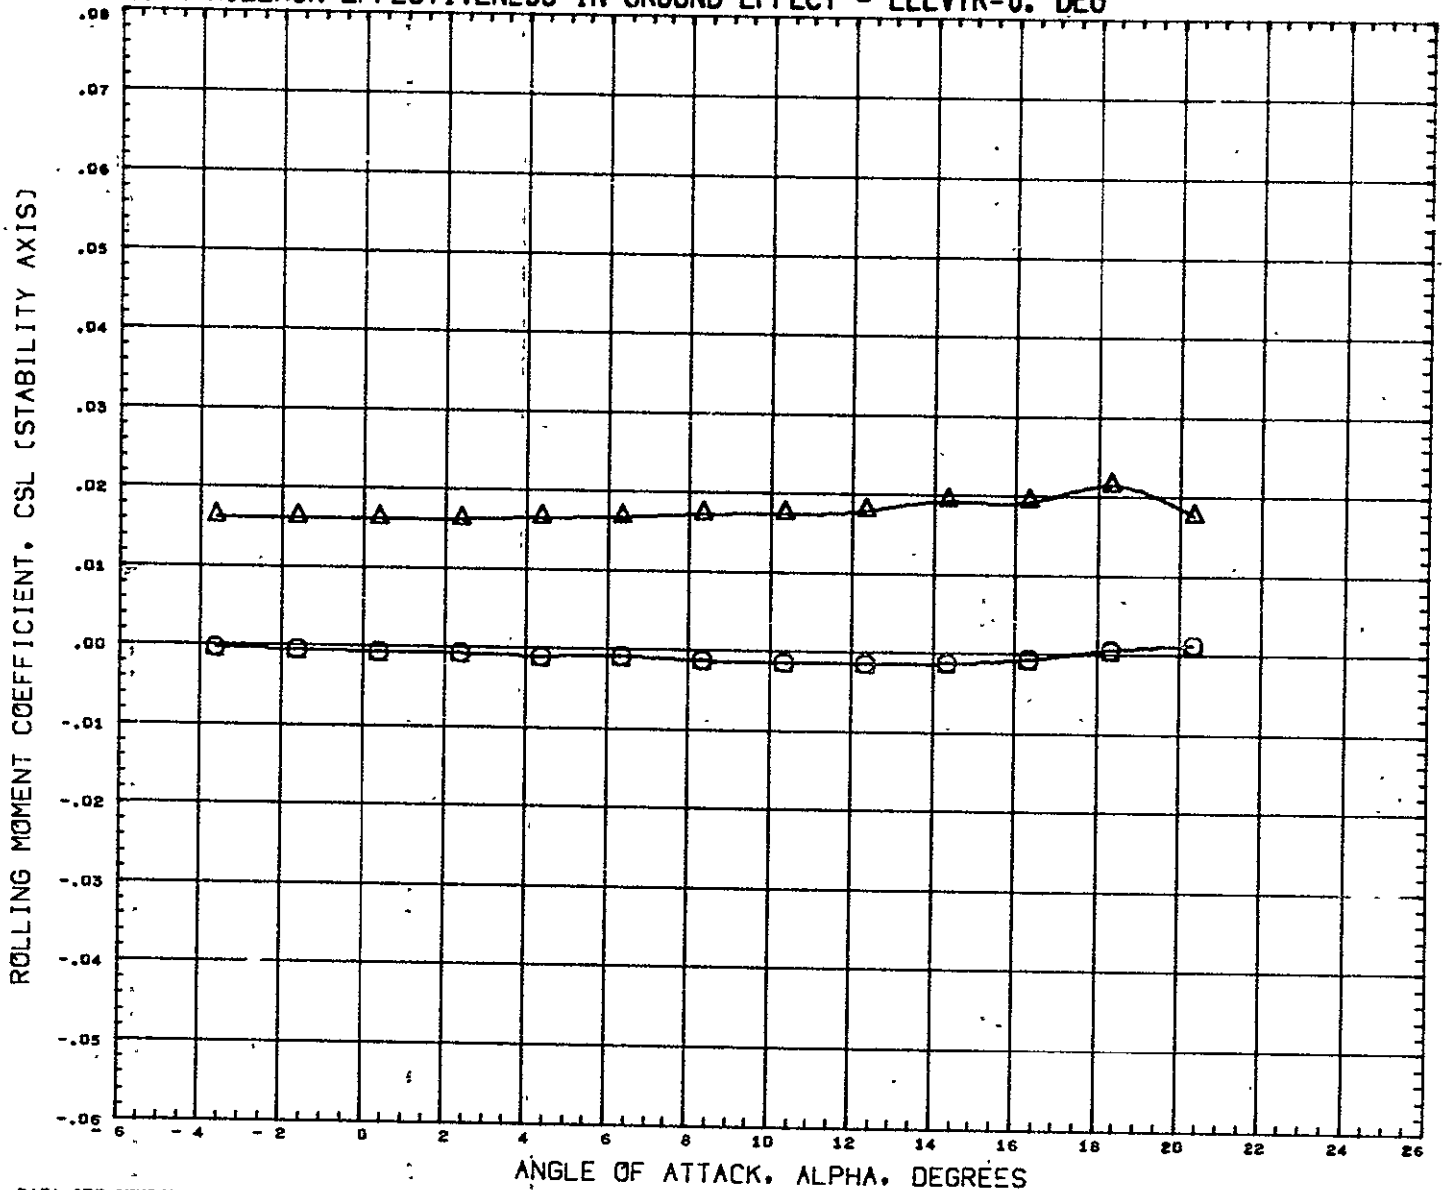

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
(RCW005)	□	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW010)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-10.000	5.000	-5.000	LREF	6.4320 FT
							BREF	3.8920 FT
							XMRP	1485.0040 IN
							YMRP	0.0000 IN
							ZMRP	377.0004 IN
							SCALE	0.0400

MACH 0.170


FIG. 4 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-5. DEG.

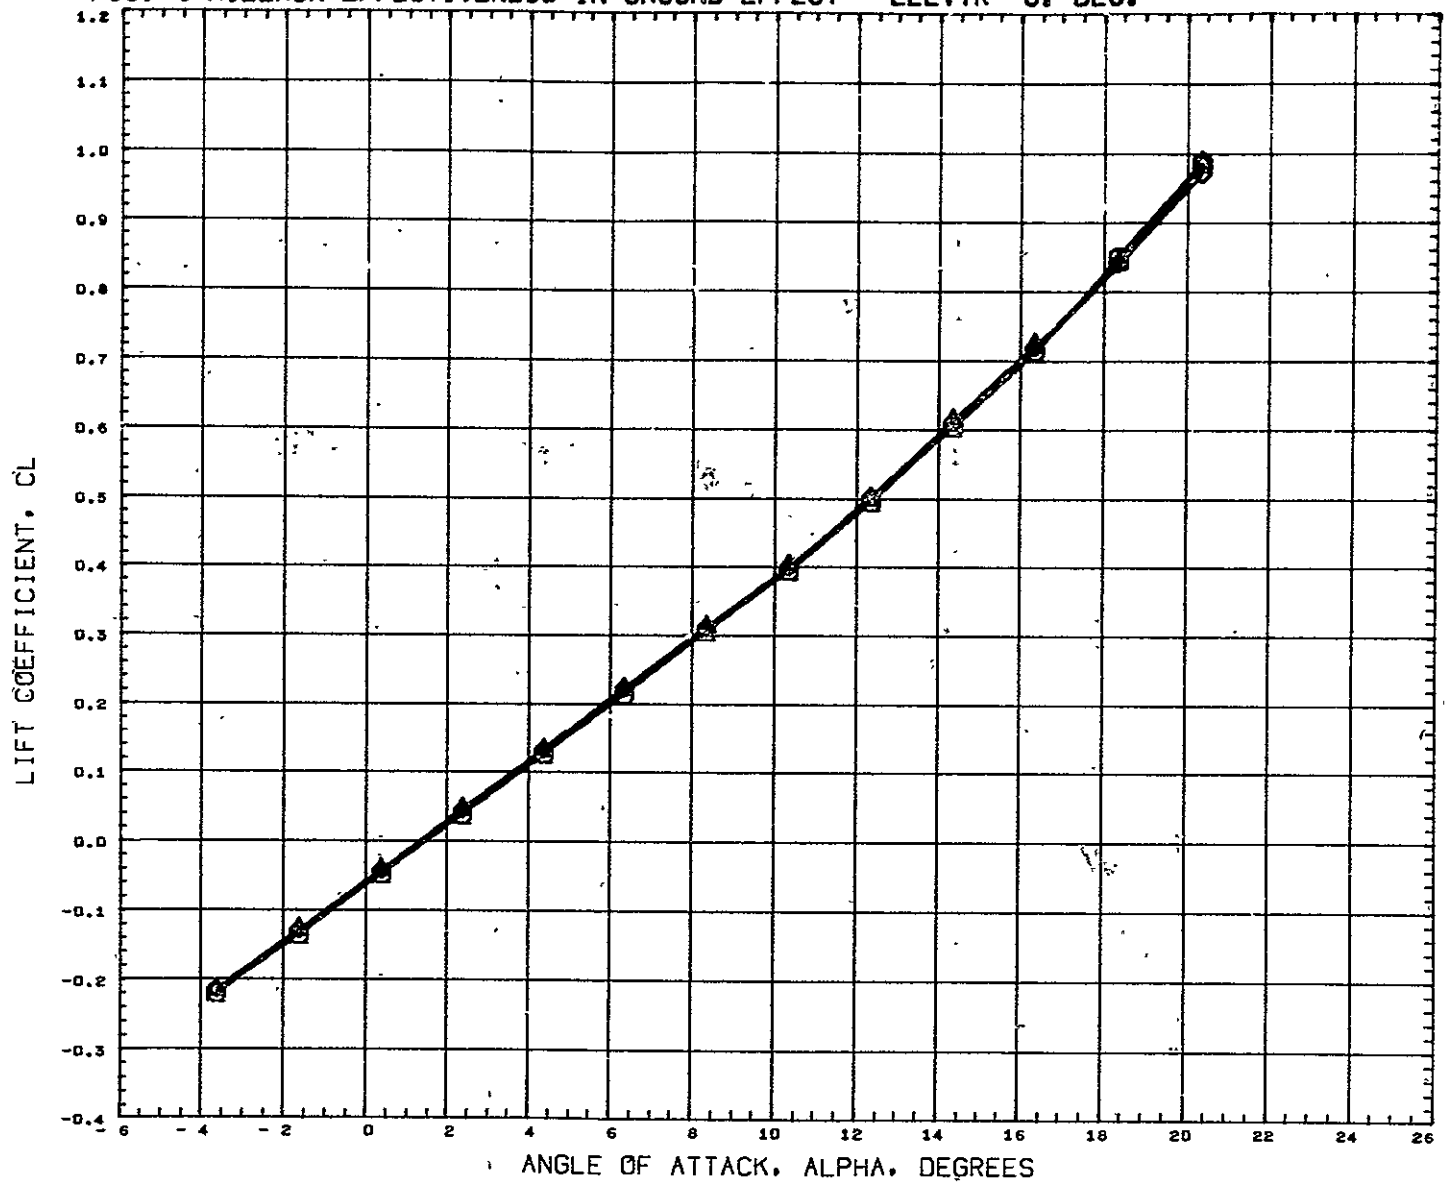

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
(RCWD14)	○	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	-5.000	-5.000	SREF	9.1952 SQ FT
(RCWD08)	△	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	-10.000	0.000	-10.000	LREF	6.4320 FT
(RCWD11)	◇	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	-20.000	5.000	-15.000	BREF	3.8920 FT
							XHRF	1485.0040 IN
							YHRF	0.0000 IN
							ZHRF	377.0004 IN
							SCALE	0.0400

MACH 0.170

FIG. 4 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-5. DEG.

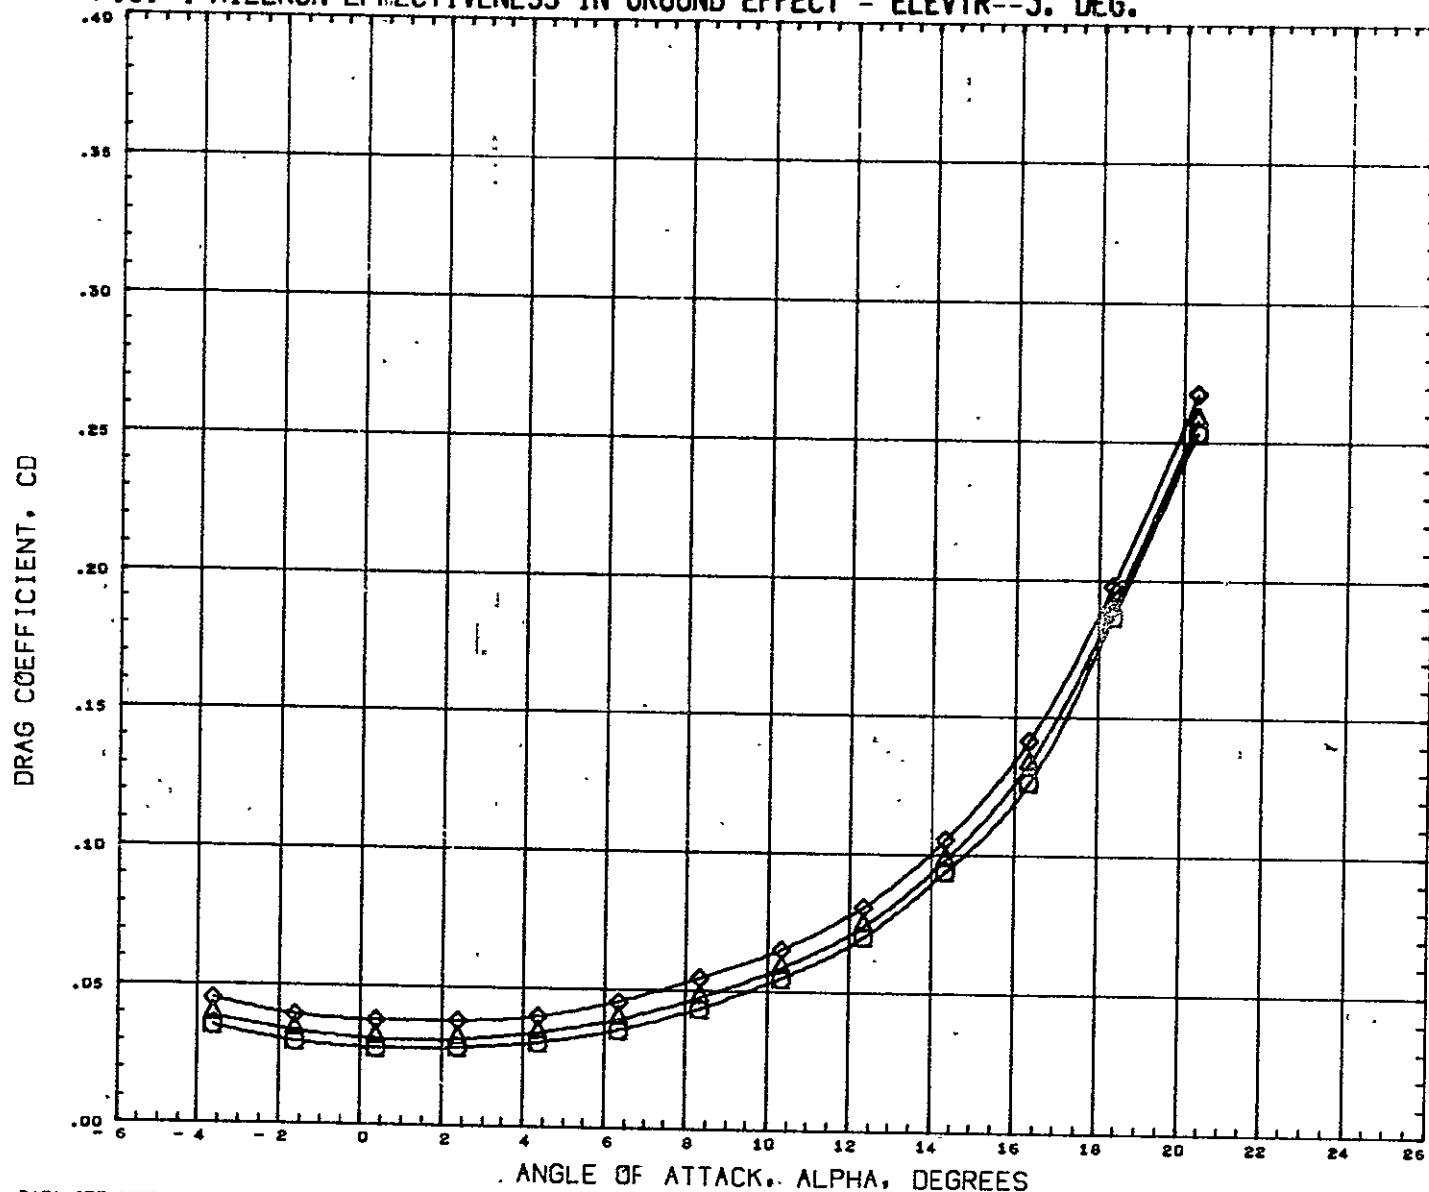


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW014)	GWTT 290-CONF ROS-NB1 B1F1W1V168
(RCW008)	GWTT 290-CONF ROS-NB1 B1F1W1V168
(RCW011)	GWTT 290-CONF ROS-NB1 B1F1W1V168

BETA	AILRON	LELEVN	RELEVN
0.000	0.000	-5.000	-5.000
0.000	-10.000	0.000	-10.000
0.000	-20.000	5.000	-15.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRF	1485.0040 IN
YMRF	0.0000 IN
ZMRF	377.0004 IN
SCALE	0.0400

MACH 0.170


FIG. 4 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-5. DEG.

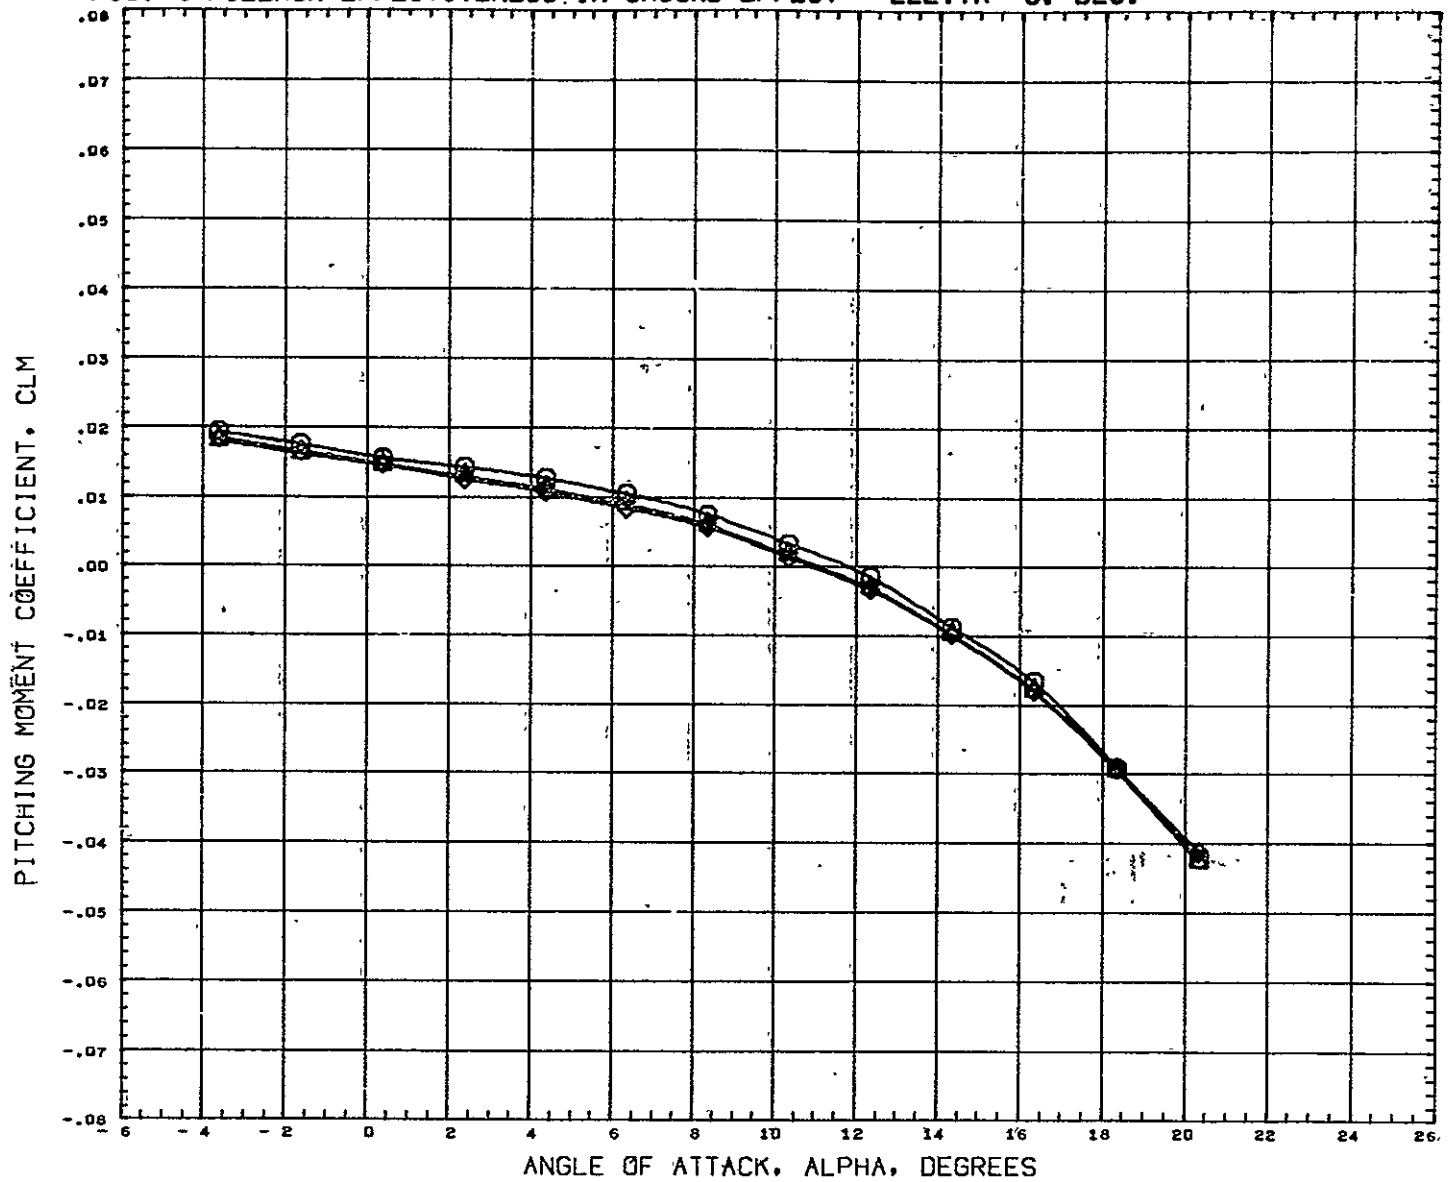

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
(RCW014)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-0.000	-5.000	-5.000	SREF	9.1952 SQ FT
(RCW008)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-10.000	0.000	-10.000	LREF	6.4320 FT
(RCW011)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	-20.000	5.000	-15.000	BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 4 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-5. DEG.

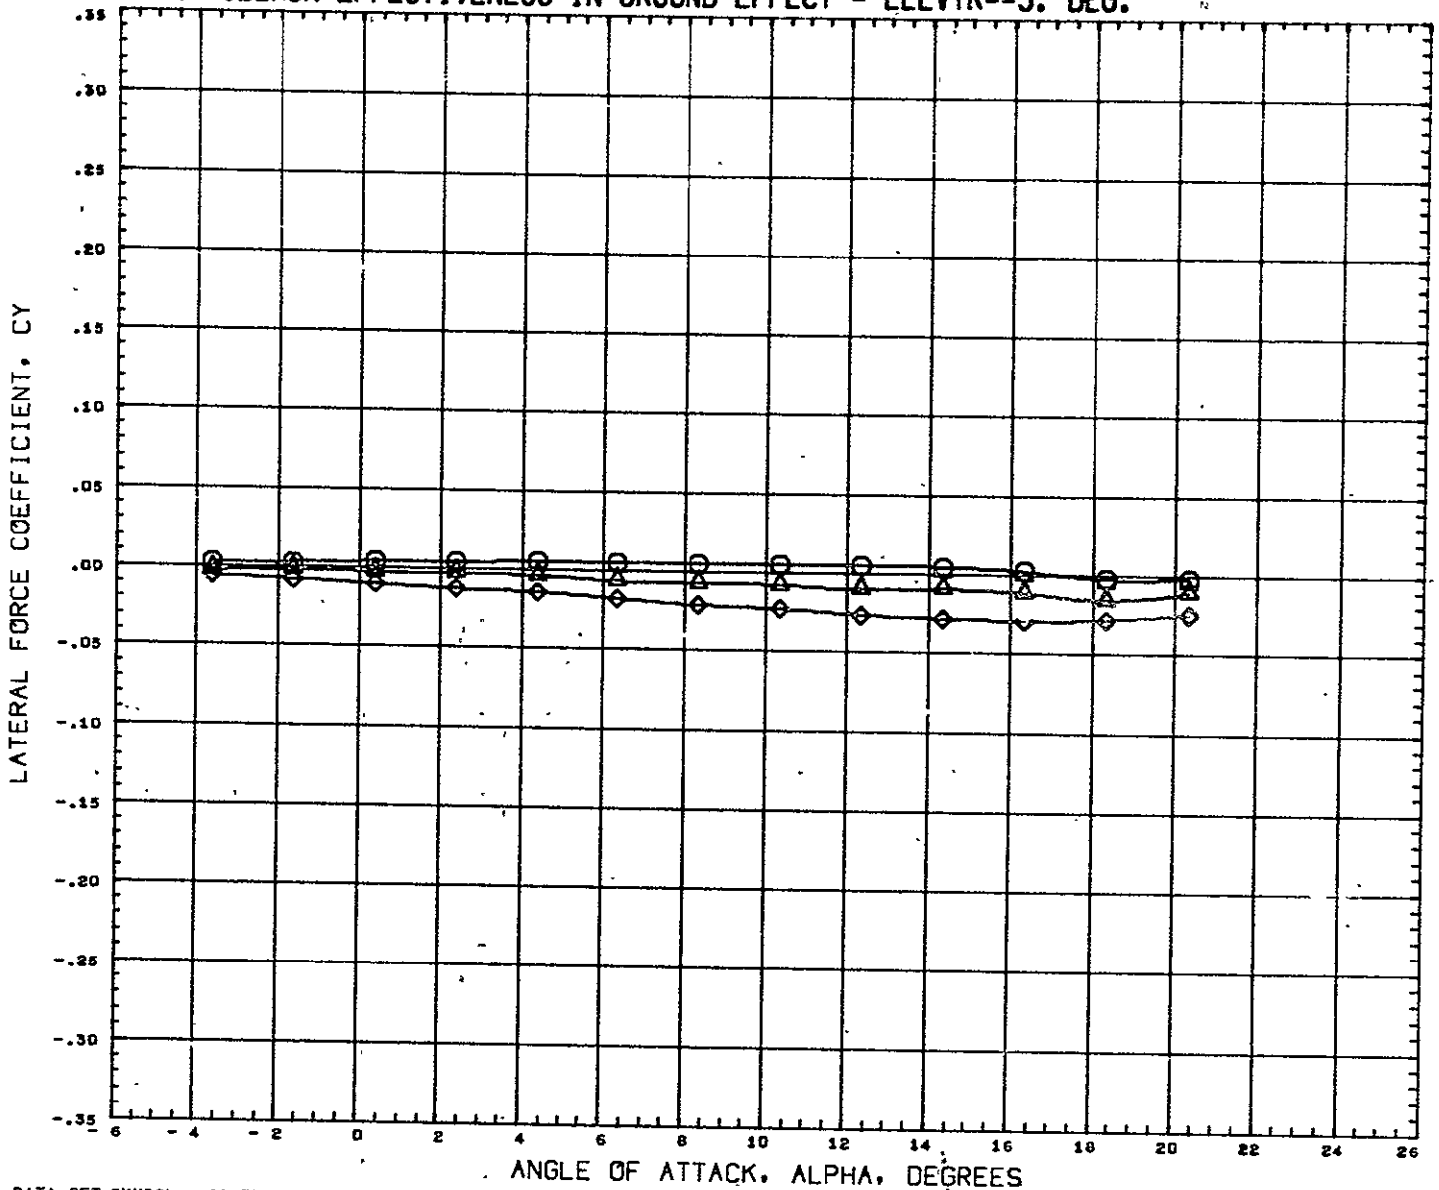

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
(RCWD14)	GWTT 29D-CONF ROS-NB1 B1F1W1V16B	0.000	0.000	-5.000	-5.000	SREF	9.1952 SQ FT
(RCWD08)	GWTT 29D-CONF ROS-NB1 B1F1W1V16B	0.000	-10.000	0.000	-10.000	LREF	6.4320 FT
(RCWD11)	GWTT 29D-CONF ROS-NB1 B1F1W1V16B	0.000	-20.000	5.000	-15.000	BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 4 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-5. DEG.

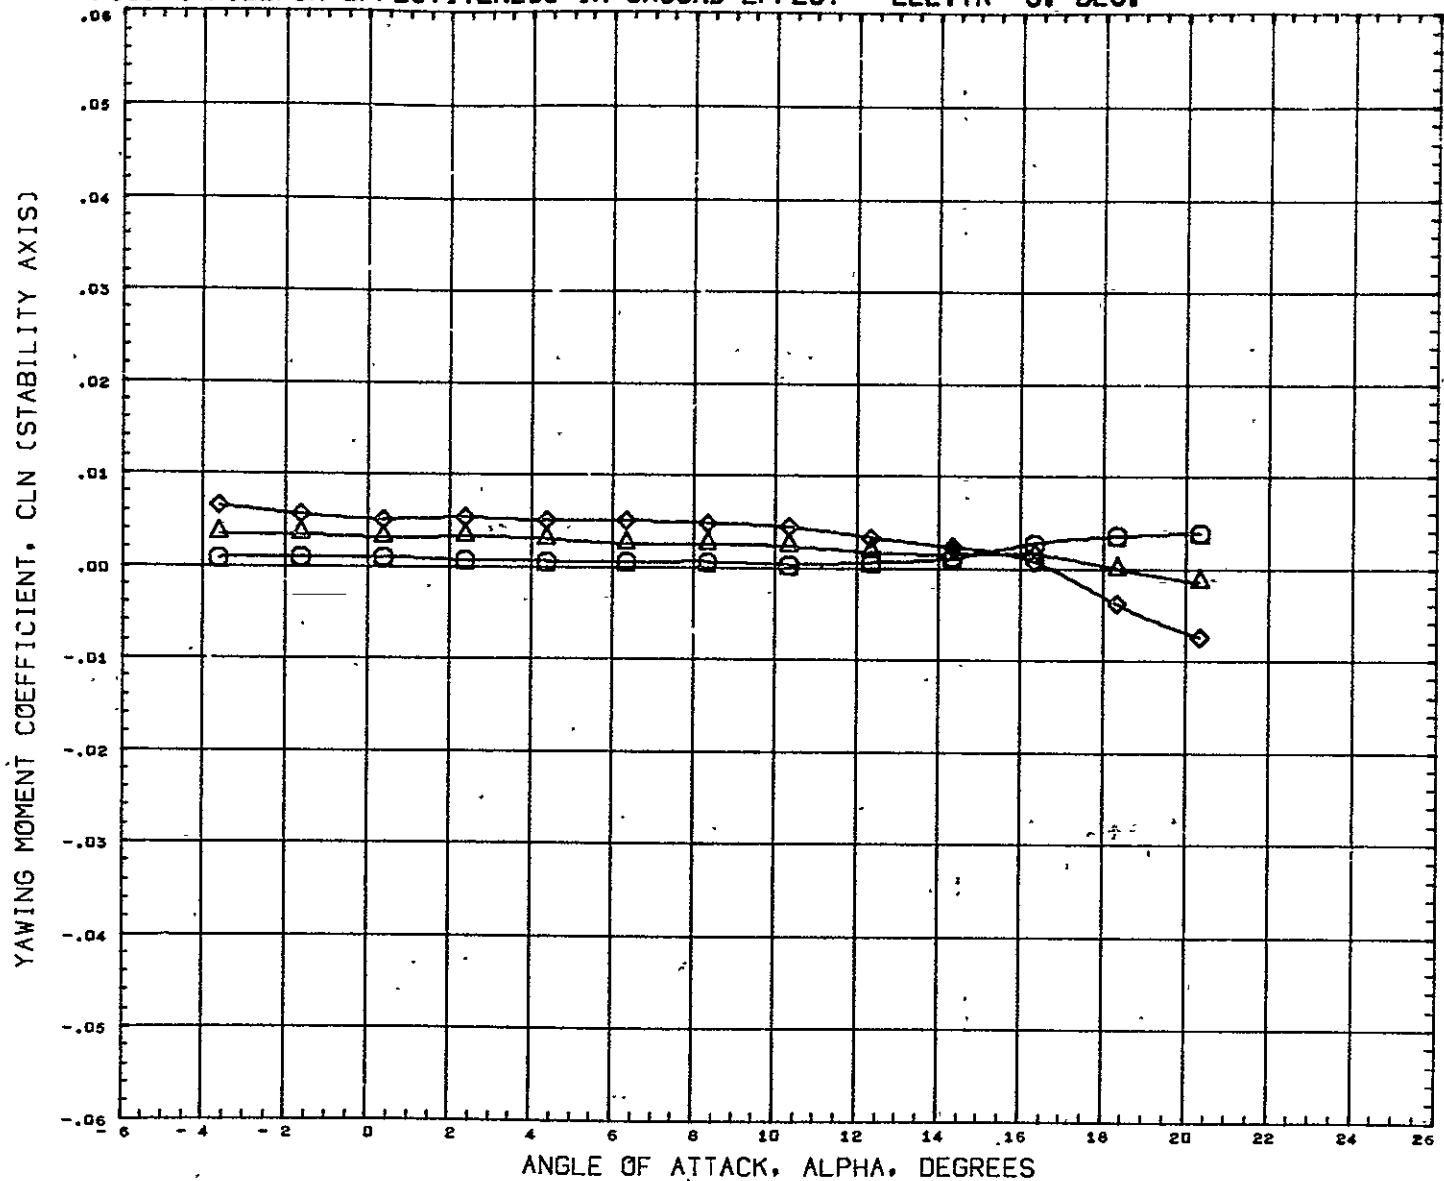

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
(RCW014)	○	GWTI 290-CONF	ROS-NB1 B1F1W1V1GB	0.000	0.000	-5.000	-5.000	SREF	9.1952 SQ FT
(RCW008)	△	GWTI 290-CONF	ROS-NB1 B1F1W1V1GB	0.000	-10.000	0.000	-10.000	LREF	6.4320 FT
(RCW011)	◇	GWTI 290-CONF	ROS-NB1 B1F1W1V1GB	0.000	-20.000	5.000	-15.000	BREF	3.8920 FT
								XMRP	1485.0040 IN
								YMRP	0.0000 IN
								ZMRP	377.0004 IN
								SCALE	0.0400

MACH 0.170

FIG. 4 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-5. DEG.

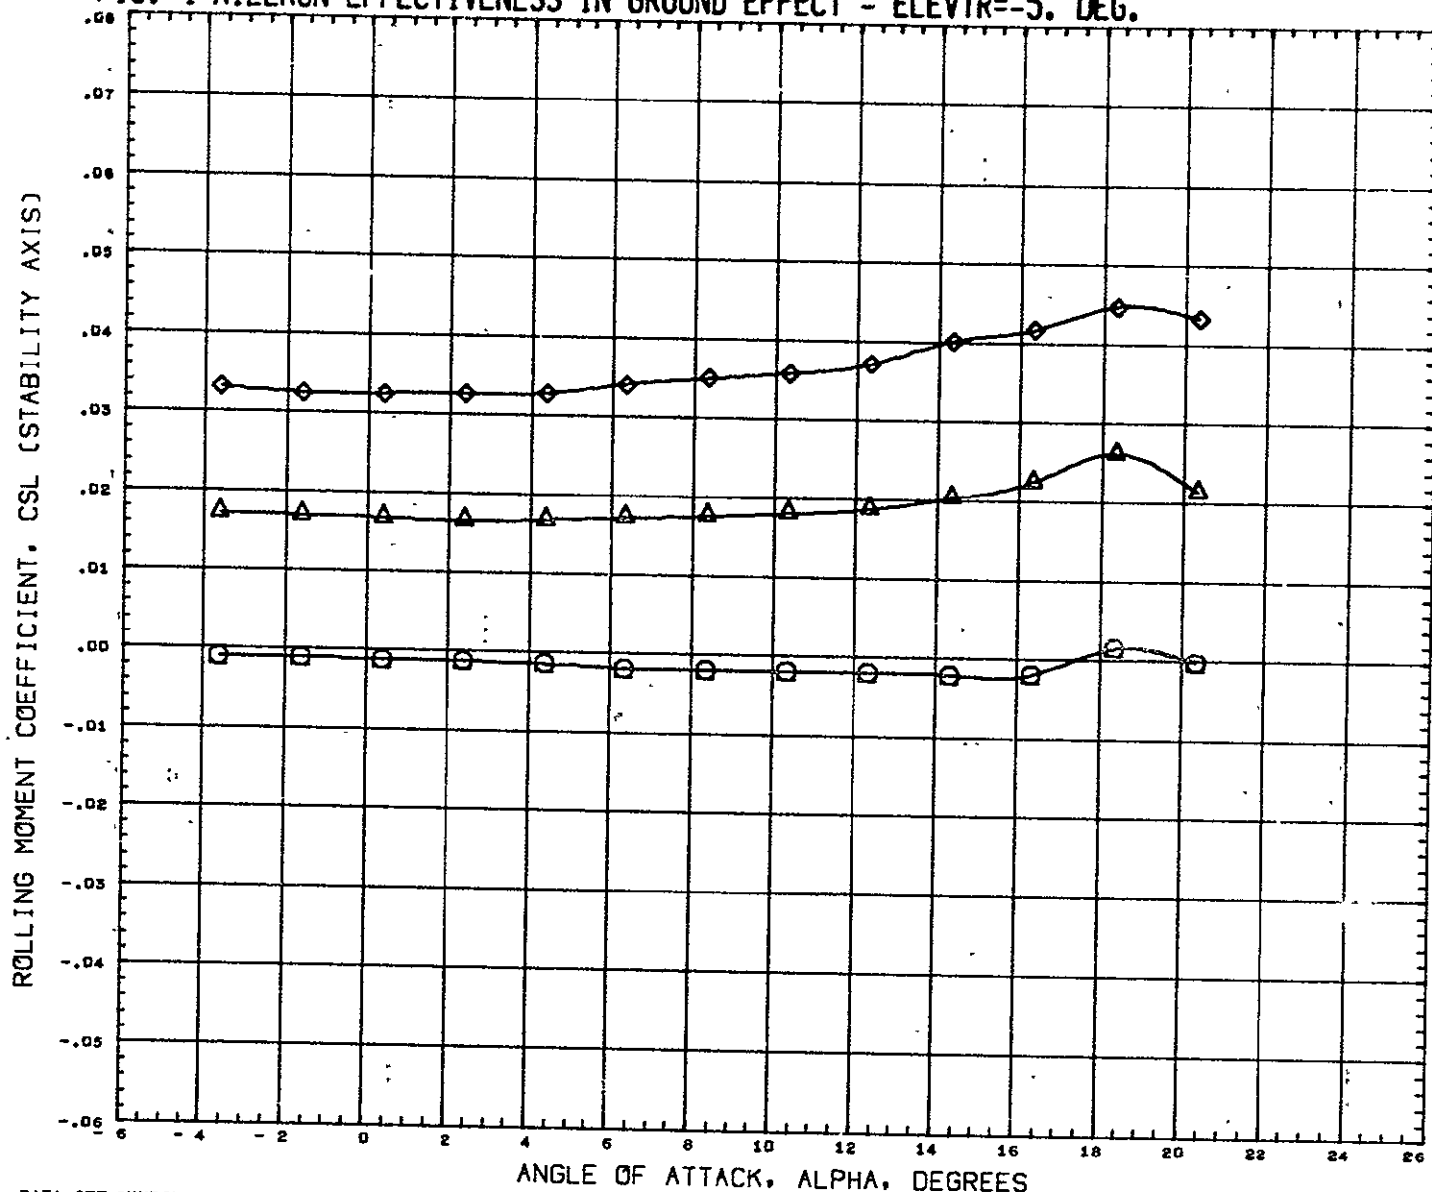


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCWD14) GWTT 290-CONF ROS-NB1 B1F1W1V1GB
 (RCWD08) GWTT 290-CONF ROS-NB1 B1F1W1V1GB
 (RCWD11) GWTT 290-CONF ROS-NB1 B1F1W1V1GB

BETA AILRON LELEVN RELEVN
 0.000 0.000 -5.000 -5.000
 0.000 -10.000 0.000 -10.000
 0.000 -20.000 5.000 -15.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170


FIG. 5 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-10. DEG

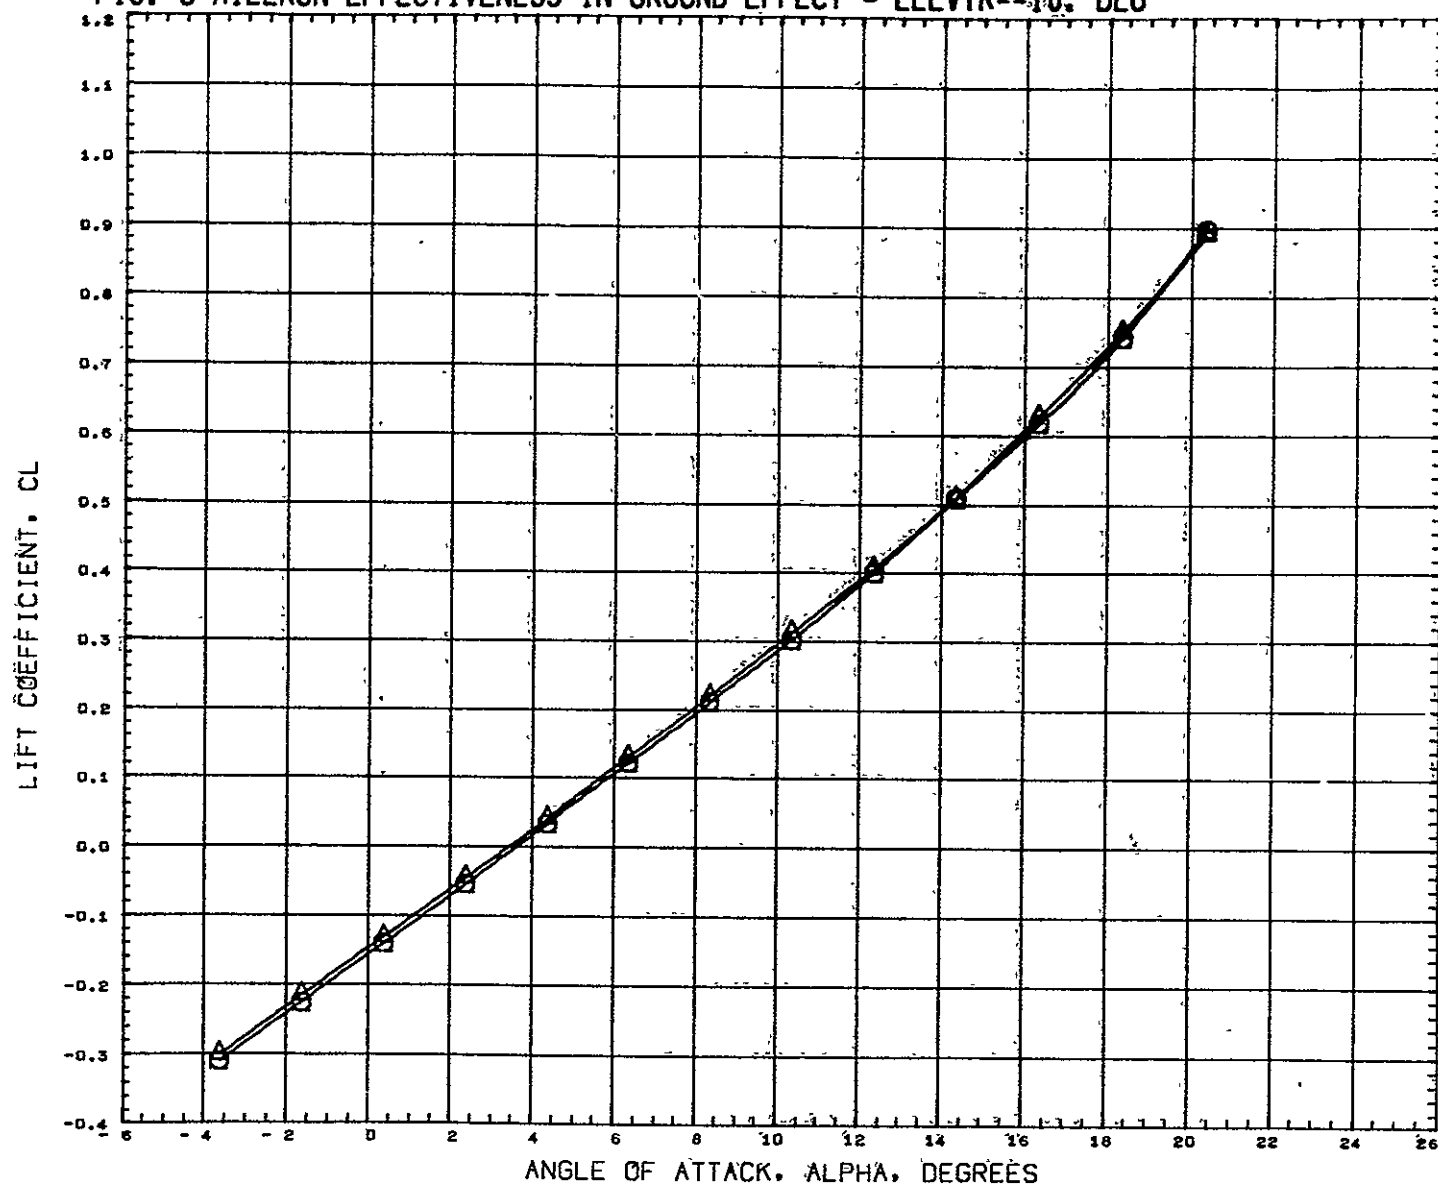

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
(RCW009)	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0.000	0.000	-10.000	-10.000	SREF	9.1952 SQ FT
(RCW013)	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0.000	-10.000	-5.000	-15.000	LREF	6.4320 FT
						BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 5 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-10. DEG

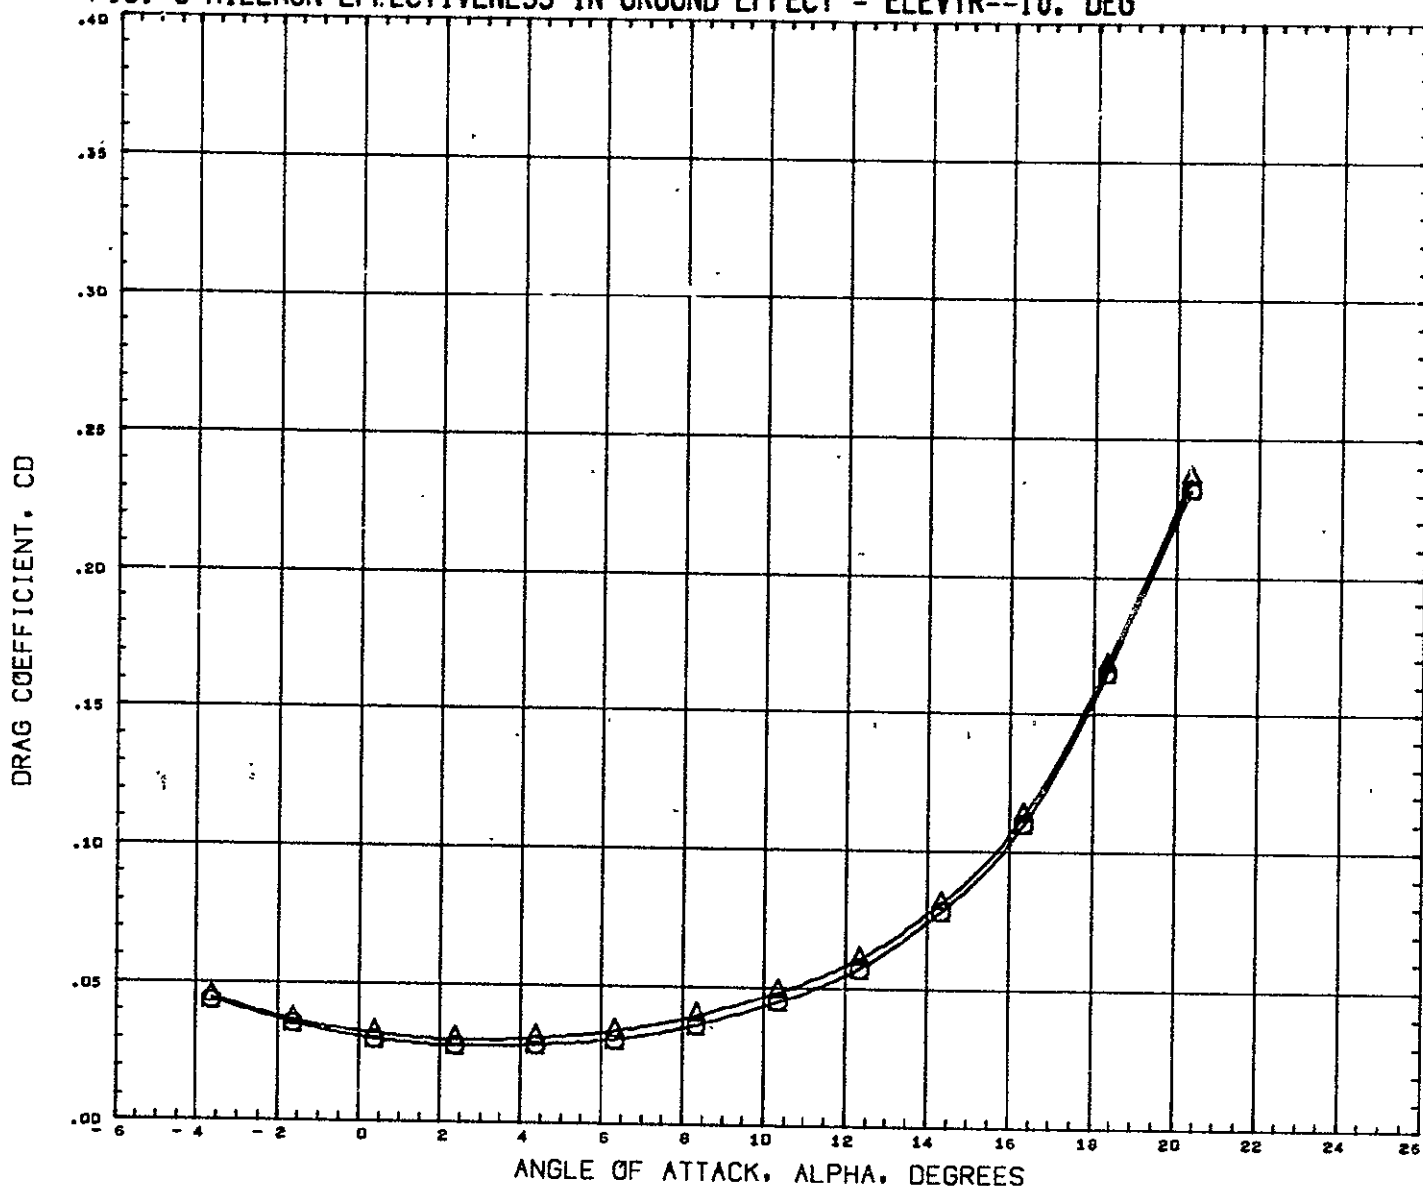


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCWD09) ○ 6WTT 290-CONF ROS-NB1 B1F1W1V1GB
 (RCWD13) △ 6WTT 290-CONF ROS-NB1 B1F1W1V1GB

BETA AILRON LELEVN RELEVN
 0.000 0.000 -10.000 -10.000
 0.000 -10.000 -5.000 -15.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170


FIG. 5 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-10. DEG

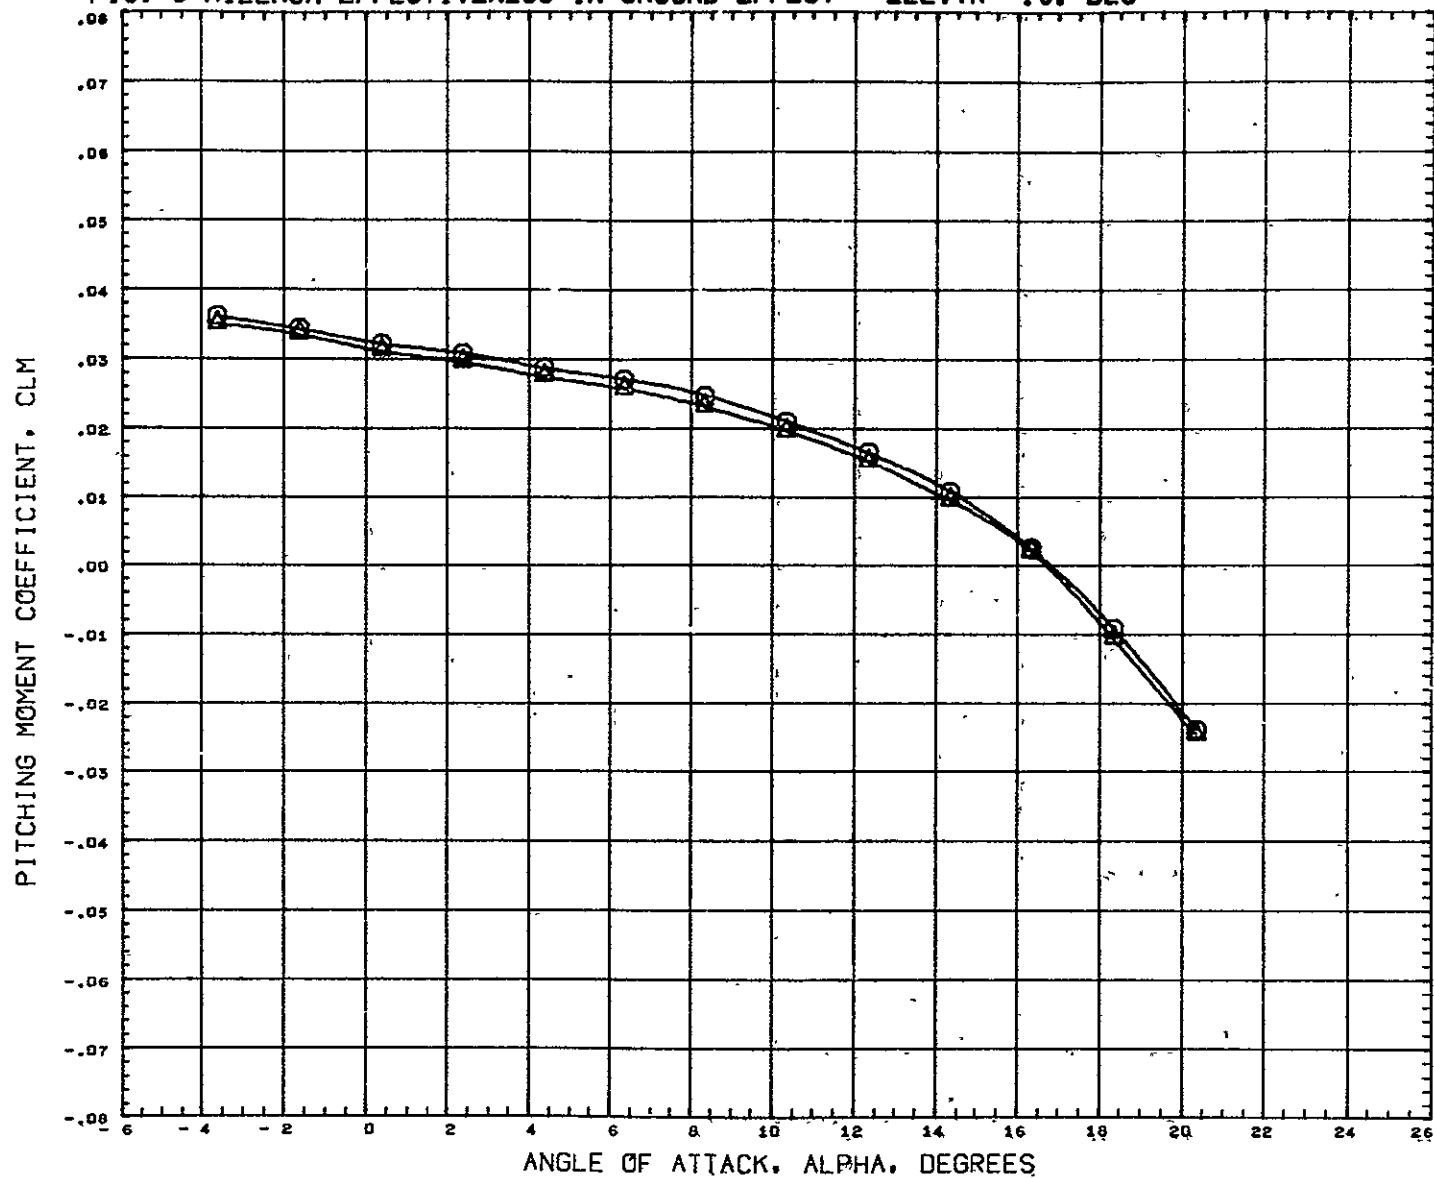

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
(RCW009)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	-10.000	-10.000	SREF	9.1952 SQ FT
(RCW013)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	-10.000	-5.000	-15.000	LREF	6.4320 FT
						BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 5 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-10. DEG

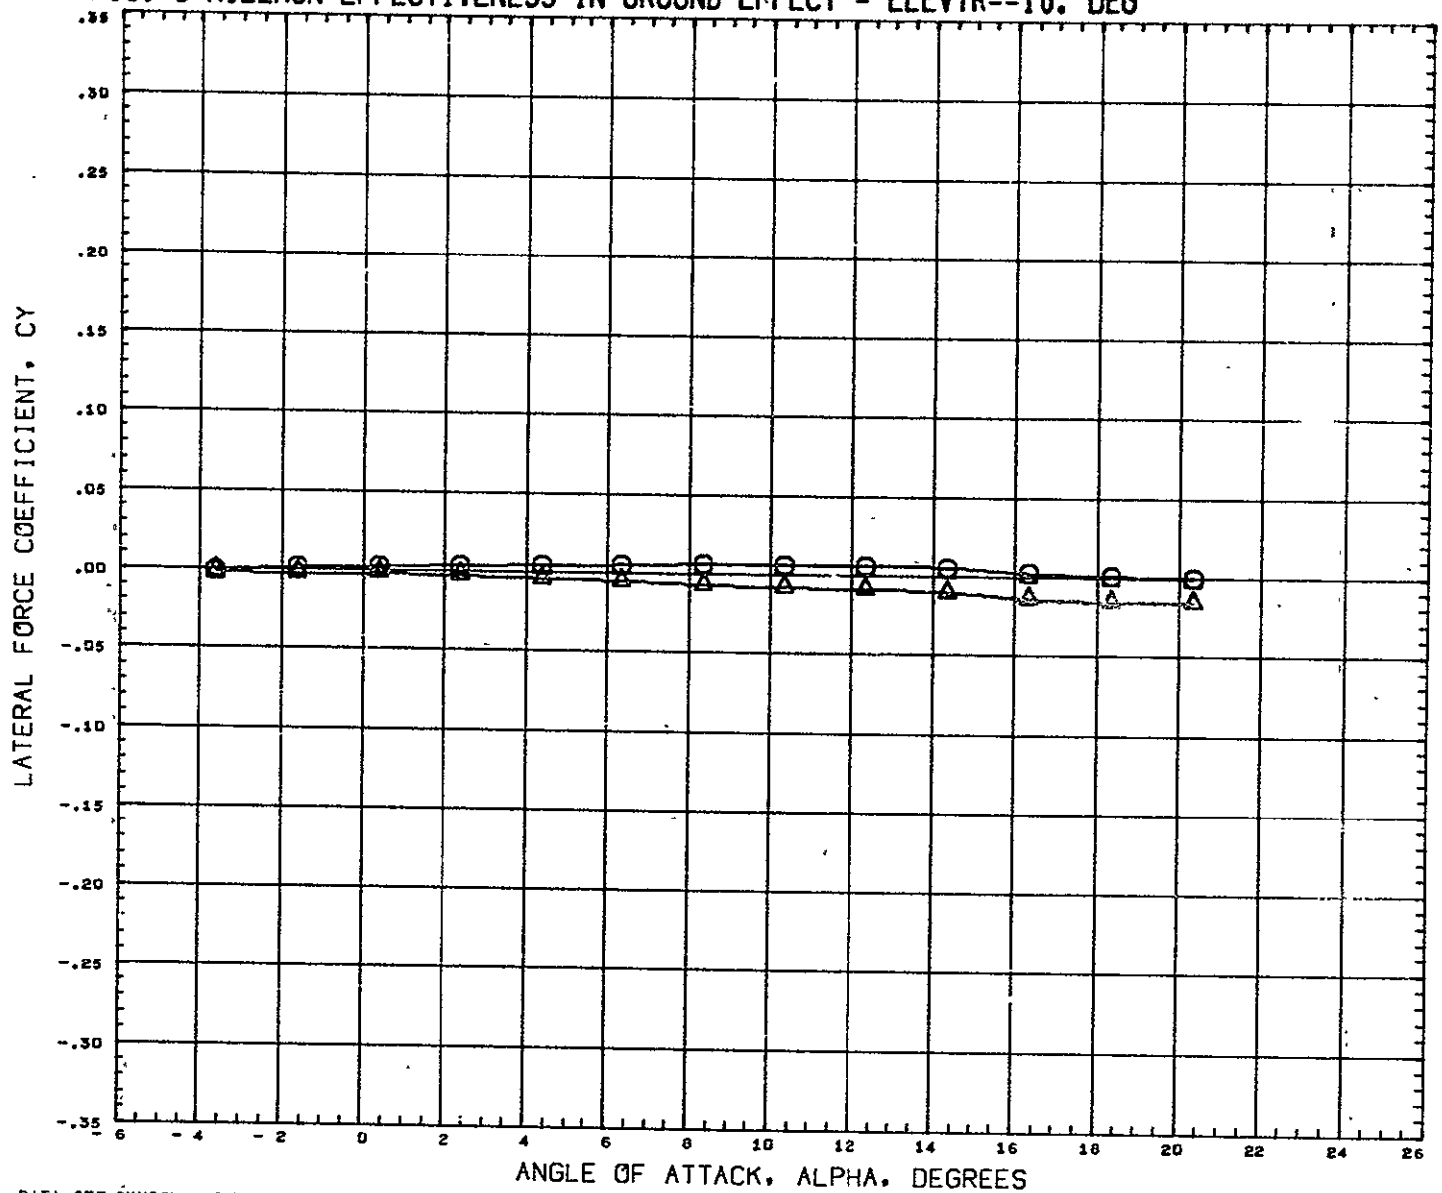


DATA SET	SYMBOL	CONFIGURATION DESCRIPTION
(RCWD09)	○	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB
(RCWD13)	△	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB

BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION
0.000	0.000	-10.000	-10.000	SREF 9.1952 SQ FT
0.000	-10.000	-5.000	-15.000	LREF 6.4320 FT
				BREF 3.8920 FT
				XHRF 1465.0040 IN
				YHRF 0.0000 IN
				ZHRF 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 5 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-10. DEG

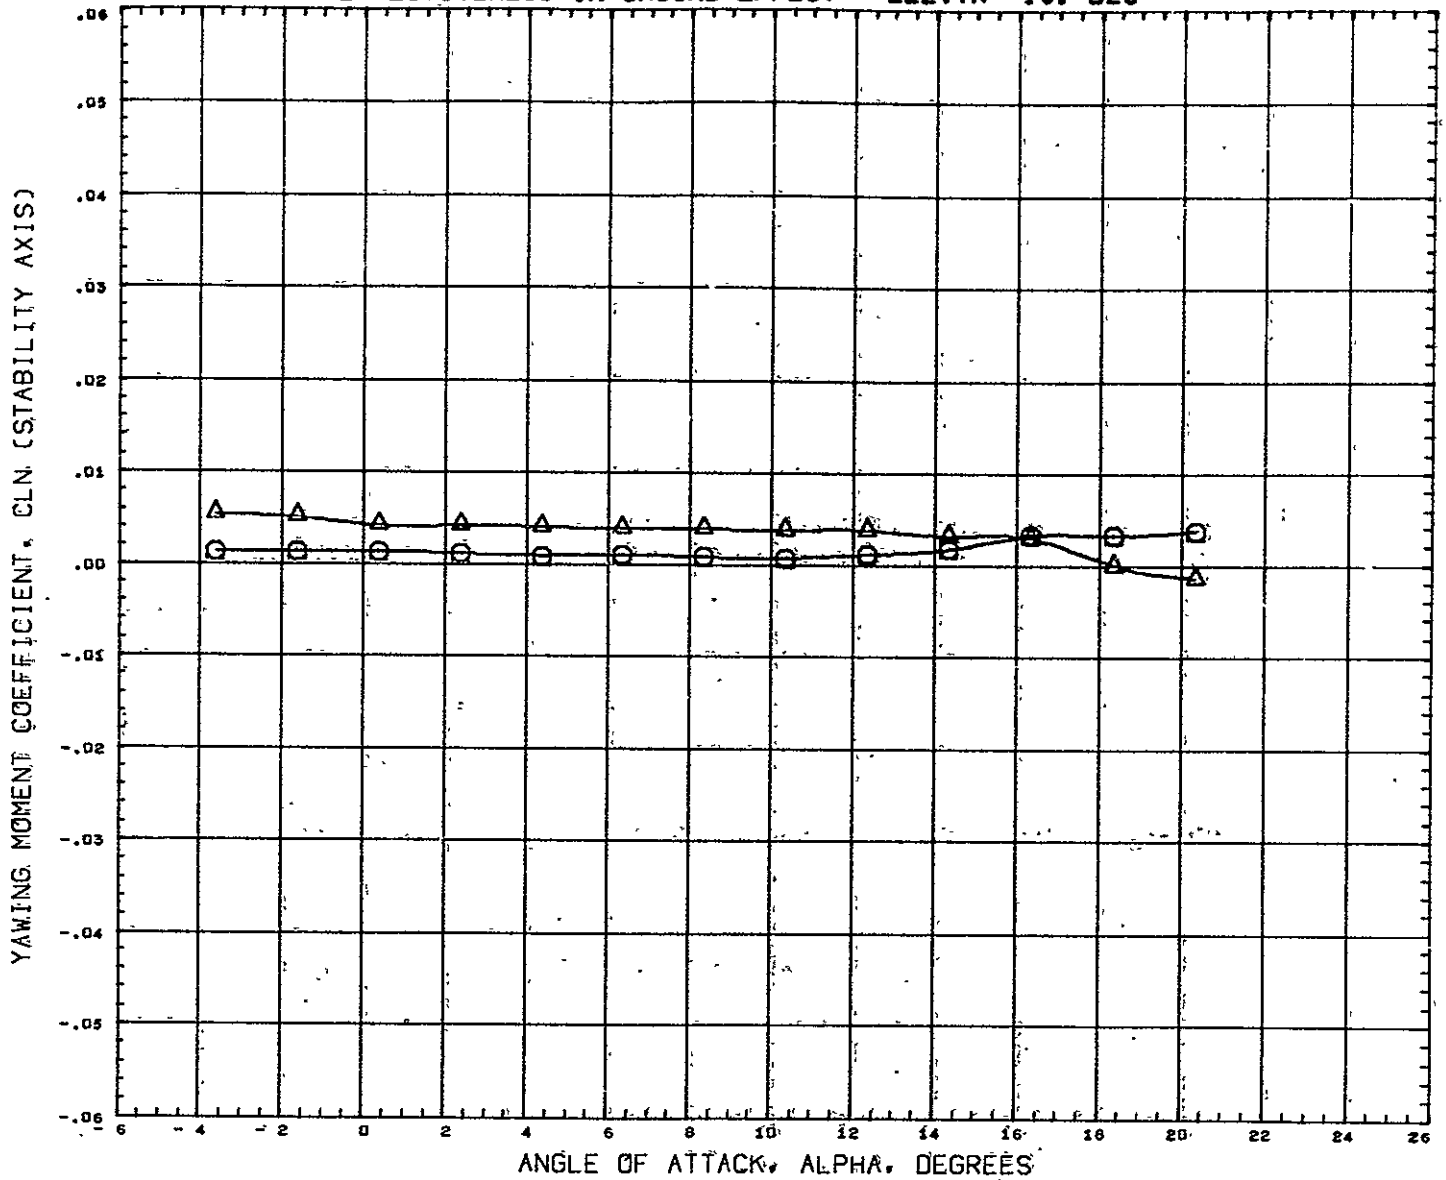


DATA SET SYMBOLS CONFIGURATION DESCRIPTION
 (RCW009) GWTT 290-CONF ROS-NB1 B1F3W1V16B
 (RCW013) GWTT 290-CONF ROS-NB1 B1F1W1V16B

BETA	AILRON	LELEVN	RELEVN	REFERENCE INFORMATION	
0.000	0.000	-10.000	-10.000	SREF	9.1952 SQ FT
0.000	-10.000	-5.000	-15.000	LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 5 AILERON EFFECTIVENESS IN GROUND EFFECT - ELEVTR=-10. DEG

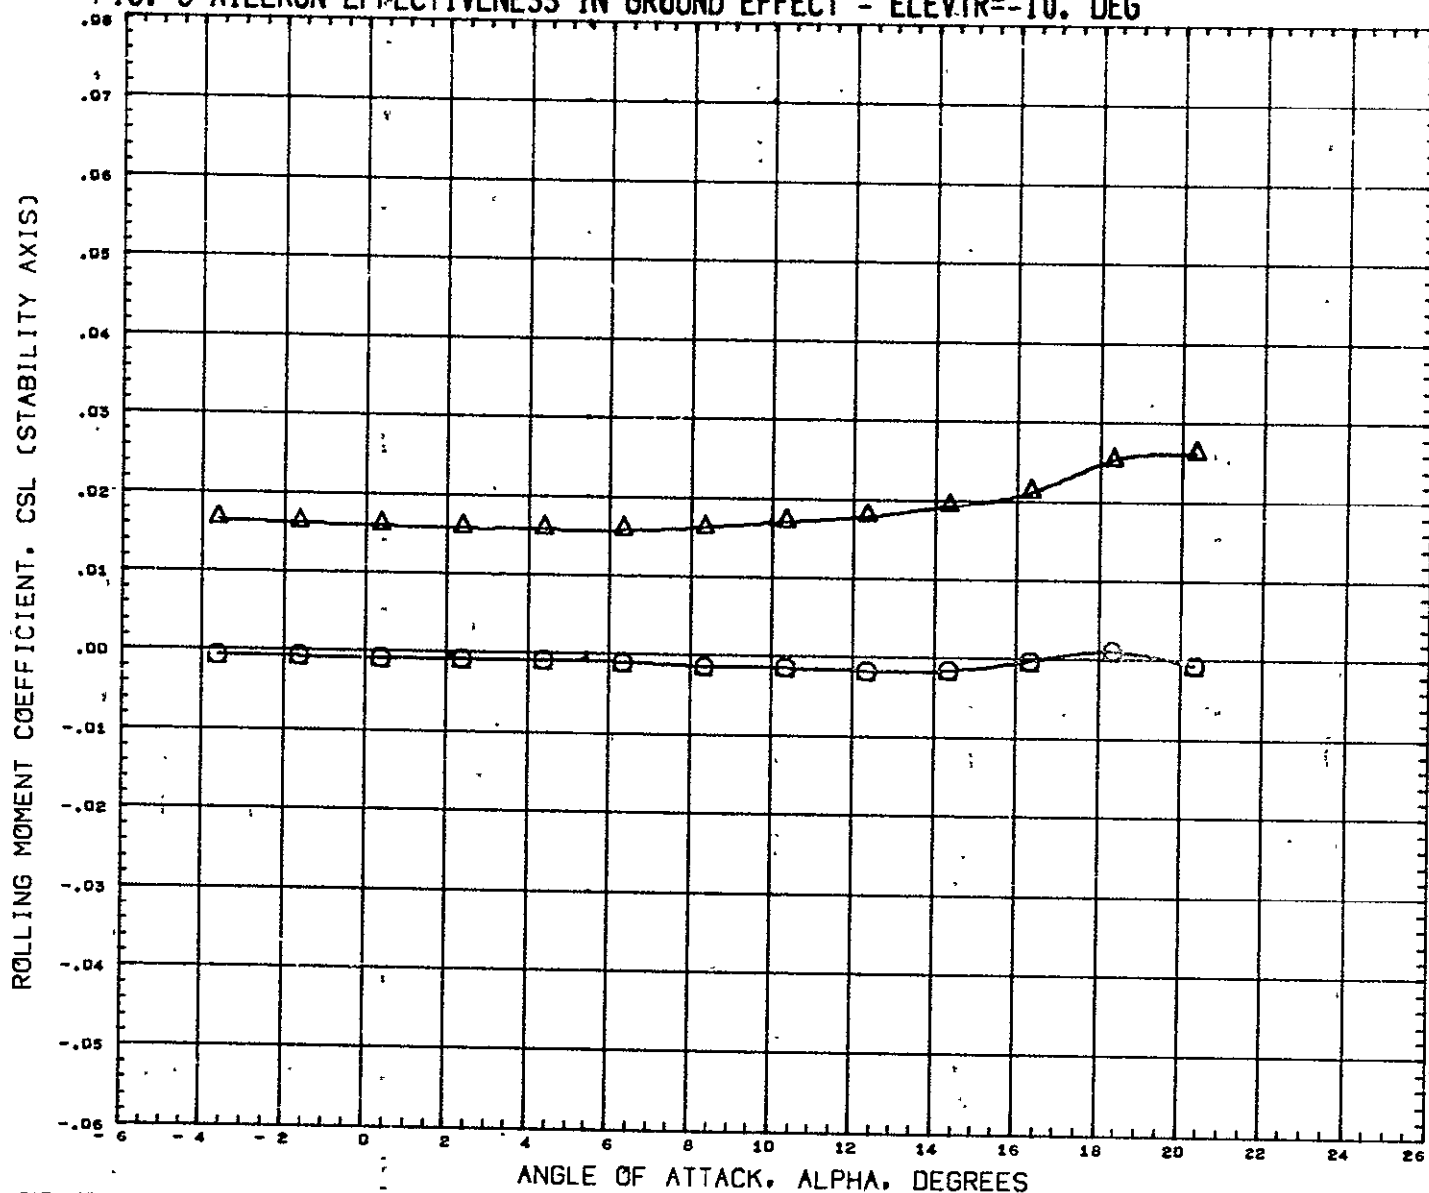


DATA SET	SYMBOL	CONFIGURATION DESCRIPTION
(RCWD09)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCWD13)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1GB

BETA	AILRON	LELEVN	RELEVN
0.000	0.000	-10.000	-10.000
0.000	-10.000	-5.000	-15.000

REFERENCE INFORMATION		
SREF	9.1952	SQ FT
LREF	6.4320	FT
BREF	3.8920	FT
XMRP	1485.0040	IN
YMRP	0.0000	IN
ZMRP	377.0004	IN
SCALE	0.0400	

MACH 0.170

FIG. 6 RUDDER EFFECTIVENESS IN PITCH IN GROUND EFFECT

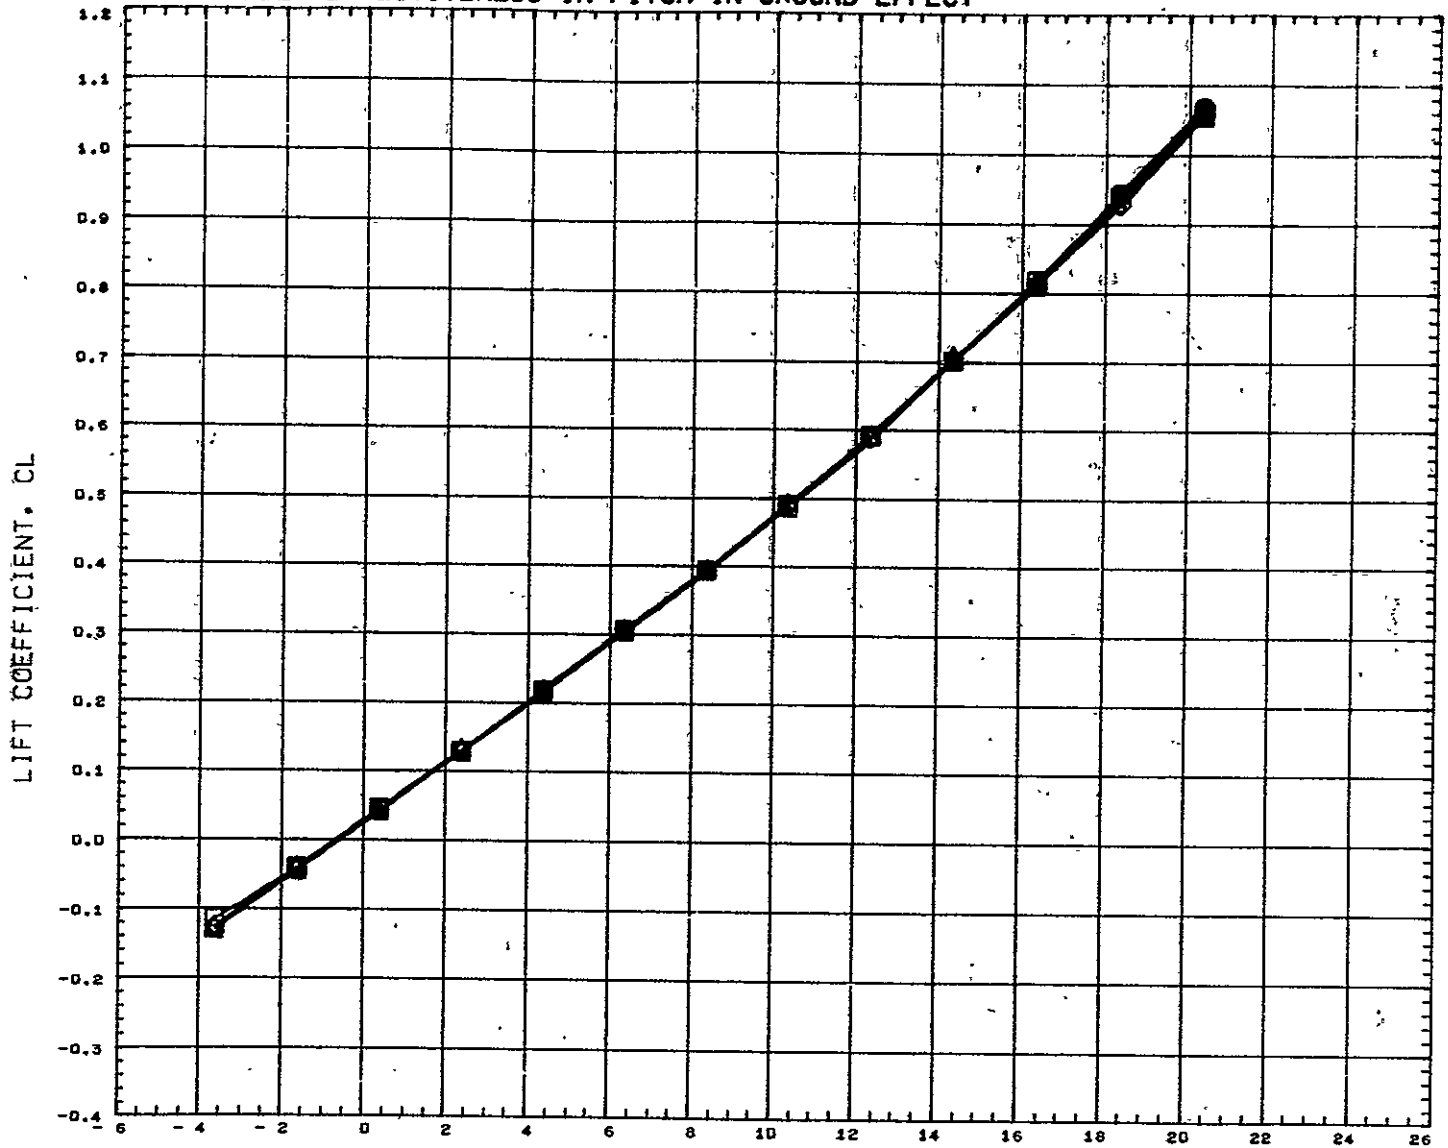


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCWD05)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCWD15)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCWD16)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCWD17)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	0.000	-5.000
0.000	0.000	0.000	-10.000
0.000	0.000	0.000	-15.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170


FIG. 6 RUDDER EFFECTIVENESS IN PITCH IN GROUND EFFECT

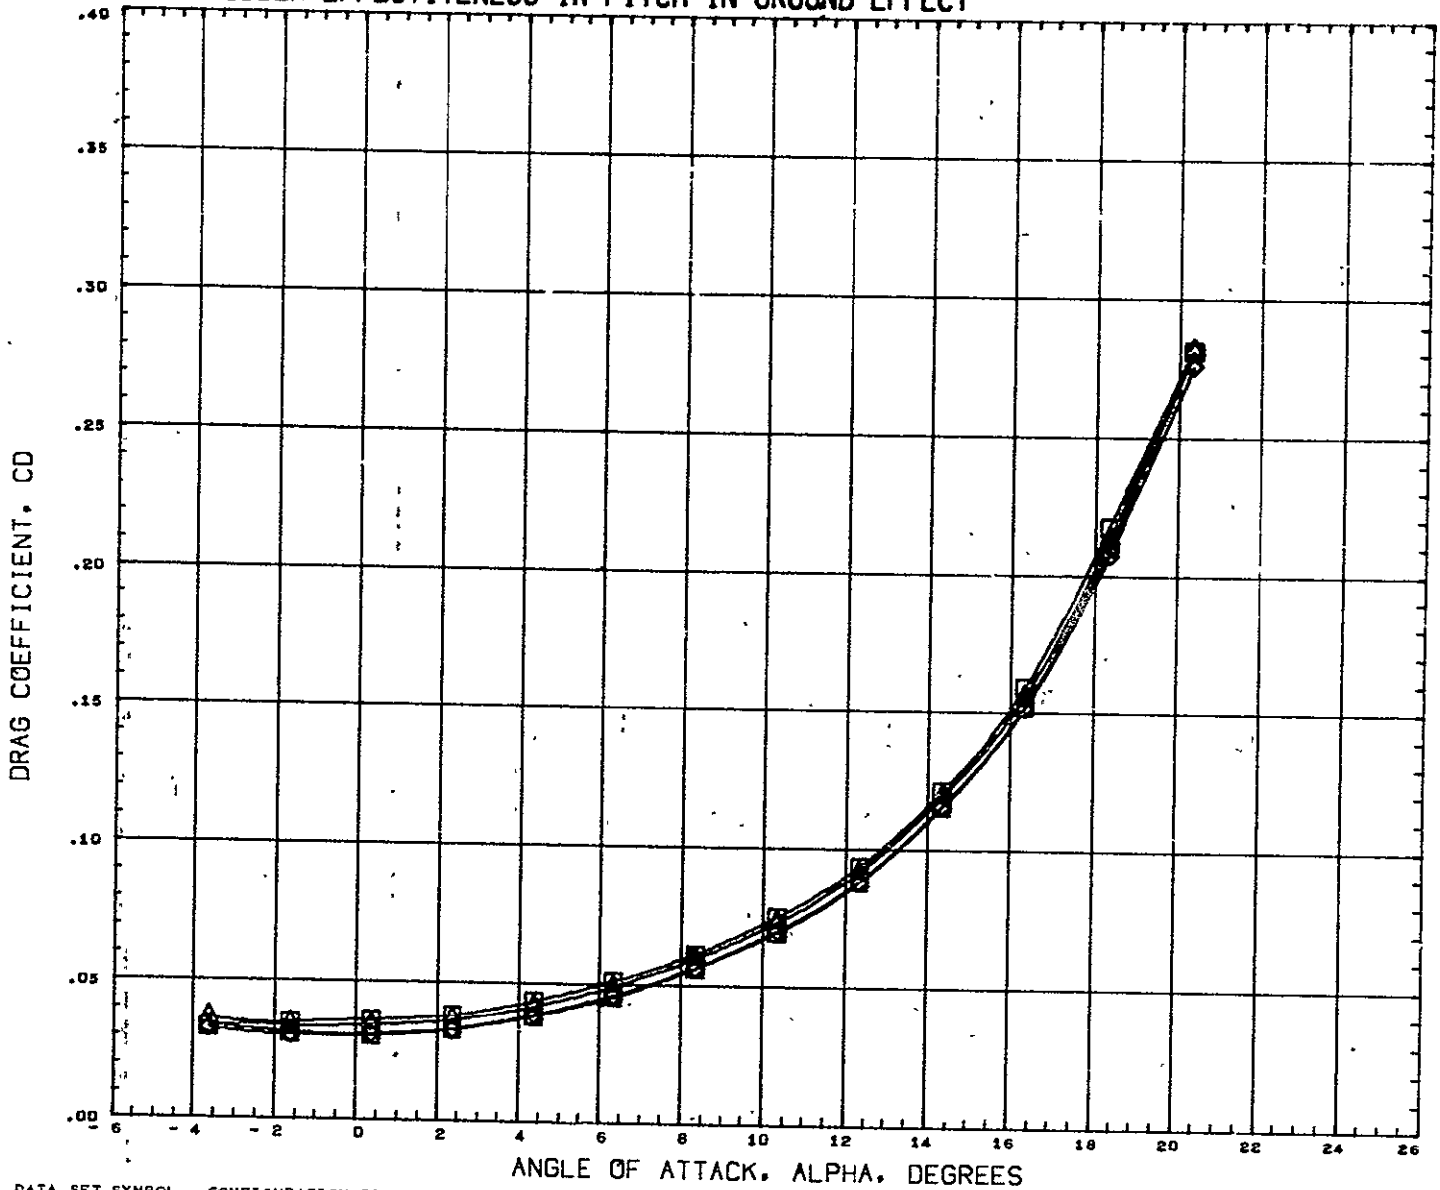

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW005)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW015)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCW016)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCW017)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-15.000	XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 6 RUDDER EFFECTIVENESS IN PITCH IN GROUND EFFECT

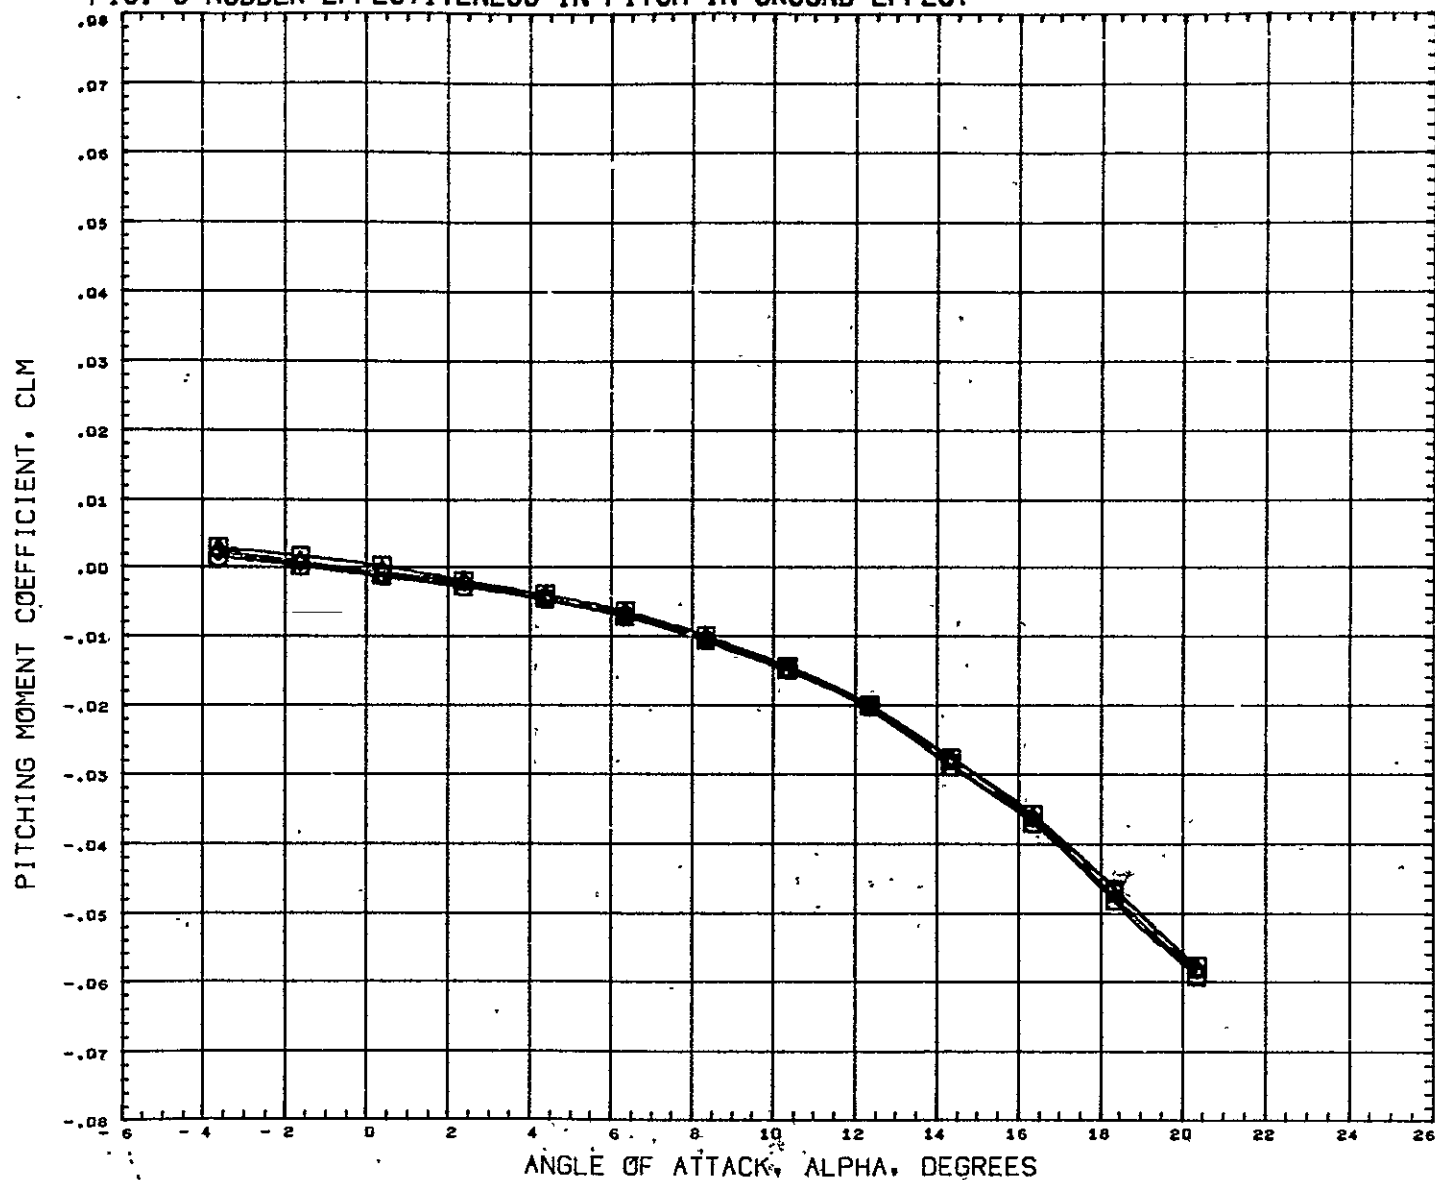

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCWD05)	○	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCWD15)	△	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCWD16)	◇	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCWD17)	□	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-15.000	XMRP	1485.0040 IN
							YMRP	0.0000 IN
							ZMRP	377.0004 IN
							SCALE	0.0400

MACH 0.170


FIG. 6 RUDDER EFFECTIVENESS IN PITCH IN GROUND EFFECT

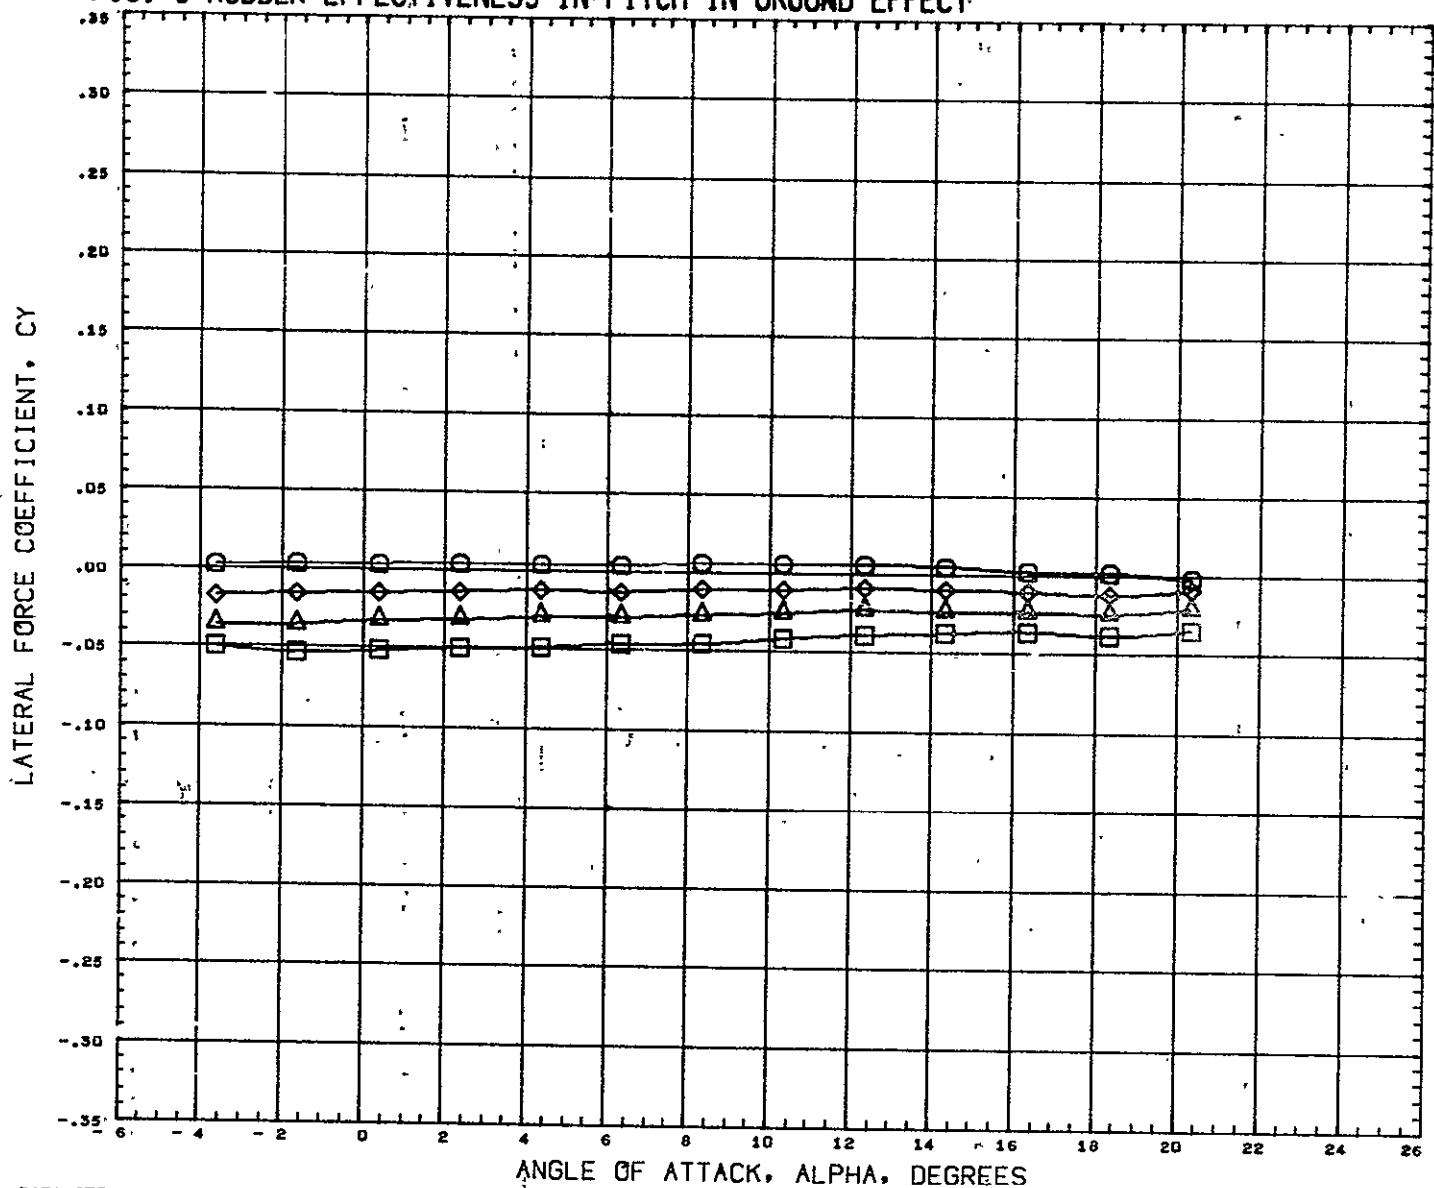

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCWD05)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCWD15)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCWD16)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCWD17)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-15.000	XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 6 RUDDER EFFECTIVENESS IN PITCH IN GROUND EFFECT

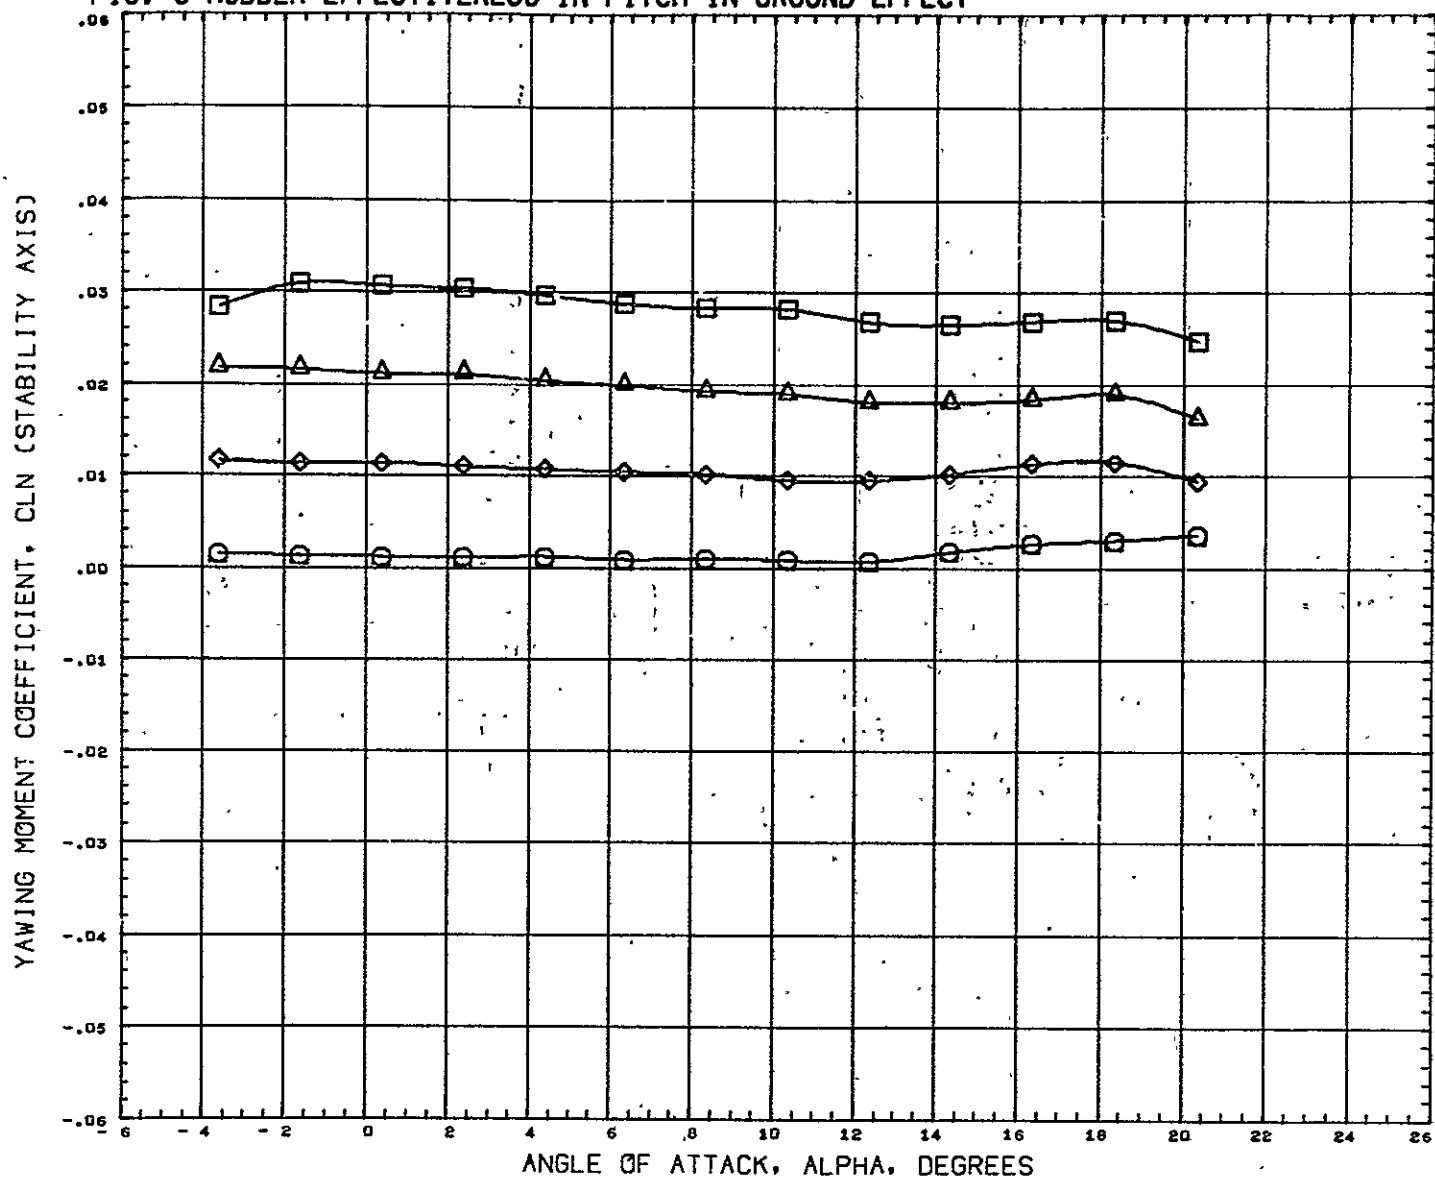

DATA SET SYMBOL	SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW005)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW015)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCW016)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCW017)	□	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0.000	0.000	0.000	-15.000	XHRF	1485.0040 IN
							YHRF	0.0000 IN
							ZHRF	377.0004 IN
							SCALE	0.0400

MACH 0.170


FIG. 6 RUDDER EFFECTIVENESS IN PITCH IN GROUND EFFECT

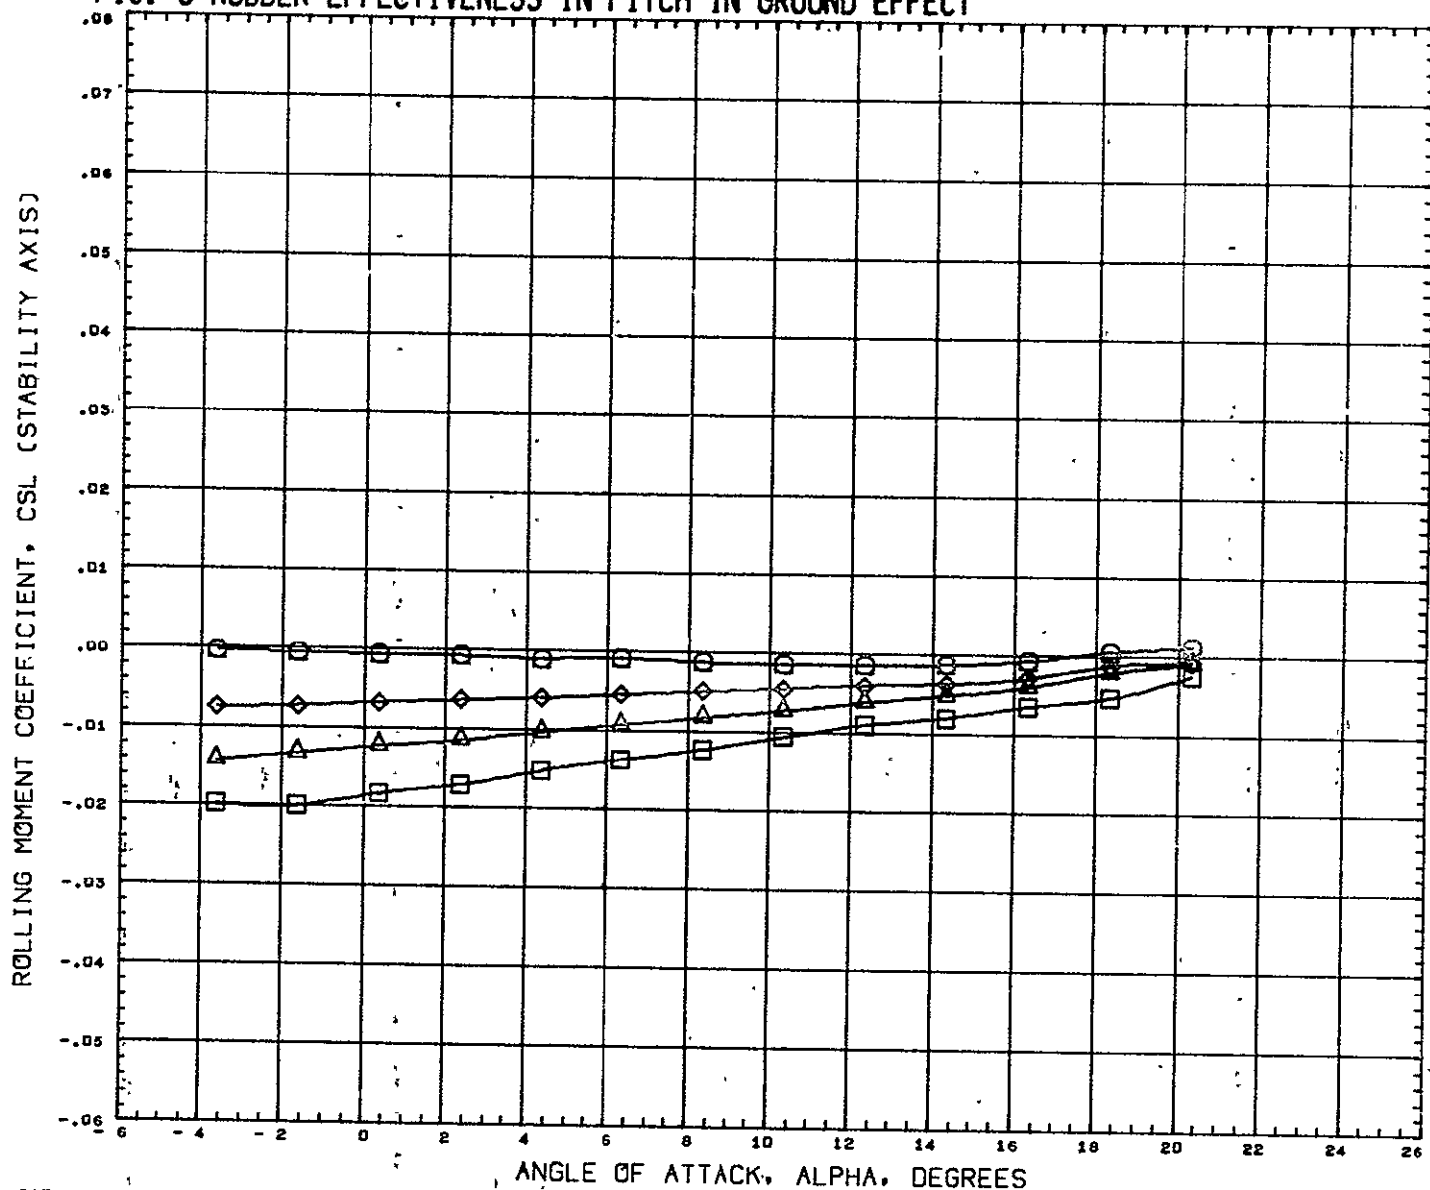

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW005)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW015)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCW016)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCW017)	□	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-15.000	XMRF	1485.0040 IN
							YMRF	0.0006 IN
							ZMRF	377.0004 IN
							SCALE	0.0400

MACH 0.170


FIG. 7 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG

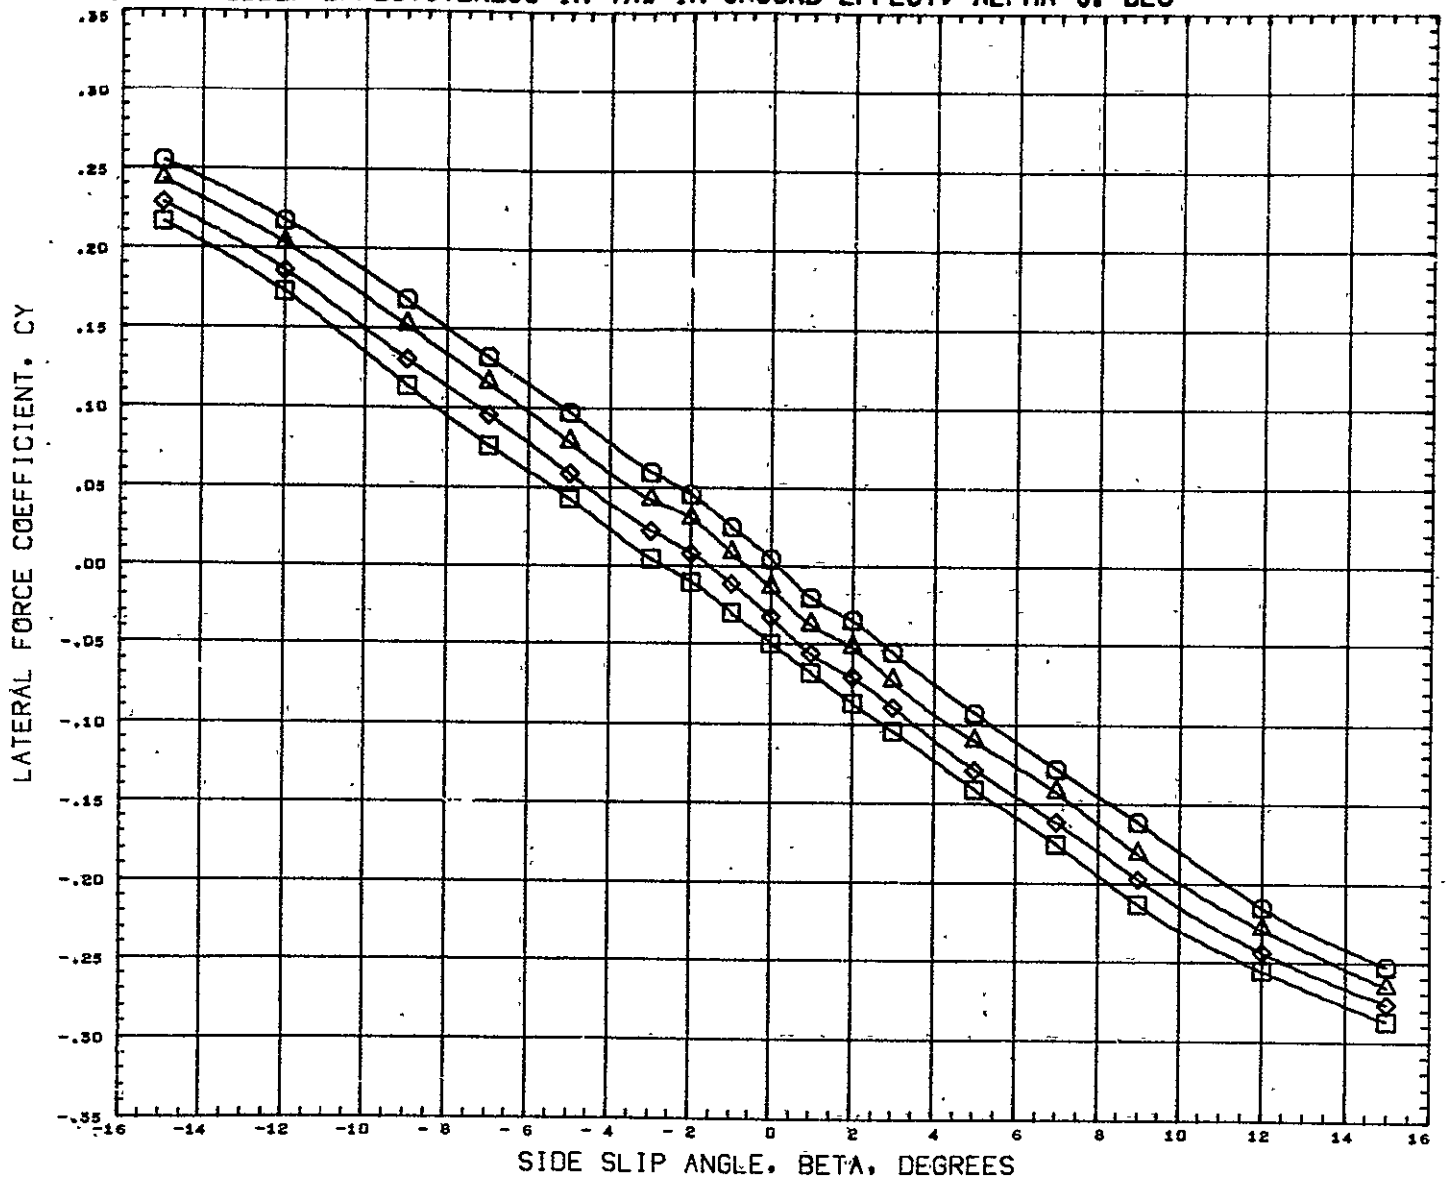

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
(RCWD21)	GWTT 20J-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	-9.1952	sq FT
(RCWD20)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-5.000	LREF	6.4320	FT
(RCWD19)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-10.000	SREF	3.8920	FT
(RCWD18)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0.000	3.000	0.000	-15.000	XMRF	1485.0040	IN
						YNRF	0.0000	IN
						ZMRF	377.0004	IN
						SCALE	0.0400	

MACH 0.170


FIG. 7 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG

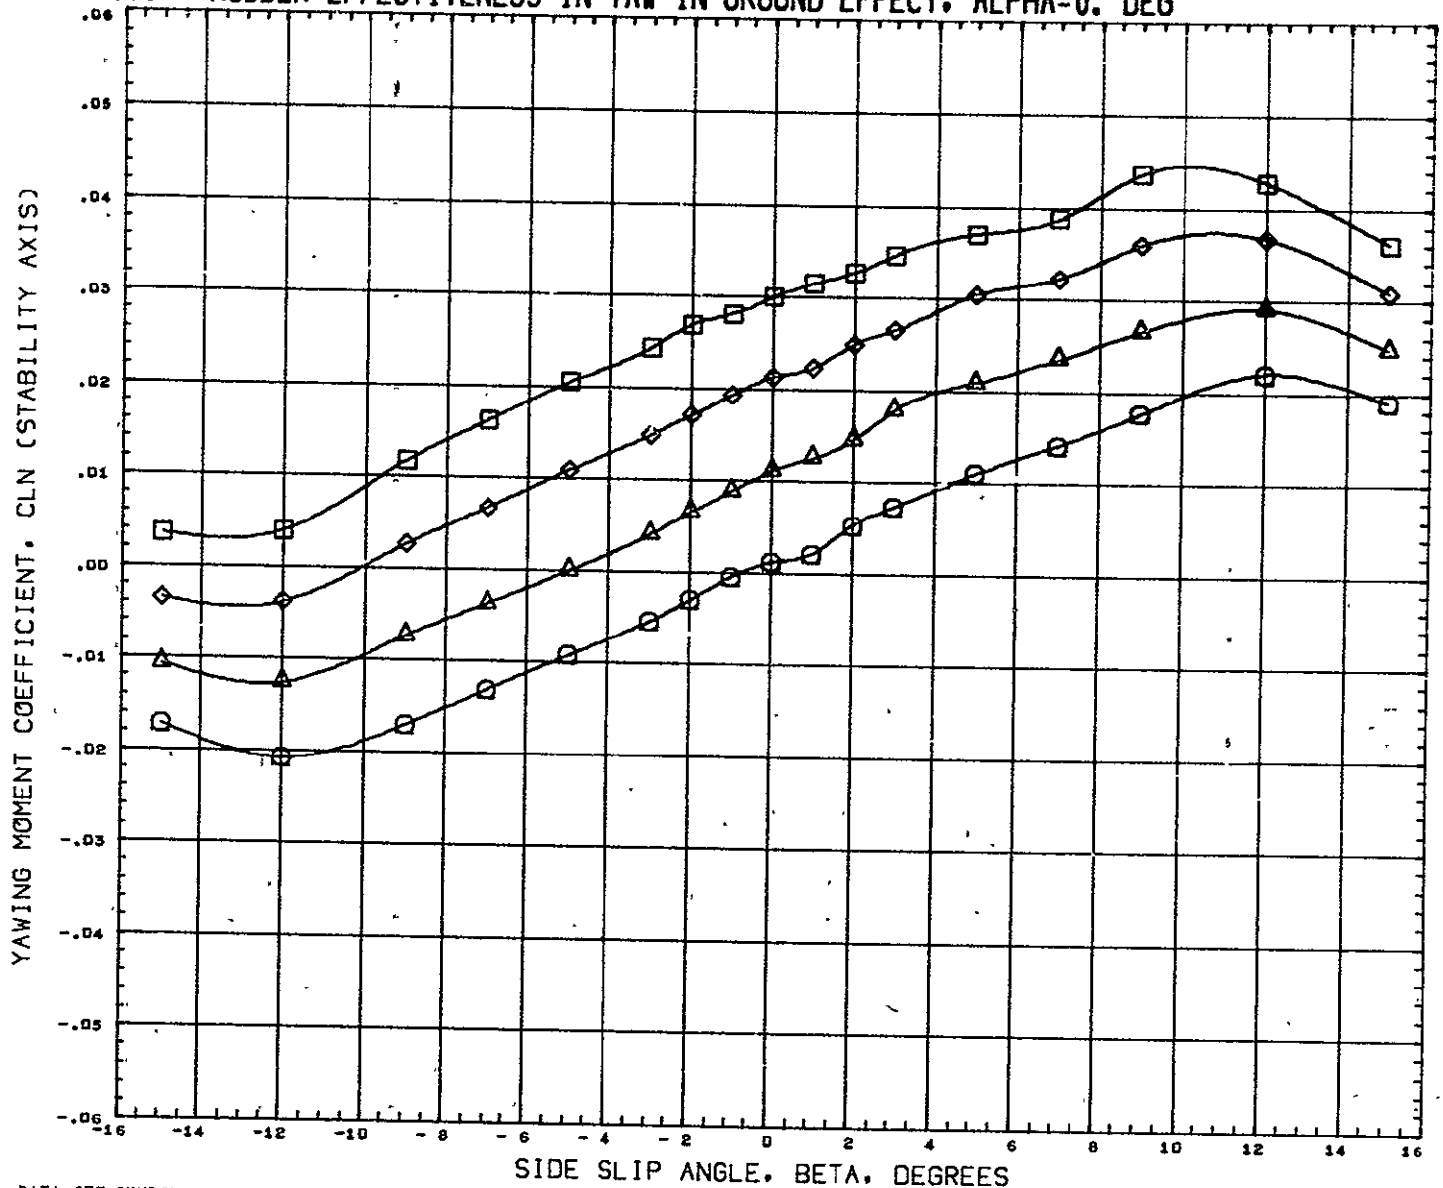

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW021)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW020)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCW019)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCW018)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-15.000	XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 7 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG

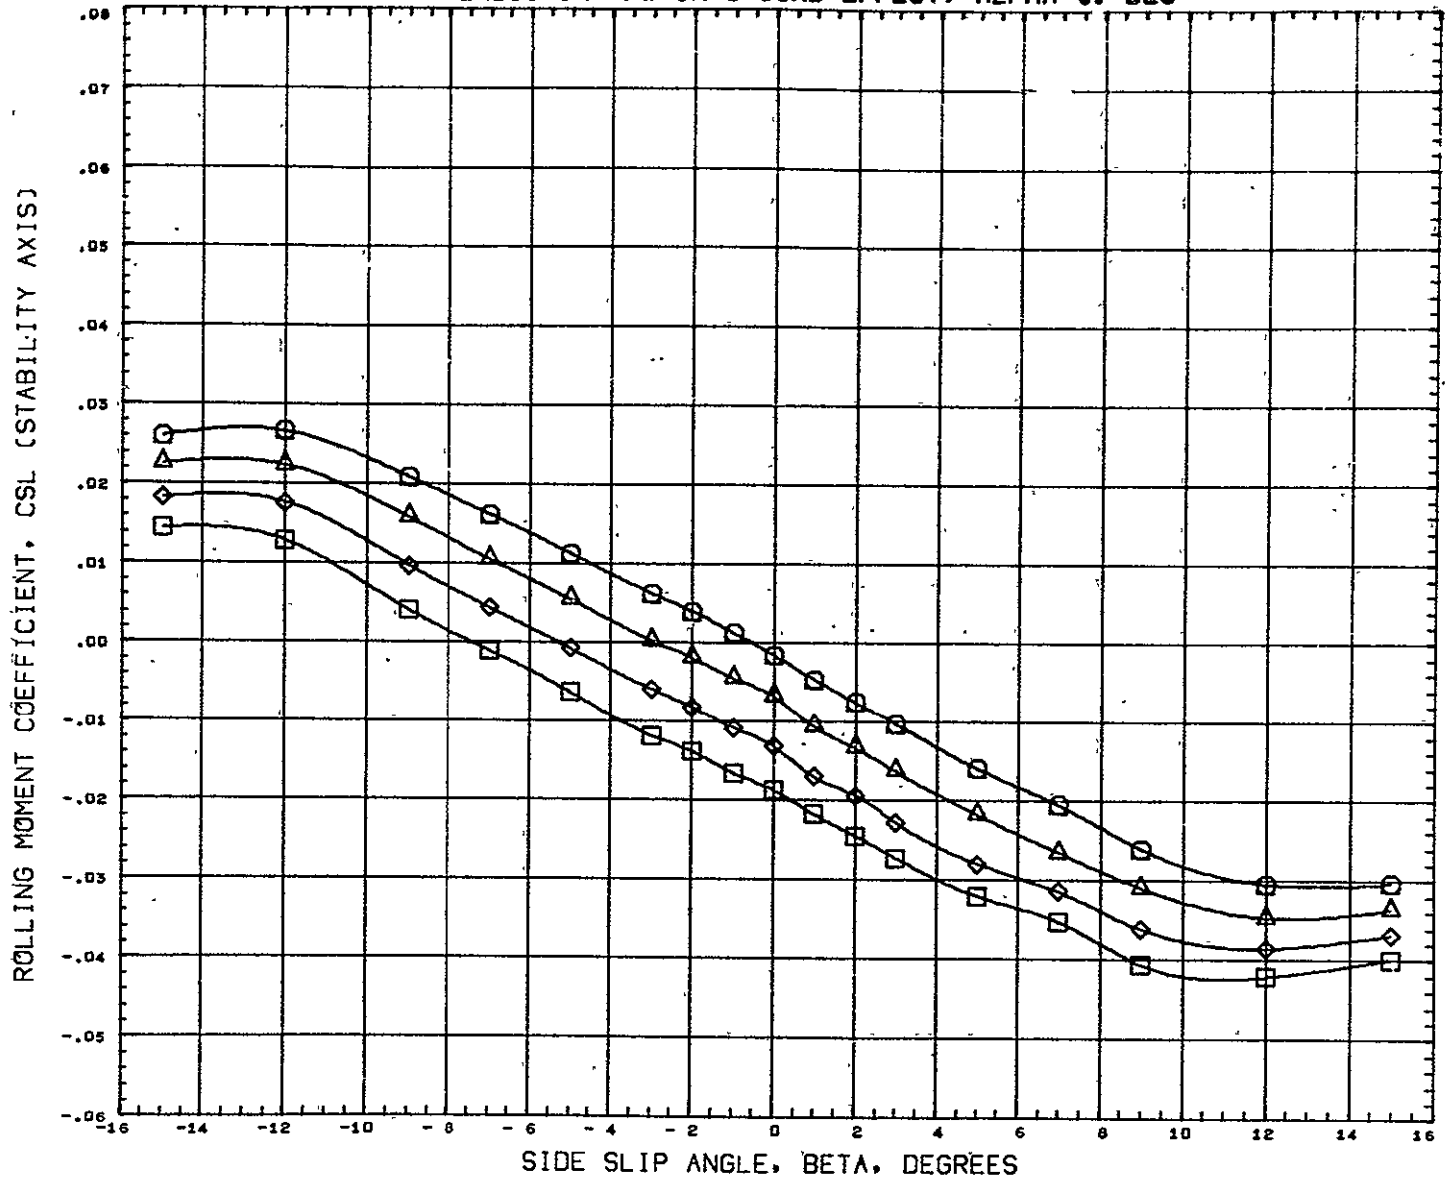

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCWD21)	○	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCWD20)	△	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCWD19)	◇	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCWD18)	□	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-15.000	XMRP	1485.0040 IN
								YMRP	0.0000 IN
								ZMRP	377.0004 IN
								SCALE	0.0400

MACH 0.170


FIG. 7 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG

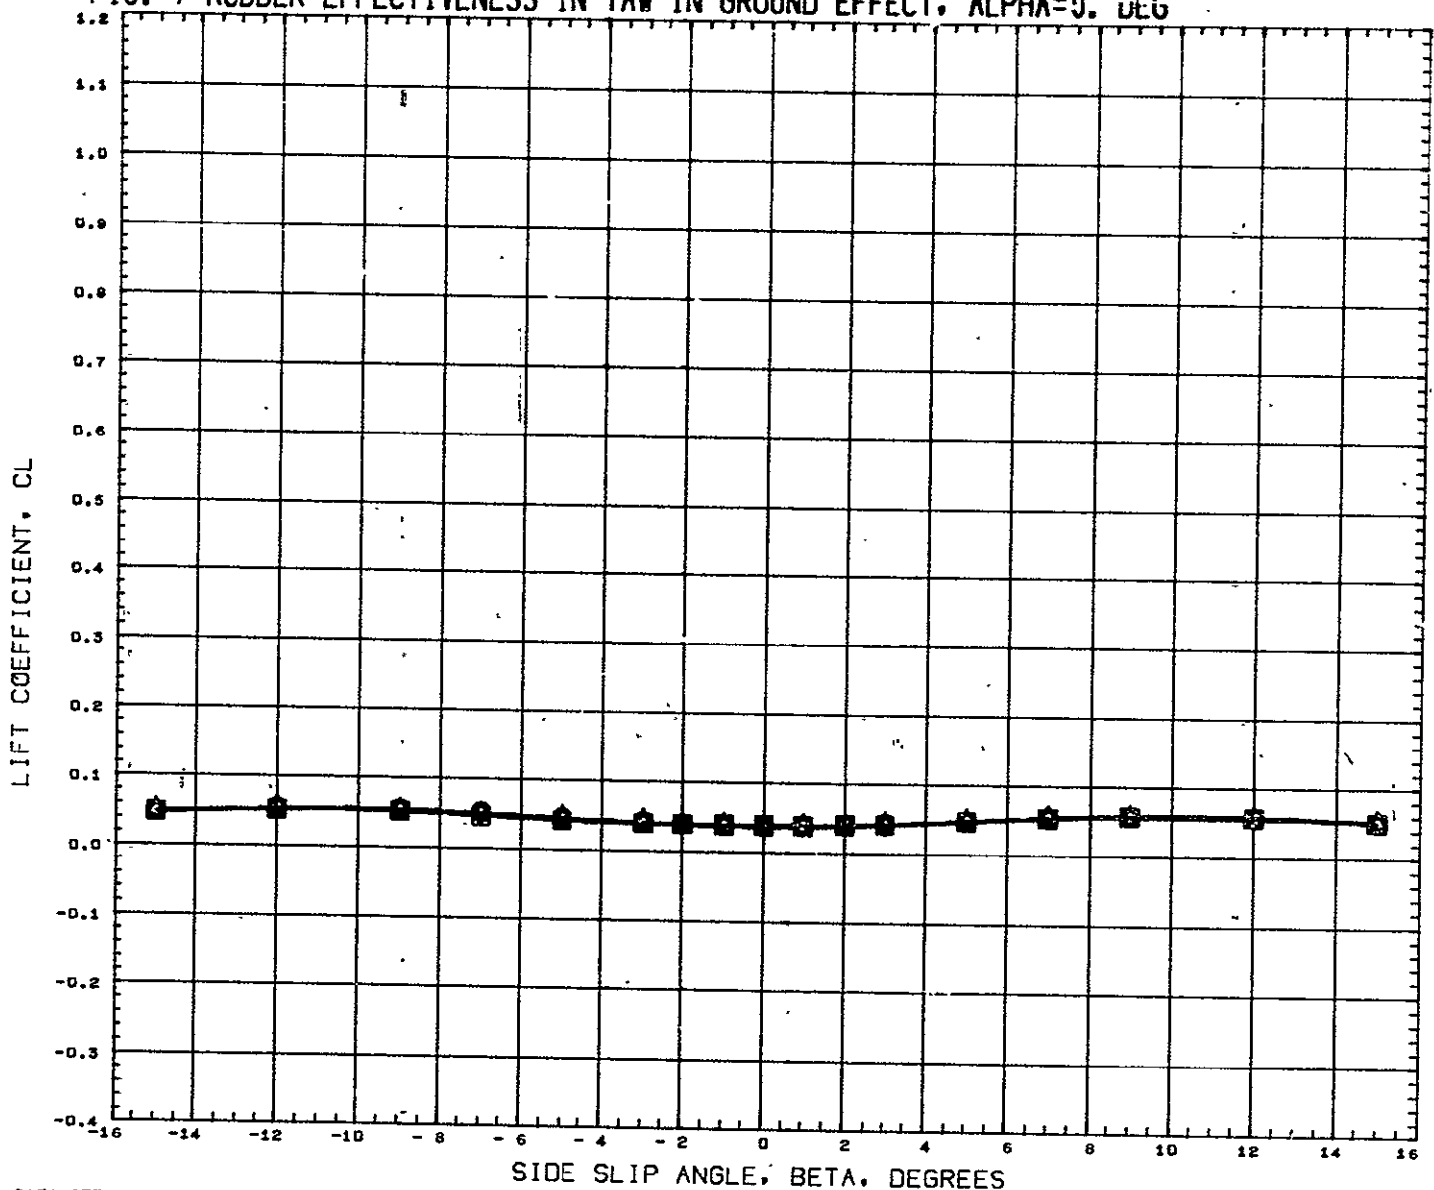

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCWD21)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCWD20)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCWD19)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCWD18)	□	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	-15.000	XMRP	1485.0040 IN
							YMRP	0.0000 IN
							ZMRP	377.0004 IN
							SCALE	0.0400

MACH 0.170


FIG. 7 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG

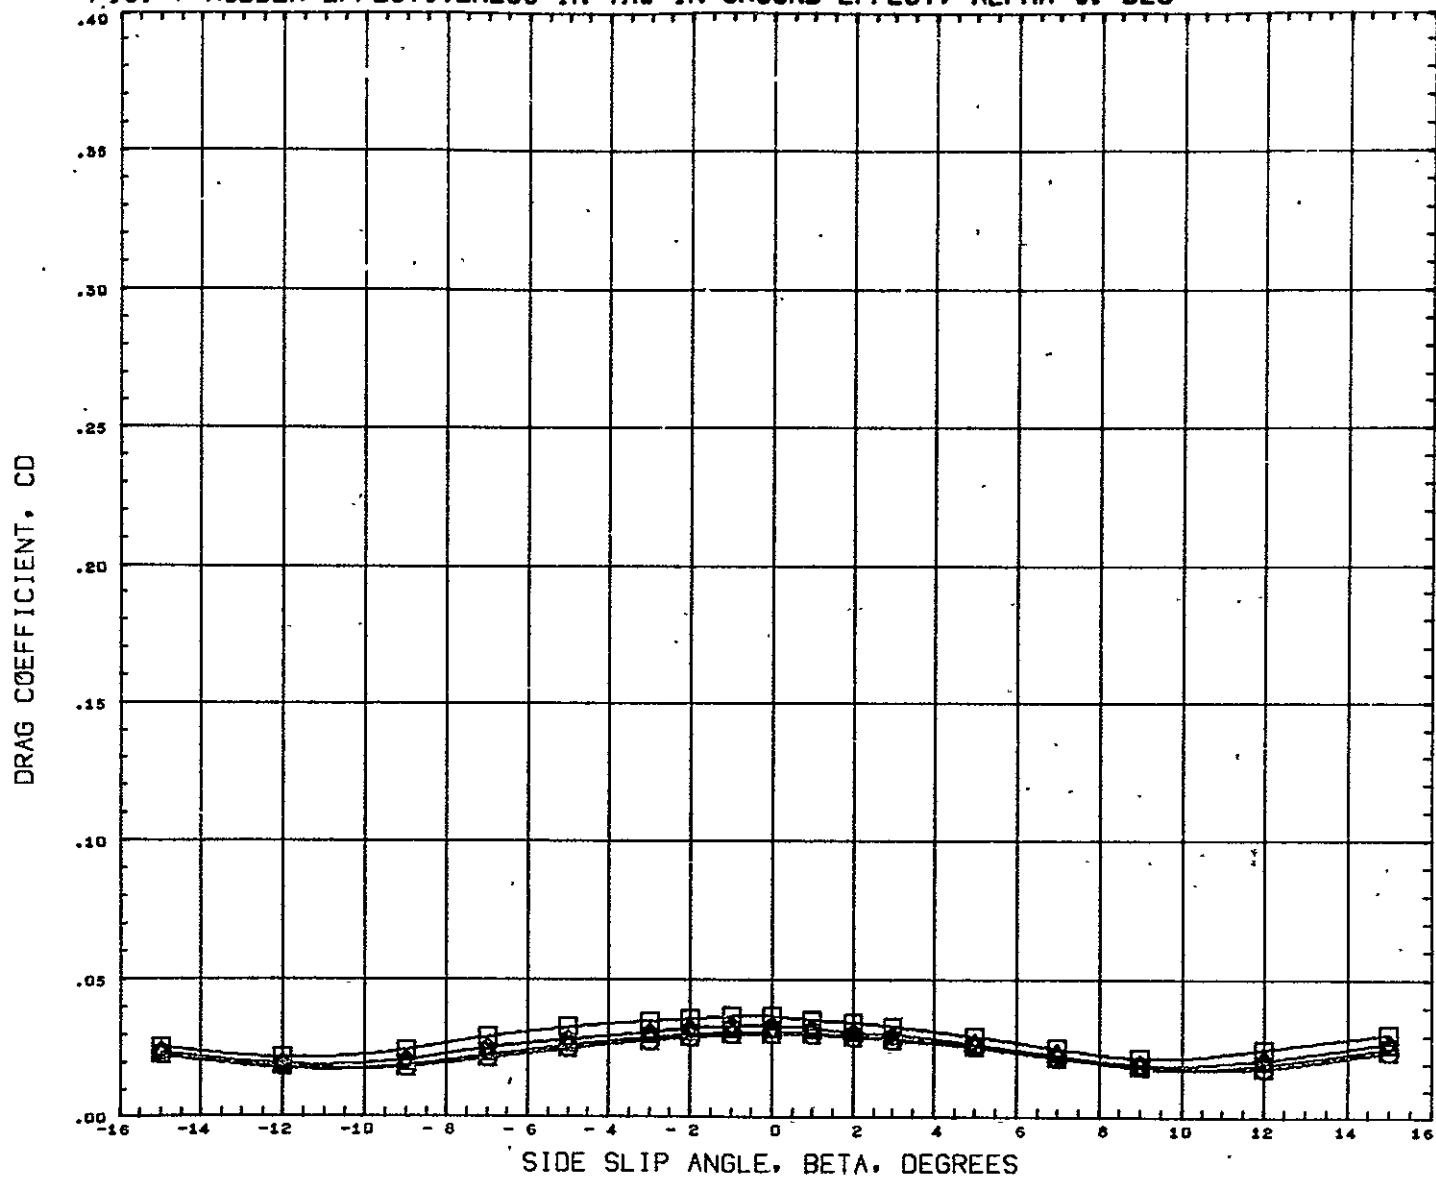

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW021)	○	GWTT 290-CONF	ROS-NB1 81F1W1V1G8	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW020)	△	GWTT 290-CONF	ROS-NB1 81F1W1V1G8	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCW019)	◇	GWTT 290-CONF	ROS-NB1 81F1W1V1G8	0.000	0.000	0.000	-10.000	BREF	3.8920 FT
(RCW018)	□	-GWTT 290-CONF	ROS-NB1 81F1W1V1G8	0.000	0.000	0.000	-15.000	XMRP	1485.0040 IN
								YMRP	0.0000 IN
								ZMRP	377.0004 IN
								SCALE	0.0400

MACH 0.170

FIG. 7 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=0. DEG

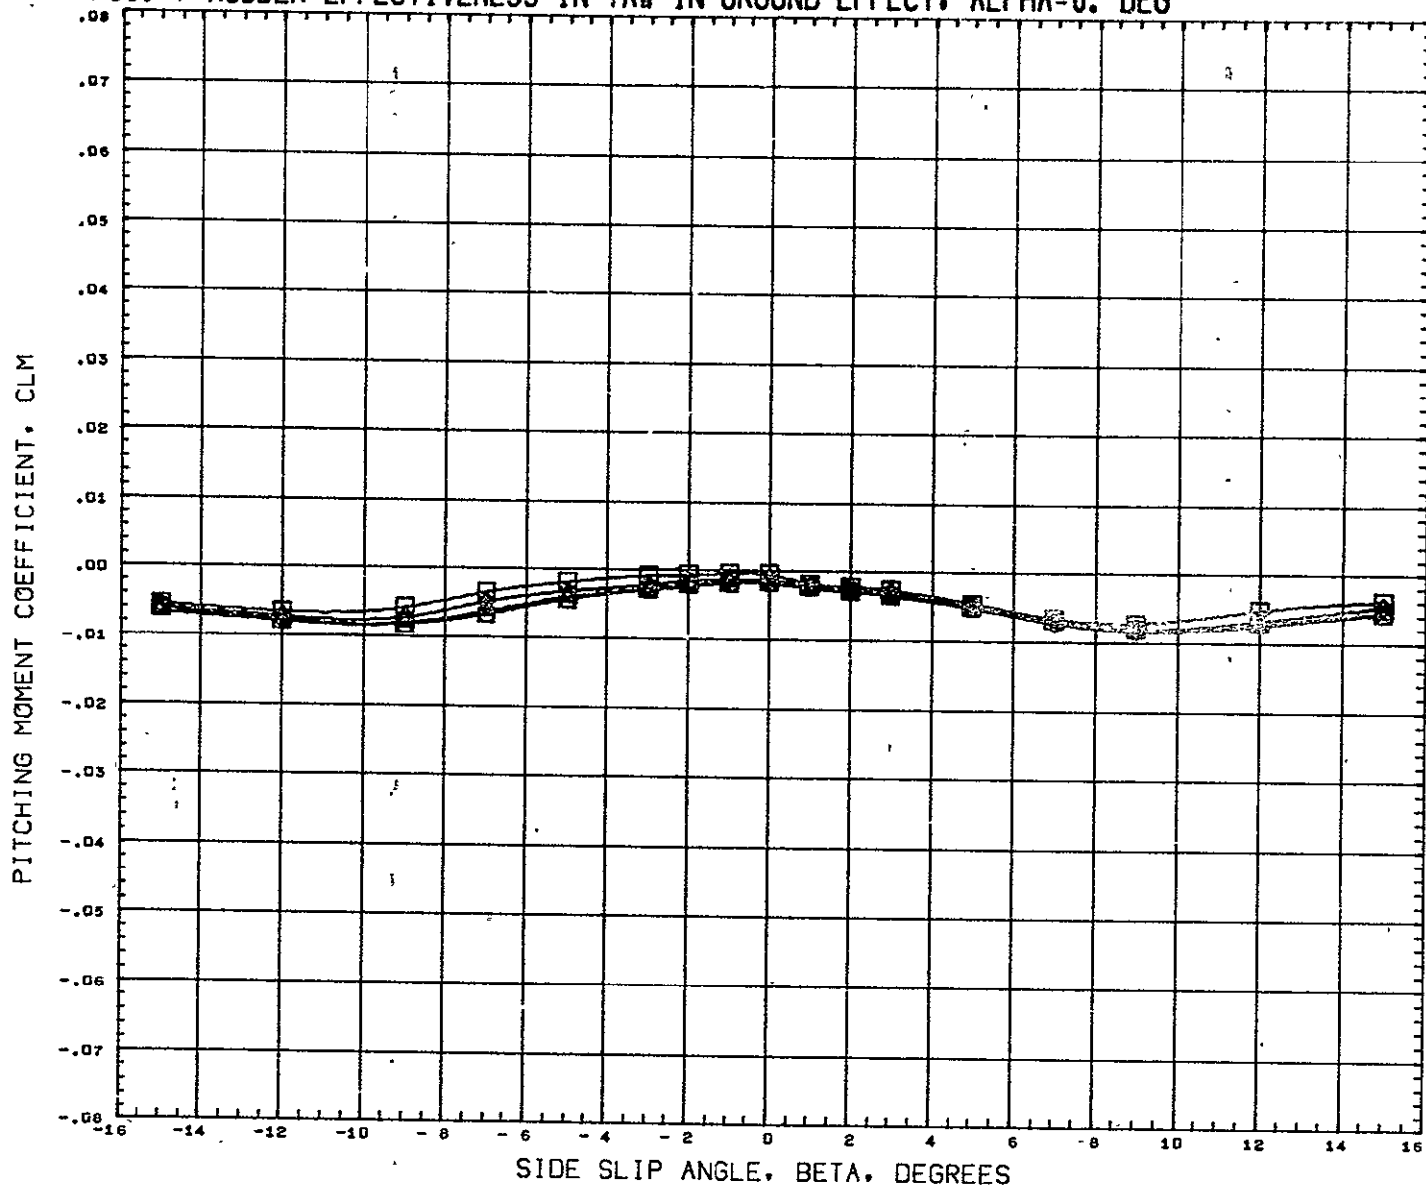


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCWD21)	GWTT 290-CONF ROS-NB1 B1F1W1V1G0
(RCWD20)	GWTT 290-CONF ROS-NB1 B1F1W1V1G8
(RCWD19)	GWTT 290-CONF ROS-NB1 B1F1W1V1G8
(RCWD18)	GWTT 290-CONF ROS-NB1 B1F1W1V1G8

ALPHA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	0.000	-5.000
0.000	0.000	0.000	-10.000
0.000	0.000	0.000	-15.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
SREF	3.8920 FT
XHRP	1485.0040 IN
YHRP	0.0000 IN
ZHRP	377.0004 IN
SCALE	0.0400

MACH 0.170


FIG. 8 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=0. DEG., ELEVTR=0. DEG

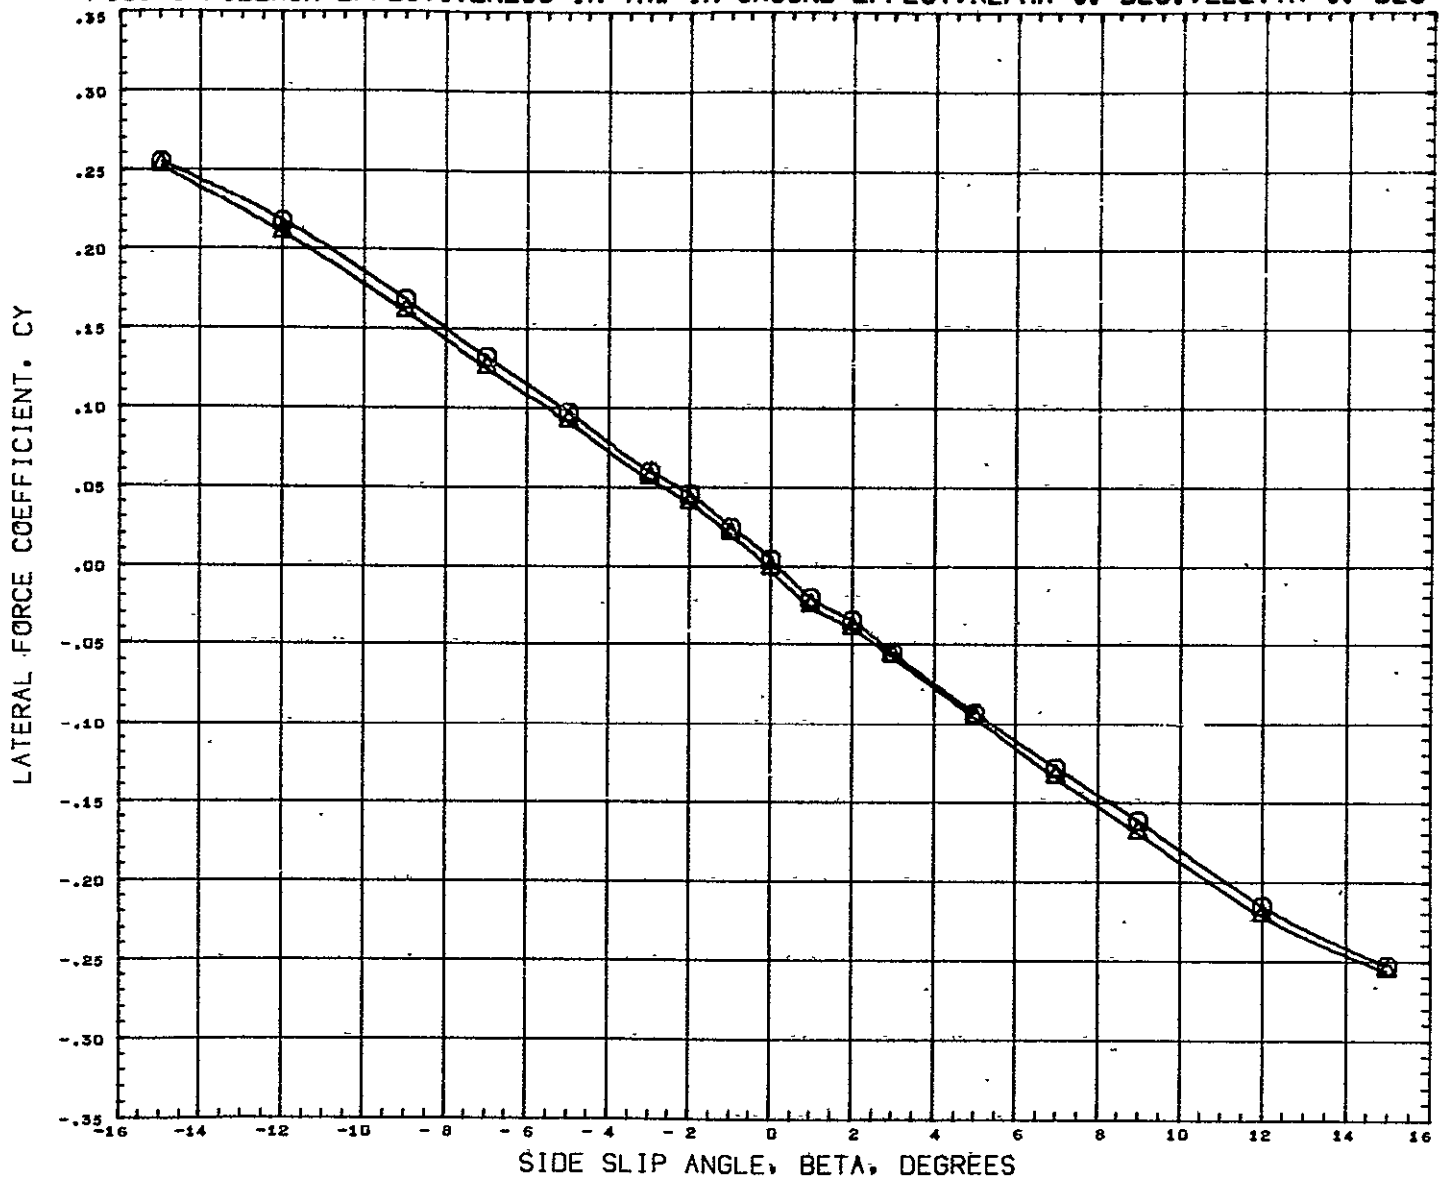

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW021)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW024)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	-10.000	0.000	LREF	6.4320 FT
						BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 8 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG., ELEVTR=0. DEG

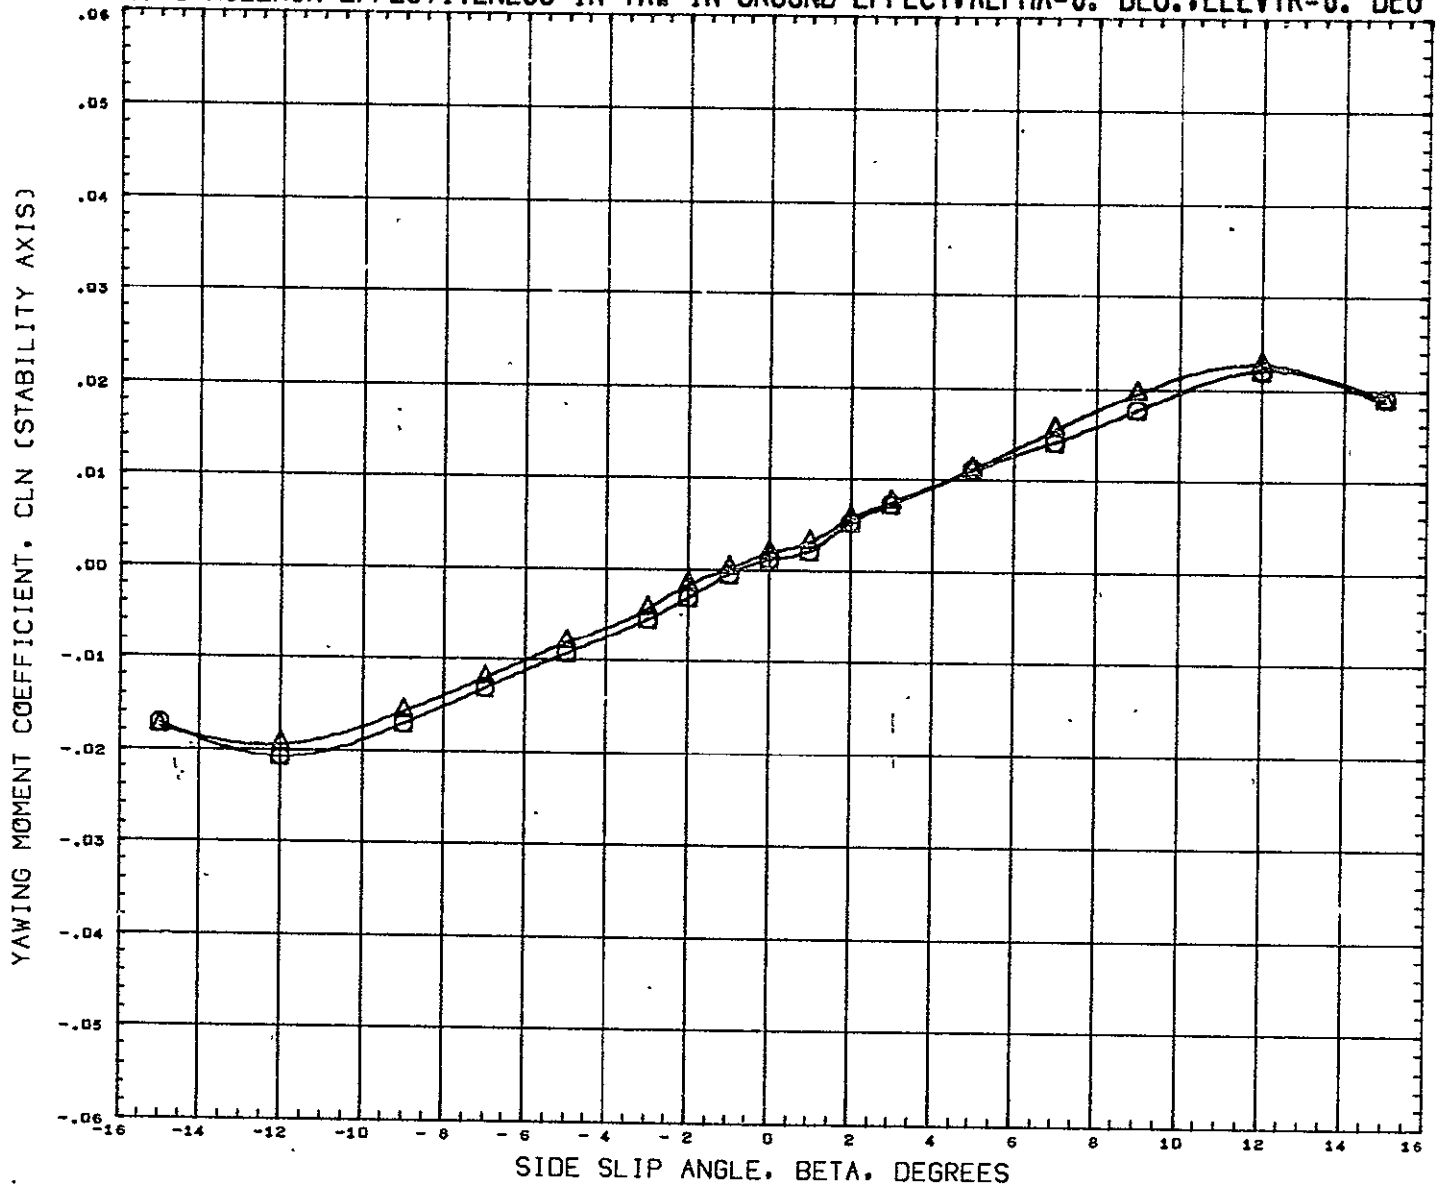


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCWD21)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCWD24)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	-10.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRF	1485.0040 IN
YMRF	0.0000 IN
ZMRF	377.0004 IN
SCALE	0.0400

MACH 0.170


FIG. 8 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG., ELEVTR=0. DEG

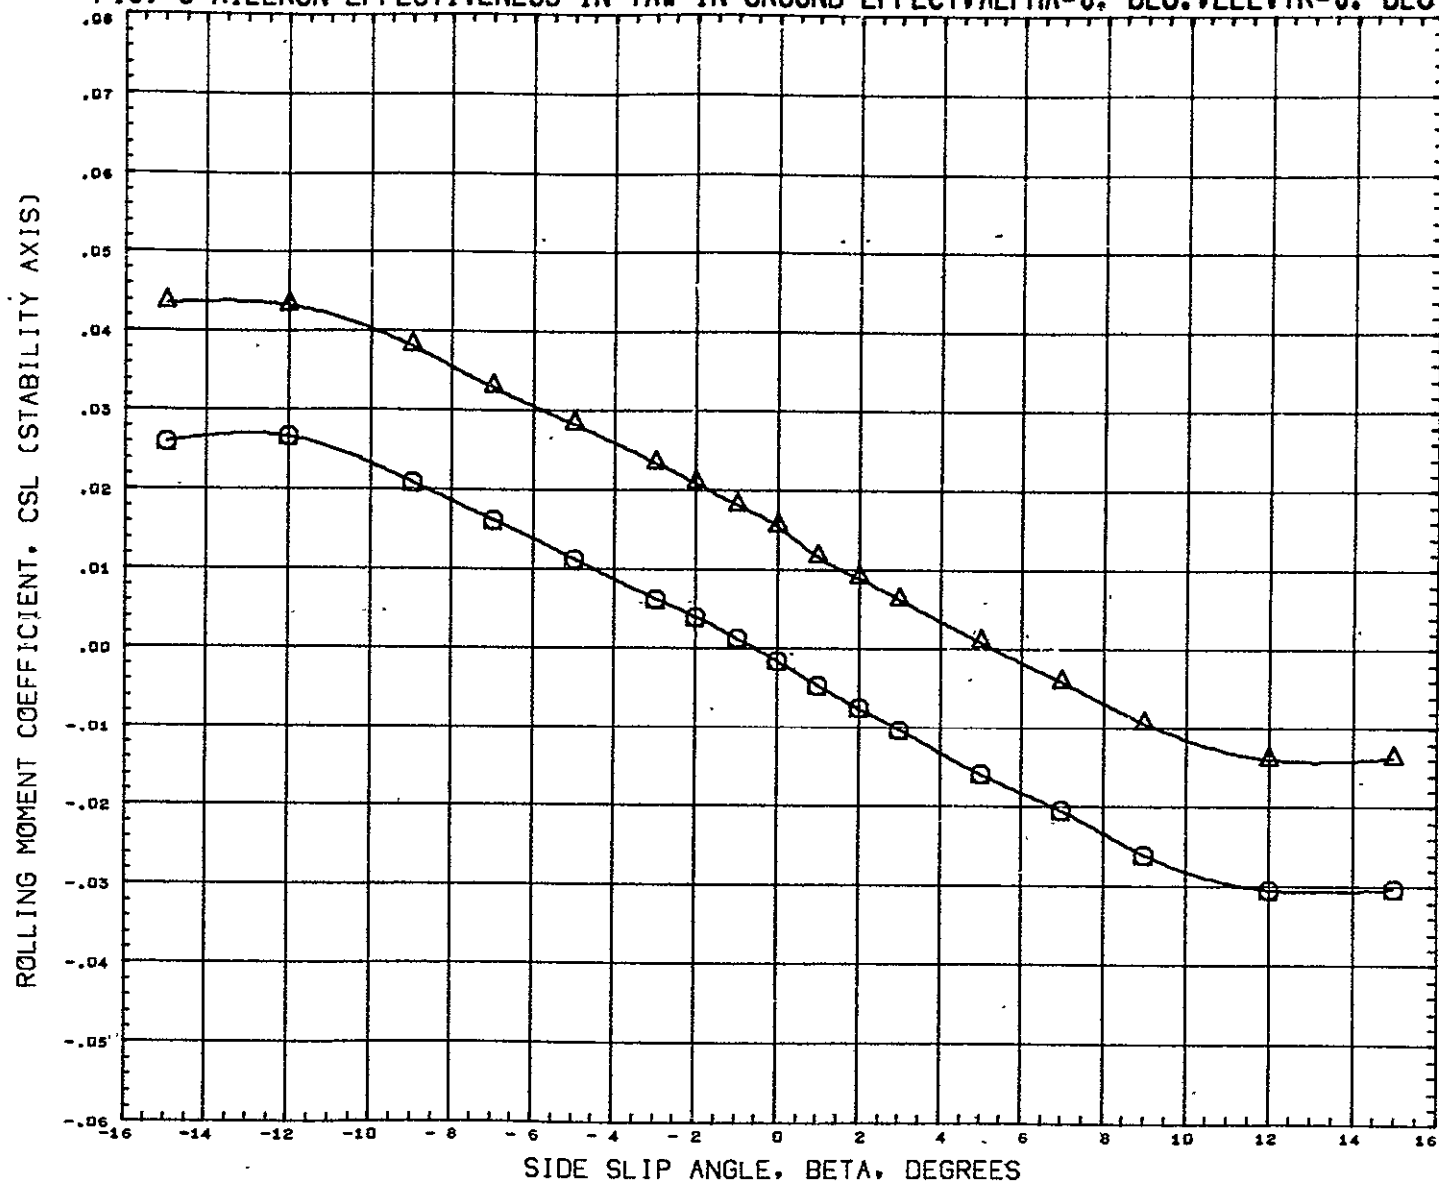

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW021)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW024)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	-10.000	0.000	LREF	6.4320 FT
						BREF	3.6920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 8 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG., ELEVTR=0. DEG

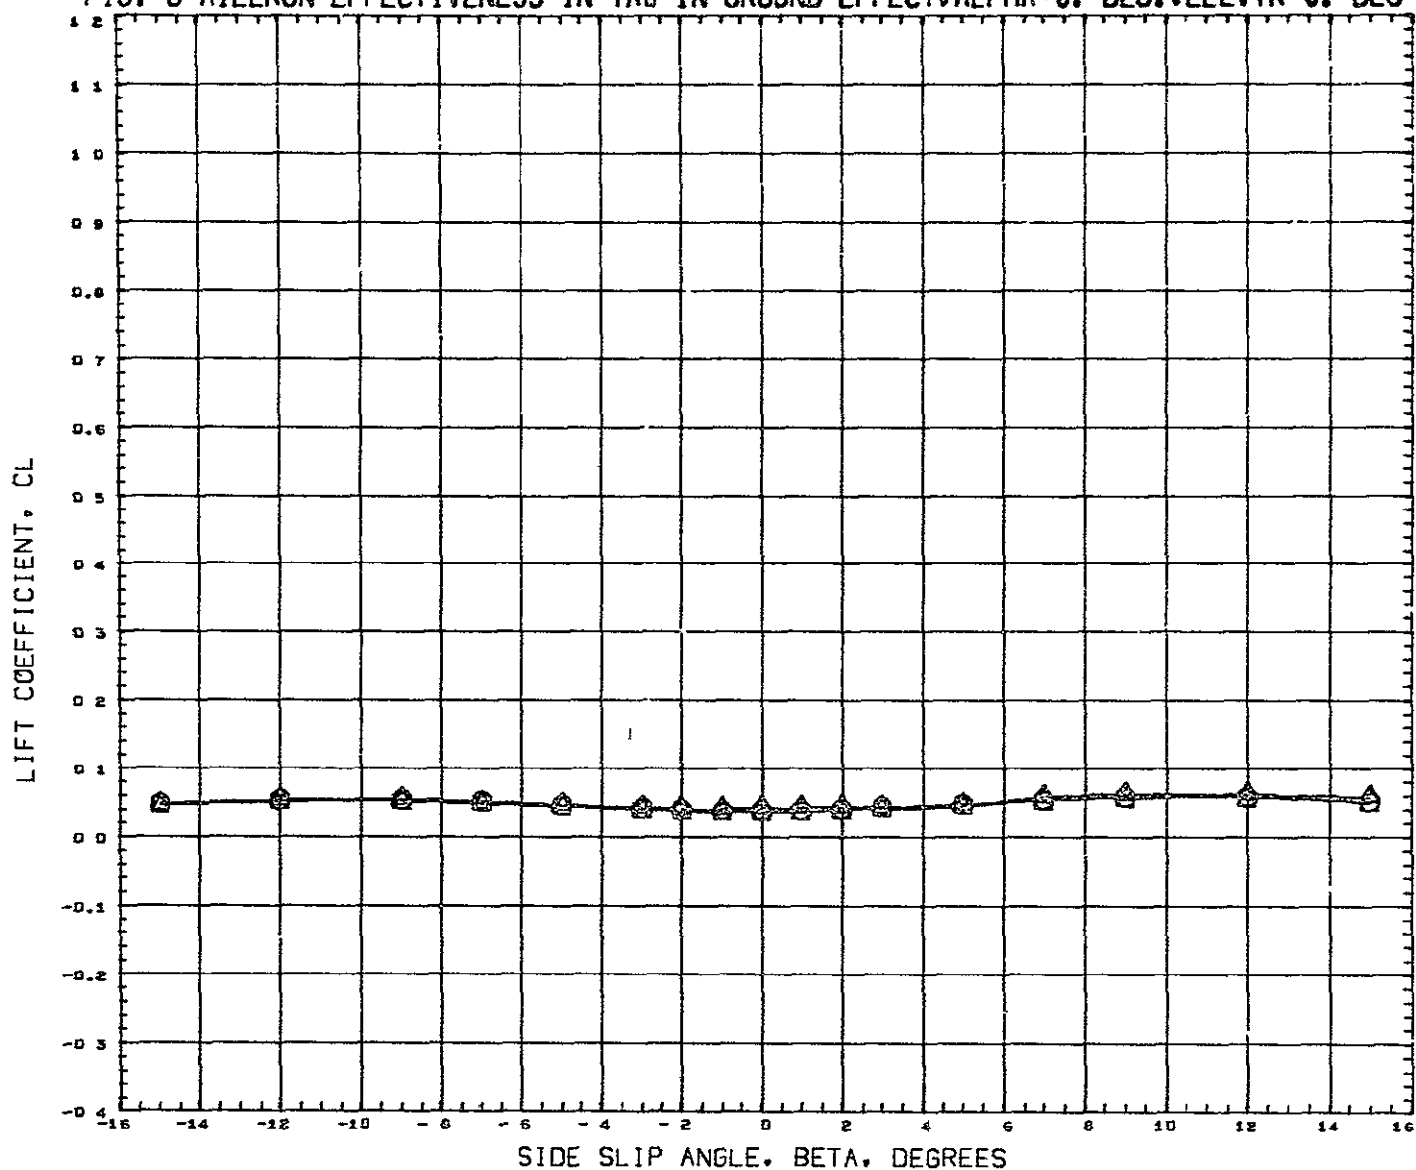


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW021)	Q GTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCW024)	Q GTT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	0 000	-10 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				AMRF 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 8 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG., ELEVTR=0. DEG

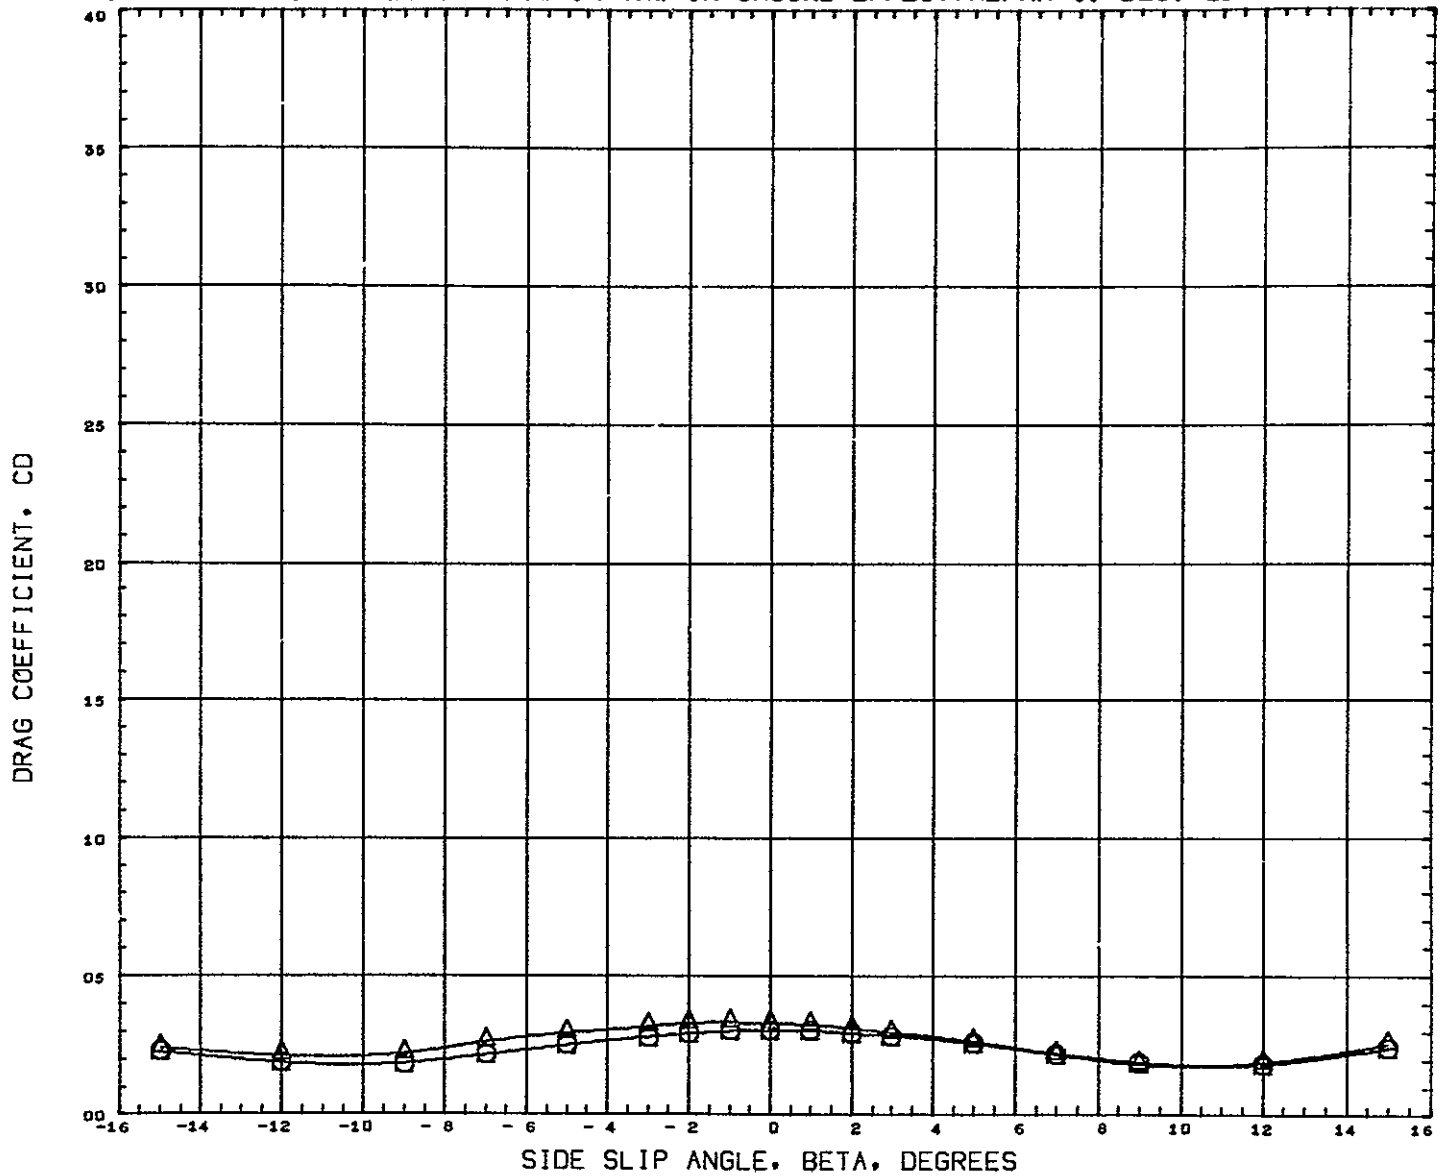


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW021) GWT 290-CONF ROS-NB1 B1F1W1V16B
 (RCW024) GWT 290-CONF ROS-NB1 B1F1W1V16B

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	0 000	-10 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 8 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0. DEG., ELEVTR=0. DEG

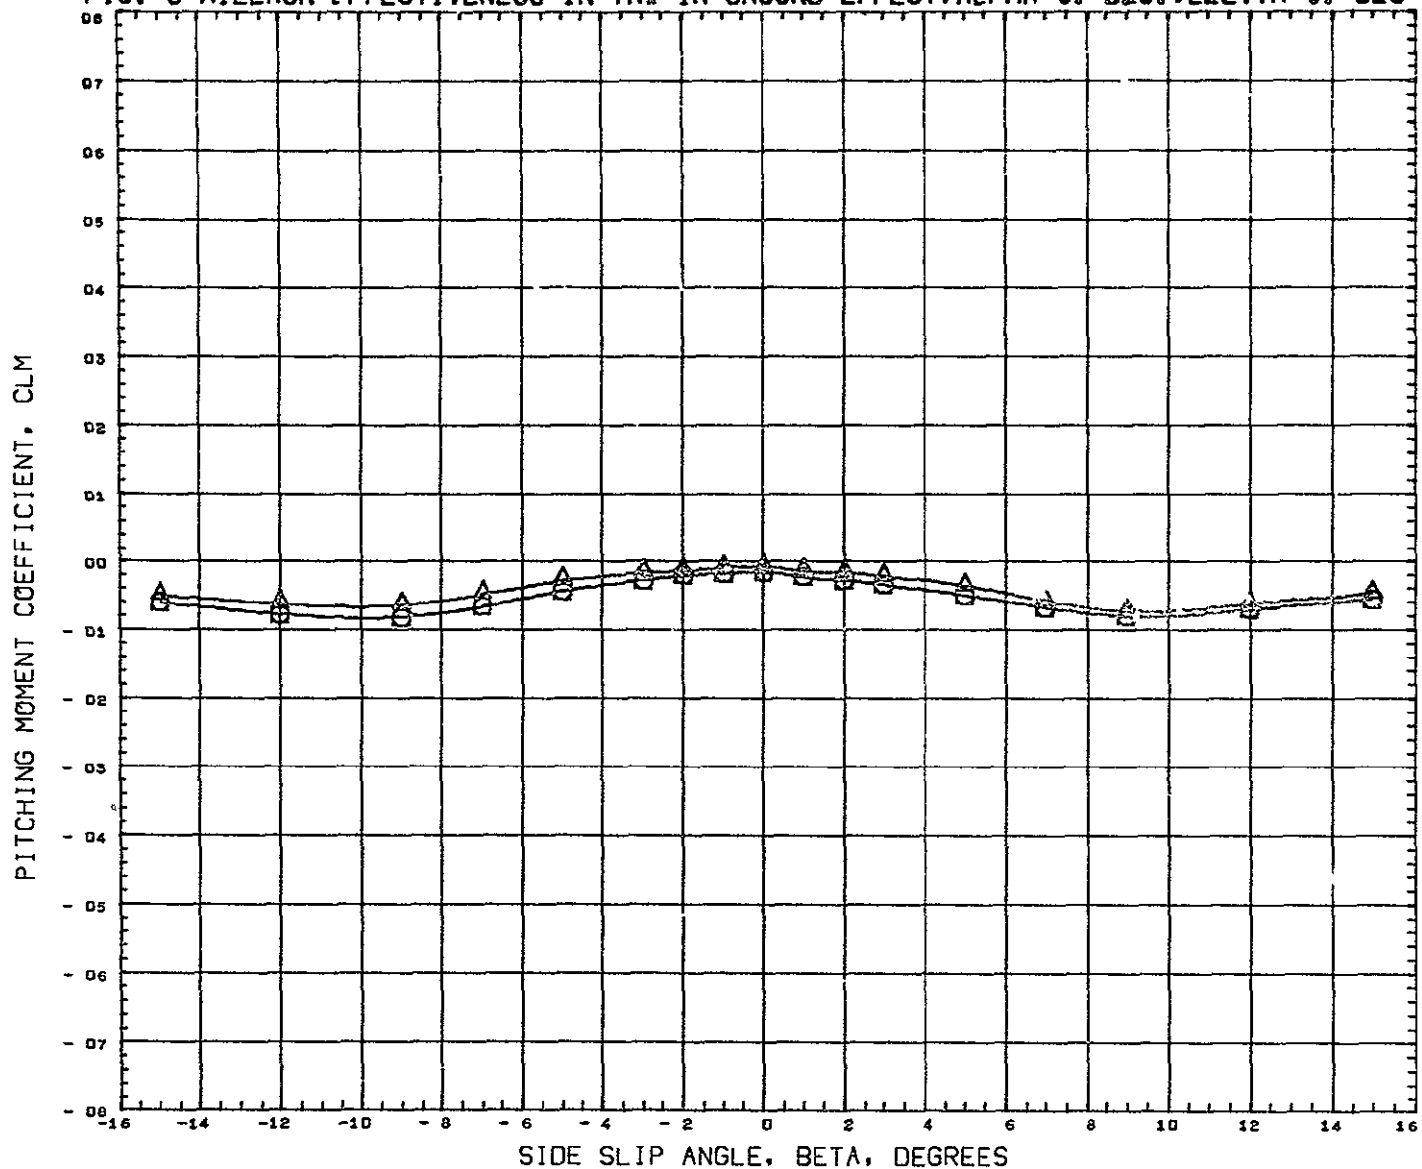


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW021)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB
(RCW024)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	0 000	-10 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XNRP 1485 0040 IN
				YNRP 0 0000 IN
				ZNRP 377 0004 IN
				SCALE 0 0400

MACH 0 170


FIG. 9 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-5. DEG.

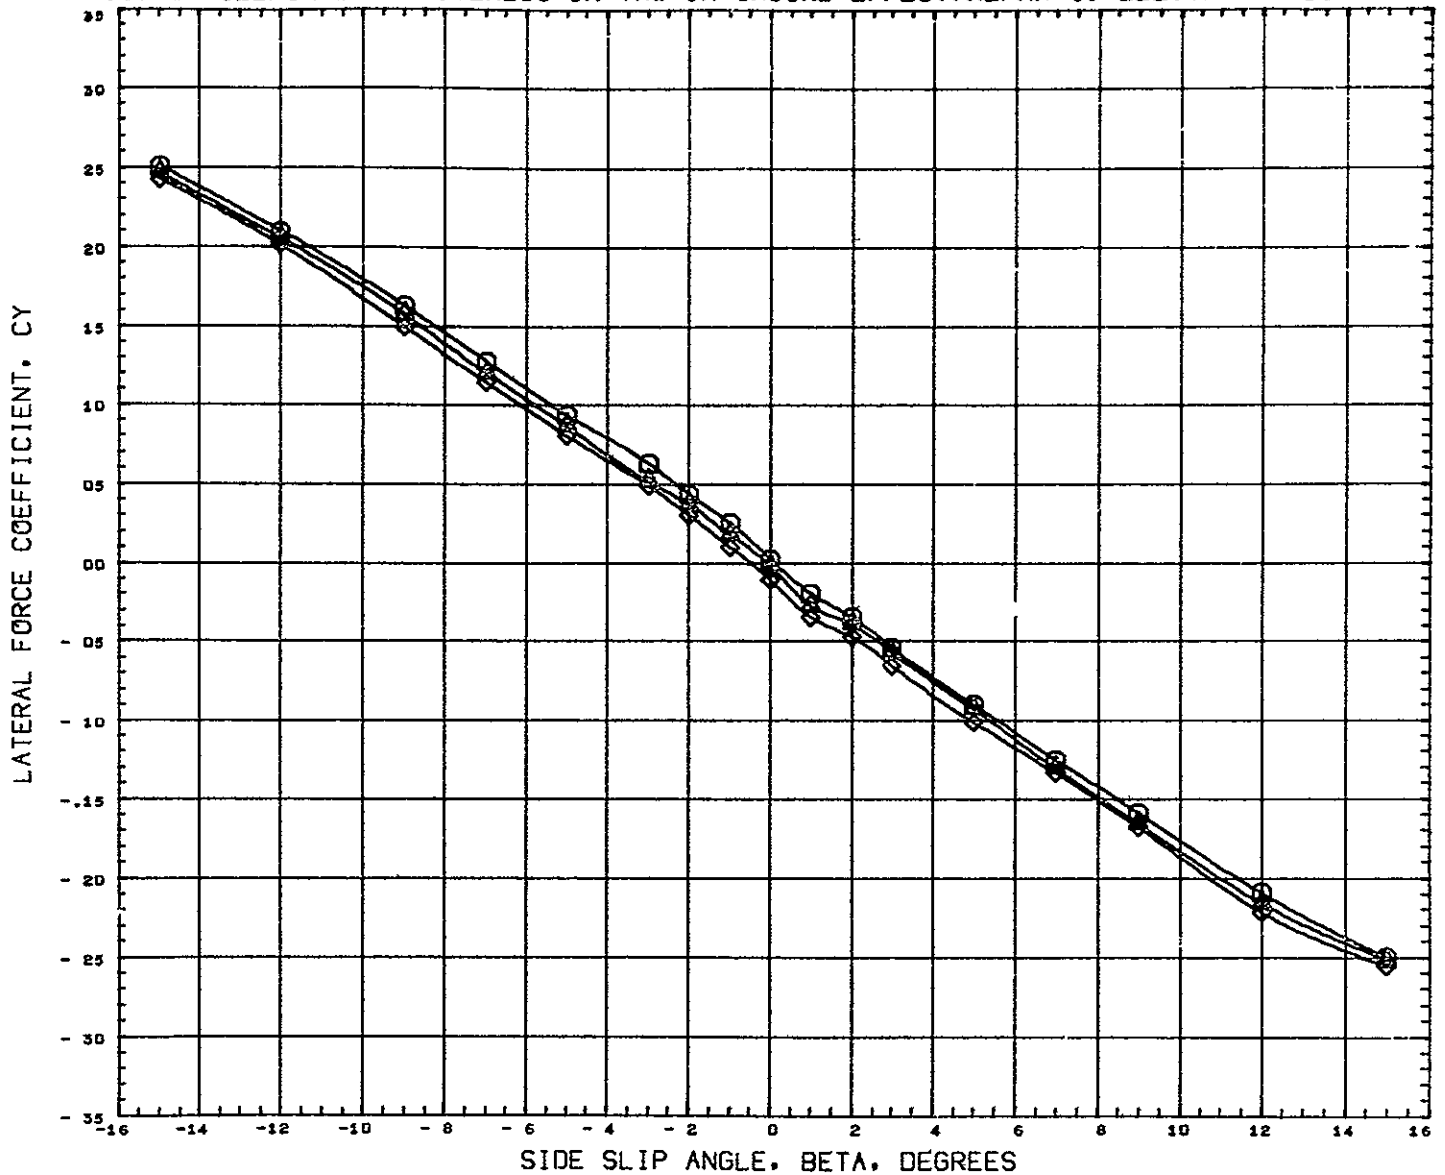

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(RCW027)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	0 000	0 000	SREF 9 1952 SQ FT
(RCW022)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	0 000	0 000	LREF 6 4320 FT
(RCW025)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	-20 000	0 000	BREF 3 8920 FT
						XMRP 1485 0040 IN
						YMRP 0 0000 IN
						ZMRP 377 0004 IN
						SCALE 0 0400

MACH 0 170


FIG. 9 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-5. DEG.

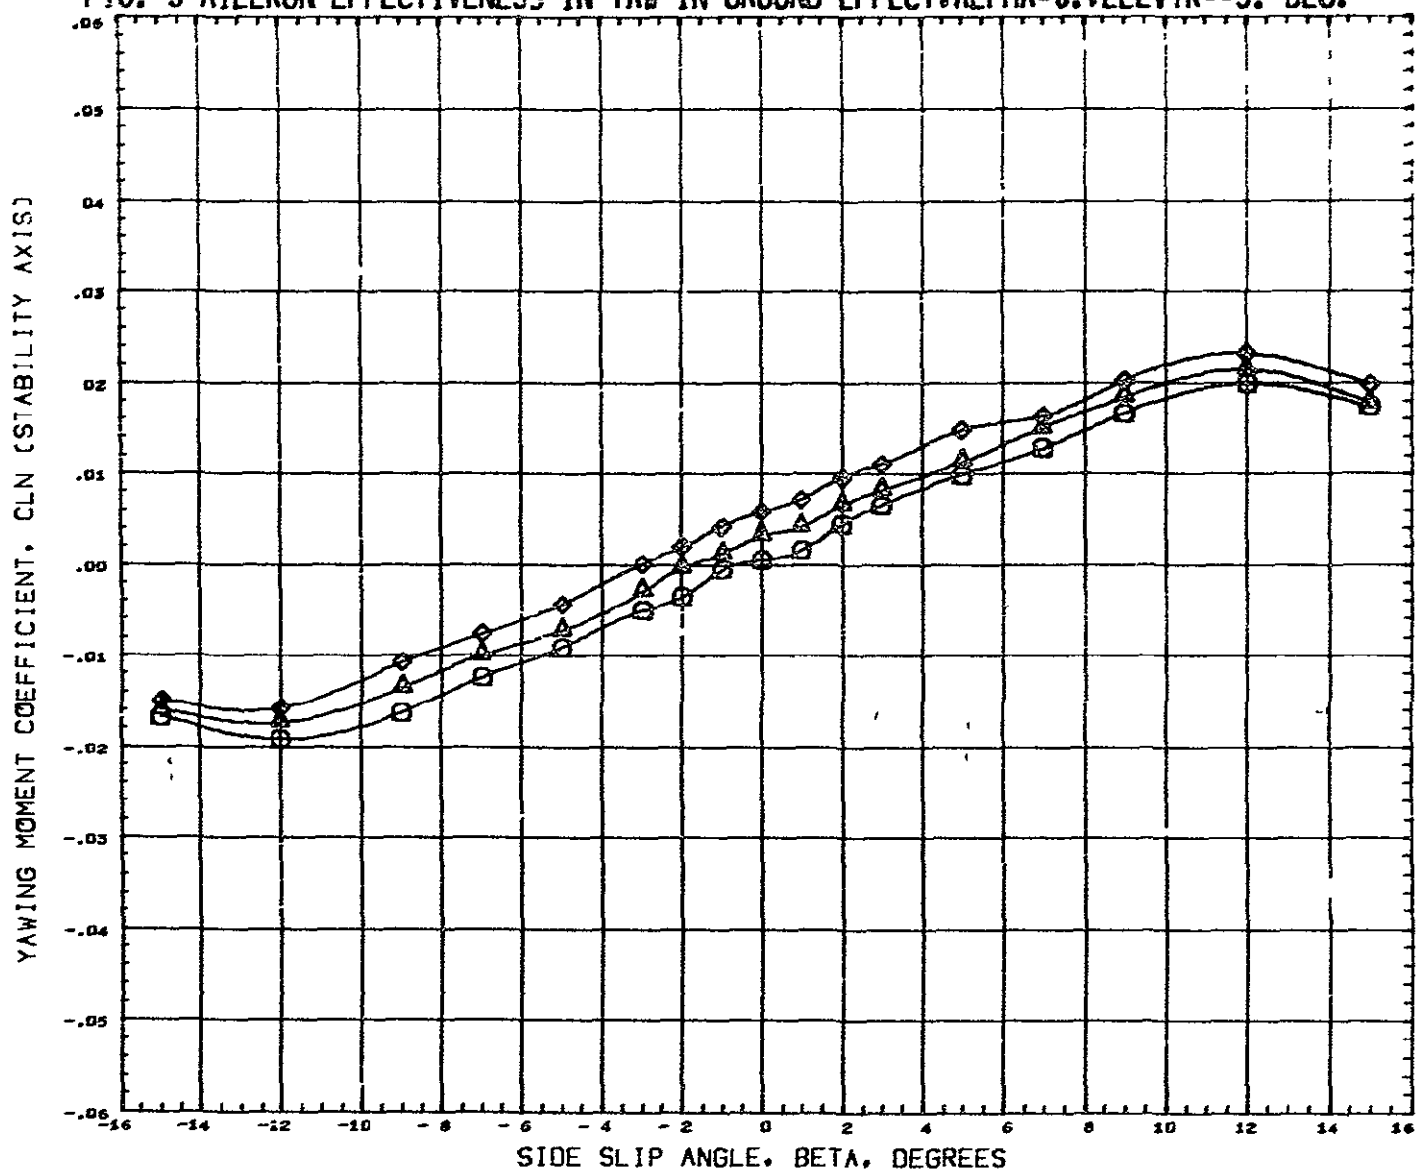

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW027)	QWTI 290-CONF ROS-NB1 B1F1W1V1G8	0 000	-5.000	0 000	0 000	SREF	9 1952 SQ FT
(RCW022)	QWTI 290-CONF ROS-NB1 B1F1W1V1G8	0 000	-5.000	0 000	0 000	LREF	6 4320 FT
(RCW025)	QWTI 290-CONF ROS-NB1 B1F1W1V1G8	0 000	-5.000	-20 000	0 000	BREF	3 8920 FT
						YNRF	1485 0040 IN
						YNRF	0 0055 IN
						ZNRF	377.0004 IN
						SCALE	0 0450

MACH 0 170

FIG. 9 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-5. DEG.

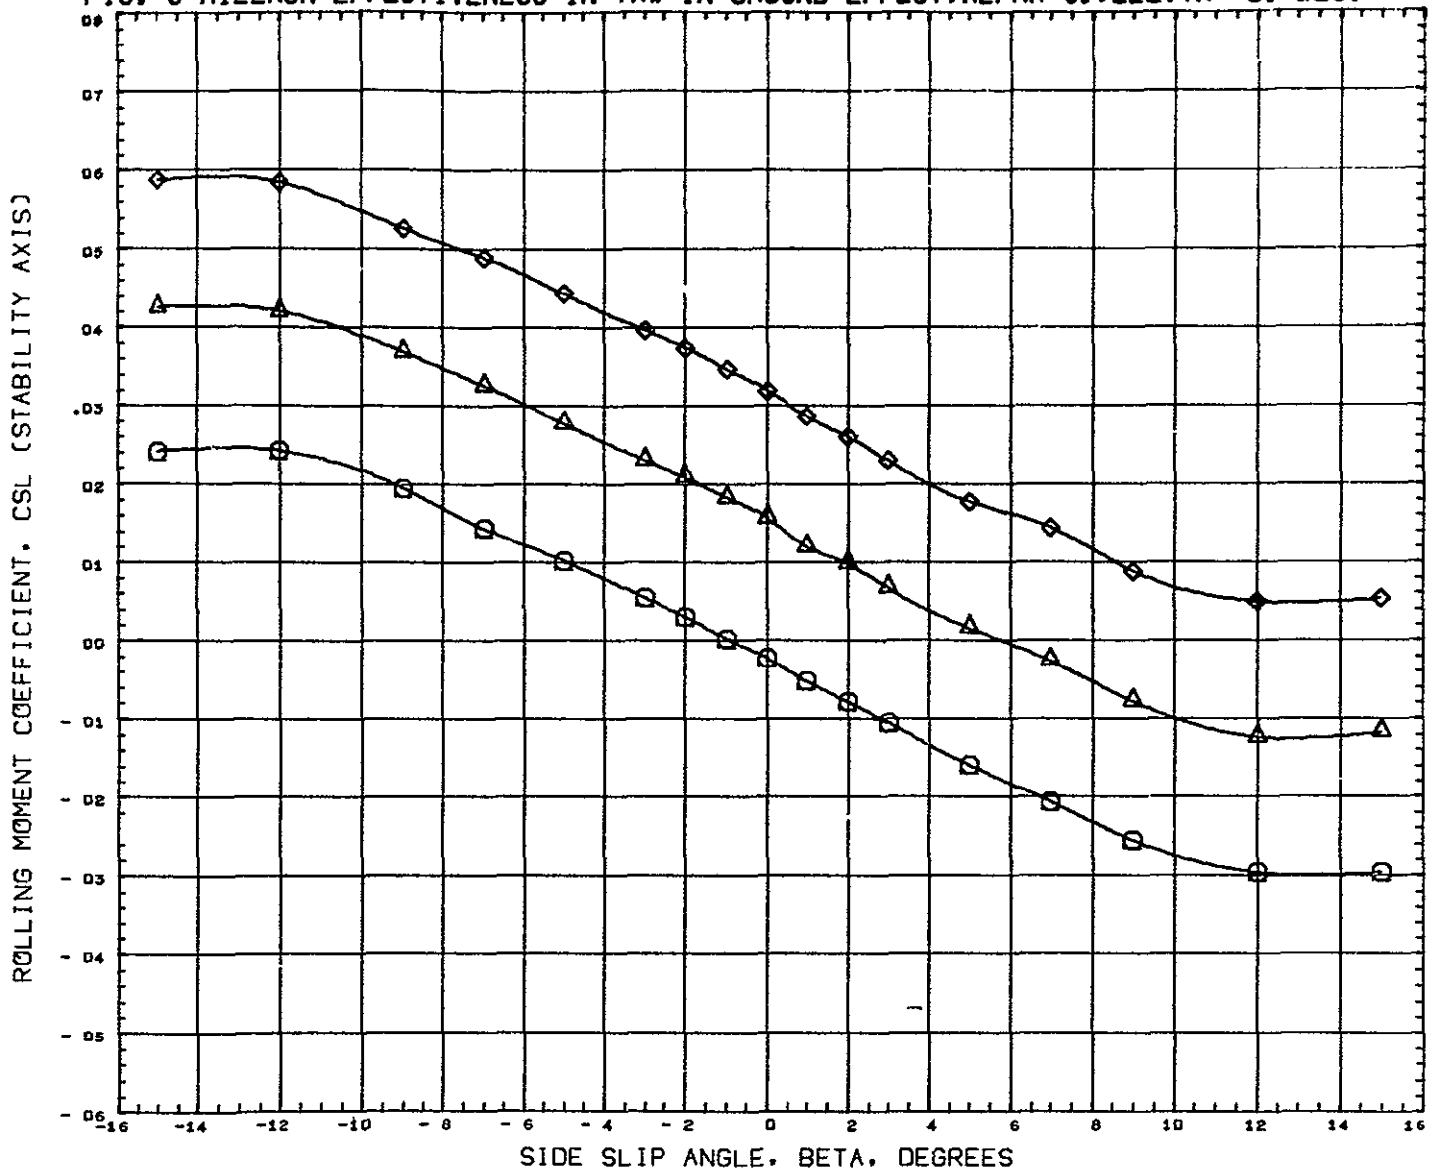


DATA SET SYMBOL	CONFIGURATION	DESCRIPTION
(RCW027)	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB
(RCW022)	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB
(RCW025)	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	-5 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	-5 000	0 000	0 000	LREF 6 4320 FT
0 000	-5 000	-20 000	0 000	BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

NACH 0 170


FIG. 9 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-5. DEG.

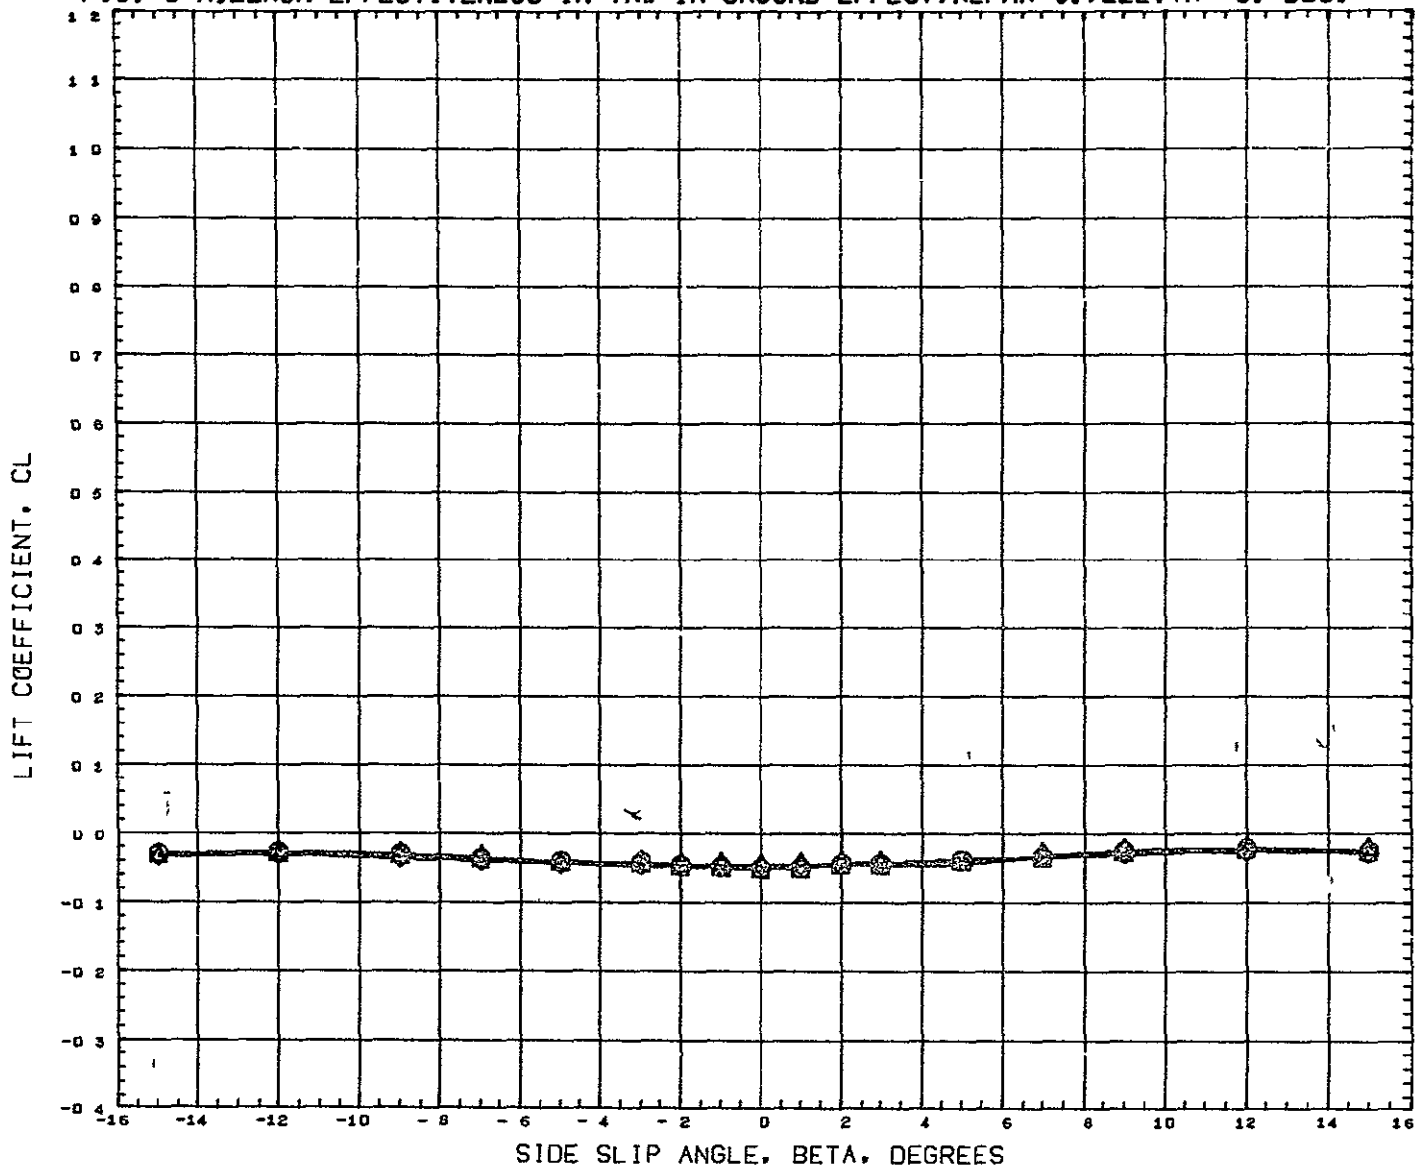

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCWD27)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	0 000	0 000	SREF	9 1952 SQ FT
(RCWD22)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	0 000	0 000	LREF	6 4320 FT
(RCWD25)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	-20 000	0 000	BREF	3 8920 FT
						XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

MACH 0 170


FIG. 9 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-5. DEG.

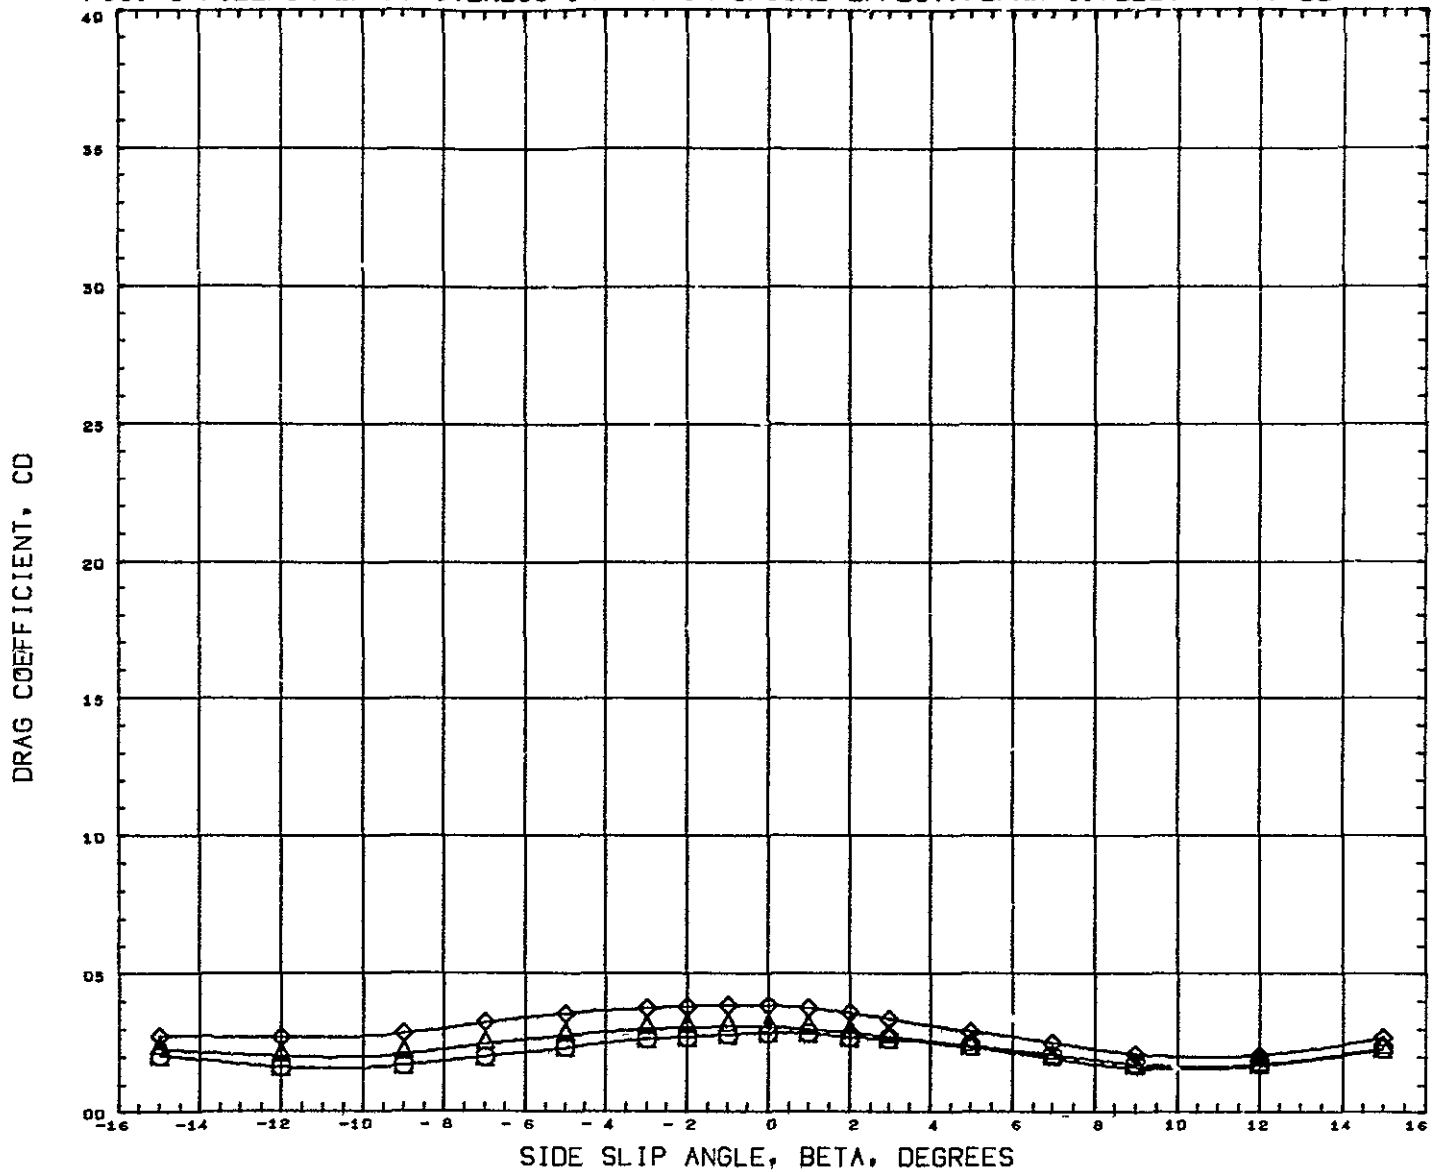

DATA SET SYMBOL	CONFIGURATION	DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW027)	GWTT 290-CONF	ROS-NB1 B1F1W1V16B	0 000	-5 000	0 000	0 000	SREF	9 1952 SQ FT
(RCW022)	GWTT 290-CONF	ROS-NB1 B1F1W1V16B	0 000	-5 000	0 000	0 000	LREF	6 4320 FT
(RCW025)	GWTT 290-CONF	ROS-NB1 B1F1W1V16B	0 000	-5 000	-20 000	0,000	BREF	3 8920 FT
							XMRP	1485 0040 IN
							YMRP	0 0000 IN
							ZMRP	377 0004 IN
							SCALE	0 0400

MACH 0.170


FIG. 9 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=0. ELEVTR=-5. DEG.

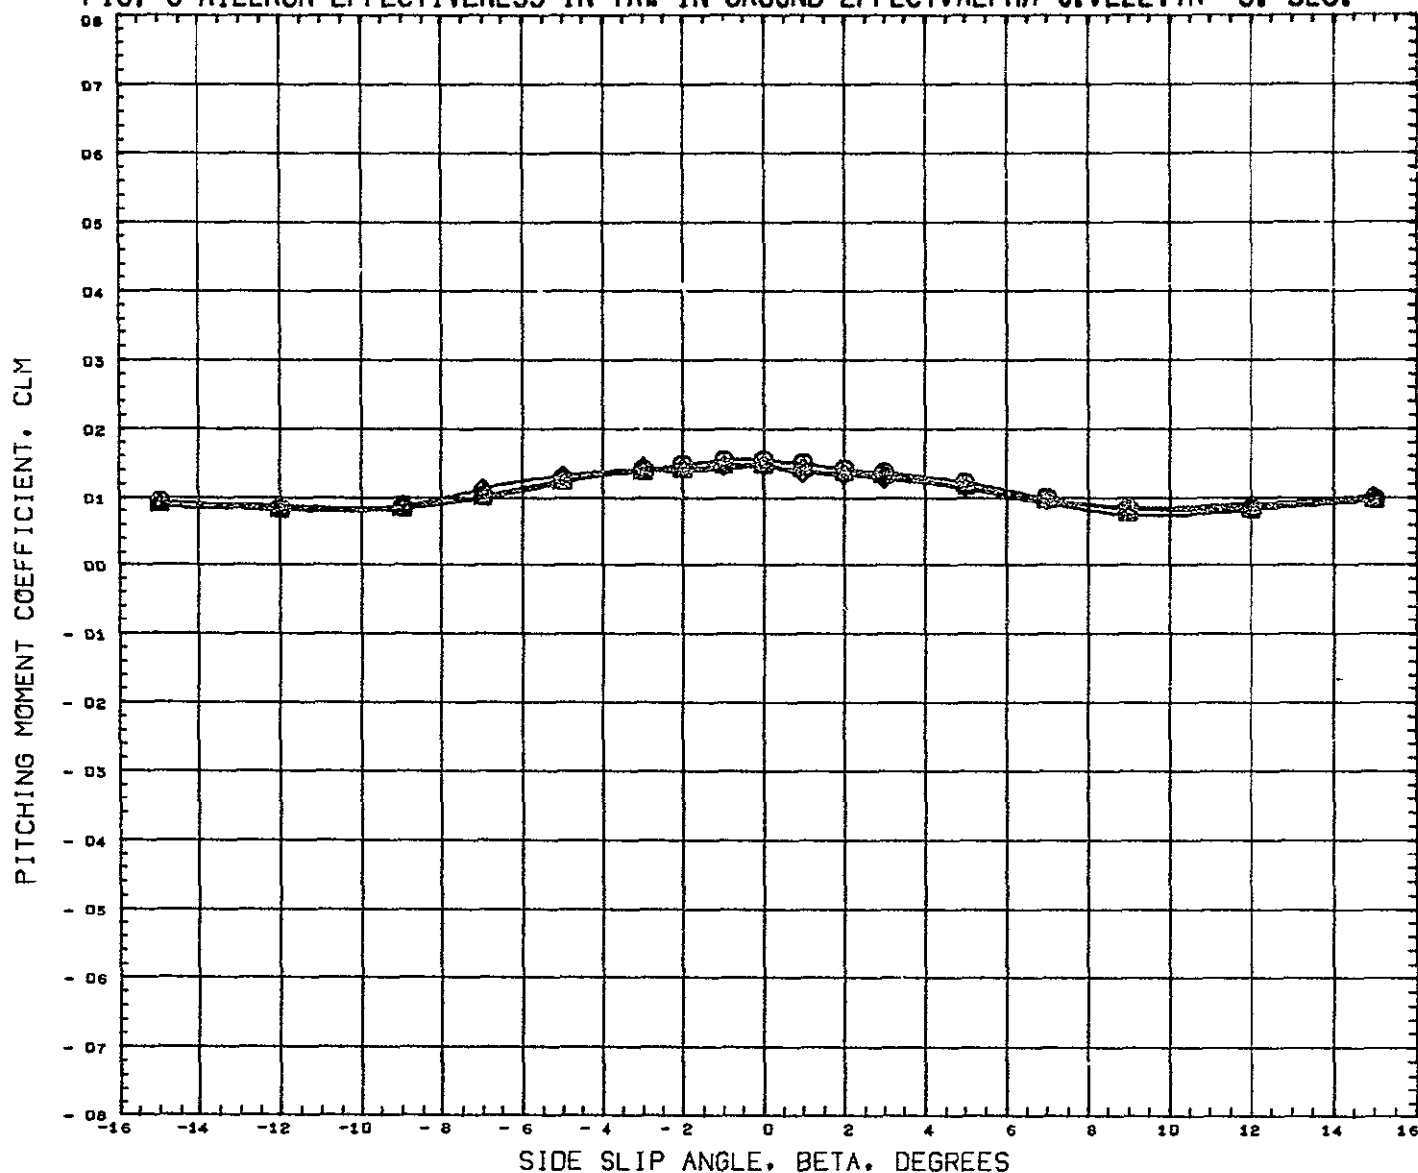

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW027)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	0 000	0 000	SREF	9 1952 SQ FT
(RCW022)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	0 000	0 000	LREF	6 4320 FT
(RCW025)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	0 000	-5 000	-20 000	0 000	BREF	3 8920 FT
						XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

MACH 0.170

FIG. 10 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-10. DEG.

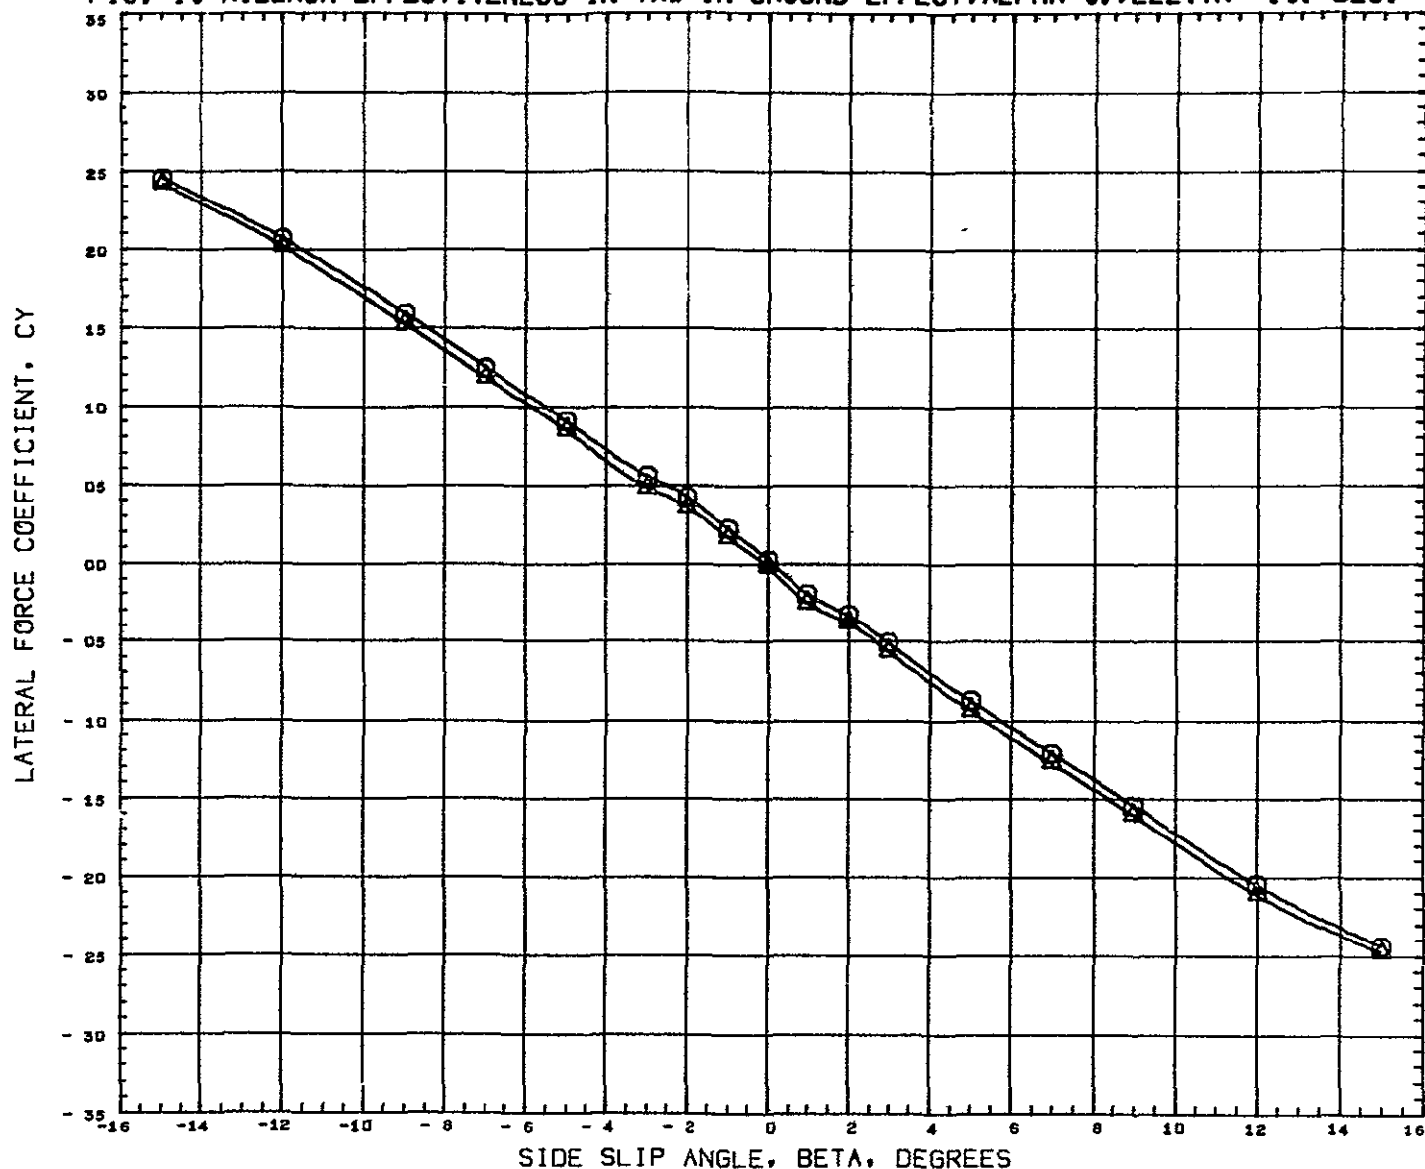


DATA SET SYMBOL CONFIGURATION DESCRIPTION

(RCW023) Q GWT 290-CONF ROS-NB1 B1F1W1V1GB
 (RCW026) Q GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	-10 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	-10 000	-10 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 10 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-10. DEG.

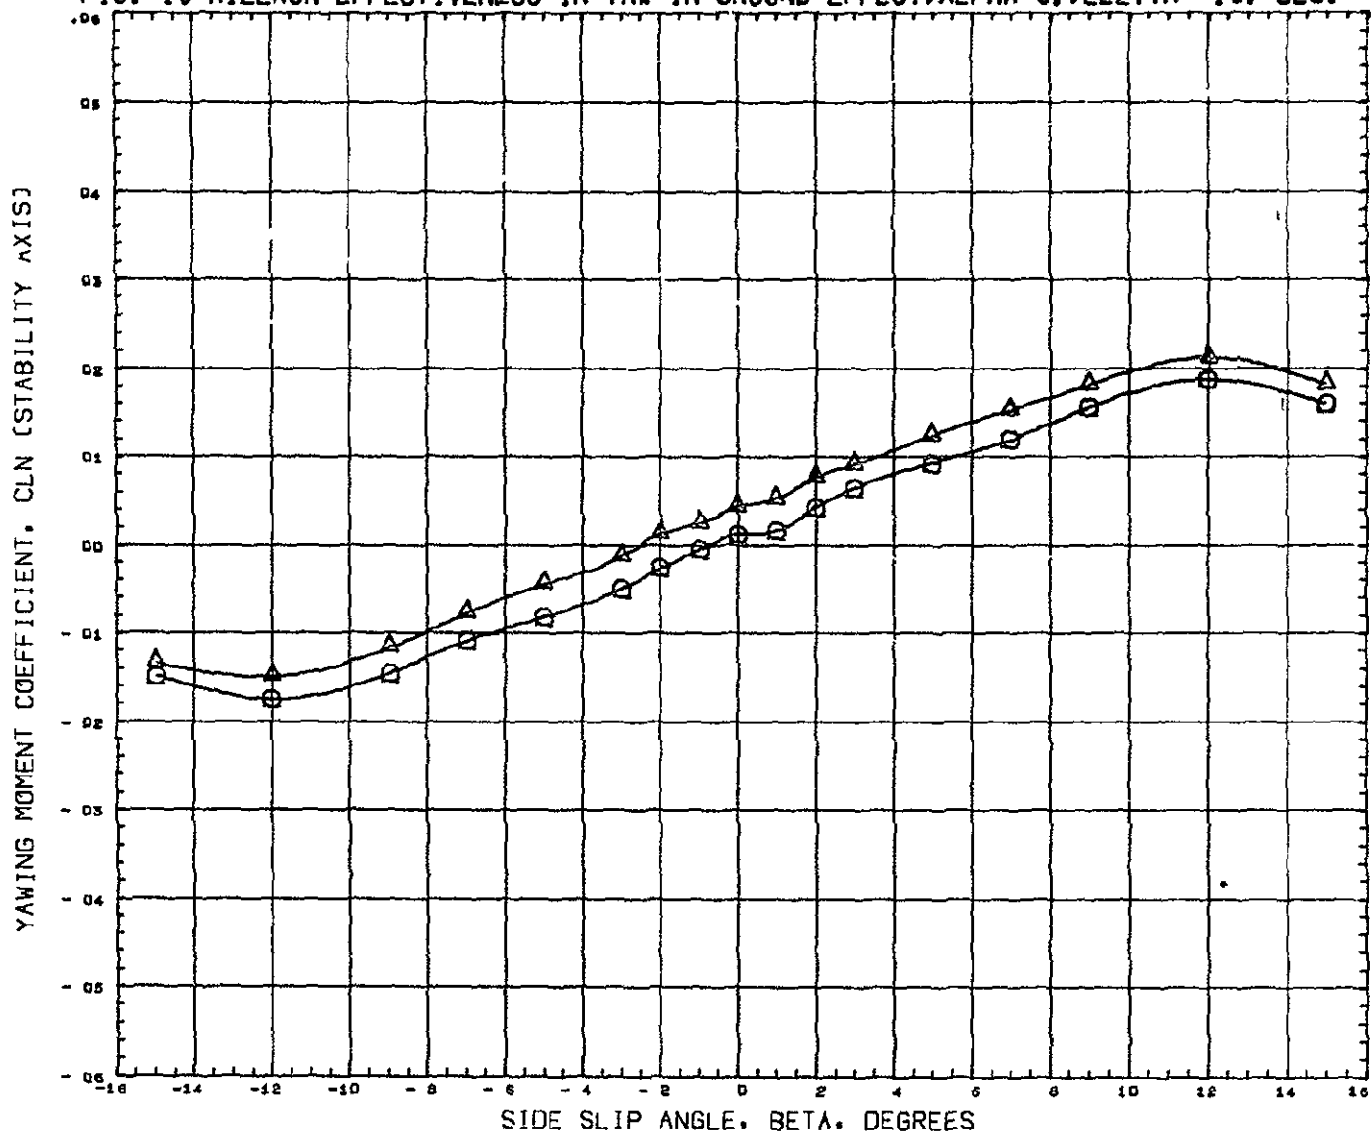


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW025) GWTT 290-CONF ROS-NB1 B1F1W1V16B
 (RCW026) GWTT 290-CONF ROS-NB1 B1F1W1V16B

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
0.000	-10.000	0.000	0.000	SREF	9.1952 SQ FT
0.000	-10.000	-10.000	0.000	LREF	6.4320 FT
				BREF	3.0920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 10 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=0. ELEVTR=-10. DEG.

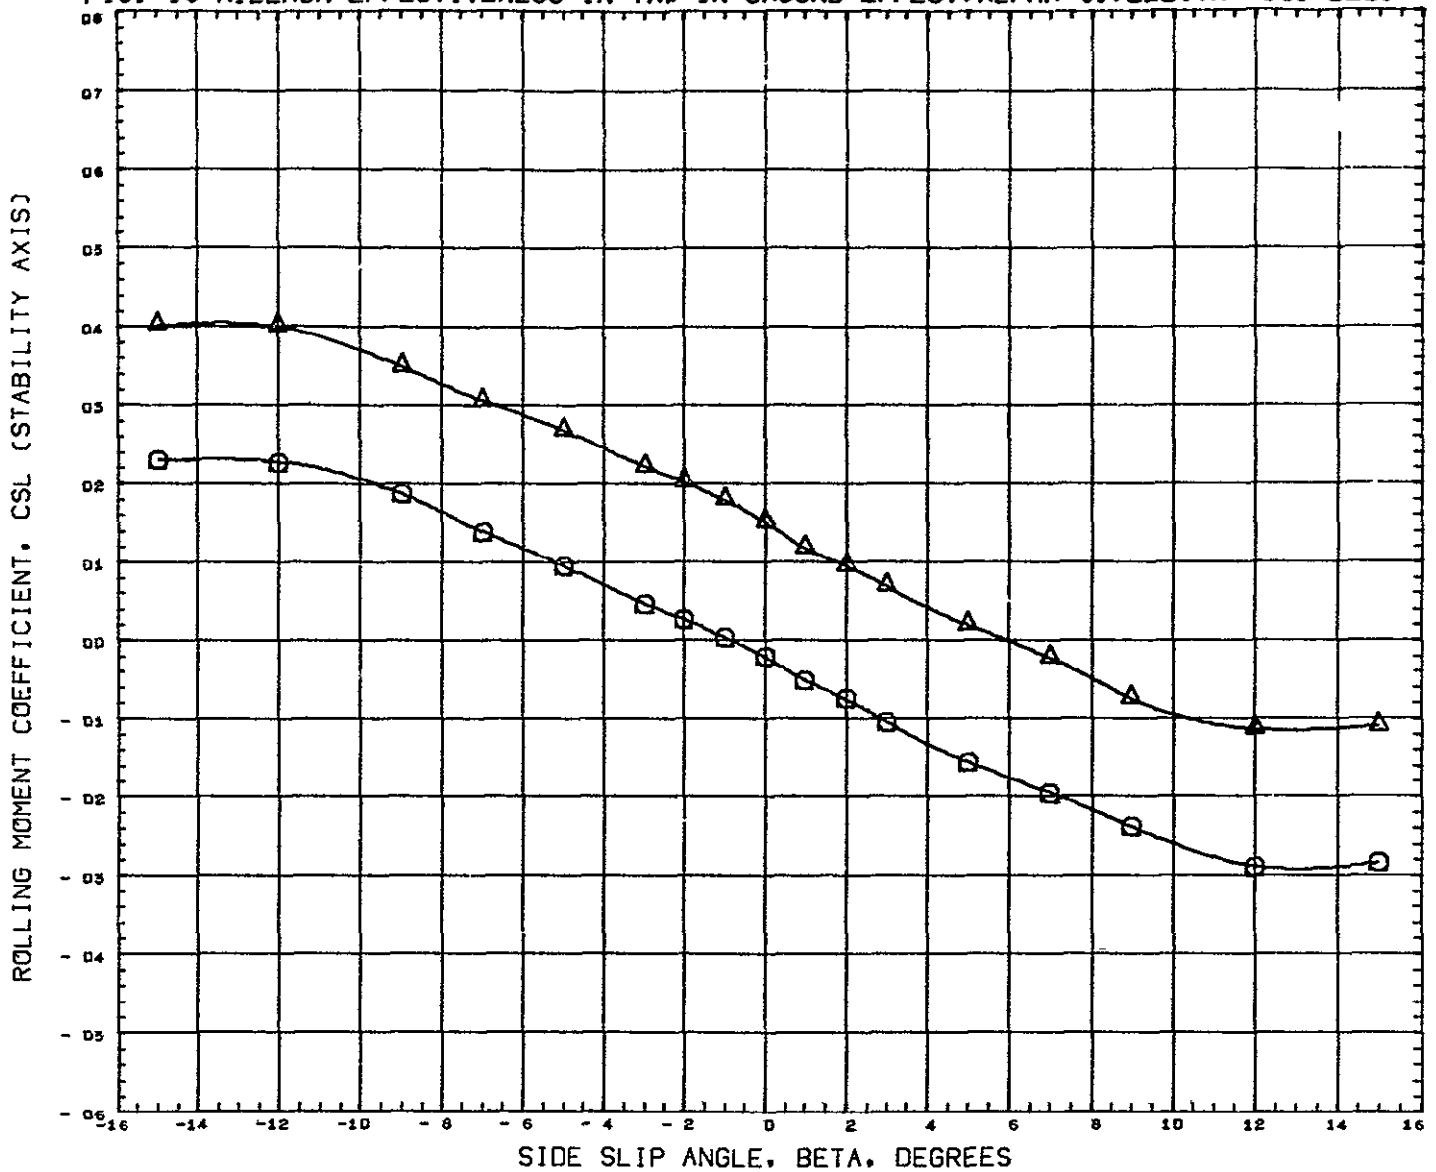


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW023)	GWTT 290-CONF ROS-NB1 B1F1W1V16B
(RCW026)	GWTT 290-CONF ROS-NB1 B1F1W1V16B

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	-10 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	-10 000	-10 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0.0400

MACH 0 170


FIG. 10 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-10. DEG.

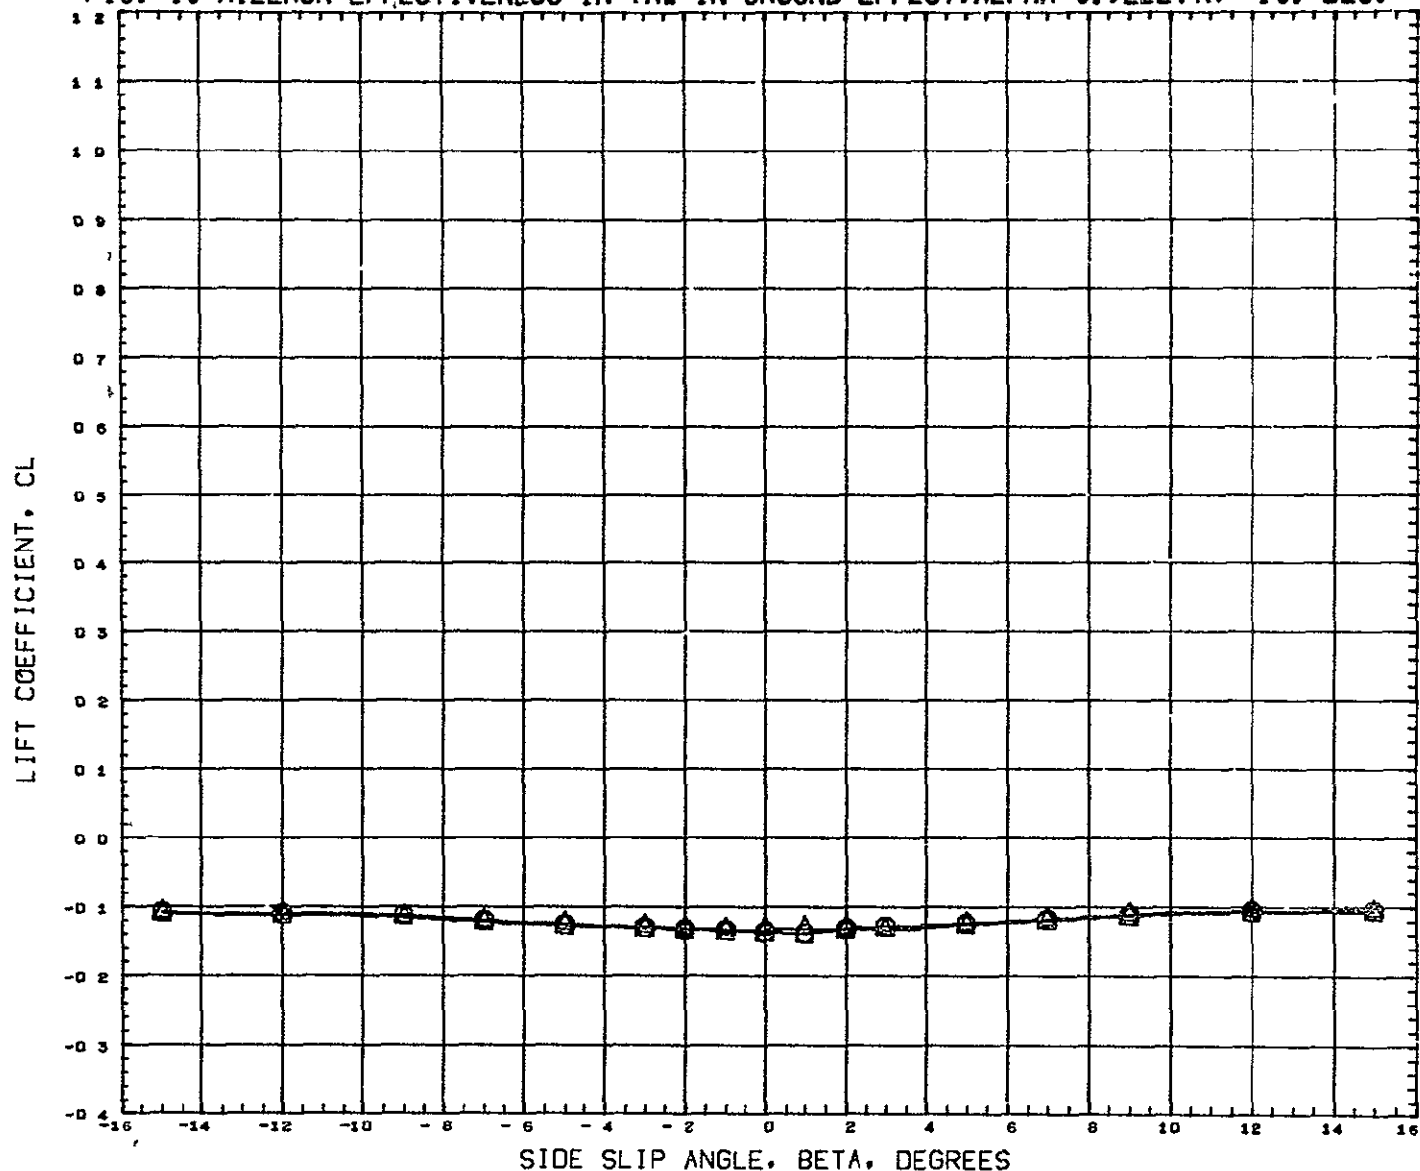

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
(RCW023)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0 000	-10 000	0 000	0 000	SREF	9 1952	SQ FT
(RCW026)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0 000	-10 000	-10 000	0 000	LREF	6 4320	FT
						BREF	3 8920	FT
						XHRP	1485 0040	IN
						YHRP	0 0000	IN
						ZHRP	377 0004	IN
						SCALE	0 0400	

MACH 0 170

FIG. 10 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=0., ELEVTR=-10. DEG.

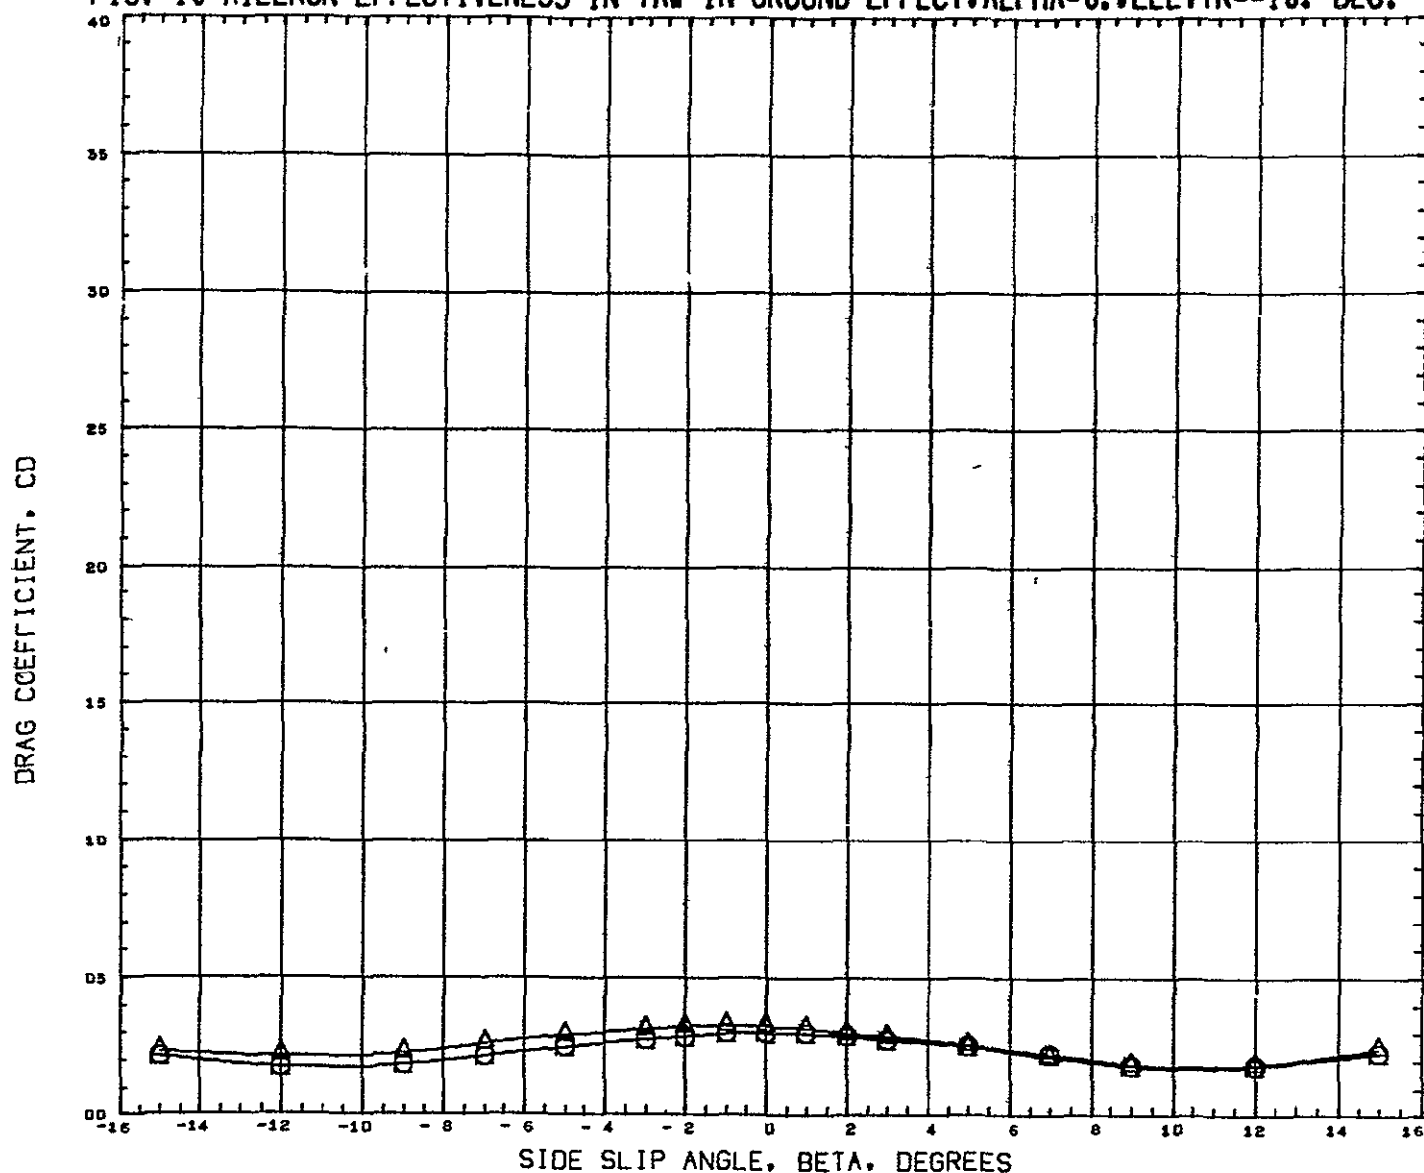


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW023) $\bigcirc$	GWT 290-CONF ROS-NB1 B1F1W1V1GB
(RCW026) $\triangle$	GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	-10 000	0 000	0.000	SREF 9 1952 SQ FT
0 000	-10 000	-10 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 10 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=0., ELEVTR=-10. DEG.

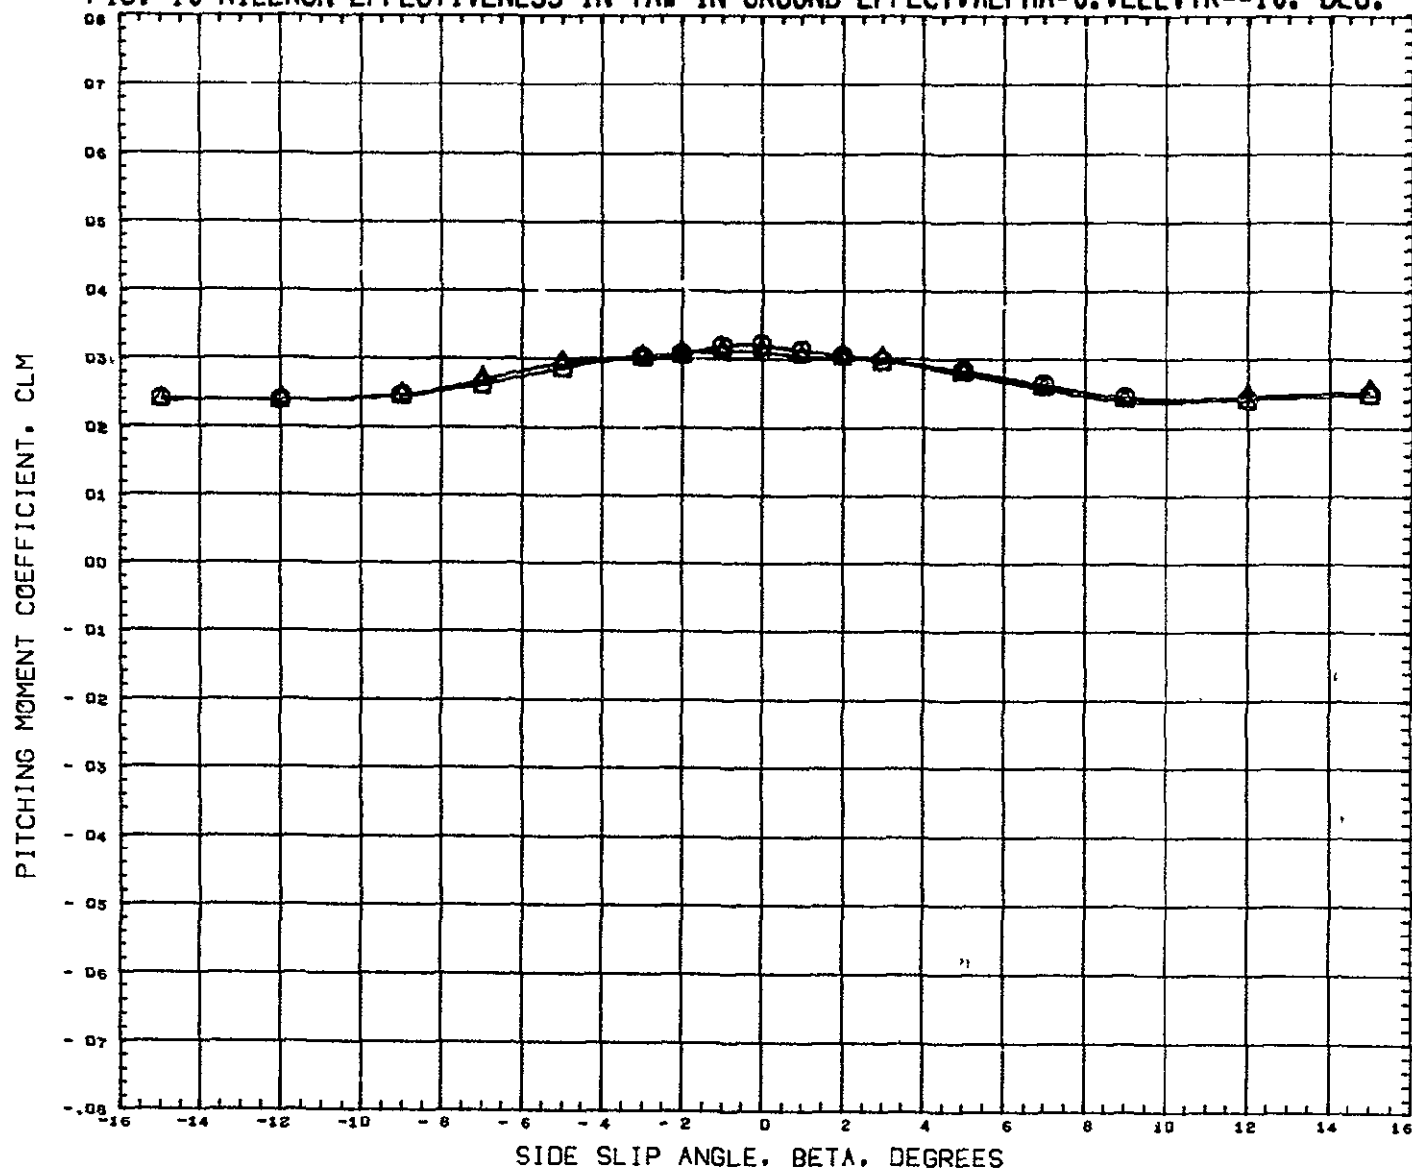


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW023)	GWT 290-CONF ROS-NB1 B1F1W1V1GB
(RLW026)	GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER
0 000	-10 000	0 000	0 000
0 000	-10 000	-10 000	0 000

REFERENCE INFORMATION		
SREF	9 1952	SG FT
LREF	6 4320	FT
BREF	3 8920	FT
XMRP	1485 0040	IN
YMRP	0 0000	IN
ZMRP	377 0004	IN
SCALE	0 0400	

MACH 0 170

FIG. 11 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-10. DEG.

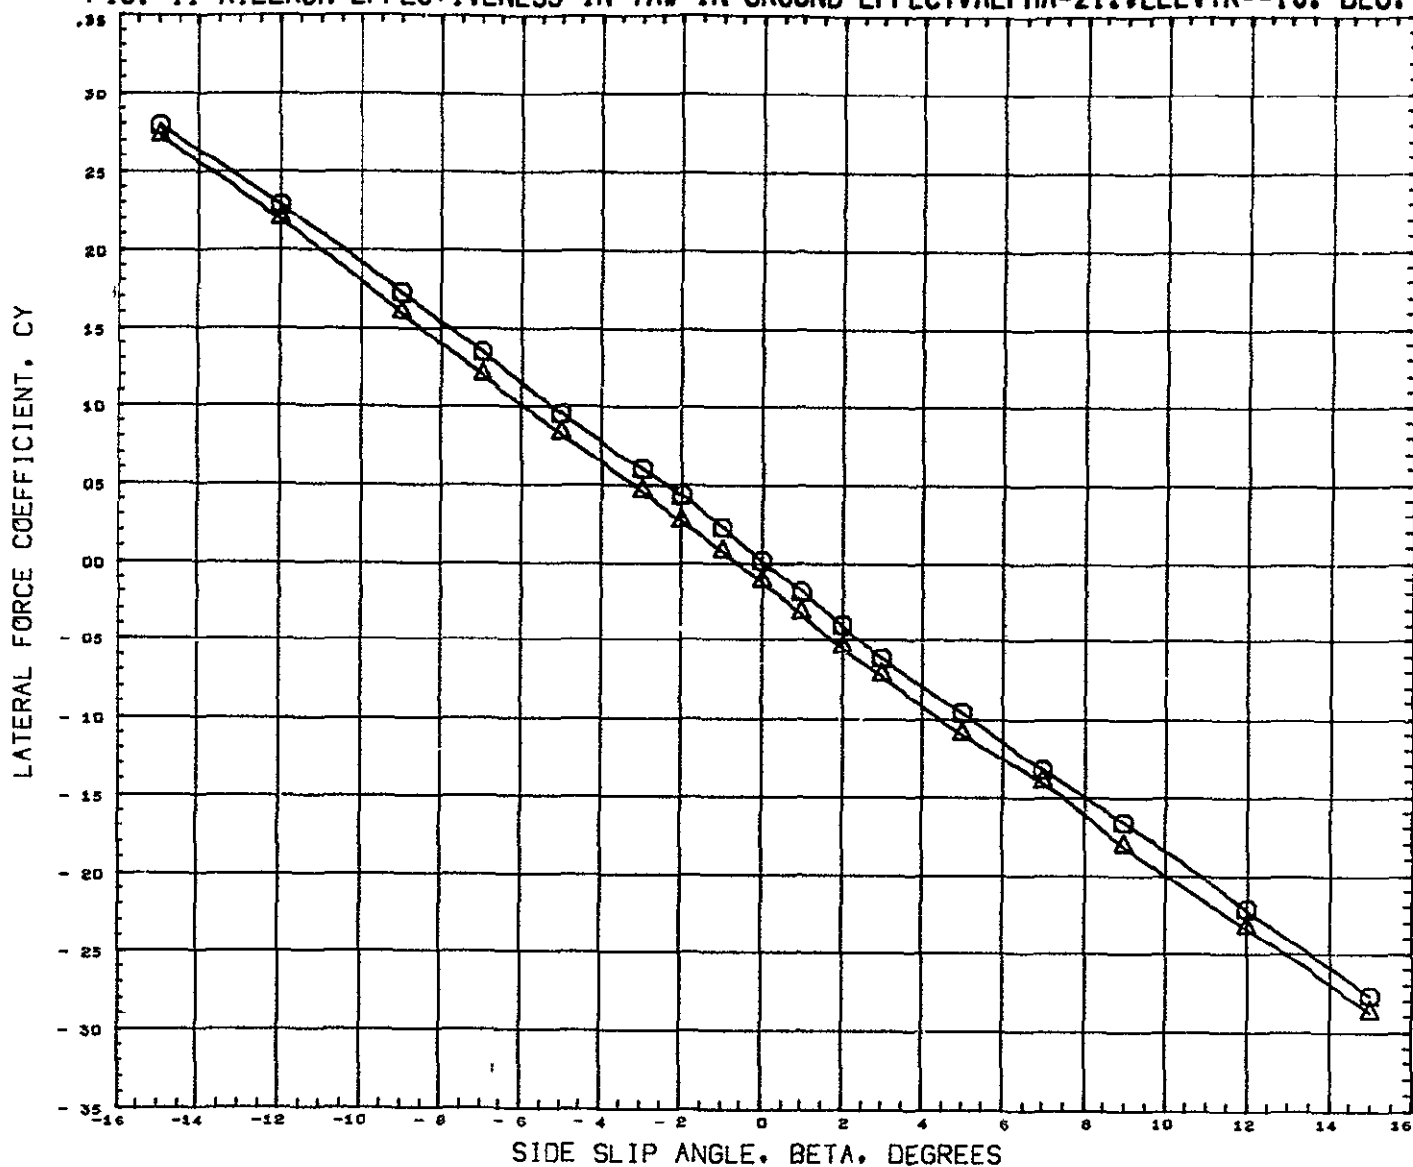


DATA SET	SYMBOL	CONFIGURATION DESCRIPTION
(ACW033)	○	GWT 290-CONF ROS-NB1 B1F1W1V1GB
(ACW030)	△	GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER
-10 000	0 000	0 000	0 000
-10 000	-10 000	0 000	0 000

REFERENCE INFORMATION	
SREF	9 1952 SQ FT
LREF	6 4320 FT
BREF	3 8920 FT
XMRP	1485 0040 IN
YMRP	0 0000 IN
ZMRP	377 0004 IN
SCALE	0 0400

MACH 0 170

FIG. 11 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-10. DEG.

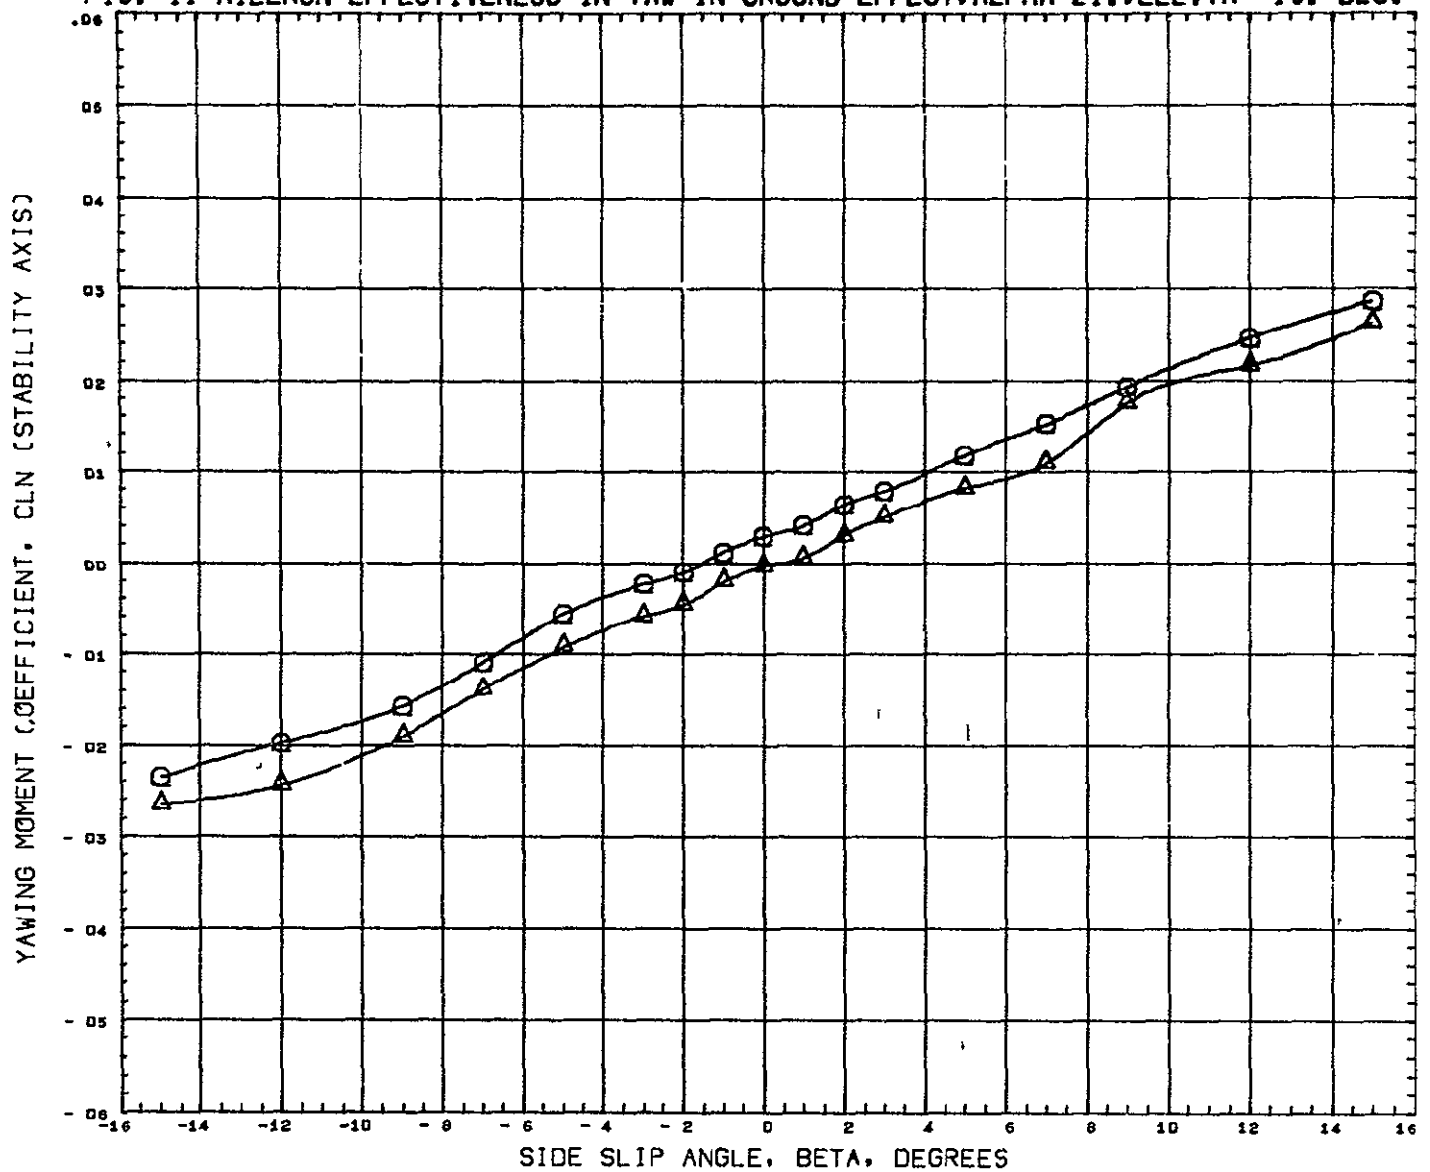


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACWD33) ~ O GWTT 29D-CONF ROS-NB1 B1F1W1V1GB
 (ACWD30) ~ Δ GWTT 29D-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
-10 000	0 000	0 000	0 000	SREF	9 1952	SQ FT
-10 000	-10 000	0 000	0 000	LREF	6 4320	FT
				BREF	3 8920	FT
				XMRP	1485 0040	IN
				YMRP	0 0000	IN
				ZMRP	377 0004	IN
				SCALE	0 0400	\$

MACH 0 170

FIG. 11 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-10. DEG.

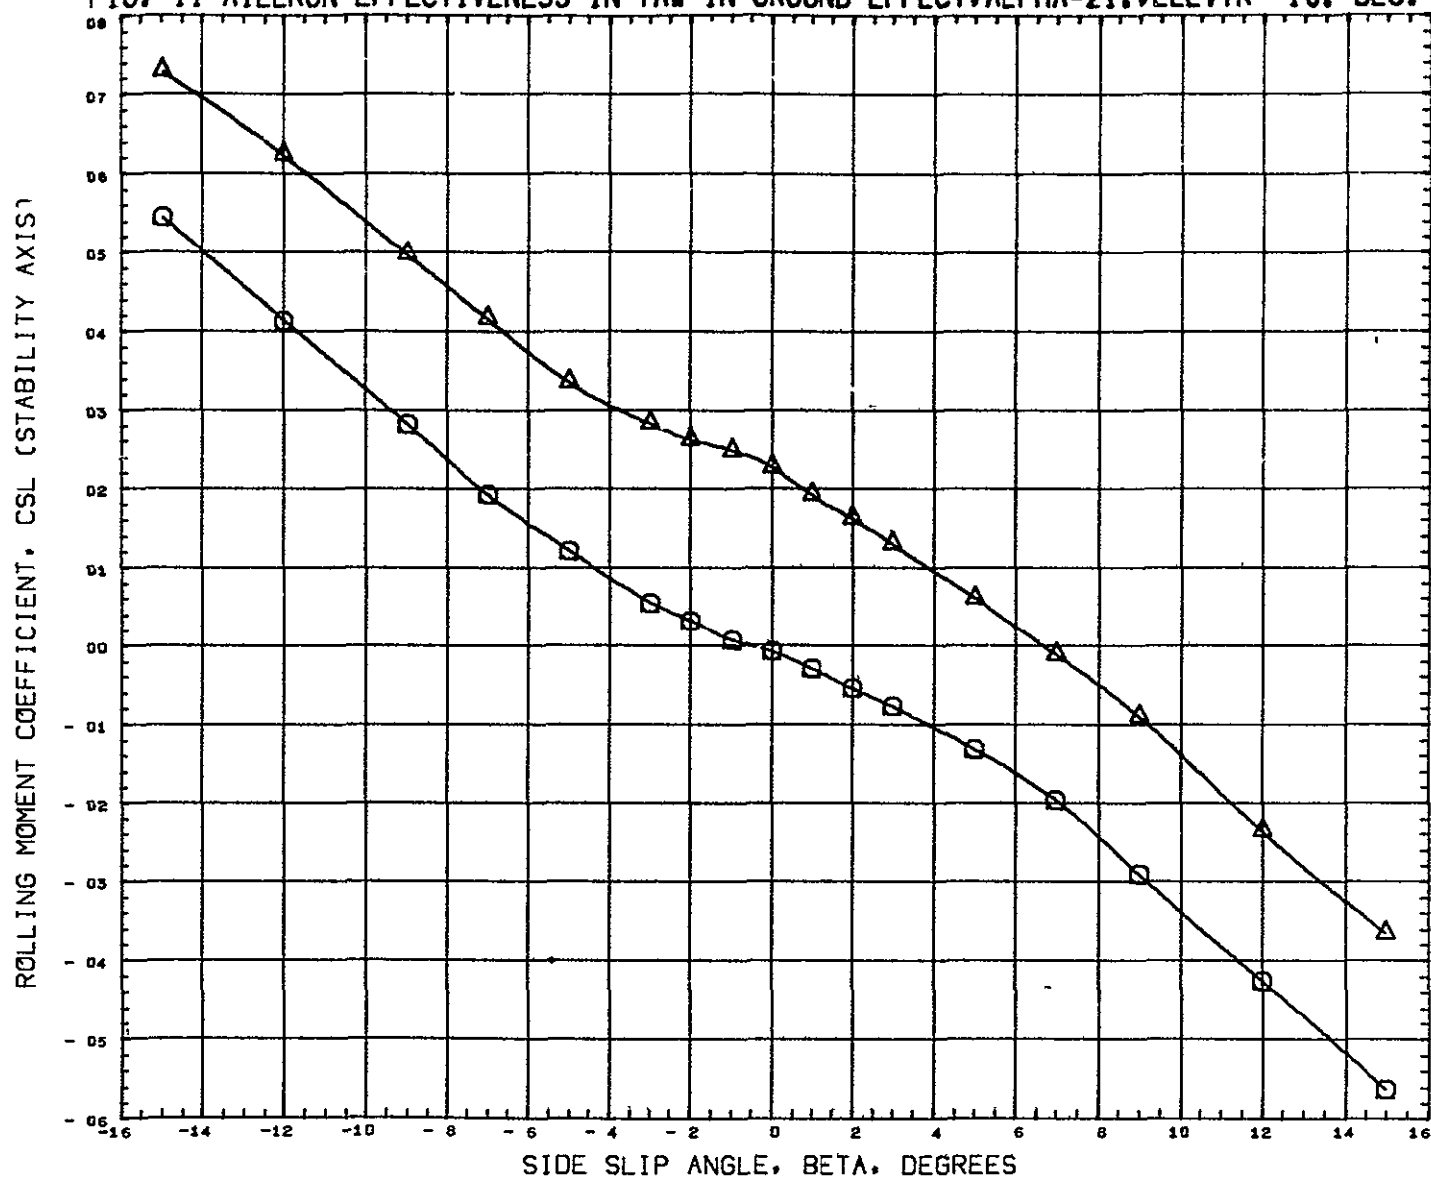


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(ACW033) ○	GWT 290-CONF ROS-NB1 B1F1W1V1GB
(ACW030) △	GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
-10 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
-10 000	-10 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0 170


FIG. 11 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=21.0. ELEVTR=-10. DEG.

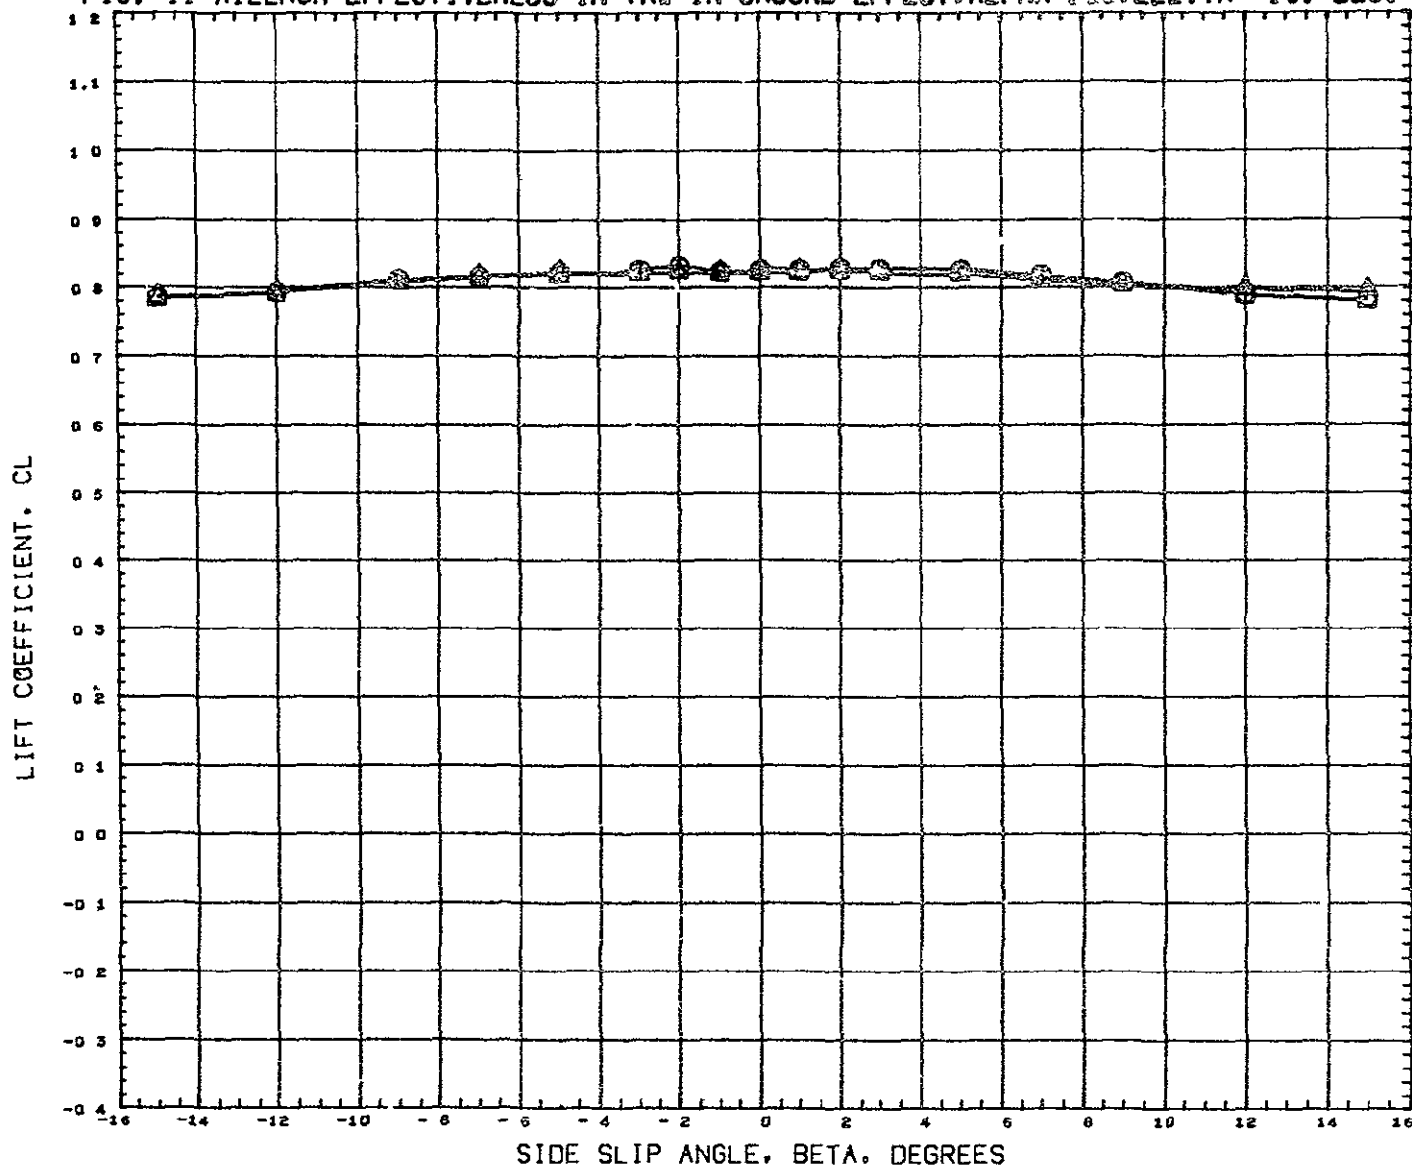

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(ACW033)	GWIT 290-CONF ROS-NB1 B1F1W1V1GB	-10 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
(ACW030)	GWIT 290-CONF ROS-NB1 B1F1W1V1GB	-10 000	-10 000	0 000	0 000	LREF 6 4320 FT
						BREF 3 8920 FT
						XHRF 1485,0040 IN
						YHRF 0 0000 IN
						ZHRF 377 0004 IN
						SCALE 0 0400

HACH 0 170

FIG. 11 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-10. DEG.

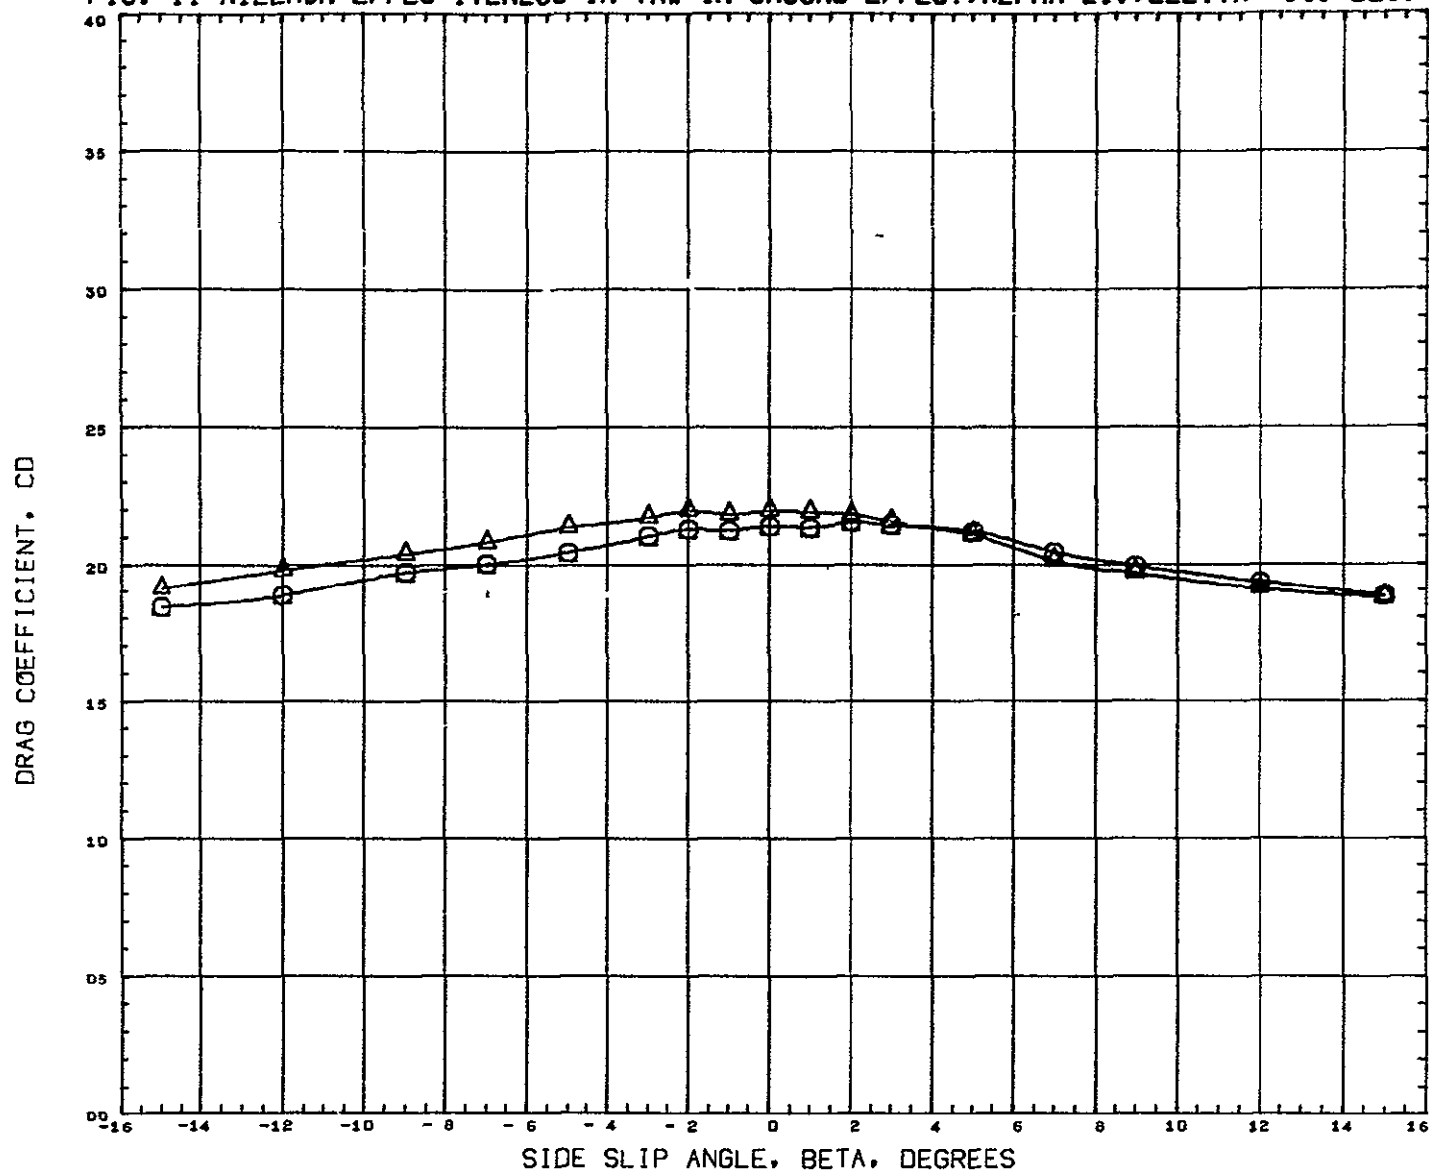


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(ACW033)	GWTT 290-CONF ROS-NB1 B1F1W1V16B
(ACW030)	GWTT 290-CONF ROS-NB1 B1F1W1V16B

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
-10 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
-10 000	-10 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XNRF 1485 0040 IN
				YNRF 0 0000 IN
				ZNRF 377 0004 IN
				SCALE 0 0400

MACH 0.170

FIG. 11 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21, ELEVTR=-10, DEG.

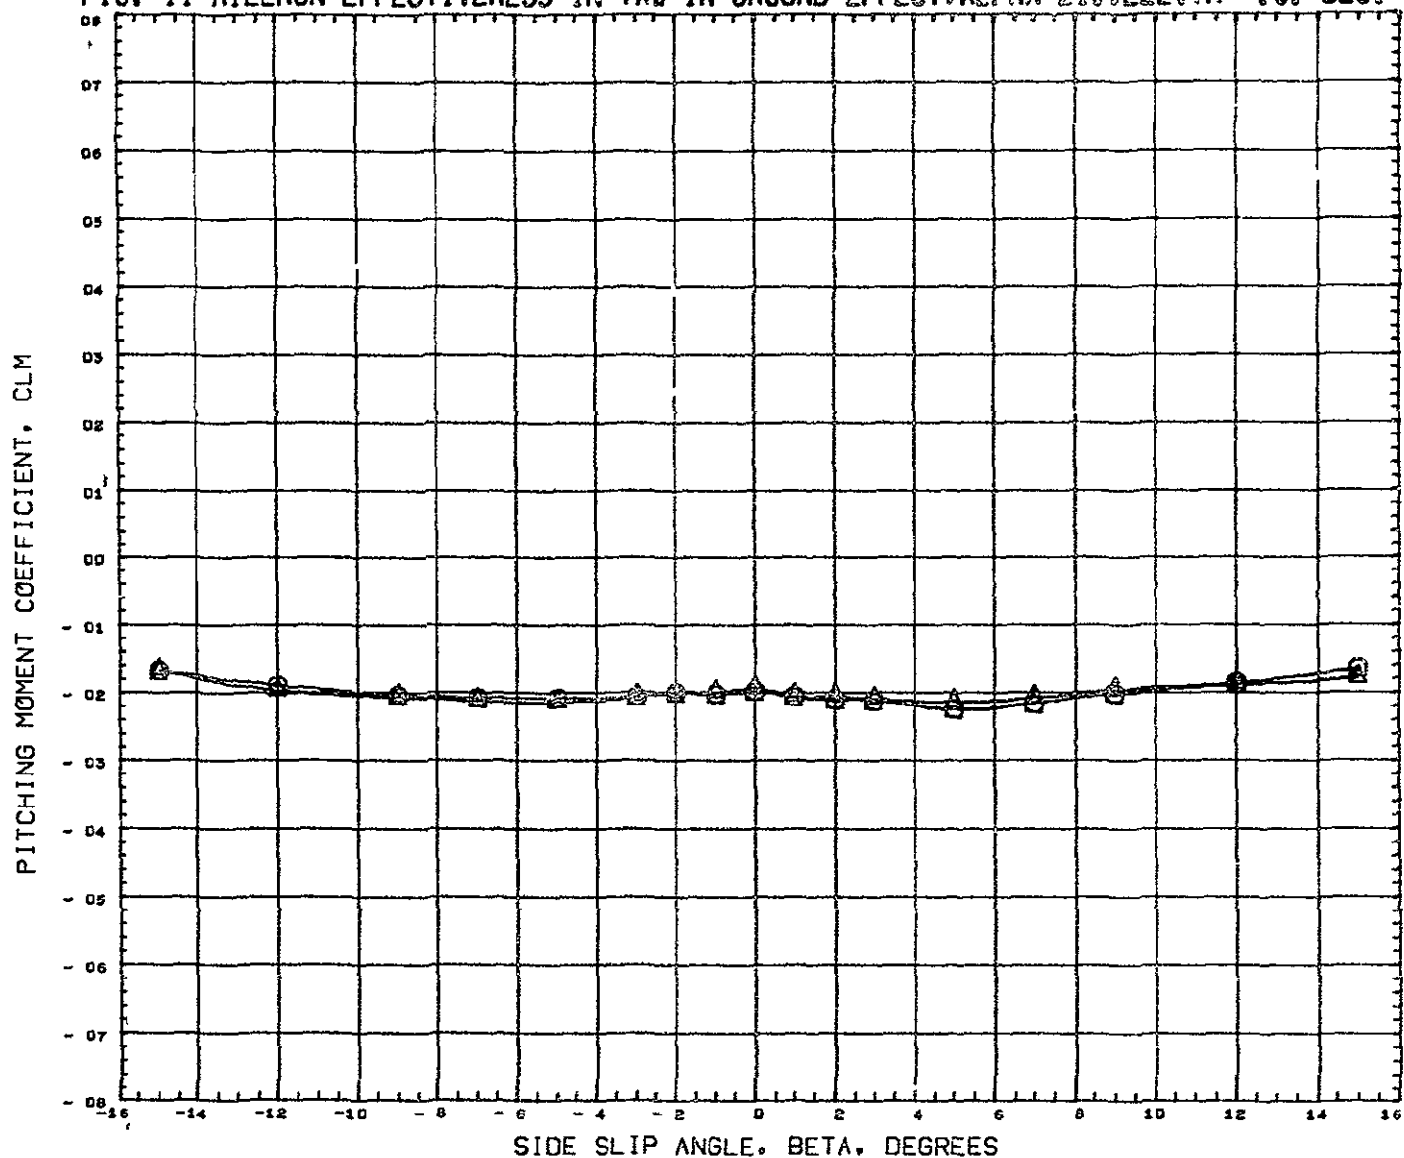


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW033) GWT 290-CONF RO-NB1 B1F1W1V1GB
 (ACW030) GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
-10 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
-10 000	-10 000	0 000	0 000	LREF 6 4320 FT
				BRFF 3 8920 FT
				XMRF 1485 0040 IN
				YMRF 0 0000 IN
				ZMRF 377 0004 IN
				SCALE 0 0400

MACH D 170


FIG. 12 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-5. DEG.

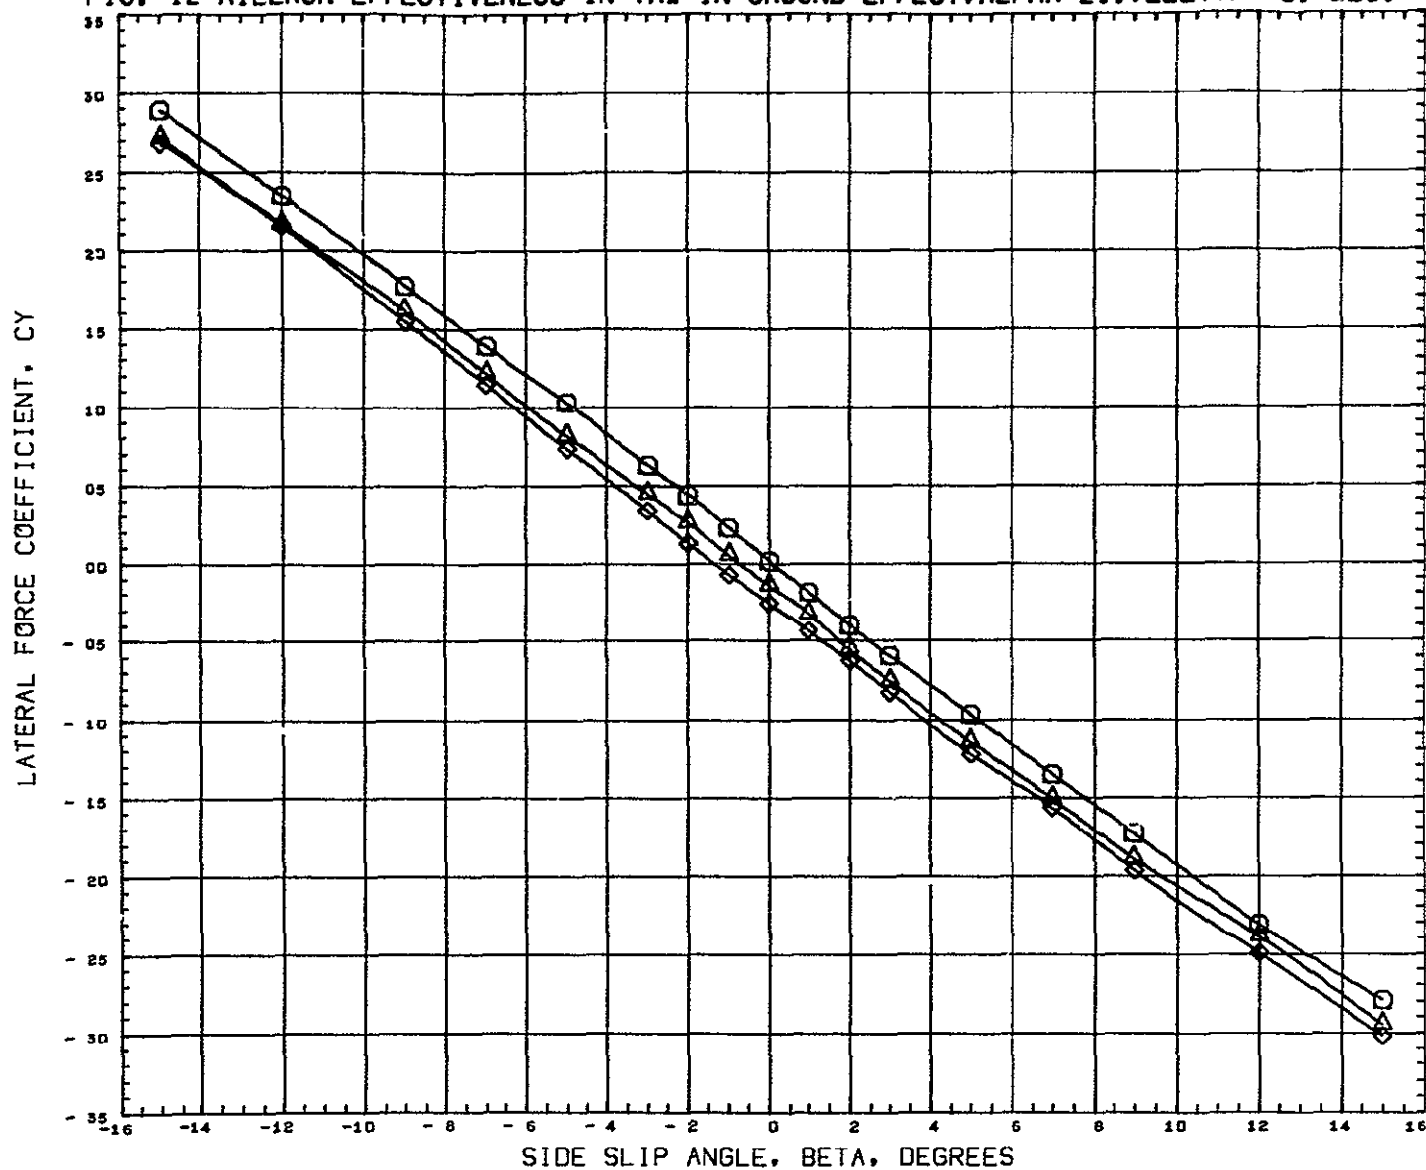

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACW029)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	-5 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(ACW034)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	-5 000	-10 000	0 000	0 000	LREF	6 4320 FT
(ACW031)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	-5 000	-20 000	0 000	0 000	BREF	3 8920 FT
						XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

MACH 0 170

FIG. 12 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-5. DEG.

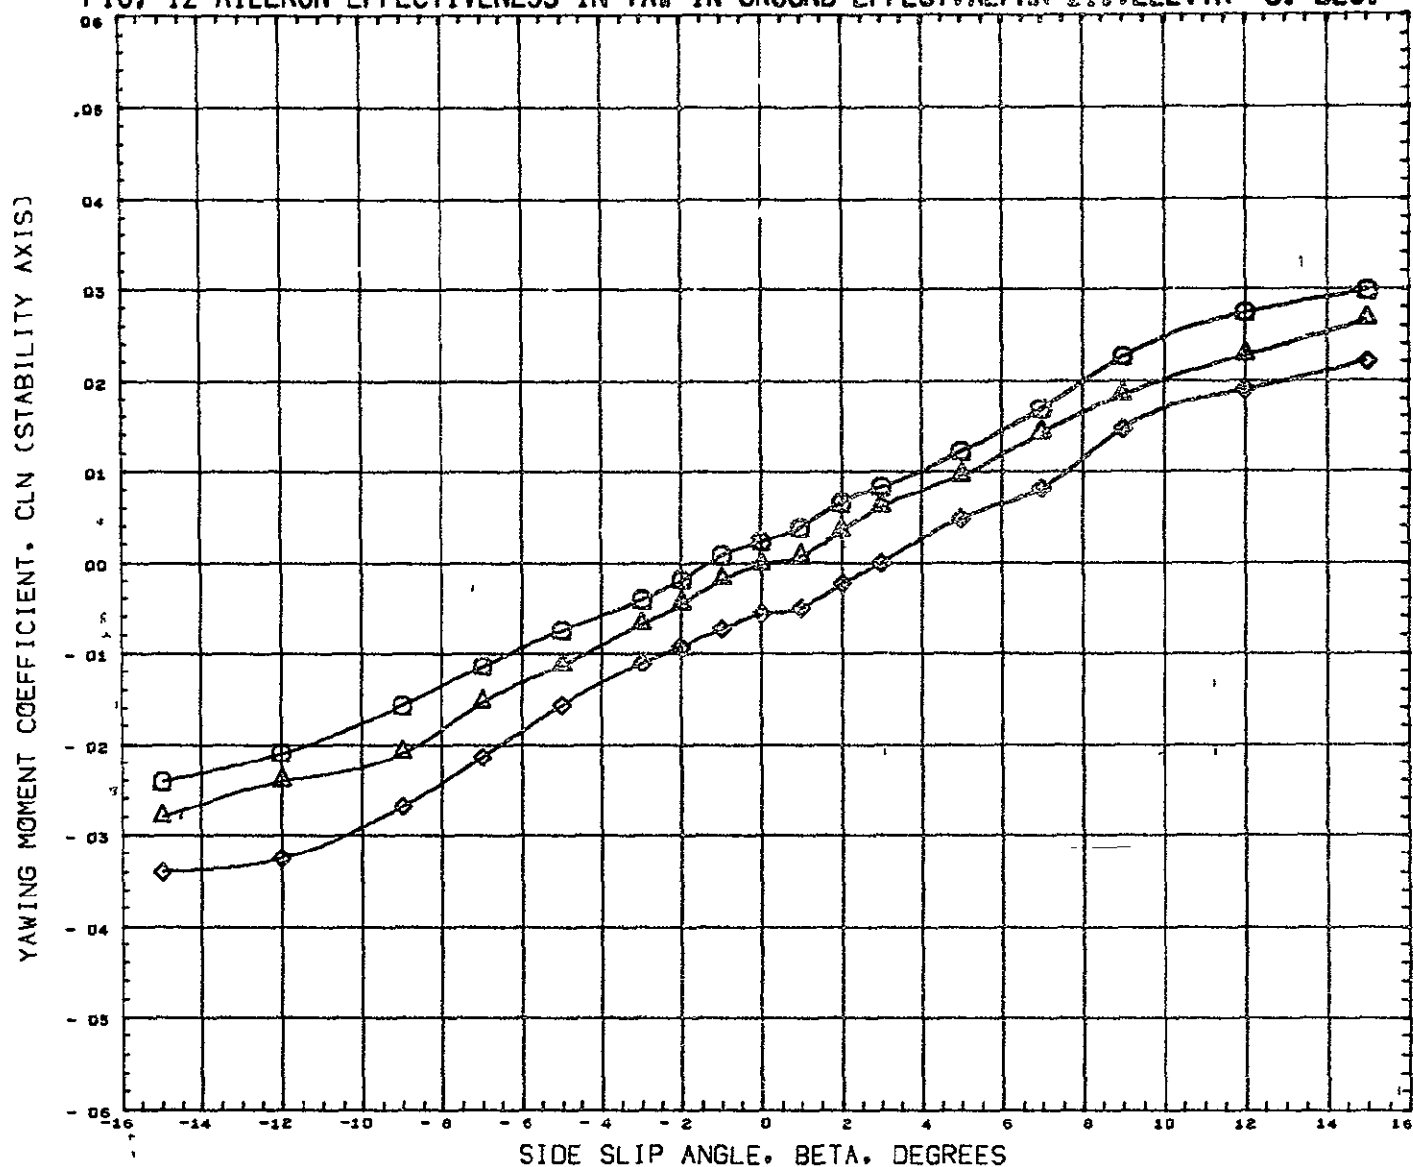


DATA SET	SYMBOL	CONFIGURATION DESCRIPTION
(ACW029)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1G8
(ACW034)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1G8
(ACW031)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1G8

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
-5.000	0.000	0.000	0.000	SREF 9 1952 SQ FT
-5.000	-10.000	0.000	0.000	LREF 6 4320 FT
-5.000	-20.000	0.000	0.000	BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0.170

FIG. 12 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-5. DEG.

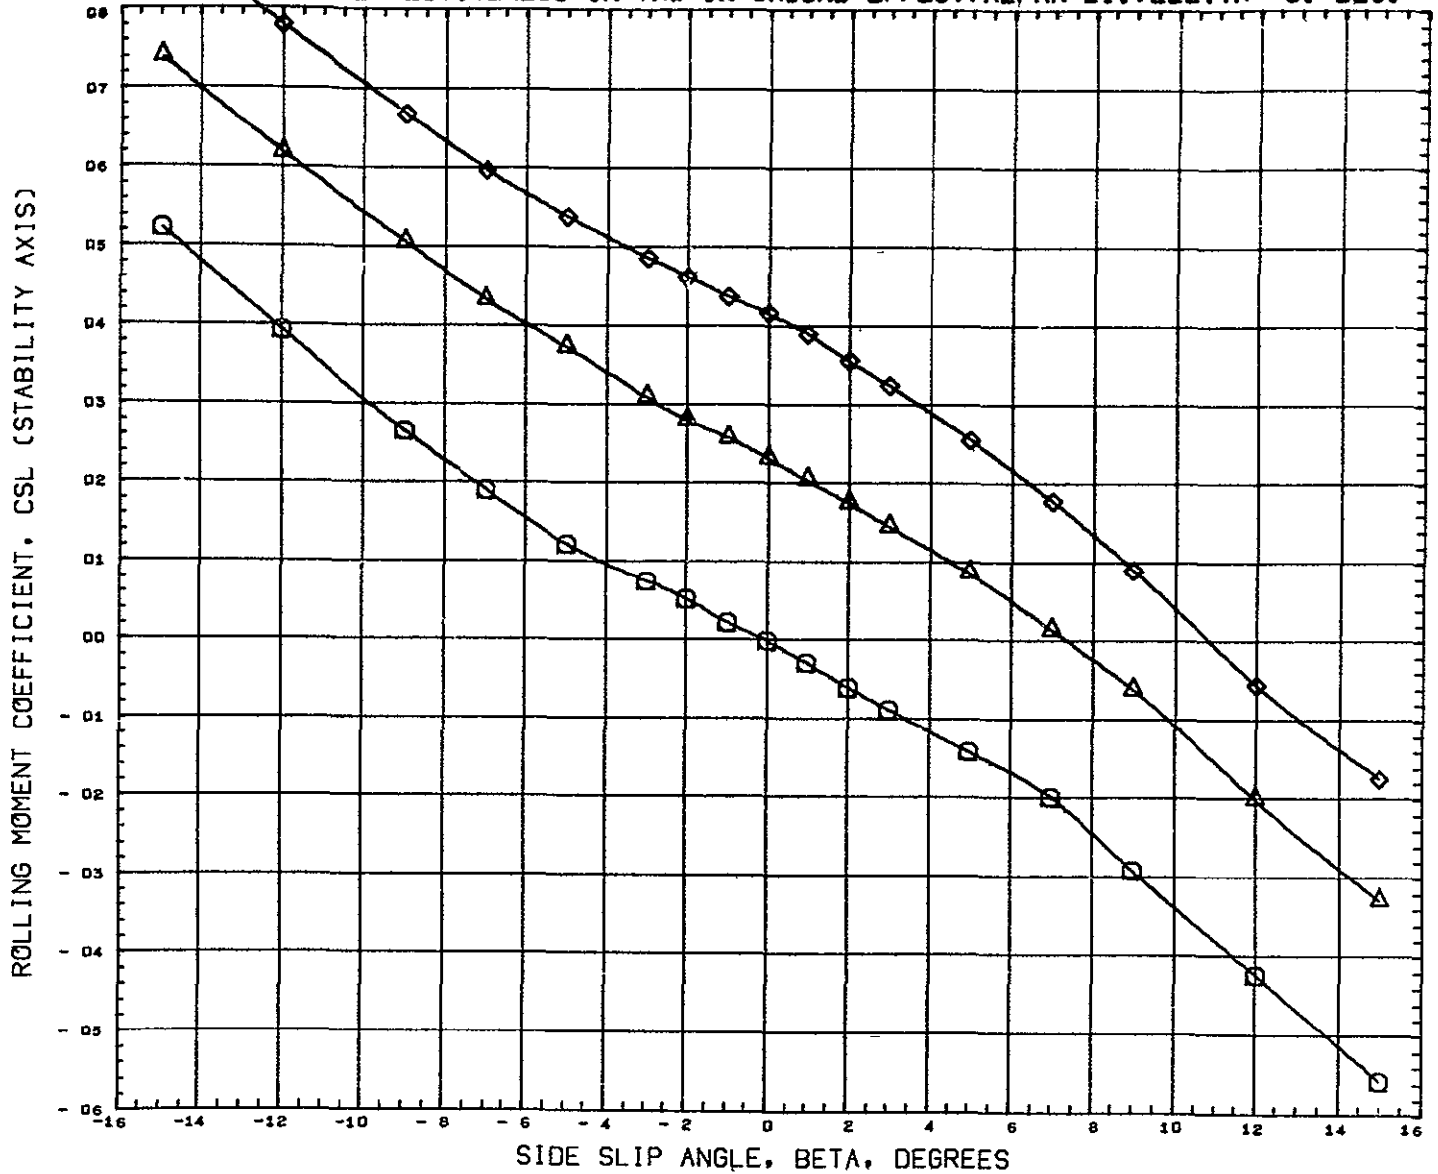


DATA SET SYMBOL CONFIGURATION DESCRIPTION

(ACW029) GWT 290-CONF ROS-NB1 B1F1W1V1GB
 (ACW034) GWT 290-CONF ROS-NB1 B1F1W1V1GB
 (ACW031) GWT 290-CONF ROS-NB1 B1F1W1V1GF

ALPHA	ELEVTR	AILRON	RUPDER	REFERENCE INFORMATION
-5 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
-5 000	-10 000	0,000	0,000	LREF 6 4320 FT
-5 000	-20 000	0 000	0 000	BREF 3 8920 FT
				XHRP 1485 0040 IN
				YHRP 0 0000 IN
				ZHRP 377 0004 IN
				SCALE 0 0400

MACH 0 170


FIG. 12 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-5. DEG.

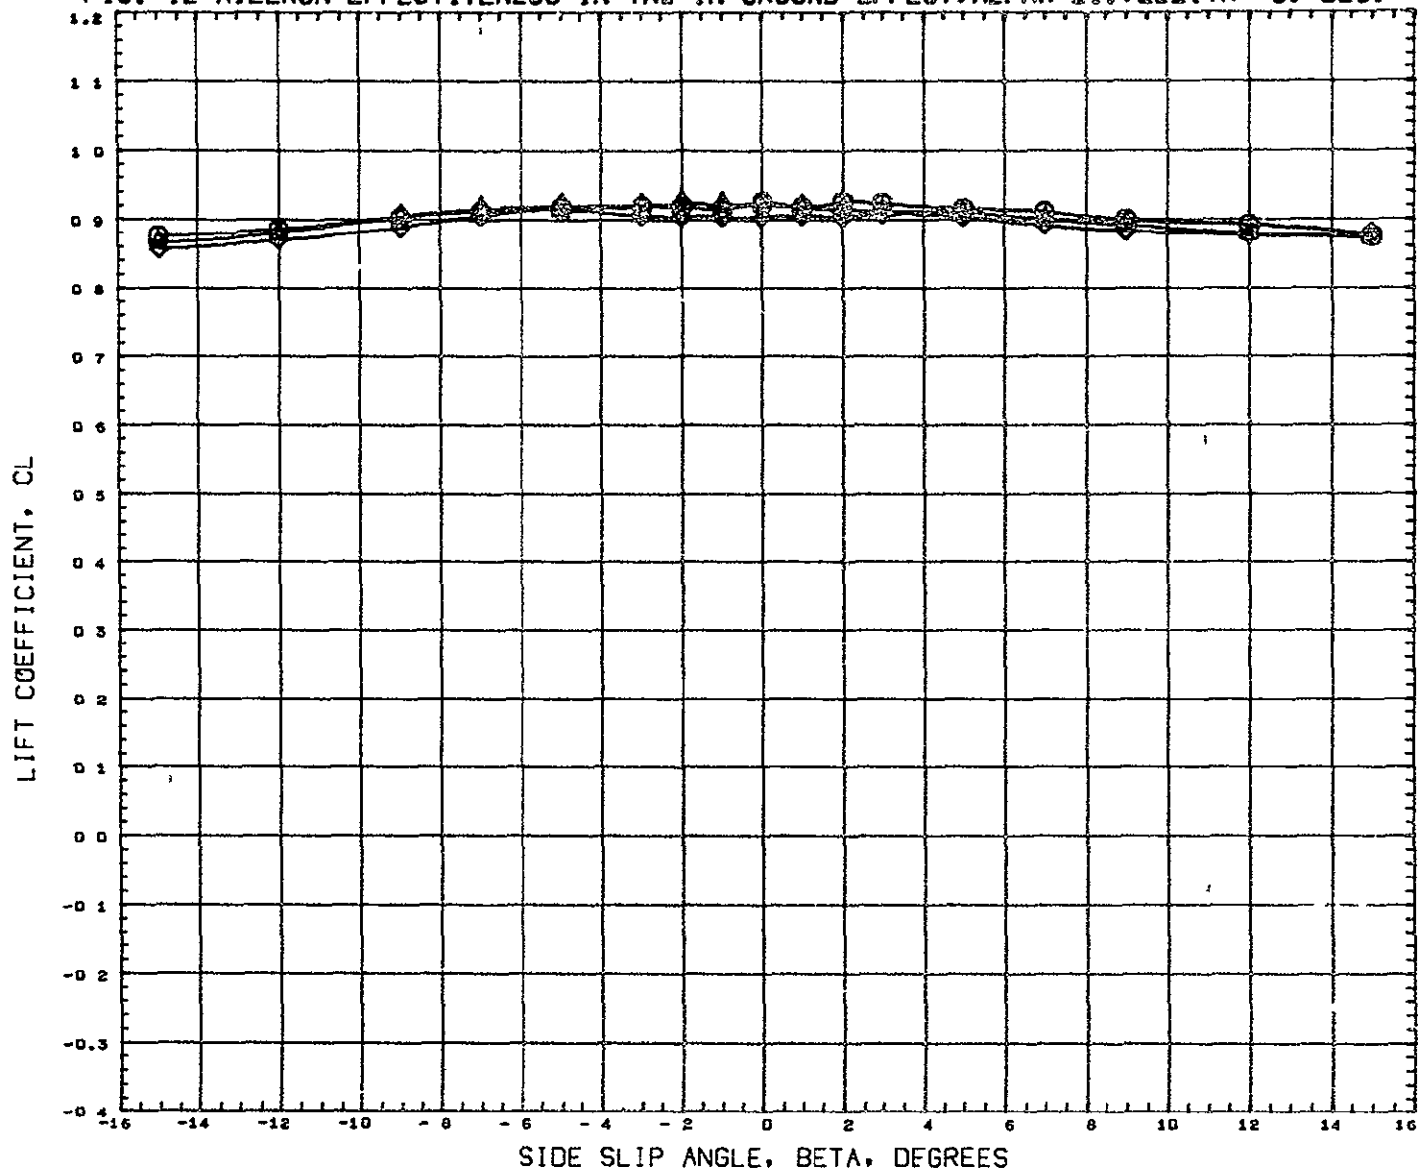

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACWD29)	GWTT 290-CONF ROS-NB1 B1F1W1V168	-5 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(ACWD34)	GWTT 290-CONF ROS-NB1 B1F1W1V168	-5 000	-10 000	0 000	0 000	LREF	6 4320 FT
(ACWD31)	GWTT 290-CONF ROS-NB1 B1F1W1V168	-5 000	-20 000	0 000	0 000	BREF	3 8920 FT
						XHRF	1485 0040 IN
						YHRF	0 0000 IN
						ZHRF	377 0004 IN
						SCALE	0 0400

MACH 0 170


FIG. 12 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=-5. DEG.

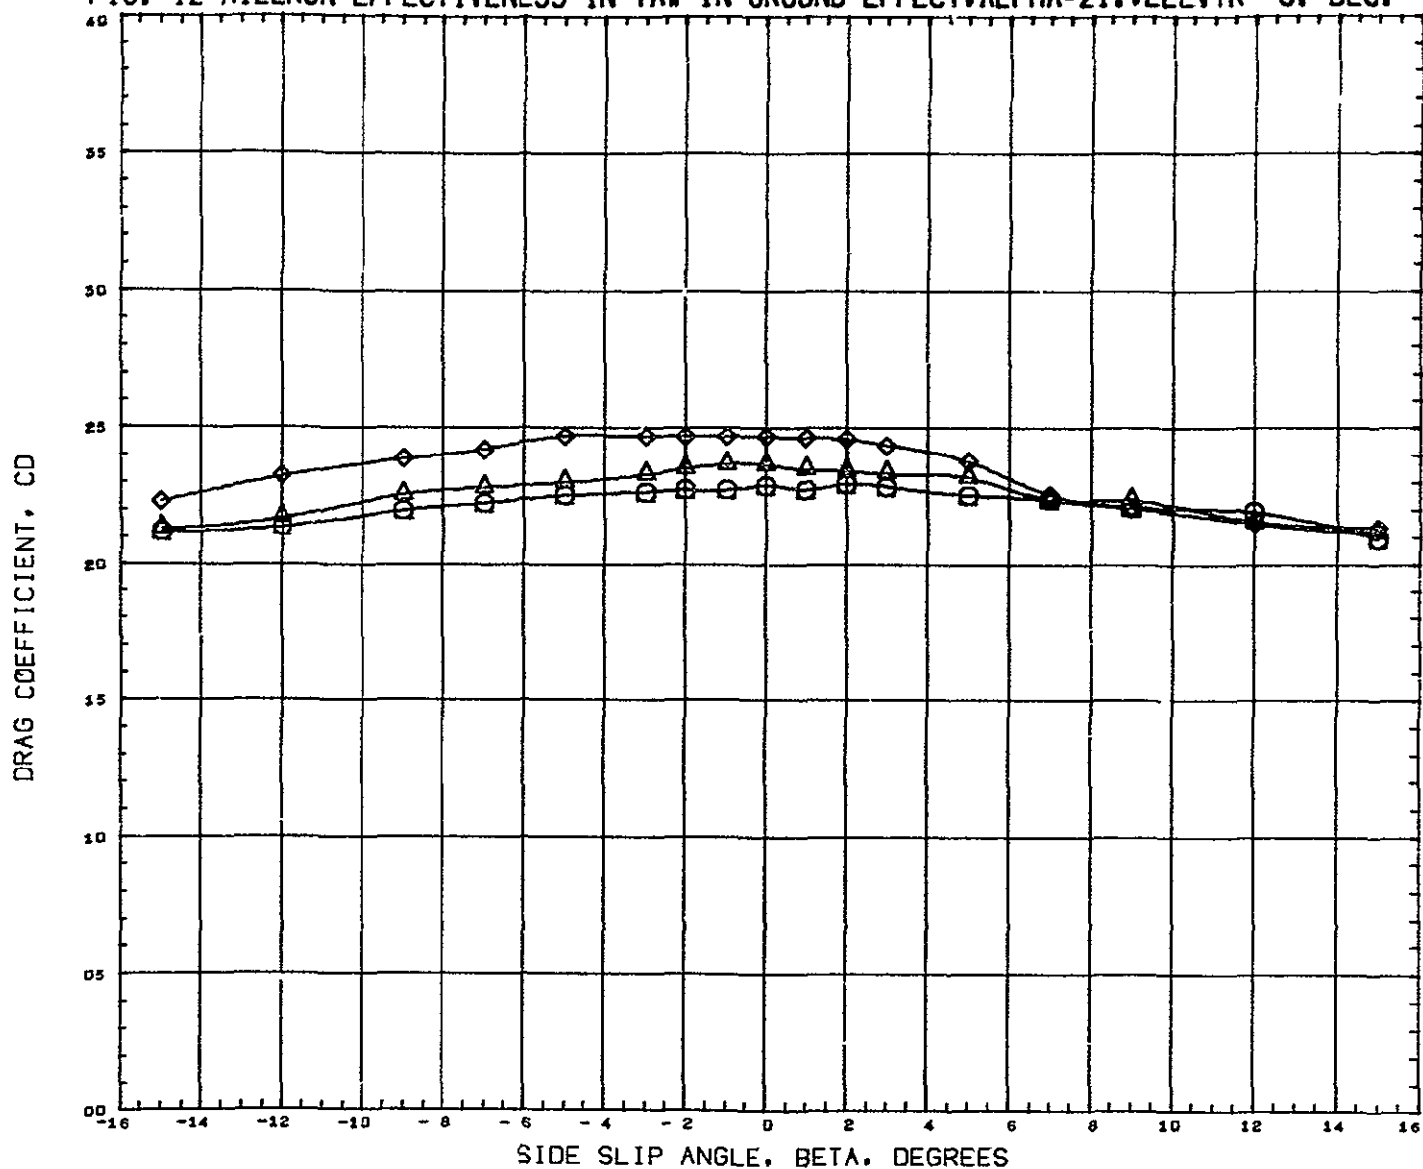

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(ACW029)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	-5 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
(ACW034)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	-5 000	-10 000	0 000	0 000	LREF 6 4320 FT
(ACW031)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	-5 000	-20 000	0 000	0 000	BREF 3 8920 FT
						XNRF 1485 0040 IN
						YNRF 0 0000 IN
						ZNRF 377 0004 IN
						SCALE 0 0400

MACH 0.170


FIG. 12 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=21.0. ELEVTR=-5. DEG.

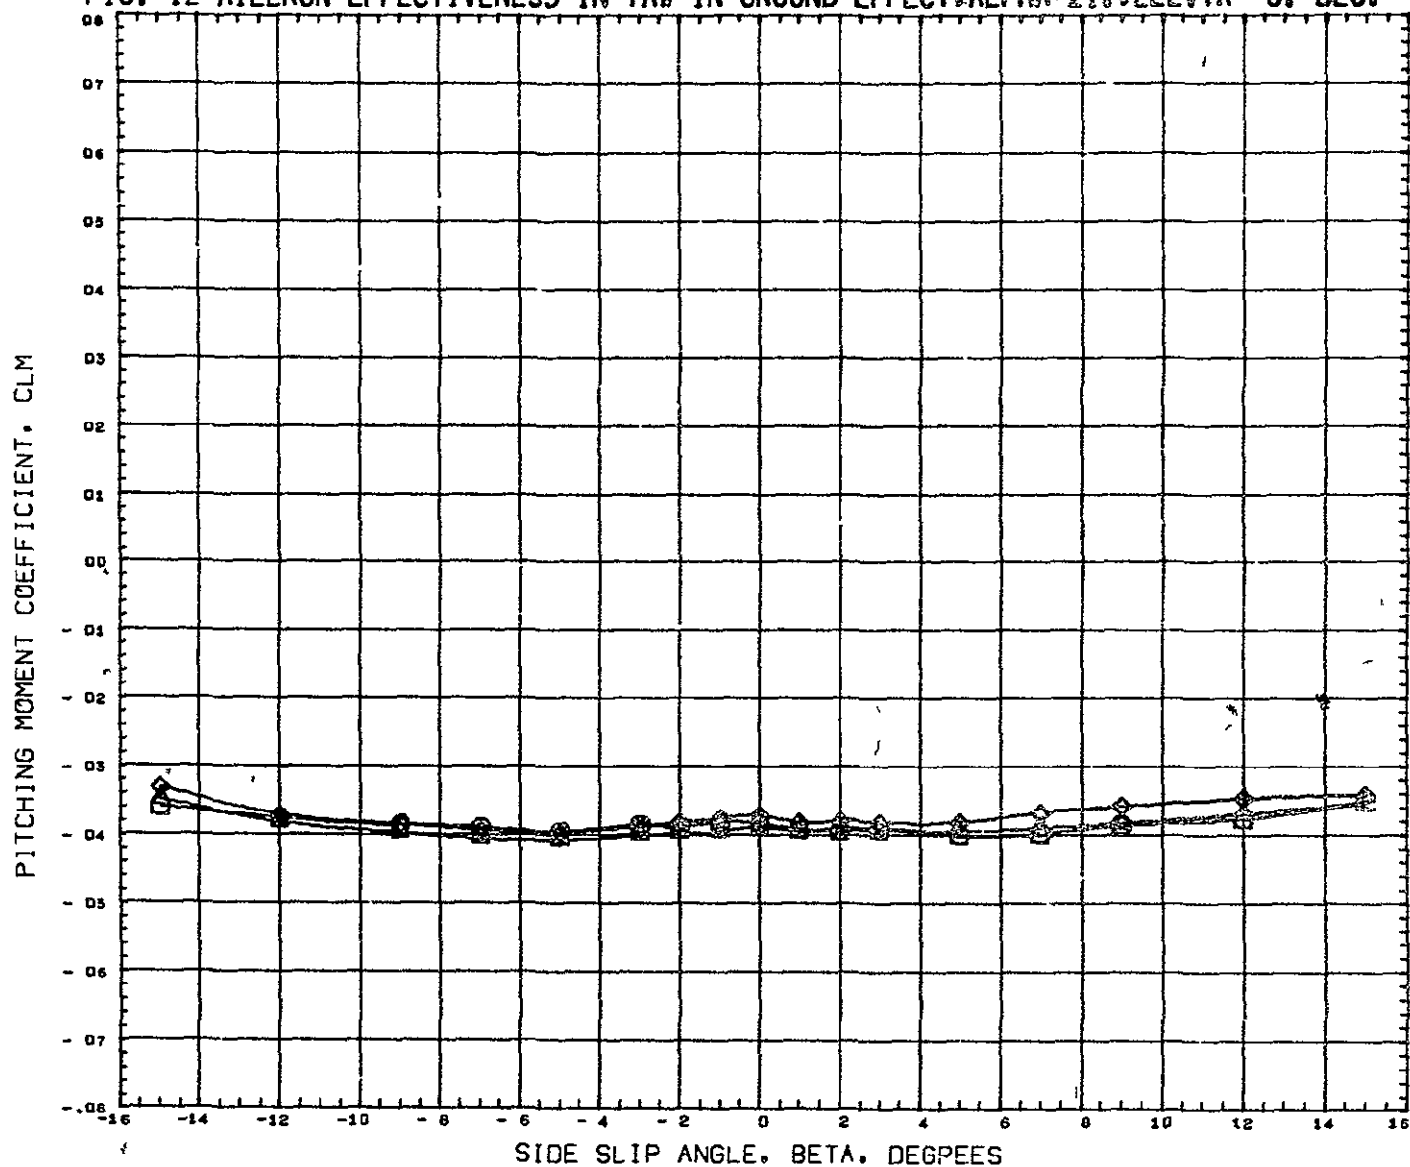

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(ACW029)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	-5.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
(ACW034)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	-5.000	-10.000	0.000	0.000	LREF 6.4320 FT
(ACW031)	GWTT 290-CONF ROS-NB1 B1F1W1V1GB	-5.000	-20.000	0.000	0.000	BREF 3.8920 FT
						XMRP 1485.0040 IN
						YMRP 0.0000 IN
						ZMRP 377.0004 IN
						SCALE 0.0400

MACH 0.170

FIG. 13 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21.0, ELEVTR=0. DEG.

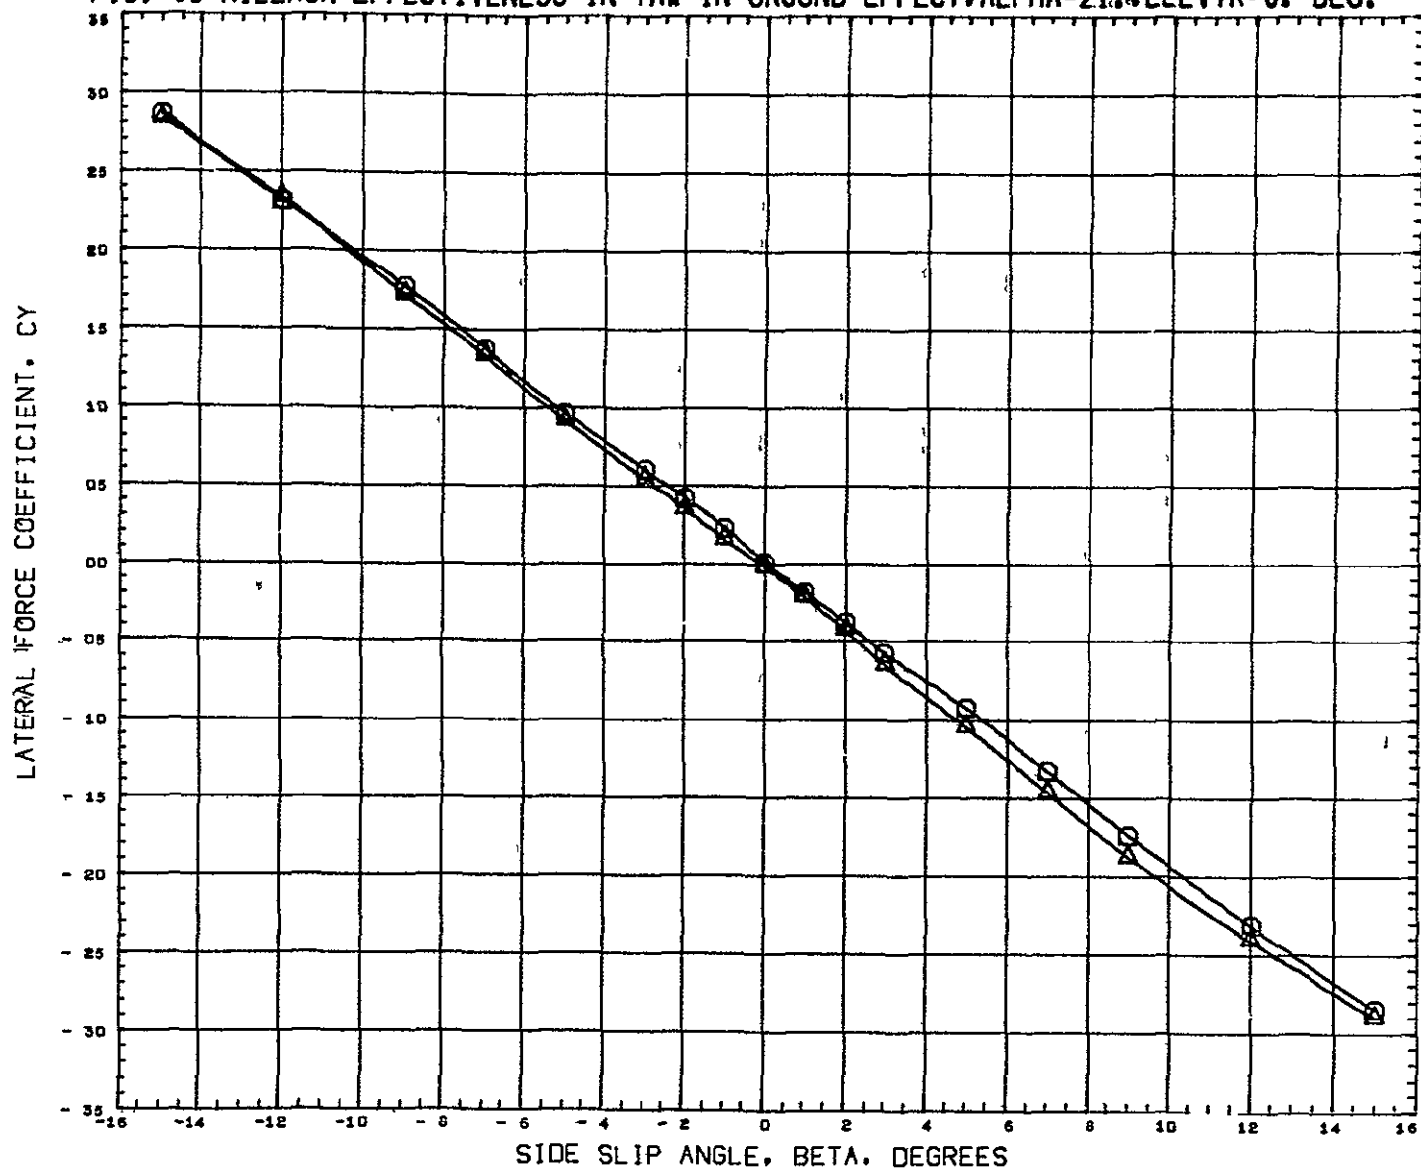


DATA SET SYMBOL CONFIGURATION DESCRIPTION

(ACWD35) $\bigcirc$ GWTT 290-CONF ROS-NB1 B1F1W1V1GB
 (ACWD32) $\triangle$ GWTT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	0 000	-10 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRF 1485 0040 IN
				YMRF 0 0000 IN
				ZMRF 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 13 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=21.0. ELEVTR=0. DEG.

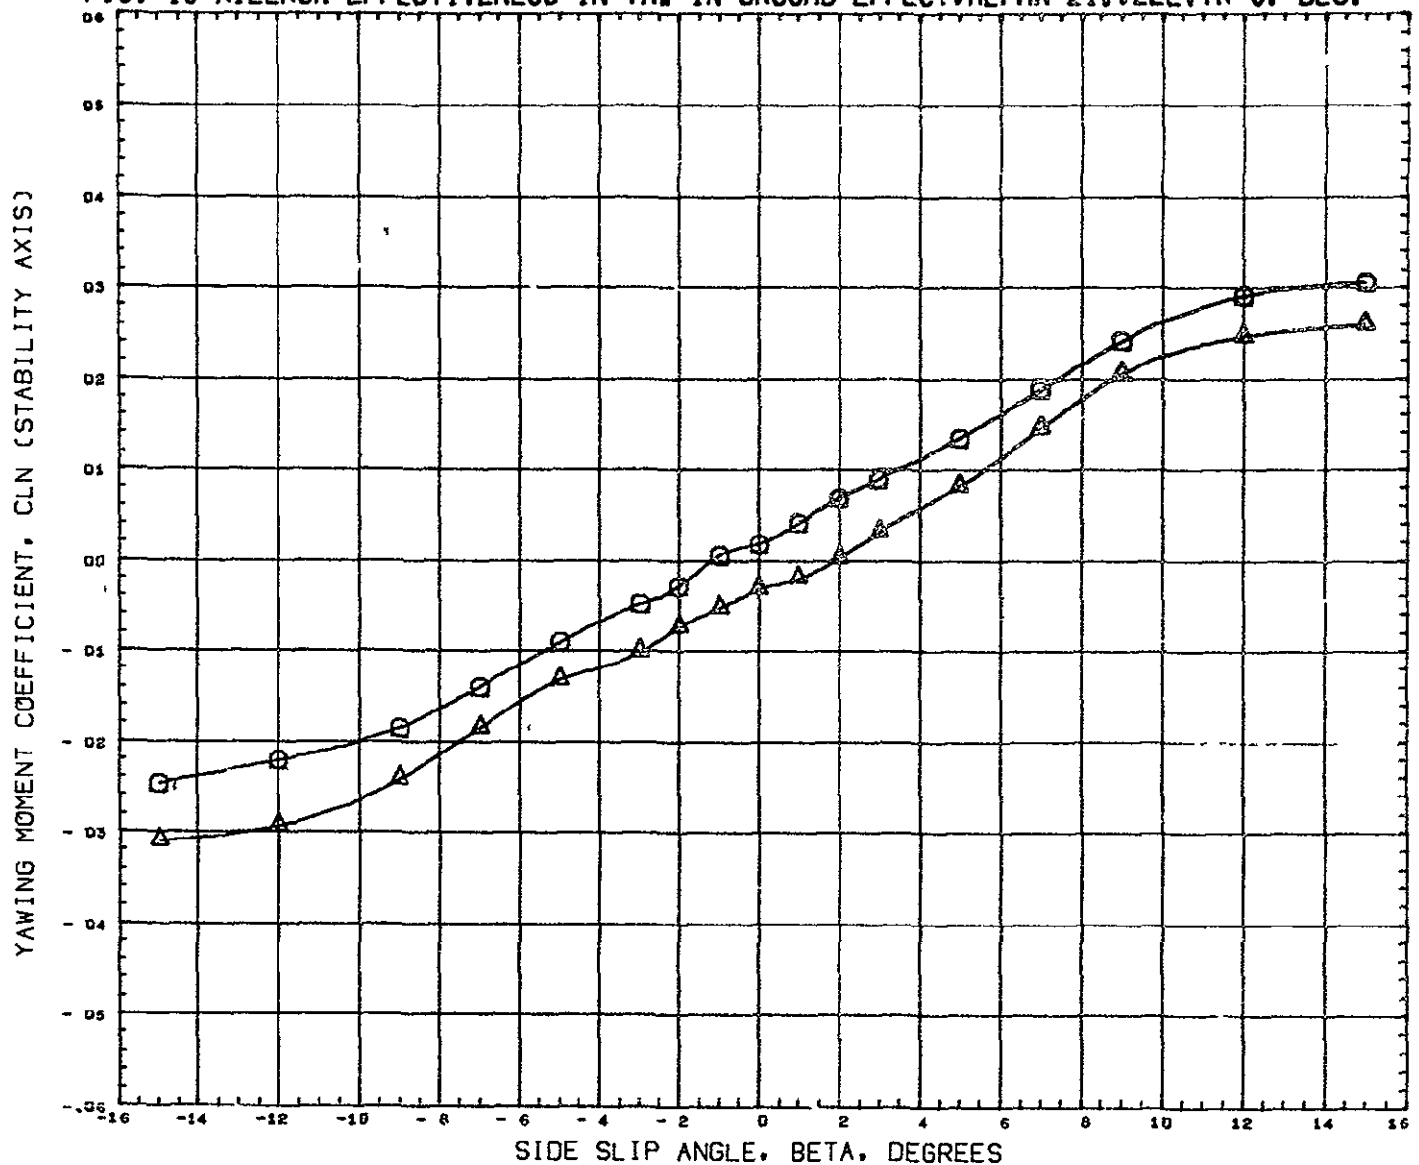


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(ACW035)	GWT 290-CONF ROS-NB1 B1F1W1V1GB
(ACW032)	GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER
0 000	0 000	0 000	0 000
0 000	0 000	-10 000	0 000

REFERENCE INFORMATION		
SREF	9 1952	SQ FT
LREF	6 4320	FT
BREF	3 8920	FT
XHRP	1485 0040	IN
YHRP	0 0000	IN
ZHRP	377 0004	IN
SCALE	0 0400	

MACH 0 170

FIG. 13 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=0. DEG.

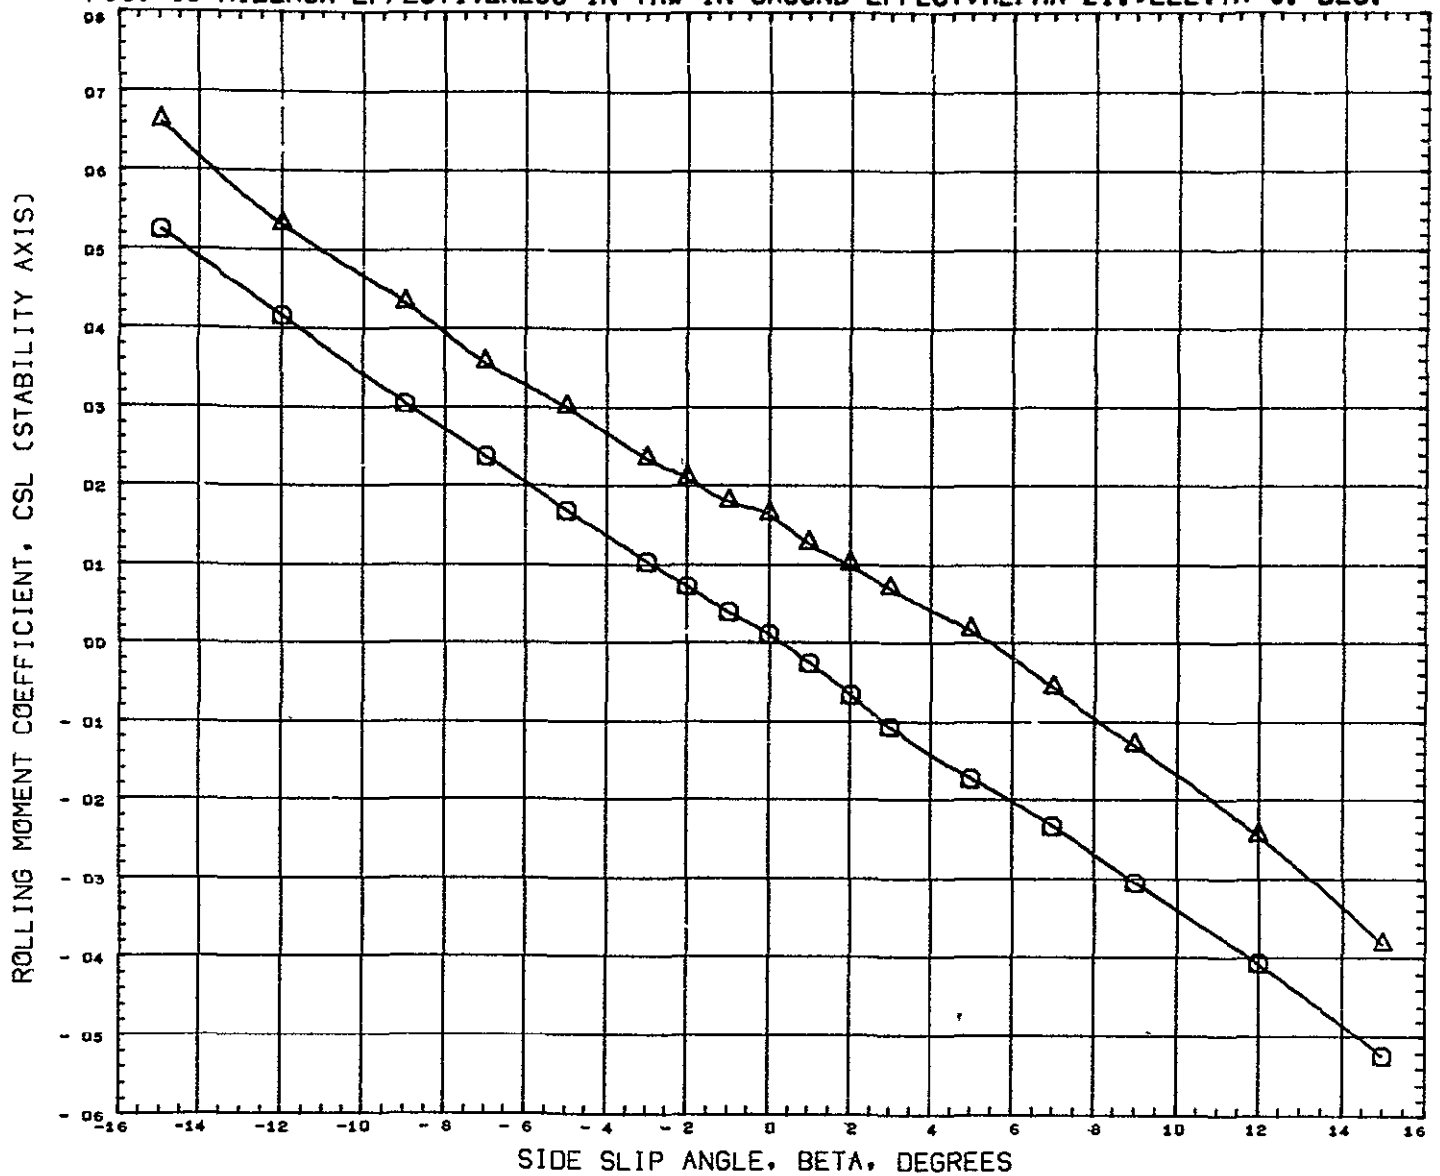


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW035) GWT 290-CONF ROS-N21 B1F1W1V1GB
 (ACW032) GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	-10 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 13 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=0. DEG.

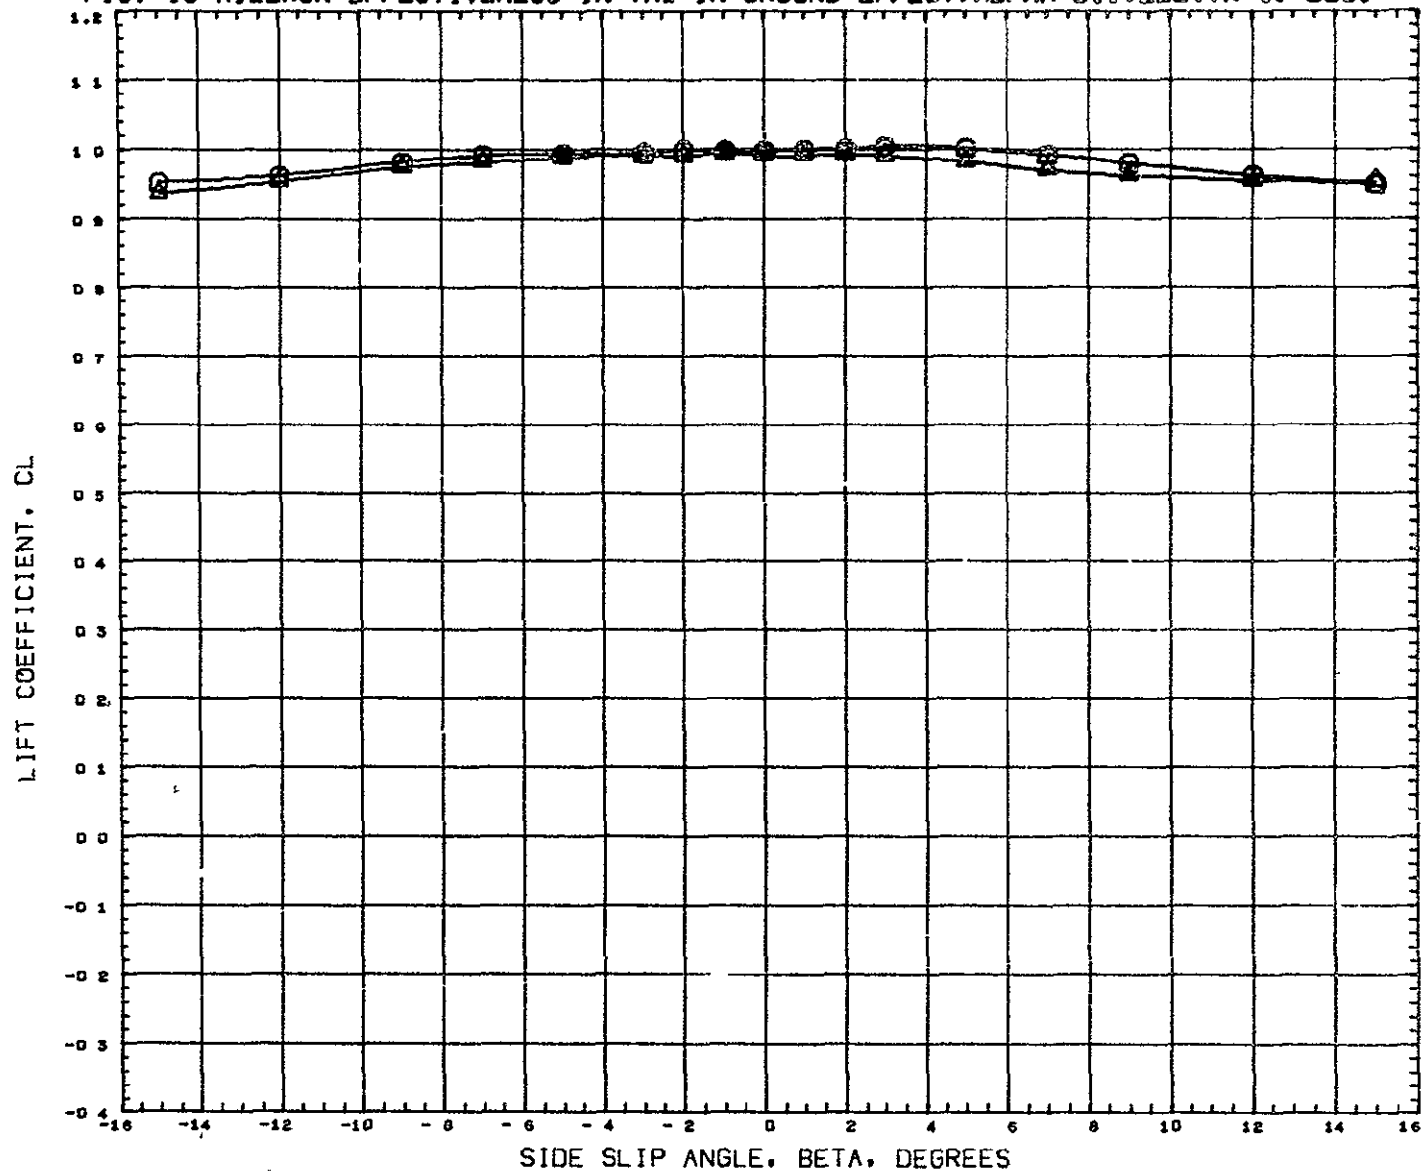


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACWD35) $\bigcirc$ GWTT 290-CONF ROS-NB1 B1F1W1V1GB
 (ACWD32) $\triangle$ GWTT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	-10 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XHRP 1485 0040 IN
				YHRP 0 0000 IN
				ZHRP 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 13 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=0. DEG.

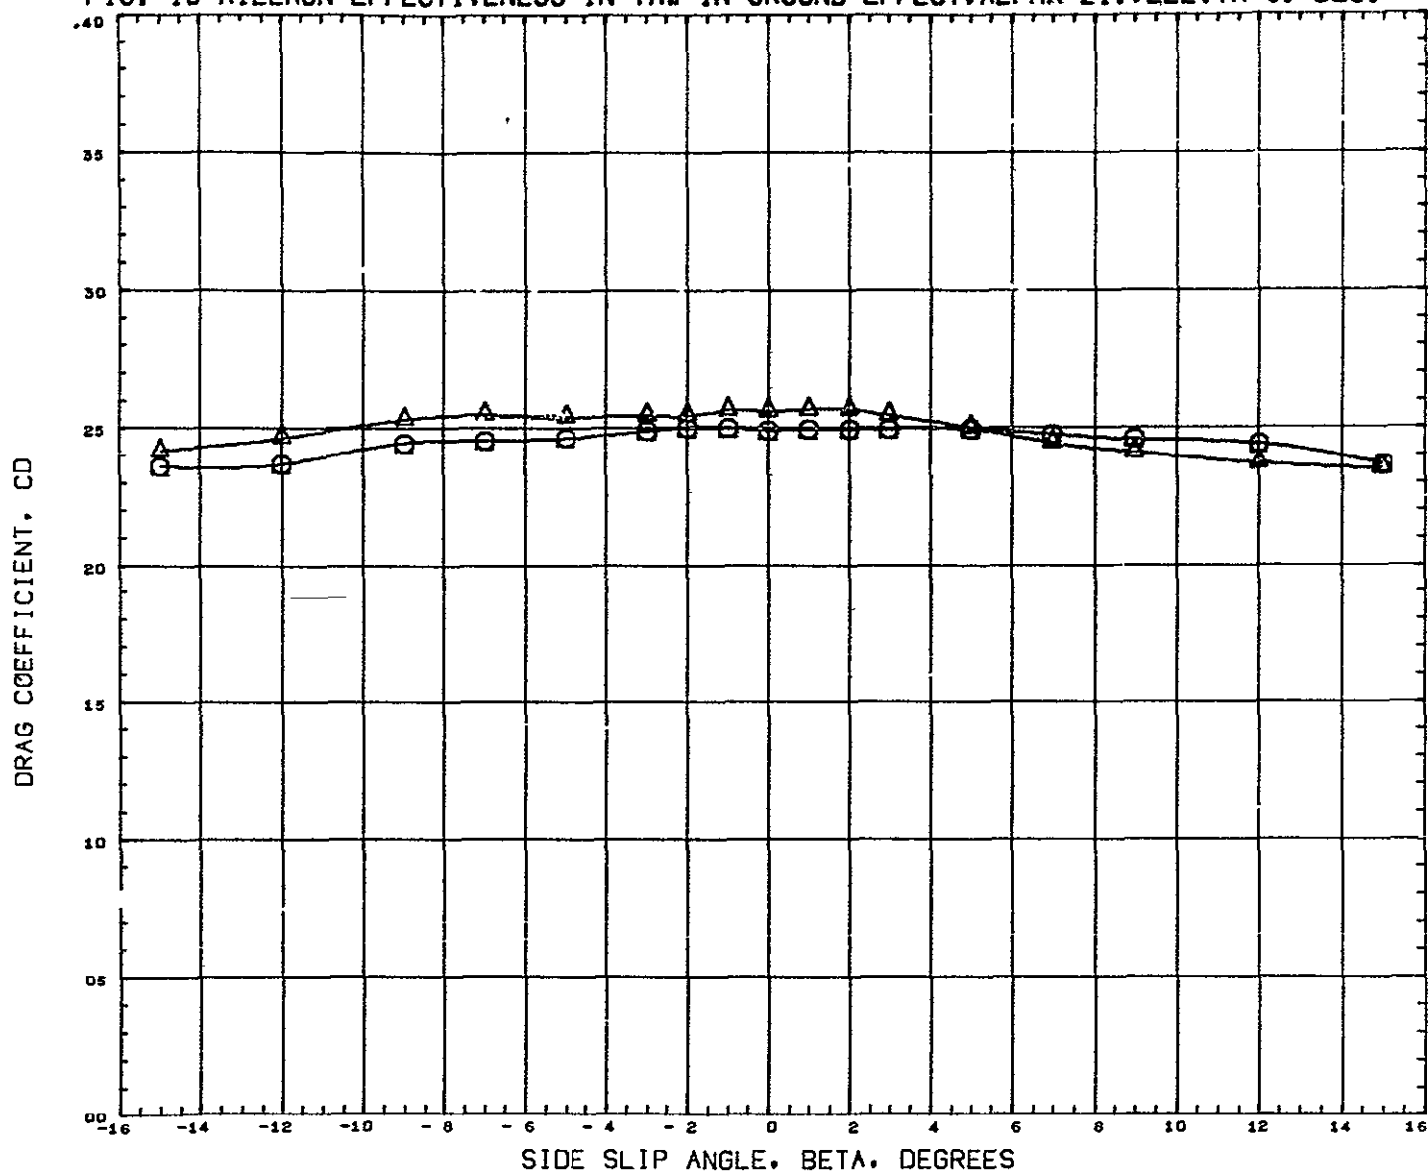


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(ACWD35) ○	GWT 290-CONF ROS-NB1 B1F1W1V1GB
(ACWD32) △	GWT 290-CONF ROS-NB1 B1F1W1V1GB

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	-10 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XNRP 1485 0040 IN
				YNRP 0 0000 IN
				ZHRP 377 0004 IN
				SCALE 0 0400

MACH 0 170


FIG. 13 AILERON EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21., ELEVTR=0. DEG.

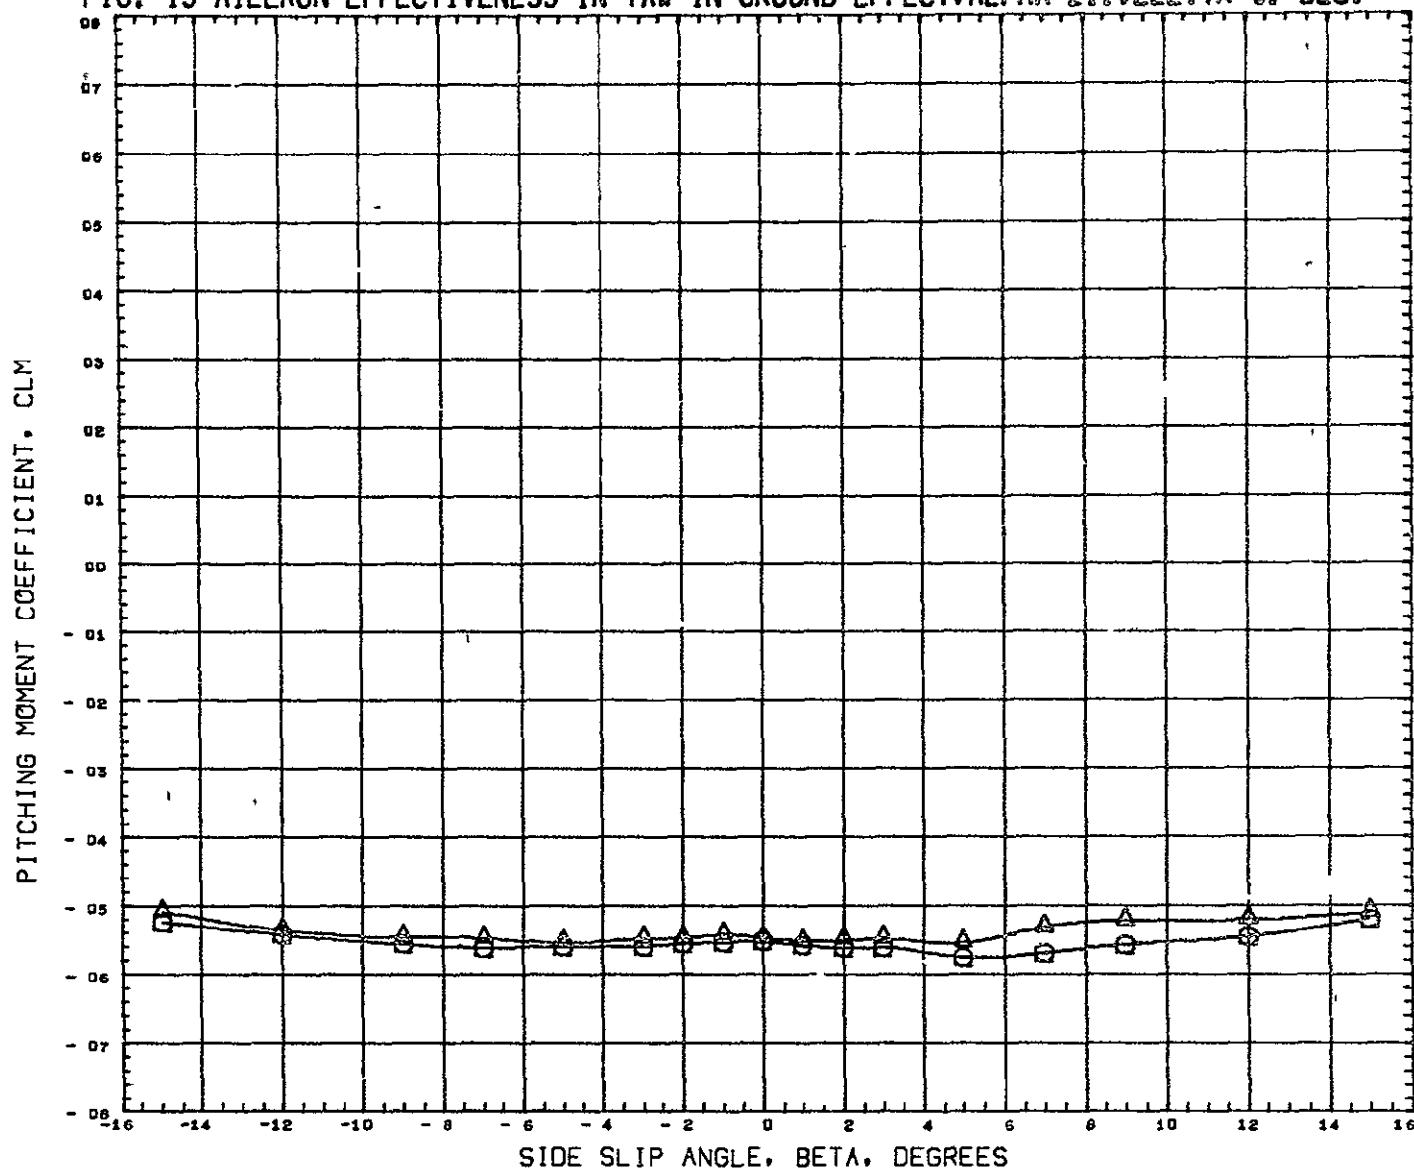

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACW035)	GWTI 290-CONF ROS-NB1 81F1W1V16B	0 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(ACW032)	GWTI 290-CONF ROS-NB1 81F1W1V16B	0 000	-10 000	0 000	0 000	LREF	6 4320 FT
						BREF	3 8920 FT
						XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

MACH 0 170


FIG. 14 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21. DEG.

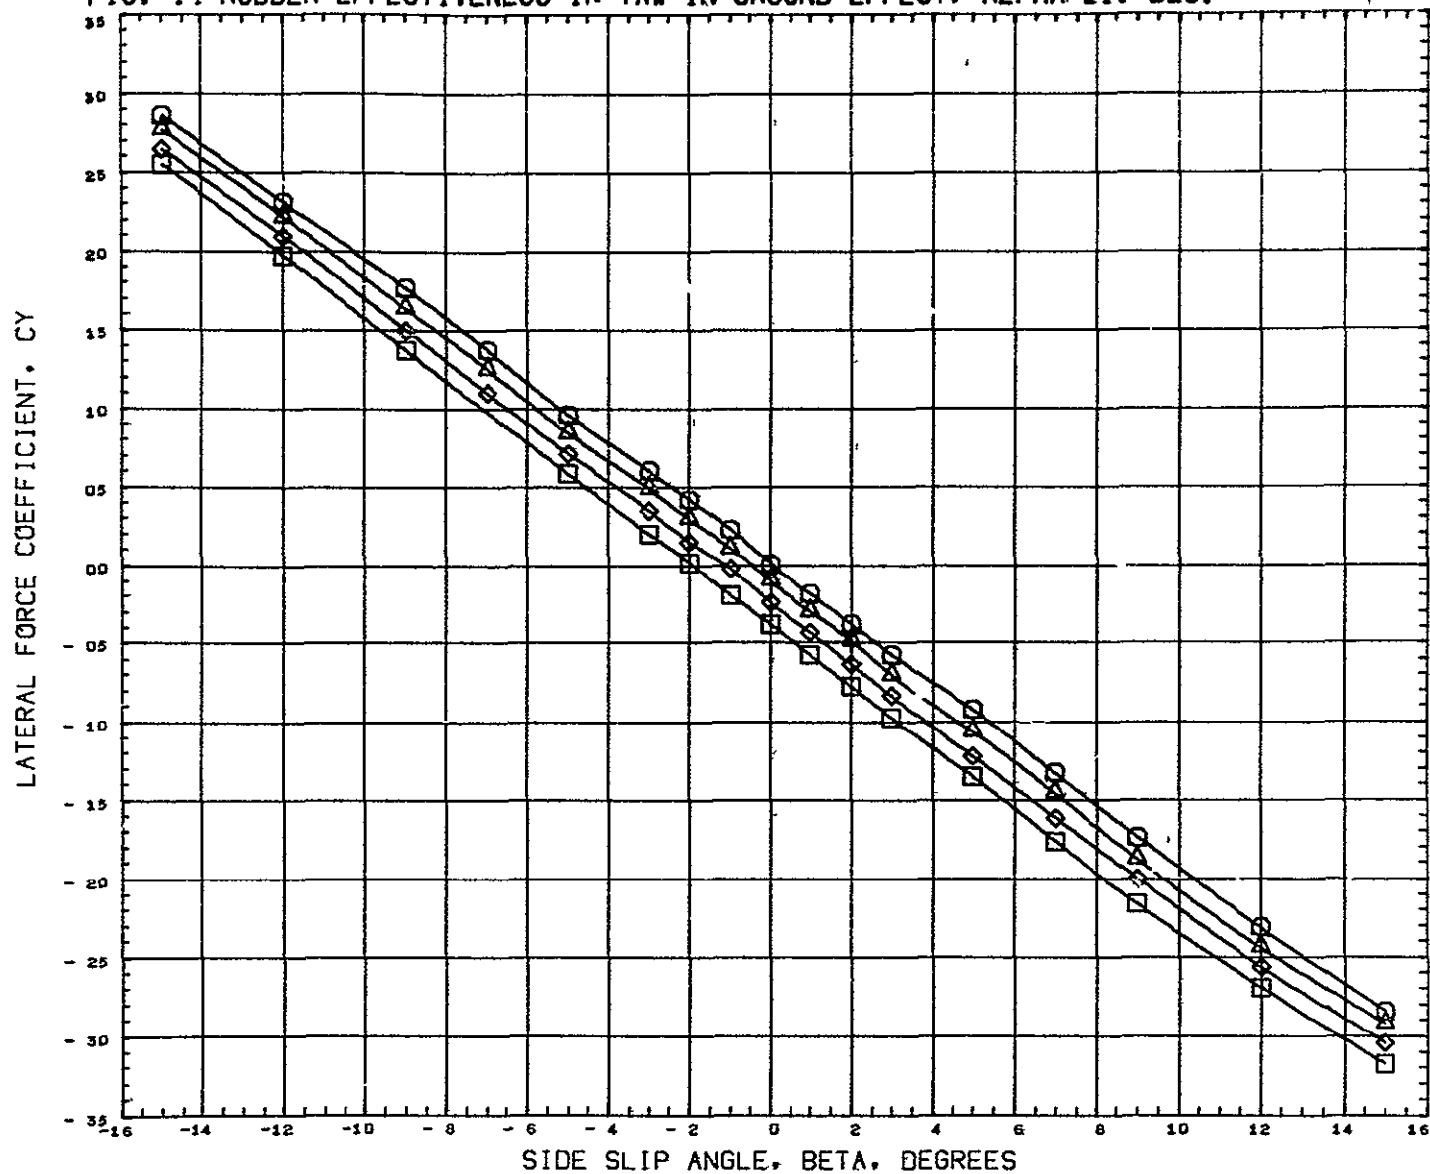

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACWD35)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	0.000	0.000	SREF	9 19.2 SQ FT
(ACWD36)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	-5.000	0.000	LREF	6 4320 FT
(ACWD37)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	-10.000	0.000	BREF	3 8920 FT
(ACWD38)	GWT 290-CONF ROS-NB1 B1F1W1V1GB	0.000	0.000	-15.000	0.000	XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

HACH 0.170


FIG. 14 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21. DEG.

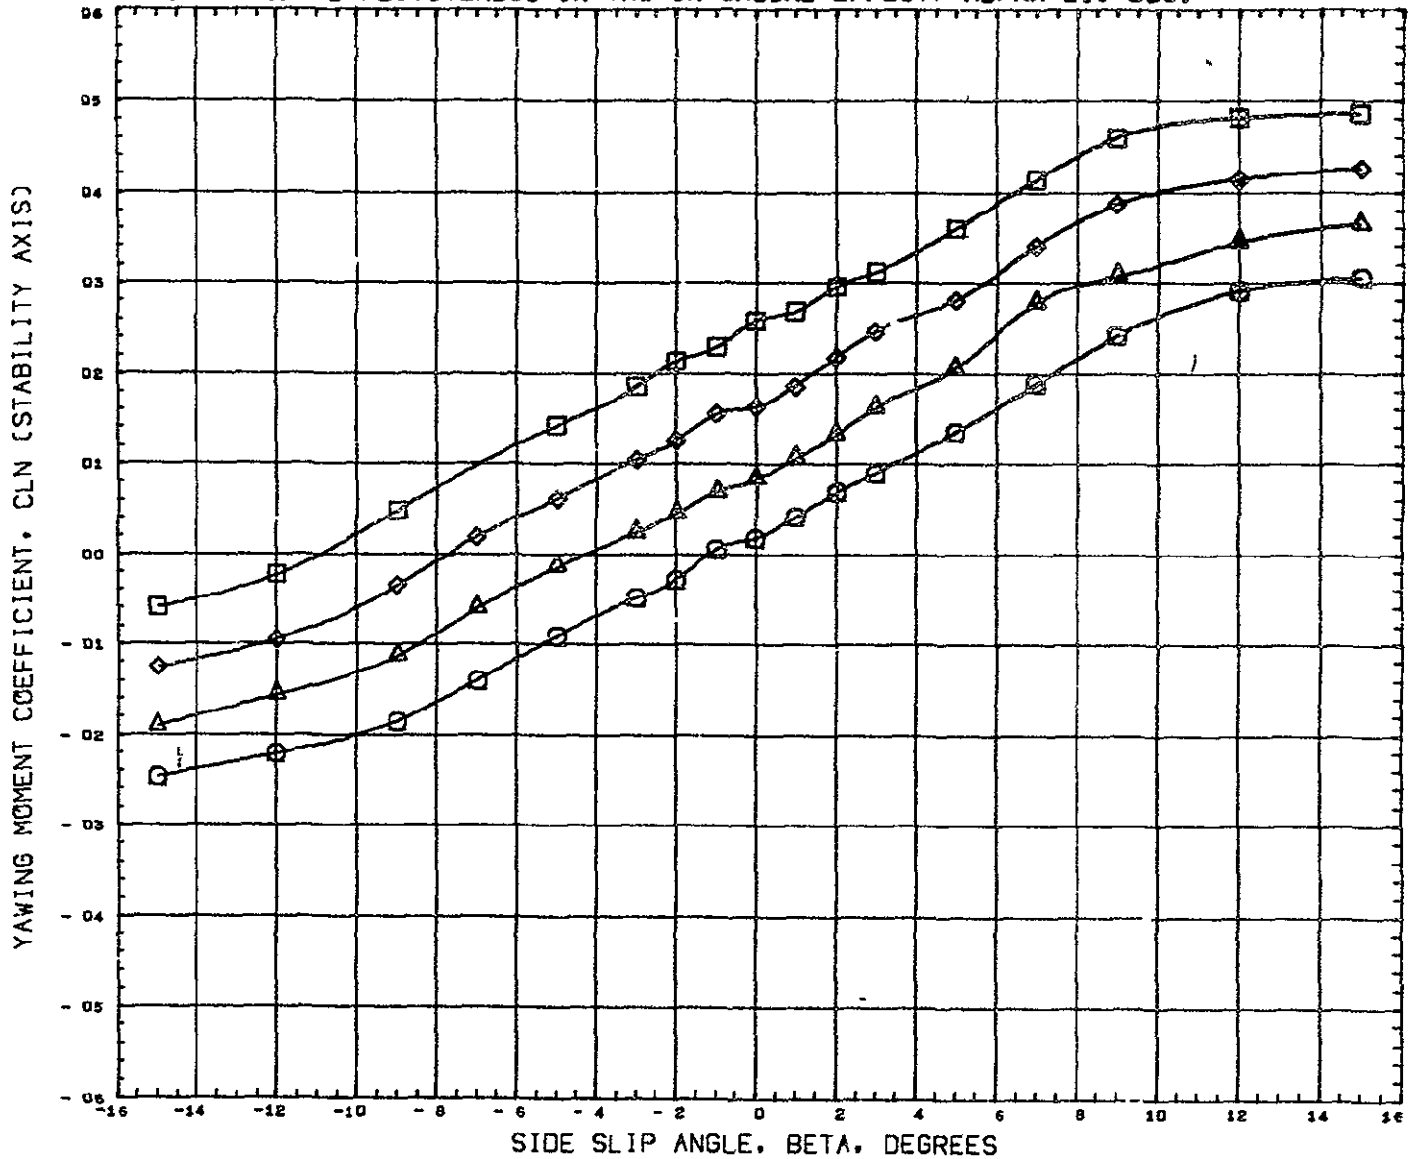

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
(ACW035)	○	GWTT 290-CONF	ROS-NB1 81F1W1V16B	0 000	0 000	0 000	0 000	SREF	9 1952	50 FT
(ACW036)	△	GWTT 290-CONF	ROS-NB1 81F1W1V16B	0 000	0 000	-5 000	0 000	LREF	6 4320	FT
(ACW037)	◇	GWTT 290-CONF	ROS-NB1 81F1W1V16B	0 000	0 000	-10 000	0 000	BREF	3 8920	FT
(ACW038)	□	GWTT 290-CONF	ROS-NB1 81F1W1V16B	0 000	0 000	-15 000	0 000	XMRP	1485 0040	IN
								YMRP	0 0000	IN
								ZMRP	377 0004	IN
								SCALE	0 0400	

MACH 0 170


FIG. 14 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21. DEG.

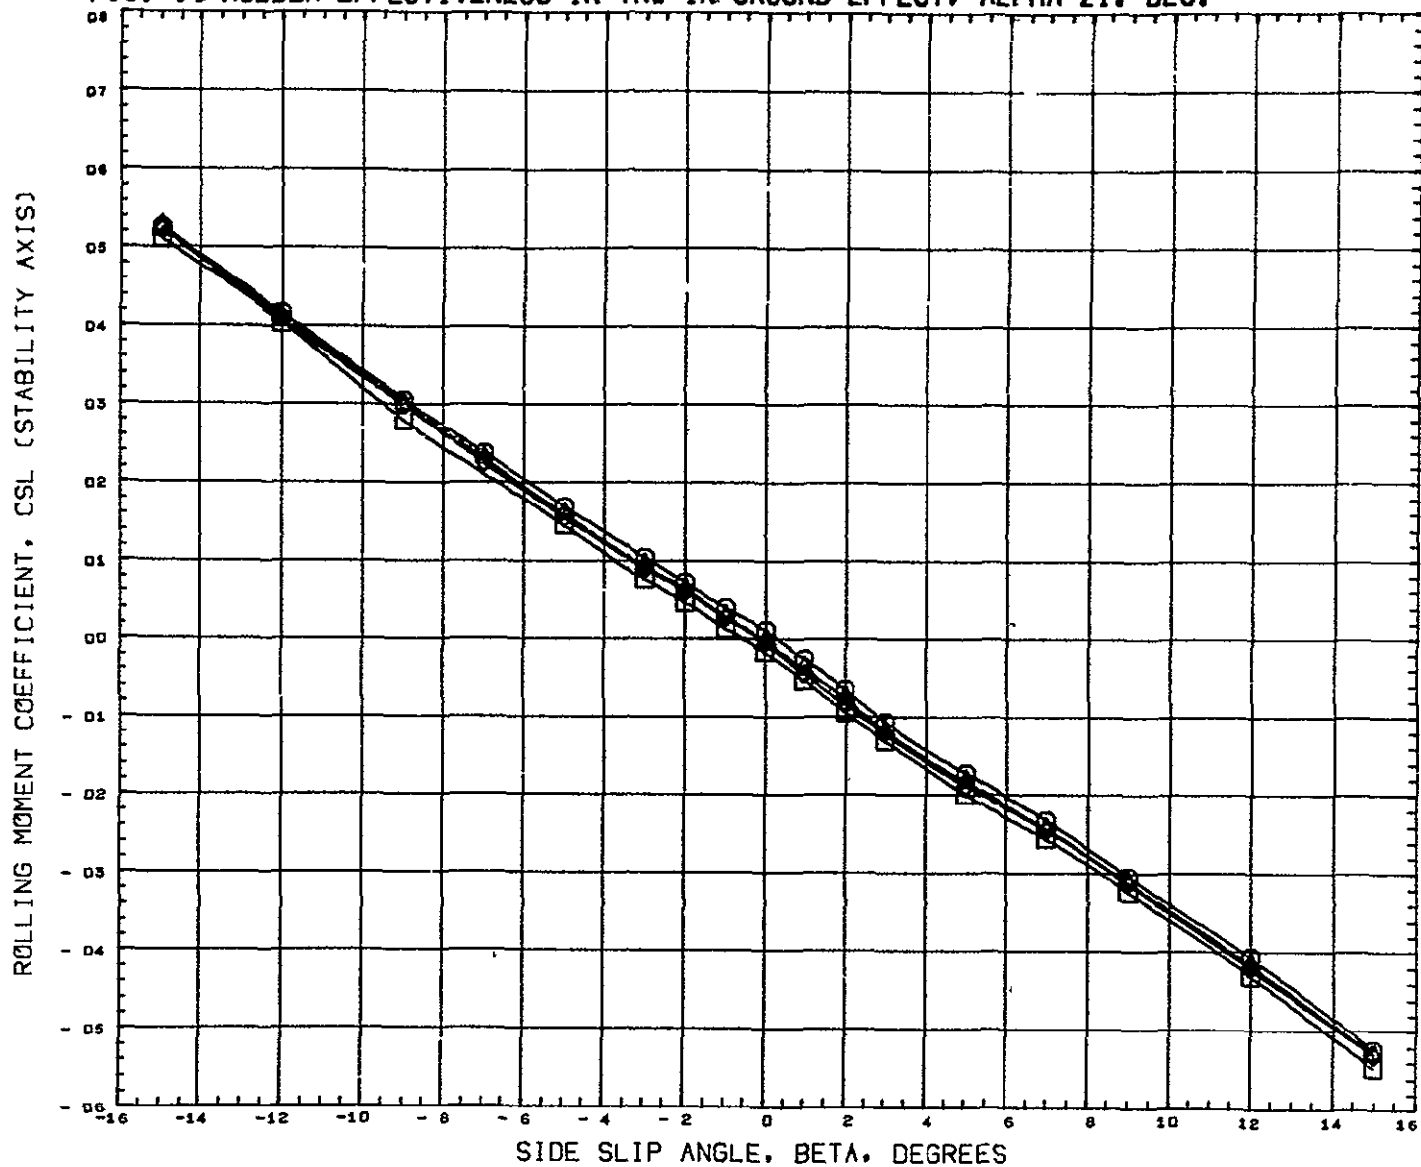

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AIRLON	RUDDER	REFERENCE INFORMATION
(ACW035)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
(ACW036)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0 000	0 000	-5 000	0 000	LREF 6 4320 FT
(ACW037)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0 000	0 000	-10 000	0 000	BREF 3 8920 FT
(ACW038)	□	GWTT 290-CONF ROS-NB1 B1F1W1V1G8	0 000	0 000	-15 000	0 000	XMRP 1485 0045 IN
							YMRP 0 0000 IN
							ZMRP 377 0004 IN
							SCALE 0 0400

MACH 0 170


FIG. 14 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT. ALPHA=21. DEG.

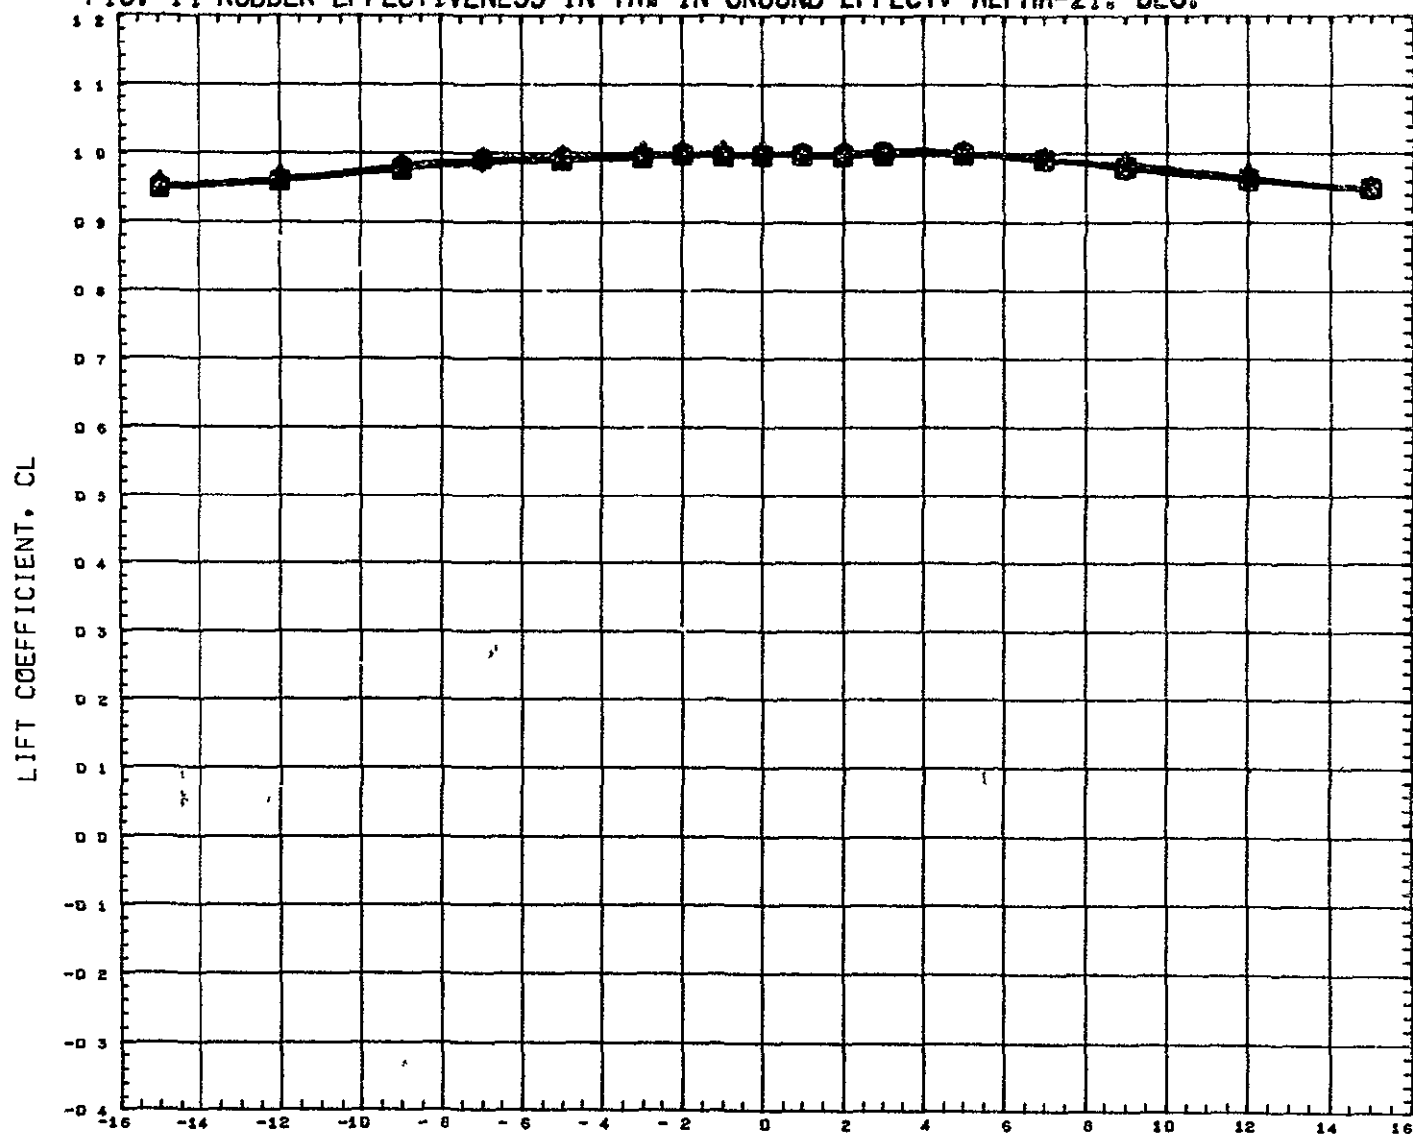

DATA SET SYMBOL				CONFIGURATION DESCRIPTION				ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
(ACW035)	□	GWTT	290-CONF	ROS-NB1	B1F1W1V16B			0 000	0 000	0 000	0 000	SREF	9 1952	SQ FT
(ACW036)	△	GWTT	290-CONF	ROS-NB1	B1F1W1V16B			0 000	0 000	-5 000	0 000	LREF	5 4320	FT
(ACW037)	◇	GWTT	290-CONF	ROS-NB1	B1F1W1V16B			0 000	0 000	0 000	-10 000	BREF	3 8920	FT
(ACW038)	□	GWTT	290-CONF	ROS-NB1	B1F1W1V16B			0 000	0 000	0 000	-15 000	XMRP	1485 0040	IN
												YMRP	0 0000	IN
												ZMRP	377 0004	IN
												SCALE	0 0400	

MACH 0.170


FIG. 14 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21. DEG.

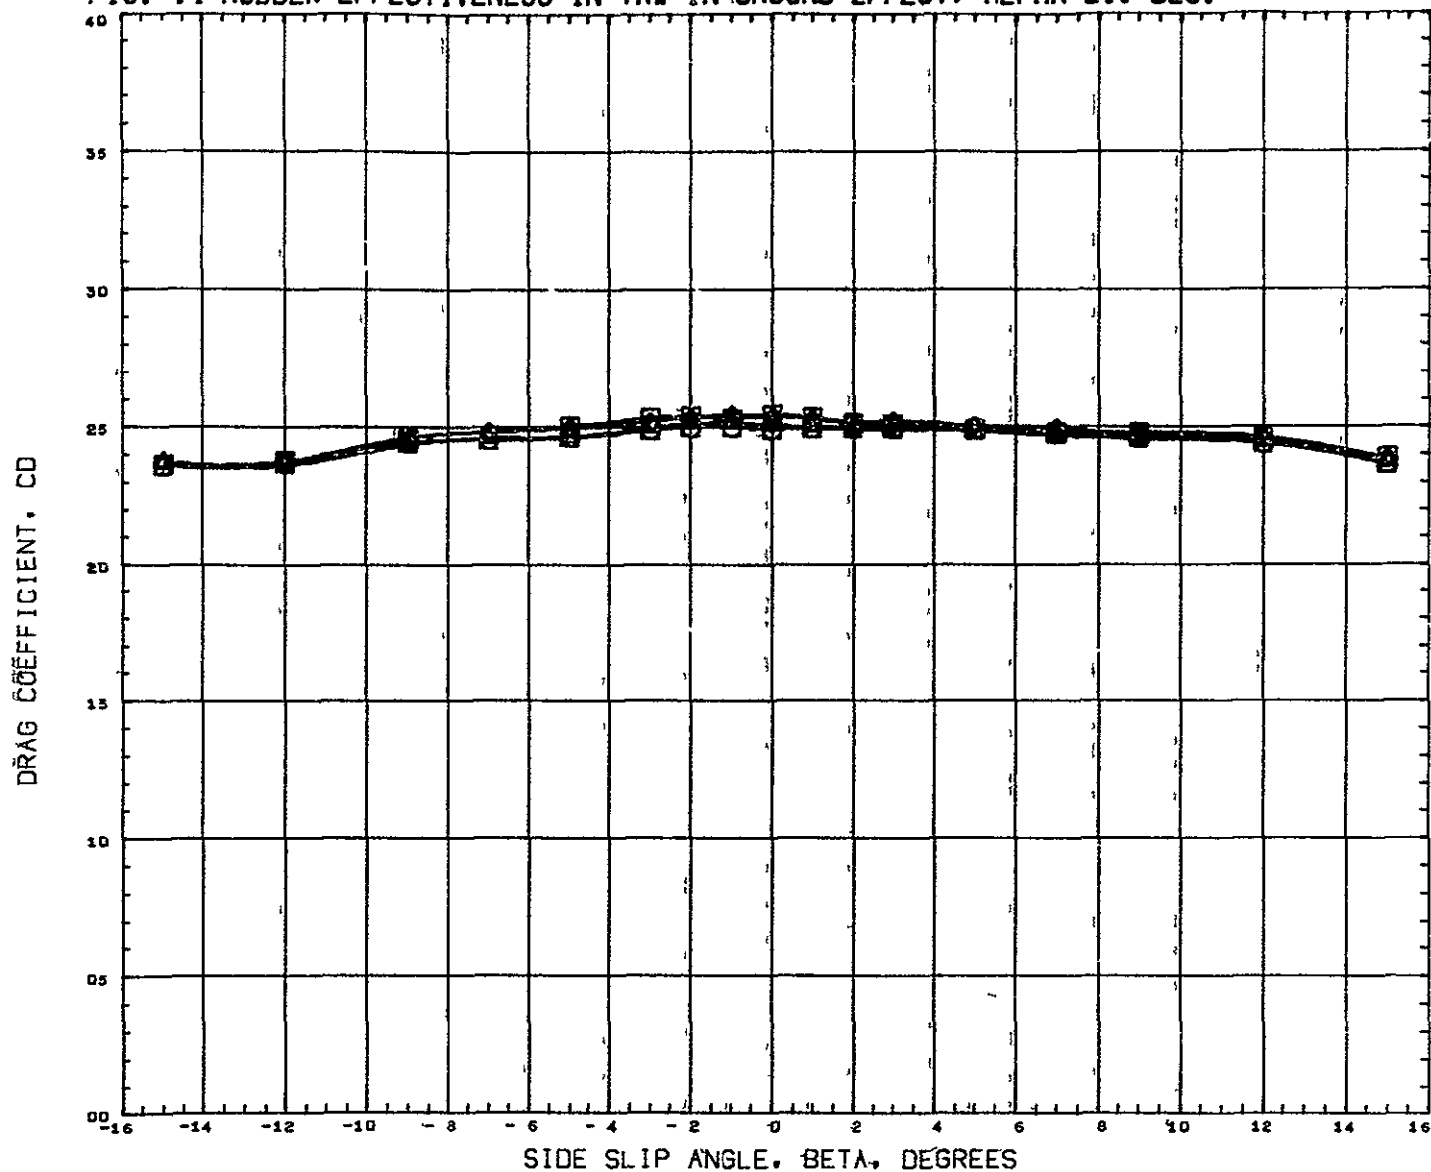

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACW035)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(ACW036)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0 000	0 000	-5 000	0 000	LREF	6 4320 FT
(ACW037)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0 000	0 000	-10 000	0 000	BREF	3 8920 FT
(ACW038)	GWTT 29D-CONF ROS-NB1 B1F1W1V1GB	0 000	0 000	-15 000	0 000	XMRP	1485 0040 IN
						YMRF	0 0000 IN
						ZMRF	377 0004 IN
						SCALE	0 0400

MACH 0.170


FIG. 14 RUDDER EFFECTIVENESS IN YAW IN GROUND EFFECT, ALPHA=21. DEG.

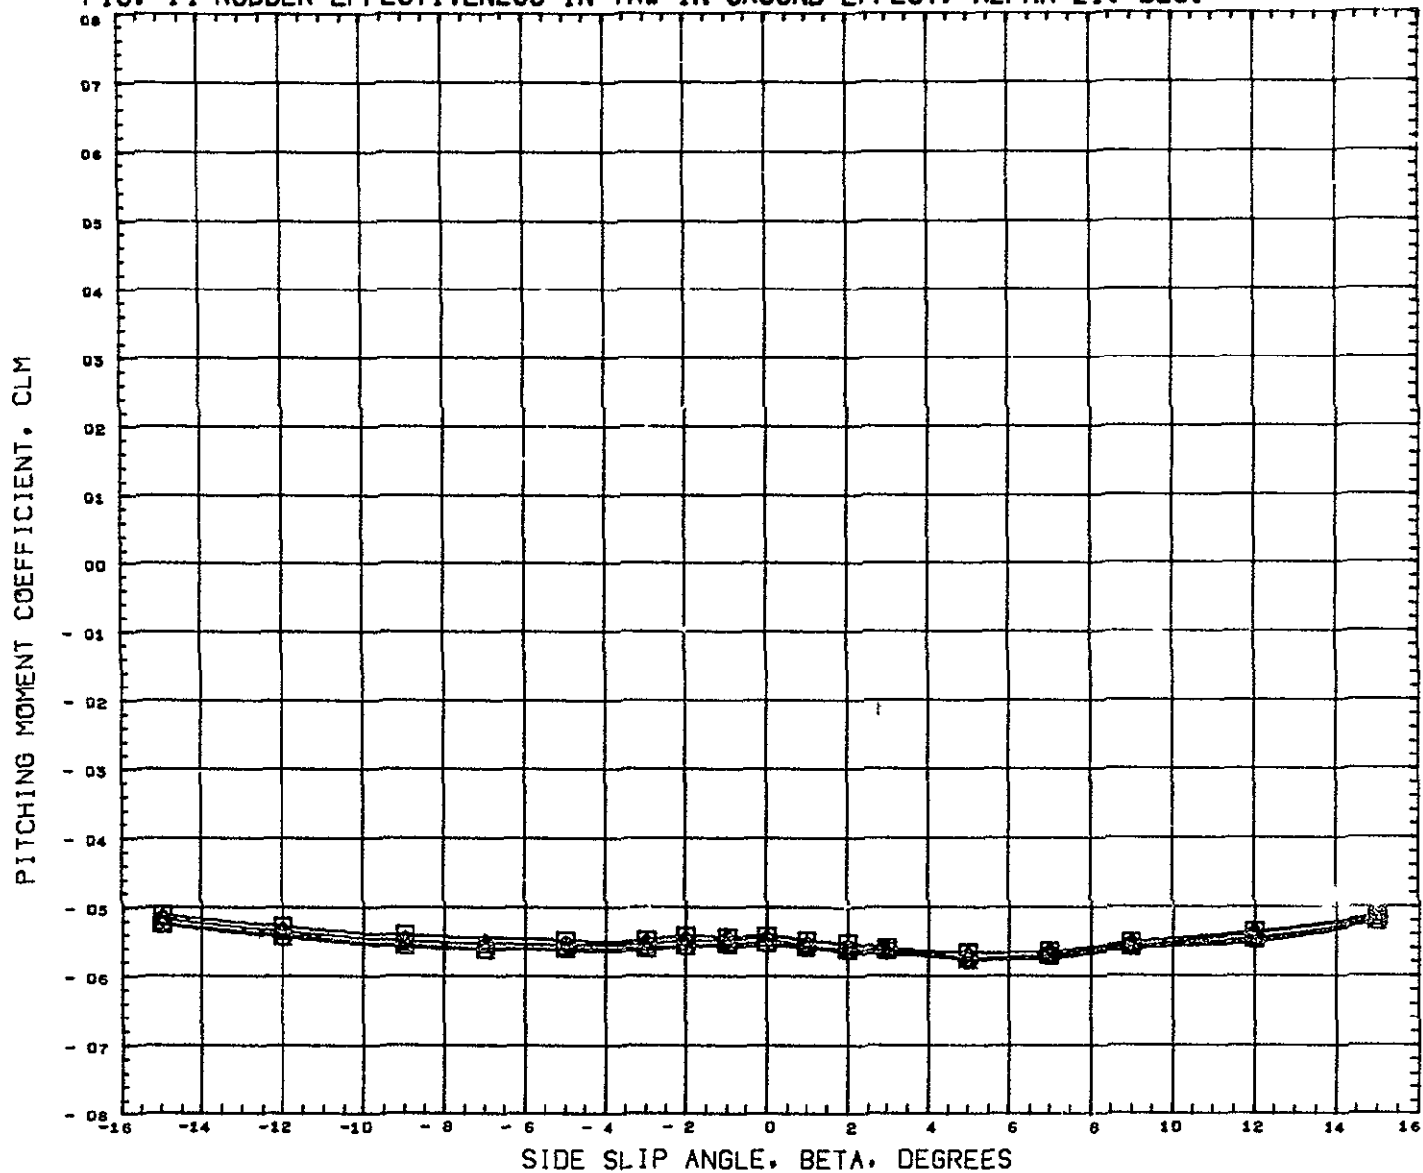

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACWG35)	○	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0 000	0 000	0 000	0 000	SREF	9 1952 50 FT
(ACWD36)	△	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0 000	0 000	-5 000	-5 000	LREF	6 4320 FT
(ACWD37)	◇	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0 000	0 000	-10 000	-10 000	RREF	3 8920 FT
(ACWD38)	□	GWTT 290-CONF	ROS-NB1 B1F1W1V1GB	0 000	0 000	-15 000	-15 000	XMRP	1485 0040 IN
								YMRP	0 0000 IN
								ZMRP	377 0004 IN
								SCALE	0 0400

MACH 0 170

FIG. 15 EFFECT OF SHORT NOSE IN YAW, ALPHA=0. DEG

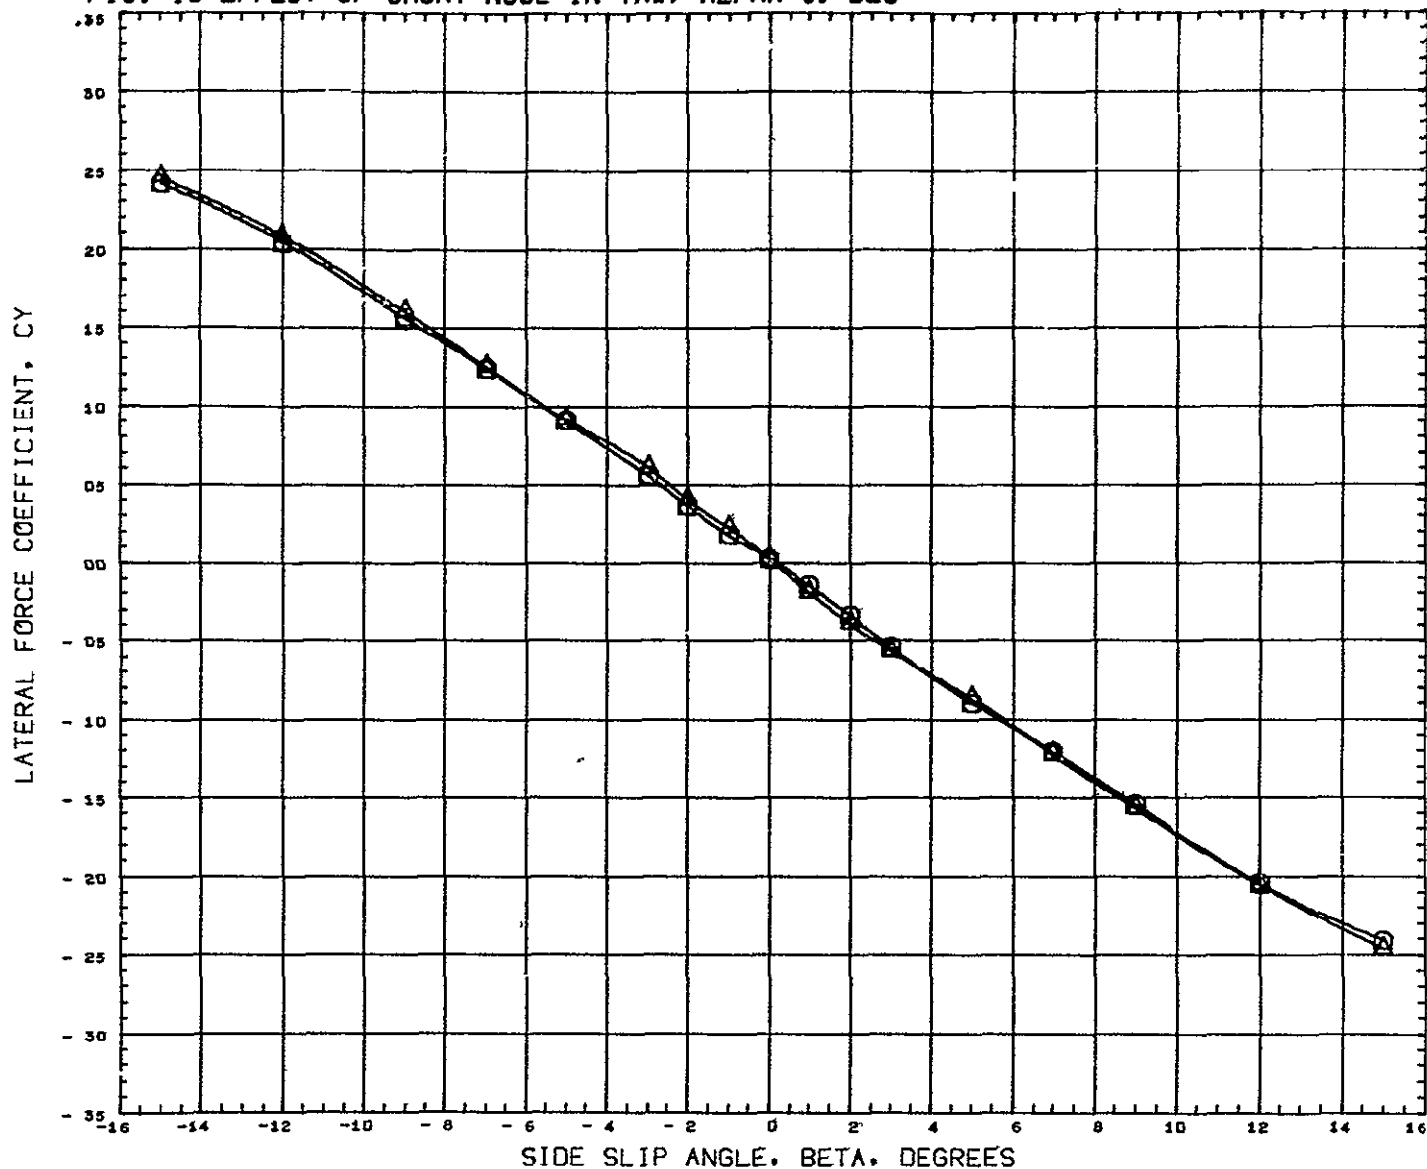


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCMD42) GWTT 290-CONF ROS-NB2 B3F1W1V1
 (XC0054) GWTT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	0 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0.170

FIG. 15 EFFECT OF SHORT NOSE IN YAW. ALPHA=0. DEG

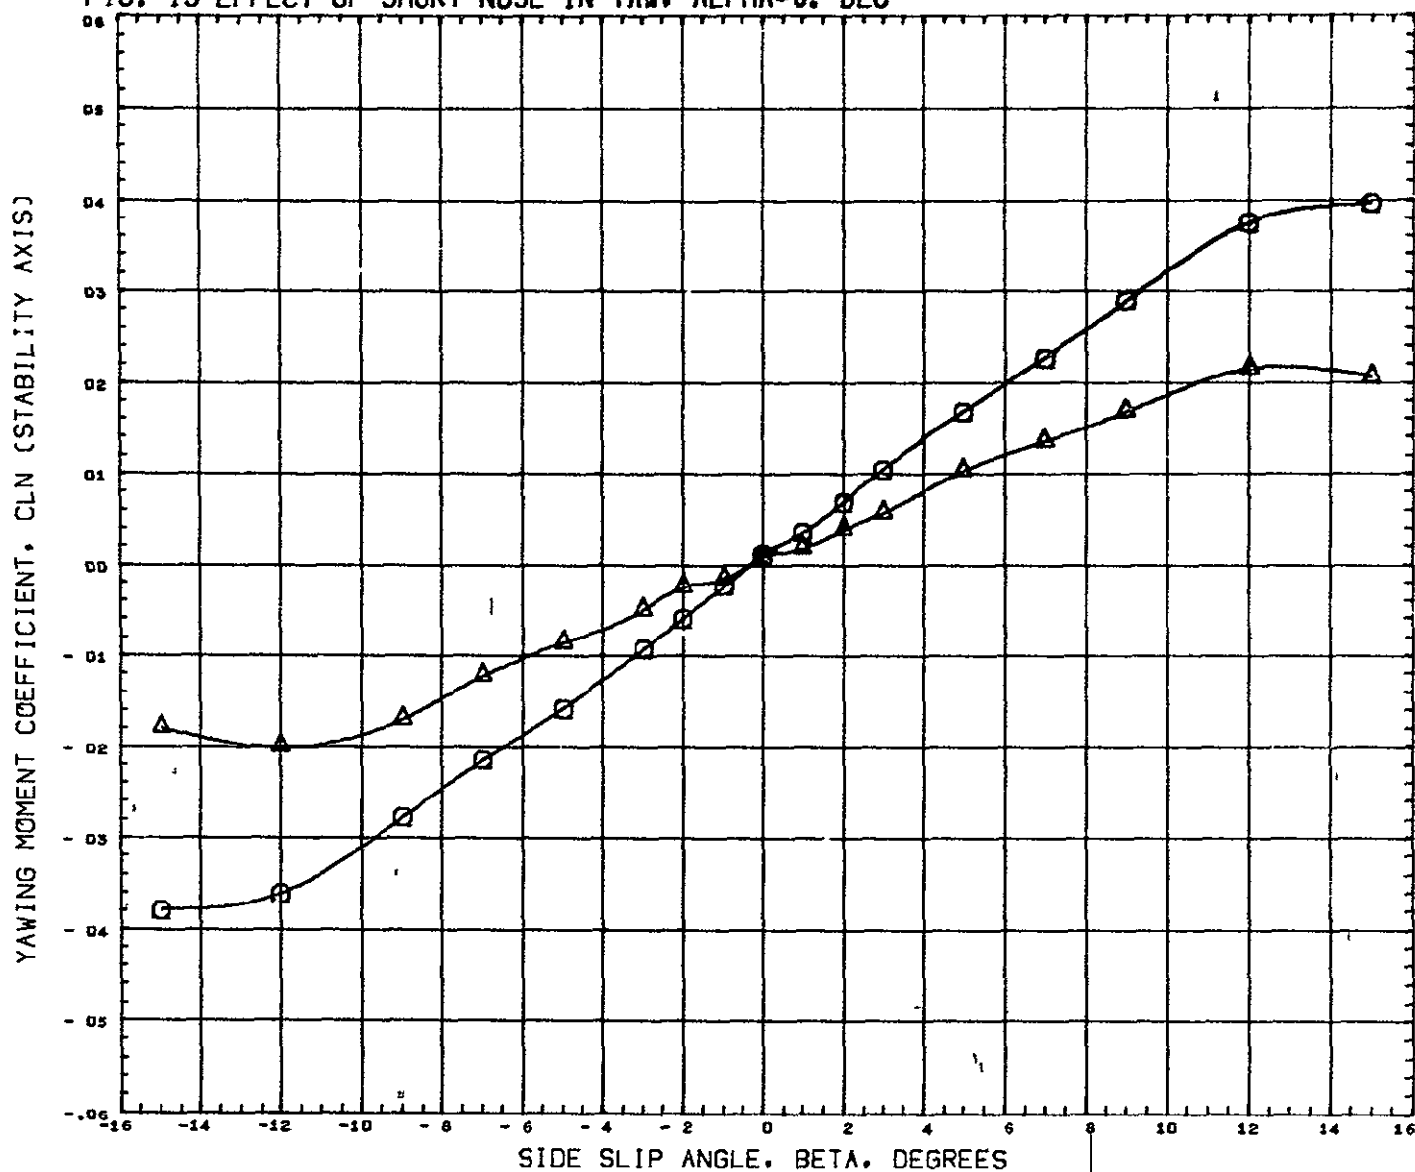


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCWD42) $\bigcirc$ GWT 290-CONF ROS-NB2 B3F1W1V1
 (XCQ954) $\triangle$ GWT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	0 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XHRF 1485 0040 IN
				YHRF 10 0000 IN
				ZHRF 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 15 EFFECT OF SHORT NOSE IN YAW, ALPHA=0. DEG

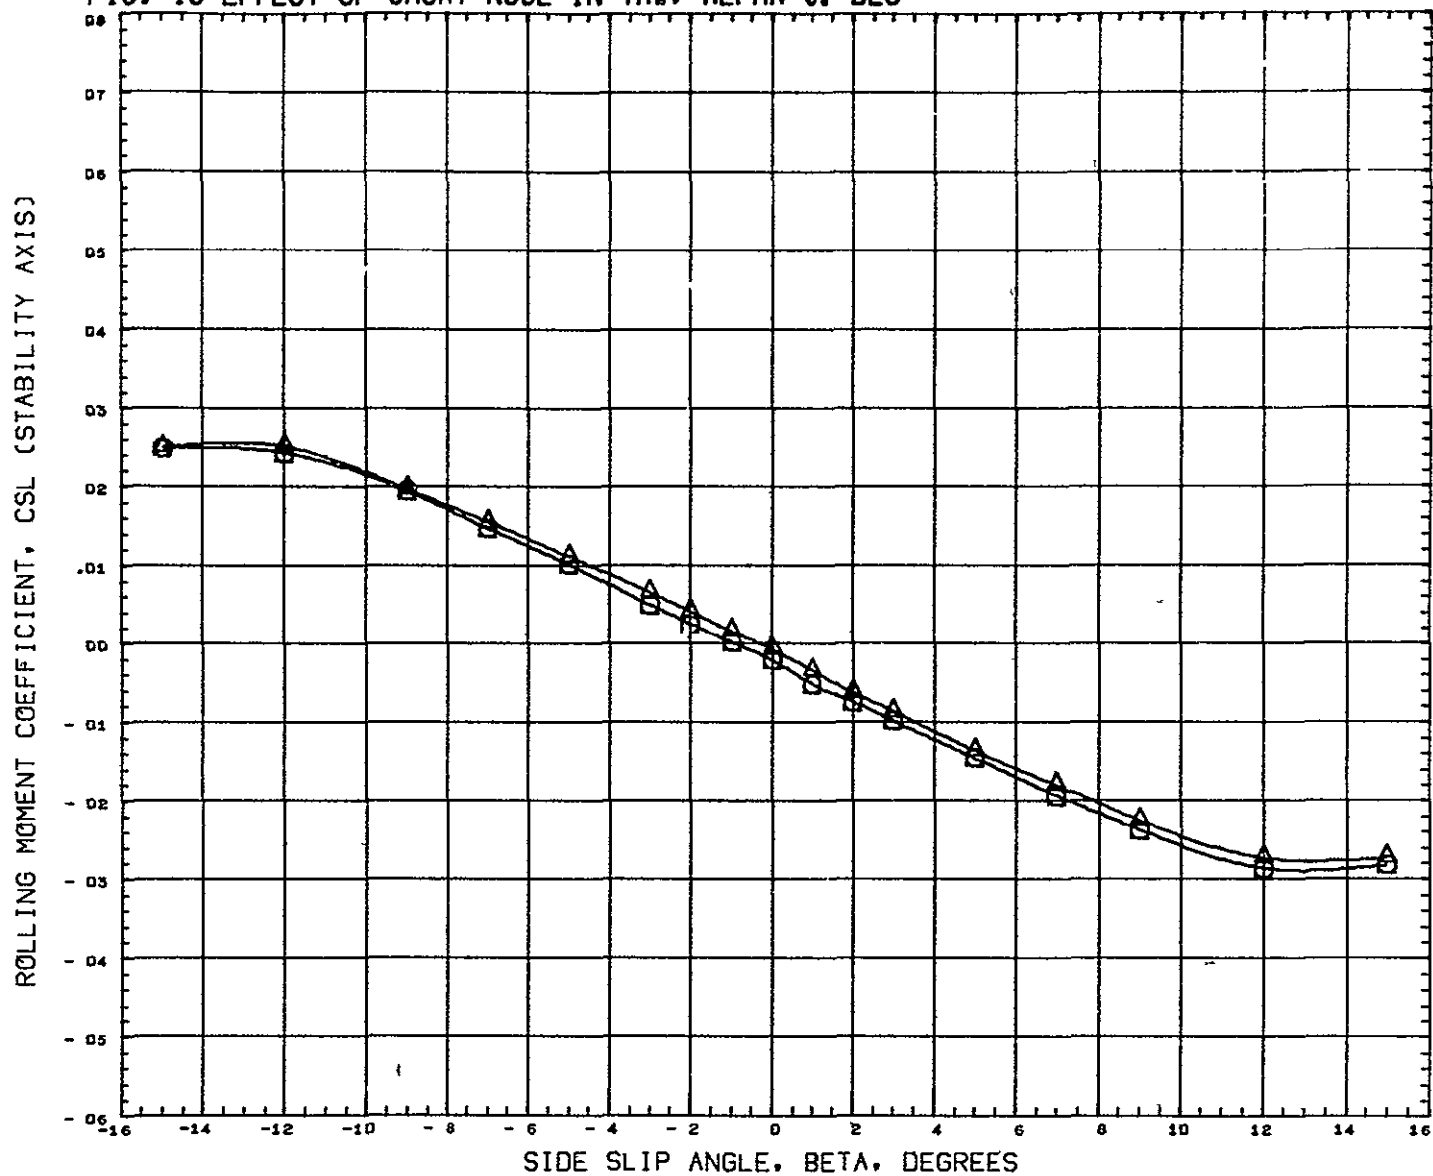


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW042)  GWTT 290-CONF ROS-NB2 B3F1W1V1
 (XCR054)  GWTT 289-CONF ROS-NB1 B1W1V1

ALPHA ELEVTR AILRON RUDDER
 0 000 0 000 0 000 0 000
 0 000 0 000 0 000 0 000

REFERENCE INFORMATION
 SREF 9 1952 SQ FT
 LREF 6 4320 FT
 BREF 3 8920 FT
 XMRP 1485 0040 IN
 YMRP 0 0000 IN
 ZMRP 377 0004 IN
 SCALE 0 0400

MACH 0 170

FIG. 15 EFFECT OF SHORT NOSE IN YAW. ALPHA=0. DEG

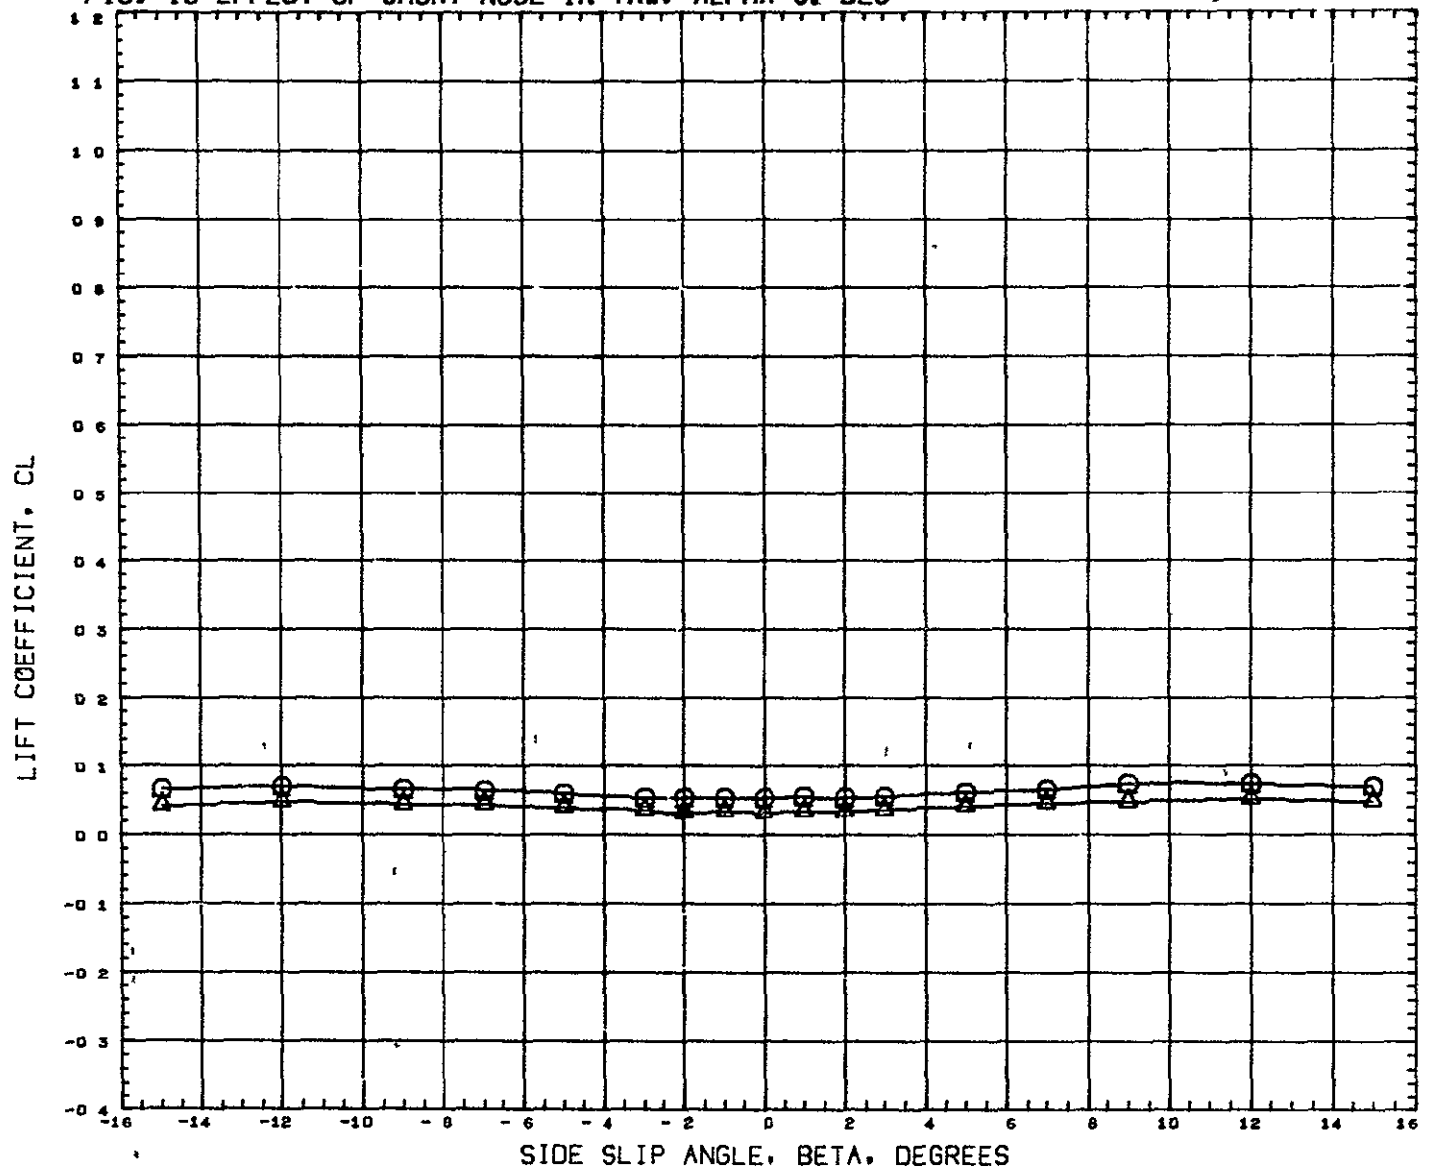


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCWD42) GWTT 290-CONF ROS-NB2 B3F1W1V1
 (XC9054) GWTT 289-CONF ROS-NB1 B1W1V1

ALPHA ELEVTR AILRON RUDDER
 0 000 0 000 0 000 0 000
 0 000 0 000 0 000 0 000

REFERENCE INFORMATION
 SREF 9 1952 SQ FT
 LREF 6 4320 FT
 BREF 3 8920 FT
 XMRP 1485 0040 IN
 YMRP 0 0000 IN
 ZMRP 37 0004 IN
 SCALE 0 0400

MACH 0 170

FIG. 15 EFFECT OF SHORT NOSE IN YAW, ALPHA=0. DEG

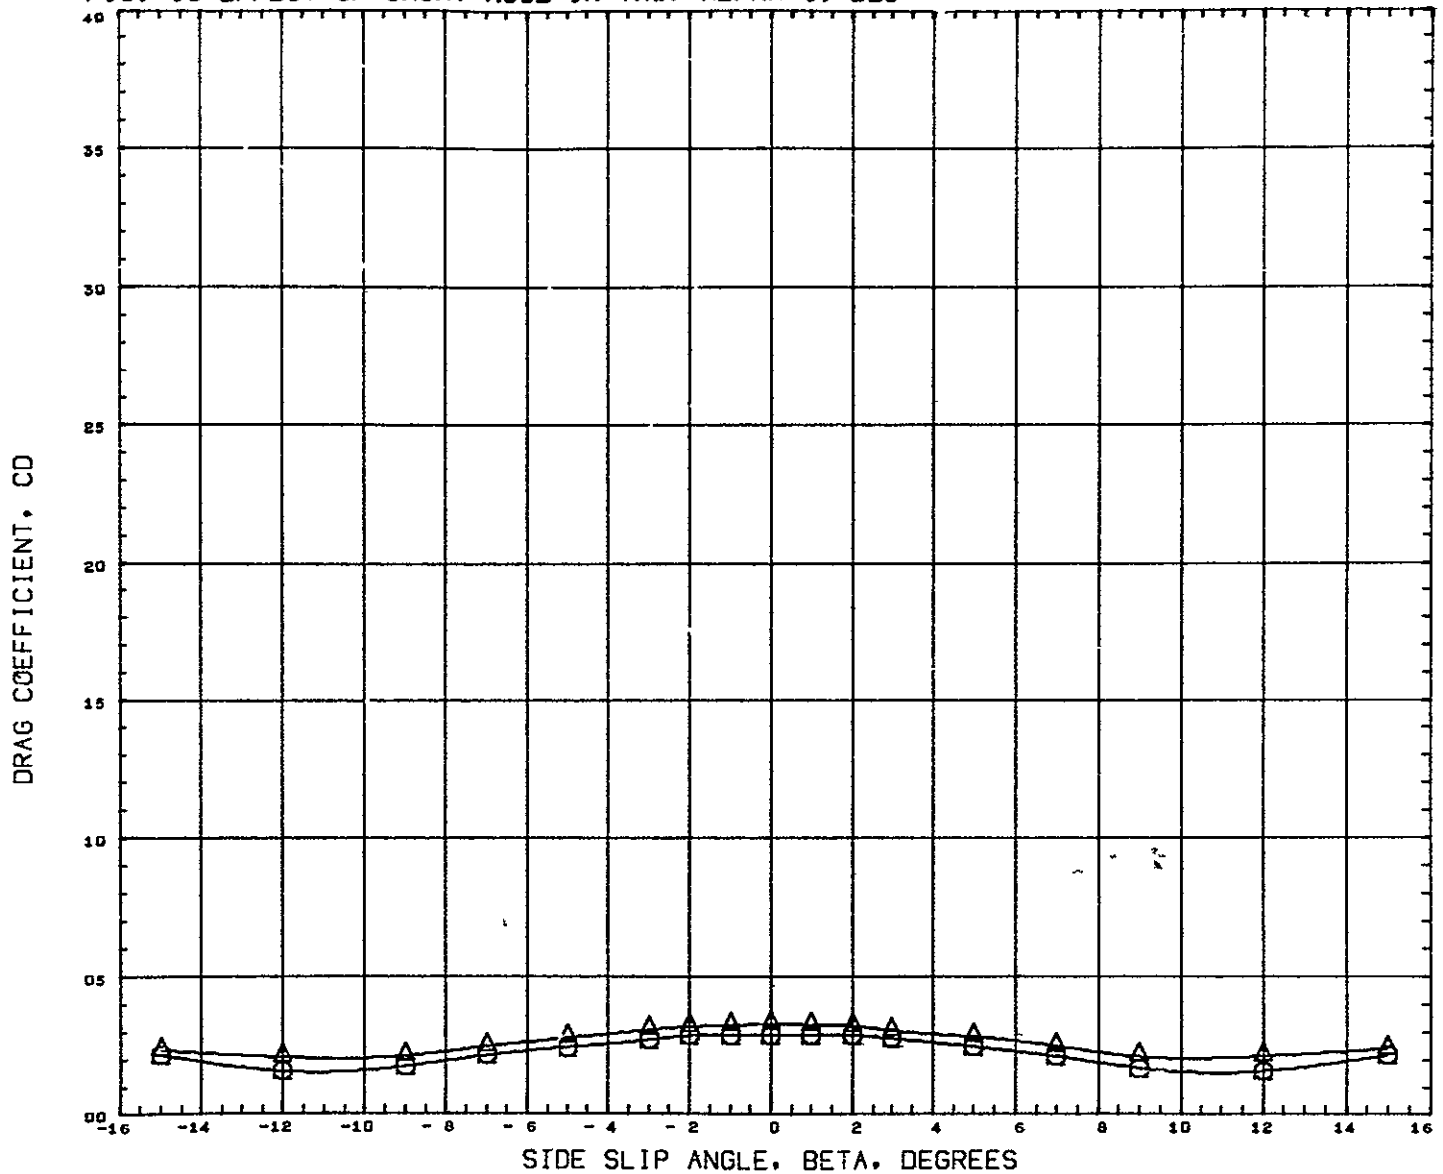


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCWD42)	GWTT 290-CONF ROS-NB2 B3F1W1V1
(XCQ054)	GWTT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
0 000	0 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRP 1485 0040 IN
				YMRP 0 0000 IN
				ZMRP 377 0004 IN
				SCALE 0 0400

MACH 0 170

FIG. 15 EFFECT OF SHORT NOSE IN YAW, ALPHA=0. DEG

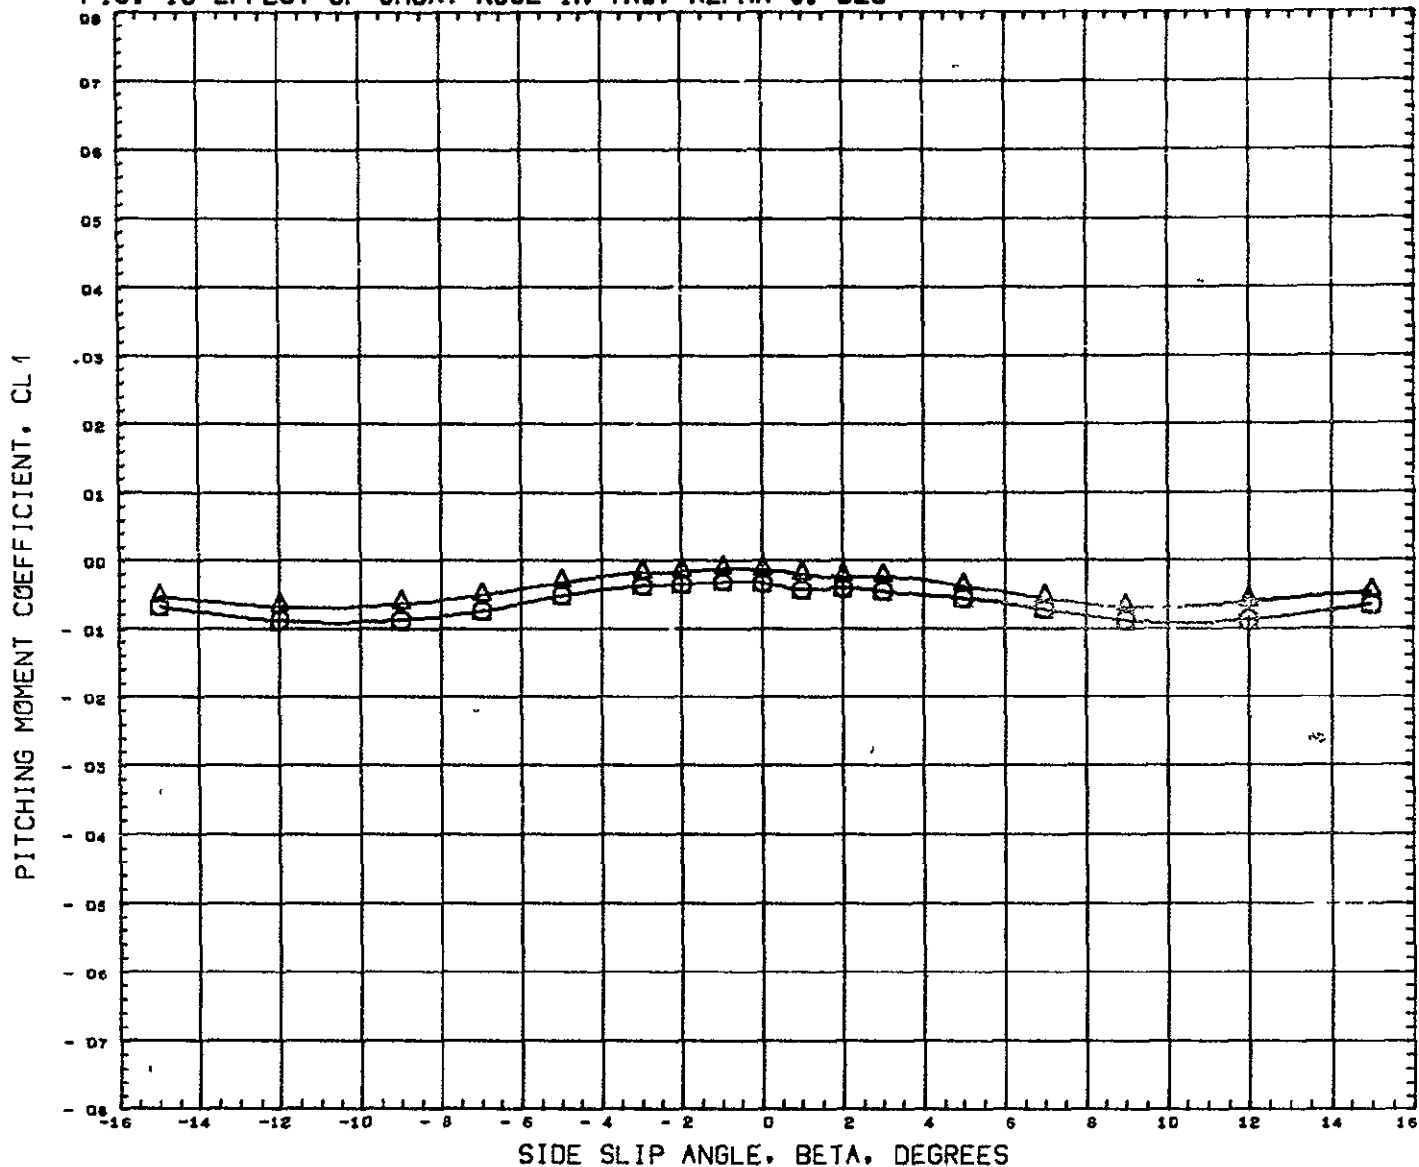


DATA SET SYMBOL CONFIGURATION DESCRIPTION
(RCW042) $\circ$ GWT 290-CONF ROS-NB2 B3F1W1V1
(XCR054) Δ GWT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
0.000	0.000	0.000	0.000	LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 16 EFFECT OF SHORT NOSE IN YAW, ALPHA=21. DEG

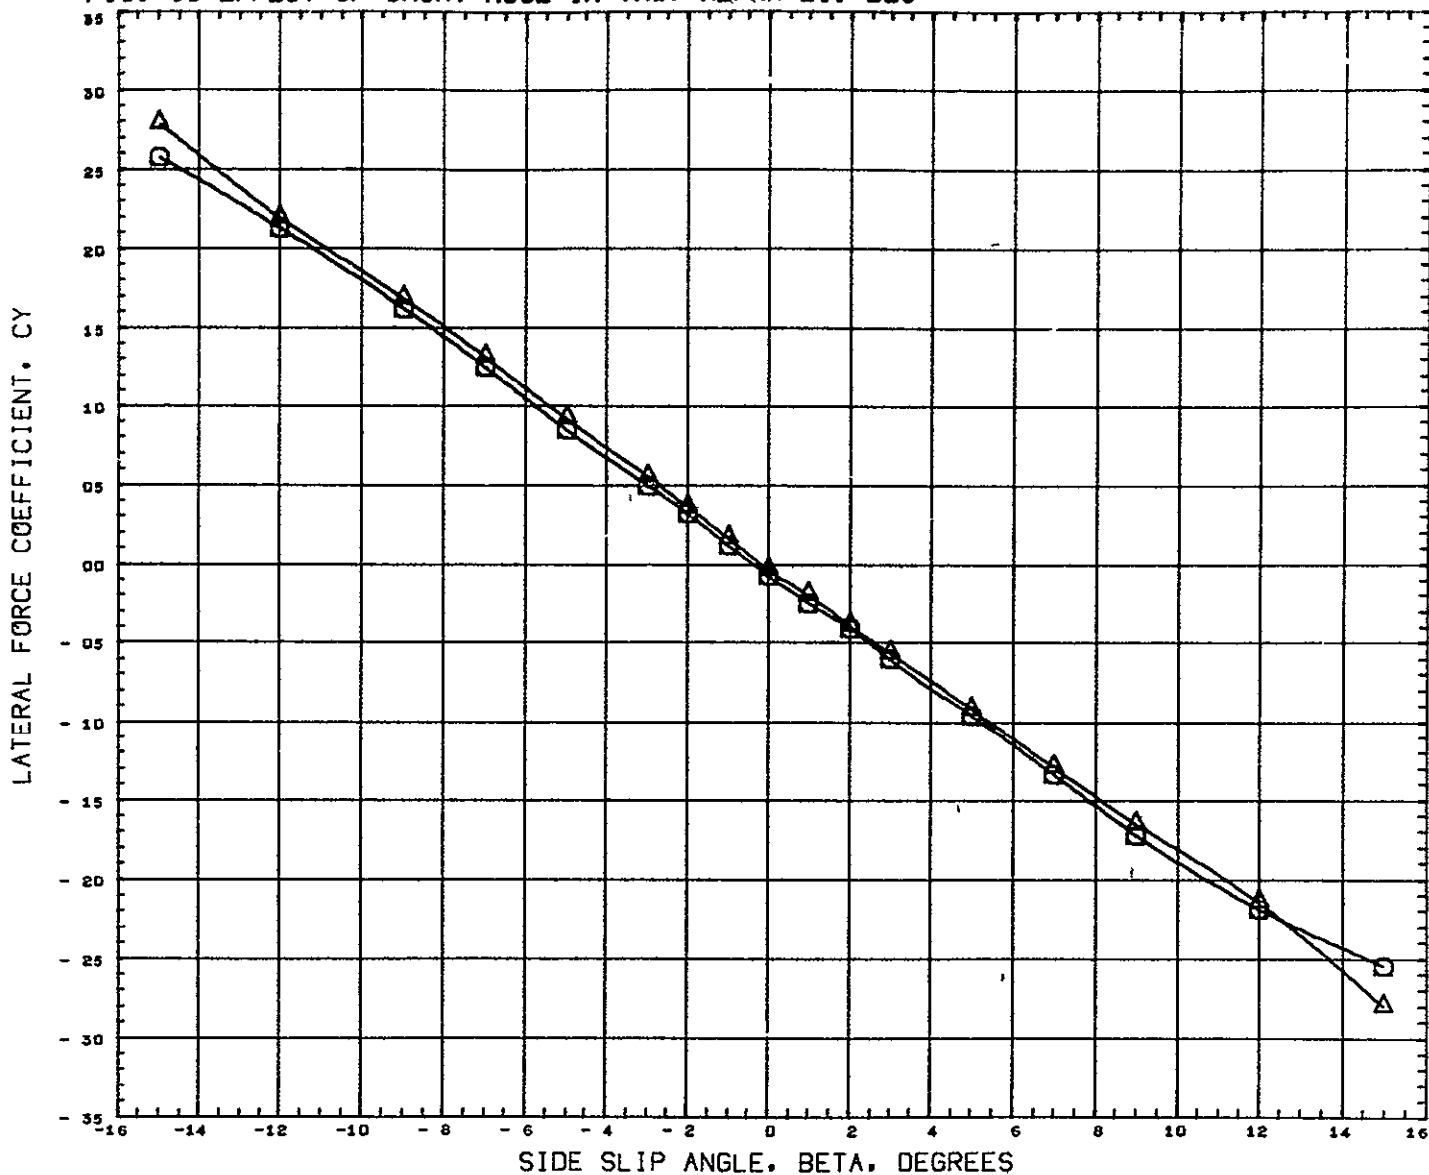


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACWD40) GWT 290-CONF ROS-NB2 B3F1W1V1
 (XCQD52) GWT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
21 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
				LREF	6 4320 FT
				BREF	3 8920 FT
				XMRP	1485 0040 IN
				YMRP	0 0000 IN
				ZMRP	377 0004 IN
				SCALE	0 0400

MACH 0 170

FIG. 16 EFFECT OF SHORT NOSE IN YAW, ALPHA=21. DEG

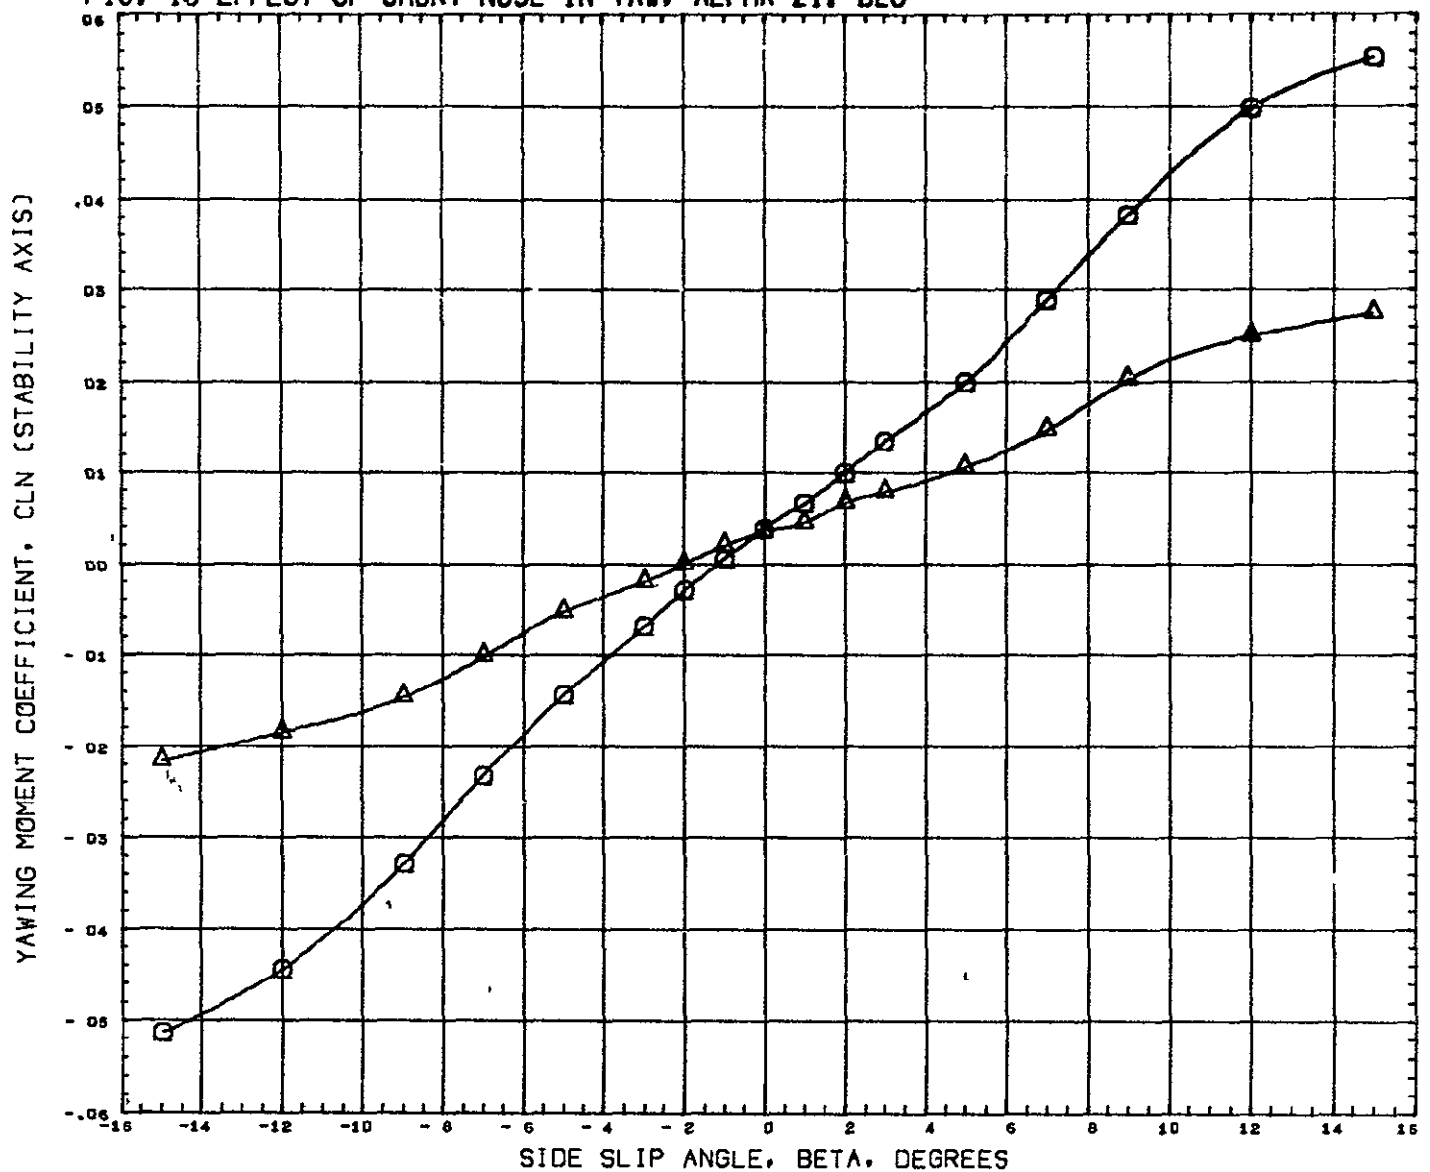


DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION
(ACWD40)	○	GWTT 290-CONF	ROS-NB2 B3F1W1V1
(XC0052)	△	GWTT 289-CONF	ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE	INFORMATION
21.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
				LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 16 EFFECT OF SHORT NOSE IN YAW, ALPHA=21. DEG

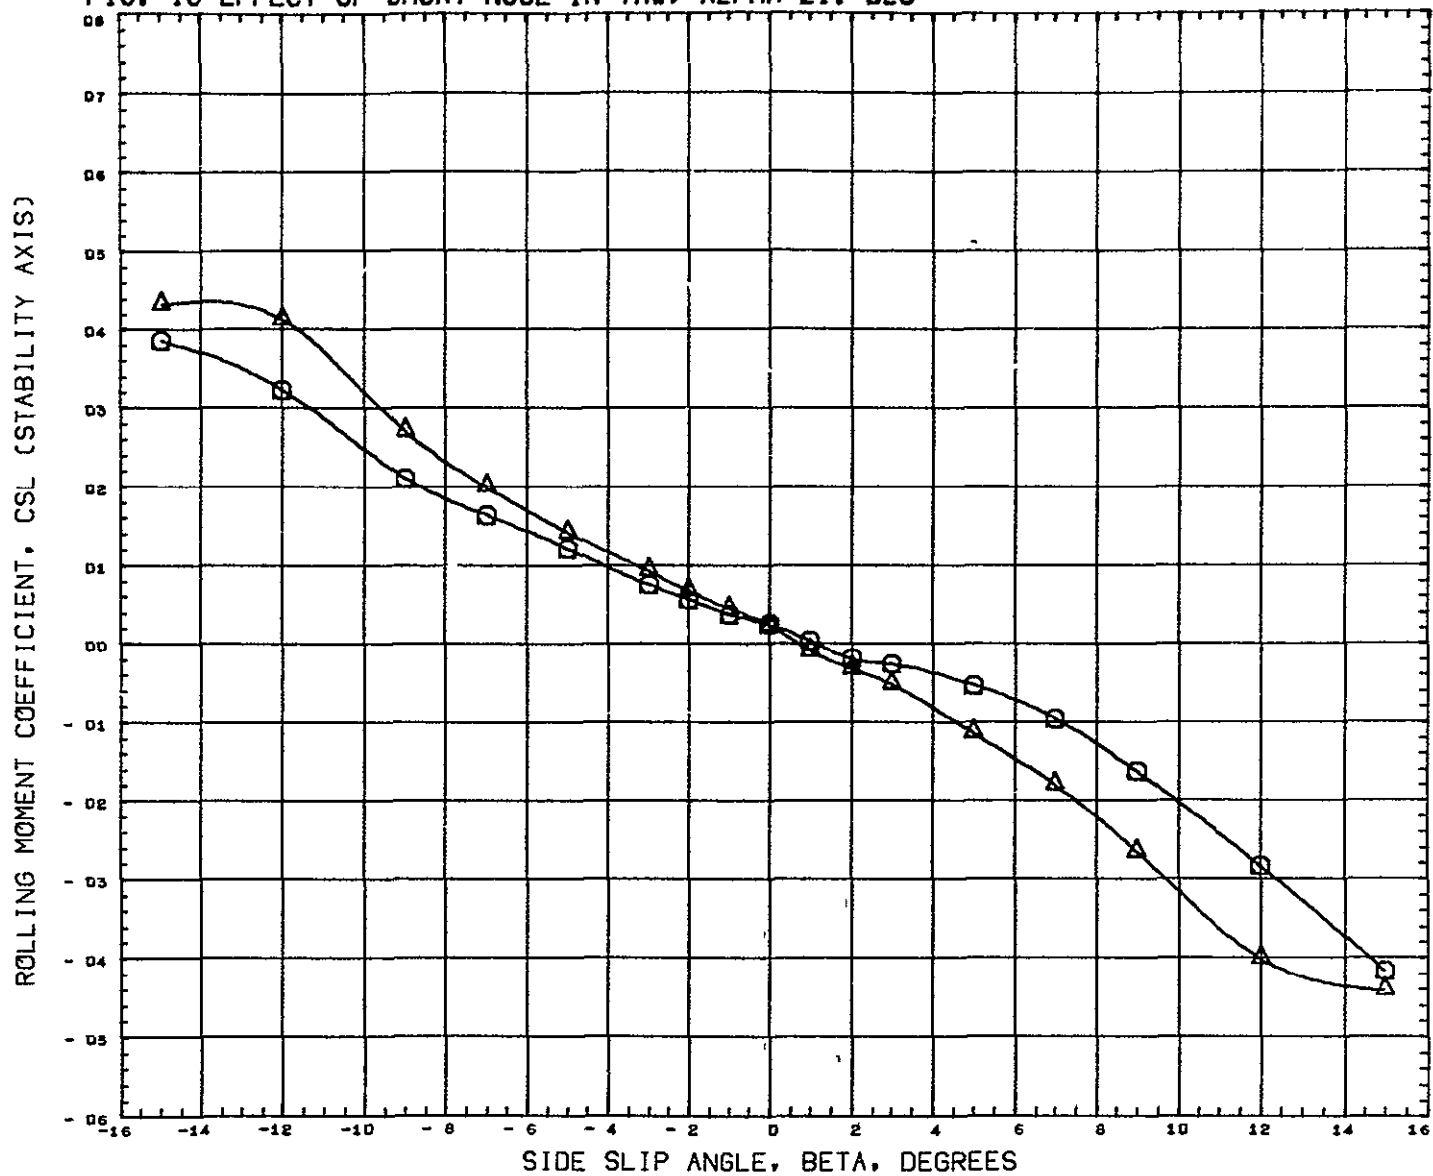


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACH040) $\bigcirc$ GWTT 290-CONF ROS-NB2 B3F1W1V1
 (XC0052) $\triangle$ GWTT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
21.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
				LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 16 EFFECT OF SHORT NOSE IN YAW, ALPHA=21. DEG

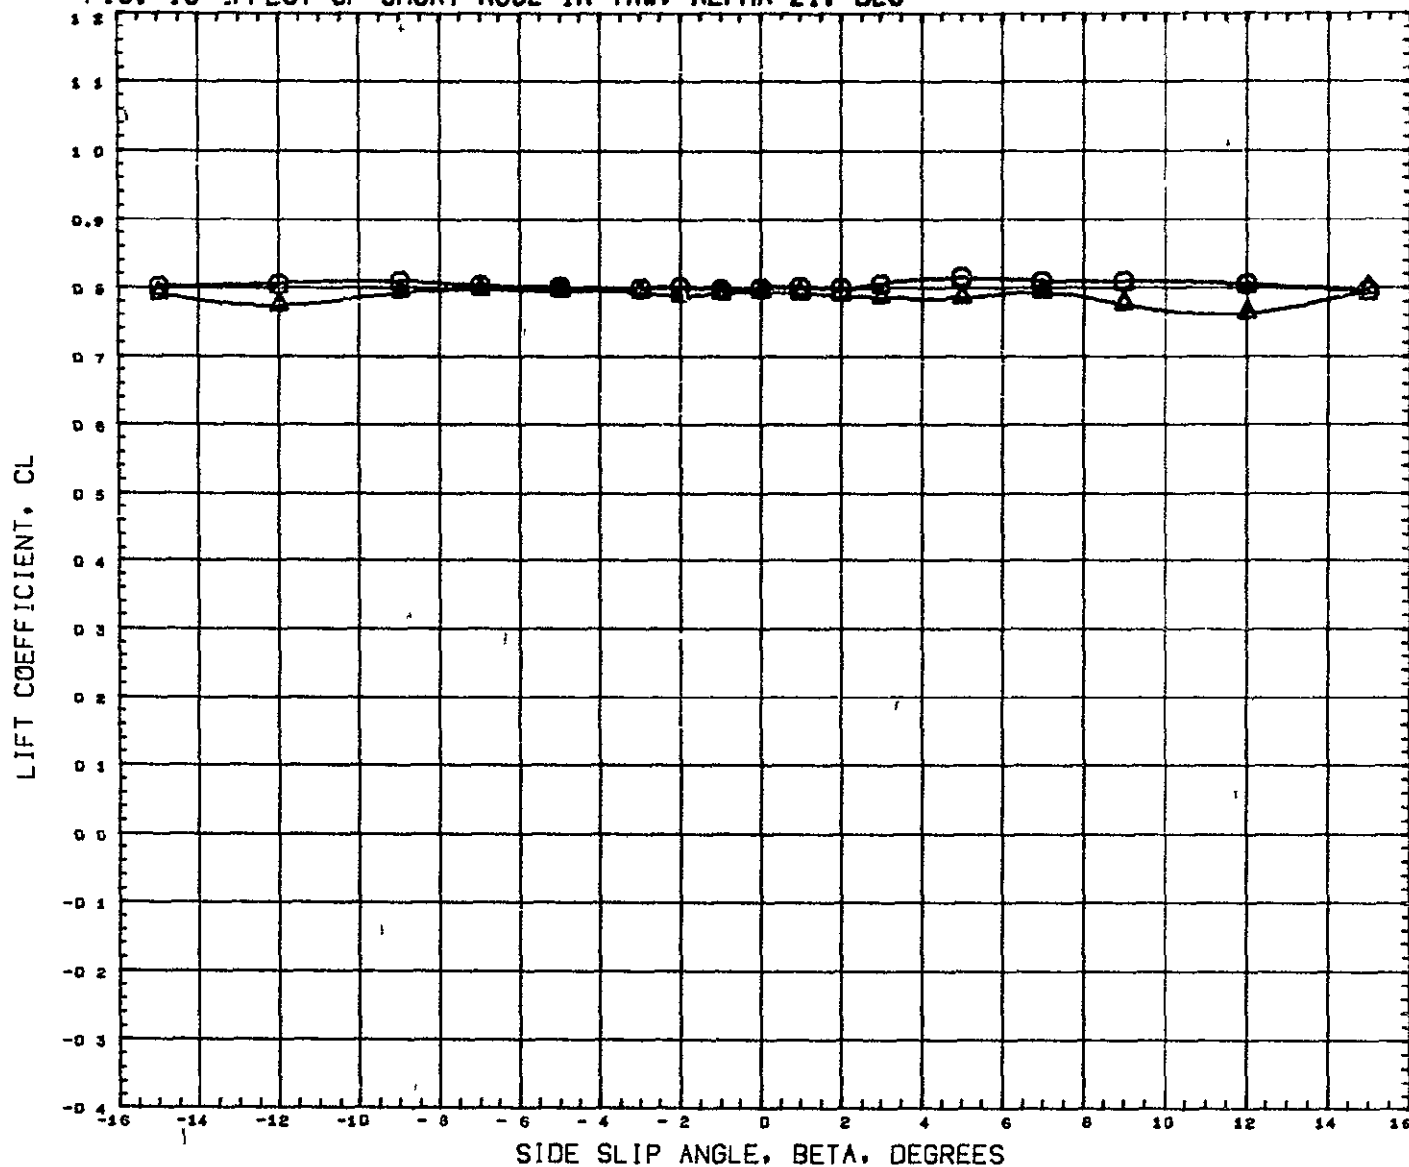


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW040) GWTT 290-CONF ROS-NB2 B3F1W1V1
 (XC0052) GWTT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
21.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
				LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 16 EFFECT OF SHORT NOSE IN YAW. ALPHA=21. DEG

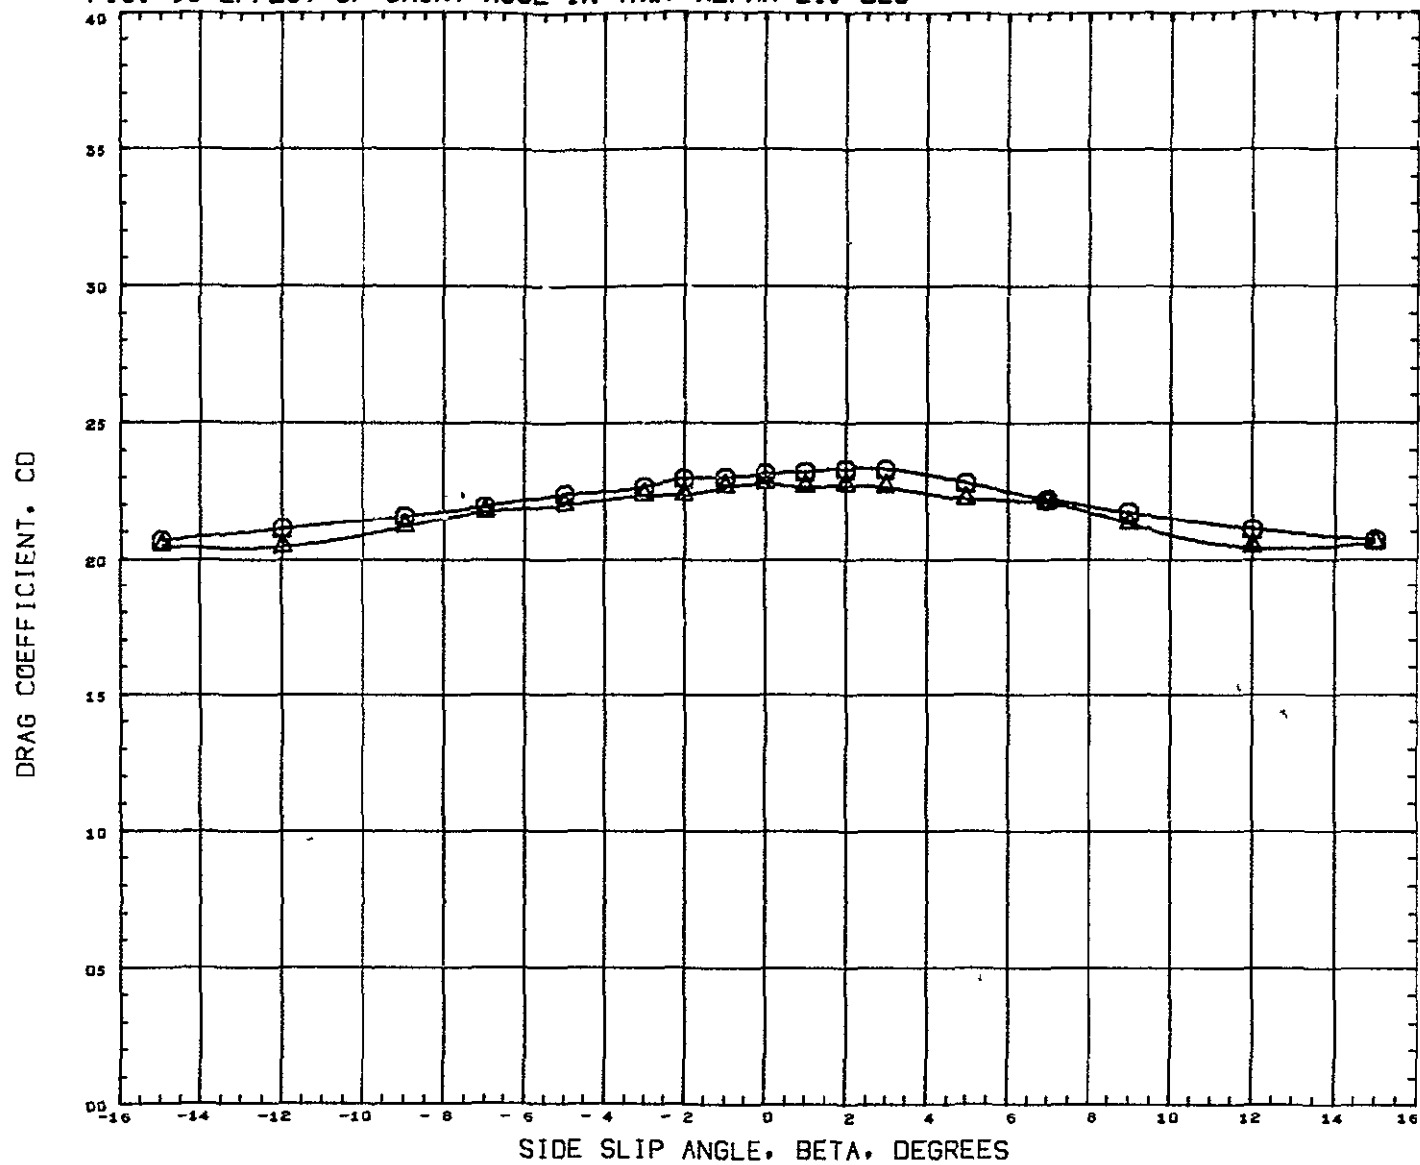


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW040) $\bigcirc$ GWT 290-CONF ROS-NB2 B3F1W1V1
 (XCR052) $\triangle$ GWT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
21.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
				LREF	6.4320 FT
				BREI	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.6400

HACH 0.170


FIG. 16 EFFECT OF SHORT NOSE IN YAW, ALPHA=21. DEG

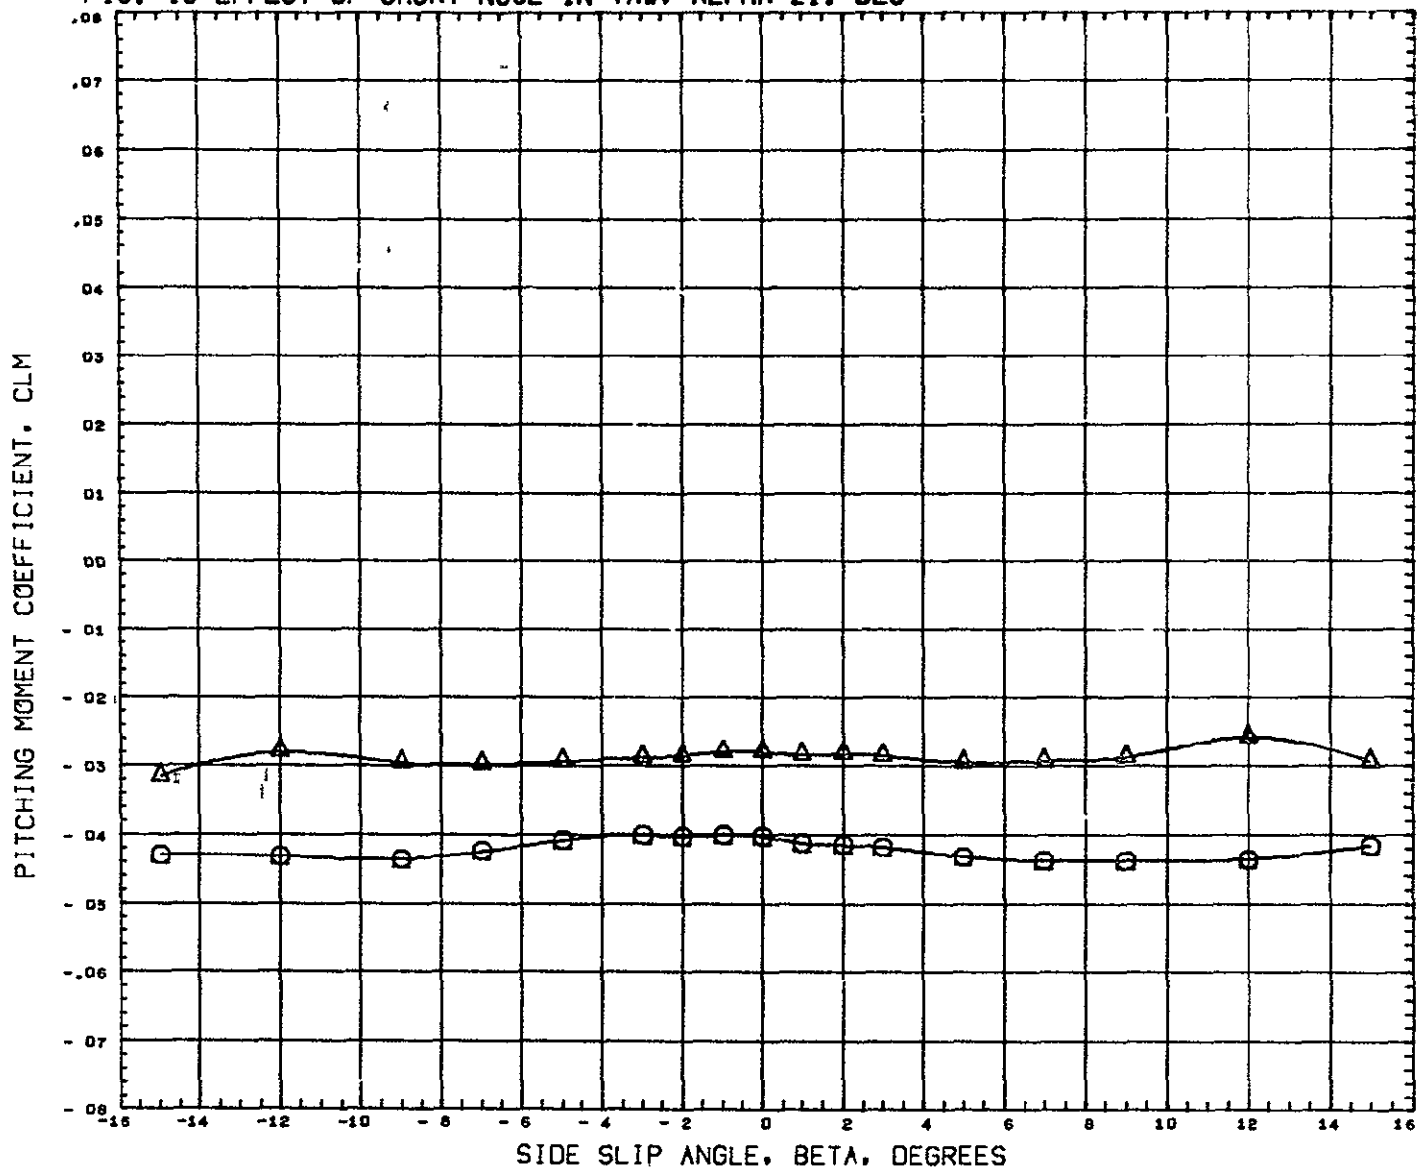

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACW040)	GWTI 290-CONF ROS-NB2 B3F1W1V1	21 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(XCQ052)	GWTI 289-CONF ROS-NB1 B1W1V1					LREF	6 4320 FT
						BREF	3 8920 FT
						XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

MACH 0.170

FIG. 17 EFFECT OF SHORT NOSE IN YAW(BODY ALONE), ALPHA=0. DEG.

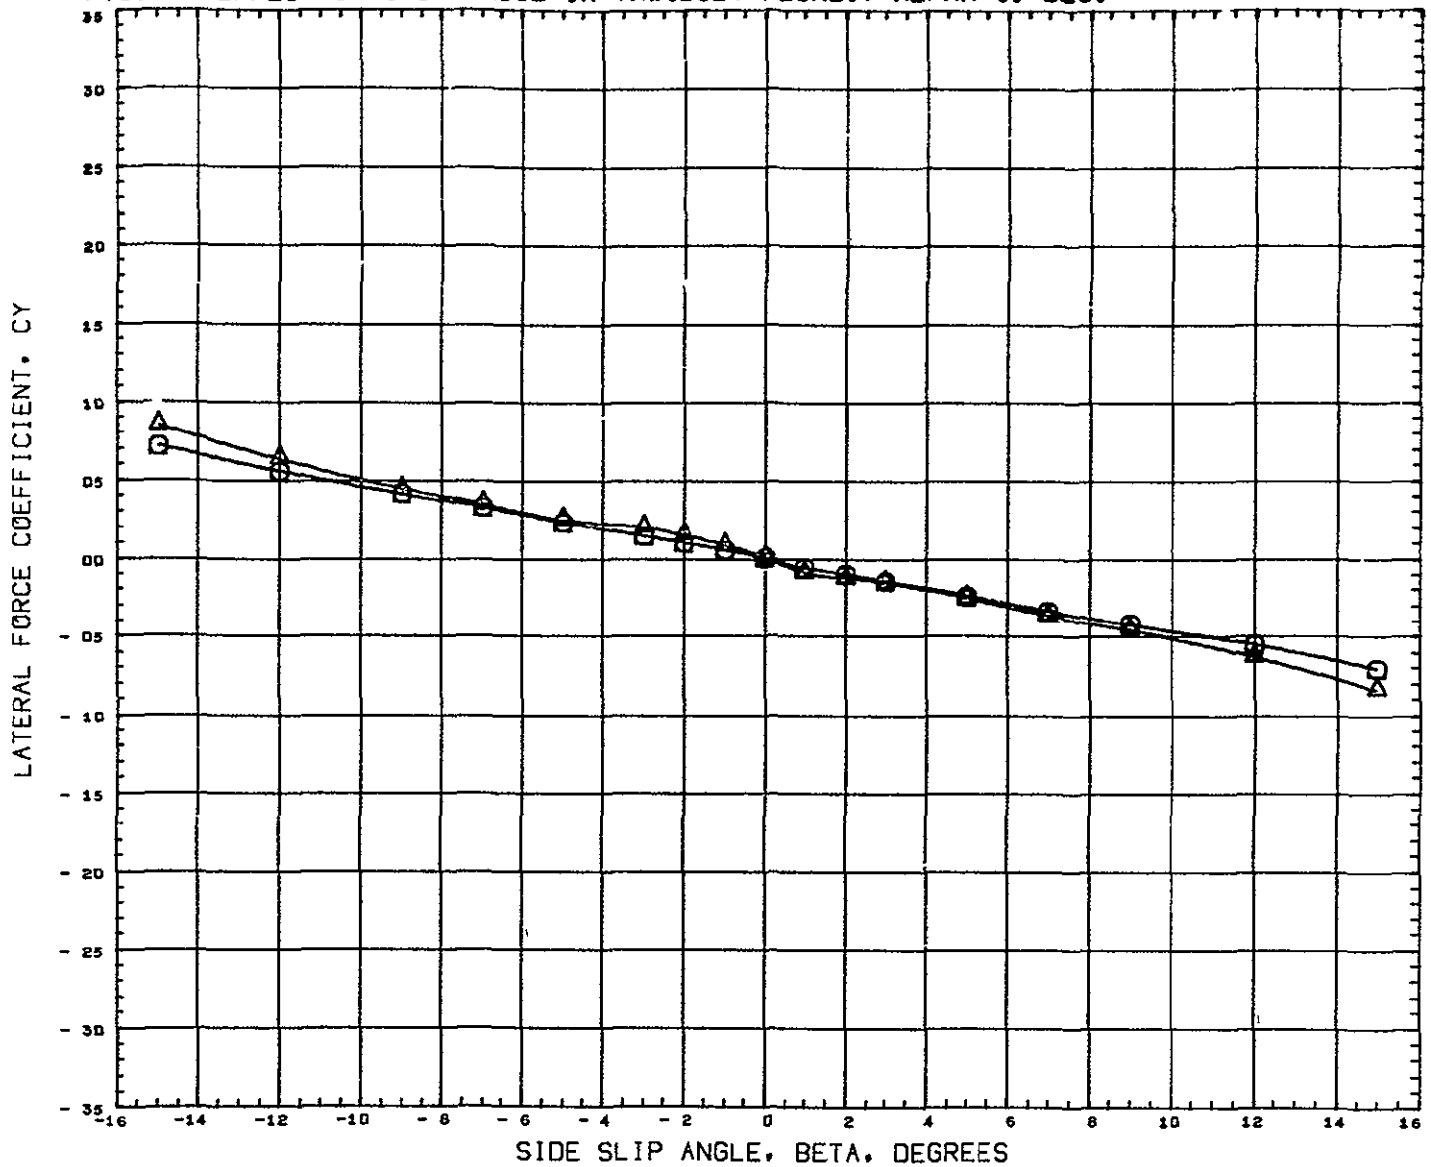


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW044) Q GWTT 290-CONF ROS-NB2 B3F1
 (XCQ042) A GWTT 289-CONF ROS-NB1 B1

ALPHA ELEVTR AILRON RUDDER
 0 000
 0 000

REFERENCE INFORMATION
 SREF 9 1952 SQ FT
 LREF 6 4320 FT
 BREF 3 8920 FT
 XMRP 1485 0040 IN
 YMRP 0 0000 IN
 ZMRP 377 0004 IN
 SCALE 0 0400

MACH 0 170

FIG. 17 EFFECT OF SHORT NOSE IN YAW(BODY ALONE). ALPHA=0. DEG.

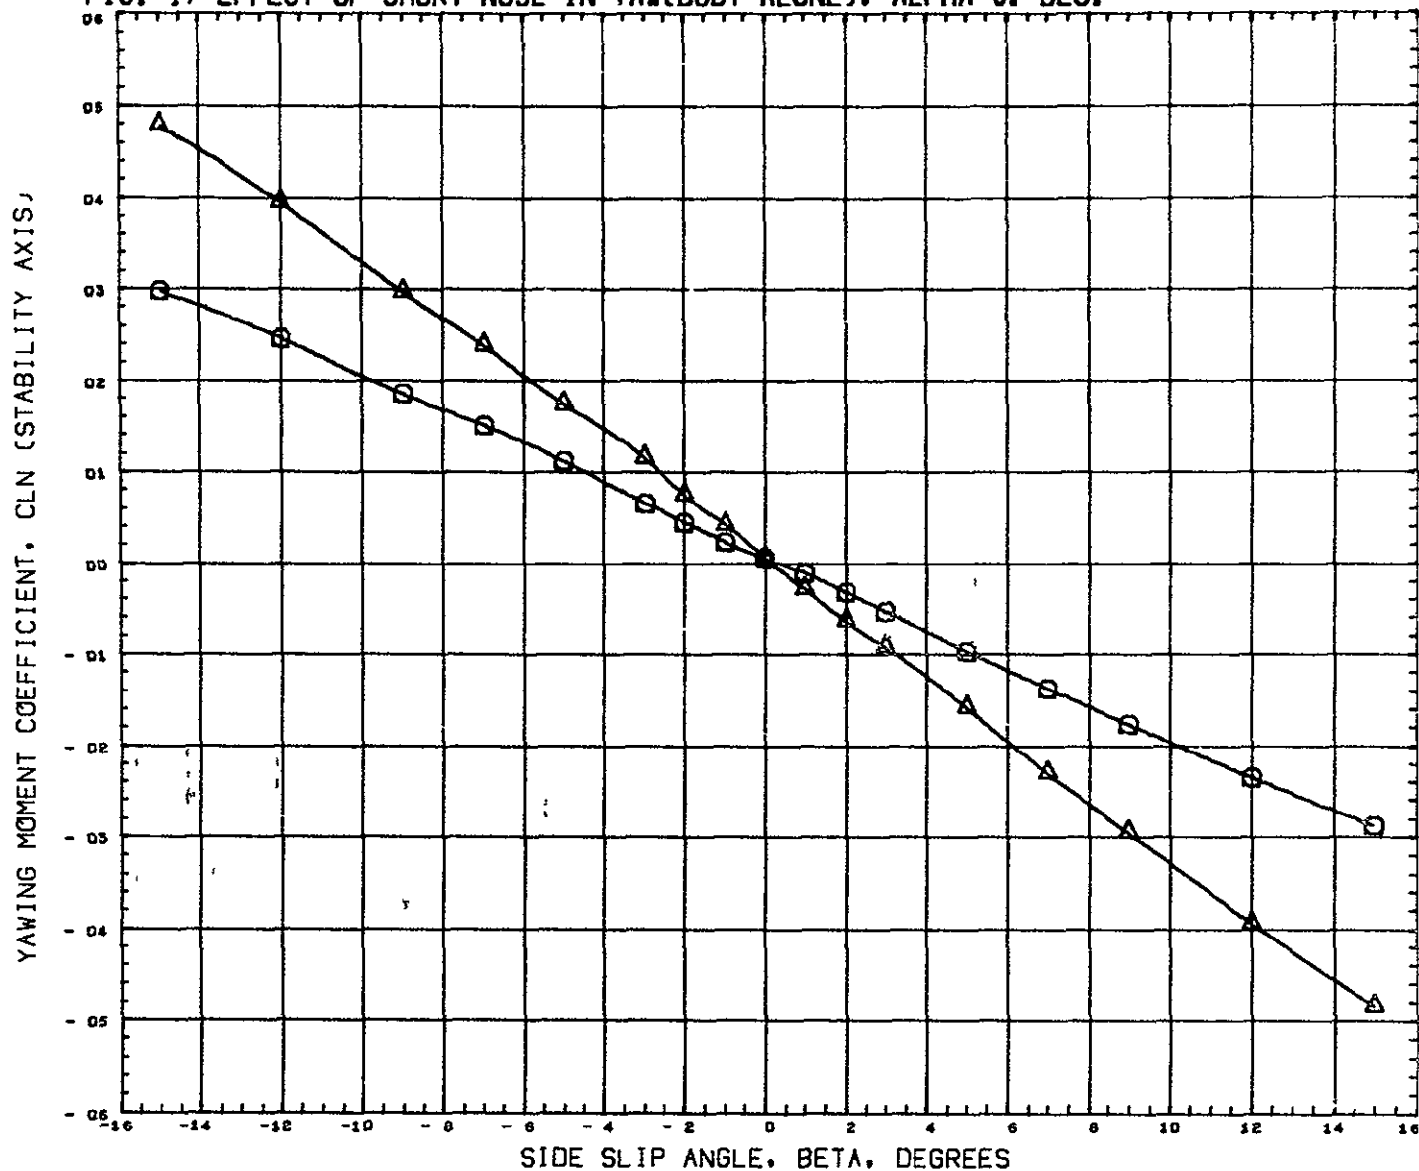


DATA SET SYMBO	CONFIGURATION DESCRIPTION
(RCWD44) ○	GWT 290-CONF ROS-NB2 B3F1
(XCQD42) △	GWT 289-CONF ROS-NB1 B1

ALPHA	ELEVTR	AILRON	RUDDER
0 000			
0 000			

REFERENCE INFORMATION		
SREF	9 1952	SQ FT
LREF	6 4320	FT
BREF	3 8920	FT
XMRP	1485 0040	IN
YNRP	0 0000	IN
ZMRP	377 0004	IN
SCALE	0.0400	

MACH | 0 170

FIG. 17 EFFECT OF SHORT NOSE IN YAW(BODY ALONE), ALPHA=0. DEG.

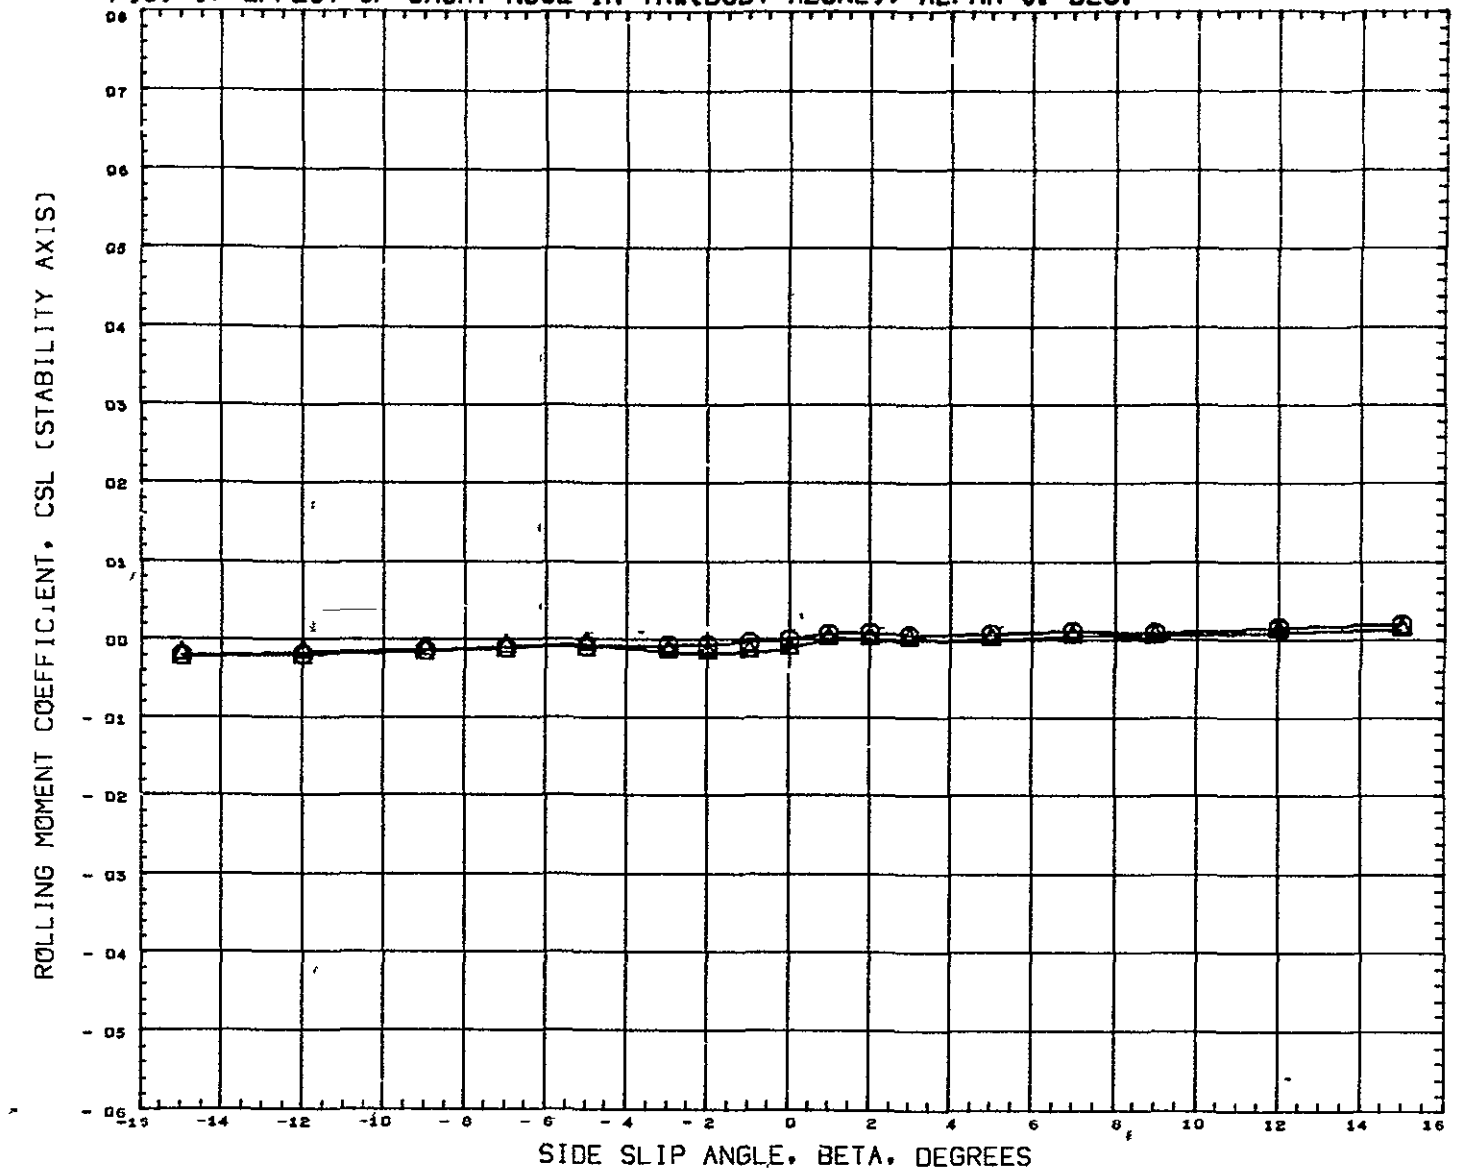


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCWD44)	GWTT 290-CONF ROS-NB2 B3F1
(XCQD42)	GWTT 289-CONF ROS-NB1 B1

ALPHA	ELEVTR	AILRON	RUDDER
0.000			
0.000			

REFERENCE INFORMATION		
SREF	9 1952	SQ FT
LREF	6 4320	FT
BREF	3 8920	FT
XMRP	1485 0040	IN
YMRP	0 0000	IN
ZMRP	377 0004	IN
SCALE	0 0400	

MACH 0 170

FIG. 17 EFFECT OF SHORT NOSE IN YAW(BODY ALONE), ALPHA=0. DEG.

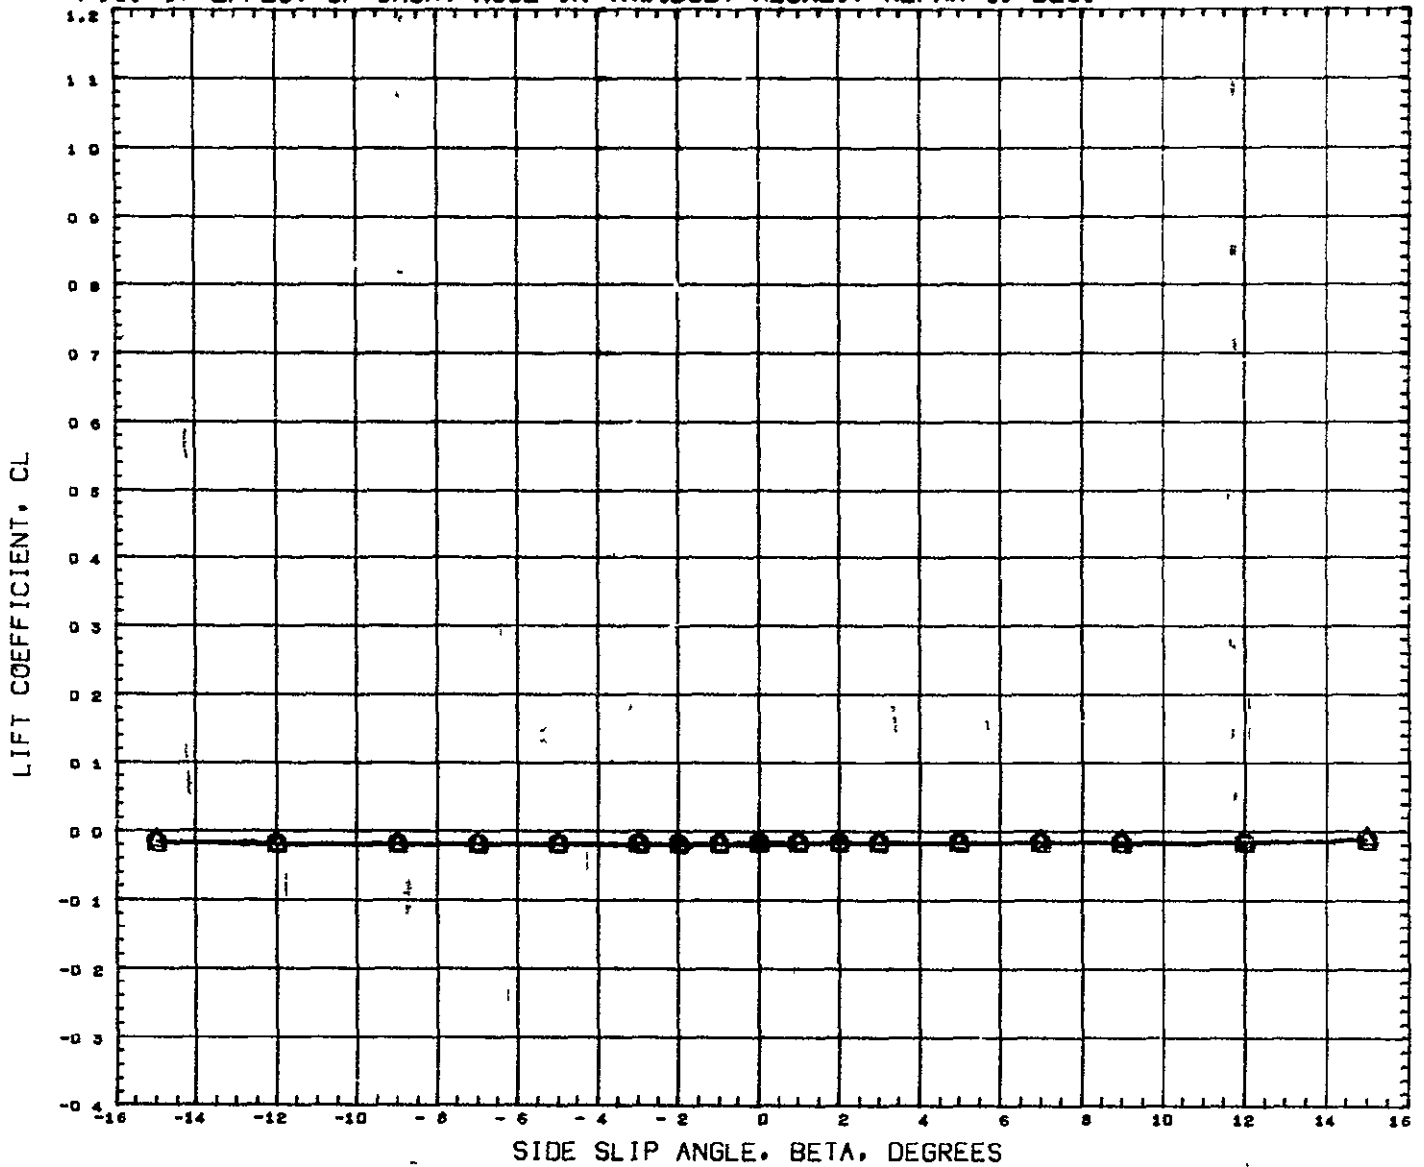


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCWD44) Q GWTT 290-CONF ROS-NB2 B3F1
 (XCWD42) A GWTT 289-CONF ROS-NB1 B1

ALPHA ELEVTR AILRON RUDDER
 0 000
 0 000

REFERENCE INFORMATION
 SREF 9 1952 SQ FT
 LREF 6 4320 FT
 BREF 3 8920 FT
 XMRP 1485 0040 IN
 YMRP 0 0000 IN
 ZMRP 377 0004 IN
 SCALE 0 0400

MACH 0 170

FIG. 17 EFFECT OF SHORT NOSE IN YAW(BODY ALONE), ALPHA=0. DEG.

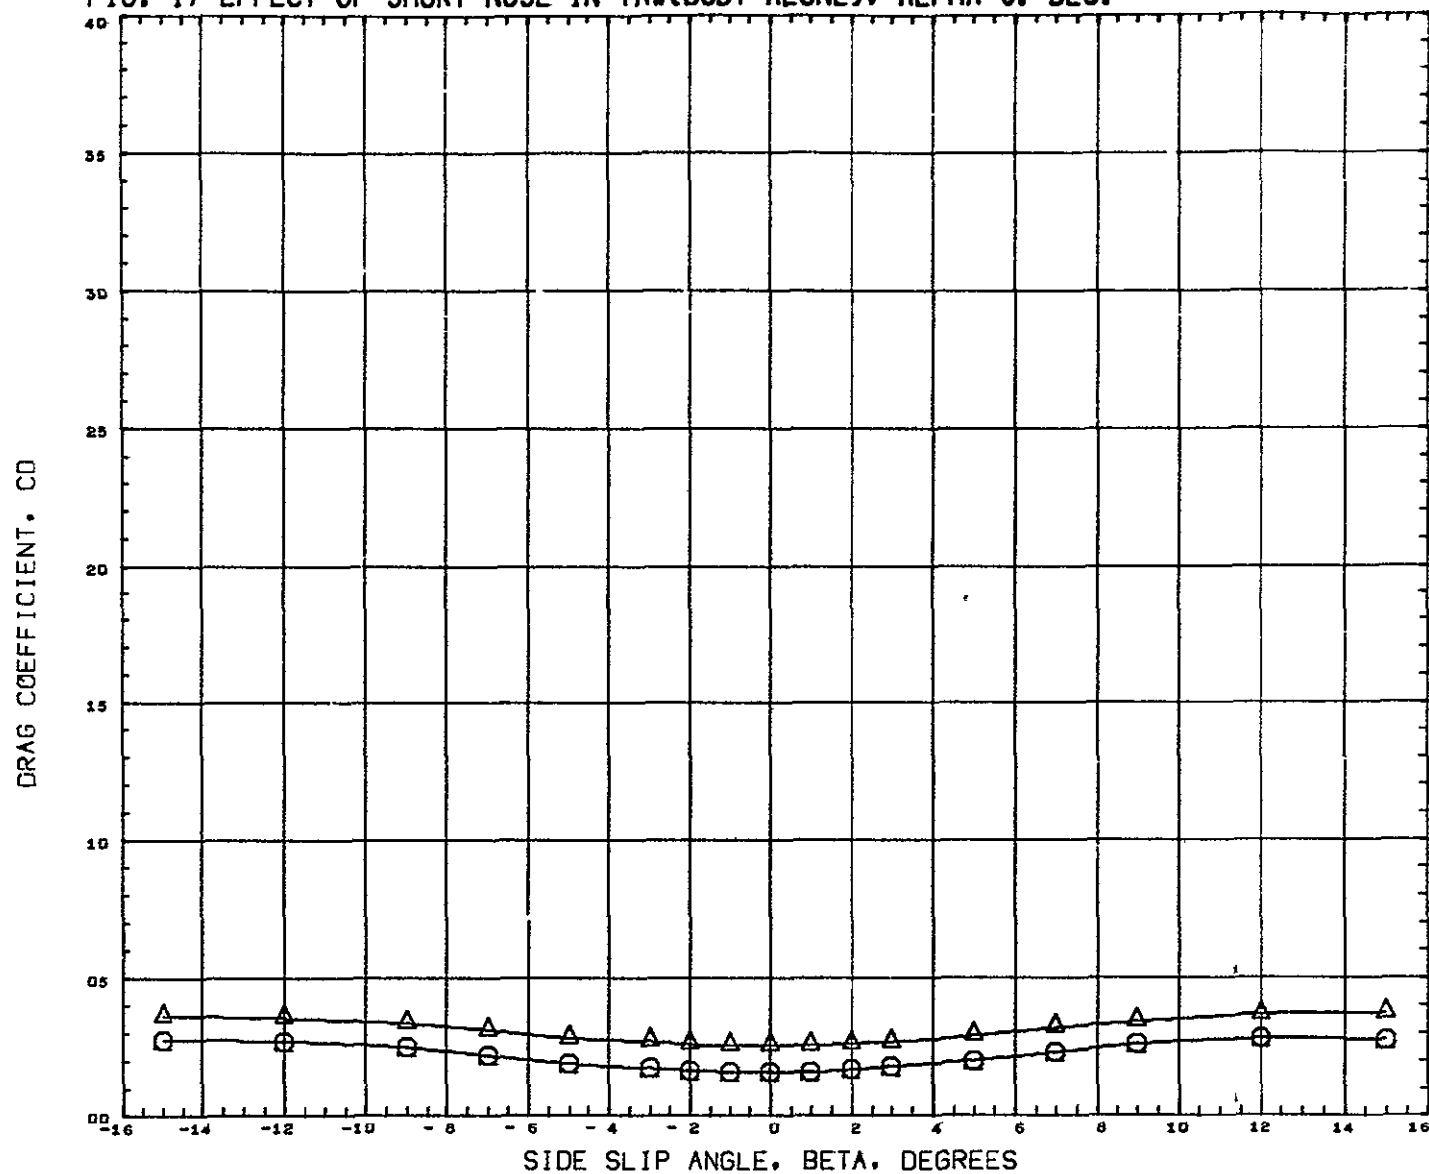


DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION
(RCWD44)	○	GWT 290-CONF	ROS-NB2 B3F1
(XCQD42)	△	GWT 289-CONF	ROS-NB1 B1

ALPHA	ELEVTR	AILRON	RUDDER
0 000			
0 000			

REFERENCE INFORMATION		
SREF	9 1952	SQ FT
LREF	6 4320	FT
BREF	3 8920	FT
XMRP	1485 0040	IN
YMRP	0 0000	IN
ZMRP	377 0004	IN
SCALE	0 0400	

MACH 0 170

FIG. 17 EFFECT OF SHORT NOSE IN YAW(BODY ALONE), ALPHA=0. DEG.

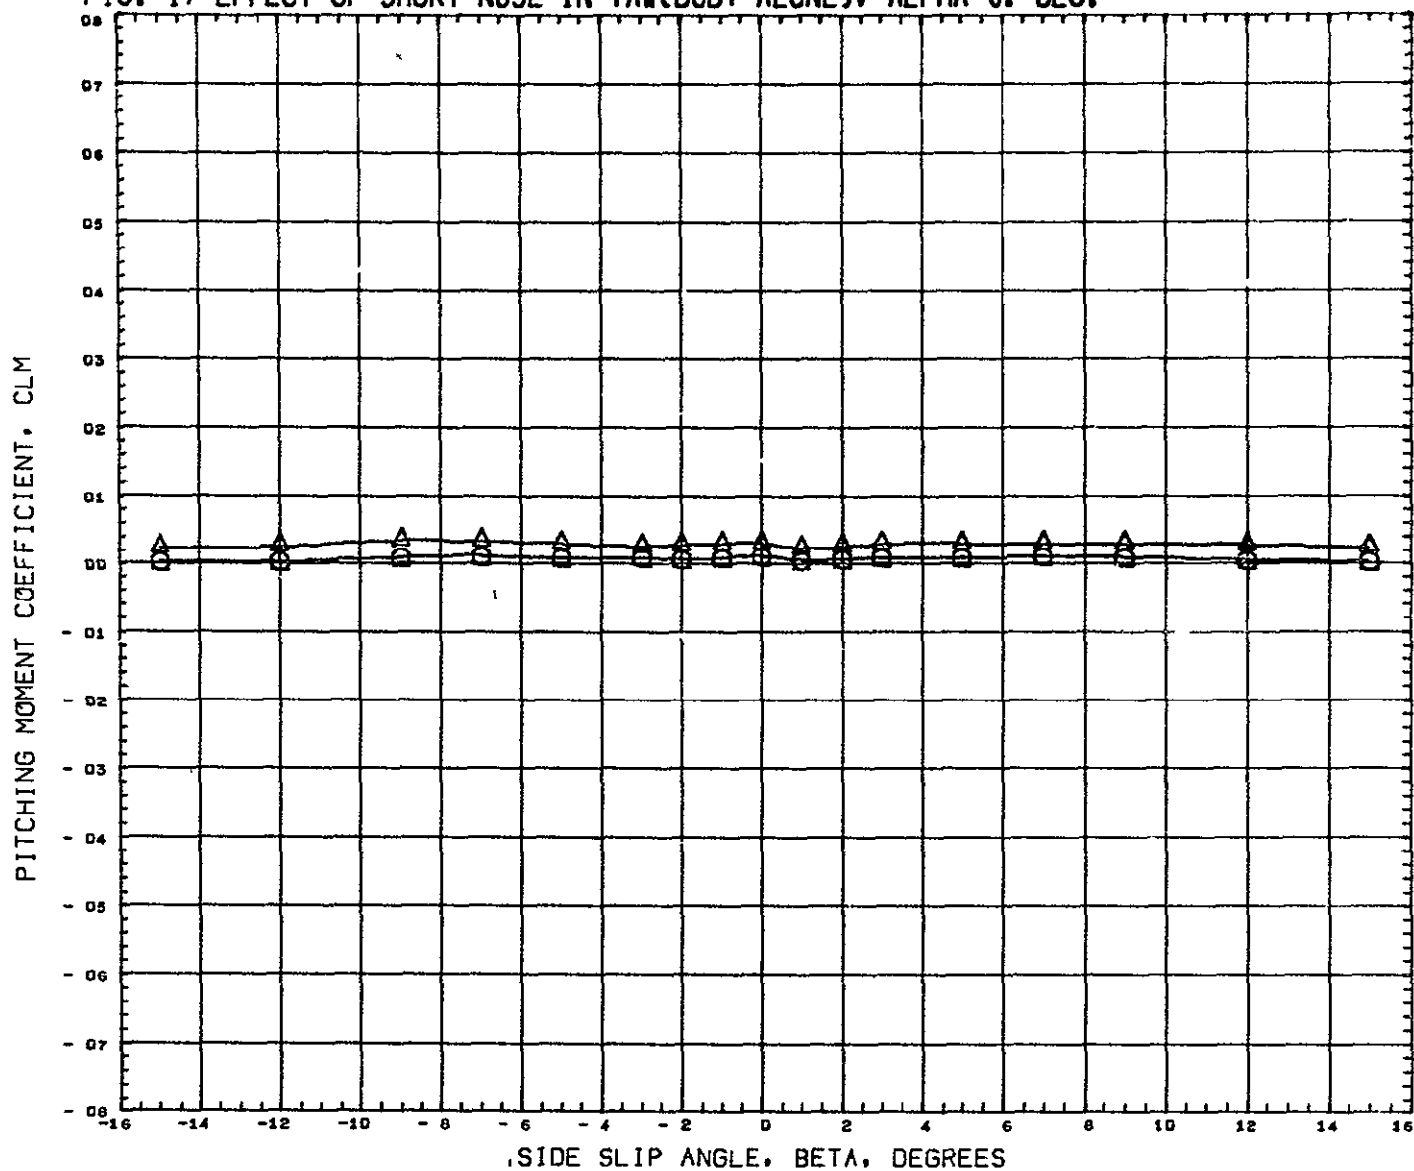


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW044) Q GWT 290-CONF ROS-NB2 B3F1
 (XC0042) A GWT 289-CONF ROS-NB1 B1

ALPHA ELEVTR AILRON RUDDER
 0 000
 0 000

REFERENCE INFORMATION
 SREF 9 1952 SQ FT
 LREF 6 4320 FT
 BREF 3 8920 FT
 XMRP 1485 00-0 IN
 YMRP 0 0000 IN
 ZMRP 377 0004 IN
 SCALE 0 0400

MACH 0 170

FIG. 18 EFFECT OF SHORT NOSE IN PITCH

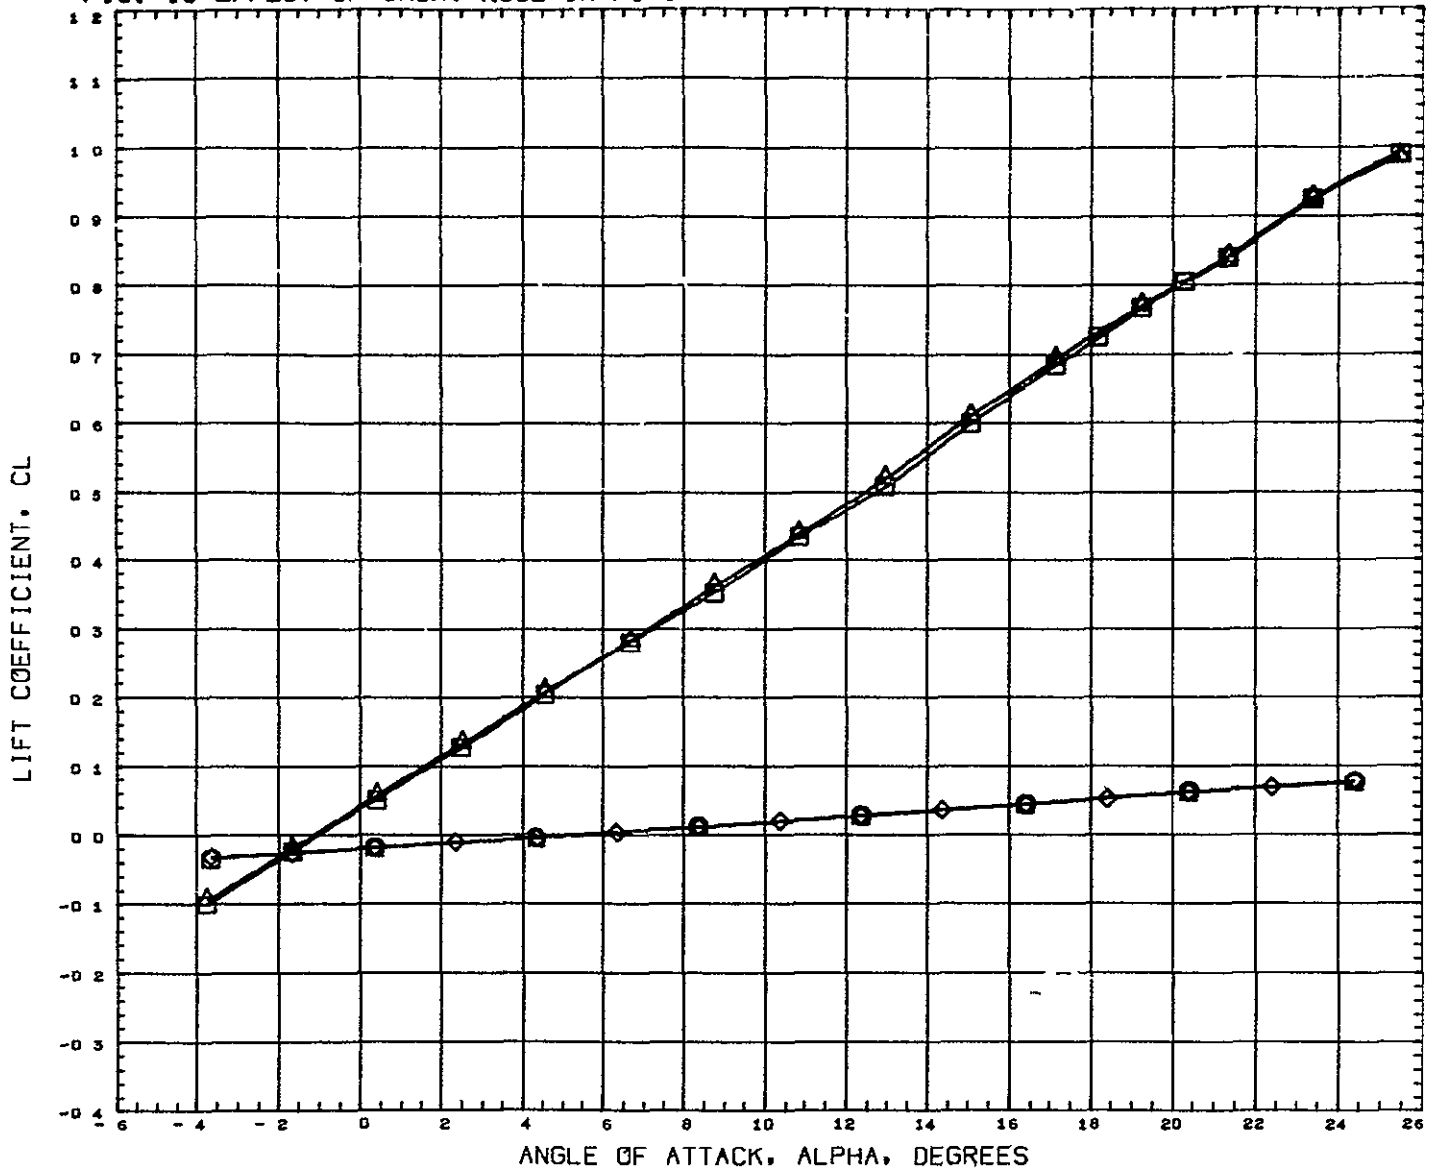

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDEF	REFERENCE INFORMATION	
(RCWD46)	GWTT 29D-CONF ROS-NB2 B3F1	0 000				SREF	9 1952 SQ FT
(RCWD48)	GWTT 29D-CONF ROS-NB2 B3F1W1V1	0 000	0 000	0 000	0 000	LREF	6 4320 FT
(RCQD40)	GWTT 289-CONF ROS-NB1 B1	0 000				BREF	3 8920 FT
(RCQD27)	GWTT 289-CONF ROS-NB1 B1W1V1	0 000	0 000	0 000	0 000	XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400
MACH 0 170							

FIG. 18 EFFECT OF SHORT NOSE IN PITCH


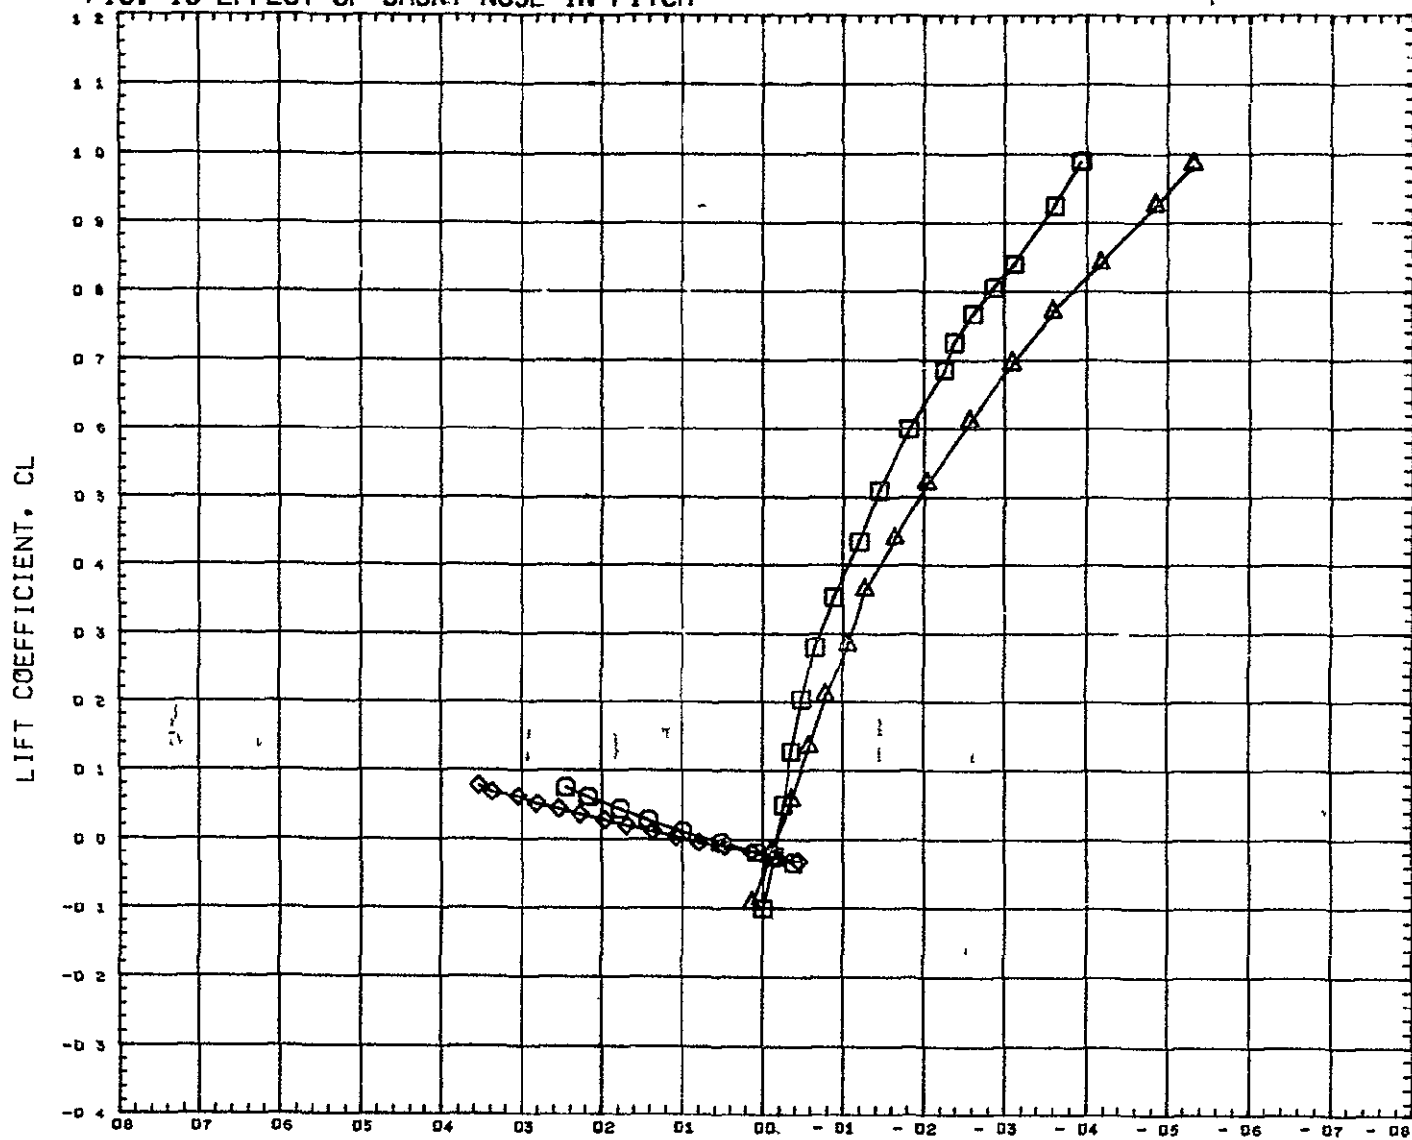


FIG. 18 EFFECT OF SHORT NOSE IN PITCH

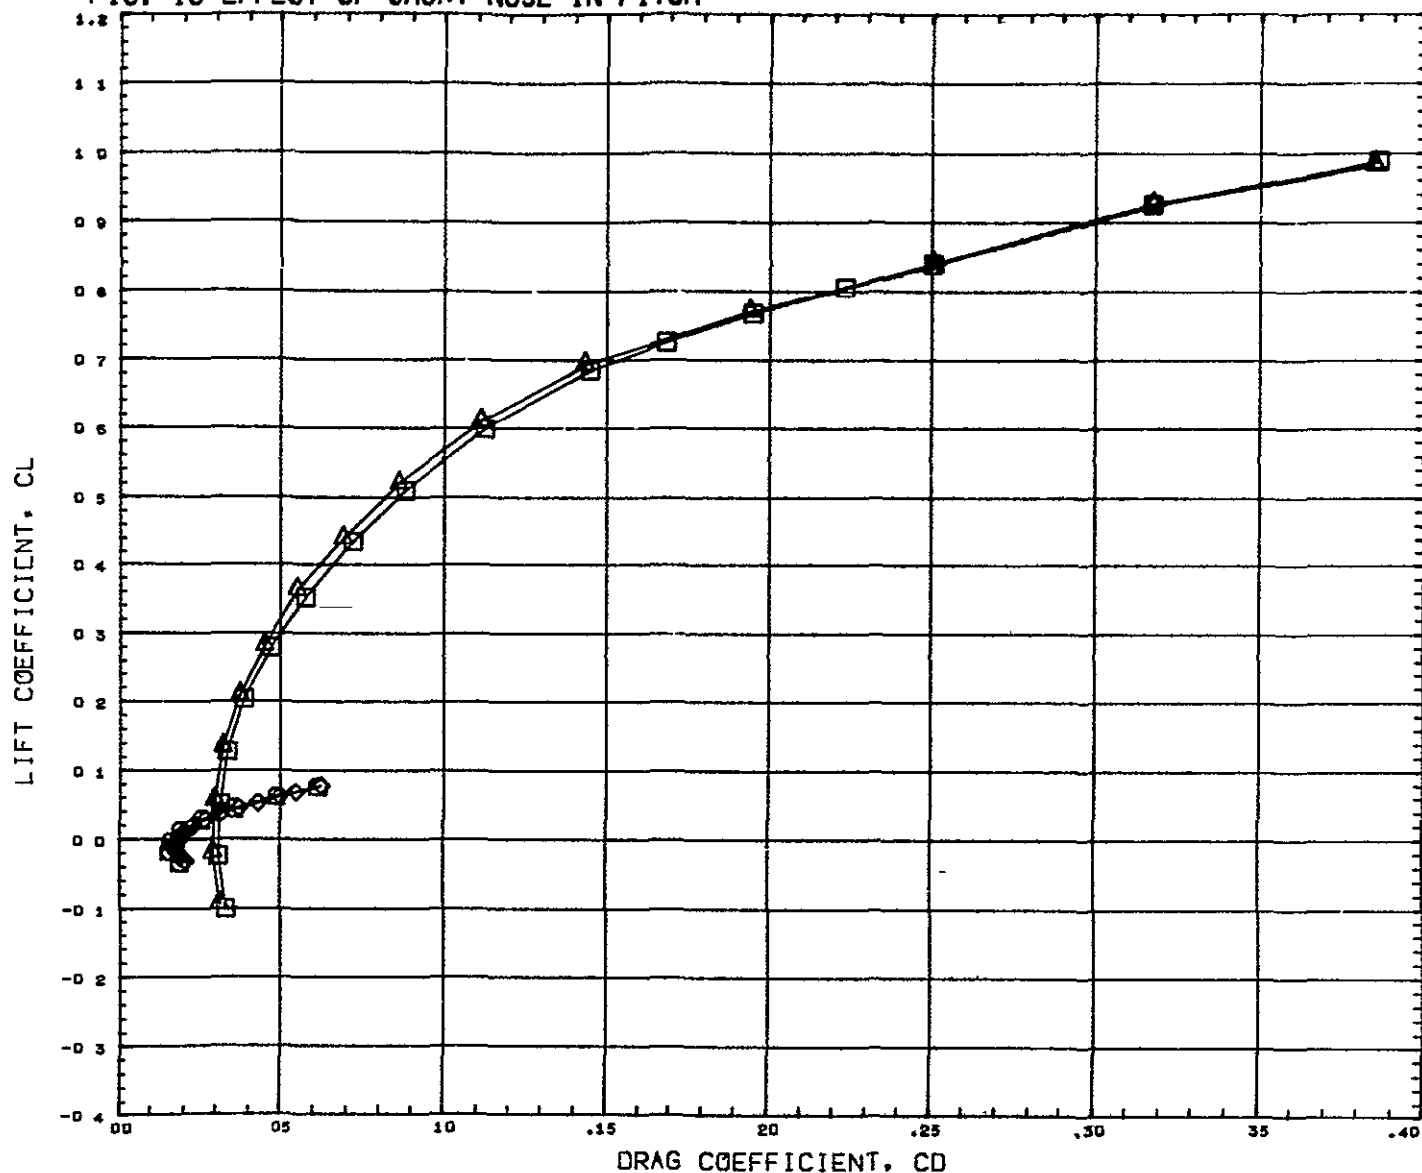


DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION
(RCWD46)	○	GWTT 290-CONF	ROS-NB2 B3F1
(RCWD48)	△	GWTT 290-CONF	ROS-NB2 B3F1W1V1
(RCQD40)	◇	GWTT 289-CONF	ROS-NB1 B1
(RCQD27)	□	GWTT 289-CONF	ROS-NB1 B1W1V1

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	0.000	0.000
0.000	0.000	0.000	0.000
0.000	0.000	0.000	0.000

REFERENCE INFORMATION		
SREF	9	1952 SQ FT
LREF	6	4320 FT
BREF	3	8920 FT
XMRP	1485	0040 IN
YMRP	0	0000 IN
ZMRP	377	0004 IN
SCALE	0	0400

NACH D 170


FIG. 19 YAW POLAR-SHORT NOSE

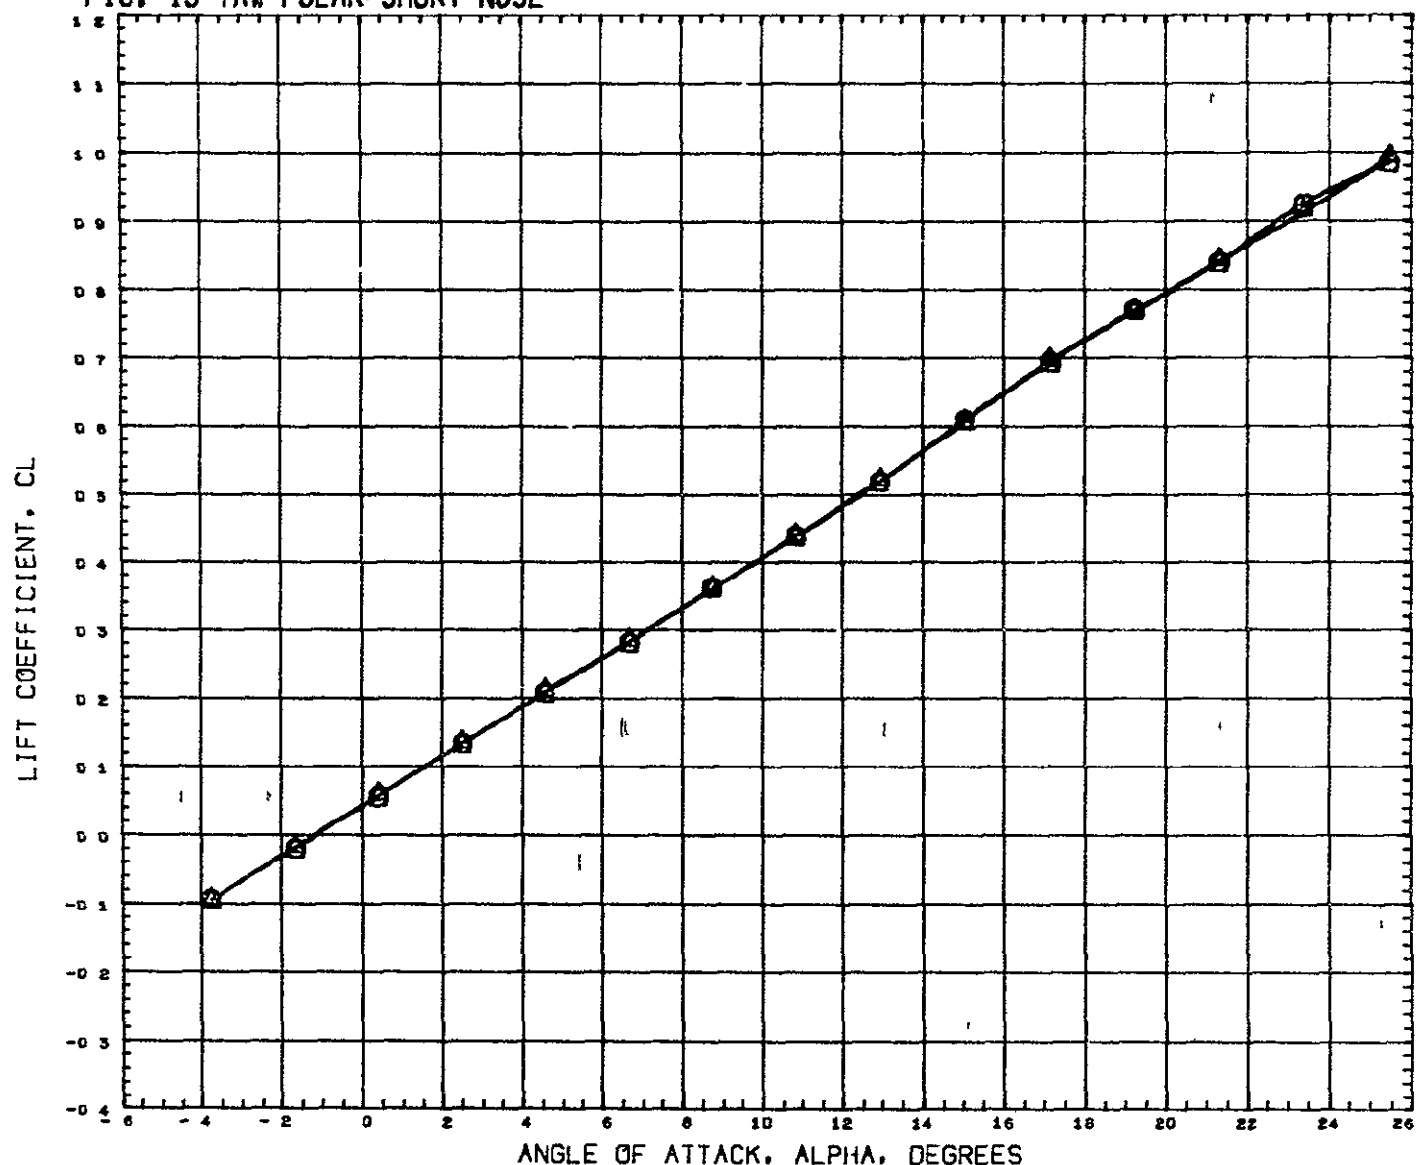

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCWD48)	GWT 290-CONF ROS-NB2 B3F1W1V1	0 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(RCWD49)	GWT 290-CONF ROS-NB2 B3F1W1V1	3 000	0 000	0 000	0 000	LREF	6 4320 FT
						BREF	3 8920 FT
						XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

MACH 0.170

FIG. 19 YAW POLAR-SHORT NOSE

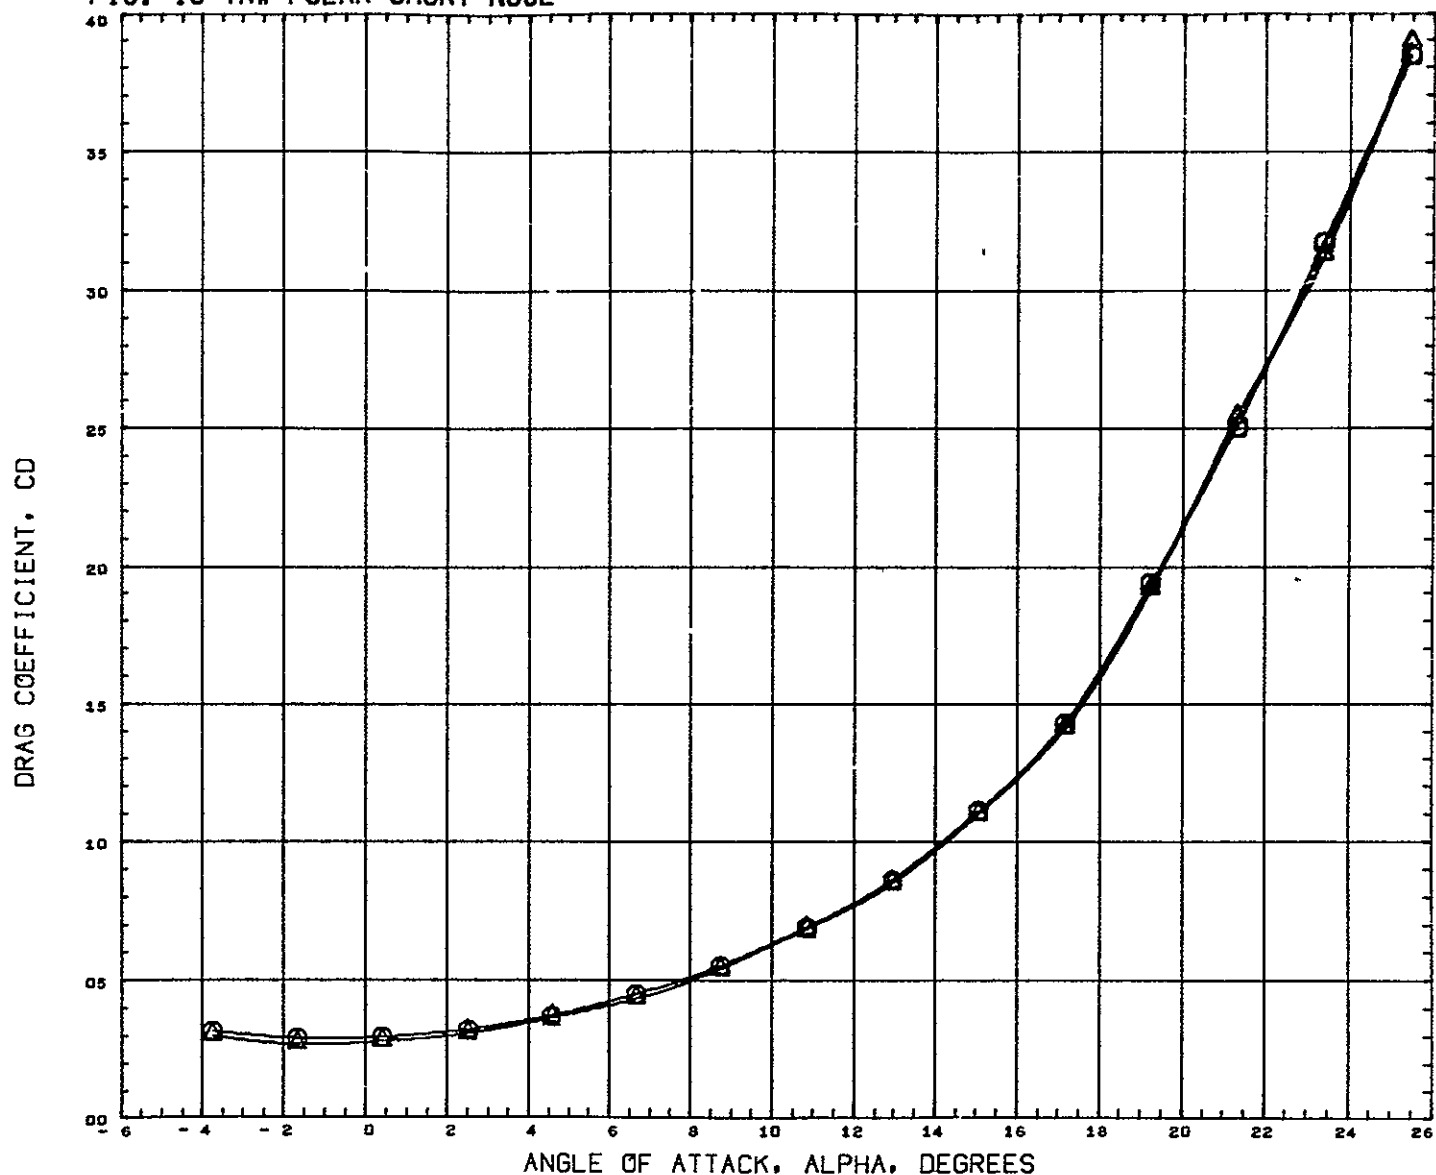

DATA SET SYMBOL CONFIGURATION DESCRIPTION


(RCND48) $\odot$ GWTT 290-CONF ROS-NB2 B3F1W1V1
 (RCND49) $\triangle$ GWTT 290-CONF ROS-NB2 B3F1W1V1

BETA 0 000 ELEVTR 0 000 AILRON 0 000 RUDDER 0 000
 3 000 0 000 0 000 0 000

REFERENCE INFORMATION
 SREF 9 1952 SQ FT
 LREF 6 4320 FT
 BREF 3 8920 FT
 XMRP 1485 0040 IN
 YMRP 0 0000 IN
 ZMRP 377 0004 IN
 SCALE 0 0400

MACH 0 170

FIG. 19 YAW POLAR-SHORT NOSE

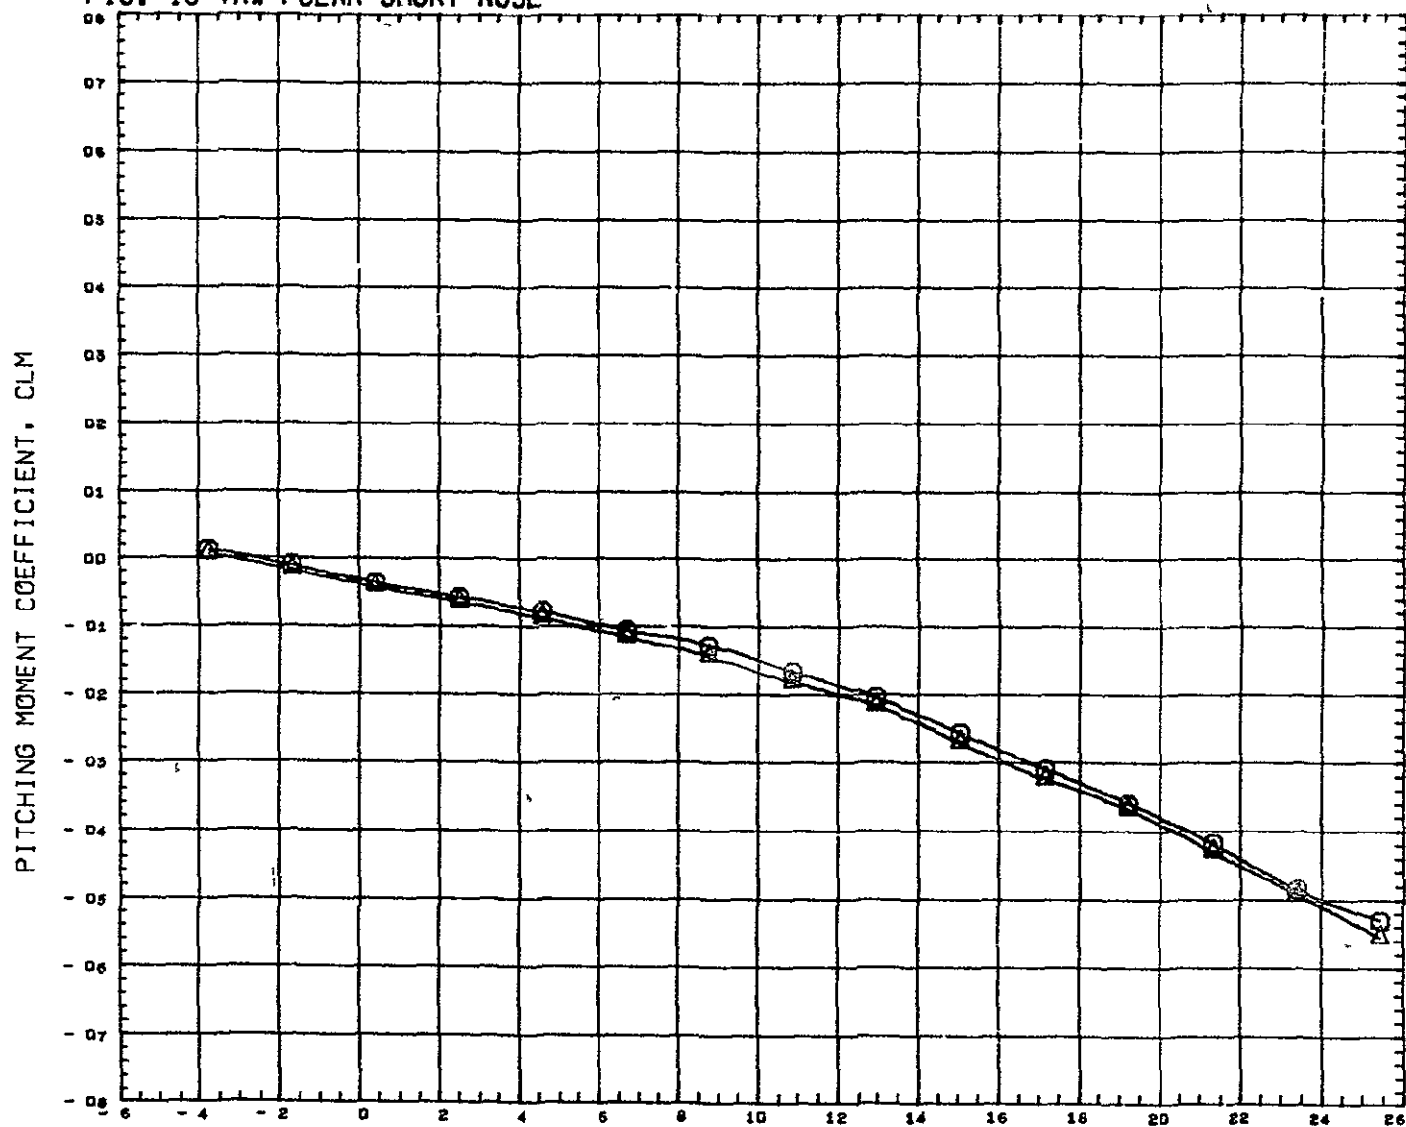


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW048) GWTT 29D-CONF ROS-NB2 B3F1W1V1
 (RCW049) GWTT 29D-CONF ROS-NB2 B3F1W1V

BETA ELEVTR AILRON RUDDER
 0.000 0.000 0.000 0.000
 3.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.000

MACH 0.170

FIG. 19 YAW POLAR-SHORT NOSE

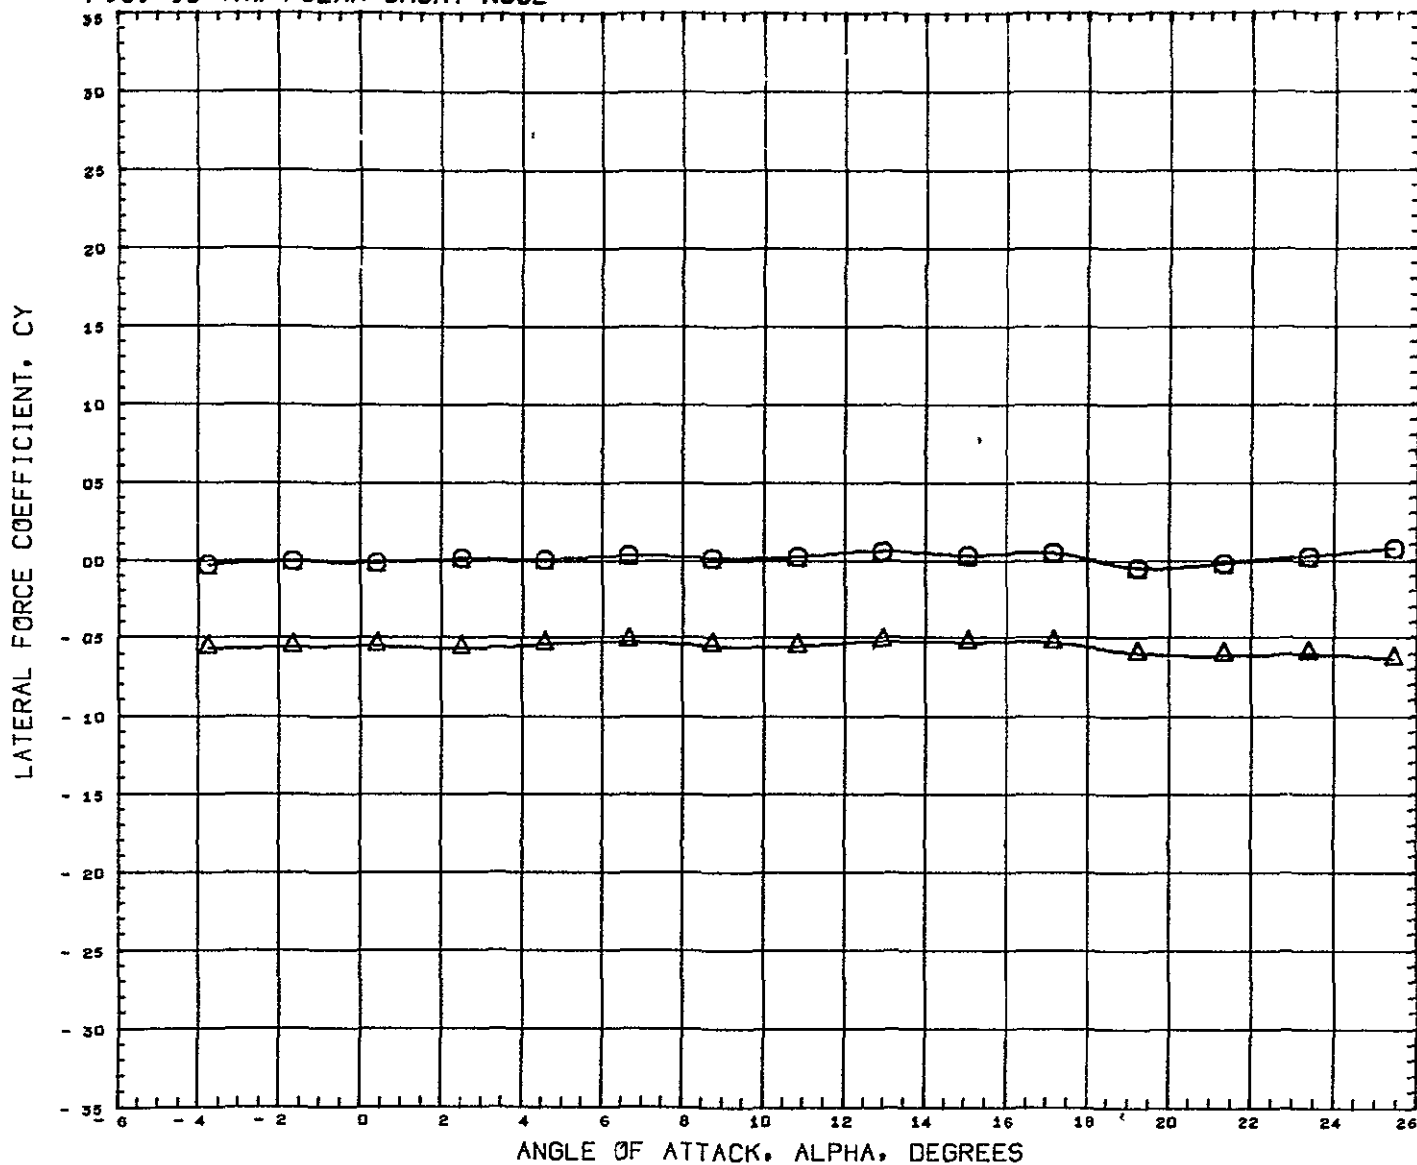


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW048) $\bigcirc$	GWTT 290-CONF ROS-NB2 83F1W1V1
(RCW049) $\triangle$	GWTT 290-CONF ROS-NB2 83F1W1V1

BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0 000	0 000	0 000	0 000	SREF 9 1952 SQ FT
3 000	0 000	0 000	0 000	LREF 6 4320 FT
				BREF 3 8920 FT
				XMRF 1485 0040 IN
				YMRF 0 0000 IN
				ZMRF 377 0004 IN
				SCALE 0 0400

MACH 0.170

FIG. 19 YAW POLAR-SHORT NOSE

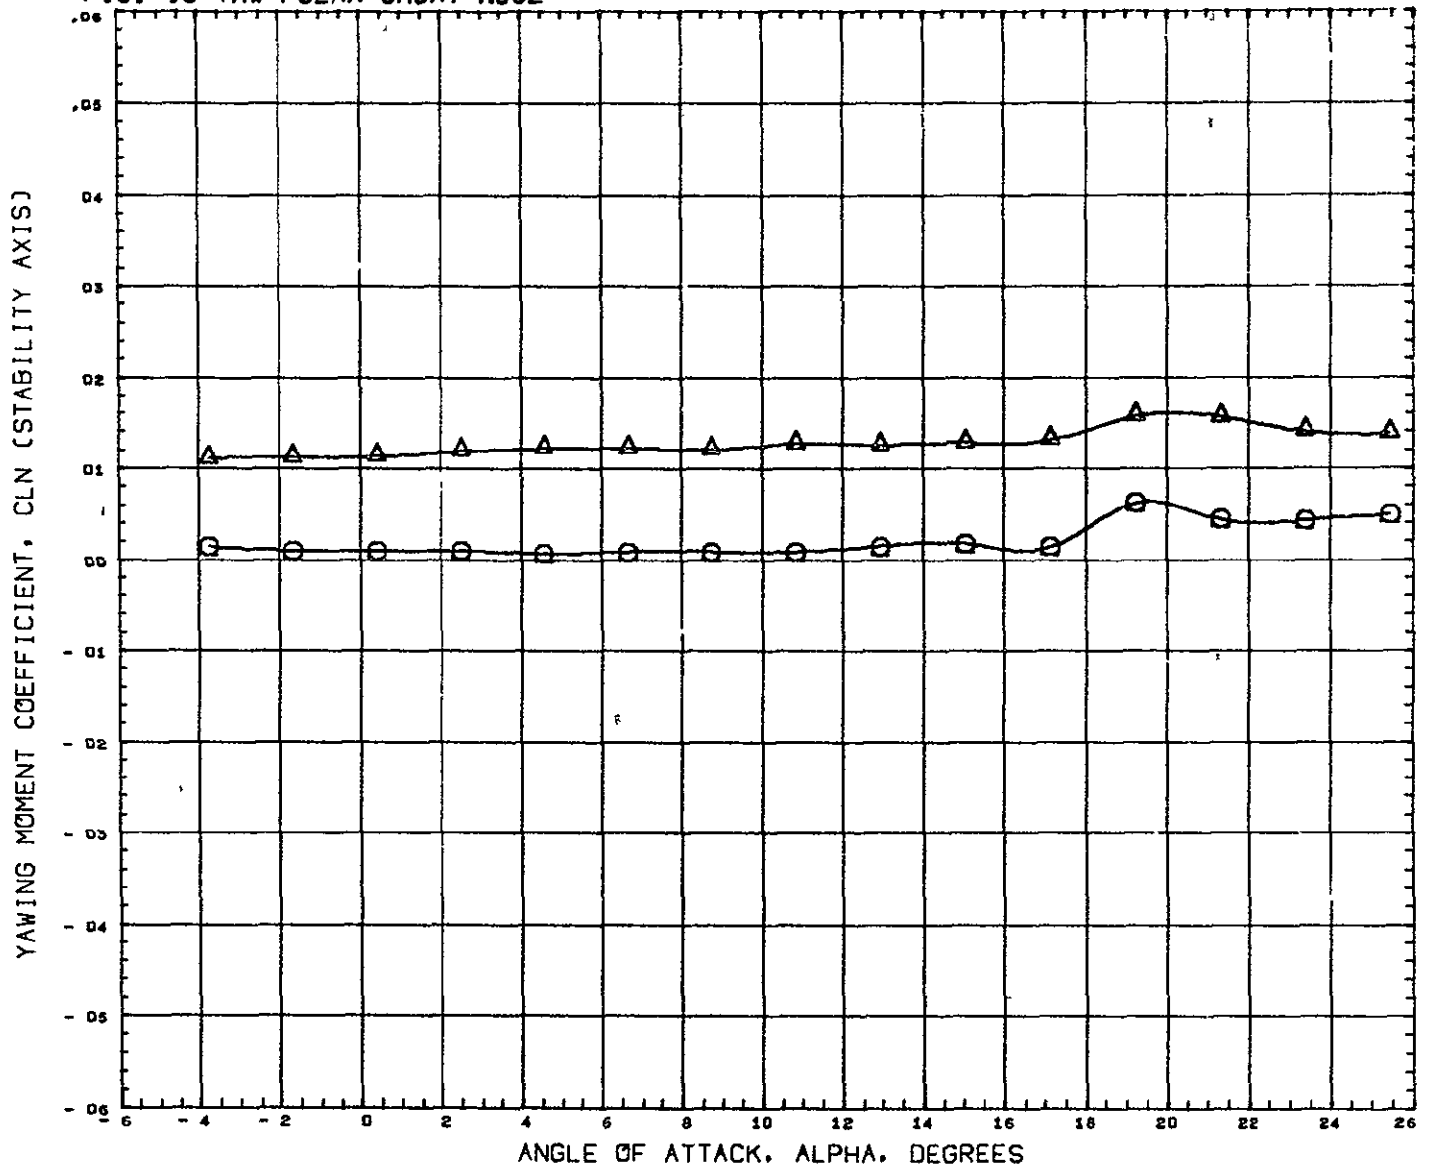


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCWD48) GWTT 290-CONF ROS-NB2 B3F1W1V1
 (RCWD49) GWTT 290-CONF ROS-NB2 B3F1W1V1

BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
0 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
3 000	0 000	0 000	0 000	LREF	6 4320 FT
				BREF	3 8920 FT
				XMRP	1485 0040 IN
				YMRP	0 0000 IN
				ZMRP	377 0004 IN
				SCALE	0 0400

MACH 0 170

FIG. 19 YAW POLAR-SHORT NOSE

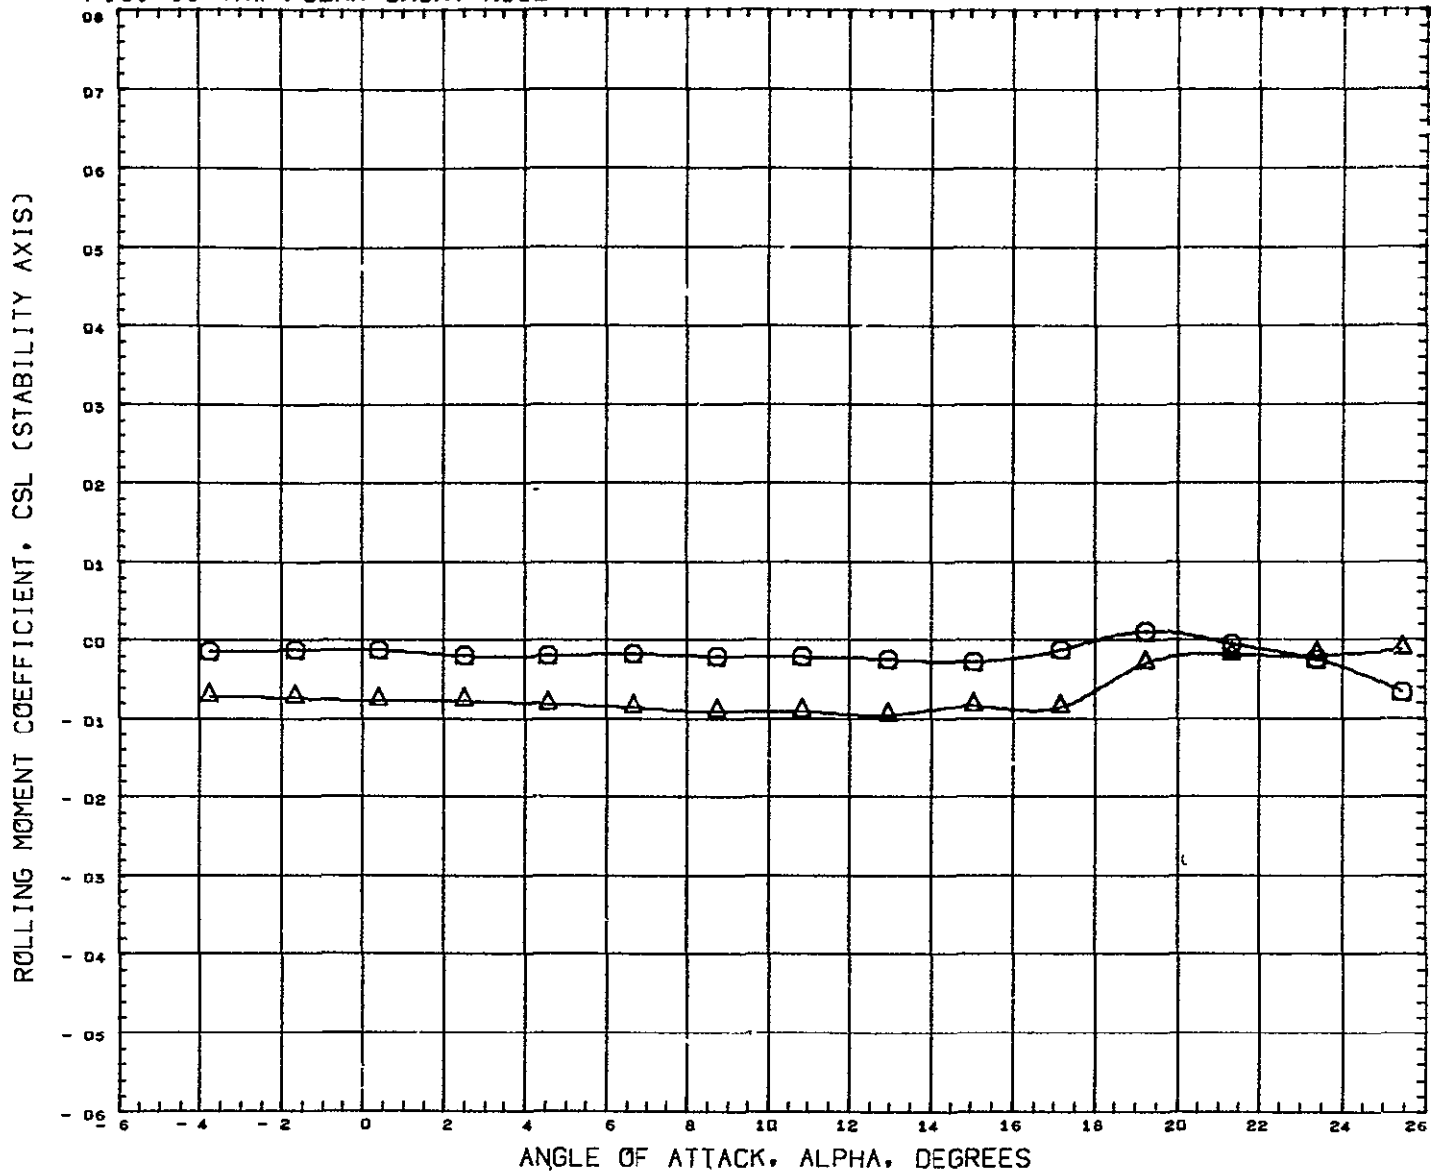

DATA SET SYMBOL CONFIGURATION DESCRIPTION


(RCWD48)  6WTT 290-CONF ROS-NB2 B3F1W1V1
(RCWD49)  6WTT 290-CONF ROS-NB2 B3F1W1V1

BETA 0 000 0 000 0 000 0 000
ELEVTR 0 000 0 000 0 000 0 000
AILRON 0 000 0 000 0 000 0 000
RUDDER 0 000 0 000 0 000 0 000

REFERENCE INFORMATION
SREF 9 1952 SQ FT
LREF 6 4320 FT
BREF 3 8920 FT
XMRP 1485 0046 IN
YMRP 0 0000 IN
ZMRP 377 0004 IN
SCALE 0 0400

MACH U 170


FIG. 20 EFFECT OF BODY FLAP (LONG NOSE)

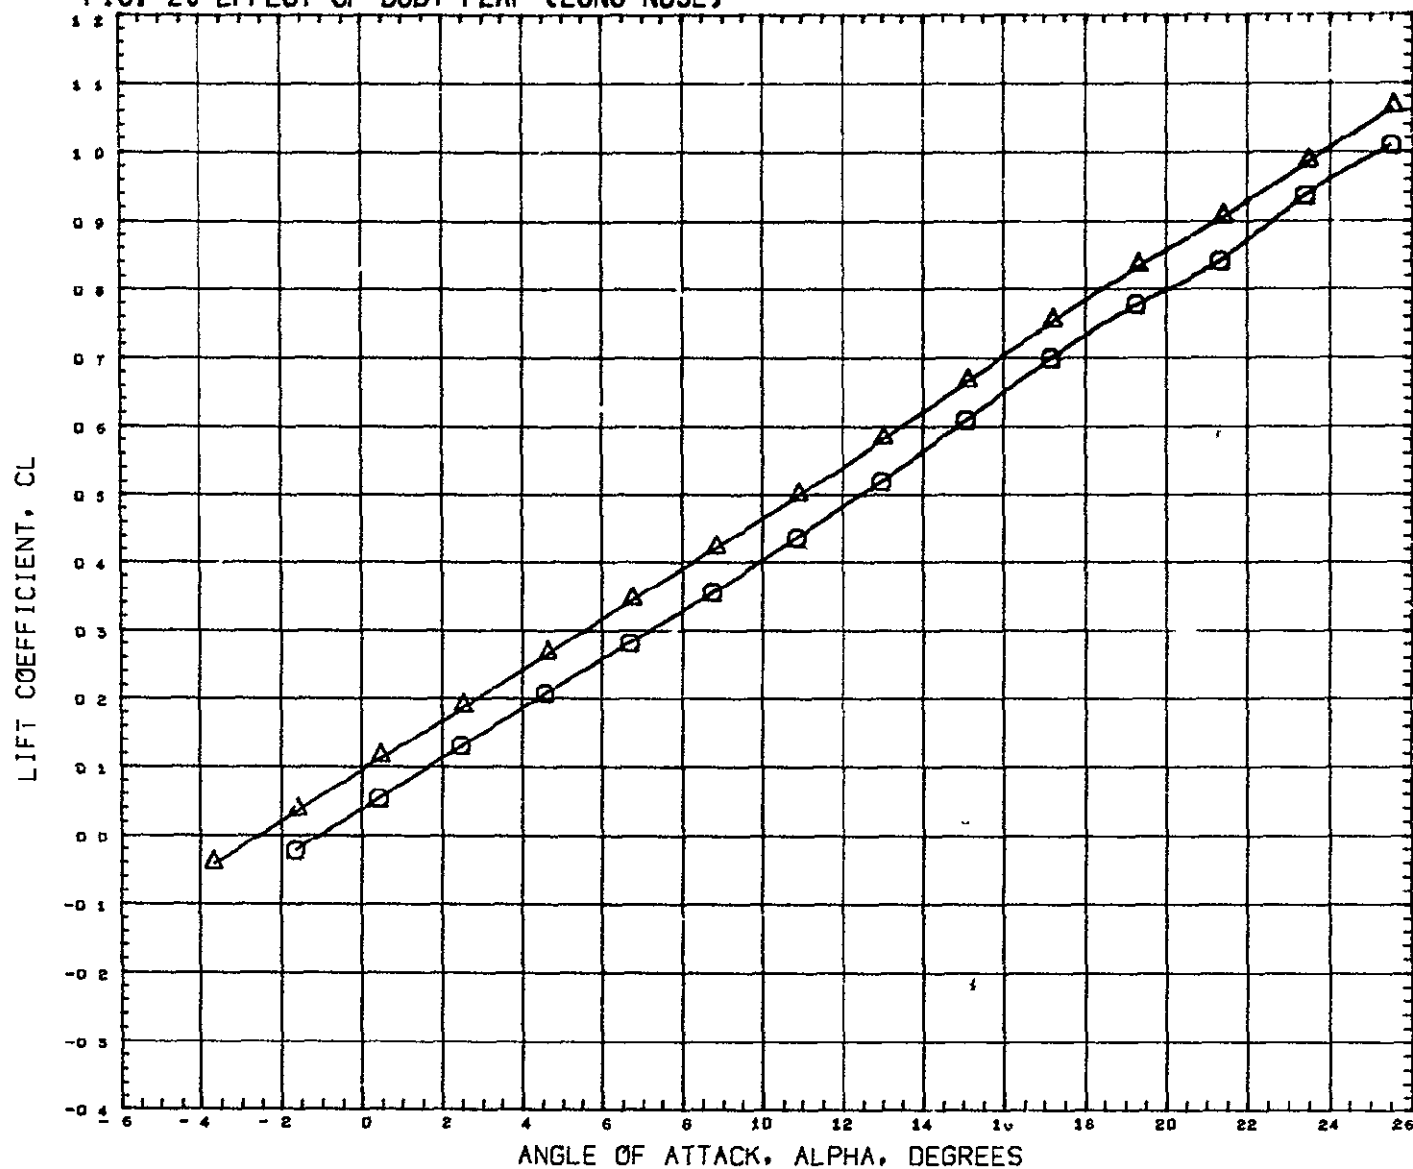

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW004)	Q GTT 29D-CONF ROS-NB1 B1F1W1V1	0 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(RCW050)	Q GTT 29D-CONF ROS-NB1 B1F1W1V1 (BODY FLAP AT D)	0 000	0 000	0 000	0 000	LREF	6 4320 FT
						BREF	3 8920 FT
						XNRP	1485 0040 IN
						YNRP	0 0000 IN
						ZNRP	377 0004 IN
						SCALE	0 0400

MACH 0.170 1


FIG. 20 EFFECT OF BODY FLAP (LONG NOSE)

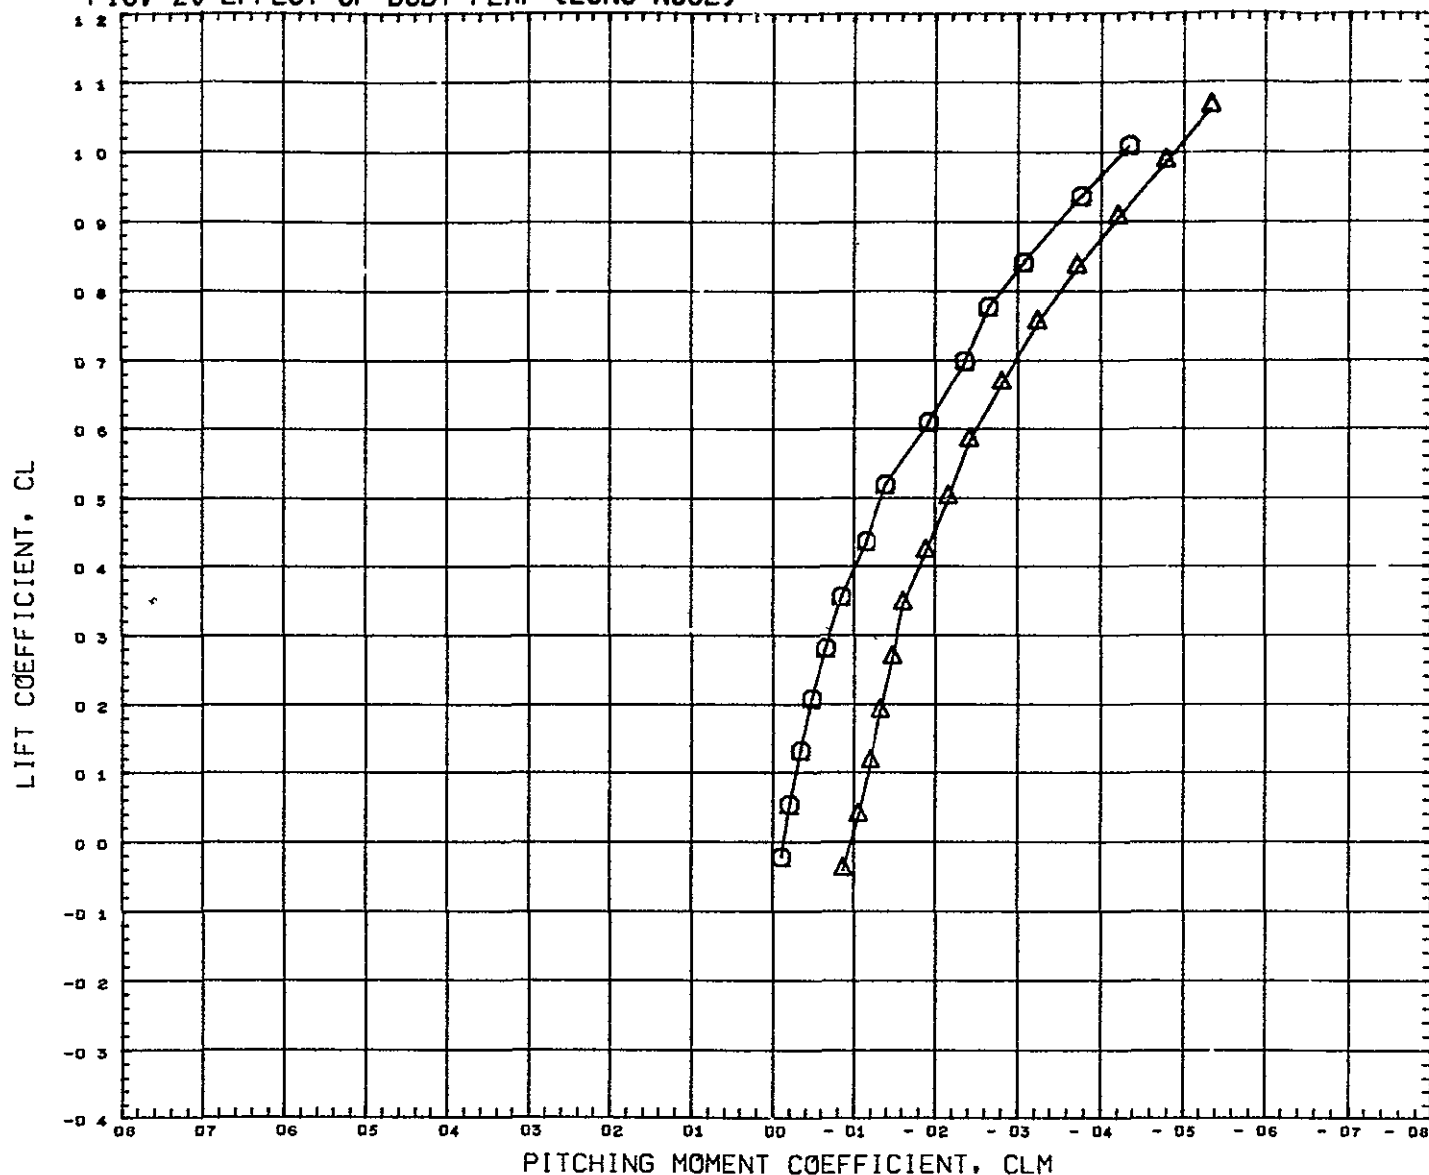

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW004)	GWT 290-CONF ROS-NB1 B1F1W1V1	0 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(RCW050)	GWT 290-CONF ROS-NB1 B1F1W1V1(BODY FLAP AT 0)	0 000	0 000	0 000	0 000	LREF	6 4320 FT
						BREF	3 8920 FT
						XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

MACH 0 170


FIG. 20 EFFECT OF BODY FLAP (LONG NOSE)

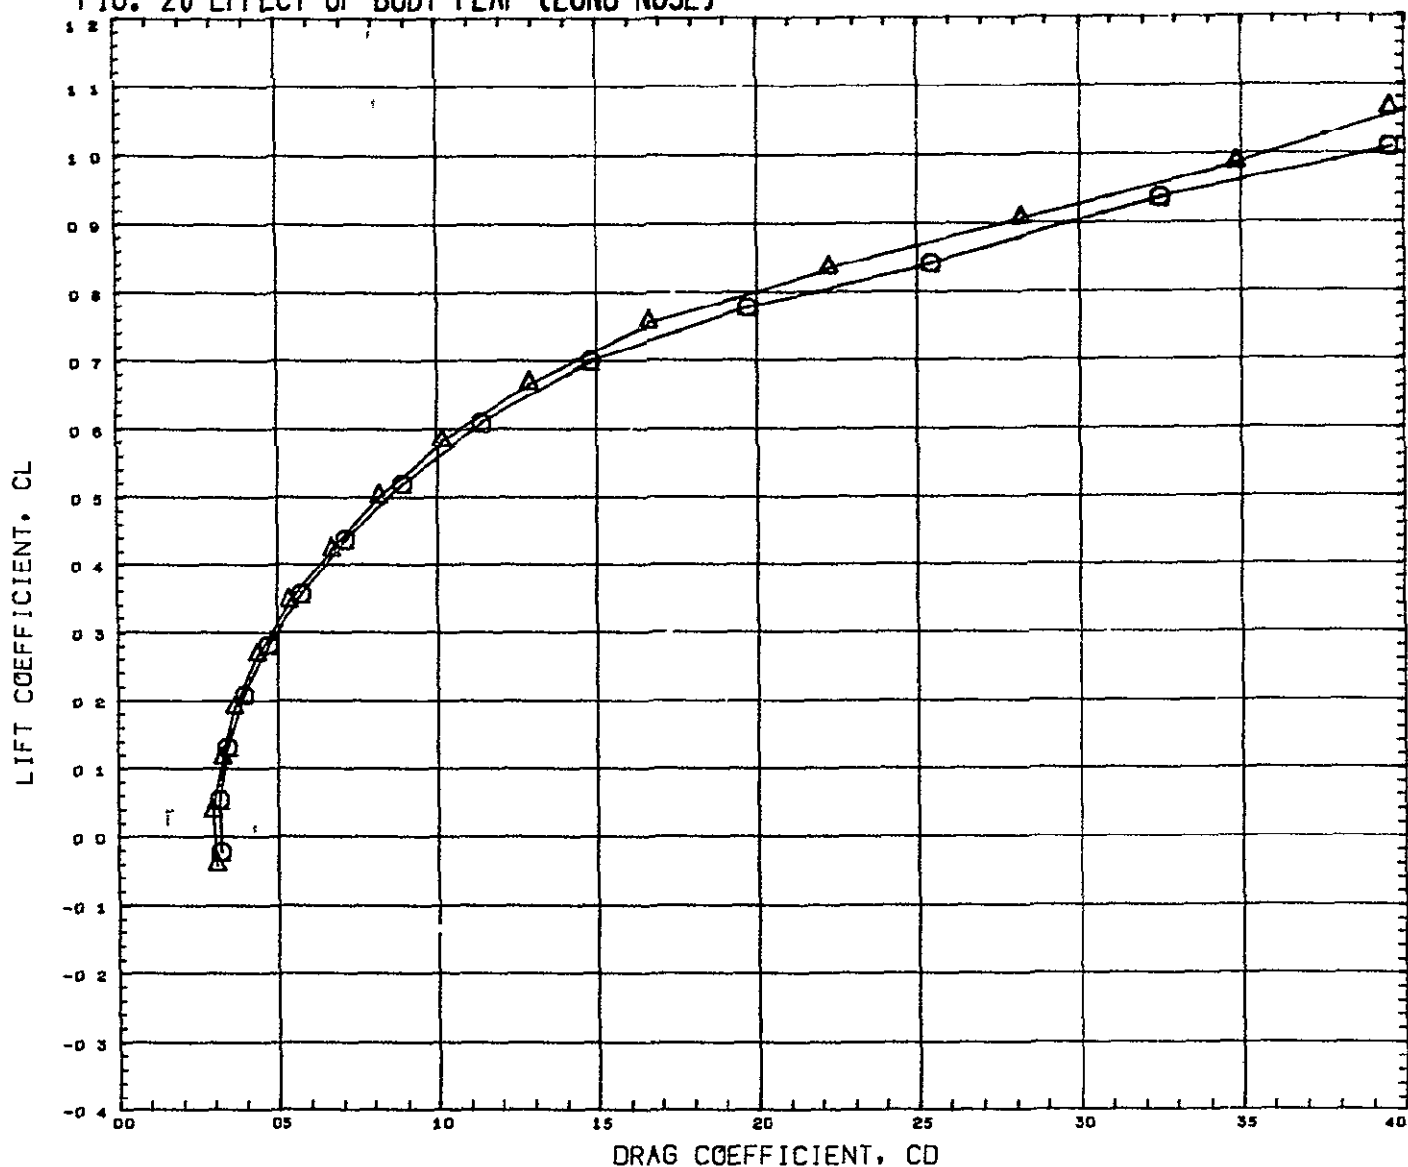

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW004)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(RCW050)	GWTT 290-CONF ROS-NB1 B1F1W1V1 (BODY FLAP AT D)	0 000	0 000	0 000	0 000	LREF	6 4320 FT
						BREF	3 8920 FT
						XMRP	1485 0040 IN
						YMRP	0 0000 IN
						ZMRP	377 0004 IN
						SCALE	0 0400

MACH 0 170


FIG. 21 RUDDER EFFECTIVENESS IN PITCH

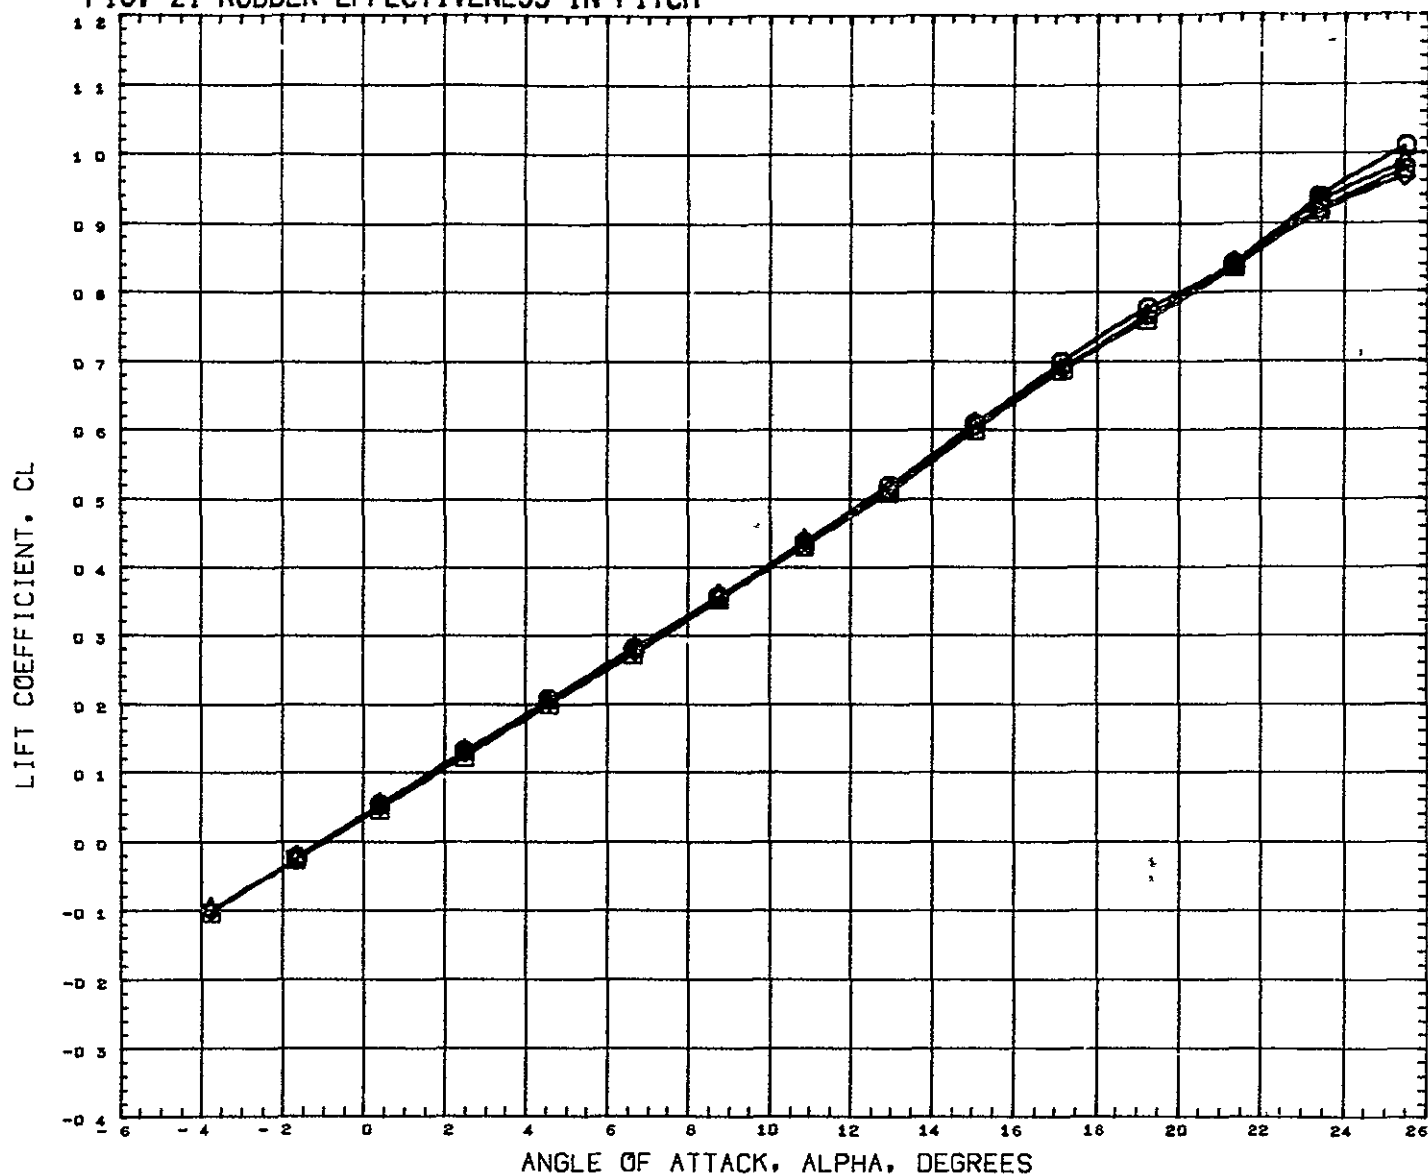

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW004)	○	GWTT 290-CONF	ROS-NB1 B1F1W1V1	0 000	0 000	0 000	0 000	SREF	9 1952 SQ FT
(RCW051)	△	GWTT 290-CONF	ROS-NB1 B1F1W1V1	0 000	0 000	0 000	-5 000	LREF	6 4320 FT
(RCW052)	◇	GWTT 290-CONF	ROS-NB1 B1F1W1V1	0 000	0 000	0 000	-15 000	BREF	3 8920 FT
(RCQ035)	□	GWTT 289-CONF	ROS-NB1 B1W1V1	0 000	0 000	0 000	-10 000	XMRP	1485 0040 IN
								YMRP	0 0000 IN
								ZMRP	377 0004 IN
								SCALE	0 0400

MACH 0 170

FIG. 21 RUDDER EFFECTIVENESS IN PITCH

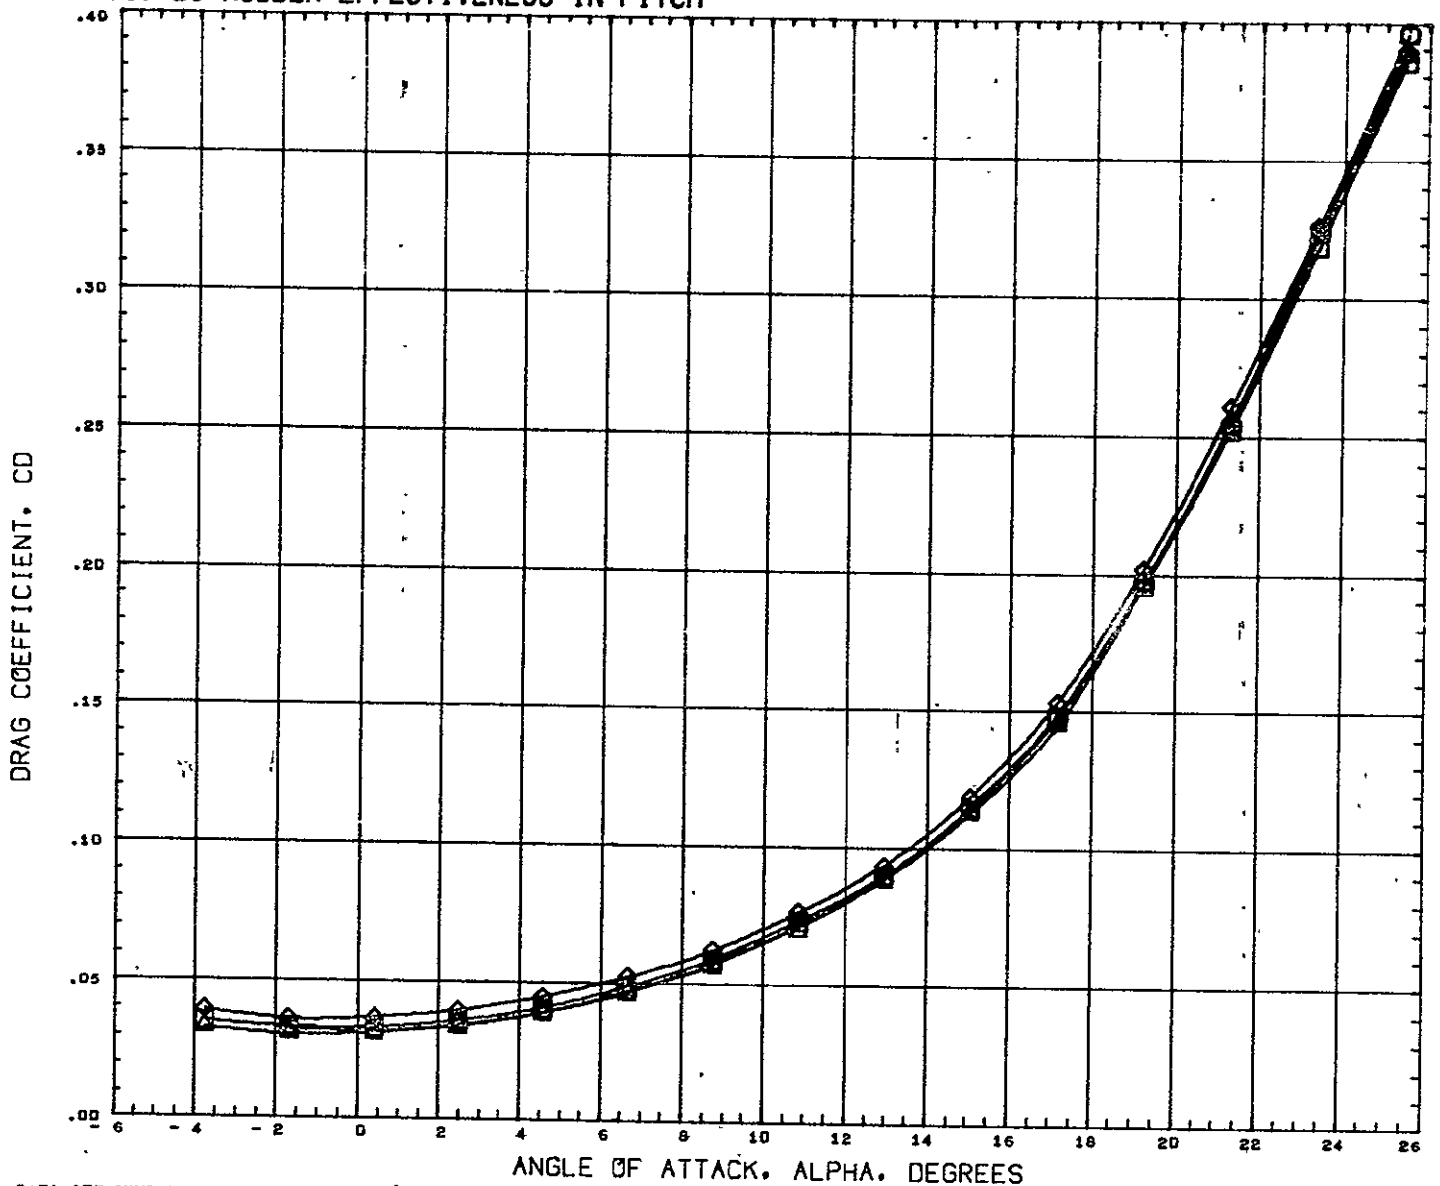


DATA SET	SYMBOL	CONFIGURATION DESCRIPTION
(RCW004)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW051)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW052)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCQ035)	□	GWTT 289-CONF ROS-NB1 B1W1V1

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	0.000	-5.000
0.000	0.000	0.000	-15.000
0.000	0.000	0.000	-10.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	10.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170

FIG. 21 RUDDER EFFECTIVENESS IN PITCH

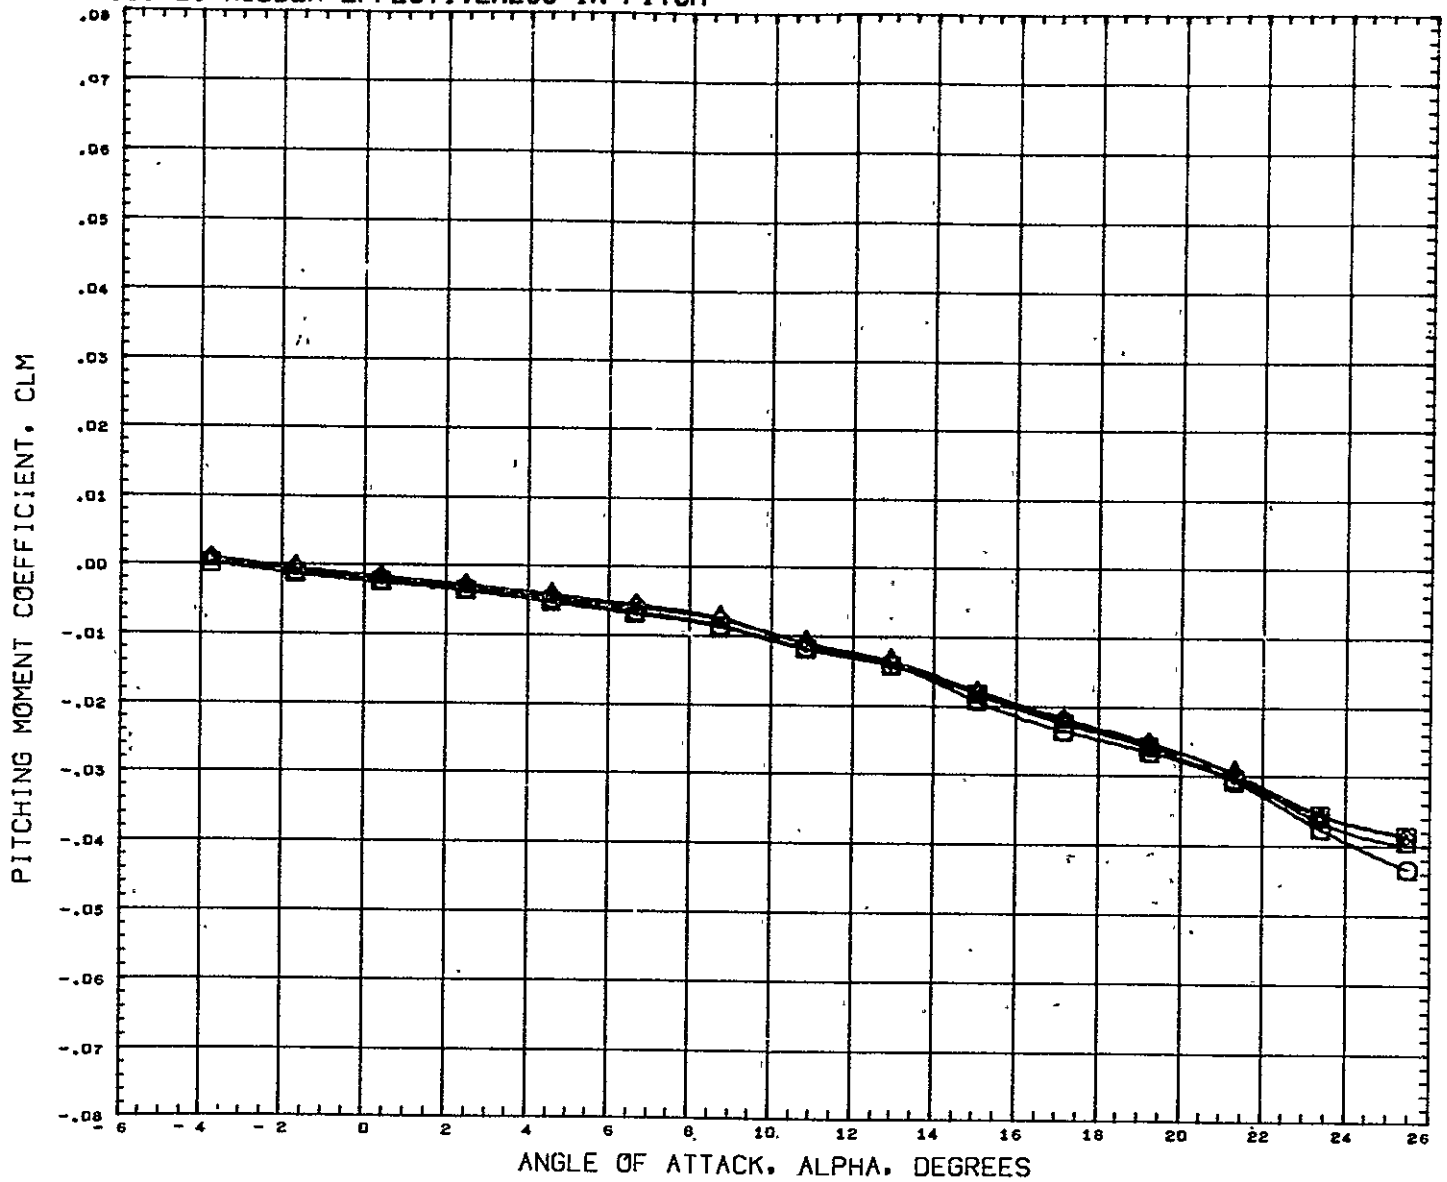

DATA SET SYMBOL CONFIGURATION DESCRIPTION


(RCW004) GWTT 290-CONF ROS-NB1 B1F1W1V1
 (RCW051) GWTT 290-CONF ROS-NB1 B1F1W1V1
 (RCW052) GWTT 290-CONF ROS-NB1 B1F1W1V1
 (RCW035) GWTT 289-CONF ROS-NB1 B1W1V1

BETA ELEVTR AILRON RUDDER
 0.000 0.000 0.000 0.000
 0.000 0.000 0.000 -5.000
 0.000 0.000 0.000 -15.000
 0.000 0.000 0.000 -10.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170


FIG. 21 RUDDER EFFECTIVENESS IN PITCH

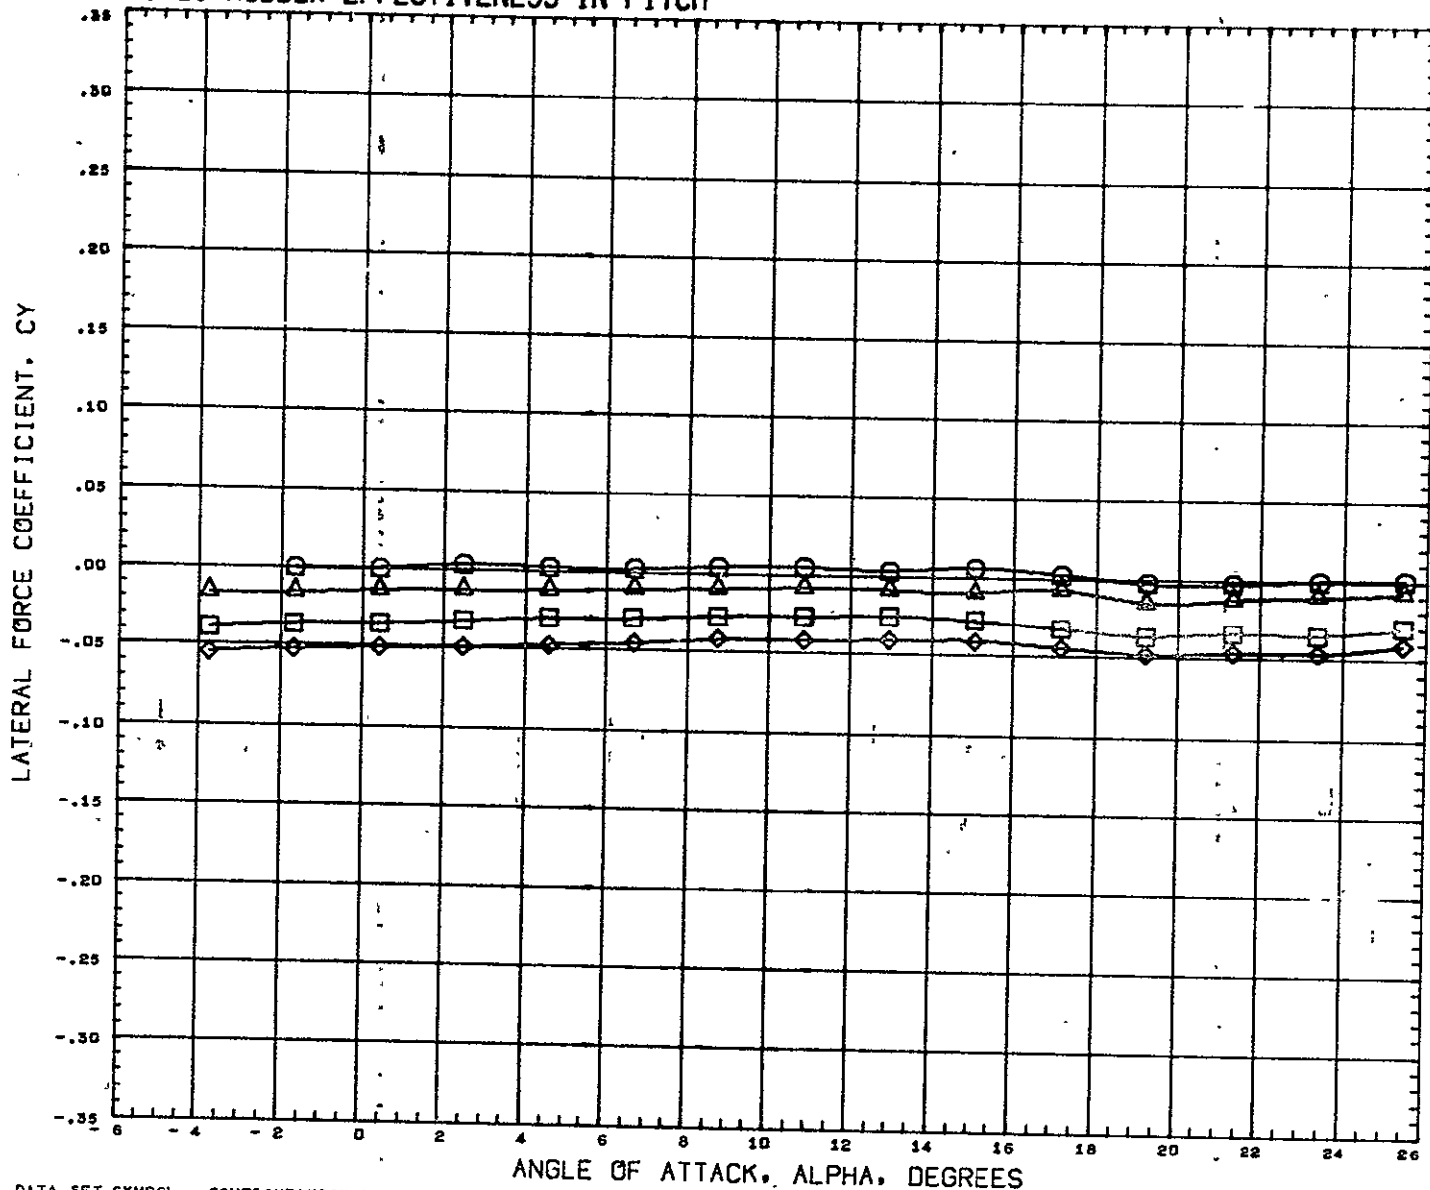

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(RCW004)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
(RCW051)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	LREF 6.4320 FT
(RCW052)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	BREF 3.8920 FT
(RCQ035)	□	GWTT 289-CONF ROS-NB1 B1W1V1	0.000	0.000	0.000	-10.000	XMRP 1495.0040 IN
							YMRP 0.0000 IN
							ZMRP 377.0004 IN
							SCALE 0.0400

MACH 0.170


FIG. 21 RUDDER EFFECTIVENESS IN PITCH

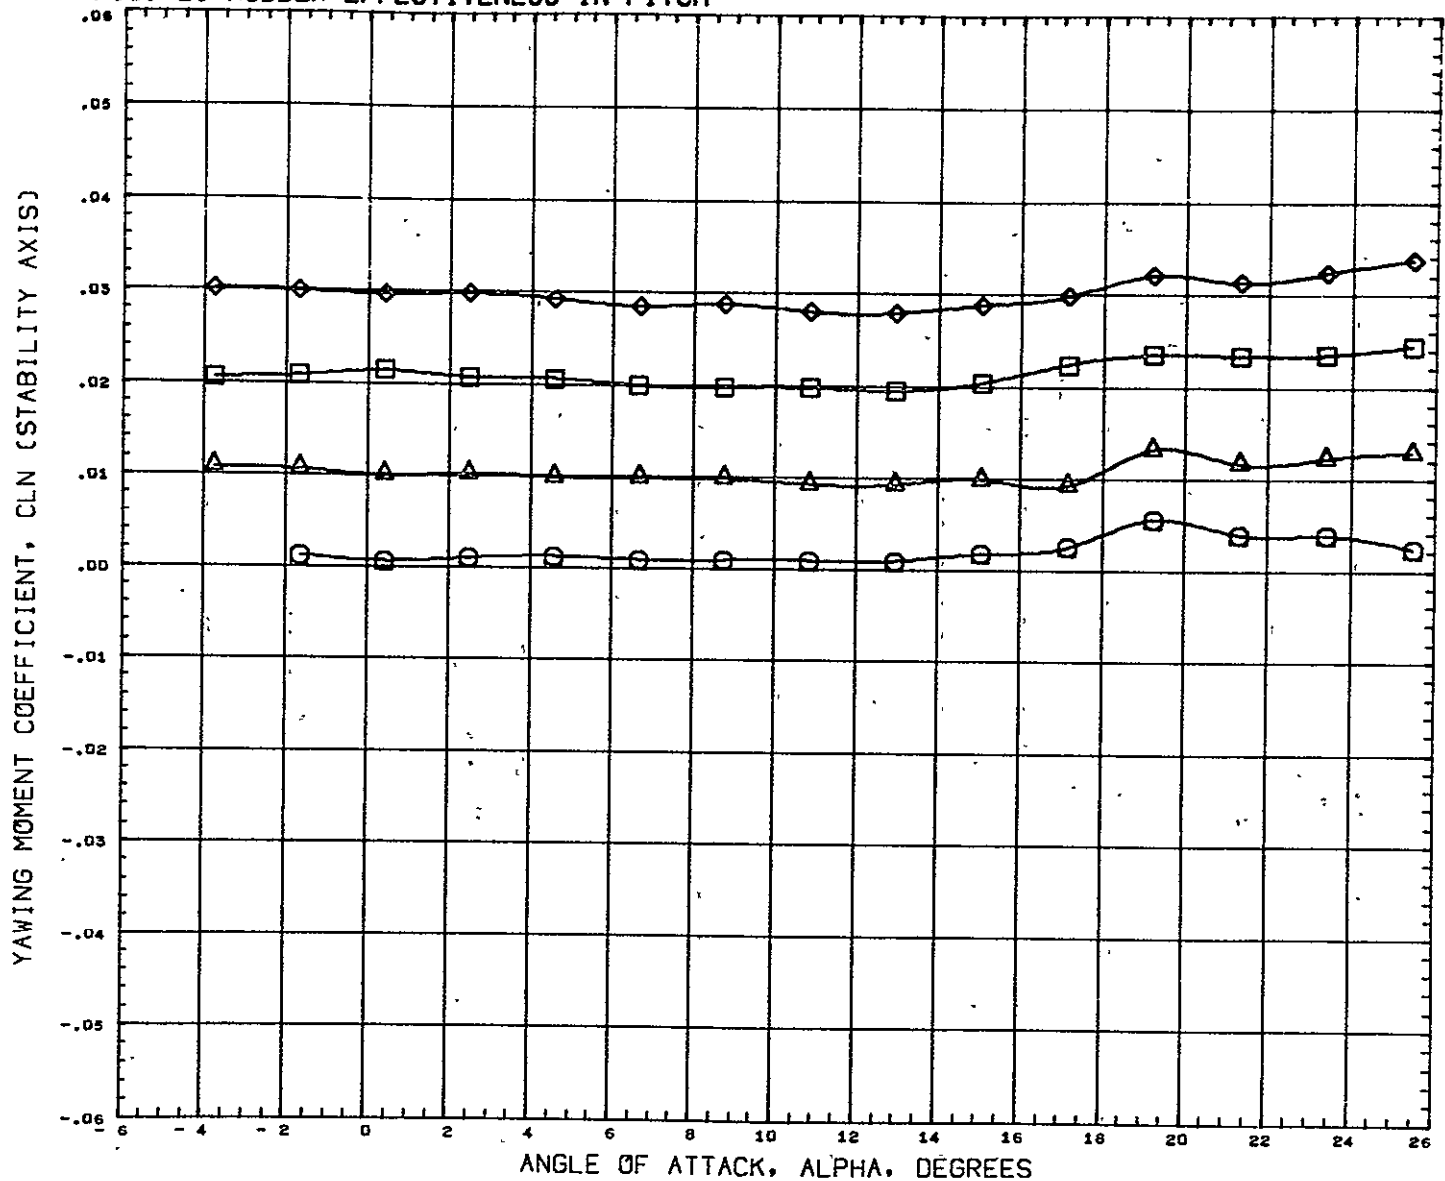

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION				BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
(RCW004)	◇	GWTT 290-CONF	ROS-NB1	B1F1W1V1		0.000	0.000	0.000	0.000	SREF	9.1952	SQ FT
(RCW051)	△	GWTT 290-CONF	ROS-NB1	B1F1W1V1		0.000	0.000	0.000	-5.000	LREF	6.4320	FT
(RCW052)	□	GWTT 290-CONF	ROS-NB1	B1F1W1V1		0.000	0.000	0.000	-15.000	BREF	3.8920	FT
(RCW035)	○	GWTT 289-CONF	ROS-NB1	B1W1V1		0.000	0.000	0.000	-10.000	XMRP	1485.0040	IN
										YMRP	0.0000	IN
										ZMRP	377.0004	IN
										SCALE	0.0400	

MACH 0.170

FIG. 21 RUDDER EFFECTIVENESS IN PITCH

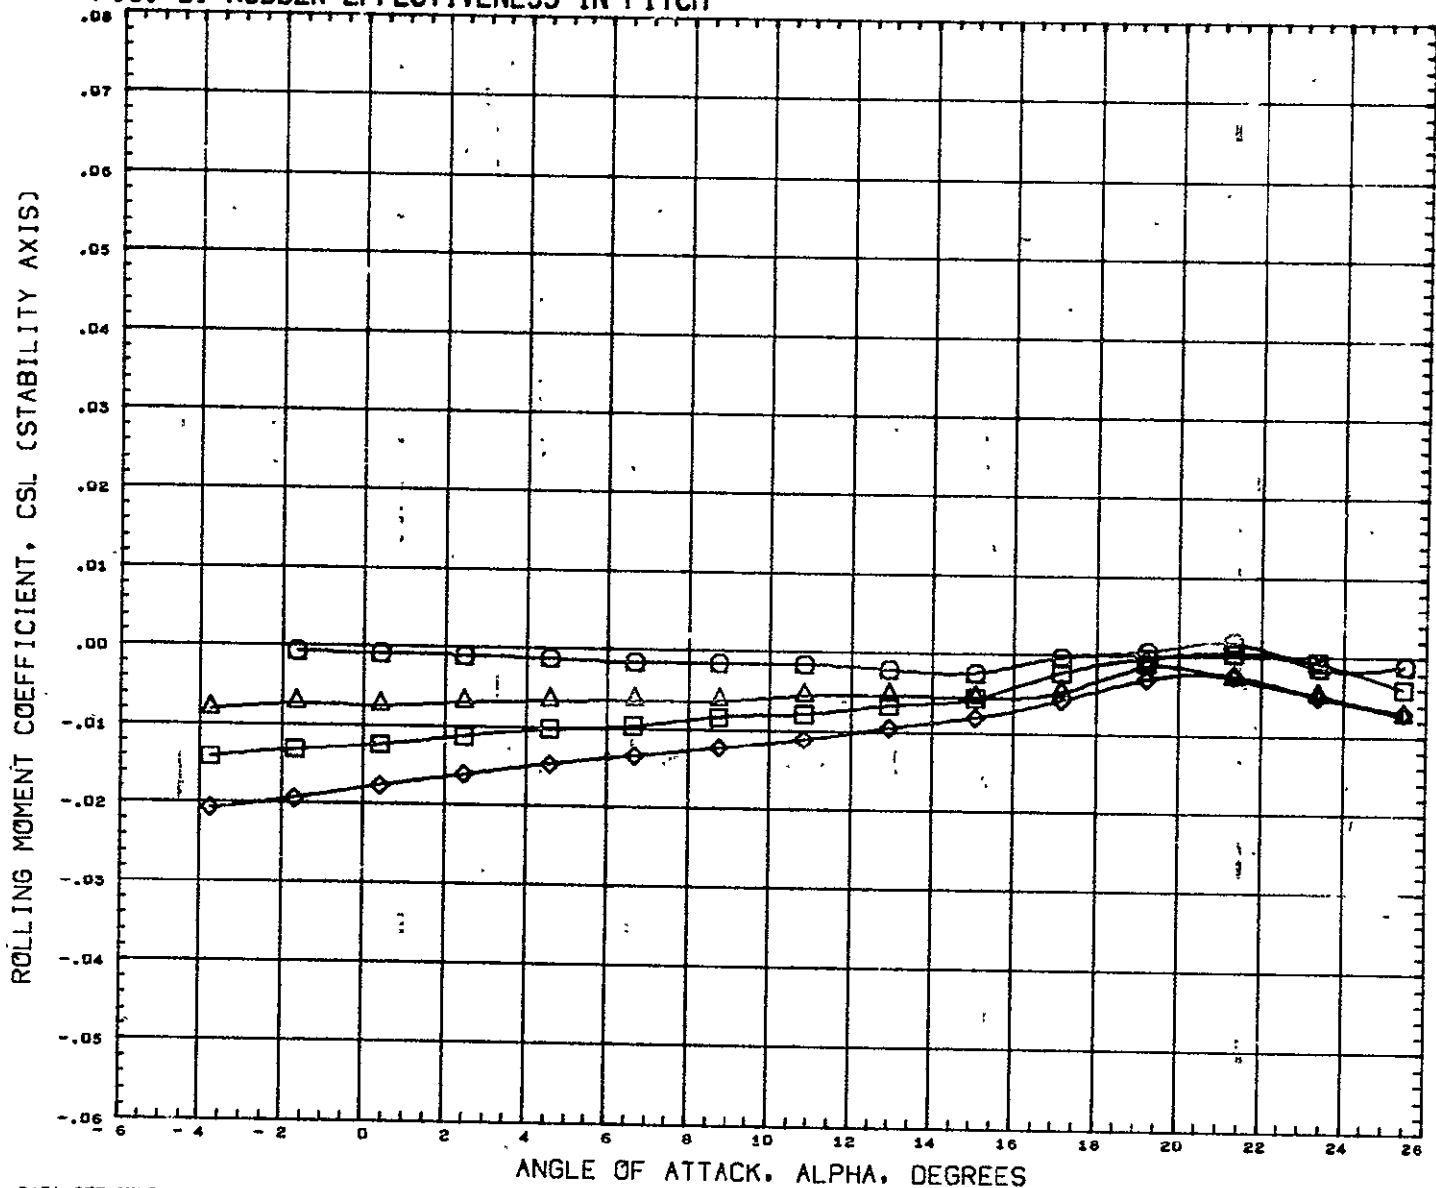


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCWD04) GWT 290-CONF ROS-NB1 B1F1W1V1
 (RCWD51) GWT 290-CONF ROS-NB1 B1F1W1V1
 (RCWD52) GWT 290-CONF ROS-NB1 B1F1W1V1
 (RCWD35) GWT 289-CONF ROS-NB1 B1W1V1

BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
0.000	0.000	0.000	-5.000	LREF 6.4320 FT
0.000	0.000	0.000	-15.000	BREF 3.8920 FT
0.000	0.000	0.000	-10.000	XMRP 1485.0040 IN
				YMRP 0.0000 IN
				ZMRP 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 22 EFFECT OF SPLIT RUDDERS IN PITCH

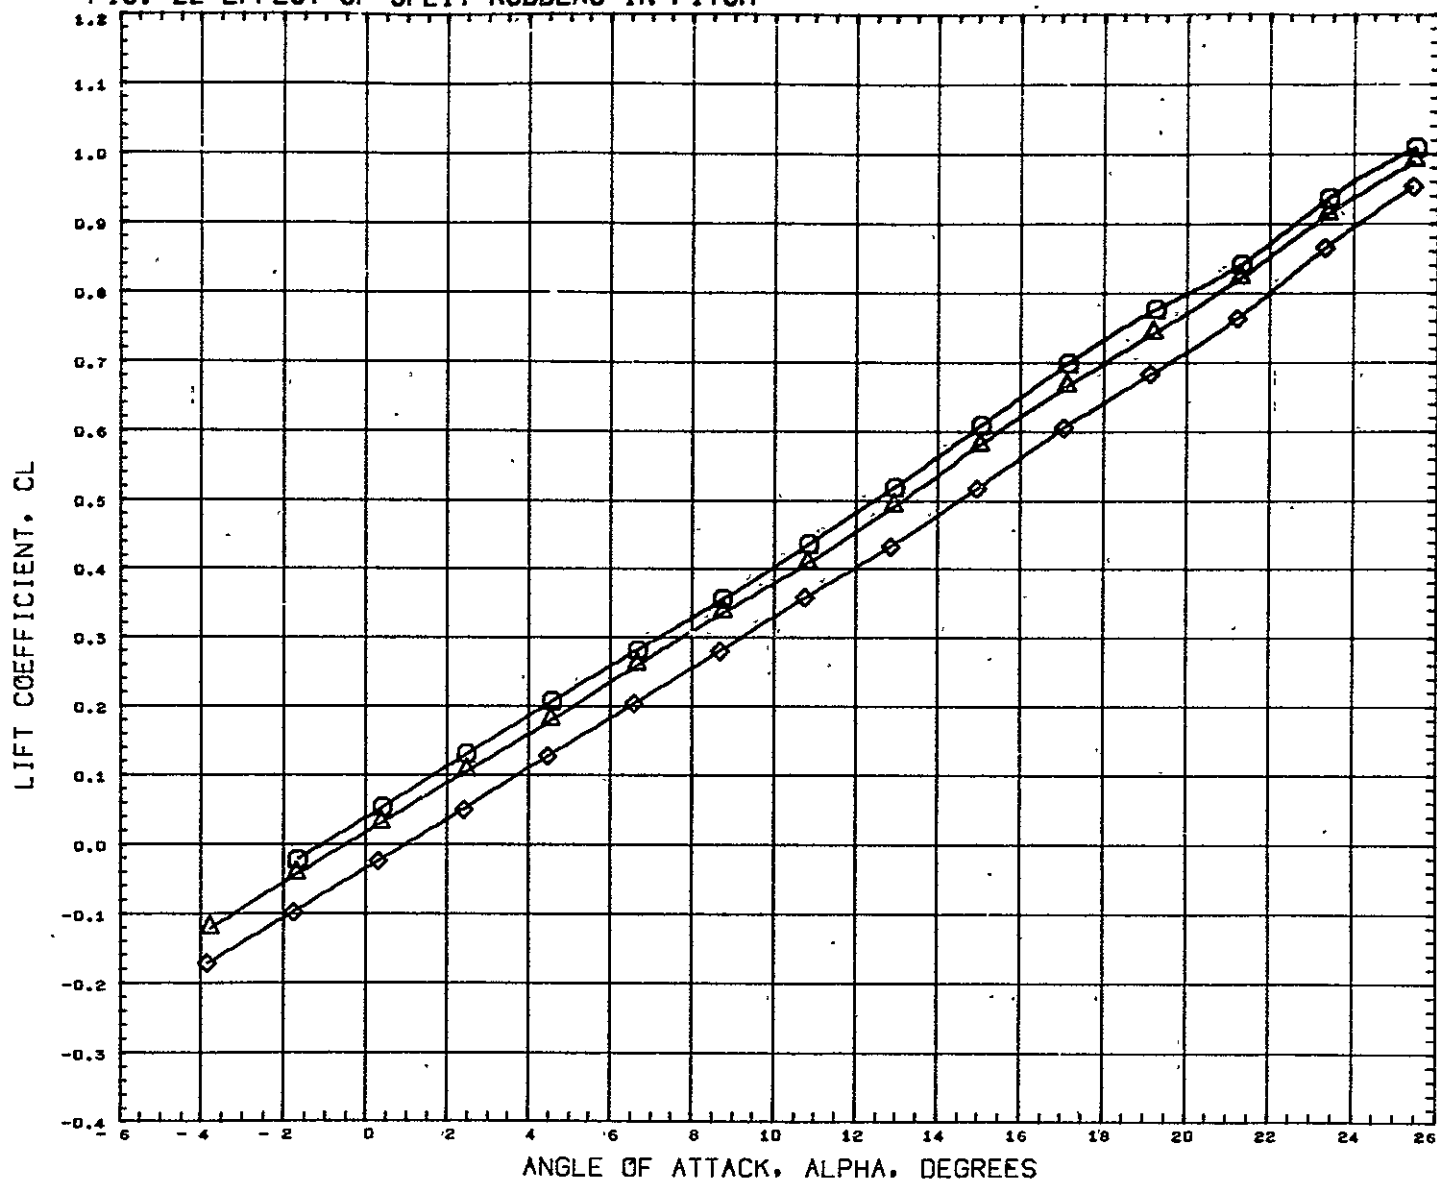


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW004)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW059)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW058)	GWTT 290-CONF ROS-NB1 B1F1W1V1

BETA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION
0.000			0.000	SREF 9.1952 SQ FT
0.000	30.000	-30.000		LREF 6.4320 FT
0.000	60.000	-60.000		BREF 3.8920 FT
				XHRF 1485.0040 IN
				YHRF 0.0000 IN
				ZHRF 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 22 EFFECT OF SPLIT RUDDERS IN PITCH

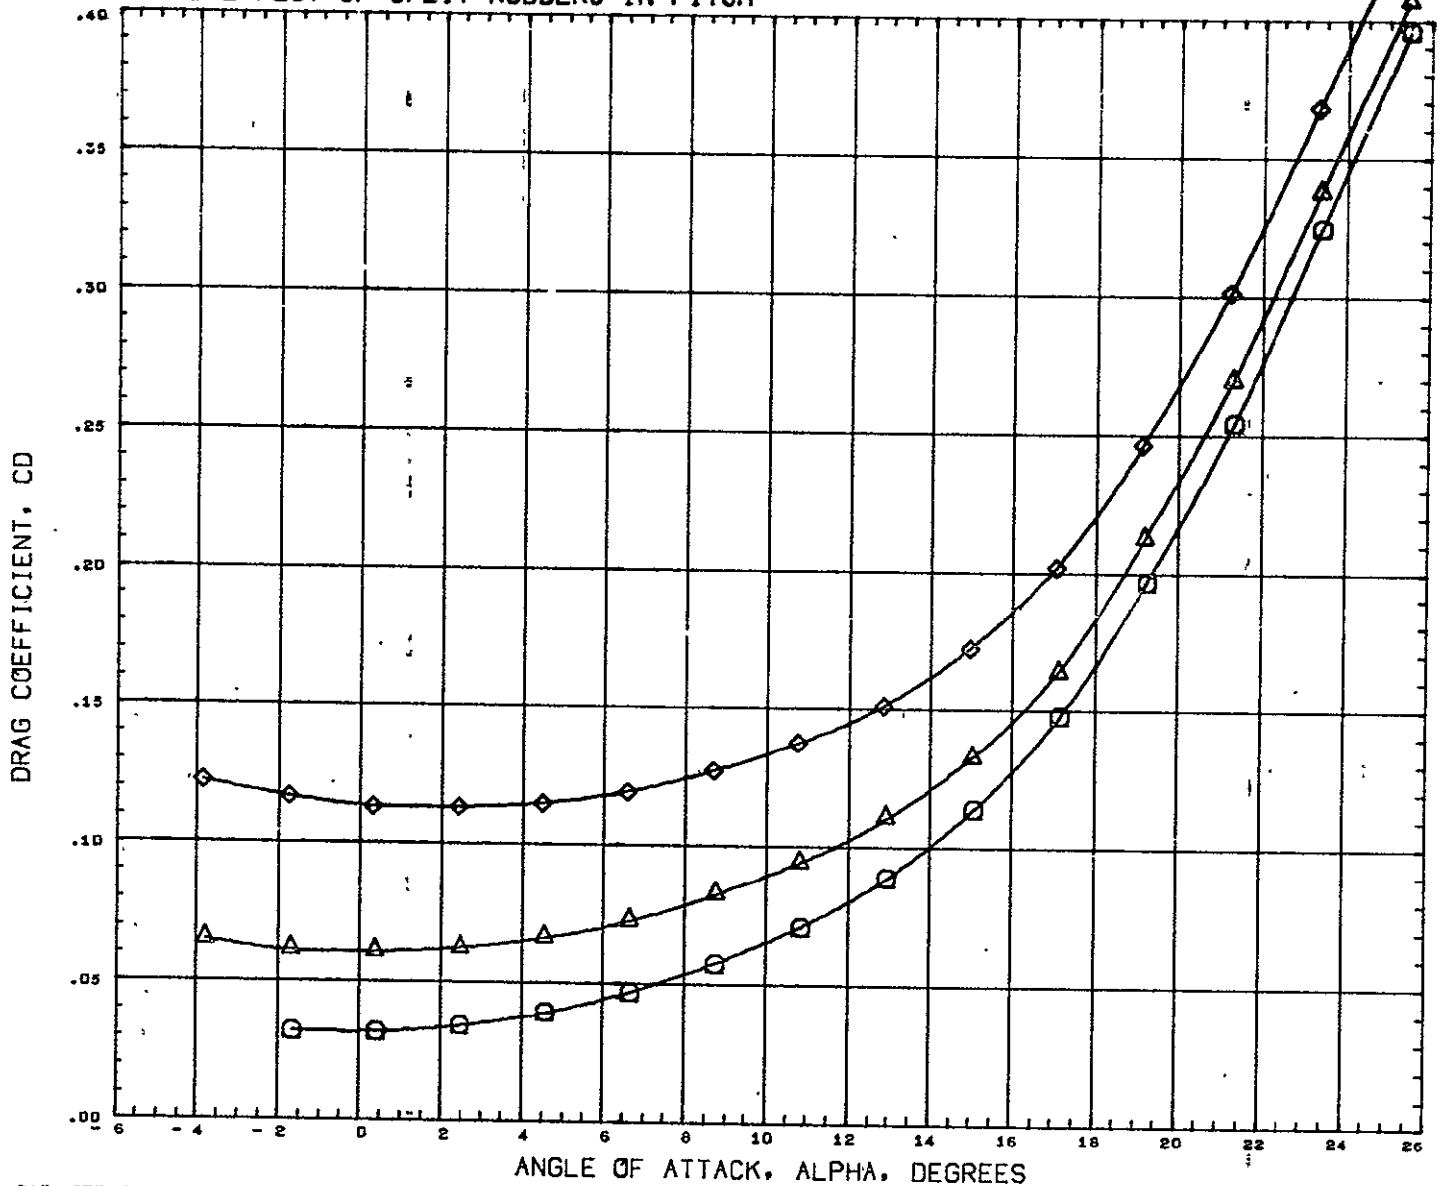


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW004)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW059)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW058)	GWTT 290-CONF ROS-NB1 B1F1W1V1

BETA	LRUDDR	RRUDDR	RUDDER
0.000			0.000
0.000	30.000	-30.000	
0.000	60.000	-60.000	

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170

FIG. 22 EFFECT OF SPLIT RUDDERS IN PITCH

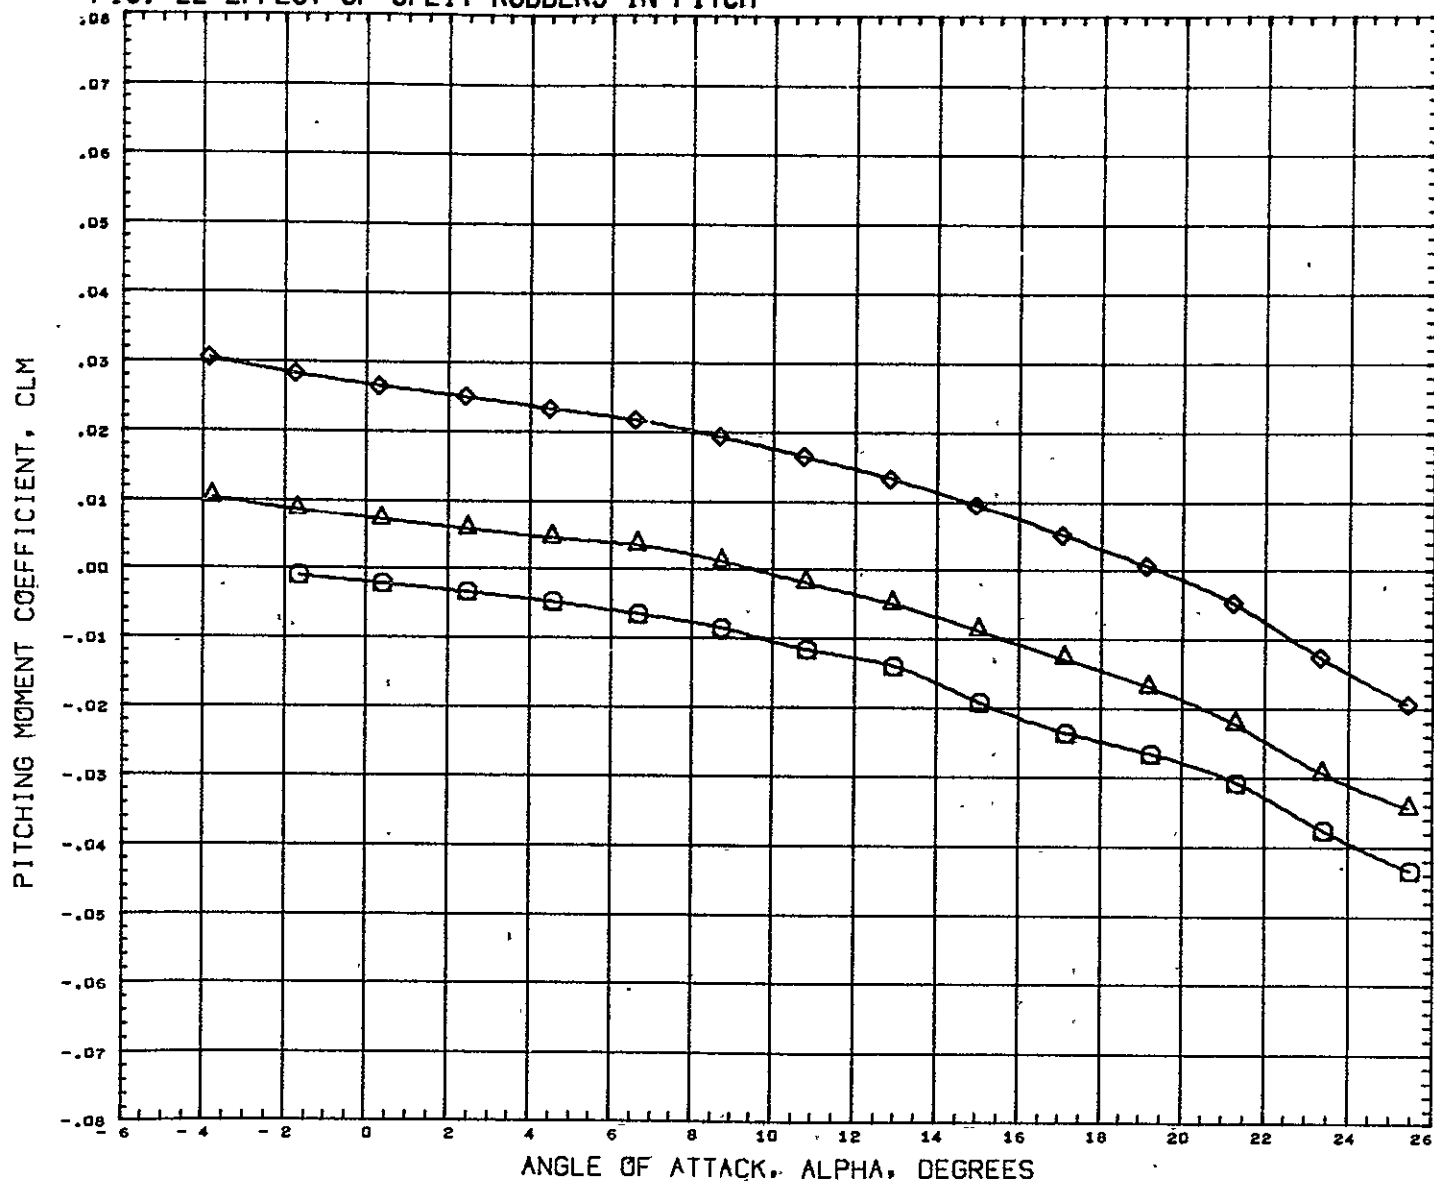


DATA SET	SYMBOL	CONFIGURATION DESCRIPTION
(RCW004)	○	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW059)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW058)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1

BETA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION
0.000			0.000	SREF 9.1952 SQ FT
0.000	30.000	-30.000		LREF 6.4320 FT
0.000	60.000	-60.000		BREF 3.8920 FT
				XMRF 1485.0040 IN
				YMRF 0.0000 IN
				ZMRF 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 23 EFFECT OF ENGINE PODS (E1) IN PITCH

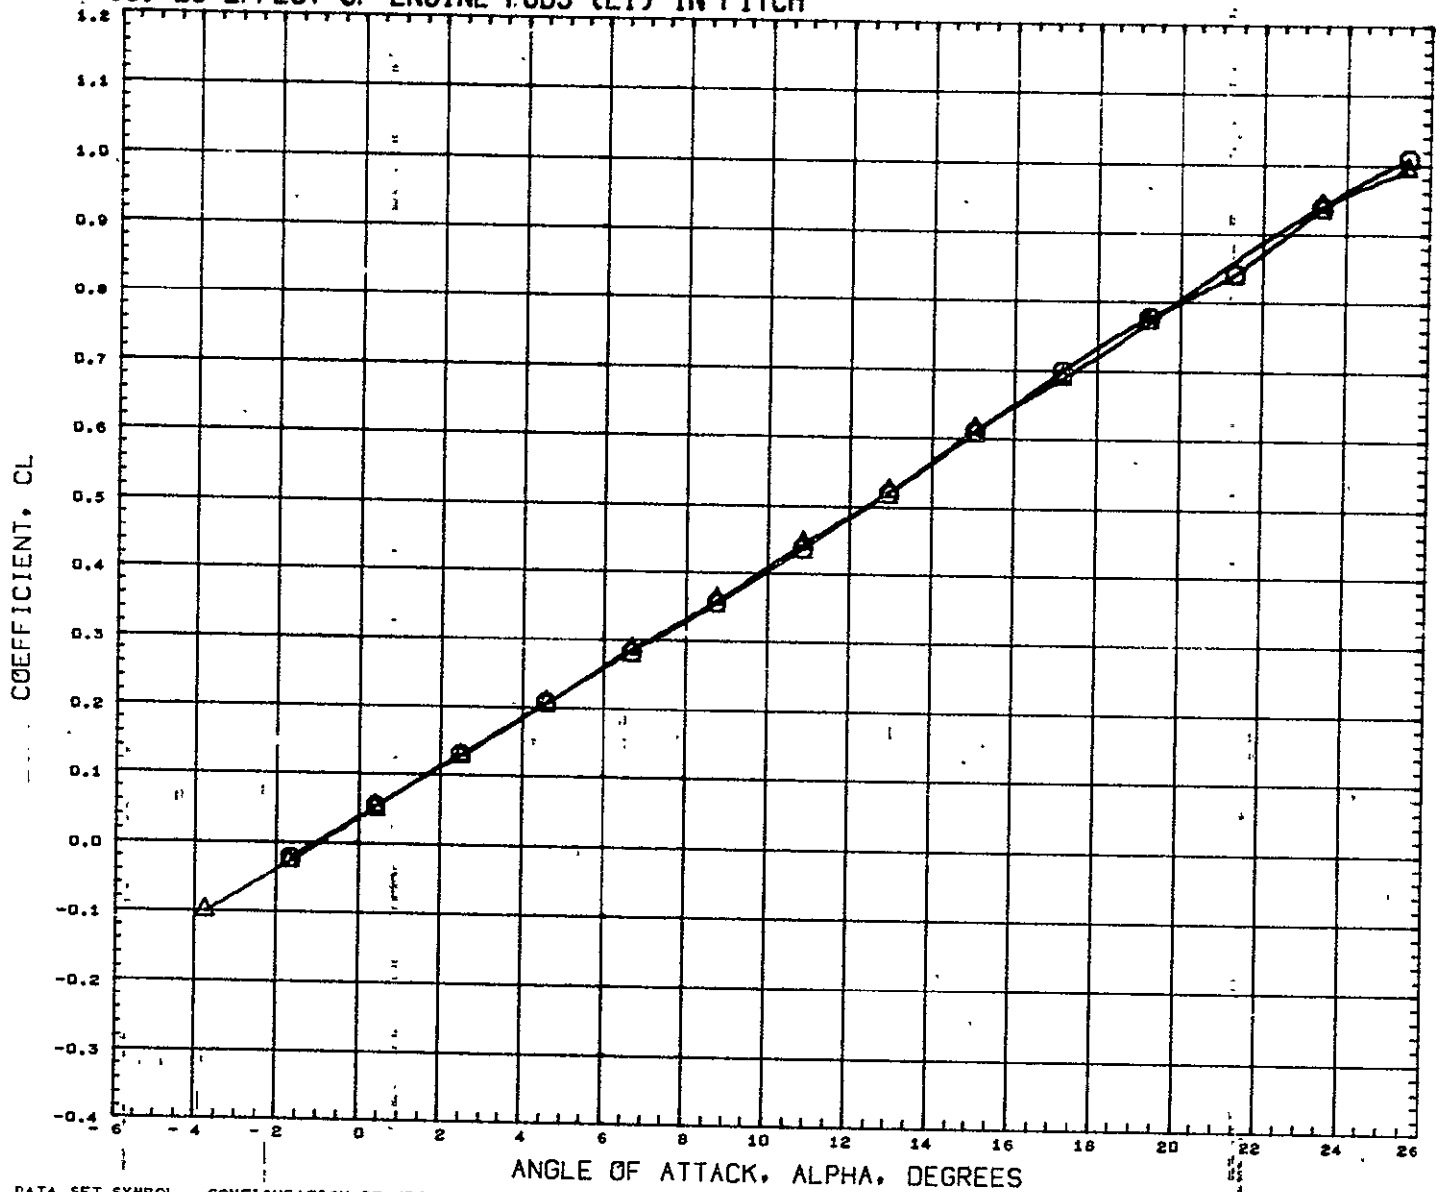

DATA SET SYMBOL CONFIGURATION DESCRIPTION
(RCW004) Q GWIT 290-CONF ROS-NB1 B1F1W1V1
(RCW060) A GWIT 290-CONF ROS-NB1 B1F1W1V1E1


BETA ELEVTR AILRON RUDDER
0.000 0.000 0.000 0.000
0.000 0.000 0.000 0.000

REFERENCE INFORMATION
SREF 9.1952 SQ FT
LREF 6.4320 FT
BREF 3.8920 FT
XMRP 1485.0040 IN
YMRP 0.0000 IN
ZMRP 377.0004 IN
SCALE 0.0400

MACH 0.170

① 4

FIG. 23 EFFECT OF ENGINE PODS (E1) IN PITCH

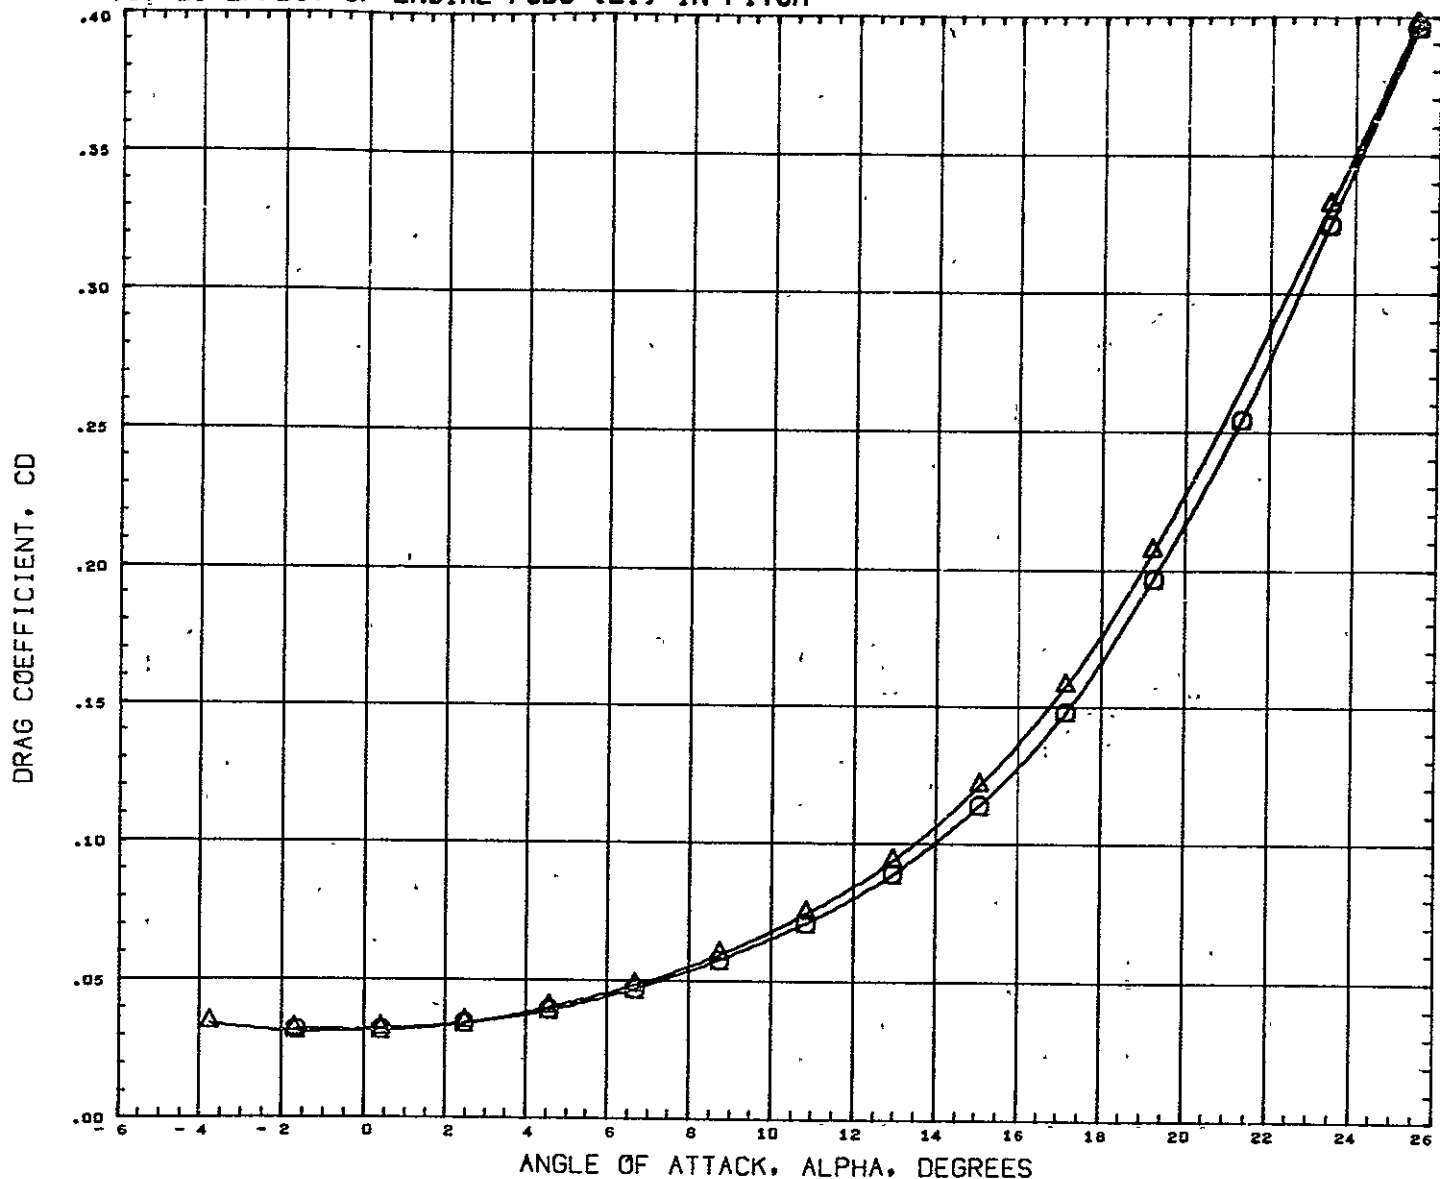


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW004) ○	GWTI 290-CONF ROS-NB1 B1F1W1V1
(RCW060) △	GWTI 290-CONF ROS-NB1 B1F1W1V1E1

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	0.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
CREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170

FIG. 23 EFFECT OF ENGINE PODS (E1) IN PITCH

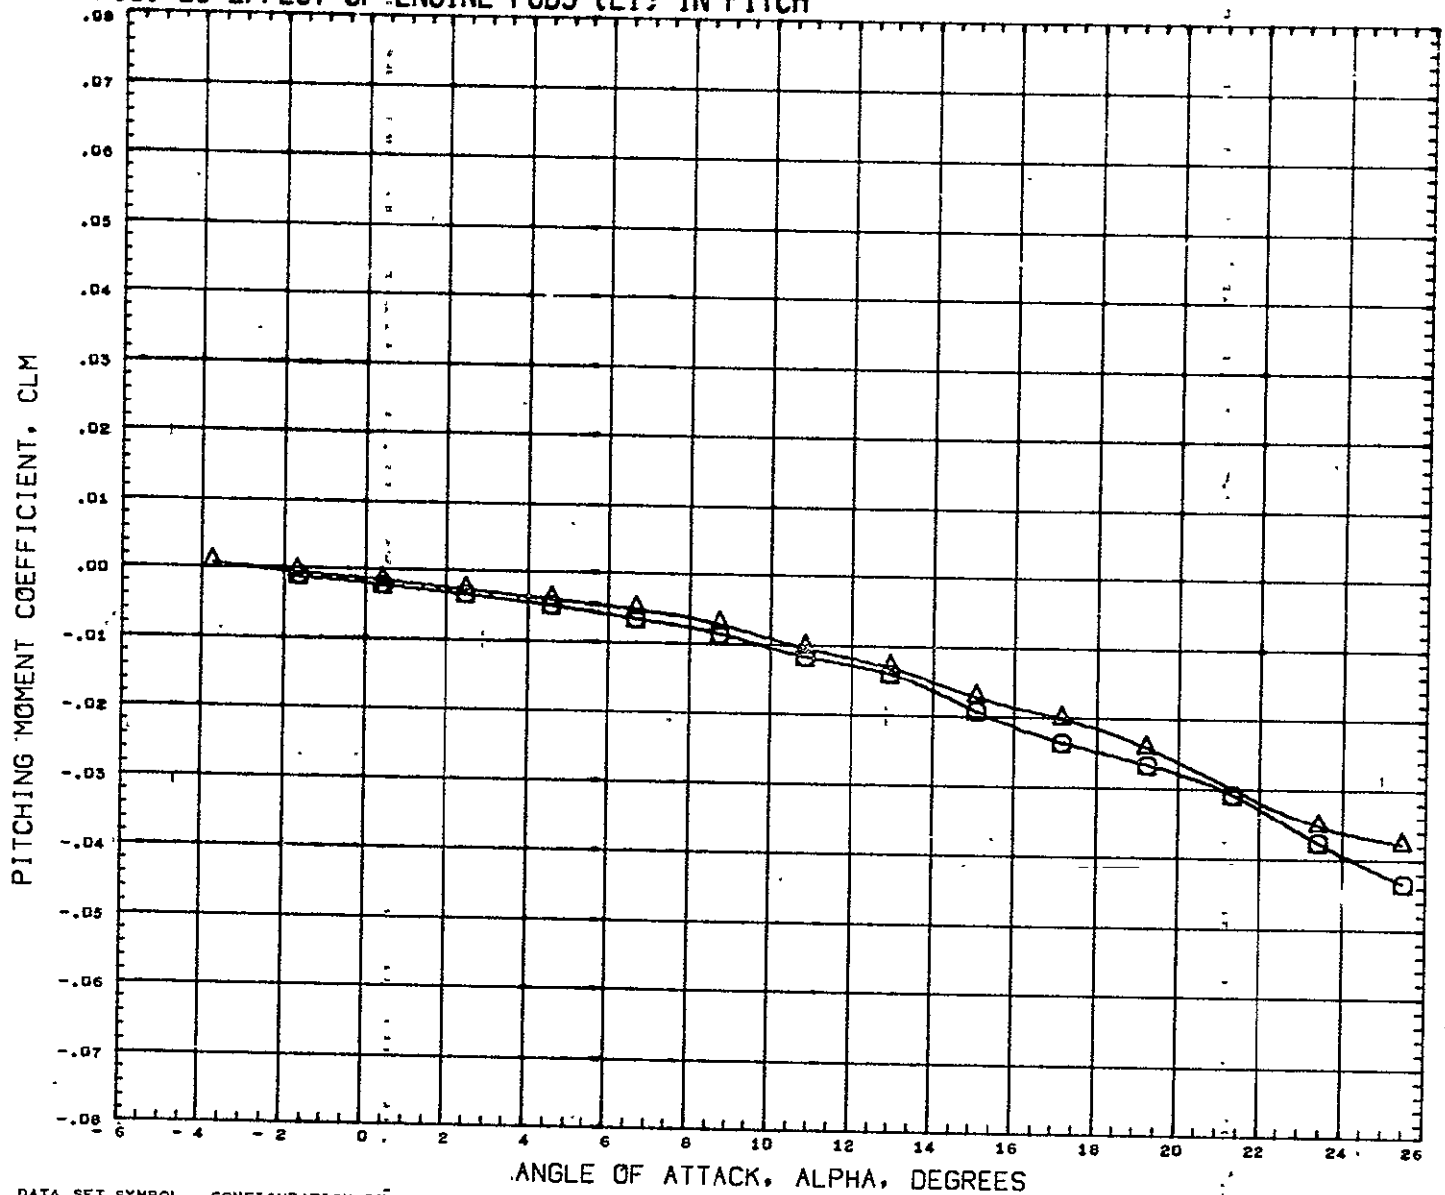


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW004) ○	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW060) △	GWTT 290-CONF ROS-NB1 B1F1W1V1E1

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	0.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	- 3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	- 0.0400

MACH 0.170

FIG. 24 YAW POLARS WITH ENGINE PODS (E1)

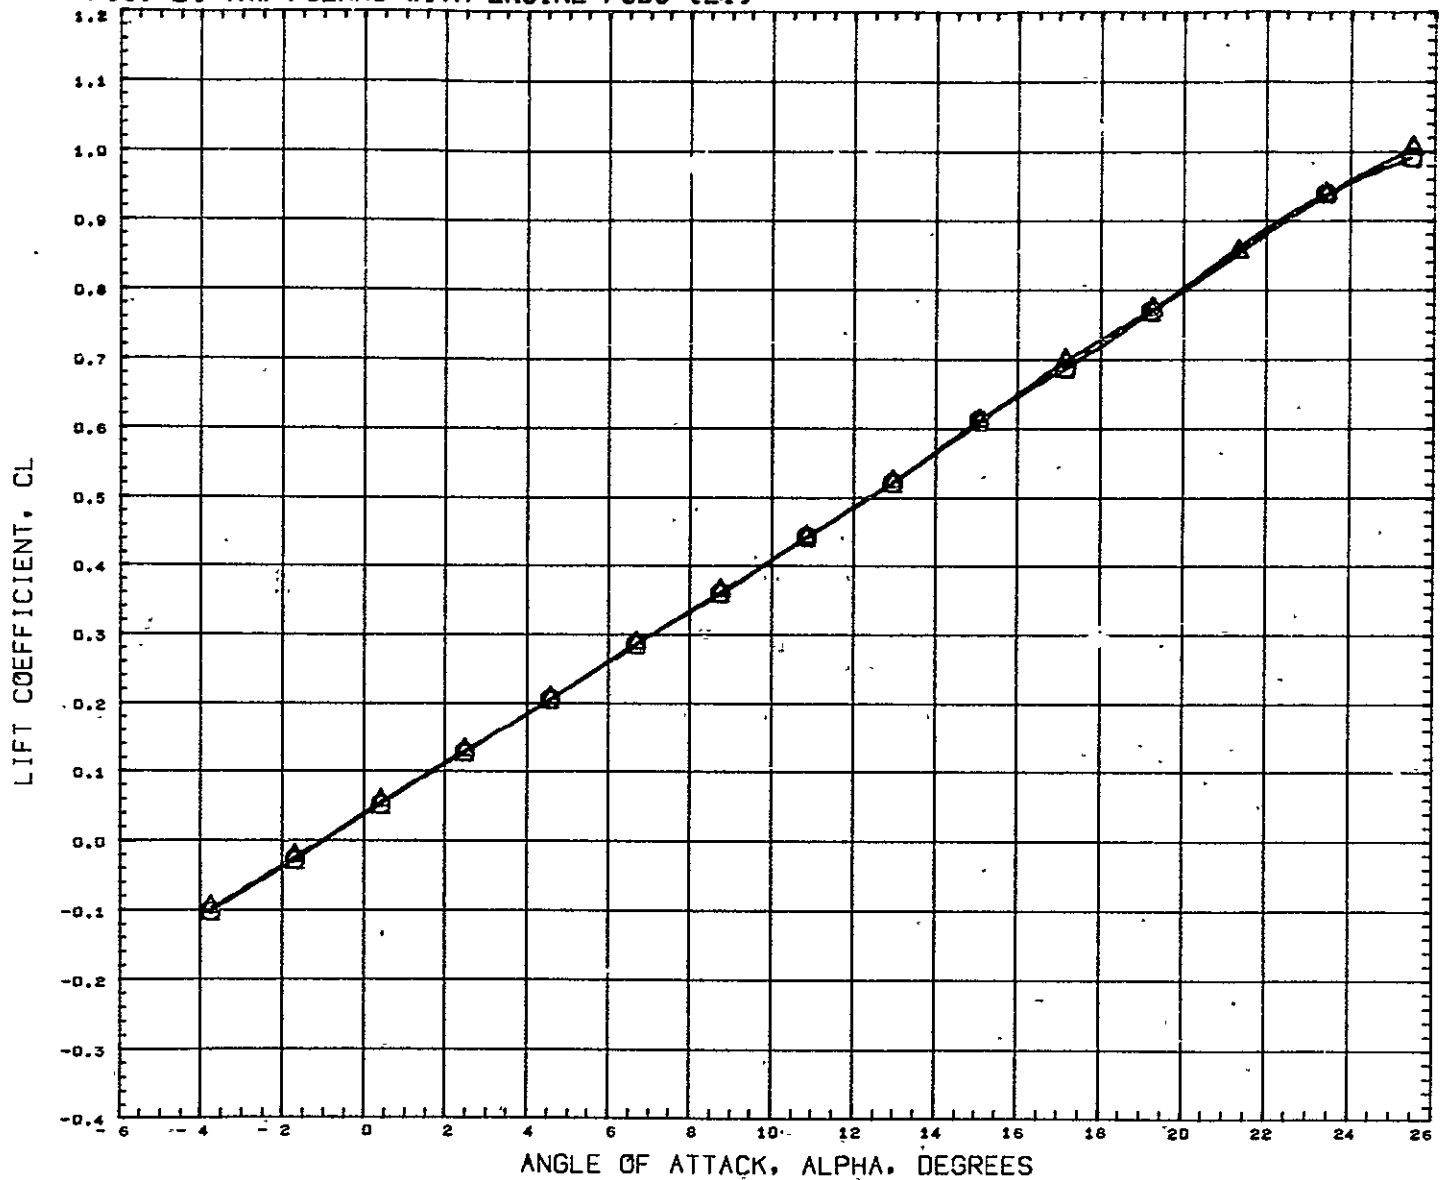


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCWD60)	GWTT 290-CONF ROS-NB1 B1F1W1V1E1
(RCWD61)	GWTT 290-CONF ROS-NB1 B1F1W1V1E1

BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
3.000	0.000	0.000	0.000	LREF 6.4320 FT
				BREF 3.8920 FT
				XMRP 1485.0040 IN
				YMRP 0.0000 IN
				ZMRP 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 24 YAW POLARS WITH ENGINE PODS (E1)

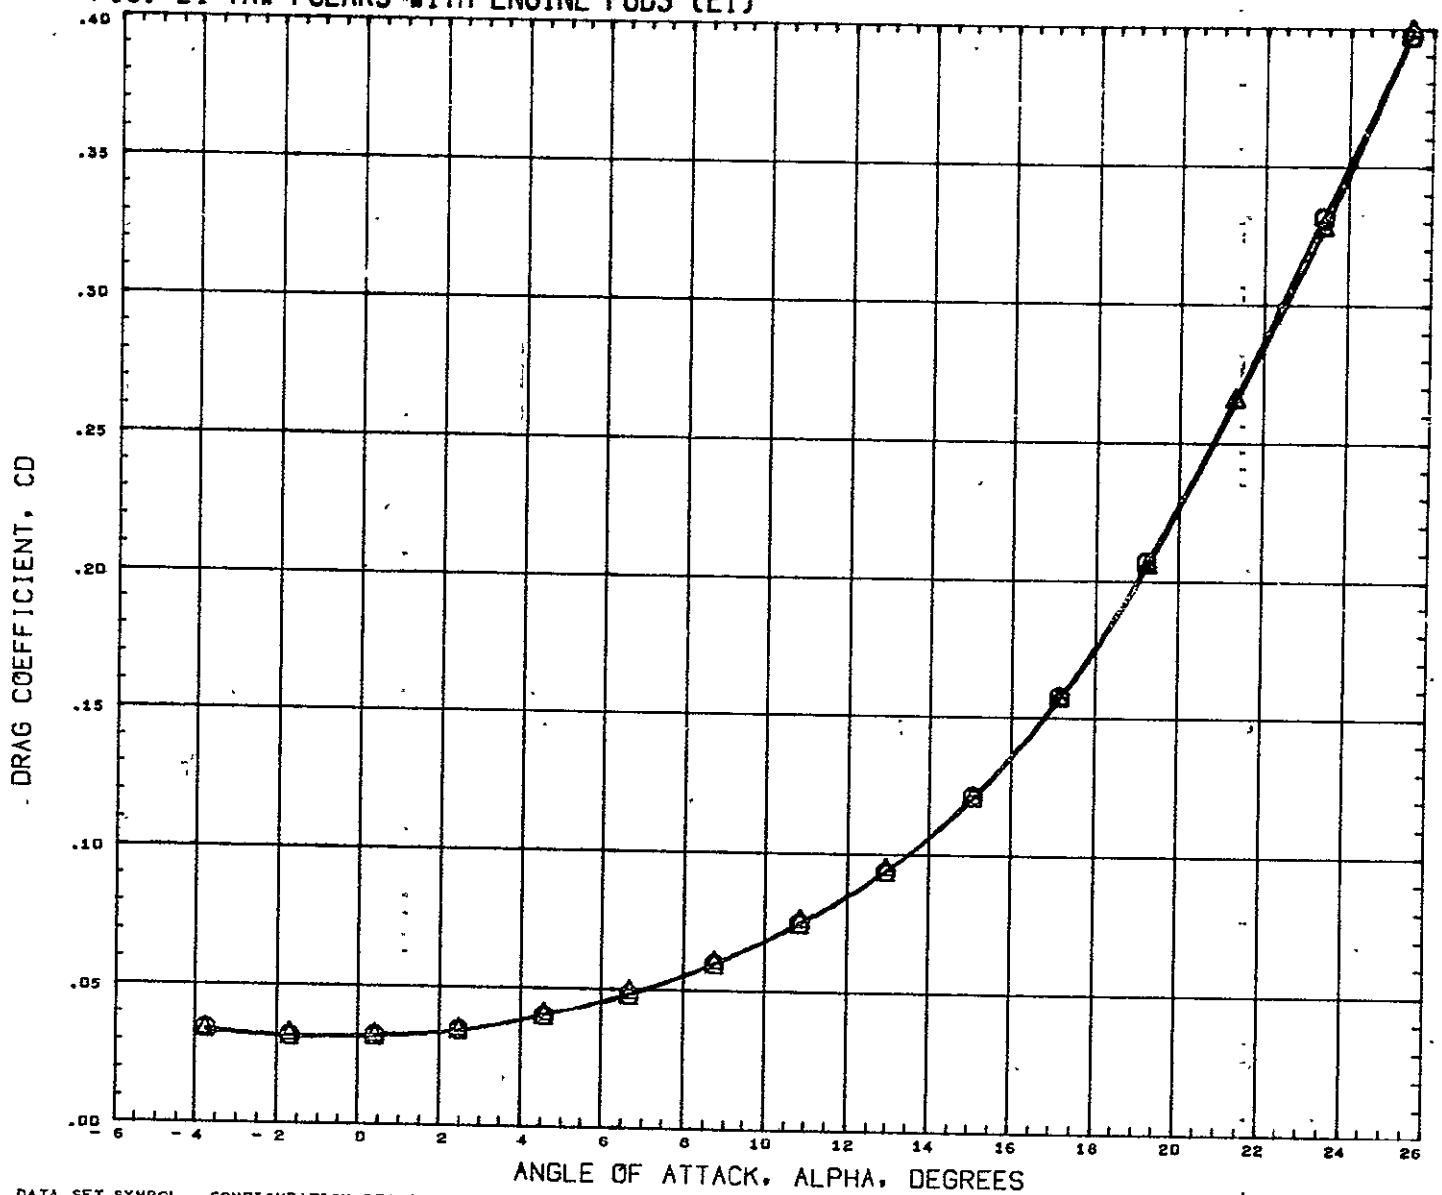

DATA SET SYMBOL CONFIGURATION DESCRIPTION


(RCWD60) Q GWTT 290-CONF ROS-NB1 B1F1W1V1E1
(RCWD61) A GWTT 290-CONF ROS-NB1 B1F1W1V1E1

BETA ELEVTR AILRON RUDDER
0.000 0.000 0.000 0.000
3.000 0.000 0.000 0.000

1
REFERENCE INFORMATION
SREF 9.1952 SQ FT
LREF 6.4320 FT
BREF 83.8920 FT
XMRP 1485.0040 IN
YMRP 10.0000 IN
ZMRP 377.0004 IN
SCALE 0.0400

MACH 0.170


FIG. 24 YAW POLARS WITH ENGINE PODS (E1)

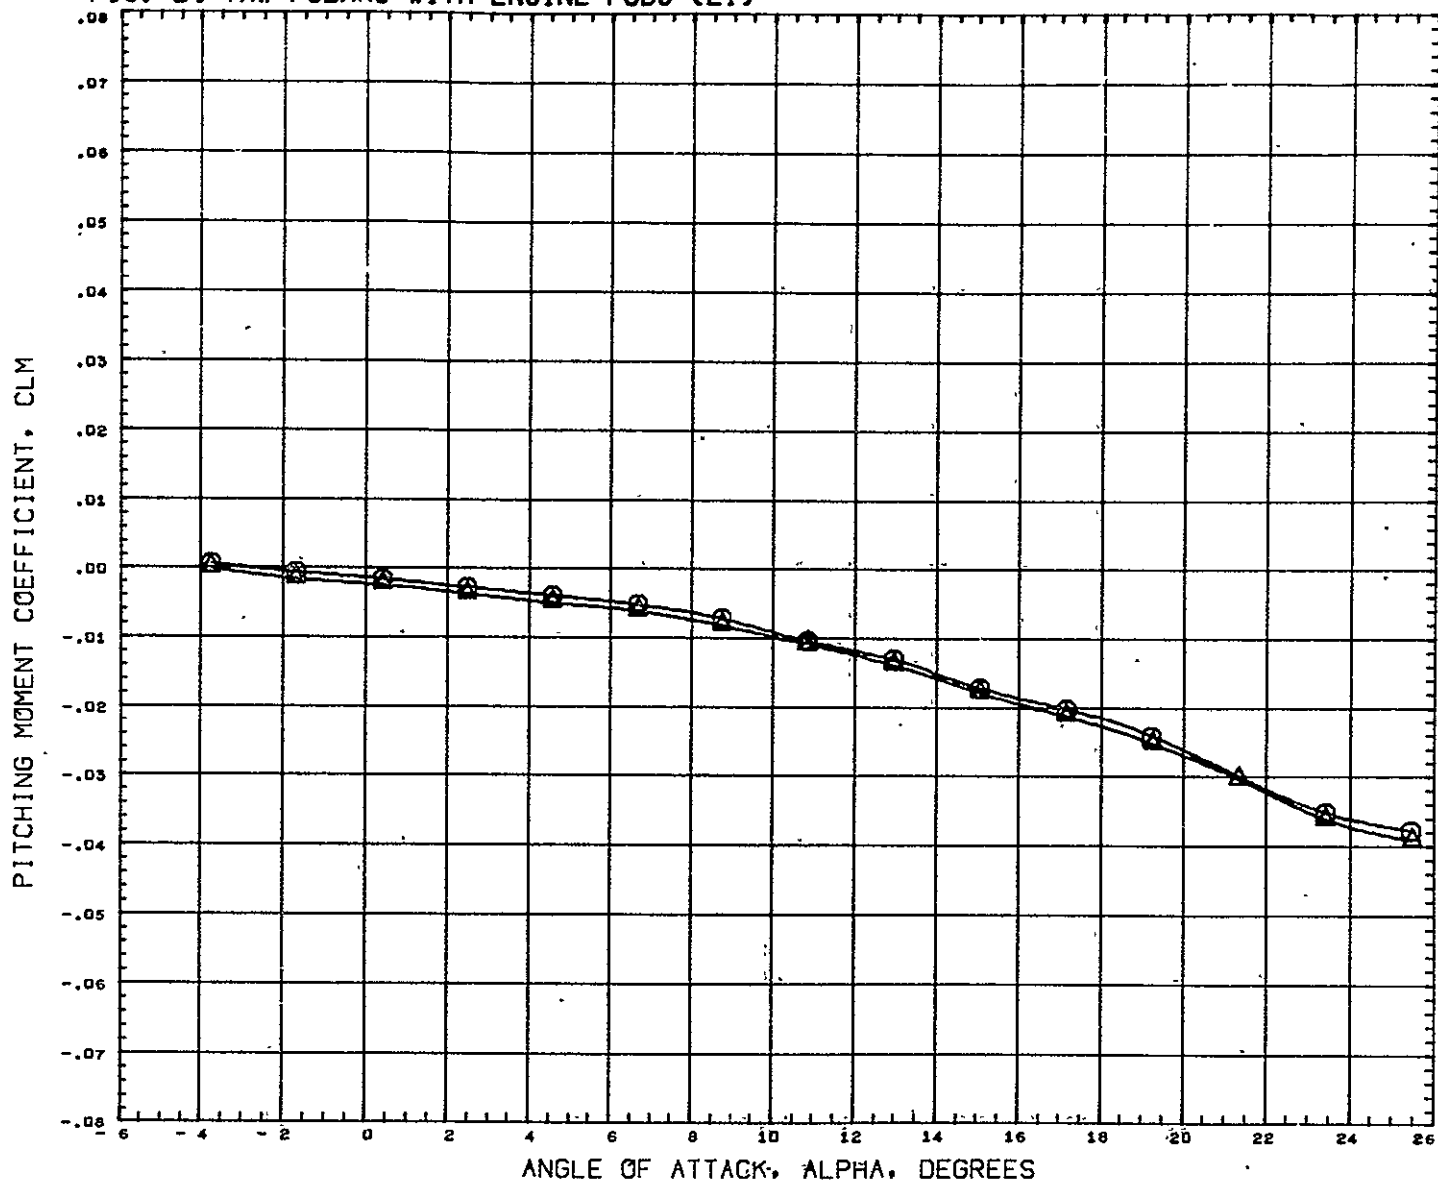

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW060)	Q GWTT 29D-CONF ROS-NB1 B1F1W1V1E1	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW061)	A GWTT 29D-CONF ROS-NB1 B1F1W1V1E1	3.000	0.000	0.000	0.000	LREF	6.4320 FT
						BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 24 YAW POLARS WITH ENGINE PODS (E1)

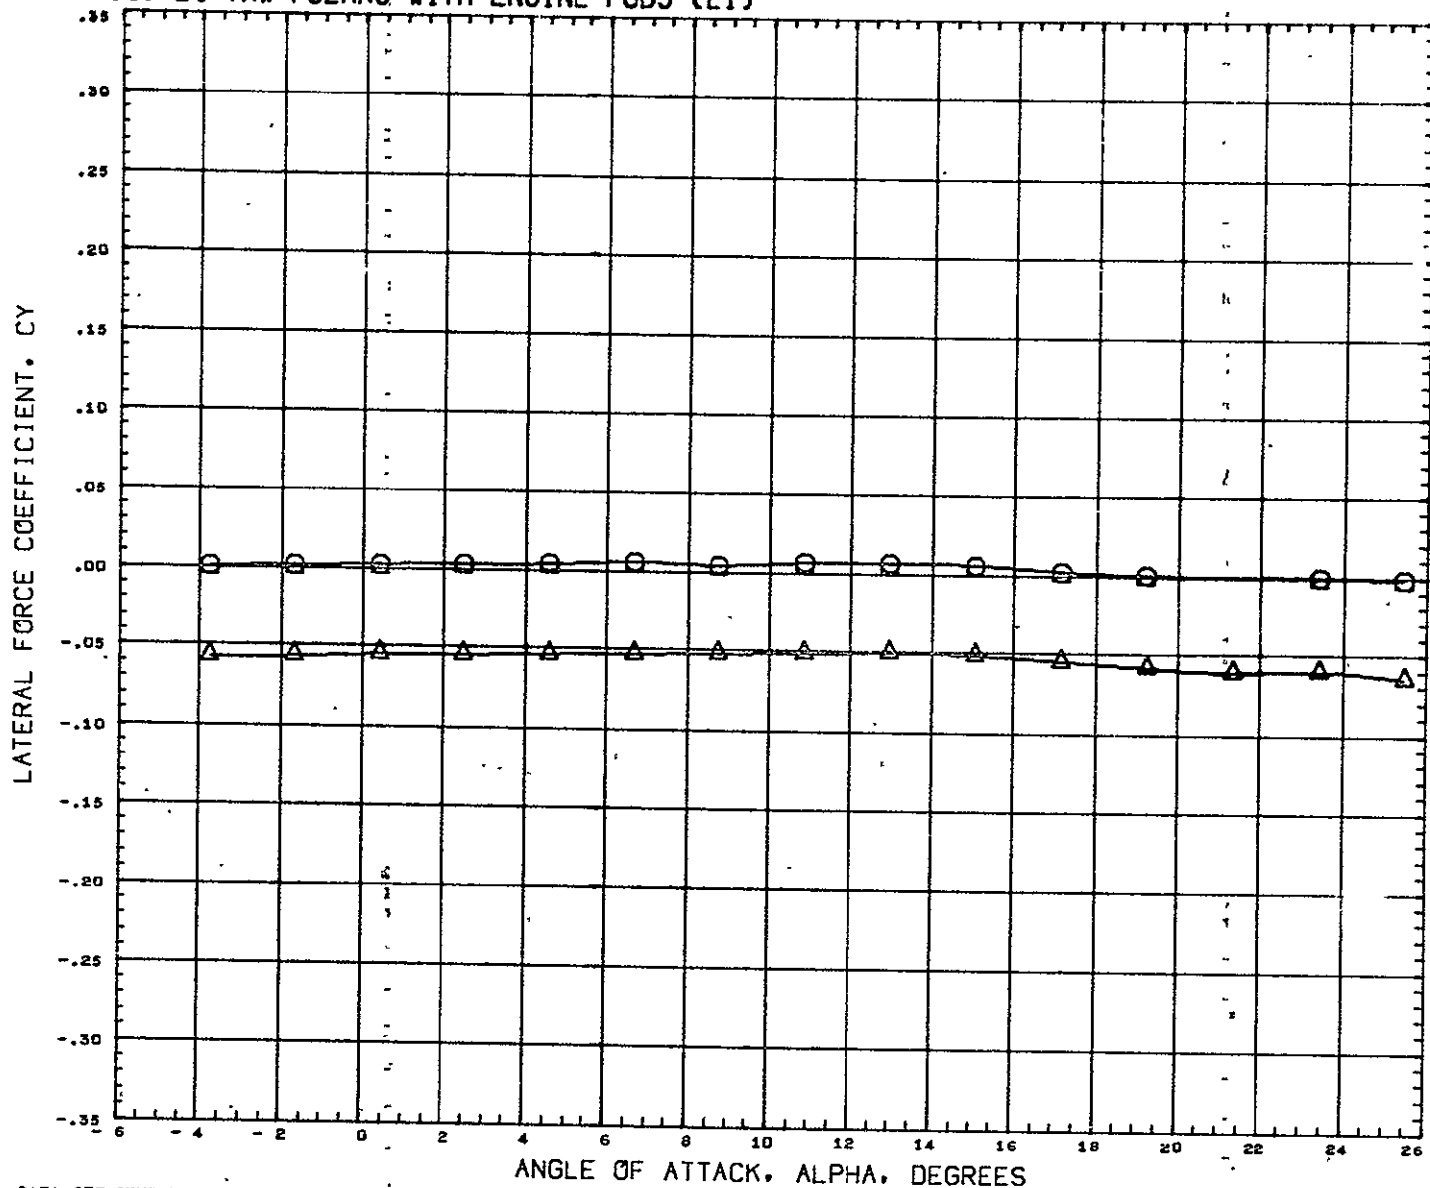


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW060)	GWTT 290-CONF ROS-NB1 B1F1W1V1E1
(RCW061)	GWTT 290-CONF ROS-NB1 B1F1W1V1E1

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
3.000	0.000	0.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XHRF	1485.0040 IN
YHRF	0.0000 IN
ZHRF	377.0004 IN
SCALE	0.0400

MACH 0.170


FIG. 24 YAW POLARS WITH ENGINE PODS (E1)

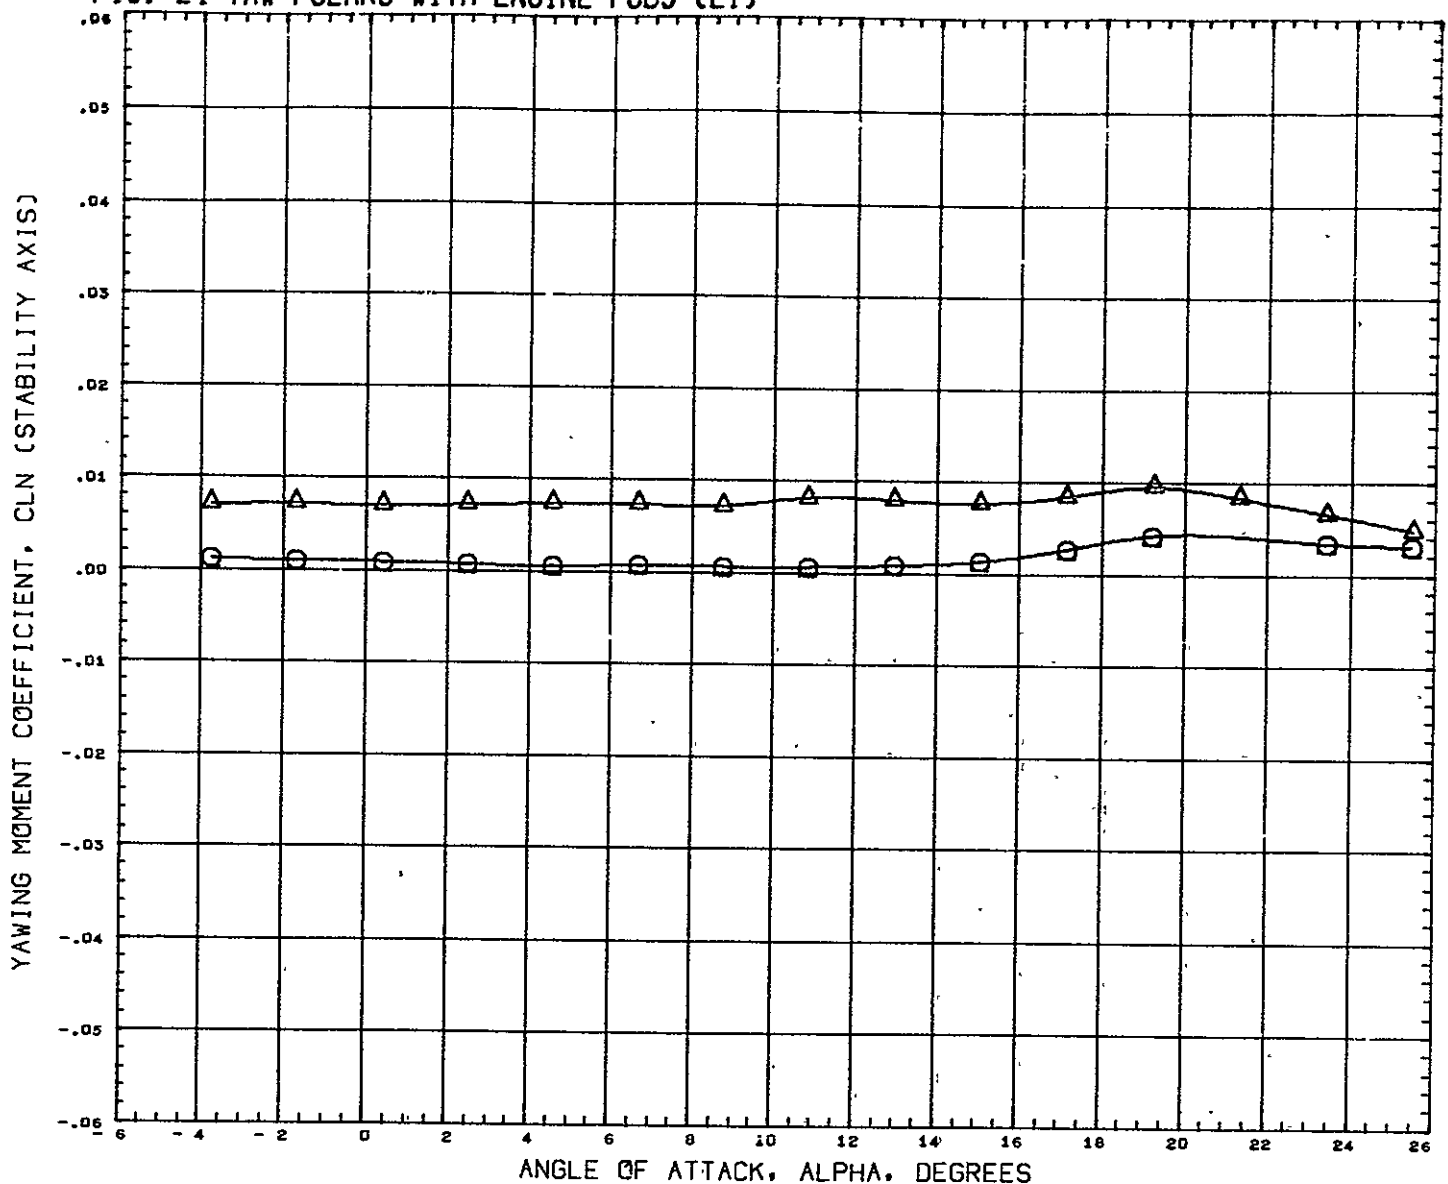

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
(RCWD60)	GWTT 29D-CONF ROS-NB1 B1F1W1V1E1	0.000	0.000	0.000	0.000	SREF	9.1952	SQ FT
(RCWD61)	GWTT 29D-CONF ROS-NB1 B1F1W1V1E1	3.000	0.000	0.000	0.000	LREF	6.4320	FT
						BREF	3.8920	FT
						XMRP	1485.0040	IN
						YMRP	0.0000	IN
						ZMRP	377.0004	IN
						SCALE	0.0400	

MACH 0.170

FIG. 24 YAW POLARS WITH ENGINE PODS (E1)

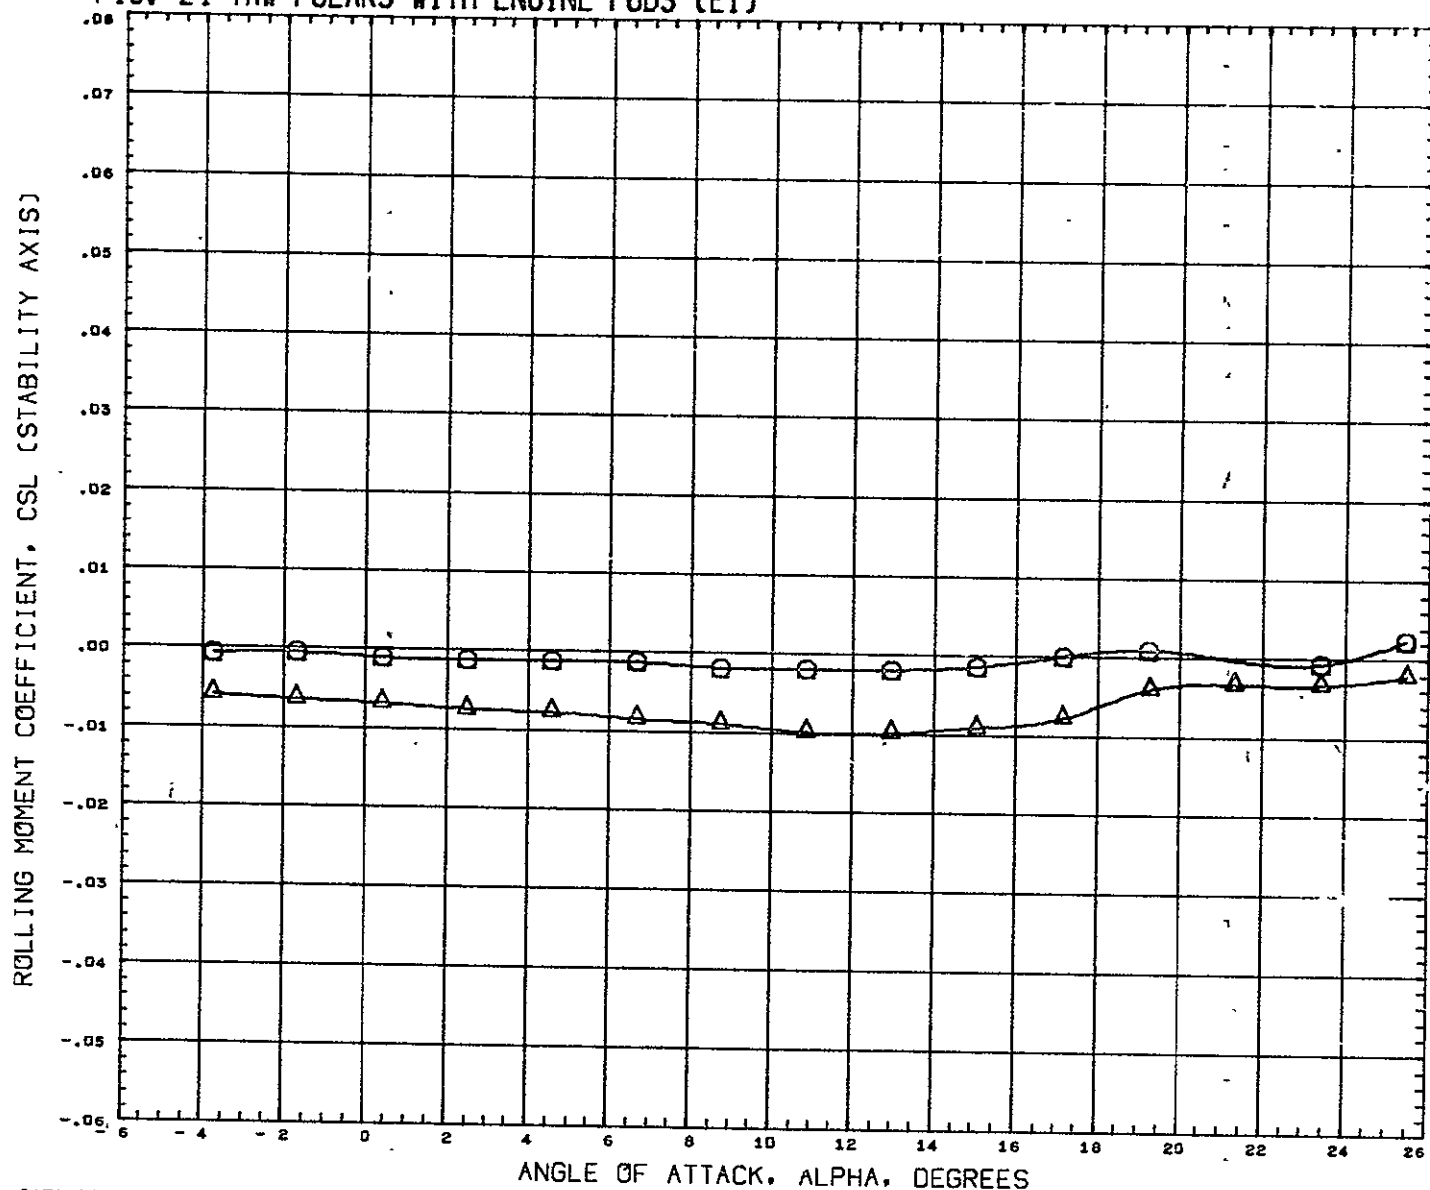

DATA SET SYMBOL CONFIGURATION DESCRIPTION


(RCW060)  GWTT 290-CONF ROS-NB1 BIF1W1V1E1
 (RCW061)  GWTT 290-CONF ROS-NB1 BIF1W1V1E1

BETA ELEVTR AILRON RUDDER
 0.000 0.000 0.000 0.000
 3.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP -377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 25 EFFECT OF ENGINE PODS(E1) IN YAW, ALPHA=21. DEG.

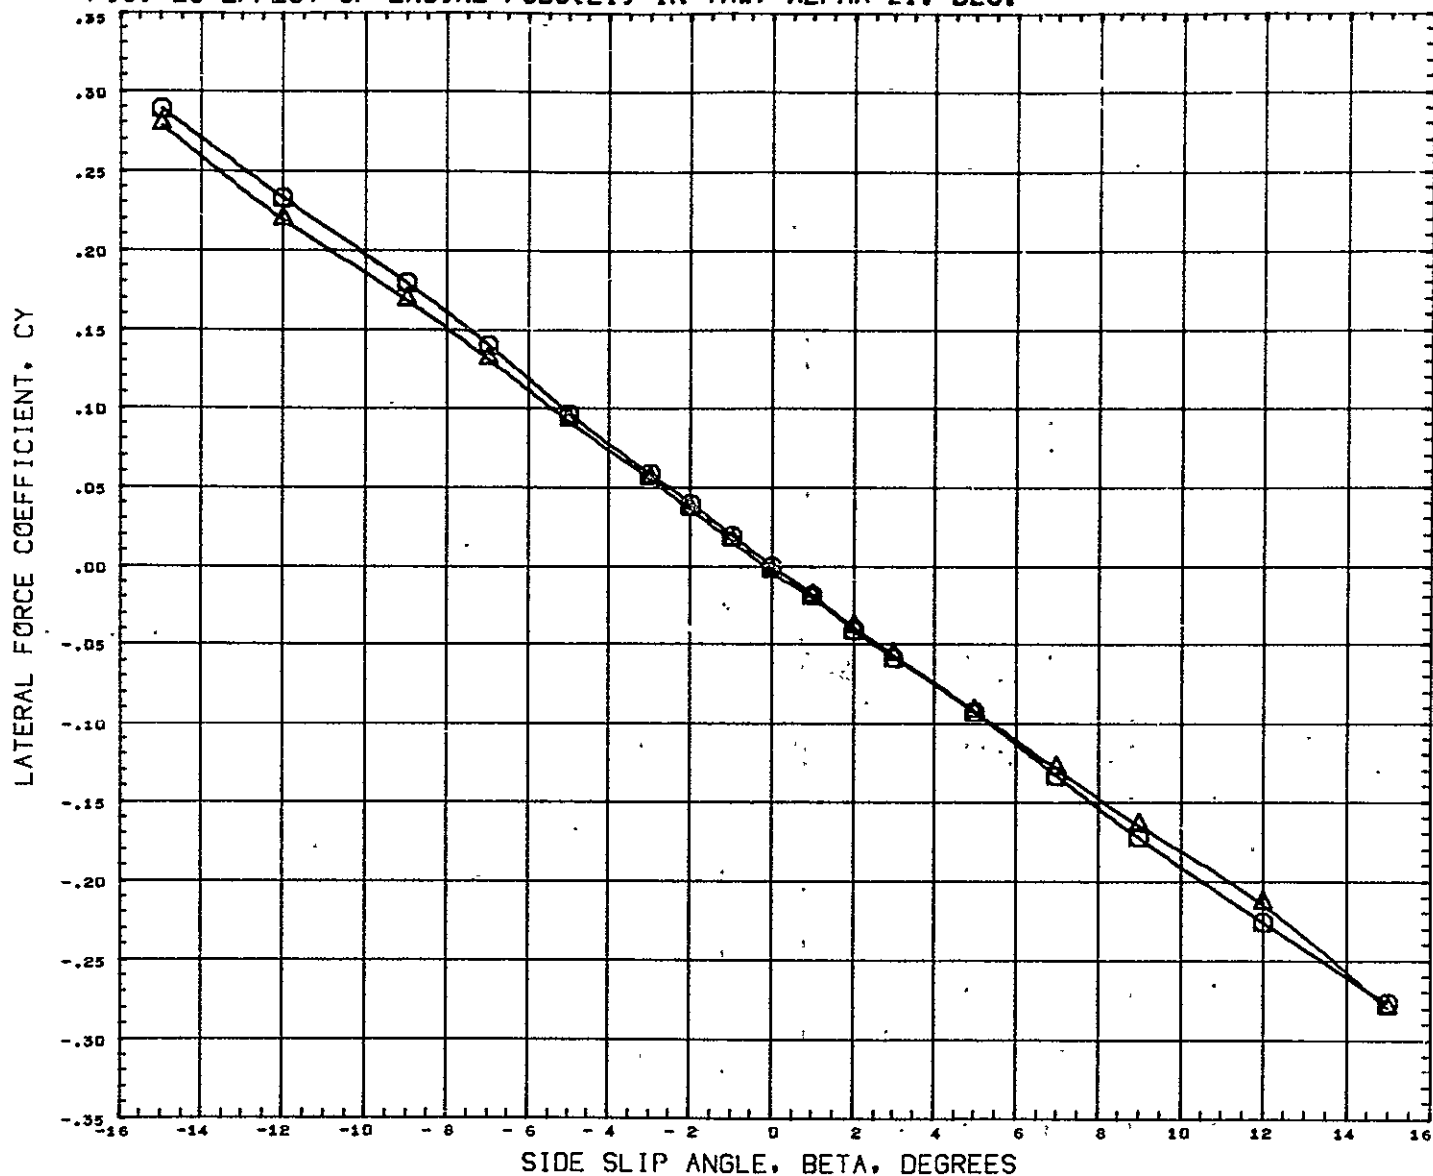


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW062) GWT 290-CONF ROS-NB1 B1F1W1V1E1
 (XCQ052) GWT 289-CONF. ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
21.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
				LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 25 EFFECT OF ENGINE PODS(E1) IN YAW. ALPHA=21. DEG.

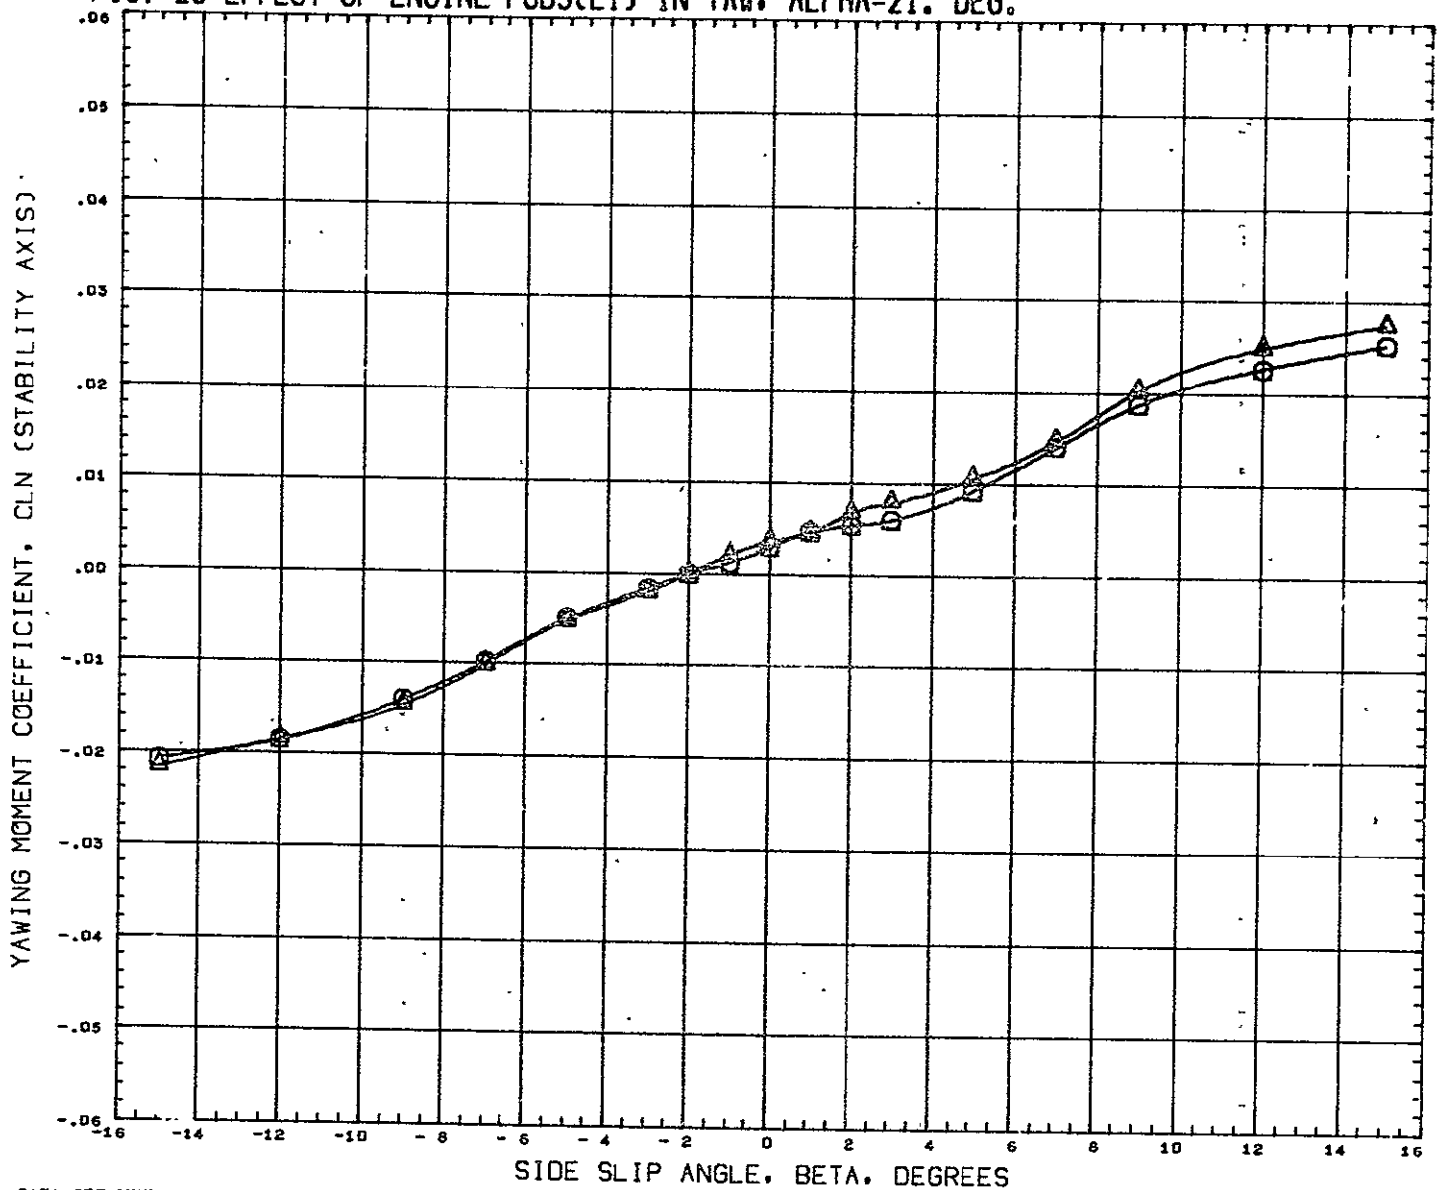


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACWD62) GWTT 290-CONF ROS-NB1 B1F1W1V1E1
 (XCQ052) GWTT 289-CONF. ROS-NB1 B1W1V1

ALPHA ELEVTR AILRON RUDDER
 21.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XNRP 1485.0040 IN
 YNRP 0.0000 IN
 ZNRP 377.0074 IN
 SCALE 0.0400

MACH 0.170

FIG. 25 EFFECT OF ENGINE PODS(E1) IN YAW, ALPHA=21. DEG.

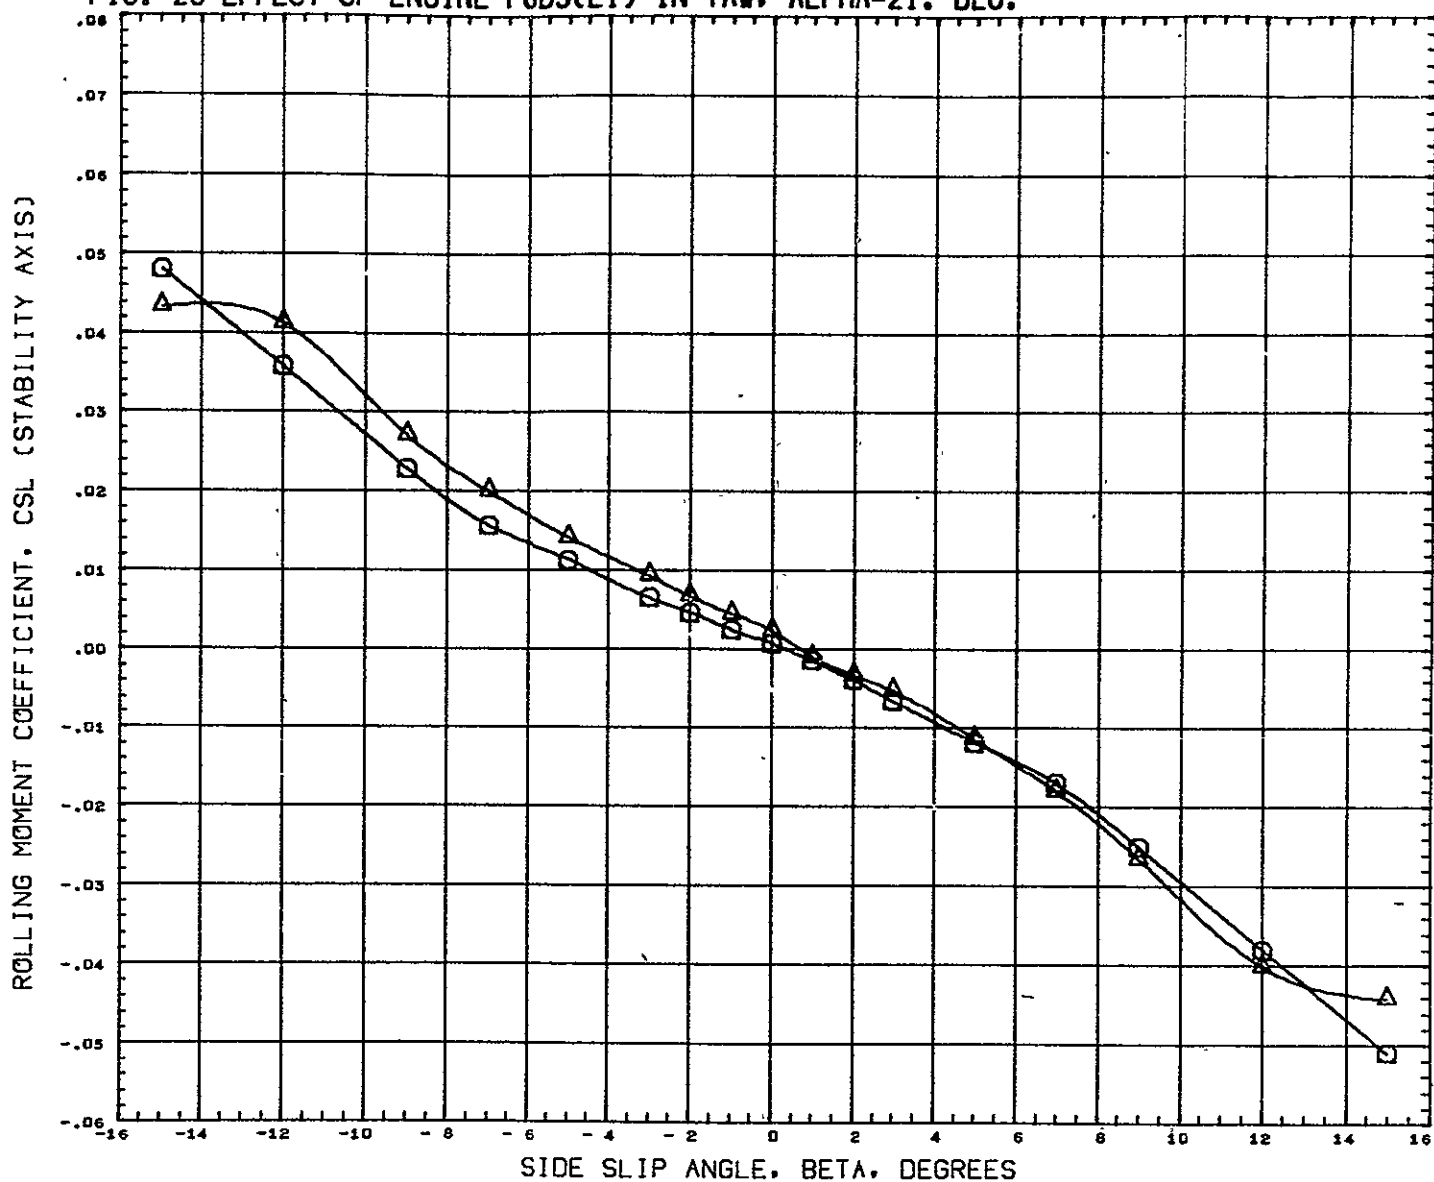


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW062) ○ GWT 290-CONF ROS-NB1 B1F1W1V1E1
 (XCQ052) △ GWT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
21.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
	0.000	0.000	0.000	LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 25 EFFECT OF ENGINE PODS(E1) IN YAW, ALPHA=21. DEG.

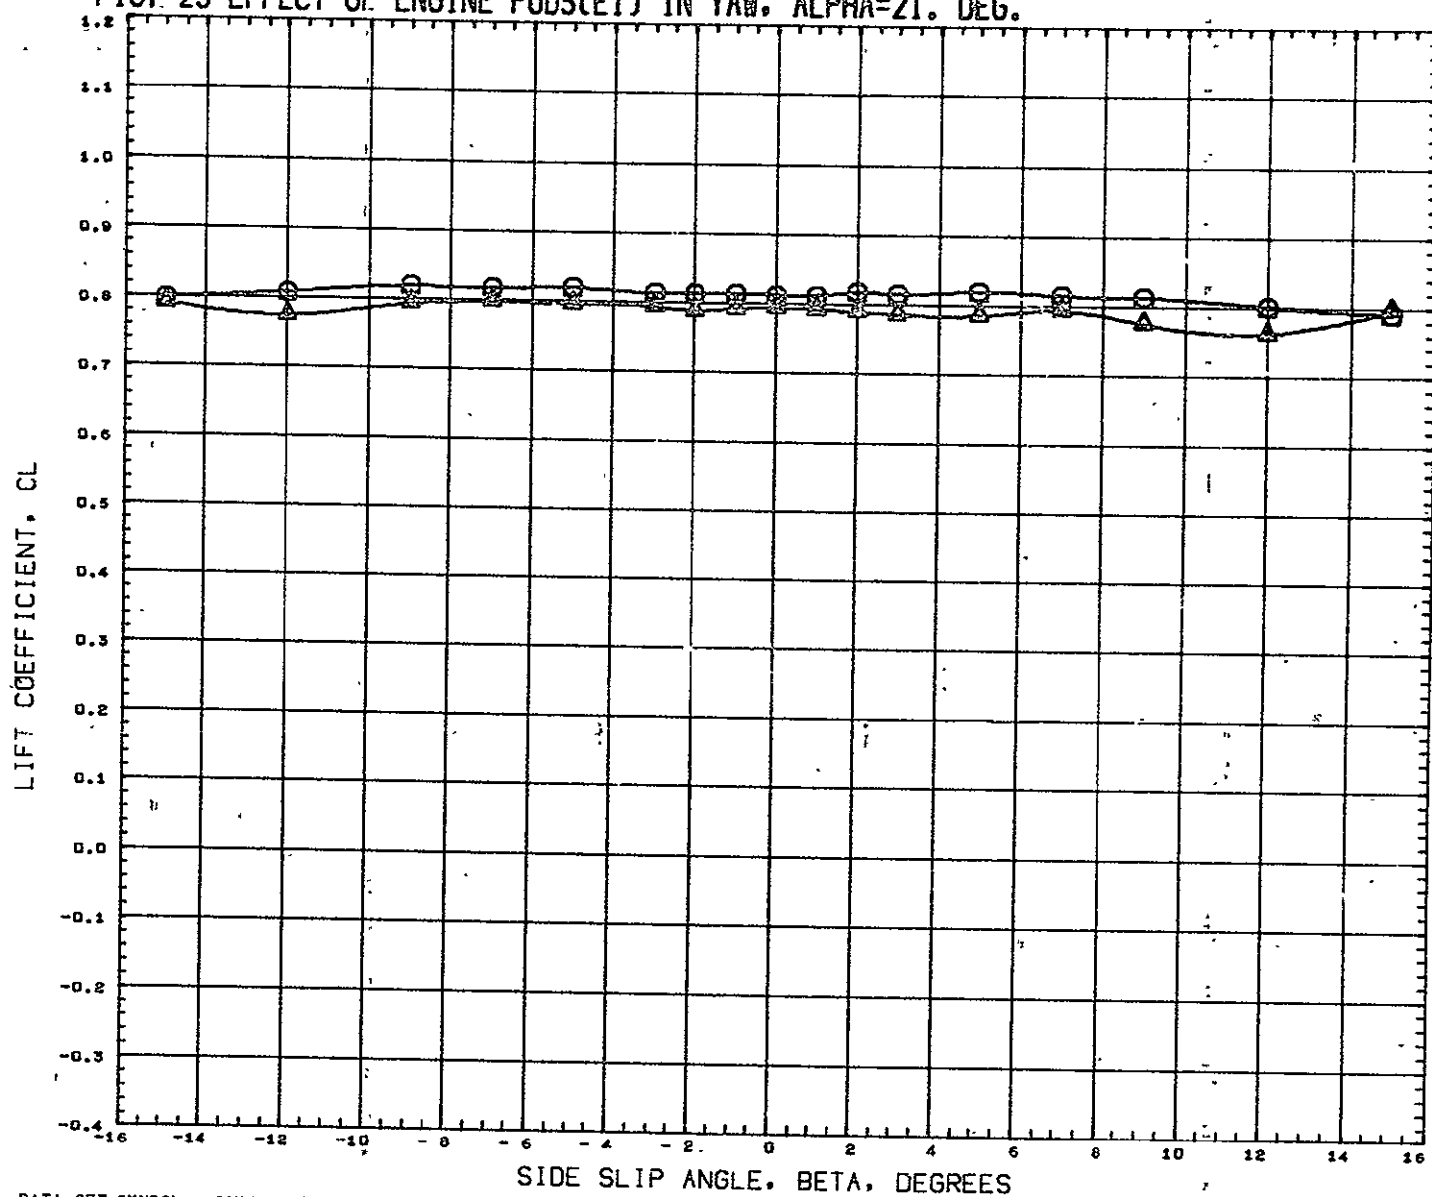


DATA SET SYMBOL - CONFIGURATION DESCRIPTION
 (ACW062) GWT 290-CONF ROS-NB1 B1:1W1V1E1
 (XCQ052) GWT 289-CONF ROS-NB1 B1W1V1

ALPHA ELEVTR AILRON RUDDER
 21.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.6920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 25 EFFECT OF ENGINE PODS(E1) IN YAW, ALPHA=21. DEG.

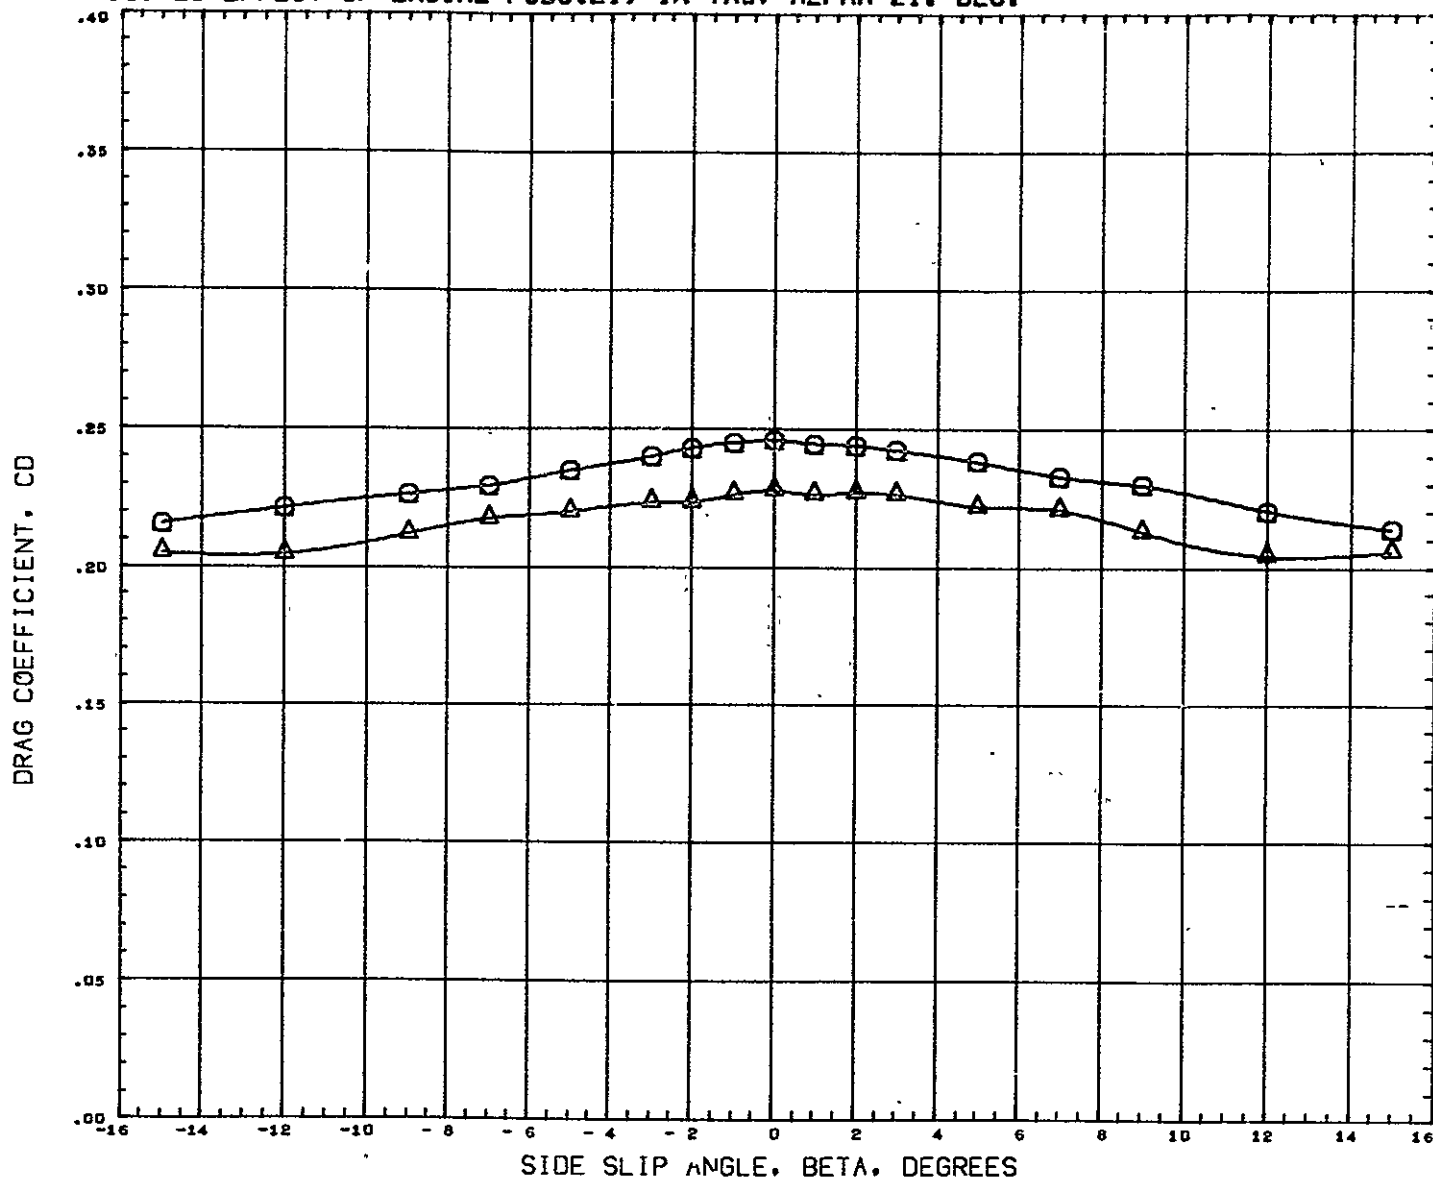


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW062) GWT 290-CONF ROS-NB1 B1F1W1V1E1
 (XCQ052) GWT 289-CONF ROS-NB1 B1W1V1

ALPHA ELEVTR AILRON RUDDER
 21.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 25 EFFECT OF ENGINE PODS(E1) IN YAW, ALPHA=21. DEG.

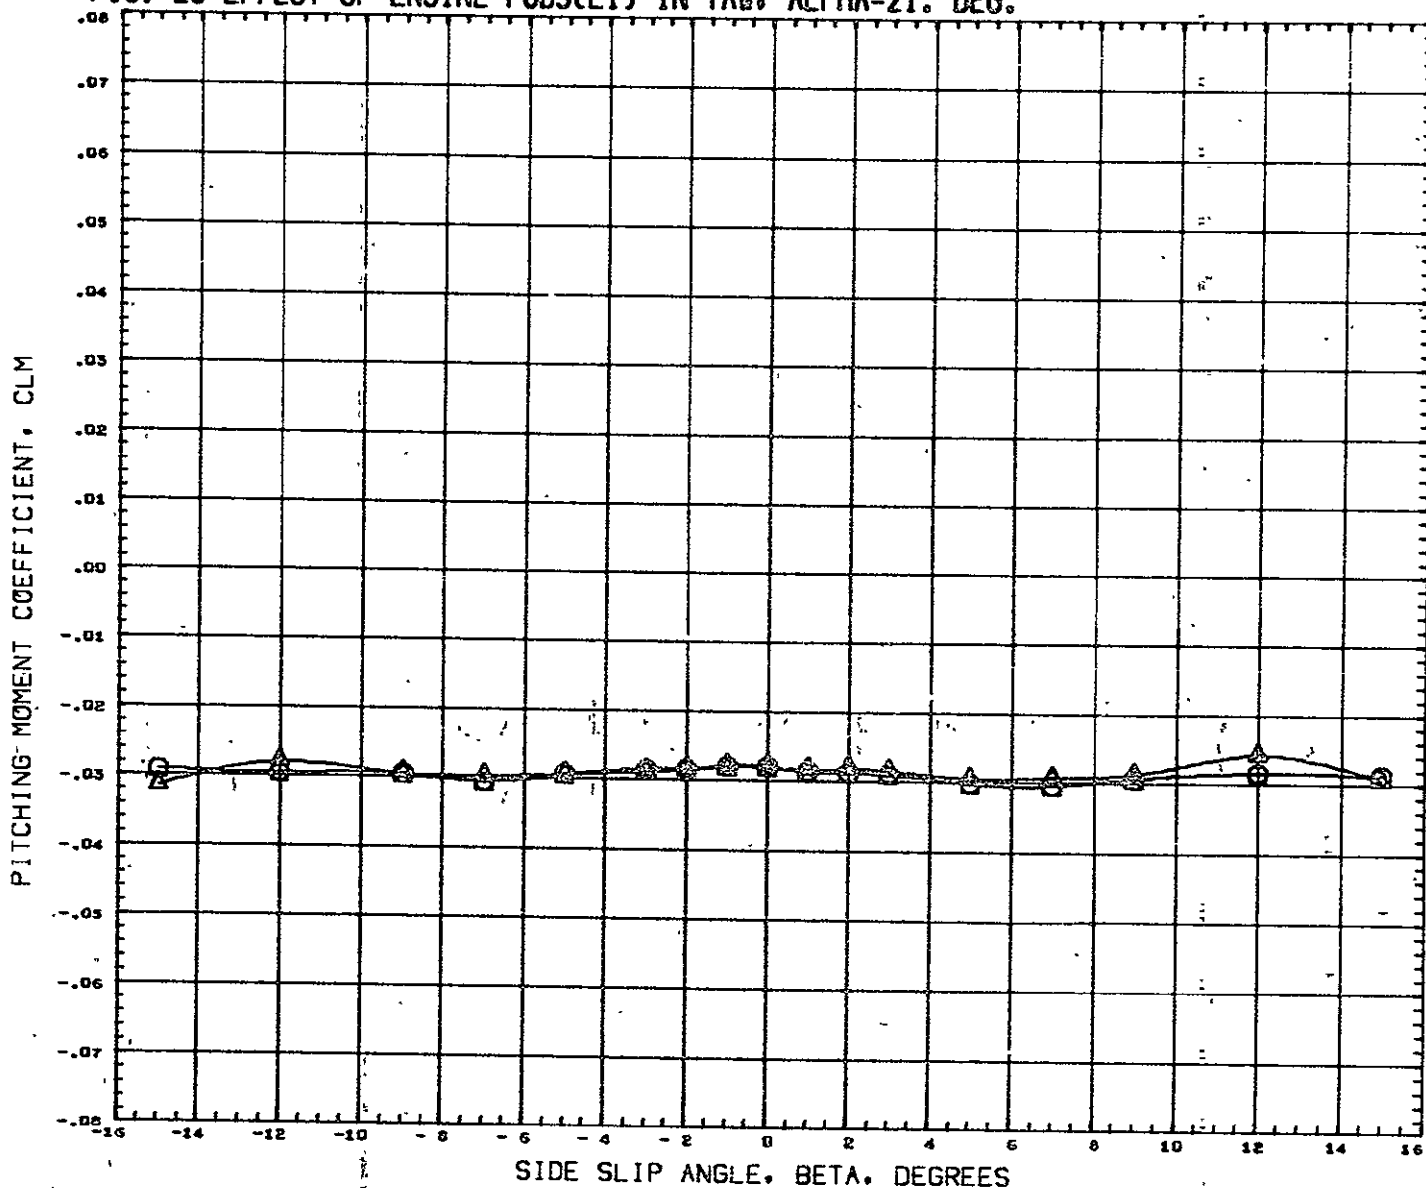


DATA SET SYMBOL	CONFIGURATION	DESCRIPTION
(ACW062)	GWTT 290-CONF	ROS-NB1 B1F1W1V1E1
(XCR052)	GWTT 289-CONF	ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER
21.000	0.000	0.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170


FIG. 26 RUDDER EFFECTIVENESS IN YAW. ALPHA=0.0 DEG.

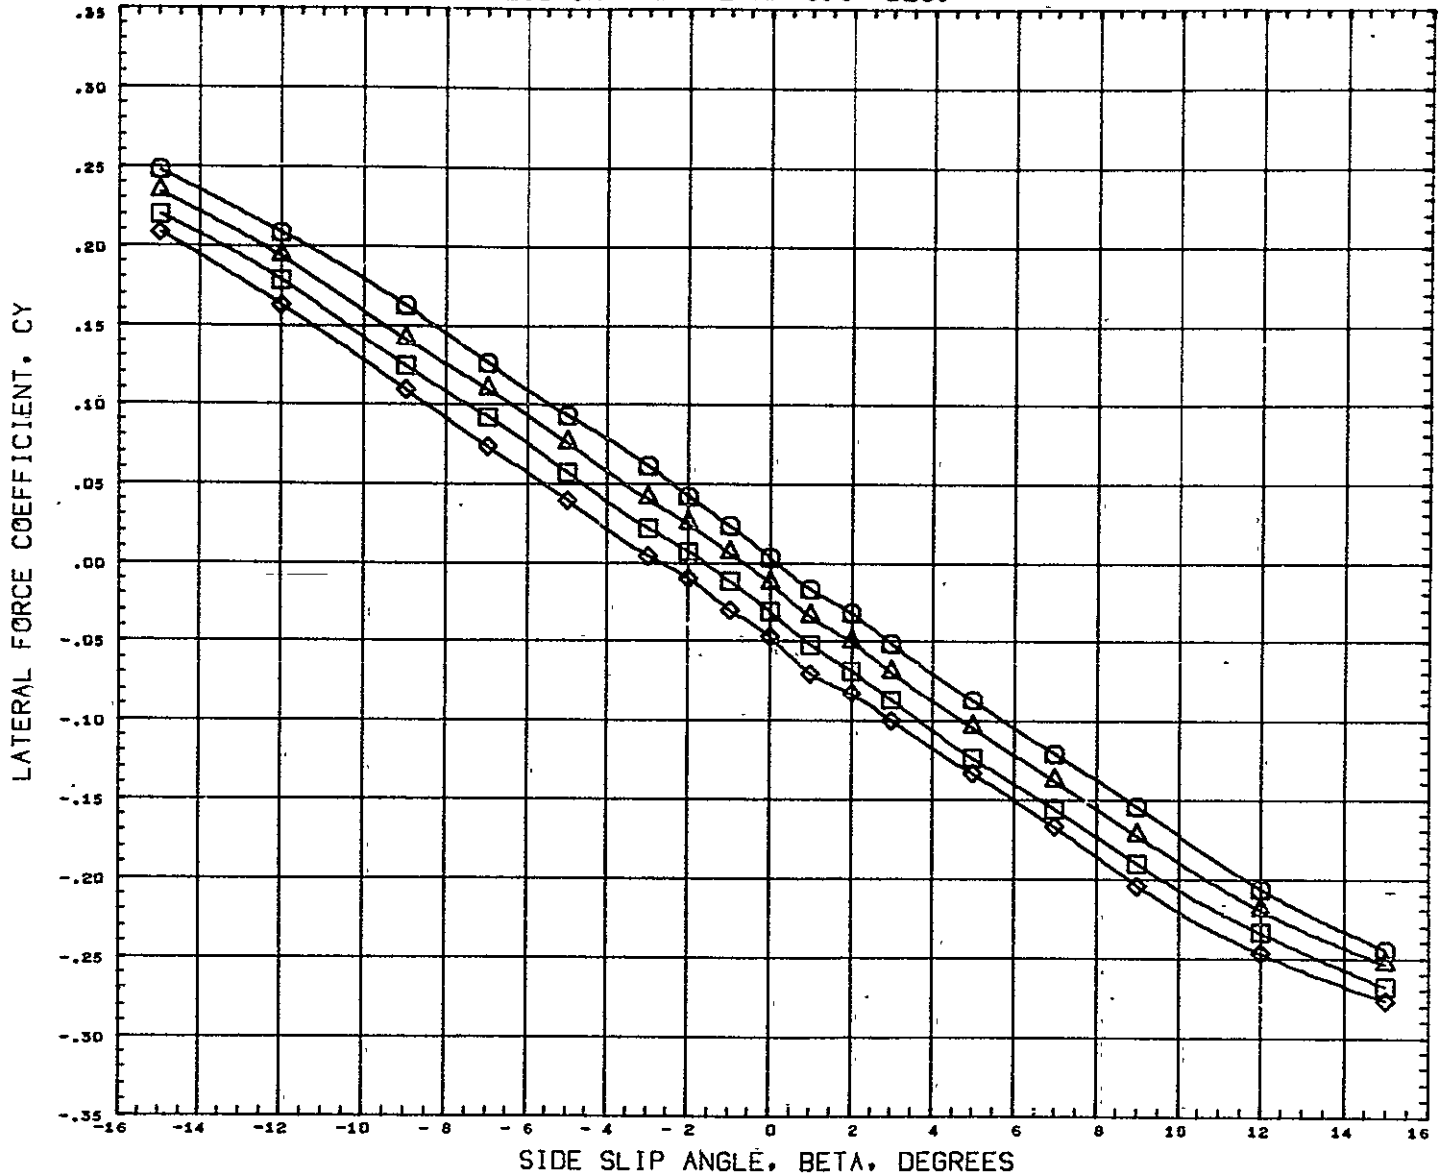

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW002)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW064)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCW065)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	BREF	3.8920 FT
(XCQ056)	GWTT 289-CONF ROS-NB1 B1W1V1	0.000	0.000	0.000	-10.000	XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 26 RUDDER EFFECTIVENESS IN YAW. ALPHA=0.0 DEG.

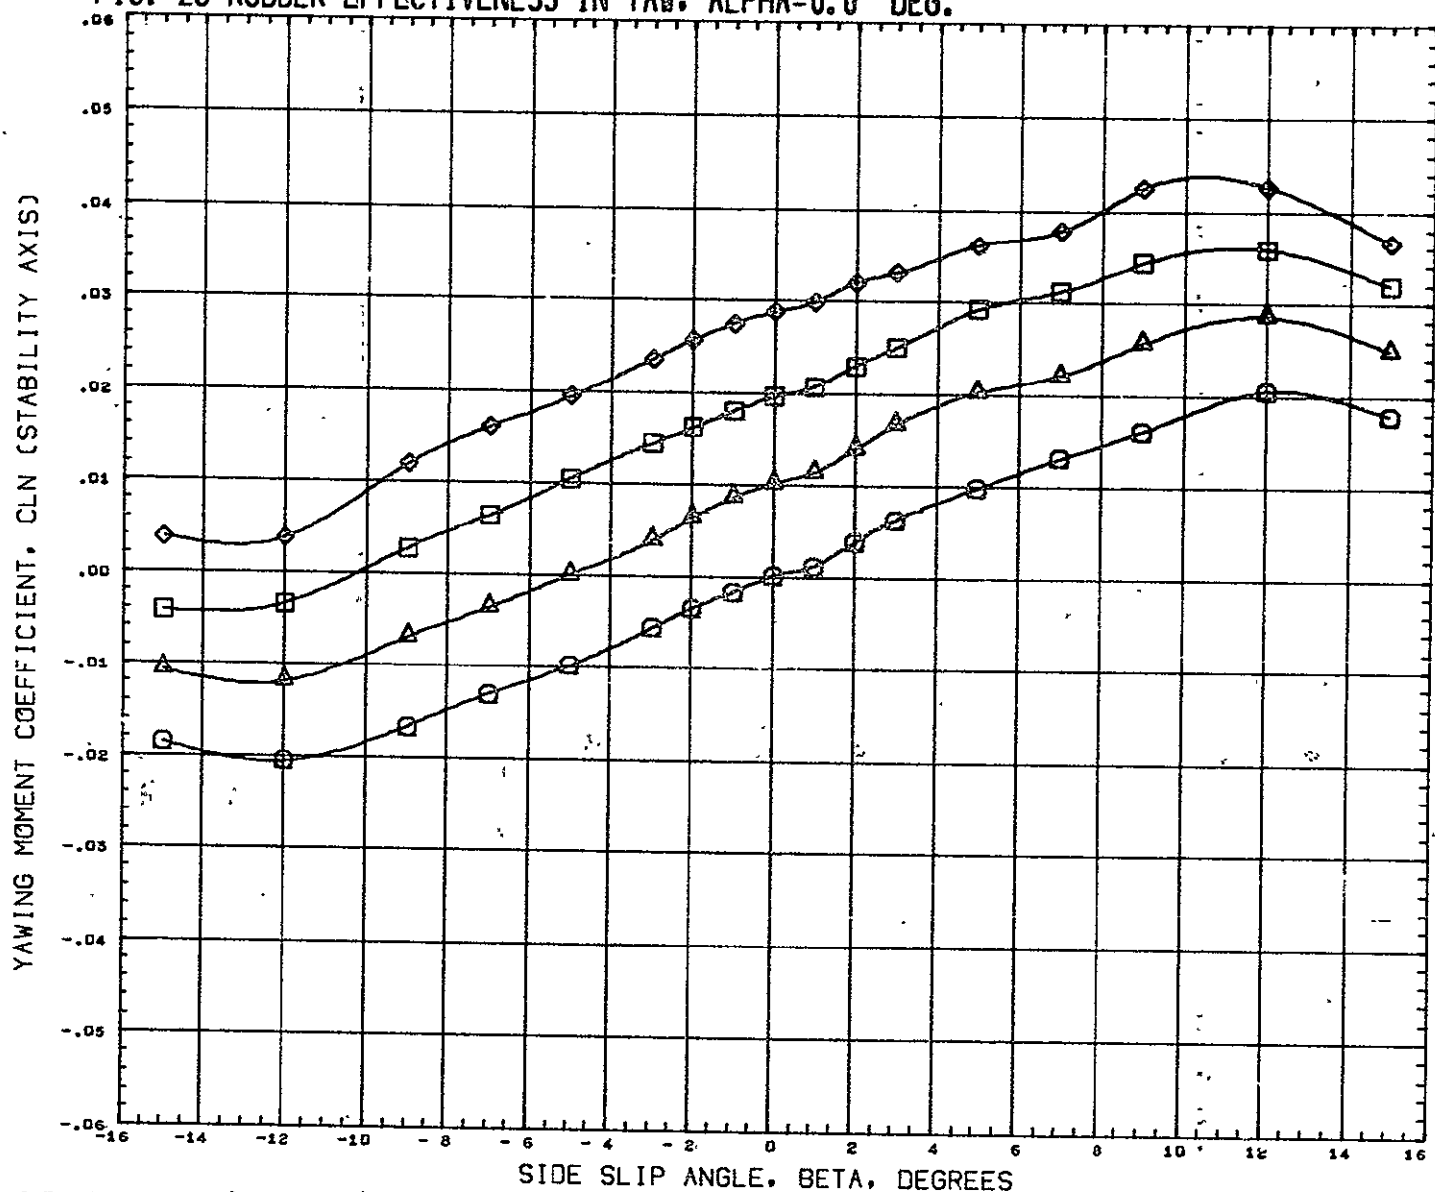


DATA SET SYMBOL CONFIGURATION DESCRIPTION

(RCW062)	◇	GWTT 290-CONF	ROS-NB1	B1F1W1V1
(RCW064)	△	GWTT 290-CONF	ROS-NB1	B1F1W1V1
(RCW065)	◇	GWTT 290-CONF	ROS-NB1	B1F1W1V1
(XC0056)	□	GWTT 289-CONF	ROS-NB1	B1W1V1

HACH 0.170

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
0.000	0.000	0.000	-5.000	LREF	6.4320 FT
0.000	0.000	0.000	-15.000	BREF	3.8920 FT
0.000	0.000	0.000	-10.000	XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400


FIG. 26 RUDDER EFFECTIVENESS IN YAW, ALPHA=0.0 DEG.

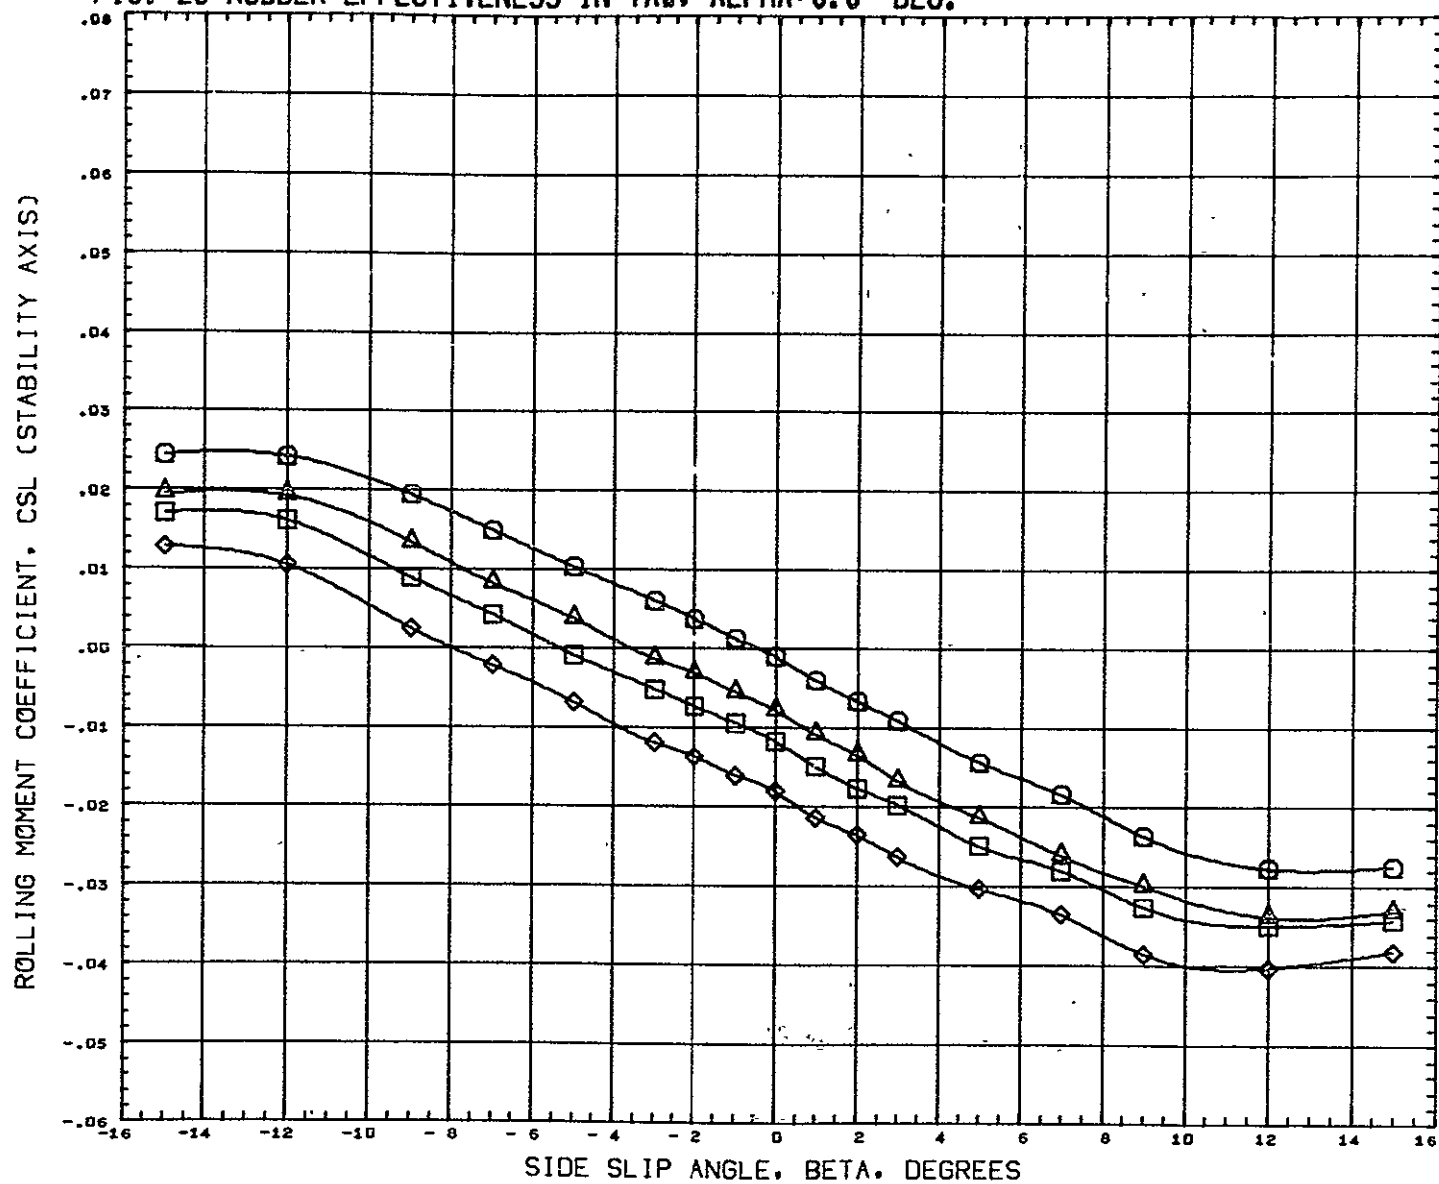

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW002)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW064)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCW065)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	BREF	3.8920 FT
(XC0056)	GWTT 289-CONF. ROS-NB1 B1W1V1	0.000	0.000	0.000	-10.000	XHREF	1485.0040 IN
						YHREF	0.0000 IN
						ZHREF	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 26 RUDDER EFFECTIVENESS IN YAW, ALPHA=0.0 DEG.

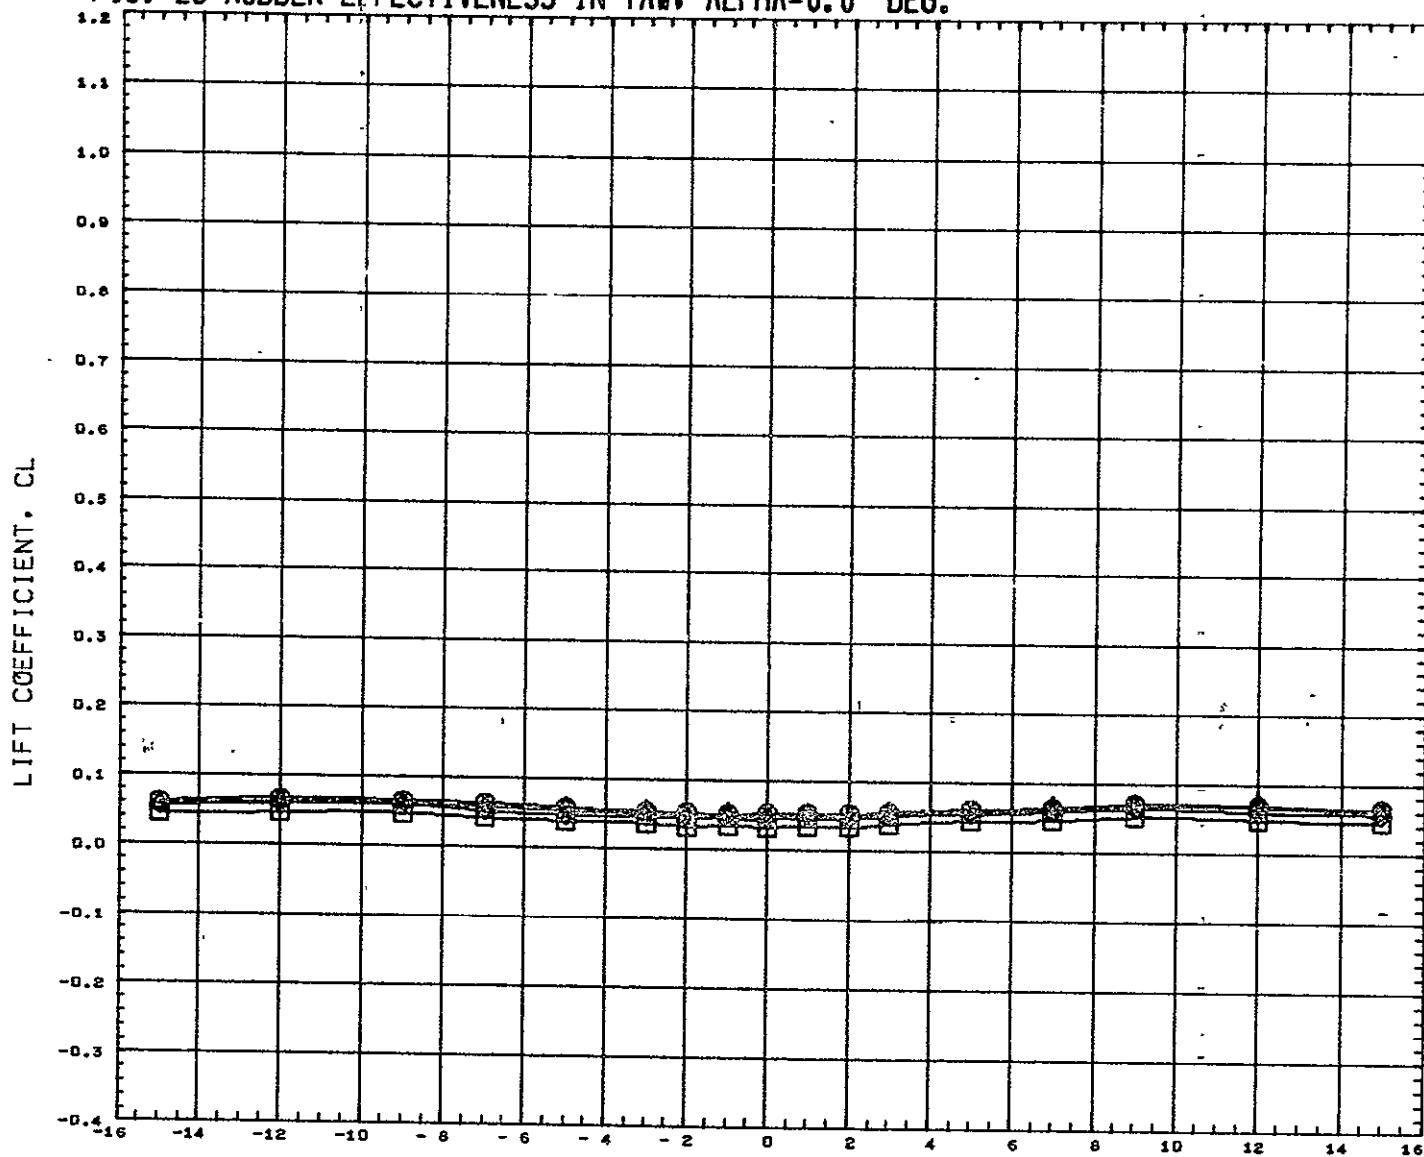

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCWD02)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCWD64)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	LREF	6.4320 FT
(RCWD65)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	BREF	3.8920 FT
(XCWD56)	GWTT 289-CONF ROS-NB1 B1W1V1	0.000	0.000	0.000	-10.000	XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 26 RUDDER EFFECTIVENESS IN YAW, ALPHA=0.0 DEG.

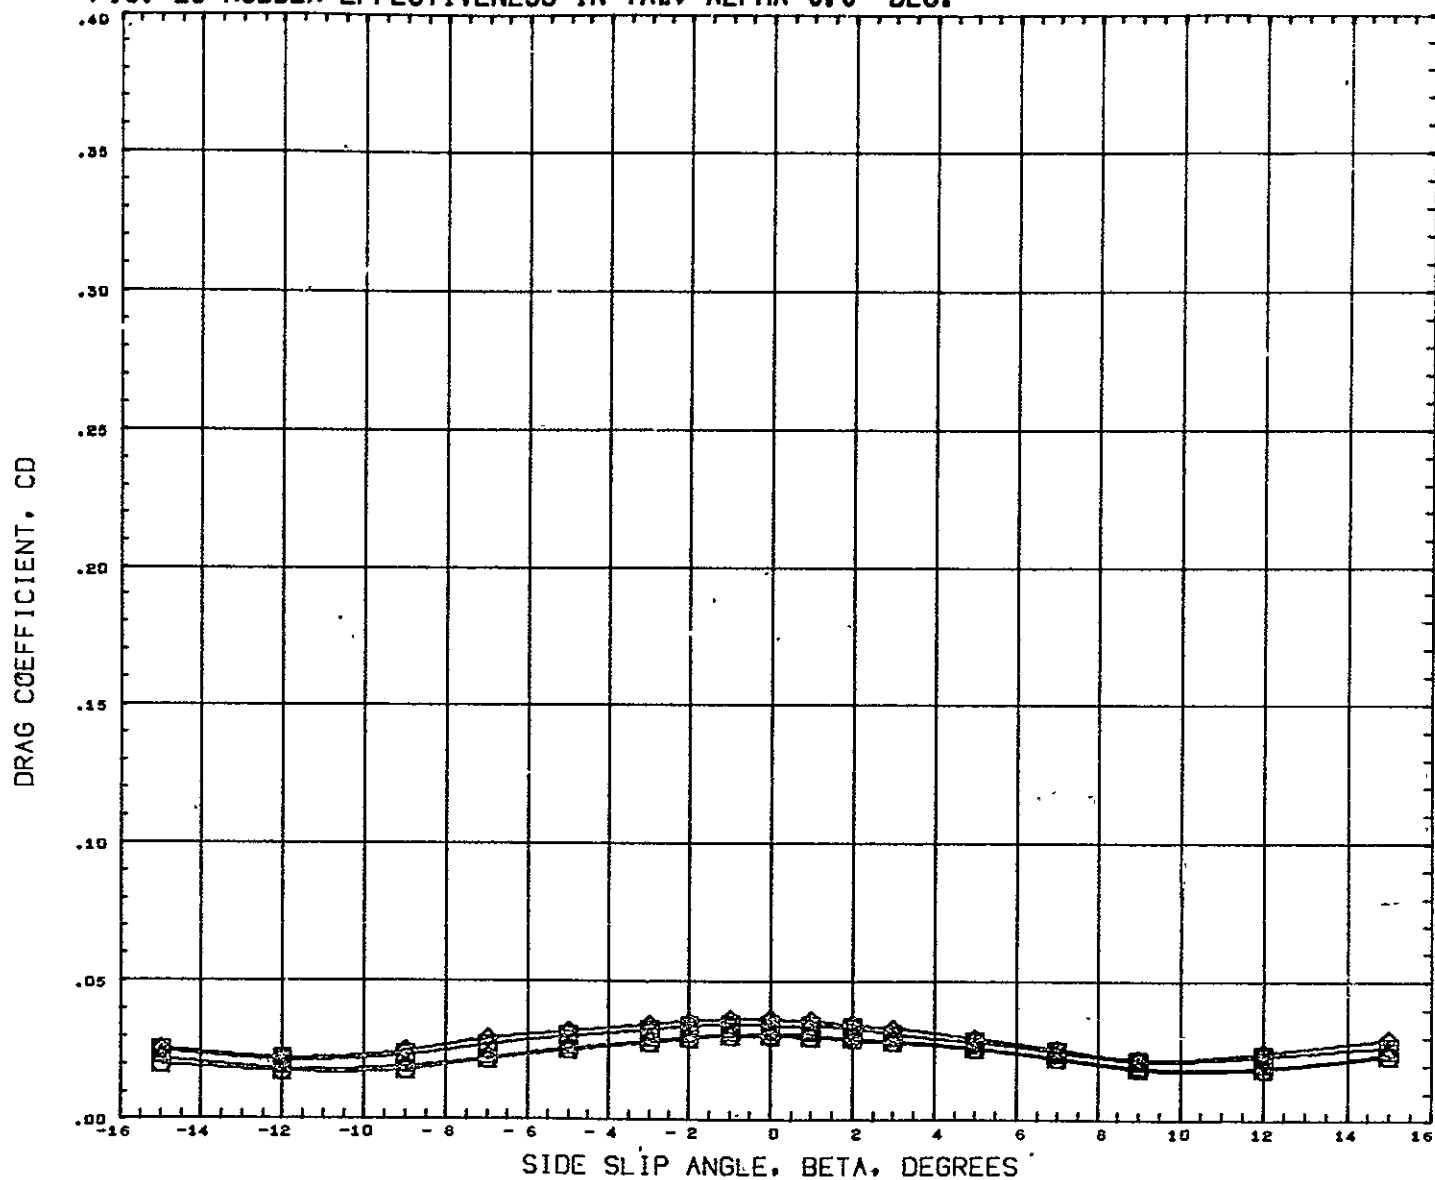

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(RCW002)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
(RCW064)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	LREF 6.4320 FT
(RCW065)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	BREF 3.8920 FT
(XCQ056)	GWTT 289-CONF ROS-NB1 B1W1V1	0.000	0.000	0.000	-10.000	XHRP 1485.0040 IN
						YHRP 0.0000 IN
						ZHRP 377.0004 IN
						SCALE 0.0400

MACH 0.170

FIG. 26 RUDDER EFFECTIVENESS IN YAW, ALPHA=0.0 DEG.

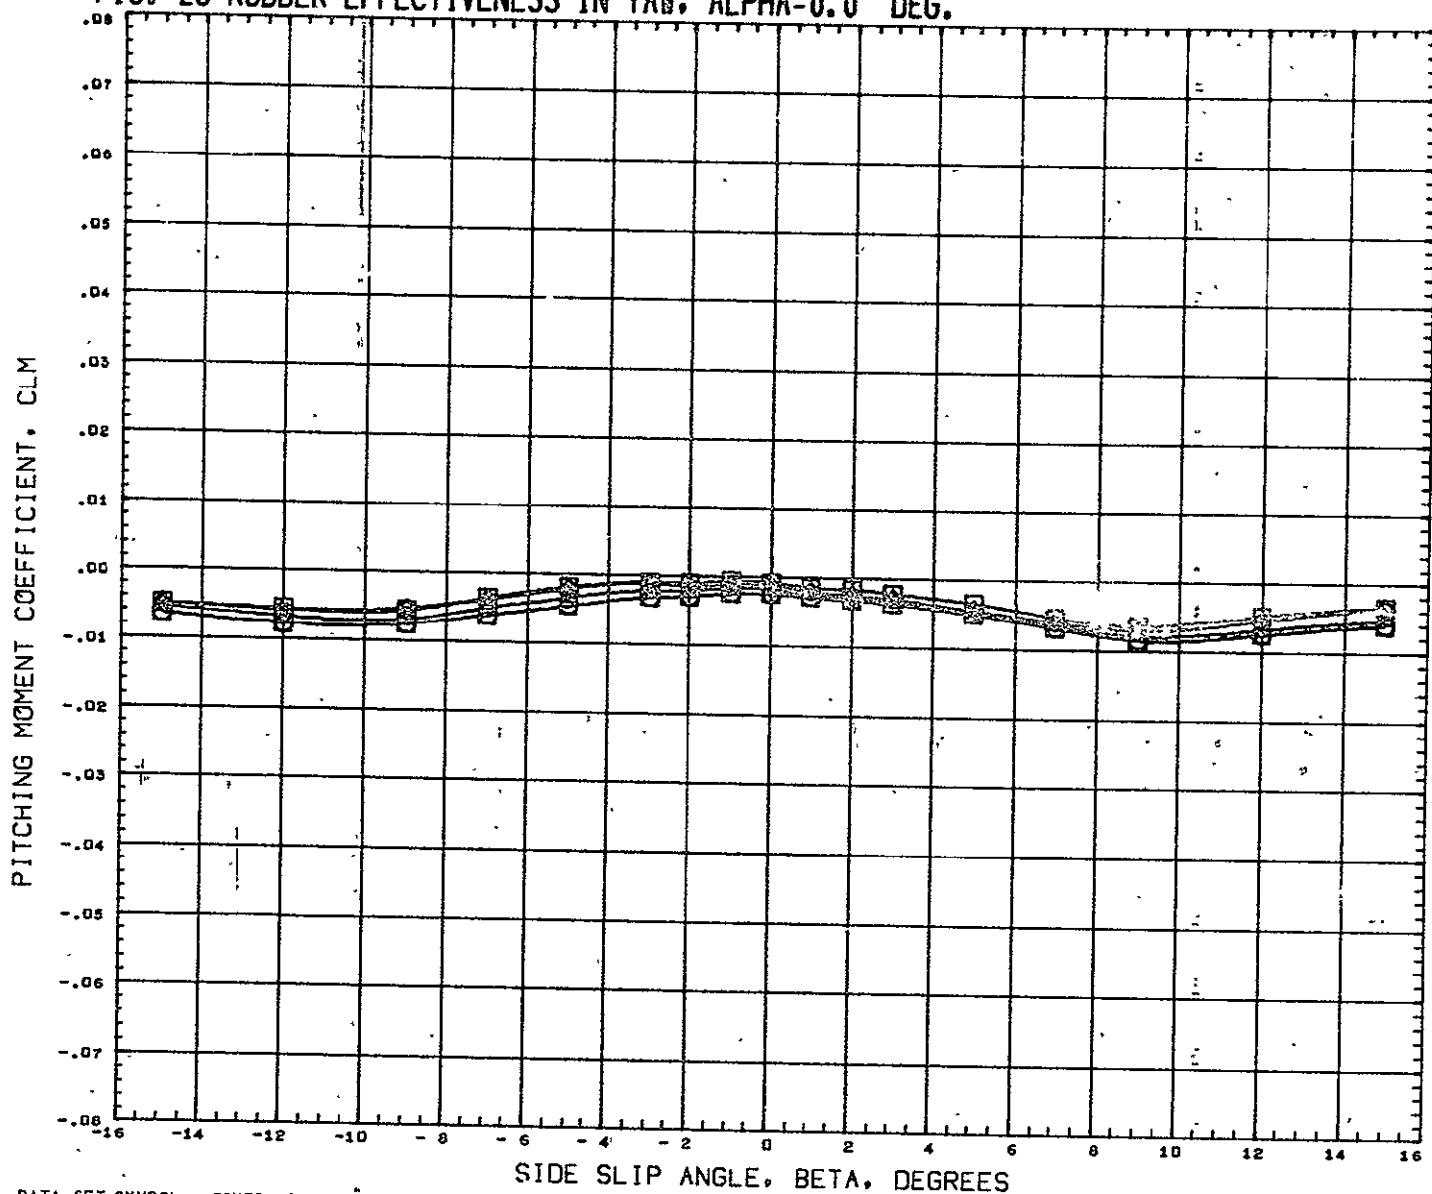


DATA SET SYMBOL CONFIGURATION DESCRIPTION

(RCW002)	○	GWTT 290-CONF	ROS-NB1	B1F1W1V1
(RCW064)	△	GWTT 290-CONF	ROS-NB1	B1F1W1V1
(RCW065)	◇	GWTT 290-CONF	ROS-NB1	B1F1W1V1
(XC0056)	□	GWTT 289-CONF	ROS-NB1	B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
0.000	0.000	0.000	-5.000	LREF	6.4320 FT
0.000	0.000	0.000	-15.000	BREF	3.8920 FT
0.000	0.000	0.000	-10.000	XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170


FIG. 27 RUDDER EFFECTIVENESS IN YAW, ALPHA=21. DEG

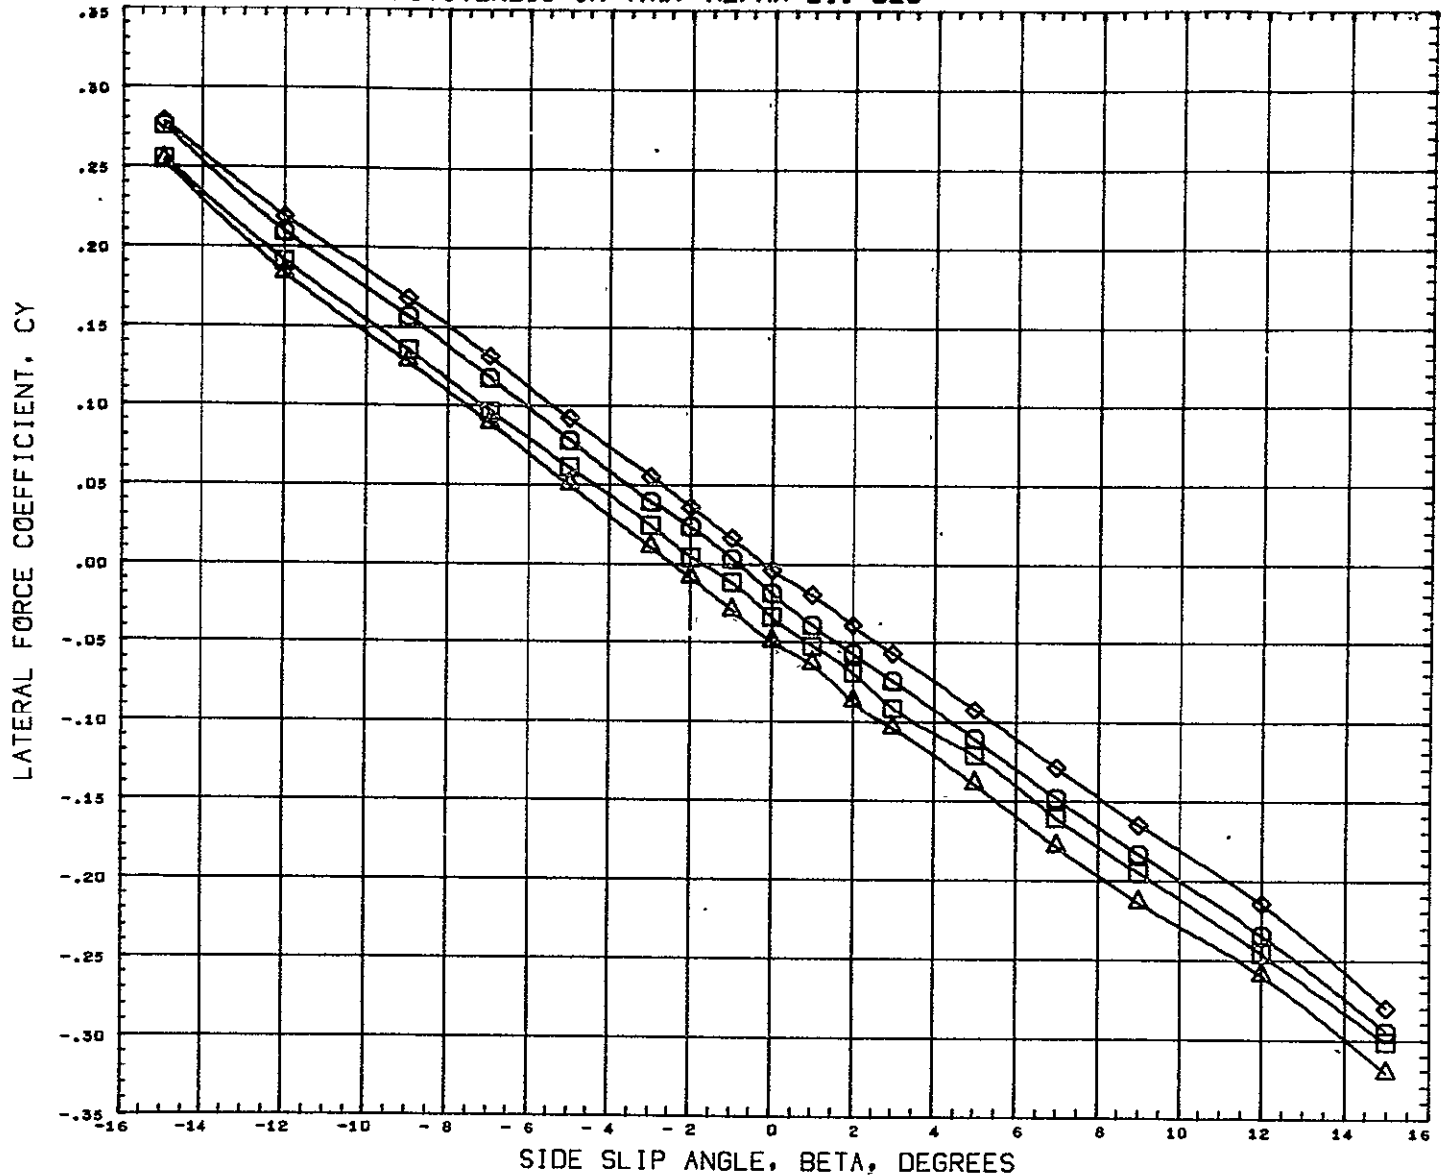

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
(ACW063)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	SREF	9.1952	SQ FT
(ACW066)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	LREF	6.4320	FT
(XC0052)	GWTT 289-CONF ROS-NB1 B1W1V1	21.000	0.000	0.000	0.000	BREF	3.8920	FT
(XC0057)	GWTT 289-CONF ROS-NB1 B1W1V1	21.000	0.000	0.000	-10.000	XMRP	1485.0040	IN
						YMRP	0.0000	IN
						ZMRP	377.0004	IN
						SCALE	0.0400	

MACH 0.170

FIG. 27 RUDDER EFFECTIVENESS IN YAW, ALPHA=21. DEG

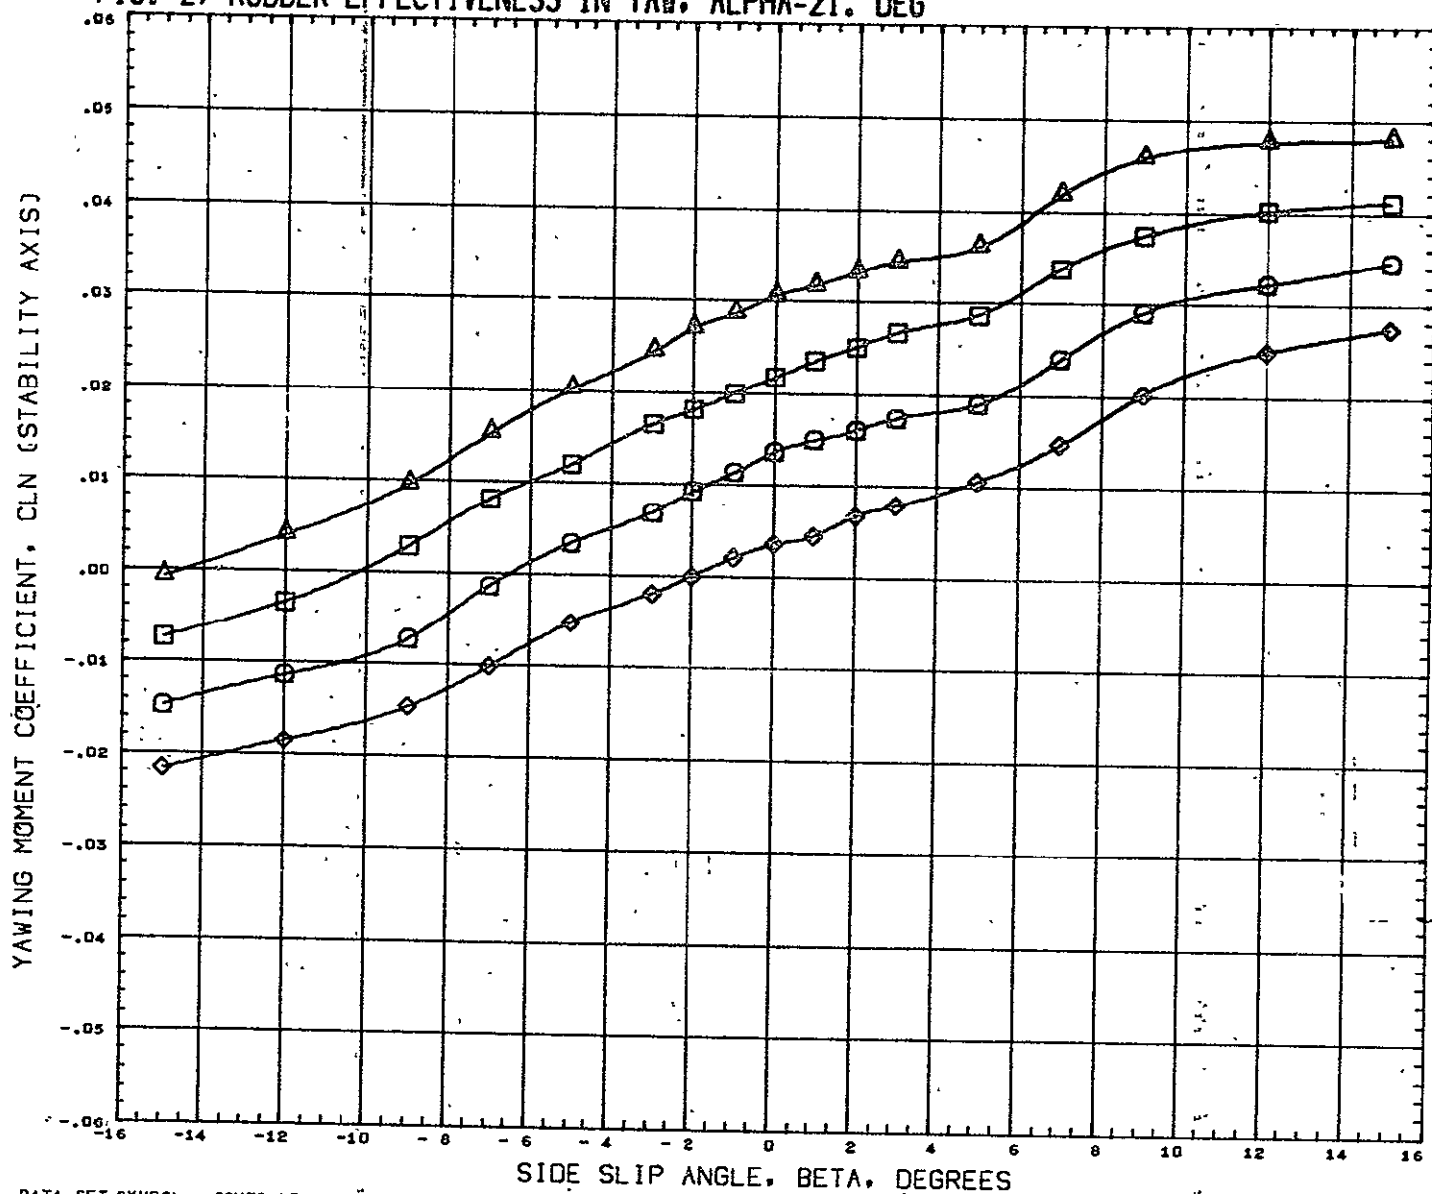


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(ACW063)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(ACW066)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(XCQ052)	GWTT 289-CONF ROS-NB1 B1W1V1
(XCQ057)	GWTT 289-CONF ROS-NB1 B1W1V1

ALPHA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	-5.000
0.000	0.000	0.000	-15.000
21.000	0.000	0.000	0.000
21.000	0.000	0.000	-10.000

REFERENCE INFORMATION		
SREF	9.1952	SQ FT
LREF	6.4320	FT
BREF	3.8920	FT
XMRP	1485.0040	IN
YMRP	0.0000	IN
ZMRP	377.0004	IN
SCALE	0.0400	

MACH 0.170


FIG. 27 RUDDER EFFECTIVENESS IN YAW. ALPHA=21. DEG

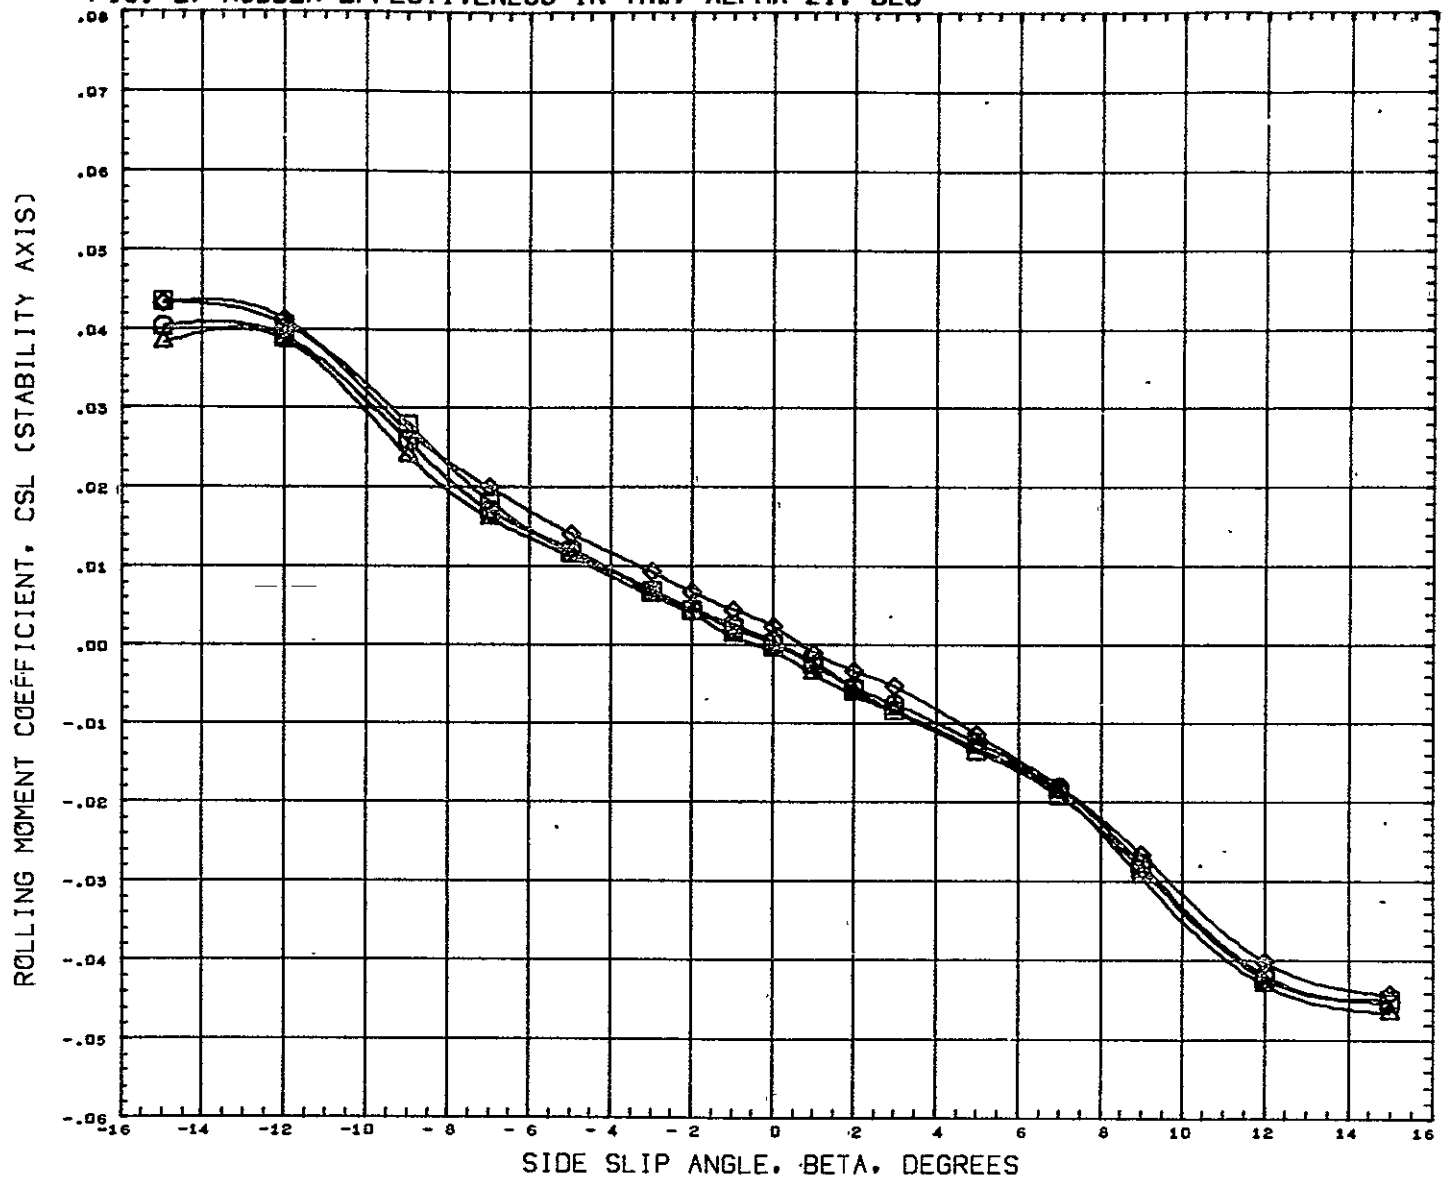

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACW063)	○	GWTT 290-CONF	ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	SREF	9.1952 SQ FT
(ACW066)	△	GWTT 290-CONF	ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	LREF	6.4320 FT
(XC0052)	◇	GWTT 289-CONF	ROS-NB1 B1W1V1	21.000	0.000	0.000	0.000	BREF	3.8920 FT
(XC0057)	□	GWTT 289-CONF	ROS-NB1 B1W1V1	21.000	0.000	0.000	-10.000	XHRP	1485.0040 IN
								YHRP	0.0000 IN
								ZHRP	377.0004 IN
								SCALE	0.0400

MACH 0.170


FIG. 27 RUDDER EFFECTIVENESS IN YAW, ALPHA=21. DEG

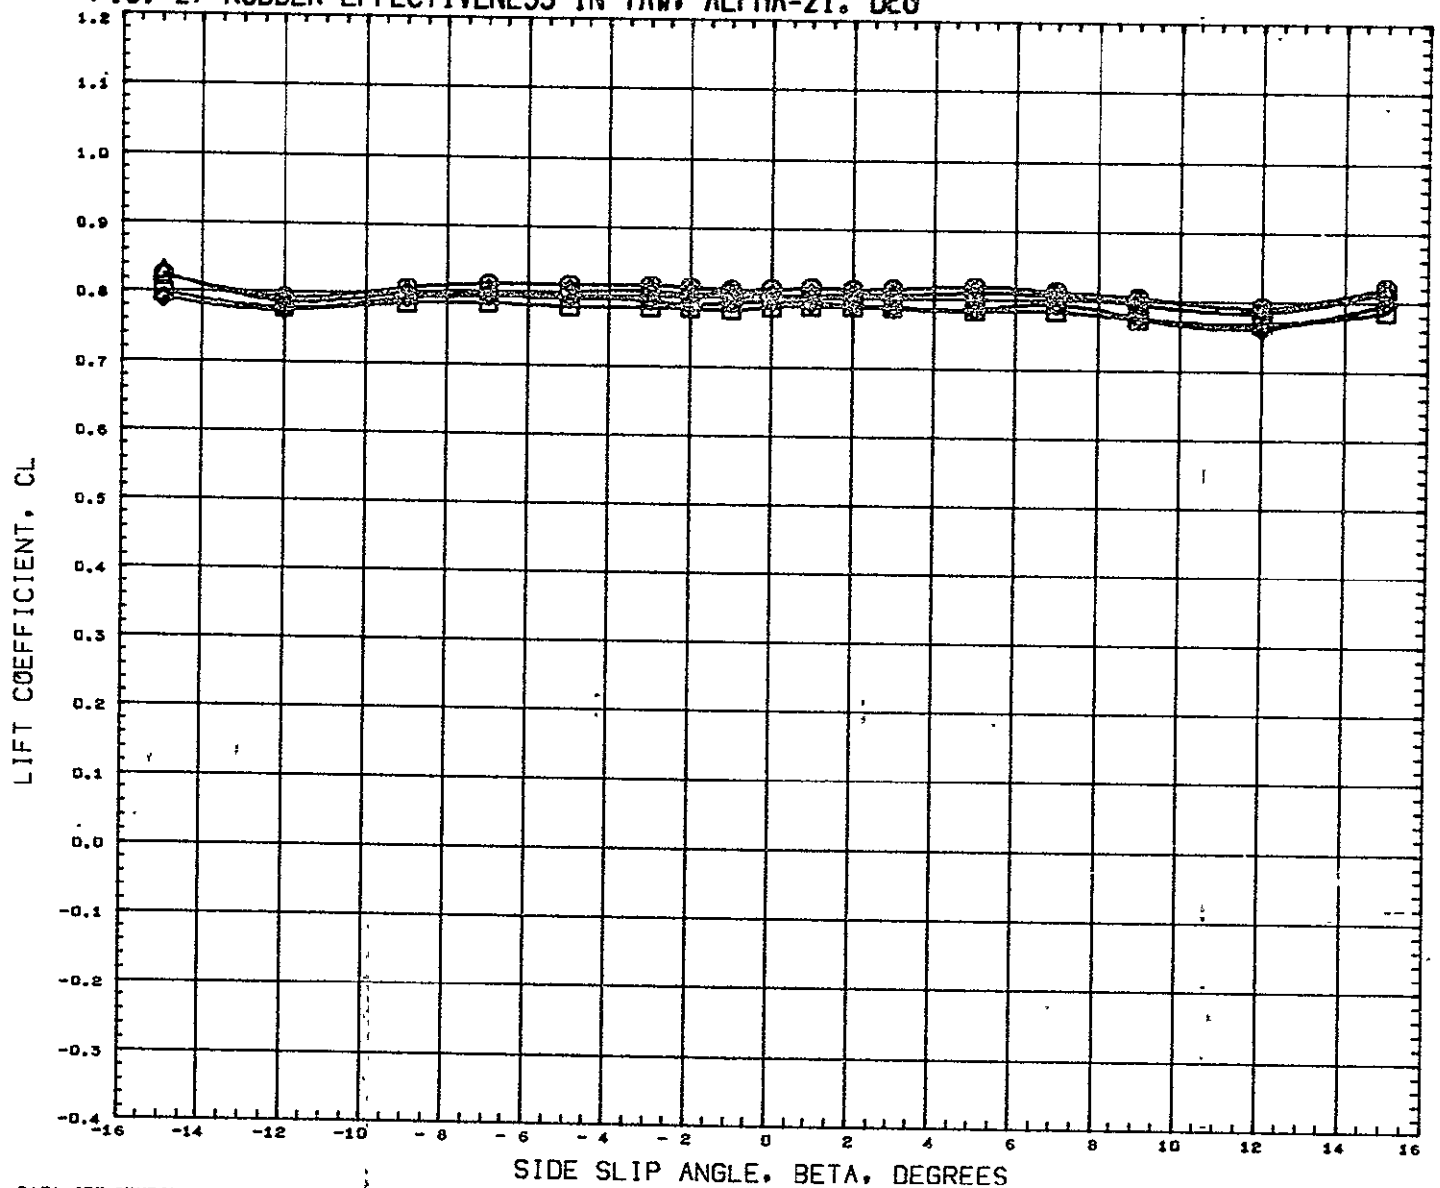

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(ACW063)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	SREF 9.1952 SQ FT
(ACW066)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	LREF 6.4320 FT
(XCQ052)	GWTT 289-CONF ROS-NB1 B1W1V1	21.000	0.000	0.000	0.000	BREF 3.8920 FT
(XCQ057)	GWTT 289-CONF ROS-NB1 B1W1V1	21.000	0.000	0.000	-10.000	XMRP 1485.0040 IN
						YMRP 0.0000 IN
						ZMRP 377.0004 IN
						SCALE 0.0400

MACH 0.170


FIG. 27 RUDDER EFFECTIVENESS IN YAW, ALPHA=21. DEG

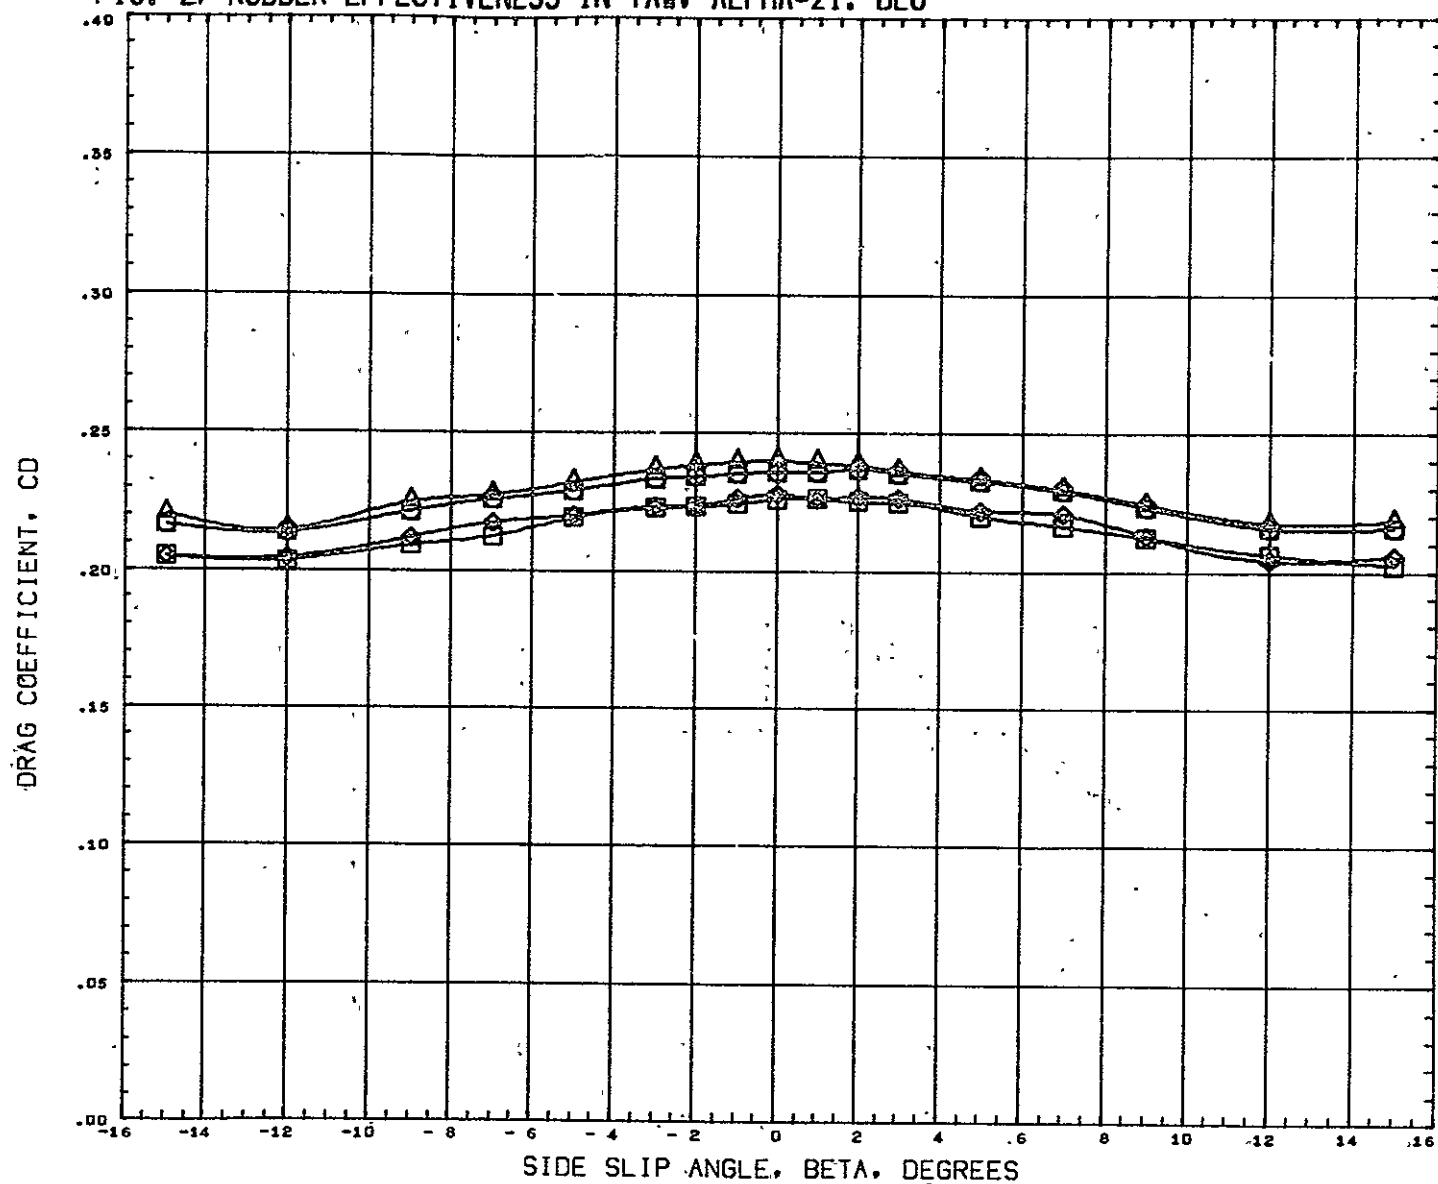

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACW063)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	SREF	9.1952 SQ FT
(ACW066)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	LREF	6.4320 FT
(XCQ052)	GWTT 289-CONF ROS-NB1 B1W1V1	21.000	0.000	0.000	0.000	BREF	3.8920 FT
(XCQ057)	GWTT 289-CONF ROS-NB1 B1W1V1	21.000	0.000	0.000	-10.000	XHRF	1485.0040 IN
						YHRF	0.0000 IN
						ZHRF	377.0004 IN
						SCALE	0.0400

MACH 0.170


FIG. 27 RUDDER EFFECTIVENESS IN YAW, ALPHA=21. DEG

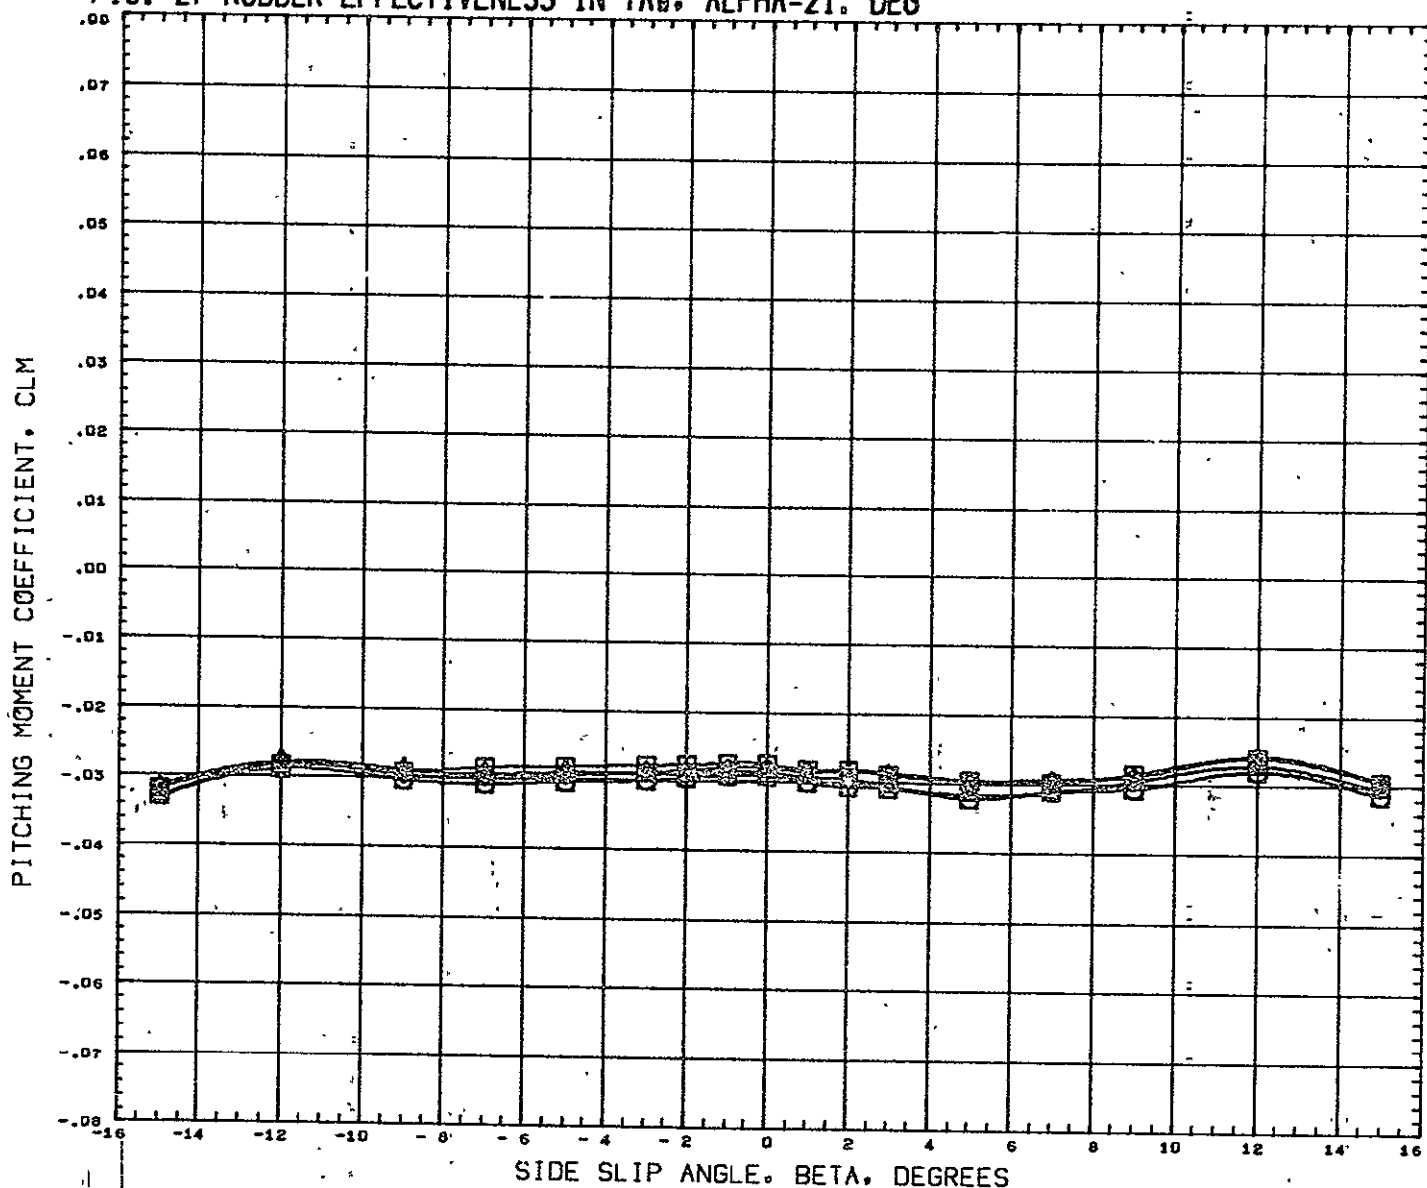

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(ACWD63)	X	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-5.000	SREF 9.1952 SQ FT
(ACWD66)		GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	-15.000	LREF 6.4320 FT
(XCQ052)		GWTT 289-CONF ROS-NB1 B1W1V1	21.000	0.000	0.000	0.000	BREF 3.8920 FT
(XCQ057)		GWTT 289-CONF ROS-NB1 B1W1V1	21.000	0.000	0.000	-10.000	XHRF 1485.0040 IN
							YHRF 0.0000 IN
							ZHRF 377.0004 IN
							SCALE 0.0400

MACH 0.170

FIG. 28 EFFECT OF SPLIT RUDDERS IN YAW, ALPHA=0. DEG.

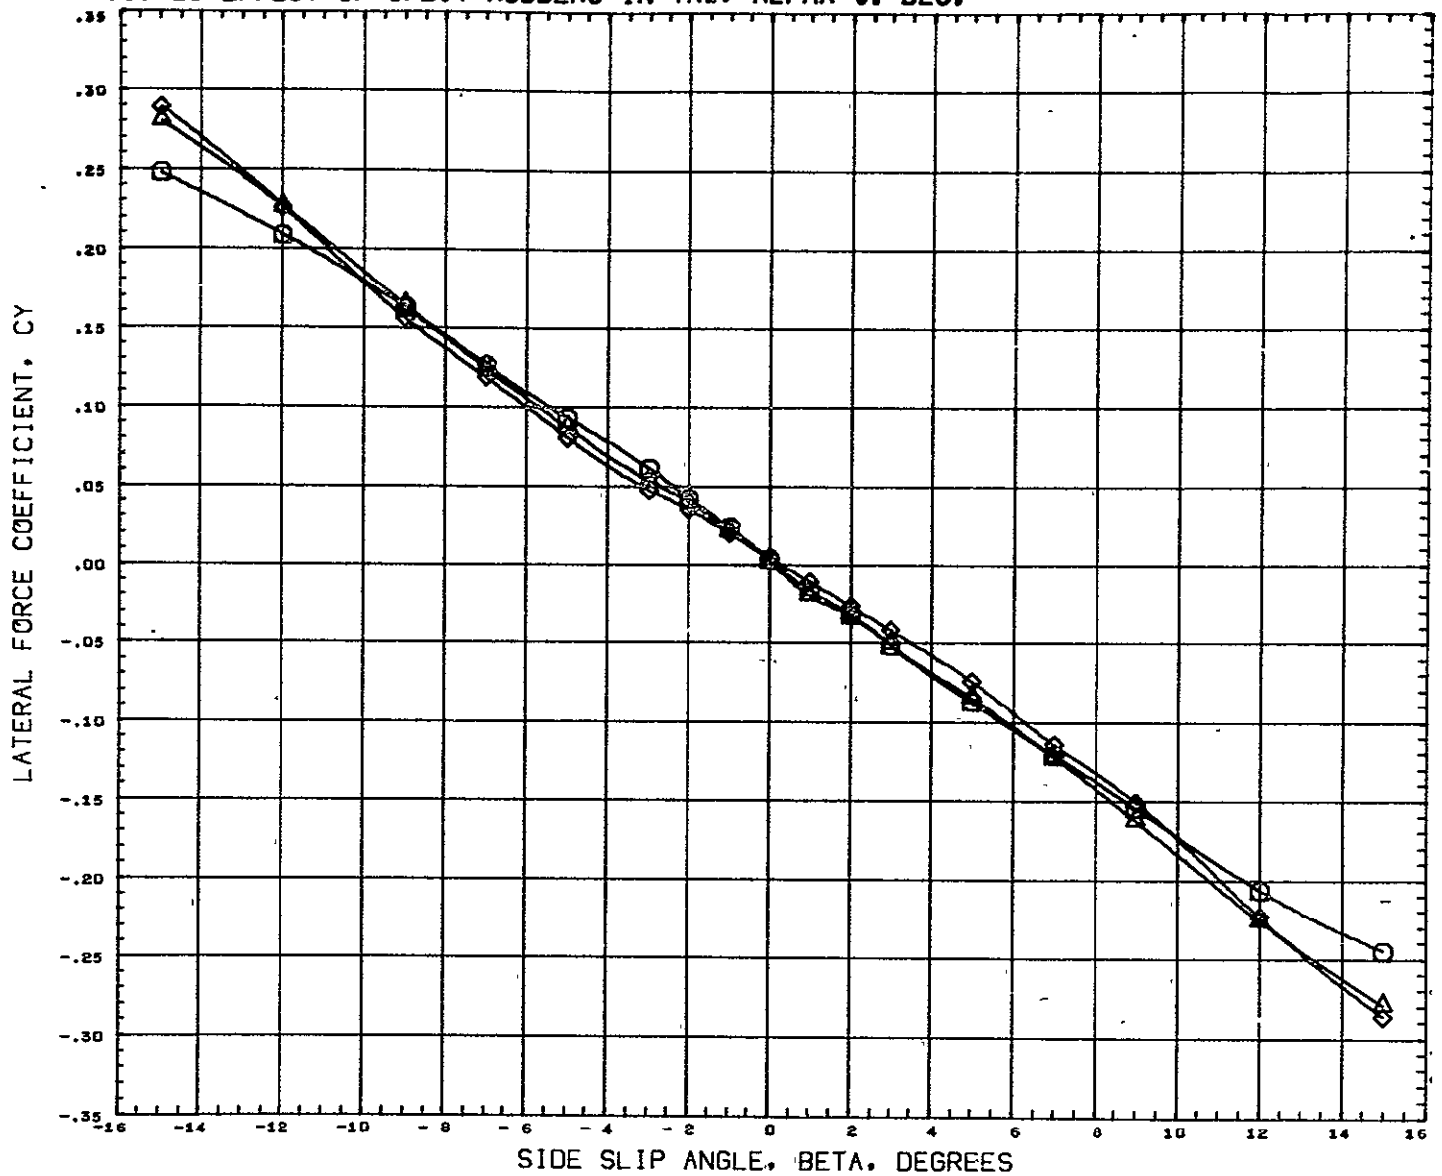


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW002)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW069)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW068)	GWTT 290-CONF ROS-NB1 B1F1W1V1

ALPHA	LRUDDR	RRUDDR	RUDDER
0.000			0.000
0.000	30.000	-30.000	
0.000	60.000	-60.000	

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170

FIG. 28 EFFECT OF SPLIT RUDDERS IN YAW, ALPHA=0. DEG.

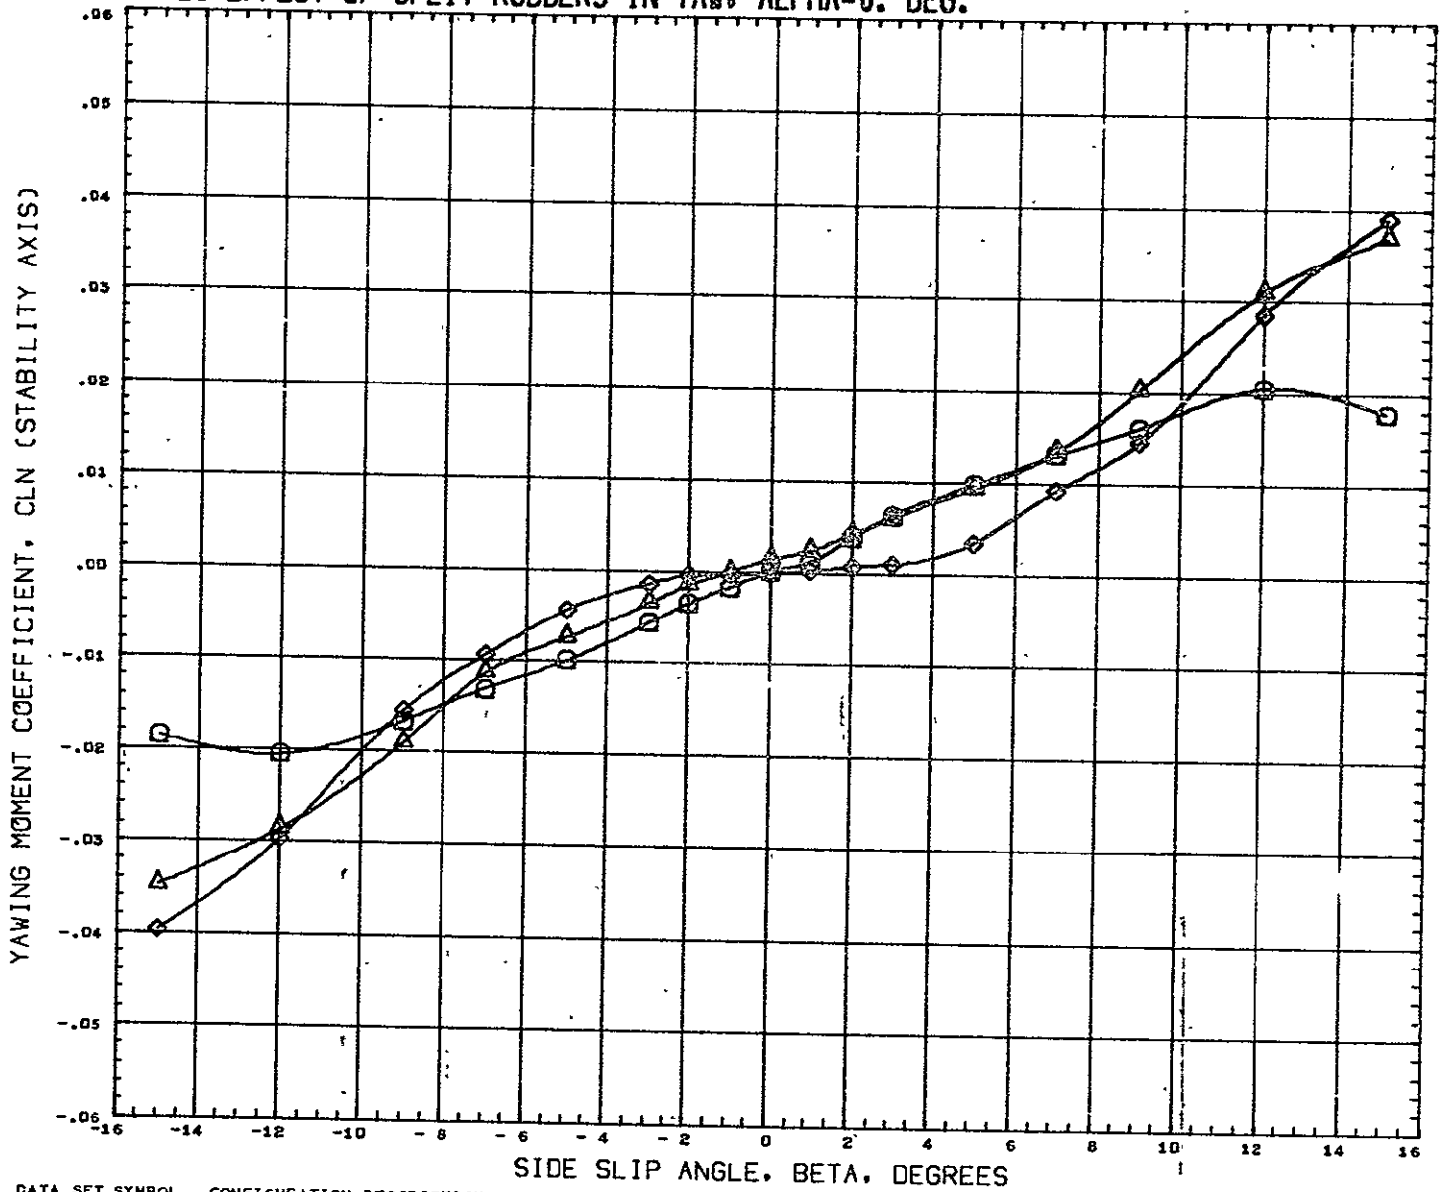


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW002) □	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW069) △	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW068) ◇	GWTT 290-CONF ROS-NB1 B1F1W1V1

ALPHA	LRUDDR	RRUDDR	RUDDER
0.000			0.000
0.000	30.000	-30.000	
0.000	60.000	-60.000	

REFERENCE INFORMATION		
SREF	9.1952	SQ FT
LREF	6.4320	FT
BREF	3.8920	FT
XHRF	1485.0040	IN
YHRF	0.0000	IN
ZHRF	377.0004	IN
SCALE	0.0400	

MACH 0.170


FIG. 28 EFFECT OF SPLIT RUDDERS IN YAW. ALPHA=0. DEG.

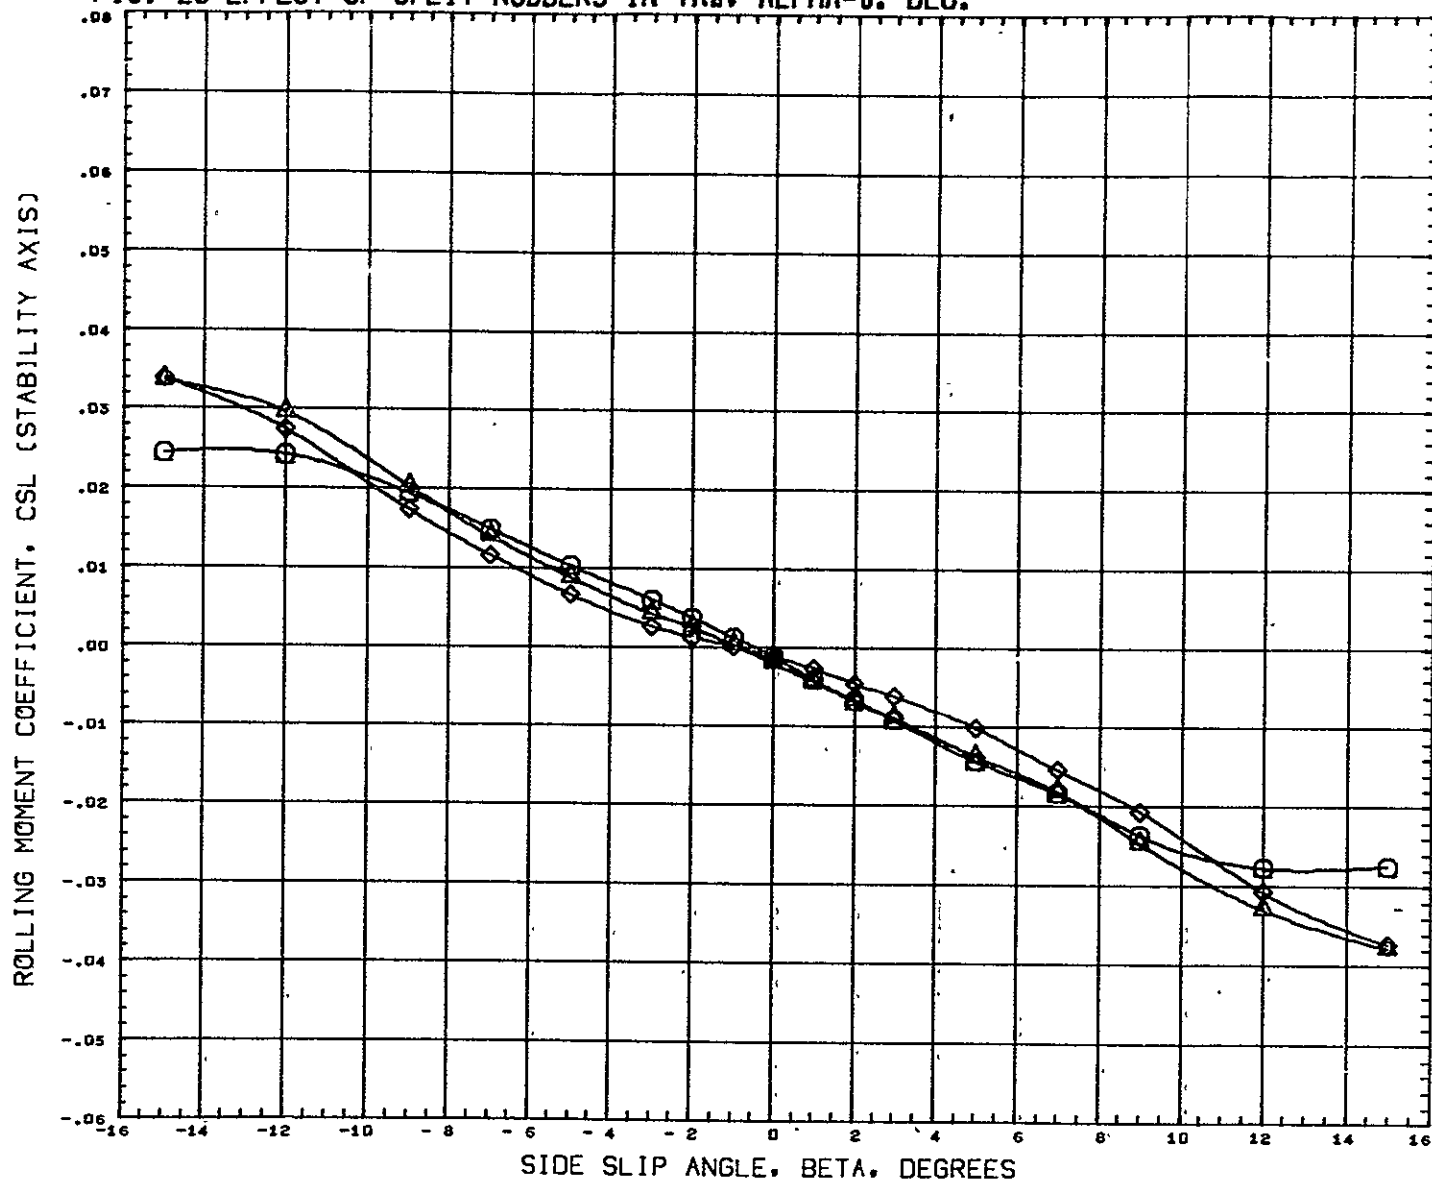

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION
(RCW002)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000			0.000	SREF 9.1952 SQ FT
(RCW069)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	30.000	-30.000		LREF 6.4320 FT
(RCW068)	GWTT 290-CONF ROS-NB1 B1F1W1V1	0.000	60.000	-60.000		BREF 3.8920 FT
						XMRP 1485.0040 IN
						YMRP 0.0000 IN
						ZMRP 377.0004 IN
						SCALE 0.0400

MACH 0.170

FIG. 28 EFFECT OF SPLIT RUDDERS IN YAW. ALPHA=0. DEG.

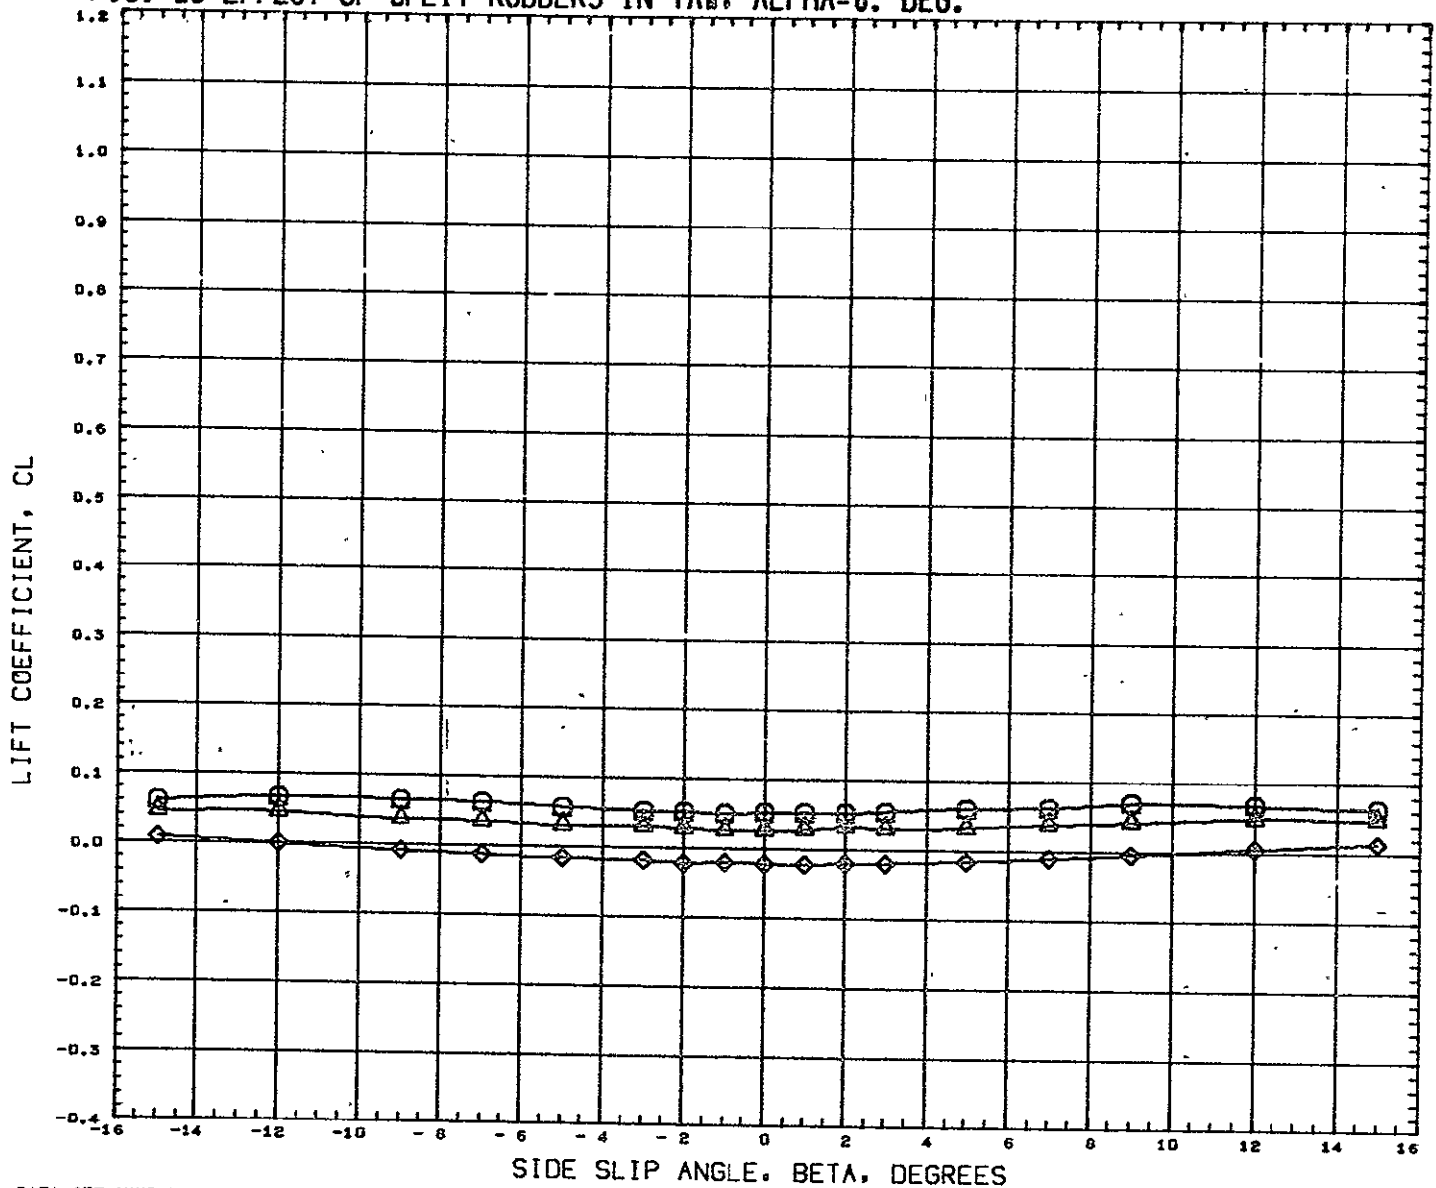


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCWD02)	GWT 290-CONF ROS-NB1 B1F1W1V1
(RCWD69)	GWT 290-CONF ROS-NB1 B1F1W1V1
(RCWD68)	GWT 290-CONF ROS-NB1 B1F1W1V1

ALPHA	LRUDDR	RRUDDR
0.000	0.000	0.000
0.000	30.000	-30.000
0.000	60.000	-60.000

RUDDER	REFERENCE INFORMATION
0.000	SREF 9.1952 Sq FT
	LREF 6.4320 FT
	BREF 3.8920 FT
	XMRP 1485.0040 IN
	YMRP 0.0000 IN
	ZMRP 377.0004 IN
	SCALE 0.0400

MACH 0.170


FIG. 28 EFFECT OF SPLIT RUDDERS IN YAW. ALPHA=0. DEG.

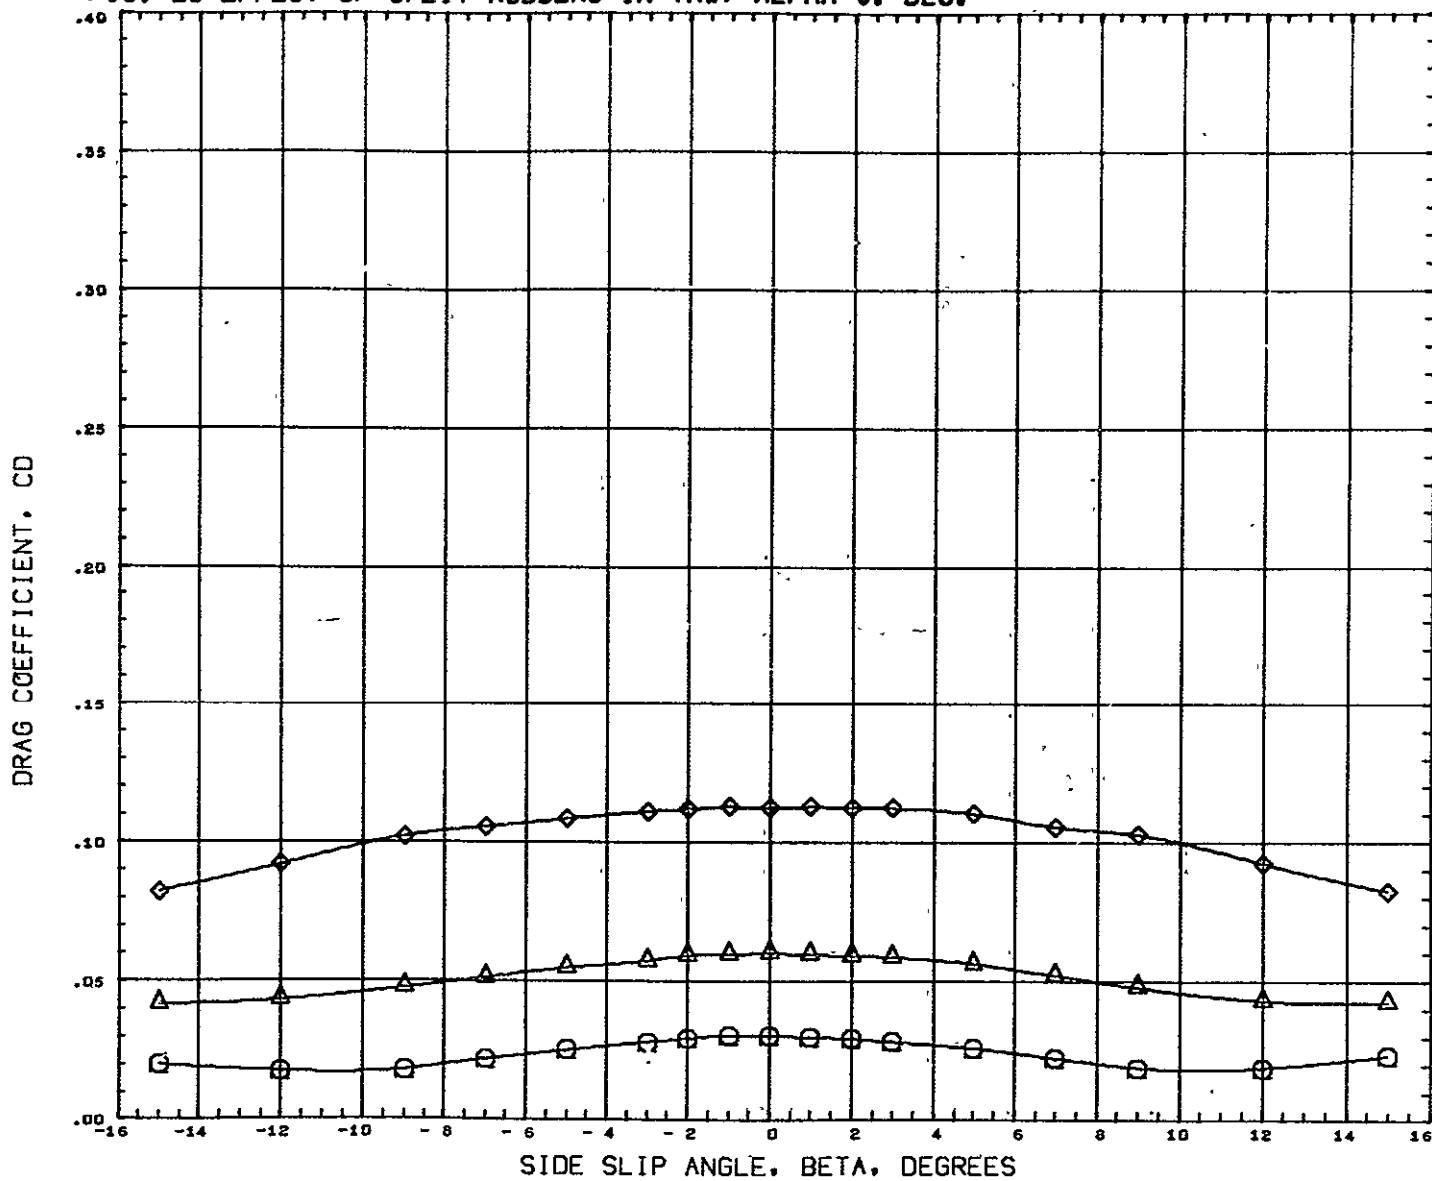

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION	
(RCW002)	GWT 290-CONF ROS-NB1 B1F1W1V1	0.000			0.000	SREF	9.1952 SQ FT
(RCW069)	GWT 290-CONF ROS-NB1 B1F1W1V1	0.000	30.000	-30.000		LREF	6.4320 FT
(RCW068)	GWT 290-CONF ROS-NB1 B1F1W1V1	0.000	60.000	-60.000		BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 28 EFFECT OF SPLIT RUDDERS IN YAW, ALPHA=0. DEG.

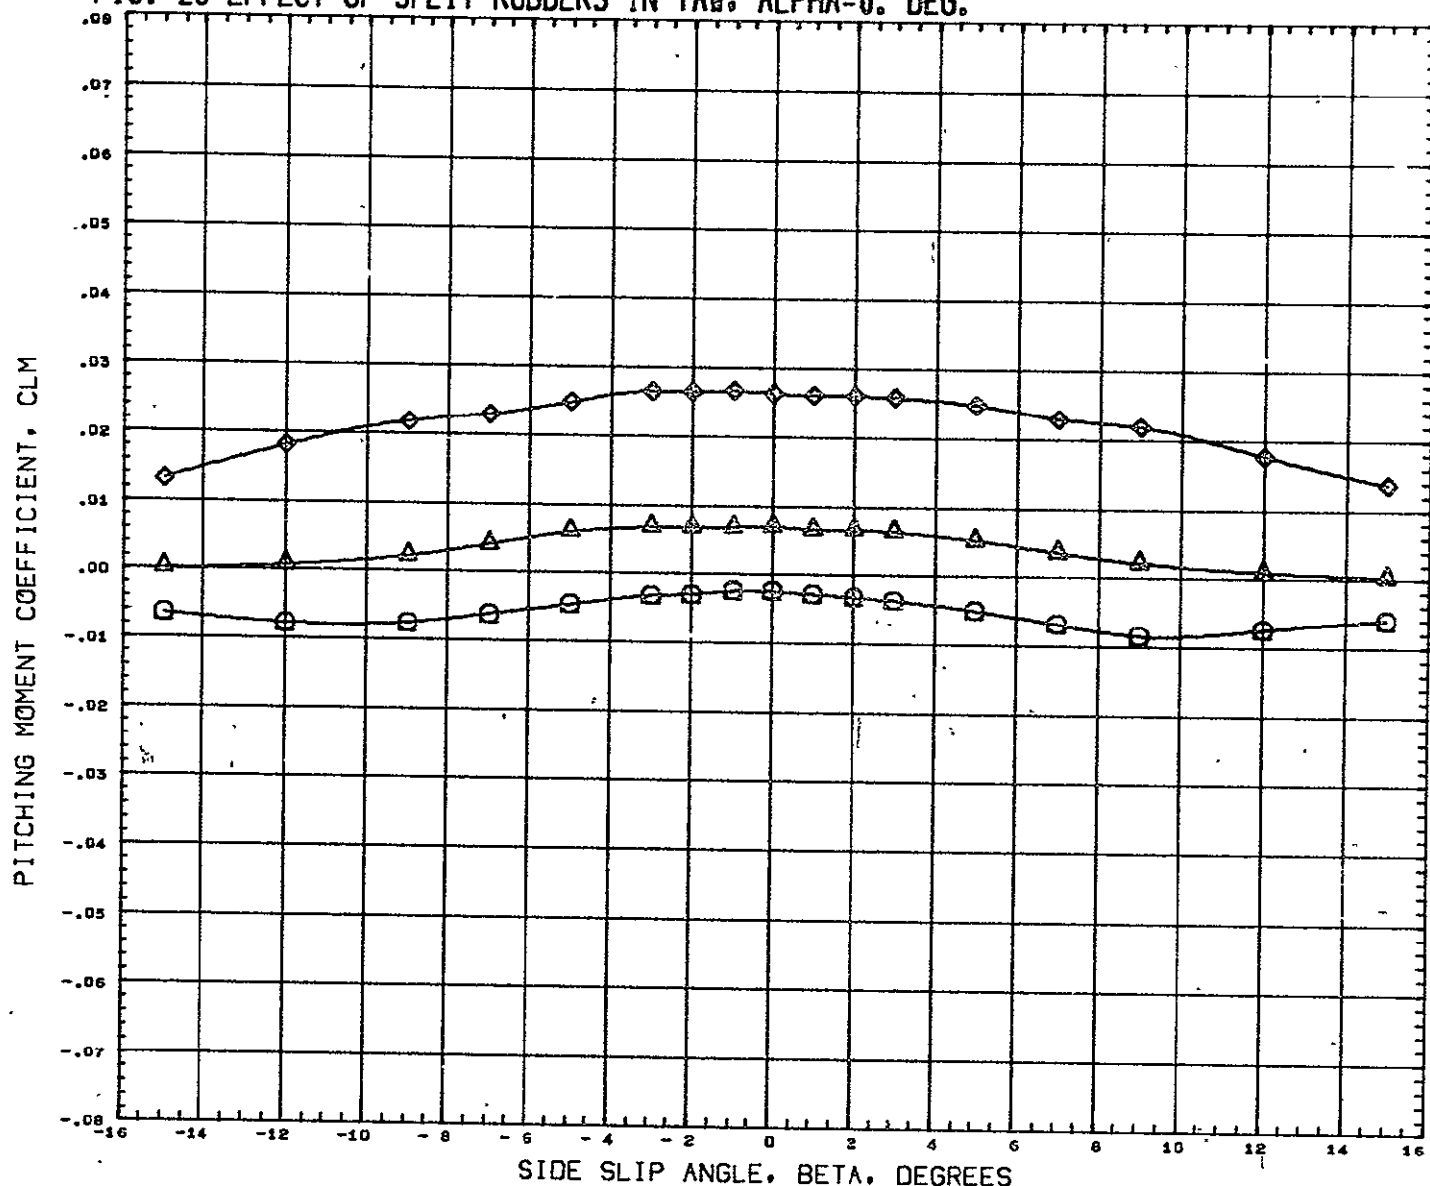


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW002)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW069)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(RCW068)	GWTT 290-CONF ROS-NB1 B1F1W1V1

ALPHA	LRUDDR	RRUDDR
0.000	0.000	0.000
0.000	30.000	-30.000
0.000	60.000	-60.000

RUDDER	REFERENCE INFORMATION
0.000	SREF 9.1952 SQ FT
	LREF 6.4320 FT
	BREF 3.8920 FT
	XMRP 1485.6940 IN
	YMRP 0.0000 IN
	ZMRP 377.0004 IN
	SCALE 0.0400

MACH 0.170


FIG. 29 EFFECT OF SPLIT RUDDERS IN YAW, ALPHA=21. DEG.

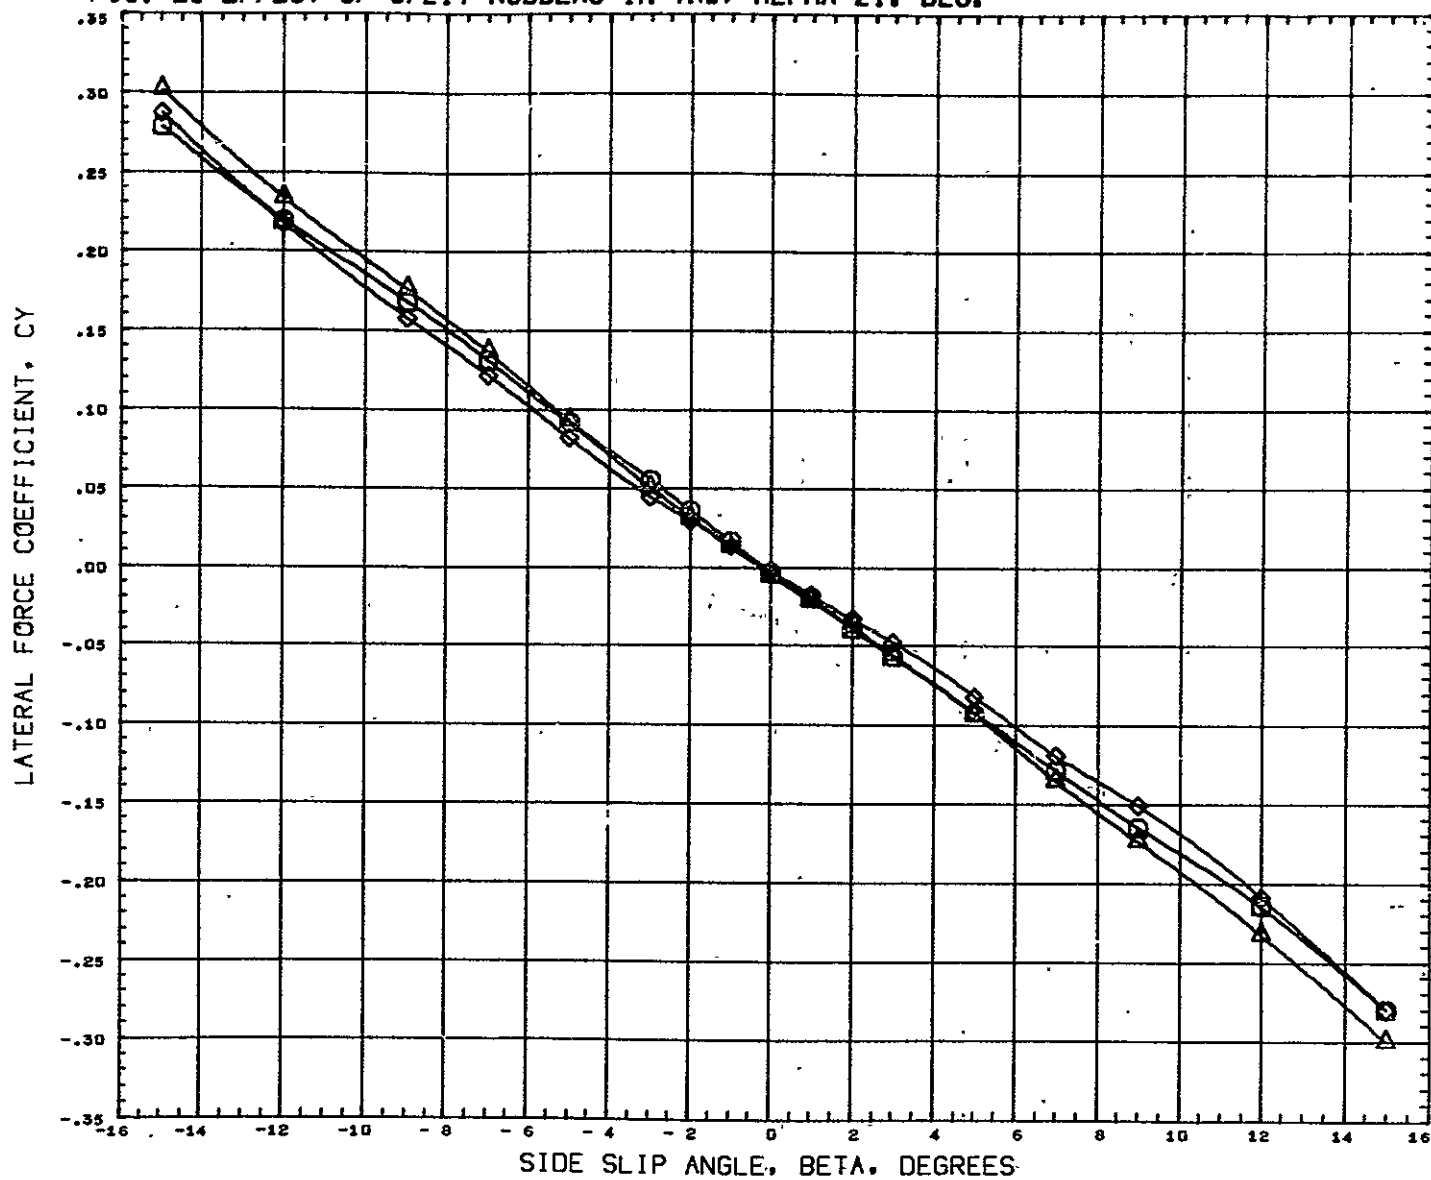

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION	
(XCQD52)	○	GWTT 289-CONF. ROS-NB1 B1W1V1	21.000			0.000	SREF	9.1952 SQ FT
(ACW070)	△	GWTT 290-CONF ROS-NB1 B1F1W1V1		30.000	-30.000		LREF	6.4320 FT
(ACW067)	◇	GWTT 290-CONF ROS-NB1 B1F1W1V1		60.000	-60.000		BREF	3.6920 FT
							XMRP	1485.0040 IN
							YMRP	0.0000 IN
							ZMRP	377.0004 IN
							SCALE	0.0400

MACH 0.170

FIG. 29 EFFECT OF SPLIT RUDDERS IN YAW. ALPHA=21. DEG.

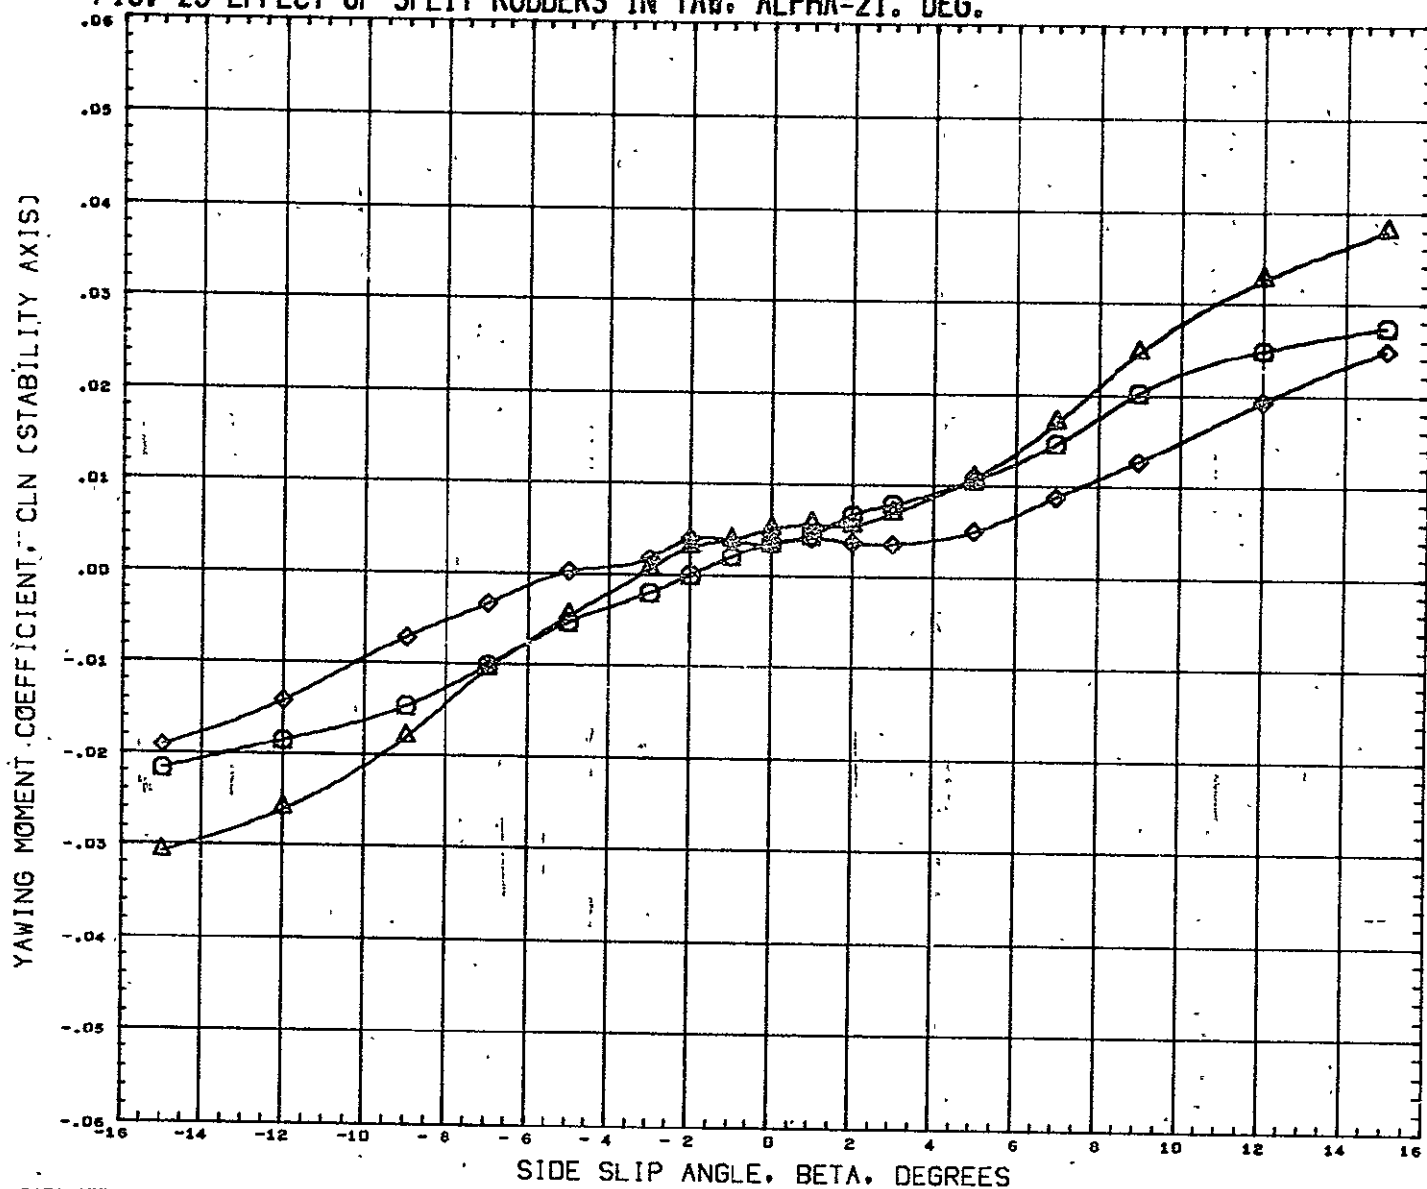


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(XCQ052)	GWTT 289-CONF. ROS-NB1 B1W1V1
(ACWD70)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(ACWD67)	GWTT 290-CONF ROS-NB1 B1F1W1V1

ALPHA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION	
21.000	30.000	-30.000	0.000	SREF	9.1952 SQ FT
	60.000	-60.000		LREF	6.4320 FT
				BREF	3.8920 FT
				XHRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 29 EFFECT OF SPLIT RUDDERS IN YAW, ALPHA=21. DEG.

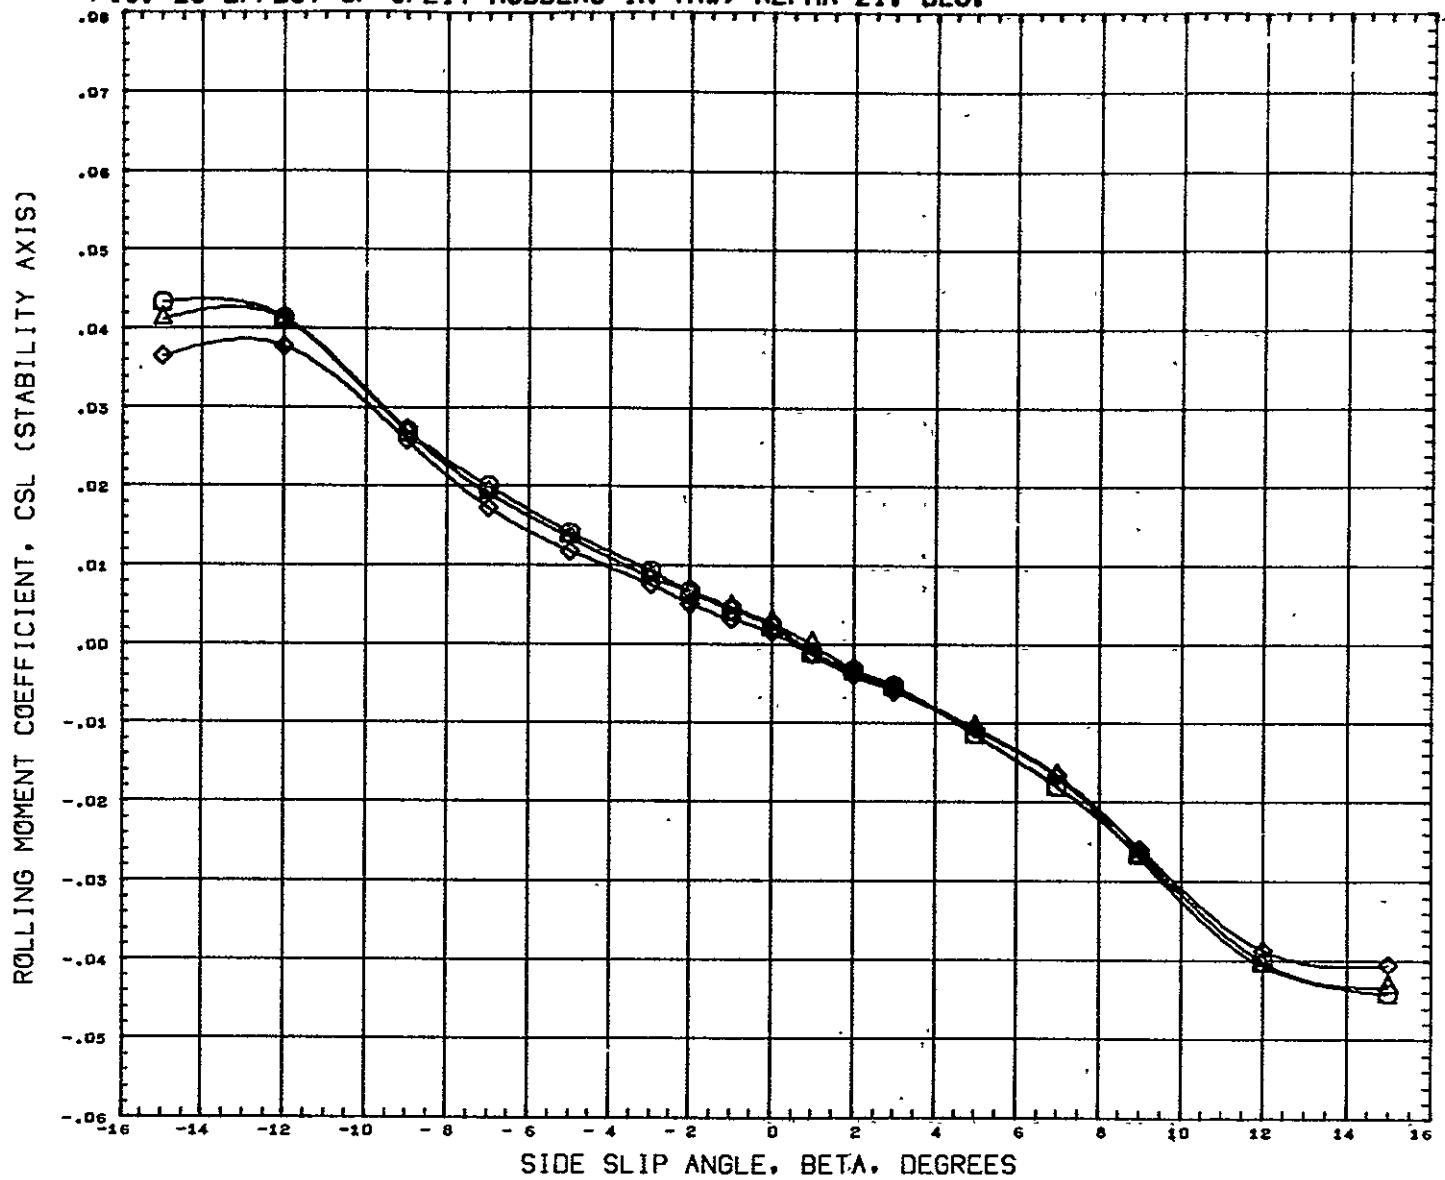


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(XCQD52)	GWTT 289-CONF. ROS-NB1 B1W1V1
(ACWD70)	GWTT 290-CONF. ROS-NB1 B1F1W1V1
(ACWD67)	GWTT 290-CONF. ROS-NB1 B1F1W1V1

ALPHA	LRUDDR	RRUDDR	RUDDER
21.000	30.000	-30.000	0.000
	60.000	-60.000	

REFERENCE INFORMATION		
SREF	9.1952	SQ FT
LREF	6.4320	FT
BREF	3.8920	FT
XMRP	1485.0040	IN
YMRP	0.0000	IN
ZMRP	377.0004	IN
SCALE	0.0400	

MACH 0.170

FIG. 29 EFFECT OF SPLIT RUDDERS IN YAW, ALPHA=21. DEG.

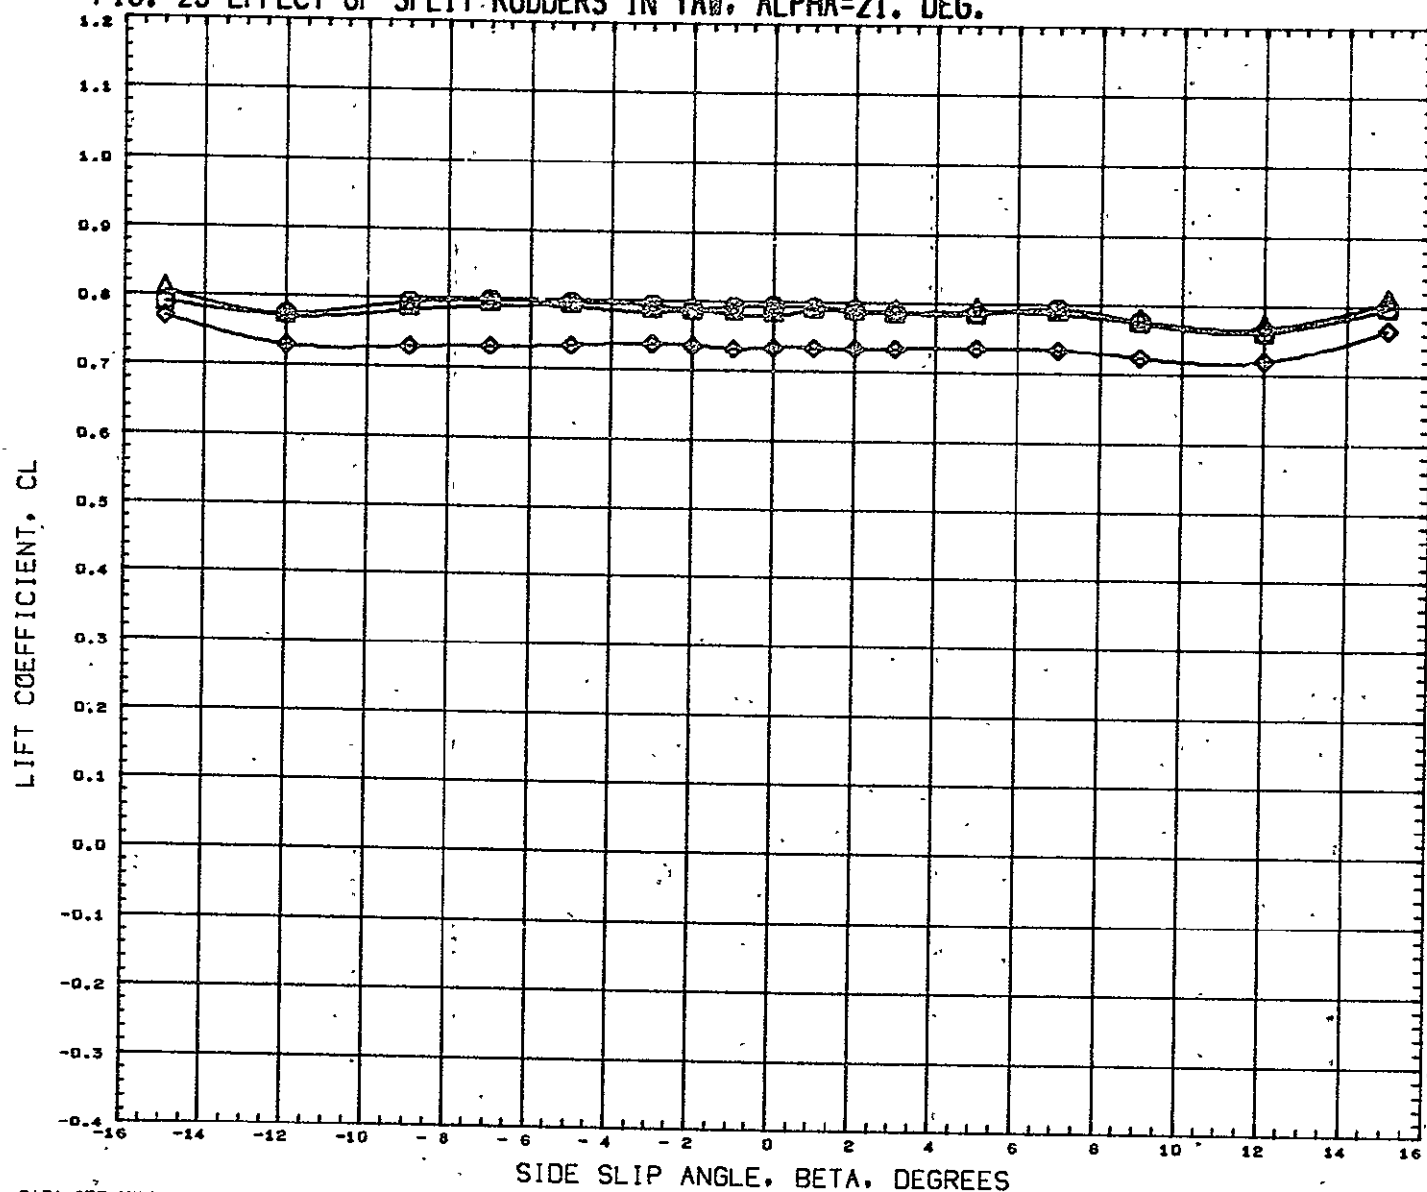


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (XC9062) GWTT 289-CONF. ROS-NB1 B1W1V1
 (ACW070) GWTT 290-CONF ROS-NB1 B1F1W1V1
 (ACW067) GWTT 290-CONF ROS-NB1 B1F1W1V1

ALPHA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION
21.000	30.000	-30.000	0.000	SREF 9.1952 SQ FT
	60.000	-60.000		LREF 6.4320 FT
				BREF 3.8920 FT
				XMRP 1405.0040 IN
				YMRP 0.0000 IN
				ZMRP 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 29 EFFECT OF SPLIT RUDDERS IN YAW. ALPHA=21. DEG.

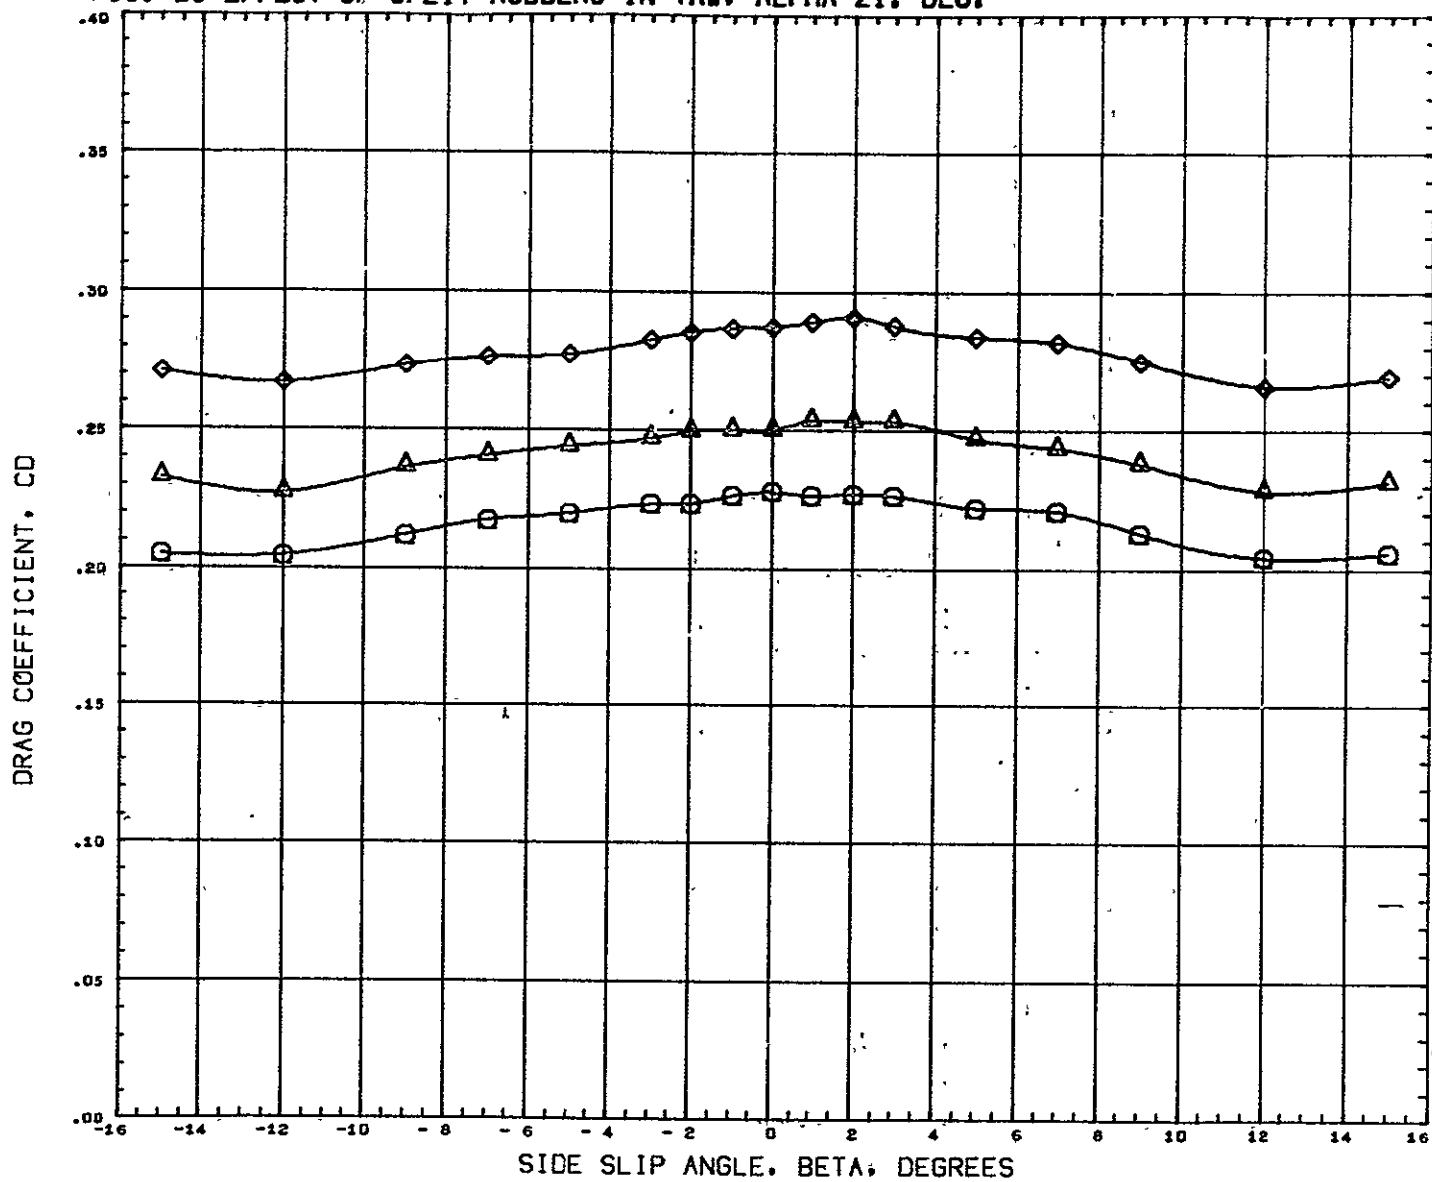


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(XCRD52)	GWTT 289-CONF. ROS-NB1 B1W1V1
(ACW070)	GWTT 290-CONF ROS-NB1 B1F1W1V1
(ACW067)	GWTT 290-CONF ROS-NB1 B1F1W1V1

ALPHA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION
21.000			0.000	SREF 9.1952 SQ FT
	30.000	-30.000		LREF 6.4320 FT
	60.000	-60.000		BREF 3.8920 FT
				XMRP 1485.0040 IN
				YMRP 0.0000 IN
				ZMRP 377.0004 IN
				SCALE 0.0400

MACH 0.170


FIG. 29 EFFECT OF SPLIT RUDDERS IN YAW, ALPHA=21. DEG.

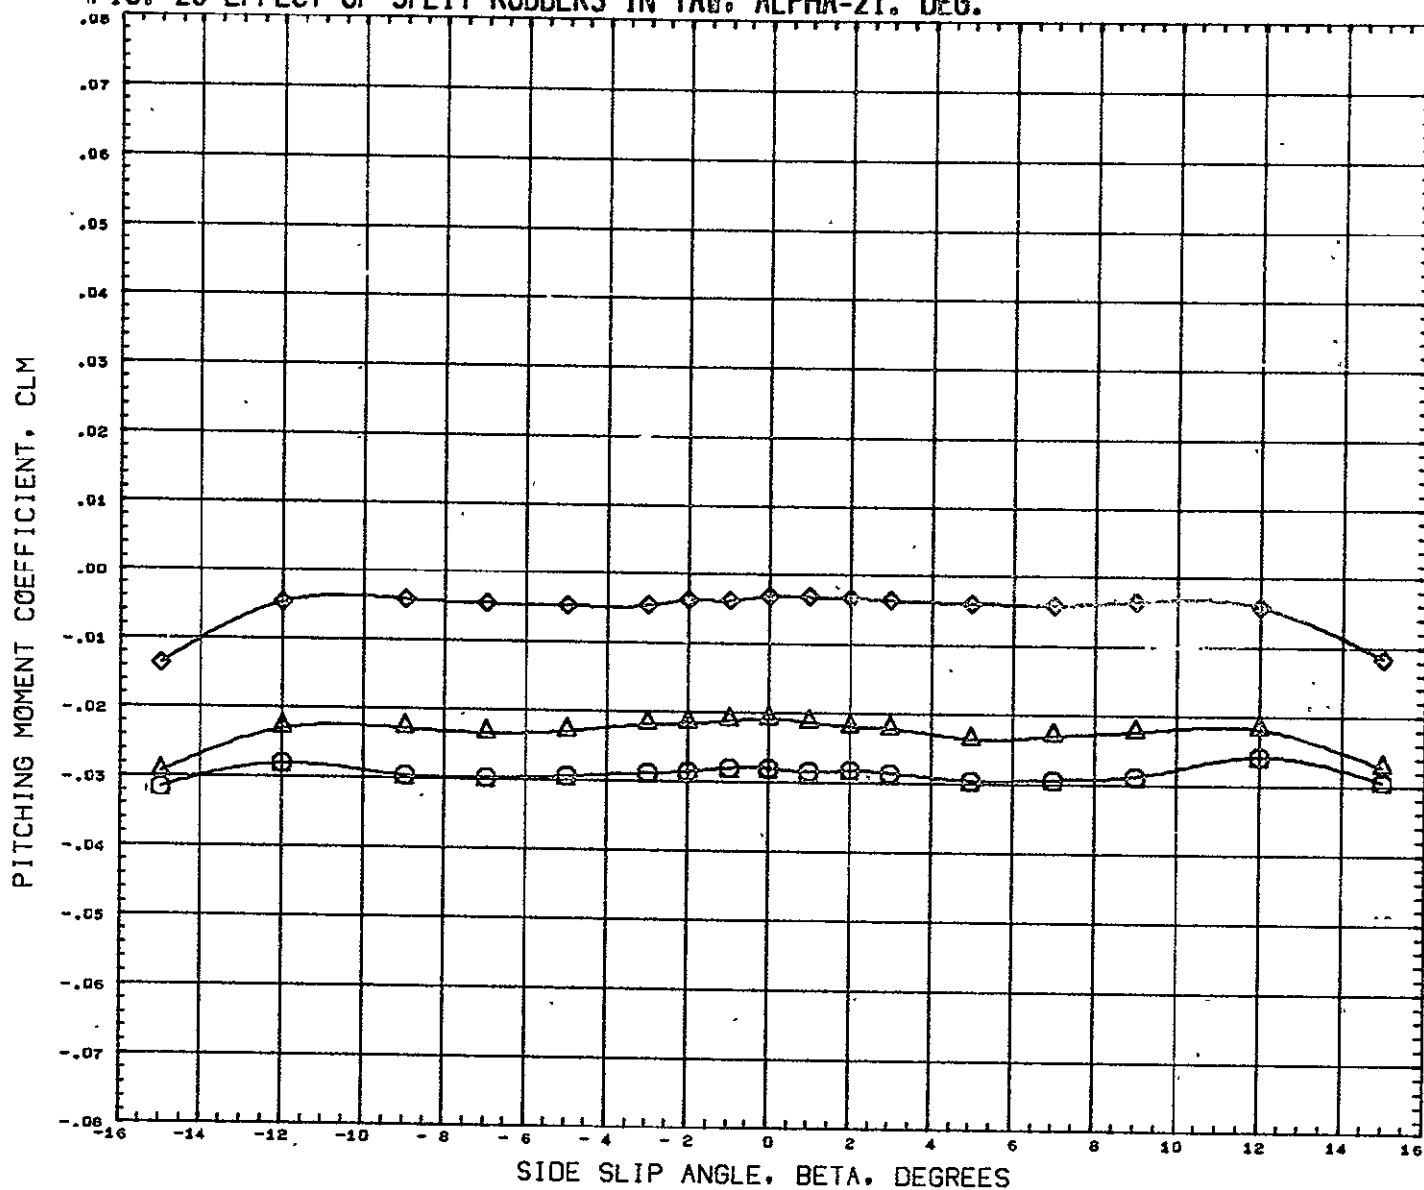

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	LRUDDR	RRUDDR	RUDDER	REFERENCE INFORMATION	
(XCQ052)	GWT 289-CONF. ROS-NB1 B1W1V1	21.000				SREF	9.1952 SQ FT
(ACW070)	GWT 290-CONF. ROS-NB1 B1F1W1V1		30.000	-30.000	0.000	LREF	6.4320 FT
(ACW067)	GWT 290-CONF. ROS-NB1 B1F1W1V1		60.000	-60.000		SREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 30 EFFECT OF TWIN FINS WITH WIDE BODY IN YAW. ALPHA=21. DEG.

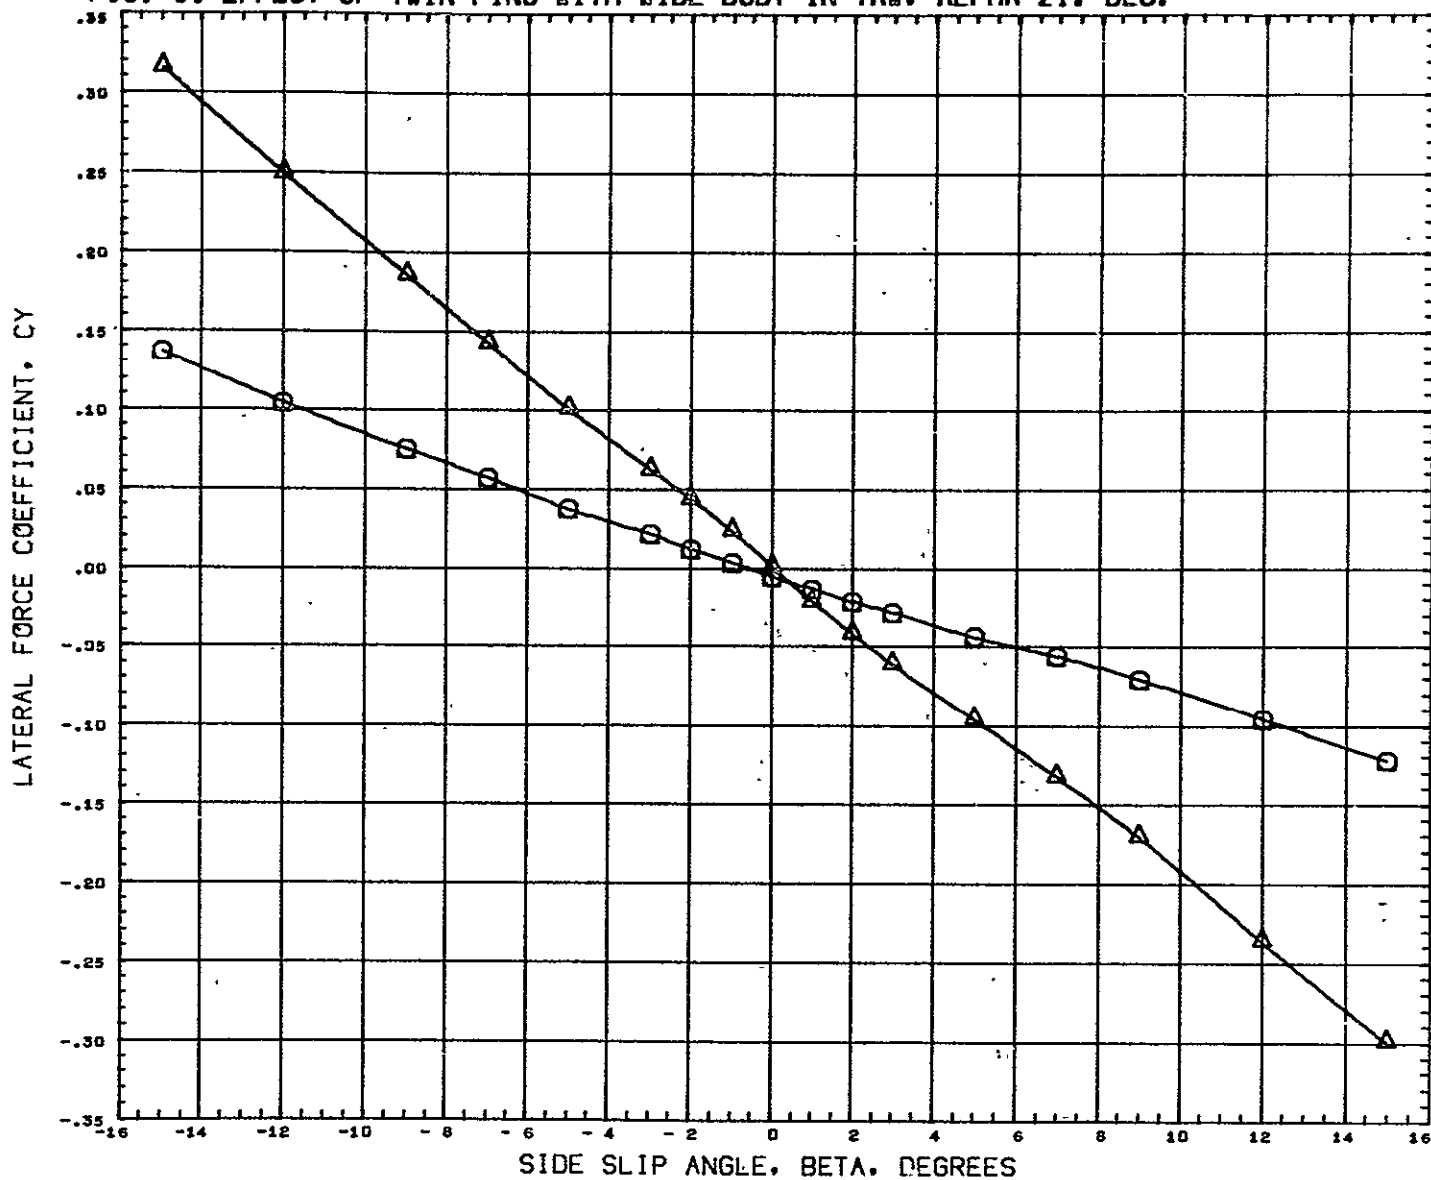


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW072) $\circ$ GWTT 29D-CONF ROS-WB1 B2W1
 (ACW074) Δ GWTT 29D-CONF ROS-WB1 B2W1V2

ALPHA 9.000
 ELEVTR 0.000
 AILRON 0.000
 RUDDER 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.6920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 30 EFFECT OF TWIN FINS WITH WIDE BODY IN YAW, ALPHA=21. DEG.

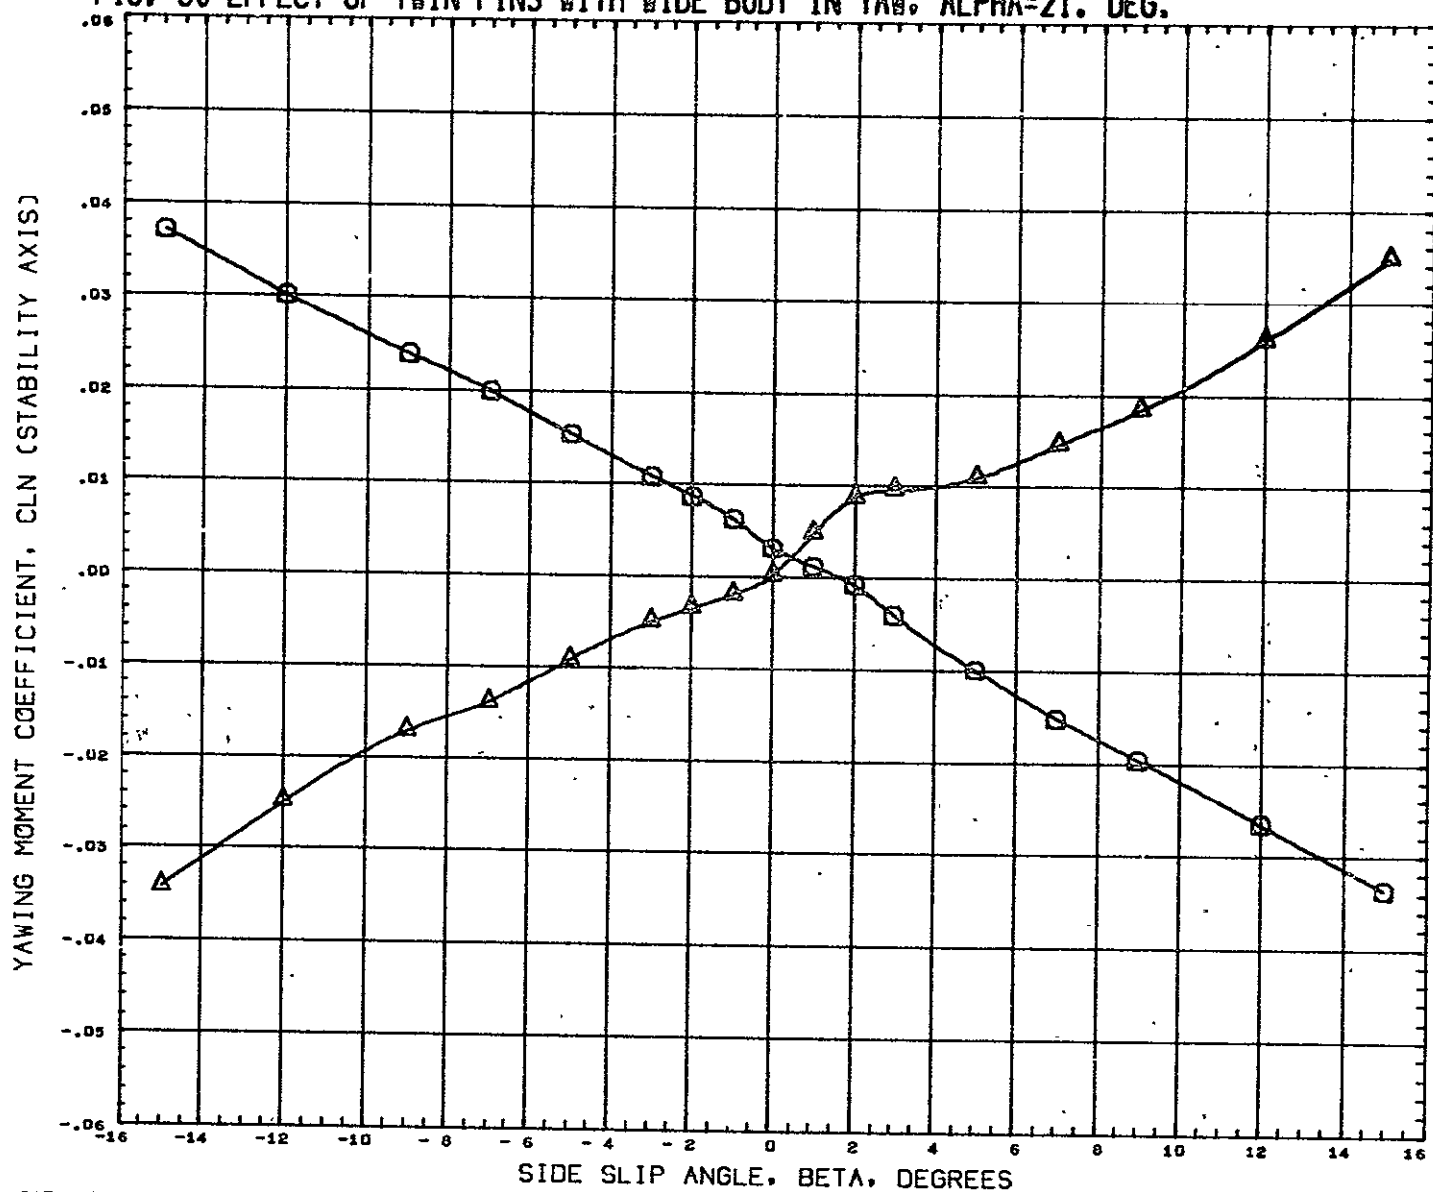


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACWD72) GWTT 290-CONF ROS-WB1 B2W1
 (ACWD74) GWTT 290-CONF ROS-WB1 B2W1V2

ALPHA ELEVTR AILRON RUDDER
 0.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 50 FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 30 EFFECT OF TWIN FINS WITH WIDE BODY IN YAW. ALPHA=21. DEG.

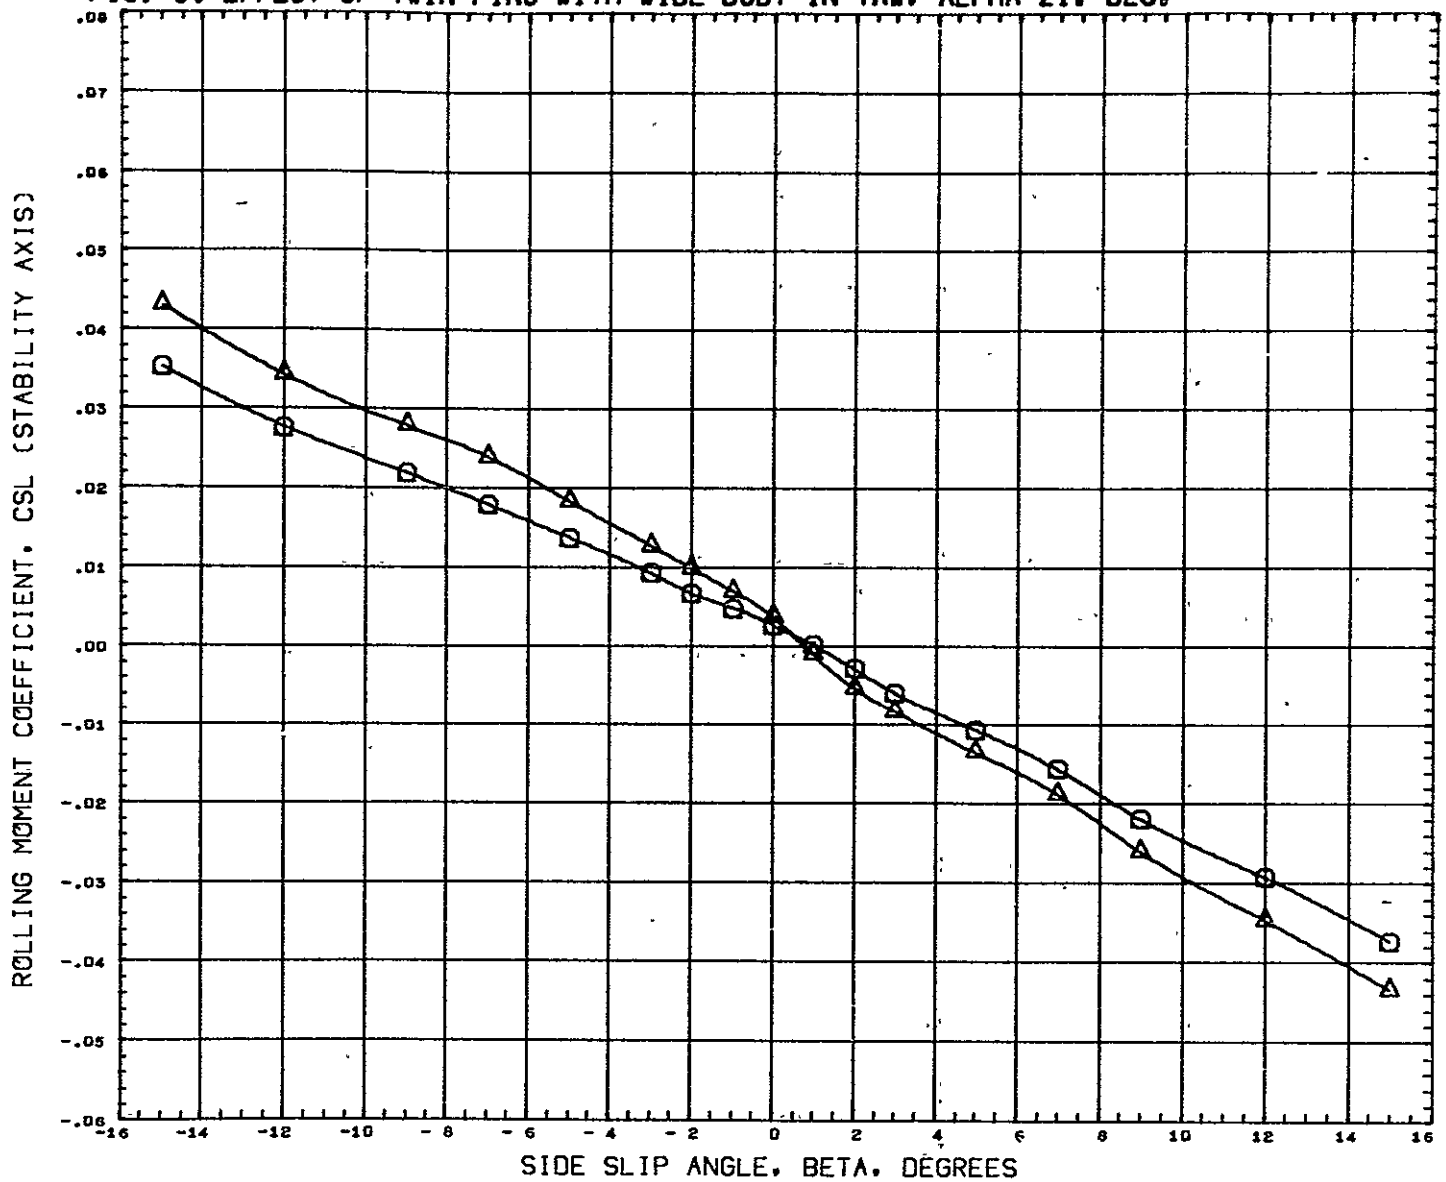


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (ACW072) ○ GWT 290-CONF ROS-WB1 B2W1
 (ACW074) △ GWT 290-CONF ROS-WB1 B2W1V2

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
				LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170

FIG. 31 EFFECT OF WING TIP FINS IN YAW. ALPHA=21. DEG.

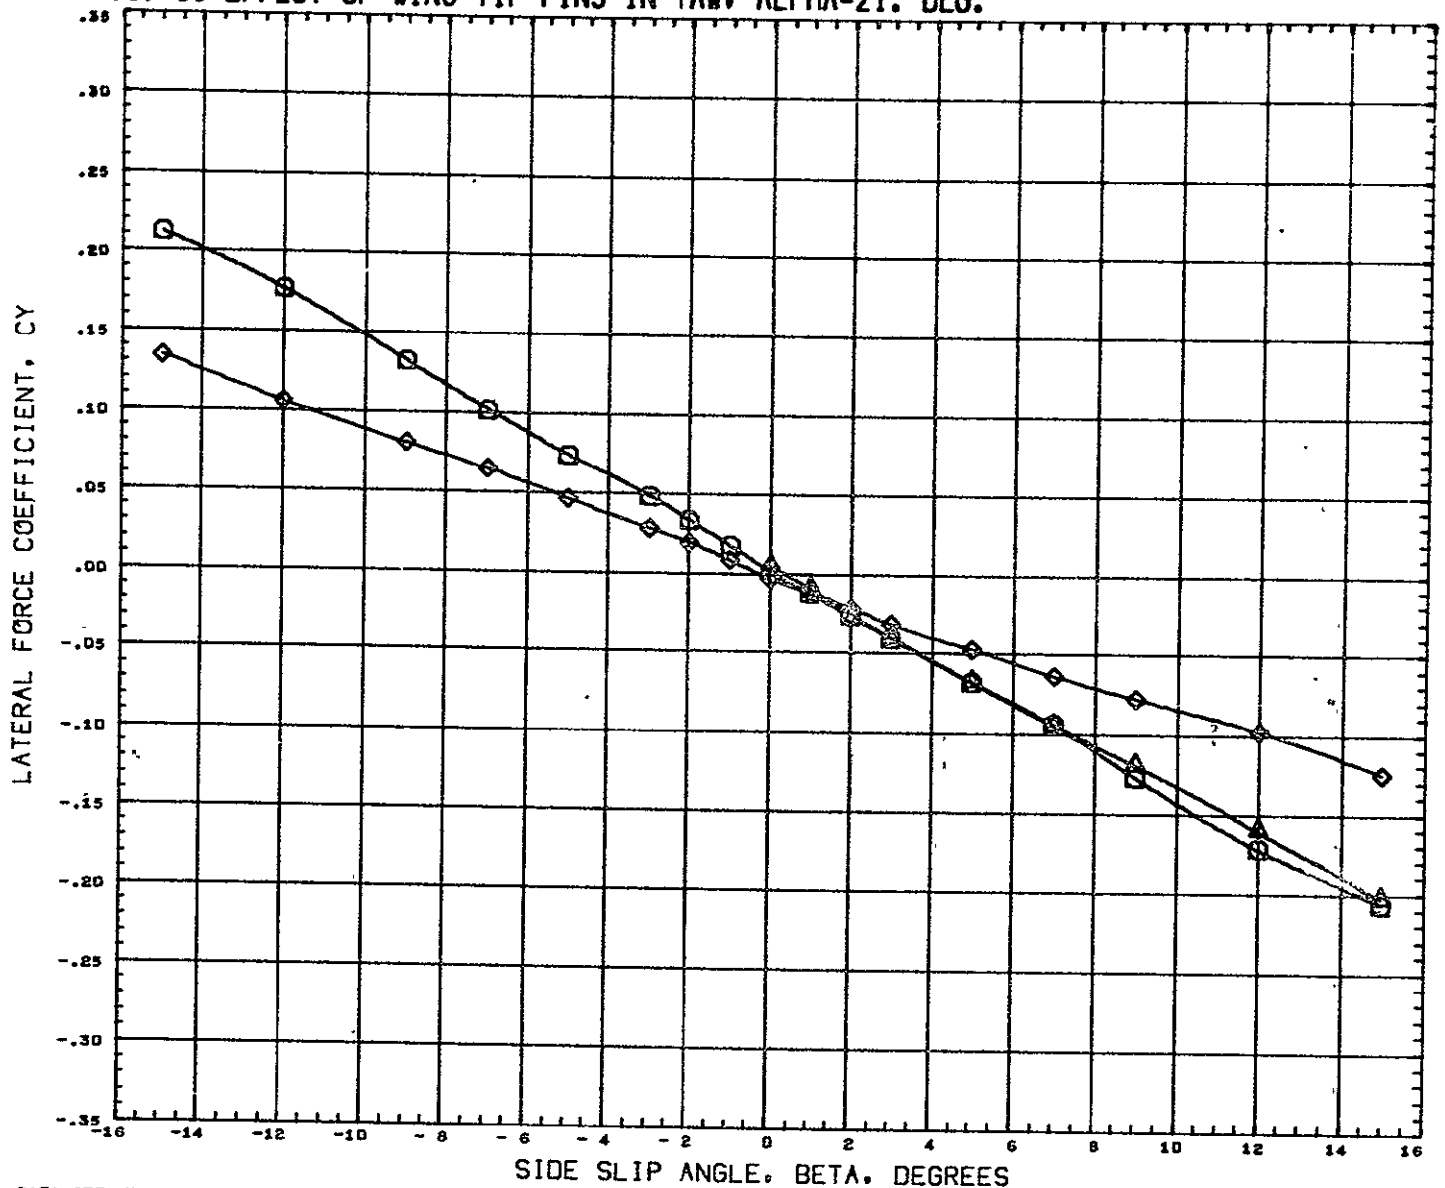


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(ACWD76)	GWTT 290-CONF ROS-NB1 B1F1W2V3
(ACWD77)	GWTT 290-CONF ROS-NB1 B1F1W2V3
(XCR050)	GWTT 289-CONF ROS-NB1 B1W1

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
21.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
	-15.000	0.000	0.000	LREF 6.4320 FT
	0.000	0.000	0.000	BREF 3.8920 FT
				XMRP 1485.0040 IN
				YMRP 0.0000 IN
				ZMRP 377.0004 IN
				SCALE 0.0400

HACH 0.170

FIG. 31 EFFECT OF WING TIP FINS IN YAW, ALPHA=21. DEG.

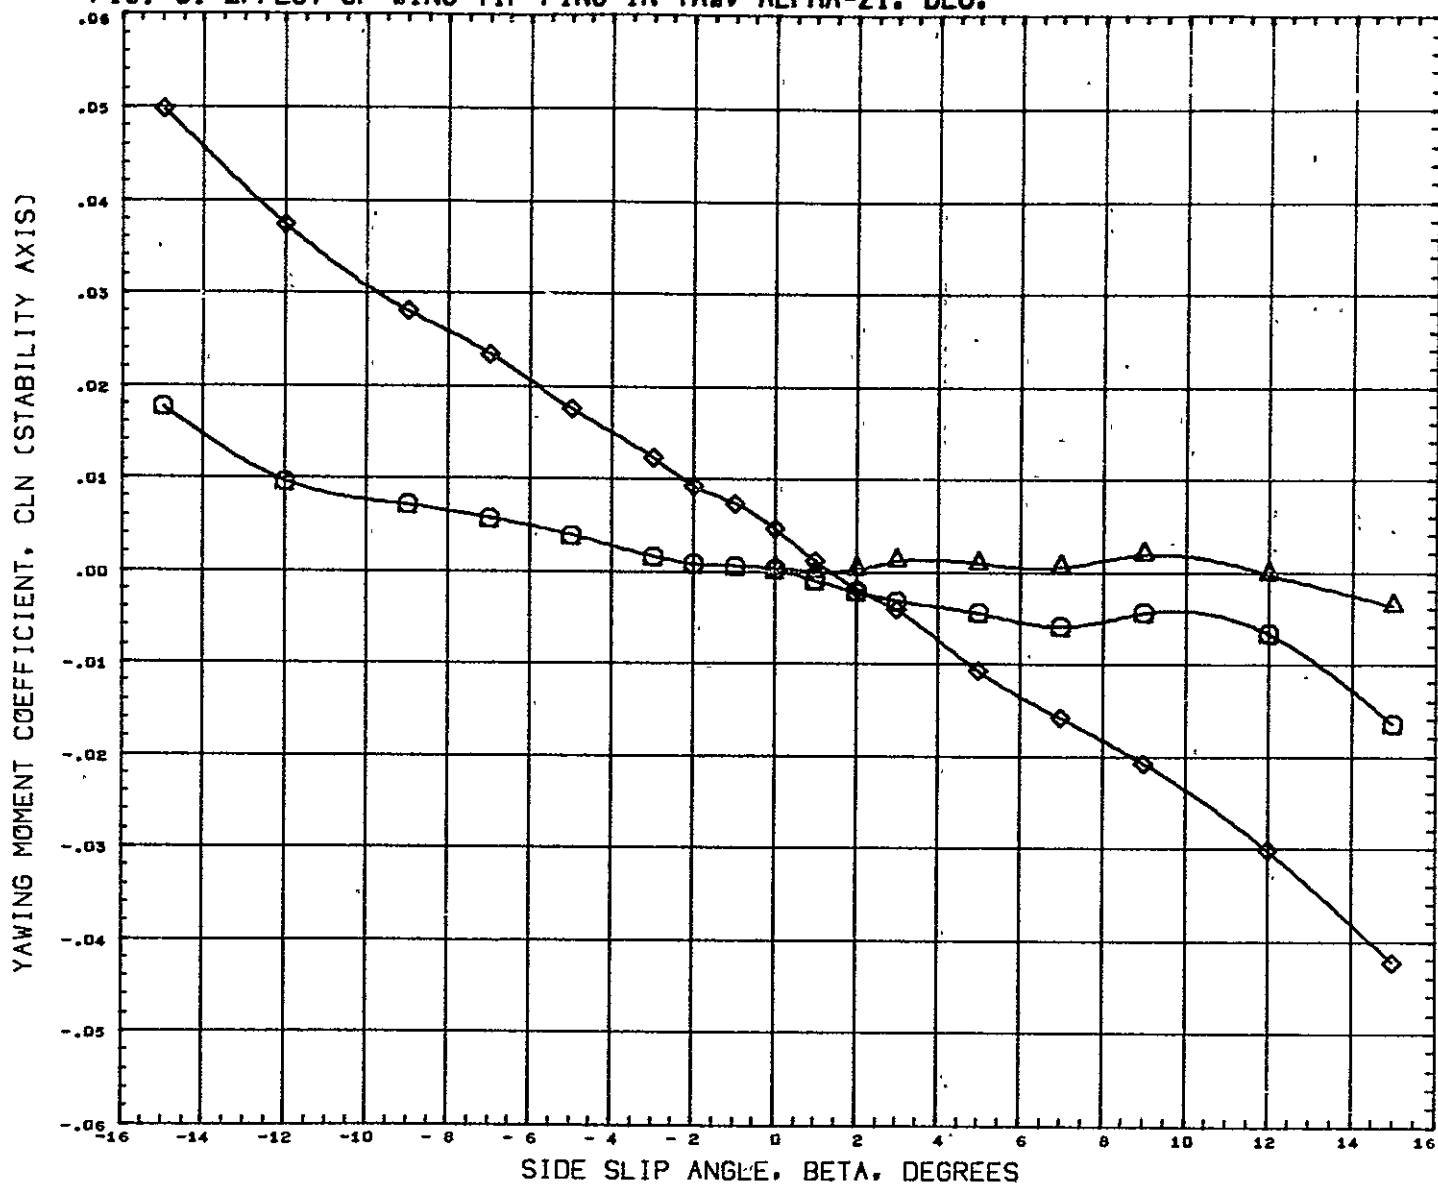

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(ACW076)	GWTT 290-CONF ROS-NB1 B1F1W2V3	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(ACW077)	GWTT 290-CONF ROS-NB1 B1F1W2V3	-15.000	0.000	0.000	0.000	LREF	6.4326 FT
(XCQ050)	GWTT 289-CONF ROS-NB1 B1W1	21.000	0.000	0.000		BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 31 EFFECT OF WING TIP FINS IN YAW. ALPHA=21. DEG.


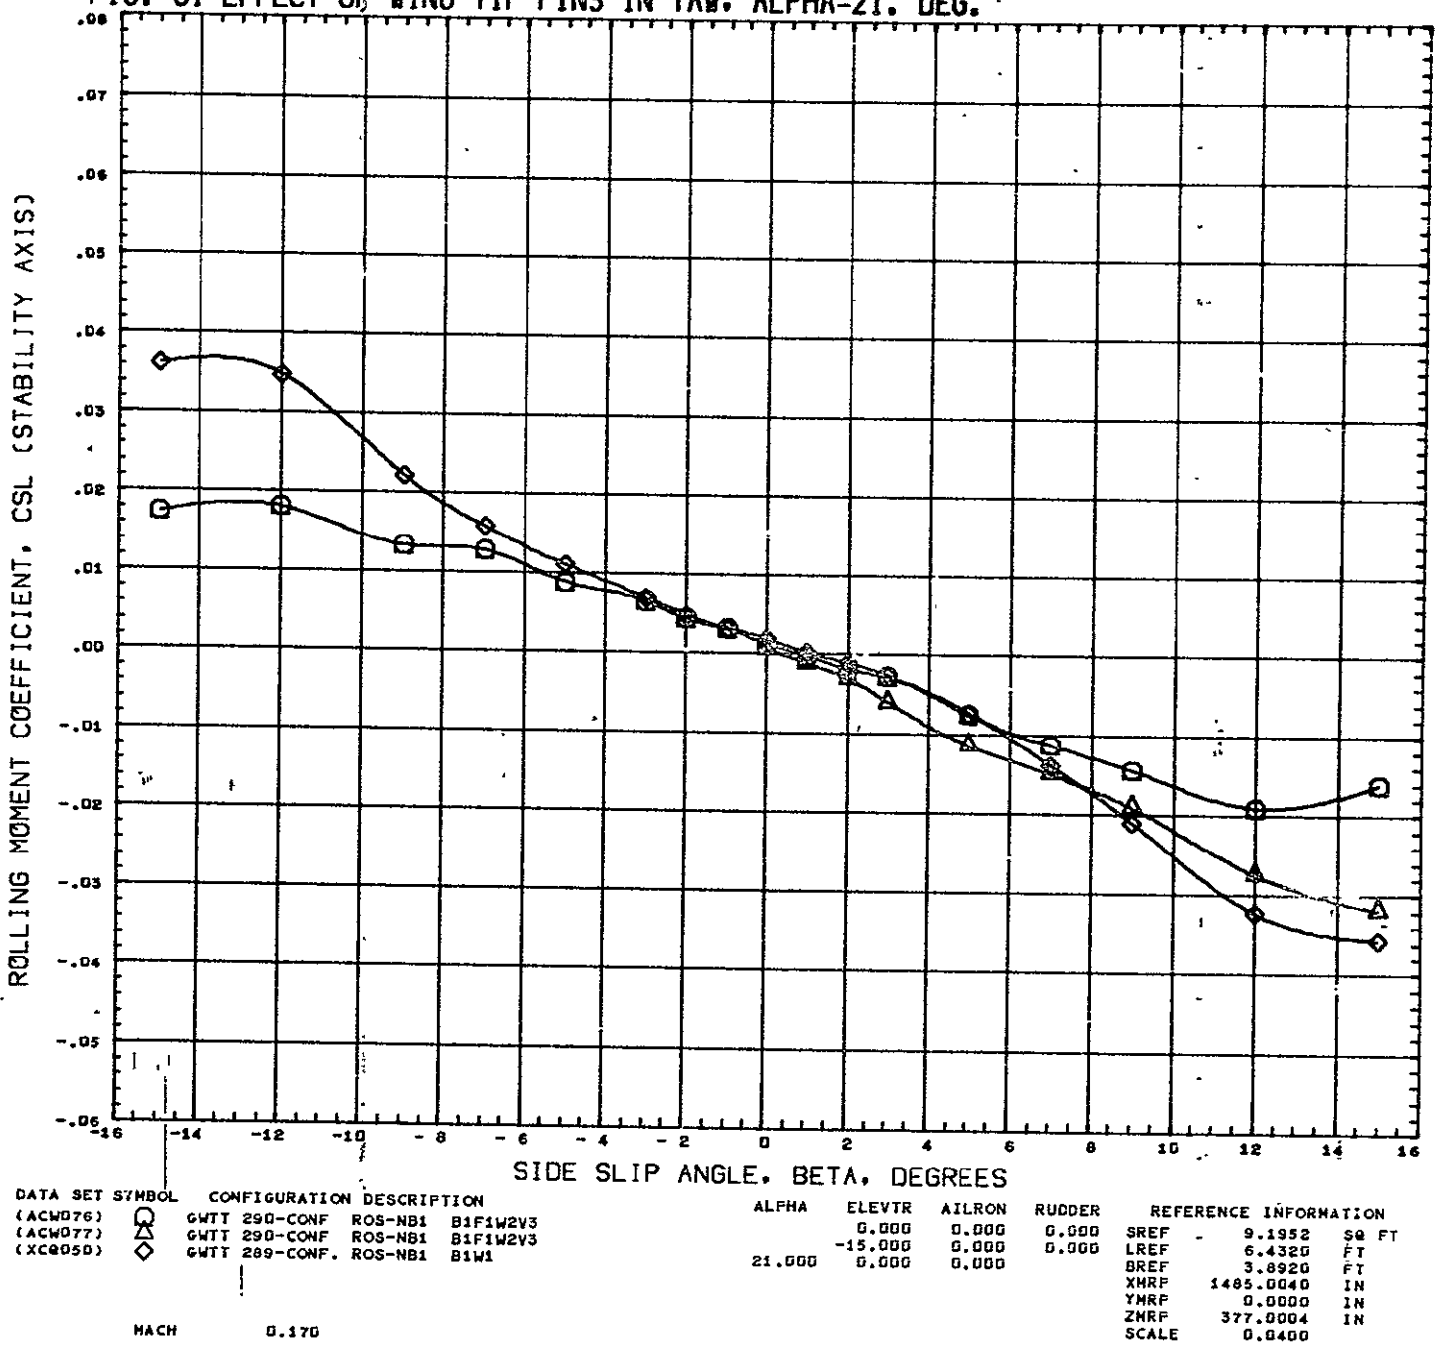


FIG. 32 WING TIP FIN MODIFIED,ELEVTR=-15. DEG.

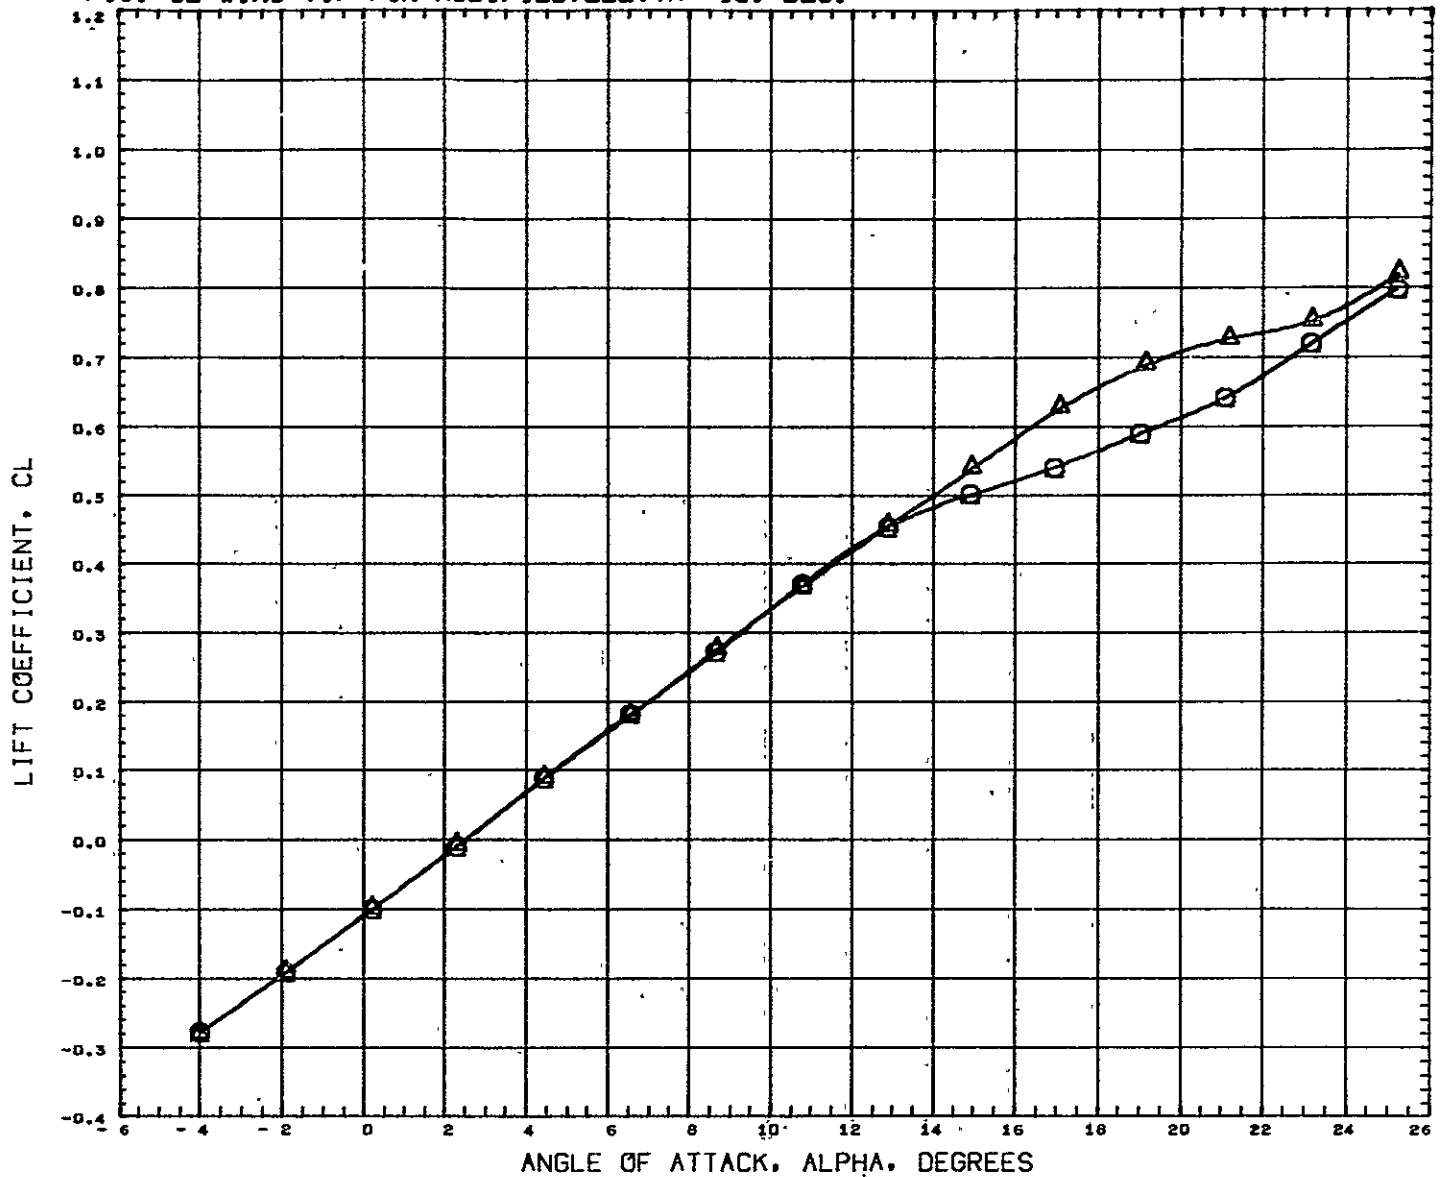


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW079) $\square$ GWTT 290-CONF ROS-NB1 B1F1W2V3
 (RCW080) $\triangle$ GWTT 290-CONF ROS-NB1 B1F1W2V3B

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
-15.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
-15.000	0.000	0.000	0.000	LREF 6.4320 FT
				BREF 3.8920 FT
				XHRF 1485.0040 IN
				YHRF 0.0000 IN
				ZHRF 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 32 WING TIP FIN MODIFIED, ELEVTR=-15. DEG.

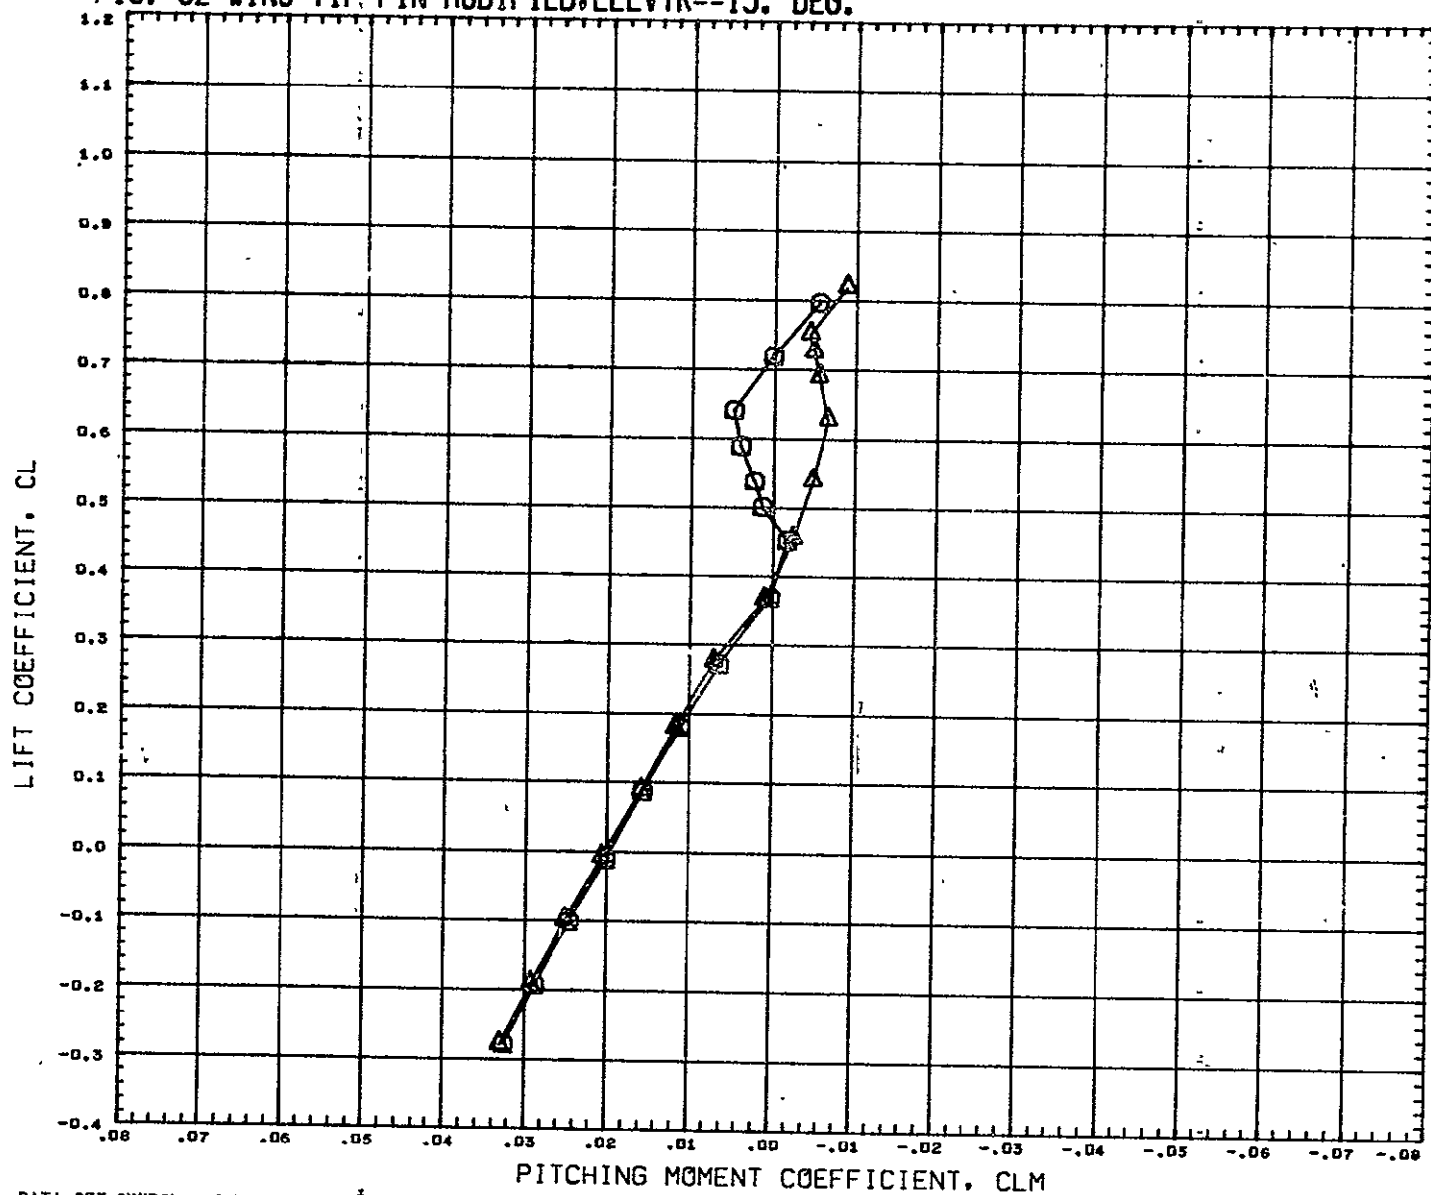


DATA SET SYMBOL	CONFIGURATION	DESCRIPTION
(RCW079)	Q	GWTT 290-CONF ROS-NB1 B1F1W2V3
(RCW080)	A	GWTT 290-CONF ROS-NB1 B1F1W2V3B

ALPHA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
-15.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
-15.000	0.000	0.000	0.000	LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170


FIG. 33 EFFECT OF AFT END MODIFICATIONS

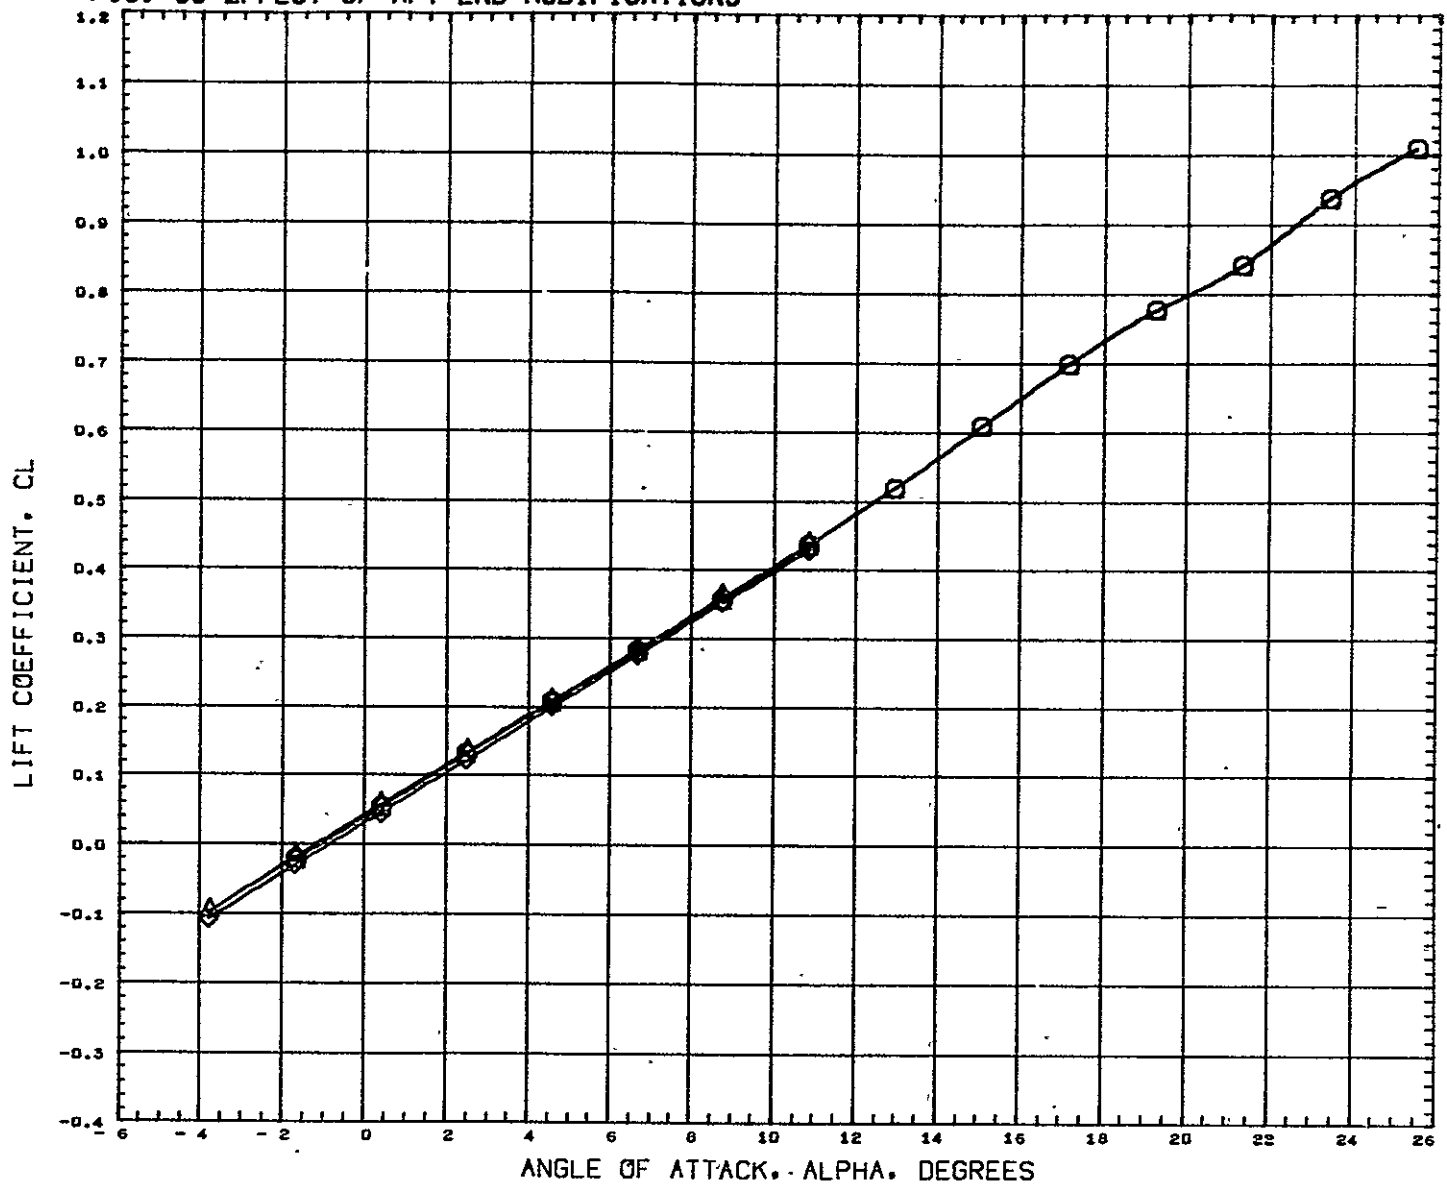

DATA SET	SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
(RCW004)	○	GWT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
(RCW001)	△	GWT 290-CONF ROS-NB1 B(1B)F1W1V1	0.000	0.000	0.000	0.000	LREF 6.4320 FT
(RCW002)	◇	GWT 290-CONF ROS-NB1 B(1C)F1W1V1	0.000	0.000	0.000	0.000	BREF 3.8920 FT
							XMRP 1485.0040 IN
							YMRP 0.0000 IN
							ZMRP 377.0004 IN
							SCALE 0.0400

MACH 0.170


FIG. 33 EFFECT OF AFT END MODIFICATIONS

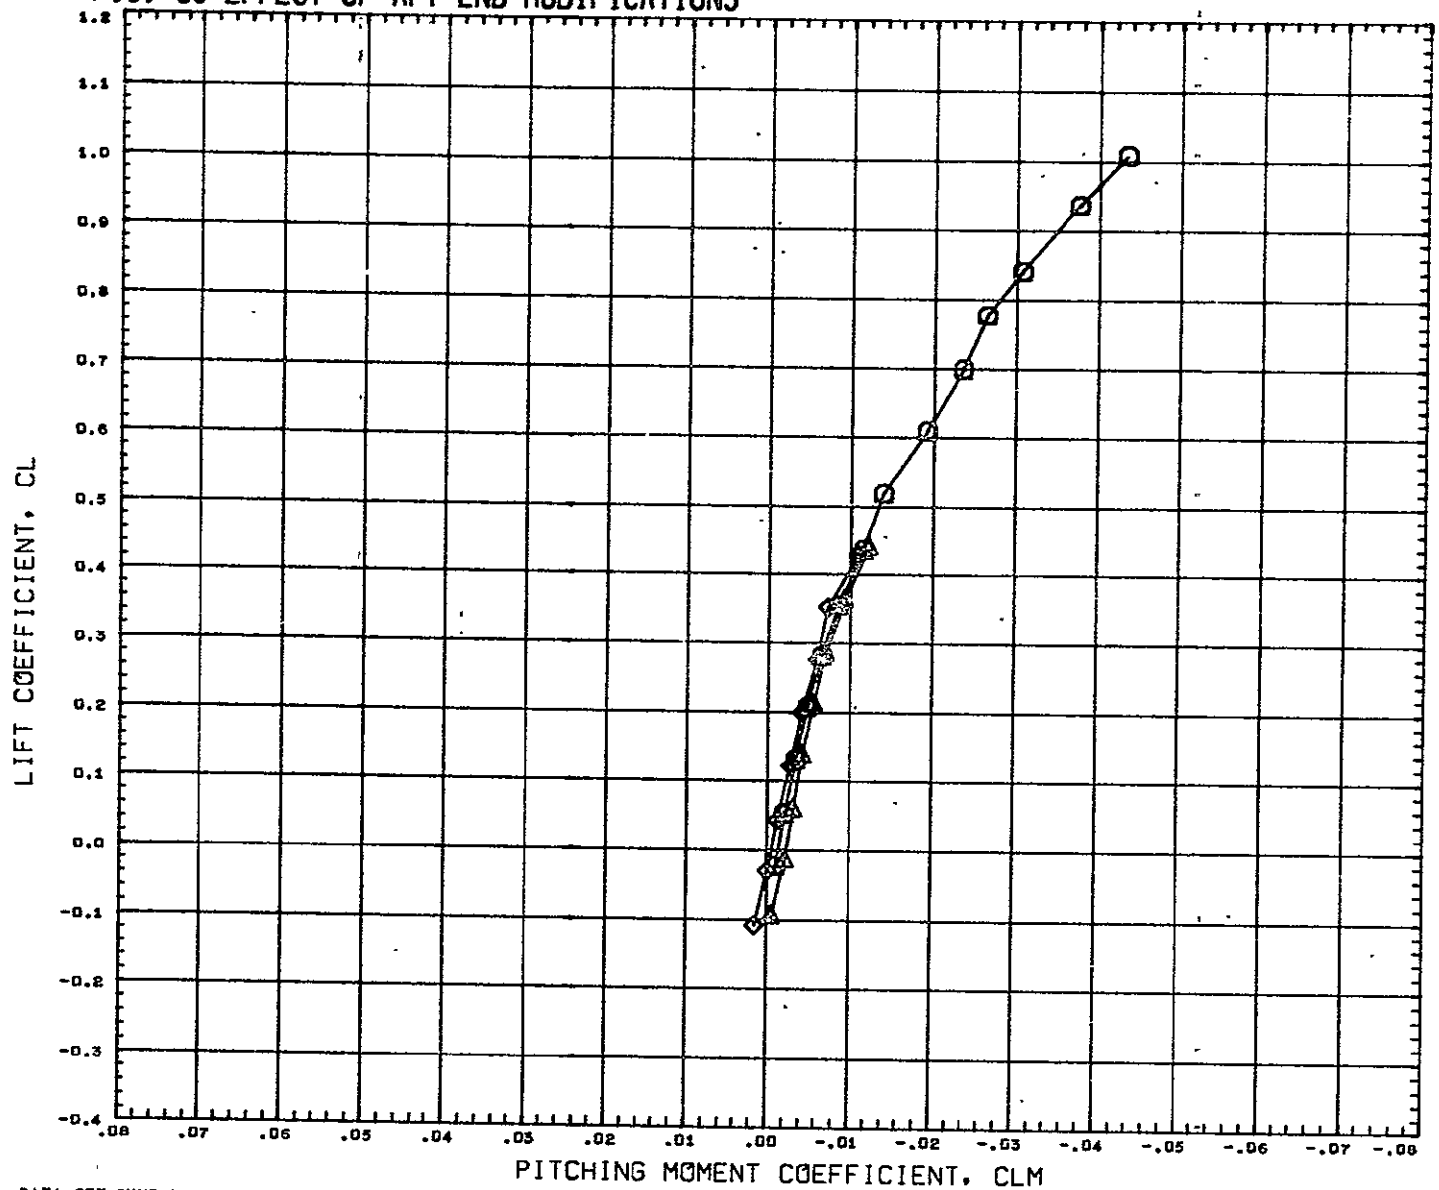

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW004)	GWT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW001)	GWT 290-CONF ROS-NB1 B(1B)F1W1V1	0.000	0.000	0.000	0.000	LREF	6.4320 FT
(RCW002)	GWT 290-CONF ROS-NB1 B(1C)F1W1V1	0.000	0.000	0.000	0.000	BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 33 EFFECT OF AFT END MODIFICATIONS

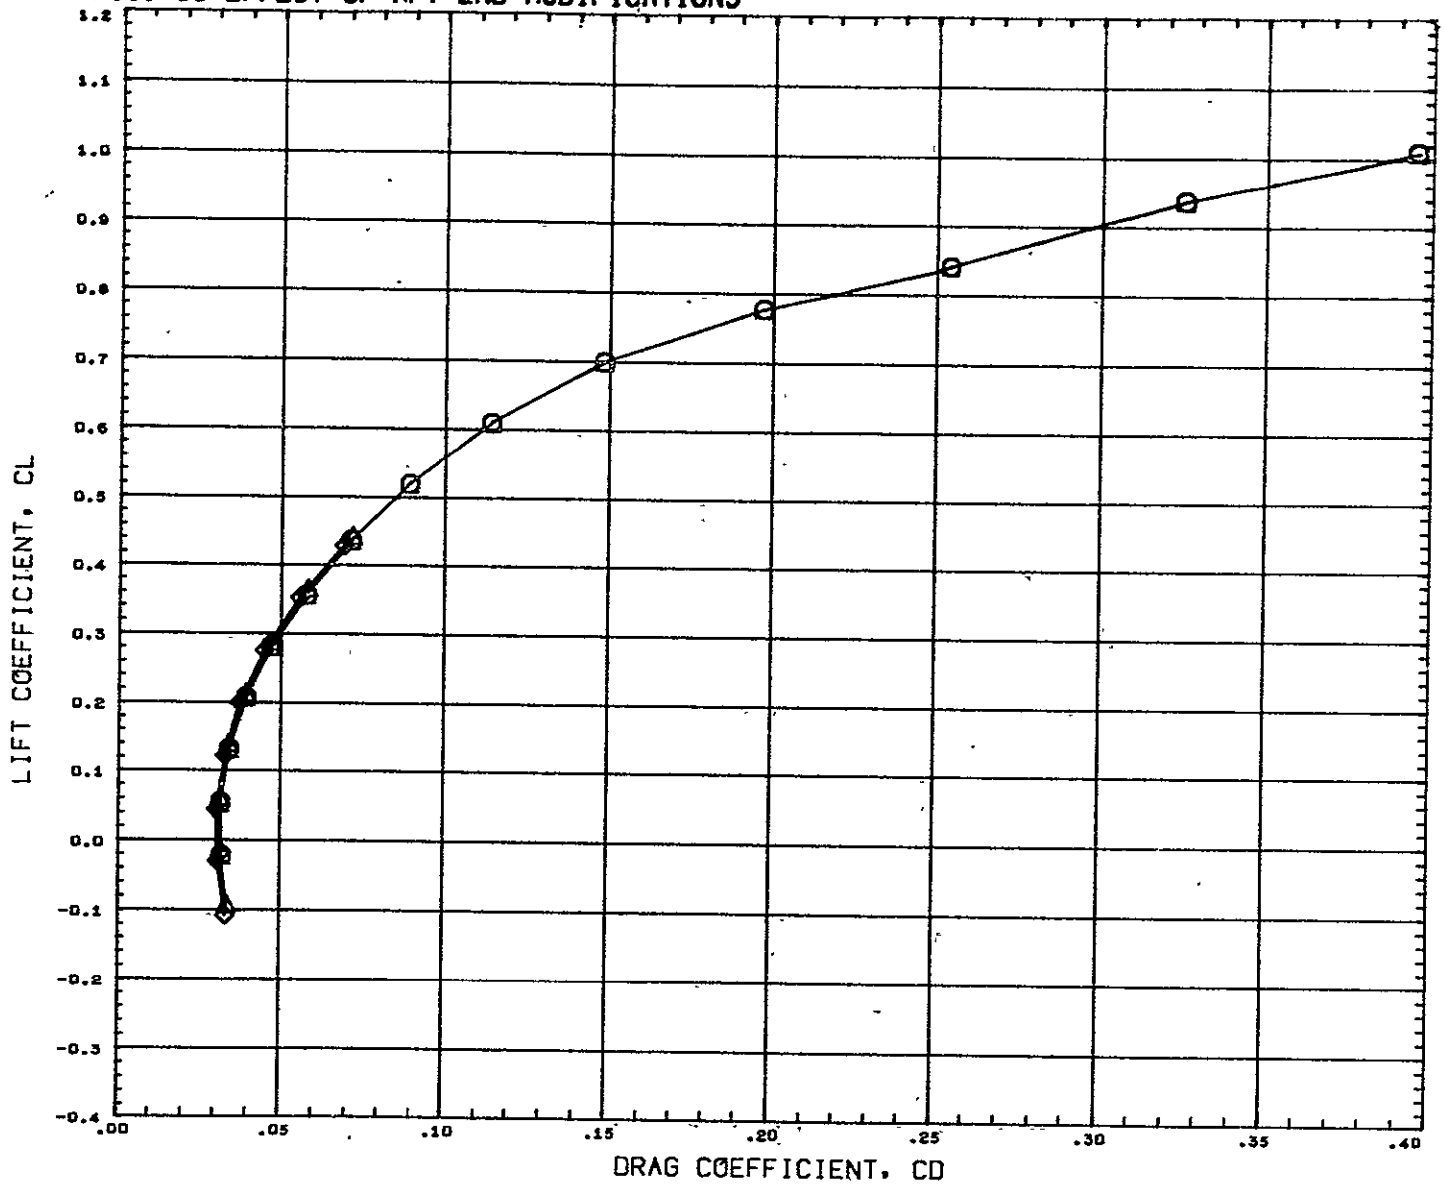


DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION
(RCW004)	○	GWTT 29D-CONF	ROS-NB1 B1F1W1V1
(RCW081)	△	GWTT 29D-CONF	ROS-NB1 B(1B)F1W1V1
(RCW082)	◇	GWTT 29D-CONF	ROS-NB1 B(1C)F1W1V1

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	0.000	0.000
0.000	0.000	0.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170

FIG. 34 EFFECT OF E2 ENGINE PODS

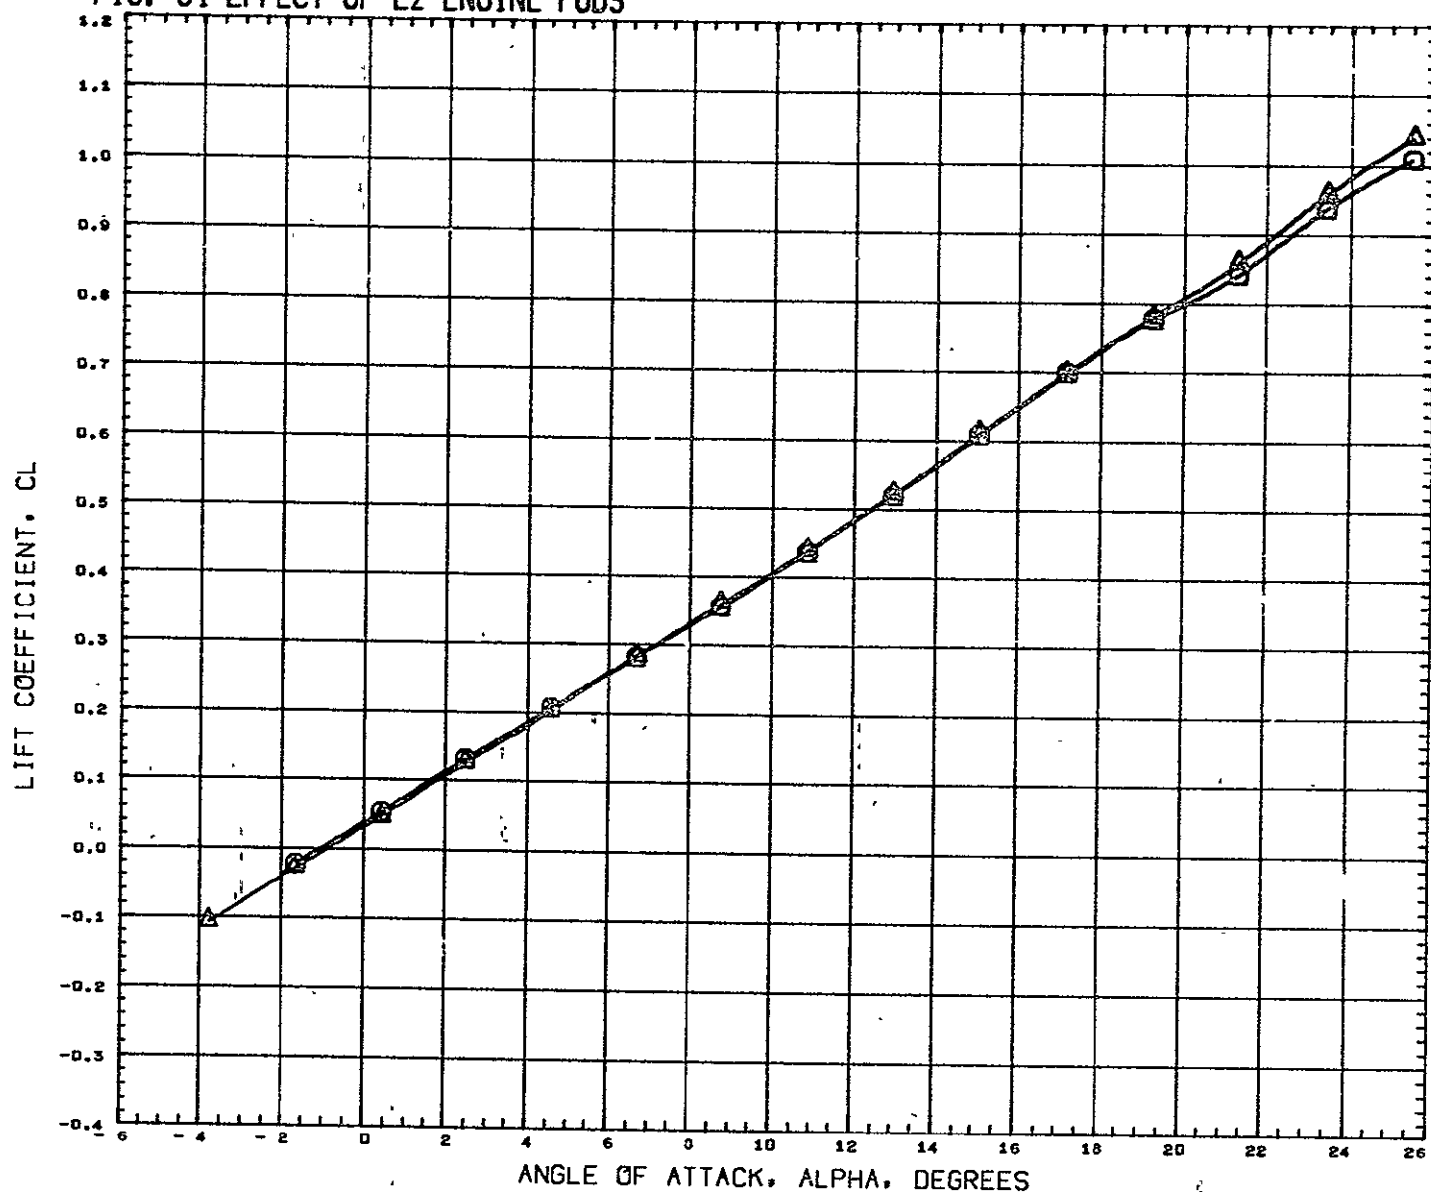


DATA SET	SYMBOL	CONFIGURATION DESCRIPTION
(RCWD04)	○	GWT 290-CONF ROS-NB1 B1F1W1V1
(RCWD03)	△	GWT 290-CONF ROS-NB1 B1F1W1V1E2

BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
0.000	0.000	0.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170


FIG. 34 EFFECT OF E2 ENGINE PODS

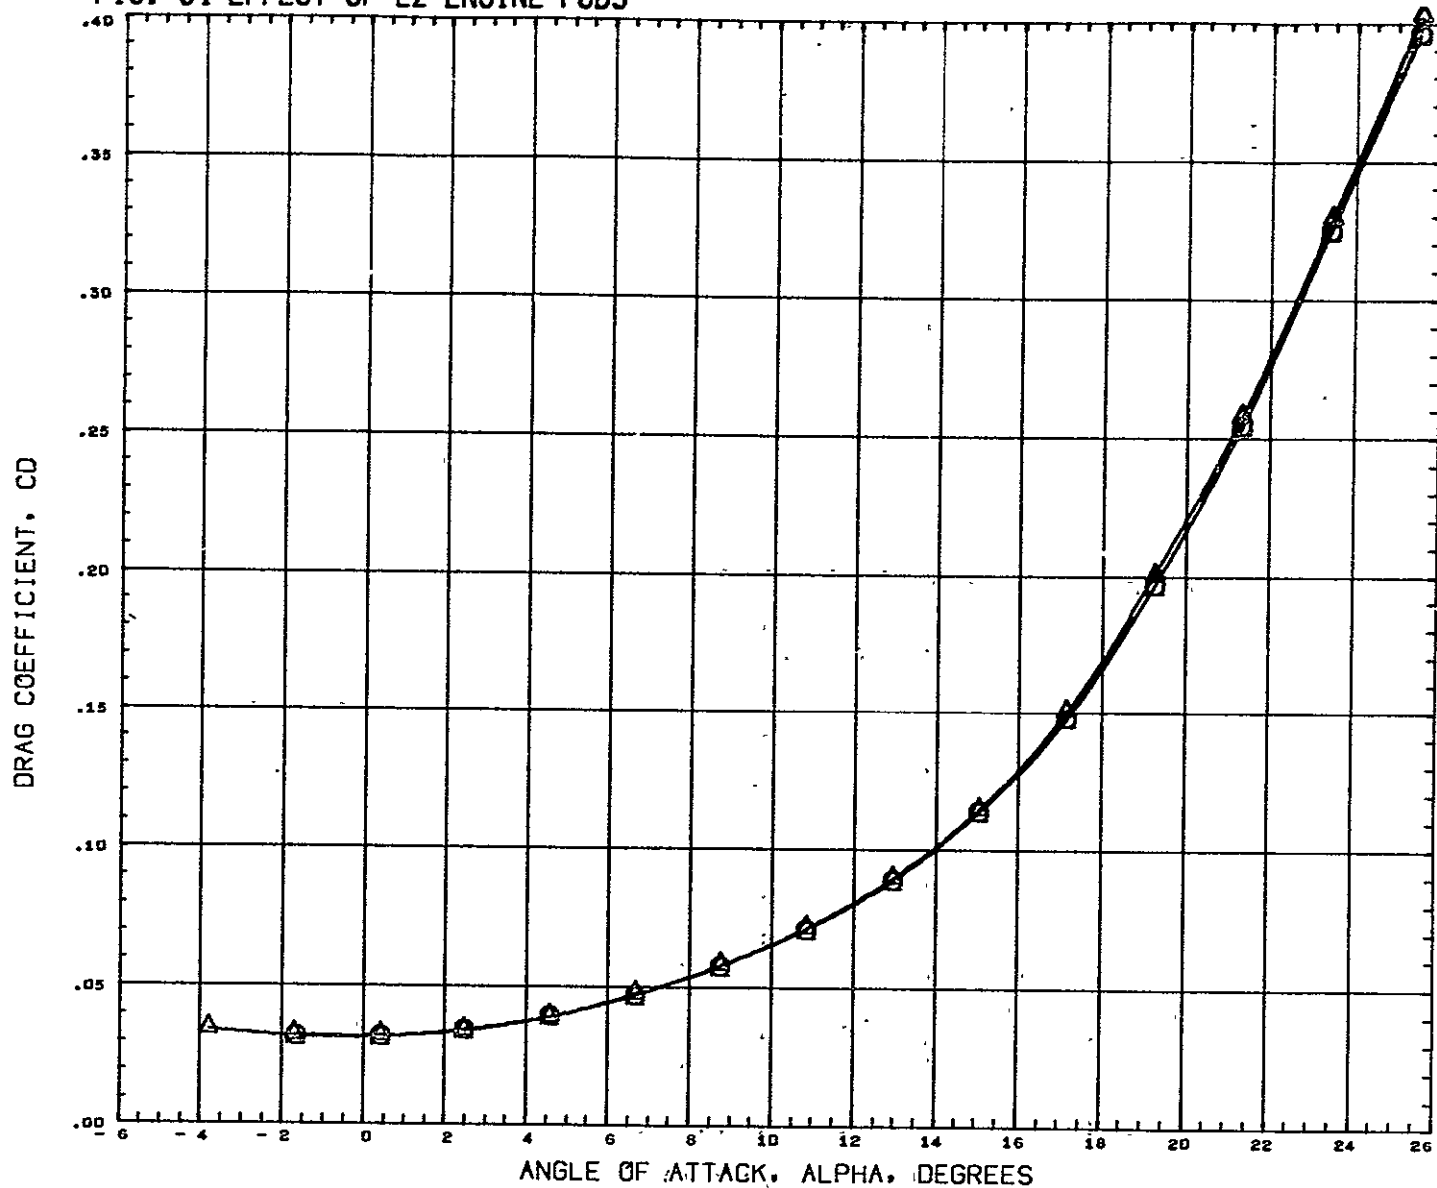

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
(RCW004)	Q GTT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
(RCW003)	A GTT 290-CONF ROS-NB1 B1F1W1V1E2	0.000	0.000	0.000	0.000	LREF	6.4320 FT
						BREF	3.8920 FT
						XMRP	1485.0040 IN
						YMRP	0.0000 IN
						ZMRP	377.0004 IN
						SCALE	0.0400

MACH 0.170

FIG. 34 EFFECT OF E2 ENGINE PODS

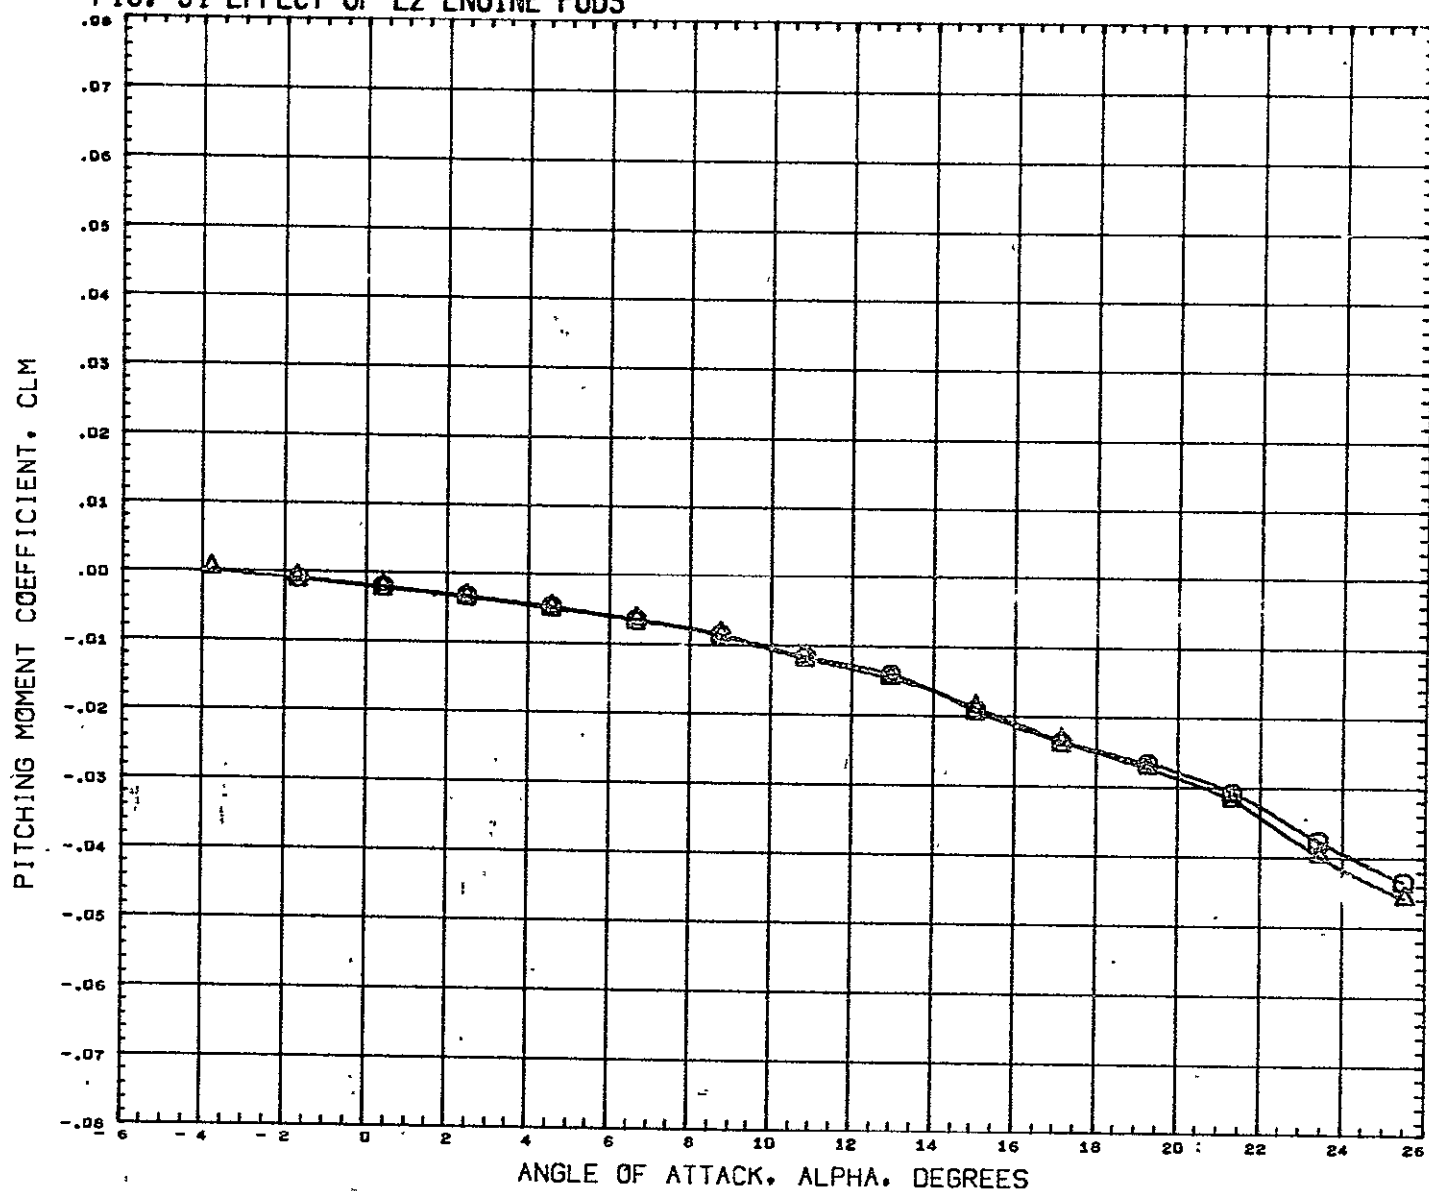


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW004) GWT 290-CONF ROS-NB1 B1F1W1V1
 (RCW003) GWT 290-CONF ROS-NB1 B1F1W1V1E2

BETA 0.000 ELEVTR 0.000 AILRON 0.000 RUDDER 0.000
 0.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRF 1485.0040 IN
 YMRF 0.0000 IN
 ZMRF 377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 34 EFFECT OF E2 ENGINE PODS

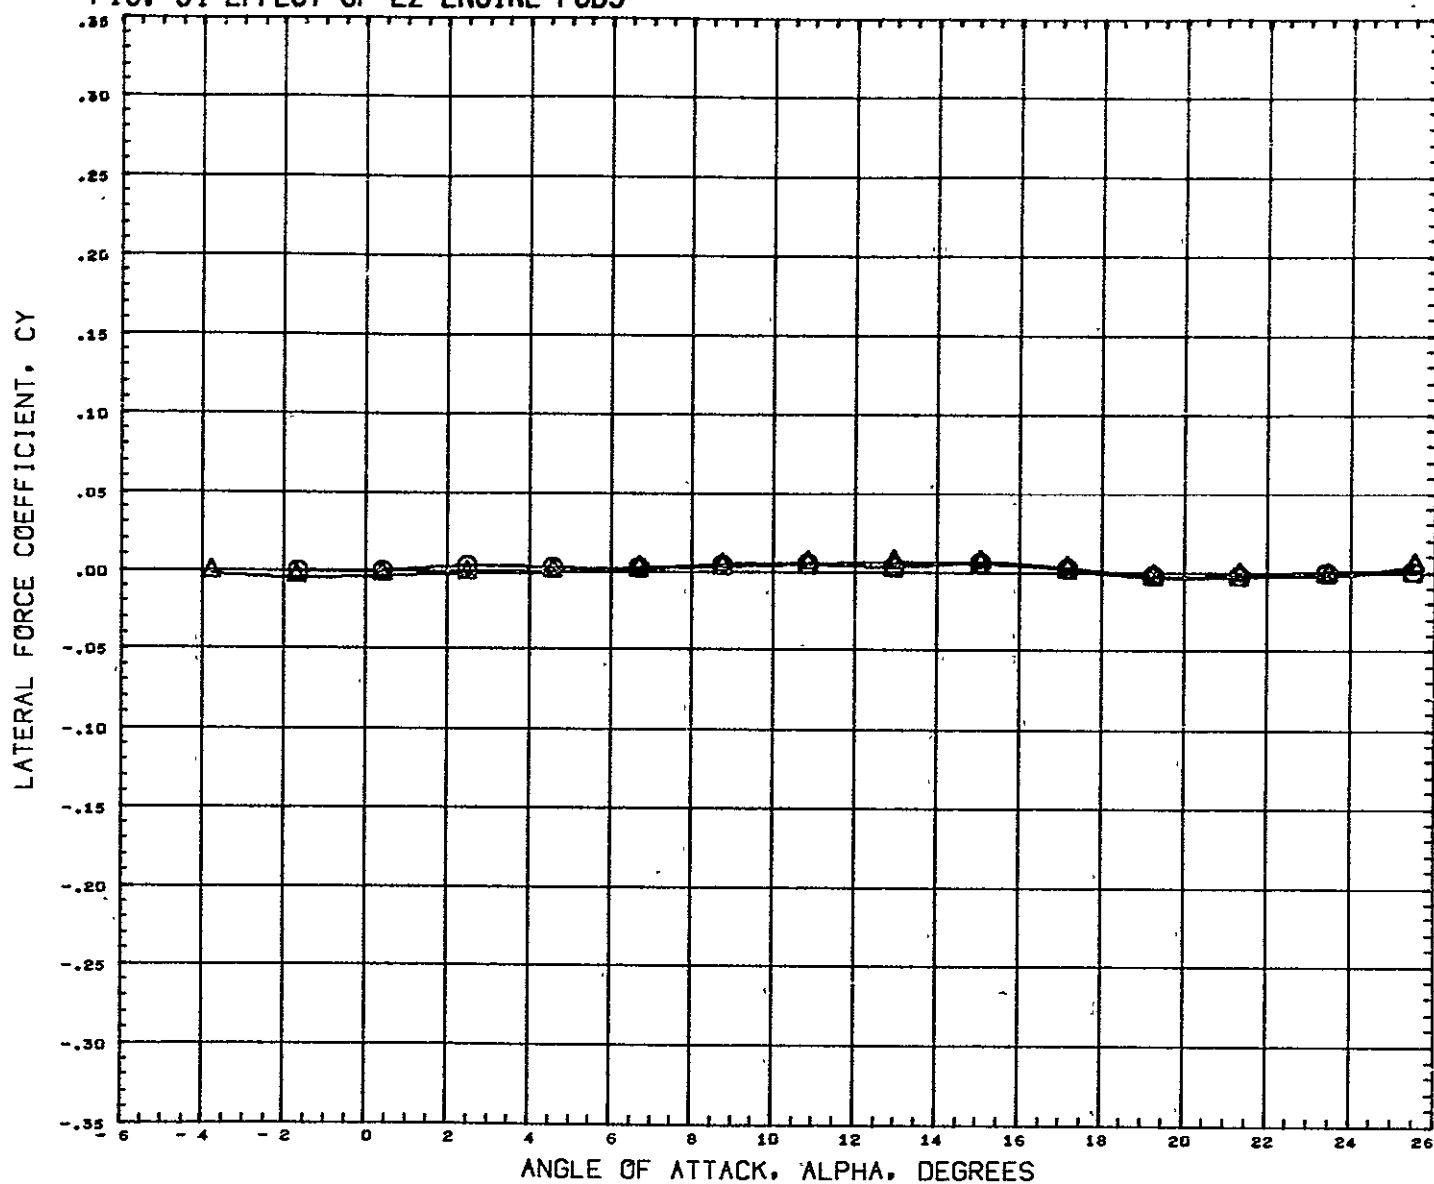


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW004) GWT 290-CONF ROS-NB1 B1F1W1V1
 (RCW003) GWT 290-CONF ROS-NB1 B1F1W1V1E2

BETA ELEVTR AILRON RUDDER
 0.000 0.000 0.000 0.000
 0.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170


FIG. 34 EFFECT OF E2 ENGINE PODS

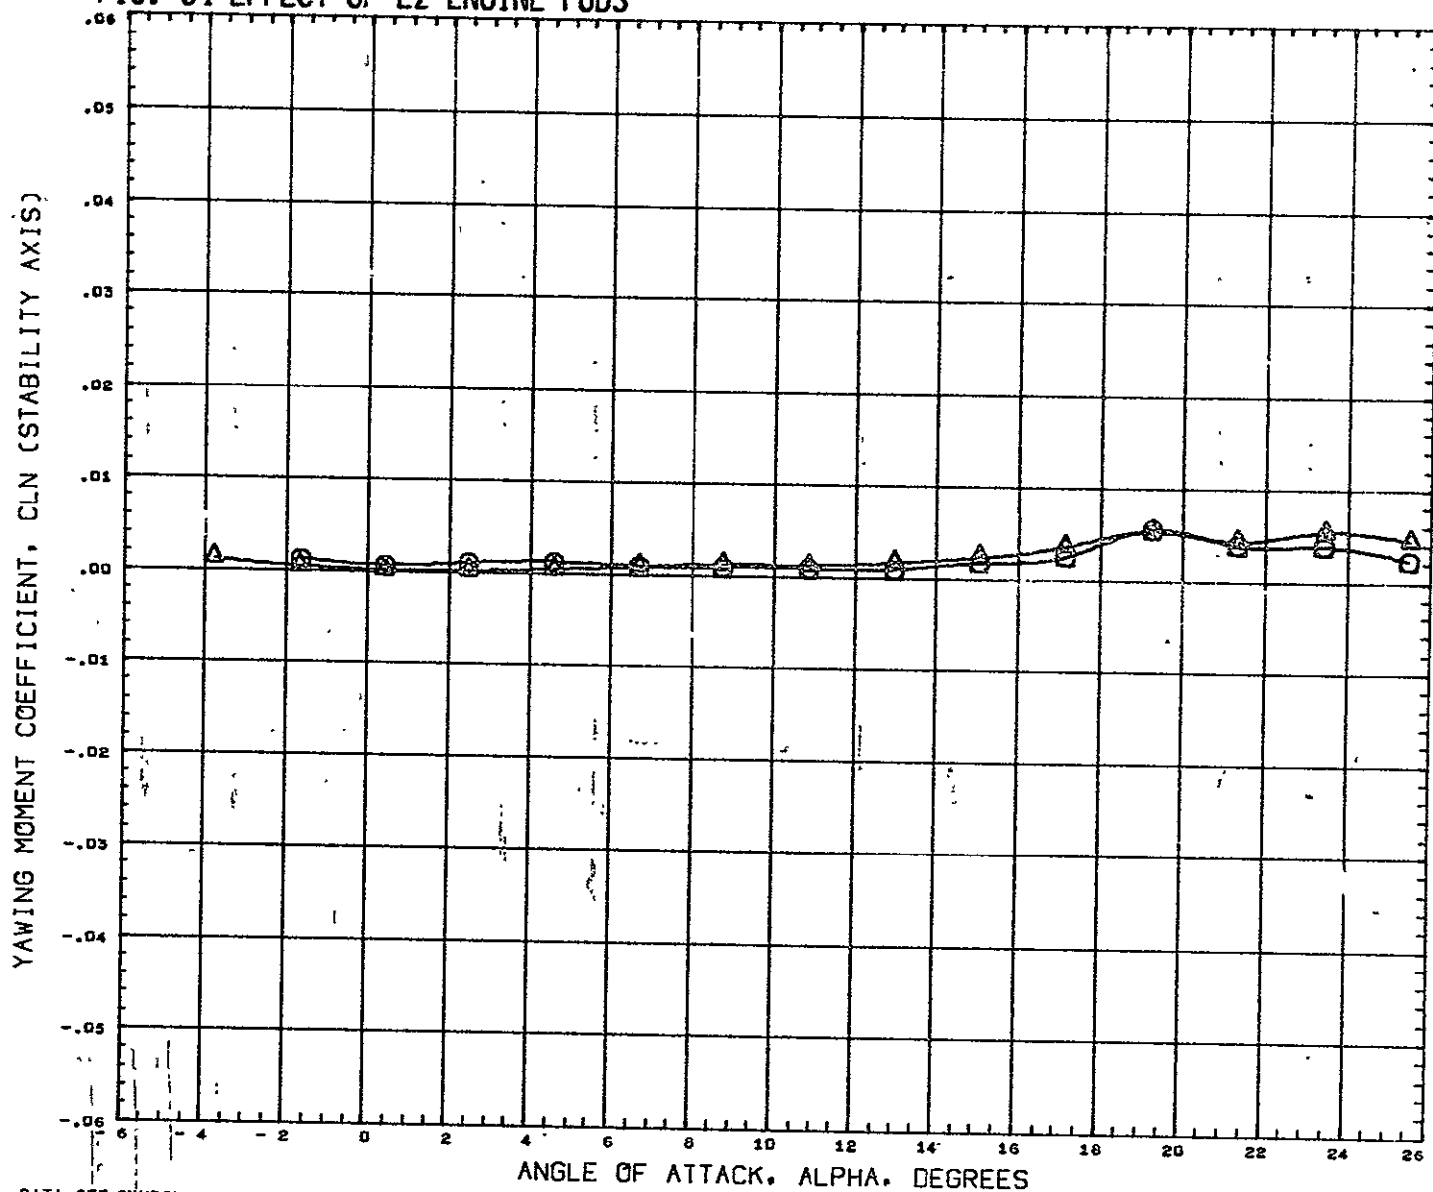

DATA SET SYMBOL	CONFIGURATION DESCRIPTION	BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION		
(RCW004)	GWT 290-CONF ROS-NB1 B1F1W1V1	0.000	0.000	0.000	0.000	SREF	9.1952	SR FT
(RCW083)	GWT 290-CONF ROS-NB1 B1F1W1V1E2	0.000	0.000	0.000	0.000	LREF	6.4320	FT
						BREF	3.8920	FT
						XMRP	1485.0040	IN
						YMRP	0.0000	IN
						ZMRP	377.0004	IN
						SCALE	0.6400	

MACH 0.170

FIG. 34 EFFECT OF E2 ENGINE PODS

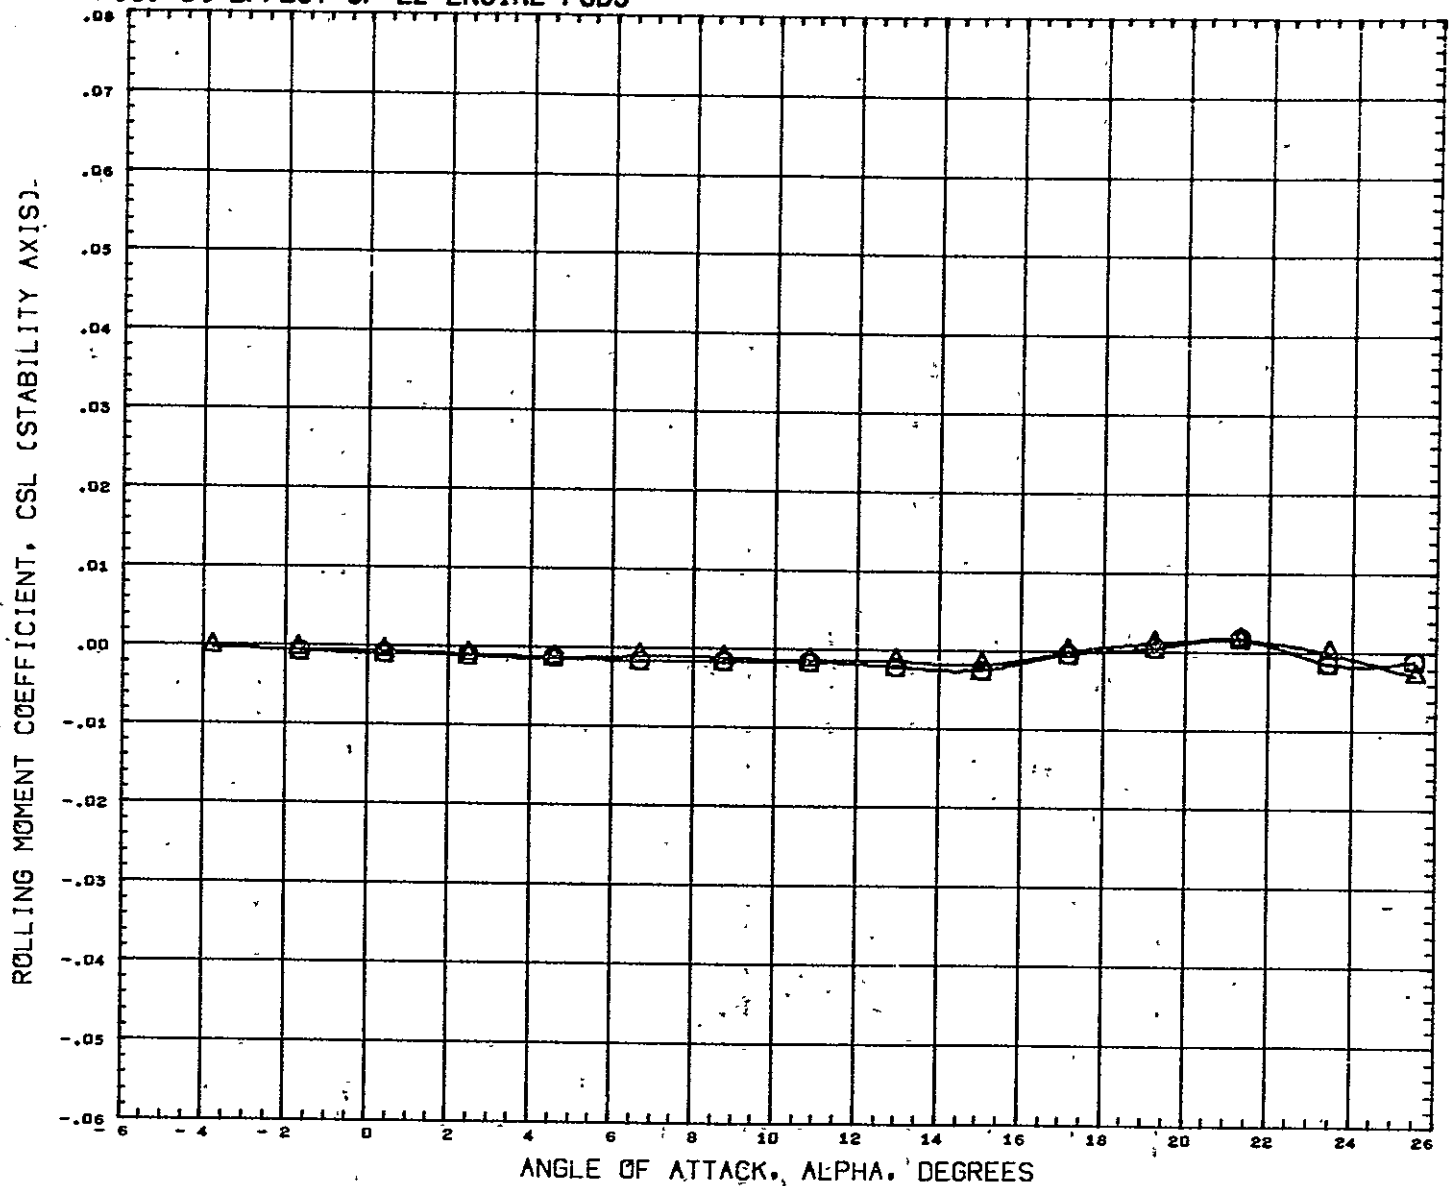


DATA SET SYMBOL	CONFIGURATION DESCRIPTION
(RCW004)	GWTT 29D-CONF ROS-NB1 81F1W1V1
(RCW083)	GWTT 29D-CONF ROS-NB1 81F1W1V1E2

BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
0.000	0.000	0.000	0.000	LREF 6.4320 FT
				BREF 3.8920 FT
				XMRP 1485.0040 IN
				YMRP 0.0000 IN
				ZMRP 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 35 YAW POLARS WITH E2 ENGINE PODS

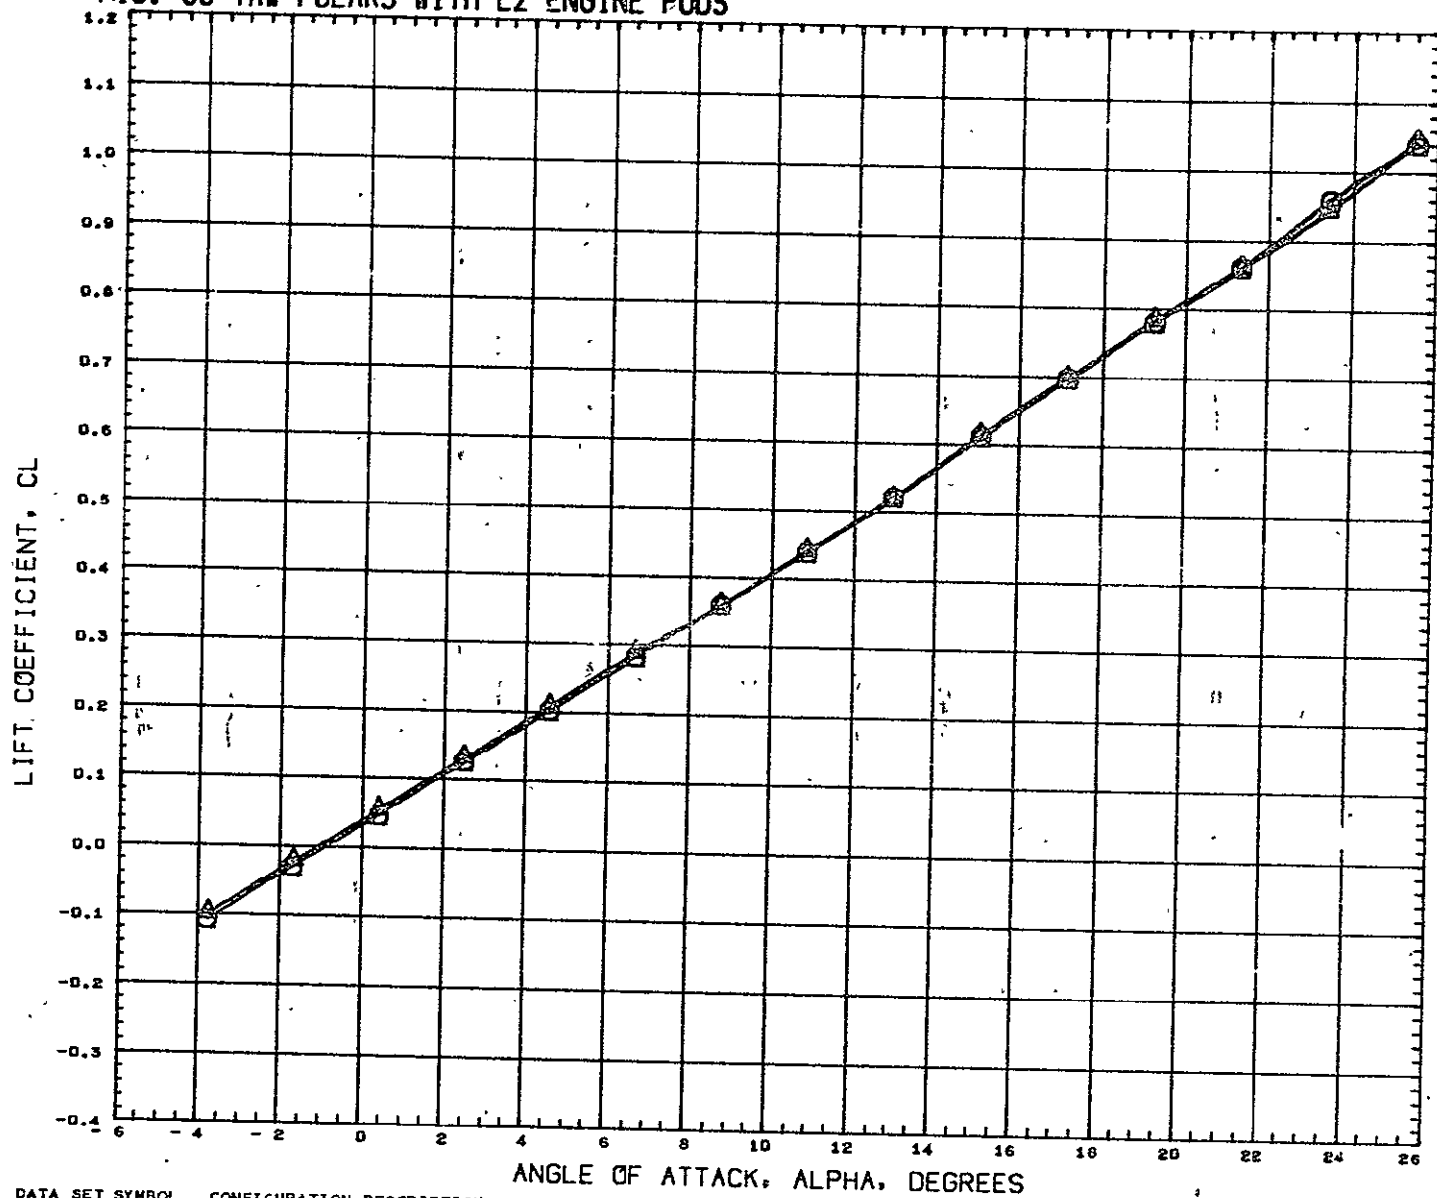


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW083) GWTT 290-CONF ROS-NB1. B1F1W1V1E2
 (RCW084) GWTT 290-CONF ROS-NB1 B1F1W1V1E2

BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION
0.000	0.000	0.000	0.000	SREF 9.1952 SQ FT
3.000	0.000	0.000	0.000	LREF 6.4320 FT
				BREF 3.8920 FT
				XMRP 1485.0040 IN
				YMRP 0.0000 IN
				ZMRP 377.0004 IN
				SCALE 0.0400

MACH 0.170

FIG. 35 YAW POLARS WITH E2 ENGINE PODS

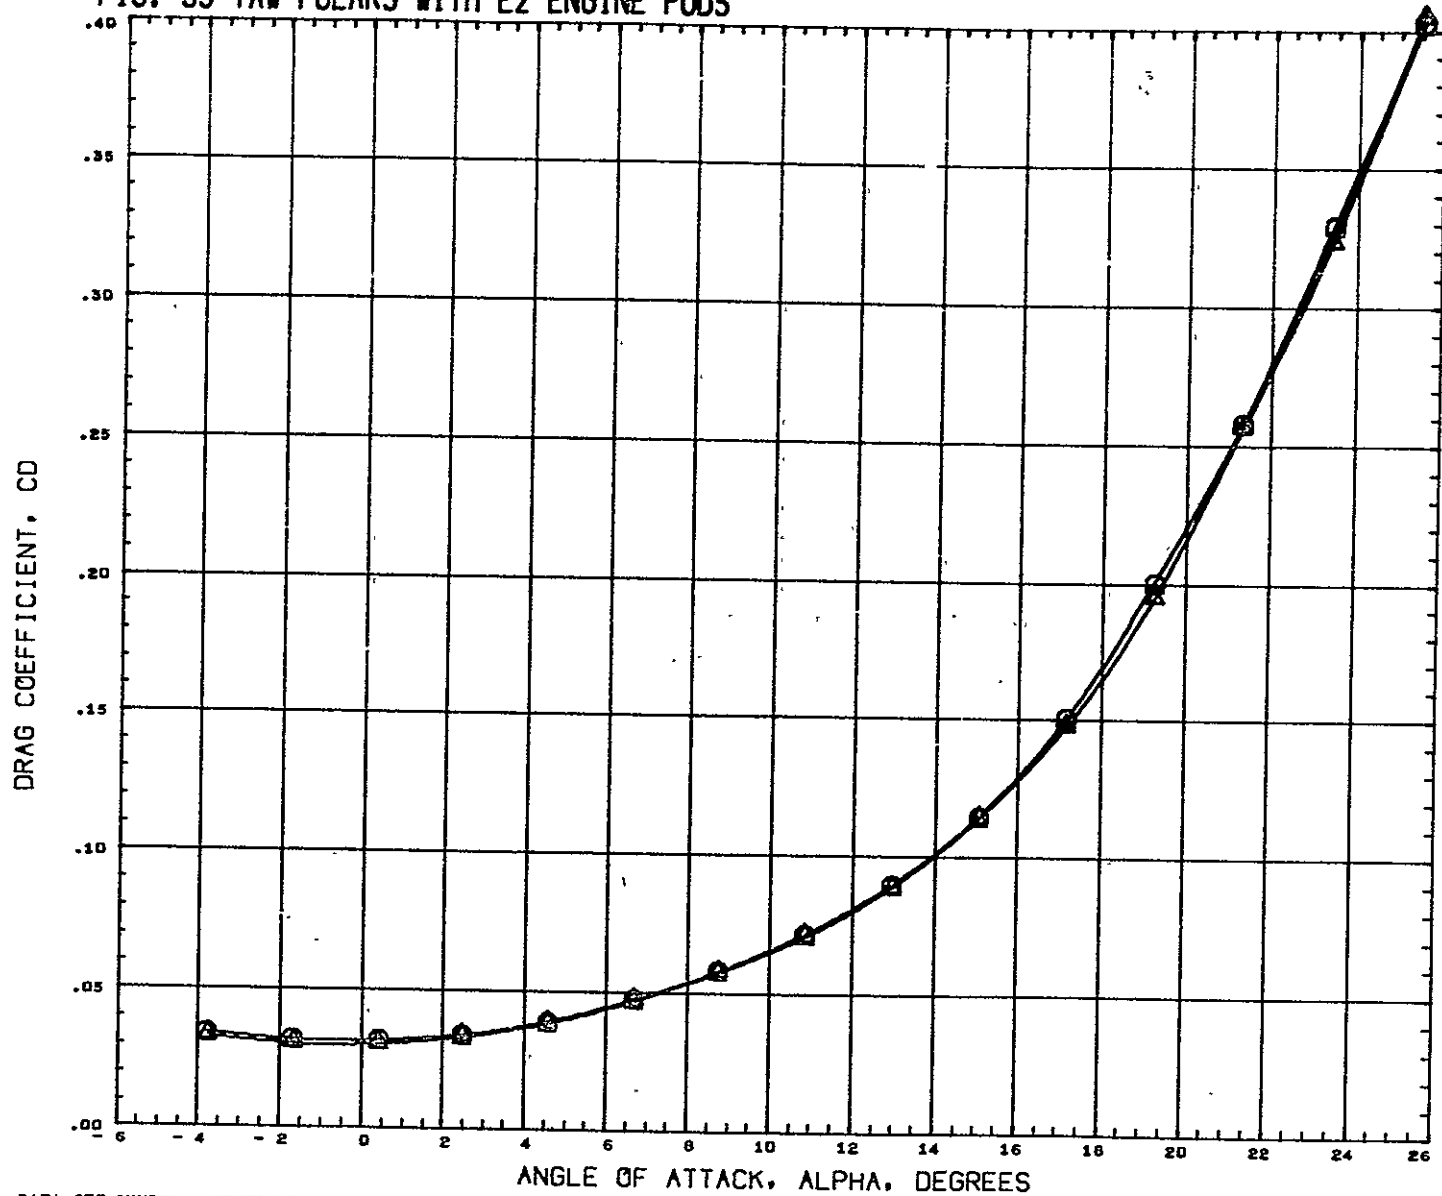


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW083)  GWTT 290-CONF ROS-NB1 B1F1W1V1E2
 (RCW084)  GWTT 290-CONF ROS-NB1 B1F1W1V1E2

BETA ELEVTR 'AILRON RUDDER
 0.000 0.000 0.000 0.000
 3.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 35 YAW POLARS WITH E2 ENGINE PODS

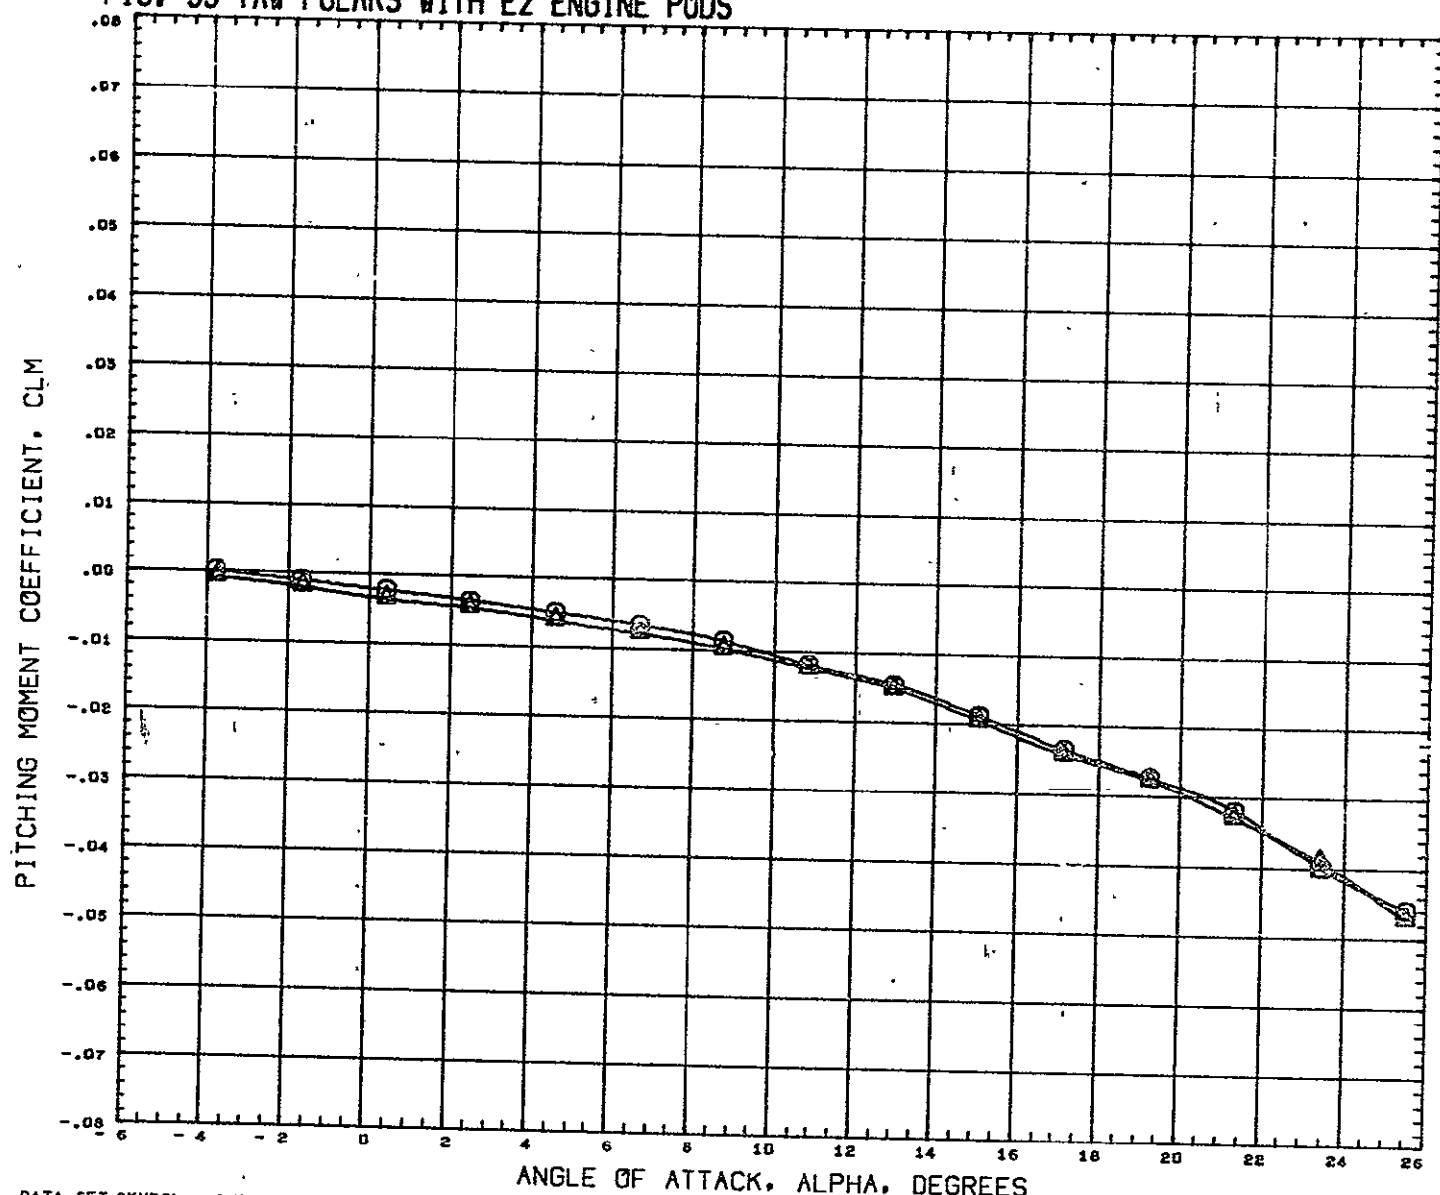


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW083) $\bigcirc$ GWTT 290-CONF ROS-NB1 B1F1W1V1E2
 (RCW084) $\triangle$ GWTT 290-CONF ROS-NB1 B1F1W1V1E2

BETA ELEVTR AILRON RUDDER
 0.000 0.000 0.000 0.000
 3.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 35 YAW POLARS WITH E2 ENGINE PODS

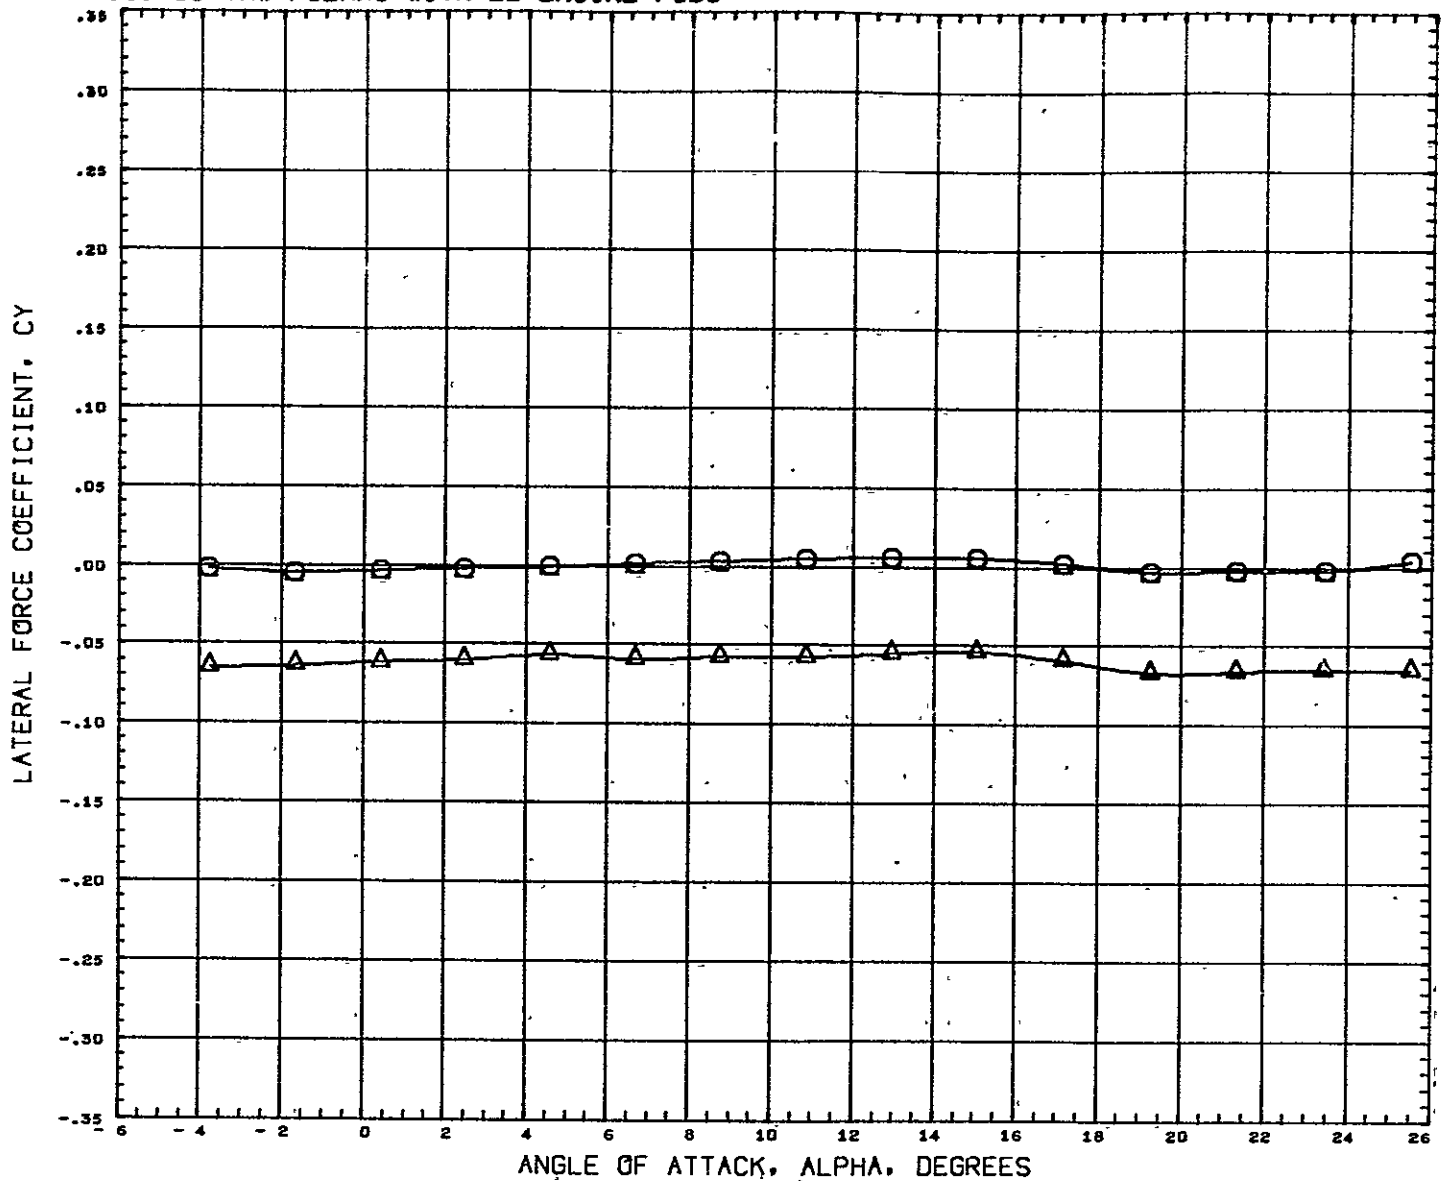


DATA SET SYMBOL CONFIGURATION DESCRIPTION
 (RCW083) $\bigcirc$ GWT 290-CONF ROS-NB1 B1F1W1V1E2
 (RCW084) $\triangle$ GWT 290-CONF ROS-NB1 B1F1W1V1E2

BETA ELEVTR AILRON RUDDER
 0.000 0.000 0.000 0.000
 3.000 0.000 0.000 0.000

REFERENCE INFORMATION
 SREF 9.1952 SQ FT
 LREF 6.4320 FT
 BREF 3.8920 FT
 XMRP 1485.0040 IN
 YMRP 0.0000 IN
 ZMRP 377.0004 IN
 SCALE 0.0400

MACH 0.170

FIG. 35 YAW POLARS WITH E2 ENGINE PODS

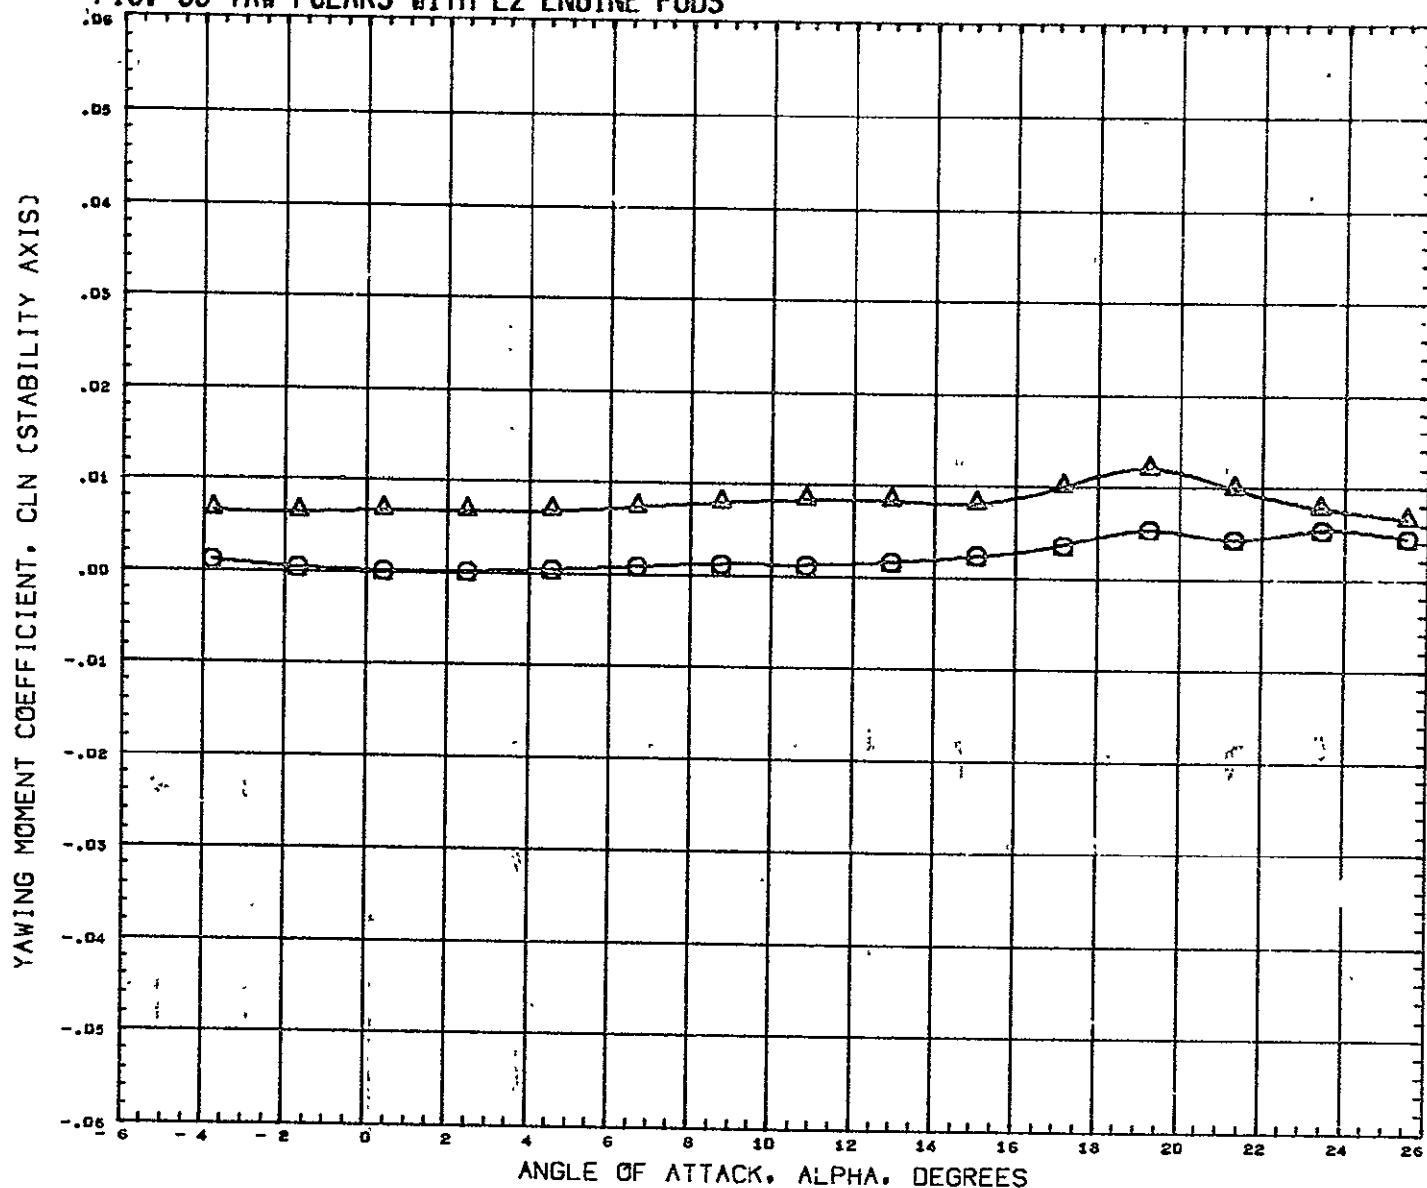

DATA SET	SYMBOL	CONFIGURATION	DESCRIPTION
(RCWD83)	○	GWTT 290-CONF	ROS-NB1 B1F1W1V1E2
(RCWD84)	△	GWTT 290-CONF	ROS-NB1 B1F1W1V1E2


BETA	ELEVTR	AILRON	RUDDER
0.000	0.000	0.000	0.000
3.000	0.000	0.000	0.000

REFERENCE INFORMATION	
SREF	9.1952 SQ FT
LREF	6.4320 FT
BREF	3.8920 FT
XMRP	1485.0040 IN
YMRP	0.0000 IN
ZMRP	377.0004 IN
SCALE	0.0400

MACH 0.170

5④

FIG. 35 YAW POLARS WITH E2 ENGINE PODS

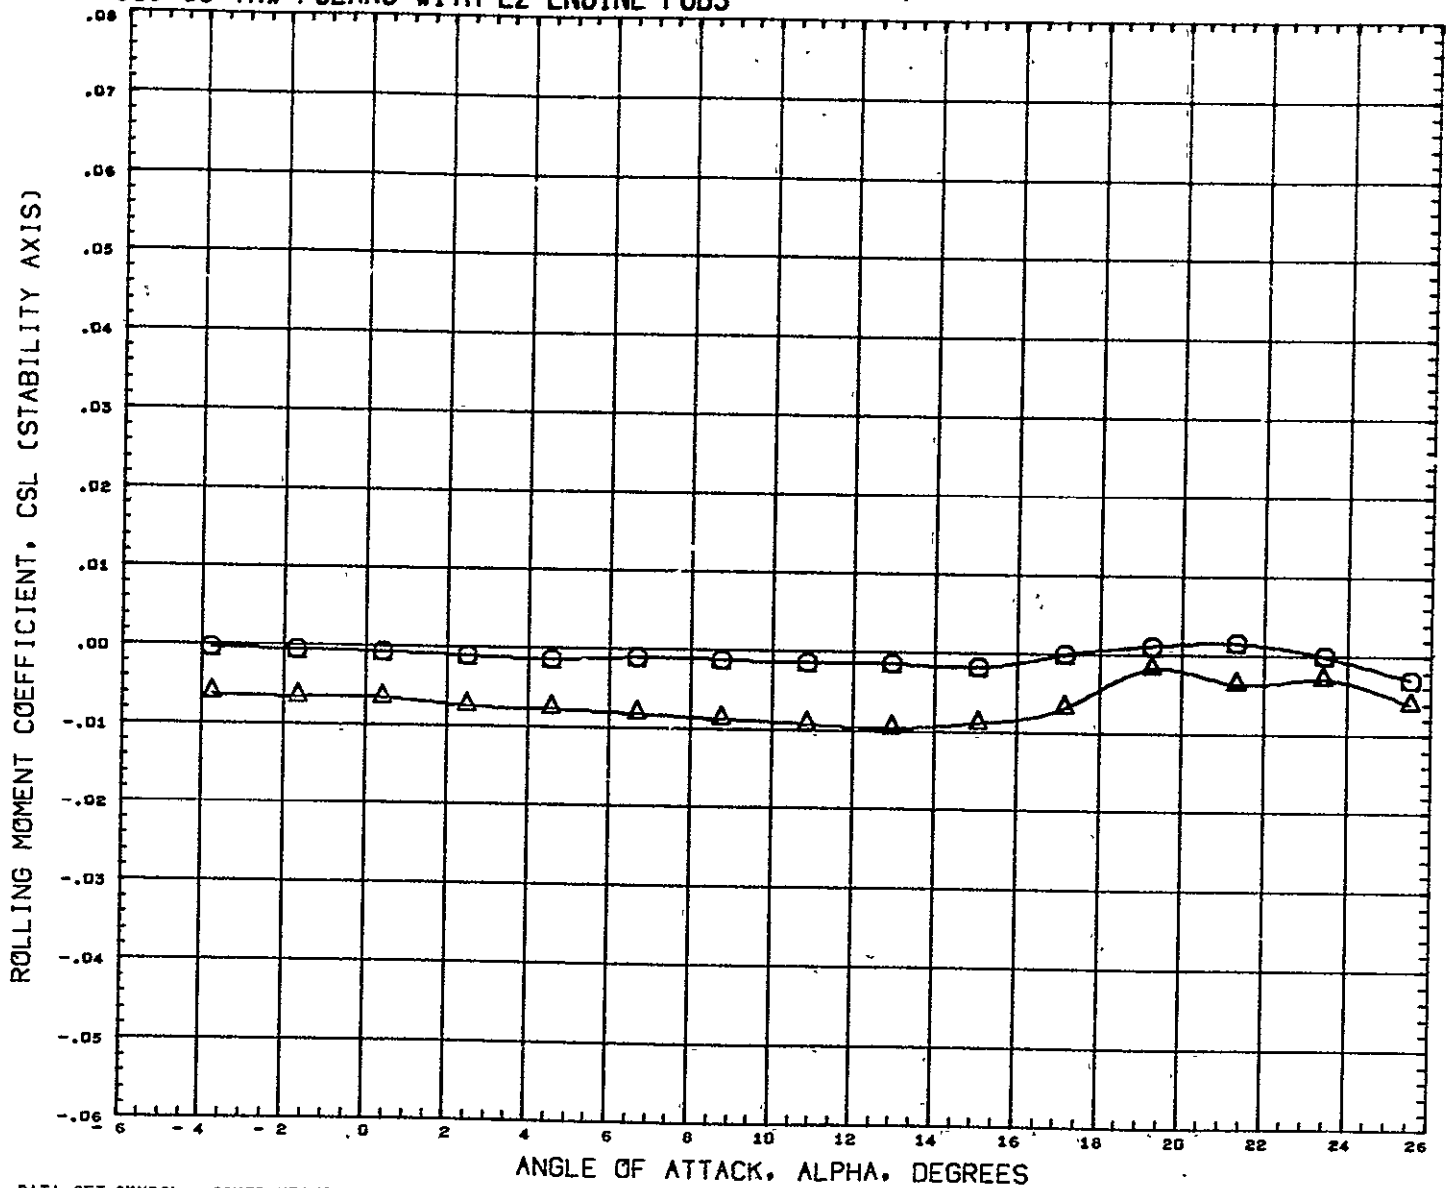

DATA SET SYMBOL CONFIGURATION DESCRIPTION
(RCWD83) $\square$ GWTT 290-CONF ROS-NB1 B1F1W1V1E2
(RCWD84) $\triangle$ GWTT 290-CONF ROS-NB1 B1F1W1V1E2

BETA	ELEVTR	AILRON	RUDDER	REFERENCE INFORMATION	
0.000	0.000	0.000	0.000	SREF	9.1952 SQ FT
3.000	0.000	0.000	0.000	LREF	6.4320 FT
				BREF	3.8920 FT
				XMRP	1485.0040 IN
				YMRP	0.0000 IN
				ZMRP	377.0004 IN
				SCALE	0.0400

MACH 0.170