

N 7 2 - 3 0 9 5 0

**NASA CONTRACTOR
REPORT**

NASA CR-61386

**CASE FILE
COPY**

**SKYLAB EXPERIMENT PERFORMANCE
EVALUATION MANUAL**

**Appendix B: Experiment M415 Thermal Control
Coatings (MSFC), Revised**

**By K. S. Purushotham
Teledyne Brown Engineering Company
Huntsville, Alabama**

October 1972 (Revised edition)

Prepared for

**NASA-GEORGE C. MARSHALL SPACE FLIGHT CENTER
Marshall Space Flight Center, Alabama 35812**

1. REPORT NO. NASA CR-61386	2. GOVERNMENT ACCESSION NO.	3. RECIPIENT'S CATALOG NO.	
4. TITLE AND SUBTITLE Skylab Experiment Performance Evaluation Manual. Appendix B: Experiment M415 Thermal Control Coatings (MSFC), Revised		5. REPORT DATE Revised October 1972	
		6. PERFORMING ORGANIZATION CODE 5161	
7. AUTHOR(S) K. S. Purushotham		8. PERFORMING ORGANIZATION REPORT #	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Teledyne Brown Engineering Company Huntsville, Alabama		10. WORK UNIT NO.	
		11. CONTRACT OR GRANT NO. NAS8-21804	
12. SPONSORING AGENCY NAME AND ADDRESS National Aeronautics and Space Administration Washington, D. C. 20546		13. TYPE OF REPORT & PERIOD COVERED Contractor Report	
		14. SPONSORING AGENCY CODE	
15. SUPPLEMENTARY NOTES Prepared for Astronautics Laboratory, Science and Engineering			
16. ABSTRACT This appendix contains a series of analyses for Experiment M415, Thermal Control Coatings (MSFC), to be used for evaluating the performance of the Skylab corollary experiments under preflight, inflight, and post-flight conditions. Experiment contingency plan workaround procedure and malfunction analyses are presented in order to assist in making the experiment operationally successful.			
17. KEY WORDS Skylab Experiments		18. DISTRIBUTION STATEMENT Unclassified - Unlimited <i>William A. Shaw</i>	
19. SECURITY CLASSIF. (of this report) Unclassified	20. SECURITY CLASSIF. (of this page) Unclassified	21. NO. OF PAGES 58	22. PRICE NTIS

REVISION CHANGES

Page	Description
	This revision was required because of changes in the Experiment M-415 sensor cover design and its deployment sequence. A detailed list of changes follows:
B-7	Functional Block Number 3.1.1. Rewritten to reflect new time of data acquisition.
B-9	Functional Block Number 3.1.4. Editorial change only.
B-10	Functional Block Number 3.4.1. Rewritten to reflect design and sequence changes.
B-12	Functional Block Number 3.5.1.3. Rewritten to reflect design and sequence changes.
B-15	Figure B-1. Editorial change only.
B-21	Figure B-3. New systems diagram.
B-23	Renumbered sensor specimens according to latest design.
B-28	Editorial change only.
B-37 to B-41	Replaced telemetry signal profile because of design and sequence changes.
B-41	Added combined telemetry signal profile.
B-55	Deleted paragraphs 6 and 7 of the Conclusions and Recommendations.

100

TABLE OF CONTENTS

	Page
SECTION I. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS	B-6
SECTION II. EXPERIMENT M-415, THERMAL CONTROL COATINGS INTERFACE BLOCK DIAGRAM . .	B-18
SECTION III. EXPERIMENT M-415, THERMAL CONTROL COATINGS SYSTEMS DIAGRAM	B-20
SECTION IV. EXPERIMENT M-415, THERMAL CONTROL COATINGS DATA REQUIREMENTS SUMMARY	B-22
SECTION V. EXPERIMENT M-415, THERMAL CONTROL COATINGS DATA REQUEST FORMS	B-24
SECTION VI. EXPERIMENT M-415, THERMAL CONTROL COATINGS ENGINEERING CHANGE REQUESTS	B-31
SECTION VII. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE	B-33
SECTION VIII. EXPERIMENT M-415, THERMAL CONTROL COATINGS MALFUNCTION AND CONTIN- GENCY PLAN OUTLINE	B-45
SECTION IX. EXPERIMENT M-415, THERMAL CONTROL COATINGS MALFUNCTION ANALYSES	B-50
SECTION X. CONCLUSIONS AND RECOMMENDATIONS. . .	B-55
REFERENCES	B-56

LIST OF ILLUSTRATIONS

Figure	Title	Page
B-1.	Experiment M-415, Thermal Control Coatings Functional Block Diagram	B-15
B-2.	Experiment M-415, Thermal Control Coatings Interface Block Diagram and Definition	B-19
B-3.	Experiment M-415, Thermal Control Coatings Systems Diagram	B-21

LIST OF TABLES

Table	Title	Page
B-I.	Experiment M-415, Thermal Control Coatings Pre-Flight Operations Evaluation Analysis.	B-7
B-II.	Experiment M-415, Thermal Control Coatings Data Requirements Summary	B-23
B-III.	Experiment M-415, Thermal Control Coatings Evaluation Sequence	B-34
B-IV.	Experiment M-415, Thermal Control Coatings Malfunction and Contingency Plan Outline - Experiment Preparation (P)	B-46
B-V.	Experiment M-415, Thermal Control Coatings Malfunction and Contingency Plan Outline - Experiment Operation (O)	B-47
B-VI.	Experiment M-415, Thermal Control Coatings Malfunction and Contingency Plan Outline - Experiment Termination (T)	B-49

DEFINITION OF SYMBOLS

CRT	Cathode Ray Tube
CSM	Command Service Module
EBW	Electric Bridge Wire
FBD	Functional Block Diagram
FO	Functional Objective
HOSC	Huntsville Operations Support Center
IU	Instrument Unit
LES	Launch Escape System
OMSF	Office of Manned Space Flight
P_f	Probability of Failure
P_{ft}	Total Probability of Failure
P_s	Probability of Success
TBD	To Be Determined
TBS	To Be Supplied

SECTION I.

**EXPERIMENT M-415, THERMAL CONTROL COATINGS
PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS**

TABLE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS (Sheet 1 of 8)

FUNCTIONAL BLOCK NUMBER AND TITLE	EXPECTED RANGE AND DIMENSION OF VARIABLES			CRITICALITY CATEGORY NUMBER*	REMARKS
	MIN.	NOM.	MAX.		
3.0 Analyze and predict facet performance profile for Skylab Experiment M-415, Thermal coatings.				N/A	Refer to functional item 3.1.
3.1 Make explicit statements about objectives in qualitative and quantitative terms.				N/A	Refer to functional item 3.1.1.
3.1.1 Specify duration that the experi- ment is required to operate and provide useful information.				N/A	No crew participation is required for this experiment. The experiment data acquisition begins upon activation of the Instrument Unit (IU) and will continue through the IU lifetime. After Command Service Module (CSM) separation the IU/S-IVB is rolled about the X-axis such that at local noon the sun-line will pass through a point on the IU exterior midway between two experiment sensor panels (25.5° from IU position II towards position I). This roll position will be maintained until the termination of the experiment. References 1, 2, and 3. The functional objectives (FO) of Experiment M-415 are: • FO-1: Obtain data to determine the degradation of three thermal control coating materials when subjected to moisture and dust prior to launch, heat and erosion effects from launch, S-IB interstage retrofire, Launch Escape System (LES) tower jettison, and space environment. • FO-2: Obtain data to determine the degradation of three thermal control coating materials when subjected to S-IB interstage retrofire, LES tower jettison, and space environment.
3.1.2 Specify the types of criteria that are to be maximized or minimized.				N/A	

*Critical Category Number Definition:

- Category I--Experiment and equipment whose failure could adversely affect crew safety.
- Category II--Experiment and equipment whose failure could result in not achieving a primary mission objective, but does not adversely affect crew safety.
- Category IIIa--Experiment and equipment whose failure could result in not achieving a secondary mission objective, but which does not adversely affect crew safety or preclude the achievement of any primary mission objective.
- Category IIIb--Experiment and equipment whose failure could not result in a loss of primary or secondary mission objectives and does not adversely affect crew safety.

TABLE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS (Sheet 2 of 8)

FUNCTIONAL BLOCK NUMBER AND TITLE	EXPECTED RANGE AND DIMENSION OF VARIABLES			CRITICALITY CATEGORY NUMBER	REMARKS
	MIN.	NOM.	MAX.		
3.1.2 (Concluded)					- FO-3: Obtain data to determine the degradation of three thermal control coating materials when subjected to LES tower jettison and space environment. - FO-4: Obtain data to determine the degradation of three thermal control coating materials when subjected to space environment. References 3 and 4.
3.1.3 Specify the percentage of acceptable max. /min. for each criterion.				N/A	The weighted value for each FO has not been assigned. The FO weights total 100 percent. The weights represent the percentage of detailed test objective that is accomplished when the respective FO has been satisfied. The following arbitrary weighted values are assigned: - FO-1 40 percent - FO-2 30 percent - FO-3 20 percent - FO-4 10 percent. The minimum acceptable percentage for each FO is derived as follows: - FO-1: A minimum of four sensors should function normally to obtain the desired data. This constitutes 66.6 percent of the desired performance or 26.64 percent of the total objective. - FO-2: A minimum of four sensors should function normally to obtain the desired data. This constitutes 66.6 percent of the desired performance or 19.98 percent of the total objective. - FO-3: A minimum of four sensors should function normally to obtain desired data. This constitutes 66.6 percent of the desired performance or 13.32 percent of the total objective. - FO-4: A minimum of four sensors should function normally to obtain desired data. This constitutes 66.6 percent of the desired performance or 6.66 percent of the total objective. - Total percentage of acceptable max. /min. The above values are subjective estimates.
	26.64%	33.32%	40%		
	19.98%	24.99%	30%		
	13.32%	16.66%	20%		
	6.66%	8.33%	10%		
	66.50%	83.25%	100%		

MSFC - One Time Form 17 (March 1972)

TABLE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS (Sheet 3 of 8)

FUNCTIONAL BLOCK NUMBER AND TITLE	EXPECTED RANGE AND DIMENSION OF VARIABLES			CRITICALITY CATEGORY NUMBER	REMARKS
	MIN.	NOM.	MAX.		
3.1.4 Specify the experiment constraints: • Musts • Must Nots • Wants • Don't Wants.				N/A	• Musts --N/A. • Must Nots --N/A • Wants --After CSM separation the S-IVB/IU shall be rolled about the X-axis such that at local noon the sun-line will pass through a point on the IU exterior midway between two experiment sensor panels. The roll position will be maintained. • Don't Wants --N/A
3.1.5 Specify the experiment operational tolerances: • Must • Must Nots • Wants • Don't Wants.				N/A	References 1 and 3. Refer to pages B-34 through B-44. Specific tolerances for each functional item are TBD.
3.2 Define decision rules for each experiment objective.				N/A	If the experiment is aborted, the probability of success (P_g) is equal to 0. If the experiment is compromised and minimum information is salvaged, $P_g = 0.1 \rightarrow 0.5$; if the maximum information is salvaged, $P_g = 0.5 \rightarrow 0.9$. If the experiment is completed as scheduled, $P_g = 1.0$.
3.3 Specify experiment priority number (numerical statement) for a given Skylab flight designation.				N/A	Experiment M-415 is scheduled for flight on SL-2. No priority number is assigned for this experiment.
3.4 Briefly describe and list the major subsystems for Experiment M-415.				N/A	Reference 5. Refer to functional items 3.4.1 and 3.4.2.

TABLE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS (Sheet 4 of 8)

FUNCTIONAL BLOCK NUMBER AND TITLE	EXPECTED RANGE AND DIMENSION OF VARIABLES		CRITICALITY CATEGORY NUMBER	REMARKS
	MIN.	NOM. MAX.		
3.4.1 Describe the major functions.			N/A	Experiment M-415 is designed to study the degradation effects of prelaunch, launch and the space environment on the absorptivity, emissivity, and stability characteristics of various material coatings commonly used for passive thermal control. The results of the experiment will answer questions concerning the design of spacecraft thermal systems. Experiment M-415 is mounted on the IU of AS-206. There are two sensor panels and each panel contains 12 thermal sensors that are arranged in four rows of three per panel. These sensors are coated with three different thermal control coatings. One sensor of each panel will be coated with a black absorbing paint to form a "worst" conditioning base line from which to correlate the data received from the other sensors. The sensors are protected by covers. One set of covers is a bolt on type and is removed prior to launch. The other three sets of covers are deployed by self contained explosive bolts. The second and fourth row of covers are hinged and spring loaded to the panel fairing. When the thruster pyrotechnics are ignited, the thruster force will drive the covers outboard away from the panels and cause the covers to rotate and latch. The third row of covers is expelled into space after the CSM has separated from the S-IVB/IU. The covers are deployed by the IU Digital Computer System. Verification of cover expulsion will be provided by the contact switches mounted on the sensor panels. The covers are removed in the following sequence: • First row of covers removed prior to launch • Fourth row of covers deployed immediately prior to S-IVB/Interstage separation and retrofire from S-IVB. Time $T_3 + 0.6$ sec. • Second row of covers deployed immediately prior to LES jettison during S-IVB powered ascent. Time $T_3 + 18$ sec. • Third row of covers jettisoned after the CSM has separated from the S-IVB/IU. This occurs after orbital insertion. Time $T_4 + 2547$ sec. Data acquisition will begin as soon as IU is activated and will continue until the loss of IU power. References 1, 2, and 3. The major components of Experiment M-415 are: • Sensors • Thrusters • Contact Switches • Connectors and wiring. References 1 and 2.
3.4.2 List the major components.			N/A	

TABLE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS (Sheet 5 of 8)

FUNCTIONAL BLOCK NUMBER AND TITLE	EXPECTED RANGE AND DIMENSION OF VARIABLES			CRITICALITY CATEGORY NUMBER	REMARKS
	MIN.	NOM.	MAX.		
3.5 Define the M-415 experiment/ carrier subsystem interfaces: - Physical --Mechanical --Electrical --Communication and Data --Support - Environmental --Natural and Induced --Contamination - Operational --Pointing and control --Crew safety --Sequence --Operability.				N/A	A Functional Block Diagram (FBD) is submitted as Figure B-1 and is used as a subsystem component listing. Critical subsystem components will be identified and evaluated for failure and correlated to possible experiment/carrier interface problems.
3.5.1 Sensor panels.				N/A	Refer to functional item 3.5.1.2.1.
3.5.1.2.1 Specify the total probability of failure (P_{ft}) for the thermal sensor cover gasket.	nil			IIIb	Each sensor cover has one silicone rubber gasket that conforms to MIL-R-5847 class I grade 50. The gasket is bonded to the sensor cover by Epon 403 adhesive and protects the sensor from unwanted exposures until respective covers are expelled. The probability of failure (P_f) is considered to be remote. If the gasket should fail, the following situation could occur: - Mechanical --If the gasket should fracture or crack, the leakage of external atmosphere or other prelaunch conditions would contaminate the sensors and degrade the data of the experiment. There is no way to indicate the failure of the gaskets. Reference 6.

TABLE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS (Sheet 6 of 8)

FUNCTIONAL BLOCK NUMBER AND TITLE	EXPECTED RANGE AND DIMENSION OF VARIABLES			CRITICALITY CATEGORY NUMBER	REMARKS
	MIN.	NOM.	MAX.		
3.5.1.3 Specify P_{ft} for the Thrusters.	24 Vdc	0.1 28 Vdc 5 A	32 Vdc	IIIa	The sensor cover plates are removed by firing armament thrusters (squibs). Each panel requires six thrusters to initiate and deploy the sensor covers. The thrusters incorporate a pyrotechnic squib that uses a parallel bridgewire circuit. The composition of the pyrotechnic is TBS. The commands to fire the thrusters are issued by the IU and DCS and are preprogrammed. It requires 28 $\pm$ 3 Vdc at 5 A for 10 msec to fire the thrusters. Four squibs are fired at a time. Each squib circuit requires 150 W of power. The peak power is 600 W for 10 msec. Electrical current is supplied to bridgewires causing them to ignite the pyrotechnic, which generates a gas charge and forces the bolts to break and thrust away from the structure. The P_f for the squibs is considered small. If this should fail, the following situation could happen: - Electrical --It is assumed that failure of any squib to fire could prevent the ejection of a panel cover. This would result in loss of data from that row of sensors. The following indications could be used to determine the failure of squibs: - Failure to receive the K151-601 and K152-602 telemetry signal that is generated when the covers are ejected. References 1 and 7. There are 12 thermal control coated sensors for each panel. The sensing element is a nickel resistance thermometer encased in a thin sheet of Bakelite (R&P STIKON Type 20200). The resistance thermometer is attached to the under side of each sensor disc by an adhesive. Each thermometer gives an individual reading of the heat absorption of the sensor's thermal coating. The resistance thermometer requires nominal 5.0 Vdc for operation. The nominal resistance is $200 \pm 0.5 \Omega$ at 70 °F. The temperature measurements are received and processed by the IU Data System. The data are transmitted to the ground through IU telemetry. It is estimated that the P_f for the thermometers is considered to be small. If the thermometers should fail, the following situation could occur: - Electrical --Opening, shorting, or grounding of any one of the resistance thermometers would result in loss of information from that sensor.
3.5.1.4.1 Specify the P_{ft} for resistance thermometers (sensors).		0.1		IIIb	

MSFC - One Time Form 17 (March 1972)

TABLE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS EVALUATION ANALYSIS (Sheet 7 of 8)

FUNCTIONAL BLOCK NUMBER AND TITLE	EXPECTED RANGE AND DIMENSION OF VARIABLES			CRITICALITY CATEGORY NUMBER	REMARKS
	MIN.	NOM.	MAX.		
3.5.1.4.1 (Concluded)					The following indications could be used to determine the failure of the resistance thermometers: • An open circuit will indicate a full scale reading • A short circuit will indicate a zero reading • Grounding of the lead wires will indicate no change in reading. References 4 and 7.
3.5.1.4.2 Specify the P_t for resistance thermometers (housekeeping).		0.1		IIb	A thermometer of higher resistance is attached to the base of each panel. This thermometer provides overall temperature environment within the thermal control coating specimen panel assembly and permits correction for heat exchanges between test surfaces and sensor mounting assembly. It is estimated that the P_t for the thermometers is small. If the thermometers should fail, the following situation could occur. • Electrical --Opening, shorting, or grounding of the thermometers would result in loss of information and make it difficult to compare temperatures. The following indication could be used to determine the failure of the resistance thermometer (housekeeping): • Refer to functional item 3.5.1.4.1. References 4 and 7.
3.5.1.5 Specify the P_t for the contact switches.		0.1		IIb	Three contact switches are mounted to each sensor panel base. Each contact switch senses the separation of one of the cover panels. When the sensor cover panels are deployed, the contact switch transmits a telemetry signal to ground indicating that the event has occurred. It is estimated that the P_t for the contact switches is small. If the contact switches should fail, the following situation could occur: • Electrical --It would be impossible to determine deployment of the sensor covers. The following indication can be used to determine the failure of the contact switches. • Failure to receive a change of state signal from measurement Nos. K151-601 and K152-602 indicates that the panel covers failed to deploy or that the contact switches failed to operate. References 2 and 7.

MSFC - One Time Form 17 (March 1972)

TABLE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS PRE-FLIGHT OPERATIONS' EVALUATION ANALYSIS (Sheet 8 of 8)

FUNCTIONAL BLOCK NUMBER AND TITLE	EXPECTED RANGE AND DIMENSION OF VARIABLES			CRITICALITY CATEGORY NUMBER	REMARKS
	MIN.	NOM.	MAX.		
3.5.1.6 Specify the P_{ft} for the connectors and wiring.		0.1		IIIb	The wiring contains circuitry for the sensors and squibs and is connected to the IU. The wires leading to the squibs must be shielded in order to meet the radio frequency and susceptibility requirements. The shorting connectors will remain installed until the firing cable is installed and the shorting connectors are grounded to the IU. The P_{ft} for the wiring is considered to be very small. If this should fail, the following situation could occur: • Electrical --Failure in the sensor wiring would result in loss of information from the sensors. - Failure of squib firing circuitry (open circuit) would result in non deployment of sensor covers. The following indication could be used to determine the failure of the wiring and connectors: • Refer to functional item 3.5.1.4.1. References 1 and 7.

MSFC - One Time Form 17 (March 1972)

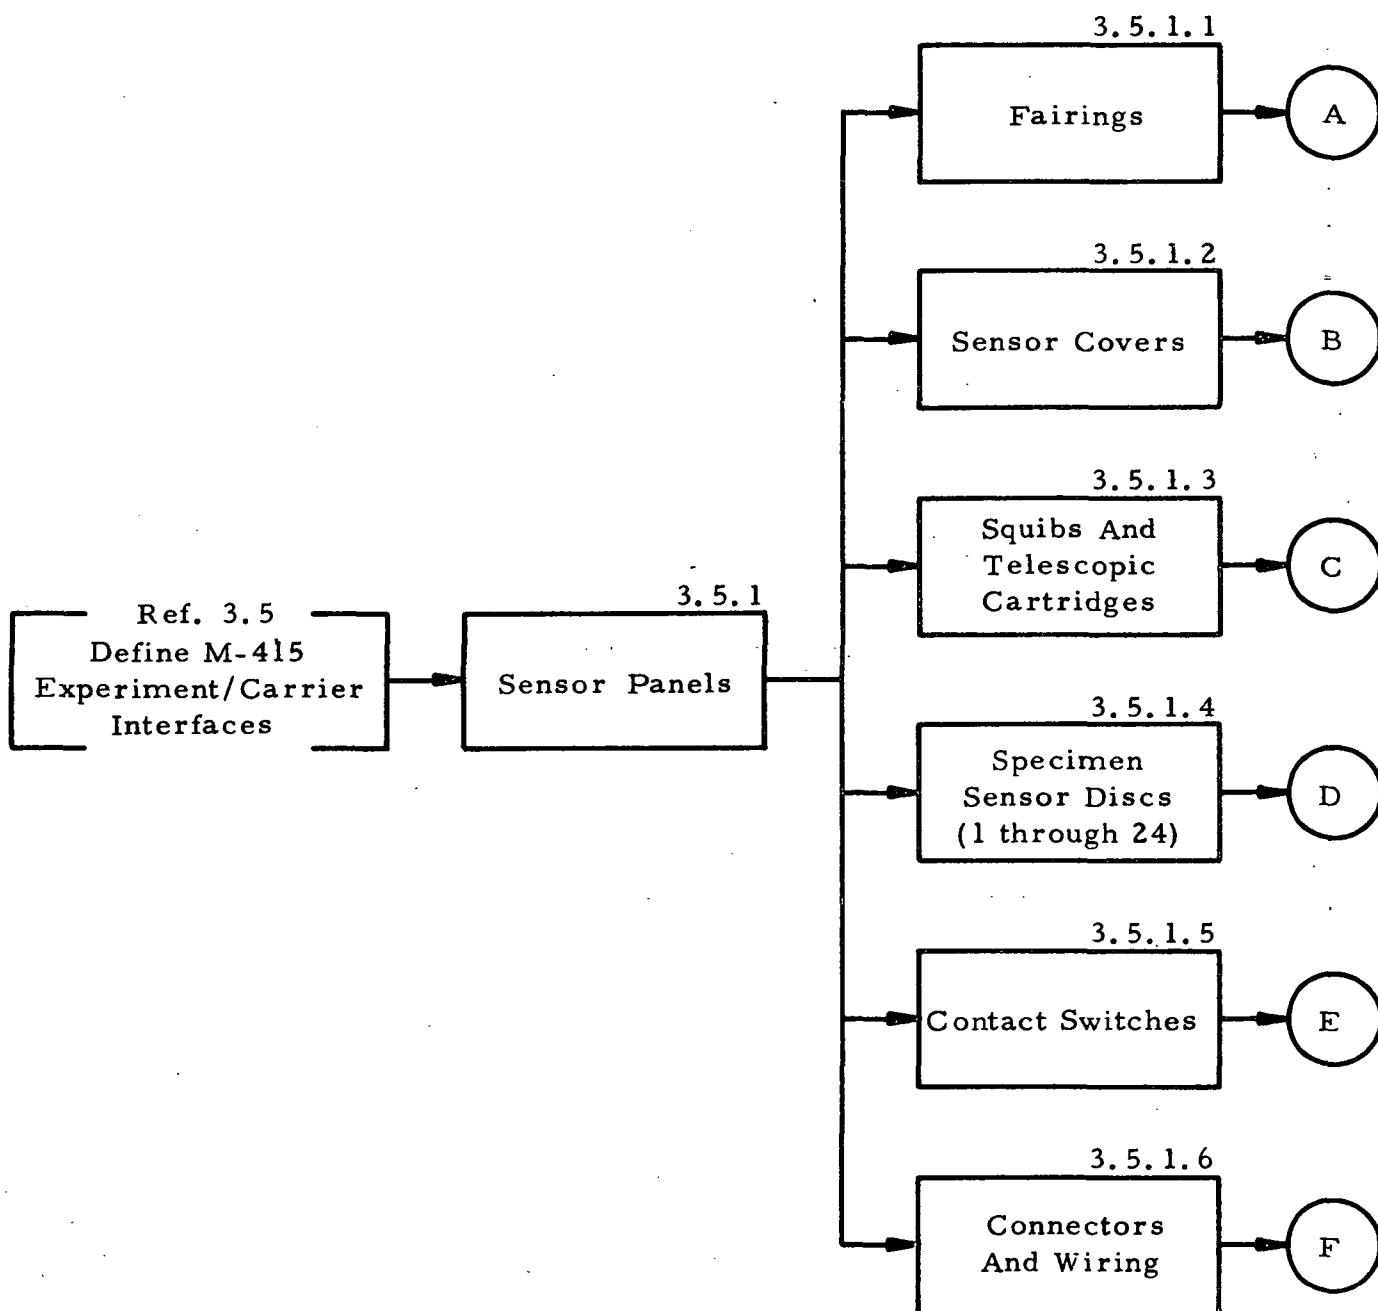


FIGURE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS
FUNCTIONAL BLOCK DIAGRAM (Sheet 1 of 3)

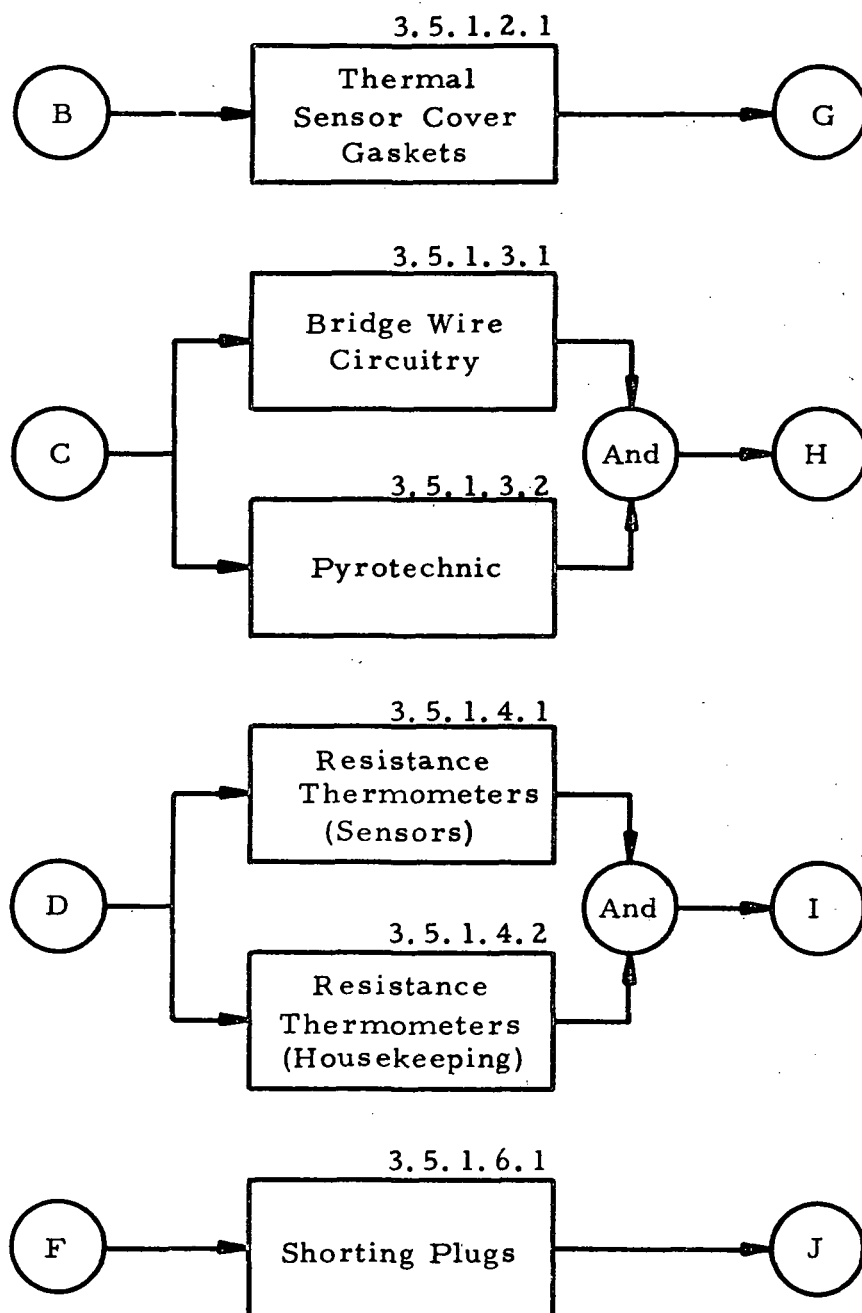


FIGURE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS
FUNCTIONAL BLOCK DIAGRAM (Sheet 2 of 3)


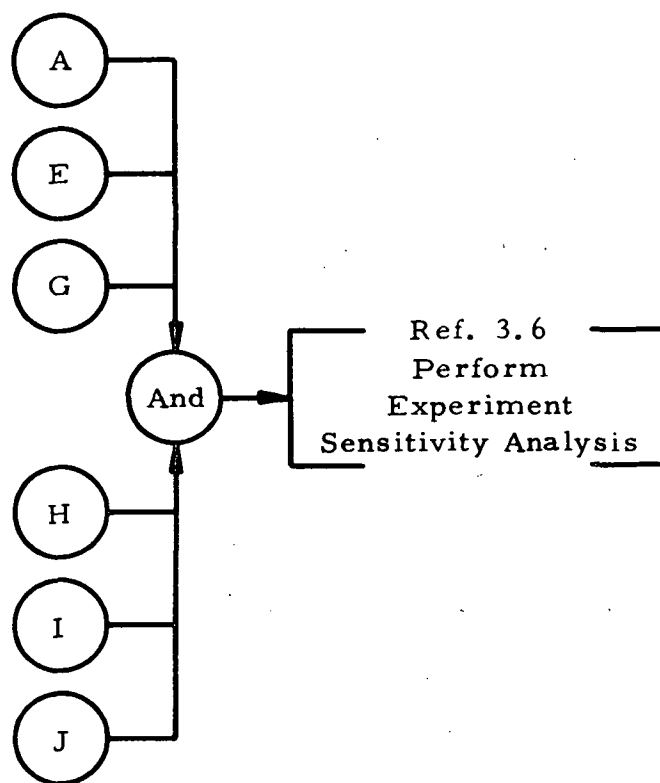


FIGURE B-1. EXPERIMENT M-415, THERMAL CONTROL COATINGS
FUNCTIONAL BLOCK DIAGRAM (Sheet 3 of 3)

SECTION II.
EXPERIMENT M-415, THERMAL CONTROL COATINGS
INTERFACE BLOCK DIAGRAM

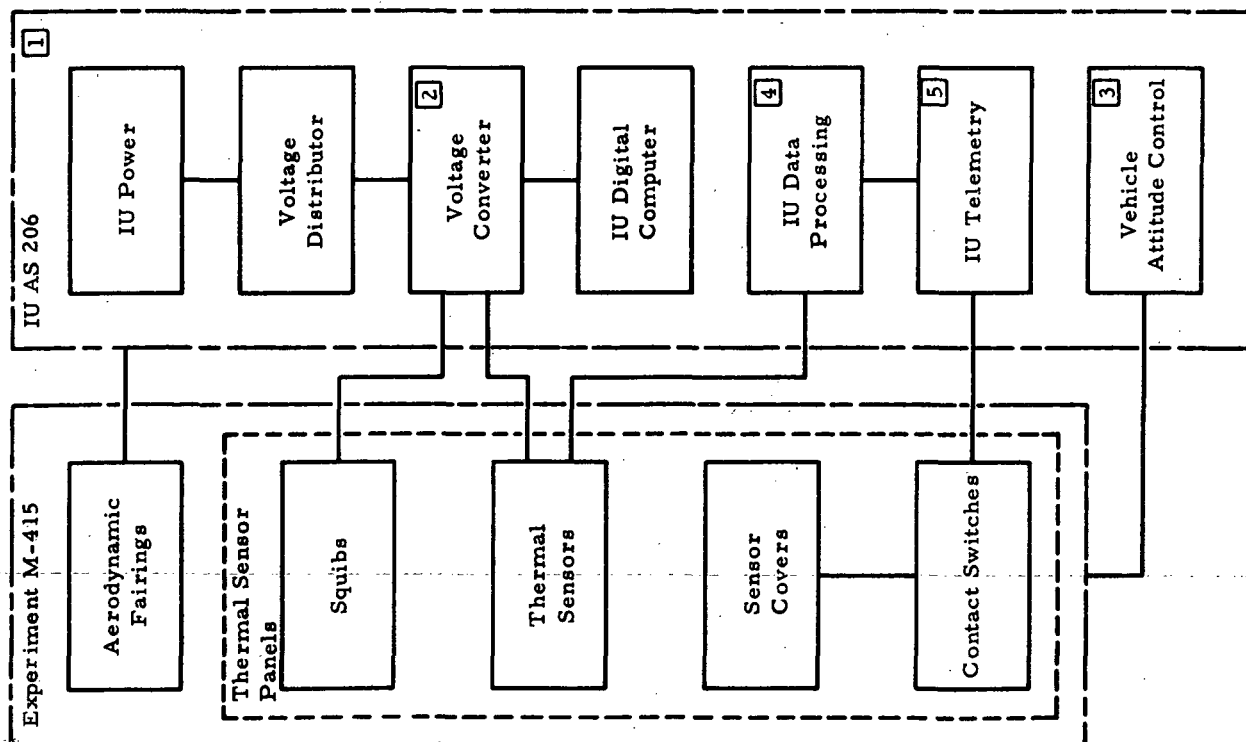

Code	Data Source	Remarks
1	N/A	There is a mechanical interface between the IU structure and the aerodynamic fairings. The fairings are provided so that the panel can be kept in a laminar flow air stream during launch. Turbulence would cause an uneven separation of contamination and temperature from the sensor panel.
2	K151-601 K152-602	There is an electrical interface between the IU Voltage Converter and Experiment M-415 sensors. The sensors will receive 5 Vdc from the Voltage Converter. There is an electrical interface between the IU Voltage Converter and the squibs. The squibs will receive 28 Vdc from the converter to deploy the sensor covers.
3	H60-603	There is no direct interface between the Vehicle Attitude Control System and Experiment M-415. The vehicle is required to perform certain attitude maneuvers so that at local noon the sun-line will pass through a point on the IU exterior midway between the two sensor panels. The Vehicle Attitude Control System controls the pitch, yaw, and roll maneuvers that maintain vehicle attitude during data acquisition.
4	Refer to Table B-II	There is an Instrumentation and Communication interface between the IU Data Processing Module and Experiment M-415 Thermal Sensors. The IU Data Processing Module will process all the sensor measurements and begin transmitting signals by IU telemetry immediately upon activation of the IU.
5	K151-601 K152-602	There is an Instrumentation and Communication interface between the IU telemetry and the contact switches. Upon deployment of the thermal sensor covers, the contact switches will transmit signals through IU telemetry to verify that the sensor covers have deployed.

FIGURE B-2. EXPERIMENT M-415, THERMAL CONTROL COATINGS INTERFACE BLOCK DIAGRAM AND DEFINITION

SECTION III.
EXPERIMENT M-415, THERMAL CONTROL COATINGS
SYSTEMS DIAGRAM

Note: Taken from Reference 9.

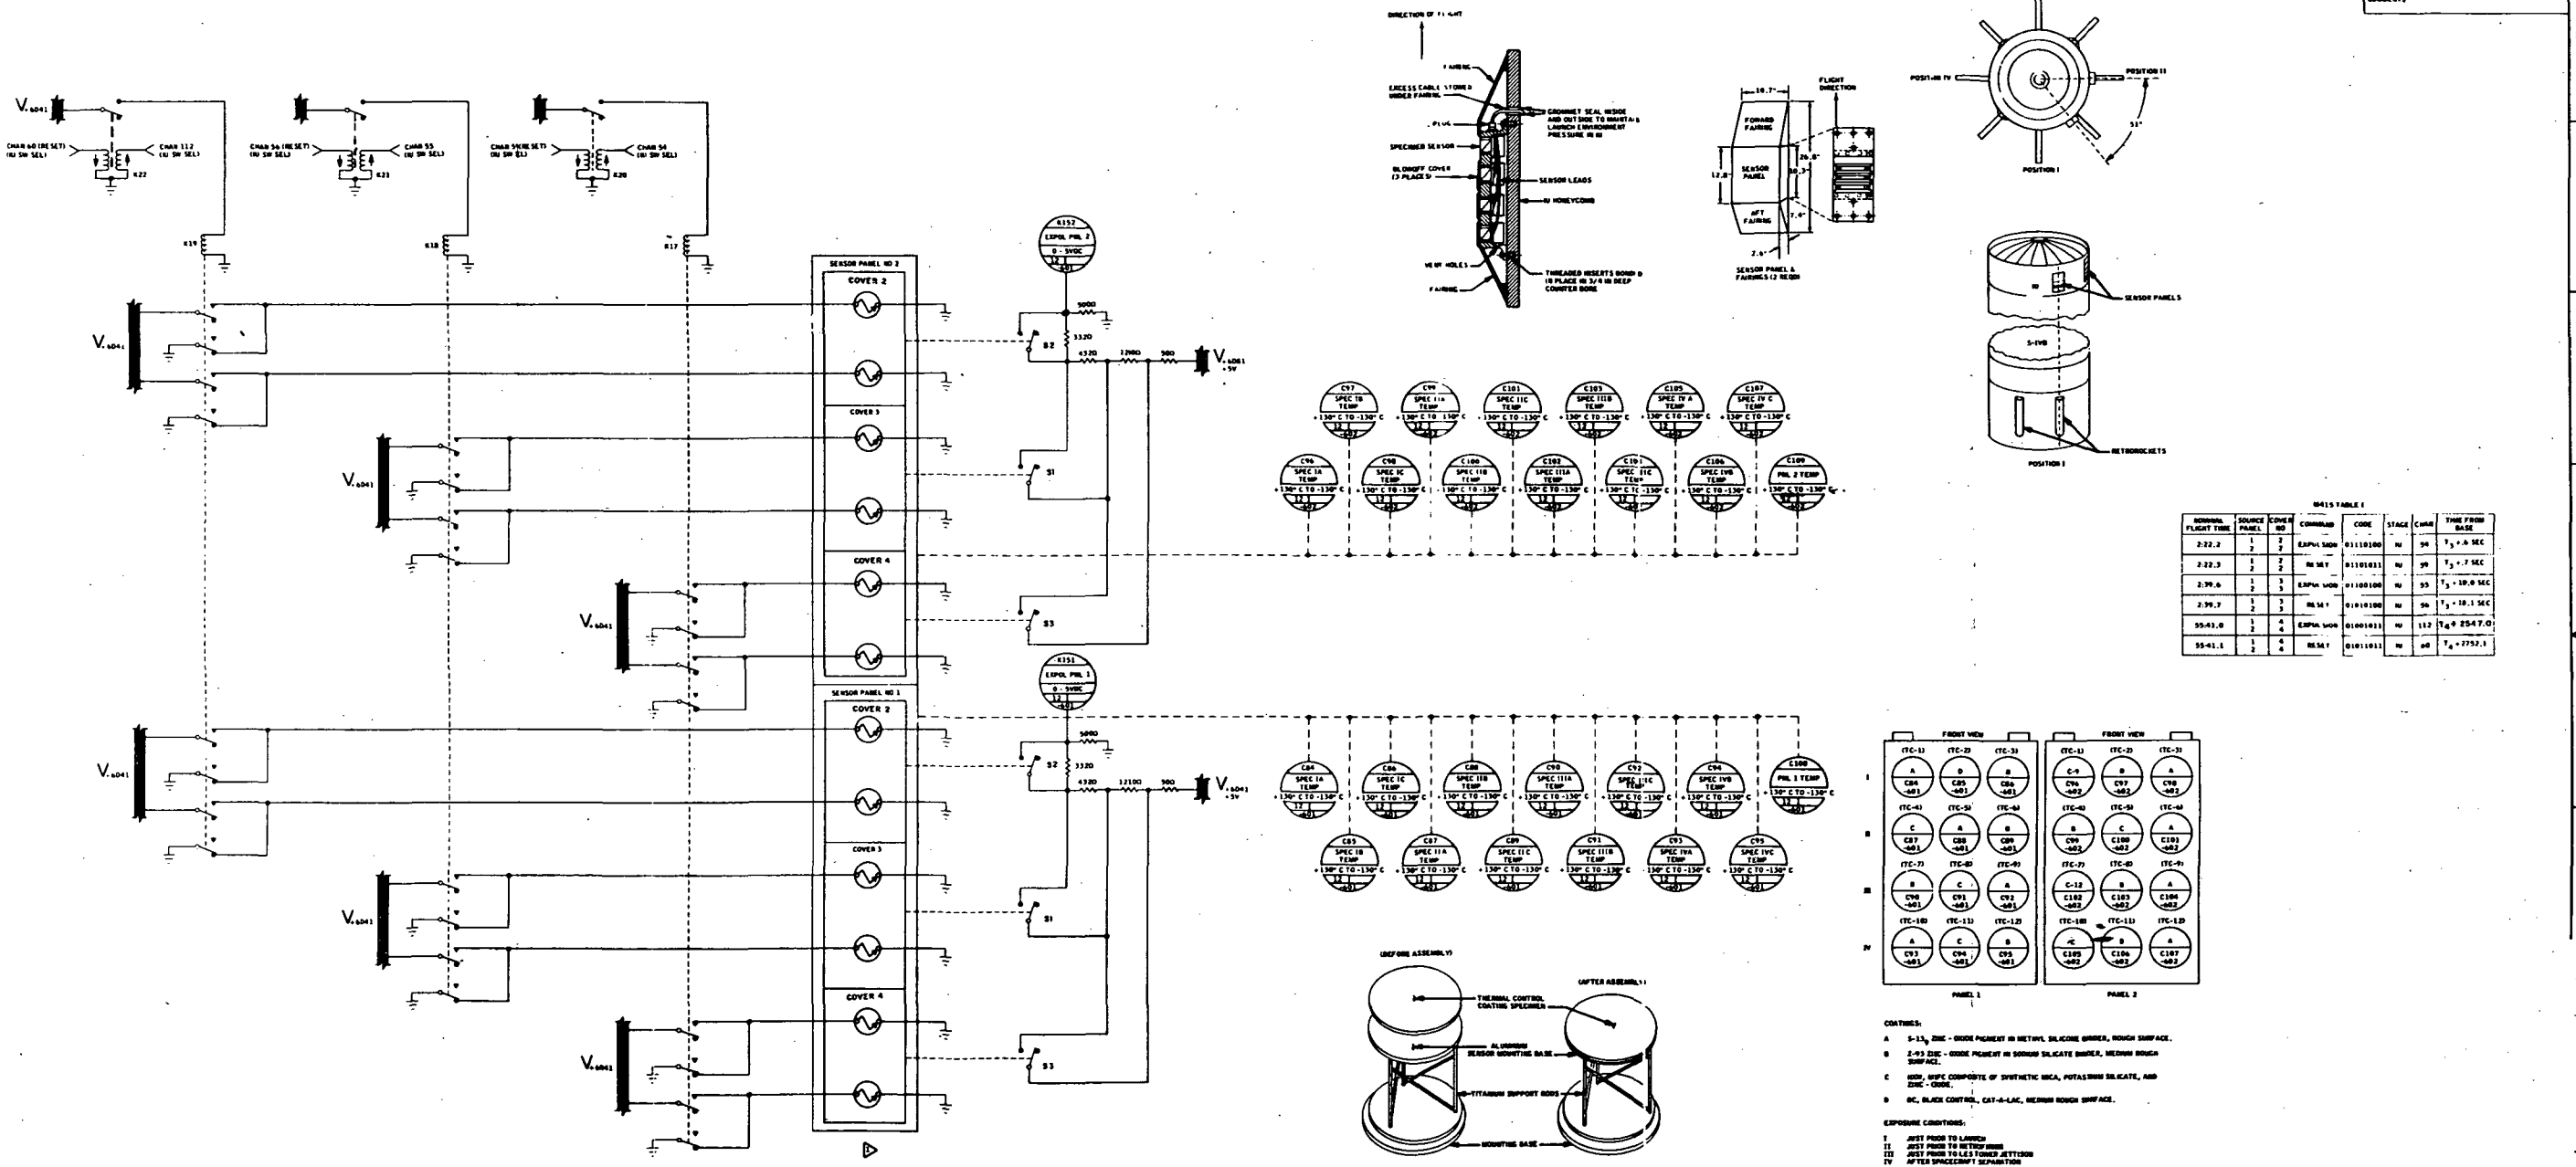


FIGURE B-3. EXPERIMENT M-415, THERMAL CONTROL COATINGS SYSTEMS DIAGRAM

SECTION IV.
EXPERIMENT M-415, THERMAL CONTROL COATINGS
DATA REQUIREMENTS SUMMARY

EXPERIMENT M-415, THERMAL CONTROL COATINGS DATA REQUIREMENTS SUMMARY

Measurement Name	Range and Dimension of Variable	Measurement Number	Telemetry Assignment Channel	Data Return	Data Time	Remarks
Specimen TC-1 Panel No. 1, Temperature	-130 to 130 °C	C84-601	DP1A0-06-01-00	Continuous	Real	
Specimen TC-2 Panel No. 1, Temperature	-130 to 130 °C	C85-601	DP1A0-06-02-00	Continuous	Real	
Specimen TC-3 Panel No. 1, Temperature	-130 to 130 °C	C86-601	DP1A0-06-03-00	Continuous	Real	
Specimen TC-4 Panel No. 1, Temperature	-130 to 130 °C	C87-601	DP1A0-06-04-00	Continuous	Real	
Specimen TC-5 Panel No. 1, Temperature	-130 to 130 °C	C88-601	DP1A0-06-05-00	Continuous	Real	
Specimen TC-6 Panel No. 1, Temperature	-130 to 130 °C	C89-601	DP1A0-06-06-00	Continuous	Real	
Specimen TC-7 Panel No. 1, Temperature	-130 to 130 °C	C90-601	DP1A0-06-07-00	Continuous	Real	
Specimen TC-8 Panel No. 1, Temperature	-130 to 130 °C	C91-601	DP1A0-06-08-00	Continuous	Real	
Specimen TC-9 Panel No. 1, Temperature	-130 to 130 °C	C92-601	DP1A0-06-09-00	Continuous	Real	
Specimen TC-10 Panel No. 1, Temperature	-130 to 130 °C	C93-601	DP1A0-06-10-00	Continuous	Real	
Specimen TC-11 Panel No. 1, Temperature	-130 to 130 °C	C94-601	DP1A0-07-05-00	Continuous	Real	
Specimen TC-12 Panel No. 1, Temperature	-130 to 130 °C	C95-601	DP1A0-07-06-00	Continuous	Real	
Specimen TC-1 Panel No. 2, Temperature	-130 to 130 °C	C96-602	DP1A0-07-07-00	Continuous	Real	
Specimen TC-2 Panel No. 2, Temperature	-130 to 130 °C	C97-602	DP1A0-07-08-00	Continuous	Real	
Specimen TC-3 Panel No. 2, Temperature	-130 to 130 °C	C98-602	DP1A0-17-08-00	Continuous	Real	
Specimen TC-4 Panel No. 2, Temperature	-130 to 130 °C	C99-602	DP1A0-17-09-00	Continuous	Real	
Specimen TC-5 Panel No. 2, Temperature	-130 to 130 °C	C100-602	DP1A0-07-09-00	Continuous	Real	
Specimen TC-6 Panel No. 2, Temperature	-130 to 130 °C	C101-602	DP1A0-18-02-00	Continuous	Real	
Specimen TC-7 Panel No. 2, Temperature	-130 to 130 °C	C102-602	DP1A0-18-03-00	Continuous	Real	
Specimen TC-8 Panel No. 2, Temperature	-130 to 130 °C	C103-602	DP1A0-18-04-00	Continuous	Real	
Specimen TC-9 Panel No. 2, Temperature	-130 to 130 °C	C104-602	DP1A0-18-05-00	Continuous	Real	
Specimen TC-10 Panel No. 2, Temperature	-130 to 130 °C	C105-602	DP1A0-18-06-00	Continuous	Real	
Specimen TC-11 Panel No. 2, Temperature	-130 to 130 °C	C106-602	DP1A0-18-07-00	Continuous	Real	
Specimen TC-12 Panel No. 2, Temperature	-130 to 130 °C	C107-602	DP1A0-18-10-00	Continuous	Real	
Temperature Panel No. 1	-130 to 130 °C	C108-601	DP1A0-21-09-00	Continuous	Real	
Panel No. 2	-130 to 130 °C	C109-602	DP1A0-21-10-00	Continuous	Real	
Deployment of Covers						
Panel No. 1	0 to 5 Vdc	K151-601	DP1A0-19-09-00	Discrete	Real	
Panel No. 2	0 to 5 Vdc	K152-602	DP1A0-19-10-00	Discrete	Real	
6D31 Bus Voltage	0 to 35 Vdc	M14-601	CF1A0-04-06-00	Continuous	Real	

SECTION V.

EXPERIMENT M-415, THERMAL CONTROL COATINGS
DATA REQUEST FORMS

DATA REQUEST FORM Skylab Program		DRF Control No.		Date 11/29/71
		Exp/Sys No. ASTN-SD/SIB/M-415-032		Revision
Mission SL-2	Period of Interest FLT/MANNED		Op. Need Date	Rev Date
Request Contact		Data Recipient		Date Req
Name Organization Phone		Name W. R. Bock Address S&E-ASTN-SDF Phone MSFC, Alabama 35812 205-453-3810		REAL
				Qty 1
Reference Document: ERD: M-415, SE-010-011-24 5-15-71;RFP: MSC - 03625 5-2-72				
MRD Content				
Detailed Requirements: Experiment M-415 SC-4020 Plots Provide 4020 plots for the following: Parameters associated with the operation of Experiment M-415.				
Comments & Explanation:				
Originator Name W. R. Bock Organization MSFC/S&E-ASTN-SDF Phone 205-453-3810 Signature _____ Date _____		Integrator Name J. R. Riquelmy Organization S&E-ASTN-SDF Phone 205-453-3810 Signature _____ Date _____		
Request Approval Name _____ Organization _____ Phone _____ Signature _____ Date _____		Implementing Agency Name _____ Organization _____ Phone _____ Signature _____ Date _____		

DRF Control No.

Exp/Sys No.

ASTN-SD/SIB/M415-032

Revision

Date

Detailed Requirements:

<u>Meas. No.</u>	<u>Title</u>
C84-601	TEMP, Specimen TC-1 Panel 1
C85-601	TEMP, Specimen TC-2 Panel 1
C86-601	TEMP, Specimen TC-3 Panel 1
C87-601	TEMP, Specimen TC-4 Panel 1
C88-601	TEMP, Specimen TC-5 Panel 1
C89-601	TEMP, Specimen TC-6 Panel 1
C90-601	TEMP, Specimen TC-7 Panel 1
C91-601	TEMP, Specimen TC-8 Panel 1
C92-601	TEMP, Specimen TC-9 Panel 1
C93-601	TEMP, Specimen TC-10 Panel 1
C94-601	TEMP, Specimen TC-11 Panel 1
C95-601	TEMP, Specimen TC-12 Panel 1
C96-602	TEMP, Specimen TC-1 Panel 2
C97-602	TEMP, Specimen TC-2 Panel 2
C98-602	TEMP, Specimen TC-3 Panel 2
C99-602	TEMP, Specimen TC-4 Panel 2
C100-602	TEMP, Specimen TC-5 Panel 2
C101-602	TEMP, Specimen TC-6 Panel 2
C102-602	TEMP, Specimen TC-7 Panel 2
C103-602	TEMP, Specimen TC-8 Panel 2
C104-602	TEMP, Specimen TC-9 Panel 2
C105-602	TEMP, Specimen TC-10 Panel 2
C106-602	TEMP, Specimen TC-11 Panel 2
C107-602	TEMP, Specimen TC-12 Panel 2
C108-601	TEMP, Panel 1
C109-602	TEMP, Panel 2

DATA REQUEST FORM Skylab Program		DRF Control No.		Date
		Exp/Sys No. ASTN-SD/SIB/M-415		Revision
Mission SL-2	Period of Interest FLIGHT/MANNED		Op. Need Date	Rev Date
Request Contact		Data Recipient		Date Req
Name		Name W. R. Bock, S&E-ASTN-SDF		Real
Organization		Address MSFC, Alabama 35812		Qty
Phone		Phone 205-453-3810		
Reference Document: ERD: M-415, SE-010-011-24 5-15-71;RFP:MSC - 03625 5-2-72				
MRD Content				
Detailed Requirements: The Payload Integration Section (S&E-ASTN-SDI) requires the capability to monitor experiment M-415 event data. These data should be displayed on the console in the form of a light.				
Comments & Explanation: These data will be used to measure and evaluate the integrity of experiment/carrier interfaces so that the Skylab Mission Evaluation reporting requirements can be fulfilled (See OMSF Program Directive 35, M-D ML 3200-138, 5-71).				
Originator		Integrator		
Name K. S. Purushotham		Name J. R. Riquelmy		
Organization Teledyne Brown Engineering Co.		Organization S&E-ASTN-SDF		
Phone 205-532-1612		Phone 205-453-3810		
Signature _____		Signature _____		
Date _____		Date _____		
Request Approval		Implementing Agency		
Name _____		Name _____		
Organization _____		Organization _____		
Phone _____		Phone _____		
Signature _____		Signature _____		
Date _____		Date _____		

DRF Contr'l No.

Exp/Sys No.

ASTN-SD/SIB/M-415

Revision

Date

Detailed Requirements:Measurement No.Measurement Name

K-151-601

Panel No. 1, Deployment of Covers

K-152-602

Panel No. 2, Deployment of Covers

DATA REQUEST FORM Skylab Program		DRF Control No.		Date
		Exp/Sys No. ASTN-SD/S-IB/M415		Revision
Mission SL-2	Period of Interest FLT/MANNED		Op. Need Date	Rev Date
Request Contact		Data Recipient		Date Req
Name		Name W. R. Bock		Real
Organization		Address S&E-ASTN-SDF		Qty
Phone		Phone Huntsville, Ala. 35812 205-453-3810		
Reference Document: ERD: M-415, SE-010-011-24 5-15-71:RFP:MSC - 03625 5-2-72				
MRD Content				
Detailed Requirements: The S&E-ASTN-SDI section needs to assess the level of the IU 6D31 Bus Voltage. The voltage level is needed 30 min before the start of the experiment. The voltage level should be displayed as analog data on a cathode ray tube (CRT). Capability of providing a hard copy of the data presented on the CRT should be made available to the user.				
Comments & Explanation: These data will be used to measure and evaluate the experiment/carrier interfaces so that the Skylab Mission Evaluation reporting requirements can be fulfilled (See OMSF Program Directive 35, M-D MC 3200-138, 5-71).				
Originator			Integrator	
Name	K. S. Purushotham		Name	
Organization	Teledyne Brown Engineering Co.		Organization	
Phone	Huntsville, Alabama		Phone	
Signature	205-532-1612	Date	Signature	Date
Request Approval			Implementing Agency	
Name			Name	
Organization			Organization	
Phone			Phone	
Signature		Date	Signature	Date

DRF Control No.	Exp/Sys No. ASTN-SD/S-IB/M415	Revision	Date
-----------------	----------------------------------	----------	------

Detailed Requirements:

Measurement No.

M14-601

Measurement Name

IU 6D-31 Bus Voltage

SECTION VI.

**EXPERIMENT M-415, THERMAL CONTROL COATINGS
ENGINEERING CHANGE REQUESTS**

Engineering Change Requests for Experiment M-415 are N/A.

SECTION VII.

EXPERIMENT M 415, THERMAL CONTROL COATINGS
EVALUATION SEQUENCE

TABLE B-III. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 1 of 11)

<u>Assignments</u>	<u>Conditions</u>	<u>Requirements</u>
Mission:		
• SL-2		
	Crew	
	• N/A	
Orbital Assembly:		
• S-IVB/IU Booster Stage		
Carrier:		
• Instrument Unit of AS 206		

Experiment Evaluation Team - Key Personnel Locator

<u>Name</u>	<u>Responsibility</u>	<u>Office Address, Symbol, and Telephone Number</u>
Mr. E. C. McKannon	Principal Investigator (PI)	MSFC, Bldg. 4610, S&E-ASTN-MM, 205-453-5500
Mr. E. C. McKannon	Experiment Developer (ED)	MSFC, Bldg. 4610, S&E-ASTN-MM, 205-453-5500
Mr. Bill Jenkins	MSFC Experiment Manager (EM)	MSFC, Bldg. 4201, PM-SL-DP, 205-453-3182
Mr. Estell Lowe	S&E Integration Engineer (IE)	MSFC, Bldg. 4610, S&E-5P-P, 205-453-2574
Mr. Bob Lake	S&E Experiment Engineer (EE)	MSFC, Bldg. 4200, S&E-R, 205-453-1119
Mr. W. R. Bock	Technical Discipline Manager (TDM)	MSFC, Bldg. 4610, S&E-ASTN-SDF, 205-453-3810
Mr. K. S. Furushotham	Experiment Operations Engineer (EOE)	Teledyne Brown Engineering Company, Huntsville, Alabama, 205-532-1612
Mr. Don Slater	Experiment Integration Engineer (EIE)	Martin Marietta Corporation, Denver, Colorado, 303-794-5451
Mr. Don Townsley	Experiment Flight Controller (EFC)	MSC, Houston, Texas, 713-483-4617

TABLE B-III. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 2 of 11)

Operation Step	Data										Contingencies
	Return					Evaluation					
	Recorder Number	Measurement Name and Signal	Telemetry Channel	Frequency	Range and Division of Variables	Limit of Concern	Safety Check	Accuracy	Remarks	See Contingency Plan Number	
L = -60 min GMT: 14:59 for SL-2											Experiment Evaluation Team manned and available. Contact Experiment M-415, Technical Discipline Manager, SkE-ASTN-SD: HOSC Telephone No. TBD, Astronautics Laboratory Telephone No. 205-453-3910. Reference: Skylab Flight Plan SL-1 through SL-4, MSC, May 1, 1972. Commence experiment preparation (ground action). Determine experiment status. Acquire status and evaluate the performance of the IU Bus Voltage (6D31).
L = -30 min GMT: 15:19 for SL-2											
P 1.0											
P 1.1	TBS	6D31 Bus Voltage		H	C	Range: 0 to 35 Vdc				P11A1 P11B1	
		M14-601	CP1A0-04-06-00 DP1A0-04-06-00			Read: 24 to 32 Vdc	20 to 32 Vdc				
P 1.2	Measure or verify Panel No. 1 electric bridge wire (EBW) resistance:										
TBS	Squib No. 1	N/A	G	D	Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45				P12A1 P12B1 P12C1	Subtract the line resistance from the total resistance to determine EBW resistance value.
TBS	Squib No. 2	N/A	G	D	Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45				P12A1 P12B1 P12C1	Subtract the line resistance from the total resistance to determine EBW resistance value.
TBS	Squib No. 3	N/A	G	D	Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45				P12A1 P12B1 P12C1	Subtract the line resistance from the total resistance to determine EBW resistance value.

P - Preparation
 O - Operations
 T - Termination
 L - Lift-off (Booster)
 ASTN-72-1-OT (Jan 72)

E - Event
 H - Housekeeping
 A - Analog
 D - Digital
 G - Ground Test

C - Continuous
 I - Intermittent
 D - Discrete
 (Specified number of times)

R - Real Time
 N - Near/Real Time
 A - All Time

TABLE B-111. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 3 of 11)

Operation Step Number*		Data					Contingencies			
		Return			Evaluation					
		Recorder Number	Measurement Name, Number, and Signal	Telemetry Channel	Functions*	Range and Dimension of Variables	Limits of Concern	Satisfactory Check	Remarks***	See Contingency Plan Number
P 1.2 (Concluded)	TBS	Squib No. 4	N/A	G	$\bar{D}$ Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45		P12A1 P12B1 P12C1	Subtract the line resistance from the total resistance to determine EBW resistance value.	
	TBS	Squib No. 5	N/A	G	$\bar{D}$ Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45		P12A1 P12B1 P12C1	Subtract the line resistance from the total resistance to determine EBW resistance value.	
	TBS	Squib No. 6	N/A	G	$\bar{D}$ Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45		P12A1 P12B1 P12C1	Subtract the line resistance from the total resistance to determine the EBW resistance value.	
P 1.3		Measure or verify Panel No. 2 EBW resistance.								
TBS	Squib No. 1	N/A	G	$\bar{D}$ Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45		P13A1 P13B1 P13C1	Subtract the line resistance from the total resistance to determine EBW resistance value.		
TBS	Squib No. 2	N/A	G	$\bar{D}$ Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45		P13A1 P13B1 P13C1	Subtract the line resistance from the total resistance to determine the EBW resistance value.		
TBS	Squib No. 3	N/A	G	$\bar{D}$ Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45		P13A1 P13B1 P13C1	Subtract the line resistance from the total resistance to determine the EBW resistance value.		
TBS	Squib No. 4	N/A	G	$\bar{D}$ Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45		P13A1 P13B1 P13C1	Subtract the line resistance from the total resistance to determine the EBW resistance value.		
TBS	Squib No. 5	N/A	G	$\bar{D}$ Total Ω one-Line Ω time EBW Ω	EBW Ω 0.90 to 1.45		P13A1 P13B1 P13C1	Subtract the line resistance from the total resistance to determine the EBW resistance value.		
*** R - Real Time N - Near/Real Time A - All Time										
** E - Event H - Housekeeping A - Analog D - Digital G - Ground Test										
* P - Preparation O - Operations T - Termination L - Lift-off (Booster)										
ASTN-72-1: OT (Jan 72)										

R - Real Time
 N - Near/Real Time
 A - All Time

C - Continuous
 I - Intermittent
 D - Discrete
 (Specified number of times)

E - Event
 H - Housekeeping
 A - Analog
 D - Digital
 G - Ground Test

P - Preparation
 O - Operations
 T - Termination
 L - Lift-off (Booster)
 ASTN-72-1.OT (Jan 72)

TABLE B-III. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 5 of 11)

Operation Step	Data										Contingencies	
	Return					Evaluation					Remarks	Remarks
	Recorder Number	Measurement Name, Number, and Signal	Telemetry Channel	Functions	Frequency	Range and Duration of Variables	Limit of Concern	Safety Check	Remarks	See Contingency Plan Number		
O 1.1.2	TBS	Panel No. 2: Cover No. 4 deployment K 152-602	DP1A0-19-10-00	E	D Range: one-0 to 5 Vdc time Read: 1.9 Vdc	1.9 to 2.1 Vdc				0112A1		
Signal Profile GMT Duration (sec) 16:59:34 1.9 V 0.99 V Sensor Cover Deployed yes no 140 150 160 170 a b c $T_1 = 00:02:21.6$ $a = T_1 + 0.6$ or 142.2 sec $b = 17.4$ sec $c = \text{Next time base (sec)}$												
O 1.1.3	TBS	Panel No. 1: Cover No. 2 deployment K 151-601	DP1A0-19-09-00	E	D Range: one-0 to 5 Vdc time Read: 2.84 Vdc	2.84 to 3.1 Vdc				0113A1		
*** C - Continuous I - Intermittent D - Discrete (Specified number of times) *** R - Real Time N - Near/Real Time A - All Time *** E - Event H - Housekeeping A - Analog D - Digital G - Ground Test ASTN-72-1-OT (Jan 72)												

TABLE B-III. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 6 of 11)

Operation Step Number*	Recorder Number	Measurement Name, Number, and Signal	Return	Data	Contingencies
Return	Telemetry Assembly Channel	Frequency*	Range and Dimension of Variables	Limits of Concern	Remarks
Contingencies	See Contingency Plan Number	Remarks	Check	Evaluation	Remarks
O 1.1.3 (Concluded)		Signal Profile (Vdc) GMT Duration (sec) Panel No. 2: Cover No. 2 deployment K 152-602 DP1A0-19-10-00 Range: one - 0 to 5 Vdc time Read: 2.84 Vdc			
O 1.1.4 TBS		Signal Profile (Vdc) GMT Duration (sec) Panel No. 2: Cover No. 2 deployment K 152-602 DP1A0-19-10-00 Range: one - 0 to 5 Vdc time Read: 2.84 Vdc			O114A1

* P - Preparation
 O - Operations
 T - Termination
 L - Lift-off (Booster)
 ASTN-72-1-OT (Jan 72)

** E - Event
 H - Housekeeping
 A - Analog
 D - Digital
 G - Ground Test

*** C - Continuous
 I - Intermittent
 D - Discrete
 (Specified number of times)

**** R - Real Time
 N - Near/Real Time
 A - All Time

TABLE B-III. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 7 of 11)

Operation Step Number*	Data				Contingencies	
	Recorder Number	Measurement Name, Number, and Signal	Return		Evaluation	Remarks
			Telemetry Channel	Functions*		
O 1.1.5	TBS	Panel No. 1: Cover No. 3 deployment. K 151-601	DPIA0-19-09-00	E D one-time time	Range: 0 to 5 Vdc Read: 4.55 Vdc	See Contingency Plan Number
Signal Profile (Vdc) GMT Duration (sec) 16:29:34						
O 1.1.6	TBS	Panel No. 2: Cover No. 3 deployment. K 152-602	DPIA0-19-10-00	E D one-time time	Range: 0 to 5 Vdc Read: 4.55 Vdc	O116A1
Signal Profile (Vdc) GMT Duration (sec) 16:29:34						

R - Real Time
N - Near/Real Time
A - All Time

C - Continuous
I - Intermittent
D - Discrete
(Specified number of times)

E - Event
H - Housekeeping
A - Analog
D - Digital
G - Ground Test

P - Preparation
O - Operations
T - Termination
L - Liftoff (Booster)
ASTN-72-1-OT (Jan 72)

TABLE B-III. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 8 of 11)

Operation Step	Recorder Number	Measurement Name, Number, and Signal	Data				Contingencies	
			Return	Telemetry Channel	Frequency	Range and Dimension of Variables	Limit of Concern	Remarks
O 1.2		Panel Nos. 1 and 2; Covers 4, 2, and 3 deployment				$T_3 + 0.6$ $T_3 + 18$ $T_4 + 2547$ C $T_3 = 00:02:21.6$ $T_4 = 00:09:50.1$ $A = 17.4 \text{ sec}$ $B = 2977.5 \text{ sec}$ $C = \text{TBD sec}$ Signal Profile Duration (sec) GMT 16:59:34		

* P - Preparation
 O - Operations
 T - Termination
 L - Liftoff (Booster)
 ASTN-72-1-CT (Jan 72)

** E - Event
 H - Housekeeping
 A - Analog
 D - Digital
 G - Ground Test

*** C - Continuous
 I - Intermittent
 D - Discrete
 (Specified number of times)

**** R - Real Time
 N - Near/Real Time
 A - All Time

TABLE B-111. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 9 of 11)

Operation Step Number*			Data										Contingencies								
			Return		Range and Duration of Variables		Limits of Concern		Check		Evaluation										
Recorder Number			Measurement Name, Number, and Signal		Telemetry Channel Assignment		Frequency**		Functions**		Satisfactory		Anomaly		Remarks***		See Contingency Plan Number		Remarks		
Monitor Panel and Specimen Sensor Temperatures.																					
O 1.3	TBS	Panel No. 1: Specimen Temperatures			A		C		Range: -135 to 135 °C Read: 20 to 100 °C		-135 to 135 °C						O131A1				
O 1.3.1		Specimen Measurement No.	Telemetry Assignment Channel																		
		TC-1	C 84-601	DP1A0-06-01-00																	
		TC-2	C 85-601	DP1A0-06-02-00																	
		TC-3	C 86-601	DP1A0-06-03-00																	
		TC-4	C 87-601	DP1A0-06-04-00																	
		TC-5	C 88-601	DP1A0-06-05-00																	
		TC-6	C 89-601	DP1A0-06-06-00																	
		TC-7	C 90-601	DP1A0-06-07-00																	
		TC-8	C 91-601	DP1A0-06-08-00																	
		TC-9	C 92-601	DP1A0-06-09-00																	
		TC-10	C 93-601	DP1A0-06-10-00																	
		TC-11	C 94-601	DP1A0-07-05-00																	
		TC-12	C 95-601	DP1A0-07-06-00																	
O 1.3.2	TBS	Panel No. 1 Temperature			A		C		Range: -135 to 135 °C Read: 20 to 100 °C		-135 to 135 °C						O132A1				
		C 108-601	DP1A0-21-09-00																		

* P - Preparation
 O - Operations
 T - Termination
 L - Lift-off (Booster)
 ASTN-72-1-OT (Jan 72)

** E - Event
 H - Housekeeping
 A - Analog
 D - Digital
 G - Ground Test

*** C - Continuous
 I - Intermittent
 D - Discrete
 (Specified number of times)

**** R - Real Time
 N - Near/Real Time
 A - All Time

TABLE B-III. EXPERIMENT M-415, THERMAL CONTROL COATINGS EVALUATION SEQUENCE (Sheet 10 of 11)

Data														Contingencies	
Return															
Operation Step Number*	Recorder Number	Measurement		Telemetry		Functions**	Frequency***	Range and Dimension of Variables	Limits of Concern	Evaluation		Remarks			
		Name, Number, and Signal	Assignment Channel	Channel	Check					Remarks***	See Contingency Plan Number				
O 1.4	Monitor Panel and Specimen Sensor Temperatures.														
O 1.4.1	TBS	Panel No. 2: Specimen Temperatures.		A		C	Range: -135 to 135 °C		-135 to 135 °C				O141A1		
		Specimen Measurement No.	Telemetry Assignment Channel				Read: 20 to 100 °C								
		TC-1	C 96-602	DP1A0-07-07-00											
		TC-2	C 97-602	DP1A0-07-08-00											
		TC-3	C 98-602	DP1A0-17-08-00											
		TC-4	C 99-602	DP1A0-17-09-00											
		TC-5	C 100-602	DP1A0-07-09-00											
		TC-6	C 101-602	DP1A0-18-02-00											
		TC-7	C 102-602	DP1A0-18-03-00											
		TC-8	C 103-602	DP1A0-18-04-00											
		TC-9	C 104-602	DP1A0-18-05-00											
		TC-10	C 105-602	DP1A0-18-06-00											
		TC-11	C 106-602	DP1A0-18-07-00											
TC-12	C 107-602	DP1A0-07-10-00													
O 1.4.2	TBS	Panel No. 2: Temperature		A		C	Range: -135 to 135 °C		-135 to 135 °C				O142A1		
		C 109-602	DP1A0-21-10-00				Read: 20 to 100 °C								

* P - Preparation
 O - Operations
 T - Termination
 L - Lift-off (Booster)
 ASTN-72-1-OT (Jan 72)

** E - Event
 H - Housekeeping
 A - Analog
 D - Digital
 G - Ground Test

*** C - Continuous
 I - Intermittent
 D - Discrete
 (Specified number of times)

**** R - Real Time
 N - Near/Real Time
 A - All Time

SECTION VIII.

**EXPERIMENT M-415, THERMAL CONTROL COATINGS
MALFUNCTION AND CONTINGENCY PLAN OUTLINE**

TABLE B-IV. EXPERIMENT M-415, THERMAL CONTROL COATINGS MALFUNCTION AND CONTINGENCY PLAN OUTLINE - EXPERIMENT PREPARATION (P)

Operation Step Number	Experiment/Crew Tasks	Possible Malfunction	Contingency Plan	Remarks (malfunctions, corrections, results)
P 1.1	Acquire the status and evaluate the performance of the IU Bus Voltage (6D31).	P11A IU Bus Voltage is decreasing.	P11A1 Continue with the experiment.	
		P11B IU Bus Voltage is lost.	P11B1 Terminate the experiment.	
P 1.2	Measure or verify panel No. 1 bridge wire resistance.	P12A Low resistance.	P12A1 Continue with the experiment.	
		P12B High resistance.	P12B1 Reference: • P12A1.	
		P12C Open.	P12C1 Reference: • P12A1.	
P 1.3	Measure or verify panel No. 2 bridge wire resistance.	P13A Low resistance.	P13A1 Reference: • P12A1.	
		P13B High resistance.	P13B1 Reference: • P12A1.	
		P13C Open.	P13C1 Reference: • P12A1.	

P

ASTN-OT-7 (Feb. 72)

TABLE B-V. EXPERIMENT M-415, THERMAL CONTROL COATINGS MALFUNCTION AND CONTINGENCY PLAN OUTLINE - EXPERIMENT OPERATION (O)
(Sheet 1 of 2)

Operation Step Number	Experiment/Crew Tasks	Possible Malfunction	Contingency Plan	Remarks (malfunctions, corrections, results)
O 1.1.1	Panel No. 1: Cover No. 4 deployment.	O111A Cover cannot be deployed.	O111A1 Initiate the panel deployment command signal using the rf command link to the IU switch selector command system. O111A2 Continue with experiment.	
O 1.1.2	Panel No. 2: Cover No. 4 deployment.	O112A Reference: O111A.	O11A1 Reference: • O111A1. • O111A2.	
O 1.1.3	Panel No. 1: Cover No. 2 deployment.	O113A Reference: • O111A.	O113A1 Reference: • O111A1. • O111A2.	
O 1.1.4	Panel No. 2: Cover No. 2 deployment.	O114A Reference: • O111A.	O114A1 Reference: • O111A1. • O111A2.	
O 1.1.5	Panel No. 1: Cover No. 3 deployment.	O115A Reference: • O111A.	O115A1 Reference: • O111A1. • O111A2.	
O 1.1.6	Panel No. 2: Cover No. 3 deployment.	O116A Reference: • O111A.	O116A1 Reference: • O111A1. • O111A2.	

O

TABLE B-V. EXPERIMENT M-415, THERMAL CONTROL COATINGS MALFUNCTION AND CONTINGENCY PLAN OUTLINE - EXPERIMENT OPERATION (O)
(Sheet 2 of 2)

Operation Step Number	Experiment/Crew Tasks	Possible Malfunction	Contingency Plan	Remarks (malfunctions, corrections, results)
O 1.3	Monitor panel and specimen sensor temperatures (see Operation Step Nos. O 1.3.1 and O 1.3.2).			
O 1.3.1	Panel No. 1: Specimen Temperatures.	O131A Erratic operation due to open or short circuit.	O131A1 Continue to monitor the sensor temperatures for the remainder of the flight.	
O 1.3.2	Panel No. 1: Temperature.	O132A Reference: • O131A	O132A1 Reference: • O131A1	
O 1.4	Monitor Panel No. 2: Specimen Sensor Temperatures (see Operation Step Nos. O 1.4.1 and O 1.4.2).			
O 1.4.1	Panel No. 2: Specimen Temperatures.	O141A Reference: • O131A	O142A1 Reference: • O131A1	
O 1.4.2	Panel No. 2: Temperature	O142A Reference: • O131A	O142A1 Reference: • O131A1	

0

TABLE B-VI. EXPERIMENT M-415, THERMAL CONTROL COATINGS MALFUNCTION AND CONTINGENCY PLAN OUTLINE - EXPERIMENT TERMINATION (T)

Operation Step Number	Experiment/Crew Tasks	Possible Malfunction	Contingency Plan	Remarks (malfunctions, corrections, results)
T 1.0	Experiment M-415 is "open-ended".	T1A N/A	T1A1 N/A	

T

ASTN-OT-9 (Feb. 72)

SECTION IX.

**EXPERIMENT M-415, THERMAL CONTROL COATINGS
MALFUNCTION ANALYSES**

The material contained in this section is an excerpt from Reference 10.

9. THERMAL CONTROL COATINGS, M415

The primary M415 operational functions requiring analysis are presented in Table 9.1. Figure 9.1 depicts the relationship used to develop this table.

Table 9.1 Operational Functions and Malfunction Analysis Items, M415

Operational Function	Sub-Function	Malfunction Analysis Item
9.1 Expel Panel Covers	9.1.1 Expel Panel 1 Covers	9.1.1.1 Row 2 Cover Failure
		9.1.1.2 Row 3 Cover Failure
		9.1.1.3 Row 4 Cover Failure
	9.1.2 Expel Panel 2 Covers	9.1.2.1 Row 2 Cover Failure
		9.1.2.2 Row 3 Cover Failure
		9.1.2.3 Row 4 Cover Failure

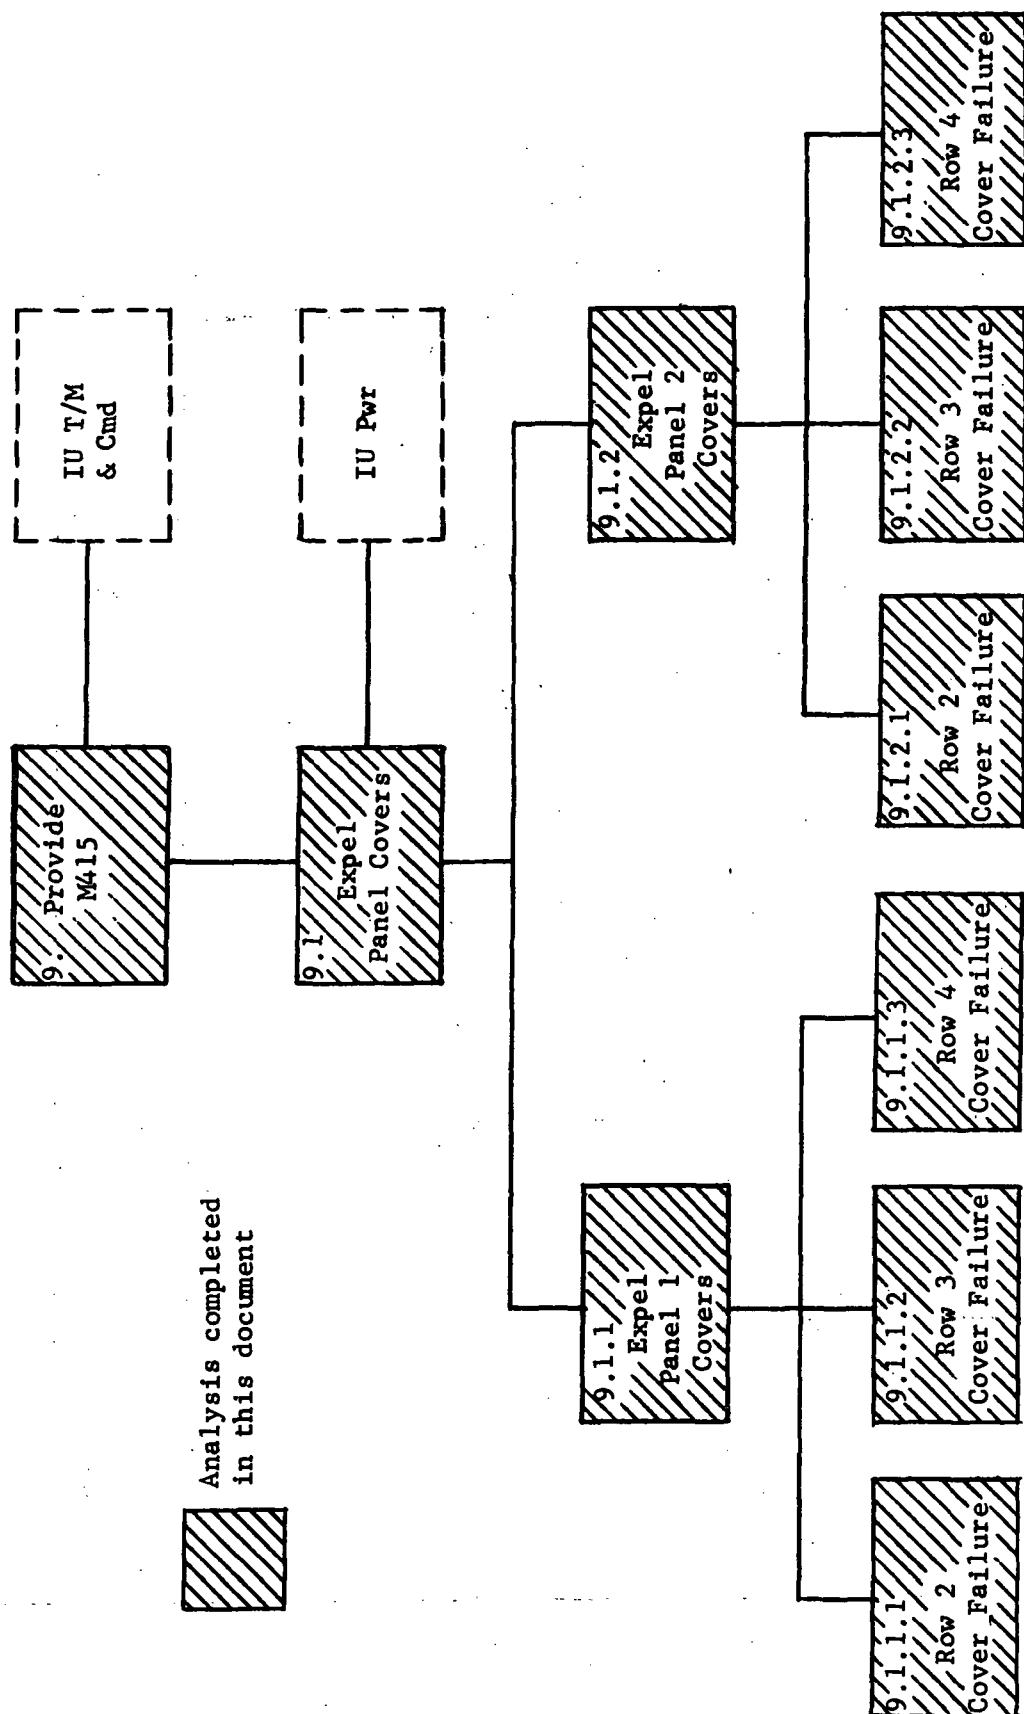


Figure 9.1 Functional Flow and Malfunction Analysis Diagram, M415

MALFUNCTION ANALYSIS CHART, M415

MALFUNCTION OR CONDITION	INDICATION		EFFECT			ACTION
	PRIMARY MEASUREMENTS	SUPPORT MEASUREMENTS	MISSION/CREW	SYSTEM/SUBSYSTEM	SYSTEM/INTERACTION	
9. Provide M415						
9.1 Expel Panel Covers						
9.1.1 Expel Panel 1 Covers (Row 1 removed pre-launch)	M151, Panel 1 Deployed.		Mission: None Crew: None		None	Ground Action: Phase C Crew Action: None 1. Reissue appropriate CGS Sw Sel Cmd: a. Deploy Row 2 cover, or b. Deploy Row 3 cover, or c. Deploy Row 4 cover.
9.1.1.1 Row 2 Cover Failure	(U): No voltage level change immediately before retro-fire.	C87, C88, and C99; Specimen Temps (U): Temp levels lower than expected. Note: Temp T/M not available until after 4th row covers are expelled.		Loss of Row 2 Thermal Control Coating data.		
9.1.1.2 Row 3 Cover Failure	(U): No voltage level change immediately before LES jettison.	C90, C91, and C92; Specimen Temps (U): Same as 9.1.1.1 Crew Observation (U): Do not audibly detect armament thrusters firing. (This is an inconclusive cue.)		Loss of Row 3 Thermal Control Coating data.		

MISSION PHASES: A. All Phases
B. Boost to Orbit
C. Activation
D. 1st Visitation
E. 1st Storage
F. 2nd Visitation
G. 2nd Storage
H. 3rd Visitation

MALFUNCTION ANALYSIS CHART, M415

MALFUNCTION		INDICATION		EFFECT		MALFUNCTION
MALFUNCTION OR CONDITION	PRIMARY MEASUREMENTS	SUPPORT MEASUREMENTS	MISSION/CREW	SYSTEM/SUBSYSTEM	SYSTEM/INTERACTION	CREW OK COMMAND
9.1.1.3 Row 4 Cover Failure	(U): No voltage level change after CSM separation.	C93, C94, and C95; Specimen Temps. (U): Same as 9.1.1.1. Crew Observation (U): Do not observe cover expulsion. (This is an inconclusive cue.)		Loss of Row 4 Thermal Control Coating data.		
9.1.2 Expel Panel 2 Covers (Row 1 removed pre-launch)	K152, Panel 2 deployed		Mission: None Crew: None		None	Ground Action: Phase C Crew Action: None 1. Same as 9.1.1, Step 1.
9.1.2.1 Row 2 Cover Failure	(U): Same as 9.1.1.1	C99, C100, and C101; Specimen Temps (U): Same as 9.1.1.1		Same as 9.1.1.1		
9.1.2.2 Row 3 Cover Failure	(U): Same as 9.1.1.2	C102, C103, and C104; Specimen Temps (U): Same as 9.1.1.1 Crew Observation (U): Same as 9.1.1.2		Same as 9.1.1.2		
9.1.2.3 Row 4 Cover Failure	(U): Same as 9.1.1.3	C105, C106, and C107; Specimen Temps (U): Same as 9.1.1.1 Crew Observation (U): Same as 9.1.1.3		Same as 9.1.1.3		

MISSION PHASES:

- A. All Phases
- B. Boost to Orbit
- C. Activation
- D. 1st Visitation
- E. 1st Storage
- F. 2nd Visitation
- G. 2nd Storage
- H. 3rd Visitation

SECTION X. CONCLUSIONS AND RECOMMENDATIONS

1. The M415 Thermal Control Coatings experiment does not require the flight crew to participate. The experiment is mounted on the IU of SL-2 and will be operated by the IU electronic subsystem. The experiment data will become available immediately upon lift-off. The experiment will continue to operate through the IU lifetime.
2. The probability that sensor covers could be deployed prematurely is quite small. If this should occur with the third row of covers, it could come in contact with the vehicle and possibly cause damage that could affect the mission and the crew safety.

REFERENCES

1. Skylab Operations Handbook. Vol. I: Experiment Descriptions, MSC-000924, Manned Spacecraft Center, Houston, Texas, November 19, 1971.
2. Experiment Requirements Document for Experiment M-415, Thermal Control Coatings. Repository No. SE-010-011-2H, CCBD No. 805-70-0014, Marshall Space Flight Center, Huntsville, Alabama, April 15, 1971.
3. Mission Requirement Document. Vol. I: First Skylab Mission SL-1/SL-2, I-MRD-001E, Manned Spacecraft Center, Houston, Texas, November 1, 1971.
4. End Item Specification, Experiment 415, Thermal Control Coatings. 71M00040, Rev. B, Marshall Space Flight Center, Huntsville, Alabama, May 15, 1972.
5. Skylab Program Directive No. 43B Operations Directive (Draft). NASA Office of Manned Space Flight, Washington, D. C., February 1972.
6. Configuration Specification for Experiment M-415, Thermal Control Coatings. 71M00043, Rev. B, Marshall Space Flight Center, Huntsville, Alabama, February 5, 1972.
7. Failure Effect Analysis and Criticality Determination of Thermal Control Coatings. 25M02044, Marshall Space Flight Center, Huntsville, Alabama, August 1972.
8. Instrument Unit Electrical Schematics for MSFC Experiment M-415 Cover Separation Ordnance. Dwg. No. 7910130, International Business Machines Corporation, Huntsville, Alabama, July 23, 1966.
9. Skylab Experiments Systems Handbook. Manned Spacecraft Center, Houston, Texas, September 1, 1971.
10. Wilcoxson, C. B., et al: Mission Operations Design Support, OWS Experiments Malfunction Analyses, Rev. A, ED-2002-1244, Martin Marietta Corporation, Denver, Colorado, May 12, 1972.