

(NASA-CR-134880) EFFECT OF NOZZLE	N76-13199
NONLINEARITIES UPON NONLINEAR STABILITY OF	
LIQUID PROPELLANT ROCKET MOTORS (Georgia	
Inst. of Tech.) 142 p HC \$6.00 CACL 21H	Unclas
	G3/20 04124

EFFECT OF NOZZLE NONLINEARITIES
UPON NONLINEAR STABILITY OF
LIQUID PROPELLANT ROCKET MOTORS

BY

M.S. Padmanabhan
E.A. Powell
B.T. Zinn

GEORGIA INSTITUTE OF TECHNOLOGY

prepared for

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

NASA Lewis Research Center
Grant NGR 11-002-179
Richard J. Priem, Project Manager



NOTICE

This report was prepared as an account of Government-sponsored work. Neither the United States, nor the National Aeronautics and Space Administration (NASA), nor any person acting on behalf of NASA:

- A.) Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately-owned rights; or
- B.) Assume any liabilities with respect to the use of, or for damages resulting from the use of, any information, apparatus, method or process disclosed in this report.

As used above, "person acting on behalf of NASA" includes any employee or contractor of NASA, or employee of such contractor, to the extent that such employee or contractor of NASA or employee of such contractor prepares, disseminates, or provides access to any information pursuant to his employment or contract with NASA, or his employment with such contractor.

Requests for copies of this report should be referred to

National Aeronautics and Space Administration
Scientific and Technical Information Facility
P. O. Box 33
College Park, Md. 20740

1. Report No. NASA CR-134880		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Effect of Nozzle Nonlinearities Upon Nonlinear Stability of Liquid Propellant Rocket Motors				5. Report Date October, 1975	
				6. Performing Organization Code	
7. Author(s) M. S. Padmanabhan, E. A. Powell, and B. T. Zinn				8. Performing Organization Report No.	
9. Performing Organization Name and Address Georgia Institute of Technology Atlanta, Georgia 30332				10. Work Unit No.	
				11. Contract or Grant No. NGR 11-002-179	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D. C. 20546				13. Type of Report and Period Covered Contractor Report	
				14. Sponsoring Agency Code	
15. Supplementary Notes Project Manager, Richard J. Priem, Chemical Propulsion Division, NASA Lewis Research Center, Cleveland, Ohio.					
16. Abstract A three-dimensional, nonlinear nozzle admittance relation is developed by solving the wave equation describing finite-amplitude oscillatory flow inside the subsonic portion of a choked, slowly-convergent axisymmetric nozzle. This nonlinear nozzle admittance relation is then used as a boundary condition in the analysis of nonlinear combustion instability in a cylindrical liquid rocket combustor. In both nozzle and chamber analyses solutions are obtained using the Galerkin method with a series expansion consisting of the first tangential, second tangential, and first radial modes. Using Crocco's time-lag model to describe the distributed unsteady combustion process, combustion instability calculations are presented for different values of the following parameters: (1) time-lag, (2) interaction index, (3) steady-state Mach number at the nozzle entrance, and (4) chamber length-to-diameter ratio. In each case, limit-cycle pressure amplitudes and waveforms are shown for both linear and nonlinear nozzle admittance conditions. These results show that when the amplitudes of the second tangential and first radial modes are considerably smaller than the amplitude of the first tangential mode the inclusion of nozzle nonlinearities has no significant effect on the limiting amplitude and pressure waveforms.					
17. Key Words (Suggested by Author(s)) Combustion Instability Liquid Rockets Exhaust Nozzles Method of Weighted Residuals			18. Distribution Statement Unclassified - unlimited		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 141	22. Price* \$3.00

* For sale by the National Technical Information Service, Springfield, Virginia 22151

FOREWORD

The research described herein, which was conducted at Georgia Institute of Technology, was supported by NASA Grant No. NGR-11-002-179. The work was done under the management of the NASA Project Manager, Dr. Richard J. Priem, Chemical Rockets Division, NASA-Lewis Research Center.

ABSTRACT

A three-dimensional, nonlinear nozzle admittance relation is developed by solving the wave equation describing finite-amplitude oscillatory flow inside the subsonic portion of a choked, slowly-convergent axisymmetric nozzle. This nonlinear nozzle admittance relation is then used as a boundary condition in the analysis of nonlinear combustion instability in a cylindrical liquid rocket combustor. In both nozzle and chamber analyses solutions are obtained using the Galerkin method with a series expansion consisting of the first tangential, second tangential, and first radial modes. Using Crocco's time-lag model to describe the distributed unsteady combustion process, combustion instability calculations are presented for different values of the following parameters: (1) time-lag, (2) interaction index, (3) steady-state Mach number at the nozzle entrance, and (4) chamber length-to-diameter ratio. In each case, limit-cycle pressure amplitudes and waveforms are shown for both linear and nonlinear nozzle admittance conditions. These results show that when the amplitudes of the second tangential and first radial modes are considerably smaller than the amplitude of the first tangential mode the inclusion of nozzle nonlinearities has no significant effect on the limiting amplitude and pressure waveforms.

PRECEDING PAGE BLANK NOT FILMED

TABLE OF CONTENTS

	Page
SUMMARY	1
INTRODUCTION	2
SYMBOLS	3
NOZZLE ANALYSIS	5
Development of the Nozzle Wave Equation	6
Method of Solution	9
Derivation of Admittance Relations	12
Calculation of the Nozzle Response	14
COMBUSTION INSTABILITY ANALYSIS	17
Combustion Chamber Model	17
Application of Galerkin Method	19
Numerical Solution Procedure	21
RESULTS AND DISCUSSION	22
Admittance Coefficients	22
Stability Calculations	27
CONCLUDING REMARKS	31
APPENDIX A - PROGRAM NOZADM: A USER'S MANUAL	40
General Description	40
Program Structure	40
Input Data	42

PRECEDING PAGE BLANK NOT FILMED

TABLE OF CONTENTS (Continued)

	Page
Steady-State Quantities	43
Coefficients	44
Integrals	44
Integration of the Differential Equations	46
Output	46
FORTRAN Listing	48
APPENDIX B - PROGRAM COEFFS3D: A USER'S MANUAL	78
FORTRAN Listing	81
APPENDIX C - PROGRAM LCYC3D: A USER'S MANUAL	108
FORTRAN Listing	112
REFERENCES	140

LIST OF ILLUSTRATIONS

Figure		Page
1.	Coordinate System Used for the Solution of the Oscillatory Nozzle Flow.....	8
2.	Nozzle Profile Used in Calculating Admittances.....	16
3.	Typical Mathematical Model of a Liquid Rocket Motor.....	18
4.	Linear Admittances for the 1T, 2T, and 1R Modes.....	23
5.	Nonlinear Admittances for the 2T Mode.....	24
6.	Nonlinear Admittances for the 1R Mode.....	25
7.	Relative Magnitudes of Linear and Nonlinear Admittances...	26
8.	Effect of Entrance Mach Number on the Relative Magnitudes of Linear and Nonlinear Admittances.....	28
9.	Effect of Nozzle Half-Angle on the Relative Magnitudes of Linear and Nonlinear Admittances.....	29
10.	Effect of Nozzle Radii of Curvature on the Relative Magnitudes of Linear and Nonlinear Admittances for the 2T Mode.	30
11.	Linear Stability Limit.....	32
12.	Comparison of Pressure Waveforms for a Mildly Unstable Motor.....	33
13.	Comparison of Pressure Waveforms for a Strongly Unstable Motor.....	34
14.	Comparison of Limit-Cycle Amplitudes for Different Values of n	35
15.	Comparison of Limit-Cycle Pressure Amplitudes for Different Values of τ	36
16.	Comparison of Limit-Cycle Amplitudes for Different Values of M_e	37

LIST OF ILLUSTRATIONS (Continued)

Figure		Page
17.	Comparison of Limit-Cycle Amplitudes for Different Values of L/D	38
A-1.	Flow Chart.....	41

SUMMARY

Recently, a three-dimensional, nonlinear nozzle admittance relation has been developed. In this analysis, the wave equation for an axisymmetric, choked nozzle was solved using the Galerkin method with an approximating series solution for the velocity potential perturbation which was compatible with recent nonlinear combustion instability theories. Assuming that the amplitude of the fundamental mode is considerably larger than the amplitudes of the remaining modes in the series expansion, nonlinear admittance coefficients were determined as a function of the frequency and amplitude of the fundamental mode.

The nonlinear nozzle theory was then applied in the analysis of nonlinear combustion instability in a cylindrical combustor with uniform injection of propellants at one end and a slowly converging nozzle at the other end. The distributed unsteady combustion process was described by means of Crocco's time-lag model. The Galerkin method was used to determine the behavior of the pressure perturbation in the rocket combustor, where the nonlinear nozzle admittance relation was used as the boundary condition at the nozzle end of the chamber. In these computations, a three-mode series expansion consisting of the first tangential (1T), second tangential (2T), and first radial (1R) modes was used. Since the amplitude and frequency of the 1T mode upon which the nonlinear nozzle admittances depend are not known a priori, an iterative solution technique was used.

Combustion instability calculations have been made for different values of the following parameters: (1) time-lag, (2) interaction index, (3) steady state Mach number at the nozzle entrance, and (4) chamber length-to-diameter ratio. In each case limit-cycle pressure amplitudes and waveforms were obtained with both the linear and nonlinear nozzle admittances. These results show that under the assumptions of the analysis the effect of nozzle nonlinearities can be safely neglected in nonlinear stability calculations.

INTRODUCTION

Various aerospace propulsion devices, such as liquid and solid propellant rocket motors and air breathing jet engines, are often subject to combustion instabilities which are detrimental to the performance and safety of operation of these devices. In order to design stable engines, capabilities for a priori determination of the linear and nonlinear characteristics of the instability and the range of operating conditions for which these engines are dynamically stable must be acquired. In order to perform such an analysis, the behavior of the exhaust nozzle under oscillatory flow conditions must be understood. In particular, it is necessary to know how a wave generated in the combustion chamber is partially transmitted and partially reflected at the nozzle entrance. The information is usually expressed as a boundary condition (usually referred to as a Nozzle Admittance Relation) that must be satisfied at the nozzle entrance.

Before such a boundary condition can be derived, the nature of the wave motion inside the nozzle must be investigated. The behavior of oscillations in a converging-diverging supercritical nozzle was first treated by Tsien¹ who considered the case in which the oscillation of the incoming flow is one-dimensional and isothermal. Crocco^{2,3} extended Tsien's work to cover the more general cases of non-isothermal one- and three-dimensional oscillations. The analyses of Tsien and Crocco are both restricted to small-amplitude (i.e., linear) oscillations. More recently, a nonlinear nozzle theory has been developed by Zinn and Crocco^{4,5,6} who extended the previous linear theories to the investigation of the behavior of finite-amplitude waves.

In recent studies conducted by Zinn, Powell, and Loes, theories were developed which describe the nonlinear behavior of longitudinal^{7,8} and transverse^{9,10} instabilities in liquid-propellant rocket chambers with quasi-steady nozzles. These theories have now been extended to situations in which the instabilities are three-dimensional and the rocket combustors are attached to conventional nozzles¹¹. All of these theories have successfully predicted the transient behavior, nonlinear waveforms, and limit-cycle amplitudes of longitudinal and tangential instabilities in unstable motors.

In order to assess the importance of nozzle nonlinearities upon the

nonlinear stability characteristics of various propulsion devices, a new nonlinear nozzle theory is needed for the following reasons. First, the nonlinear analysis of Zinn^{5,6} is mathematically complicated and requires considerable computer time. For this reason, Zinn's analysis has never been used to perform actual computations of the wave structure in the nozzle or the nonlinear nozzle response. Secondly, the nonlinear nozzle admittance relation developed by Zinn is not compatible with the recently developed nonlinear combustion theories (see References 7 through 11). Consequently, a linear nozzle boundary condition or a short nozzle (quasi-steady) assumption had to be used in all of the nonlinear combustion instability theories developed to date. The use of a linear nozzle boundary condition in these nonlinear theories was justified by assuming that under the conditions of moderate amplitude oscillations and small mean flow Mach number the effect of nozzle nonlinearities is of higher order and can be neglected. Thus a nonlinear nozzle analysis is needed to determine the validity of this assumption. Furthermore, in the case of transverse instabilities the "linear" nozzle has been known to exert a destabilizing effect; in these cases it is especially important to know how nonlinearities affect the nozzle behavior.

Thus a nonlinear nozzle admittance relation has been developed and has been applied as a boundary condition in the recently-developed nonlinear combustion instability theories. The development of this theory, its application in the chamber stability analysis, and typical results for liquid-propellant rockets will be described in the following sections.

SYMBOLS

$A_p(\varphi)$	axially dependent amplitude functions in Eq. (4)
$B_p(t)$	time dependent amplitude functions in Eq. (18)
$B_N(\tilde{\Phi}')$	nozzle boundary residual (see Eq. (10))
b_p	complex axial acoustic eigenvalue
c	dimensionless sonic velocity, c^*/c_o^*

$E_N(\tilde{\phi}')$	residual of Eq. (2)
$E_C(\tilde{\phi}')$	residual of Eq. (17)
i	imaginary unit, $\sqrt{-1}$
J_m	Bessel function of the first kind, order m
k_p	multiple of fundamental frequency
m	azimuthal mode number
n	pressure interaction index
p	dimensionless pressure, $\gamma p^* / \rho_0^* c_0^{*2}$
r	dimensionless radial coordinate, r^* / r_c^*
r_c^*	chamber radius
S_{mm}	dimensionless transverse mode acoustic frequency
t	dimensionless time, $\frac{t}{(r_c^* / c_0^*)}$
u	dimensionless axial velocity, u^* / c_0^*
Y_p	linear admittance for the p^{th} mode
z	dimensionless axial coordinate, z^* / r_c^*
γ	specific heat ratio
Γ_p	nonlinear admittance for the p^{th} mode
ζ_p	linear admittance function
θ	azimuthal coordinate
ρ	dimensionless density, ρ^* / ρ_0^*
τ	dimensionless pressure sensitive time lag, $\frac{\tau^*}{(r_c^* / c_0^*)}$

ϕ steady state potential function
 $\bar{\phi}$ velocity potential
 ψ steady state stream function
 ω dimensionless frequency

Subscripts:

e evaluated at the nozzle entrance
 n radial mode number
 r, i real and imaginary parts of a complex quantity, respectively
 w evaluated at the nozzle wall
 o stagnation quantity
 $\phi, \psi, r, \theta, z, t$ partial differentiation with respect to $\phi, \psi, r, \theta, z,$ or $t,$ respectively

Superscripts:

$()'$ perturbation quantity
 $-$
 $(\bar{\quad})$ steady state quantity
 $()^*$ dimensional quantity, complex conjugate
 (\sim) approximate solution

NOZZLE ANALYSIS

The development of the nonlinear nozzle theory is described in detail in Refs. (12) and (13), therefore only a brief summary will be given in this section.

Development of the Nozzle Wave Equation

As in the Zinn-Crocco analysis,^{5,6} finite-amplitude, periodic oscillations were assumed to occur inside the slowly convergent, subsonic portion of an axisymmetric nozzle operating in the supercritical range. The flow in the nozzle was assumed to be adiabatic and inviscid and to have no body forces or chemical reactions. The fluid was also assumed to be calorically perfect. Under the further assumption of isentropic and irrotational flow the continuity and momentum equations were combined to obtain the following equation which describes the behavior of the velocity potential:

$$\begin{aligned} \nabla^2 \bar{\phi} - \bar{\phi}_{tt} &= 2\nabla \bar{\phi} \cdot \nabla \bar{\phi}_t + (\gamma-1) \bar{\phi}_t \nabla^2 \bar{\phi} \\ &+ \frac{\gamma-1}{2} (\nabla \bar{\phi} \cdot \nabla \bar{\phi}) \nabla^2 \bar{\phi} + \frac{1}{2} \nabla \bar{\phi} \cdot \nabla (\nabla \bar{\phi} \cdot \nabla \bar{\phi}) \end{aligned} \quad (1)$$

These equations are consistent with those used in the second-order nonlinear combustion instability theory developed by Powell, Zinn, and Lores (see References 7 and 10).

A nozzle wave equation was obtained from Eq. (1) by expressing the velocity potential as the sum of a steady state and a perturbation (i.e. $\bar{\phi} = \bar{\phi} + \bar{\phi}'$), introducing the (φ, ψ, θ) coordinate system used by Zinn and Crocco^{5,6} (see Figure 1), assuming a slowly convergent nozzle and one-dimensional mean flow, and neglecting third order nonlinear terms. This wave equation is given by:

$$\begin{aligned} E_N(\bar{\phi}') &= f_1(\varphi) \bar{\phi}'_{\varphi\varphi} - f_2(\varphi) \bar{\phi}'_{\varphi} + f_3(\varphi) \left[2(\psi \bar{\phi}'_{\psi\psi} + \bar{\phi}'_{\psi}) + \frac{1}{2\psi} \bar{\phi}'_{\theta\theta} \right] \\ &- 2 \bar{\phi}'_{\varphi t} + f_4(\varphi) \bar{\phi}'_t - \frac{1}{\bar{u}} \bar{\phi}'_{tt} \\ &- \left\{ 2 \bar{\phi}'_{\varphi} \bar{\phi}'_{\varphi t} + \frac{4\rho}{\bar{u}} \psi \bar{\phi}'_{\psi} \bar{\phi}'_{\psi t} + \frac{\bar{\rho}}{\bar{u}\psi} \bar{\phi}'_{\theta} \bar{\phi}'_{\theta t} \right. \end{aligned} \quad (2)$$

$$\begin{aligned}
& + (\gamma+1)\bar{u}^2 \bar{\phi}'_{\varphi} \bar{\phi}'_{\varphi\varphi} + 2 \bar{\rho}\bar{u} \psi \bar{\phi}'_{\psi} \bar{\phi}'_{\psi\varphi} + \frac{\bar{\rho}\bar{u}}{2\psi} \bar{\phi}'_{\theta} \bar{\phi}'_{\theta\varphi} \\
& + f_5(\varphi) (\bar{\phi}'_{\varphi})^2 + f_6(\varphi) \psi (\bar{\phi}'_{\psi})^2 + f_6(\varphi) \frac{1}{4\psi} (\bar{\phi}'_{\theta})^2 \\
& + (\gamma-1) \bar{\phi}'_{\varphi\varphi} \bar{\phi}'_{\theta} - f_4(\varphi) \bar{\phi}'_{\varphi} \bar{\phi}'_{\theta} \\
& + (\gamma-1) \frac{\bar{\rho}}{\bar{u}} \left[2 \left(\psi \bar{\phi}'_{\psi\psi} + \bar{\phi}'_{\psi} \right) + \frac{1}{2\psi} \bar{\phi}'_{\theta\theta} \right] \bar{\phi}'_{\theta} \\
& + (\gamma-1) \bar{\rho}\bar{u} \left[2 \left(\psi \bar{\phi}'_{\psi\psi} + \bar{\phi}'_{\psi} \right) + \frac{1}{2\psi} \bar{\phi}'_{\theta\theta} \right] \bar{\phi}'_{\varphi} \} = 0
\end{aligned}$$

where

$$f_1(\varphi) = \frac{\bar{c}^2}{c^2} - \bar{u}^2 \quad (3)$$

$$f_2(\varphi) = \frac{1}{c^2} \frac{d\bar{u}^2}{d\varphi}$$

$$f_3(\varphi) = \frac{\bar{\rho}\bar{c}^2}{\bar{u}}$$

$$f_4(\varphi) = - \frac{(\gamma-1)}{2\bar{c}^2} \frac{d\bar{u}^2}{d\varphi}$$

$$f_5(\varphi) = \frac{3}{2} \left[1 + \frac{\gamma-1}{2} \frac{\bar{u}^2}{\bar{c}^2} \right] \frac{d\bar{u}^2}{d\varphi}$$

$$f_6(\varphi) = \frac{\bar{\rho}}{2\bar{u}} \left[1 - (2-\gamma) \frac{\bar{u}^2}{\bar{c}^2} \right] \frac{d\bar{u}^2}{d\varphi}$$

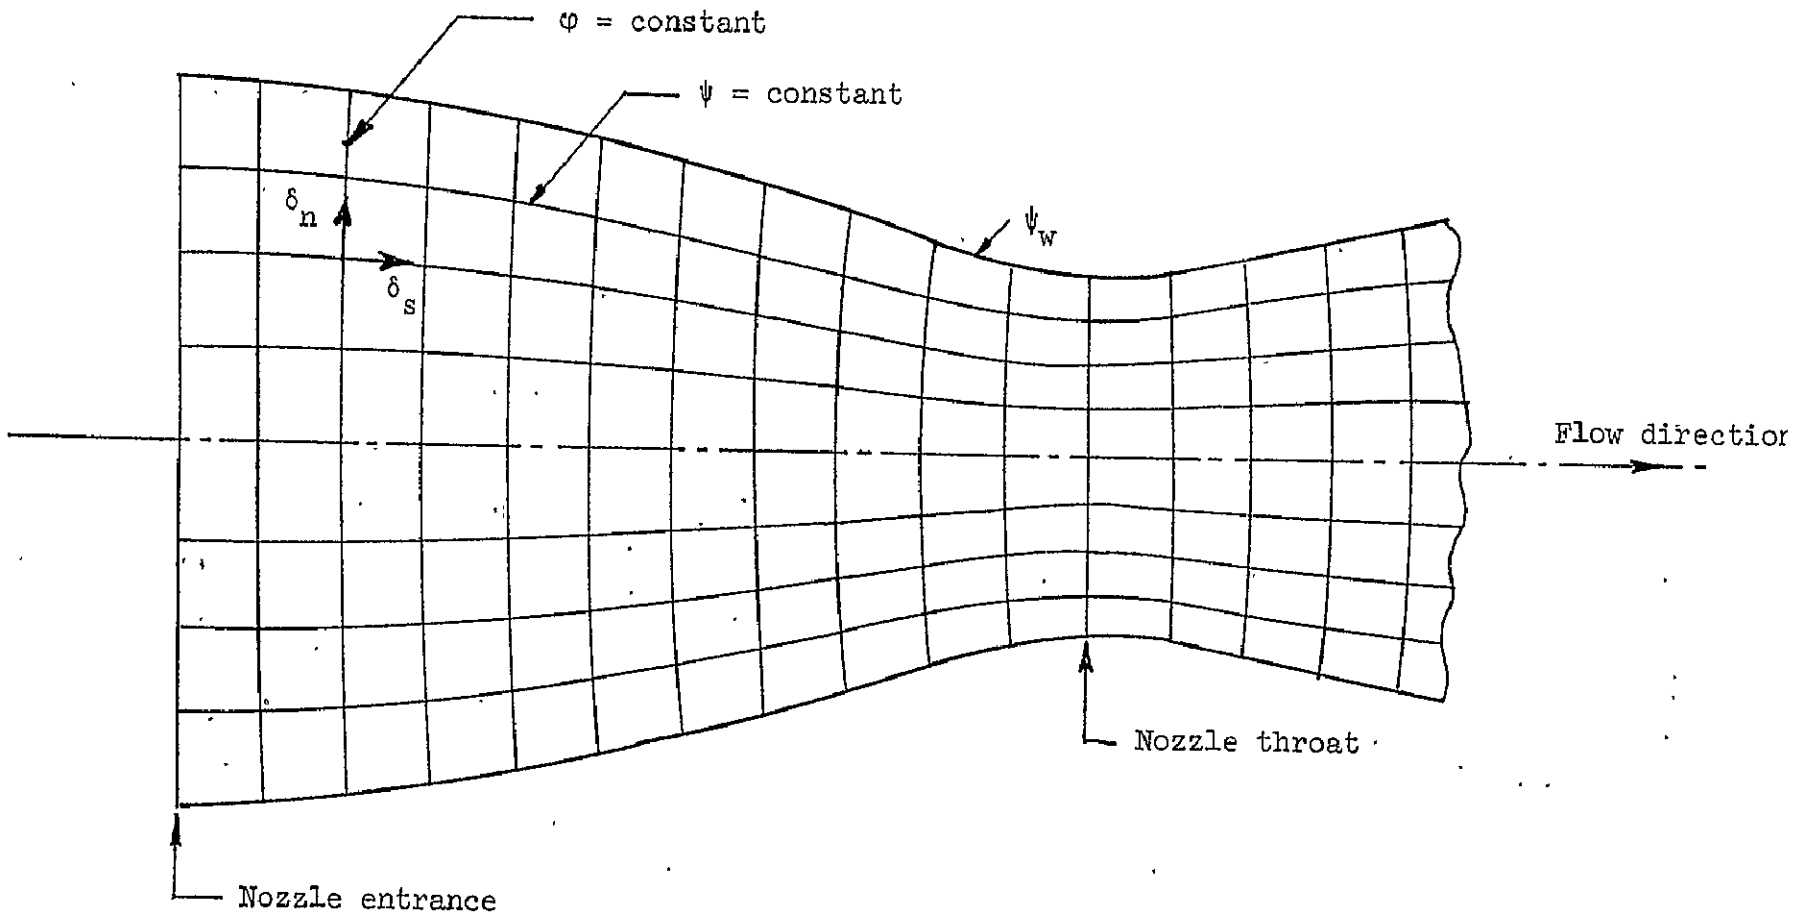


Figure 1. Coordinate System used for the Solution of the Oscillatory Nozzle Flow.

Method of Solution

In the nonlinear combustion instability theories developed by Powell and Zinn (see Refs. 7 - 11) the governing equations were solved by means of an approximate solution technique known as the Galerkin Method, which is a special case of the Method of Weighted Residuals^{14,15}. In these investigations it was shown that the Galerkin Method could be successfully applied in the solution of nonlinear combustion instability problems; its application was straightforward and it required relatively little computation time. Thus the Galerkin Method was also used in the nozzle analysis to determine the nonlinear nozzle admittance relation.

The first step in using the Galerkin Method in the solution of the wave equation (i.e., Eq. (2)) was to express the velocity potential, $\tilde{\phi}'$, as an approximating series expansion. The structure of this series expansion was guided by the experience gained in the nonlinear nozzle admittance studies performed by Zinn and Crocco (see Ref. 5) as well as in the nonlinear combustion instability analyses of Powell and Zinn (see Ref. 10). Thus the velocity potential was expressed as follows:

$$\tilde{\phi}' = \sum_{p=1}^N \left\{ A_p(\varphi) \cos(m\theta) J_m \left[S_{mn} \left(\frac{\psi}{\psi_w} \right)^{\frac{1}{2}} \right] e^{ik_p \omega t} \right\} \quad (4)$$

where the functions $A_p(\varphi)$ are unknown complex functions of the axial variable φ , and θ - and ψ -dependent eigenfunctions were determined from the first-order (i.e., linear) solutions by Zinn⁵. For each value of the index p , there corresponds the mode numbers $m(p)$ and $n(p)$ as well as the number k_p . This correspondence is illustrated in the table below for a three-term expansion consisting of the first tangential (1T), second tangential (2T), and first radial (1R) modes.

Table 1. Three-Mode Expansion

p	m(p)	n(p)	k_p	Mode
1	1	1	1	1T
2	2	1	2	2T
3	0	1	2	1R

In the time-dependence, ω is the fundamental frequency which must be specified and the integer k_p gives the frequency of the higher harmonics. The values of k_p for the various modes appearing in Eq. (4) were determined from the results of the nonlinear combustion instability analysis of Powell and Zinn¹⁰. For example it was found that, due to nonlinear coupling between modes, the 2T and 1R modes oscillated with twice the frequency of the 1T mode. Thus in Eq. (4) $k_1 = 1$ and $k_2 = k_3 = 2$. The amplitudes and phases of the various modes depend on the axial location (i.e., φ) in the nozzle through the unknown functions $A_p(\varphi)$.

Next the assumed series expansion for $\tilde{\Phi}'$ (i.e., Eq. (4)) was substituted into the wave equation (i.e., Eq. (2)) to form the residual, $E_N(\tilde{\Phi}')$. According to the Galerkin method, the residual $E_N(\tilde{\Phi}')$ was required to satisfy the following orthogonality conditions:

$$\int_0^T \int_S E_N(\tilde{\Phi}') e^{-ik_j \omega t} \cos m\theta J_m \left[S_{mn} \left(\frac{\psi}{\psi_w} \right)^{\frac{1}{2}} \right] dS dt = 0 \quad (5)$$

$$j = 1, 2, \dots, N..$$

where N is the number of terms in the series expansions of the dependent variables. The weighting functions in Eq. (5) correspond to the assumed time and space dependences of the terms that appear in the series expansion.

The time integration is performed over one period of oscillation, $T = 2\pi/\omega$, while the spatial integration is performed over any surface of $\varphi = \text{constant}$ in the nozzle (in Eq. (5) dS indicates an incremental area on this surface).

Evaluating the spatial and temporal integrals in Eq. (5) yielded a system of N nonlinear, second order, coupled, complex ordinary differential equations to be solved for the complex amplitude functions $A_p(\varphi)$. Unfortunately these equations were not quasi-linear; that is, the highest order derivatives appeared in the nonlinear terms. This greatly complicated the numerical solution of these equations, thus an additional approximation was made to obtain a quasi-linear system of equations.

This additional approximation was based on the well-known fact that most transverse instabilities behave like the first tangential (1T) mode. Based on the results of the recent nonlinear combustion instability theory¹¹, it was assumed that the amplitude of the 1T mode was considerably larger than the amplitudes of the remaining modes in the series solution. Through an order of magnitude analysis correct to second order, the original non-quasilinear system of equations was reduced to the following linear inhomogeneous system of equations:

$$H_1(\varphi) \frac{d^2 A_1}{d\varphi^2} + M_1(\varphi) \frac{dA_1}{d\varphi} + N_1(\varphi) A_1(\varphi) = 0 \quad (6)$$

$$H_p(\varphi) \frac{d^2 A_p}{d\varphi^2} + M_p(\varphi) \frac{dA_p}{d\varphi} + N_p(\varphi) A_p(\varphi) = I_p \left\{ A_1, \frac{dA_1}{d\varphi}, \frac{d^2 A_1}{d\varphi^2} \right\}$$

$$p = 2, 3, \dots, N$$

where

$$H_p(\varphi) = \bar{u}^2(\bar{c}^2 - \bar{u}^2) \quad (7)$$

$$M_p(\varphi) = -\bar{u}^2 \left[\frac{1}{\bar{c}^2} \frac{d\bar{u}^2}{d\varphi} + 2ik_p \omega \right]$$

$$N_p(\varphi) = \left[-\frac{S_p^2}{2\psi_w} \bar{\rho} \bar{u} \bar{c}^2 - \frac{\gamma-1}{2} ik_p \omega \frac{\bar{u}^2}{\bar{c}^2} \frac{d\bar{u}^2}{d\varphi} + k_p^2 \omega^2 \right]$$

and I_p are inhomogeneous terms which are functions of φ and the amplitude of the 1T mode, $A_1(\varphi)$.

It can be seen that the above equations are decoupled with respect to the 1T mode; that is, the solution for A_1 can be obtained independently of the amplitudes of the other modes. Thus to second order the nozzle nonlinearities do not affect the 1T mode. On the other hand, the nozzle nonlinearities influence the amplitudes of the higher modes (i.e., A_2 and A_3) by means of the inhomogeneous terms in the equations for the higher modes.

Derivation of Admittance Relations

It has been shown (see Refs. (12) and (13)) that the solution of Eq. (6) can be expressed as the sum of a homogeneous solution $A_p^{(h)}$ and a particular solution of the inhomogeneous equation $A_p^{(i)}$ as follows:

$$A_p(\varphi) = K_{1p} A_p^{(h)}(\varphi) + A_p^{(i)}(\varphi) \quad (8)$$

Using this result a nonlinear admittance relation to be used as a boundary condition in nonlinear combustion instability analyses was derived. Noting that the velocity potential $\tilde{\Phi}'$ given by Eq. (5) is a summation of partial potentials Φ'_p where

$$\bar{\Phi}'_p = A_p(\varphi) \cos(m\theta) J_m \left[S_{mm} \left(\frac{\psi}{\psi_w} \right) \right] e^{ik_p z} e^{i\omega t} \quad (9)$$

a nozzle admittance relation can be written for each of the partial potentials. This is done by introducing Eq. (8) into Eq. (9), taking partial derivatives with respect to z and t and eliminating K_1 between the resulting equations. The resulting admittance relations are given by:

$$B_N(\bar{\Phi}') = \frac{\partial \bar{\Phi}'_p}{\partial z} + \gamma Y_p \frac{\partial \bar{\Phi}'_p}{\partial t} \quad (10)$$

$$+ \bar{u}_e \bar{c}_e^2 \left\{ \cos(m\theta) J_m \left[S_{mm} \left(\frac{\psi}{\psi_w} \right)^{\frac{1}{2}} \right] e^{ik_p \omega t} \right\} \Gamma_p = 0$$

where

$$Y_p = \left(\frac{i \bar{u}_e}{\sqrt{k_p \omega}} \right) \frac{1}{A_p^{(h)}} \frac{dA_p^{(h)}}{d\varphi} \quad p = 1, 2, \dots, N \quad (11)$$

$$\Gamma_p = \frac{1}{\bar{c}_e^2 A_p^{(h)}} \left[A_p^{(i)} \frac{dA_p^{(h)}}{d\varphi} - A_p^{(h)} \frac{dA_p^{(i)}}{d\varphi} \right] \quad p = 2, 3, \dots, N \quad (12)$$

Equation (10) is the nonlinear nozzle admittance relation to be used as the boundary condition at the nozzle entrance plane in nonlinear stability analyses of rocket combustors. The quantities Y_p and Γ_p are, respectively, the linear and nonlinear admittance coefficients for the p th mode. The nonlinear admittance, Γ_p , represents the effect of nozzle nonlinearities upon the nozzle response, and it is zero when nonlinearities are absent (i.e., for the LF mode).

It can easily be shown that when the Mach number at the nozzle entrance is small, Eq. (10) can be expressed, correct to second order, as:

$$U_p - \frac{Y_p}{P_p} P_p = - \bar{u}_e \bar{c}_e^2 \Gamma_p \quad (13)$$

where U_p and P_p are the φ -dependent amplitudes of the axial velocity and pressure perturbations respectively.

In order to use the admittance relation (Eq. (10) or Eq. (13)) in combustion instability analysis, the admittance coefficients Y_p and Γ_p must be determined for the nozzle under consideration. The equations governing these quantities are readily derived from Eqs. (6) using the definition of Γ_p (i.e., Eq. (12)) to obtain:

$$H_p \frac{d\zeta_p}{d\varphi} = - M_p \zeta_p - N_p - H_p \zeta_p^2 \quad (14)$$

$$H_p \frac{d\Gamma_p}{d\varphi} = \left(- H_p \zeta_p + \frac{\gamma-1}{2c^2} \frac{d\bar{u}^2}{d\varphi} H_p - M_p \right) \Gamma_p - \frac{I_p}{c^2} \quad (15)$$

where

$$\zeta_p = \frac{1}{A_p^{(h)}} \frac{dA_p^{(h)}}{d\varphi} \quad (16)$$

Calculation of the Nozzle Response

To obtain the nozzle response for any specific nozzle, Eqs. (14) and (15) are solved in the following manner. As pointed out earlier, the non-linear terms vanish for the 1T mode (i.e., $\Gamma_1 = 0$, $I_1 = 0$) and it is only necessary to solve Eq. (14) to obtain ζ_1 (and hence Y_1) at the nozzle entrance. Since Eq. (14) does not depend on the higher modes, it can be solved independently for ζ_1 . Once ζ_1 has been determined both Eqs. (14)

and (15) must be solved for the other modes. In order to do this, the amplitude $A_1(\varphi)$ must be determined since Eq. (15) depends on $A_1(\varphi)$ and its derivatives through $I_p(\varphi)$. Once $\zeta_1(\varphi)$ is known, $A_1(\varphi)$ is determined by numerically integrating Eq. (16) where the constant of integration is determined by the specified value of the pressure amplitude $|p_1|$ (of the 1T mode) at the nozzle entrance. The value of A_1 thus found is introduced into Eq. (15) which is then solved for Γ_p .

Since Eqs. (14) and (15) are first order ordinary differential equations, the numerical integration of these equations must start at some initial point where the initial conditions are known, and terminate at the nozzle entrance where the admittance coefficients Y_p and Γ_p are needed. Since the equations are singular at the throat, the integration is initiated at a point that is located a short distance upstream of the throat. The needed initial conditions are obtained by expanding the dependent variables in a Taylor series about the throat ($\varphi = 0$).

In Eqs. (14) and (15), the quantities H_p , M_p , N_p and I_p are functions of the steady-state flow variables in the nozzle and these must be computed before performing the numerical integration to obtain ζ_p and Γ_p . For a specified nozzle profile, the steady-state quantities are computed by solving the quasi-one-dimensional isentropic steady-state equations for the nozzle flow. Figure 2 shows the nozzle profile used in these computations. All of the length variables have been non-dimensionalized with respect to the radius of the combustion chamber to which the nozzle is attached, and hence $r_c = 1$. At the throat r_{th} is fixed by the Mach number at the nozzle entrance plane. The nozzle profile is smooth and is completely specified by r_{cc} , r_{ct} and θ_1 , which are respectively the radius of curvature at the chamber, radius of curvature at the throat and slope of the central conical section. The steady-state equations are integrated using equal steps in steady-state potential φ by beginning at the throat and continuing to the nozzle entrance where the radius of the wall equals 1.

A computer program, NOZADM, has been developed to numerically solve Eqs. (14) - (16) and calculate the linear and nonlinear nozzle admittances. A computer code and description of this program is given in Appendix A.

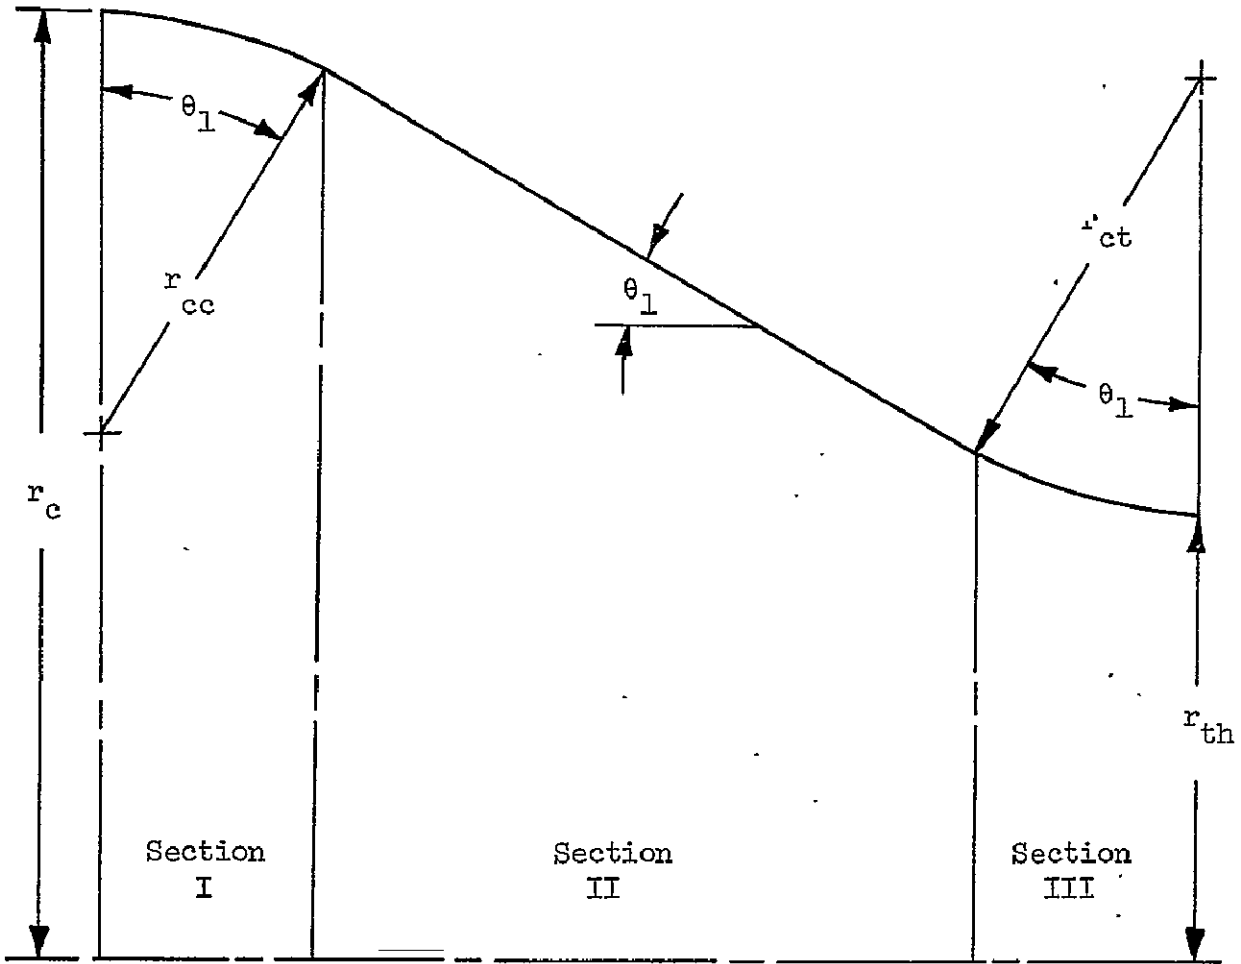


Figure 2. Nozzle Profile Used in Calculating Admittances.

COMBUSTION INSTABILITY ANALYSIS

Combustion Chamber Model

This section describes the application of the nonlinear nozzle admittance theory developed in the previous section to the analysis of combustion instability in a liquid-propellant rocket combustor. A cylindrical combustor with uniform injection of propellants at one end and a slowly-convergent nozzle at the other end was considered. The liquid propellant rocket motor that was analyzed is shown in Figure 3. The analysis of such a motor for a linear nozzle response is given in Ref. (11).

The oscillatory flow in the combustion chamber is described by the three-dimensional, second-order, potential theory developed in Ref. (11). In this theory the velocity potential $\bar{\phi}$ must satisfy the following nonlinear partial differential equation:

$$\begin{aligned}
 E_c(\bar{\phi}') &= \bar{\phi}'_{rr} + \frac{1}{r} \bar{\phi}'_r + \frac{1}{r^2} \bar{\phi}'_{\theta\theta} + \bar{\phi}'_{zz} - \bar{\phi}'_{tt} \\
 &- 2\bar{\phi}'_r \bar{\phi}'_{rt} - \frac{2}{r} \bar{\phi}'_\theta \bar{\phi}'_{\theta t} - 2\bar{\phi}'_z \bar{\phi}'_{zt} \\
 &- (\gamma-1) \bar{\phi}'_t \left(\bar{\phi}'_{rr} + \frac{1}{r} \bar{\phi}'_r + \frac{1}{r^2} \bar{\phi}'_{\theta\theta} + \bar{\phi}'_{zz} \right) \\
 &- 2\bar{u} \bar{\phi}'_{zt} - (\gamma+1) \bar{\phi}'_t \frac{d\bar{u}}{dz} \\
 &+ \gamma n \frac{d\bar{u}}{dz} \left[\bar{\phi}'_t(r, \theta, z, t) - \bar{\phi}'_t(r, \theta, z, t - \bar{\tau}) \right] = 0
 \end{aligned} \tag{17}$$

where Crocco's time-lag ($n - \tau$) model is used to describe the distributed unsteady combustion process. In the present analysis the linear nozzle boundary condition used in the previous analysis (see Eq. (2) of Ref. 11) was replaced by the nonlinear admittance condition given by Eq. (10).

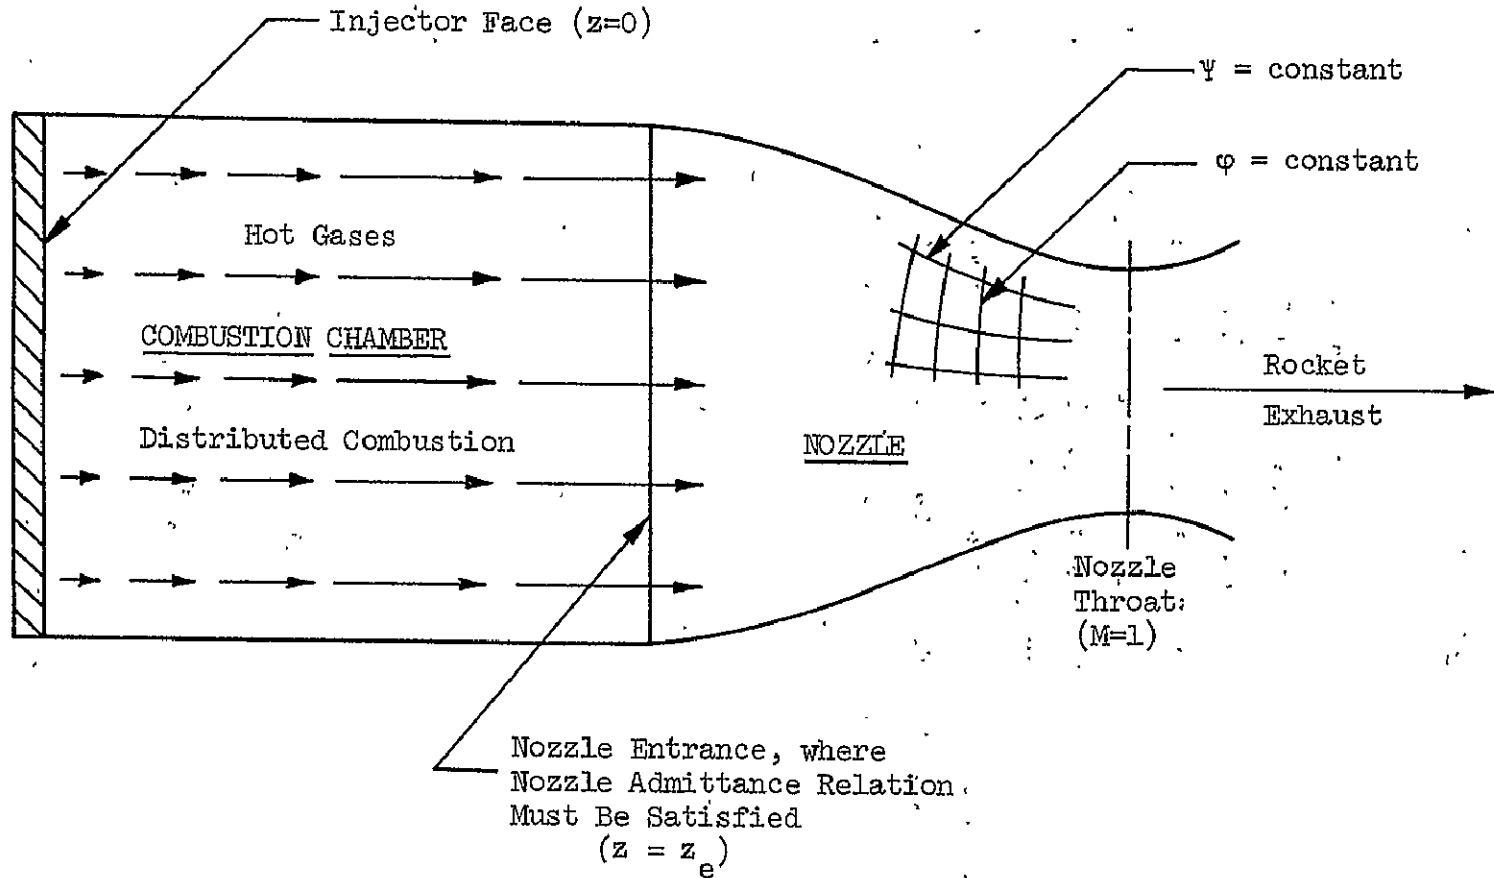


Figure 3. Typical Mathematical Model of a Liquid Rocket Motor.

Application of Galerkin Method

Assuming a series expansion of the form (see Ref. 11):

$$\tilde{\Phi}' = \sum_{p=1}^N \tilde{\Phi}_p = \sum_{p=1}^N B_p(t) \cos(m\theta) J_m(S_{mm}r) \cosh(ib_p z) \quad (18)$$

the Galerkin method was used to obtain approximate solutions to Eq. (17). In Eq. (18) the radial and azimuthal eigenfunctions are the same as those used in the nozzle analysis (see Eq. 4). Unlike the nozzle analysis where the unknown coefficients $A_p(\varphi)$ were functions of axial location in the nozzle, the unknown coefficients $B_p(t)$ in Eq. (18) are functions of time. The b_p appearing in the axial dependence are the axial acoustic eigenvalues for a chamber with a solid wall boundary condition at the injector end and a linear nozzle admittance condition at the other end.

The unknown amplitudes $B_p(t)$ were determined by substituting the assumed series expansion (i.e., Eq. (18)) into the wave equation (i.e., Eq. (17)) to form the residual $E_c(\tilde{\Phi}')$. Similarly, the series expansion was substituted into the nozzle boundary condition (i.e., Eq. (10)) to obtain the boundary residual $B_N(\tilde{\Phi}')$. The residuals $E_c(\tilde{\Phi}')$ and $B_N(\tilde{\Phi}')$ were required to satisfy the following orthogonality condition (see Ref. 11):

$$\int_0^{z_e} \int_0^{2\pi} \int_0^1 E_c(\tilde{\Phi}') Z_j^*(z) \Theta_j(\theta) R_j(r) r dr d\theta dz \quad (19)$$

$$- \int_0^{2\pi} \int_0^1 B_N(\tilde{\Phi}') Z_j^*(z_e) \Theta_j(\theta) R_j(r) r dr d\theta = 0$$

$$j = 1, 2, \dots, N$$

where the Z_j^* are the complex conjugates of the axial acoustic eigenfunctions appearing in Eq. (18), and Θ_j and R_j are the azimuthal and radial eigenfunctions respectively.

Evaluating the spatial integrals in Eqs. (19) gave the following system of N complex nonlinear equations to be solved for the amplitude functions, $B_p(t)$:

$$\sum_{p=1}^N \left\{ C_0(j,p) \frac{dB_p}{dt^2} + C_1(j,p) B_p(t) + \left[C_2(j,p) - nC_3(j,p) \right] \frac{dB_p}{dt} \right. \quad (20)$$

$$\left. + nC_3(j,p) \frac{d[B_p(t-\bar{\tau})]}{dt} + C_4(j,p) e^{ik_p \omega t} \right\}$$

$$+ \sum_{p=1}^N \sum_{q=1}^N \left\{ D_1(j,p,q) B_p \frac{dB_q}{dt} + D_2(j,p,q) B_p \frac{dB_q^*}{dt} \right.$$

$$\left. + D_3(j,p,q) B_p^* \frac{dB_q}{dt} + D_4(j,p,q) B_p^* \frac{dB_q^*}{dt} \right\} = 0$$

$$j = 1, 2, \dots, N$$

In the above equation, the term $C_4(j,p) e^{ik_p \omega t}$ results from the presence of nozzle nonlinearities (i.e. the term involving Γ_p in Eq. (10)).

The coefficients appearing in Eq. (20) were determined by evaluating the various integrals of hyperbolic, trigonometric, and Bessel functions that arise from the spatial integrations indicated in the Galerkin orthogonality conditions. These were calculated by the computer program COEFFS3D (Appendix B).

The time-dependent behavior of an engine following the introduction of a disturbance is determined by specifying the form of the initial disturbance and then following the subsequent behavior of the individual modes by numerically integrating Eqs. (20). Once the time-dependence of the individual modes is known, the velocity potential, $\tilde{\phi}$, is calculated from Eq. (18).

The pressure perturbation at any location within the chamber is related to

Φ' by the following second-order momentum equation (see Ref. 11):

$$p' = -\gamma \left[\tilde{\Phi}'_t + u\tilde{\Phi}'_z + \frac{1}{2} (\tilde{\Phi}'_r)^2 + \frac{1}{2r^2} (\tilde{\Phi}'_\theta)^2 + \frac{1}{2} (\tilde{\Phi}'_z)^2 - \frac{1}{2} (\tilde{\Phi}'_t)^2 \right] \quad (21)$$

Numerical Solution Procedure

Equation (20) is a system of N ordinary differential equations which describes the behavior of the N complex time-dependent functions, $B_p(t)$. Beginning with a sinusoidal initial disturbance, a fourth order Runge-Kutta scheme was employed for the numerical integration of this system of equations. In the present calculations, a three-mode series expansion consisting of the first tangential (1T), second tangential (2T) and first radial mode (1R) was used. This is the same series expansion used in the stability calculations presented in Refs. (10) and (11). The numerical integration of Eqs. (20) is performed by the computer program, LCYC3D, which is described in Appendix C.

The oscillatory flow in the combustor and nozzle are mutually dependent on each other; that is, the combustion chamber analysis requires knowledge of the nozzle admittances, but these nozzle admittances depend on the frequency of oscillation and the pressure amplitude, which can only be determined by the combustion chamber analysis. Thus an iterative solution technique is used. In this procedure, linear nozzle admittances are first calculated for the specified nozzle geometry. Next, the combustion chamber analysis is carried out using these linear nozzle admittances ($\Gamma_p = 0$), and limit-cycle frequency and pressure amplitude of the 1T mode at the nozzle entrance are determined. This information is then used in the nozzle theory to determine the nonlinear nozzle admittances which are used in the chamber analysis to calculate new limit-cycle frequencies and pressure amplitude. If the limit-cycle amplitude obtained with the nonlinear nozzle boundary condition is significantly different from the limit-cycle amplitude obtained with the linear nozzle admittances, new values of the nonlinear admittances are calculated and the process is repeated until the change in limit-cycle amplitude is sufficiently small.

RESULTS AND DISCUSSION

Admittance Coefficients

Computations of the admittance coefficients have been performed using a three-term series expansion consisting of the first tangential, second tangential and first radial modes. An Adam-Bashforth predictor-corrector scheme was used to perform the numerical integration, while the starting values needed to apply this method were obtained using a fourth order Runge-Kutta integration scheme. Computations have been performed for several nozzles, at different frequencies and pressure amplitudes of the first tangential mode.

Figure 4 shows the frequency dependence of the linear admittance coefficients for the 1T, 2T, and 1R modes for a typical nozzle ($\theta_1 = 20^\circ$, $r_{cc} = 1.0$, $r_{ct} = 0.9234$; $M = 0.2$). Here, ω is the frequency of the 1T mode, while the frequency of the 2T and 1R modes is 2ω due to nonlinear coupling. Hence the real parts of the linear admittance coefficients for the 2T and 1R modes actually attain their peak values at a higher frequency than that for the 1T mode. The linear admittance coefficients for the 1T mode are in complete agreement with those calculated previously by Bell and Zinn¹⁶.

The frequency dependence of the nonlinear admittance coefficient for the 2T mode is shown in Figure 5 with pressure amplitude of the 1T mode as a parameter. While the behavior of the linear admittance coefficient depends only upon the frequency of oscillations, the behavior of the nonlinear admittance coefficient is seen to depend also on the amplitude of the 1T mode. The absolute values of both Γ_r and Γ_i increase with increasing pressure amplitude of the 1T mode, which acts as a driving force. It is observed that the absolute values of Γ_r and Γ_i vary with frequency in a manner similar to the absolute values of Y_r and Y_i . The frequency dependence of the nonlinear admittance coefficient for the 1R mode is shown in Figure 6 with pressure amplitude of the 1T mode as a parameter.

Figure 7 shows the effect of pressure amplitude upon the magnitude of the ratio of nonlinear admittance coefficient to the linear admittance coefficient for the 2T and 1R modes respectively. This ratio, $|\Gamma/Y|$, increases with increasing pressure amplitude. In the limiting case of $|p_1| = 0$, the nonlinear admittance coefficient is zero for all frequencies as expected.

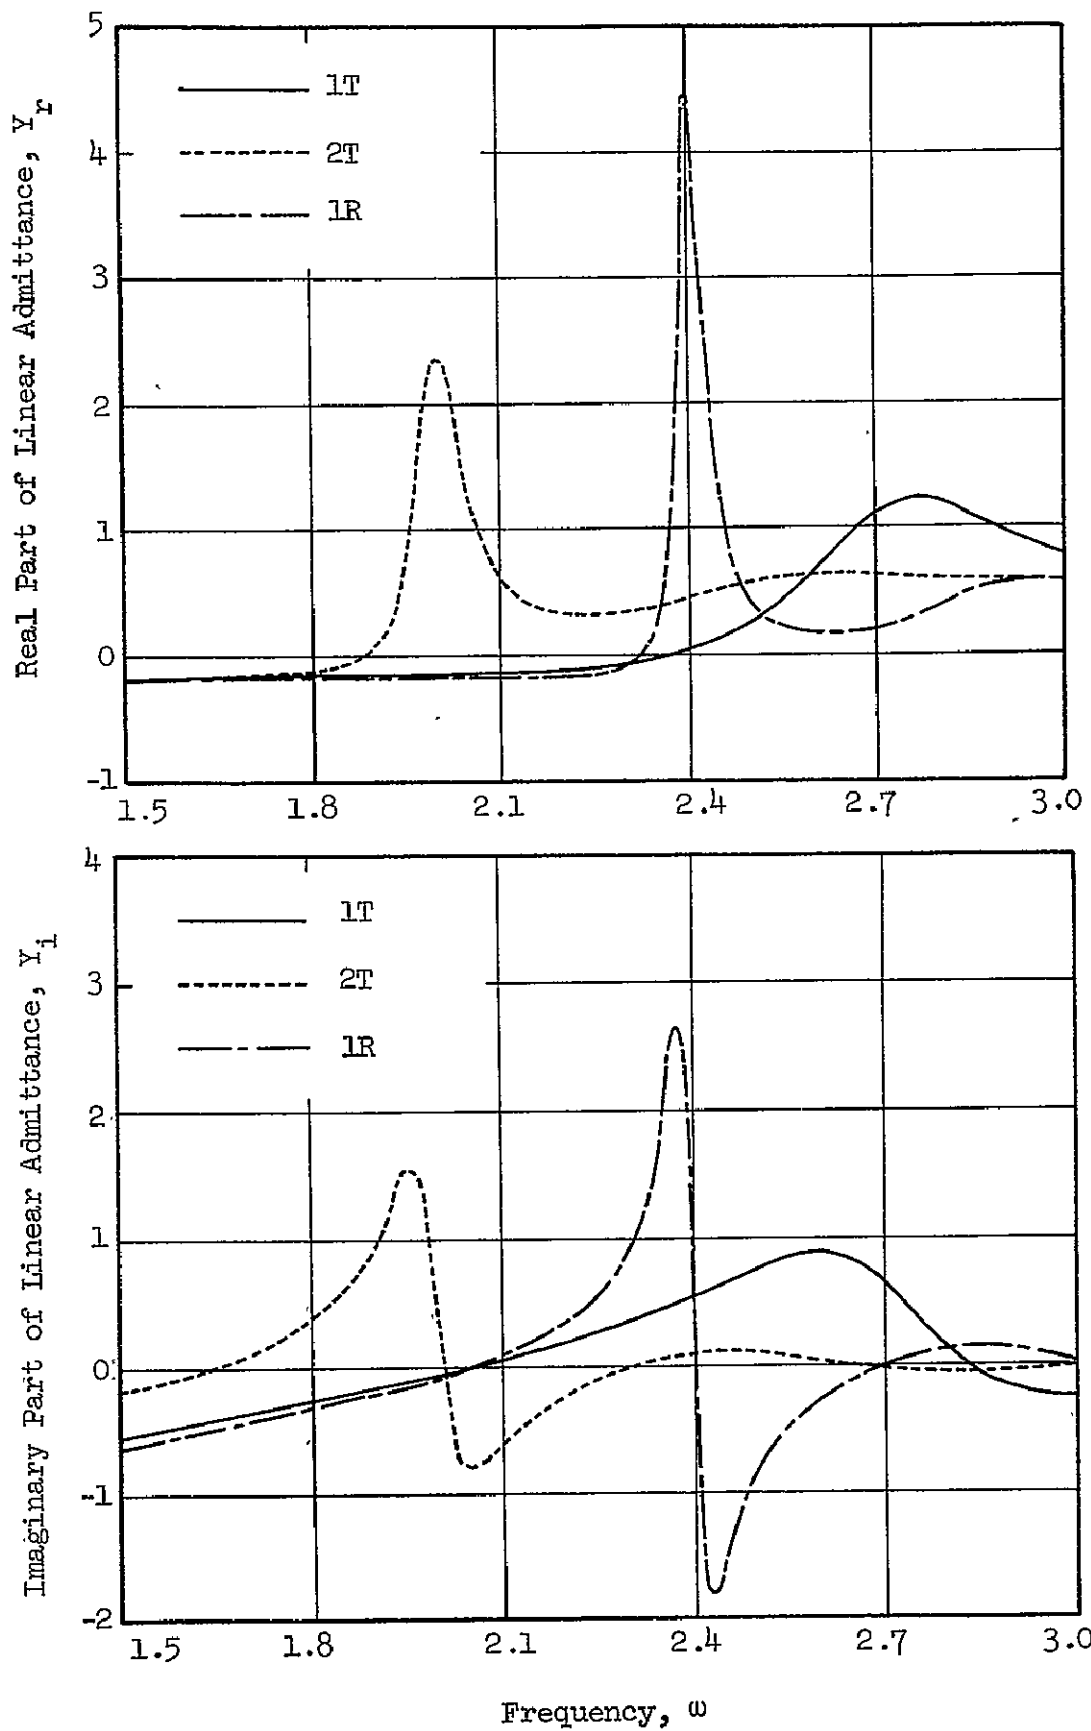


Figure 4. Linear Admittances for the 1T, 2T, and 1R Modes.

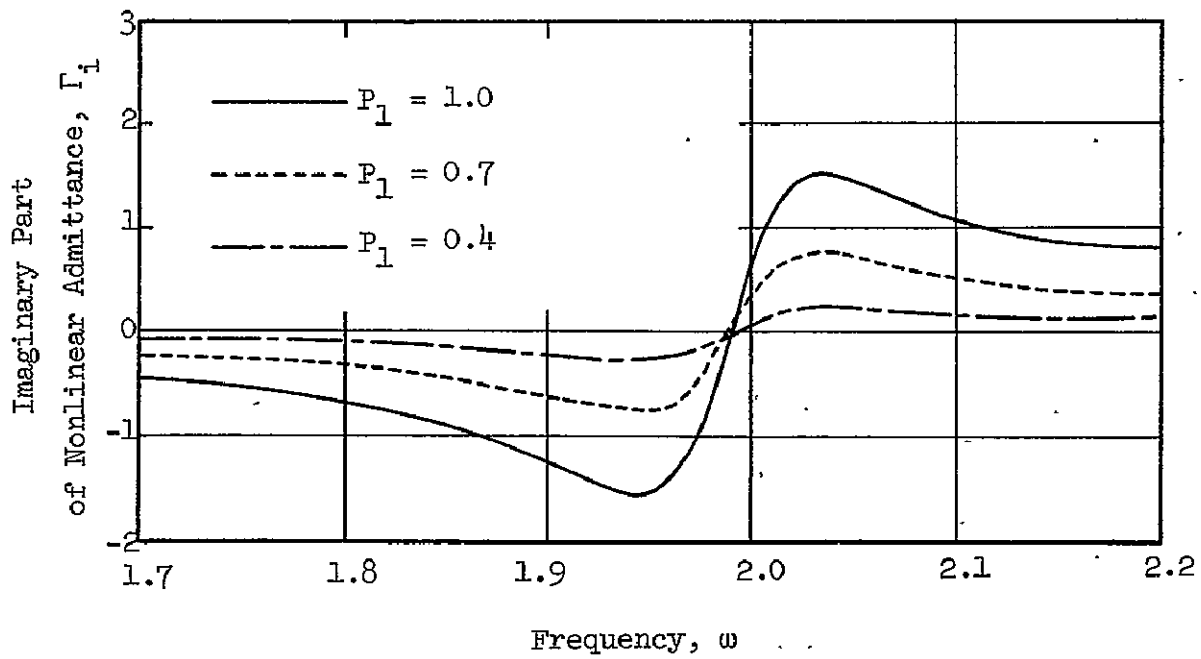
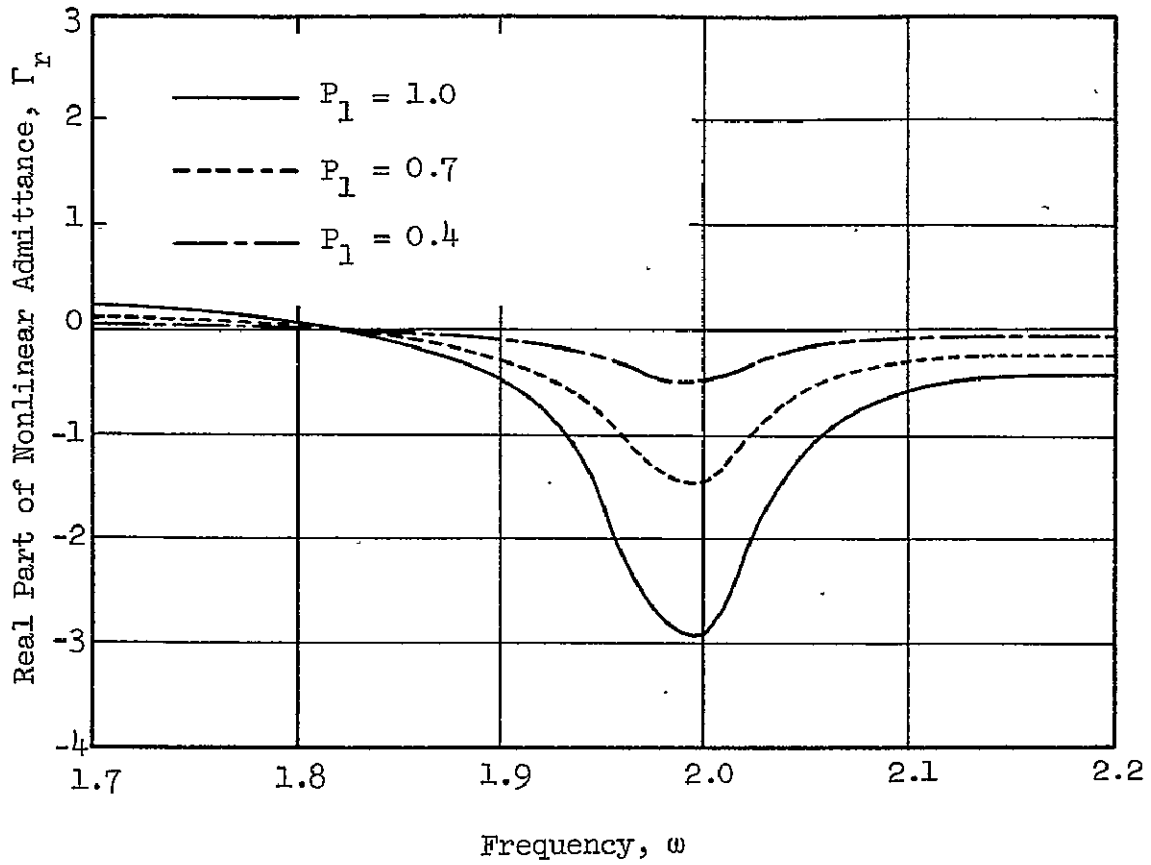


Figure 5. Nonlinear Admittances for the 2T Mode.

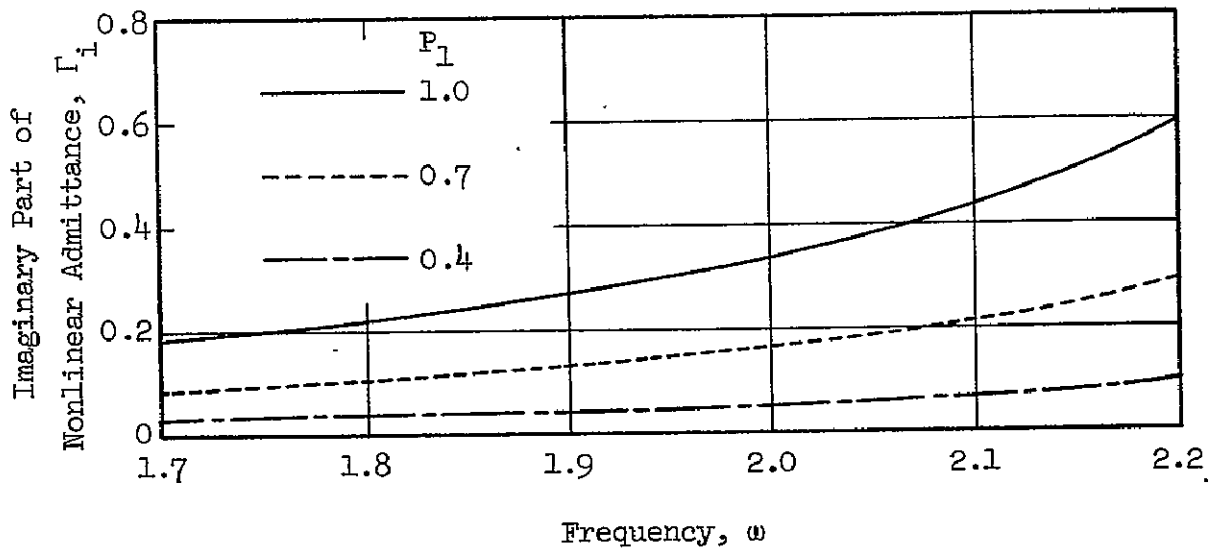
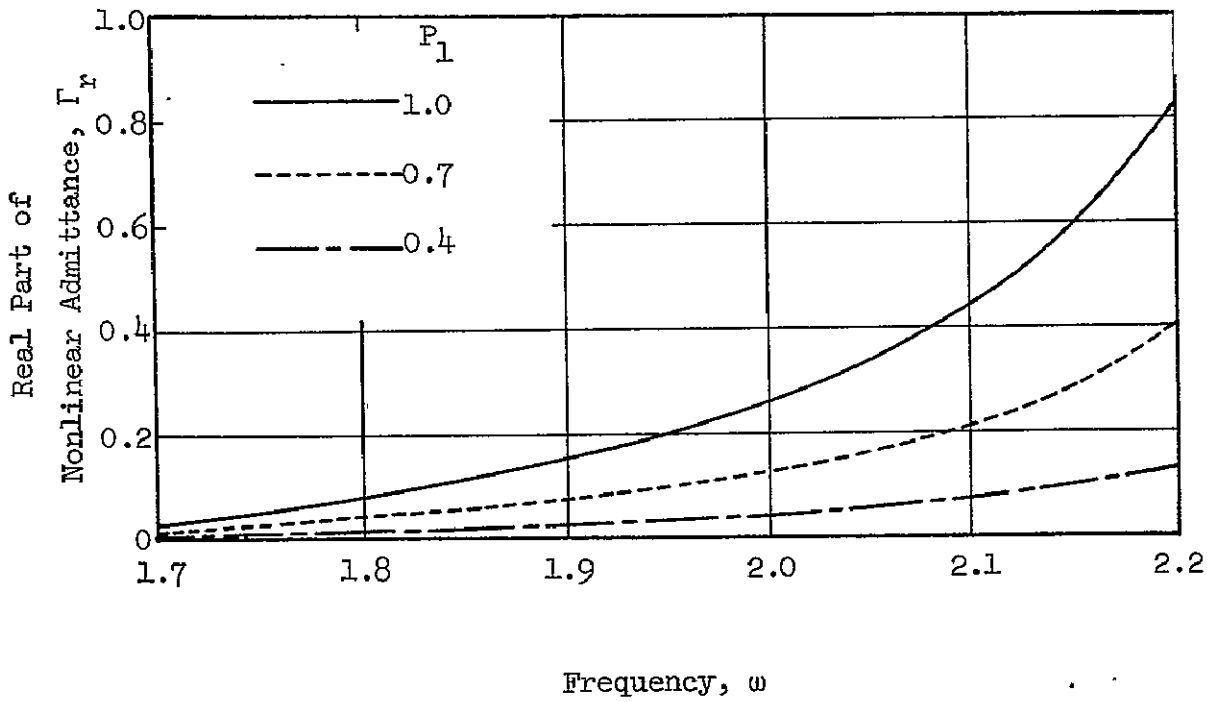


Figure 6. Nonlinear Admittances for the LR Mode.

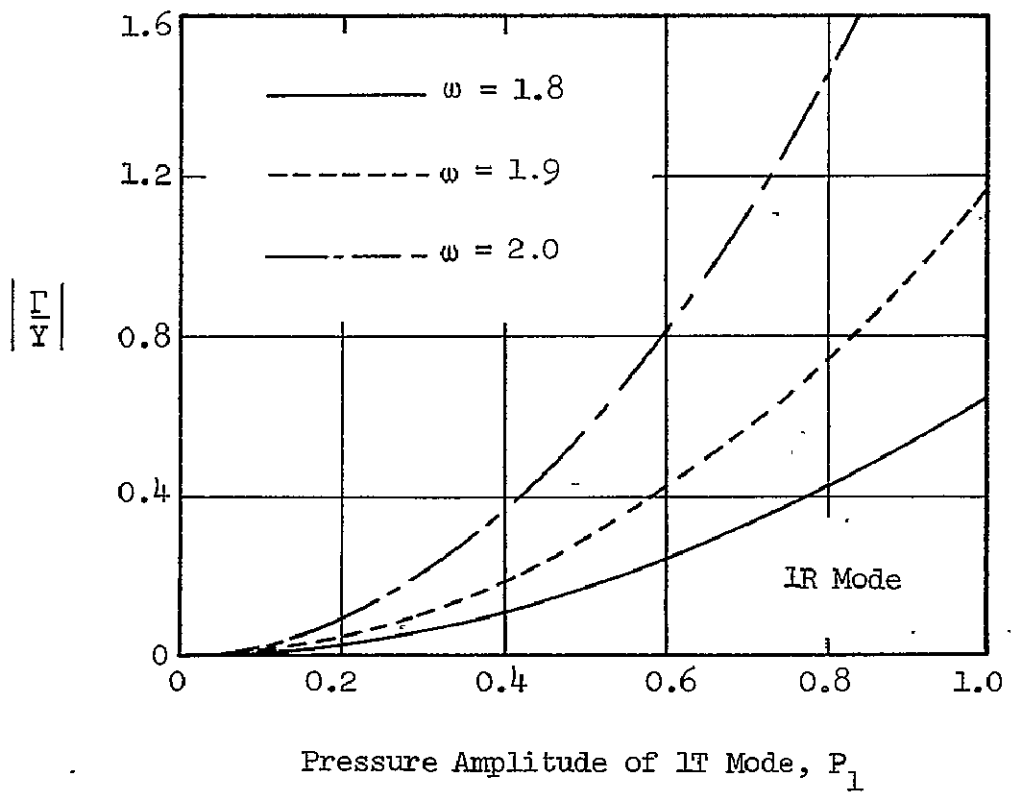
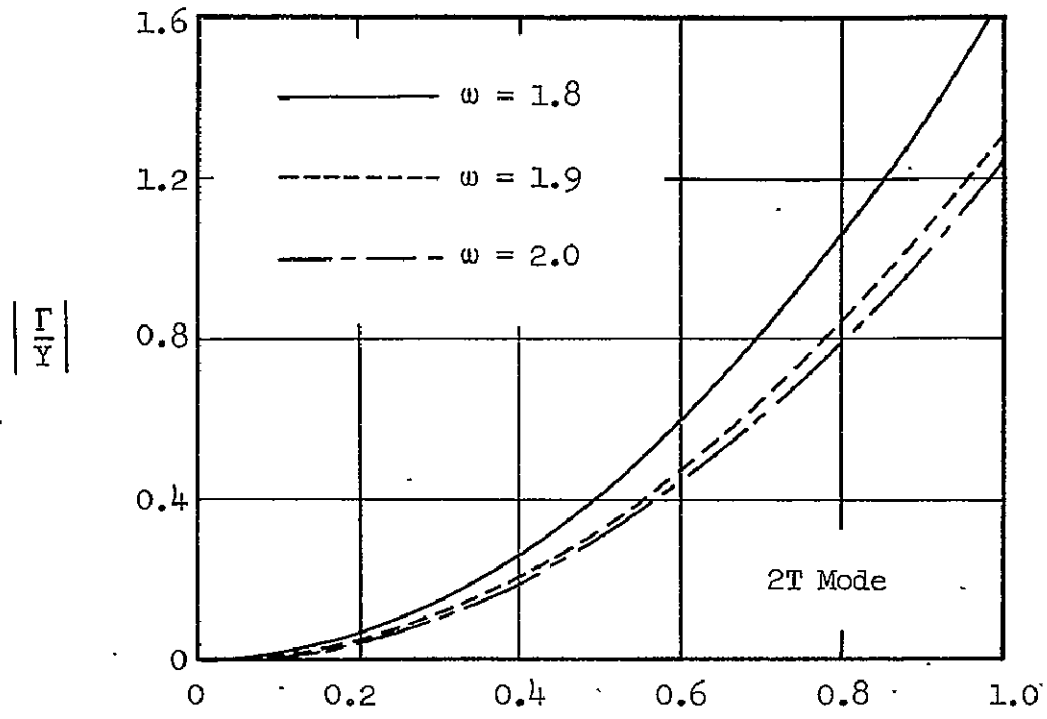


Figure 7. Relative Magnitudes of Linear and Nonlinear Admittances.

Figure 8 shows the influence of entrance Mach number M_e on the nonlinear nozzle admittance coefficients for the 2T and 1R modes respectively. Here the relative magnitudes of the linear and nonlinear admittances (i.e., $|\Gamma/Y|$) are plotted as a function of amplitude of the 1T mode. In each case there is a significant decrease in $|\Gamma/Y|$ with increasing Mach number, thus it appears that the importance of nozzle nonlinearities will be smaller at higher Mach numbers.

The effect of nozzle half-angle on $|\Gamma/Y|$ for the 2T and 1R modes is shown in Figure 9. It is readily seen that for θ_1 between 15 and 45 degrees there is only a slight effect of nozzle half-angle on the relative magnitudes of the linear and nonlinear admittances. However, it should be noted that both the linear and nonlinear theories are restricted to slowly convergent nozzles (i.e., small θ_1).

Figure 10 shows the effect of the nozzle radii of curvature upon the quantity $|\Gamma/Y|$ for the 2T mode. It is observed that a change in the radius of curvature of the nozzle at the throat has an insignificant effect on the relative magnitude of the linear and nonlinear admittances. On the other hand, a similar change in the radius of curvature of the nozzle at the entrance section has considerable effect on the relative magnitude of the linear and nonlinear admittances. Similar results were obtained for the 1R mode.

In summary, the results obtained in the admittance calculations indicate that the magnitude of the nonlinear admittance coefficient is comparable to that of the linear admittance coefficient, especially at large pressure amplitudes. To determine if this result has a significant effect upon combustor stability, calculations were made for typical liquid rocket combustors using the nonlinear admittances. These results were compared with similar calculations using linear admittances. The results of this investigation are discussed in the remainder of this report.

Stability Calculations

Combustion instability calculations have been made using the three mode series consisting of the 1T, 2T, and 1R modes. These calculations have been made for different values of the following parameters: (1) time lag $\bar{\tau}$, (2) interaction index n , (3) steady state Mach number at the nozzle entrance M_e , and (4) chamber length-to-diameter ratio L/D . All of the combustors that

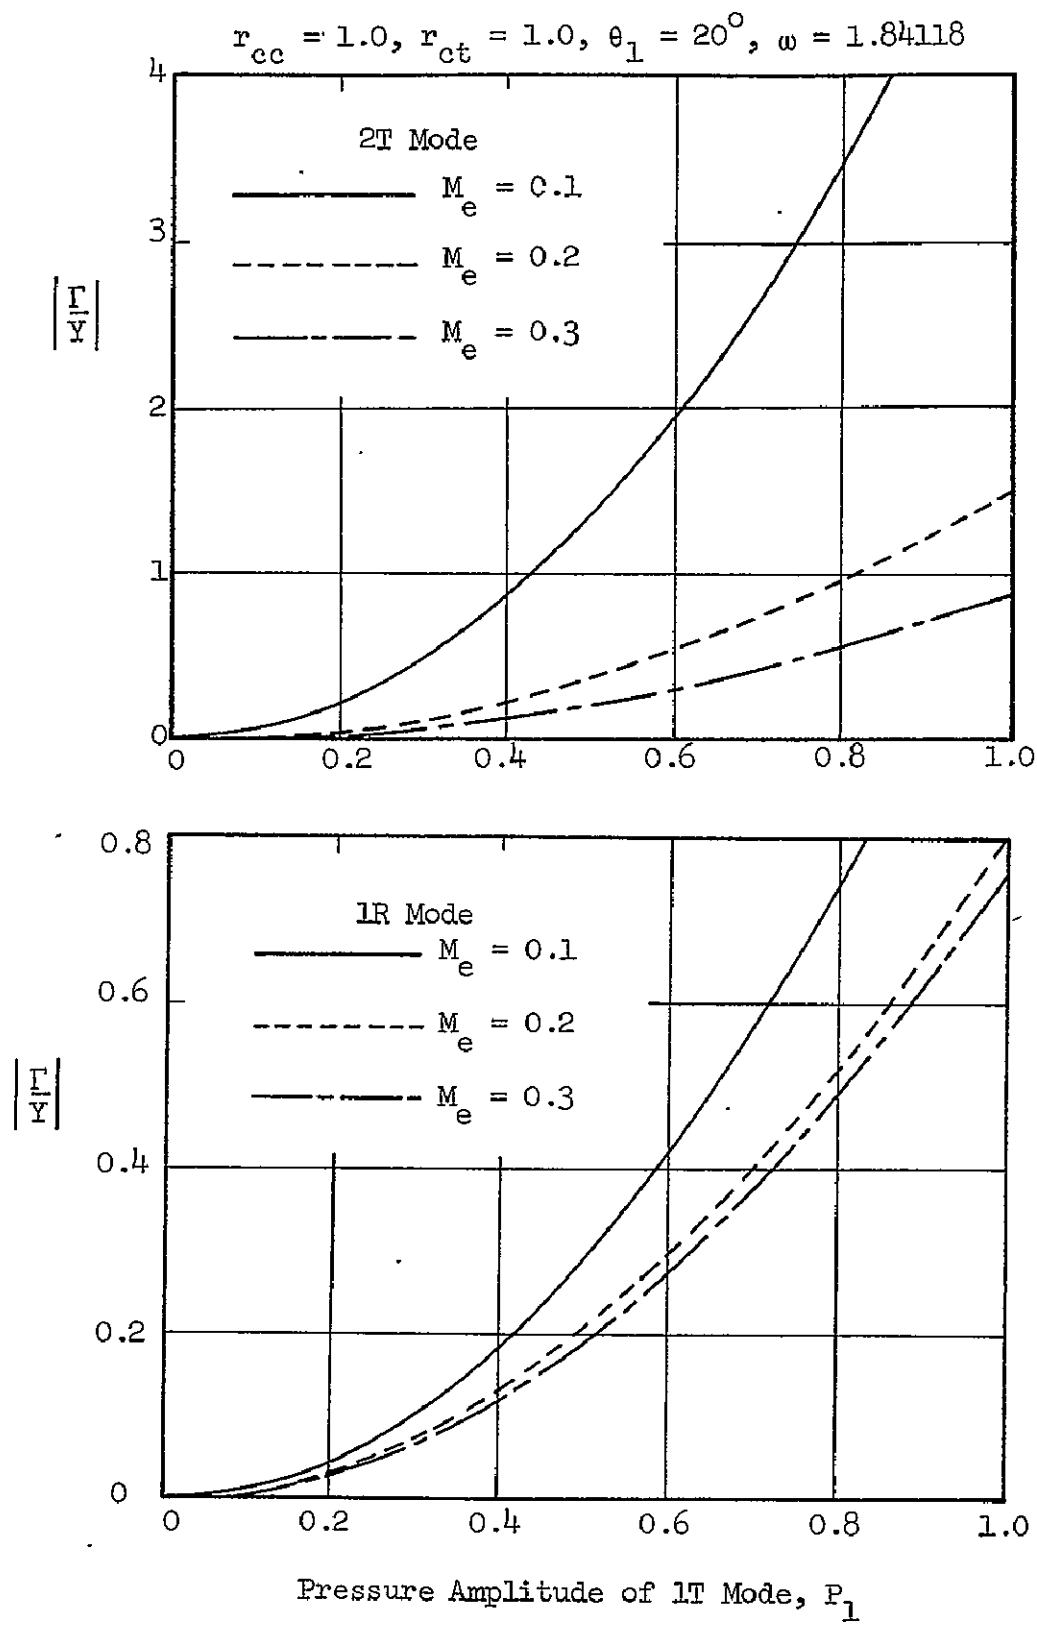


Figure 8. Effect of Entrance Mach Number on the Relative Magnitudes of Linear and Nonlinear Admittances.

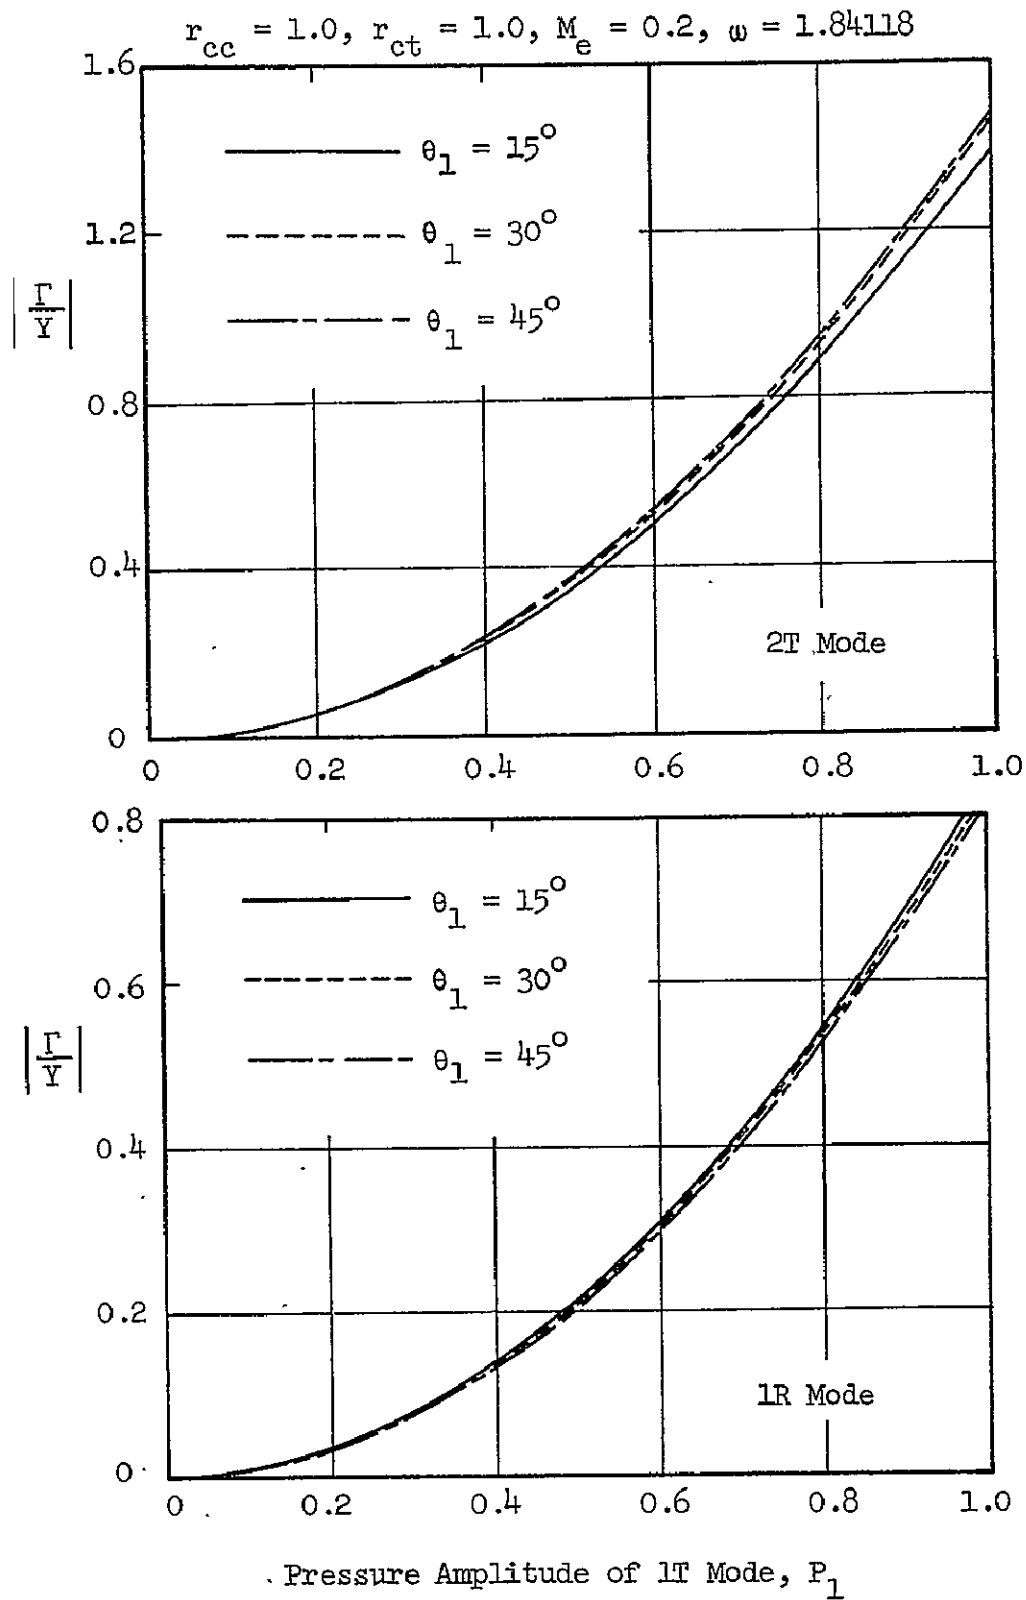


Figure 9. Effect of Nozzle Half-Angle on the Relative Magnitudes of Linear and Nonlinear Admittances.

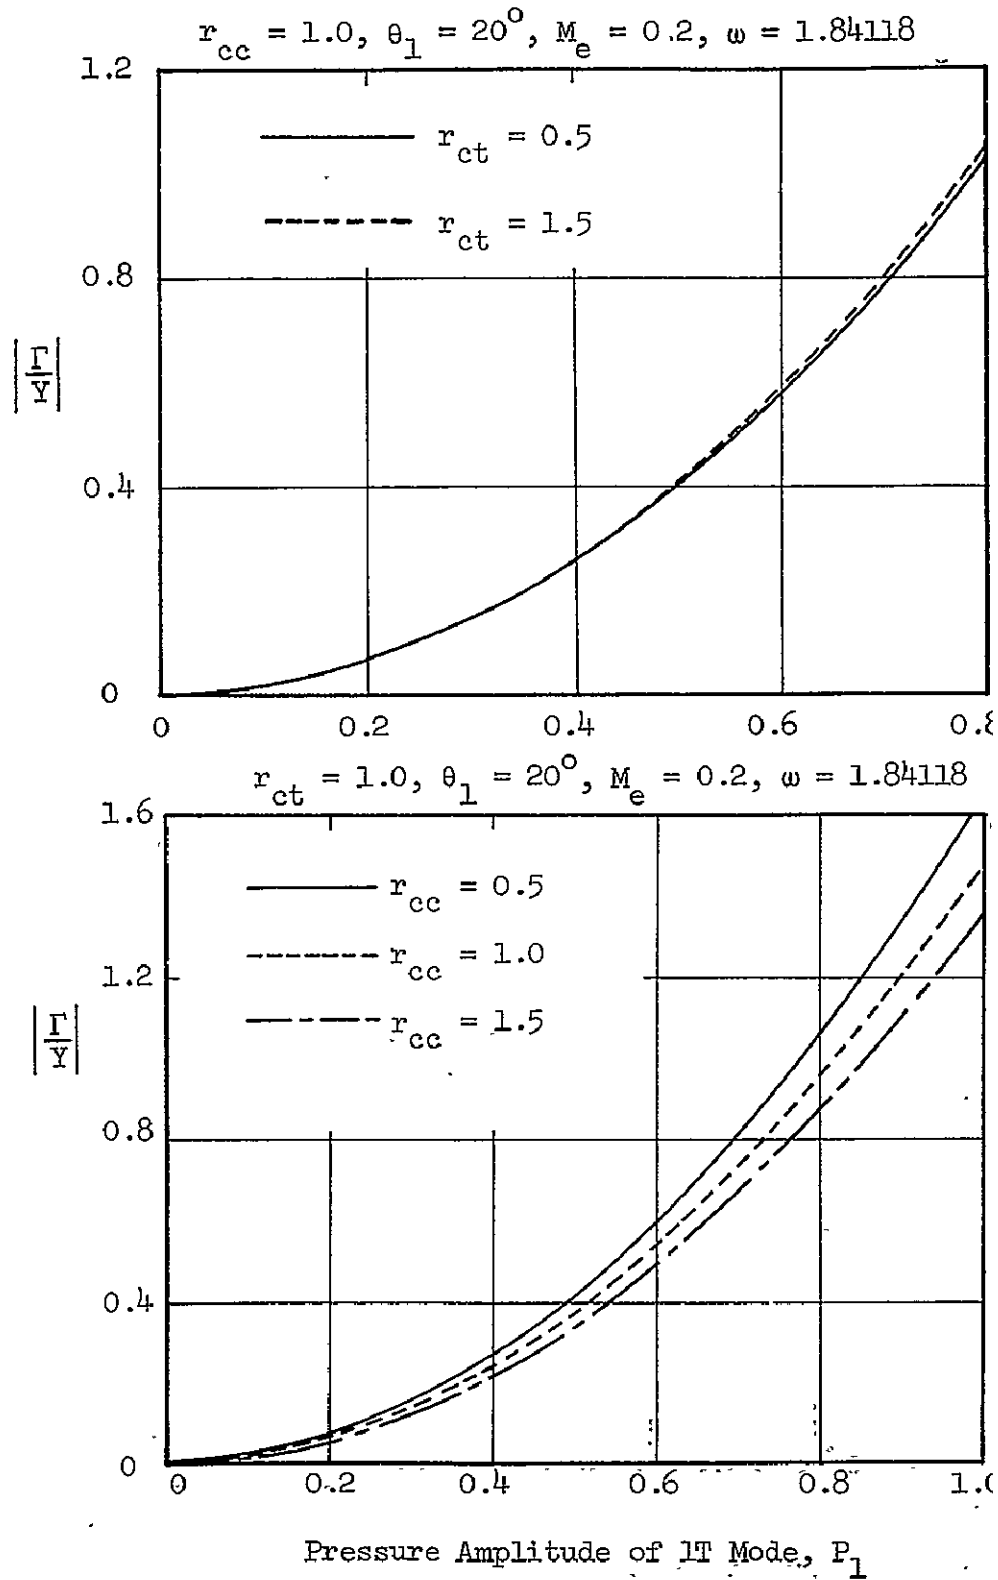


Figure 10. Effect of Nozzle Radii of Curvature on the Relative Magnitudes of Linear and Nonlinear Admittances for the 2T Mode.

have been analyzed are attached to nozzles with the following specifications: radius of curvature of nozzle at the combustion chamber, $r_{cc} = 1.0$, radius of curvature of nozzle at the throat, $r_{ct} = 1.0$; and nozzle half-angle, $\theta_1 = 20^\circ$. In each case, solutions have been obtained with both the linear and nonlinear nozzle admittances.

A typical neutral stability curve is shown in the n - $\bar{\tau}$ plane in Figure 11. Since it was desired to study the limit-cycle behavior of the motor, the values of n and $\bar{\tau}$ considered were chosen from the unstable region of this stability diagram.

Limit-cycle amplitudes and waveforms were calculated for $\bar{\tau} = 1.6$ (resonant conditions) for several values of n as shown in Figure 11. Wall pressure waveforms (antinode) are shown for a mildly unstable case (Point A, $n = 0.52$) and a strongly unstable case (Point B, $n = 0.70$) in Figures 12 and 13. Figure 14 shows limit-cycle amplitude as a function of n for $\bar{\tau} = 1.6$. In each case both linear and nonlinear nozzle admittances were used in the calculations. These results show that the nozzle nonlinearities have only a small effect on the limit-cycle amplitude and waveform even for fairly large amplitude instabilities.

Similar comparisons were made for the off-resonant values of n and $\bar{\tau}$ shown in Figure 11 (see points C, D, E, F). These results also show very little effect of nozzle nonlinearities on the limit-cycle amplitudes for off-resonant oscillations as seen in Figure 15.

Finally, comparisons of limit-cycle amplitudes are shown for various exit Mach numbers in Figure 16 and for various length-to-diameter ratios in Figure 17. Again, limit-cycle amplitudes obtained using the nonlinear nozzle boundary condition agree closely with those obtained using the linear nozzle boundary condition.

CONCLUDING REMARKS

A second-order theory and computer program have been developed for calculating three-dimensional, nonlinear nozzle admittance coefficients to be used in the analysis of nonlinear combustion instability problems. This theory is applicable to slowly convergent, supercritical nozzles under isentropic, irrotational conditions when the combustion chamber oscillations are dominated

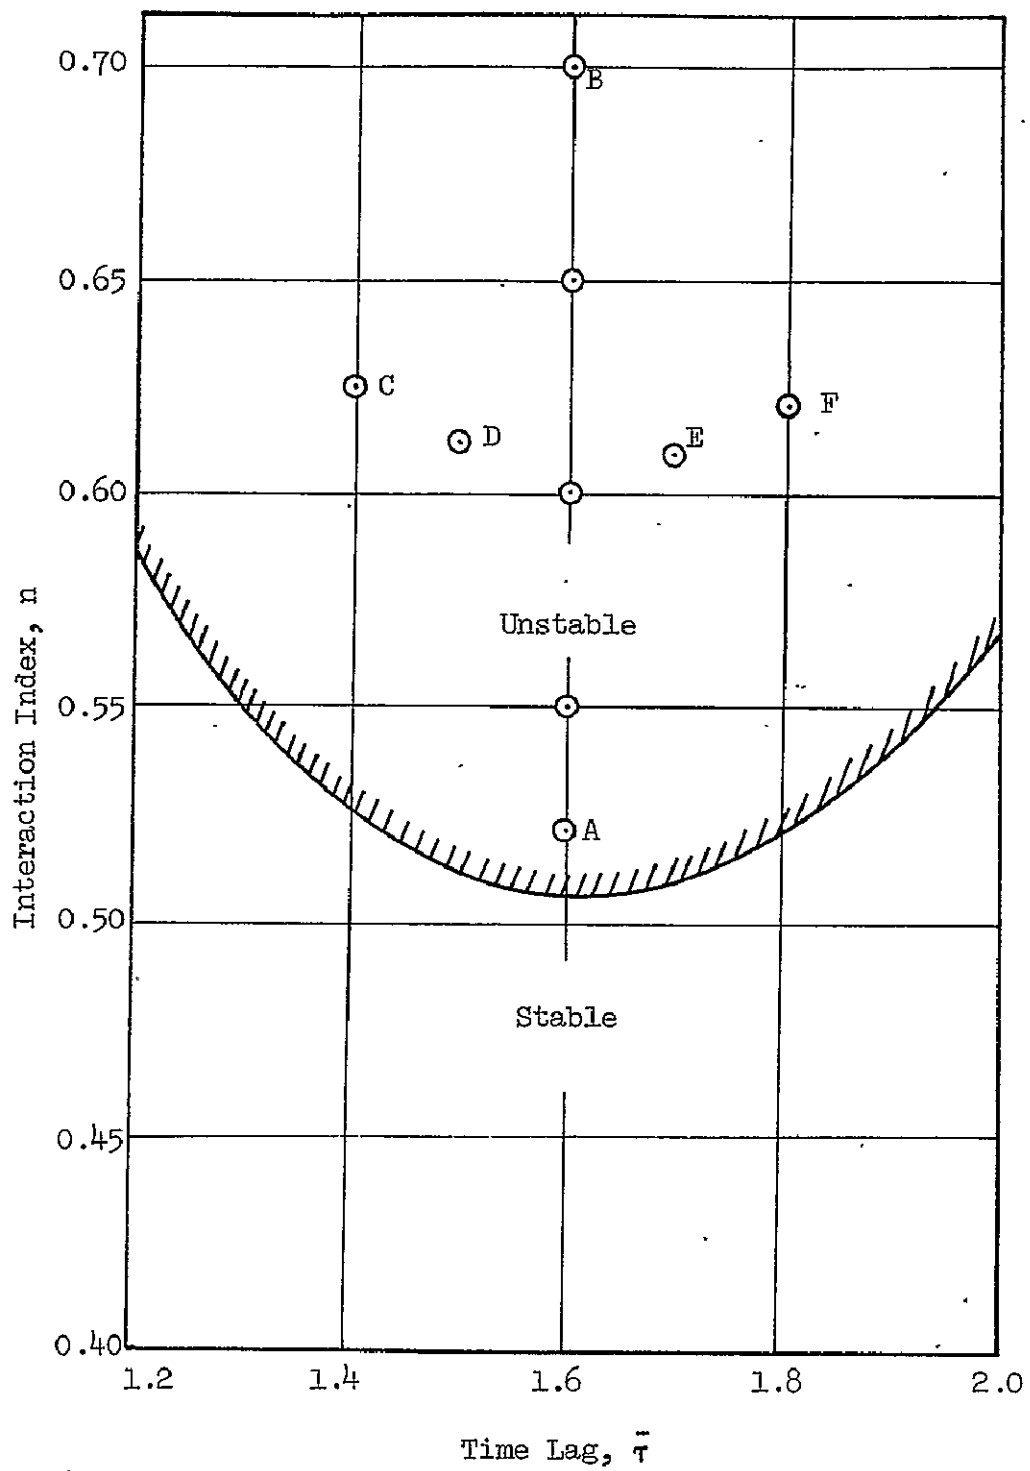


Figure 11. Linear Stability Limit.

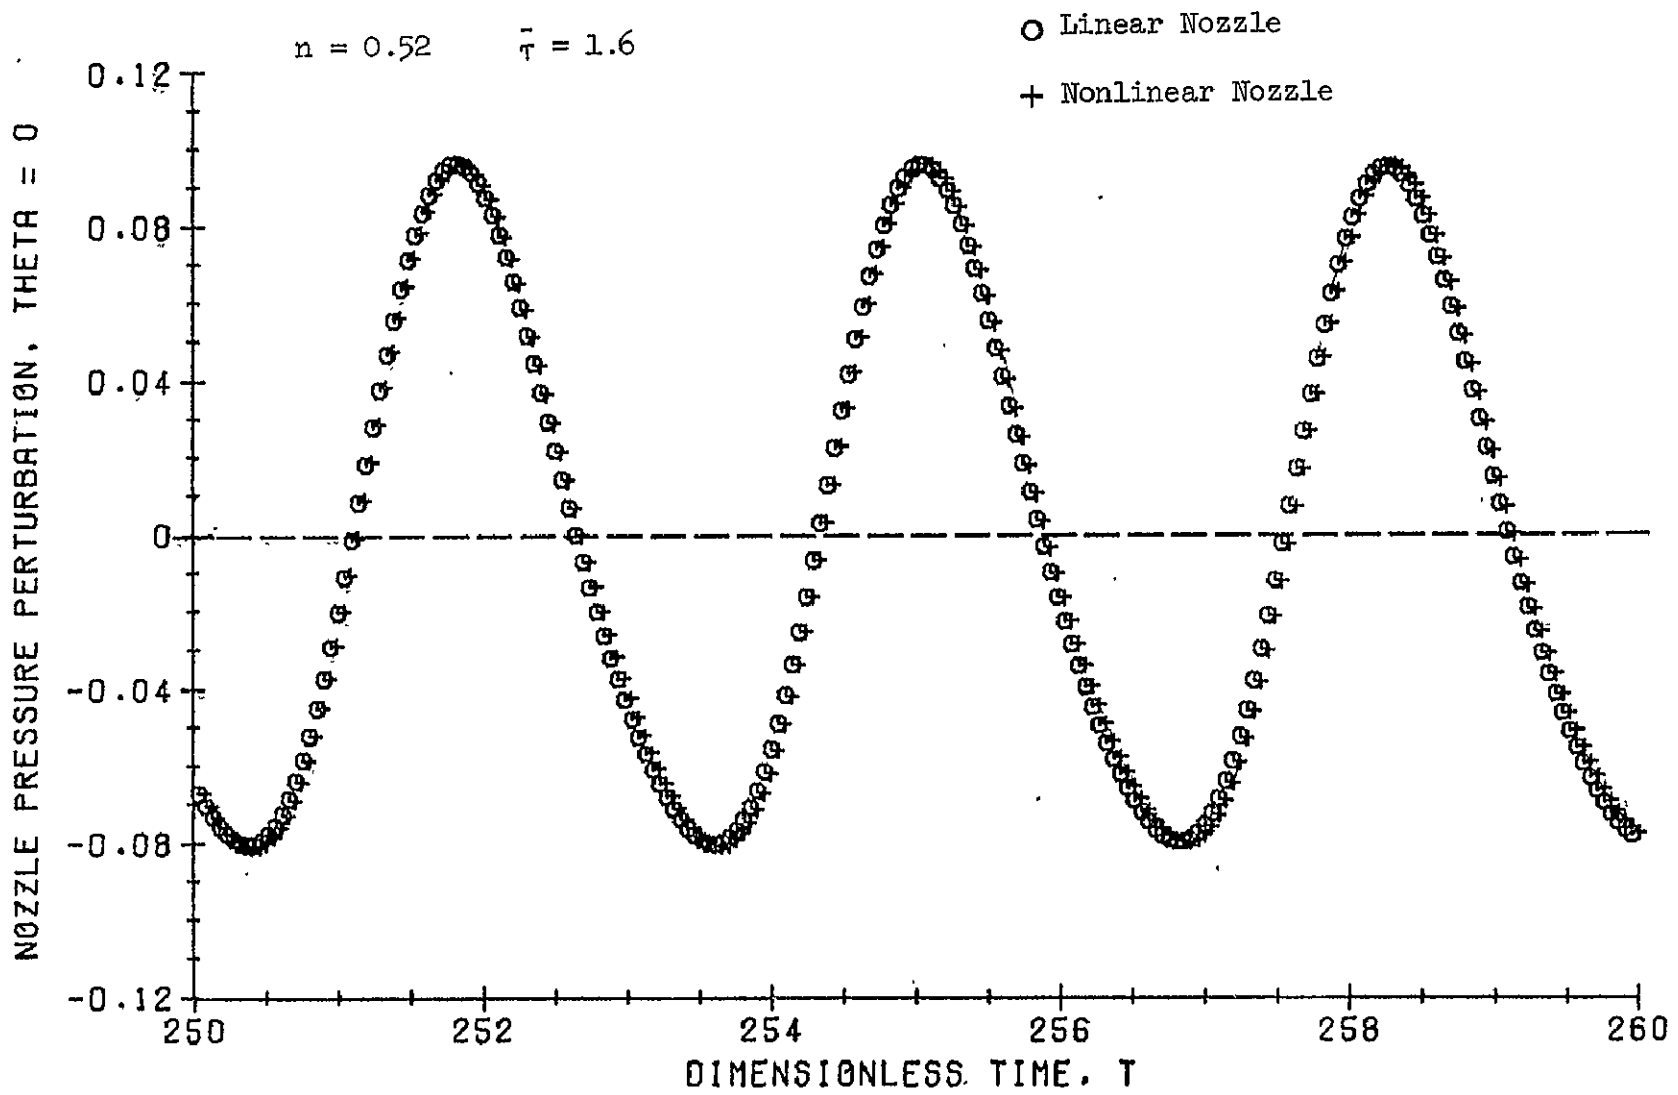


Figure 12. Comparison of Pressure Waveforms for a Mildly Unstable Motor.

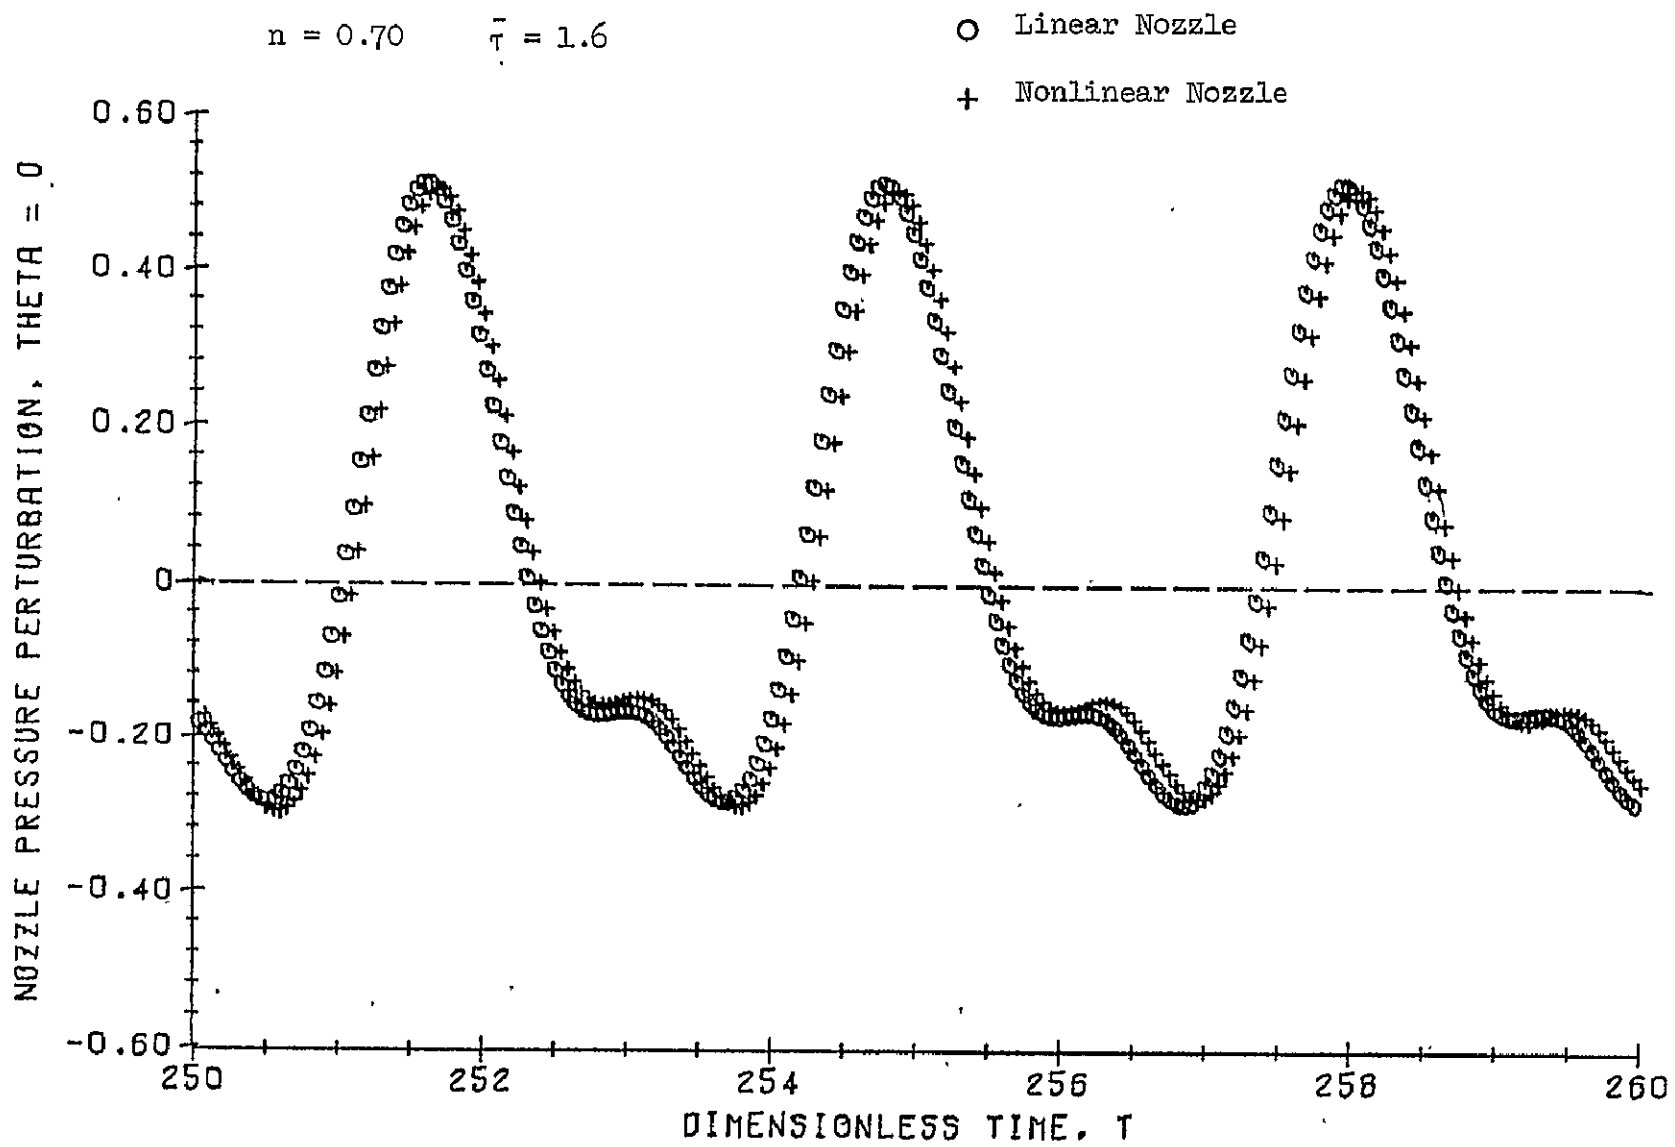


Figure 13. Comparison of Pressure Waveforms for a Strongly Unstable Motor.

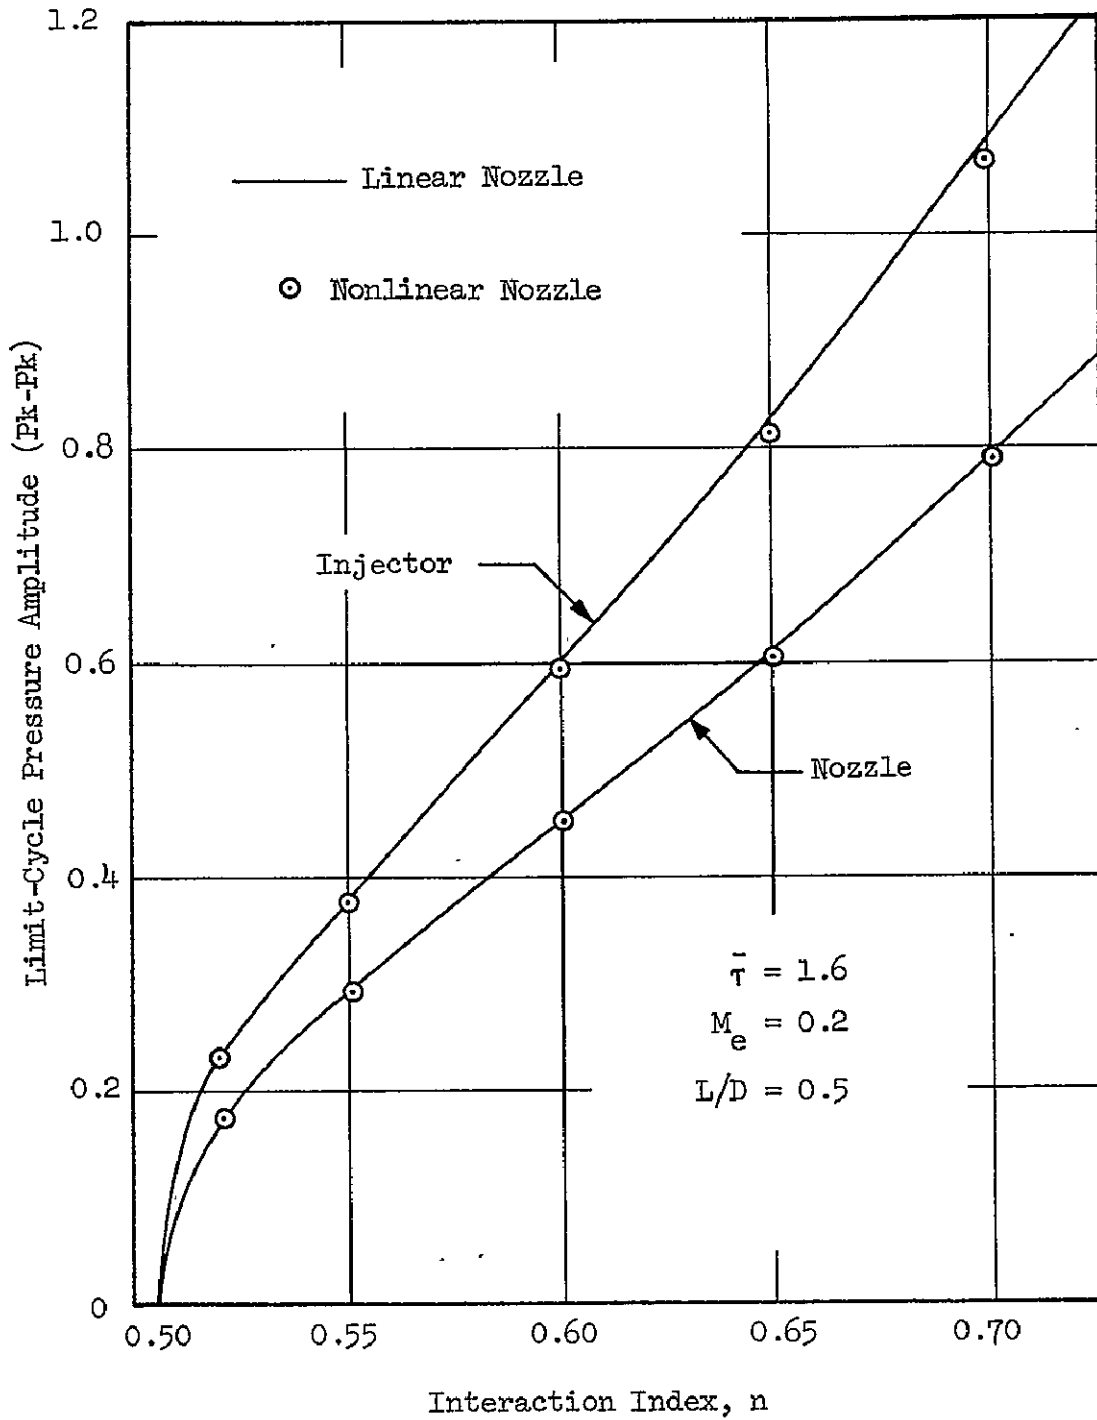


Figure 14. Comparison of Limit-Cycle Amplitudes for Different Values of n.

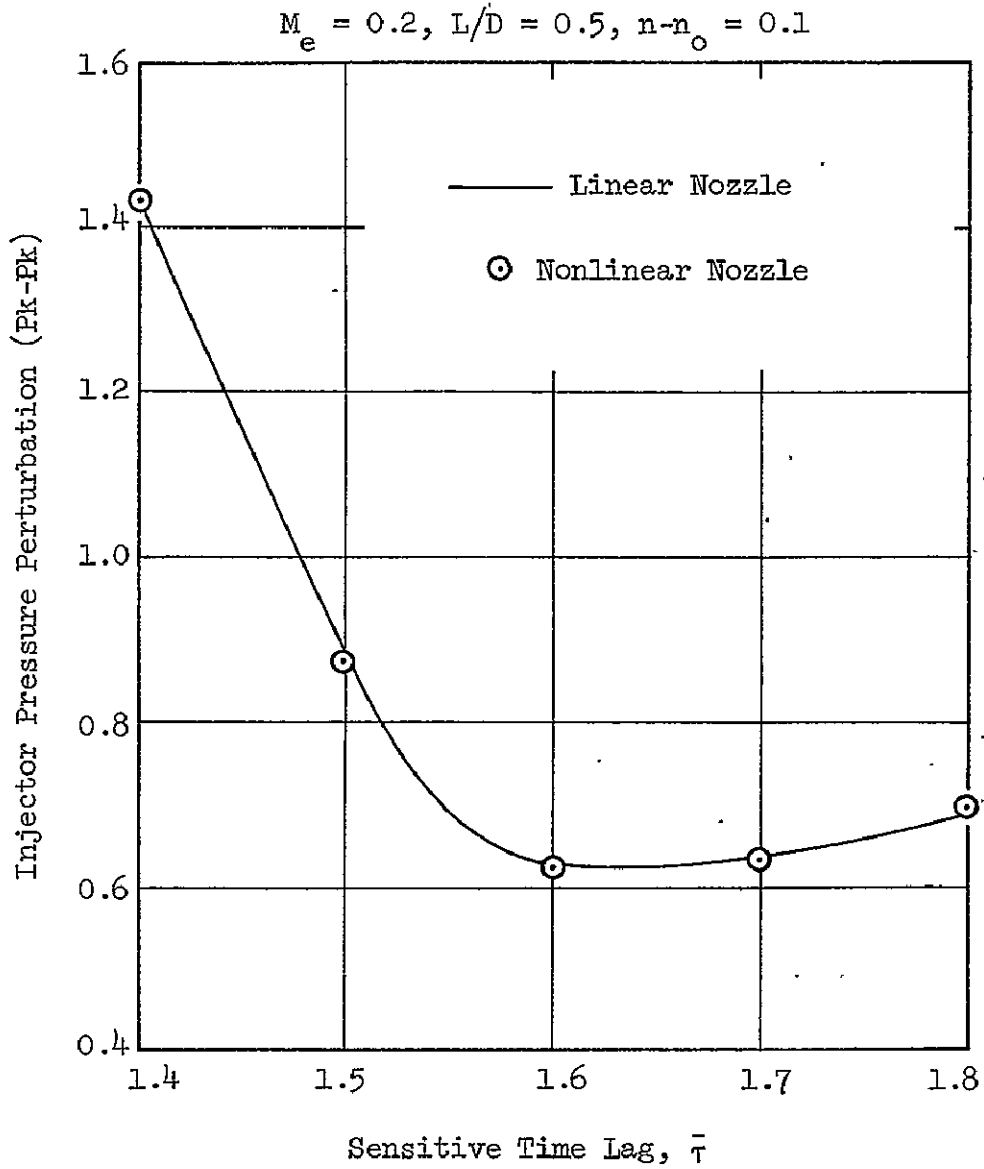


Figure 15. Comparison of Limit-Cycle Pressure Amplitudes for Different Values of $\bar{\tau}$.

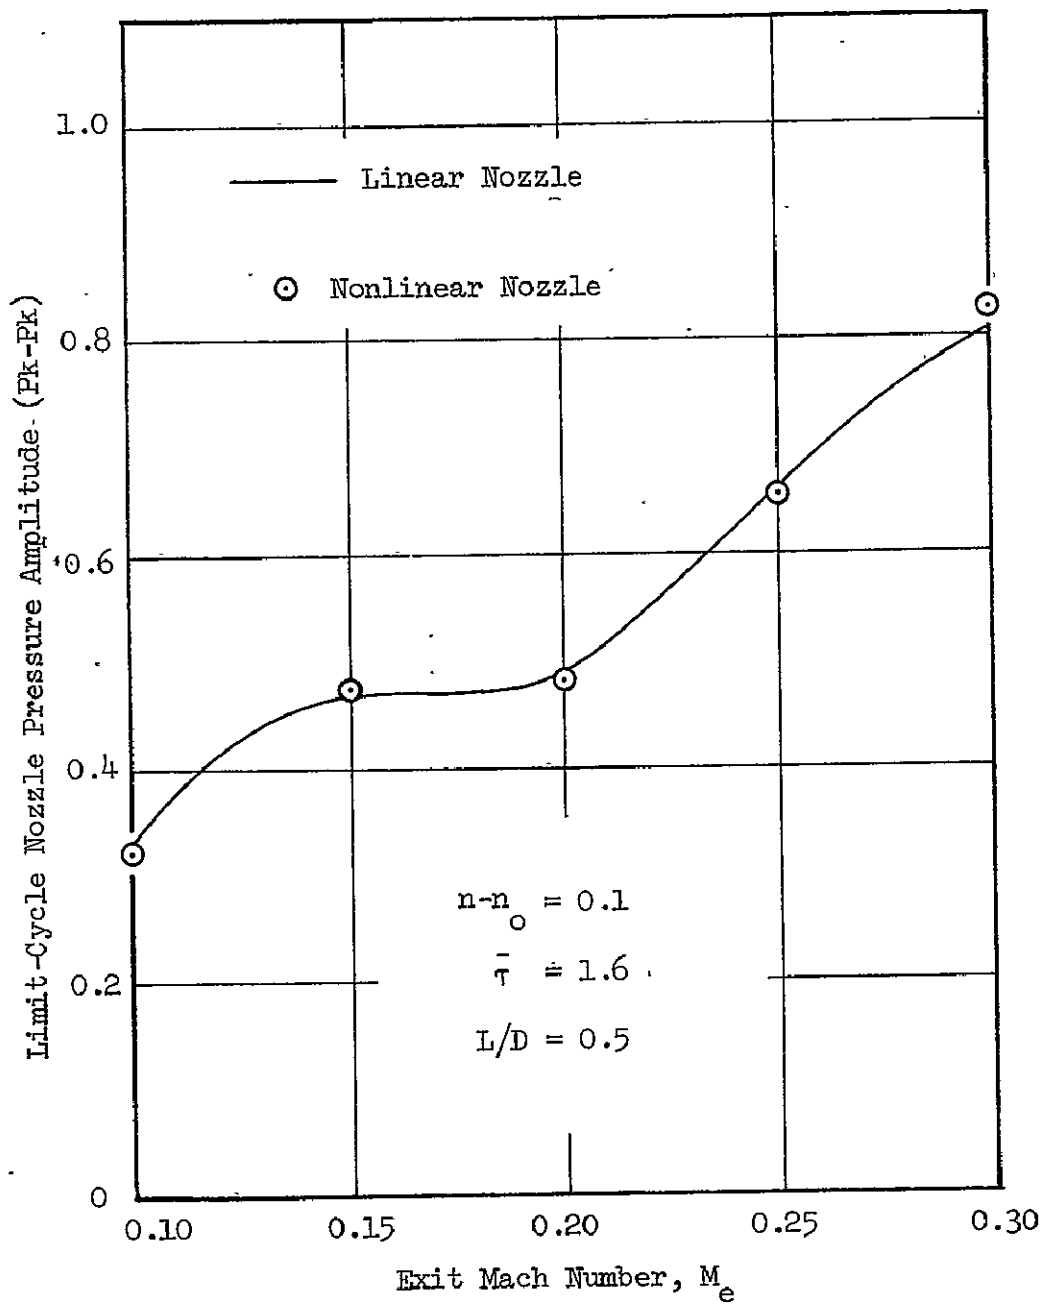


Figure 16. Comparison of Limit-Cycle Amplitudes for Different Values of M_e .

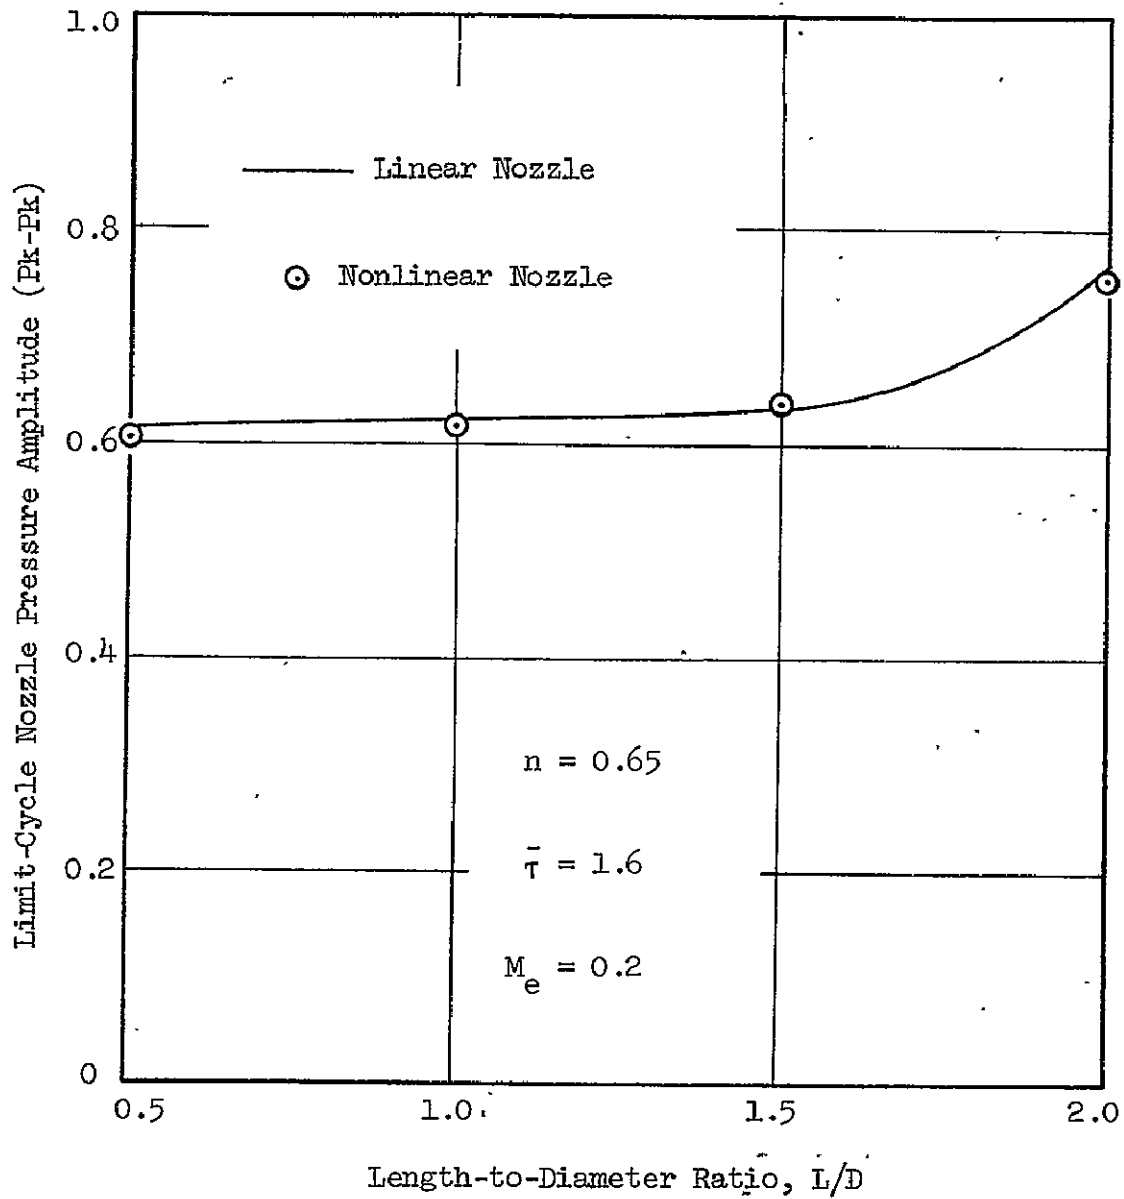


Figure 17. Comparison of Limit-Cycle Amplitudes for Different Values of L/D.

by the LT mode. Nozzle admittances have been computed for typical nozzle geometries, and results have been shown as a function of the frequency and amplitude of the LT mode.

The nonlinear nozzle admittances have been incorporated into the previously developed nonlinear combustion instability theory, and calculations of limit-cycle amplitudes and pressure waveforms have been made to assess the importance of the nonlinear contribution to the nozzle admittance. These results show that nozzle nonlinearities can be safely neglected in nonlinear combustion instability calculations if the following conditions are satisfied: (1) the amplitude of the oscillations are moderate, (2) the mean flow Mach number is small, and (3) the instability is dominated by the first tangential mode. Therefore, the linear nozzle boundary condition used in the previous nonlinear combustion instability analyses is adequate for most cases involving LT mode instability.

APPENDIX A

PROGRAM NOZADM: A USER'S MANUAL

General Description

Program NOZADM calculates both the linear and the nonlinear admittance coefficients for a specified nozzle. These admittance coefficients are required as input for Program COEFFS3D (see Appendix B) which calculates the coefficients of both the linear and nonlinear terms in the combustor amplitude equation (i.e., Eq. (20)). The output of Program NOZADM is either punched onto cards or stored on disk or drum for input to Program COEFFS3D.

Program Structure

A flow chart for Program NOZADM is shown in Fig. (A-1). The program performs the following operations: (1) reads the input data, (2) calculates the steady-state flow quantities in the nozzle, (3) obtains the starting values needed to numerically integrate Eqs. (14) and (15), (4) performs the numerical integration of Eqs. (14) and (15) to obtain the desired admittance coefficients, and (5) provides the desired output.

The inputs to the program include parameters describing the nozzle, the frequency and pressure amplitude of the fundamental mode, and the various control numbers.

After reading the input, the program obtains the steady-state flow quantities at every station in the nozzle by calling the subroutine STEADY. This subroutine also calculates the number of station points (NPLAST) in the nozzle.

The evaluation of the admittance coefficients is carried out in stages. The work performed in each step depends upon whether or not the nonlinear admittances are to be evaluated. If only the linear admittances are required, only the equation for ζ_p needs to be solved. Thus, the equations governing ζ_p are solved individually for each of the modes in the series expansion. On the other hand, if the nonlinear admittances are also required the equations governing the linear admittance for the fundamental mode (ζ_1) and the amplitude of the fundamental mode (A_1) are first solved to obtain these quantities at

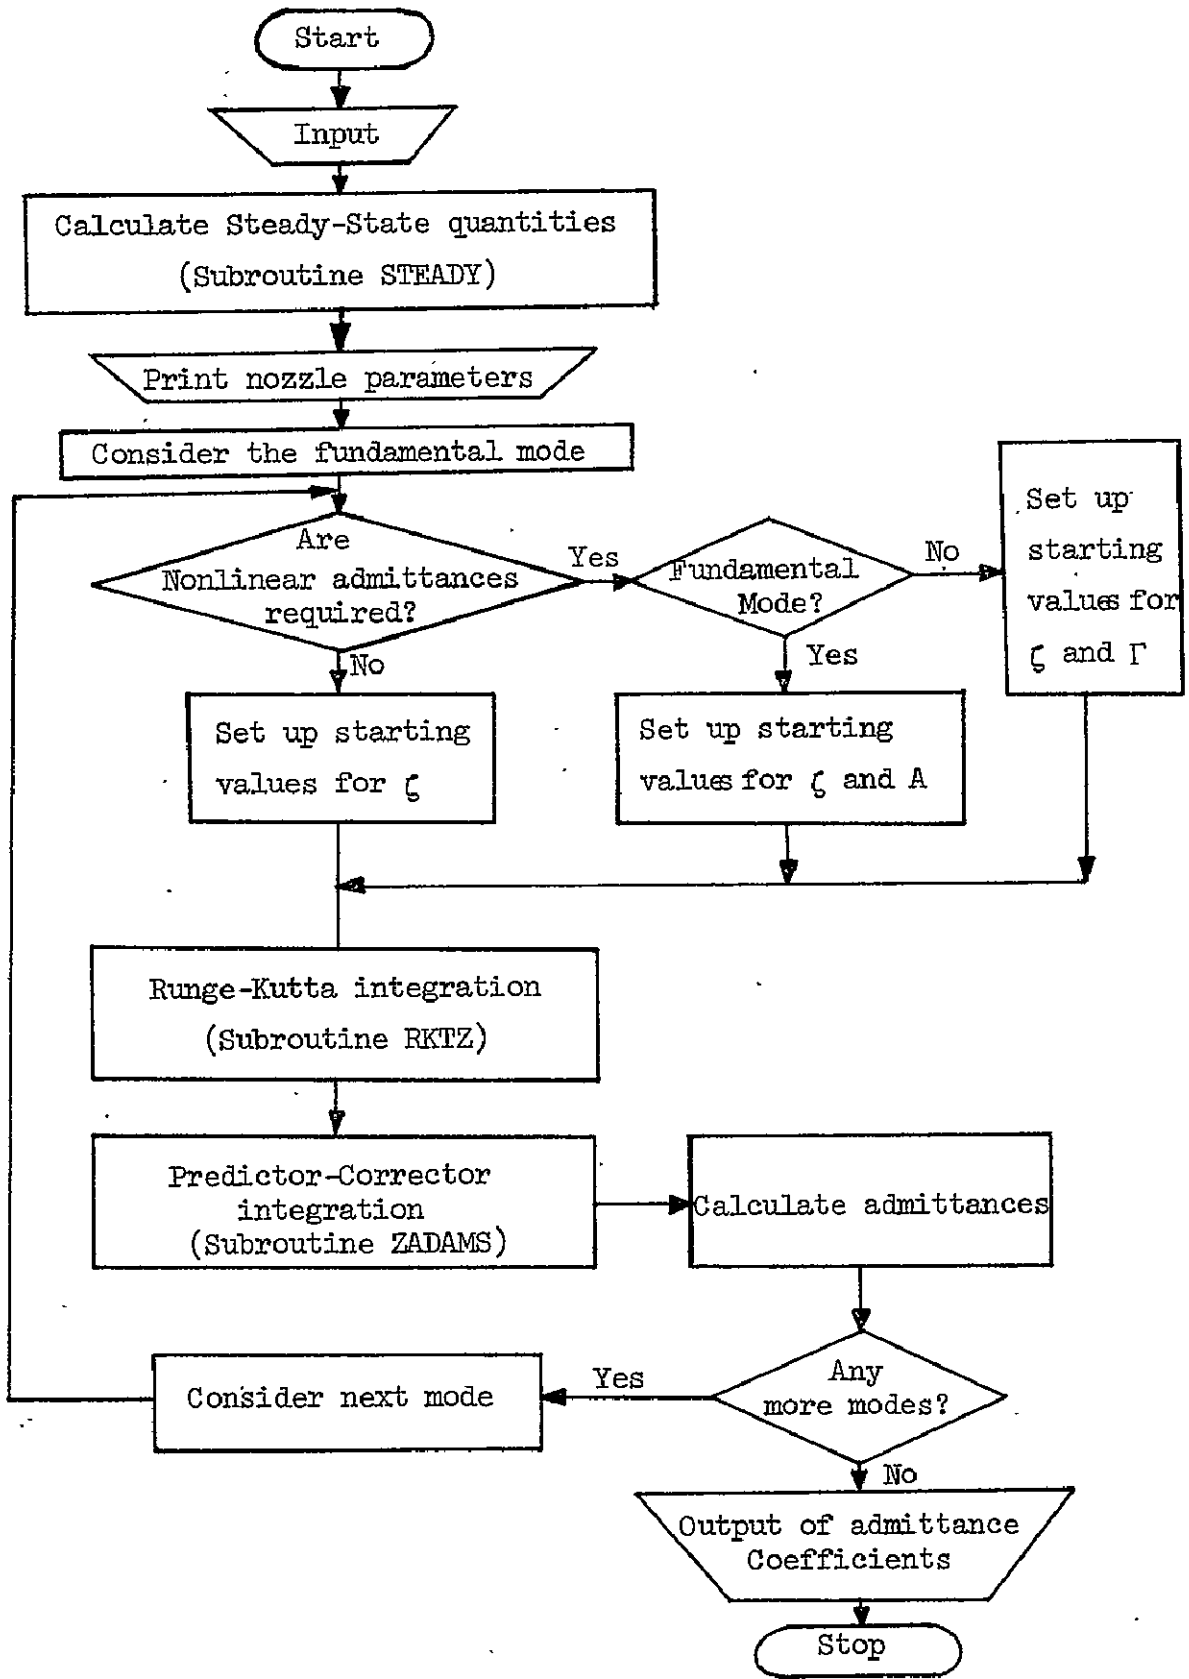


Figure A-1. Flow Chart.

every station in the nozzle. In the subsequent steps, the equations for ζ and Γ for each of the remaining modes are solved.

Input Data

A precise definition of the input data required to run the computer program is given below. The input is given through three data cards. In the description of the cards below, the location number refers to the columns of the card. "I" indicates integers and "F" indicates real numbers with a decimal point. For the I formats, the values are placed in fields of five locations while a field of ten locations is used with the "F" formats. In either case, the numbers must be placed in the rightmost locations of the allocated field.

<u>No. of Cards</u>	<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
1	1-10	F	CM	Mach number at the nozzle entrance
	11-20	F	ANGLE	Nozzle half-angle
	21-30	F	RCC	Radius of curvature of the nozzle at the entrance
	31-40	F	RCT	Radius of curvature of the nozzle at the throat
	41-50	F	GAM	Ratio of specific heats
1	1-5	I	NOZNLI	If 0: nonlinear admittances are not evaluated If 1: nonlinear admittances are evaluated
	6-10	I	NOUT	Determines output If 0: only printed output If 1: printed and stored on disk or drum (output device number 7) If 2: printed and cards punched in a format suitable for the program COEFFS3D

<u>No of Cards</u>	<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
	11-15	I	IEXTN	If 0: no extension section If 1: an extension section is present.
	16-25	F	EXTNSN	Length of the extension section; omit if IEXTN = 0
1	1-10	F	WC	Frequency of oscillation
	11-20	F	PIAMPL	Pressure amplitude of the fundamental mode. Omit if only linear admittances are needed.

The nozzle parameters ANGLE, RCC and RCF correspond to θ_1 , r_{cc} and r_{ct} in Fig. 2. For IEXTN = 1, the integration of Eqs. (14) and (15) is continued beyond the nozzle entrance plane to a length EXTNSN within the combustion chamber. When NOUT = 1, the values of the necessary admittance coefficients are stored on disk or drum (device number 7) in a format suitable for input to program COEFFS3D. If, instead of providing this data to program COEFFS3D through data file 7, it is desirable to provide punched cards only, NOUT should be 2. Again the format is such that these cards can be fed to program COEFFS3D directly.

Steady-State Quantities

The subroutine STEADY is called to evaluate the steady-state quantities in the nozzle. This subroutine first calculates the radius of the nozzle at the throat necessary to obtain the specified Mach number at the nozzle entrance. The steady-state flow quantities at the throat are determined by the choking conditions. Starting with these values, the steady-state flow quantities at the other stations in the nozzle are calculated by numerically integrating the steady-state equations starting from the throat. The subroutine RKSTDY determines the values of the steady-state velocity near the throat using the Runge-Kutta scheme. These values are needed to start the Adam's predictor-corrector scheme for integrating the steady-state flow equation. The numerical integration is performed by the subroutine UADAMS. Starting slightly upstream.

of the throat, the numerical integration is continued till the nozzle entrance is reached (radius of the nozzle $R = 1$). The arrays U and C contain the steady-state velocity and speed of sound respectively.

Coefficients

The complex coefficients that appear in the nozzle admittance equations are evaluated in the program by calling the subroutine COEFFS. These coefficients contain certain integrals involving trigonometric and Bessel functions. The subroutine INTGRL sets up arrays for these integrals.

Integrals

The necessary trigonometric integrals are determined by the subroutine INTGRL itself. Denoting

$$\Theta_p(\theta) = \cos(m_p \theta),$$

the integrals are as follows:

$$\begin{aligned} \text{ALPHA (1, p)} &= \int_0^{2\pi} [\Theta_p(\theta)]^2 \Theta_1(\theta) \, d\theta \\ \text{ALPHA (2, p)} &= \int_0^{2\pi} [\Theta_p'(\theta)]^2 \Theta_1(\theta) \, d\theta \\ \text{ALPHA (3, p)} &= \int_0^{2\pi} \Theta_p''(\theta) \Theta_p(\theta) \Theta_1(\theta) \, d\theta \\ \text{ALPHA (4, p)} &= \int_0^{2\pi} [\Theta_p(\theta)]^2 \, d\theta \\ \text{ALPHA (5, p)} &= \int_0^{2\pi} \Theta_p''(\theta) \Theta_p(\theta) \, d\theta \end{aligned}$$

The integrals involving Bessel functions are as follows:

$$\text{BETA (1, p)} = \int_0^1 [R_1(r)]^2 R_1(r) r \, dr$$

$$\text{BETA (2, p)} = \int_0^1 [R_p(r)]^2 R_1(r) \frac{1}{r} \, dr$$

$$\text{BETA (3, p)} = \int_0^1 [R_p'(r)]^2 R_1(r) r \, dr$$

$$\text{BETA (4, p)} = \int_0^1 R_p''(r) R_p(r) R_1(r) r \, dr$$

$$\text{BETA (5, p)} = \int_0^1 R_p'(r) R_p(r) R_1(r) \, dr$$

$$\text{BETA (6, p)} = \int_0^1 [R_p(r)]^2 r \, dr$$

$$\text{BETA (7, p)} = \int_0^1 R_p'(r) R_p(r) \, dr$$

$$\text{BETA (8, p)} = \int_0^1 R_p''(r) R_p(r) r \, dr$$

$$\text{BETA (9, p)} = \int_0^1 [R_p(r)]^2 \frac{1}{r} \, dr$$

Here $R_p(r) = J_m[S_{mn}r]$ where m and n are the transverse mode numbers for the p th mode.

These integrals of Bessel functions are obtained from the functions RAD1 and RAD2. RAD2 provides the first five integrals while RAD1 provides the last four integrals. Simpson's integration scheme is used in these function subprograms to evaluate these integrals. The values of the Bessel functions of the first kind are obtained using the subroutine JBES (see Ref. 17

Integration of the Differential Equations

For the numerical integration of the differential equations, a fourth-order Adam-Bashforth predictor-corrector scheme is employed. The necessary initial values are obtained by using a fourth-order Runge-Kutta scheme near the throat. The Runge-Kutta integration is performed by subroutine RKTZ. The predictor-corrector integration is performed by subroutines TADAMS and ZADAMS. The values of the dependent variables are stored in the array Y and their derivatives are stored in the array DY. The integration is continued in steps of DP in the axial variable (steady-state velocity potential) till the combustion chamber is reached.

After the numerical integration of all the differential equations is completed, the admittance coefficients are evaluated. AMPL (J) and PHASE(J) are the amplitude and phase of the linear admittance coefficient for mode J. GNOZ(J) is the complex, nonlinear admittance coefficient for mode J.

Output

The output of the program NOZADM contains two sections.

In Section 1, the parameters of the nozzle being analyzed are printed out. The output of this section occupies only one page and is essentially a print out of the input data. The parameters, which are printed are: the Mach number at the nozzle entrance (CM), the specific heat ratio (GAM), the nozzle half-angle (ANGLE), the length of the extension section, if any (EXTNSN), the radius of curvature of the nozzle at the throat (RCT), the radius of curvature of the nozzle at the entrance (RCC), and the number of stations in the nozzle (NPLAST). Section 1 is printed for any value of the control number NOUF.

Section 2 contains the nozzle admittance coefficients. Depending on the value of the control number NOUT, Section 2 is printed, stored on disk or drum or punched onto cards. These three modes of output will now be discussed individually.

Printed output: The control number NOUT for this mode is 0. The printed output appears on one page and contains both the linear and nonlinear admittance coefficients. For each coefficient, the real and imaginary parts as well as the magnitude and phase are printed out. If nonlinear admittance coefficients are not calculated by the program (NOZNLL = 0), zeros are entered in the spaces for the nonlinear coefficients.

This mode of output is inconvenient to use for instability analysis since it would then be necessary to manually punch all the input cards for the program COEFFS3D.

Disk or Drum Storage: The control number NOUT for this mode is 1. When disk or drum storage (like the FASTRAND System on the UNIVAC 1108) is available, this is the most convenient means of storing the output of Section 2. The necessary admittance coefficients are stored in a format suitable for input to the program COEFFS3D. The device number for this output is 7. The control statement needed to request the disk or drum storage on the computer depends on the computer facilities being used.

Punched Cards: NOUT for this mode is 2. This mode of output is the simplest way to run the instability program. The cards containing the necessary admittance coefficients are punched by the computer in a format suitable for use with program COEFFS3D, which is the next program to be executed.

FORTRAN Listing

```

C
C ***** PROGRAM NOZADM *****
C
C     THIS PROGRAM EVALUATES THE LINEAR AND NONLINEAR ADMITTANCES
C     OF A SPECIFIED NOZZLE.
C
C     THE FOLLOWING INPUTS ARE REQUIRED :
C
C     CM IS THE MACH NUMBER AT THE NOZZLE ENTRANCE.
C     ANGLE IS THE SLOPE OF THE MIDDLE SECTION OF THE NOZZLE.
C     RCC IS THE RADIUS OF CURVATURE OF THE NOZZLE AT THE ENTRANCE.
C     RCT IS THE RADIUS OF CURVATURE AT THE THROAT.
C     GAM IS THE SPECIFIC HEATS RATIO.
C
C     NOZNL1 DETERMINES WHETHER THE NONLINEAR ADMITTANCES ARE TO
C     BE EVALUATED:
C     NOZNL1 = 0     NOT EVALUATED.
C     NOZNL1 = 1     EVALUATED.
C     NOUT DETERMINES THE OUTPUT:
C     NOUT = 0     PRINTED OUTPUT ONLY.
C     NOUT = 1     PRINTED AND WRITTEN INTO A FASTRAND FILE.
C     NOUT = 2     PRINTED AND ADMITTANCES PUNCHED INTO CARDS.
C     IEXTN DETERMINES IF THERE IS AN EXTENSION SECTION
C     IEXTN = 0     NO EXTENSION SECTION.
C     IEXTN = 1     THERE IS AN EXTENSION SECTION.
C     EXTNSN IS THE LENGTH OF THE EXTENSION SECTION.
C
C     WC IS THE FREQUENCY OF THE FUNDAMENTAL MODE.
C     PIAMPL IS THE PRESSURE AMPLITUDE OF THE FUNDAMENTAL MODE.
C
C
C     COMMON      /X1/CM, ANGLE, RCC, RCT, GAM, G, RT, DF
1                /X2/T, R1, R2, NPLAST, NEND, IEXTN
2                /X3/WC, SUN, IP, MODE, NU, KP(3)
3                /X4/RU(7), RDU(7), ZTHR1, GTHR1
4                /X5/U(1000), EU(1000), C(1000), RW(1000)
5                /X6/AFN, AFN1, AFN2
6                /X7/ALPHA(5, 3), BETA(9, 3)
7                /X8/ZRK(1000)
C     COMPLEX    AFN(1000), AFN1(1000), AFN2(1000), ACHMER, CONST,
1                CC(25), CC1(25), CFH, CFM, CFN, CGRP1, CGRP2,
2                INHMG, INHMG1, ZTHR, ZTHR1, AH, AH1, GTHR, GTHR1,
3                ZETA, TAU, LINAEM, ZRK, GNOZ(3)
C     DIMENSION  G(4), GP(4), Y(4), DY(4, 4), SMN(3), ISTEP(3),
1                NAME(3), PHASE(3), AMFL(3)
C     DATA      (NAME(MODE), MODE = 1, 3) /2H1T, 2H2T, 2H1R/
1                (SMN(MODE), MODE = 1, 3) /1.84118, 3.05424, 3.83171/
C
C     READ (5, 5005) CM, ANGLE, RCC, RCT, GAM
C     READ (5, 5010) NOZNL1, NOUT, IEXTN, EXTNSN
C     READ (5, 5015) WC, PIAMPL
C     GMIN1 = GAM - 1.
C     GPL1 = GAM + 1.
C     DF = -0.002
C     ISTEP = 1 :      INTEGRATE FOR ZETA ONLY.

```

ORIGINAL PAGE
OF POOR QUALITY

```

C      ISTEP = 2 :      INTEGRATE FOR ZETA & AH.
C      ISTEP = 3 :      INTEGRATE FOR ZETA & GAMMA.
      IF (NOZNL1 .EQ. 1) GO TO 10
      ISTEP(1) = 1
      ISTEP(2) = 1
      ISTEP(3) = 1
      GO TO 15
10     ISTEP(1) = 2
      ISTEP(2) = 3
      ISTEP(3) = 3
15     CONTINUE
      KP(1) = 1
      KP(2) = 2
      KP(3) = 2
C
C      OBTAIN STEADY-STATE QUANTITIES IN THE NOZZLE .
      CALL STEADY
C
C      PRINT OUT THE NOZZLE PARAMETERS.
      WRITE (6,1005)
      WRITE (6,1010) CM
      WRITE (6,1015) GAM
      WRITE (6,1020) ANGLE
      WRITE (6,1025) EXTNSN
      WRITE (6,1030) RCT
      WRITE (6,1035) RCC
      WRITE (6,1040) NPLAST
C
      NEND = NPLAST
      IF (IEXTN .NE. 1) GO TO 25
C
C      DETERMINE NUMBER OF STATIONS IN THE EXTENSION REGION, AND
C      DEFINE STEADY-STATE QUANTITIES IN THAT REGION.
C
      UEXT = U(NPLAST)
      NEND = NPLAST - (EXTNSN * UEXT ** .5) / DP
      DO 20 NP = NPLAST,NEND
      U(NP) = U(NPLAST)
      C(NP) = C(NPLAST)
      DU(NP) = DU(NPLAST)
      RW(NP) = RW(NPLAST)
20     CONTINUE
25     CONTINUE
      IF (NEND .GT. 1000) GO TO 550
C
      CALL INTGRL
      SBTR=(RT*RCT)**.5
C
      ACHMBR = CMLX (PIAMPL / (WC*GAM) ,0.)
      IF (NOUT .EQ. 0) WRITE (6,1050) WC,PIAMPL
      IF (NOUT .EQ. 0) WRITE (6,1055)
C
      DO 500 MODE=1,3
      IP=ISTEP(MODE)
      SVN=SMN(MODE)

```

ORIGINAL PAGE IS
OF POOR QUALITY

SUNR=SVN/RT

C
C*****STARTING VALUES SECTION*****
C

P=0.
AHR = 1.
AHI = 0.
AH = CMPLX (AHR,AHI)
UP = U(1)
CP = C(1)
DUP = DU(1)
RWP = RW(1)
CALL COEFFS (UP,DUP,CP,RWP,CC)
CFH = CC(1)
CFM = CC(2) + CC(6)
CFN = CC(3) + CC(4) + CC(5) + CC(7) + CC(8)

C
C*****DERIVATIVES OF THE COEFFICIENTS AT THE THROAT*****
C

EVALUATE DERIVATIVES OF LINEAR COEFFICIENTS.
XR = - 4./(GPL1 * SRTR)
CFH1 = CMPLX (XR,0.)
XR = - (24. + 4. * GAM) / (GPL1 * 3. * RT * RCT)
XI = - 8. * WC * KP(MODE) / (GPL1 * SRTR)
CFM1 = CMPLX (XR,XI)
XR = - 2.*GMIN1 * (BETA (8,MODE) + BETA (7,MODE) + BETA (9,MODE)
1 * ALPHA (5,MODE) / ALPHA (4,MODE)) / (GPL1 * RT * RT
2 * SRTR * BETA (6,MODE))
XI = -(12 + 2*GAM) * WC * KP(MODE) * GMIN1 / (3.*GPL1 * RT*RCT)
CFN1 = CMPLX (XR,XI)

C
C SET UP VALUES AT THE THROAT BY TAYLORS EXPANSION
C

STARTING VALUES FOR ZETA
ZTHR = - CFN / CFM
ZTHR1 = - (CFM1 * ZTHR + CFH1 * ZTHR * ZTHR + CFN1) / (CFH1 + CFM)
ZFK(1) = ZTHR

C
IF (MODE.NE.1) GO TO 110
AFN(1) = AH
AFN1(1) = AFN(1) * ZTHR
AFN2(1) = AFN1(1) * ZTHR + AFN(1) * ZTHR1

110 CONTINUE
G(1) = REAL (ZTHR)
G(2) = AIMAG (ZTHR)
DY (1,1) = REAL (ZTHR1)
DY (2,1) = AIMAG (ZTHR1)
GO TO (120,130,140), IP

130 G(3) = AHR
G(4) = AHI
AH1 = AH * ZTHR
DY (3,1) = REAL (AH1)
DY(4,1) = AIMAG (AH1)

140 GO TO 120
CONTINUE

```

CGRP1 = CC(13) + CC(14) + CC(19) + CC(23) + CC(24) + CC(25)
CGRP2 = CC(10) + CC(11) + CC(17) + CC(20) + CC(21) + CC(22)
INHMG = -CC(18) * AFN(1) * AFN2(1) - CC(12) * AFN1(1) * AFN2(1)
1      -(CC(9) + CC(15)) * AFN1(1) * AFN1(1) - CGRP1 * AFN(1) *
2      AFN1(1) - CGRP2 * AFN(1) * AFN(1)

```

C
C

```

EVALUATE DERIVATIVES OF NON-LINEAR COEFFICIENTS.
A1B1 = ALPHA(1,MODE) * BETA(1,MODE)
A2B2 = ALPHA(2,MODE) * BETA(2,MODE)
A1B3 = ALPHA(1,MODE) * BETA(3,MODE)
A4B6 = ALPHA(4,MODE) * BETA(6,MODE)
DO 26 J = 1,25
26  CC1(J) = CMPLX (0.,0.)
XR = - (2.*A1B1 * WC) / (A4B6 * GPL1 * SRTR)
XI = XR
CC1(9) = CMPLX (XR,XI)
XR = - (4. * A1B1) / (3.1415927 * GPL1 * SRTR * A4B6)
XI = - XR
CC1(12) = CMPLX (XR,XI)
XR = - A1B3 / (GPL1 * RT * RT * SRTR * A4B6)
XI = - XR
CC1(13) = CMPLX (XR,XI)
XR = - A2B2 / (GPL1 * RT * RT * A4B6 * SRTR)
XI = - XR
CC1(14) = CMPLX (XR,XI)
XR = - A1B1 * (3.*GPL1 * SRTR + GMIN1 * (12.+GAM)) /
1      (2. * RT * RCT * GPL1 * GPL1 * A4B6)
XI = - XR
CC1(15) = CMPLX (XR,XI)
XR = A1B3 * (9. - 2.*GAM - GAM*GAM) / (12. * RT**3 * RCT * GPL1
1      * A4B6)
XI = - XR
CC1(16) = CMPLX (XR,XI)
XR = A2B2 * (9. - 2.*GAM - GAM*GAM) / (12. * RT**3 * RCT * GPL1
1      * A4B6)
XI = - XR
CC1(17) = CMPLX (XR,XI)
XR = - (GMIN1 * WC * A1B1) / (GPL1 * SRTR * A4B6)
XI = XR
CC1(18) = CMPLX (XR,XI)
XR = - (GMIN1 * (6.+GAM) * WC * A1B1) / (3. * GPL1 * RT * RCT
1      * A4B6)
XI = XR
CC1(19) = CMPLX (XR,XI)
XR = - (GMIN1 * ALPHA (1,MODE) * (BETA (4,MODE) - BETA(5,MODE)))
1      / (GPL1 * RT * RT * SRTR * A4B6)
XI = - XR
CC1(23) = CMPLX (XR,XI)
XR = - (GMIN1 * ALPHA (1,MODE) * BETA (5,MODE) * 2.)
1      / (GPL1 * RT * RT * SRTR * A4B6)
XI = - XR
CC1(24) = CMPLX (XR,XI)
XR = - (GMIN1 * ALPHA (3,MODE) * BETA (2,MODE))
1      / (GPL1 * RT * RT * SRTR * A4B6)
XI = - XR

```

```

CC1 (25) = CMPLX (XR,XI)
C
INHMG1 = - AFN2(1) * AFN2(1) * CC(12) - AFN1(1) * AFN2(1) *
1      (CC(18) + CC1(12) + 2.*CC(9) + 2.*CC(15)) - AFN2(1)
2      * AFN(1) * (CC1(18) + CGRP1) - AFN1(1) * AFN1(1) *
3      (CC1(9) + CC1(15) + CGRP1) - AFN1(1) * AFN(1) *
4      (CC1(13) + CC1(14) + CC1(19) + CC1(23) + CC1(24)
5      + CC1(25) + 2.*CGRP2) - AFN(1) * AFN(1) * (CC1(10)
6      + CC1(11) + CC1(17) + CC1(20) + CC1(21) + CC1(22))
C
STARTING VALUES FOR GAMMA
GTHR = - INHMG / (CP * CFM)
GTHR1 = (-CP * GTHR * (CFH1 * ZTHR + CFM1) + (GMIN1 * .5 * 4. /
1      (GFL1 * SRTR)) * GTHR * (CFH1 + CFM) - INHMG1) /
2      (CP * CFH1 + CP * CFM)
C
G(3) = REAL (GTHR)
G(4) = AIMAG (GTHR)
DY (3,1) = REAL (GTHR1)
DY (4,1) = AIMAG (GTHR1)
120 CONTINUE
C
*****NUMERICAL COMPUTATIONS*****
C
RUNGE-KUTTA INTEGRATION TO PROVIDE INITIAL VALUES
C FOR PREDICTOR-CORRECTOR INTEGRATION
C
DO 30 IRK = 2,4
CALL RKTZ(DP,P,G,GP,IRK)
P=P+DP
ZR=G(1)
ZI=G(2)
ZRK(IRK) = CMPLX (ZR,ZI)
DY(1,IRK)=GP(1)
DY(2,IRK)=GP(2)
GO TO (150,160,170), IP
160 AHR = G(3)
AHI = G(4)
DY(3,IRK)=GP(3)
DY(4,IRK)=GP(4)
IF (MODE.NE.1) GO TO 162
AFN (IRK) = CMPLX (G(3),G(4))
AFN1 (IRK) = CMPLX (GP(3),GP(4))
AR2 = G(1)*GP(3) - G(2)*GP(4) + GP(1)*G(3) - GP(2)*G(4)
AI2 = G(2)*GP(3) + G(1)*GP(4) + GP(2)*G(3) + GP(1)*G(4)
AFN2(IRK) = CMPLX (AR2,AI2)
162 GO TO 150
170 CONTINUE
GAMR = G(3)
GAMI = G(4)
DY(3,IRK) = GP(3)
DY(4,IRK) = GP(4)
150 CONTINUE
30 CONTINUE
Y(1)=ZR

```

```

Y(2)=ZI
GO TO (180,190,200), IP
190 Y(3) = AHR
    Y(4) = AHI
    GO TO 180
200 CONTINUE
    Y(3) = GAMR
    Y(4) = GAMI
180 CONTINUE
C
C PREDICTOR- CORRECTOR INTEGRATION
CALL ZADAMS (DP,P,Y,EY,ITORZ)
C
C
C CALCULATE LINEAR ADMITTANCE COEFFICIENTS.
UE = U(NEND)
CE = C(NEND)
RHOE = CE ** (1./GMIN1)
FR = WC * KP(MODE)
F = UE ** .5 / (FR*GAM)
IF (ITORZ .EQ. 1) GO TO 35
ZR=Y(1)
ZI=Y(2)
ZETA = CMPLX (ZR,ZI)
LINADM = F * CMPLX(0.,1.) * ZETA
GO TO 40
35 TR= Y(1)
   TI = Y(2)
   TAU = CMPLX (TR, TI)
   LINADM = F * CMPLX(0.,1.) / TAU
40 CONTINUE
   YR = REAL (LINADM)
   YI = AIMAG (LINADM)
   YMAG = CABS (LINADM)
   YPHASE = ATAN2 (YI,YR) * 180. / 3.1415927
   AMPL(MODE) = YMAG
   PHASE(MODE) = YPHASE
C
GO TO (210,220,230), IP
220 AHR = Y(3)
    AHI = Y(4)
    IF (MODE .NE. 1) GO TO 210
    CONST = ACHMER / AFN(NEND)
    DO 50 NP = 1,NEND
    AFN(NP) = CONST * AFN(NP)
    AFN1(NP) = CONST * AFN1(NP)
    AFN2(NP) = CONST * AFN2(NP)
50 CONTINUE
C
C NONLINEAR ADMITTANCE COEFFICIENT IS ZERO FOR IT MODE.
GAMR = 0.
GAMI = 0.
GMAG = 0.
GPHASE = 0.
GBYY = 0.0

```

```

GNOZ(1) = (0.0,0.0)
C
GO TO 210
230 CONTINUE
C
CALCULATE NONLINEAR ADMITTANCE COEFFICIENTS.
GAMR = Y(3)
GAMI = Y(4)
GMAG = (GAMR * GAMR + GAMI * GAMI) ** .5
GPHASE = ATAN2 (GAMI,GAMR) * 180. / 3.1415927
GBYY = CABS (CMPLX (GAMR,GAMI) / LINADM)
GNOZ(MODE) = CMPLX(GAMR,GAMI)
C
210 CONTINUE
IF (NOUT .EQ. 0) WRITE (6,1060) NAME(MODE), YR, YI,
1 YMAG, YPHASE, GAMR, GAMI, GMAG, GPHASE, GBYY
500 CONTINUE
510 CONTINUE
520 CONTINUE
550 CONTINUE
IF (NOUT .EQ. 0) GO TO 560
DO 570 J = 1, 3
IF (NOUT .EQ. 1) WRITE (7,7005) J, AMPL(J), PHASE(J)
IF (NOUT .EQ. 2) PUNCH 7005 J, AMPL(J), PHASE(J)
570 CONTINUE
IF (NOZNL1 .EQ. 0) GO TO 560
DO 580 J = 1, 3
IF (NOUT .EQ. 1) WRITE (7,7005) J, GNOZ(J)
IF (NOUT .EQ. 2) PUNCH 7005 J, GNOZ(J)
580 CONTINUE
560 WRITE (6,1065)
C
C ***** READ FORMAT SPECIFICATIONS *****
C
5005 FORMAT (6F10.0)
5010 FORMAT (3I5,F10.0)
5015 FORMAT (2F10.0)
C
C ***** WRITE FORMAT SPECIFICATIONS *****
C
1005 FORMAT (1H1,////////,45X,17H*****,,/,45X,
1 17HNOZZLE PARAMETERS,,/,45X,17H*****,,////////)
1010 FORMAT (1H0,25X,"MACH NUMBER = ",F4.2)
1015 FORMAT (1H0,25X,"GAMMA = ",F4.2)
1020 FORMAT (1H0,25X,"NOZZLE ANGLE = ",F5.2)
1025 FORMAT (1H0,25X,"LENGTH OF EXTENSION SECTION = ",F4.2)
1030 FORMAT (1H0,25X,"RADIUS OF CURVATURE AT THE THROAT = ",F7.5)
1035 FORMAT (1H0,25X,"RADIUS OF CURVATURE AT THE NOZZLE ENTRANCE = ",
1 F7.5)
1040 FORMAT (1H0,25X,"NUMBER OF STATIONS IN THE NOZZLE = ",I4)
1050 FORMAT (1H1,////,46X,18H*****,,/,46X,
1 18HNOZZLE ADMITTANCES,,/,46X,18H*****,,////////,
2 20X,"FREQUENCY = ",F8.6,40X,"PRESSURE AMPLITUDE = ",F6.4)
1055 FORMAT (////////,5X,"MODE",10X,2HYR,9X,2HYI,9X,"YMAG",9X,"YPHASE",

```

ORIGINAL PAGE IS
OF POOR QUALITY

```
1          11X, 2HGR, 9X, 2HGI, 9X, 4HG MAG, 10X, 6HGPHASE, 13X, 3HG/Y, //)
1060  FORMAT (1H0, 5X, A2, 2X, 3F12.4, F16.4, 3F12.4, 2F16.4)
1065  FORMAT (1H1)
7005  FORMAT (15, 2F10.5)
C
C *****
C
STOP
END
```


SUBROUTINE STEADY

C
 C THIS SUBROUTINE EVALUATES STEADY-STATE QUANTITIES IN THE NOZZLE.
 C
 C NOZZLE PROFILE AND FLOW PARAMETERS ARE PASSED TO THE SUBROUTINE
 C THROUGH THE COMMON BLOCKS X1 AND X2.
 C THE SUBPROGRAM PROVIDES THE OUTPUT THROUGH COMMON BLOCK X5.
 C U IS THE SQUARE OF THE STEADY-STATE VELOCITY;
 C DU IS THE DERIVATIVE OF U WITH RESPECT TO STEADY-STATE POTENTIAL ;
 C C IS THE SQUARE OF THE SPEED OF SOUND;
 C RW IS THE RADIUS OF THE NOZZLE.
 C THESE OUTPUT QUANTITIES ARE STORED IN THE RESPECTIVE ARRAYS AT
 C INTERVALS OF DP IN P (STEADY-STATE POTENTIAL).
 C
 C

COMMON /X1/ CM, ANGLE, RCC, RCT, GAM, Q, RT, DP
 COMMON /X2/ T, R1, R2, NPLAST, NEND, IEXTN
 COMMON /X4/ RU(7), RDU(7), ZTHR1, GTHR1
 COMMON /X5/ U(1000), DU(1000), C(1000), RW(1000)

C
 T= 3.1415927*ANGLE/180.
 RT = (CM**2) * ((1.+(GAM-1.)*CM**2/2.) ** ((-GAM-1.)/
 1 (4*(GAM-1.)))*((2/(GAM+1)) ** ((-GAM-1)/(4*(GAM-1))))
 SRTR = (RT*RCT) **.5
 Q = (.25*RT) * ((2/(GAM+1.)) ** ((GAM+1.) / (4*(GAM-1))))
 R1 = RT+RCT*(1.-COS(T))
 R2 = 1.-RCC * (1.-COS(T))
 R=RT
 P= 0.
 RW(1) = RT
 U(1) = 2./(GAM+1.)
 RU(1) = U(1)
 C(1) = U(1)
 DU(1) = 4./((GAM+1.)*SRTR)
 RDU(1) = DU(1)
 G = U(1)
 DO 30 I=2,7
 CALL RKSTDY (P, G, GP)
 P = P + DP/2.
 RU(I) = G
 RDU(I)=GP
 IF (I .EQ. 2*(I/2)) GO TO 30
 NP = (I+1)/2
 U(NP) = RU(I)
 DU(NP) = RDU(I)
 C(NP) = 1.-(GAM-1)*U(NP)*.5
 RW(NP) = Q**((C(NP)) ** (-1./(2*(GAM-1.))))
 1 *(U(NP)**-.25)*4.
 30 CONTINUE
 CALL UADAMS (P)
 RETURN
 END

```

SUBROUTINE RKSTDY(P,G,DUM)
C
C THIS SUBROUTINE PERFORMS A FOURTH ORDER RUNGE-KUTTA INTEGRATION
C TO OBTAIN STARTING VALUES OF STEADY-STATE VELOCITY FOR THE
C PREDICTOR-CORRECTOR METHOD.
C P IS THE CURRENT VALUE OF THE STEADY-STATE POTENTIAL: INPUT.
C G IS THE SQUARE THE STEADY-STATE VELOCITY: INPUT AND OUTPUT.
C AS OUTPUT, G IS THE VALUE AT THE NEXT STEP.
C DUM IS DERIVATIVE OF THE SQUARE OF STEADY-STATE VELOCITY: OUTPUT.
C DUM IS OBTAINED BY CALLING SUBROUTINE RKUDIF.
C
C
COMMON /X1/ CM,ANGLE,RCC,RCT,GAM,G,RT,DP
DIMENSION A(4),FZ(4)
C
A(1) = 0.
A(2) = 0.5
A(3) = 0.5
A(4) = 1.
H = DP/2.
PR=P
GR=G
CALL RKUDIF(PR,GR,DUM)
FZ(1) = DUM
DO 30 I=2,4
PR = P+A(I)*H
GR = G+A(I)*H*FZ(I-1)
CALL RKUDIF (PR,GR,DUM)
FZ(I) = DUM
30 CONTINUE
G = G + H* (FZ(1) + 2*(FZ(2)+FZ(3)) + FZ(4))/6.
CALL RKUDIF(PR,G,DUM)
RETURN
END

```

```

SUBROUTINE RKUDIF(P,G,GP)
C
C THIS SUBROUTINE EVALUATES THE DIFFERENTIAL ELEMENT IN THE
C RUNGE-KUTTA INTEGRATION SCHEME FOR SOLVING THE EQUATION FOR SQUARE
C OF STEADY-STATE VELOCITY.
C
C P IS THE VALUE OF STEADY-STATE POTENTIAL AT THE STATION,
C WHERE DIFFERENTIAL ELEMENT IS SOUGHT; INPUT.
C G IS THE VALUE OF THE FUNCTION AT P; INPUT.
C GP IS THE REQUIRED DIFFERENTIAL ELEMENT.
C
COMMON /X1/ CM, ANGLE, RCC, RCT, GAM, O, RT, DF
COMMON /X2/ T, R1, R2, NPLAST, NEND, IEX IN
COMMON /X3/ WC, SVN, IP, MODE, NU, KP(3)
C
IF (P) 15, 10, 15
10 GP = 4./ ((GAM+1.) * ((RCT*RT) **.5))
GO TO 20
15 C = 1-(GAM-1.)*G*.5
R = G*((C) ** (-1./(2.*(GAM-1.))) * (G**-.25) * 4.
IF (R-1.) 22, 22, 50
22 IF (R-R1) 25, 30, 30
25 DR = -((2.*RCT*(R-RT) - (R-RT) * (R-RT))**.5) / (RT+RCT-R)
GO TO 45
30 IF (R-R2) 35, 40, 40
35 DR = -TAN(T)
GO TO 45
40 DR = ((2.*RCC*(1-R) - (R-1)*(R-1)) **.5) / (1.-R-RCC)
45 DU = -(G**-.75)*(C**((2.*GAM-1) / (2.*(GAM-1.))) /
1 (G*(1.-(GAM+1.) * G*.5))
GP = DU*DR
GO TO 20
50 GP = 0.
20 RETURN
END

```

```

SUBROUTINE UADAMS(P)
C
C THIS SUBROUTINE CARRIES OUT A MODIFIED ADAMS PREDICTOR-CORRECTOR
C INTEGRATION SCHEME TO SOLVE THE DIFFERENTIAL EQUATION FOR THE
C STEADY-STATE VELOCITY.
C
C P IS THE VALUE OF THE STEADY-STATE POTENTIAL AT THE STATION,
C WHERE PREDICTOR-CORRECTOR INTEGRATION COMMENCES; INPUT.
C DURING THE PROGRAM, P IS CHANGED TO THE VALUE AT CURRENT STATION.
C H IS THE STEP-SIZE; INPUT THROUGH COMMON BLOCK X1.
C COMMON BLOCKS X1 AND X2 PROVIDE DETAILS OF NOZZLE PROFILE.
C
C THE STEADY-STATE QUANTITIES ARE THE OUTPUT, AND
C ARE PROVIDED BY MEANS OF COMMON BLOCK X5.
C
C
COMMON /X1/ CM, ANGLE, RCC, RCT, GAM, Q, RT, H
COMMON /X2/ T, R1, R2, NPLAST, NEND, IEXTN
COMMON /X5/ U(1000), DU(1000), C(1000), RW(1000)
C
NP=4
10 CONTINUE
PRED = U(NP) + H*(55.*DU(NP) - 59.*DU(NP-1) + 37.*DU(NP-2)
1 -9.*DU(NP-3))/24.0
P = P + H
NP = NP + 1
UP = PRED
CP = 1.-(GAM-1.)*UP*.5
R = Q*(CP**(-1./ (2.*(GAM-1.)))) * (UP**-.25)*4.
C
C IF R = 1, THE NOZZLE ENTRANCE HAS BEEN REACHED.
IF (R-1.) 17,17,100
C
17 IF (R-R1) 20,25,25
20 DR = -((2.*RCT*(R-RT) - (R-RT)*(R-RT))**.5) / (RT+RCT-R)
GO TO 40
25 IF (R-R2) 30,35,35
30 DR=-TAN(T)
GO TO 40
35 DR = ((2.*RCC*(1.-R) - (1.-R)*(1.-R))**.5) / (1.-R-RCC)
40 DQ = -(UP**.75) * (CP**((2.*GAM-1) / (2.*(GAM-1)))) /
1 (Q*(1.-(GAM+1.) * UP * .5))
DUP = DR*DQ
COR = U(NP-1)+H* (9.*DUP+19.*DU(NP-1) - 5.*DU(NP-2)
1 +DU(NP-3))/24.0
UP = (251.*COR + 19.*PRED) / 270.
CP = 1.-(GAM-1.)*UP*.5
R = Q*(CP**(-1./ (2.*(GAM-1.)))) * (UP**-.25)*4.
C
C IF R = 1, THE NOZZLE ENTRANCE HAS BEEN REACHED
IF (R-1.) 62,62,100
C
62 IF (R-R1) 65,70,70
65 DR = -((2.*RCT*(R-RT) - (R-RT)*(R-RT))**.5) / (RT+RCT-R)
GO TO 85
70 IF (R-R2) 75,80,80

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

75  DR = -TAN(T)
    GO TO 85
80  DR = ((2.*RCC*(1.-R) - (1.-R)*(1.-R)**.5) / (1.-R-RCC)
85  DQ = -(UF**.75) * (CP**((2.*GAM-1) / (2.*(GAM-1)))) /
    I   (Q*(1.-(GAM+1.) * UF * .5))
    IF (NP .GT. 1000) GO TO 87
C
C   STORE STEADY STATE QUANTITIES AT STATION NP IN RESPECTIVE ARRAYS.
    DU(NP)=DR*DQ
    U(NP) = UF
    C(NP) = CP
    RW(NP) = R
C
87  GO TO 10
100 NPLAST= NP-1
    RETURN
    END

```

```

SUBROUTINE COEFFS (U, DU, C, R, CC)
C
C THIS SUBROUTINE COMPUTES THE COEFFICIENTS.
C U, DU, C, R ARE THE STEADY-STATE QUANTITIES AT THE AXIAL LOCATION,
C WHERE THE COEFFICIENTS ARE REQUIRED.
C CC ARE THE COMPLEX COEFFICIENTS.
C SUBROUTINE INTGRL PROVIDES ALPHA & BETA, THE VALUES OF TRANSVERSE
C INTEGRALS THROUGH COMMON BLOCK X7.
C
COMMON /X3/ WC, SVN, IP, MODE, NU, KP(3)
COMMON/X7/ ALPHA(5,3), BETA(9,3)
COMPLEX CC(25)
DATA GAM/1.2/
C
GMIN1 = GAM - 1.
M = MODE
A4B6 = ALPHA (4,M) * BETA (6,M)
RSQR = R * R
C
C***** LINEAR COEFFICIENTS *****
C
CCR = U * (C-U)
CC(1) = CMPLX(CCR,0.0)
CCR = - U*DU / C
CC(2) = CMPLX(CCR,0.0)
CCR = C * (BETA (8,M) - BETA (7,M)) / (RSQR * BETA (6,M))
CC(3) = CMPLX(CCR,0.0)
CCR = 2. * C * BETA (7,M) / (RSQR * BETA (6,M))
CC(4) = CMPLX(CCR,0.0)
C
CCR = C * ALPHA (5,M) * BETA (9,M) / (RSQR * A4B6)
CC(5) = CMPLX(CCR,0.0)
CCR = 0.0
CCI = - 2. * WC * U * KP(M)
CC(6) = CMPLX (CCR,CCI)
CCR = 0.0
CCI = - GMIN1 * WC * KP(M) * U * DU / (2. * C)
CC(7) = CMPLX (CCR,CCI)
CCR = (WC * KP(M)) **2
CCI = 0.0
CC(8) = CMPLX (CCR,CCI)
IF (IP .NE. 3) GO TO 110
C
C***** NONLINEAR COEFFICIENTS *****
C
A1 = ALPHA (1,M)
A2 = ALPHA (2,M)
A3 = ALPHA (3,M)
B1 = BETA (1,M)
B2 = BETA (2,M)
B3 = BETA (3,M)
B4 = BETA (4,M)
B5 = BETA (5,M)
CCR = - .5 * A1*B1 * WC*U / A4B6
CCI = CCR
CC(9) = CMPLX (CCR,CCI)

```

```

    CCR = - .5 * A1 * B3 * WC / (RSQR * A4B6)
    CCI = CCR
    CC(10) = CMPLX (CCR,CCI)
C
    CCR = - .5 * A2*B2 * WC / (RSQR * A4B6)
    CCI = CCR
    CC(11) = CMPLX (CCR,CCI)
    CCR = - ((GAM+1.) * U*U * A1*B1) / (4.*3.1415927*A4B6)
    CCI = - CCR
    CC(12) = CMPLX (CCR,CCI)
    CCR = - (U * A1 * B3) / (4. * RSQR * A4B6)
    CCI = - CCR
    CC(13) = CMPLX (CCR,CCI)
    CCR = - (U * A2 * B2) / (4. * RSQR * A4B6)
    CCI = - CCR
    CC(14) = CMPLX (CCR,CCI)
    CCR = - 3.*U * (1. + .5*GMIN1 * U*DU/C) * A1*B1 / (8.*A4B6)
    CCI = - CCR
    CC(15) = CMPLX (CCR,CCI)
C
    CCR = - DU * (1. - (2.-GAM) * U/C) * A1 * B3 / (16 * RSQR * A4B6)
    CCI = - CCR
    CC(16) = CMPLX (CCR,CCI)
    CCR = - DU * (1. - (2.-GAM) * U/C) * A2 * B2 / (16 * RSQR * A4B6)
    CCI = - CCR
    CC(17) = CMPLX (CCR,CCI)
    CCR = - (GMIN1 * WC * A1 * B1) / (4. * A4B6)
    CCI = CCR
    CC(18) = CMPLX (CCR,CCI)
    CCR = - (GMIN1 * WC * U * DU * A1 * B1) / (4. * C * A4B6)
    CCI = CCR
    CC(19) = CMPLX (CCR,CCI)
    CCR = - GMIN1 * WC * A1 * (B4 - B5) / (4. * RSQR * A4B6)
    CCI = CCR
    CC(20) = CMPLX (CCR,CCI)
C
    CCR = - GMIN1 * A1 * B5 / (2. * RSQR * A4B6)
    CCI = CCR
    CC(21) = CMPLX (CCR,CCI)
    CCR = - GMIN1 * A3 * B2 / (4. * RSQR * A4B6)
    CCI = CCR
    CC(22) = CMPLX (CCR,CCI)
    CCR = - GMIN1 * U*A1 * (B4 - B5) / (4. * RSQR * A4B6)
    CCI = - CCR
    CC(23) = CMPLX (CCR,CCI)
    CCR = - GMIN1 * U * A1 * B5 / (2.*RSQR * A4B6)
    CCI = - CCR
    CC(24) = CMPLX (CCR,CCI)
    CCR = - GMIN1 * U * A3 * B2 / (4.*RSQR * A4B6)
    CCI = - CCR
    CC(25) = CMPLX (CCR,CCI)
110 CONTINUE
    RETURN
    END

```

```

SUBROUTINE INTGRL
C
C   THIS SUBROUTINE EVALUATES THE DIFFERENT TRANSVERSE INTEGRALS.
C
COMMON/X7/ ALPHA(5,3), BETA(9,3)
S1 = 1.84118
S2 = 3.05424
S3 = 3.83171
PI = 3.1415927
C
C *****TANGENTIAL INTEGRALS*****
C
DO 20 NOPT = 1,3
20 ALPHA (NOPT,1) = 0.
ALPHA (4,1) = 1.0
ALPHA (5,1) = -1.0
ALPHA (1,2) = 0.5
ALPHA (2,2) = -0.5
ALPHA (3,2) = -0.5
ALPHA (4,2) = 1.0
ALPHA (5,2) = -4.0
ALPHA (1,3) = 1.0
ALPHA (2,3) = 1.0
ALPHA (3,3) = -1.0
ALPHA (4,3) = 2.0
ALPHA (5,3) = 0.0
DO 30 I = 1,5
DO 30 J = 1,3
30 ALPHA(I,J) = PI*ALPHA(I,J)
C
C *****RADIAL INTEGRALS*****
C
DO 40 MODE = 1,3
GO TO (110,120,130), MODE
110 M=1
S=S1
GO TO 140
120 M=2
S=S2
GO TO 140
130 M=0
S=S3
140 CONTINUE
BETA (1,MODE) = RAD2 (1,1,1,M,S1,S1,S)
BETA (2,MODE) = RAD2 (2,1,1,M,S1,S1,S)
BETA (3,MODE) = RAD2 (7,1,1,M,S1,S1,S)
BETA (4,MODE) = RAD2 (8,1,1,M,S1,S1,S)
BETA (5,MODE) = RAD2 (5,1,1,M,S1,S1,S)
BETA (6,MODE) = RAD1 (1,M,S)
BETA (7,MODE) = RAD1 (4,M,S)
BETA (8,MODE) = RAD1 (5,M,S)
BETA (9,MODE) = RAD1 (2,M,S)
40 CONTINUE
RETURN
END

```



```

FUNCTION RAD1 (NOPT,M,B)
C
C THIS SUBROUTINE CALCULATES THE INTEGRAL OVER THE INTERVAL
C (0,1) OF THE FOLLOWING PRODUCTS OF TWO BESSEL FUNCTIONS
C
C NOPT = 1  JM(B*R) * JM(B*R) * R
C
C NOPT = 2  JM(B*R) * JM(B*R)/R
C
C NOPT = 3  JPM(B*R) * JM(B*R) * R
C
C NOPT = 4  JPM(B*R) * JM(B*R)
C
C NOPT = 5  JPPM(B*R) * JM(B*R) * R
C
C JM IS THE BESSEL FUNCTION OF FIRST KIND OF ORDER M
C JPM IS THE DERIVATIVE OF JM WITH RESPECT TO R
C JPPM IS THE SECOND DERIVATIVE OF JM WITH RESPECT TO R
C M IS A NON-NEGATIVE INTEGER
C B IS A REAL NUMBER
C
C
C DIMENSION FUNCT(200)
DOUBLE PRECISION DN, DH, DSTEP, DR, ARG, BES1, BES2, BESH,
1 BESL, PROD, FUNCT, S1, S2, S3
C
C NN = 100
DN = NN
DH = 1.0/DN
NP1 = NN + 1
C
C ***** CALCULATION OF INTEGRANDS *****
C
C DO 160 I = 1, NP1
DSTEP = I - 1
DR = DH * DSTEP
ARG = B * DR
C
C CALCULATE BESSEL FUNCTIONS.
CALL JBES(M,ARG,BES2,$500)
BES1 = BES2
IF (NOPT .LT. 3) GO TO 130
C
C CALCULATE FIRST DERIVATIVES OF BESSEL FUNCTIONS.
CALL JBES(M+1,ARG,BESH,$500)
IF (NOPT .EQ. 5) GO TO 120
IF (I .EQ. 1) GO TO 115
RM = M
BES1 = B * (RM*BES1/ARG - BESH)
GO TO 130
115 IF (M .EQ. 0) GO TO 117
CALL JBES(M-1,ARG,BESL,$500)
BES1 = B * (BESL - BESH)/2.0
GO TO 130
117 CALL JBES(1,ARG,BES1,$500)
BES1 = -BES1 * B

```

```

GO TO 130
C
C   CALCULATE SECOND DERIVATIVES OF BESSEL FUNCTIONS.
120 IF (I .EQ. 1) GO TO 122
    RM = M
    F = RM * (RM - 1.0)/(ARG * ARG)
    BES1 = ((F - 1.0) * BES1 + BESH/ARG) * B * B
    GO TO 130
122 CALL JBES(M+2, ARG, BESH, $500)
    IF (M .EQ. 0) BES1 = 0.5 * B * B * (BESH - BES1)
    IF (M .EQ. 1) BES1 = 0.25 * B * B * (BESH - 3.0*BES1)
    IF (M .LT. 2) GO TO 130
    CALL JBES(M-2, ARG, BESL, $500)
    BES1 = 0.25 * B * B * (BESL - 2.0*BES1 + BESH)
C
130 PROD = BES1 * BES2
C
C   CALCULATE WEIGHTING FUNCTIONS AND LIMITS FOR R = 0.
    IF (NOPT .EQ. 2) GO TO 140
    IF (NOPT .EQ. 4) GO TO 150
    FUNCT(I) = PROD * DR
    GO TO 160
140 IF (I .EQ. 1) GO TO 145
    FUNCT(I) = PROD/DR
    GO TO 160
145 FUNCT(I) = 0.0
    GO TO 160
150 FUNCT(I) = PROD
C
160 CONTINUE
C
C
C   ***** SIMPSONS RULE INTEGRATION *****
C
    NM1 = NN - 1
    S1 = FUNCT(1) + FUNCT(NP1)
    S2 = 0.0
    S3 = 0.0
    DO 20 I = 2, NN, 2
        S2 = S2 + FUNCT(I)
    20 CONTINUE
    DO 30 I = 3, NM1, 2
        S3 = S3 + FUNCT(I)
    30 CONTINUE
    RESULT = DH * (S1 + 4.0*S2 + 2.0*S3)/3.0
    RAD1 = RESULT
    GO TO 501
500 WRITE (6, 6000)
6000 FORMAT (1H1, 10HERROR JBES)
501 CONTINUE
    RETURN
    END

```

```

FUNCTION RAD2 (NOPT,L,M,N,A,B,C)
C
C THIS SUBROUTINE CALCULATES THE INTEGRAL OVER THE INTERVAL
C (0,1) OF THE FOLLOWING PRODUCTS OF THREE BESSEL FUNCTIONS
C
C NOPT = 1 JL(A*R) * JM(B*R) * JN(C*R) * R
C
C NOPT = 2 JL(A*R) * JM(B*R) * JN(C*R)/R
C
C NOPT = 3 JL(A*R) * JM(B*R) * JN(C*R)/(R*R)
C
C NOPT = 4 JPL(A*R) * JM(B*R) * JN(C*R) * R
C
C NOPT = 5 JPL(A*R) * JM(B*R) * JN(C*R)
C
C NOPT = 6 JPL(A*R) * JM(B*R) * JN(C*R)/R
C
C NOPT = 7 JPL(A*R) * JPM(B*R) * JN(C*R) * R
C
C NOPT = 8 JPPL(A*R) * JM(B*R) * JN(C*R) * R
C
C NOPT = 9 JPPL(A*R) * JPM(B*R) * JN(C*R) * R
C
C JL IS THE BESSEL FUNCTION OF FIRST KIND OF ORDER L
C JPL IS THE DERIVATIVE OF JL WITH RESPECT TO R
C JPPL IS THE SECOND DERIVATIVE OF JL WITH RESPECT TO R
C L, M, N ARE NON-NEGATIVE INTEGERS
C A, B, C ARE REAL NUMBERS
C
C
C DIMENSION FUNCT(200)
C DOUBLE PRECISION DN, DH, DSTEP, DR, ARG1, ARG2, ARG3,
1 BES1, BES2, BES3, BESH, BESL, PROD,
2 FUNCT, BESLIM, S1, S2, S3
C
C NN = 100
C DN = NN
C DH = 1.0/DN
C NP1 = NN + 1
C
C ***** CALCULATION OF INTEGRANDS *****
C
C DO 160 I = 1, NP1
C DSTEP = I - 1
C DR = DH * DSTEP
C ARG1 = A * DR
C ARG2 = B * DR
C ARG3 = C * DR
C
C CALCULATE BESSEL FUNCTIONS.
C CALL JBES(N,ARG3,BES3,$500)
C CALL JBES(L,ARG1,BES1,$500)
C CALL JBES(M,ARG2,BES2,$500)
C IF ((NOPT .EQ. 7) .OR. (NOPT .EQ. 9)) GO TO 105
C GO TO 110
C

```

```

C      CALCULATE FIRST DERIVATIVES OF BESSEL FUNCTIONS.
105  CALL JBES(M+1,ARG2,BESH,$500)
      IF (I .EQ. 1) GO TO 107
      RM = M
      BES2 = B * (RM*BES2/ARG2 - BESH)
      GO TO 110
107  IF (M .EQ. 0) GO TO 109
      CALL JBES(M-1,ARG2,BESL,$500)
      BES2 = B * (BESL - BESH)/2.0
      GO TO 110
109  CALL JBES(1,ARG2,BES2,$500)
      BES2 = -BES2 * B
110  IF (NOPT .LT. 4) GO TO 130
      CALL JPES(L+1,ARG1,BESH,$500)
      IF (NOPT .GT. 7) GO TO 120
      IF (I .EQ. 1) GO TO 115
      RL = L
      BES1 = A * (RL*BES1/ARG1 - BESH)
      GO TO 130
115  IF (L .EQ. 0) GO TO 117
      CALL JBES(L-1,ARG1,BESL,$500)
      BES1 = A * (BESL - BESH)/2.0
      GO TO 130
117  CALL JBES(1,ARG1,BES1,$500)
      BES1 = -BES1 * A
      GO TO 130

C
C      CALCULATE SECOND DERIVATIVES OF BESSEL FUNCTIONS.
120  IF (I .EQ. 1) GO TO 122
      RL = L
      F = RL * (RL - 1.0)/(ARG1 * ARG1)
      BES1 = ((F - 1.0) * BES1 + BESH/ARG1) * A * A
      GO TO 130
122  CALL JBES(L+2,ARG1,BESH,$500)
      IF (L .EQ. 0) BES1 = 0.5 * A * A * (BESH - BES1)
      IF (L .EQ. 1) BES1 = 0.25 * A * A * (BESH - 3.0*BES1)
      IF (L .LT. 2) GO TO 130
      CALL JBES(L-2,ARG1,BESL,$500)
      BES1 = 0.25 * A * A * (BESL - 2.0*BES1 + BESH)

C
130  PROD = BES1 * BES2 * BES3

C
C      CALCULATE WEIGHTING FUNCTIONS AND LIMITS FOR R = 0.
      IF ((NOPT .EQ. 2) .OR. (NOPT .EQ. 6)) GO TO 133
      IF (NOPT .EQ. 3) GO TO 136
      IF (NOPT .EQ. 5) GO TO 140
      FUNCT(I) = PROD * DR
      GO TO 160
133  IF (I .EQ. 1) GO TO 134
      FUNCT(I) = PROD/DR
      GO TO 160
134  BESLIM = 0.0
      IF (NOPT .EQ. 6) GO TO 135
      IF ((L.EQ.1) .AND. (M.EQ.0) .AND. (N.EQ.0)) BESLIM = A/2.0
      IF ((L.EQ.0) .AND. (M.EQ.1) .AND. (N.EQ.0)) BESLIM = B/2.0
      IF ((L.EQ.0) .AND. (M.EQ.0) .AND. (N.EQ.1)) BESLIM = C/2.0

```

```

      GO TO 155
135 IF ((L.EQ.0) .AND. (M.EQ.0) .AND. (N.EQ.0)) BESLIM = -A*A/2.0
      IF ((L.EQ.1) .AND. (M.EQ.1) .AND. (N.EQ.0)) BESLIM = A*B/4.0
      IF ((L.EQ.1) .AND. (M.EQ.0) .AND. (N.EQ.1)) BESLIM = A*C/4.0
      IF ((L.EQ.2) .AND. (M.EQ.0) .AND. (N.EQ.0)) BESLIM = A*A/4.0
      GO TO 155
136 IF (I .EQ. 1) GO TO 138
      FUNCT(I) = PROD/(DR*DR)
      GO TO 160
138 BESLIM = 0.0
      IF ((L.EQ.2) .AND. (M.EQ.0) .AND. (N.EQ.0)) BESLIM = A*A/8.0
      IF ((L.EQ.0) .AND. (M.EQ.2) .AND. (N.EQ.0)) BESLIM = B*B/8.0
      IF ((L.EQ.0) .AND. (M.EQ.0) .AND. (N.EQ.2)) BESLIM = C*C/8.0
      IF ((L.EQ.1) .AND. (M.EQ.1) .AND. (N.EQ.0)) BESLIM = A*B/4.0
      IF ((L.EQ.1) .AND. (M.EQ.0) .AND. (N.EQ.1)) BESLIM = A*C/4.0
      IF ((L.EQ.0) .AND. (M.EQ.1) .AND. (N.EQ.1)) BESLIM = B*C/4.0
      GO TO 155
140 FUNCT(I) = PROD
      GO TO 160
155 FUNCT(I) = BESLIM
C
160 CONTINUE
C
C
C ***** SIMPSONS RULE INTEGRATION *****
C
      NM1 = NN - 1
      S1 = FUNCT(1) + FUNCT(NM1)
      S2 = 0.0
      S3 = 0.0
      DO 20 I = 2, NN, 2
        S2 = S2 + FUNCT(I)
20 CONTINUE
      DO 30 I = 3, NM1, 2
        S3 = S3 + FUNCT(I)
30 CONTINUE
      RESULT = DH * (S1 + 4.0*S2 + 2.0*S3)/3.0
      RAD2 = RESULT
      GO TO 501
500 WRITE (6, 6000)
6000 FORMAT (1H1,10HERROR JBES)
501 CONTINUE
      RETURN

```

```

SUBROUTINE RKTZ(H,T1,G,DUM,IRK)
C
C THIS SUBROUTINE PERFORMS A FOURTH ORDER RUNGE-KUTTA INTEGRATION
C TO OBTAIN THE INITIAL VALUES FOR THE PREDICTOR-CORRECTOR METHOD.
C
C NU IS THE NUMBER OF DIFFERENTIAL EQUATIONS TO BE SOLVED.
C IF IP = 1, INTEGRATION IS CARRIED OUT FOR ZETA ONLY (NU = 2).
C IF IP = 2, INTEGRATION IS CARRIED OUT FOR ZETA AND AH (NU = 4).
C IF IP = 3, INTEGRATION IS CARRIED OUT FOR ZETA AND GAMMA (NU = 4).
C IP IS PASSED TO THIS SUBROUTINE THROUGH BLOCK COMMON X3.
C
C H IS THE STEP-SIZE; INPUT.
C T1 IS THE CURRENT VALUE OF STEADY STATE POTENTIAL; INPUT.
C G ARE THE VALUES OF THE FUNCTIONS AT THE NEXT STEP; OUTPUT.
C DUM ARE THE VALUES OF THE DERIVATIVES OF THE FUNCTIONS
C AT THE NEXT STEP; OUTPUT.
C DUM ARE OBTAINED BY CALLING SUBROUTINE RKDIF.
C
C
COMMON /X3/ WC,SVN,IP,MODE,NU,KP(3)
DIMENSION A(4),G(4),GZ(4),DUM(4),FZ(4,4)
A(1)=0.
A(2)=.5
A(3)=.5
A(4)=1.
TZ=T1
NU=4
IF (IP.EQ.1) NU=2
DO 10 J=1,NU
10 GZ(J)=G(J)
IK=1
CALL RKDIF(TZ,GZ,DUM,IK,IRK)
DO 25 J=1,NU
25 FZ(1,J)=DUM(J)
DO 30 IK=2,4
TZ=T1+A(IK)*H
DO 35 J=1,NU
35 GZ(J)=G(J)+A(IK)*H*FZ(IK-1,J)
CALL RKDIF(TZ,GZ,DUM,IK,IRK)
DO 50 J=1,NU
50 FZ(IK,J)=DUM(J)
30 CONTINUE
DO 55 J=1,NU
55 G(J)=G(J)+H*(FZ(1,J)+2.*(FZ(2,J)+FZ(3,J))+FZ(4,J))/6.
IK=4
CALL RKDIF(TZ,G,DUM,IK,IRK)
75 RETURN
END

```

SUBROUTINE RKDIF(P,G,GP,IK,IRK)

```
C
C   THIS SUBROUTINE EVALUATES THE DIFFERENTIAL ELEMENT IN THE
C   RUNGE-KUTTA INTEGRATION SCHEME.
C   P IS THE CURRENT VALUE OF STEADY-STATE POTENTIAL; INPUT.
C   G ARE THE VALUES OF THE FUNCTIONS AT P; INPUT.
C   GP ARE THE DERIVATIVES OF FUNCTIONS AT P; OUTPUT.
C
COMMON /X1/ CM,ANGLE,RCC,RCT,GAM,Q,RT,DP
COMMON /X2/ T,R1,R2,NPLAST,NEND,IEXTN
COMMON /X3/ WC,SVN,IP,MODE,NU,KP(3)
COMMON /X4/ RU(7),EDU(7),ZTHR1,GTHR1
COMMON /X6/ AFN,AFN1,AFN2
COMPLEX AFN(1000),AFN1(1000),AFN2(1000)
COMPLEX CC(25),CFH,CFM,CFN,INHMG
COMPLEX ZETA,ZETA1,AH,AH1,CGAM,CGAM1,ZTHR1,GTHR1,AP,AP1,AP2
DIMENSION G(4),GP(4)

C
ZR = G(1)
ZI = G(2)
ZETA = CMPLX (ZR,ZI)
GO TO (110,120,130),IF
120 AHR = G(3)
    AHI = G(4)
    AH = CMPLX (AHR,AHI)
GO TO 110
130 CONTINUE
    GAMR = G(3)
    GAMI = G(4)
    CGAM = CMPLX (GAMR,GAMI)
110 CONTINUE
    IF (P) 15,10,15
10   GP(1) = REAL(ZTHR1)
    GP(2) = AIMAG(ZTHR1)
GO TO (140,150,160), IF
150 AH1 = AH * ZETA
    GP(3) = REAL (AH1)
    GP(4) = AIMAG (AH1)
GO TO 140
160 CONTINUE
    GP(3) = REAL (GTHR1)
    GP(4) = AIMAG (GTHR1)
140 CONTINUE
GO TO 20
15  ICL = 2*IRK - 2
    IF (IK .EQ. 1) ICL = 2*IRK - 3
    IF (JK .EQ. 4) ICL = 2*IRK - 1
    U=RU(ICL)
    DU=RDU(ICL)
    C=1.-(GAM-1.)*U*.5
    R=G*((C)**(-1/(2*(GAM-1.))))*(U**-.25)*4.
    CALL COEFFS (U,DU,C,R,CC)
    CFH = CC(1)
    CFM = CC(2) + CC(6)
    CFN = CC(3) + CC(4) + CC(5) + CC(7) + CC(8)
```

```

ZETA1 = ( -CFM * ZETA - CFN) / CFH - ZETA * ZETA
GP(1) = REAL (ZETA1)
GP(2) = AIMAG (ZETA1)
GO TO (170,180,190), IP
180 AH1 = AH * ZETA
GP(3) = REAL (AH1)
GP(4) = AIMAG (AH1)
GO TO 170
190 CONTINUE
GO TO (30,40,40,50), IK
30 AP = AFN (IRK-1)
AP1 = AFN1 (IRK-1)
AP2 = AFN2 (IRK-1)
GO TO 60
40 AP = .5 * (AFN (IRK-1) + AFN (IRK))
AP1 = .5 * (AFN1 (IRK-1) + AFN1 (IRK))
AP2 = .5 * (AFN2 (IRK-1) + AFN2 (IRK))
GO TO 60
50 AP = AFN (IRK)
AP1 = AFN1 (IRK)
AP2 = AFN2 (IRK)
60 CONTINUE
INHMG = - CC(18) * AP * AP2 - CC(12) * AP1 * AP2 - (CC(9)
1      + CC(15)) * AP1 * AP1 - (CC(13) + CC(14) + CC(19)
2      + CC(23) + CC(24) + CC(25)) * AP1 * AP - (CC(10) + CC(11)
3      + CC(17) + CC(20) + CC(21) + CC(22)) * AP * AP
CGAM1 = ( - ZETA + .5* (GAM-1.) * DU/C - CFM/CFH) * CGAM
1      - INHMG / (C * CFH)
GP(3) = REAL (CGAM1)
GP(4) = AIMAG (CGAM1)
170 CONTINUE
20  RETURN
END

```



```

SUBROUTINE ZADAMS (H,X,Y,DY,ITORZ)
C
C THIS SUBROUTINE CARRIES OUT A MODIFIED ADAMS PREDICTOR-CORRECTOR
C INTEGRATION SCHEME TO SOLVE THE VARIOUS DIFFERENTIAL EQUATIONS AS
C DESCRIBED BELOW
C IF IP = 1, INTEGRATION IS CARRIED OUT FOR ZETA ONLY;
C IF IP = 2, INTEGRATION IS CARRIED OUT FOR ZETA AND AH;
C IF IP = 3, INTEGRATION IS CARRIED OUT FOR ZETA AND GAMMA.
C IP IS PASSED TO THE SUBROUTINE THROUGH COMMON BLOCK X3.
C
C H IS THE STEP-SIZE; INPUT.
C X IS THE VALUE OF STEADY-STATE POTENTIAL AT THE STATION ,
C WHERE THE PREDICTOR-CORRECTOR INTEGRATION STARTS; INPUT.
C DURING THE PROGRAM, X IS CHANGED TO VALUE AT CURRENT STATION.
C Y ARE THE VALUES 'AT X , OF THE FUNCTIONS, WHOSE EQUATIONS ARE
C BEING SOLVED; INPUT AND OUTPUT.
C DY ARE THE DERIVATIVES OF Y; INPUT AND OUTPUT.
C
C ITOZ PASSES TO MAIN PROGRAM THE INFORMATION AS TO WHICH VARIABLE
C (TAU OR ZETA) HAS BEEN INTEGRATED.
C ITOZ = 1 : INTEGRATION OF EQUATION FOR TAU.
C ITOZ = 2 : INTEGRATION OF EQUATION FOR ZETA.
C
C
COMMON /X1/ CM, ANGLE, RCC, RCT, GAM, @, RT
COMMON /X2/ T, R1, R2, NPLAST, NEND, IEXTN
COMMON /X3/ WC, SVN, IP, MODE, NU, KP(3)
COMMON /X5/ U(1000), DU(1000), C(1000), RW(1000)
COMMON /X6/ AFN, AFN1, AFN2
COMMON /X8/ ZETA, TAU, CCEXT
COMPLEX ZETA(1000), TAU(1000), CCEXT(25)
COMPLEX AFN(1000), AFN1(1000), AFN2(1000)
COMPLEX CC(25), CFH, CFM, CFN, INHMG, ZETA1, AH, AH1, AH2, AF, AF1, AF2,
1 CGAM, CGAM1
DIMENSION Y(4), DY(4,4), DP(4), PRED(4), COR(4)
C
NP=4
ITORZ = 2
IF (IEXTN .NE. 1) GO TO 10
C
C DEFINE STEADY STATE QUANTITIES IN THE EXTENSION REGION.
C
UEXT = U(NEND)
CEXT = C(NEND)
REXT = RW(NEND)
DUEXT = DU(NEND)
CALL COEFFS (UEXT, DUEXT, CEXT, REXT, CCEXT)
C
C NU IS THE NUMBER OF EQUATIONS TO BE SOLVED.
C
10 CONTINUE
DO 15 J=1, NU
PRED(J)=Y(J)+H*(55.*DY(J,4)-59.*DY(J,3)+37.*DY(J,2)
1 -9.*DY(J,1))/24.
15 CONTINUE
X=X+H

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

NF=NP+1
ZR=PRED(1)
ZI=PRED(2)
ZETA(NP) = CMPLX (ZR,ZI)
GO TO (110,120,130), IP
120 AHR = PRED(3)
    AHI = PRED(4)
    AH = CMPLX (AHR,AHI)
    GO TO 110
130 CONTINUE
    CGAM = CMPLX (PRED(3),PRED(4))
110 CONTINUE
    IF (NP .LE. NPLAST) GO TO 20
    DO 25 I = 1,25
25   CC(I) = CCEXT(I)
    GO TO 30
20   CONTINUE
    UP=U(NP)
    DUP=DU(NP)
    CP=C(NP)
    R=RW(NP)
    CALL COEFFS (UP,DUP,CP,R,CC)
30   CONTINUE
    CFH = CC(1)
    CFM = CC(2) + CC(6)
    CFN = CC(3) + CC(4) + CC(5) + CC(7) + CC(8)
    ZETA1 = ( - CFM * ZETA(NP) - CFN) / CFH - ZETA(NP) **2
    DP(1) = REAL (ZETA1)
    DP(2) = AIMAG (ZETA1)
    GO TO (140,150,160), IP
150  AH1 = AH * ZETA(NP)
    DP(3) = REAL (AH1)
    DP(4) = AIMAG (AH1)
    GO TO 140
160  CONTINUE
C
C   AP,AP1 AND AP2 ARE THE VALUES OF THE AMPLITUDE FUNCTION AND
C   THEIR DERIVATIVES AT THE CURRENT STATION.
    AP = AFN(NP)
    AP1 = AFN1(NP)
    AP2 = AFN2(NP)
C
    INHMG = - CC(18) * AP * AP2 - CC(12) * AP1 * AP2 - (CC(9)
1      + CC(15)) * AP1 * AP1 - (CC(13) + CC(14) + CC(19)
2      + CC(23) + CC(24) + CC(25)) * AP1 * AP - (CC(10) + CC(11)
3      + CC(17) + CC(20) + CC(21) + CC(22)) * AP * AP
    CGAM1 = (- ZETA(NP) + .5* (GAM-1.) * DUP/CP - CFM/CFH) * CGAM
1      - INHMG / (CP * CFH)
    DP(3) = REAL (CGAM1)
    DP(4) = AIMAG (CGAM1)
140  CONTINUE
    DO 45 J=1,NU
    COR(J)= Y(J) + H*(DY(J,2)-5.*DY(J,3)+19.*DY(J,4)
1      +9.*DP(J))/24.0
45   Y(J)= (251.*COR(J)+19.*PRED(J))/270.

```

```

DO 55 I=1,NU
DO 55 J=1,3
55 DY(I,J) = DY(I,J+1)
ZR=Y(1)
ZI=Y(2)
ZETA(NP) = CMPLX (ZR,ZI)
ZETA1 = ( - CFM * ZETA(NP) - CFN) / CFH - ZETA(NP) **2
DY (1,4) = REAL (ZETA1)
DY (2,4) = AIMAG (ZETA1)
GO TO (170,180,190), IF
180 AH = CMPLX (Y(3),Y(4))
AH1 = AH * ZETA(NP)
DY(3,4) = REAL (AH1)
DY(4,4) = AIMAG (AH1)
IF (MODE.NE.1) GO TO 182
AH2 = AH1 * ZETA(NP) + AH * ZETA1
AFN(NP) = AH
AFN1(NP) = AH1
AFN2(NP) = AH2
182 GO TO 170
190 CONTINUE
CGAM = CMPLX (Y(3),Y(4))
CGAM1 = (- ZETA(NP) + .5* (GAM-1.) * DUF/CF - CFM/CFH) * CGAM
1 - INHMG / (CF * CFH)
DY(3,4) = REAL (CGAM1)
DY (4,4) = AIMAG (CGAM1)
170 CONTINUE
IF (NP .EQ. NEND) GO TO 100
C
C DECIDE WHICH EQUATION IS TO BE INTEGRATED : TAU OR ZETA
C
IF (CABS (ZETA(NP)) .LT. 10) GO TO 10
ITORZ = 1
C
C CALCULATE VALUE OF TAU AND ITS DERIVATIVE AT LAST FOUR STATIONS.
DO 410 I = 1,4
410 TAU (NP-4+I) = 1./ZETA(NP-4+I)
Y(1) = REAL (TAU(NP))
Y(2) = AIMAG (TAU(NP))
DO 420 I = 1,4
TSQR = REAL (TAU(NP-4+I) * TAU(NP-4+I))
TSQI = AIMAG (TAU(NP-4+I) * TAU(NP-4+I))
ZPR = DY(1,I)
ZPI = DY(2,I)
DY(1,I) = - TSQR*ZPR + TSQI*ZPI
DY(2,I) = - TSGR*ZPI - TSQI*ZPR
420 CONTINUE
C
CALL TADAMS (H,NP,X,Y,DY,IQ,ITORZ)
GO TO (10,100), IQ
100 RETURN
END

```

SUBROUTINE TADAMS (H,NP,X,Y,DY,IQ,ITORZ)

```
C
C THIS SUBROUTINE CARRIES OUT A MODIFIED ADAMS PREDICTOR-CORRECTOR
C INTEGRATION SCHEME TO SOLVE THE VARIOUS DIFFERENTIAL EQUATIONS AS
C DESCRIBED BELOW
C IF IP = 1, INTEGRATION IS CARRIED OUT FOR TAU ONLY;
C IF IP = 2, INTEGRATION IS CARRIED OUT FOR TAU AND AH;
C IF IP = 3, INTEGRATION IS CARRIED OUT FOR TAU AND GAMMA.
C IP IS PASSED TO THE SUBROUTINE THROUGH COMMON BLOCK X3.
C
C H IS THE STEP-SIZE; INPUT.
C X IS THE VALUE OF STEADY-STATE POTENTIAL AT THE STATION,
C WHERE THE PREDICTOR-CORRECTOR INTEGRATION STARTS; INPUT.
C DURING THE PROGRAM, X IS CHANGED TO THE VALUE AT CURRENT STATION.
C Y ARE THE VALUES AT X, OF THE FUNCTIONS, WHOSE EQUATIONS ARE
C BEING SOLVED; INPUT AND OUTPUT.
C DY ARE THE DERIVATIVES OF Y; INPUT AND OUTPUT.
C IQ INDICATES WHETHER INTEGRATION IS COMPLETE; OUTPUT.
C IQ = 1 : INTEGRATION IS TO BE CONTINUED BY SUBROUTINE ZADAMS.
C IQ = 2 : INTEGRATION IS COMPLETE.
C ITOZ INDICATES WHICH EQUATION SHOULD BE INTEGRATED :
C ITOZ = 1 : INTEGRATION OF EQUATION FOR ZETA.
C ITOZ = 2 : INTEGRATION OF EQUATION FOR TAU.
C
C
C COMMON /X1/ CM, ANGLE, RCC, RCT, GAM, G, RT
COMMON /X2/ T, R1, R2, NFLAST, NEND, IEXTN
COMMON /X3/ WC, SVN, IP, MODE, NU, KP(3)
COMMON /X5/ U(1000), DU(1000), C(1000), RW(1000)
COMMON /X6/ AFN, AFN1, AFN2
COMMON /X8/ ZETA, TAU, CCEXT
COMPLEX AFN(1000), AFN1(1000), AFN2(1000)
COMPLEX CC(25), CFH, CFM, CFN, INHMG, AH, AH1, AF, AF1, AF2, CGAM, CGAM1
COMPLEX ZETA(1000), TAU(1000), TAU1, CCEXT(25)
DIMENSION Y(4), DY(4,4), DP(4), PRED(4), COR(4)
C
10 CONTINUE
C NU IS THE NUMBER OF EQUATIONS TO BE SOLVED.
DO 15 J = 1, NU
PRED(J) = Y(J) + H * (55. * DY(J, 4) - 59. * DY(J, 3) + 37. * DY(J, 2)
1 - 9. * DY(J, 1)) / 24.
15 CONTINUE
X = X + H
NP = NP + 1
TR = PRED(1)
TI = PRED(2)
TAU(NP) = CMPLX(TR, TI)
ZETA(NP) = 1. / TAU(NP)
GO TO (110, 120, 130), IP
120 AHR = PRED(3)
AHI = PRED(4)
AH = CMPLX(AHR, AHI)
GO TO 110
130 CONTINUE
CGAM = CMPLX(PRED(3), PRED(4))
```

```

110 CONTINUE
    IF (NP .LE. NPLAST) GO TO 20
C
C OBTAIN COEFFICIENTS IN THE EXTENSION SECTION.
DO 25 I = 1,25
25 CC(I) = CCEXT(I)
C
GO TO 30
20 CONTINUE
DUP = DU(NP)
UP = U(NP)
CF = C(NP)
R = RW (NP)
CALL COEFFS (UP,DUP,CF,R,CC)
30 CONTINUE
CFH = CC(1)
CFM = CC(2) + CC(6)
CFN = CC(3) + CC(4) + CC(5) + CC(7) + CC(8)
TAU1 = 1. + (CFM + CFN * TAU(NP)) * TAU(NP) / CFH
IP(1) = REAL (TAU1)
DP(2) = AIMAG (TAU1)
GO TO (140,150,160), IF
150 AH1 = AH / TAU(NP)
DP(3) = REAL (AH1)
DP(4) = AIMAG (AH1)
GO TO 140
160 CONTINUE
C
C AP,AP1 AND AP2 ARE THE VALUES OF THE AMPLITUDE FUNCTION AND
C THEIR DERIVATIVES AT THE CURRENT STATION.
AP = AFN(NP)
AP1 = AFN1(NP)
AP2 = AFN2(NP)
C
INHMG = - CC(18) * AP * AP2 - CC(12) * AP1 * AP2 - (CC(9)
1 + CC(15)) * AP1 * AP1 - (CC(13) + CC(14) + CC(19)
2 + CC(23) + CC(24) + CC(25)) * AP1 * AP - (CC(10) + CC(11)
3 + CC(17) + CC(20) + CC(21) + CC(22)) * AP * AP
CGAM1 = ( - ZETA(NP) + .5 * (GAM - 1.) * DUP/CF - CFM/CFH) * CGAM
1 - INHMG / (CF * CFH)
DP(3) = REAL (CGAM1)
DP(4) = AIMAG (CGAM1)
140 CONTINUE
DO 45 J=1,NU
COR(J)= Y(J) + H*(DY(J,2)-5.*DY(J,3)+19.*DY(J,4)
1 +9.*DP(J))/24.0
45 Y(J)= (251.*COR(J)+19.*PRED(J))/270.
DO 55 I=1,NU
LO 55 J=1,3
55 DY(I,J) = DY(I,J+1)
TR = Y(1)
TI = Y(2)
T2 = TR*TR + TI*TI
TAU (NP) = CMPLX (TR, TI)
ZETA (NP) = 1./ TAU(NP)

```

```

    TAU1 = 1. + (CFM + CFN * TAU(NP)) * TAU(NF) / CFH
    DY (1,4) = REAL (TAU1)
    DY (2,4) = AIMAG (TAU1)
180  GO TO (170,180,190), IF
    AHR = Y(3)
    AHI = Y(4)
    AH = CMPLX (AHR,AHI)
    AH1 = AH / TAU(NF)
    DY (3,4) = REAL (AH1)
    DY (4,4) = AIMAG (AH1)
    IF (MODE .NE. 1) GO TO 182
    AFN(NF) = AH
    AFN1(NF) = AH1
    AFN2 (NF) = ( TAU(NP) * AFN1(NF) - TAU1 * AFN(NF) ) /
1      ( TAU(NP)*TAU(NF) )
182  GO TO 170
190  CONTINUE
    CGAM = CMPLX (Y(3),Y(4))
    CGAM1 = ( - ZETA(NP) + .5 * (GAM - 1.) * DUP/CF - CFM/CFH) * CGAM
1      - INHMG / (CF * CFH)
    DY (3,4) = REAL (CGAM1)
    DY (4,4) = AIMAG (CGAM1)
170  CONTINUE
    IF (NP .EQ. NEND) GO TO 100
C
C  DECIDE WHICH EQUATION IS TO BE INTEGRATED : TAU OR ZETA
C
    IF (CABS(TAU(NP)) .LT. .10) GO TO 10
    ITOZ = 2
    Y(1) = REAL ( ZETA(NP) )
    Y(2) = AIMAG ( ZETA(NP) )
C
C  CALCULATE DERIVATIVES OF ZETA AT THE LAST FOUR POINTS.
    IO 420 I = 1,4
    ZSQR = REAL ( ZETA(NP-4+I) * ZETA(NP-4+I) )
    ZSQI = AIMAG ( ZETA(NP-4+I) * ZETA(NP-4+I) )
    TPR = DY(1,I)
    TPI = DY(2,I)
    DY(1,I) = - ZSQR*TPR + ZSQI*TPI
    DY(2,I) = - ZSQR*TPI - ZSQI*TPR
420  CONTINUE
C
    IO = 1
    RETURN
100  IO = 2
105  RETURN
    END

```

APPENDIX B

PROGRAM COEFFS3D: A USER'S MANUAL

Program COEFFS3D calculates the coefficients of both the linear and nonlinear terms that appear in Eq. (20). These coefficients are required as input for Program LCYC3D (see Appendix C) which numerically integrates this system of equations. Program COEFFS3D is a slightly modified version of the program described in detail in Appendix C of Ref. 11. The modification lies in the evaluation of one more coefficient, $C_h(j, p)$ defined by

$$C_h(j, p) = \bar{u}_e \bar{c}_e^2 \Gamma_p Z_j^*(z_e) \int_0^{2\pi} \Theta_p \Theta_j d\theta \int_0^1 R_p R_j r dr.$$

This coefficient represents the effect of nozzle nonlinearities. Except for this additional coefficient, the two programs are very similar in the structure of their numerical calculations and their output. Hence in this user's manual, only the listing of the entire program together with a precise description of the necessary input is given. For details of the program, one is referred to Appendix C of Ref. 11.

In the following description of the input, the location number refers to columns of the card. Three formats are used for input: "A" indicates alphanumeric characters, "I" indicates integers and "F" indicates real numbers with a decimal point. For the "I" and "F" formats the values are placed in fields of five and ten locations respectively (right justified).

<u>No. of Cards</u>	<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
1	1-72	A	Title	Title of the case
1	1-10	F	GAMMA	Ratio of specific heats
	11-20	F	UE	Steady-state Mach number at nozzle entrance
	21-30	F	R/D	Length-to-diameter ratio
	31-40	F	Z/COMB	Length of the combustion zone

<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
41-45	I	NDROPS	If 0: droplet momentum source neglected If 1: droplet momentum source included
46-50	I	NOZZIE	If 0: quasi-steady nozzle If 1: conventional nozzle
1-5	I	NJMAX	Number of series terms (complex)
6-10	I	NONLIN	If 0: linear terms only If 1: both linear and nonlinear terms
11-15	I	NEGL	If 0: all non-zero coefficients calculated If 1: small coefficients neglected
16-20	I	NOUT	If 0: printed output only If 1: printed and written into file If 2: written into file only If 3: card output only
21-25	I	NOZNLI	If 0: nozzle nonlinearities neglected If 1: nozzle nonlinearities included
26-30	I	NZDATA	If 0: nozzle admittance values input through cards If 1: nozzle admittance values input through file If NZDATA is 1, NOUT in program NOZADM should be 1

The next card is necessary only if NEGL = 1.

<u>No. of Cards</u>	<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
1	1-10	F	SM1	Linear coefficients with absolute value less than SM1 neglected
	11-20	F	SM2	Nonlinear coefficients with absolute value less than SM2 neglected

The next NJMAX cards are necessary only if NOZZLE = 1 and NZDATA = 0.

NJMAX	1-5	I	J	Integer which identifies the series term
	6-15	F	AMPL(J)	Amplitude of the linear nozzle admittance
	16-25	F	PHASE(J)	Phase of the linear nozzle admittance

The next NJMAX cards are necessary only if NZDATA = 0 and NOZNLL = 1.

NJMAX	1-5	I	J	Integer which identifies the series term
	6-15	F	GNOZ(J)	Real part of the nonlinear nozzle admittance
	16-25	F	GNOZ(J)	Imaginary part of the nonlinear nozzle admittance
NJMAX	1-5	I	J	Integer which identifies series term
	6-10	I	L(J)	Axial mode number, l
	11-15	I	M(J)	Tangential mode number, m
	16-20	I	N(J)	Radial mode number, n
	21-25	I	NS(J)	NS(J) = 1: $\Theta_j = \sin(m\theta)$ NS(J) = 2: $\Theta_j = \cos(m\theta)$
	26-30	A	NAME(J)	Four character name

FORTTRAN Listing

```
C
C
C ***** PROGRAM COEFFS3D *****
C
C     THIS PROGRAM COMPUTES THE COEFFICIENTS WHICH APPEAR
C     IN THE DIFFERENTIAL EQUATIONS WHICH GOVERN THE MODE-AMPLITUDE
C     FUNCTIONS.  THESE COEFFICIENTS ARE PUNCHED ONTO CARDS FOR
C     INPUT INTO PROGRAM LIMCYC.
C
C     THE FOLLOWING INPUTS ARE REQUIRED:
C     THE TITLE OF THE CASE.
C     GAMMA IS THE SPECIFIC HEAT RATIO.
C     UE IS THE STEADY STATE MACH NUMBER AT THE NOZZLE ENTRANCE.
C     RLD IS THE LENGTH-TO-DIAMETER RATIO.
C     ZCCMB IS THE LENGTH OF THE REGION OF UNIFORMLY DISTRIBUTED
C     COMBUSTION, EXPRESSED AS A FRACTION OF THE CHAMBER LENGTH.
C     NDROPS DETERMINES THE PRESENCE OF DROPLET MOMENTUM SOURCES:
C     NDROPS = 0  DROPLET MOMENTUM SOURCE NEGLECTED.
C     NDROPS = 1  DROPLET MOMENTUM SOURCE INCLUDED.
C     NOZZLE SPECIFIES THE TYPE OF NOZZLE USED:
C     NOZZLE = 0  QUASI-STEADY
C     NOZZLE = 1  CONVENTIONAL NOZZLE.
C     FOR CONVENTIONAL NOZZLE
C     AMPL IS THE NOZZLE AMPLITUDE RATIO.
C     PHASE IS THE NOZZLE PHASE SHIFT.
C     NOZNL1 DETERMINES THE PRESENCE OF NOZZLE NONLINEARITIES
C     NOZNL1 = 0  NOZZLE NONLINEARITIES NEGLECTED.
C     NOZNL1 = 1  NOZZLE NONLINEARITIES INCLUDED.
C     NZDATA DETERMINES HOW THE NOZZLE DATA IS SUPPLIED
C     NZDATA = 0  FROM CARDS.
C     NZDATA = 1  FROM A FASTRAND FILE.
C     NJMAX IS THE NUMBER OF MODE-AMPLITUDE FUNCTIONS IN THE ASSUMED
C     SERIES SOLUTION.  NJMAX MUST NOT EXCEED MX.
C     THE COEFFICIENTS COMPUTED ARE DETERMINED BY NONLIN AS FOLLOWS
C     NONLIN = 0  LINEAR COEFFICIENTS ONLY
C     NONLIN = 1  BOTH LINEAR AND NONLINEAR COEFFICIENTS
C     COEFFICIENTS TO BE NEGLECTED ARE DETERMINED BY NEGL
C     AS FOLLOWS:
C     NEGL = 0  TERMS SMALLER THAN 0.00001 ARE NEGLECTED.
C     NEGL = 1  LINEAR TERMS SMALLER THAN SM1 AND NONLINEAR
C     TERMS SMALLER THAN SM2 ARE NEGLECTED.
C     THE OUTPUT IS DETERMINED BY NOUT AS FOLLOWS
C     NOUT = 0  PRINTED OUTPUT ONLY
C     NOUT = 1  PRINTED AND WRITTEN ON FASTRAND FILE.
C     NOUT = 2  FASTRAND FILE ONLY.
C     NOUT = 3  CARD OUTPUT ONLY.
C     EACH MODE-AMPLITUDE IS ASSIGNED AN INTEGER J.
C     THE MODE IS SPECIFIED BY THE INDICES L(J), M(J), AND N(J).
C     L(J) IS THE AXIAL MODE NUMBER AND MUST NOT EXCEED 5.
C     M(J) IS THE AZIMUTHAL MODE NUMBER AND MUST NOT EXCEED 8.
C     N(J) IS THE RADIAL MODE NUMBER AND MUST NOT EXCEED 5.
C     THE INTEGER NS(J) IS ASSIGNED AS FOLLOWS:
C     NS = 1  A-FUNCTION  SIN(M*THETA) * COSH(I*B*Z)
C     NS = 2  B-FUNCTION  COS(M*THETA) * COSH(I*B*Z)
C     NAME(J) IS A FOUR-CHARACTER NAME.
```

C
C
C

```
PARAMETER  MX=5, MX2=10, MX4=20
DIMENSION  L(MX), N(MX), NAME(MX), S(MX), SJ(MX), TITLE(80),
1          RJROOT(10,5), RIVAL(10,5), C1(MX2,MX2), C(4,MX2,MX2),
2          D(MX2,MX2,MX2), AMPL(MX), PHASE(MX), AZI(2),
3          BES1(9,9,9), BES2(9,9,9), BES3(9,9,9),
4          V(2), JC(MX2), TS(4,MX2), TSQ(MX2), KMAX(5)
COMPLEX    CRSLT, CI, ZEJ, ZEP1, ZEP2, CZE, CAZ, CRAD,
1          G1, DCOEF, CGAM, CAX, P(MX), BC(MX), YNOZ(MX),
2          CNORM(MX), CSSQ(MX), TANINT(2), RADINT(3),
3          AXINT(4,3), CC(5,MX,MX), CD1(MX,MX,MX),
4          CD2(MX,MX,MX), AX(4), T1, T2, D1, D2, D3, D4,
5          CD3(MX,MX,MX), CD4(MX,MX,MX), GNOZ(MX)
COMMON     B /BLK2/ M(MX), NS(MX)
```

C
C
C

DATA INPUT.

```
PI = 3.1415927
SM1 = 0.00001
SM2 = 0.00001
SM3 = 0.00001
CI = (0.0,1.0)
```

C
C

INPUT ROOTS AND VALUES OF BESSEL FUNCTIONS.

DATA ((RJROOT(I,J), J = 1,5), I = 1,9)/

1	3.83171,	7.01559,	10.17347,	13.32369,	16.47063,
2	1.84118,	5.33144,	8.53632,	11.70600,	14.86359,
3	3.05424,	6.70613,	9.96947,	13.17037,	16.34752,
4	4.20119,	8.01524,	11.34592,	14.58585,	17.78875,
5	5.31755,	9.28240,	12.68191,	15.96411,	19.19603,
6	6.41562,	10.51986,	13.98719,	17.31284,	20.57551,
7	7.50127,	11.73494,	15.26818,	18.63744,	21.93172,
8	8.57784,	12.93239,	16.52937,	19.94185,	23.26805,
9	9.64742,	14.11552,	17.77401,	21.22906,	24.58720/

DATA ((RIVAL(I,J), J = 1,5), I = 1,9)/

1	-0.40276,	0.30012,	-0.24970,	0.21836,	-0.19647,
2	0.58187,	-0.34613,	0.27330,	-0.23330,	0.20701,
3	0.48650,	-0.31353,	0.25474,	-0.22088,	0.19794,
4	0.43439,	-0.29116,	0.24074,	-0.21097,	0.19042,
5	0.39965,	-0.27438,	0.22959,	-0.20276,	0.18403,
6	0.37409,	-0.26109,	0.22039,	-0.19580,	0.17849,
7	0.35414,	-0.25017,	0.21261,	-0.18978,	0.17363,
8	0.33793,	-0.24096,	0.20588,	-0.18449,	0.16929,
9	0.32438,	-0.23303,	0.19998,	-0.17979,	0.16539/

C
C

INPUT PARAMETERS.

```
4 READ (5,5000, END = 600) (TITLE(I), I = 1, 72)
  READ (5,5001) GAMMA, UE, RLD, ZCOMB, NLROPS, NOZZLE
  IF (GAMMA) 600, 600, 8
8 READ (5,5004) NJMAX, NONLIN, NEGL, NOUT, NOZNL1, NZDATA
  IF (NEGL .EQ. 1) READ (5,5005) SM1, SM2
  IF (NOZZLE .EQ. 1) GO TO 5
C COMPUTE ADMITTANCE FOR QUASI-STEADY NOZZLE.
```

```

      Y = (GAMMA - 1.0) * UE / (2.0 * GAMMA)
      DO 3 J = 1, NJMAX
      AMPL(J) = Y
      PHASE(J) = 0.0
3     CONTINUE
      GO TO 7
5     CONTINUE
      IF (NZDATA .EQ. 0) NZDATA = 5
      IF (NZDATA .EQ. 1) NZDATA = 7
      DO 6 I = 1, NJMAX
      READ (NZDATA, 5003) J, AMPL(J), PHASE(J)
6     CONTINUE
      IF (NOZNL1 .NE. 1) GO TO 7
      DO 710 I = 1, NJMAX
      READ (NZDATA, 5003) J, GNOZ(J)
710    CONTINUE
      7 DO 10 I = 1, NJMAX
      READ (5, 5002) J, L(J), M(J), N(J), NS(J), NAME(J)
10     CONTINUE
C
      DO 12 J = 1, NJMAX
      THETA = PHASE(J) * PI / 180.0
      YR = AMPL(J) * COS(THETA)
      YI = AMPL(J) * SIN(THETA)
      YNOZ(J) = CMPLX(YR, YI)
12    CONTINUE
C
      ZE = 2.0 * FLD
      CZE = CMPLX(ZE, 0.0)
      CGAM = CMPLX(GAMMA, 0.0)
      CAX = CGAM
      IF (NDROPS .EQ. 1) CAX = CGAM + (1.0, 0.0)
C
C *****
C
C ASSIGN ARRAYS FOR ROOTS OF BESSEL FUNCTIONS.
      DO 20 J = 1, NJMAX
      IF ((M(J) .EQ. 0) .AND. (N(J) .EQ. 0)) GO TO 15
      MM = M(J) + 1
      NN = N(J)
      S(J) = RJROOT(MM, NN)
      SJ(J) = RJVAL(MM, NN)
      GO TO 25
15    S(J) = 0.0
      SJ(J) = 1.0
25    SSQ = S(J) * S(J)
      CSSQ(J) = CMPLX(SSQ, 0.0)
20    CONTINUE
C
C *****
C
C CALCULATE AXIAL ACOUSTIC EIGENVALUES.
C
C FIND MAXIMUM VALUES OF L(J), M(J), AND N(J).
      KN = 0

```

```

LMAX = 0
MMAX = 0
NMAX = 0
DO 30 J = 1, NJMAX
  IF (L(J) .GT. LMAX) LMAX = L(J)
  IF (M(J) .GT. MMAX) MMAX = M(J)
  IF (N(J) .GT. NMAX) NMAX = N(J)
  IF (N(J) .NE. N(1)) KN = 1
30 CONTINUE
LMAX = LMAX + 1
MMAX = MMAX + 1
C
C   COMPUTE EIGENVALUES.
DO 40 J = 1, NJMAX
  LL = L(J)
  SMN = S(J)
  YAMFL = AMFL(J)
  YPHASE = PHASE(J)
  CALL EIGVAL(LL, SMN, GAMMA, ZE, YAMFL, YPHASE, CRSLT)
  B(J) = CRSLT
  EC(J) = CONJG(CRSLT)
40 CONTINUE
C
C   *****
C
C   CALCULATE LINEAR COEFFICIENTS.
C
C   CALCULATE THE NUMBER OF LINEAR COEFFICIENTS.
C
NCOEFF = 4
IF (NOZNL1 .EQ. 1) NCOEFF = 5
NCFM1 = NCOEFF-1
C
DO 100 NJ = 1, NJMAX
DO 100 NP = 1, NJMAX
C
C   ZERO COEFFICIENT ARRAYS.
DO 105 KC = 1, NCOEFF
  CC(KC, NJ, NP) = (0.0, 0.0)
105 CONTINUE
C
C   ORTHOGONALITY PROPERTY OF TANGENTIAL EIGENFUNCTIONS.
IF ( NS(NP) .NE. NS(NJ) ) GO TO 100
IF (M(NP) .NE. M(NJ)) GO TO 100
IF (M(NJ) .EQ. 0) GO TO 112
AZ = PI
GO TO 120
112 IF ( NS(NJ) .EQ. 1) GO TO 100
AZ = 2.0 * PI
C
C   ORTHOGONALITY PROPERTY OF RADIAL EIGENFUNCTIONS.
120 IF (N(NP) .NE. N(NJ)) GO TO 100
IF (S(NP)) 125, 122, 125
125 SGM = M(NJ) * M(NJ)
SSO = S(NP) * S(NP)

```

```

      SJSQ = SJ(NJ) * SJ(NJ)
      RAD = (SSQ - SQM) * SJSQ / (2.0 * SSQ)
      GO TO 127
122 RAD = 0.5
C
C   CALCULATE AXIAL INTEGRALS.
127 DO 130 NOPT = 1, 4
      CALL AXIAL1 (NOPT, NP, NJ, UE, ZE, ZCOMB, CRSLT)
      AX(NOPT) = CRSLT
130 CONTINUE
C
C   EVALUATE FUNCTIONS AT NOZZLE END.
      ZEJ = CCOSH(CI*BC(NJ)*CZE)
      ZEP1 = CCOSH(CI*B(NP)*CZE)
      ZEP2 = CI * B(NP) * CSINH(CI*B(NP)*CZE)
C
      CAZ = CMPLX(AZ,0.0)
      CRAD = CMPLX(RAD,0.0)
C
C   COEFFICIENT OF THE SECOND DERIVATIVE OF A(P).
      CC(1,NJ,NP) = AX(1) * CAZ * CRAD
C
C   COEFFICIENT OF A(P).
      CC(2,NJ,NP) = (CSSQ(NP)*AX(1) - AX(2) + ZEP2*ZEJ) * CAZ * CRAD
C
C   COEFFICIENT OF THE FIRST DERIVATIVE OF A(P).
      CC(3,NJ,NP) = (CAX*AX(3) + (2.0,0.0)*AX(4)
1      + CGAM*YNOZ(NP)*ZEP1*ZEJ) * CAZ * CRAD
C
C   COEFFICIENT OF THE RETARDED DERIVATIVE OF A(P).
      CC(4,NJ,NP) = CGAM * AX(3) * CAZ * CRAD
C
      IF (NOZNL1 .NE. 1) GO TO 100
C
C   COEFFICIENT DUE TO NOZZLE NONLINEARITIES.
      CESQ = 1 - (GAMMA-1) * UE/2.
      CC(5,NJ,NP) = UE * CESQ * GNOZ(NP) * ZEJ * CAZ * CRAD
C
100 CONTINUE
C
C   NORMALIZE LINEAR COEFFICIENTS.
      DO 140 NJ = 1, NJMAX
      CNORM(NJ) = CC(1,NJ,NJ)
      DO 140 NP = 1, NJMAX
      DO 140 KC = 1, NCOEFF
      CC(KC,NJ,NP) = CC(KC,NJ,NP) / CNORM(NJ)
140 CONTINUE
C
C   *****
C
C   COMPUTE NONLINEAR COEFFICIENTS.
      IF (NONLIN .EQ. 0) GO TO 402
      G1 = (CGAM - (1.0,0.0)) * (0.5,0.0)

```

```

C      COMPUTATIONS OF BESSEL INTEGRALS WHEN ALL SERIES TERMS HAVE THE
C      SAME RADIAL MODE NUMBER N(J).
      IF (KN .EQ. 1) GO TO 170
      DO 150 MP = 1, MMAX
      DO 150 MQ = 1, MMAX
      DO 150 MJ = 1, MMAX
      BES1(MP,MQ,MJ) = 0.0
      BES2(MP,MQ,MJ) = 0.0
      BES3(MP,MQ,MJ) = 0.0
      L1 = MP - 1
      L2 = MQ - 1
      L3 = MJ - 1
      LM = L1 + L2
      LN = L1 + L3
      MN = L2 + L3
      IF ((L3.EQ.LM) .OR. (L2.EQ.LN) .OR. (L1.EQ.MN)) GO TO 160
      GO TO 150
160 IF (NMAX .EQ. 0) GO TO 165
      A1 = RJROOT(MP,NMAX)
      A2 = RJROOT(MQ,NMAX)
      A3 = RJROOT(MJ,NMAX)
      GO TO 167
165 A1 = 0.0
      A2 = 0.0
      A3 = 0.0
167 CALL RADIAL(1,L1,L2,L3,A1,A2,A3,RESULT)
      BES1(MP,MQ,MJ) = RESULT
      CALL RADIAL(2,L1,L2,L3,A1,A2,A3,RESULT)
      BES2(MP,MQ,MJ) = RESULT
      CALL RADIAL(3,L1,L2,L3,A1,A2,A3,RESULT)
      BES3(MP,MQ,MJ) = RESULT
150 CONTINUE
C
170 DO 200 NJ = 1, NJMAX
      DO 200 NP = 1, NJMAX
      DO 200 NQ = 1, NJMAX
C
      CD1(NJ,NP,NQ) = (0.0,0.0)
      CD2(NJ,NP,NQ) = (0.0,0.0)
      CD3(NJ,NP,NQ) = (0.0,0.0)
      CD4(NJ,NP,NQ) = (0.0,0.0)
C
      DO 210 J = 1, 2
      CALL AZIMTL(J,NP,NQ,NJ,RESULT)
      AZI(J) = RESULT
      TANINT(J) = CMPLX(RESULT,0.0)
210 CONTINUE
C
      IF (AZI(1)) 220, 225, 220
225 IF (AZI(2)) 220, 200, 220
C
220 IF (KN .EQ. 0) GO TO 222
      L1 = M(NP)
      L2 = M(NQ)
      L3 = M(NJ)

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

A1 = S(NP)
A2 = S(NQ)
A3 = S(NJ)
GO TO 244

C
222 MP = M(NP) + 1
    MQ = M(NQ) + 1
    MJ = M(NJ) + 1
    RADINT(1) = CMPLX(BES1(MP, MQ, MJ), 0.0)
    RADINT(2) = CMPLX(BES2(MP, MQ, MJ), 0.0)
    RADINT(3) = CMPLX(BES3(MP, MQ, MJ), 0.0)

C
244 DO 240 J = 1, 3
    IF (KN .EQ. 0) GO TO 242
    CALL RADIAL (J, L1, L2, L3, A1, A2, A3, RESULT)
    RADINT(J) = CMPLX(RESULT, 0.0)
242 DO 240 NC = 1, 4
    CALL AXIAL2 (J, NC, NP, NQ, NJ, ZE, CRSLT)
    AXINT(NC, J) = CRSLT
240 CONTINUE

C
C
DO 250 J = 1, 4
T1 = G1 * CSSQ(NP) * AXINT(J, 1)
T2 = G1 * AXINT(J, 3)
D1 = AXINT(J, 1) * TANINT(1) * RADINT(3)
D2 = AXINT(J, 1) * TANINT(2) * RADINT(2)
D3 = AXINT(J, 2) * TANINT(1) * RADINT(1)
D4 = (T2 - T1) * TANINT(1) * RADINT(1)
DCOEF = (0.5, 0.0) * (D1 + D2 + D3 + D4) / CNORM(NJ)
IF (J .EQ. 1) CD1(NJ, NP, NQ) = (1.0, -1.0) * DCOEF
IF (J .EQ. 2) CD2(NJ, NP, NQ) = (1.0, 1.0) * DCOEF
IF (J .EQ. 3) CD3(NJ, NP, NQ) = (1.0, 1.0) * DCOEF
IF (J .EQ. 4) CD4(NJ, NP, NQ) = (1.0, -1.0) * DCOEF
250 CONTINUE
200 CONTINUE

C
C
*****
C
CALCULATE COEFFICIENTS FOR EQUIVALENT REAL SYSTEM.
C
402 DO 350 NJ = 1, NJMAX
    NEWJ = (2 * NJ) - 1
    NEWJ1 = NEWJ + 1
    DO 350 NP = 1, NJMAX
        NEWP = (2 * NP) - 1
        NEWP1 = NEWP + 1

C
C
COEFFICIENTS OF LINEAR TERMS.
CCR = REAL(CC(1, NJ, NP))
CCI = AIMAG(CC(1, NJ, NP))
C1(NEWJ, NEWP) = CCR
C1(NEWJ, NEWP1) = -CCI
C1(NEWJ1, NEWP) = CCI
C1(NEWJ1, NEWP1) = CCR

```



```

CCR = REAL(CC(KC+1,NJ,NP))
CCI = AIMAG(CC(KC+1,NJ,NP))
C(KC,NEWJ,NEWF) = CCR
C(KC,NEWJ,NEWF1) = -CCI
C(KC,NEWJ1,NEWF) = CCI
C(KC,NEWJ1,NEWF1) = CCR

```

```
360 CONTINUE
```

```
C
C COEFFICIENTS OF NONLINEAR TERMS.
```

```
IF (NONLIN .EQ. 0) GO TO 350
```

```
DO 370 NQ = 1, NJMAX
```

```
NEWQ = (2 * NQ) - 1
```

```
NEWQ1 = NEWQ + 1
```

```
CD1R = REAL(CD1(NJ,NP,NQ))
```

```
CD1I = AIMAG(CD1(NJ,NP,NQ))
```

```
CD2R = REAL(CD2(NJ,NP,NQ))
```

```
CD2I = AIMAG(CD2(NJ,NP,NQ))
```

```
CD3R = REAL(CD3(NJ,NP,NQ))
```

```
CD3I = AIMAG(CD3(NJ,NP,NQ))
```

```
CD4R = REAL(CD4(NJ,NP,NQ))
```

```
CD4I = AIMAG(CD4(NJ,NP,NQ))
```

```
D(NEWJ,NEWF,NEWQ) = CD1R + CD2R + CD3R + CD4R
```

```
D(NEWJ,NEWF,NEWQ1) = -CD1I + CD2I - CD3I + CD4I
```

```
D(NEWJ,NEWF1,NEWQ) = -CD1I - CD2I + CD3I + CD4I
```

```
D(NEWJ,NEWF1,NEWQ1) = -CD1R + CD2R + CD3R - CD4R
```

```
D(NEWJ1,NEWF,NEWQ) = CD1I + CD2I + CD3I + CD4I
```

```
D(NEWJ1,NEWF,NEWQ1) = CD1R - CD2R + CD3R - CD4R
```

```
D(NEWJ1,NEWF1,NEWQ) = CD1R + CD2R - CD3R - CD4R
```

```
D(NEWJ1,NEWF1,NEWQ1) = -CD1I + CD2I + CD3I - CD4I
```

```
370 CONTINUE
```

```
350 CONTINUE
```

```
C
```

```
C
```

```
*****
```

```
C
```

```
COMPUTE COEFFICIENTS FOR THE EQUATIONS WHICH ARE DECOUPLED  
IN THE SECOND DERIVATIVES.
```

```
C
```

```
C
```

```
DO 405 KC = 1, NCOEFF
```

```
KMAX(KC) = 0
```

```
405 CONTINUE
```

```
C
```

```
C
```

```
CALCULATE INVERSE OF THE MATRIX C1(1,J).
```

```
JMAX = NJMAX
```

```
NJMAX = 2 * NJMAX
```

```
C
```

```
V(1) = 1
```

```
CALL GJR(C1,MX2,MX2,NJMAX,0,$500,JC,V)
```

```
C
```

```
C
```

```
USE INVERSE TO CALCULATE DECOUPLED COEFFICIENTS.
```

```
C
```

```
DO 410 NF = 1, NJMAX
```

```
C
```

```
C
```

```
LINEAR COEFFICIENTS.
```

```
DO 420 NJ = 1, NJMAX
```

```

DO 420 KC = 1, NCFM1
TS(KC,NJ) = 0.0
DO 420 K = 1, NJMAX
TS(KC,NJ) = TS(KC,NJ) + C1(NJ,K) * C(KC,K,NP)
420 CONTINUE
DO 430 NJ = 1, NJMAX
DO 425 KC = 1, 3
C(KC,NJ,NP) = TS(KC,NJ)
ABSVAL = ABS(C(KC,NJ,NP))
IF (ABSVAL .GE. SM1) KMAX(KC) = KMAX(KC) + 1
425 CONTINUE
IF (NOZNL1 .NE. 1) GO TO 430
C(4,NJ,NP) = TS(4,NJ)
ABSVAL = ABS(C(4,NJ,NP))
IF (ABSVAL .GE. SM3) KMAX(4) = KMAX(4) + 1
430 CONTINUE
C
C   NONLINEAR COEFFICIENTS.
IF (NONLIN .EQ. 0) GO TO 410
DO 415 NQ = 1, NJMAX
DO 440 NJ = 1, NJMAX
TSQ(NJ) = 0.0
DO 440 K = 1, NJMAX
TSQ(NJ) = TSQ(NJ) + C1(NJ,K) * D(K,NP,NQ)
440 CONTINUE
DO 445 NJ = 1, NJMAX
D(NJ,NP,NQ) = TSQ(NJ)
ABSVAL = ABS(D(NJ,NP,NQ))
IF (ABSVAL .GE. SM2) KMAX(NCOEFF) = KMAX(NCOEFF) + 1
445 CONTINUE
415 CONTINUE
C
410 CONTINUE
C
C   *****
C   OUTPUT.
C
IF (NOUT .GE. 2) GO TO 455
C
C   PRINTED OUTPUT
WRITE (6,6001) (TITLE(I), I = 1, 72)
WRITE (6,6002) GAMMA, UE, RLD, ZCOMB
IF (NDROPS .EQ. 0) WRITE (6,6020)
IF (NDROPS .EQ. 1) WRITE (6,6021)
IF (NOZZLE .EQ. 0) WRITE (6,6012)
IF (NOZNL1 .EQ. 1) GO TO 760
WRITE (6,6022)
WRITE (6,6004)
DO 310 J = 1, JMAX
WRITE (6,6003) NAME(J), J, L(J), M(J), N(J), NS(J),
1          S(J), SJ(J), B(J), YNOZ(J)
310 CONTINUE
GO TO 765
760 CONTINUE
WRITE (6,6023)

```

```

WRITE (6,6025)
DO 770 J = 1, JMAX
WRITE (6,6026) NAME(J), J, L(J), M(J), N(J), NS(J),
1 S(J), SJ(J), B(J), YNOZ(J), GNOZ(J)
770 CONTINUE
765 CONTINUE
IF (NONLIN .EQ. 0) WRITE (6,6013)

C
C OUTPUT OF LINEAR COEFFICIENTS.
DO 320 KC = 1, NCFM1
IF (KC .EQ. 1) WRITE (6,6005)
IF (KC .EQ. 2) WRITE (6,6006)
IF (KC .EQ. 3) WRITE (6,6007)
IF (KC .EQ. 4) WRITE (6,6024)
WRITE (6,6008) (J, J = 1, NJMAX)
WRITE (6,6014)
DO 320 NJ = 1, NJMAX
WRITE (6,6009) NJ, (C(KC,NJ,NP), NP = 1, NJMAX)
320 CONTINUE

C
C OUTPUT OF NONLINEAR COEFFICIENTS.
IF (NONLIN .EQ. 0) GO TO 452
DO 400 NJ = 1, NJMAX
WRITE (6,6010) NJ
WRITE (6,6011) (J, J = 1, NJMAX)
WRITE (6,6015)
DO 400 NF = 1, NJMAX
WRITE (6,6009) NF, (D(NJ,NP,NQ), NG = 1, NJMAX)
400 CONTINUE
452 IF (NOUT .EQ. 0) GO TO 4

C
455 IF (NOUT .EQ. 3) GO TO 480

C
C WRITE COEFFICIENTS ON FASTRAND FILE.
C
C WRITE (9,7001) GAMMA, UE, ZE, ZCOMB, NDROPS, NJMAX, NOZNL1
C
DO 450 J = 1, JMAX
WRITE (9,7002) J, L(J), M(J), N(J), NS(J), S(J), SJ(J),
1 NAME(J)
450 CONTINUE

C
DO 457 J = 1, JMAX
WRITE (9,7006) J, YNOZ(J), B(J)
457 CONTINUE
IF (NOZNL1 .NE. 1) GO TO 720
DO 730 J = 1, JMAX
WRITE (9,7007) J, GNOZ(J)
730 CONTINUE
720 CONTINUE

C
DO 460 KC = 1, 3
WRITE (9,7003) KMAX(KC)
DO 460 NJ = 1, NJMAX
DO 460 NP = 1, NJMAX

```

```

      ABSVAL = ABS(C(KC,NJ,NP))
      IF (ABSVAL .GE. SM1) WRITE (9,7004) NJ,NP, C(KC,NJ,NP)
460 CONTINUE
C
      IF (NOZNL1 .NE. 1) GO TO 464
      WRITE (9,7003) KMAX(4)
      DO 462 NJ = 1, NJMAX
      DO 462 NP = 1, NJMAX
      ABSVAL = ABS(C(4,NJ,NP))
      IF (ABSVAL .GE. SM3) WRITE (9,7004) NJ, NP, C(4,NJ,NP)
462 CONTINUE
464 CONTINUE
C
      WRITE (9,7003) KMAX(NCOEFF)
      IF (NONLIN .EQ. 0) GO TO 4
      DO 470 NJ = 1, NJMAX
      DO 470 NP = 1, NJMAX
      DO 470 NQ = 1, NJMAX
      ABSVAL = ABS(D(NJ,NP,NQ))
      IF (ABSVAL .GE. SM2) WRITE (9,7005) NJ, NP, NQ, D(NJ,NP,NQ)
470 CONTINUE
      GO TO 4
C
      PUNCHED CARD OUTPUT.
C
480 PUNCH 7001 GAMMA, UE, ZE, ZCOMB, NDROPS, NJMAX, NOZNL1
C
      DO 482 J = 1, JMAX
      PUNCH 7002 J, L(J), M(J), N(J), NS(J), S(J), SJ(J),
1          NAME(J)
482 CONTINUE
C
      DO 484 J = 1, JMAX
      PUNCH 7006 J, YNOZ(J), B(J)
484 CONTINUE
      IF (NOZNL1 .NE. 1) GO TO 740
      DO 750 J = 1, JMAX
      PUNCH 7007 J, GNOZ(J)
750 CONTINUE
740 CONTINUE
C
      DO 486 KC = 1, 3
      PUNCH 7003 KMAX(KC)
      DO 486 NJ = 1, NJMAX
      DO 486 NP = 1, NJMAX
      ABSVAL = ABS(C(KC,NJ,NP))
      IF (ABSVAL .GE. SM1) PUNCH 7004 NJ, NP, C(KC,NJ,NP)
486 CONTINUE
C
      IF (NOZNL1 .NE. 1) GO TO 490
      PUNCH 7003 KMAX(4)
      DO 492 NJ = 1, NJMAX
      DO 492 NP = 1, NJMAX
      ABSVAL = ABS(C(4,NJ,NP))
      IF (ABSVAL .GE. SM3) PUNCH 7004 NJ, NP, C(4,NJ,NP)

```

```

492 CONTINUE
490 CONTINUE
C
PUNCH 7003 KMAX (NCOEFF)
IF (NONLIN .EQ. 0) GO TO 4
DO 488 NJ = 1, NJMAX
DO 488 NP = 1, NJMAX
DO 488 NQ = 1, NJMAX
ABSVAL = ABS(D(NJ,NP,NG))
IF (ABSVAL .GE. SM2) PUNCH 7005 NJ, NP, NQ., D(NJ,NP,NQ)
488 CONTINUE
GO TO 4
C
C ERROR EXIT
500 IF (JC(1)) 510, 510, 520
510 JC(1) = ABS(JC(1))
WRITE (6,6017) JC(1)
GO TO 4
520 WRITE (6,6018) JC(1)
GO TO 4
600 CONTINUE
WRITE (6,6027)
C
C *****
C
C FORMAT SPECIFICATIONS.
5000 FORMAT (72A1)
5001 FORMAT (4F10.0,2I5)
5002 FORMAT (5I5,1X,A4)
5003 FORMAT (I5,2F10.0)
5004 FORMAT (6I5)
5005 FORMAT (2F10.0)
6001 FORMAT (1H1,1X,72A1//)
6002 FORMAT (2X,8HGAMMA = ,F5.2,5X,5HUE = ,F5.2,5X,6HL/D = ,F8.5,
1 5X,8HZCOMB = ,F5.2//)
6003 FORMAT (2X,A4,5I5,4F10.5,2F11.5//)
6004 FORMAT (2X///2X,29HNAME J L M N NS,7X,3HSMN,3X,
1 7HJM(SMN),7X,3HEFS,7X,3HETA,8X,2HYR,8X,2HYI//)
6005 FORMAT (1H1,45H DECOUPLED COEFFICIENT OF B(P); C(1,J,P)///)
6006 FORMAT (1H1,44H DECOUPLED COEFFICIENT OF THE DERIVATIVE OF,
1 6H B(P);,5X,8HC(2,J,P)///)
6007 FORMAT (1H1,39H DECOUPLED COEFFICIENT OF THE RETARDED,
1 20H DERIVATIVE OF B(P);,5X,8HC(3,J,P)///)
6008 FORMAT (7X,1HP,18,9I12)
6009 FORMAT (2X//2X,I3,3X,10F12.6)
6010 FORMAT (1H1,42H DECOUPLED COEFFICIENT OF E(P) * DB(O)/DT,
1 19H IN EQUATION FOR B(12,1H)///)
6011 FORMAT (7X,1HQ,18,9I12)
6012 FORMAT (2X,19HQUASI-STEADY NOZZLE//)
6013 FORMAT (2X//2X,24HLINEAR COEFFICIENTS ONLY)
6014 FORMAT (4X,1HP)
6015 FORMAT (4X,1HQ)
6017 FORMAT (1H1,31H OVERFLOW DETECTED, LAST ROW = ,I5)
6018 FORMAT (1H1,34H SINGULARITY DETECTED, LAST ROW = ,I5)
6020 FORMAT (2X,"DROPLET MOMENTUM SOURCE NEGLECTED"//)

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

6021 FORMAT (2X,"DROFLET MOMENTUM SOURCE INCLUDED"/)
6022 FORMAT (2X,"NOZZLE NONLINEARITIES NEGLECTED"/)
6023 FORMAT (2X,"NOZZLE NONLINEARITIES INCLUDED"/)
6024 FORMAT (1H1," DECOUPLED COEFFICIENT DUE TO NOZZLE",
1      " NONLINEARITIES:", 5X,8HC(4,J,P)////)
6025 FORMAT (2X////2X,29HNAME . J L M N NS,7X,3HSMN,3X,
1      7HJM(SMN),7X,3HEFS,7X,3HETA,8X,2HYR,8X,2HYI,
2      8X,2HGR,8X,2HGI//)
6026 FORMAT (2X,A4,5I5,4F10.5,4F11.5/)
6027 FORMAT (1H1)
7001 FORMAT (4F10.5,3I5)
7002 FORMAT (5I5,2F10.5,1X,A4)
7003 FORMAT (I5)
7004 FORMAT (2I5,F15.6)
7005 FORMAT (3I5,F15.6)
7006 FORMAT (I5,4F10.5)
7007 FORMAT (I5,2F10.5)
      END

```

```

SUBROUTINE EIGVAL(L, SMN, GAMMA, ZE, YAMPL, YPHASE, RESULT)
C
COMPLEX RESULT
COMMON /BLK1/ GSQ, ABSQ, ALBET, SMNSQ
C
*****
C
THIS SUBROUTINE COMPUTES THE COMPLEX AXIAL ACOUSTIC EIGENVALUES
C
FOR A CYLINDRICAL CHAMBER WITH A NOZZLE AND STORES THEM IN
C
RESULT.
C
THE EIGENVALUES ARE COMPUTED BY MEANS OF NEWTONS METHOD.
C
THE INPUT PARAMETERS ARE AS FOLLOWS
C
L IS THE AXIAL MODE NUMBER.
C
SMN IS THE DIMENSIONLESS ACOUSTIC FREQUENCY.
C
GAMMA IS THE SPECIFIC HEAT RATIO.
C
ZE IS THE LENGTH-TO-RADIUS RATIO.
C
YAMPL IS THE NOZZLE AMPLITUDE FACTOR.
C
YPHASE IS THE NOZZLE PHASE SHIFT IN DEGREES.
C
*****
C
PI = 3.1415927
ERR = 0.0000001
C
IF (YAMPL) 5,60,5
CALCULATE CONSTANTS.
5 PHASE = YPHASE * PI/180.0
ALPHA = YAMPL * COS(PHASE)
BETA = YAMPL * SIN(PHASE)
GSQ = GAMMA * GAMMA
ABSQ = (ALPHA * ALPHA) - (BETA * BETA)
ALBET = ALPHA * BETA
SMNSQ = SMN * SMN
C
ASSIGN INITIAL GUESS FOR EIGENVALUE.
IF (L .EQ. 0) GO TO 45
RL = L
PHI = PI/2.0 + PHASE
XM = RL * PI/ZE
A = YAMPL/ZE
XO = XM + A*COS(PHI)
YO = A*SIN(PHI)
GO TO 47
45 CONTINUE
YPHI = YPHASE
IF (YPHASE .GT. 180) YPHI = YPHASE - 180.
IF (YPHASE .LT. 0) YPHI = YPHASE + 180.
IF (YAMPL .LT. 0.1) GO TO 110
IF (YAMPL .LT. 0.4) GO TO 120
IF (YAMPL .LT. 0.8) GO TO 150
IF (YAMPL .LT. 1.2) GO TO 160
XO = 1.0 * YAMPL
GO TO 170
160 XO = 1.25 * YAMPL

```

```

170 IF (YPHI .LE. 30.) TANPSI = -0.4
    IF (YPHI.GT.30. .AND. YPHI.LE.60.) TANPSI = -0.2
    IF (YPHI.GT.60. .AND. YPHI.LE.120.) TANPSI = 0.0
    IF (YPHI.GT.120. .AND. YPHI.LE.150.) TANPSI = 0.2
    IF (YPHI .GT. 150.) TANPSI = 0.4
    GO TO 140
150 XO = 2.0 * YAMFL
    IF (YPHI .LE. 30.) TANPSI = -0.6
    IF (YPHI.GT.30. .AND. YPHI.LE.60.) TANPSI = -0.3
    IF (YPHI.GT.60. .AND. YPHI.LE.120.) TANPSI = 0.0
    IF (YPHI.GT.120. .AND. YPHI.LE.150.) TANPSI = 0.3
    IF (YPHI .GT. 150.) TANPSI = 0.6
    GO TO 140
110 XO = 5. * YAMFL
    GO TO 130
120 XO = 3. * YAMFL
130 CONTINUE
    IF (YPHI .LE. 30.) TANPSI = -0.75
    IF (YPHI.GT.30. .AND. YPHI.LE.60.) TANPSI = -0.4
    IF (YPHI.GT.60. .AND. YPHI.LE.120.) TANPSI = 0.0
    IF (YPHI.GT.120. .AND. YPHI.LE.150.) TANPSI = 0.4
    IF (YPHI .GT. 150.) TANPSI = 0.75
140 CONTINUE
    YO = XO * TANPSI
C
C   ITERATION USING NEWTONS METHOD FOR A SYSTEM OF TWO EQUATIONS
C   IN TWO UNKNOWNNS.
47 L1 = 0
    X = XO
    Y = YO
40 CALL FCNS(X,Y,Z,E,F,G,FX,FY,GX,GY)
    IF (L1 .EQ. 40) GO TO 50
    RJFG = (FX * GY) - (GX * FY)
    IF (RJFG) 20, 30, 20
20 DELTAX = (-F * GY + G * FY)/RJFG
    DELTAY = (-G * FX + F * GX)/RJFG
    L1 = L1 + 1
    X = X + DELTAX
    Y = Y + DELTAY
C
C   TEST FOR CONVERGENCE.
C   IF (ABS(DELTAX) .GE. ERR .OR. ABS(DELTAY) .GE. ERR) GO TO 40
    GO TO 10
C
C   WARNING MESSAGES
30 WRITE (6,6005)
    GO TO 10
50 WRITE (6,6006)
    -GO TO 10
C
C   CASE OF HARD WALL (YAMPL = 0).
60 RL = L

```



```
X = HL * PI/ZE
Y = 0.0
10 RESULT = CMPLX(X,Y)
C
C   FORMAT SPECIFICATIONS.
6005 FORMAT (2X//2X,16HJACOBIAN IS ZERO//)
6006 FORMAT (2X//2X,35HFAILED TO CONVERGE IN 40 ITERATIONS//)
RETURN
END
```

```

SUBROUTINE FCNS(X,Y,ZE,F,G,FX,FY,GX,GY)
C
C THIS SUBROUTINE COMPUTES THE FUNCTIONS F(X,Y) AND G(X,Y)
C AND THEIR PARTIAL DERIVATIVES WITH RESPECT TO X AND Y.
C
COMMON /ELK1/ GSQ, ABSQ, ALBET, SMNSQ
C
C COMPUTE THE TRIGONOMETRIC FUNCTIONS, THE HYPERBOLIC FUNCTIONS
C AND THEIR SQUARES.
C
  I = 1
  ARGX = ZE * X
  ARGY = ZE * Y
10 SX = SIN(ARGX)
  CX = COS(ARGX)
  SHY = SINH(ARGY)
  CHY = COSH(ARGY)
  IF (I .EQ. 2) GO TO 20
  SXSQ = SX * SX
  CXSQ = CX * CX
  SHYSQ = SHY * SHY
  CHYSQ = CHY * CHY
  ARGX = 2.0 * ARGX
  ARGY = 2.0 * ARGY
  I = 2
  GO TO 10
C
C COMPUTE TRANSCENDENTAL FUNCTIONS AND THEIR DERIVATIVES
C
20 FF = (SXSQ * CHYSQ) - (CXSQ * SHYSQ)
  GG = (CXSQ * CHYSQ) - (SXSQ * SHYSQ)
  HH = 0.25 * SX * SHY
  FFX = ZE * SX * CHY
  GGY = ZE * CX * SHY
  FFY = -GGY
  GGX = -FFX
  HHX = 0.5 * GGY
  HHY = 0.5 * FFX
C
C COMPUTE FACTORS
  XYSQ = (X * X) - (Y * Y)
  XY = X * Y
  SMNXY = SMNSQ + XYSQ
  F1 = (ABSQ * SMNXY) - (4.0 * ALBET * XY)
  F2 = (ALBET * SMNXY) + (ABSQ * XY)
  G1 = (ABSQ * SMNXY) + (4.0 * ALBET * XY)
  FX1 = (2.0 * X * ABSQ) - (4.0 * ALBET * Y)
  FX2 = (2.0 * X * ALBET) + (ABSQ * Y)
  FY1 = (-2.0 * Y * ABSQ) - (4.0 * ALBET * X)
  FY2 = (-2.0 * Y * ALBET) + (ABSQ * X)

```

```

GX1 = (2.0 * X * ABSQ) + (4.0 * ALBET * Y)
GY1 = (-2.0 * Y * ABSQ) + (4.0 * ALBET * X)
C
C
C
COMPUTE F(X,Y) AND G(X;Y)
F = (XYSQ * FF) - (4.0 * XY * HH)
1   + GSQ * ((F1 * GG) + (4.0 * F2 * HH))
G = (XYSQ * HH) + (XY * FF)
1   + GSQ * ((F2 * GG) - (G1 * HH))
C
C
C
COMPUTE THE PARTIAL DERIVATIVES OF F AND G
FX = (2.0 * X * FF) + (XYSQ * FFX)
1   -4.0 * ((Y * HH) + (XY * HHX))
2   + GSQ * ((FX1 * GG) + (F1 * GGX)
3   + (4.0 * FX2 * HH) + (4.0 * F2 * HHX))
FY = (-2.0 * Y * FF) + (XYSQ * FFY)
1   -4.0 * ((X * HH) + (XY * HHY))
2   + GSQ * ((FY1 * GG) + (F1 * GGY)
3   + (4.0 * FY2 * HH) + (4.0 * F2 * HHY))
GX = (2.0 * X * HH) + (XYSQ * HHX)
1   + (Y * FF) + (XY * FFX)
2   + GSQ * ((FX2 * GG) + (F2 * GGX)
3   -(GX1 * HH) - (G1 * HHX))
GY = (-2.0 * Y * HH) + (XYSQ * HHY)
1   + (X * FF) + (XY * FFY)
2   + GSQ * ((FY2 * GG) + (F2 * GGY)
3   -(GY1 * HH) - (G1 * HHY))
RETURN
END

```

```

SUBROUTINE AXIAL1 (NOPT,NP,NJ,UE,ZE,ZCOMB,RESULT)
C
C
C THIS SUBROUTINE CALCULATES THE INTEGRAL OVER THE INTERVAL
C (0,ZE) OF THE FOLLOWING FUNCTIONS ACCORDING TO THE VALUE
C OF NOPT
C
C NOPT = 1      Z(NP) * ZC(NJ)
C NOPT = 2      ZP(NP) * ZC(NJ)
C NOPT = 3      UP * Z(NP) * ZC(NJ)
C NOPT = 4      U * ZP(NP) * ZC(NJ)
C
C IN THE ABOVE EQUATIONS:
C Z(NP) IS THE AXIAL ACOUSTIC EIGENFUNCTION OF INDEX NP.
C Z(NJ) IS THE AXIAL ACOUSTIC EIGENFUNCTION OF INDEX NJ.
C ZC IS THE COMPLEX CONJUGATE OF THE AXIAL EIGENFUNCTION.
C ZP AND ZFP ARE THE FIRST AND SECOND DERIVATIVES OF THE
C AXIAL EIGENFUNCTIONS RESPECTIVELY.
C U IS THE STEADY STATE VELOCITY DISTRIBUTION AND UP IS ITS
C AXIAL DERIVATIVE.
C THE VELOCITY DISTRIBUTION IS COMPUTED BY THE SUBROUTINE UBAR.
C
C
C PARAMETER MX = 5
C REAL      MAG
C COMPLEX   CI, CZE, BP, BJ, T1, T2, CH, F1, F2, F3, CZ, ARG,
C !         S1, S2, S3, RESULT, FUNCT(500),B(MX)
C COMMON    B
C
C CI = (0.0,1.0)
C CZE = CMPLX(ZE,0.0)
C BP = B(NP)
C BJ = CONJG(B(NJ))
C
C IF (NOPT .GT. 2) GO TO 50
C CALCULATE INTEGRALS BY MEANS OF ANALYTICAL EXPRESSIONS FOR
C NOPT = 1 AND NOPT = 2.
C ARG = (BP + BJ) * CI
C MAG = CABS(ARG)
C IF (MAG) 20, 25, 20
20 T1 = CSINH(ARG*CZE)/ARG
C GO TO 30
25 T1 = CZE
30 ARG = (BP - BJ) * CI
C MAG = CABS(ARG)
C IF (MAG) 35, 40, 35
35 T2 = CSINH(ARG*CZE)/ARG
C GO TO 45
40 T2 = CZE
45 RESULT = (T1 + T2) * (0.5,0.0)
C IF (NOPT .EQ. 2) RESULT = -B(NP) * B(NP) * RESULT
C GO TO 100
C

```

```

C      NUMERICAL EVALUATION OF INTEGRALS FOR NOPT = 3 AND NOPT = 4.
C
C      COMPUTE STEP SIZE FOR SIMPSON INTEGRATION.
50 N = 50
   RN = N
   RESULT = (0.0,0.0)
   IC = ZCOMB
   IC = 2 - IC
C
   DO 90 J = 1, IC
   IF (J .EQ. 1) H = ZCOMB * ZE/RN
   IF (J .EQ. 2) H = (1.0 - ZCOMB) * ZE/RN
   IF (J .EQ. 1) Z0 = 0.0
   IF (J .EQ. 2) Z0 = ZCOMB * ZE
   NP1 = N + 1
   CH = CMPLX(CH,0.0)
C
C      COMPUTE INTEGRANDS.
DO 60 I = 1, NP1
  STEP = I - 1
  Z = (STEP * H) + Z0
  IF ((I.EQ.1) .AND. (J.EQ.2)) Z = Z + H/100.0
  IF (NOPT .EQ. 3) CALL UBAR(2,UE,ZE,ZCOMB,Z,F)
  IF (NOPT .EQ. 4) CALL UBAR(1,UE,ZE,ZCOMB,Z,F)
  F1 = CMPLX(F,0.0)
  CZ = CMPLX(Z,0.0)
  ARG = CI * BP
  IF (NOPT .EQ. 3) F2 = CCOSH(ARG*CZ)
  IF (NOPT .EQ. 4) F2 = ARG * CSINH(ARG*CZ)
  ARG = CI * BJ
  F3 = CCOSH(ARG*CZ)
  FUNCT(I) = F1 * F2 * F3
60 CONTINUE
C
C      PERFORM SIMPSON INTEGRATION.
NM1 = N - 1
S1 = FUNCT(1) + FUNCT(NP1)
S2 = (0.0,0.0)
S3 = (0.0,0.0)
DO 70 I = 2, N, 2
  S2 = S2 + FUNCT(I)
70 CONTINUE
DO 80 I = 3, NM1, 2
  S3 = S3 + FUNCT(I)
80 CONTINUE
RESULT = RESULT +
1      CH * (S1 + (4.0,0.0)*S2 + (2.0,0.0)*S3)/(3.0,0.0)
90 CONTINUE
C
100 CONTINUE
RETURN
END

```

SUBROUTINE AXIAL2(NOPT,NCONJ,NP,NQ,NJ,ZE,RESULT)

THIS SUBROUTINE CALCULATES THE INTEGRAL OVER THE INTERVAL
(0,ZE) OF THE FOLLOWING FUNCTIONS ACCORDING TO THE VALUES
OF NOPT AND NCONJ

FOR NCONJ = 1 AND

NOPT = 1 Z(NP) * Z(NQ) * ZC(NJ)
NOPT = 2 ZP(NP) * ZP(NQ) * ZC(NJ)
NOPT = 3 ZPP(NP) * Z(NQ) * ZC(NJ)

FOR NCONJ = 2 AND

NOPT = 1 Z(NP) * ZC(NQ) * ZC(NJ)
NOPT = 2 ZP(NP) * ZPC(NQ) * ZC(NJ)
NOPT = 3 ZPP(NP) * ZC(NQ) * ZC(NJ)

FOR NCONJ = 3 AND

NOPT = 1 ZC(NP) * Z(NQ) * ZC(NJ)
NOPT = 2 ZPC(NP) * ZP(NQ) * ZC(NJ)
NOPT = 3 ZPPC(NP) * Z(NQ) * ZC(NJ)

FOR NCONJ = 4 AND

NOPT = 1 ZC(NP) * ZC(NQ) * ZC(NJ)
NOPT = 2 ZPC(NP) * ZPC(NQ) * ZC(NJ)
NOPT = 3 ZPPC(NP) * ZC(NQ) * ZC(NJ)

IN THE ABOVE EQUATIONS:

Z(NP), Z(NQ), AND Z(NJ) ARE THE AXIAL ACOUSTIC EIGENFUNCTIONS
AND NP, NQ, AND NJ ARE THEIR INDICES.

ZP IS THE FIRST DERIVATIVE OF THE AXIAL EIGENFUNCTIONS.

ZPP IS THE SECOND DERIVATIVE OF THE AXIAL EIGENFUNCTIONS.

ZC AND ZPC ARE COMPLEX CONJUGATES OF Z AND ZP RESPECTIVELY.

PARAMETER MX = 5

REAL MAG

COMPLEX CI, CF, CZE, BP, BQ, BJ, SUM, RESULT,

1 ARG(4), FUNCT(4), B(MX)

COMMON B

CALCULATE INTEGRALS BY MEANS OF ANALYTICAL EXPRESSIONS.

CI = (0.0,1.0)

CF = (0.25,0.0)

CZE = CMPLX(ZE,0.0)

BP = B(NP)

BQ = B(NQ)

BJ = CONJG(B(NJ))

IF ((NCONJ.EQ.2) .OR. (NCONJ.EQ.4)) BQ = CONJG(BQ)

IF (NCONJ .GT. 2) BP = CONJG(BP)

ARG(1) = (BP + BQ + BJ) * CI

```

ARG(2) = (BP + BQ - BJ) * CI
ARG(3) = (BP - BQ + BJ) * CI
ARG(4) = (BP - BQ - BJ) * CI
DO 10 J = 1,4
MAG = CABS(ARG(J))
IF (MAG) 12, 15, 12
12 FUNCT(J) = CSINH(ARG(J)*CZE)/ARG(J)
GO TO 10
15 FUNCT(J) = CZE
10 CONTINUE
IF (NOPT .EQ. 2) GO TO 30
SUM = FUNCT(1) + FUNCT(2) + FUNCT(3) + FUNCT(4)
RESULT = CF * SUM
IF (NOPT .EQ. 3) RESULT = -BP * BP * RESULT
GO TO 50
30 SUM = FUNCT(1) + FUNCT(2) - FUNCT(3) - FUNCT(4)
RESULT = -CF * BP * BQ * SUM
50 CONTINUE
RETURN
END

```

```

SUBROUTINE AZIMTL(NOPT, NP, NQ, NJ, RESULT)
C
C   PARAMETER MX = 5
C   DIMENSION  NFCN(3), SG(2)
C   COMMON  /BLK2/  M(MX), NS(MX)
C
C   *****
C   THIS SUBROUTINE CALCULATES THE INTEGRAL OVER THE INTERVAL
C   (0, 2*PI) OF THE FOLLOWING FUNCTIONS ACCORDING TO THE VALUE
C   OF NOPT
C
C   NOPT = 1      TH(NP) * TH(NQ) * TH(NJ)
C
C   NOPT = 2      THP(NP) * THP(NQ) * TH(NJ)
C
C   IN THE ABOVE EQUATIONS:
C   TH(NP), TH(NQ), AND TH(NJ) ARE THE TANGENTIAL EIGENFUNCTIONS
C   AND NP, NQ, AND NJ ARE THEIR INDICES.
C   THP IS THE DERIVATIVE OF THE TANGENTIAL EIGENFUNCTIONS.
C
C   IF NS = 1  TH = SIN(M*THETA)
C   IF NS = 2  TH = COS(M*THETA)
C
C   *****
C
C   RESULT = 0.0
C   FACTOR = 1.0
C   PI = 3.1415927
C
C   DISTINGUISH BETWEEN SINES AND COSINES.
C   DO 10 K1 = 1, 3
C   NFCN(K1) = 1
10 CONTINUE
C   IF (NS(NJ).EQ.2) NFCN(3) = 2
C   IF (NOPT.EQ.2) GO TO 20
C   IF (NS(NP).EQ.2) NFCN(1) = 2
C   IF (NS(NQ).EQ.2) NFCN(2) = 2
C   GO TO 30
20 IF (NS(NP).EQ.1) NFCN(1) = 2
C   IF (NS(NQ).EQ.1) NFCN(2) = 2
C   DO 40 K1 = 1,2
C   SG(K1) = 1.0
C   IF (NFCN(K1).EQ.1) SG(K1) = -1.0
40 CONTINUE
C   FACTOR = SG(1) * SG(2) * M(NP) * M(NQ)
C
C   30 NSUM = 0
C   DO 50 K1 = 1, 3
C   NSUM = NSUM + NFCN(K1)
50 CONTINUE
C

```



```

IF ((NSUM .EQ. 3) .OR. (NSUM .EQ. 5)) GO TO 60
IF (NSUM .EQ. 4) GO TO 70
IF (NSUM .EQ. 6) GO TO 80

```

C

```

70 KOPT = 2
IF (NFCN(1) .EQ. 2) GO TO 72
GO TO 74
72 LL = M(NP)
MM = M(NQ)
NN = M(NJ)
GO TO 90
74 IF (NFCN(2) .EQ. 2) GO TO 76
GO TO 78
76 LL = M(NQ)
MM = M(NP)
NN = M(NJ)
GO TO 90
78 LL = M(NJ)
MM = M(NP)
NN = M(NQ)
GO TO 90

```

C

```

80 KOPT = 1
LL = M(NP)
MM = M(NQ)
NN = M(NJ)

```

C

COMPUTE VALUES OF THE INTEGRALS.

C

```

90 IF ((LL.NE.0) .AND. (MM.NE.0) .AND. (NN.NE.0)) GO TO 101
GO TO 103
101 LM = LL + MM
LN = LL + NN
MN = MM + NN
IF ((NN.EQ.LM) .OR. (MM.EQ.LN)) RESULT = PI/2.0
IF (LL .EQ. MN) GO TO 102
GO TO 104
102 IF (KOPT .EQ. 1) RESULT = PI/2.0
IF (KOPT .EQ. 2) RESULT = -PI/2.0
GO TO 104
103 IF ((LL.EQ.0) .AND. (MM.EQ.0) .AND. (NN.EQ.0)) GO TO 105
IF ((KOPT.EQ.1) .AND. (NN.EQ.0) .AND. (LL.EQ.MM)) RESULT = PI
IF ((KOPT.EQ.1) .AND. (MM.EQ.0) .AND. (LL.EQ.NN)) RESULT = PI
IF ((LL .EQ. 0) .AND. (MM .EQ. NN)) RESULT = PI
GO TO 104
105 IF (KOPT .EQ. 1) RESULT = 2.0 * PI
104 CONTINUE
RESULT = FACTOR * RESULT
60 CONTINUE
RETURN
END

```

```

SUBROUTINE RADIAL(NOPT,L,M,N,A,B,C,RESULT)
C
C THIS SUBROUTINE CALCULATES THE INTEGRAL OVER THE INTERVAL
C (0,1) OF THE FOLLOWING PRODUCTS OF THREE BESSEL FUNCTIONS:
C
C NOPT = 1 JL(A*R) * JM(B*R) * JN(C*R) * R
C
C NOPT = 2 JL(A*R) * JM(B*R) * JN(C*R)/R
C
C NOPT = 3 JPL(A*R) * JPM(B*R) * JN(C*R) * R
C
C JL IS THE BESSEL FUNCTION OF FIRST KIND OF ORDER L
C JPL IS THE DERIVATIVE OF JL WITH RESPECT TO R
C L, M, N ARE NON-NEGATIVE INTEGERS
C A, B, C ARE REAL NUMBERS
C
C DIMENSION FUNCT(200)
C DOUBLE PRECISION DN, DH, DSTEP, DR, ARG1, ARG2, ARG3,
1 BES1, BES2, BES3, BESH, BESL, PROD,
2 FUNCT, BESLIM, S1, S2, S3
C
C NN = 100
C DN = NN
C DH = 1.0/DN
C NP1 = NN + 1
C
C DO 10 I = 1, NP1
C DSTEP = I - 1
C DR = DH * DSTEP
C ARG1 = A * DR
C ARG2 = B * DR
C ARG3 = C * DR
C
C CALL JBES(N, ARG3, BES3, $500)
C IF (NOPT .EQ. 3) GO TO 101
C CALL JBES(L, ARG1, BES1, $500)
C CALL JBES(M, ARG2, BES2, $500)
C GO TO 102
101 IF (L .EQ. 0) GO TO 103
C CALL JBES(L+1, ARG1, BESH, $500)
C CALL JBES(L-1, ARG1, BESL, $500)
C BES1 = A * (BESL - BESH)/2.0
C GO TO 104
103 CALL JBES(1, ARG1, BES1, $500)
C BES1 = -BES1 * A
104 IF (M .EQ. 0) GO TO 105
C CALL JBES(M+1, ARG2, BESH, $500)
C CALL JBES(M-1, ARG2, BESL, $500)
C BES2 = B * (BESL - BESH)/2.0
C GO TO 102

```

```

105 CALL JBES(1,ARG2,BES2,5500)
    BES2 = -BES2 * B
102 PROD = BES1 * BES2 * BES3
C
    IF (NOPT .EQ. 2) GO TO 110
    FUNCT(I) = PROD * DR
    GO TO 10
110 IF (I .EQ. 1) GO TO 111
    FUNCT(I) = PROD/DR
    GO TO 10
111 BESLIM = 0.0
    IF ((L.EQ.1) .AND. (M.EQ.0) .AND. (N.EQ.0)) BESLIM = A/2.0
    IF ((L.EQ.0) .AND. (M.EQ.1) .AND. (N.EQ.0)) BESLIM = B/2.0
    IF ((L.EQ.0) .AND. (M.EQ.0) .AND. (N.EQ.1)) BESLIM = C/2.0
    FUNCT(I) = BESLIM
10 CONTINUE
C
    NM1 = NN - 1
    S1 = FUNCT(1) + FUNCT(NP1)
    S2 = 0.0
    S3 = 0.0
    DO 20 I = 2, NN, 2
        S2 = S2 + FUNCT(I)
    20 CONTINUE
    DO 30 I = 3, NM1, 2
        S3 = S3 + FUNCT(I)
    30 CONTINUE
    RESULT = DH * (S1 + 4.0*S2 + 2.0*S3)/3.0
    GO TO 501
500 WRITE (6, 6000)
6000 FORMAT (1H1,10HERROR JBES)
501 CONTINUE
    RETURN
    END

```

```

SUBROUTINE UBAR(NOPT,UE,ZE,ZCOMB,Z,RESULT)
C
C THIS SUBROUTINE CALCULATES THE STEADY STATE VELOCITY
C DISTRIBUTION FOR UNIFORMLY DISTRIBUTED COMBUSTION COMPLETED AT
C  $Z = ZCOMB * ZE$  WHERE:
C UE IS THE EXIT MACH NUMBER.
C ZE IS THE DIMENSIONLESS LENGTH.
C Z IS THE AXIAL COORDINATE.
C
C IF NOPT = 1 THE DISTRIBUTION IS CALCULATED.
C IF NOPT = 2 THE DERIVATIVE IS CALCULATED.
C IF NOPT = 3 THE SECOND DERIVATIVE IS CALCULATED.
C
C
      ECZ = ZCOMB * ZE
      GO TO (10,20,30), NOPT
10 IF (Z .LE. ECZ) RESULT = UE * Z/ECZ
      IF (Z .GT. ECZ) RESULT = UE
      GO TO 40
20 IF (Z .LE. ECZ) RESULT = UE/ECZ
      IF (Z .GT. ECZ) RESULT = 0.0
      GO TO 40
30 RESULT = 0.0
40 CONTINUE
      RETURN
      END

```

APPENDIX C

PROGRAM LCYC3D: A USER'S MANUAL

Program LCYC3D calculates the nonlinear stability characteristics of the combustion chamber described in Fig. 3 by numerically integrating the system of differential equations given by Eq. (20). Except for the term $C_4(j,p) e^{ik \omega t}$, this equation is the same as Eq. (12) of Ref. 11, whose solution is carried out by the program LCYC3D described in detail in Appendix D of Ref. 11. The present computer program is very similar to Program LCYC3D of Ref. 11 in its general structure, input and output. Hence in this user's manual, only the complete listing of the present program, along with a precise description of the necessary input, is given; for details about the program (including input) one is referred to Appendix D of Ref. 11.

<u>No. of Cards</u>	<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
1	1-5	I	NOUTCF	If 0: coefficients are not printed out If 1: only the linear coefficients are printed out If 2: all the coefficients are printed out
	6-10	I	NOZNL2	If 0: nozzle nonlinearities not included If 1: nozzle nonlinearities included
1	1-72	A	TITLE	Title used to label the plots
1	1-10	F	EN	Interaction index, n
	11-20	F	TAU	Time lag, $\bar{\tau}$
	21-30	F	H	Time increment for numerical integration
	31-40	F	TSTART	Time at which output of solution begins

<u>No. of Cards</u>	<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
	41-50	F	TQUIT	Time at which output of solution ends
1	1-5	I	NIEST	If 0: compute transient behavior If 1: compute limit-cycle behavior
	6-10	I	JMODE	Identifies the amplitude function used to test for limit-cycles
	11-15	I	NLOC	Determines location for wall pressure maxima and minima If 1: $z = 0, \theta = 0^\circ$ If 2: $z = 0, \theta = 45^\circ$ If 3: $z = 0, \theta = 90^\circ$
	16-20	I	NTERMS	Number of amplitude functions given initial values
	21-25	I	NPZ	Determines how secondary instability zones are handled If 0: all instability zones included If 1: secondary zones eliminated
	26-30	I	NOUT	Determines output If 0: printed output only If $1 \leq \text{NOUT} \leq 6$: both printed and plotted output; NOUT being the number of the last plot produced
	31-35	I	ICTYPE	If 1: amplitudes selected to satisfy the nozzle boundary condition If 2: amplitudes selected to eliminate the extraneous solution

The next three cards are necessary only if $1 \leq \text{NOUT} \leq 6$.

<u>No. of Cards</u>	<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
1	1-10	F	YHI(1)	Maximum ordinate for pressure plots
	11-20	F	YHI(5)	Maximum ordinate for velocity plots
	21-30	F	YLAB(1)	Interval for ordinate labeling of pressure plots
	31-40	F	YLAB(5)	Interval for ordinate labeling of velocity plots
1	1-5	I	ITICY(1)	Number of ordinate tic marks for pressure plots
	6-10	I	ITICY(5)	Number of ordinate tic marks for velocity plots
	11-15	I	NFIRST	Gives the number of the first plot produced
	16-20	I	NOMIT	If 0: time-history plot produced If 1: time-history plot omitted
1	1-5	I	MDPLOT(1)	If 0: plot of the first mode amplitude not produced If 1: plot of the first mode amplitude is produced
	6-10	I	MDPLOT(2)	If 0: plot of the second mode amplitude not produced If 1: plot of the second mode amplitude is produced
	11-15	I	MDPLOT(3)	If 0: plot of the third mode amplitude not produced If 1: plot of the third mode amplitude is produced

<u>No. of Cards</u>	<u>Location</u>	<u>Type</u>	<u>Input Item</u>	<u>Comments</u>
	16-20	I	MDPLOT(4)	If 0: plot of the pressure amplitude of the first mode not produced If 1: plot of the pressure amplitude of the first mode is produced

The next card is necessary only if plot of any mode-amplitude is desired.

1	1-10	F	YHIMD	Maximum ordinate for mode-amplitude plots
	11-20	F	YIABMD	Interval for ordinate labeling of mode-amplitude plots
	21-25	I	ITICMD	Number of ordinate tic marks for mode-amplitude plots
NTERMS	1-5	I	J	Identifies complex amplitude function
	6-15	F	AST	Amplitude of $\sin(\omega t)$ terms in initial conditions
	16-25	F	ACT	Amplitude of $\cos(\omega t)$ terms in initial conditions

The next card is necessary only if ICTYPE = 2.

1	1-10	F	DAMP	Damping factor in initial condition, obtained from linear stability analysis (Appendix E of Ref. 11)
	11-20	F	FREQ	Corresponding frequency

FORTRAN Listing

```
C ***** PROGRAM LCYC3D *****
C
C THIS PROGRAM CALCULATES THE NONLINEAR BEHAVIOR OF
C TRANSVERSE, AXIAL, OR COMBINED LONGITUDINAL-TRANSVERSE
C INSTABILITIES IN A CYLINDRICAL COMBUSTION CHAMBER WITH
C UNIFORM PROPELLANT INJECTION, DISTRIBUTED COMBUSTION
C PROCESS, AND A CONVENTIONAL NOZZLE. THE COMBUSTION PROCESS
C IS DESCRIBED BY CHOCQO'S TIME-LAG MODEL. BOTH TRANSIENT
C AND LIMIT-CYCLE SOLUTIONS ARE CALCULATED.
C
C THE FOLLOWING INPUTS ARE REQUIRED
C
C (1) THE CONTROL NUMBERS, NOUTCF AND NOZNL2.
C (2) THE COEFFICIENTS FROM PROGRAM COEFFS3D.
C (3) THE DATA DECK.
C
C NOUTCF DETERMINES PRINTOUT OF COEFFICIENTS.
C IF NOUTCF = 0 COEFFICIENTS ARE NOT PRINTED OUT.
C IF NOUTCF = 1 LINEAR COEFFICIENTS ONLY ARE PRINTED OUT.
C IF NOUTCF = 2 ALL COEFFICIENTS ARE PRINTED OUT.
C NOZNL2 DETERMINES IF THE NOZZLE NONLINEARITIES ARE TO BE INCLUDED.
C IF NOZNL2 = 0 NOZZLE NONLINEARITIES NOT INCLUDED.
C IF NOZNL2 = 1 NOZZLE NONLINEARITIES INCLUDED.
C
C THE DATA DECK CONTAINS THE FOLLOWING INFORMATION:
C
C TITLE OF THE RUN.
C
C EN IS THE INTERACTION INDEX.
C TAU IS THE TIME LAG.
C H IS THE INTEGRATION STEP SIZE.
C TSTART IS THE TIME AT WHICH OUTPUT STARTS.
C TQUIT IS THE TIME AT WHICH COMPUTATIONS ARE TERMINATED.
C
C NTEST IS TASK CONTROL NUMBER:
C IF NTEST = 0 COMPUTE TRANSIENT BEHAVIOR.
C IF NTEST = 1 COMPUTE THE LIMIT-CYCLE BEHAVIOR.
C JMODE IS THE MODE-AMPLITUDE USED TO TEST FOR LIMIT-CYCLES.
C NLOC DETERMINES THE LOCATION OF THE WALL PRESSURE MAXIMA
C AND MINIMA:
C IF NLOC = 1 LOCATION IS Z = 0, THETA = 0 DEGREES.
C IF NLOC = 2 LOCATION IS Z = 0, THETA = 45 DEGREES.
C IF NLOC = 3 LOCATION IS Z = 0, THETA = 90 DEGREES.
C NTERMS IS THE NUMBER OF TERMS GIVEN INITIAL VALUES.
C NPZ DETERMINES HOW SECONDARY STABILITY ZONES (PHANTOM
C ZONES) ARE HANDLED.
C IF NPZ = 0 PHANTOM ZONES ARE RETAINED.
C IF NPZ = 1 PHANTOM ZONES ARE ELIMINATED.
C NOUT IS THE OUTPUT CONTROL NUMBER.
C IF NOUT = 0 PRINTED OUTPUT ONLY.
C IF NOUT > 0 BOTH PRINTED AND PLOTTED OUTPUT, NOUT
C DETERMINES THE NUMBER OF THE LAST PLOT
C PRODUCED.
C ICTYPE IS THE INITIAL CONDITION CONTROL NUMBER:
C IF ICTYPE = 1 AMPLITUDES SELECTED TO SATISFY
```



```

COMMON      RV(MX2,4), C(4,MX2,MX2), D(MX2,MX2SQ),
1           KPMAX(4,MX2), IC(4,MX2,MX2), KPGMAX(MX2),
2           IDF(MX2,MX2SQ), IDO(MX2,MX2SQ)
COMMON      /BLK2/   M(MX), NS(MX), SJ(MX), B
COMMON      /BLK3/   NJMAX, NLMAX, GAMMA, COEF(3,MX2)
COMMON      /NLTERM/ NOZNL2, EXTRA(MX2,4)

```

```

C
DATA        ITT/"DIMENSIONLESS TIME, T"/,
1           ITY1/"INJECTOR FRESSURE PERTURBATION, THETA = 0"/,
2           ITY2/"INJECTOR FRESSURE PERTUREATION, THETA = 45"/,
3           ITY3/"INJECTOR PRESSURE PERTURBATION, THETA = 90"/,
4           ITY4/"NOZZLE PRESSURE PERTURBATION, THETA = 0"/,
5           ITY5/"NOZZLE AXIAL VELOCITY, THETA = 0"/,
6           ITY6/"NOZZLE B.C. (RE(-GAMMA*Y*PHIT)) AT THETA = 0"/,
7           ITP/"PRESSURE PEAKS"/
8           MTITL1/"AMPLITUDE OF 1T MODE"/
9           MTITL2/"AMFLITUDE OF 2T MODE"/
1          MTITL3/"AMPLITUDE OF 1R MODE"/
2          PRTITL/"PRESSURE AMPLITUDE OF 1T MODE"/

```

```

C
LAST = 250
ERR = 0.001
TDEL = 10.0
NPT = 0
AA(1) = 0.0
AA(2) = 0.5
AA(3) = 0.5
AA(4) = 1.0
PI = 3.1415927
READ (5,5003) NOUTCF, NOZNL2

```

```

C
C ***** COEFFICIENT INPUT SECTION *****
C

```

```

C THIS VERSION OF LCYC3D READS THE COEFFICIENT DATA FROM
C A FASTRAND FILE GENERATED BY PROGRAM COEFS3D. TO READ
C THIS DATA FROM CARDS, USE READ (5,XXXX) INSTEAD OF
C READ (9,XXXX) IN THIS SECTION.
C

```

```

C INPUT OF MOTOR PARAMETERS AND NUMBER OF TERMS.
READ (9,5001) GAMMA, UE, ZE, ZCOME, NDROPS, NJMAX, NOZNL1
WRITE (6,6001) GAMMA, UE, ZE, ZCOMB, NJMAX
IF (NDROPS .EQ. 0) WRITE (6,6030)
IF (NDROPS .EQ. 1) WRITE (6,6031)
IF (NOZNL2 .EQ. 0) WRITE (6,6032)
IF (NOZNL2 .EQ. 1) WRITE (6,6033)
NU = 2 * NJMAX
JMX = NJMAX/2
RLD = 0.5 * ZE

```

```

C WRITE (6,6002)
C

```

```

C INPUT OF DESCRIPTION OF SERIES EXPANSION.
DO 10 K = 1, JMX
READ (9,5002) NJ, L(NJ), M(NJ), N(NJ), NS(NJ), S(NJ), SJ(NJ),
1          NAME(NJ)

```

```

      WRITE (6,6003) NAME(NJ), NJ, L(NJ), M(NJ), N(NJ), NS(NJ),
      1 S(NJ), SJ(NJ)
10 CONTINUE
C
  WRITE (6,6010)
  DO 15 K = 1, JMX
  READ (9,5010) J, YNOZ(J), B(J)
  WRITE (6,6015) J, YNOZ(J), B(J)
  NJ = (2 * J) - 1
  YR(NJ) = REAL(YNOZ(J))
  YI(NJ) = AIMAG(YNOZ(J))
  YR(NJ+1) = YR(NJ)
  YI(NJ+1) = YI(NJ)
15 CONTINUE
  IF (NOZNL1 .NE. 1) GO TO 815
  WRITE (6,6034)
  DO 820 K = 1, JMX
  READ (9,5011) J, GNOZ(J)
  WRITE (6,6035) J, GNOZ(J)
820 CONTINUE
815 CONTINUE
C
C   CALCULATE THE NUMBER OF TYPES OF LINEAR COEFFICIENTS.
  NCOEFF = 4
  IF (NOZNL1 .EQ. 1) NCOEFF = 5
  NCFM1 = NCOEFF - 1
C
C   ZERO LINEAR COEFFICIENT ARRAYS.
  DO 20 KC = 1, NCFM1
  DO 20 NJ = 1, MX2
  DO 20 NP = 1, MX2
  C(KC,NJ,NP) = 0.0
  CP(KC,NJ,NP) = 0.0
20 CONTINUE
C
C   ZERO NONLINEAR COEFFICIENT ARRAY.
  DO 30 NJ = 1, MX2
  DO 30 NPQ = -1, -MX2SQ
  D(NJ,NPQ) = 0.0
30 CONTINUE
C
C   INPUT OF LINEAR COEFFICIENTS.
  DO 40 KC = 1, NCFM1
  READ (9,5003) KMAX
  IF (NOUTCF .GT. 0) WRITE (6,6004) KC, KMAX
  IF (KMAX .EQ. 0) GO TO 40
  DO 45 K = 1, KMAX
  READ (9,5004) NJ, NP, CP(KC,NJ,NP)
  IF (NOUTCF .GT. 0) WRITE (6,6005) KC, NJ, NP, CP(KC,NJ,NP)
45 CONTINUE
40 CONTINUE
C
C
C   INPUT OF NONLINEAR COEFFICIENTS.
  READ (9,5003) NLMAX

```

```

IF (NOUTCF .EQ. 2) WRITE (6,6006) NLMAX
IF (NLMAX .EQ. 0) GO TO 50
DO 52 NJ = 1, MX2
KPGMAX(NJ) = 0
52 CONTINUE
DO 55 K = 1, NLMAX
READ (9,5005) NJ, NF, NQ, DT
IF (NOUTCF .EQ. 2) WRITE (6,6007) NJ, NF, NQ, DT
KPGMAX(NJ) = KPGMAX(NJ) + 1
KPG = KPGMAX(NJ)
IDP(NJ,KPG) = NF
IDQ(NJ,KPG) = NQ
D(NJ,KPG) = DT
55 CONTINUE
50 CONTINUE

```

```

C
C ***** PRESSURE COEFFICIENT SECTION *****
C

```

```

CALCULATE SPATIAL COORDINATES FOR PRESSURE COMPUTATION.

```

```

DO 51 NPRES = 1, 3
Z(NPRES) = 0.0
RTHETA = NPRES - 1
ANGLE(NPRES) = RTHETA * 45.0
THETA(NPRES) = RTHETA * PI/4.0
Z(NPRES + 3) = ZE
ANGLE(NPRES + 3) = ANGLE(NPRES)
THETA(NPRES + 3) = THETA(NPRES)
51 CONTINUE

```

```

C
C CALCULATE COEFFICIENTS FOR PRESSURE TIME HISTORIES.

```

```

DO 53 NPRES = 1, 6
DO 53 J = 1, JMX
NP = (2 * J) - 1
Z1 = Z(NPRES)
ANG = THETA(NPRES)
CALL PHICFS(J,Z1,ANG,C1,C2,C3)
IF (NPRES .EQ. 4) CPHIT(J) = C1
CFT(NPRES,NP) = REAL(C1)
CFT(NPRES,NP+1) = -AIMAG(C1)
CFTH(NPRES,NP) = REAL(C2)
CFTH(NPRES,NP+1) = -AIMAG(C2)
CFZ(NPRES,NP) = REAL(C3)
CFZ(NPRES,NP+1) = -AIMAG(C3)
53 CONTINUE

```

```

C
C1 = (0.0,1.0)
CAXI = GAMMA * CCOSH(C1 * B(1) * ZE)
CAXIR = REAL(CAXI)
CAXII = AIMAG(CAXI)

```

```

C
C OUTPUT OF COEFFICIENTS FOR PRESSURE TIME HISTORIES.

```

```

WRITE (6,6020)
DO 56 NPRES = 1, 6
WRITE (6,6014)
DO 56 J = 1, NJMAX

```

```

        WRITE (6,6021)          J, Z(NPRES), ANGLE(NPRES),
1          CFT(NPRES,J), CFTH(NPRES,J), CFZ(NPRES,J)
56 CONTINUE
C
C ***** DATA INPUT SECTION *****
C
C   READ (5,5000) TITLE
C
C   ZERO INITIAL VALUE AND FREQUENCY ARRAYS.
5 DO 57 K = 1, NJMAX
  AS(K) = 0.0
  AC(K) = 0.0
  FRQ1(K) = 0.0
57 CONTINUE
C
C   READ COMBUSTION AND CONTROL PARAMETERS.
  READ (5,5006, END = 300) EN, TAU, H, TSTART, TQUIT
C
C   READ CONTROL NUMBERS.
  READ (5,5008) NTEST, JMODE, NLOC, NTERMS, NFZ, NOUT, ICTYPE
  JMODE = (2 * JMODE) - 1
  JFMODE = JMODE + NJMAX
  IF (NOZNL2 .NE. 1) GO TO 825
  FREQ = S(1)
  KFREQ(1) = 1
  KFREQ(2) = 2
  KFREQ(3) = 2
  DO 830 K = 1, JMX
    WKP(J) = FREQ * KFREQ(J)
830 CONTINUE
825 CONTINUE
C
C   IF (NOUT .GT. 0) NPT = 1
C   IF (NOUT .EQ. 0) GO TO 9
C   READ DATA FOR SETTING UP PLOTS.
  READ (5,5009) YHI(1), YHI(5), YLAB(1), YLAB(5)
  READ (5,5008) ITICY(1), ITICY(5), NFIRST, NOMIT
  READ (5,5014) MDPLOT
  MDPLTL = 0
  DO 320 K = 1, JMX
    MDPLTL = MDPLTL + MDPLOT(K)
320 CONTINUE
  IF (MDPLTL .EQ. 0) GO TO 9
  READ (5,5015) YHIMD, YLAEMD, ITICMD
  YLOMD = - YHIMD
C
C ***** INITIAL AMPLITUDES SECTION *****
C
C   9 DO 58 K = 1, NTERMS
C
C   INPUT INITIAL AMPLITUDES FOR F-FUNCTIONS.
  READ (5,5007) J, AST, ACT
  NJ = (2 * J) - 1
  AS(NJ) = AST

```

```

      AC(NJ) = ACT
C
C   CALCULATE FREQUENCY AND DAMPING.
      IF (ICTYPE .EQ. 2) GO TO 584
      RL = L(J)
      AX = RL * PI/ZE
      AXSQ = AX * AX
      SSQ = S(J) * S(J)
      FRQ1(NJ) = SQRT(SSQ + AXSQ)
      DMP1(NJ) = 0.0
      GO TO 586
584 LONG = L(J)
      SMN = S(J)
      READ (5,5099) DAMP,FREQ
      DMP1(NJ) = DAMP
      FRQ1(NJ) = FREQ
586 CONTINUE
      FRQ1(NJ+1) = FRQ1(NJ)
      DMP1(NJ+1) = DMP1(NJ)
C
      IF (ICTYPE .EQ. 2) GO TO 582
C   CALCULATE INITIAL AMPLITUDES FOR G-FUNCTIONS.
C
      IF (FRQ1(NJ)) 58, 58, 581
581 GYRU = GAMMA*YR(NJ)*UE
      GYIF = GAMMA*YI(NJ)*FRQ1(NJ)
      GYRF = GAMMA*YR(NJ)*FRQ1(NJ)
      GYIU = GAMMA*YI(NJ)*UE
C
      NFRES = 4
      IF (NS(J) .EQ. 1) NFRES = 6
C
      A1 = (1.0 + GYRU)*CFZ(NPRES,NJ+1)
      A2 = GYIF*CFT(NPRES,NJ+1)
      A3 = -(1.0 + GYRU)*CFZ(NPRES,NJ) + GYIF*CFT(NPRES,NJ)
      A4 = GYRF*CFT(NPRES,NJ) + GYIU*CFZ(NPRES,NJ)
C
      DET = A1*A1 + A2*A2
      IF (DET .LT. 0.0000001) GO TO 583
      R1 = A3*AC(NJ) - A4*AS(NJ)
      R2 = -A4*AC(NJ) - A3*AS(NJ)
C
      AC(NJ+1) = (R1*A1 + R2*A2)/DET
      AS(NJ+1) = -(R2*A1 - R1*A2)/DET
      GO TO 58
583 AC(NJ+1) = -AS(NJ)
      AS(NJ+1) = AC(NJ)
      GO TO 58
C
582 ARG = FRQ1(NJ) * TAU
      FSIN = SIN(ARG)
      FCOS = 1. - COS(ARG)
      FSO = FRQ1(NJ) * FRC1(NJ)
      DSO = DMP1(NJ) * LMP1(NJ)

```

```

    A1 = DSQ - FSQ + DMP1(NJ) * (CP(2,NJ,NJ)
1      - EN * CP(3,NJ,NJ) * FCOS)
2      + EN * CP(3,NJ,NJ) * FRQ1(NJ) * FSIN
3      + CP(1,NJ,NJ)
    A2 = (2.0 * DMP1(NJ) + CP(2,NJ,NJ)
1      - EN * CP(3,NJ,NJ) * FCOS) * FRQ1(NJ)
2      - EN * CP(3,NJ,NJ) * DMP1(NJ) * FSIN
    A3 = CP(2,NJ,NJ+1) * IMP1(NJ) + CP(1,NJ,NJ+1)
    A4 = CP(2,NJ,NJ+1) * FRQ1(NJ)
    DEN = A3*A3 + A4*A4
    IF (DEN .LT. 0.0000001) GO TO 585
    R1 = A1*A3 + A2*A4
    R2 = A1*A4 - A2*A3
    AC(NJ+1) = (-R1*AC(NJ) + R2*AS(NJ))/DEN
    AS(NJ+1) = -(R2*AC(NJ) + R1*AS(NJ))/DEN
    GO TO 58
585 AC(NJ+1) = -AS(NJ)
    AS(NJ+1) = AC(NJ)
C
    58 CONTINUE
C
C
C
    OUTPUT OF INITIAL AMPLITUDES.
    WRITE (6,6016)
    DO 590 J = 1, NJMAX
    IF (AS(J)) 591, 592, 591
592 IF (AC(J)) 591, 590, 591
591 WRITE (6,6017) J, DMP1(J), FRQ1(J), AC(J), AS(J)
590 CONTINUE
    IF (NTEST .EQ. 0) WRITE (6,6025)
    IF (NTEST .EQ. 1) WRITE (6,6026)
    IF (NPZ .EQ. 1) WRITE (6,6028)
    IF (NOUT .GE. 1) WRITE (6,6027)
C
C
C
    ***** LINEAR COEFFICIENTS SECTION *****
    DO 59 KC = 1, NCFM1
    DO 59 NJ = 1, MX2
    KPMAX(KC,NJ) = 0
    59 CONTINUE
C
    IF (NPZ .EQ. 0) GO TO 605
    DO 602 J = 1, JMX
    NJ = (2 * J) - 1
    RL = L(J)
    AX = RL * PI/ZE
    AXSQ = AX * AX
    SSG = S(J) * S(J)
    OMEGA = SQRT(SSG + AXSQ)
    TAUCUT(NJ) = 2.0 * PI/OMEGA
    TAUCUT(NJ+1) = TAUCUT(NJ)
602 CONTINUE
C
    DO 604 NJ = 1, NJMAX
    DO 604 NP = 1, NJMAX

```



```

        IF (TAU .GT. TAUCUT(NP)) CP(3,NJ,NP) = 0.0
604 CONTINUE
C
C   COMPUTE LINEAR COEFFICIENTS FOR GIVEN VALUES OF EN AND TAU.
605 DO 60 NJ = 1, NJMAX
      DO 60 NP = 1, NJMAX
        CT = CP(1,NJ,NP)
        IF (CT) 61, 62, 61
61     KP MAX(1,NJ) = KP MAX(1,NJ) + 1
        KP = KP MAX(1,NJ)
        IC(1,NJ,KP) = NP
        C(1,NJ,KP) = CT
62     CT = CP(2,NJ,NP) - EN*CP(3,NJ,NP)
        IF (CT) 63, 64, 63
63     KP MAX(2,NJ) = KP MAX(2,NJ) + 1
        KP = KP MAX(2,NJ)
        IC(2,NJ,KP) = NP
        C(2,NJ,KP) = CT
64     CT = EN * CP(3,NJ,NP)
        IF (CT) 65, 66, 65
65     KP MAX(3,NJ) = KP MAX(3,NJ) + 1
        KP = KP MAX(3,NJ)
        IC(3,NJ,KP) = NP
        C(3,NJ,KP) = CT
66     IF (NOZNL2 .NE. 1) GO TO 60
        CT = CP(4,NJ,NP)
        IF (CT) 67,60,67
67     KP MAX(4,NJ) = KP MAX(4,NJ) + 1
        KP = KP MAX(4,NJ)
        IC(4,NJ,KP) = NP
        C(4,NJ,KP) = CT
60 CONTINUE
C
C   ***** STEP-SIZE COMPUTATION *****
C
      NDIV = 1.0 + TAU/H
      RN = NDIV
      H = TAU/RN
      H6 = H/6.0
C
C   ***** INITIAL VALUES SECTION *****
C
      WRITE (6,6008) EN, TAU, GAMMA, UE, RLD
      WRITE (6,6009)
      WRITE (6,6022) (ANGLE(J), J = 1,6), (ANGLE(J), J = 1,3)
      WRITE (6,6012)
      NP1 = NDIV + 1
      DO 70 I = 1, NP1
        NSTEP = I - NP1
        RSTEP = NSTEP
        TIME = RSTEP * H
        TI(I) = TIME
      DO 75 J = 1, NJMAX
        JP = J + NJMAX
        IF (AC(J)) 751, 753, 751

```

```

753 IF (AS(J)) 751, 752, 751
752 U(I,J) = 0.0
    U(I,JP) = 0.0
    GO TO 75
751 ARG = FRQ1(J) * TIME
    FSIN = SIN(ARG)
    FCOS = COS(ARG)
    FEXP = EXP(DMP1(J)*TIME)
    U(I,J) = (AS(J)*FSIN + AC(J)*FCOS) * FEXP
    U(I,JP) = ((AS(J) * FCOS) - (AC(J) * FSIN)) * FRQ1(J) * FEXP
1      + DMP1(J) * U(I,J)
75 CONTINUE
C   CALCULATE INITIAL VALUES OF PRESSURE AND VELOCITY.
DO 704 NPRES = 1, 6
DO 702 J = 1, NJMAX
COEF(1,J) = CFT(NPRES,J)
COEF(2,J) = CFTH(NPRES,J)
COEF(3,J) = CFZ(NPRES,J)
702 CONTINUE
DO 703 J = 1, NU
Y(J) = U(I,J)
703 CONTINUE
UBAR = 0.0
IF (NPRES .GT. 3) UBAR = UE
UMS = 0.0
IF ((NDROPS.EQ.1) .AND. (NPRES.LT.4)) UMS = UE/(ZE*ZCOME)
CALL PRSVEL(UBAR,UMS,Y,P,VTH,VZ)
PRESS(NPRES) = P
IF (NPRES .GT. 3) AXVEL(NPRES - 3) = VZ
704 CONTINUE
PRS(I) = PRESS(NLOC)
C
C   CALCULATE INITIAL VALUES OF NOZZLE B.C.
CSUM = (0.0,0.0)
DO 710 J = 1, JMX
JP = NJMAX + (2 * J) - 1
FT = Y(JP)
GT = Y(JP+1)
A = CMFLX(FT,GT)
CSUM = CSUM + YNOZ(J) * CPHIT(J) * A
710 CONTINUE
SUM = REAL(CSUM)
YFHI = -GAMMA * SUM
WRITE (6,6011) NSTEP, TIME, (PRESS(J), J = 1,6),
1      (AXVEL(J), J = 1,3), YFHI
70 CONTINUE
C
WRITE (6,6008) EN, TAU, GAMMA, UE, RLD
WRITE (6,6022) (ANGLE(J), J = 1,6), (ANGLE(J), J = 1,3)
C
C   ***** INITIALIZE CONTROL NUMBERS *****
C
LINE = 8
K = 0
MAXNO = 0

```

```

MAXP = 0
IF (NOUT .EQ. 0) GO TO 100
JFLOT = 0
TMIN = TSTART
TMAX = TSTART + TDEL
YLO(F) = -YHI(1)
DO 90 J = 2,4
YHI(J) = YHI(1)
YLO(J) = YLO(1)
YLAB(J) = YLAB(1)
ITICY(J) = ITICY(1)
90 CONTINUE
YLO(5) = -YHI(5)
YHI(6) = YHI(5)
YLO(6) = YLO(5)
YLAB(6) = YLAB(5)
ITICY(6) = ITICY(5)
C
C ***** NUMERICAL CALCULATIONS SECTION *****
C
100 I = NP1
C
C RUNGE-KUTTA INTEGRATION SCHEME.
105 NSTEP = (I - NP1 + (LAST - NP1) * K)
RSTEP = NSTEP
TIME = RSTEP * H
TI(I) = TIME
DO 110 J = 1, NJMAX
JP = J + NJMAX
RV(J,1) = U(I-NDIV,JP)
RV(J,4) = U(I-NDIV+1,JP)
RV(J,2) = 0.375*RV(J,1) + 0.75*RV(J,4) - 0.125*U(I-NDIV+2,JP)
RV(J,3) = RV(J,2)
110 CONTINUE
IF (NOZNL2 .NE. 1) GO TO 835
DO 840 II = 1,4
TZ = TIME + AA(II)*H
DO 840 J = 1,JMX
JODD = 2*J - 1
JEVEN = 2*J
EXTRA(JODD,II) = COS(WKF(J)*TZ)
EXTRA(JEVEN,II) = SIN(WKF(J)*TZ)
840 CONTINUE
835 CONTINUE
DO 120 J = 1, NU
Y(J) = U(I,J)
120 CONTINUE
CALL RHS(NU,1,Y,YP)
DO 130 J = 1, NU
FZ(1,J) = YP(J)
130 CONTINUE
DO 140 II = 2,4
DO 144 J = 1, NU
UZ(J) = Y(J) + AA(II) * H * FZ(II-1,J)
144 CONTINUE

```

```

      CALL RHS(NU,II,UZ,YF)
      DO 148 J = 1, NU
      FZ(II,J) = YF(J)
148 CONTINUE
140 CONTINUE
      DO 150 J = 1, NU
      U(I+1,J) = Y(J) + (FZ(1,J)+2.0*(FZ(2,J)+FZ(3,J)) + FZ(4,J)) * H6
150 CONTINUE
C
C   CALCULATE PRESSURE TIME HISTORIES.
      DO 154 NPRES = 1, 6
      DO 152 J = 1, NJMAX
      COEF(1,J) = CFT(NPRES,J)
      COEF(2,J) = CFTH(NPRES,J)
      COEF(3,J) = CFZ(NPRES,J)
152 CONTINUE
      UBAR = 0.0
      IF (NPRES .GT. 3) UBAR = UE
      UMS = 0.0
      IF ((NDROPS.EQ.1) .AND. (NPRES.LT.4)) UMS = UE/(ZE*ZCOMB)
      CALL PRSVEL(UBAR,UMS,Y,P,VTH,VZ)
      PRESS(NPRES) = P
      IF (NPRES .GT. 3) AXVEL(NPRES - 3) = VZ
154 CONTINUE
      PRS(I) = PRESS(NLOC)
C
C   CALCULATE VALUES OF NOZZLE B.C.
      CSUM = (0.0,0.0)
      DO 650 J = 1, JMX
      JP = NJMAX + (2 * J) - 1
      FT = Y(JP)
      GT = Y(JP+1)
      A = CMPLX(FT,GT)
      CSUM = CSUM + YNOZ(J) * CPHIT(J) * A
650 CONTINUE
      SUM = REAL(CSUM)
      YPHI = -GAMMA * SUM
C
C
C   DETERMINE MAXIMA AND MINIMA OF PRINCIPAL MODE-AMPLITUDE
C   FUNCTION FOR USE IN DETERMINING LIMIT-CYCLE BEHAVIOR.
      IF (U(I,JPMODE) * U(I+1,JPMODE)) 170, 170, 160
170 PDEN = U(I,JPMODE) - U(I+1,JPMODE)
      IF (PDEN) 171, 160, 171
171 FP = U(I,JPMODE)/PDEN
      PA = (FP - 1.0) * FP * 0.5
      PB = 1.0 - (FP * FP)
      PC = (FP + 1.0) * FP * 0.5
      MAXNO = MAXNO + 1
      UMAX(MAXNO) = PA*U(I-1,JMODE) + PB*U(I,JMODE) + PC*U(I+1,JMODE)
      IF (MAXNO .GE. 500) GO TO 250
160 CONTINUE
C
C   DETERMINE MAXIMUM AND MINIMUM PRESSURE AT LOCATION SPECIFIED
C   BY NLOC.

```

```

    DFL = FRS(I) - PRS(I-1)
    DFS = FRS(I-1) - PRS(I-2)
    IF (DPL*DPS) 173, 173, 175
173 FNUM = FRS(I-2) - FRS(I)
    PDEN = 2.0 * (PRS(I-2) + PRS(I) - 2.0*PRS(I-1))
    IF (PDEN) 174, 175, 174
174 PP = FNUM/PDEN
    FA = (PF - 1.0) * PP * 0.5
    PB = 1.0 - (PF * PP)
    FC = (PP + 1.0) * PF * 0.5
    MAXP = MAXP + 1
    FMAX(MAXP) = FA*PRS(I-2) + PB*PRS(I-1) + FC*PRS(I)
    TIMAX(MAXP) = TI(I-1) + PF*H
    IF (MAXP .GE. 500) GO TO 250
175 CONTINUE
C
    IF (NTEST .EQ. 1) GO TO 155
    IF (TIME .LT. TSTART) GO TO 155
    IF ((NOUT .EQ. 0) .OR. (NOUT .GT. 6)) GO TO 156
C
C ***** TIME HISTORY PLOTTING SECTION *****
C
    IF (TMAX .GT. TQUIT) GO TO 156
    IF ((TIME .GT. TMAX) .OR. (JFLOT .GE. 500)) GO TO 1000
C
    JFLOT = JFLOT + 1
C
C    FILL TIME ARRAY FOR PLOTTING.
    TFLOT(JFLOT) = TIME
C
C    FILL INJECTOR PRESSURE ARRAYS FOR PLOTTING (THETA = 0, 45, 90)
    DO 1001 J = 1,3
    YFLOT(J,JFLOT) = PRESS(J)
1001 CONTINUE
C
C    FILL NOZZLE PRESSURE ARRAY FOR PLOTTING (THETA = 0)
    YFLOT(4,JFLOT) = PRESS(4)
C
C    FILL NOZZLE AXIAL VELOCITY ARRAY FOR PLOTTING (THETA = 0)
    YFLOT(5,JFLOT) = AXVEL(1)
C
C    FILL NOZZLE B.C. ARRAY FOR PLOTTING (THETA = 0).
    YFLOT(6,JFLOT) = YFHI
C
    IF (MDPLTL .EQ. 0) GO TO 156
C
C    FILL MODE AMPLITUDE ARRAYS FOR PLOTTING.
    DO 322 J = 1, JMX
    IF (MDFLOT(J) .EQ. 0) GO TO 322
    J12 = 2*J - 1
    UFLOT(J,JFLOT) = U(1,J12)
322 CONTINUE
C
    J1T1 = NJMAX + 1
    J1T2 = NJMAX + 2

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

PRIT(JPLOT) = CAXI*U(I,JIT1) - CAXII*U(I,JIT2)
C
GO TO 156
C
1000 NUM = JPLOT
C
C FLOT TIME HISTORIES.
C
DO 1020 NPLOT = NFIRST, NOUT
C
JPLOT = 0
C
C ASSIGN PLOTTING PARAMETERS.
YMIN = YLC(NPLOT)
YMAX = YHI(NPLOT)
NTICY = ITICY(NPLOT)
DELY = YLAB(NPLOT)
C
C ELIMINATE POINTS THAT ARE OUT OF THE ORDINATE RANGE.
DO 1010 J = 1, NUM
IF ((YFLOT(NPLOT,J) .LT. YMIN) .OR. (YFLOT(NPLOT,J) .GT. YMAX))
1 GO TO 1010
JPLOT = JPLOT + 1
DUMMYT(JPLOT) = TPLOT(J)
DUMMYY(JPLOT) = YFLOT(NPLOT,J)
1010 CONTINUE
C
IF (JPLOT .EQ. 0) GO TO 1020
GO TO (1011,1012,1013,1014,1015,1016), NPLOT
C
C PLOT INJECTOR PRESSURE AT THETA = 0 DEGREES.
1011 CALL GRAPH$(IBUF,3000,4,JPLOT,51,NTICY,TMAX,YMAX,TMIN,YMIN,
1 ITT,ITY1,21,41,DUMMYT,DUMMYY,2.0,DELY,TITLE)
GO TO 1020
C
C PLOT INJECTOR PRESSURE AT THETA = 45 DEGREES.
1012 IF (M(JMODE) .EQ. 0) GO TO 1020
CALL GRAPH$(IBUF,3000,4,JPLOT,51,NTICY,TMAX,YMAX,TMIN,YMIN,
1 ITT,ITY2,21,42,DUMMYT,DUMMYY,2.0,DELY,TITLE)
GO TO 1020
C
C PLOT INJECTOR PRESSURE AT THETA = 90 DEGREES.
1013 IF (M(JMODE) .EQ. 0) GO TO 1020
CALL GRAPH$(IBUF,3000,4,JPLOT,51,NTICY,TMAX,YMAX,TMIN,YMIN,
1 ITT,ITY3,21,42,DUMMYT,DUMMYY,2.0,DELY,TITLE)
GO TO 1020
C
C PLOT NOZZLE PRESSURE AT THETA = 0 DEGREES.
1014 CALL GRAPH$(IBUF,3000,4,JPLOT,51,NTICY,TMAX,YMAX,TMIN,YMIN,
1 ITT,ITY4,21,39,DUMMYT,DUMMYY,2.0,DELY,TITLE)
GO TO 1020
C
C PLOT NOZZLE AXIAL VELOCITY AT THETA = 0 DEGREES.
1015 CALL GRAPH$(IBUF,3000,4,JPLOT,51,NTICY,TMAX,YMAX,TMIN,YMIN,
1 ITT,ITY5,21,32,DUMMYT,DUMMYY,2.0,DELY,TITLE)

```

```

GO TO 1020
C
C   PLOT NOZZLE B.C. AT THETA = 0 DEGREES.
1016 CALL GRAPH8(IBUF,3000,4,JFLOT,51,NTICY,TMAX,YMAX,TMIN,YMIN,
1      ITT,ITY6,21,44,DUMMYT,DUMMY,2.0,DELY,TITLE)
C
1020 CONTINUE
C
IF (MDFLT .EQ. 0) GO TO 330
DO 324 NFLOT = 1, JMX
IF (MDPLOT(NFLOT) .EQ. 0) GO TO 324
JFLOT = 0
DO 328 J123 = 1, 4
IF (NFLOT .EQ. 1) MTITL(J123) = MTITL1(J123)
IF (NFLOT .EQ. 2) MTITL(J123) = MTITL2(J123)
IF (NFLOT .EQ. 3) MTITL(J123) = MTITL3(J123)
328 CONTINUE
C
DO 326 J = 1, NUM
IF ((UPLLOT(NFLOT,J) .LT. YLOMD) .OR. (UPLLOT(NFLOT,J)
1      .GT. YHIMD)) GO TO 326
JFLOT = JFLOT + 1
DUMMY1(JFLOT) = TFLCT(J)
DUMMY(JFLOT) = UPLLOT(NFLOT,J)
326 CONTINUE
IF (JFLOT .EQ. 0) GO TO 324
C
C   PLOT AMPLITUDES OF DIFFERENT MODES.
CALL GRAPH8(IEUF,3000,4,JFLOT,51,ITICMD,TMAX,YHIMD,TMIN,
1      YLOMD,ITT,MTITL,21,20,DUMMYT,DUMMY,2.0,YLAEMD,TITLE)
324 CONTINUE
C
IF (MDPLOT(4) .EQ. 0) GO TO 330
JFLOT = 0
DO 332 J = 1, NUM
IF ((PRIT(J) .LT. YLOMD) .OR. (PRIT(J) .GT. YHIMD)) GO TO 332
JFLOT = JFLOT + 1
DUMMYT(JFLOT) = TFLCT(J)
DUMMY(JFLOT) = PRIT(J)
332 CONTINUE
IF (JFLOT .EQ. 0) GO TO 330
C
C   PLOT PRESSURE AMPLITUDE OF 1T MODE.
CALL GRAPH8(IEUF,3000,4,JFLOT,51,ITICMD,TMAX,YHIMD,TMIN,
1      YLOMD,ITT,FRITL,21,29,DUMMYT,DUMMY,2.0,YLAEMD,TITLE)
330 CONTINUE
C
C   REASSIGN PLOTTING PARAMETERS FOR NEXT SFT OF PLOTS.
JFLOT = 0
TMIN = TMAX
TMAX = TMAX + TDEL
C
C   ***** TIME HISTORY PRINTED OUTPUT SECTION *****
C
156 WRITE (6,6011) NSTEP, TIME, (PRESS(J), J = 1,6),

```

```

1          (AXVEL(J), J = 1,3), YPHI
LINE = LINE + 1
157 IF (TIME .GT. TQUIT) GO TO 250
IF (LINE .LT. 52) GO TO 155
WRITE (6,6013)
WRITE (6,6022) (ANGLE(J), J = 1,6), (ANGLE(J), J = 1,3)
LINE = 4
C
155 I = I + 1
IF (I .LT. LAST) GO TO 105
C
C ***** LIMIT-CYCLE SECTION *****
C
C TEST FOR LIMIT CYCLE.
K = K + 1
IF ((NTEST .EQ. 0) .OR. (MAXNO .LT. 80)) GO TO 190
UTOT = 0.0
DO 180 J = 0, 3
JMAX = MAXNO - J
UTOT = UTOT + ABS(UMAX(JMAX))
180 CONTINUE
UAVG(K) = UTOT/4.0
IF (K .EQ. 1) GO TO 190
CHANGE = UAVG(K) - UAVG(K-1)
ABSCHG = ABS(CHANGE/UAVG(K))
IF (ABSCHG .GT. ERR) GO TO 190
TM = TIME/2.0
ITM = TM
ITM = 2*ITM + 2
TM = ITM
TSTART = TM + TSTART
TQUIT = TM + TQUIT
TMIN = TSTART
TMAX = TSTART + TDEL
NTEST = 0
C
C RE-ASSIGN ARRAYS.
190 DO 200 I = 1, NP1
ILAST = LAST - NP1 + I
PRS(I) = PRS(ILAST)
TI(I) = TI(ILAST)
DO 200 J = 1, NU
U(I,J) = U(ILAST,J)
200 CONTINUE
GO TO 100
C
C ***** PRESSURE MAXIMA AND MINIMA PRINTOUT *****
C
250 WRITE (6,6023) Z(NLOC), ANGLE(NLOC), MAXP
LINE = 4
DO 255 JST = 1, MAXP, 8
JSTART = JST
JSTOP = JST + 7
IF (JSTOP .GT. MAXP) JSTOP = MAXP

```



```

WRITE (6,6024) (FMAX(J), J = JSTART, JSTOP)
WRITE (6,6024) (TIMAX(J), J = JSTART, JSTOP)
WRITE (6,6014)
LINE = LINE + 3
IF (LINE .LT. 52) GO TO 255
LINE = 0
WRITE (6,6013)
255 CONTINUE
IF ((NOUT .EQ. 0) .OR. (NOMIT .EQ. 1)) GO TO 5
C
C ***** PRESSURE MAXIMA PLOTTING SECTION *****
C
C DETERMINE LARGEST VALUE OF FMAX.
AMPMAX = 0.0
DO 260 J = 1, MAXP
IF (FMAX(J) .LT. AMPMAX) GO TO 260
AMPMAX = FMAX(J)
260 CONTINUE
C
C RANGE OF PLOT AND COORDINATE LABELING.
ITM = AMPMAX + 1.0
AMPMAX = ITM
ITM = 1.0 + TIMAX(MAXP)/50.0
TMAX = ITM * 50
DELX = TMAX/10.0
DELY = AMPMAX/10.0
C
C ELIMINATE NEGATIVE VALUES.
JPLCT = 0
DO 262 J = 1, MAXP
IF (FMAX(J)) 262, 264, 264
264 JPLCT = JPLCT + 1
DUMMYT(JPLCT) = TIMAX(J)
DUMMYY(JPLCT) = FMAX(J)
262 CONTINUE
C
C PLOT VALUES.
CALL GRAPH8(IEUF, 3000, 4, JPLCT, 101, 101, TMAX, AMPMAX, 0.0, 0.0,
1 ITT, ITF, 21, 14, DUMMYT, DUMMYY, DELX, DELY, TITLE)
C
C GO TO 5
C
C TURN OFF PLOTTING ROUTINE.
300 IF (NPT .EQ. 1) CALL SHPARG
C
C ***** READ FORMAT SPECIFICATIONS *****
C
5000 FORMAT (12A6)
5001 FORMAT (4F10.0, 3I5)
5002 FORMAT (5I5, 2F10.5, 1X, A4)
5003 FORMAT (2I5)
5004 FORMAT (2I5, F15.6)
5005 FORMAT (3I5, F15.6)
5006 FORMAT (5F10.0)
5007 FORMAT (15, 2F10.0)

```

5008 FORMAT (7I5)
 5009 FORMAT (7F10.0)
 5010 FORMAT (15,4F10.5)
 5011 FORMAT (15,2F10.5)
 5012 FORMAT (F10.0)
 5014 FORMAT (4I5)
 5015 FORMAT (2F10.0,15)
 5099 FORMAT (2F10.0)

C
 C
 C

***** WHITE FORMAT SPECIFICATIONS *****

6001 FORMAT (1H1,9H GAMMA = ,F5.3,5X,5HUE = ,F5.3,
 1 5X,5HZE = ,F8.5,5X,8HZCOME = ,F5.2,
 2 5X,8HNJMAX = ,I2//)
 6002 FORMAT (2X,29HNAME J L M N NS,7X,3HSMN,3X,
 1 7HJM(SMN)//)
 6003 FORMAT (2X,A4,5I5,2F10.5)
 6004 FORMAT (1H0,26H NUMBER OF COEFFICIENTS C(I,1,10H,NJ,NP) IS,15//)
 6005 FORMAT (2X,2HC(I,1,1H,,I2,1H,,I2,4H) = ,F10.5)
 6006 FORMAT (1H0,38H NUMBER OF COEFFICIENTS D(NJ,NP,N0) IS,15//)
 6007 FORMAT (2X,2HD(I,2,1H,,I2,1H,,I2,4H) = ,F10.5)
 6008 FORMAT(1H1,45H COMBUSTION PARAMETERS: INTERACTION INDEX = ,F7.5,
 1 12X,11HTIME-LAG = ,F7.5/2X,17HMOTOR PARAMETERS:,19X,
 2 8HGAMMA = ,F7.5,23H EXIT MACH NUMBER = ,F7.5,
 3 22H LENGTH/DIAMETER = ,F7.5//)
 6009 FORMAT (2X,18HINITIAL CONDITIONS//)
 6010 FORMAT (1H0,5X,1HJ,8X,2HYR,8X,2HYI,7X,3HEPS,7X,3HETA//)
 6011 FORMAT (2X,15,F12.5,10F10.5)
 6012 FORMAT (1H0)
 6013 FORMAT (1H1)
 6014 FORMAT (1H)
 6015 FORMAT (2X,15,4F10.5)
 6016 FORMAT (1H1,36H INITIAL CONDITIONS ARE OF THE FORM://
 1 2X,49HU(1,J) = AC(J)*COS(FREQ*T) + AS(J)*SIN(FREQ*T)),
 2 14H * EXP(DAMP*T)///6X,1HJ,8X,7HDAMPING,
 3 6X,9HFREQUENCY,10X,5HAC(J),10X,5HAS(J)///)
 6017 FORMAT (2X,15,4F15.8//)
 6020 FORMAT (1H1,46H COEFFICIENTS FOR COMPUTATION OF WALL PRESSURE,
 1 10H WAVEFORMS///43X,27HCOEFFICIENTS IN SERIES FOR://
 2 22X,5HTHETA,10X,4HTIME,10X,5HTHETA,10X,5HAXIAL/
 3 6X,1HJ,9X,1HZ,3X,9H(DEGREES),5X,10HDERIVATIVE,
 4 5X,10HDERIVATIVE,5X,10HDERIVATIVE//)
 6021 FORMAT (2X,15,F10.3,F12.1,3F15.7)
 6022 FORMAT (26X,17HINJECTOR PRESSURE,14X,15HNOZZLE PRESSURE,
 1 12X,21HNOZZLE AXIAL VELOCITY/3X,4HSTEP,8X,4HTIME,
 2 F5.0,5H DEG.,F5.0,5H DEG.,F5.0,5H DEG.,
 3 F5.0,5H DEG.,F5.0,5H DEG.,F5.0,5H DEG.,
 4 F5.0,5H DEG.,F5.0,5H DEG.,F5.0,5H DEG.,6X,4HYPHI//)
 6023 FORMAT (1H1,38H PRESSURE MAXIMA AND MINIMA AT: Z = ,F5.2,
 1 11H THETA = ,F4.1/19H VALUES COMPUTED: ,I3//)
 6024 FORMAT (1H ,7X,8F13.6)
 6025 FORMAT (2X//2X,37HTHE TRANSIENT BEHAVIOR IS CALCULATED.)
 6026 FORMAT (2X//2X,39HTHE LIMIT-CYCLE BEHAVIOR IS CALCULATED.)
 6027 FORMAT (2X//2X,33HTHIS RUN PRODUCES PLOTTED OUTPUT.)
 6028 FORMAT (2X//2X,"THE PHANTOM ZONES ARE ELIMINATED.")

```
6030 FORMAT (2X,"DROPLET MOMENTUM SOURCE IS NEGLECTED"/)
6031 FORMAT (2X,"DROPLET MOMENTUM SOURCE IS INCLUDED"/)
6032 FORMAT (2X,"NOZZLE NONLINEARITIES NEGLECTED"/)
6033 FORMAT (2X,"NOZZLE NONLINEARITIES INCLUDED"/)
6034 FORMAT (1H0,8X,1HJ,10X,2HGR,10X,2HGI//)
6035 FORMAT (5X,I5,2F12.5)
      END
```

ORIGINAL PAGE IS
OF POOR QUALITY

```

SUBROUTINE PHICFS(NP,Z,THETA,CT,CTH,CZ)
C
C THIS SUBROUTINE COMPUTES THE COEFFICIENTS NEEDED TO
C CALCULATE THE WALL PRESSURE PERTURBATION.
C
C NP IS THE INDEX OF THE COMPLEX SERIES TERM.
C Z IS THE AXIAL LOCATION.
C THETA IS THE AZIMUTHAL LOCATION.
C CT IS THE COEFFICIENT IN THE SERIES FOR THE TIME DERIVATIVE O
C THE VELOCITY POTENTIAL.
C CTH IS THE COEFFICIENT IN THE SERIES FOR THE THETA DERIVATIVE
C OF THE VELOCITY POTENTIAL.
C CZ IS THE COEFFICIENT IN THE SERIES FOR THE AXIAL DERIVATIVE
C OF THE VELOCITY POTENTIAL.
C
PARAMETER MX = 5
COMPLEX CI, CZ, CAXI, CAXIZ, CRAD, CAZI, CAZITH,
1 B(MX), CT, CTH, CZ
COMMON /BLK2/ M(MX), NS(MX), SJ(MX), B
C
CI = (0.0,1.0)
CZ = CMPLX(Z,0.0)
CAXI = CCOSH(CI * B(NP) * CZ)
CAXIZ = CI * B(NP) * CSINH(CI * B(NP) * CZ)
CRAD = CMPLX(SJ(NP),0.0)
EM = M(NP)
ARG = EM * THETA
FSIN = SIN(ARG)
FCOS = COS(ARG)
AZI = FCOS
IF (NS(NP) .EQ. 1) AZI = FSIN
AZITH = EM * FCOS
IF (NS(NP) .EQ. 2) AZITH = -EM * FSIN
CAZI = CMPLX(AZI,0.0)
CAZITH = CMPLX(AZITH,0.0)
C
CT = CAZI * CAXI * CRAD
CTH = CAZITH * CAXI * CRAD
CZ = CAZI * CAXIZ * CRAD
C
RETURN
END

```

```

SUBROUTINE PRSVEL(UBAR, UMS, Y, P, VTH, VZ)
C
C THIS SUBROUTINE COMPUTES THE WALL PRESSURE AND VELOCITY.
C
C UBAR IS THE LOCAL AXIAL STEADY STATE MACH NUMBER.
C UMS IS THE DERIVATIVE OF THE MACH NUMBER FOR THE CASE
C WHEN DROPLET MOMENTUM SOURCES ARE INCLUDED.
C Y IS THE ARRAY CONTAINING VALUES OF THE MODE-AMPLITUDE
C FUNCTIONS AND THEIR DERIVATIVES.
C P IS THE VALUE OF THE WALL PRESSURE PERTURBATION.
C VTH IS THE TANGENTIAL COMPONENT OF VELOCITY AT THE WALL.
C VZ IS THE AXIAL COMPONENT OF VELOCITY AT THE WALL.
C
PARAMETER      MX2=10, MX4=20
DIMENSION      Y(MX4), SUM(4), SUMSQ(3)
COMMON         /BLK3/  NJMAX, NLMAX, GAMMA, COEF(3, MX2)
C
DO 10 I = 1, 4
SUM(I) = 0.0
10 CONTINUE
C
DO 20 I = 1, 4
DO 20 J = 1, NJMAX
JY = J
IF (I .EQ. 1) JY = J + NJMAX
II = I
IF (I .EQ. 4) II = 1
SUM(I) = SUM(I) + Y(JY) * COEF(II, J)
20 CONTINUE
C
FLIN = SUM(1) + UBAR*SUM(3) + UMS*SUM(4)
PNL = 0.0
IF (NLMAX .EQ. 0) GO TO 40
DO 30 I = 1, 3
SUMSQ(I) = SUM(I) * SUM(I)
30 CONTINUE
PNL = 0.5 * (SUMSQ(2) + SUMSQ(3) - SUMSQ(1))
C
40 P = -GAMMA * (FLIN + PNL)
VTH = SUM(2)
VZ = SUM(3)
C
RETURN
END

```

SUBROUTINE FHS(NU,II,U,UP)

C

```
PARAMETER      MX=5, MX2=10, MX4=20, MX2SQ=100
DIMENSION      U(NU), UP(NU)
COMMON         RV(MX2,4), C(4,MX2,MX2), D(MX2,MX2SQ),
1             KPMAX(4,MX2), IC(4,MX2,MX2), KPOMAX(MX2),
2             IDP(MX2,MX2SQ), IDQ(MX2,MX2SQ)
COMMON         /BLK3/  NJMAX, NLMAX, GAMMA, COEF(3,MX2)
COMMON         /NLTERM/ NOZNL2, EXTRA(MX2,4)
```

C

```
DO 10 NJ = 1, NJMAX
NJP = NJ + NJMAX
UP(NJ) = U(NJP)
SL1 = 0.0
SL2 = 0.0
SL3 = 0.0
SL4 = 0.0
SNL = 0.0
MAX = KPMAX(1,NJ)
IF (MAX .EQ. 0) GO TO 25
DO 20 KP = 1, MAX
NP = IC(1,NJ,KP)
SL1 = SL1 + (C(1,NJ,KP) * U(NP))
20 CONTINUE
25 MAX = KPMAX(2,NJ)
IF (MAX .EQ. 0) GO TO 35
DO 30 KP = 1, MAX
NPP = IC(2,NJ,KP) + NJMAX
SL2 = SL2 + (C(2,NJ,KP) * U(NPP))
30 CONTINUE
35 MAX = KPMAX(3,NJ)
IF (MAX .EQ. 0) GO TO 45
DO 40 KP = 1, MAX
NP = IC(3,NJ,KP)
SL3 = SL3 + (C(3,NJ,KP) * RV(NP,II))
40 CONTINUE
45 IF (NOZNL2 .NE. 1) GO TO 65
MAX = KPMAX(4,NJ)
IF (MAX .EQ. 0) GO TO 65
DO 60 KP = 1, MAX
NP = IC(4,NJ,KP)
SL4 = SL4 + (C(4,NJ,KP) * EXTRA(NP,II))
60 CONTINUE
65 IF (NLMAX .EQ. 0) GO TO 55
MAX = KPOMAX(NJ)
IF (MAX .EQ. 0) GO TO 55
DO 50 KPO = 1, MAX
NP = IDP(NJ,KPO)
NQP = IDQ(NJ,KPO) + NJMAX
SNL = SNL + (D(NJ,KPO) * U(NP) * U(NQP))
50 CONTINUE
55 UP(NJP) = -(SL1 + SL2 + SL3 + SL4 + SNL)
10 CONTINUE
RETURN
END
```

```

COMPILEF (FLD=ABS)
SUBROUTINE GRAPHS( IBUF, NLOC, LDEV, NTOT, NTICK, NTICY,
1  XMAX, YMAX, XMIN, YMIN, ITITLX, ITITLY, LTITLX, LTITLY, XARRAY,
2  YARRAY, DELX, DELY, TITLE)

```

```

-----
C
C IDENTIFIER          MEANING          TYPE
C
C IBUF:  ADDRESS OF BUFFER AREA FOR PLOT OUTPUT          INTEGER
C NLOC:  NUMBER OF LOCATIONS IN BUFFER AREA (>=2000)    INTEGER
C LDEV:  LOGICAL DEVICE NUMBER FOR PLOT                 INTEGER
C NTOT:  NUMBER OF POINTS TO BE PLOTTED                INTEGER
C NTICK: NUMBER OF TIC MARKS ON ABSCISSA (>=2)          INTEGER
C NTICY: NUMBER OF TIC MARKS ON ORDINATE (>=2)          INTEGER
C XMAX:  UPPER LIMIT OF ABSCISSA DOMAIN                 REAL
C YMAX:  UPPER LIMIT OF ORDINATE RANGE                 REAL
C XMIN:  LOWER LIMIT OF ABSCISSA DOMAIN                 REAL
C YMIN:  LOWER LIMIT OF ORDINATE RANGE                 REAL
C ITITLX: ABSCISSA LABEL                                FIELDATA ARRAY
C ITITLY: ORDINATE LABEL                                FIELDATA ARRAY

C LTITLX: NUMBER OF CHARACTERS IN ITITLX                INTEGER
C LTITLY: NUMBER OF CHARACTERS IN ITITLY                INTEGER
C XARRAY: ABSCISSA POINTS IN TERMS OF XMIN-XMAX COORD'S REAL ARRAY
C YARRAY: ORDINATE POINTS IN TERMS OF YMIN-YMAX COORD'S REAL ARRAY
C DELX:  INTERVALS OF ABSCISSA TIC MARK LABELING       REAL
C        IN TERMS OF XMIN-XMAX COORDINATES
C DELY:  INTERVALS OF ORDINATE TIC MARK LABELING       REAL
C        IN TERMS OF YMIN-YMAX COORDINATES
C TITLE: LABEL FOR THE WHOLE RUN                        FIELDATA ARRAY

```

```

-----
DIMENSION IBUF(NLOC), XARRAY(NTOT), YARRAY(NTOT), ITITLX(1),
1  ITITLY(1), YLIT(100)
DIMENSION TITLE(1)

```

```

-----
C
C FIXED BASIC PARAMETERS

```

```

-----
LOGICAL ZERO
DEFINE ZERO=NDEC.LT.0.AND.ABS(FPN).LT.5
1  .OR.NDEC.GT.0.AND.ABS(FPN).LT.5.*10.**(-NDEC-1)
DEFINE DNDEC=NDEC-FLD(0,36,ZERO)*NDEC-FLD(0,36,ZERO)
DEFINE IFIX(FARG)=INT(FARG+.5)
DATA J/1/
DATA HEIGHT/.105/
DATA INTEG/1/
DATA ABSCIS/8./
DATA ORDINA/6./
DATA ICODE/-1/

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

DATA TOPMAR/1./
DATA BOTMAR/1.5/
REAL LEFMAR
DATA LEFMAR/1.9/
DATA RYTMAR/1.1/
DATA FACT/1./
DATA MAXIS/1/
DATA MLINE/1/
DATA HTLAB/.105/

```

```

C -----
C
C 19 INITIAL COMPUTATION OF DERIVED PARAMETERS
C AND INITIAL PLOTS CALL
C 20 SKIPS PRELIMINARIES FOR 2ND AND SUBSEQUENT CALLS
C

```

```

C -----
GO TO (19,20),J
19 YDIT(1) = 3./19.
TICKLE = .HEIGHT/2.
ROTFAC = - 3./14. * HEIGHT - 4./7. * HEIGHT
STARTL = 6 * HEIGHT + ROTFAC + TICKLE
SEPLAB = STARTL + 1.5 * HEIGHT
SYMBLH = 0.070
REAL LABSEP
LABSEP = 4. * HEIGHT
ASTART = 2. * HEIGHT
DO 1 I = 2,100
1 YDIT(I) = YDIT(I - 1) + (2 * MOD(I,2) + 1)/19.
YDIT(100) = YDIT(100) + .5
CALL PLOTS(IBUF,NLOC,LDEV)
CALL FACTOR(1.)
J = 2
CALL SYMBOL (HEIGHT,36 * HEIGHT + 5.5,HEIGHT,TITLE,270.,72)
CALL PLOT(1., - .5, - 3)
3 DO 2 I = 1,100
2 CALL PLOT(0.,YDIT(I),3 - MOD(I,2))
DO 33 I = 1,100
33 YDIT(I) = YDIT(I) - ABSCIS - RYTMAR
C -----

```

```

C
C RESET ORIGIN
C

```

```

C -----
XPAGE = BOTMAR + ORDINA
GO TO 2019
20 XPAGE = BOTMAR + ORDINA + TOPMAR
2019 CALL WHERE(RXPAGE,RYPAGE,FACT)
YPAGE = RYPAGE - LEFMAR
CALL PLOT(XPAGE,YPAGE, - 3)
CALL FACTOR(FACT)

```



```

C -----
C
C   DRAW AXES AND LABELING MAXIS TIMES
C
C -----
C   DO 100 I = 1,MAXIS
100  CALL MYAXIS
C -----
C
C   DRAW POINTS, OPTIONAL CENTERLINE, AND PAGE SCISSOR
C   MLINE TIMES
C
C -----
C   DO 200 I = 1,MLINE
200  CALL MYLINE
      RETURN
C -----
C
C   ENTRY POINT SHPARG
C   TERMINATE PLOTTING SEQUENCE
C
C -----
C   ENTRY SHPARG
      CALL WHERE(RXPAGE,RYPAGE,I)
      CALL PLOT(RXPAGE,RYPAGE,999)
      RETURN
C -----
C
C   SUBROUTINE MYAXIS (INTERNAL)
C
C -----
C   SUBROUTINE MYAXIS
      STARTL = 6 * HEIGHT + ROTFAC + TICKLE
      IMAX = IFIX((YMAX - YMIN)/DELY)
      TICSEP = ORDINA/(ABS(NTICY) - 1)
      CALL DENDEC(YMAX,DELY,NDEC)
      K = 1
      N = (ABS(NTICY)/IMAX) - 1 + MOD(ABS(NTICY),2)
      DO 9 I = 0,IMAX
      GO TO (11,12),K
11   IF(2 * I.LT.IMAX)GO TO 12
      CALL AXLAB(0.,ITITLY,LTITLY,HTLAB)
      K = 2
12   FPN = YMAX - I * DELY
      IF(ZERO)FPN = 0.
      TMID = 1.
      XPAGE = - I * ORDINA/IMAX - .5 * HEIGHT
      IF(FPN)113,122,118
113  IF(NDEC - 2)115,114,112
114  YPAGE = STARTL@5CHAR

```

```

GO TO 112
115 IF(NDEC - 1)117,116,112
116 YPAGE = STARTL - HEIGHT@4CHAR
GO TO 112
117 IF(ABS(FPN) - 100.)119,116,116
119 IF(ABS(FPN) - 10.)120,121,121
120 YPAGE = STARTL - 3 * HEIGHT@2CHAR
GO TO 112
121 YPAGE = STARTL - 2 * HEIGHT@3CHAR
GO TO 112
122 YPAGE = STARTL - 4 * HEIGHT@1CHAR
GO TO 112
118 IF(NDEC - 2)123,116,112
123 IF(NDEC - 1)125,124,112
124 IF(FPN - 10.)121,116,116
125 IF(FPN - 10.)122,120,126
126 IF(FPN - 100.)120,121,127
127 IF(FPN - 1000.)121,116,128
128 IF(FPN - 10000.)116,114,114
112 NNDEC = DNDEC
CALL NUMBER(XPAGE,YPAGE,HEIGHT,FPN,270.,NNDEC)
XPAGE = - I * (ORDINA/IMAX)
DO 10 JJ = 1,N
YPAGE = TICKLE * TMID
CALL PLOT(XPAGE,YPAGE,3)
YPAGE = YPAGE * (- 1 + 1/IMAX * .5)
CALL PLOT(XPAGE,YPAGE,2)
IF(1/IMAX)110,110,9
110 YPAGE = 0
CALL PLOT(XPAGE,YPAGE,3)
XPAGE = XPAGE - TICSEP
CALL PLOT(XPAGE,YPAGE,2)
TMID = .5
10 CONTINUE
9 CONTINUE
K = 1
IMAX = IFIX((XMAX - XMIN)/DELX)
TICSEP = ABSCIS/(NTICX - 1)
XPAGE = - ASTART - ORDINA
CALL DENDEC(XMAX,DELX,NDEC)
DO 28 I = 0,IMAX
STARTL = - I * ABSCIS/IMAX
GO TO (24,25),K
24 IF(2 * I.LT.IMAX)GO TO 25
CALL AXLAB(270.,ITITLX,LTITLX,RTLAB)
K = 2
XPAGE = - ASTART - ORDINA
25 FPN = XMIN + I * DELX
IF(ZERO)FPN = 0.
IF(FPN)813,822,818
813 IF(NDEC - 2)815,814,23
814 YPAGE = STARTL + 16./7. * HEIGHT@5CHAR
GO TO 23
815 IF(NDEC - 1)817,816,23

```

```

816  YPAGE = STARTL + 25./14. * HEIGHT@4CHAR
      GO TO 23
817  IF(ABS(FPN) - 100.)819,816,816
819  IF(ABS(FPN) - 10.)820,821,821
820  YPAGE = STARTL + 11./14. * HEIGHT@2CHAR
      GO TO 23
821  YPAGE = STARTL + 9./7. * HEIGHT@3CHAR
      GO TO 23
822  YPAGE = STARTL + 2./7. * HEIGHT@1CHAR
      GO TO 23
818  IF(NDEC - 2)823,816,23
823  IF(NDEC - 1)825,824,23
824  IF(FPN - 10.)821,816,816
825  IF(FPN - 10.)822,820,826
826  IF(FPN - 100.)820,821,827
827  IF(FPN - 1000.)821,816,828
828  IF(FPN - 10000.)816,814,814
23   NNDEC = DNDEC.
28   CALL NUMBER(XPAGE,YPAGE,HEIGHT,FPN,270.,NNDEC)
      N = (NTICKX/IMAX) - 1 + MOD(NTICKX,2)
      DO 26 I = IMAX,0, - 1
          TMID = 1.
          YPAGE = - I * ABSCIS/IMAX.
          DO 27 JJ = 1,N
              XPAGE = - ORDINA - TICKLE * TMID
              CALL PLOT(XPAGE,YPAGE,3)
              XPAGE = XPAGE + (TICKLE + FLD(0,36,I.NE.0) * TICKLE) * TMID
              CALL PLOT(XPAGE,YPAGE,2)
              IF(1)111,26,111
111  XPAGE = - ORDINA
      CALL PLOT(XPAGE,YPAGE,3)
      YPAGE = YPAGE + TICSEP
      CALL PLOT(XPAGE,YPAGE,2)
      TMID = .5
27   CONTINUE
26   CONTINUE
      RETURN

```

```

C -----
C
C   SUBROUTINE MYLINE (INTERNAL)
C
C -----

```

```

SUBROUTINE MYLINE
ITOP = IFIX((ABSCIS + RYTMAR + .5)/11. * 99.)
IBOT = IFIX(RYTMAR/11. * 99.)
DO 17 I = 1,NTOT
XPAGE = (YARRAY(I) - YMAX)/(YMAX - YMIN) * ORDINA
YPAGE = (XMIN - XARRAY(I))/(XMAX - XMIN) * ABSCIS
17  CALL SYMBOL(XPAGE,YPAGE,SYMBLH,INTEG,270.,ICODE)
    IF(NTICY.GE.0)GO TO 22
    XPAGE = - ORDINA/2.
    YPAGE = - ABSCIS
    CALL PLOT(XPAGE,YPAGE,3)
    DO 18 I = IBOT,ITOP

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

18 CALL PLOT(XPAGE,YDIT(I),3 - MOD(I,2))
22 XPAGE = TOPMAR
   YPAGE = - ABSCIS - HYTMAR - .5
   CALL PLOT(XPAGE,YPAGE,3)
   DO 21 I = 1,100
21 CALL PLOT(XPAGE,YDIT(I),3 - MOD(I,2))
   RETURN
C -----
C
C   SUBROUTINE AXLAB (INTERNAL)
C
C -----
SUBROUTINE AXLAB(ANGLE,IBCD,NCHARX,HEIGHT)
DIMENSION IBCD(7)
LOGICAL S
INTEGER QSQ/' S'/
K = 2
NCHAR = NCHARX
S = .FALSE.
IF(ABS(ANGLE).GT..1)GO TO 30
XPAGE = - ORDINA/2. - NCHAR * HEIGHT/2
YPAGE = SEPLAB
GO TO 31
30 XPAGE = - ORDINA - LABSEP
   YPAGE = - ABSCIS/2. + NCHAR * HEIGHT/2
31 LSTART = 6 * MOD(NCHAR,6) - 12
   IF(LSTART.EQ. - 12)LSTART = 24
   LOOK = NCHAR/6 + 1.1
   IF(LSTART.EQ. - 6)GO TO 13
   IF(FLD(0,12,'S').EQ.FLD(LSTART,12,IBCD(LOOK)))GO TO 15
   GO TO 14
13 IF(FLD(0,6,'').NE.FLD(30,6,IBCD(LOOK - 1)))GO TO 14
   IF(FLD(0,6,'S').NE.FLD(0,6,IBCD(LOOK)))GO TO 14
15 NCHAR = NCHAR - 1
   S = .TRUE.
14 CALL SYMBOL(XPAGE,YPAGE,HEIGHT,IBCD,ANGLE,NCHAR)
   IF(S)CALL SYMBOL(999.,999.,2 * HEIGHT/3,QSQ,ANGLE,2)
   RETURN
C -----
C
C   SUBROUTINE DENDEC (INTERNAL)
C
C -----
SUBROUTINE DENDEC(QMAX,DELQ,NDEC)
IF(INT(ABS(QMAX)).GE.10)GO TO 5
IF(AMOD(ABS(QMAX - DELQ),.1).GE..01)GO TO 7
NDEC = 1
RETURN
5 NDEC = - 1
  RETURN
7 NDEC = 2
  RETURN
END

```

REFERENCES

1. Tsien, H. S., "The Transfer Functions of Rocket Nozzles," American Rocket Society Journal, Vol. 22, 1952, pp 139-143.
2. Crocco, L. and Cheng, S. I., Theory of Combustion Instability in Liquid Propellant Rocket Motors, Appendix B. AGARD Monograph No. 8, Butterworths, London, 1956.
3. Crocco, L. and Sirignano, W. A., "Behavior of Supercritical Nozzles Under Three Dimensional Oscillatory Conditions," Princeton University Department of Aerospace and Mechanical Sciences, Report No. 790, April 1967.
4. Zinn, B. T., "A Theoretical Study of Nonlinear Transverse Combustion Instability in Liquid Propellant Rocket Motors," Princeton University Department of Aerospace and Mechanical Sciences, Report No. 732, May 1966.
5. Zinn, B. T. and Crocco, L., "Periodic Finite-Amplitude Oscillations in Slowly Converging Nozzles," Astronautica Acta, Vol. 13, 1968, pp. 481-488.
6. Zinn, B. T. and Crocco, L., "The Nozzle Boundary Condition in the Nonlinear Rocket Instability Problem," Astronautica Acta, Vol. 13, 1968, pp. 489-496.
7. Lores, M. E. and Zinn, B. T., "The Prediction of Nonlinear Longitudinal Combustion Instability in Liquid Propellant Rockets," NASA CR-120904, April 1972.
8. Lores, M. E. and Zinn, B. T., "Nonlinear Longitudinal Combustion Instability in Rocket Motors," presented at the AIAA 11th Aerospace Sciences Meeting, January 1973.

9. Zinn, B. T. and Powell, E. A., "Nonlinear Combustion Instability in Liquid Propellant Rocket Engines," Proceedings of the 13th Symposium (International) on Combustion, The Combustion Institute, pp. 491-503.
10. Powell, E. A. and Zinn, B. T., "The Prediction of the Nonlinear Behavior of Unstable Liquid Rockets," NASA CR-72902, July 1971.
11. Powell, E. A. and Zinn, B. T., "The Prediction of Nonlinear Three-Dimensional Combustion Instability in Liquid Rockets with Conventional Nozzles," NASA CR-121279, October 1973.
12. Padmanabhan, M. S., Powell, E. A., and Zinn, B. T., "Application of the Galerkin Method in the Prediction of Nonlinear Nozzle Admittances," Proceedings of the 11th JANNAF Combustion Meeting, CPIA Publication 261, Vol. II, December 1974, pp. 141-163.
13. Padmanabhan, M. S., "The Effect of Nozzle Nonlinearities Upon the Nonlinear Stability of Liquid Rocket Motors," Ph.D. Thesis, Georgia Institute of Technology (December 1975).
14. Finlayson, B. A. and Scriven, L. E., "The Method of Weighted Residuals -- A Review," Applied Mechanics Reviews, Vol. 19, No. 9, September 1966, pp. 735-744.
15. Ames, W. F., Nonlinear Partial Differential Equations in Engineering, Academic Press, New York, 1965, pp. 243-262.
16. Bell, W. A. and Zinn, B. T., "The Prediction of Three-Dimensional Liquid-Propellant Rocket Nozzle Admittances," NASA CR-121129, February 1973.
17. McCracken, D. D., FORTRAN with Engineering Applications, John Wiley and Sons, Inc., New York, 1967, pp. 146-153.

REPORT DISTRIBUTION LIST

NASA-Lewis Research Center
Attn: Dr. R. J. Priem/MS 500-204
21000 Brookpark Road
Cleveland, OH 44135

NASA-Lewis Research Center
Attn: Library/MS 60-3
21000 Brookpark Road
Cleveland, OH 44135

NASA-Lewis Research Center
Attn: Report Control Office/MS 5-5
21000 Brookpark Road
Cleveland, OH 44135

NASA-Lewis Research Center
Attn: E. A. Bourke/MS 500-205
21000 Brookpark Road
Cleveland, OH 44135

NASA Headquarters
Attn: RPS/Robert A. Wasel
600 Independence Ave., SW, Room 526
Washington, DC 20546

NASA-Lewis Research Center
Attn: Procurement Section
Mail Stop 500-313
21000 Brookpark Road
Cleveland, OH 44135

NASA-Lyndon B. Johnson Space Center
Attn: EP/Joseph G. Thibodaux
Houston, TX 77058

NASA-George C. Marshall Space Flight
Center
Attn: S&E-ASTN-PP/ R. J. Richmond
Huntsville, AL 35812

NASA Scientific & Technical Information
Facility - Acquisitions Branch
P. O. Box 33
College Park, MD 20740

Aerojet Liquid Rocket Company
Attn: David A. Fairchild
Bldg. 20001/Sec. 9732
P. O. Box 13222
Sacramento, CA 95813

Aerojet General Corporation
Propulsion Division
Attn: R. Stiff
P. O. Box 15847
Sacramento, CA 95803

Aerospace Corporation
Attn: O. W. Dykema
P. O. Box 92957
Los Angeles, CA 90045

Aerospace Corporation
Attn: Library-Documents
2400 E. El Segundo Boulevard
Los Angeles, CA 90045

Air Force Rocket Propulsion Lab. (RPM)
Attn: Library
Edwards, CA 93523

Air Force Office of Scientific Research
Chief Propulsion Division
Attn: Dr. J. F. Masi (NAE)
1400 Wilson Boulevard
Arlington, VA 22209

Air Force Rocket Propulsion Laboratory
Attn: Daweel George
Edwards, CA 93523

AFAPL
Research & Technology Div.
AF Systems Command
U. S. Air Force
Attn: Library/APRP
Wright Patterson AFB, OH 45433

Air Force Rocket Propulsion Laboratory
Attn: Richard R. Weiss
Edwards, CA 93523

AFAPL

Attn: Frank D. Stull (RJT)
Wright Patterson AFB, OH 45433

Army Ballistics Research Labs
Attn: Austin W. Barrows
Code AMXBR-1B
Aberdeen Proving Grounds, MD 21005

Army Ballistic Research Labs
Attn: Ingo W. May
Code AMXBR-1B
Aberdeen Proving Grounds, MD 21005

Army Material Command
Missile Systems Div.
Attn: Stephen R. Matos
Code AMCRD-MT
5001 Eisenhower Ave.
Alexandria, VA 22304

Air Force Systems Command
Arnold Engineering Development Center
Attn: Dr. H. K. Doetsch
Tullahoma, TN 37389

Aeronutronic Div. of Philco Ford Corp.
Technical Information Dept.
Ford Road
Newport Beach, CA 92663

Battelle Memorial Institute
Attn: Report Library, Room 6A
505 King Ave
Columbus, OH 43201

Bell Aerosystems, Inc.
Attn: Library
Box 1
Buffalo, NY 14205

Bell Aerospace Company
Attn: T. F. Fenger
Post Office Box 1
Mail Zone, J-81
Buffalo, NY 14205

Bureau of Naval Weapons
Department of the Navy
Attn: Library
Washington, DC

Brooklyn Polytechnic Institute
Long Island Graduate Center
Attn: V. D. Agosta
Route 110
Farmingdale, NY 11735

California Institute of Technology
Jet Propulsion Laboratory
Attn: Fred E. C. Culick
4800 Oak Grove Drive
Pasadena, CA 91103

California Institute of Technology
Jet Propulsion Laboratory
Attn: Jack H. Rupe
4800 Oak Grove Drive
Pasadena, CA 91103

California State Univ. Sacramento
School of Engineering
Attn: Frederick H. Reardon
6000 J. Street
Sacramento, CA 95819

Chemical Propulsion Information Agency
Johns Hopkins University/APL
Attn: T. W. Christian
8621 Georgia Avenue
Silver Spring, MD 20910

Colorado State University
Attn: Charles E. Mitchell
Fort Collins, CO 80521

Frankford Arsenal
Attn: Martin Visnov
NDP-R, Bldg. 64-2
Bridge & Tacony Streets
Philadelphia, PA 19137

General Electric Company
Flight Propulsion Laboratory Dept.
Attn: D. Suichu
Cincinnati, OH 45215

Georgia Institute of Technology
Georgia Tech. Res. Inst.
Attn: Warren C. Strahle
Atlanta, GA 30332

Georgia Institute of Technology
Georgia Tech. Res. Inst.
Attn: Ben T. Zinn
Atlanta, GA 30322

Melvin Gerstein
P. O. Box 452
Altadena, CA 91001

Marquardt Corporation
16555 Saticory Street
Box 2013 - South Annex
Van Nuys, CA 91409

Massachusetts Institute of Technology
Department of Mechanical Engineering
Attn: T. Y. Toong
77 Massachusetts Avenue
Cambridge, MA 02139

McDonald Douglas Corporation
McDonnell Douglas Astronautics Co.
Attn: William T. Webber
5301 Bolsa Avenue
Huntington Beach, CA 92647

D. E. Mock
Advanced Research Projects Agency
Washington, DC 20525

Lockheed Aircraft Corp
Lockheed Propulsion Co., Div.
Attn: Norman S. Cohen
P. O. Box 111
Redlands, CA 92363

Naval Postgraduate School
Department of Aeronautics
Attn: David W. Netzer
Monterey, CA 93940

Naval Underwater Systems Center
Energy Conversion Dept.
Attn: Robert S. Lazar, Code 5B331
Newport, RI 02840

Naval Weapons Center
Attn: R. L. Derr, Code 608
China Lake, CA 93555

Naval Weapons Center
Attn: Charles J. Thelen, Code 4505
China Lake, CA 93555

Naval Postgraduate School
Department of Aeronautics
Attn: Allen F. Fuhs
Monterey, CA 93940

Ohio State University
Department of Aeronautical and
Astronautical Engineering
Attn: R. Edse
Columbus, OH 43210

Pennsylvania State University
Mechanical Engineering Department
Attn: G. M. Faeth
207 Mechanical Engineering Bldg.
University Park, PA 16802

Princeton University
Forrestal Campus Library
Attn: Irvin Glassman
P. O. Box 710
Princeton, NJ 08450

Princeton University
Forrestal Campus Library
Attn: David T. Harrje
P. O. Box 710
Princeton, N.J. 08540

Princeton University
Forrestal Campus Library
Attn: Martin Summerfield
P. O. Box 710
Princeton, N.J. 08540

Propulsion Sciences, Inc.
Attn: Vito Agosta
P. O. Box 814
Melville, NY 11746

Purdue University
Jet Propulsion Laboratory
Project Squid
Attn: Robert Goulard
West Lafayette, IN 47907

Purdue University Res. Foundation
School of Mechanical Engineering
Attn: John R. Osborn
Thermal Sci. Propulsion Center
West Lafayette, IN 47906

Purdue University Res. Foundation
School of Mechanical Engineering
Attn: Bruce A. Reese
Thermal Sci. Propulsion Center
West Lafayette, IN 47906

Research and Development Associates
Attn: Raymond B. Edelman
P. O. Box 3580
525 Wilshire Blvd.
Santa Monica, CA 90402

Rockwell International Corporation
Rocketdyne Division
Attn: L. P. Combs, D/991-350
Zone 11
6633 Canoga Avenue
Canoga Park, CA 91304

Rockwell International Corporation
Rocketdyne Division
Attn: James A. Nestlerode
Dept. 596-124, AC46
6633 Canoga Ave
Canoga Park, CA 91304

Rockwell International Corp.
Rocketdyne Division
Attn: Carl L. Oberg
Dept. 589-197-SS11
6633 Canoga Ave
Canoga Park, CA 91304

Rockwell International Corp.
Rocketdyne Division
Attn: Library Dept. 596-306
6633 Canoga Avenue
Canoga Park, CA 91304

Stanford Research Institute
333 Ravenswood Avenue
Menlo Park, CA 94025

Susquehanna Corp.
Atlantic Research Division
Attn: Library
Shirley Highway and Edsall Road
Alexandria, VA 22314

TISIA
Defense Documentation Center
Cameron Station, Bldg. 5
5010 Duke Street
Alexandria, VA 22314

Tennessee Technological University
Dept. of Mech. Engrg.
Attn: Kenneth R. Purdy
P. O. Box 5014
Cookeville, TN 38501

Textron, Inc.
Bell Aerospace Div.
Research Department
Attn: John H. Morgenthaler, C-84
P. O. Box One
Buffalo, NY 14240

TRW, Inc.
TRW Systems Gp.
Attn: A. C. Ellings
One Space Park
Redondo Beach, CA 90278

TRW Systems
Attn: G. W. Elverun
One Space Park
Redondo Beach, CA 90278

TRW Systems Group
STL Tech. Lib. Doc. Acquisitions
One Space Park
Redondo Beach, CA 90278

Tulane University
Attn: J. C. O'Hara
6823 St. Charles Ave
New Orleans, LA 70118

Ultrasystems, Inc.
Attn: Thomas J. Tyson
500 Newport Center Dr.
Newport Beach, CA

United Aircraft Corp.
Pratt & Whitney Division
Florida Research & Development Center
Attn: Library
West Palm Beach, FL 33402

United Aircraft Corporation
Pratt & Whitney Aircraft Division
Attn: Thomas C. Mayes
P. O. Box 2691
West Palm Beach, FL 33402

United Aircraft Corporation
Attn: R. H. Woodward Waesche
400 Main Street
East Hartford, CT 06108

United Aircraft Corporation
United Technology Center
Attn: Library
P. O. Box 358
Sunnyvale, CA 94088

University of California
Aerospace Engineering Dept.
Attn: F. A. Williams
Post Office Box 109
LaJolla, CA 92037

University of California, Berkeley
Dept. of Mechanical Engineering
Attn: A. K. Oppenheim
Berkeley, CA 94720

University of Illinois
Aeronautics/Astronautics Engr. Dept.
Attn: R. A. Strehlow
Transportation Bldg. Room 101
Urbana, Ill 61801

University of Michigan
Attn: James A. Nicholls
P. O. Box 622
Ann Arbor, MI 48107

University of Utah
Dept. of Chemical Engineering
Attn: Alva D. Baer
Park Bldg, Room 307
Salt Lake City, UT 84112

University of Wisconsin
Mechanical Engineering Dept.
Attn: P. S. Myers
1513 University Avenue
Madison, WI 53706

United States Naval Research Laboratory
Director (Code 6180)
Attn: Library
Washington, DC 20390

Virginia Polytechnic Institute
State University
Attn: J. A. Schetz
Blacksburg, VA 24061

Office of Assistant Director
(Chemical Technician)
Office of the Director of Defense
Research & Engineering
Washington, DC 20301