

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

02

"Made available under NASA sponsorship
in the interest of early and wide dis-
semination of Earth Resources Survey
Program information and without liability
for any use made thereot."

III

7.7-100.1.8

Vol. 7

CR-148988

LAND USE INFORMATION AND AIR QUALITY PLANNING

By

Wallace E. Reed

John E. Lewis

U.S. Geological Survey

(E77-10018) CARETS: A PROTOTYPE REGIONAL ENVIRONMENTAL INFORMATION SYSTEM. VOLUME 7:
LAND USE INFORMATION AND AIR QUALITY
PLANNING Final Report (Geological Survey,
Reston, Va.) 100 p HC A05/MF A01 CSCL 08B G3/43 00018
N77-10600
Unclas

FINAL REPORT—VOLUME 7 CENTRAL ATLANTIC REGIONAL ECOLOGICAL TEST SITE (CARETS) PROJECT



1125A

SPONSORED BY

National Aeronautics and Space Administration
Goddard Space Flight Center
Greenbelt, Maryland 20771

and

U.S. Geological Survey
Reston, Virginia 22092

1975

RECEIVED

OCT 27 1976

SIS/902.6

LAND USE INFORMATION AND AIR QUALITY PLANNING: AN EXAMPLE OF ENVIRONMENTAL
ANALYSIS USING A PILOT NATIONAL LAND USE INFORMATION SYSTEM

By Wallace E. Reed and John E. Lewis

U.S. Geological Survey
Reston, Virginia

Original photography may be purchased from:
EROS Data Center
10th and Dakota Avenue
Sioux Falls, SD 57198

September 1975

Volume 7 of Final Report for:

Goddard Space Flight Center
Greenbelt, Maryland 20771

Interagency Memorandum of Understanding No. S-70243-AG
Earth Resources Technology Satellite, Investigation SR-125 (IN-002)
"Central Atlantic Regional Ecological Test Site: A Prototype Regional
Environmental Information System."

a

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle CARETS--A Prototype Regional Environmental Information System (SR-125) (v. 7) Land Use Information and Air Quality Planning		5. Report Date 9/30/75	
		6. Performing Organization Code	
7. Author(s) Wallace E. Reed and John E. Lewis		8. Performing Organization Report No.	
9. Performing Organization Name and Address U.S. Geological Survey Geography Program Mail Stop 710 Reston, VA 22092		10. Work Unit No.	
		11. Contract or Grant No. S-70243-AG	
12. Sponsoring Agency Name and Address Frederick Gordon NASA Goddard Space Flight Center Greenbelt, MD 20771		13. Type of Report and Period Covered Type III Final Report 1975	
		14. Sponsoring Agency Code	
15. Supplementary Notes Sponsored jointly by the National Aeronautics and Space Administration and the U.S. Geological Survey			
16. Abstract The pilot national land use information system developed by the U.S. Geological Survey in the Central Atlantic Regional Ecological Test Site project has provided an improved technique for estimating emissions, diffusion, and impact patterns of sulfur dioxide (SO ₂) and particulate matter. Implementation of plans to control air quality requires land use information, which, until this time, has been inadequate. The pilot system, however, provided data for updating information on the sources of point and area emissions of SO ₂ and particulate matter affecting the Norfolk-Portsmouth area of Virginia for the 1971-72 winter (Dec.-Jan.-Feb.) and the annual 1972 period, and for a future annual period--1985. This emission information is used as input to the Air Quality Display Model of the Environmental Protection Agency to obtain diffusion and impact patterns for the three periods previously mentioned. The results are: (1) During the 1971-72 winter, estimated SO ₂ amounts over an area with a SW-NE axis in the central section of Norfolk exceeded both primary and secondary levels; (2) future annual levels of SO ₂ , estimated by anticipated residential development and point-source changes, are not expected to cause serious deterioration of the region's present air quality; and (3) for the 1971-72 winter and annual 1972 period the diffusion results showed that both primary and secondary standards for particulate matter are regularly exceeded in central Norfolk and Portsmouth. In addition, on the basis of current			
17. Key Words Suggested by Author remote sensing, land use, air quality, air pollution, Norfolk, Virginia		18. Distribution Statement	
19. Security Classif. (of this report) unclassified	20. Security Classif. (of this page) not applicable	21. No. of Pages 91	22. Price

Figure 2A. Technical Report Standard Title Page. This page provides the data elements required by DoD Form DTD-1173, HEW Form OE-6000 (ERIC), and similar forms.

INT 220-5

Abstract, continued

control programs, the 1985 levels of particulate matter are expected to exceed the presently established secondary air quality standards throughout central Norfolk and Portsmouth and in certain areas of Virginia Beach.

The land use information can be used to estimate emissions for inputs to diffusion models and to interpret the implications of diffusion patterns for: (1) Implementing various control strategies, (2) selecting sites of air sampling stations, and (3) predicting the effects that proposed changes in land use might have on emission patterns and air quality.

LIST OF FINAL REPORT VOLUMES

CARETS/LANDSAT INVESTIGATION SR-125 (IN-002)

Robert H. Alexander, 1975, Principal Investigator

- Volume 1. CENTRAL ATLANTIC REGIONAL ECOLOGICAL TEST SITE: A PROTOTYPE REGIONAL ENVIRONMENTAL INFORMATION SYSTEM by Robert H. Alexander
2. NORFOLK AND ENVIRONS: A LAND USE PERSPECTIVE by Robert H. Alexander, Peter J. Buzzanell, Katherine A. Fitzpatrick, Harry F. Lins, Jr., and Herbert K. McGinty III
 3. TOWARD A NATIONAL LAND USE INFORMATION SYSTEM by Edward A. Ackerman and Robert H. Alexander
 4. GEOGRAPHIC INFORMATION SYSTEM DEVELOPMENTS ASSOCIATED WITH THE CARETS PROJECT by Robin G. Fegeas, Katherine A. Fitzpatrick Cheryl A. Hallam, and William B. Mitchell
 5. INTERPRETATION, COMPILATION AND FIELD VERIFICATION PROCEDURES IN THE CARETS PROJECT by Robert H. Alexander, Peter W. DeForth, Katherine A. Fitzpatrick, Harry F. Lins, Jr., and Herbert K. McGinty III
 6. COST-ACCURACY-CONSISTENCY COMPARISONS OF LAND USE MAPS MADE FROM HIGH-ALTITUDE AIRCRAFT PHOTOGRAPHY AND ERTS IMAGERY by Katherine A. Fitzpatrick
 7. LAND USE INFORMATION AND AIR QUALITY PLANNING: AN EXAMPLE OF ENVIRONMENTAL ANALYSIS USING A PILOT NATIONAL LAND USE INFORMATION SYSTEM by Wallace E. Reed and John E. Lewis
 8. REMOTELY-SENSED LAND USE INFORMATION APPLIED TO IMPROVED ESTIMATES OF STREAMFLOW CHARACTERISTICS by Edward J. Pluhowski
 9. SHORE ZONE LAND USE AND LAND COVER: CENTRAL ATLANTIC REGIONAL ECOLOGICAL TEST SITE by R. Dolan, B. P. Hayden, C. L. Vincent
 10. ENVIRONMENTAL PROBLEMS IN THE COASTAL AND WETLANDS ECOSYSTEMS OF VIRGINIA BEACH, VIRGINIA by Peter J. Buzzanell and Herbert K. McGinty III
 11. POTENTIAL USEFULNESS OF CARETS DATA FOR ENVIRONMENTAL IMPACT ASSESSMENT by Peter J. Buzzanell
 12. USER EVALUATION OF EXPERIMENTAL LAND USE MAPS AND RELATED PRODUCTS FROM THE CENTRAL ATLANTIC TEST SITE by Herbert K. McGinty III
 13. UTILITY OF CARETS PRODUCTS TO LOCAL PLANNERS: AN EVALUATION by Stuart W. Bendelow and Franklin F. Goodyear (Metropolitan Washington Council of Governments)

Contents

	Page
Abstract-----	1
Introduction-----	3
Acknowledgements-----	5
Land use and air quality planning-----	6
Air quality control strategies-----	6
Strategy evaluation by Federal and State agencies--	8
Land use information needed for comprehensive air quality planning-----	10
Land use information from the pilot land use information system-----	11
Land use classification scheme formulated by the U.S. Geological Survey-----	11
Measurement detail and accuracy-----	15
Polygon recording system-----	16
User products-----	19
Land use information for air quality planning in the Norfolk- Portsmouth standard metropolitan statistical area-----	20
Land use information used for the initial Norfolk area control strategy and implementation plan-----	22
Available land use information-----	22
Estimating the initial emission inventory-----	23
Evaluating and refining strategies for the Norfolk area-----	25
Selection of initial control strategy-----	25
Evaluating this strategy-----	25
Land use and emission estimates-----	27
Area sources-----	27
Point sources-----	30
Seasonality-----	44
Future emission patterns-----	44
Land use and Norfolk area emissions patterns-----	49
Determining spatial distribution patterns of air quality-----	56
Estimating pollutant diffusion patterns-----	56
Model used to estimate Norfolk area air quality-----	59
Norfolk area airflow characteristics-----	63
Selection of grid patterns for estimating pollutant concentrations-----	68
Norfolk land use and estimated air pollutant concentration patterns-----	69
Sulfur dioxide concentrations-----	81
Suspended particulate concentrations-----	82
Conclusions-----	83
Additional applications of national land use information system for air quality planning-----	86
References-----	89

ORIGINAL PAGE IS
OF POOR QUALITY

Illustrations

		Page
Figure 1.	Map of CARETS showing 1970 Norfolk-Portsmouth SMSA-----	12
2.	Controlled photomosaic showing portion of the Norfolk- Portsmouth SMSA-----	17
3a.	Level I land use map showing a portion of the 1970 Norfolk-Portsmouth SMSA-----	18
3b.	Level II land use map showing a portion of the 1970 Norfolk-Portsmouth SMSA-----	18
4.	1970 Norfolk-Portsmouth SMSA, area source emission estimating grid cell system-----	24
5.	1970 Norfolk-Portsmouth SMSA, 1970 land use selected for air quality planning-----	29
6.	1970 Norfolk-Portsmouth SMSA, selected point sources and centroids of area emission cells-----	43
7.	1970 Norfolk-Portsmouth SMSA, proposed land use, 1985-----	45
8.	1970 Norfolk-Portsmouth SMSA, estimated emissions of sulfur dioxide, 1972-----	50
9.	1970 Norfolk-Portsmouth SMSA, estimated emissions of sulfur dioxide, winter 1971-72-----	51
10.	1970 Norfolk-Portsmouth SMSA, estimated emissions of sulfur dioxide, 1985-----	52
11.	1970 Norfolk-Portsmouth SMSA, estimated emissions of particulates, 1972-----	53
12.	1970 Norfolk-Portsmouth SMSA, estimated emissions of particulates, winter 1971-72-----	54
13.	1970 Norfolk-Portsmouth SMSA, estimated emissions of particulates, 1985-----	55
14.	1970 Norfolk-Portsmouth SMSA, location of air quality sampling stations, October 1972-----	57
15.	Treatment of point (A) and virtual point for area source (B and C) diffusion patterns in air quality display model (AQDM)-----	62

Illustrations--Continued

	Page
Figure 16. Annual stability wind rose, December 1966–November 1971, Norfolk Naval Air Station-----	66
17. Winter stability wind rose, December 1966–November 1971, Norfolk Naval Air Station-----	67
18. 1970 Norfolk–Portsmouth SMSA, pollution concentration estimating points-----	70
19. 1970 Norfolk–Portsmouth SMSA, estimated average concentrations of sulfur dioxide, 1972-----	72
20. 1970 Norfolk–Portsmouth SMSA, estimated average concentrations of sulfur dioxide, winter 1972-----	73
21. 1970 Norfolk–Portsmouth SMSA, estimated average concentrations of sulfur dioxide, 1985-----	74
22. 1970 Norfolk–Portsmouth SMSA, estimated average concentrations of particulates, 1972-----	75
23. 1970 Norfolk–Portsmouth SMSA, estimated average concentrations of particulates, winter 1972-----	76
24. 1970 Norfolk–Portsmouth SMSA, estimated average concentrations of particulates, 1985-----	77

Tables

	Page
Table 1. Land use classification scheme for use with remotely sensed data-----	13
2. Example of land use statistics based on pilot national land use information system-----	28
3. Estimated Norfolk-Portsmouth SMSA, 1972 annual, winter 1971-72, and estimated annual 1985 emission inventories-----	31
4. Point sources included in air diffusion modelling of Norfolk-Portsmouth SMSA-----	47
5. Estimates of concentration of pollutants over receptors-----	78
6. Example of estimator of point and area source contributions and recommended reduction programs for selected receptor points-----	79
7. Estimates of percent of total contribution of specific sources to selected receptor estimating points-----	80

LAND USE INFORMATION AND AIR QUALITY PLANNING

An example of environmental analysis using a pilot national land use information system

By Wallace E. Reed^{1/} and John E. Lewis^{2/}

Abstract

The pilot national land use information system developed by the U.S. Geological Survey in the Central Atlantic Regional Ecological Test Site project has provided an improved technique for estimating emissions, diffusion, and impact patterns of sulfur dioxide (SO₂) and particulate matter.

Implementation of plans to control air quality requires land use information, which, until this time, has been inadequate. The pilot system, however, provided data for updating information on the sources of point and area emissions of SO₂ and particulate matter affecting the Norfolk-Portsmouth area of Virginia for the 1971-72 winter (Dec.-Jan.-Feb.) and the annual 1972 period, and for a future annual period--1985. This emission information is used as input to the Air Quality Display Model of the Environmental Protection Agency to obtain diffusion and impact patterns for the three periods previously mentioned. The results are: (1) During the 1971-72 winter, estimated SO₂ amounts over an area with a SW-NE axis in the central section

^{1/}Department of Environmental Sciences, University of Virginia, Charlottesville, Va.

^{2/}Department of Geography, McGill University, Montreal, Canada

of Norfolk exceeded both primary and secondary levels; (2) future annual levels of SO_2 , estimated by anticipated residential development and point-source changes, are not expected to cause serious deterioration of the region's present air quality; and (3) for the 1971-72 winter and annual 1972 period the diffusion results showed that both primary and secondary standards for particulate matter are regularly exceeded in central Norfolk and Portsmouth. In addition, on the basis of current control programs, the 195 levels of particulate matter are expected to exceed the presently established secondary air quality standards through central Norfolk and Portsmouth and in certain areas of Virginia Beach.

The land use information can be used to estimate emissions for inputs to diffusion models and to interpret the implications of diffusion patterns for: (1) Implementing various control strategies, (2) selecting sites of air sampling stations, and (3) predicting the effects that proposed changes in land use might have on emission patterns and air quality.

INTRODUCTION

As a major step toward satisfying the nationwide need for current, comparable land use information, the U.S. Geological Survey (USGS) has developed a pilot national land use information system in its Central Atlantic Regional Ecological Test Site (CARETS) project. Among the many uses of the system are its applications in evaluating air quality control strategies and implementation programs.

A majority of the States' air quality control implementation plans proposed during 1972 are highly dependent upon emission control strategies. Basic guidelines for preparing State air quality implementation programs were established in the Clean Air Act of 1970 (PL 90-604) as well as in the Federal Registers, April 7 and August 14, 1971. Effective consideration of alternative quality control strategies and implementation plans was seldom feasible due to lack of time and inadequate land use information. Necessary land use information can now be provided by the pilot system.

This paper examines the relationship between land use and air quality and identifies the types of land use information needed to evaluate air quality control strategies. It also presents a description of land use information available from the pilot system, suggests applications of this information to Norfolk area air quality planning, and recommends nationwide applications of the pilot system.

The data were collected during a study of the air quality in the Norfolk-Portsmouth, Virginia, Standard Metropolitan Statistical Area (SMSA) and focuses on strategies to control the effects of sulfur dioxide and suspended particulates. The Norfolk area was selected for two primary reasons. First, the physical

characteristics of its location and its air quality planning problem are similar to those of many other metropolitan regions. Second, in developing and testing the pilot system, the greatest range of land use data and specific information produced had been for the Norfolk area (Alexander, 1972).

ACKNOWLEDGMENTS

The extensive advice and assistance received from the staff of the Commonwealth of Virginia, State Air Pollution Control Board and personnel of the board's Air Quality Control Region VI in Virginia Beach; the Southeastern Virginia Planning District Commission; Virginia Department of Highways; the Environmental Protection Agency, Region III, Philadelphia, Pennsylvania; and the Office of Air Programs, Office of Land Use Planning in North Carolina are gratefully acknowledged, as are the research efforts of Gregory A. Shoemaker and Nelson M. Noner.

LAND USE AND AIR QUALITY PLANNING

Developing and evaluating air quality control strategies depends on identifying current and anticipated relationships between patterns of land use, amounts of air pollutants over other land uses, and the impact of such concentration on these land uses.

Land use activities affect air quality by emitting manmade and natural pollutants. These pollutants are dispersed by local, regional, and global airflow and affect the health, safety, operating costs, and other characteristics of all land use activities. The intensity of effect depends on the types of chemical and physical impacts that pollutants may produce, on the degree to which pollutants are concentrated in the air, and on the length of time a given activity or process is exposed to pollutants. The concentration of pollutants depends on the quantity emitted and on the location of emitting sources relative to the direction and stability of airflows. Land surface characteristics such as roughness, albedo, thermal diffusivity, amount of water, and amount of transpiring surfaces in a given area influence the meteorological conditions affecting the stability of airflows. Each of these surface characteristics can be extensively modified by the activities or processes conducted on and structures that occupy urban and rural land.

AIR QUALITY CONTROL STRATEGIES

Given the relationships between land use and airflows, one can employ a number of strategies to achieve given levels of air quality. The various perspectives from which strategies may be developed include:

I. Focus on emission sources--Emission source control

1. Change in type of activity
2. Change in fuel and other process inputs
3. Installation of emission control devices
4. Change in timing of emission
5. Change in the spatial distribution of stationary and mobile sources with respect to airflow and receptor locations

II. Focus on airflow--Airflow modification

1. Changes in surface roughness
2. Changes in surface albedo
3. Changes in transpiring surface area
4. Changes in local precipitation

III. Focus on receptor

1. Change in the activities affected by pollutants
2. Change in contact between air and receptor through structural and air-conditioning modifications
3. Change in the timing of stationary and mobile receptor activities to avoid periods of high concentration
4. Change in the spatial distribution of stationary and mobile receptors

Each of these strategies involves varying degrees of land use management and the need for land use information.

For further discussions of control strategies focused on urban areas see Allan M. Voorhees and Associates and Ryckman, Edgerley, Tomlinson and Associates, 1971; and Kennedy and others, 1971.

STRATEGY EVALUATION BY FEDERAL AND STATE AGENCIES

The Clean Air Act of 1970 and Environmental Protection Agency (EPA) action required State and local air quality planning agencies to identify air quality control regions, to select pollutant control strategies, and to develop implementation plans by early 1972 (PL 90-604 and Federal Registers, April 7 and August 14, 1971). Because of time and cost constraints, most planning agencies could not assemble the types of land use information needed to evaluate fully the range of strategies that might have been applied in each region. Therefore, EPA most frequently encouraged the collection of land use information suitable for identifying regions with similar air quality control problems and suitable for analyzing strategies focused on emission source controls.

The strategy of controlling emissions at their source required land use information to identify sources and was in line with the goal of reducing total nationwide emissions regardless of the spatial distribution of sources. Furthermore, given the types of sources and the political realities facing planners in most air quality control regions, emission source control strategies appeared to be the easiest to implement. Because the Federal Government is attempting to control mobile emission sources, local and State action could be directed toward controlling point and area

emission sources, the cost of which appeared to be less than the cost of reorganizing land use patterns or changing the timing of activities or processes emitting or receiving pollution.

In the absence of more detailed land use information, emission source control strategies appeared to be most effective in achieving primary and secondary air quality standards without inhibiting growth in each control region. Based on this strategy, regional implementation plans were developed that called for rollback procedures or proportional reductions in regional emissions (Federal Register, August 14, 1971, and U.S. Environmental Protection Agency, 1970).

Although the emission source strategy is reasonable, strategies focused on land use management, as yet unevaluated, might be more effective, either individually or in combination with adopted emission source control strategies, in specific air quality control regions. EPA's current program of planning for Air Quality Maintenance Areas calls for the refinement of existing strategies and plans and the evaluation of alternative strategies.

Information adequate for this planning and testing of alternatives is becoming available. Specifically, the pilot national land use information system developed by the USGS is designed to supply current, comparable land use information that can easily be related to the emission, receptor, and airflow characteristics of local, regional, or nationwide areas. Detailed meteorological data for air quality control regions are available from the National Oceanic and Atmospheric Administration. Air quality sampling networks are operating or being established in each control region. Where these sampling programs are not yet adequate and where adequate

meteorological and land use data exist, models for estimating pollutant diffusion and concentration can be used to evaluate planning strategies related to land use.

LAND USE INFORMATION NEEDED FOR COMPREHENSIVE AIR QUALITY PLANNING

Comprehensive air quality plans should evaluate the short- and long-term physical and social impacts of a range of strategies along with their potential for implementation. The types of land use information needed for comprehensive plans include:

1. Activity location.--For each type of process or fuel consumed, the current and anticipated location of stationary and mobile activities emitting and receiving pollutants.
2. Activity behavior.--For each type of pollutant, the timing and intensity of emissions or reception.
3. Activity physical characteristics.--The geometry, albedo, and surface material of the area and the region's activities and processes affecting local airflows.

These types of land use information are essential for developing detailed emission inventories, for analyzing airflow patterns, for evaluating probable impact on receptor activities, for identifying locations for air quality sampling stations, and for improving the calibration of models used to estimate pollutant diffusion. Much of this land use information can be directly provided or easily estimated using the pilot national land use information system.

LAND USE INFORMATION FROM THE PILOT LAND USE INFORMATION SYSTEM

The pilot national land use information system used in this study consists of a series of experimental activities undertaken by the USGS for the purpose of establishing a coordinated Federal-State program for the standardization and exchange of land use data. These activities consist of interpreting land use data from remotely sensed imagery provided by NASA's Aircraft and Earth Resources Satellite Programs, organizing these data into specific types of information, and providing this information in statistical and graphical formats to cooperating State, regional, and private users with responsibilities for land use planning and management. Components and activities in the system are being developed and tested in a series of urban and regional demonstration projects, one of which is the Central Atlantic Regional Ecological Test Site (CARETS), which includes the Norfolk-Portsmouth area of Virginia (figure 1). Assuming that these demonstration projects and associated research efforts are successful, the activities in the pilot information system will be extended nationwide and established as a regular USGS function.

LAND USE CLASSIFICATION SCHEME FORMULATED BY THE U.S. GEOLOGICAL SURVEY

To be of maximum effectiveness to users, the pilot system records land use data in categories directly related to a range of land management decisions or in categories from which estimates of such data can easily be made. The USGS land use classification scheme (Anderson and others, 1972) is represented by Levels I and II in table 1. In this table, Levels III and IV

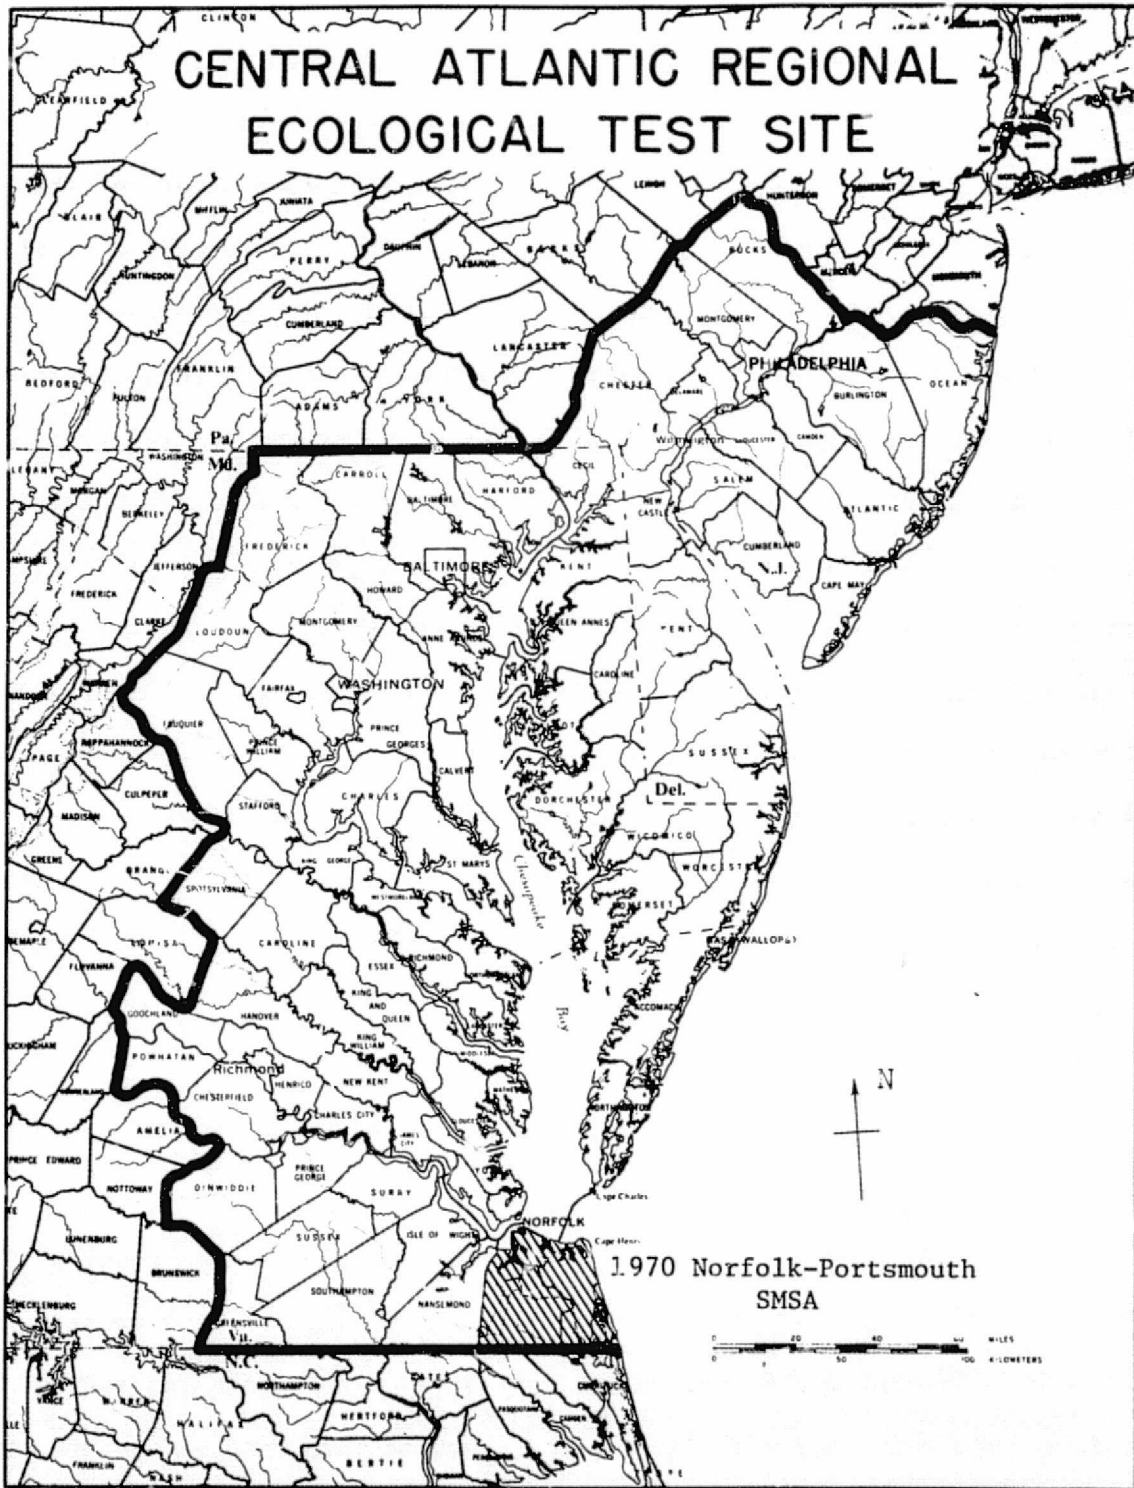


Figure 1--Map of CARETS showing 1970 Norfolk-Portsmouth SMSA

ORIGINAL PAGE IS
OF POOR QUALITY

Table 1--Land use classification scheme^{1/} for use with remotely sensed data

<u>Level I</u>	<u>Level II</u>	<u>Level III</u>	<u>Level IV</u>	
1 Urban and built up	11 Residential	111 High-density residential	1111 High-density residential structures	
	12 Commercial and services	112 Medium-density residential	1112 Yards and open space	
	13 Industrial	113 Low-density residential	1113 Parking	
	14 Extractive	114 Residential construction	1114 Streets and highways	
	15 Transportation, communications and utilities		1115 Height of structures	
	16 Institutional		1116 Height of vegetation	
	17 Strip and clustered settlement			
	18 Mixed			
	19 Open and other			
	2 Agricultural land	21 Cropland and pasture		
		22 Orchards, groves, bush fruits, vineyards, and horticultural areas		
		23 Feeding operations		
		24 Other		
	3 Range land	31 Grass		
		32 Savannas (Palmetto prairies)		
		33 Chaparral		
		34 Desert Shrub		

^{1/} Anderson and others, 1972

ORIGINAL PAGE IS
OF POOR QUALITY

Table 1--Continued

<u>Level I</u>	<u>Level II</u>	<u>Level III</u>	<u>Level IV</u>
4 Forest land	41	Deciduous	
	42	Evergreen (coniferous and other)	
	43	Mixed	
5 Water	51	Streams and waterways	
	52	Lakes	
	53	Reservoirs	
	54	Bays and estuaries	
	55	Other	
6 Nonforested wetlands	61	Vegetated	
	62	Bare	
7 Barren land	71	Salt flats	
	72	Beaches	
	73	Sand other than beaches	
	74	Bare exposed rock	
	75	Other	
8 Tundra	81	Tundra	
9 Permanent snow and ice fields	91	Permanent snow and ice fields	

provide an example of how the basic pilot system can be further detailed to meet the needs of various users, in this case, those of air quality planners.

The land use system is organized to derive Level I information primarily from satellite data. This level is intended for the most general levels of land use analysis and decisionmaking. Level II is intended to be derived from satellite and high-altitude aircraft data and can be used for decisions requiring increasingly detailed information. Successively more detailed levels of classification of land use and land cover (Levels III and IV of table 1) can be provided by State and local user agencies for local air quality evaluation and planning. Such planning usually requires more information on urban and agricultural activities than can be provided directly by Level II data. Many other Level I and II categories such as information on water and bare land activities can be used effectively as provided by the systems. The example Level III and IV categories are suggested classifications related to specific activities or processes (industry by Standard Industrial Code, agriculture by crop type, construction affecting each type of Level III activity) from which emissions or receptor impact can be estimated. These categories can also be used to identify three-dimensional profiles of structures and materials for various land uses that may affect airflow. Each of these categories could be measured uniformly nationwide or modified for the specific urban and rural characteristics of various EPA administrative or control regions.

Measurement Detail and Accuracy

The data used in this report were developed from high-altitude aerial photography and were mapped onto a controlled photomosaic base at a scale


of 1:100,000. Land uses covering an area of not less than 4 ha or approximately 10 acres can be effectively interpreted at this scale at Level I and II. This degree of detail insures the rapid assembly of data useful to a wide range of Federal and State users. As higher resolution information becomes available, land use data detailed to 0.04 ha (0.1 acre) or less will be possible and will be of considerable use in the evaluation of metropolitan area air quality characteristics.

Figure 2 shows a portion of a controlled photomosaic covering the Norfolk, Virginia, area, and figure 3 shows the same area as mapped at Level I and Level II.

Experiments are proceeding to determine the levels of accuracy needed by various users. With EPA and State-sponsored registration systems to identify the principal emission sources, air quality evaluators might be able to accept levels of error in land use areal measurement of 5 percent or greater in favor of rapid complete regional coverage and frequent updating of area measurements indicating land use change.

Polygon Recording System

In the pilot system land use data are prepared for computer manipulation by converting the boundaries of the individual land use units (known as polygons) into digital form. In this form a wide variety of computations can be made upon the data. For example, computations for percentage of total area for particular land use categories can be calculated easily for specific census tracts, jurisdictions, or other enumeration areas such as grid patterns established for air pollutant emission estimating.



ORIGINAL PAGE IS
OF POOR QUALITY

Figure 2--Controlled photomosaic showing portion of the Norfolk-Portsmouth SMSA


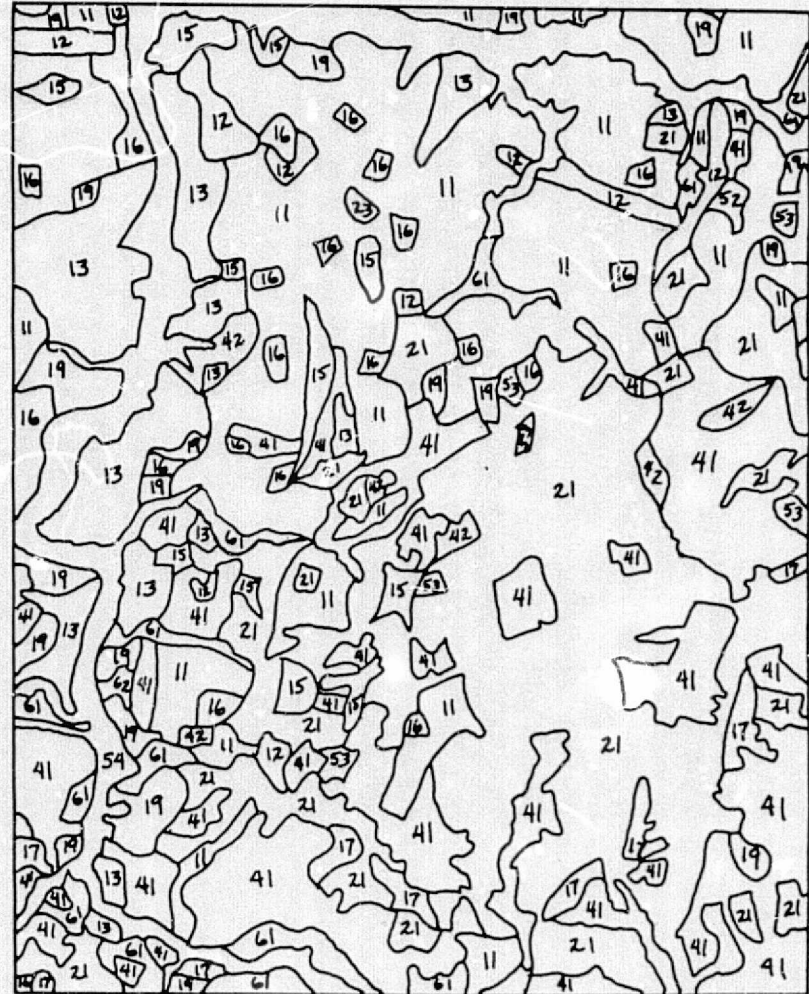
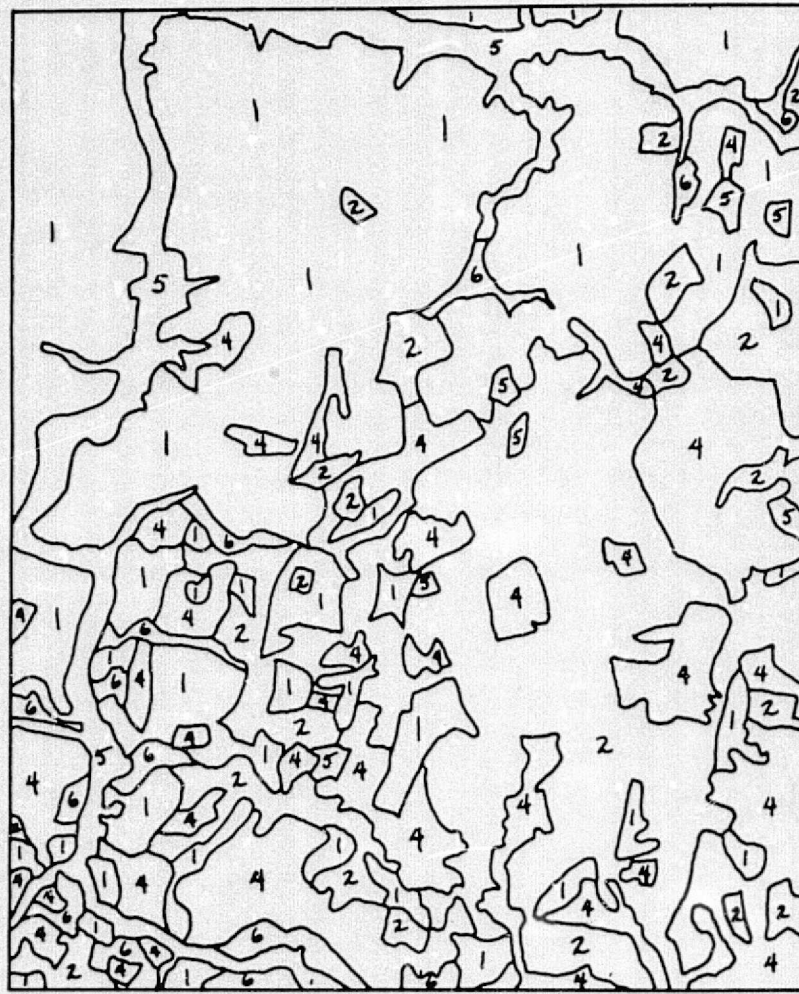


Figure 3a--Level I land use map showing a portion of the 1970 Norfolk-Portsmouth SMSA

Figure 3b--Level II land use map showing a portion of the 1970 Norfolk-Portsmouth SMSA

User Products

After the data have been digitized and stored in computer-readable form, various types of information can be derived. Tables of area, perimeter, rate of change and other characteristics of land use type can be prepared for any jurisdiction requested. In addition to tabular output, graphical information can be provided or, if needed, the original remotely sensed records.

By the end of 1973, land use information to a minimum mapping unit size of 4 ha was available for the entire CARETS area through the Geography Program of the U.S. Geological Survey, Department of the Interior, Reston, Virginia.

The pilot land use system will probably be compatible with other developing State and Federal land use information systems. For example, EPA anticipates the early completion of a nationwide information system to monitor the location and change in major point and area emission sources. This National Emission Data System (NEDS) will identify by Universal Transverse Mercator (UTM) coordinates of all point sources emitting more than 100 tons annually of any of the five major pollutants along with any other high-emission sources (Federal Registers, April 7 and August 14, 1971). Area and mobile source emission contributions will be monitored by county on the basis of fuel purchases. To check the accuracy of its urban and industrial land use identification procedures, users of the USGS national land use information system could query NEDS. Alternatively, to refine countywide emissions to more detailed areal units, land use data compiled to a minimum areal unit of 4 ha could easily be used.

When fully operational, the USGS national land use system will provide a useful source of land use information for air quality control analysis. The evaluation of air quality control strategies for the Norfolk-Portsmouth SMSA presented in this report provides a clear example of the type of use expected of the information products to be prepared by such a system.

LAND USE INFORMATION FOR AIR QUALITY PLANNING IN THE NORFOLK-PORTSMOUTH
STANDARD METROPOLITAN STATISTICAL AREA

The land use, geographic setting, and air pollution characteristics of the Norfolk-Portsmouth SMSA, which includes the cities of Norfolk, Portsmouth, Chesapeake, and Virginia Beach, present a site and air quality planning problem similar to many east coast and midwestern metropolitan areas. Air quality planning for this major segment of Virginia's Air Quality Control Region VI indicates how information from the pilot national land use information system can be used at regional, State and national scales. Virginia Air Quality Control Region VI includes both the 1970 Norfolk-Portsmouth SMSA, and the industrial area of Newport News and Hampton, separated from Norfolk by Hampton Roads, the broad estuary at the mouth of the James River (Commonwealth of Virginia, 1972a).

The Norfolk area is located on the coastal plain of Virginia at the mouth of the Chesapeake Bay and contains the only stretch of ocean frontage which is easily accessible to much of central Virginia and northern North Carolina (figure 1). The area's economy and land use reflect strong and rapidly growing industrial, commercial, transportational, institutional, recreational, and residential components.

Geographic characteristics that influence the area's airflows and pollutant dispersion are a nearly flat topographic surface, extensive water surface in wetlands, rivers, and estuaries, proximity to the open Atlantic Ocean, and an extensive mixture of agriculture and forest lands.

Primary activities in the Norfolk area include the base of naval operations for the Atlantic Fleet, shipbuilding and repair, coal and grain exporting, general shipping, chemical and fertilizer manufacturing, wholesaling to surrounding eastern Virginia and North Carolina, truck farming and fishing, and tourism focused on the area's ocean beaches, estuarine waterfront, and wetlands. The processing, power generation, heating, and transportation associated with each of these activities are the primary contributors to Norfolk area air pollution. The area's strong economy and attractive setting for retirement have resulted in extensive residential development and a concomitant increase in area source contributions to pollution from space heating and automobiles. Sulfur dioxide and suspended particulates are the primary Norfolk area pollutants because of the types of fuel oil used for heating and power generation in the area, the large amounts of sulfur used in producing fertilizer and other area manufacturing processes, the patterns of traffic flow, the large construction projects underway throughout the area, the age of many of the area manufacturing facilities, and the processing technologies of those facilities. These two pollutants are the focus of this study of air quality planning.

LAND USE INFORMATION USED FOR THE INITIAL NORFOLK AREA
CONTROL STRATEGY AND IMPLEMENTATION PLAN

While developing its sulfur dioxide and suspended particulate control strategy and implementation plan for the Norfolk-Portsmouth SMSA, the Virginia Air Pollution Control Board had little time and money for collecting a wide range of land use and geographic information on the area (Commonwealth of Virginia, 1972a). In selecting its strategy, the board followed procedures recommended by EPA (Ozolins and others, 1966; Duprey, 1968; U.S. Environmental Protection Agency, 1970). These procedures rely on the availability of land use information adequate for identifying the location of general areas and specific points having different activities and pollutant emission characteristics. Having identified the configuration of area and point sources, they estimated annual and seasonal emissions to identify regions for air quality control planning. From estimated total levels of regional emissions, the Air Pollution Control Board designed a specific emission reduction strategy focused on controlling point and area sources to bring the region within primary and secondary air quality standards without inhibiting the region's growth.

Available Land Use Information

To develop its Norfolk area control strategy, the Virginia Air Pollution Control Board had access to the following land use information: The 1965 Southeastern Virginia Planning District Commission regional land use map; U.S. Geological Survey 1:24,000-scale topographic maps; various highway and city maps; low-altitude black and white aerial photos; and directories

of commercial, industrial and other activities (Southeastern Virginia Planning District Commission, 1969). This land use information was of differing accuracy, scale, and date, and considerable time and cost were required to recompile the information at a uniform scale and in categories suitable for air quality planning.

Estimating the Initial Emission Inventory

In preparing its initial inventory of sulfur dioxide and particulate emissions in the Norfolk area, the Air Pollution Control Board used the land use information to determine the location of large point emission sources and to construct the grid system in figure 4 identifying areas having relatively homogeneous types and densities of activities.

The cells of the grid pattern constructed by the board seldom coincided in size and shape with the areas of usage designated on available land use maps. Thus, land use densities for each grid often had to be interpolated. To estimate area emissions for residential land use, the percent of each 1970 U.S. Census enumeration district contained in each cell was estimated, and that percentage of the district's population was assigned to the cell. Traffic counts supplied by State and Federal agencies indicated the highway, airline, rail and shipping traffic densities for each cell. Using the previously mentioned information and data on total local fuel purchases and materials used in different types of manufacturing, the board estimated the total area emissions of sulfur dioxide and particulates for the 1971 annual, winter, and summer periods. Quantities of point source emissions for annual and seasonal periods were reported by various firms and institutions, or emissions amounts were estimated from the timing of operations, magnitude, and type of activity at the source.

ORIGINAL PAGE IS
OF POOR QUALITY

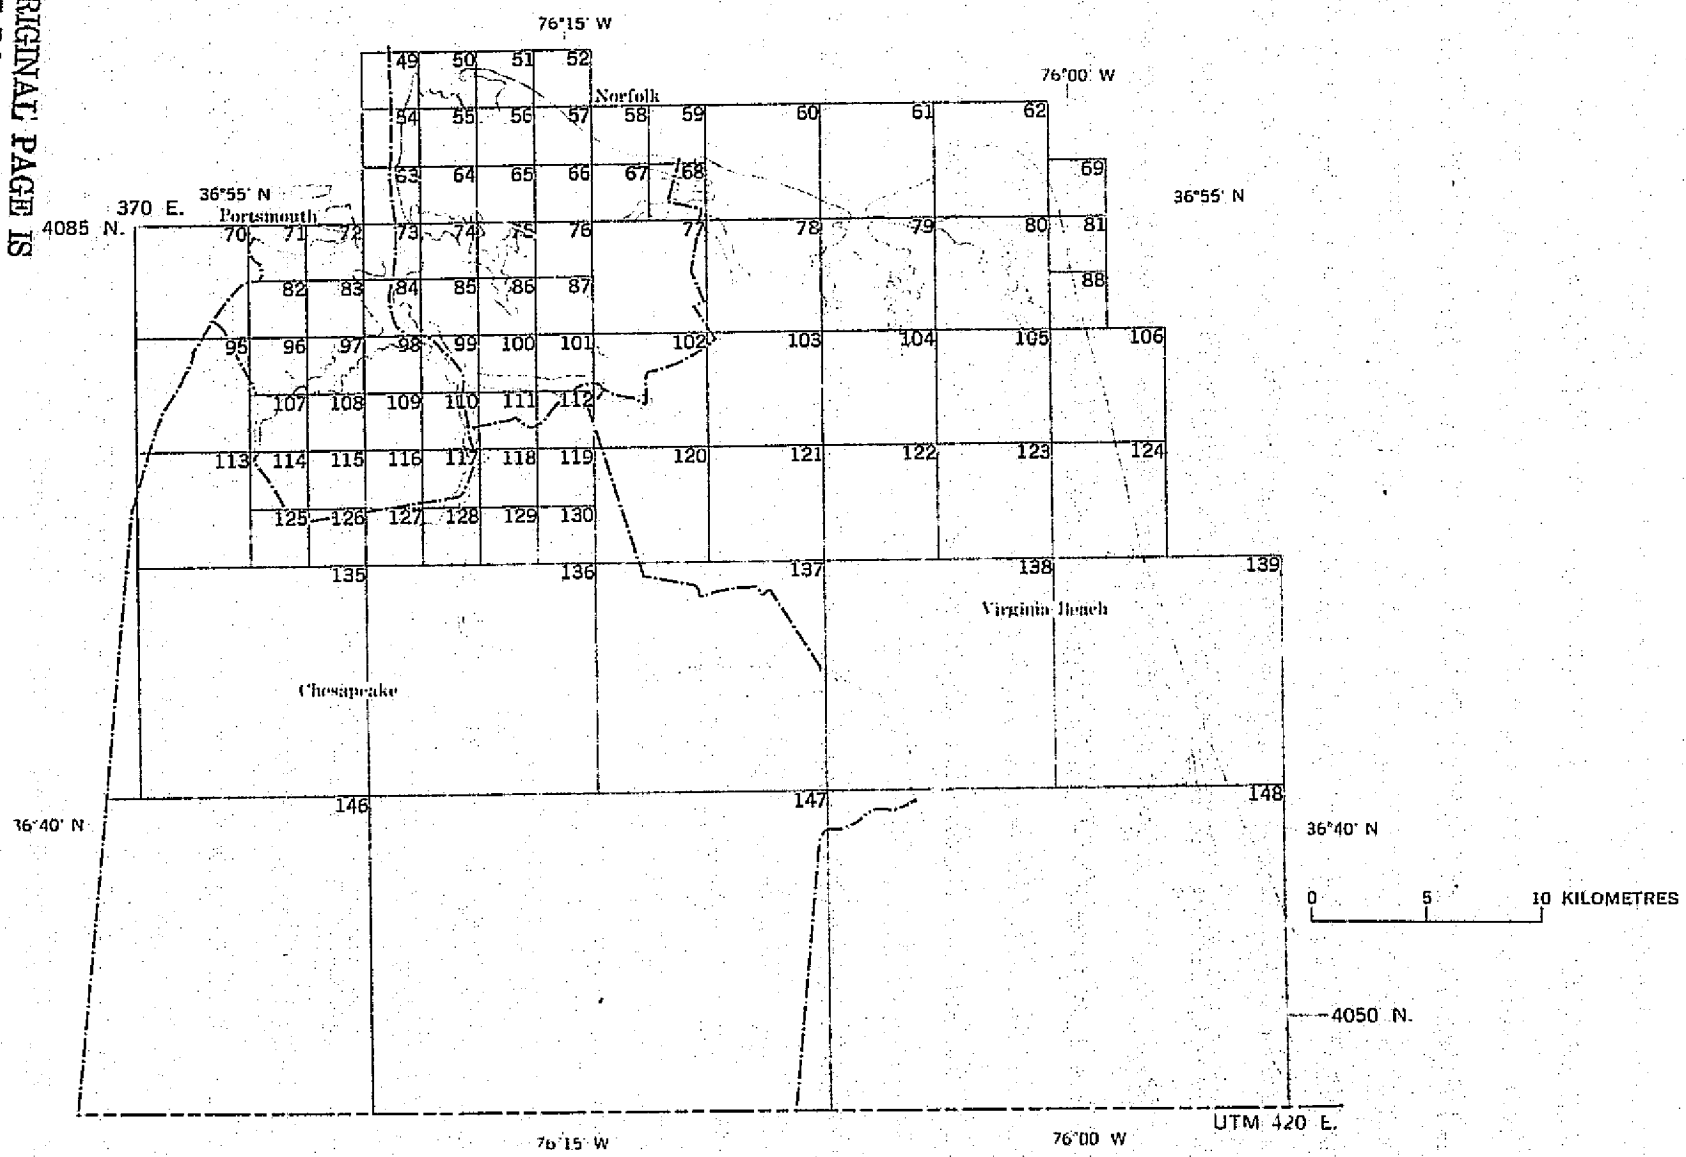


Figure 4—1970 Norfolk-Portsmouth SMSA, area source emission estimating grid cell system

EVALUATING AND REFINING STRATEGIES FOR THE NORFOLK AREA

Selection of Initial Control Strategy

When preparing its plan, the board had little time for detailed evaluation of the spatial distribution of housing and other land uses that emit or receive air pollutants. Nor could it sample or estimate pollutant diffusion patterns in the area. Rather, it compared the initially estimated annual total Norfolk area emission inventory to national and State primary and secondary standards for levels of sulfur dioxide and particulates. The board then designed an areawide emissions reduction strategy and an air quality sampling program. The strategy and program focused mainly on controlling local point sources and on anticipating the local impact of the nationwide auto-emission controls (Commonwealth of Virginia, 1972a).

Evaluating this Strategy

The Air Pollution Control Board recognized that it could make considerable improvement in the initial inventory. Since July 1972, collection of point source information has been improved by the institution of a mandatory registration and permit program (Commonwealth of Virginia, 1972b). This program requires that all large sources emitting pollutants provide detailed information on types of pollutants, levels of pollution, hours of operation, and physical conditions that affect emission levels and diffusion, such as stack height, pollutant exit velocities, and temperatures. Data collection programs related to residential space heating and other area source emissions are not as detailed. To evaluate currently adopted and

alternative strategies for controlling sulfur dioxide and suspended particulates in the Norfolk area, specific types of land use and airflow information are needed to supplement these improved emissions data. This information includes the location of activities emitting these pollutants; the level and timing of their emission; the pattern of their diffusion and concentration over receptor land uses; and the impact of such concentration on these land uses. This information should be available for both current and future periods.

Much of the land use information needed to update and improve the area source emission inventory and to evaluate alternative air quality control strategies for the Norfolk area is available from the pilot national land use information system. The CARETS project has produced Norfolk area land use information interpreted at Levels I and II at a 4-ha (approximately 10 acres) minimum mapping unit size. The CARETS project supplied to the Air Pollution Control Board maps of these data at a scale of 1:100,000 for 1959 and 1970, and a similarly scaled UTM-gridded photomosaic of the area.

The 1970 Level II land use plot was overlaid with the area source emission estimating grid cell system previously established by the board (see figure 4). For each grid cell the area and percentage of different Level II land uses were calculated. Experience gained in developing the earlier area source emissions inventory indicated that differentiation of Norfolk area residential land use (Level II) into a more detailed Level III classification of low-, medium-, and high-density residential areas would provide a more useful base for area source estimates. Areas of differing density were identified from Southeastern Virginia Planning District Commission records, plans, and standards. Their locations were plotted

on the Level II map. Level III residential areas were calculated and included in the land use area statistics for each grid cell. The percentage of land use for various cells (table 2) provides an example of the type of tabular data that can be generated by the pilot national land use information system.

The initial emission source inventory indicated that a map of a selected set of Level I, II, and III land uses would effectively emphasize the spatial relationship between emitter and receptor land uses and could highlight the problems of selecting particular control strategies. Figure 5 displays the Norfolk-Portsmouth SMSA pattern of residential, commercial/business, water, and other land uses. This figure was prepared from the Level I, II, and III plots and was overlaid with local jurisdictional boundaries along with the board's original area source emission estimating grid cell system (figure 4).

Land Use and Emission Estimates

Area Sources

The pattern of variously sized area source emission estimating grid cells established by the board encompasses similar densities and types of land use (figure 5). The 25-km² and 100-km² cells to the east and south of Norfolk and Portsmouth, however, are less diversified than the smaller cells covering the central cities.

The detailed Level II and III land use map was used to verify the concentration of housing and other activities on which the board based its initial estimate of area emissions. Where densities of land use appeared to be underestimated or overestimated, adjustments for the area emission values in these cells were made and later confirmed by officials of the

Table 2.--Example of land use statistics based on pilot national land use information system

[Percentage of selected 1970 Level I, II and III land use in the Norfolk-Portsmouth SMSA by area emission source grid cells (see figure 4). All class codes keyed to classification in table 1. PC area = percentage of cell area in above land use class. Area is in square kilometres.]

Cell	49	Class	15	12	54				
Area	6.25	PC Area	15	05	80				
Cell	50	Class	15	19	54	112			
Area	6.25	PC Area	05	05	85	05			
Cell	51	Class	111	19	54				
Area	6.25	PC Area	25	10	65				
Cell	52	Class	12	16	111	54			
Area	6.25	PC Area	05	03	15	77			
Cell	54	Class	42	12	15	54			
Area	6.25	PC Area	03	20	17	60			
Cell	55	Class	54	16	111	19	15		
Area	6.25	PC Area	05	30	05	35	25		
Cell	56	Class	54	16	15	53	112		
Area	6.25	PC Area	10	35	25	05	25		
Cell	57	Class	54	12	16	19			
Area	6.25	PC Area	05	05	05	15	70		
Cell	58	Class	54	112					
Area	6.25	PC Area	60	40					
Cell	59	Class	12	111	54				
Area	6.25	PC Area	05	15	80				
Cell	60	Class	54	52	112	15	19		
Area	25.00	PC Area	60	10	05	20	05		
Cell	61	Class	54	74	112	12	42	19	15
Area	25.00	PC Area	82	05	05	03	02	02	01
Cell	62	Class	54	41	112	74	16	19	15
Area	25.00	PC Area	60	22	07	03	05	02	01
Cell	63	Class	54	19	12	16	15	13	
Area	6.25	PC Area	66	08	18	02	03	03	
Cell	64	Class	112	54	12	19	16		
Area	6.25	PC Area	55	15	16	06	08		
Cell	65	Class	54	15	12	16	112	19	
Area	6.25	PC Area	04	08	18	22	36	12	
Cell	66	Class	112	52	15	12			
Area	6.25	PC Area	70	04	04	22			

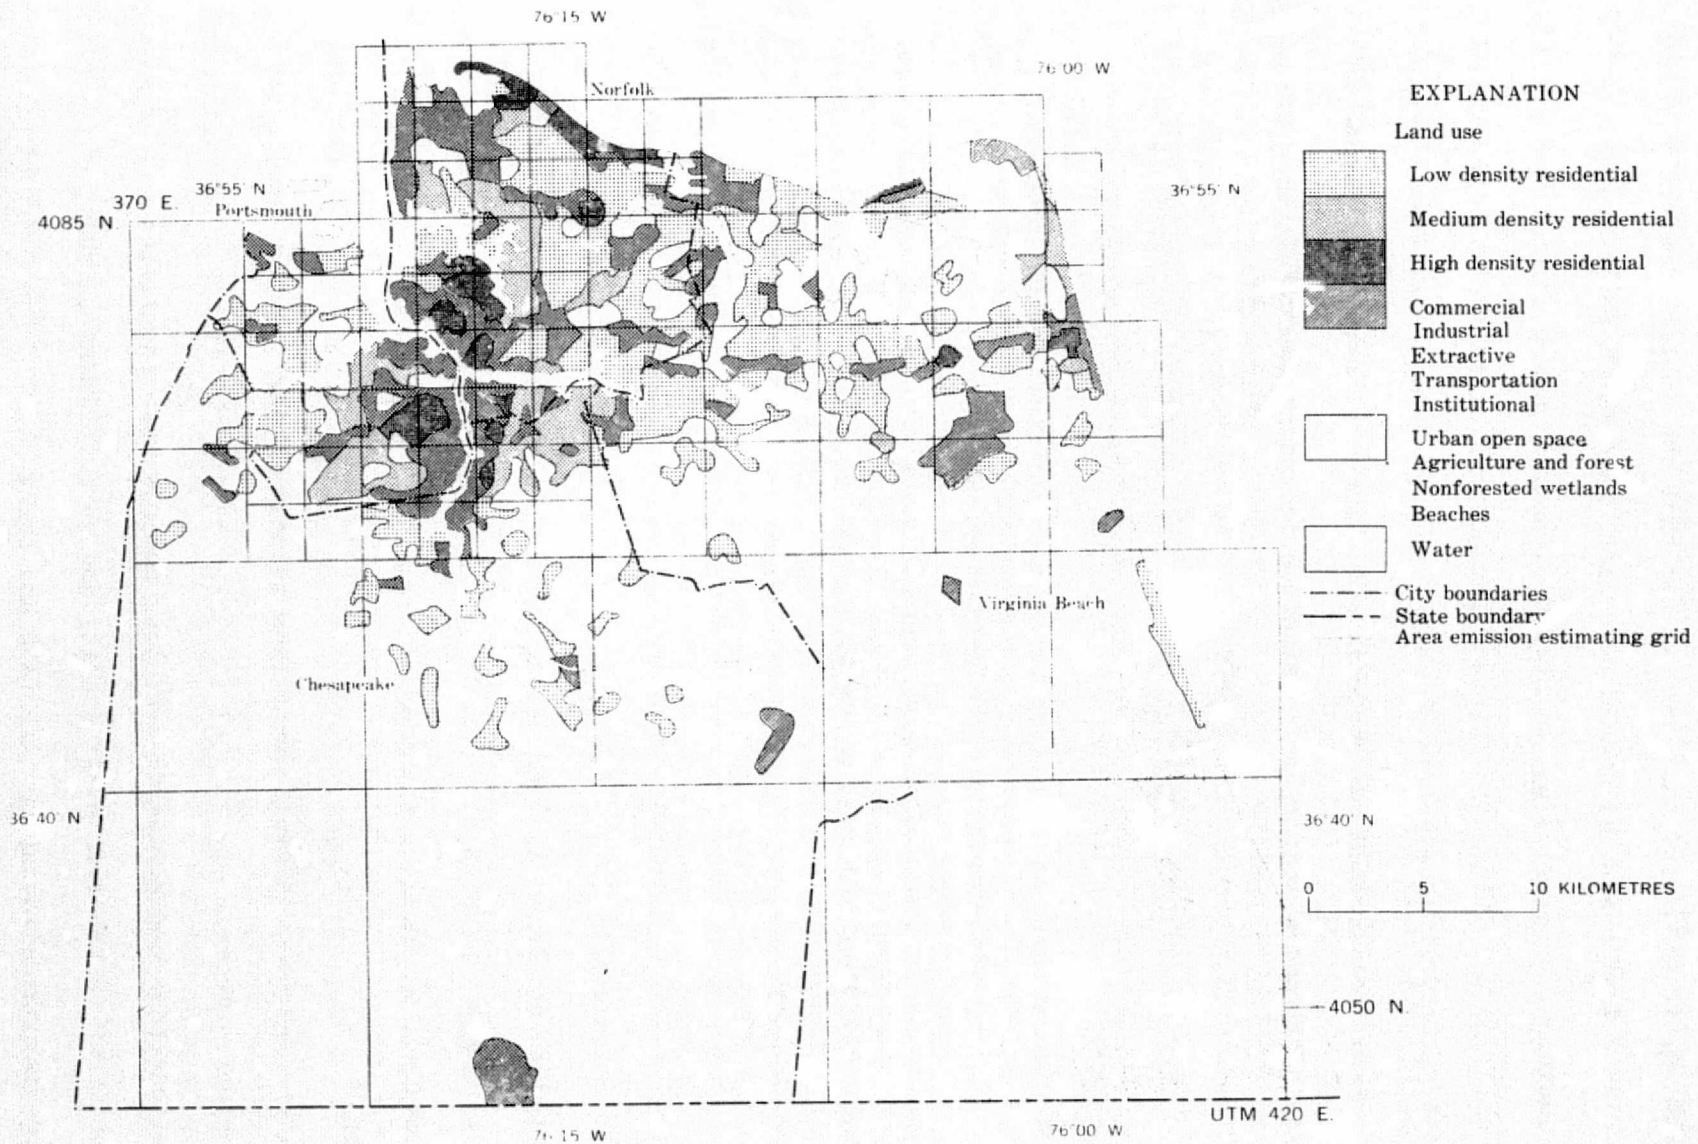


Figure 5--1970 Norfolk-Portsmouth SMSA, 1970 land use selected for air quality planning

Virginia Air Pollution Control Board, Region VI. In the course of this checking, it was found that some values that the initial inventory attributed to area emission sources should have been assigned to point sources.

In addition, by overlaying the jurisdictional boundary information provided by the land use information system, researchers could identify and correct discrepancies in jurisdictional boundaries occurring on the board's maps.

From updated land use analysis and changes in traffic patterns, an annual 1972 and winter 1971-72 emissions inventory was developed. This inventory, in tons per day, is presented in table 3.

Figure 6 indicates the centroid of each cell's area source emission. In developing air quality sampling programs and estimating pollutant diffusion, working with this centroid of activities is much more useful than dealing with the geographic center of each cell, especially for the larger cells in the Norfolk area where urban activities contributing most to area emissions are seldom located in the geographic center of a cell.

Point Sources

Of the major point emission sources identified in the board's initial emissions source inventory, many had closed down or substantially reduced their emissions by 1972. The initial inventory of point sources was located on the Level II land use map and their current annual levels of emission were verified from August 1972 board registration records. Other industrial, extractive, transportational, and institutional uses identified in the board's registration program were located on the Level II land use map, and the board's staff identified those with the greatest levels of emissions. In this way, 44 point sources having high levels of emission or emissions that had persisted over long periods were identified as the most significant to the area's air quality and were included in the updated point source emissions inventory (figure 6 and table 3).

Table 3.--Estimated Norfolk-Portsmouth SMSA, 1972 annual, winter 1971-72, and estimated annual 1985 emission inventories*

REGION: NORFOLK AREA (ANNUAL)

DATE: 5 OCTOBER, 1972

ORIGINAL PAGE IS OF POOR QUALITY

SOURCE DATA

SOURCE NUMBER	SIC CODE	SITE CODE	PROC CODE	SOURCE LOCATION HORIZ	SOURCE LOCATION VERT	SOURCE LOCATION AREA (SQ KM)	EMISSION RATE (TONS/DAY)	STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	EXIT TEMP (DEG K)	
1	50	99	4	384.0	4090.0	0.0	.09	.46	35.0	4.0	30.0	450.0
2	55	100	4	382.7	4089.0	0.0	14.87	1.68	35.0	4.0	30.0	450.0
3	54	101	4	382.0	4088.0	0.0	.37	.03	10.0	-0.0	-0.0	-0.0
4	55	102	4	382.5	4088.2	0.0	.09	.40	50.0	1.0	7.0	378.0
5	60	103	4	396.0	4086.5	0.0	3.38	.34	10.0	-0.0	-0.0	-0.0
6	77	104	1	393.0	4084.0	0.0	.45	.94	10.0	-0.0	-0.0	-0.0
7	69	105	4	410.0	4087.0	0.0	.15	.33	10.0	-0.0	-0.0	-0.0
8	75	106	4	372.0	4085.0	0.0	.26	.02	10.0	-0.0	-0.0	-0.0
9	74	107	7	382.8	4082.6	0.0	.16	1.49	10.0	-0.0	-0.0	-0.0
10	85	109	4	384.5	4081.2	0.0	.01	0.00	10.0	-0.0	-0.0	-0.0
11	87	110	4	388.8	4082.3	0.0	.01	.01	10.0	-0.0	-0.0	-0.0
12	98	112	5	380.9	4079.2	0.0	.06	.50	40.0	2.0	30.0	600.0
13	99	113	4	383.6	4079.7	0.0	.05	.03	15.0	1.0	10.0	400.0
14	99	114	4	383.6	4078.0	0.0	.69	.07	20.0	-0.0	-0.0	-0.0
15	100	115	7	385.2	4078.8	0.0	.05	.50	10.0	-0.0	-0.0	-0.0
16	101	117	4	388.9	4079.1	0.0	.05	5.00	10.0	2.0	6.0	400.0
17	101	118	4	389.1	4078.8	0.0	.05	0.00	10.0	-0.0	-0.0	-0.0
18	102	119	4	398.9	4076.9	0.0	.02	2.29	10.0	-0.0	-0.0	-0.0
19	103	120	4	397.4	4077.5	0.0	.26	4.80	10.0	2.0	4.0	340.0
20	111	121	5	386.4	4076.9	0.0	0.00	.55	10.0	-0.0	-0.0	-0.0
21	111	122	4	386.3	4077.2	0.0	.01	0.00	10.0	-0.0	-0.0	-0.0
22	112	123	4	388.7	4077.0	0.0	.14	.07	10.0	-0.0	-0.0	-0.0
23	112	124	7	388.8	4076.4	0.0	.02	.22	10.0	-0.0	-0.0	-0.0
24	112	125	5	388.7	4076.7	0.0	0.00	.69	10.0	-0.0	-0.0	-0.0
25	117	126	5	383.6	4074.2	0.0	.20	.02	10.0	-0.0	-0.0	-0.0
26	117	127	5	382.7	4074.8	0.0	.11	6.77	10.0	-0.0	-0.0	-0.0
27	117	128	5	384.3	4074.3	0.0	.27	1.22	15.0	1.0	6.0	350.0
28	106	129	5	410.2	4077.2	0.0	.17	9.98	3.0	1.0	6.0	350.0
29	109	130	7	381.2	4076.2	0.0	.10	.96	10.0	-0.0	-0.0	-0.0
30	110	131	5	384.0	4075.0	0.0	.01	.04	10.0	-0.0	-0.0	-0.0
31	111	132	5	386.0	4075.1	0.0	.30	.01	10.0	-0.0	-0.0	-0.0
32	118	134	5	385.0	4074.9	0.0	1.48	.60	10.0	-0.0	-0.0	-0.0
33	123	135	4	408.0	4074.0	0.0	1.53	.12	10.0	-0.0	-0.0	-0.0
34	124	136	4	414.4	4071.0	0.0	.80	.06	10.0	-0.0	-0.0	-0.0
35	120	137	5	384.7	4070.5	0.0	1.10	1.45	10.0	-0.0	-0.0	-0.0
36	128	139	5	384.5	4070.1	0.0	.01	.02	25.0	1.0	6.0	350.0
37	128	140	4	384.3	4071.4	0.0	.28	.02	10.0	-0.0	-0.0	-0.0
38	128	141	5	384.5	4070.5	0.0	0.00	.18	10.0	-0.0	-0.0	-0.0
39	135	142	4	372.4	4063.5	0.0	.09	.01	10.0	-0.0	-0.0	-0.0
40	128	144	4	383.0	4072.0	0.0	.01	.03	10.0	-0.0	-0.0	-0.0

*Data from Virginia State Air Pollution Control Board Implementation Plan, 1972.

[Data plotted in figures 9 through 14]

Table 3.--continued

REGION: NORFOLK AREA (ANNUAL)

DATE: 5 OCTOBER, 1972

SOURCE DATA

SOURCE NUMBER	SIC CODE	SITE CODE	PROC CODE	SOURCE LOCATION (KILOMETERS)	SOURCE AREA (SQ KM)	EMISSION RATE (TONS/DAY)	STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXHT VELOCITY (M/SEC)	EXHT TEMP (DEG K)
				HORIZ VERT		S02 PART				
41	136	145	4	384.4 4066.4	6.0	.14 .81	4.3	1.0	10.0	470.0
42	136	146	5	383.2 4069.2	6.0	0.04 .95	3.0	3.0	10.0	1200.0
43	128	147	4	383.8 4070.2	6.0	93.30 .74	60.0	4.0	30.0	400.0
44	128	148	4	384.7 4070.5	6.0	1.00 1.25	10.0	0.0	-0.0	-0.0
45	9999	49	0	382.1 4090.9	6.3	.01 .03	3.0	-0.0	-0.0	-0.0
46	9999	50	0	382.1 4090.1	6.3	.02 .07	3.0	0.0	0.0	0.0
47	9999	51	0	386.0 4091.8	6.3	.04 .14	2.0	0.0	0.0	0.0
48	9999	52	0	388.0 4090.5	6.3	.01 .06	8.0	0.0	0.0	0.0
49	9999	54	0	381.9 4089.0	6.3	.03 .12	3.0	0.0	0.0	0.0
50	9999	55	0	384.5 4089.2	6.3	.10 .41	8.0	0.0	0.0	0.0
51	9999	56	0	387.2 4088.1	6.3	.05 .20	8.0	0.0	0.0	0.0
52	9999	57	0	389.4 4088.0	6.3	.12 .48	8.0	0.0	0.0	0.0
53	9999	58	0	391.0 4087.8	6.3	.05 .18	8.0	0.0	0.0	0.0
54	9999	59	0	393.0 4087.6	6.3	.01 .06	8.0	0.0	0.0	0.0
55	9999	60	0	397.0 4086.0	25.0	.09 .05	8.0	0.0	0.0	0.0
56	9999	61	0	404.0 4085.7	25.0	.07 .07	8.0	0.0	0.0	0.0
57	9999	62	0	407.2 4087.4	25.0	.05 .04	8.0	0.0	0.0	0.0
58	9999	63	0	382.0 4086.2	6.3	.02 .06	3.0	0.0	0.0	0.0
59	9999	64	0	384.5 4086.9	6.3	.14 .56	8.0	0.0	0.0	0.0
60	9999	65	0	387.0 4085.5	6.3	.13 .46	8.0	0.0	0.0	0.0
61	9999	66	0	388.1 4086.5	6.3	.13 .48	8.0	0.0	0.0	0.0
62	9999	67	0	390.8 4085.5	6.3	.09 .36	8.0	0.0	0.0	0.0
63	9999	68	0	394.3 4086.3	6.3	.06 .19	8.0	0.0	0.0	0.0
64	9999	69	0	411.3 4085.4	6.3	.02 .01	6.0	0.0	0.0	0.0
65	9999	70	0	373.2 4082.5	25.0	.03 .04	2.0	0.0	0.0	0.0
66	9999	71	0	376.3 4082.8	6.3	.02 .01	6.0	0.0	0.0	0.0
67	9999	72	0	377.9 4083.0	6.3	.01 .01	2.0	0.0	0.0	0.0
68	9999	73	0	380.5 4083.0	6.3	0.00 0.00	3.0	0.0	0.0	0.0
69	9999	74	0	384.3 4084.1	6.3	.09 .33	8.0	0.0	0.0	0.0
70	9999	75	0	387.0 4084.1	6.3	.09 .34	8.0	0.0	0.0	0.0
71	9999	76	0	389.4 4084.5	6.3	.15 .53	8.0	0.0	0.0	0.0
72	9999	77	0	392.5 4081.5	25.0	.32 .89	8.0	0.0	0.0	0.0
73	9999	78	0	397.7 4081.0	25.0	.20 .18	6.0	0.0	0.0	0.0
74	9999	79	0	402.5 4082.5	25.0	.08 .04	8.0	0.0	0.0	0.0
75	9999	80	0	407.1 4081.3	25.0	.07 .05	4.0	0.0	0.0	0.0
76	9999	81	0	412.0 4083.7	6.3	.03 .03	4.0	0.0	0.0	0.0
77	9999	82	0	376.3 4080.5	6.3	.03 .03	8.0	0.0	0.0	0.0
78	9999	83	0	379.2 4080.5	6.3	.02 .02	6.0	0.0	0.0	0.0
79	9999	84	0	382.2 4081.8	6.3	0.00 0.00	3.0	0.0	0.0	0.0
80	9999	85	0	384.5 4082.0	6.3	.16 .56	8.0	0.0	0.0	0.0

Table 3.--continued

REGION: SOUTHWEST AREA (ANNUAL)

DATE: 5 OCTOBER, 1972

ORIGINAL PAGE IS OF POOR QUALITY

SOURCE DATA													
SOURCE NUMBER	SIC CODE	SITE CODE	PROC CODE	SOURCE LOCATION (KILOMETERS)		SOURCE AREA (SQ KM)	EMISSION RATE (TONS/DAY)		STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	EXIT TEMP (DEG K)	
				HORIZ	VERT		SO2	PART					
81	3449	86	0	387.0	4080.7	6.3	.17	.67	8.0	0.0	0.0	0.0	
82	3449	87	0	388.0	4081.8	6.3	.11	.42	8.0	0.0	0.0	0.0	
83	3449	88	0	412.2	4083.8	6.3	.06	.36	8.0	0.0	0.0	0.0	
84	9999	95	0	373.7	4077.5	25.0	.05	.36	8.0	0.0	0.0	0.0	
85	9999	96	0	377.5	4078.8	6.3	.03	.04	8.0	0.0	0.0	0.0	
86	9999	97	0	379.5	4078.0	6.3	.04	.05	8.0	0.0	0.0	0.0	
87	9999	98	0	382.0	4079.0	6.3	.07	.08	8.0	0.0	0.0	0.0	
88	9999	99	0	383.5	4078.0	6.3	.10	.23	8.0	0.0	0.0	0.0	
89	9999	100	0	387.0	4079.4	6.3	9.32	3.43	8.0	0.0	0.0	0.0	
90	9999	101	0	388.1	4079.2	6.3	.15	.46	8.0	0.0	0.0	0.0	
91	9999	102	0	392.5	4077.5	25.0	.18	.36	8.0	0.0	0.0	0.0	
92	9999	103	0	397.0	4077.0	25.0	.25	.20	8.0	0.0	0.0	0.0	
93	9999	104	0	402.5	4077.5	25.0	.18	.25	8.0	0.0	0.0	0.0	
94	9999	105	0	428.0	4077.5	25.0	.16	.20	8.0	0.0	0.0	0.0	
95	9999	106	0	412.2	4078.9	25.0	.21	.14	8.0	0.0	0.0	0.0	
96	9999	107	0	377.0	4076.8	6.3	.03	.04	8.0	0.0	0.0	0.0	
97	9999	108	0	379.5	4076.2	6.3	.07	.08	8.0	0.0	0.0	0.0	
98	9999	109	0	382.0	4076.8	6.3	.14	.16	8.0	0.0	0.0	0.0	
99	9999	110	0	384.0	4077.0	6.3	.13	.12	8.0	0.0	0.0	0.0	
100	9999	111	0	387.2	4076.9	6.3	.19	.51	8.0	0.0	0.0	0.0	
101	9999	112	0	388.1	4079.4	6.3	.08	.14	8.0	0.0	0.0	0.0	
102	9999	113	0	373.7	4072.5	25.0	.09	.08	3.0	0.0	0.0	0.0	
103	9999	114	0	377.0	4074.4	6.3	.03	.05	8.0	0.0	0.0	0.0	
104	9999	115	0	379.5	4074.3	6.3	.04	.05	8.0	0.0	0.0	0.0	
105	9999	116	0	381.7	4074.5	6.3	.08	.07	8.0	0.0	0.0	0.0	
106	9999	117	0	383.1	4073.0	6.3	.05	.06	5.0	0.0	0.0	0.0	
107	9999	118	0	386.5	4074.2	6.3	.13	.12	8.0	0.0	0.0	0.0	
108	9999	119	0	389.7	4074.4	6.3	.20	.32	8.0	0.0	0.0	0.0	
109	9999	120	0	392.3	4074.4	25.0	.12	.15	3.0	0.0	0.0	0.0	
110	9999	121	0	397.4	4074.4	25.0	.07	.05	3.0	0.0	0.0	0.0	
111	9999	122	0	403.4	4074.5	25.0	.03	.04	2.0	0.0	0.0	0.0	
112	9999	123	0	408.8	4072.9	25.0	.04	.04	5.0	0.0	0.0	0.0	
113	9999	124	0	412.5	4072.5	25.0	.04	.03	3.0	0.0	0.0	0.0	
114	9999	125	0	377.0	4072.0	6.3	.07	.06	2.0	0.0	0.0	0.0	
115	9999	126	0	379.5	4072.0	6.3	.03	.04	8.0	0.0	0.0	0.0	
116	9999	127	0	382.0	4072.0	6.3	.04	.06	8.0	0.0	0.0	0.0	
117	9999	128	0	383.6	4070.4	6.3	.10	.10	8.0	0.0	0.0	0.0	
118	9999	129	0	387.1	4071.5	6.3	.09	.11	8.0	0.0	0.0	0.0	
119	9999	130	0	389.5	4071.8	6.3	.06	.10	4.0	0.0	0.0	0.0	
120	9999	135	0	376.0	4067.2	100.0	.06	.07	2.0	0.0	0.0	0.0	

Table 3.--continued

REGION: NORFOLK AREA (DJF)

DATE: 5 OCTOBER, 1972

ORIGINAL PAGE IS OF POOR QUALITY

SOURCE DATA														
SOURCE NUMBER	SIG CODE	SITE CODE	PROC CODE	SOURCE LOCATION (KILOMETERS)		SOURCE AREA (SQ KM)	EMISSON RATE (TONS/DAY)		STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	EXIT TEMP (DEG K)		
				HORIZ	VERT		SO2	PART						
1	50	99	4	384.0	4090.0	0.0	.12	.51	35.0	4.0	30.0	450.0		
2	55	100	4	382.7	4089.0	0.0	41.99	3.14	35.0	4.0	30.0	450.0		
3	54	101	4	382.0	4088.0	0.0	1.18	.09	10.0	-0.0	-0.0	-0.0		
4	55	102	4	382.5	4088.2	0.0	.19	.05	50.0	1.0	7.0	370.0		
5	60	103	4	396.0	4086.5	0.0	4.00	.78	10.0	-0.0	-0.0	-0.0		
6	77	104	1	393.0	4084.0	0.0	.45	.34	10.0	-0.0	-0.0	-0.0		
7	69	105	4	410.0	4087.0	0.0	.46	.39	10.0	-0.0	-0.0	-0.0		
8	70	106	4	372.0	4085.0	0.0	.82	.36	10.0	-0.0	-0.0	-0.0		
9	74	107	7	382.8	4082.6	0.0	.16	1.49	10.0	-0.0	-0.0	-0.0		
10	85	109	4	384.5	4081.2	0.0	.02	.01	10.0	-0.0	-0.0	-0.0		
11	87	110	4	388.8	4082.3	0.0	.02	.31	10.0	-0.0	-0.0	-0.0		
12	98	112	5	380.9	4079.2	0.0	.06	.50	40.0	2.0	30.0	600.0		
13	99	113	4	383.6	4079.7	0.0	.07	.04	15.0	1.0	10.0	400.0		
14	99	114	4	383.6	4078.0	0.0	2.13	.22	20.0	-0.0	-0.0	-0.0		
15	100	115	7	385.2	4078.8	0.0	.05	.50	10.0	-0.0	-0.0	-0.0		
16	101	117	4	388.9	4079.1	0.0	.05	5.00	10.0	2.0	6.0	400.0		
17	101	118	4	389.1	4078.8	0.0	.13	.31	10.0	-0.0	-0.0	-0.0		
18	103	119	4	398.9	4076.9	0.0	.07	2.31	10.0	-0.0	-0.0	-0.0		
19	103	120	4	397.4	4077.5	0.0	.81	4.84	10.0	2.0	4.0	340.0		
20	111	121	5	386.4	4076.9	0.0	0.00	.55	10.0	-0.0	-0.0	-0.0		
21	111	122	4	386.3	4077.2	0.0	.03	3.30	10.0	-0.0	-0.0	-0.0		
22	112	123	4	388.7	4077.0	0.0	.14	.37	10.0	-0.0	-0.0	-0.0		
23	112	124	7	388.8	4076.4	0.0	.02	.22	10.0	-0.0	-0.0	-0.0		
24	112	125	5	388.7	4076.7	0.0	0.00	.69	10.0	-0.0	-0.0	-0.0		
25	117	126	5	383.6	4074.2	0.0	.20	.37	10.0	-0.0	-0.0	-0.0		
26	117	127	5	382.7	4074.8	0.0	.34	5.79	10.0	-0.0	-0.0	-0.0		
27	117	128	5	384.3	4074.3	0.0	.27	1.23	15.0	1.0	6.0	350.0		
28	106	129	5	410.2	4077.2	0.0	.53	10.00	3.0	1.0	6.0	350.0		
29	109	130	7	381.2	4076.2	0.0	.10	.96	10.0	-0.0	-0.0	-0.0		
30	110	131	5	384.0	4075.0	0.0	.05	.39	10.0	-0.0	-0.0	-0.0		
31	111	132	5	386.0	4075.1	0.0	.40	.03	10.0	-0.0	-0.0	-0.0		
32	118	134	5	385.0	4074.9	0.0	1.48	.50	10.0	-0.0	-0.0	-0.0		
33	123	135	4	408.0	4074.0	0.0	4.82	.38	10.0	-0.0	-0.0	-0.0		
34	124	136	4	414.4	4071.0	0.0	2.50	.19	10.0	-0.0	-0.0	-0.0		
35	128	137	5	384.7	4070.5	0.0	1.10	1.45	10.0	-0.0	-0.0	-0.0		
36	128	139	5	384.5	4070.1	0.0	.01	.32	25.0	1.0	6.0	360.0		
37	128	140	4	384.3	4071.4	0.0	.87	.05	10.0	-0.0	-0.0	-0.0		
38	128	141	5	384.5	4070.5	0.0	0.00	.18	10.0	-0.0	-0.0	-0.0		
39	135	142	4	372.4	4063.5	0.0	.29	.33	10.0	-0.0	-0.0	-0.0		
40	128	144	4	383.0	4072.0	0.0	.03	.10	10.0	-0.0	-0.0	-0.0		

Table 3.--continued

REGION: NORFOLK AREA (DJF)

DATE: 5 OCTOBER, 1972

36

SOURCE DATA													
SOURCE NUMBER	SIC CODE	SITE CODE	PROC CODE	SOURCE LOCATION (KILOMETERS)		SOURCE AREA (SQ KM)	EMISSION RATE (TONS/DAY)		STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	EXIT TEMP (DEG K)	
				HORIZ	VERT		SO2	PART					
41	136	145	4	384.4	4066.4	0.0	.16	.31	4.0	1.0	10.0	470.0	
42	136	146	5	383.2	4069.2	0.0	0.00	.90	3.0	3.0	10.0	1200.0	
43	128	147	4	383.8	4070.2	0.0	93.30	.74	60.0	4.0	30.0	400.0	
44	128	148	4	384.7	4070.5	0.0	1.00	1.35	10.0	-0.0	-0.0	-0.0	
45	9999	49	0	382.1	4090.9	6.3	.02	.03	3.0	-0.0	-0.0	-0.0	
46	9999	50	0	383.1	4090.1	6.3	.04	.07	3.0	0.0	0.0	0.0	
47	9999	51	0	386.0	4091.8	6.3	.08	.15	2.0	0.0	0.0	0.0	
48	9999	52	0	388.0	4090.5	6.3	.04	.06	8.0	0.0	0.0	0.0	
49	9999	54	0	381.9	4089.0	6.3	.08	.14	3.0	0.0	0.0	0.0	
50	9999	55	0	384.5	4089.2	6.3	.27	.46	8.0	0.0	0.0	0.0	
51	9999	56	0	387.2	4088.1	6.3	.12	.21	8.0	0.0	0.0	0.0	
52	9999	57	0	389.4	4088.0	6.3	.31	.54	8.0	0.0	0.0	0.0	
53	9999	58	0	391.0	4087.8	6.3	.12	.20	8.0	0.0	0.0	0.0	
54	9999	59	0	393.0	4087.6	6.3	.04	.06	8.0	0.0	0.0	0.0	
55	9999	60	0	397.0	4086.0	25.0	.26	.10	8.0	0.0	0.0	0.0	
56	9999	61	0	404.0	4085.7	25.0	.15	.09	8.0	0.0	0.0	0.0	
57	9999	62	0	407.2	4087.4	25.0	.13	.06	8.0	0.0	0.0	0.0	
58	9999	63	0	382.0	4086.2	6.3	.04	.07	3.0	0.0	0.0	0.0	
59	9999	64	0	384.5	4086.9	6.3	.36	.62	8.0	0.0	0.0	0.0	
60	9999	65	0	387.0	4085.5	6.3	.28	.49	8.0	0.0	0.0	0.0	
61	9999	66	0	388.1	4086.5	6.3	.30	.52	8.0	0.0	0.0	0.0	
62	9999	67	0	390.8	4085.5	6.3	.24	.40	8.0	0.0	0.0	0.0	
63	9999	68	0	394.3	4086.3	6.3	.13	.21	8.0	0.0	0.0	0.0	
64	9999	69	0	411.3	4085.4	6.3	.07	.02	6.0	0.0	0.0	0.0	
65	9999	70	0	373.2	4082.5	25.0	.08	.05	2.0	0.0	0.0	0.0	
66	9999	71	0	376.3	4082.8	6.3	.05	.02	6.0	0.0	0.0	0.0	
67	9999	72	0	377.9	4083.0	6.3	.03	.01	2.0	0.0	0.0	0.0	
68	9999	73	0	380.5	4083.0	6.3	0.00	0.00	3.0	0.0	0.0	0.0	
69	9999	74	0	384.3	4084.1	6.3	.21	.36	8.0	0.0	0.0	0.0	
70	9999	75	0	387.0	4084.1	6.3	.21	.37	8.0	0.0	0.0	0.0	
71	9999	76	0	389.4	4084.5	6.3	.33	.58	8.0	0.0	0.0	0.0	
72	9999	77	0	392.5	4081.5	25.0	.62	.96	8.0	0.0	0.0	0.0	
73	9999	78	0	397.7	4081.0	25.0	.49	.25	6.0	0.0	0.0	0.0	
74	9999	79	0	402.5	4082.5	25.0	.22	.08	6.0	0.0	0.0	0.0	
75	9999	80	0	407.1	4081.3	25.0	.18	.08	4.0	0.0	0.0	0.0	
76	9999	81	0	412.0	4083.7	6.3	.07	.04	4.0	0.0	0.0	0.0	
77	9999	82	0	376.3	4080.5	6.3	.06	.04	8.0	0.0	0.0	0.0	
78	9999	83	0	379.2	4080.5	6.3	.06	.03	6.0	0.0	0.0	0.0	
79	9999	84	0	382.2	4081.8	6.3	0.00	0.00	3.0	0.0	0.0	0.0	
80	9999	85	0	384.5	4082.0	6.3	.43	.73	8.0	0.0	0.0	0.0	

Table 3.--continued

REGION: NORFOLK AREA (DJF)

DATE: 5 OCTOBER, 1972

SOURCE DATA												
SOURCE NUMBER	SIC CODE	SITE CODE	PROC CODE	SOURCE LOCATION (KILOMETERS)		SOURCE AREA (SQ KM)	EMISSION RATE (TONS/DAY)	SO2 PART	STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	EXIT TEMP (DEG K)
81	9999	86	0	387.0	4080.7	6.3	.43	.74	8.0	0.0	0.0	0.0
82	9999	87	0	388.0	4081.8	6.3	.27	.46	8.0	0.0	0.0	0.0
83	9999	88	0	412.2	4080.8	6.3	.23	.10	8.0	0.0	0.0	0.0
84	9999	95	0	373.7	4077.5	25.0	.11	.08	8.0	0.0	0.0	0.0
85	9999	96	0	377.5	4078.8	6.3	.07	.05	8.0	0.0	0.0	0.0
86	9999	97	0	379.5	4078.0	6.3	.09	.10	8.0	0.0	0.0	0.0
87	9999	98	0	382.0	4079.0	6.3	.19	.11	8.0	0.0	0.0	0.0
88	9999	99	0	383.5	4078.0	6.3	.22	.27	8.0	0.0	0.0	0.0
89	9999	100	0	387.0	4079.4	6.3	9.77	3.96	8.0	0.0	0.0	0.0
90	9999	101	0	388.1	4079.2	6.3	.29	.51	8.0	0.0	0.0	0.0
91	9999	102	0	392.5	4077.5	25.0	.46	.45	8.0	0.0	0.0	0.0
92	9999	103	0	397.0	4077.0	25.0	.63	.30	8.0	0.0	0.0	0.0
93	9999	104	0	402.5	4077.5	25.0	.32	.27	8.0	0.0	0.0	0.0
94	9999	105	0	408.8	4077.5	25.0	.33	.23	8.0	0.0	0.0	0.0
95	9999	106	0	412.2	4078.9	25.0	.58	.24	8.0	0.0	0.0	0.0
96	9999	107	0	377.0	4076.8	6.3	.08	.05	8.0	0.0	0.0	0.0
97	9999	108	0	379.5	4075.2	6.3	.15	.11	8.0	0.0	0.0	0.0
98	9999	109	0	382.0	4076.8	6.3	.32	.23	8.0	0.0	0.0	0.0
99	9999	110	0	384.0	4077.0	6.3	.35	.28	8.0	0.0	0.0	0.0
100	9999	111	0	387.2	4076.9	6.3	.51	.64	8.0	0.0	0.0	0.0
101	9999	112	0	388.1	4075.4	6.3	.23	.19	8.0	0.0	0.0	0.0
102	9999	113	0	373.7	4072.5	25.0	.08	.08	3.0	0.0	0.0	0.0
103	9999	114	0	377.0	4074.4	6.3	.07	.06	8.0	0.0	0.0	0.0
104	9999	115	0	379.5	4074.3	6.3	.09	.07	8.0	0.0	0.0	0.0
105	9999	116	0	381.7	4074.5	6.3	.22	.12	8.0	0.0	0.0	0.0
106	9999	117	0	383.1	4073.0	6.3	.13	.09	5.0	0.0	0.0	0.0
107	9999	118	0	386.5	4074.2	6.3	.34	.18	8.0	0.0	0.0	0.0
108	9999	119	0	389.7	4074.4	6.3	.33	.34	8.0	0.0	0.0	0.0
109	9999	120	0	392.3	4074.4	25.0	.25	.18	3.0	0.0	0.0	0.0
110	9999	121	0	397.4	4074.4	25.0	.18	.08	3.0	0.0	0.0	0.0
111	9999	122	0	403.4	4074.5	25.0	.07	.05	2.0	0.0	0.0	0.0
112	9999	123	0	408.8	4072.9	25.0	.10	.05	5.0	0.0	0.0	0.0
113	9999	124	0	412.5	4072.5	25.0	.09	.05	3.0	0.0	0.0	0.0
114	9999	125	0	377.0	4072.0	6.3	.12	.09	2.0	0.0	0.0	0.0
115	9999	126	0	379.5	4072.0	6.3	.07	.05	8.0	0.0	0.0	0.0
116	9999	127	0	382.0	4072.0	6.3	.07	.06	8.0	0.0	0.0	0.0
117	9999	128	0	383.6	4070.4	6.3	.15	.15	8.0	0.0	0.0	0.0
118	9999	129	0	387.1	4071.5	6.3	.20	.14	8.0	0.0	0.0	0.0
119	9999	130	0	389.5	4071.8	6.3	.07	.10	4.0	0.0	0.0	0.0
120	9999	135	0	376.0	4067.2	100.0	.12	.08	2.0	0.0	0.0	0.0

SOURCE DATA

SOURCE NUMBER	SIC CODE	SITE CODE	PROC CODE	SOURCE LOCATION (KILOMETERS)		SOURCE AREA (SQ KM)	EMISSION RATE (TONS/DAY)		STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	EXIT TEMP (DEG. K)
				HORIZ	VERT		SO2	PART				
1	50	99	4	384.0	4090.0	0.0	.09	.46	35.0	4.0	30.0	450.0
2	55	100	4	382.7	4089.0	1.0	14.87	1.68	35.0	4.0	30.0	450.0
3	51	101	4	382.0	4088.0	0.0	.37	.03	10.0	-0.0	-0.0	-0.0
4	55	102	4	382.5	4088.2	0.0	.09	.40	50.0	1.0	2.0	370.0
5	60	103	4	396.0	4086.5	0.0	3.38	.34	10.0	-0.0	-0.0	-0.0
6	77	104	1	393.0	4084.0	0.0	.45	.94	10.0	-0.0	-0.0	-0.0
7	69	105	4	410.0	4087.0	0.0	.15	.03	10.0	-0.0	-0.0	-0.0
8	72	106	4	372.0	4085.0	0.0	.26	.42	10.0	-0.0	-0.0	-0.0
9	74	107	7	382.8	4082.6	0.0	.16	1.49	10.0	-0.0	-0.0	-0.0
10	85	109	4	384.5	4081.2	0.0	.01	0.30	10.0	-0.0	-0.0	-0.0
11	87	110	4	388.8	4082.3	0.0	.01	.01	10.0	-0.0	-0.0	-0.0
12	98	112	5	380.9	4079.2	0.0	.06	.50	40.0	2.0	30.0	600.0
13	99	113	4	383.6	4079.7	0.0	.05	.03	15.0	1.0	10.0	400.0
14	99	114	4	383.6	4078.0	0.0	.68	.07	20.0	-0.0	-0.0	-0.0
15	100	115	7	385.2	4078.8	0.0	.05	.50	10.0	-0.0	-0.0	-0.0
16	101	117	4	388.9	4079.1	0.0	.05	5.00	10.0	2.0	6.0	400.0
17	101	118	4	389.1	4078.8	0.0	.05	0.00	10.0	-0.0	-0.0	-0.0
18	103	119	4	398.9	4076.9	0.0	.02	2.29	10.0	-0.0	-0.0	-0.0
19	103	120	4	397.4	4077.5	0.0	.17	3.20	10.0	2.0	4.0	340.0
20	111	121	5	386.4	4076.9	0.0	0.00	.37	10.0	-0.0	-0.0	-0.0
21	111	122	4	386.3	4077.2	0.0	.01	3.00	10.0	-0.0	-0.0	-0.0
22	112	123	4	388.7	4077.0	0.0	.09	.05	10.0	-0.0	-0.0	-0.0
23	112	124	7	388.8	76.4	0.0	.02	.22	10.0	-0.0	-0.0	-0.0
24	112	125	5	388.7	4076.7	0.0	0.00	.69	10.0	-0.0	-0.0	-0.0
25	117	126	5	383.6	4074.2	0.0	.13	.01	10.0	-0.0	-0.0	-0.0
26	117	127	5	382.7	4074.8	0.0	.07	4.41	10.0	-0.0	-0.0	-0.0
27	117	128	5	384.3	4074.3	0.0	.18	.81	15.0	1.0	6.0	350.0
28	106	129	5	410.2	4077.2	0.0	.11	5.65	3.0	1.0	6.0	350.0
29	109	130	7	381.2	4076.2	0.0	.10	.96	10.0	-0.0	-0.0	-0.0
30	117	131	5	384.0	4075.0	0.0	.01	.04	10.0	-0.0	-0.0	-0.0
31	111	132	5	386.0	4075.1	0.0	.30	.01	10.0	-0.0	-0.0	-0.0
32	118	134	5	385.0	4074.9	0.0	.99	.40	10.0	-0.0	-0.0	-0.0
33	123	135	4	408.0	4074.0	0.0	1.53	.12	10.0	-0.0	-0.0	-0.0
34	124	136	4	414.4	4071.0	0.0	.80	.06	10.0	-0.0	-0.0	-0.0
35	128	137	5	384.7	4070.5	0.0	.73	.97	10.0	-0.0	-0.0	-0.0
36	128	139	5	384.5	4070.1	0.0	.01	.01	25.0	1.0	6.0	360.0
37	128	140	4	384.3	4071.4	0.0	.19	.01	10.0	-0.0	-0.0	-0.0
38	128	141	5	384.5	4070.5	0.0	0.00	.12	10.0	-0.0	-0.0	-0.0
39	135	142	4	372.4	4063.5	0.0	.09	.01	10.0	-0.0	-0.0	-0.0
40	128	144	4	383.0	4072.0	0.0	.01	.03	10.0	-0.0	-0.0	-0.0

ORIGINAL PAGE IS OF POOR QUALITY

Table 3.—continued

REGION: WAPLE AREA (FUT ANN)

DATE: 6 OCTOBER, 1972

ORIGINAL PAGE IS
OF POOR QUALITY

SOURCE DATA												
SOURCE NUMBER	SIC CODE	SITE CODE	PROC CODE	SOURCE LOCATION (KILOMETERS)	SOURCE AREA (SQ KM)	EMISSION RATE (TONS/DAY)	SO2	PART	STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	EXIT TEMP (DEG K)
				HORIZ VERT								
81	9999	86	0	387.0	4080.7	6.3	.17	.67	8.0	0.0	0.0	0.0
82	9999	87	0	388.0	4081.8	6.3	.11	.42	8.0	0.0	0.0	0.0
83	9999	88	0	412.2	4080.8	6.3	.09	.39	8.0	0.0	0.0	0.0
84	9999	95	0	373.7	4077.5	25.0	.17	.36	8.0	0.0	0.0	0.0
85	9999	96	0	377.5	4078.8	6.3	.03	.04	8.0	0.0	0.0	0.0
86	9999	97	0	379.5	4078.0	6.3	.04	.05	8.0	0.0	0.0	0.0
87	9999	98	0	382.0	4079.0	6.3	.07	.08	8.0	0.0	0.0	0.0
88	9999	99	0	383.5	4078.0	6.3	.10	.23	8.0	0.0	0.0	0.0
89	9999	100	0	387.0	4079.4	6.3	9.32	3.43	8.0	0.0	0.0	0.0
90	9999	101	0	388.1	4079.2	6.3	.15	.46	8.0	0.0	0.0	0.0
91	9999	102	0	392.5	4077.5	25.0	.35	.81	8.0	0.0	0.0	0.0
92	9999	103	0	397.0	4077.0	25.0	.57	1.00	8.0	0.0	0.0	0.0
93	9999	104	0	402.5	4077.5	25.0	.45	.83	8.0	0.0	0.0	0.0
94	9999	105	0	407.5	4077.5	25.0	.30	.54	6.0	0.0	0.0	0.0
95	9999	106	0	412.2	4078.9	25.0	.32	.42	8.0	0.0	0.0	0.0
96	9999	107	0	377.0	4076.8	6.3	.03	.04	8.0	0.0	0.0	0.0
97	9999	108	0	379.5	4076.2	6.3	.07	.08	8.0	0.0	0.0	0.0
98	9999	109	0	382.0	4076.8	6.3	.14	.16	8.0	0.0	0.0	0.0
99	9999	110	0	384.0	4077.0	6.3	.13	.12	8.0	0.0	0.0	0.0
100	9999	111	0	387.2	4076.9	6.3	.19	.51	8.0	0.0	0.0	0.0
101	9999	112	0	388.1	4075.4	6.3	.08	.14	8.0	0.0	0.0	0.0
102	9999	113	0	373.7	4072.5	25.0	.16	.36	3.0	0.0	0.0	0.0
103	9999	114	0	377.0	4074.4	6.3	.03	.05	8.0	0.0	0.0	0.0
104	9999	115	0	379.5	4074.3	6.3	.04	.05	8.0	0.0	0.0	0.0
105	9999	116	0	381.7	4074.5	6.3	.08	.07	8.0	0.0	0.0	0.0
106	9999	117	0	383.1	4073.0	6.3	.05	.06	5.0	0.0	0.0	0.0
107	9999	118	0	386.5	4074.2	6.3	.13	.12	8.0	0.0	0.0	0.0
108	9999	119	0	389.7	4074.4	6.3	.20	.32	8.0	0.0	0.0	0.0
109	9999	120	0	392.5	4072.5	25.0	.29	.58	3.0	0.0	0.0	0.0
110	9999	121	0	397.5	4072.5	25.0	.24	.48	3.0	0.0	0.0	0.0
111	9999	122	0	402.5	4072.5	25.0	.18	.41	2.0	0.0	0.0	0.0
112	9999	123	0	408.8	4072.9	25.0	.06	.09	5.0	0.0	0.0	0.0
113	9999	124	0	412.5	4072.5	25.0	.04	.03	3.0	0.0	0.0	0.0
114	9999	125	0	377.0	4072.0	6.3	.22	.47	2.0	0.0	0.0	0.0
115	9999	126	0	379.5	4072.0	6.3	.03	.04	8.0	0.0	0.0	0.0
116	9999	127	0	382.0	4072.0	6.3	.04	.06	8.0	0.0	0.0	0.0
117	9999	128	0	383.6	4070.4	6.3	.10	.10	8.0	0.0	0.0	0.0
118	9999	129	0	387.1	4071.5	6.3	.09	.11	8.0	0.0	0.0	0.0
119	9999	130	0	389.5	4071.8	6.3	.06	.10	4.0	0.0	0.0	0.0
120	9999	135	0	376.0	4067.2	100.0	.06	.07	2.0	0.0	0.0	0.0

Table 3.--continued

REGION: ROSELK AREA (PLT ANN)

DATE: 6 OCTOBER, 1972

42

SOURCE DATA													
SOURCE NUMBER	SIC CODE	SITE CODE	PROC CODE	SOURCE LOCATION (KILOMETERS)		SOURCE AREA (SQ KM)	EMISSION RATE (TONS/DAY)		STACK HEIGHT (METERS)	STACK DIAMETER (METERS)	EXIT VELOCITY (M/SEC)	EXIT TEMP (DEG K)	
				HORIZ	VERT		SO2	PART					
121	9999	136	0	385.0	4065.0	100.0	.51	.65	3.0	0.0	0.0	0.0	0.0
122	9999	137	0	395.0	4067.2	100.0	.12	.10	0.0	0.0	0.0	0.0	0.0
123	9999	138	0	405.0	4067.2	100.0	.04	.03	0.0	0.0	0.0	0.0	0.0
124	999	139	0	415.0	4065.0	100.0	.03	.02	0.0	0.0	0.0	0.0	0.0
125	9999	146	0	378.0	4067.5	400.0	0.08	.01	0.0	0.0	0.0	0.0	0.0
126	9999	147	0	391.6	4054.7	400.0	.04	.05	0.0	0.0	0.0	0.0	0.0
127	9999	148	0	409.3	4056.2	400.0	0.00	.01	0.0	0.0	0.0	0.0	0.0





ORIGINAL PAGE IS
OF POOR QUALITY

EXPLANATION

o Area centroids

28 Point sources¹

¹Keyed to table 8



0 .5 1 KILOMETRE

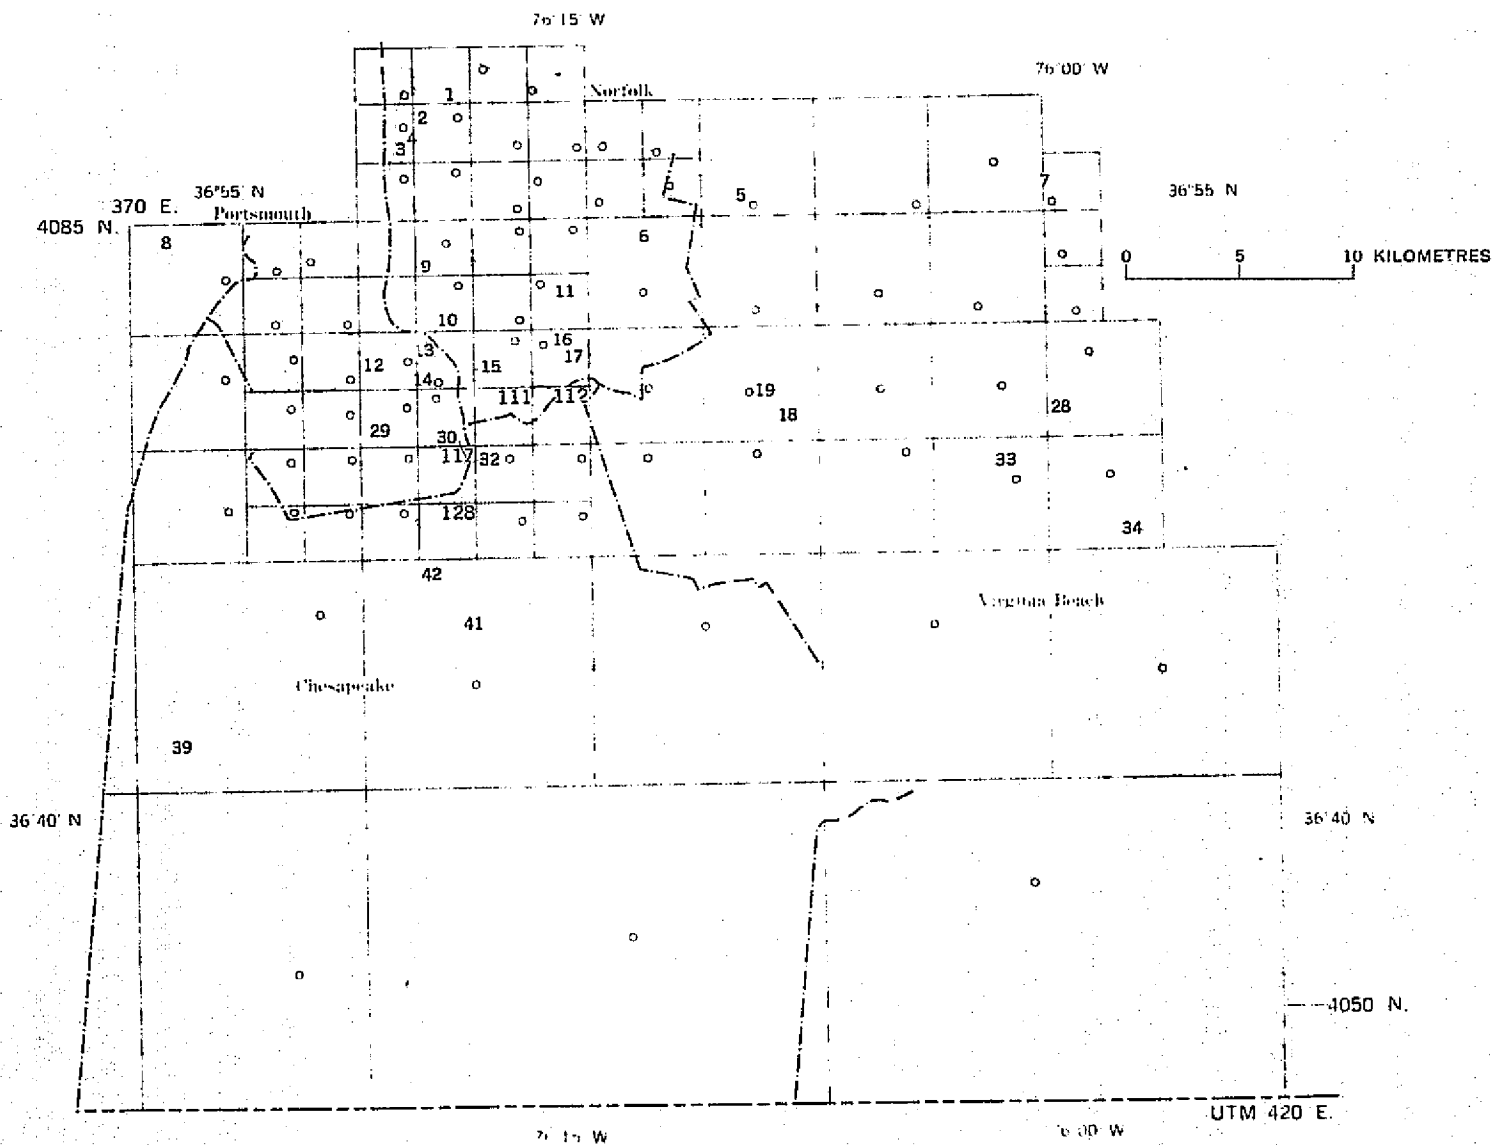


Figure 6--1970 Norfolk-Portsmouth SMSA, selected point sources and centroids of area emission cells

Seasonality

The Air Pollution Control Board's original inventory divided the emissions of area and point sources into seasonal increments. The current registration program does not provide seasonal or other periodic emission rates. If the staff of the board could determine that point sources had modified their winter operating patterns, the original winter season estimates were reduced or increased to reflect these changes. For the remaining point and area sources, however, winter emissions levels were taken as estimated in the original inventory.

Future Emission Patterns

Air quality planning for the Norfolk area must consider the impact of growth and future emission levels. Along with its capacity for estimating current patterns of emissions, the pilot national land use information system can be easily used to estimate future land use patterns and associated emission levels.

For each grid cell the rate of change between 1959 and 1970 in Level I and II land use categories was determined from the graphic information provided by the CARETS project maps. The Southeastern Virginia Planning District Commission provided 1985 population and employment projections for each of the SMSA jurisdictions along with estimated amounts of land use that would be required to accommodate a recommended pattern of future land use (figure 7). Residential and commercial land use changes to 1985 were postulated for the area by extrapolating past trends in land use change given by the pilot system and the commission's projections of utility and transportation installations (Henningson, Durham, and Richardson, 1972 and Wilbur Smith and Associates, 1969). The likelihood of a given area emissions

a

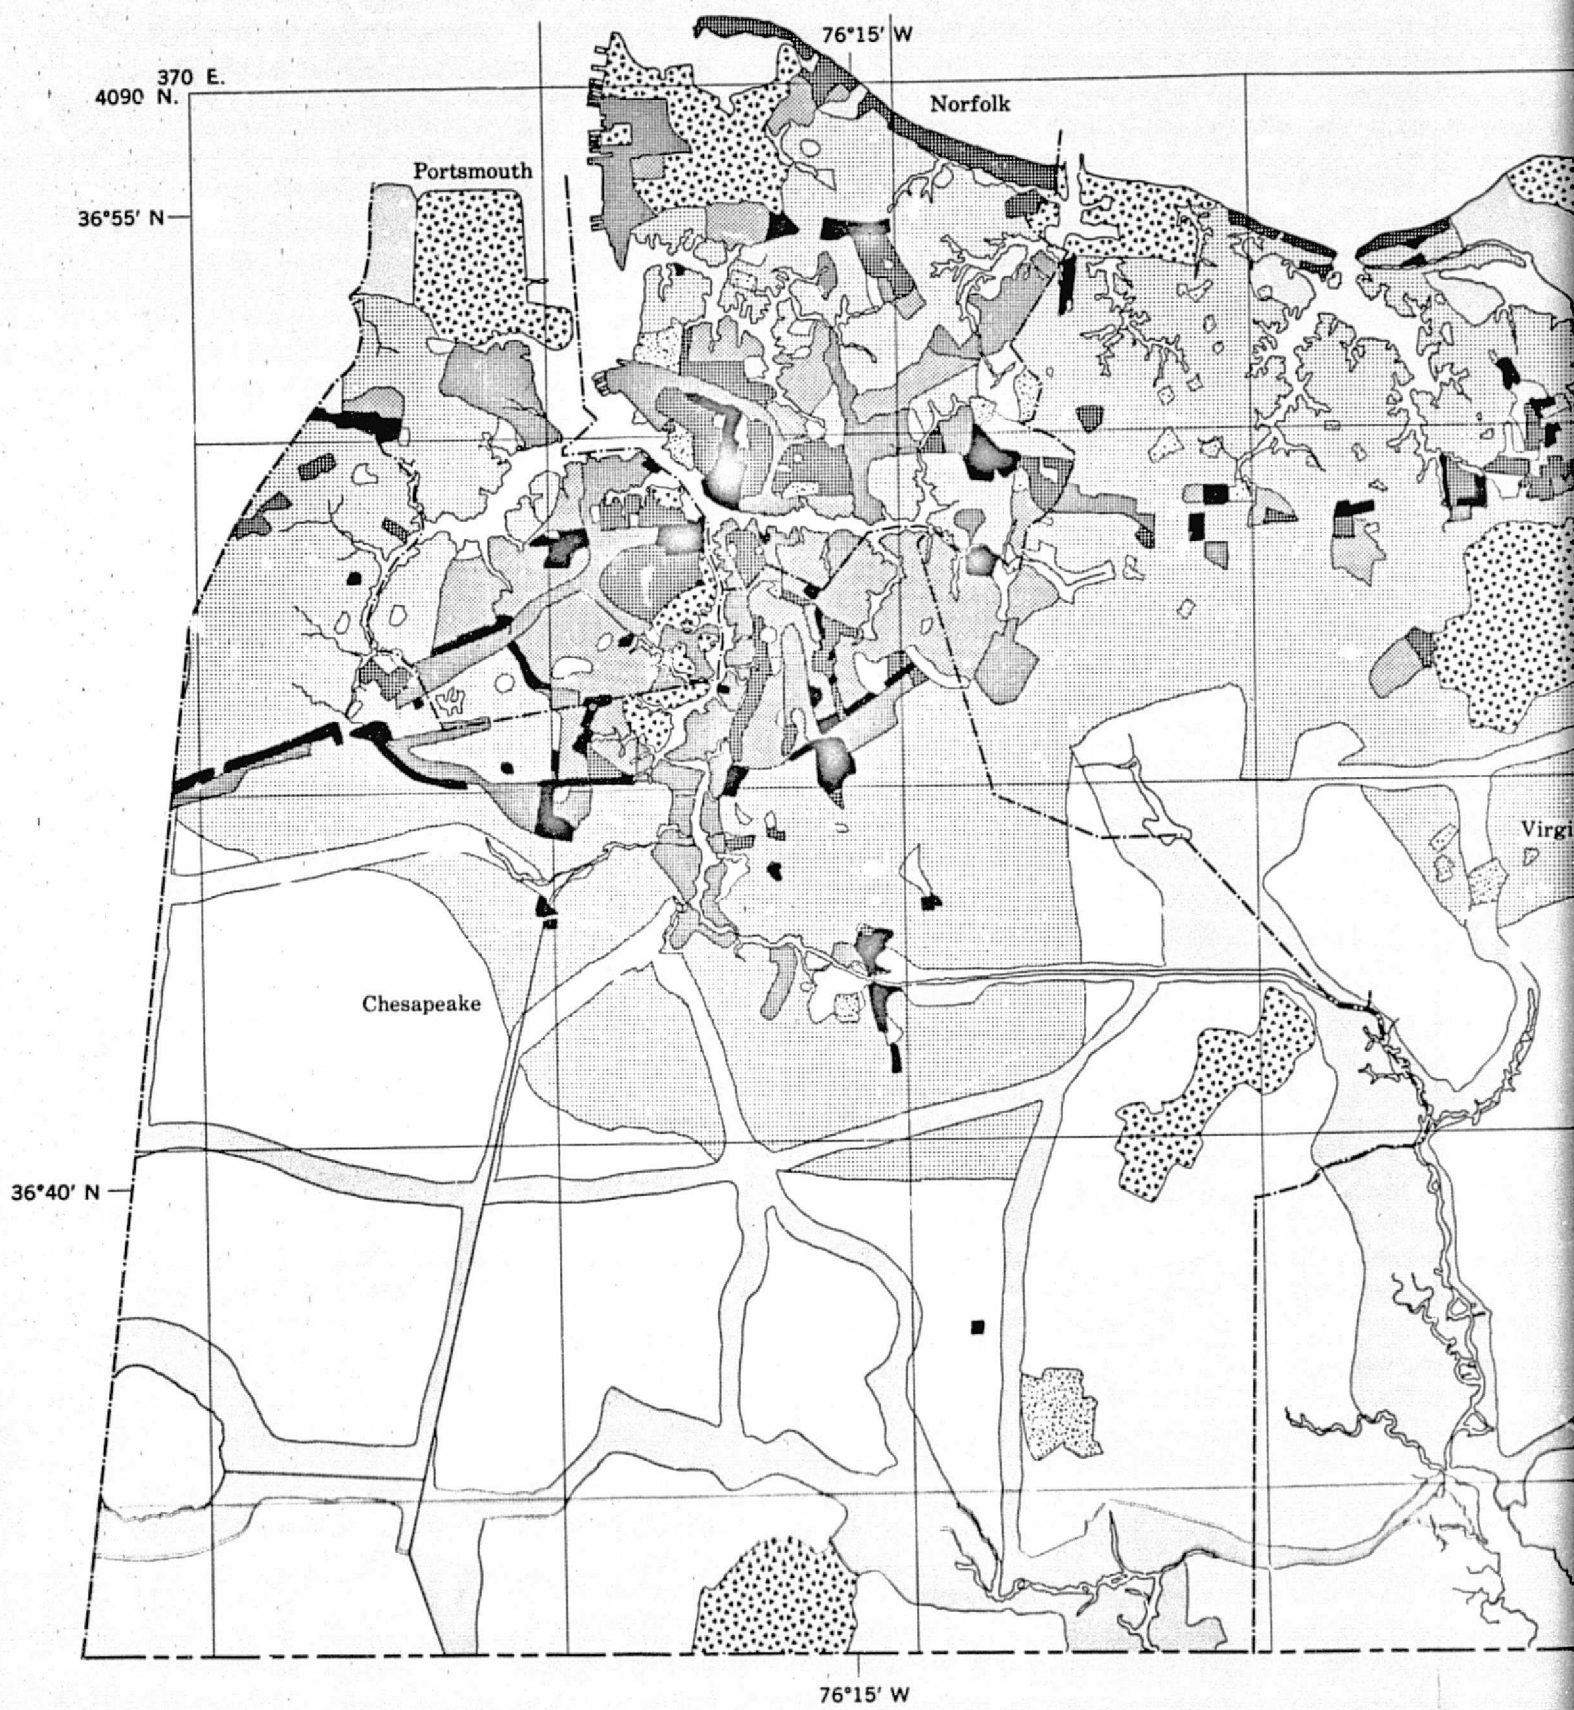
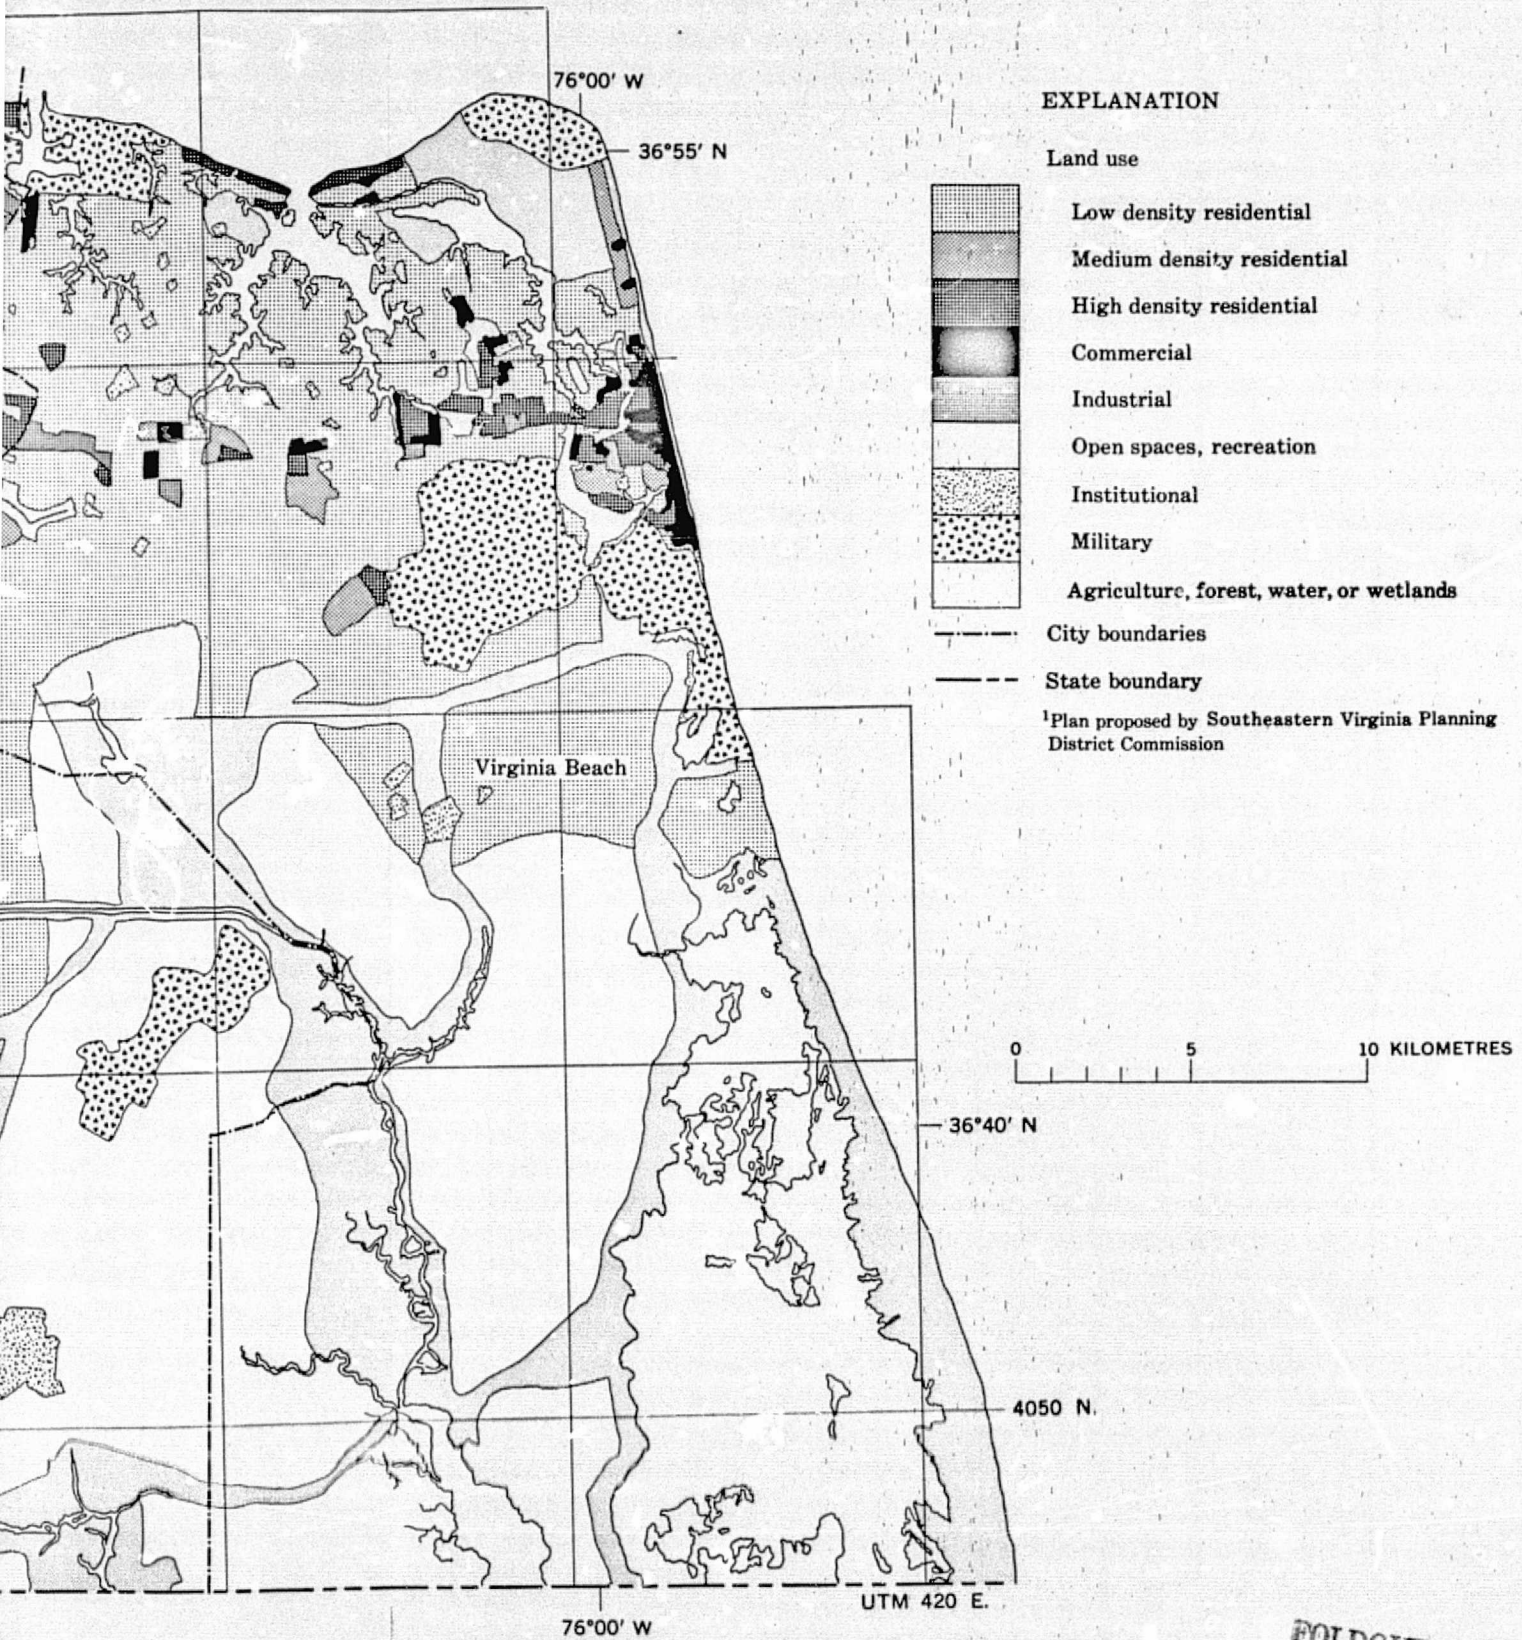


Figure 7--1970 Norfolk-Portsmouth SMSA; proposed land use, 1985

FOLDOUT FRAME /

PROPOSED LAND USE 1985¹

FOLDOUT FRAME ↙

estimating cell being developed to a given level by 1985 was estimated from this information as were standards for population density, zoning regulations, and anticipated building practices suggested by the commission.

It was assumed that emission levels from existing area sources would continue unchanged to 1985 because much of the SMSA's residential development is of recent origin; decreases in emissions per vehicle would be offset by an increased number of traffic vehicles; and small new area sources would compensate for the existing area emissions that have recently upgraded their controls or ceased emissions. Emission levels per square kilometre from residential and associated land uses to be developed by 1985 were estimated on the basis of anticipated space heating procedures, 1985 traffic volumes, and land uses to be permitted in various areas. These estimates, .01 tons of sulfur dioxide and .25 tons of particulates per day/km² were multiplied by the number of kilometres of residential and other land uses projected for each cell. These values were added to the existing amount of area emissions to estimate the 1985 total area source emissions for each cell.

Future emission levels for the 44 point sources included in this study were estimated on the basis of control programs proposed to the Air Pollution Control Board by various firms. These control programs incorporate standards for levels of emissions currently required by Virginia legislation and the Air Pollution Control Board rules (Commonwealth of Virginia, 1972b and 1972c). For purposes of this study it was estimated that no new major point source would locate outside areas of existing industrial development. Table 4 gives the inventory of point emissions sources used in 1985 estimates.

Table 4--Point sources included in air diffusion modelling of
Norfolk-Portsmouth SMSA^{1/}

Identification Number ^{2/}	Name of Source
1	Naval Air Rework Facility, Norfolk Naval Air Station
2	Naval Public Works Center, Norfolk Naval Air Station
3	Naval Supply Center, Norfolk Naval Air Station
4	Sheller Globe Corporation
5	Naval Amphibious Base
6	Norfolk Regional Airport
7	Fort Story
8	Tidewater Community College, Frederick Campus
9	City of Norfolk Incinerator
10	Owen Pattern Foundry and Manufacturing Company
11	Colonial Block Corporation
12	Georgia Pacific Corporation
13	Dixie Manufacturing Company
14	U.S. Naval Hospital
15	City of Norfolk Incinerator
16	Ames and Webb, Inc.
17	Southern Block and Pipe
18	Contractors Paving Company
19	Asphalt Roads and Materials
20	Richard Foundry Corporation
21	Colonna's Shipyard, Inc.
22	Ford Motor Company
23	Norfolk Redevelopment and Housing Authority

^{1/}Source detailed on following page

^{2/}Identification numbers keyed to table 3 and figure 6

Table 4--Continued

Identification Number ^{2/}	Name of Source
24	Southland Cork Company
25	Atlantic Creosoting Company
26	Portsmouth Paving Corporation
27	Norfolk Veneer Mills, Inc.
28	Finley Paving Corporation
29	City of Portsmouth Incinerator
30	Norfolk Naval Shipyard
31	Norfolk Shipbuilding and Drydock Corporation
32	Royster Company
33	Oceana Naval Air Station
34	Fleet Anti-Air Warfare Training Center
35	Swift Agricultural Chemicals Corporation
36	Weaver Fertilizer Company
37	Lone Star Industries
38	Southern States Coop., Inc., Fertilizer Division
39	Lone Star Industries
40	Naval Ammunition Depot, St. Julien Creek
41	Solite Masonry Units Company
42	Intercoastal Steel Corporation
43	Virginia Electric and Power Company
44	Smith-Douglass

^{1/}Selection of sources based on high levels of emission identified in Commonwealth of Virginia, State Air Pollution Control Board Implementation Plan, "Inventory Section," Richmond, Virginia, January, 1972, and in point-source emission registration forms received by the Virginia State Air Pollution Control Board, July and August 1972.

^{2/}Identification numbers keyed to table 3 and figure 6

Land Use and Norfolk Area Emissions Patterns

Plotting the spatial distribution of area and point source emissions provides basic information for evaluating the design of air quality sampling programs and estimating the likely impact of different air quality control strategies. Figures 8 through 13 show the estimated average quantity and distribution of sulfur dioxide and particulate emission in the Norfolk area for 1972 annual and winter 1971-72 periods and for an annual 1985 period. Total emissions by area cell given in table 3, were converted to per square kilometre values and are indicated by isolines. The average of major point source emissions for each cell are also plotted. The similarity between sulfur dioxide and particulate emission patterns in these figures reflects the emission of both pollutants by most sources throughout the Norfolk area. Because of the area's space heating, traffic, and industrial characteristics, particulate matter is emitted at higher levels than sulfur dioxide from all but a few point sources.

In these figures the pattern of high annual emission from point and area sources clearly reflects the concentrations of industrial, commercial, and old, dense residential activities in central Norfolk and Portsmouth (figures 8 and 11). To the east, lower emissions reflect the combination of low-density residential, commercial, transportation, and industrial land use and water and agricultural land use. The extent of high area source emissions surrounding central Norfolk and Portsmouth is larger in winter due to increased space heating in medium- and low-density residential areas (figures 9 and 12), but otherwise the patterns of winter emissions reflect annual patterns.

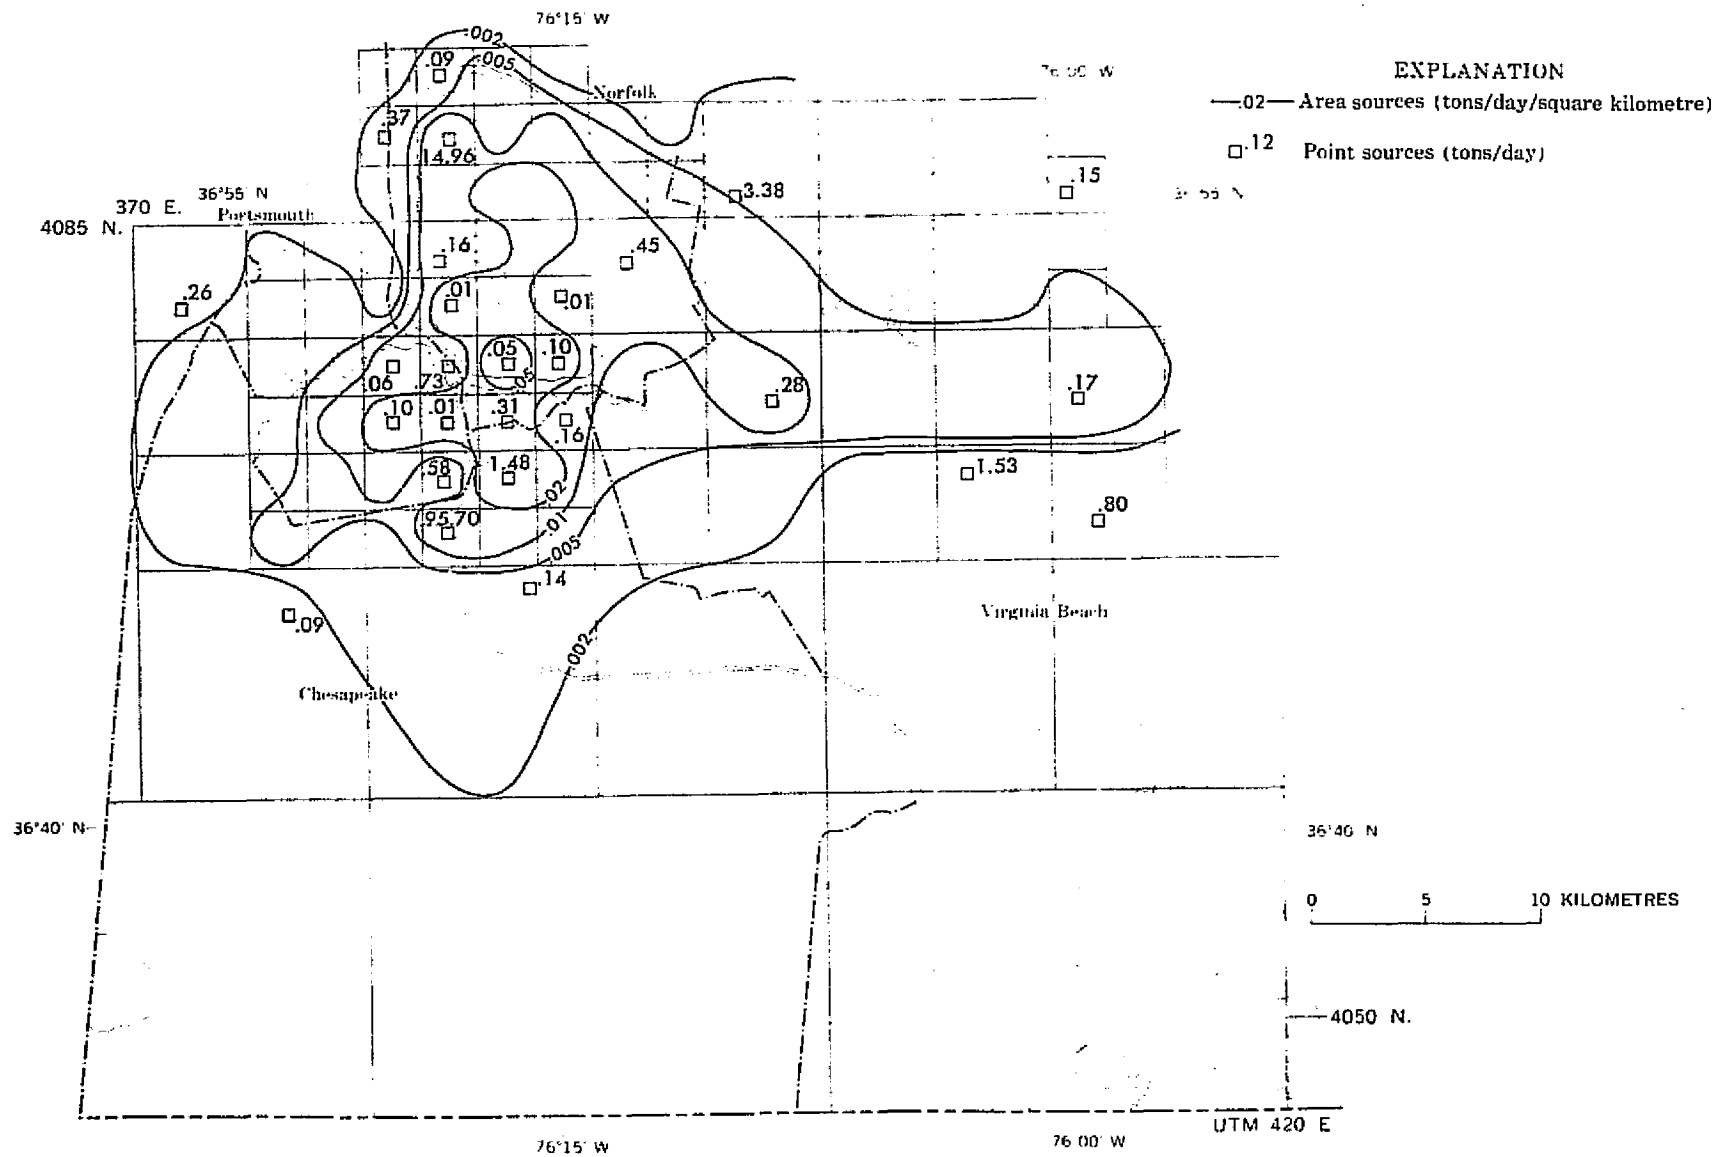


Figure 8--1970 Norfolk-Portsmouth SMSA, estimated emissions of sulfur dioxide, 1972

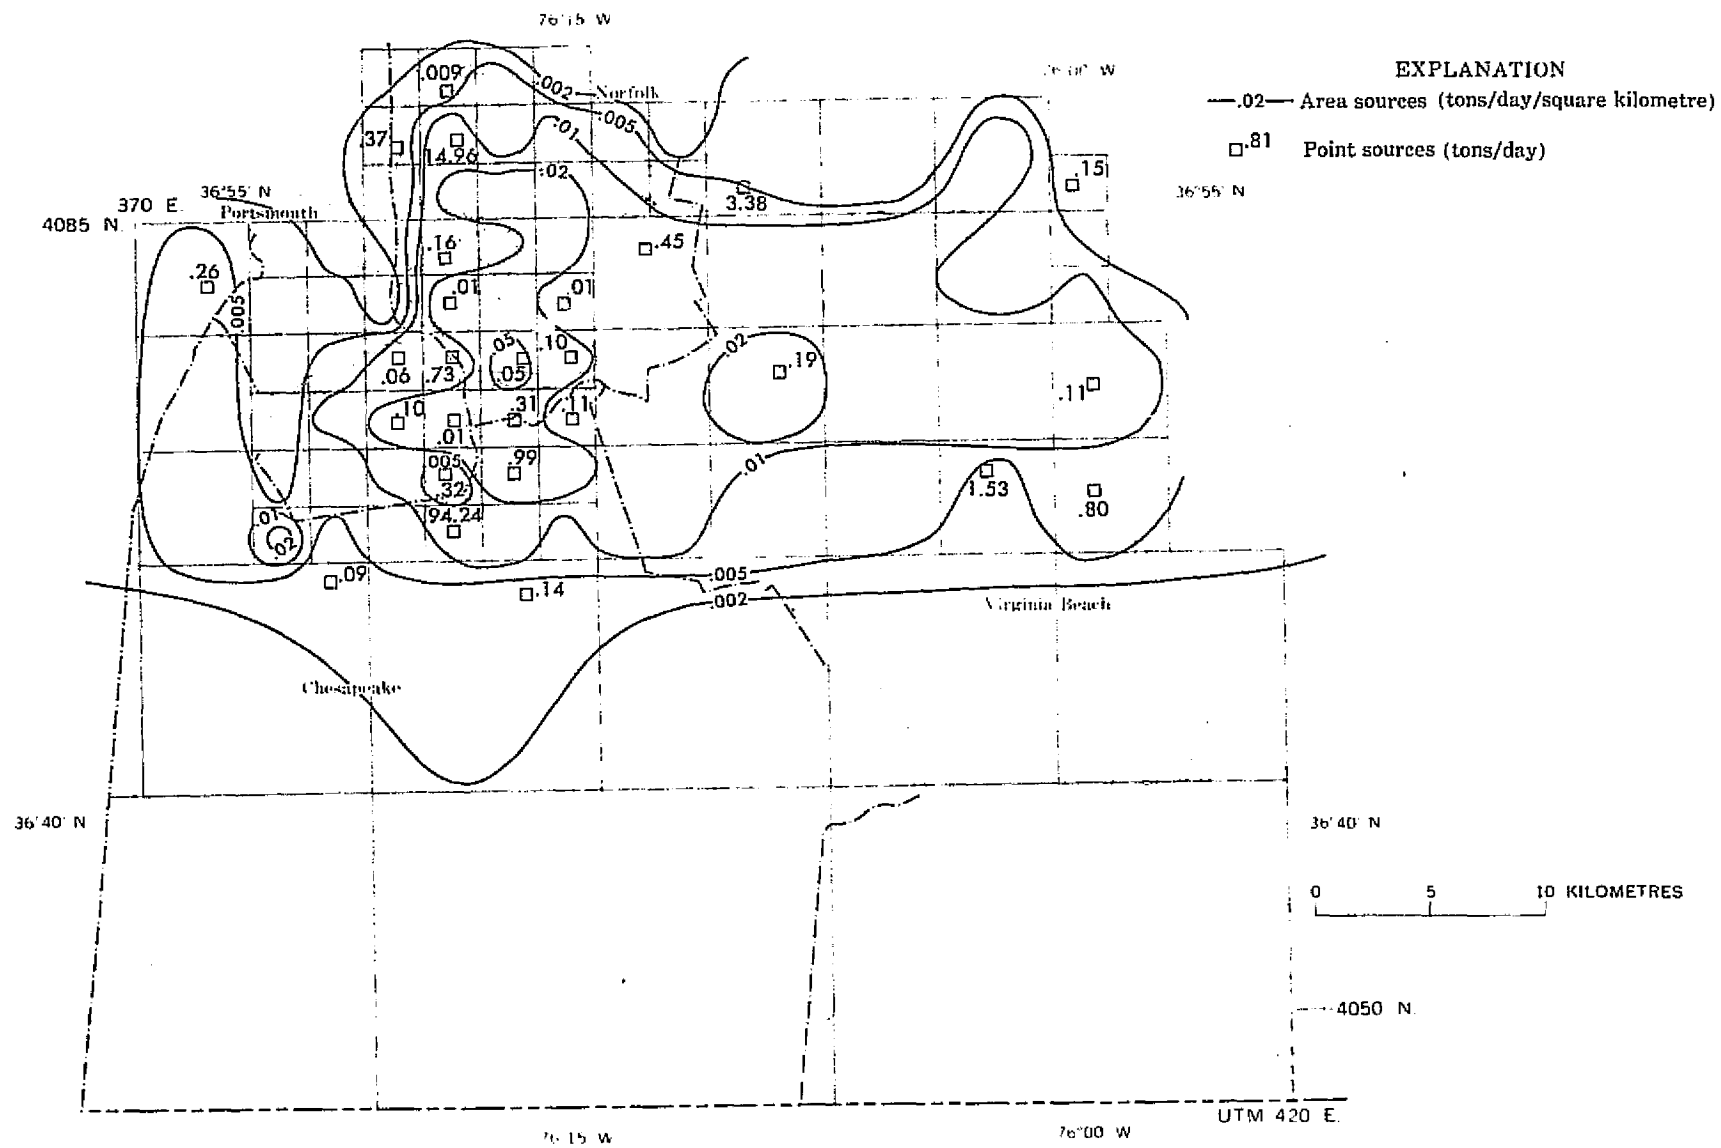


Figure 10--1970 Norfolk-Portsmouth SMSA, estimated emissions of sulfur dioxide, 1985

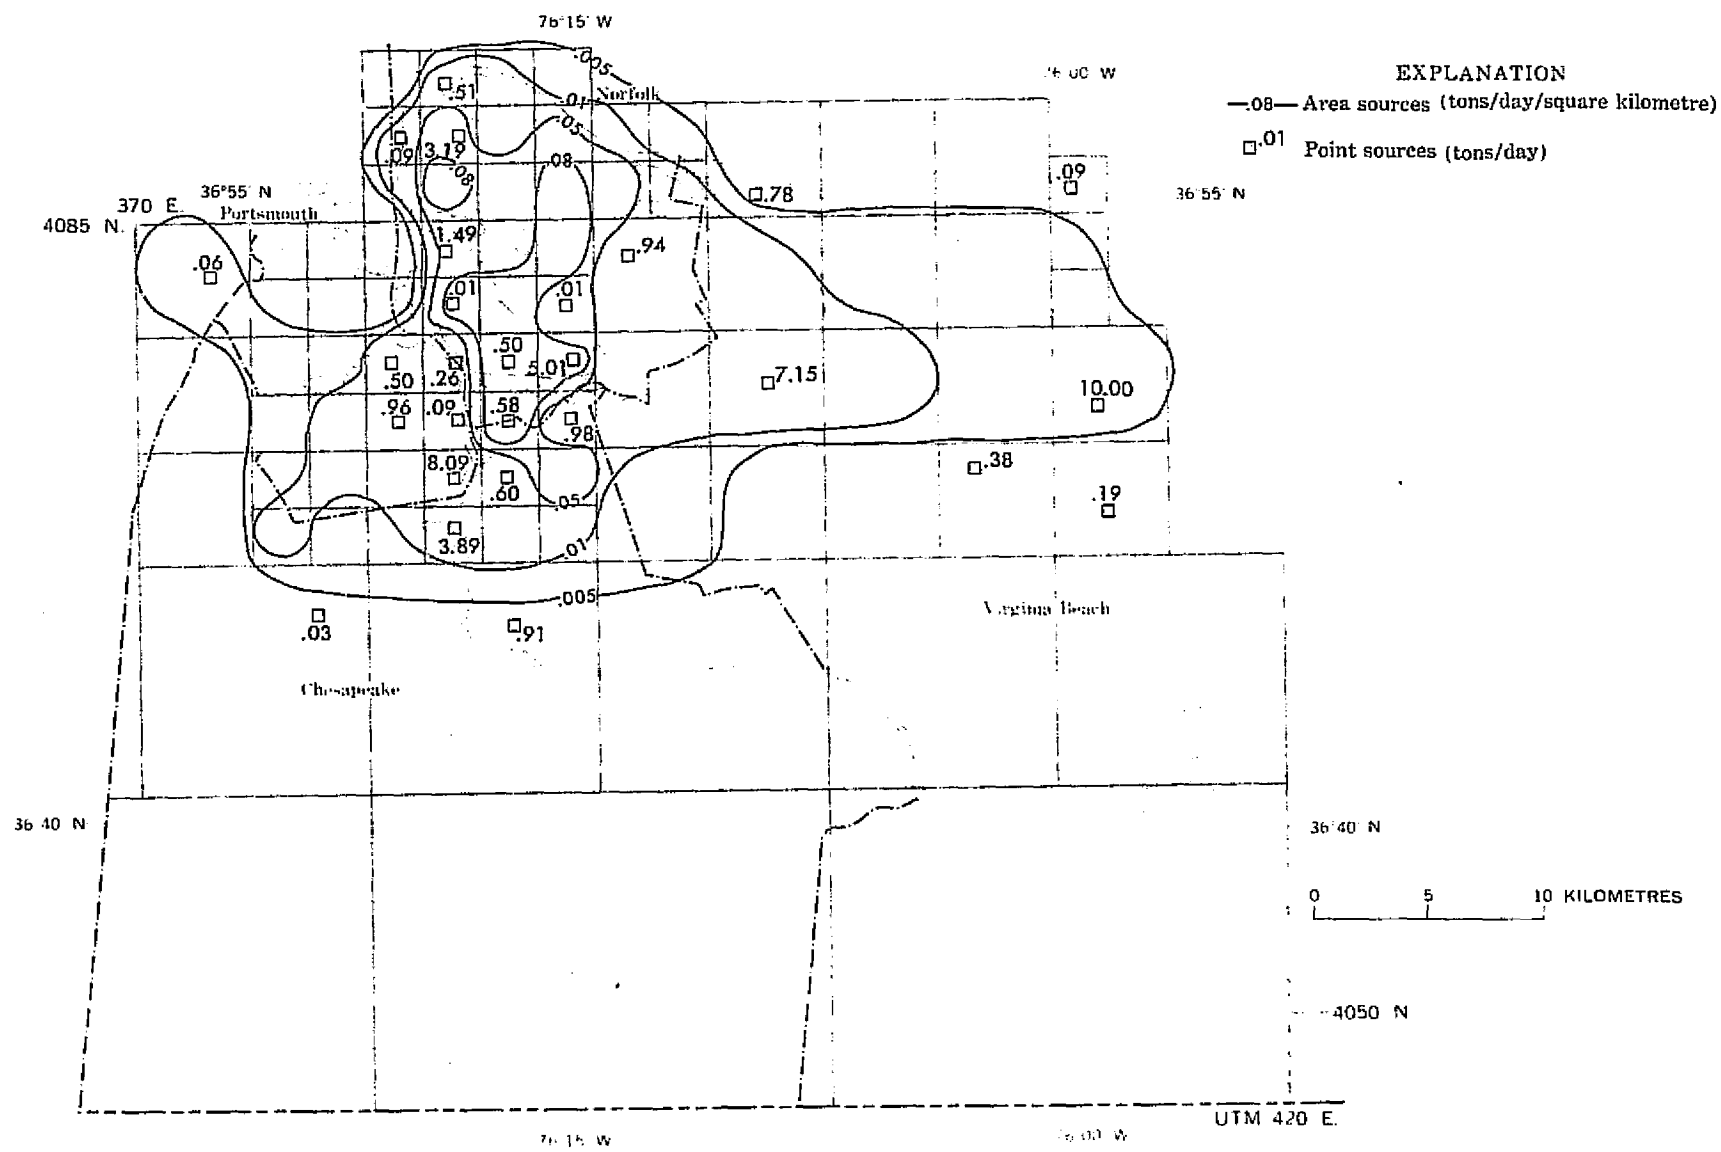


Figure 12--1970 Norfolk-Portsmouth SMSA, estimated emissions of particulates, winter 1971-72

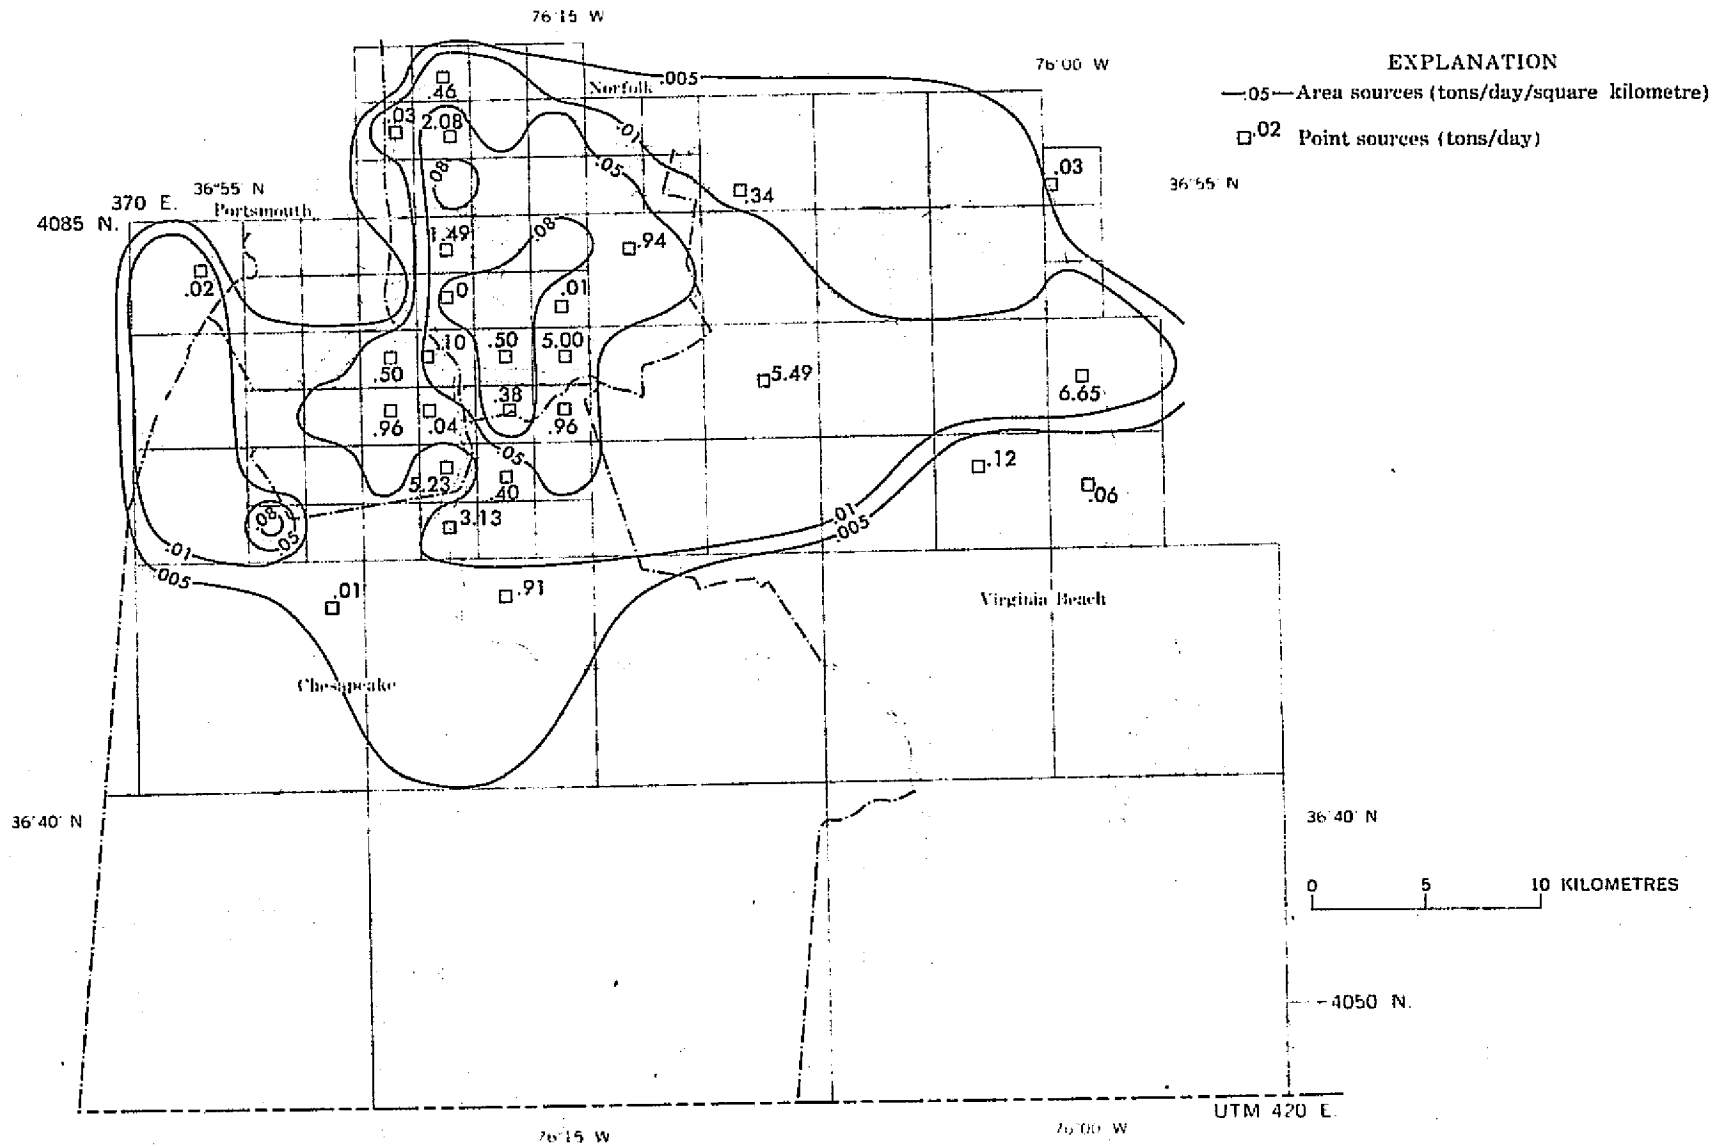


Figure 13--1970 Norfolk-Portsmouth SMSA, estimated emissions of particulates, 1985

The estimated 1985 annual emission patterns (figures 10 and 13) show the projected urban expansion into nonurbanized area. Because of the attraction of waterfront property, the Southeastern Virginia Planning District Commission anticipates that Atlantic and Chesapeake waterfronts will be filled by 1985.

Determining Spatial Distribution Patterns of Air Quality

To evaluate Norfolk area control strategies, patterns of emission need to be related to actual levels of pollutant (sulfur dioxide and particulates) concentration determined by air quality sampling throughout the region.

The air quality sampling stations shown in figure 14 were established by October 1972; the majority of them had been in operation less than 1 year (Commonwealth of Virginia, 1972d). Figure 14 suggests that their spatial distribution does not reflect the diversity and density of land uses impacted by these pollutants. Because reliable sampling information was not available, estimates of the areawide dispersion and concentration of sulfur dioxide and suspended particulates were made.

Estimating pollutant diffusion patterns

The problem of estimating pollutant dispersion and the characteristics of a pollution plume is couched in the exercise of describing the turbulent motion of air. As turbulence, at this time, is best described by probabilistic means, the most widely used and successful model for characterizing pollution dispersal is the Gaussian plume model. Wanta (1968, p. 217) outlined this model in simple terms, "the mass of pollutant emitted from a continuous point source moves downwind at a constant speed, at the same time

MARGINAL PAGE IS
OF POOR QUALITY

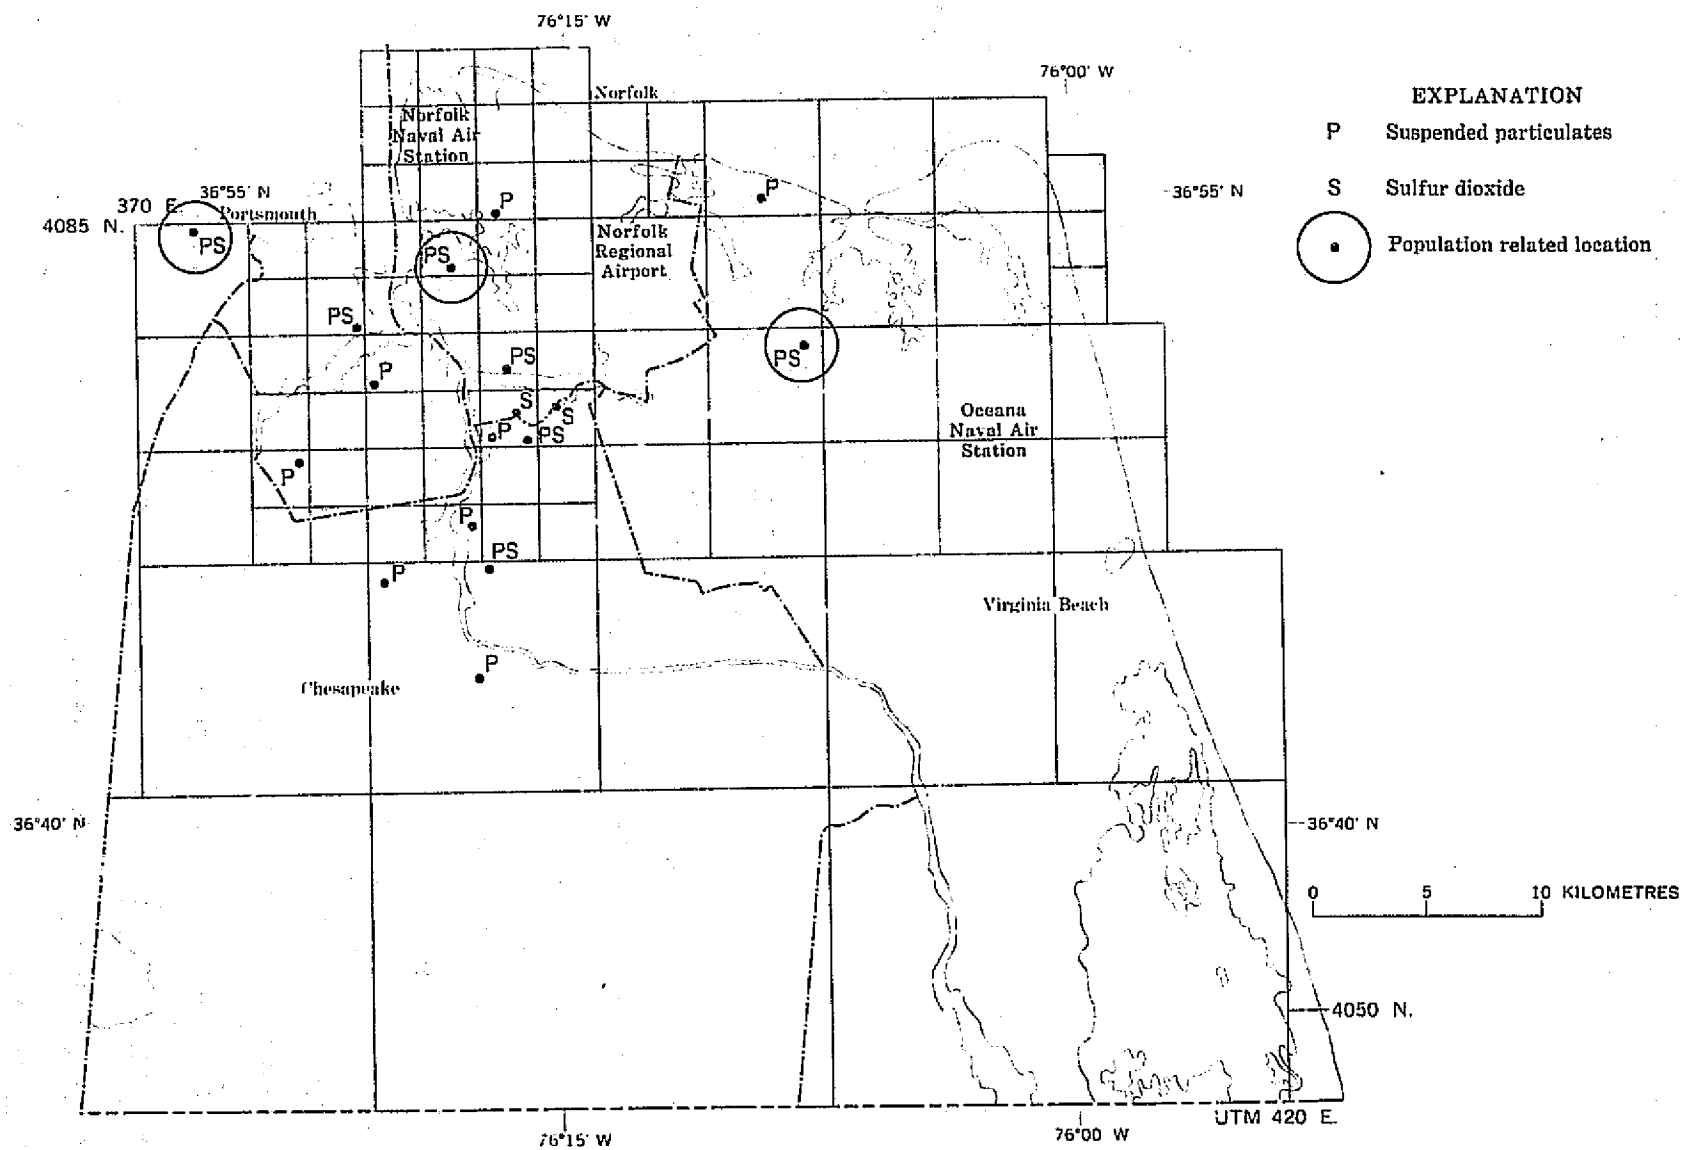


Figure 14--1970 Norfolk-Portsmouth SMSA, location of air quality sampling stations, October 1972

spreading horizontally and vertically in such fashion that while the mass in any cross section remains constant, the distribution of concentration of pollutant in the cross section along either the horizontal or vertical direction is bell-shaped, i.e., normal or Gaussian. The standard deviations of these two normal distributions are adjustable and increase with distance and time; they are diffusion coefficients or simple functions of them. The standard deviation of the horizontal profile of pollutant concentration is generally much greater than that of the vertical. Allowance can be made for the presence of nearby reflecting planes such as the ground or an elevated ideal temperature inversion. Modifications for instantaneous source and other geometrics are also available."

Wanta (1968) presents an excellent outline of urban air pollution diffusion models, especially summarizing Smith (1961), Pooler (1961), Turner (1964), Clarke (1964), Koogler and others (1967), and Miller and Holzworth (1967); all of these models are variations of the basic Gaussian model.

Turner (1970) has published a workbook for calculating a numerical solution for pollutant concentration and diffusion, and Forsdyke (1970) has briefly summarized meteorological factors concerned with the Gaussian model.

Hanna (1971) has described a simple but physically realistic model for estimating pollutant concentrations resulting from area source emissions in a city. Pollutant concentrations for the surface are directly proportional to local area source strength and inversely proportional to wind speed. The model is simple, yet results appear to compare favorably with more complex diffusion models.

Investigators have also worked with other types of models. Getis and Jackson (1971) have constructed a model to determine the probability of a specified area being polluted by a specified number of sources. This model is based on a Poisson distribution function that is used to generate areal pollution zones. Lamb (1971) and Egan and Mahoney (1971) have used a deterministic approach in estimating pollution dispersal; the general method is to solve the system of partial differential continuity equations with suitable initial and boundary conditions. This approach is much less tractable than the Gaussian model and, accordingly, less popular. Egan and Mahoney (1972) have also discussed the use of specified source models and box models for estimating pollution dispersal.

All of the models mentioned above can be calculated for either point or area source emissions or both. With a Gaussian model, the nature of the emission source and its strength are primary factors.

Work has begun on the development of receptor models based on either Bayesian statistics or on some other probability function that can characterize pollution concentration only in terms of receptor information. In the future this type of model may find wider applications than the source models now in use (U.S. Environmental Protection Agency, 1974).

Model used to estimate Norfolk area air quality

The Martin-Tikvart model, entitled the Air Quality Display Model (ADQM), is the diffusion model used in this analysis. It has been used by EPA to assess air quality standards for the designated air control regions in the United States (U.S. Environmental Protection Agency, 1970). The basic equation in the model

is a slightly modified Gaussian diffusion equation for an elevated, continuously emitting point source. The calculations have been adjusted to estimate long-term average concentrations for multiple polluting sources, both point and area sources, under a variety of meteorological conditions.

Wind direction in the AQDM is assumed to be specified on a 16-point compass, corresponding to 22.5° sectors. For an averaging period, all wind directions within a given sector are assumed to occur with equal chance.

Hourly data are used to calculate the joint frequency distribution of meteorological conditions. Wind speed is grouped into six classes and the nature of the atmospheric stability into five classes. These factors are discussed in a following section and relate directly to characteristics of the Norfolk area. For a particular combination of meteorological conditions at any receptor point at distance (p) within a given distance, the ground-level concentration (X; g/m³) due to a point source with emission rate (Q; g/s) is:

$$X(p, l, S) = [2Q[(2\pi)^{\frac{1}{2}} \sigma_z(p, l) u(S) (2\pi p/16)] \exp[-\frac{1}{2}(H/\sigma_z(p, l))^2]]$$

where u(S) is wind speed (m/s) representative of a wind speed class (S), H is effective stack height (m), and $\sigma_z(p, l)$ is standard deviation (m) of the vertical concentration distribution (Gaussian) for a ground-level emission. This expression is a function of the distance (p) from the source and the atmospheric stability class (l). The model also includes a time-delay function for SO₂, for which the half life used in this exercise was 4 hours.

For each receptor location, the model sums the effect of all sources over a wide range of meteorologic conditions. Modifications are made

for σ_z under certain conditions, and effective stack height (H) is determined in the usual manner. For more detailed information on these two aspects see Martin (1971). Area sources in the model are treated as a virtual point source at some distance upwind from the center of the area source (see figure 15).

In summarizing, the input data consist of pollutant emission source, source configuration and location, receptor location, and the meteorological information. Output data are listed for each grid and nongrid receptor specified. The output results are the arithmetic mean of ground level concentration of either SO_2 , or geometric means of particulates, or both; additional information is supplied for five user-selected receptor sites or the five maximum receptor sites. The contribution of a given point or area source to each receptor is indicated as a percentage of the total concentration on the receptor grid, and this information is displayed by the construction of an isopleth map of the pollution distribution. The receptor grid used in the Norfolk area consisted of 2.5-km^2 cells; the nature and rationale for this grid size will be discussed in a later section.

Calibration of the AQDM for a particular area begins with the calibration of concentration values--3 to 100 values for each pollutant studied--at specified measuring stations. A least-square regression analysis is conducted between the measured (independent variable) values of pollutant concentration.

If the regression line adequately describes a "good" association between measured and observed values, the model output results are adjusted at each receptor point according to the parameters calculated from the regression equation. The "goodness" of the association is determined by the calculation of a correlation coefficient that is compared to a maximum

ORIGINAL PAGE IS
OF POOR QUALITY

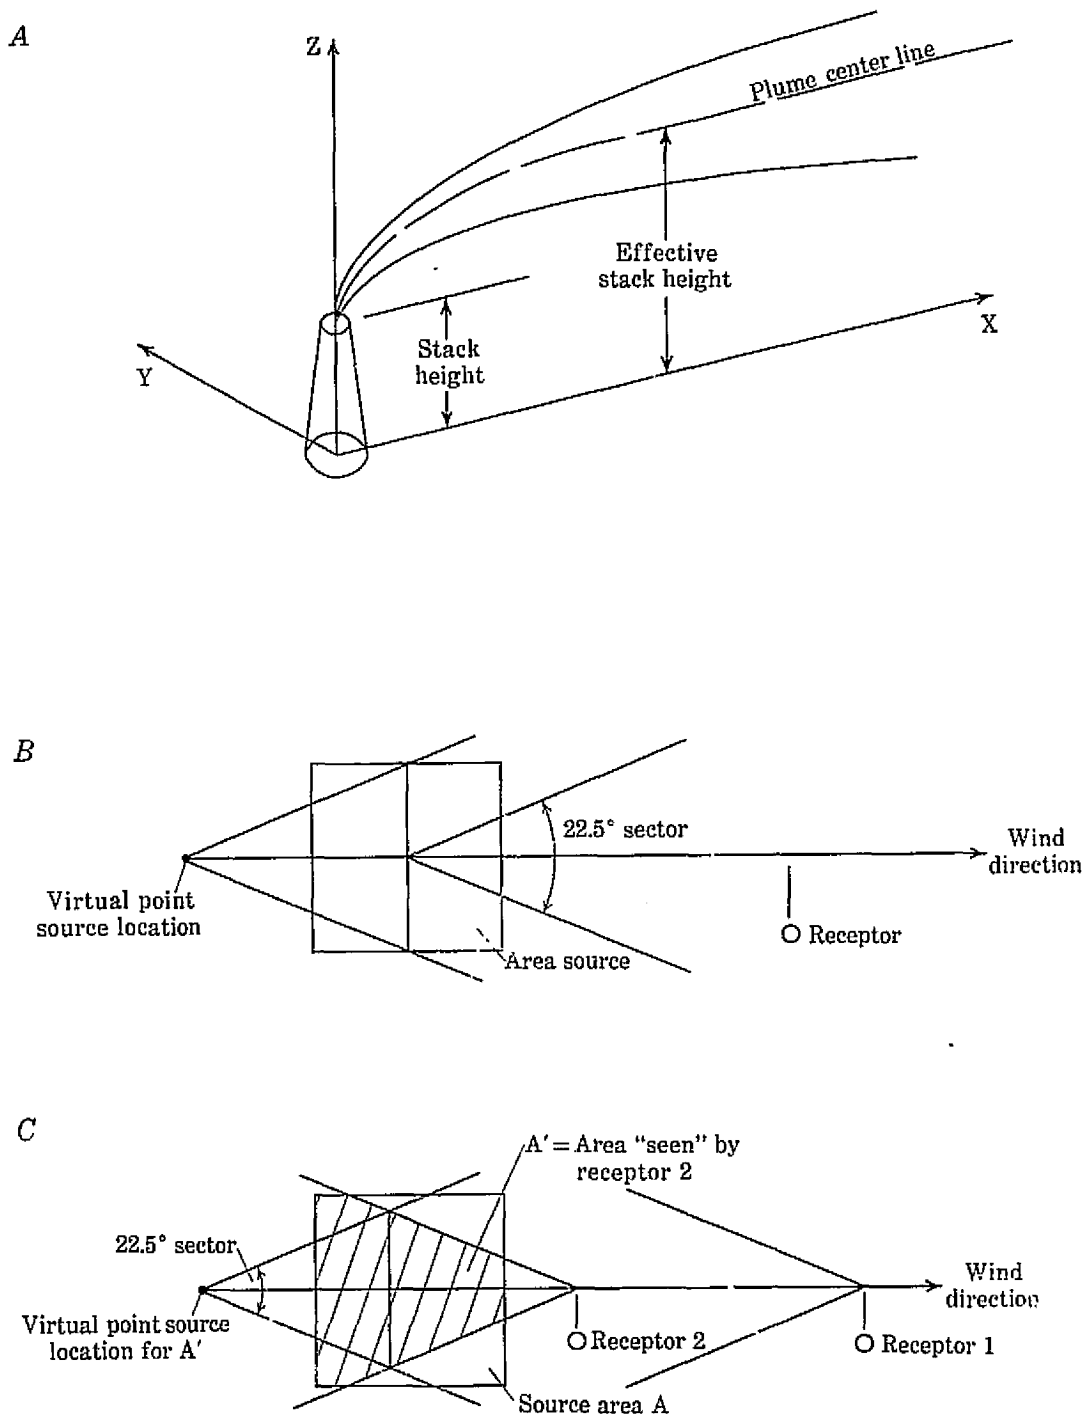


Figure 15--Treatment of point (A) and virtual point for area source (B and C) diffusion patterns in air quality display model (AQDM).

theoretical value that could have resulted due to chance. When the correlation is termed nonsignificant, the calculated concentration will be output without adjustment. Because of the lack of sample data, this correlation procedure was not utilized in this work.

Some words of caution must be expressed concerning the use of this type of model and the assumption upon which it is based: 1) The model was originally developed to represent plume behavior from actual point sources over open, flat terrain for distances of less than a few miles; the Norfolk area approximates this situation fairly closely, as it is located on a peninsula with little relief and the buildings are predominantly one-story residential complexes. 2) The surface meteorological data often provide poor characterization of the vertical nature of the lower atmosphere. 3) Emission inventories input to AQDM are subject to compoundable errors in that the model uses annual average emission figures that may be influenced by significant diurnal and seasonal variation (TRW Systems Group, 1969, p. 2-6, 2-7 and A-3).

Norfolk area airflow characteristics

The meteorological factors that influence the dispersion of pollutants are wind speed and atmospheric stability, i.e., the observed lapse rate. The effects of turbulence are included in both of these factors. Concentration at any point downwind is inversely proportional to wind speed, since increasing the wind speed increases the volume into which the pollutant is dispersed for a given time period. The observed lapse rate determines whether vertical motion in the atmosphere will be enhanced or suppressed, and thus determines the rate of dispersion of pollutants. Both of these parameters are used as inputs to the AQDM.

Stability of the atmosphere is classified into five categories based on the works of Pasquill as found in Turner (1964), who states: "Stability near the ground is dependent primarily upon net radiation and wind speed. Without the influence of clouds, insolation (incoming radiation) during the day is dependent upon solar altitude, which is a function of time of day and time of year. When clouds exist, their cover and thickness decreases incoming and outgoing radiation. In this system insolation is estimated by solar altitude and modified for existing conditions of total cloud cover and cloud ceiling height. At night, estimates of outgoing radiation are made by considering cloud cover..." The stability classes are A) extremely unstable, B) moderately unstable, C) slightly unstable, D) neutral, and E) slightly stable.

The seasonal and annual wind distribution (direction and speed percentages) and frequency of Pasquill stability classes have been calculated by the National Climatic Center, Asheville, North Carolina, (Job 13599) for Station No. 13750, Norfolk, Virginia, Naval Air Station. On the basis of 24 observations a day from December 1966 to November 1971, it was determined from Slade and others (1961), that the Naval Air Station (NAS) site gave good representation of the annual and winter wind rose for the greater Norfolk area. This representativeness and the hourly measurements were the overriding considerations in the choice of Norfolk NAS rather than one of the other three meteorological stations in the area. A slight discrepancy exists between Norfolk NAS and Oceana NAS during the winter afternoons-- a small increase in the wind direction from the east and southeast for Oceana NAS, which is located east of the Norfolk NAS and close to the Atlantic Ocean.

On an annual basis the stability frequency is as follows: 6 percent-B, 12 percent-C, 47 percent-D, and 32 percent-E, which accounts for 97 percent of all stability occurrences (figure 16). The greater frequency of D and E stability classes is an apparent anomalous condition for an urban setting. Stability class C usually predominates in urban areas because the cityscape provides greater surface roughness, which increases mechanical turbulence, and because the higher temperature of cities versus rural areas (the urban heat-island effect) produces more thermal turbulence. The Norfolk area has more instances of stable conditions because of its geographic setting. The Norfolk region is situated on a peninsula where the adjacent water areas decrease both the thermal turbulence caused by the urban heat-island effect and mechanical turbulence. The latter occurs because the water has a lower surface roughness (Van der Hoven, 1967).

The wind direction for the annual period is as follows, in decreasing percentages based on 16 points of the compass: 1) 10.5 percent-SSW; 2) 9.1 percent-S, and 9.1 percent-N; 3) 7.5 percent-W; and 4) 7.1 percent from both E and NNE (figure 16). The remaining directions each account for less than 7 percent. The lowest value is 3 percent from ESE. The highest average wind speed was from the N and NNE at 10.2 knots. A 6 percent incidence of calm was reported.

The winter season (Dec.-Jan.-Feb.) displays slight variations from the annual situation. The stability class percentages are: 1) 7 percent-C, 2) 58 percent-D, and 3) 31 percent-E (figure 17). A greater percentage of more stable conditions exists during the winter, as seen in the increase of the class D and the decrease of the class C. As compared to the annual period,

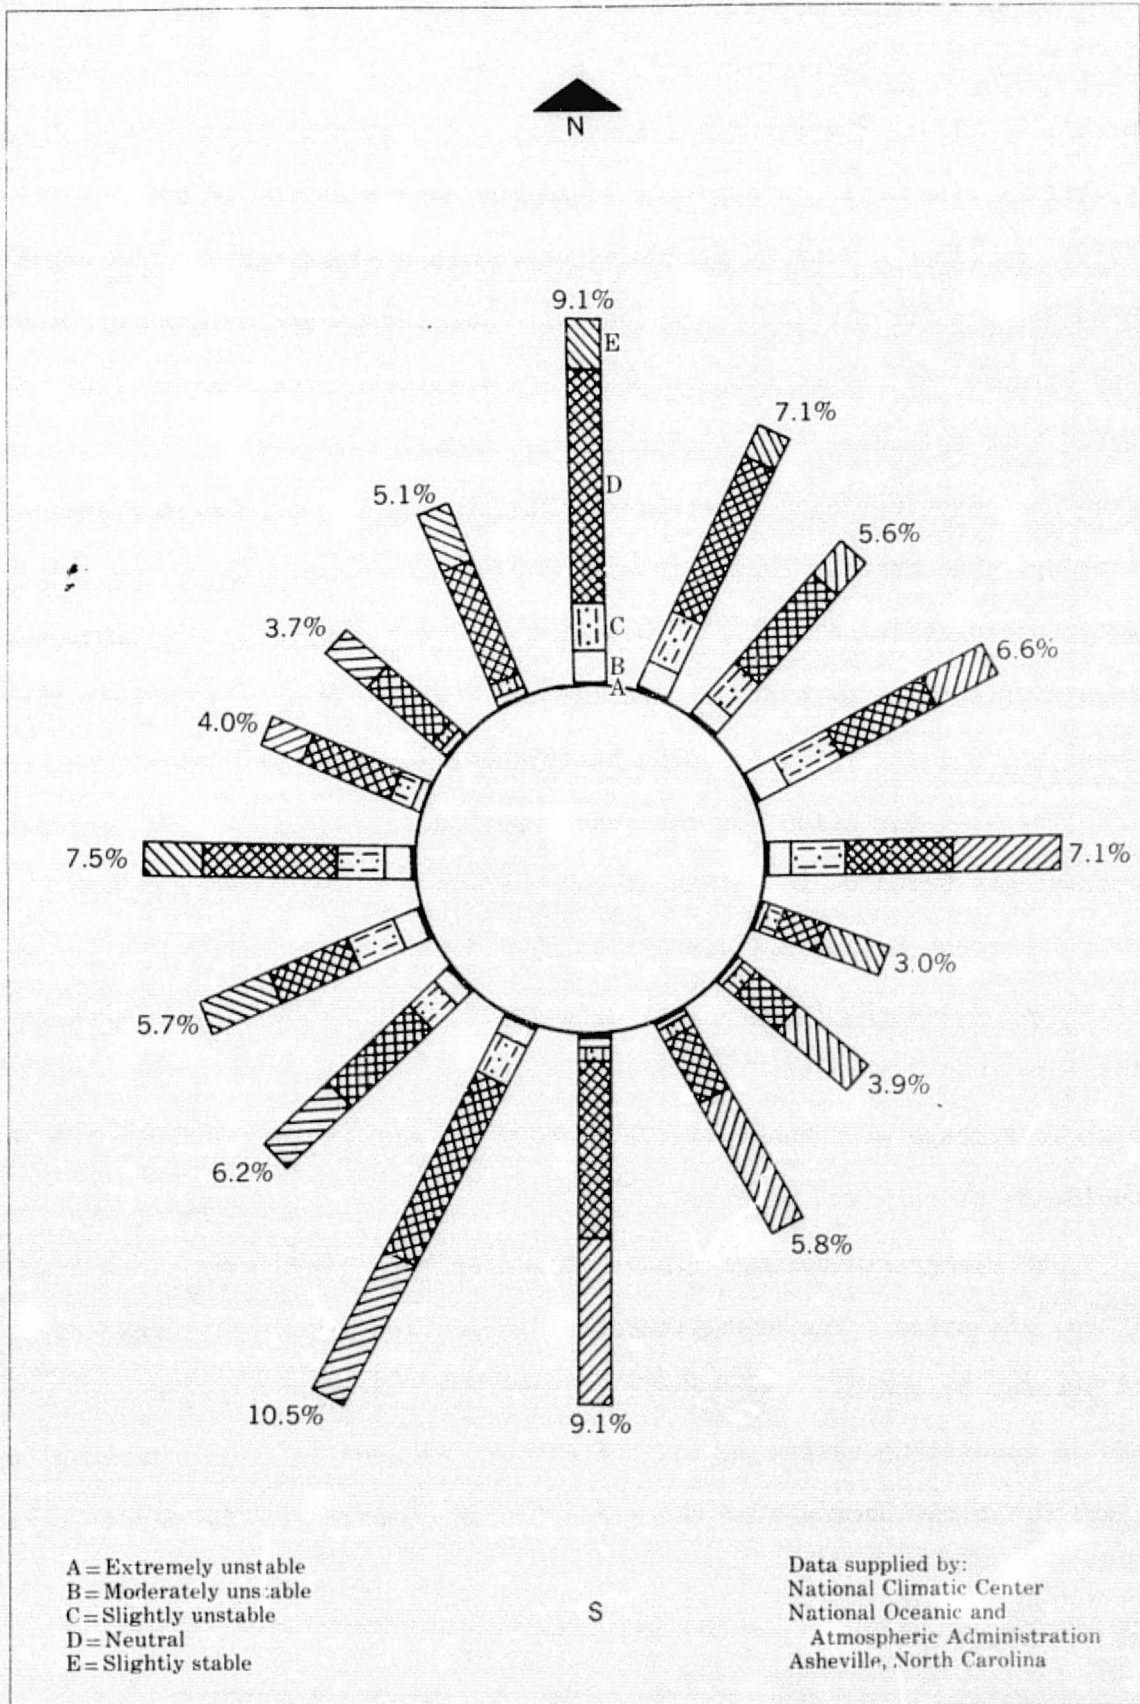


Figure 16--Annual stability wind rose, December 1966--November 1971, Norfolk Naval Air Station

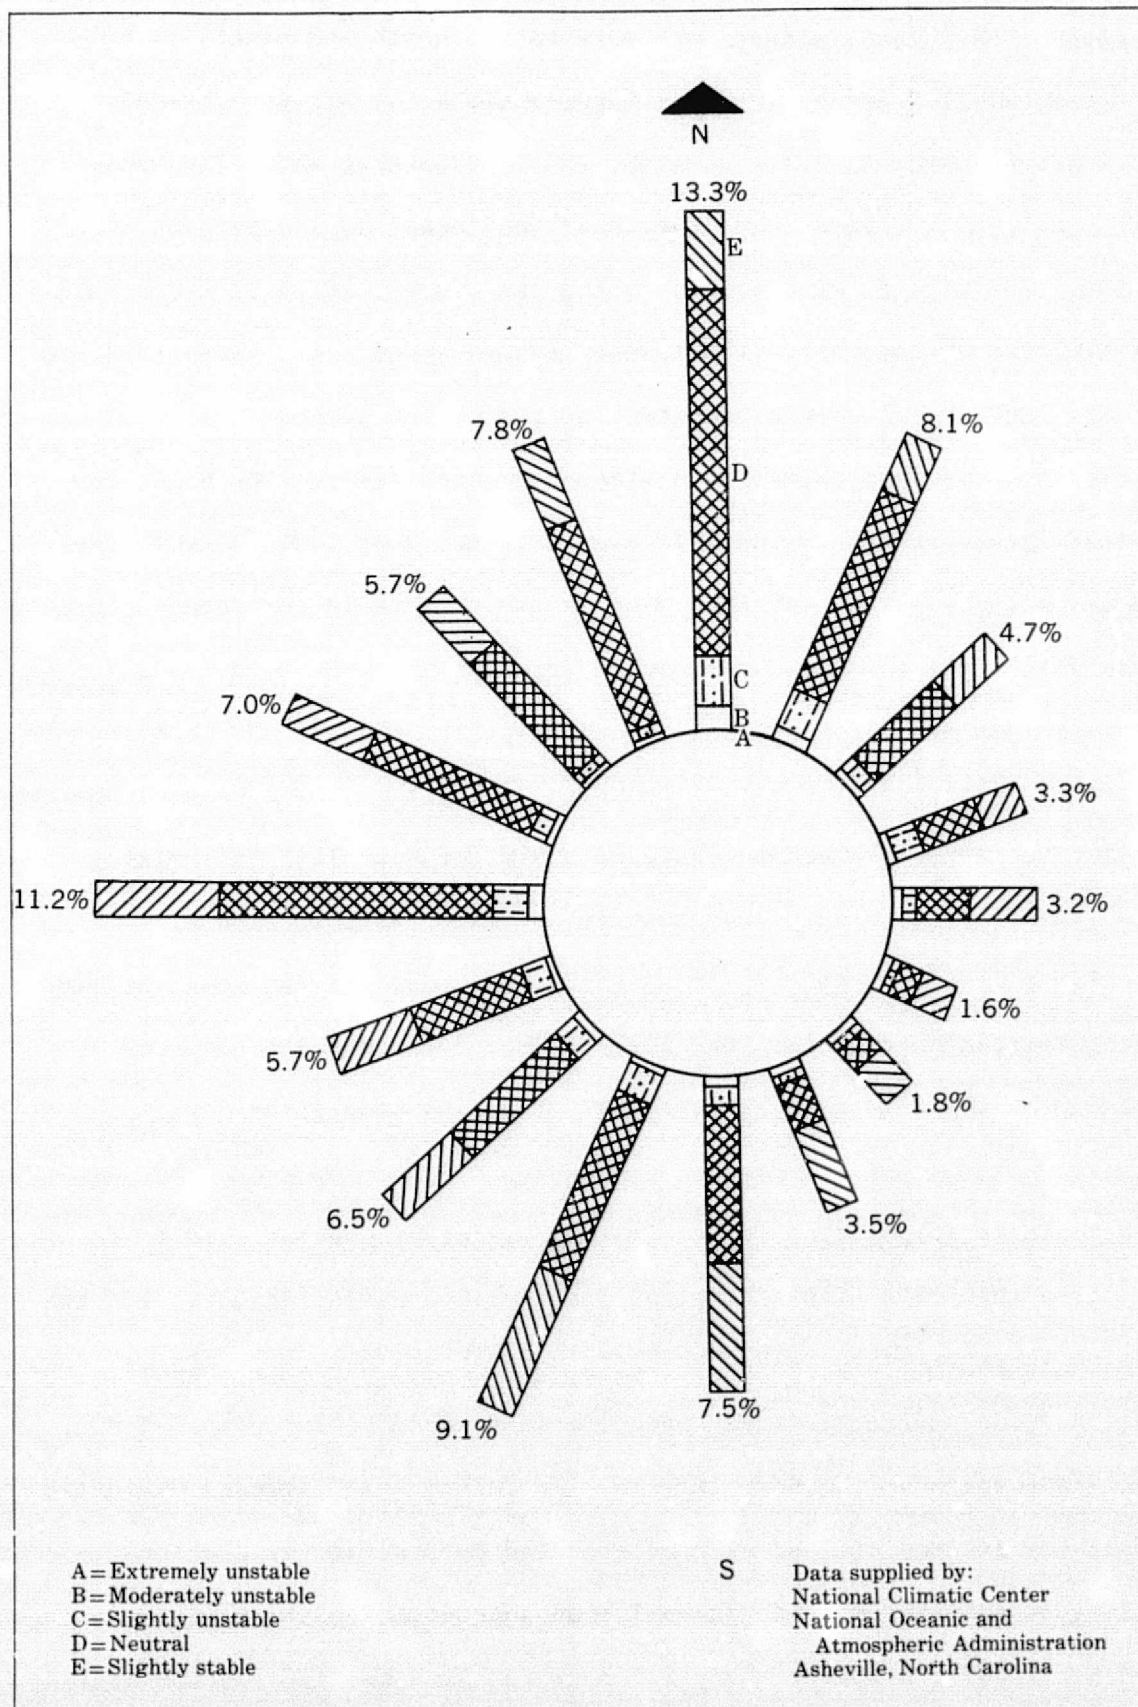


Figure 17--Winter stability wind rose, December 1966--November 1971, Norfolk Naval Air Station

the wind directions in winter turn more to the north and west: 1) 13.3 percent-N; 2) 11.2 percent-W; 3) 9.1 percent-SSW; 4) 8.1 percent-NNE; 5) 7.8 percent NNW; 6) 7.5 percent-S; and 7) 7 percent WNW. The remaining directions each are less than 7 percent; the lowest is 1.6 percent from the ESE. The highest wind speeds during the winter, 10 to 11 knots, all come from the NW quadrant. The lowest average speed was 5 knots from the SE. Six percent calms were reported for the winter period: 1) the greatest frequency of calms for a given hour occurred at 2200 h; 2) the greatest frequency of low-level inversion occurred at 0300 GMT when the wind direction was from the SSW, with fairly comparable percentages through to the NW; 3) the seasonal frequency of precipitation by wind direction was primarily from the NNE and N and secondarily from SSW and NNW, but only 11.5 percent of total yearly rainfall occurred during the winter season. Holzworth (1964) gives afternoon mixing depth of 600 m for Norfolk. This mixing depth appears to be a very conservative estimate, as Holzworth has recently updated his analysis to an annual afternoon mixing depth of 1200 m for the Norfolk area (Holzworth, 1972). This revised value was not available at the time this experimental study was undertaken.

Selection of grid patterns for estimating pollutant concentrations

Given this diffusion-estimating procedure, atmospheric data, and the emission inventories described earlier, current and future levels of sulfur dioxide and particulate concentrations could be calculated for locations throughout the Norfolk area. To relate this estimate pollution pattern to patterns of land use and selected points for air quality sampling, a grid for estimating pollution concentration for receptors was established. Although the pilot national land use information system

could provide data at a precision of 4 ha (approximately 10 acres), the spatial resolution of this grid was constrained by the estimating of area source emissions inventories at a resolution of 6.25 km² or larger. To remain within the precision of the emissions inventories and the capabilities of the estimating model itself, researchers determined that attempts to estimate pollution concentrations on a larger scale than 6.25 km² were not warranted.

From the location of point and area source emissions shown in figure 6 and the location and density of land uses to be impacted, a regular receptor grid of 2.50 km² cells was selected and superimposed on the area source emissions estimating grid at approximately the center of the 6.25 km² cells (figure 18). Because of the distance decay function in the model, locating the receptor points coincident with emission centroids for point or area sources would have resulted in estimated levels of pollution much higher than would be expected to occur as pollutants diffuse over the entire area of a cell. Alternatively, to have randomly offset the grid from area or point emission sources would have resulted in many clusterings of receptor points, leaving large areas unevaluated. The 2.50-km density of receptor points was extended into the 10-, 25-, and 100-km² grid cells to estimate how these rapidly developing lower density cells are currently being impacted. In addition, a set of receptor points was specifically placed coincident with the location of existing air quality sampling stations indicated in figure 14. The same grid was used for future estimation.

Norfolk land use and estimated air pollutant concentration patterns

On the basis of the estimated emissions inventories and receptor grid, the air pollutant concentration estimating program, ADQM, of the Air Quality

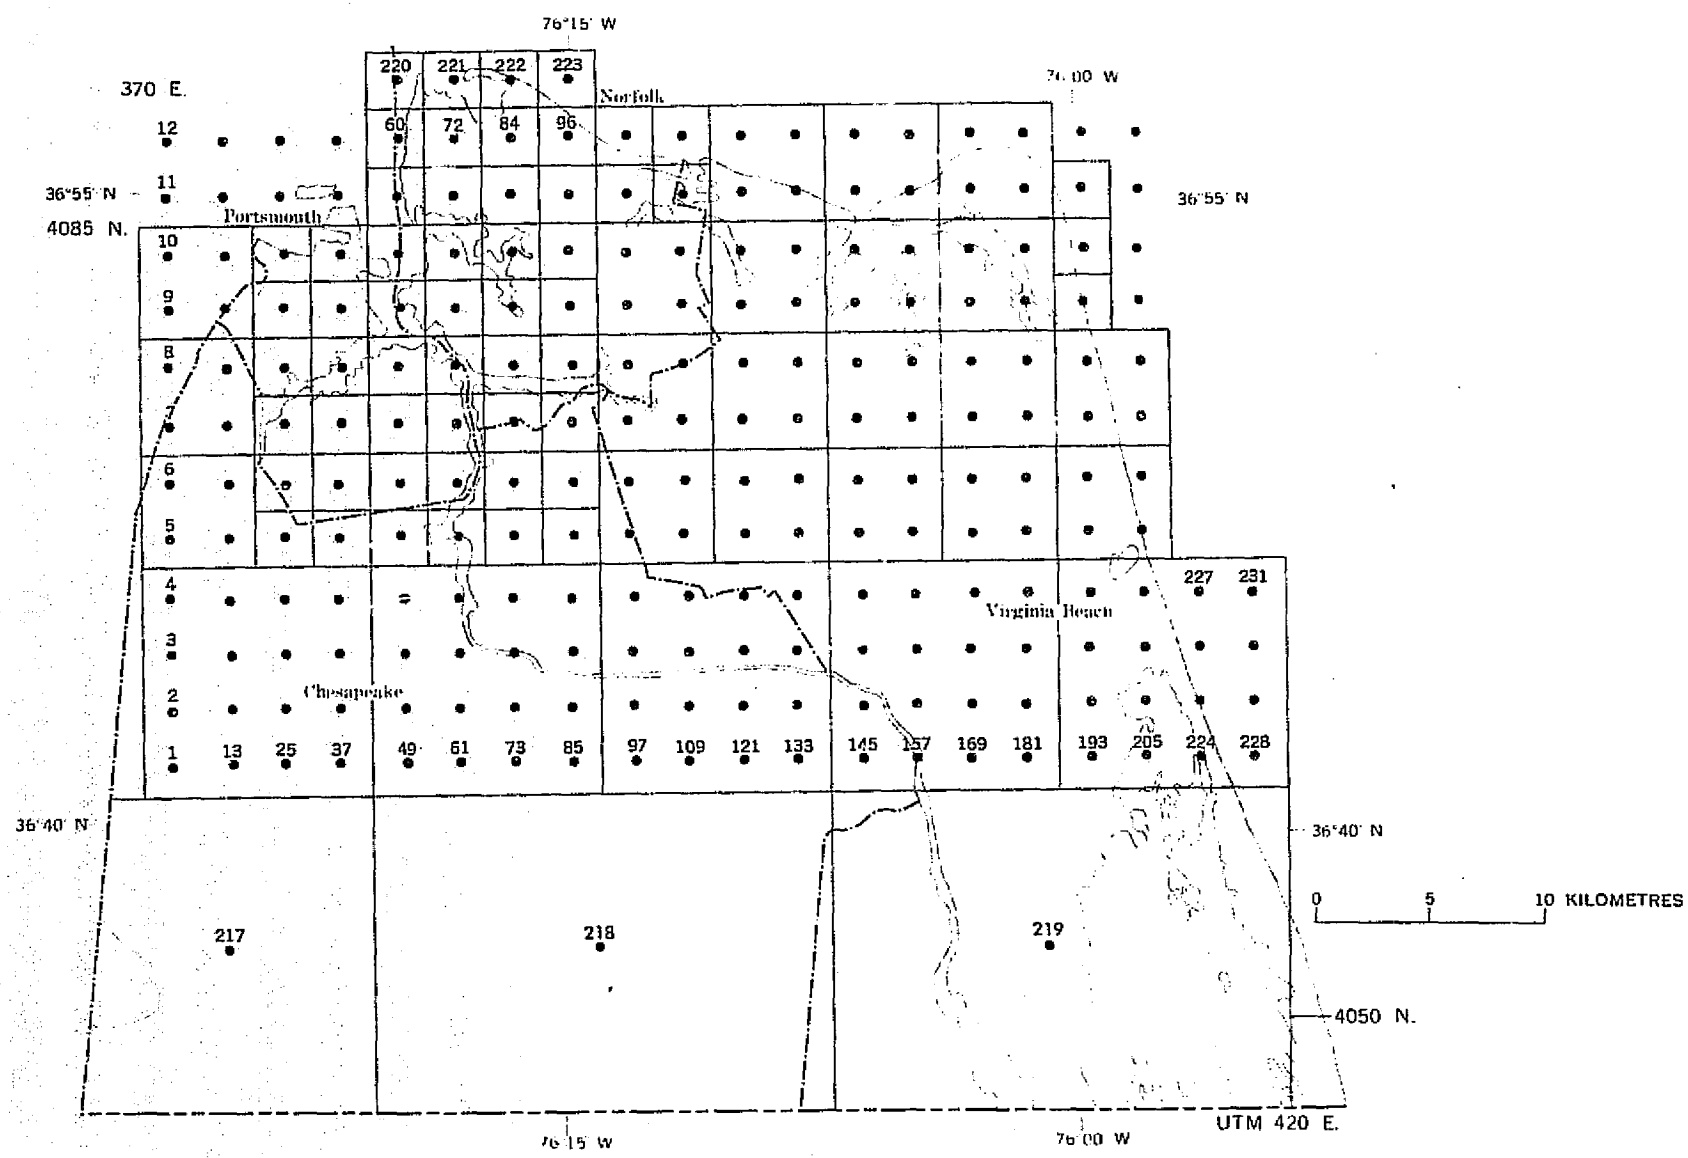


Figure 18--1970 Norfolk-Portsmouth SMSA, pollution concentration estimating points

Implementation Planning Program was used to estimate 1972 annual, winter 1971-72 and 1985 annual concentrations of sulfur dioxide and suspended particulates throughout the Norfolk area (U.S. Environmental Protection Agency, 1970). Figures 19-24 present the estimated spatial patterns. Table 5 is an example of the data produced by the AQDM program used to produce these figures. Table 6, another example of the program's output, gives point and area source contributions to receptor points having high concentrations and suggests emission reductions necessary to achieve the desired air quality. The program also produces an estimate of the contribution of each point and area source at selected receptor points (table 7). Evaluation of control strategies and implementation plans is based on these data and their relation to specific patterns of Norfolk area land use.

Although the area's air quality sampling program was not yet fully operational, the range of annual and winter sulfur dioxide and suspended particulate samples drawn at selected stations are shown in figures 19, 20, 22, and 23 (Commonwealth of Virginia, 1972b). These initial values are based on a limited number of samples, many of which were subject to modification in sampling procedures during the start-up period of the sampling system. These measured pollution values, however, generally reflect the estimated concentrations of sulfur dioxide and suspended particulates, suggesting that these model estimates are not unreasonable given the assumptions built into 1) the emissions inventories, and 2) the use of an airflow pattern for the Norfolk Naval Air Station. The large discrepancy between 1972 sampled and estimated levels for the sampling station in cell 103 appears to result from extensive construction occurring immediately adjacent to the sampling station during the previous year and by the station's proximity to an expressway and an asphalt plant, all of which tend to be averaged out in the cell's area emissions inventory.

ORIGINAL PAGE IS
OF POOR QUALITY

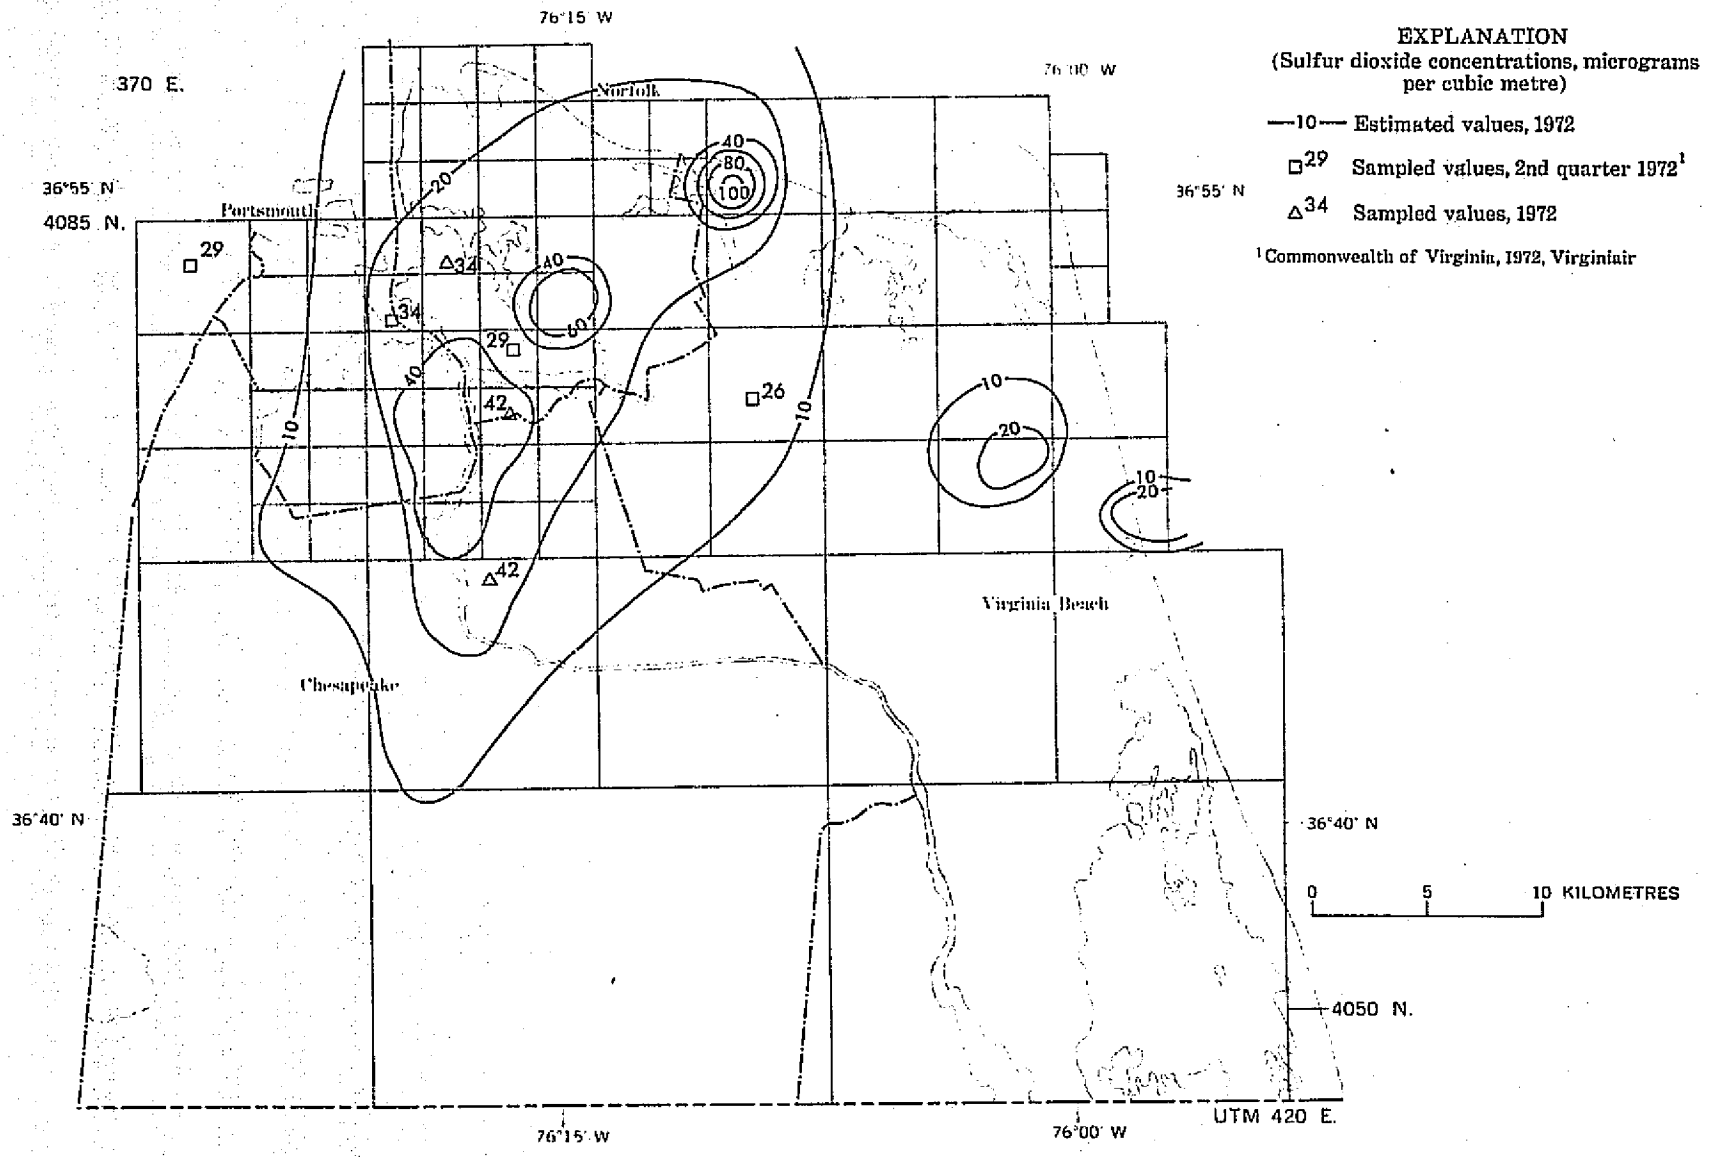


Figure 19--1970 Norfolk-Portsmouth SMSA, estimated average concentration of sulfur dioxide, 1972

ORIGINAL PAGE IS
OF POOR QUALITY

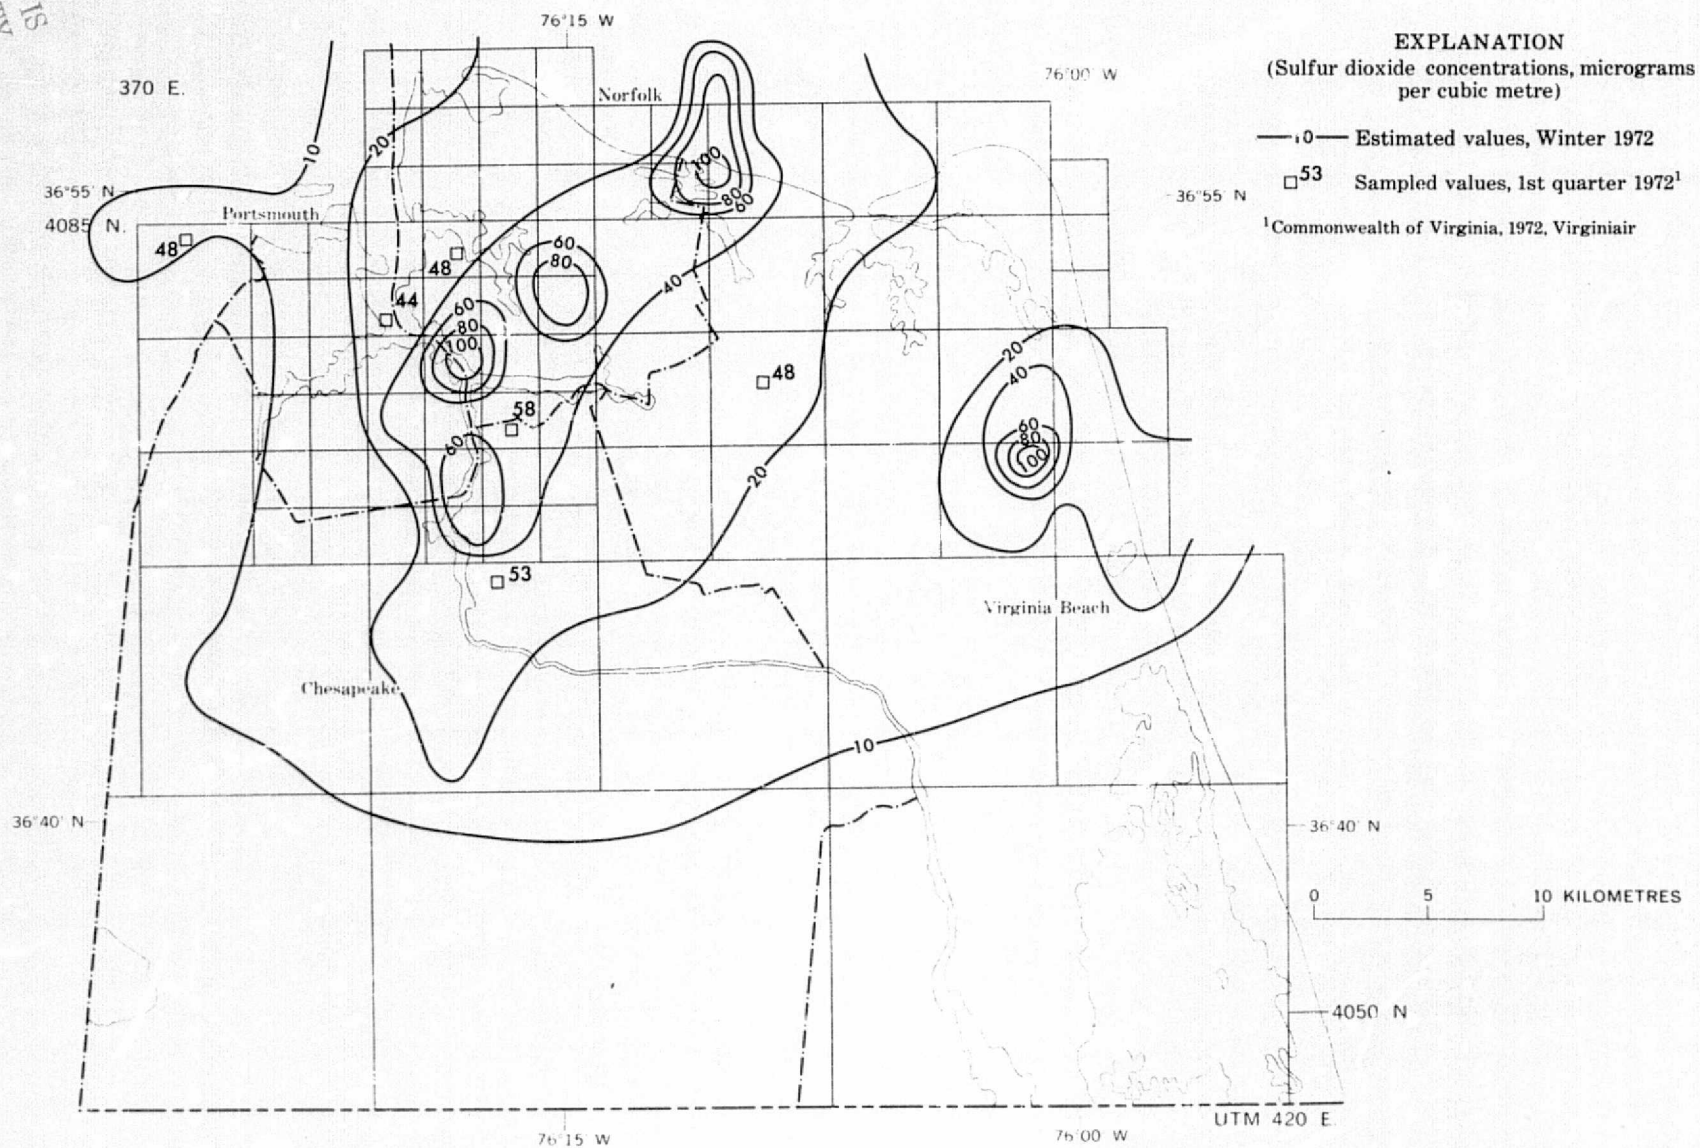


Figure 20--1970 Norfolk-Portsmouth SMSA, estimated average concentrations of sulfur dioxide, winter 1972

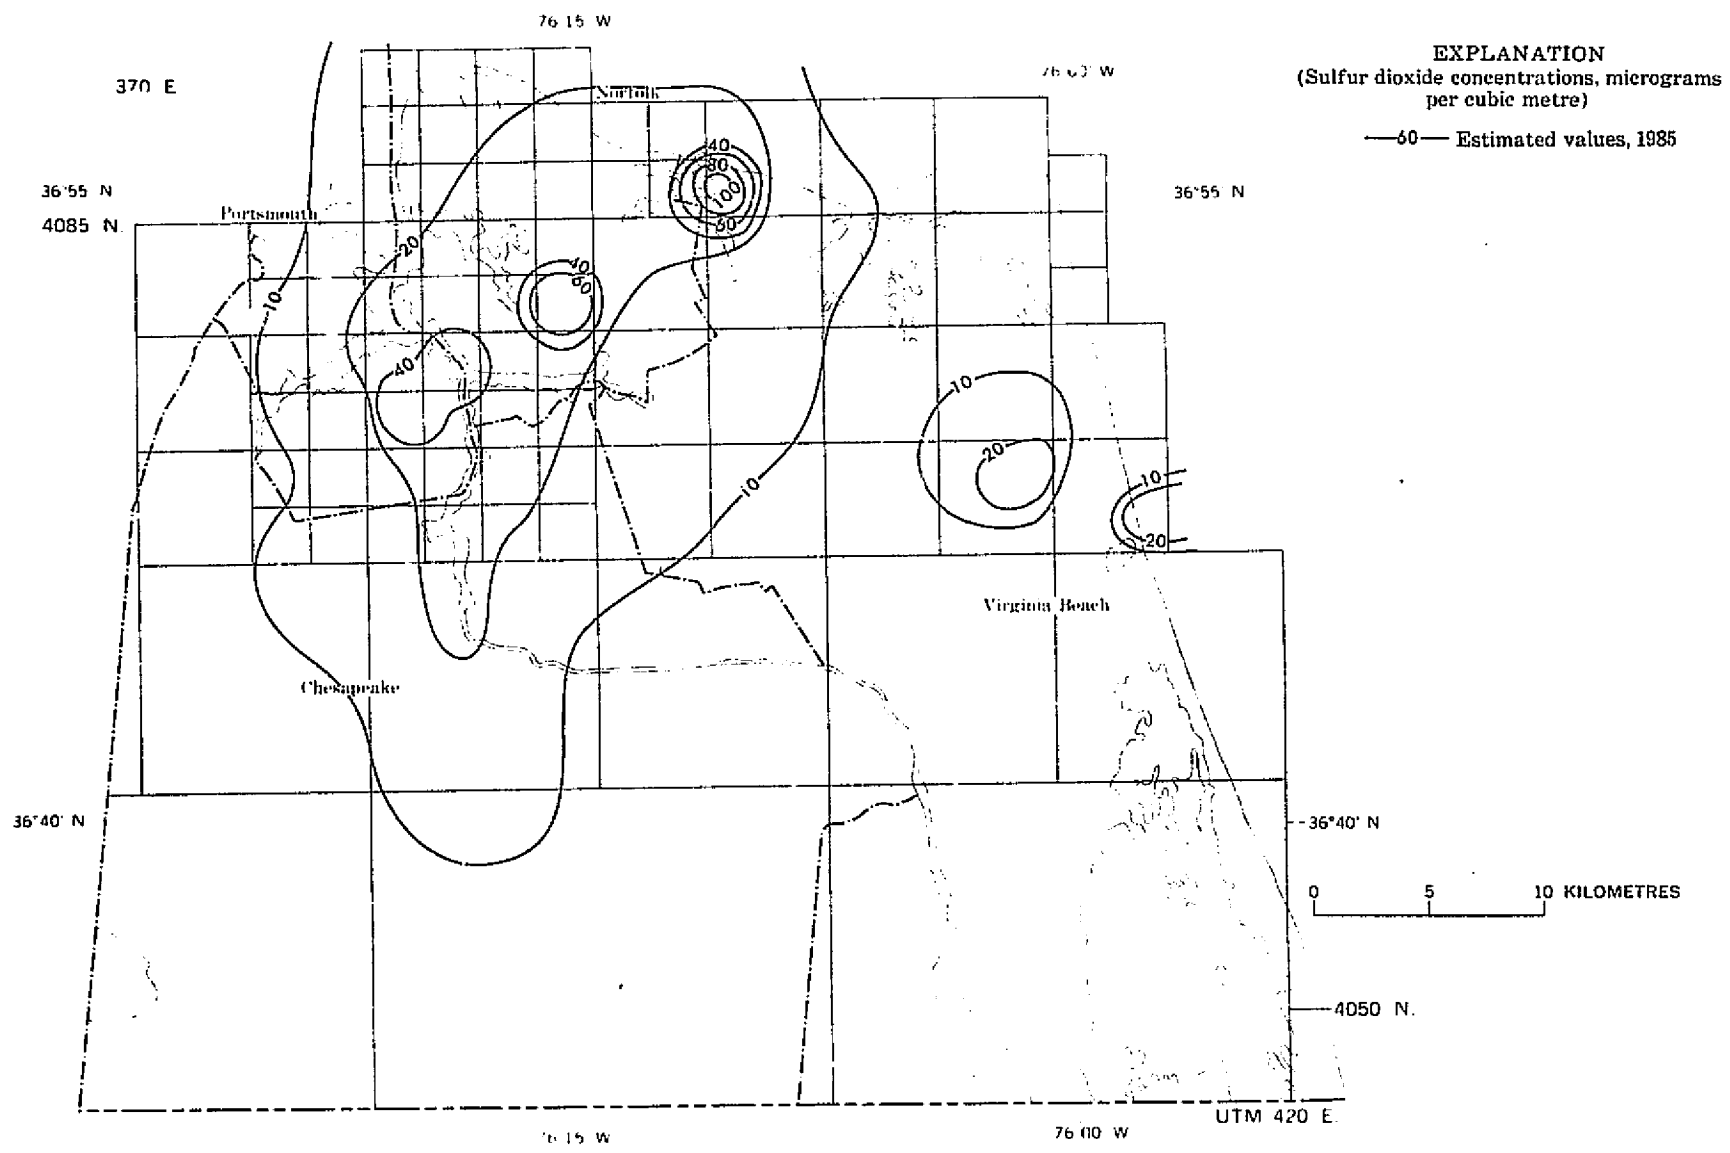


Figure 21--1970 Norfolk-Portsmouth SMSA, estimated average concentrations of sulfur dioxide, 1985

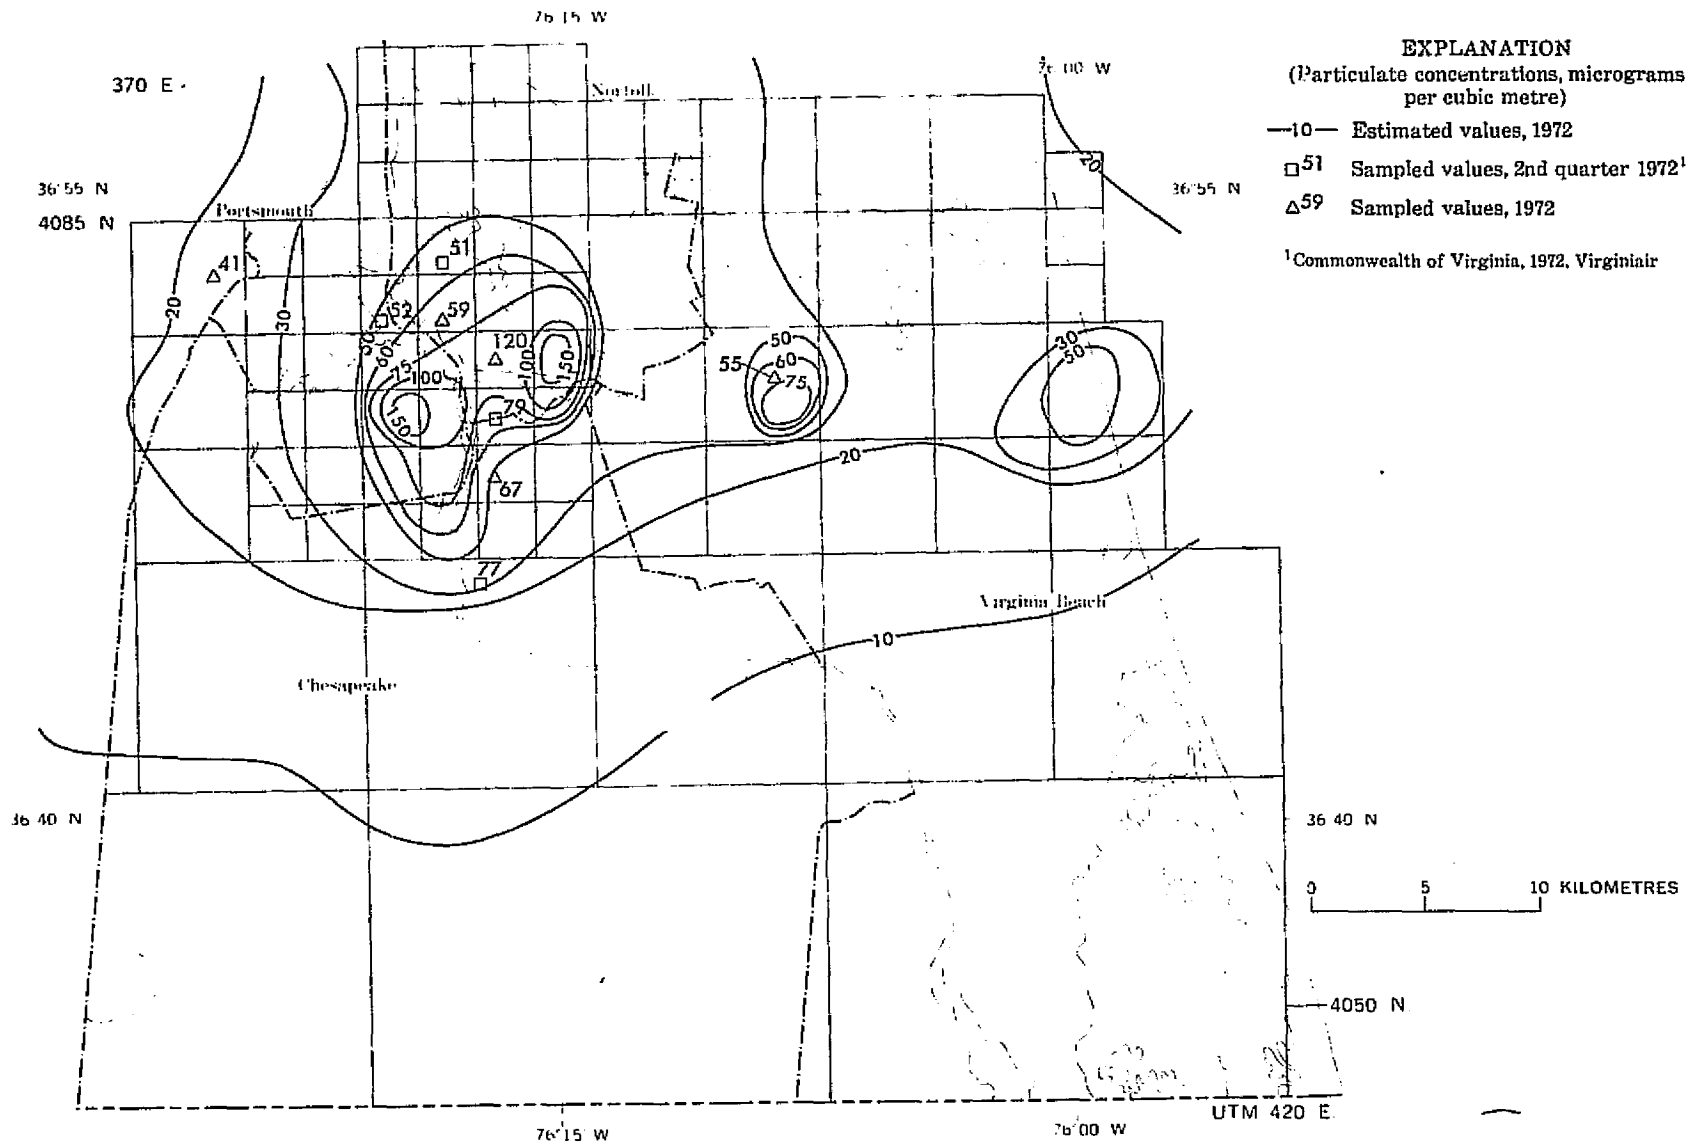


Figure 22—1970 Norfolk-Portsmouth SMSA, estimated average concentrations of particulates, 1972

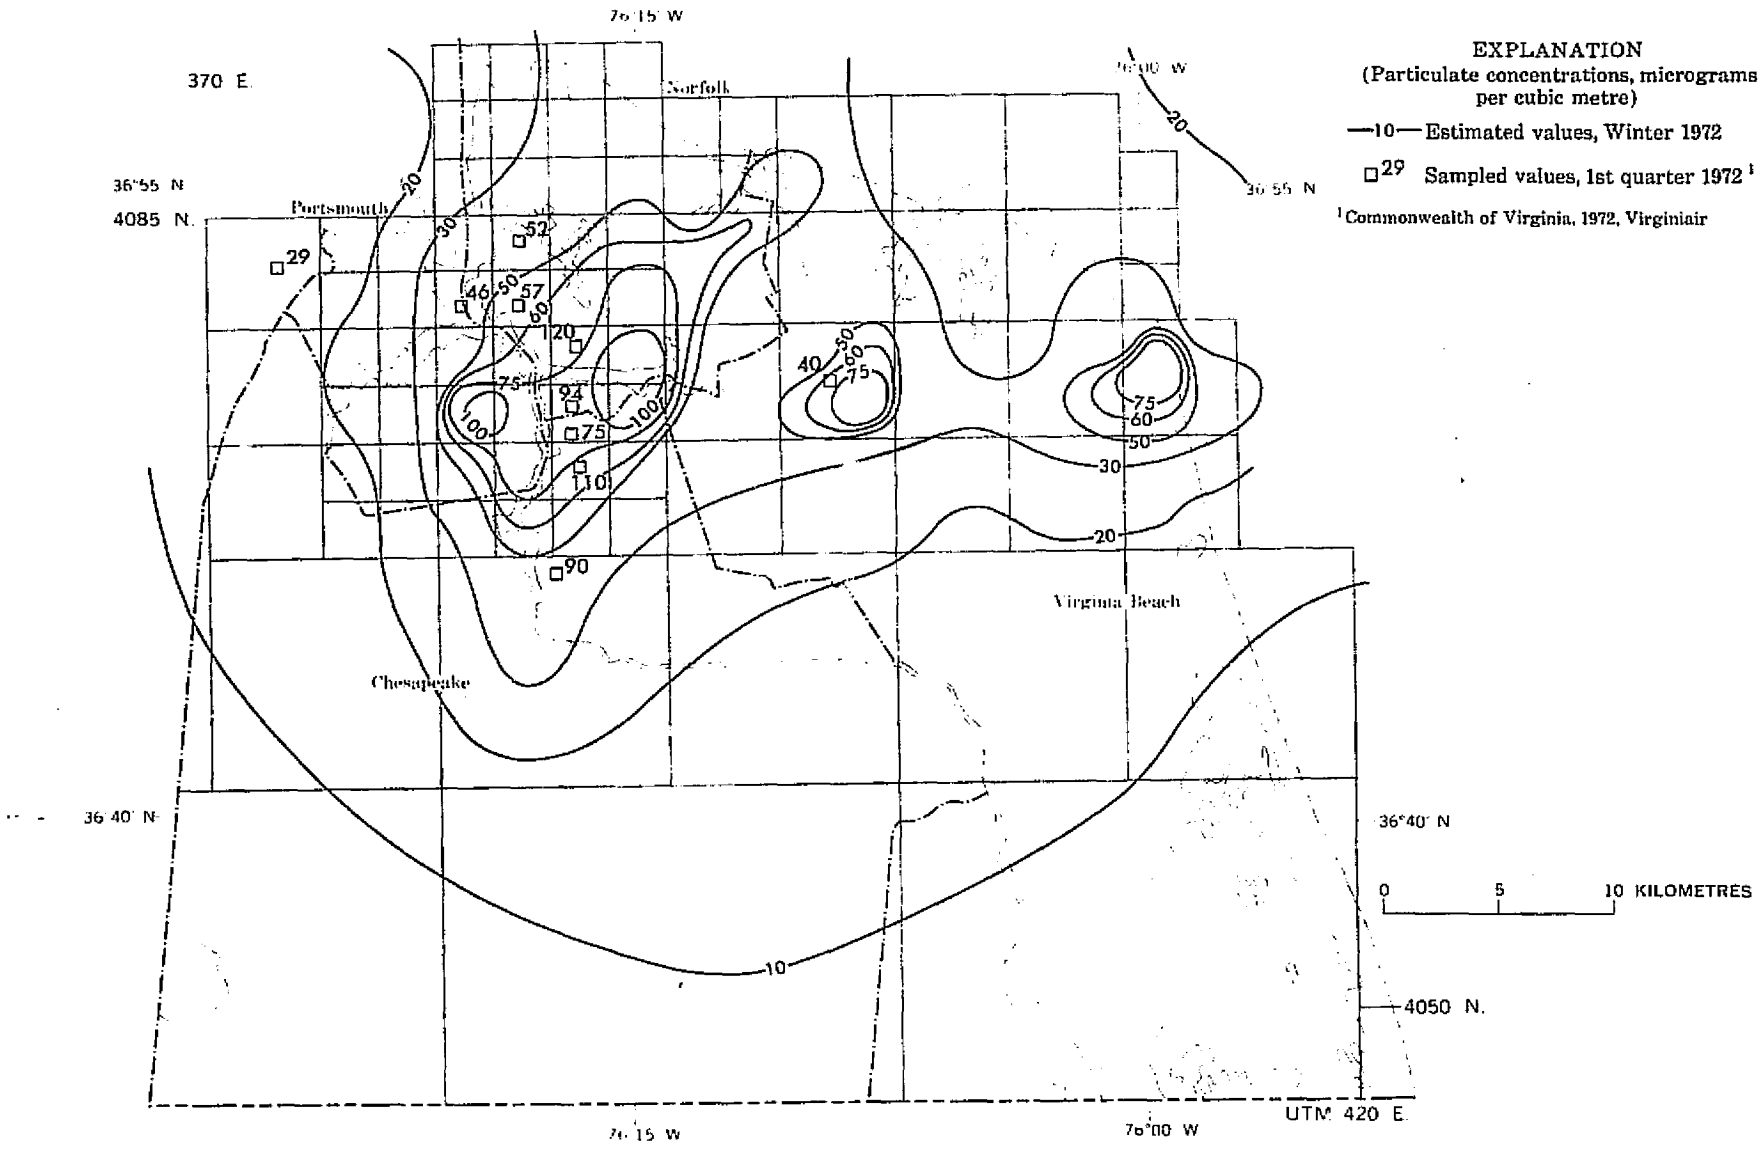


Figure 23--1970 Norfolk-Portsmouth SMSA estimated average concentrations of particulates, winter 1972

ORIGINAL PAGE IS
OF POOR QUALITY

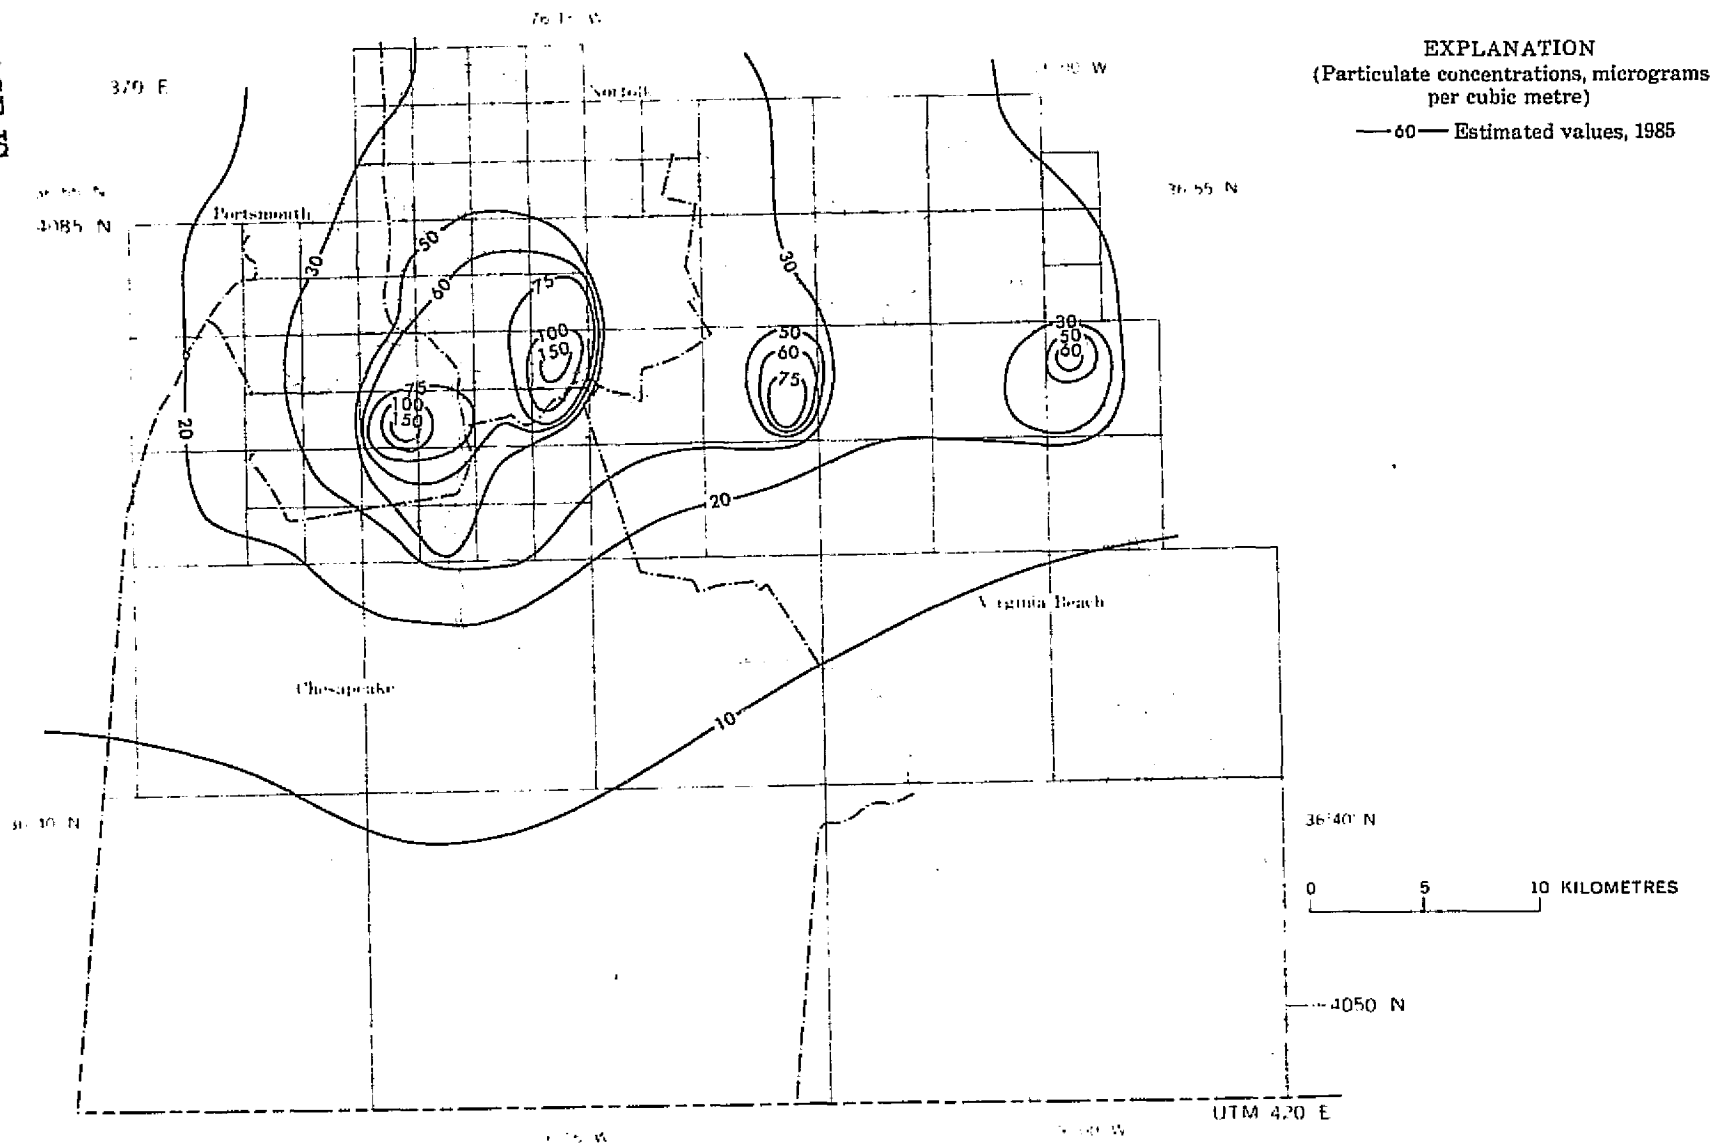


Figure 24--1970 Norfolk-Portsmouth SMSA, estimated average concentrations of particulates, 1985

Table 5.--Estimates of concentration of pollutants over receptors.

Region: Norfolk Area (Annual)

Date: 5 October 1972

RECEPTOR CONCENTRATION DATA				
Receptor Number	Receptor Location (kilometers)		Expected Arithmetic Mean (micrograms/cubic meter)	
	Horiz	Vert	SO ₂	Part
1	371.2	4061.2	5.2	8.8
2	371.2	4063.7	6.9	10.1
3	371.2	4066.2	6.6	11.8
4	371.2	4068.7	6.8	14.0
5	371.2	4071.2	6.7	16.5
6	371.2	4073.7	6.2	19.4
7	371.2	4076.2	5.6	20.4
8	371.2	4078.7	5.8	19.6
9	371.2	4081.2	6.1	19.4
10	371.2	4083.7	6.8	18.7
11	371.2	4086.2	8.0	17.6
12	371.2	4088.7	5.2	16.8
13	373.7	4061.2	5.5	9.2
14	373.7	4063.7	7.2	10.6
15	373.7	4066.2	7.8	12.4
16	373.7	4068.7	8.4	15.5
17	373.7	4071.2	8.1	18.3
18	373.7	4073.7	7.1	22.4
19	373.7	4076.2	7.3	24.1
20	373.7	4078.7	7.3	22.4
21	373.7	4081.2	7.5	23.0
22	373.7	4083.7	7.3	21.7
23	373.7	4086.2	7.7	20.5
24	373.7	4088.7	6.2	19.7
25	376.2	4061.2	6.5	9.6
26	376.2	4063.7	7.5	11.3
27	376.2	4066.2	9.6	13.6
28	376.2	4068.7	11.3	17.2
29	376.2	4071.2	10.3	21.5
30	376.2	4073.7	8.6	27.0
31	376.2	4076.2	9.9	29.6
32	376.2	4078.7	9.6	28.2
33	376.2	4081.2	9.9	28.2
34	376.2	4083.7	9.2	26.4
35	376.2	4086.2	8.9	24.9
36	376.2	4088.7	7.6	23.2
37	378.7	4061.2	8.3	10.4
38	378.7	4063.7	9.7	12.1
39	378.7	4066.2	11.4	15.0
40	378.7	4068.7	12.9	19.7

Table 6.--Example of estimates of point and area source contributions and recommended reduction programs for selected receptor points.

Region: Norfolk Area (Annual)

Date: 5 October 1972

PARTICULATE POLLUTANT CONCENTRATIONS ABOVE STANDARD OF 75.00 MICROGRAMS PER CUBIC METER						
RECEPTOR NUMBER	POLLUTANT CONCENTRATION (MICROGRAMS PER CUBIC METER)				POLLUTANT REDUCTION (PERCENT)	
	Arithmetic Mean Concentration	Excess Above Air Quality Standard	Contribution From Point Sources	Contribution From Area Sources	Necessary For Point Sources	Necessary For All Sources
55	315.7824	240.7824	306.8246	8.9579	78.4756	76.2495
92	164.3243	89.3243	148.9439	15.3804	59.9718	54.3586
236	155.5200	80.5200	150.3055	5.2144	53.5709	51.7747
91	125.3193	50.3193	114.4099	10.9095	43.9816	40.1529
67	104.8958	29.8958	94.9697	9.9262	31.4793	28.5005
139	92.5805	17.5805	88.0405	4.5400	19.9687	18.9894
93	89.6757	14.6757	53.5763	36.0994	27.3922	16.3653
200	83.1145	8.1145	80.0613	3.0531	10.1353	9.7630
66	77.5693	2.5693	69.7026	7.8668	3.6861	3.3123
233	75.7201	.7201	60.7036	15.0165	1.1862	.9510
80	75.2046	.2046	60.2716	14.9330	.3395	.2721

Table 7.--Estimates of percent of total contribution of specific sources to selected receptor estimating points

REGION: NORFOLK AREA (ANNUAL)											DATE: 5 OCTOBER, 1972	
SOURCE CONTRIBUTIONS TO FIVE SELECTED SO2 RECEPTORS (MICROGRAMS PER CUBIC METER)												
SOURCE	RECEPTOR E 233	RECEPTOR E 234	RECEPTOR E 236	RECEPTOR E 239	RECEPTOR E 245							
1	.0107	.041	.0051	.011	.0014	.01	.0030	.021	.0034	.011		
2	1.7232	6.391	.6735	1.851	.2339	1.521	.4769	2.911	.5247	1.911		
3	.2422	.961	.0755	.211	.0246	.161	.4357	.221	.0434	.161		
4	.0635	.221	.0185	.051	.0060	.041	.0087	.051	.0107	.041		
5	.8777	3.251	.6777	1.861	1.0398	6.891	2.863	1.751	.3767	1.371		
6	.2271	.841	.1657	.461	.1149	.761	.0505	.311	.0716	.261		
7	.0110	.041	.0103	.031	.0222	.151	.0054	.041	.0077	.031		
8	.0516	.191	.0234	.061	.0110	.071	.0143	.091	.0160	.061		
9	3.3192	12.311	.0758	.211	.0154	.101	.0252	.151	.0316	.121		
10	.0725	.271	.0127	.041	.0013	.011	.0021	.011	.0031	.011		
11	.0115	.041	.0089	.021	.0017	.011	.0018	.011	.0027	.011		
12	.0224	.081	.0164	.051	.0037	.021	.0051	.031	.0061	.021		
13	.1452	.541	.0634	.171	.0072	.051	.0116	.071	.0153	.061		
14	1.1209	4.161	.9298	5.301	1.090	.721	.1954	1.191	.2715	.991		
15	.0905	.341	.5816	1.601	.0091	.061	.0153	.091	.0255	.091		
16	.0332	.121	.1525	.421	.0141	.091	.0126	.081	.0204	.071		
17	.0316	.121	.1655	.451	.0153	.101	.0120	.081	.0211	.081		
18	.0022	.011	.0057	.021	.0031	1.741	.0033	.021	.0042	.021		
19	.0351	.131	.0955	.261	5.5539	36.801	.0444	.271	.0616	.221		
20	0.0000	0.001	0.0000	0.001	0.0000	0.001	0.0000	0.001	0.0000	0.001		
21	.0107	.041	.1394	.381	.0023	.011	.0042	.031	.0086	.031		
22	.0654	.321	.3089	.851	.0461	.311	.0464	.291	.0929	.331		
23	.0117	.041	.0341	.091	.0069	.051	.0073	.041	.0155	.061		
24	0.0000	0.001	0.0000	0.001	0.0000	0.001	0.0000	0.001	0.0000	0.001		
25	.1492	.551	.2796	.771	.0334	.221	.0970	.591	.1600	.581		
26	.0917	.341	.1114	.311	.0170	.111	.0418	.251	.0603	.221		
27	.2050	.761	.4723	1.301	.0486	.321	.1551	.951	.2612	.951		
28	.0099	.041	.0158	.041	.0588	.391	.0117	.071	.0149	.051		
29	.0966	.361	.0772	.211	.0132	.091	.0249	.151	.0321	.121		
30	.0086	.031	.0182	.051	.0018	.011	.0047	.031	.0075	.031		
31	.2368	.881	.8188	2.251	.0677	.451	.2063	1.271	.5857	2.131		
32	1.2355	4.591	3.4851	9.581	.2939	1.951	.9236	5.611	1.6194	6.631		
33	.0704	.261	.1405	.391	.4238	2.811	.1553	.951	.1623	.661		
34	.0194	.071	.0360	.101	.0793	.531	.0927	.321	.0537	.201		
35	.4714	1.751	.9244	2.541	.1822	1.211	2.5800	15.731	4.1378	15.081		
36	.0041	.021	.0077	.021	.0016	.011	.0212	.131	.0256	.091		
37	.1352	.501	.2693	.741	.0434	.291	.3730	2.271	1.0359	3.781		
38	0.0000	0.001	0.0000	0.001	0.0000	0.001	0.0000	0.001	0.0000	0.001		
39	.0126	.051	.0104	.031	.0044	.031	.0147	.091	.0135	.051		
40	.0052	.021	.0089	.021	.0014	.011	.0059	.041	.0144	.051		

ORIGINAL PAGE IS
OF POOR QUALITY

The emissions inventory for particulates included both settleable and suspended material. Using Virginia State Air Pollution Control Board registration and initial inventory records, no way could be devised for estimating the percentage of suspended particulates in total emission and no definite information could be obtained on the rate at which settleable materials dropped out from different types and heights of sources. Most settleable materials, however, are assumed to drop out within a distance of 2 km from source locations. The initial operation of background sampling stations within the Norfolk area suggested that a suspended particulate background level of approximately 40 mg/m^3 might exist because of salt spray from the ocean, erosion of exposed sand, and agricultural practices. This estimated background level of suspended particulates was not included in the model run. The near correspondence between levels of estimated and sampled suspended particulates may reflect a trade off between the loss of settleable particulates and the addition of suspended background matter in the sample values.

Sulfur dioxide concentrations.--Figures 19, 20, and 21 show the estimated distribution of annual 1972, winter 1971-72, and annual 1985 sulfur dioxide concentrations and relate them to the distributions and levels of emissions from specific point sources and high employment areas in figures 8, 9, and 10, and to the patterns of annual and winter air-flow in figures 16 and 17. According to these estimates, the area most impacted by sulfur dioxide on an annual basis is the Naval Amphibious Base at Little Creek, in Virginia Beach east of Norfolk. This high estimate is partly a function of the location of a receptor estimating point

nearly coincident with the point of emission. The powerplant's low stack suggests high levels may exist in the immediate vicinity. All other receptor locations are estimated to be below the national and State primary standards of 80 mg/m^3 . This area appears to be influenced by the incinerator and other area and point sources in cells 100 and 101 (figure 18).

Winter patterns indicated in figure 20 reflect the greater frequency of winds from the northwest quadrant. The effect of increased space heating throughout central Norfolk and Portsmouth and in Virginia Beach near Oceana Naval Air Station (figure 14) is evident. The estimates suggest that primary and secondary standards for sulfur dioxide are exceeded throughout these high-density residential areas.

The estimated future pattern in figure 21 indicates that, given current control plans and rules for point sources, secondary and primary standards for sulfur dioxide may continue to be exceeded in central Norfolk and in the Little Creek area to the east. Elsewhere, anticipated future levels and patterns of sulfur dioxide emissions from the development of residential and other area sources are not expected to seriously deteriorate the region's air quality.

Suspended particulate concentrations.--Figures 22-24 show estimated distribution of annual 1972, winter 1971-72, and annual 1985 suspended particulate concentrations. The broader patterns of high concentrations for particulates than for sulfur dioxide reflect the more ubiquitous contribution to particulate emissions from construction and general industrial and commercial activities throughout the Norfolk area (figures 5, 6, and 11-13).

In view of the problem of mixing settleable and suspended particulates in the estimated emission inventory, these particulate patterns suggest that the national and State primary and secondary standards of 75 and 60 μ/m^3 , respectively, are regularly exceeded in central Norfolk and Portsmouth. Current sampling values tend to confirm this, and it appears that point sources are the main contributors to these levels (see table 4 and figure 11).

The distribution and level of winter values reflect prevailing winds and increased space heating throughout the area. Large areas of residential land use in central Norfolk and Portsmouth and selected areas of Virginia Beach are estimated to be affected by concentrations above primary air quality standards.

On the basis of current control programs, 1985 levels of suspended particulates are estimated to exceed secondary standards throughout central Norfolk and Portsmouth and in certain areas of Virginia Beach. Existing point sources rather than anticipated 1985 area sources are the major contributors in this estimate (table 4 and figure 13). These estimates suggest the need for improved procedures for estimating and sampling suspended particulate emissions and natural background levels to determine whether modifications in current rules and implementation plans may be needed.

CONCLUSIONS

The Virginia State Air Pollution Control Board adopted an emissions control strategy for sulfur dioxide and suspended particulates in the Norfolk area. The implementation plan focused on local action to control

point sources. Adoption of this strategy and plan were certainly reasonable, given the time available for planning and the information available on the distribution of emission sources and receptor land uses, the level of emissions, the pattern of airflows, and the measured concentration of pollutants.

Using data from the pilot national land use information system, this more detailed analysis of the amount and distributions of pollutants in the area indicates that the board's initial air quality planning was sound. Distribution patterns of sulfur dioxide and suspended particulate concentrations, estimated using an adequate diffusion model and the best available airflow data, suggest that current and future concentrations are most affected by point source emissions. Given the levels of space heating and mobile source emissions expected for the type of low-density development anticipated for the area, this analysis suggests that current point source control programs may not achieve required standards. If additional reduction is required or desired, it is estimated that the greatest impact could be achieved through emission controls affecting institutional (military and municipal) land uses. Change in these land uses would most benefit land users in older areas of Norfolk and Portsmouth (figure 5).

This use of the uncalibrated AQDM provides the means for rapidly estimating impacts of alternative locations for new point or area emissions sources. Pollutant concentration levels estimated in this study suggest that new high emission sources should be encouraged to locate away from existing areas of high pollutant concentration. Further experimentation using the model should suggest sizes of

compatible buffer land uses or alternate mixes of uses that could improve diffusion characteristics.

With an adequate sampling program the model can be calibrated to predict more accurately the area's pollutant concentration levels. According to the Virginia's State Air Pollution Control Board Implementation Plan (Commonwealth of Virginia, 1972a), only the sampling stations in cells 70, 74, and 103 were planned to reflect the area's population concentrations. The land use and emission concentration distribution estimated in this study suggest the need for a wider dispersion of particulate sampling stations into cells 101, 106, and 109 and of sulfur dioxide sampling stations into cells 60, 87, 99, 110, 117, 123, and 128. Sampling programs in these and other cells have been undertaken by the board to confirm the validity of these estimated concentrations and to provide a basis for improved estimates. Past trends in land use change supplied by the pilot system, and future change anticipated by local planners suggest the need for greater detail in the board's area source emissions estimating grid to the east and south of the existing set of 6.25 km² cells (figure 5). Improvement in future area source emission estimates could be achieved by recording the types of fuels to be used in large subdivisions as they are developed in each grid cell. In addition, computerizing traffic flow data and matching it with the location of specific land use densities in various grid cells could speed up and improve the detail of area source emission estimates.

Given the physical setting affecting Norfolk area airflow and the pattern of developed and anticipated land use, only minor modifications in the current emissions control strategy and implementation plan are suggested by this study utilizing detailed land use information.

ADDITIONAL APPLICATIONS OF NATIONAL LAND USE INFORMATION
SYSTEM FOR AIR QUALITY PLANNING

If fully operational on a nationwide basis, the pilot national land use information system would offer air quality planners a number of services and advantages. It can provide air planners with statistics on rates of change in Level II or specially interpreted Level III land uses as a basis for predicting future emissions inventories. For updating area emissions inventories and other uses, the system could provide statistics of perimeter and density of land use by area emission estimating cell or other areal unit.

Statistics could be provided for individual land uses or a combination of them, depending on the needs of the planner. This information would be compatible with computerized traffic counts, with information on changing space heating characteristics, and with other information sources available to local air planners.

The system could also provide a range of graphic plots of land use statistics to be used with overlays showing pollution concentrations. In developing State, regional and local emissions inventories, costs could be reduced by centralized computing, based on a State or regional agency assessing information generated by various continuous air pollutant source registration and permit systems, along with data from the pilot system, from local census, and from building and traffic flow records. For example, emission estimates supplied by the States to the National Emissions Data System of the Environmental Protection Agency can be used to cross check locations and other data in the national land use information system. Similarly, air quality sampling data for local jurisdictions

could be correlated with estimated measured emissions and land use patterns to provide a check on governmental sampling programs (U.S. Environmental Protection Agency, 1971). With a national land use information system supporting these capabilities, as changes in air quality standards or emission rules are proposed, their impact on land use can more easily be evaluated.

REFERENCES

- Alexander, R. H., 1972, Central Atlantic Regional Ecological Test Site: NASA Manned Spacecraft Center: Ann. Earth Resources Program Rev., 4th, Houston, 1972, v. 3, p. 72-1 to 72-23.
- Allan M. Voorhees, and Associates, and Ryckman, Edgerley, Tomlinson and Associates, 1971, A guide for reducing air pollution through urban planning: Available from U.S. Dept. Commerce Natl. Tech. Inf. Service, Springfield, Va. 22151, as PB 207-510.
- Anderson, J. R., Hardy, E. E., and Roach, J. T., 1972, A land-use classification system for use with remote-sensor data: U.S. Geol. Survey Circ. 671, 16 p.
- Clarke, J. F., 1964, A simple diffusion model for calculating point concentrations from multiple sources: Air Pollution Control Assoc. Jour., v. 14, p. 347-352.
- Commonwealth of Virginia, 1972a, State Air Pollution Control Board implementation plan: Richmond, 736 p.
- _____ 1972b, State Air Pollution Control Board regulations for the control and abatement of air pollution: Richmond, 190 p.
- _____ 1972c, State Air Pollution Control Board regulations for the control and abatement of air pollution, supp: Richmond, 23 p.
- _____ 1972d, Virginiaair: Richmond, 28 p.
- Duprey, R. L., 1968, Compilation of air pollutant emission factors: Available from U.S. Dept. Commerce Natl. Tech. Inf. Service, Springfield, Va. 22151, as PB 190-245.
- Egan, Bruce, and Mahoney, J. R., 1971, A numerical model of urban air pollution transport, in Am. Meteorol. Soc. Conf. Air Pollution Meteorology, Raleigh, N.C., Proc. (preprint), p. 8-13.
- _____ 1972, application of a numerical air pollution transport model to a dispersion in the atmospheric boundary layer: Jour. Appl. Meteorology, v. 11, p. 1023-1039.
- Forsdyke, A. G., 1970, Meteorological factors in air pollution: World Meteorol. Organization, Tech. Note 114.
- Getis, Arthur, and Jackson, P. H., 1971, The expected proportion of a region polluted by k sources: Geog. Analysis, v. 3, p. 256-261.
- Hanna, Steven, 1971, A simple method of calculating dispersion from urban area sources: Air Pollution Control Assoc. Jour., v. 21, p. 774-777.
- Henningson Durham and Richardson, 1972, Potable water supply feasibility study for Southeastern Virginia Planning District Commission: Norfolk, Va., Southeastern Virginia Planning District Comm., 200 p.

Holzworth, George, 1964, Estimates of mean maximum mixing depths in the contiguous United States: Monthly Meteorol. Rev., v. 92, p. 235-242.

_____ 1972, Estimates of mean maximum mixing depths in the contiguous United States: Washington, D.C., U.S. Natl. Oceanic and Atmospheric Admin. Tech. Memo., 1972.

Kennedy, Allen, Cohen, Alan, Croke, E. J., Croke, K. G., Stork, J., and Hurter, A. P., 1971, Air pollution land-use planning project, phase I final report: Available from U.S. Dept. of Commerce Natl. Tech. Inf. Service, Springfield, Va. 22151, as ANL/ES-7.

Koogler, J. B., Sholtes, R. S. Danis, A. L., and Hardins, C. I., 1967, Multivariate model for atmospheric dispersion predictions: Jour. Air Pollution Control Assoc., v. 17, p. 211-214.

Lamb, R. G., 1971, The representation of atmospheric motions in urban diffusion models, in Am. Meteorol. Soc. Conf. Air Pollution Meteorology, Raleigh, N.C., Proc. (preprint), p. 5-7.

Martin, Deland, 1971, An urban diffusion model for estimating long term average values of air quality: Air Pollution Control Assoc. Jour., v. 16, p. 16-19.

Miller, M. E., and Holzworth, G. C., 1967, An atmospheric diffusion model for metropolitan areas: Air Pollution Control Assoc. Jour., v. 17, p. 46.

Ozolins, Guntis, and Smith, Raymond, 1966, A rapid survey technique for estimating community air pollution emissions: Available from U.S. Dept. Commerce Natl. Tech. Inf. Service, Springfield, Va. 22151, as PB190-240.

Pooler, Francis, 1961, A prediction model of mean urban pollution for use with standard wind rose: Internat. Jour. Air and Water Pollution, v. 4, p. 199-208.

Slade, David H., 1961, Climatology of selected harbors, Washington, D.C.: U.S. Weather Bureau (Prepared for the Maritime Administration in cooperation with the Atomic Energy Commission).

Smith, M. E., 1961, The concentrations and residence times of pollutants in the atmosphere, in Internat. Symposium of Chemicals in Lower and Upper Atmosphere, San Francisco, April 18-20, 1961, Proc. arranged by Stanford Research Inst., p. 155-166.

Southeastern Virginia Planning District Commission, 1969, Regional land use 1965: Norfolk, Regional Data Rept. No. 28, 36 p.

TRW Systems Group, 1969, Air quality display model: Washington, D.C., U.S. Public Health Service, Natl. Air Pollution Control Admin.

Turner, D. B., 1964, A diffusion model of an urban area: Jour. Appl. Meteorology, v. 3, p. 83-91.

_____ 1970, Workbook of atmospheric dispersion estimates (rev.): Cincinnati, Ohio, U.S. Public Health Service, Natl. Air Pollution Control Admin.

U.S. Environmental Protection Agency, 1970, Air quality implementation planning program, v. 1, Operator's manual, and v. 2, Programmer's manual: Available from U.S. Dept. Commerce Natl. Tech. Inf. Service, Springfield, Va. 22151, as PB 198-300.

_____ 1971, Storage and retrieval of aerometric data, users manual: Available from U.S. Dept. Commerce Natl. Tech. Inf. Service, Springfield, Va. 22151, as PB APTD-0663.

_____ 1972, Guide for compiling a comprehensive emission inventory: Available from U.S. Dept. Commerce Natl. Tech. Inf. Service, Springfield, Va. 22151, as PB APTD-1135.

_____ 1974, Users network for applied modeling of air pollution (UNAMAP): Available from U.S. Dept. Commerce Natl. Tech. Inf. Service, Springfield, Va. 22151, as PB 229-771.

Van der Hoven, Issac, 1967, Atmospheric transport and diffusion at coastal sites: Nuclear Safety, v. 8, p. 490-499.

Wanta, R. C., 1968, Meteorology and air pollution in Stern, Arthur, Air pollution, v. 1, 2d ed.: New York, Academic Press, p. 217.

Wilbur Smith and Associates, 1969, 1985 major thoroughfare plan Southeastern Virginia regional area: Virginia Dept. of Highways, 23 p.