

7.7-10198

LARS Information Note 022575

CR 151468

Made available under NASA sponsorship
in the interest of early and wide dis-
semination of Earth Resources Survey
Program information and without liability
for any use made thereof.

ERTS MULTISPECTRAL IMAGE TRANSFORMATIONS FOR GEOLOGICAL LINEAMENT ENHANCEMENT

(E77-10198) ERTS MULTISPECTRAL IMAGE
TRANSFORMATIONS FOR GEOLOGICAL LINEAMENT
ENHANCEMENT (Purdue Univ.) 22 p HC A02/MF
A01

N77-30558


CSCL 08G

Unclass

G3/43 00198

Original photography may be purchased from:
EROS Data Center
~~Intelligence Research Center~~
Sioux Falls, SD 57198

BY
PAUL E. ANUTA
BIJAN MOBASSERI



The Laboratory for Applications of Remote Sensing

Purdue University, West Lafayette, Indiana

1975

STAR INFORMATION FORM

1. Report No. 022575		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle ERTS MULTISPECTRAL IMAGE TRANSFORMATIONS FOR GEOLOGICAL LINEAMENT ENHANCEMENT				5. Report Date February 25, 1975	
				6. Performing Organization Code	
7. Author(s) Paul E. Anuta Bijan Mobasser				8. Performing Organization Report No. 022575	
				10. Work Unit No.	
9. Performing Organization Name and Address Laboratory for Applications of Remote Sensing Purdue University 1220 Potter Drive West Lafayette, Indiana 47906				11. Contract or Grant No. NGL-15-005-112 NAS9-14016	
				13. Type of Report and Period Covered III	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Earth Observations Division/Johnson Space Center Houston, Texas				14. Sponsoring Agency Code	
15. Supplementary Notes					
16. Abstract A study was conducted to investigate the edge enhancement potential of Gradient and Laplacian transformations on ERTS-1 multispectral scanner data. The requirement for enhancement came about from researchers interested in mapping geological lineaments from ERTS-1 satellite imagery. This high altitude (940 km) and large area (160 km square) imagery offers a greatly improved synoptic view of the earth as compared to lower altitude photomosaics. This report describes initial efforts to enhance linear features by application of two-dimensional derivative operators to the ERTS imagery. The enhancements also have direct applications to image registration by providing a means of enhancing temporarily invariant objects in the scene.					
17. Key Words (Suggested by Author(s)) LANDSAT IMAGE ENHANCEMENT LINEAMENT ENHANCEMENT GRADIENT LAPLACIAN			18. Distribution Statement		
19. Security Classif. (of this report) U		20. Security Classif. (of this page) U		21. No. of Pages 21	
				22. Price*	

HOW TO FILL OUT THE TECHNICAL REPORT STANDARD TITLE PAGE (JSC Form 1424)

Make items 1, 4, 5, 9, and 13 agree with the corresponding information on the report cover. Use all capital letters for title (Item 4). Leave items 2, 6, 10, 14, and 18 blank. Complete the remaining items as follows:

3. Recipient's Catalog No. Reserved for use by report recipients.
7. Author(s). Include corresponding information from the report cover. In addition, list the affiliation of an author if it differs from that of the performing organization.
8. Performing Organization Report No. Insert if performing organization wishes to assign this number.
11. Insert the number of the contract or grant under which the report was prepared.
12. In addition to the name and address as given on the cover, include the name of the JSC technical monitor for whom the work was performed.
15. Supplementary Notes. Enter information not included elsewhere but useful, such as: Prepared in cooperation with. . . Translation of (or by). . . Presented at conference of. . . To be published in. . .
16. Abstract. Include a brief (200 words) factual summary of the most significant information contained in the report. If possible, the abstract of a classified report should be unclassified. If the report contains a significant bibliography or literature survey, mention it here.
17. Key Words. Insert terms or short phrases selected by the author from the NASA Thesaurus (SP-7040) that identify the principal subjects covered in the report, and that are sufficiently specific and precise to be used for cataloging.
19. Security Classification (of report). NOTE: Reports carrying a security classification will require additional markings giving security and downgrading information as specified by the Security Requirements Checklist and the DoD Industrial Security Manual (DoD 5220.22-M).
20. Security Classification (of this page). NOTE: Because this page may be used in preparing announcements, bibliographies, and data banks, it should be unclassified if possible. If a classification is required, indicate separately the classification of the title and the abstract by following these items with either "(U)" for unclassified, or "(C)" or "(S)" as applicable for classified items.
21. No. of Pages. Insert the number of pages.
22. Price. Insert the price set by the National Technical Information Service or the Government Printing Office, if known.

Introduction

A study was conducted to investigate the edge enhancement potential of Gradient and Laplacian transformations on ERTS-1 multispectral scanner data. The requirement for enhancement came about from researchers interested in mapping geological lineaments from ERTS-1 satellite imagery. This high altitude (940 km) and large area (160 km square) imagery offers a greatly improved synoptic view of the earth as compared to lower altitude photo-mosaics. This report describes initial efforts to enhance linear features by application of two-dimensional derivative operators to the ERTS imagery. The enhancements also have direct applications to image registration by providing a means of enhancing temporarily invariant objects in the scene. The work was done as part of the evaluation of image transforms task under the NASA grants cited. Preliminary results are presented here.

The work reported in this information note was sponsored by the National Aeronautics and Space Administration NASA under Grant Number NGL-15-005-112 and Contract NAS9-14016.

Image Gradient Transformation

Edges of relatively homogeneous features in remote sensor images are characterized by step-like changes in the radiometric values observed. The gradient or vector derivative can be used to enhance edges and suppress more homogeneous areas in the image. The gradient image for a continuous real function $f(x,y)$ of two real variables (x,y) is defined as:

$$\vec{\nabla} f = \vec{i} \frac{\partial f(x,y)}{\partial x} + \vec{j} \frac{\partial f(x,y)}{\partial y} \quad (1)$$

where:

$\frac{\partial f}{\partial x,y}$ are the partial derivatives of the function with respect to x and y

$\vec{i}, \vec{j}$ unit vectors in the two orthogonal image dimensions

$\vec{\nabla} f$ Vector Gradient

An approximation of the gradient for discrete images can be computed by differencing adjacent pixels².

$$\vec{\nabla} f = \vec{i}(f_{i,j+1} - f_{ij}) + \vec{j}(f_{i+1,j} - f_{ij}) \quad (2)$$

where: f_{ij} is the image value at row i and column j

The gradient is most useful as a magnitude value which can be used to generate a positive gradient image. The magnitude of the discrete gradient is:

$$|\nabla f| = \sqrt{(f_{i,j+1} - f_{ij})^2 + (f_{i+1,j} - f_{ij})^2} \quad (3)$$

The gradient is the derivative of a two-dimensional surface in the direction of the maximum rate of change. The direction of the gradient vector is

$$\theta = \tan^{-1} \left[\frac{\frac{\partial f(x,y)}{\partial x}}{\frac{\partial f(x,y)}{\partial y}} \right] \quad (4)$$

The coordinate systems are not specified here so this is a general expression for discussion only. The derivative of the image in any direction can be computed by taking the appropriate combination of the orthogonal derivatives:

$$\frac{df}{dr(\theta)} = i \frac{\partial f}{\partial x} \cos \theta + j \frac{\partial f}{\partial y} \sin \theta \quad (5)$$

Where: $\gamma(\theta)$ is the radial direction of the derivative as defined by θ

Laplacian-Transformation

The Laplacian or second derivative magnitude for a discrete image is:

$$\begin{aligned} \nabla^2 f &= \left[(f_{ij} - f_{i-1,j}) - (f_{i+1,j} - f_{ij}) \right] \\ &\quad + \left[(f_{ij} - f_{i,j-1}) - (f_{i,j+1} - f_{ij}) \right] \\ &= 4f_{ij} - \left[f_{i-1,j} + f_{i+1,j} + f_{i,j-1} + f_{i,j+1} \right] \quad (6) \end{aligned}$$

Note that the Laplacian is a scalar whereas the Gradient is a vector (see [2] pg. 387.) The scalar gradient magnitude and Laplacian were implemented via FORTRAN programs and applied to a portion of an ERTS-1 multispectral scanner covering an area in central Nevada.

Description of Test Data

The test data chosen for evaluation of the derivative operators was ERTS-1 MSS data from Frame 1010-17592 taken over central Nevada on August 10, 1974. The subframe analysed is shown in Figure 1. This is the same data analysed in reference 1 and this study is intended as a continuation of lineament analysis research described there. The area shown is represented by the first 768 columns and the first 570 lines from this frame. The ground area covered is approximately 27 miles wide and 28 miles vertically.



Figure 1 Nevada ERTS -1 test site used for lineament enhancement tests. Frame 1018-17592, Band 5 shown, obtained August 10, 1972. Center location: 40°, 2' North, 116°, 36' West. The Humbolt River crosses the image in the upper right corner with the Reese River joining it in the top center in the very bright area running southeast to northeast. The town of Battle Mountain lies at the junction of the two rivers. Interstate 80 parallels the Humbolt River as does the Southern Pacific and Western Pacific Railways. Mt. Lewis (El. 9688) rises in the range in the center of the picture.

The area is rich in mineral deposits and numerous lineaments have been mapped and related to these deposits. The Battle Mountain mining district is particularly rich in deposits and a major **lineament** passes through this area. Battle Mountain itself is the dark area in the lower right corner of Figure 1. The Humbolt River crosses the area in the upper right corner. This small area was chosen to test the enhancement techniques. Much larger areas will be processed based on any favorable results from this investigation.

Evaluation of Gradient Transformation

The discrete gradient operation was applied to the data shown in Figure 1 for the four ERTS MSS bands. The results of these operations are portrayed by digital display images of the gradient reproduced in **gray** scale form. The gradient magnitude is a positive scalar with a range of values from zero where no edges are found to a maximum of five to twenty units for sharp edge phenomena. This range is expanded to cover most of the 0-255 dynamic range of the data system. The expanded gradient image was written on tape and reproduced using standard digital display histogramming and display procedures.

The gradient magnitude image is shown in Figure 2 for bands 5 and 6. Linear features in the image are enhanced quite well; however, the valley floors covered with highly reflective outwash material show very high gradient values indicating very rough surfaces in these areas. This result indicates a basic problem with the gradient in that



Figure 2 Gradient magnitude transformation applied to the image data shown in Figure 1. Brighter areas are caused by larger gradient values.

both linear features and rough textured areas are enhanced producing a highly cluttered image. This is especially troublesome in the mountain ranges where the lineaments need to be enhanced and are masked by the clutter of the dense irregular shapes which are producing the clutter effect. This effect is more prominent in the red band (5) than in the infra-red band (6) as seen in Figure 1.

The question remains as to whether the gradient makes geologically significant lineaments more visible. Most of the linear features seen in Figure 2 are roads, railroads, power lines and surface topographic features not related to lineaments of interest. A known lineament passes through the Battle Mountain area in a southeast northwest direction and it appears that this feature is evidenced by the faint line of brightness running in a straight line across the north edge of Battle Mountain. Another lineament can be recognized running southwest northeast at the east edge of a short mountain range just west of Battle Mountain in about the center of Figure 2. These lineaments are much more apparent in the gradient images than in the original image.

Threshold Gradient Analysis

Further manipulation was performed on the gradient images by thresholding the gradient at various gray levels. All gradient values below a threshold were set to a black level and all values above were set to white. The threshold was varied arbitrarily to observe the effect of thresholding. Figure 3 contains thresholded gradient images for band 5

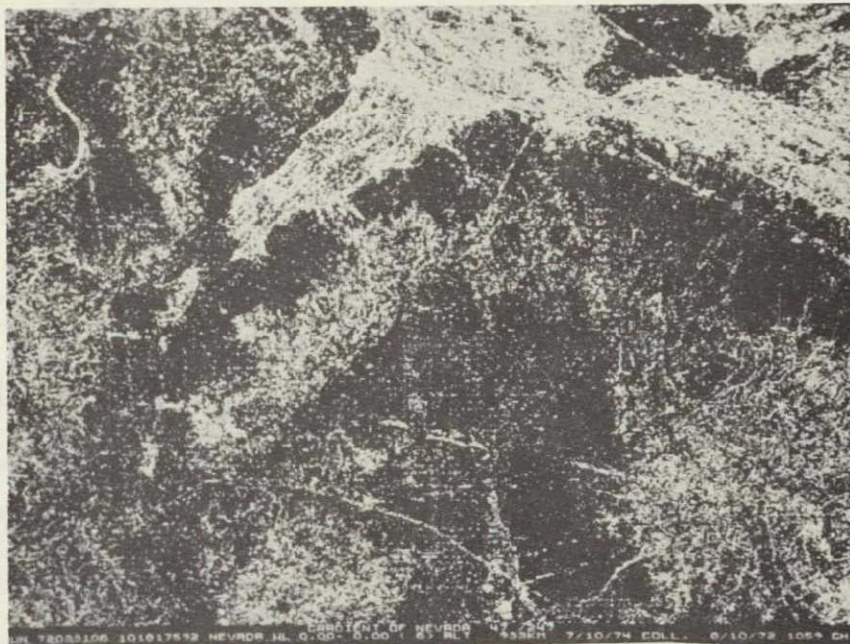


Figure 3a Thresholded gradient image of band 5 of Nevada Test site. Threshold = 47

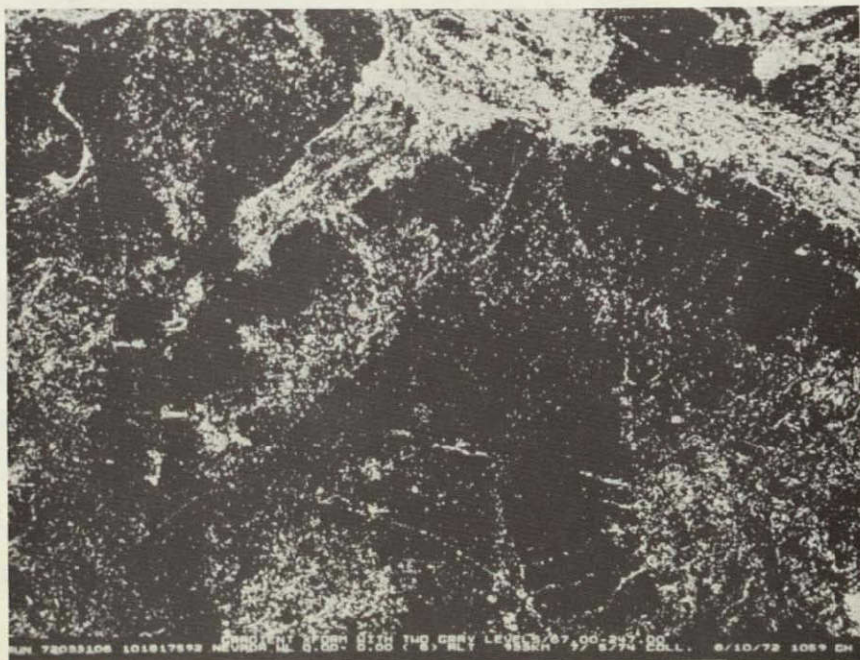


Figure 3b Same as (a) except for threshold = 67

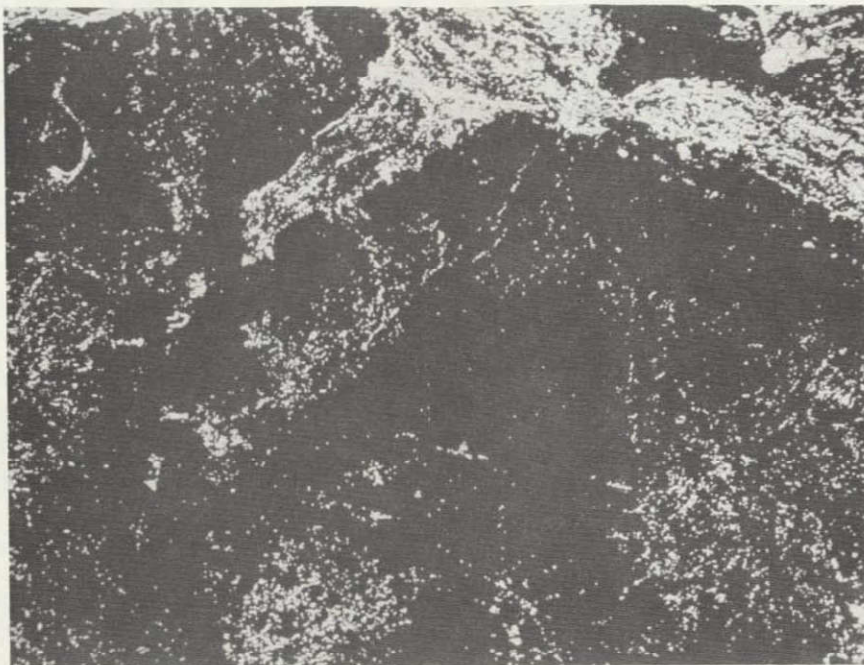


Figure 3c Thresholded gradient image of Nevada test site with threshold = 87.

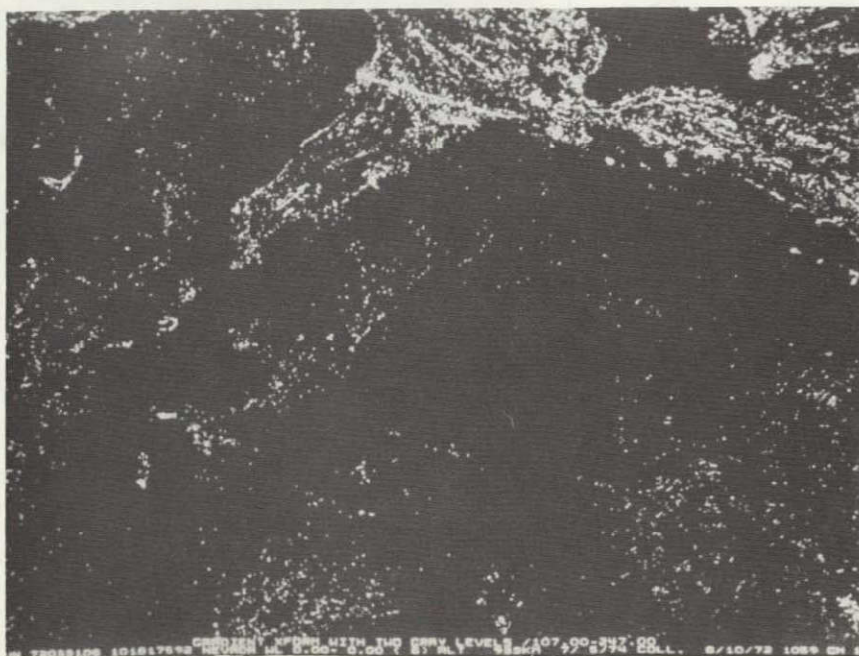


Figure 3d Same as (c) with threshold = 107.

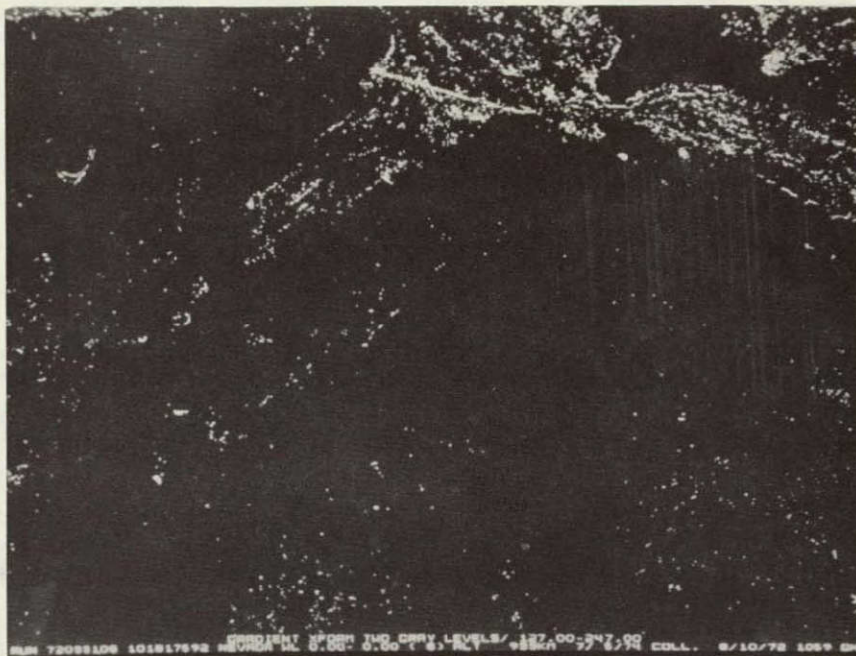


Figure 3e Same as c except threshold = 127.

for five values of threshold. The low threshold value of 47 produces an image very similar to the continuous gradient in Figure 2. The thresholded image is a little "cleaner" and more closely resembles the band 7 continuous gradient image. A threshold of 67 (Figure 3b) causes a marked reduction in edge density and causes the major Battle Mountain lineament to become unrecognizable. The sharp line feature in the central mountain range is quite clear and is enhanced by the raised threshold. Finer edge structure in the flat valley area now becomes visible, also. As the threshold is raised to 87, 107 and 127 more and more edge structure is eliminated. The interstate highway crossing the brilliant wash area becomes sharply visible for high threshold values whereas this feature was totally masked in the continuous and lower threshold value cases.

This experimentation indicates that thresholding may be a very valuable additional operation since linear features have various appearances in the gradient and can be further enhanced by using the correct threshold level. Better evaluation of these operations must be carried out over much larger image areas. The present preliminary analysis was limited to the maximum single image data set size for every point display via the LARS digital display system. Display of the full frame will require an output device with at least a 2400 sample square digital image point capability. Mosaicing can be used to assemble the entire area photo but this was not done in this study.

Laplacian Transformation Evaluation

The Laplacian transformation was also applied to the same data set. The Laplacian is a scalar which can be negative or positive so a bias was added to produce a non-negative result. The Laplacian was applied to the test site data and the results for the .6-.7 μm band are shown in Figure 4. The "noisiness" of the image seems to be more uniform and edges are more subtle. Closer inspection reveals that edges are more distinct in areas of dense edges compared to the gradient. The road through the valley in the top center is visible in the Laplacian and not in the gradient.

The Laplacian was further explored by thresholding it also. Figure 5 contains the thresholded Laplacian for five cases. Here too the Laplacian shows less structure than the gradient although certain edges of lines are visible that do not show in the gradient. The Laplacian threshold of 35 seems to generate the most acceptable image since for higher values edges start to disappear as fast as the noise. An undesirable feature of thresholding is the subjective nature of the results making it difficult to analytically set threshold levels in an algorithm.

Summary and Conclusions

Experiments using the gradient and Laplacian operators on on ERTS-1 multispectral scanner imagery were performed to evaluate their lineament enhancement capability. Both unaltered and thresholded images were generated for a test site in Nevada. The work reported here was directed toward general evaluation of the transforms rather than specific

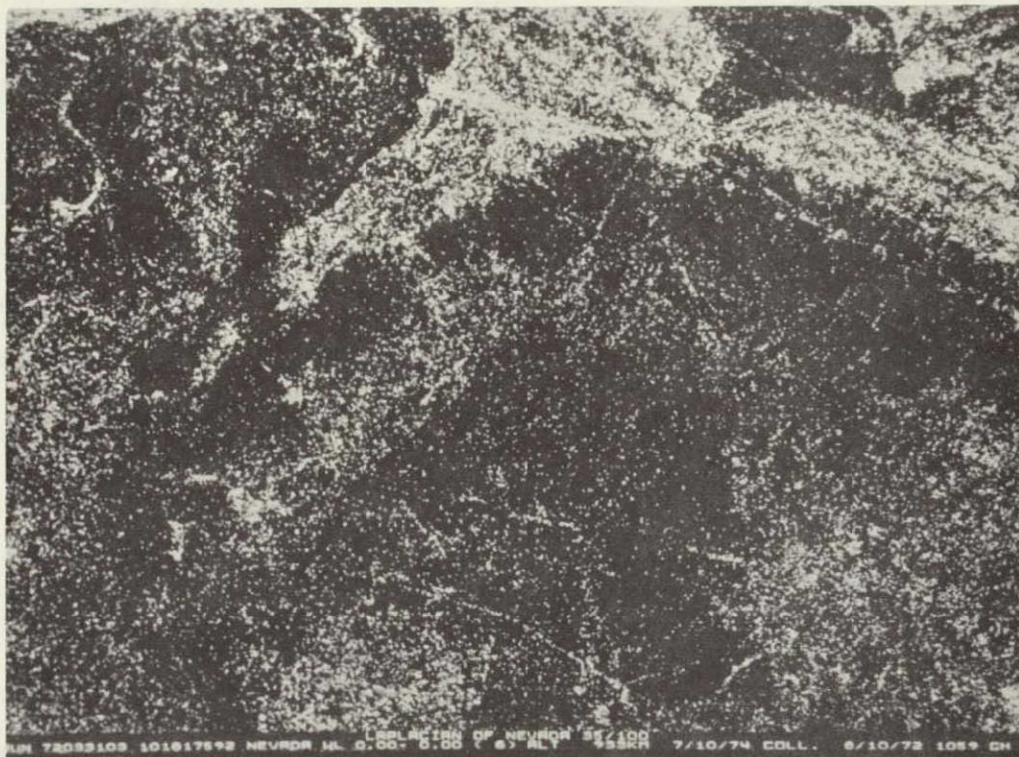


Figure 5a Thresholded Laplacian Image of band 5 ($0.6-0.7\mu\text{m}$) of Nevada site. Threshold = 35.

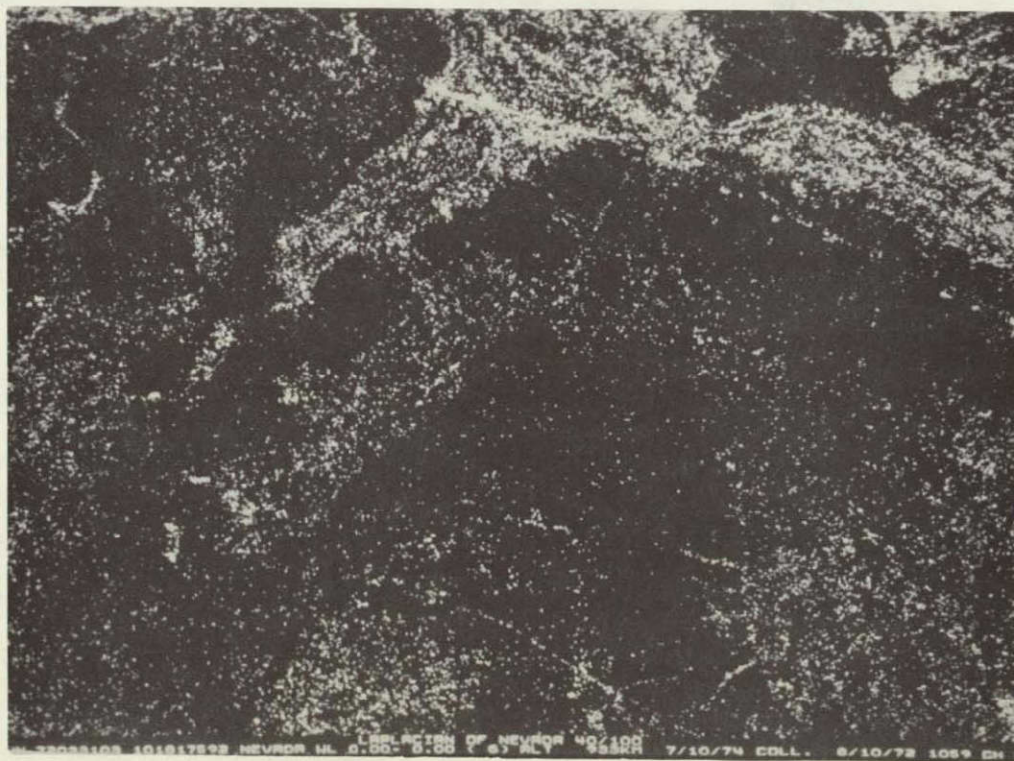


Figure 5b Thresholded Laplacian Image with threshold = 40.

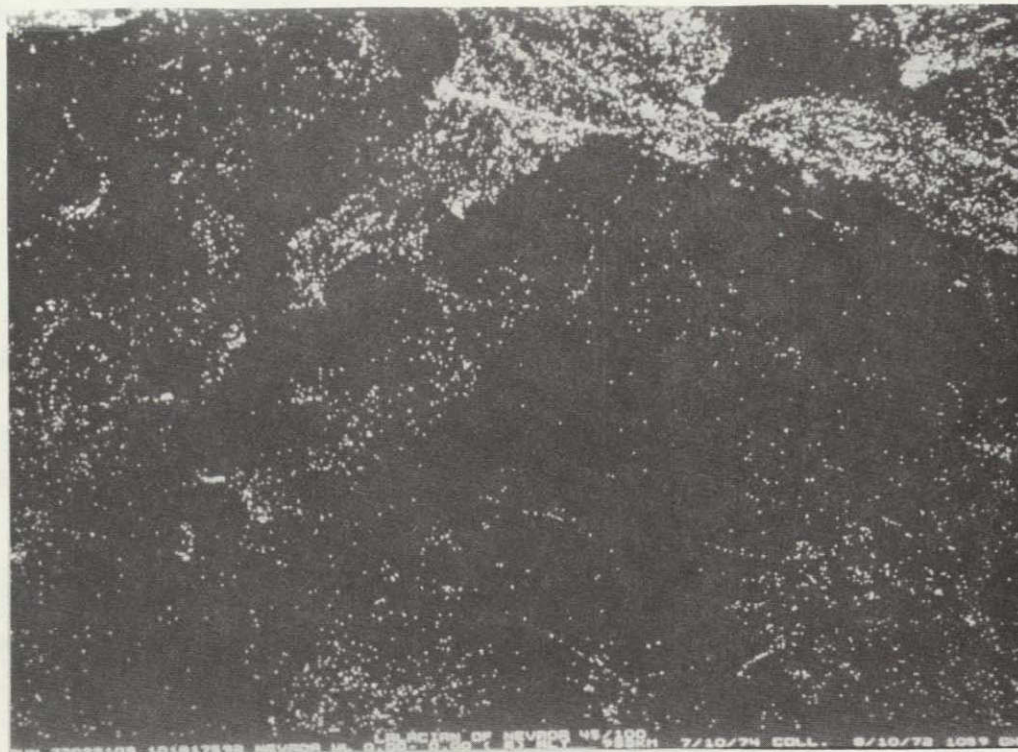


Figure 5c Thresholded Laplacian Image Threshold = 45.

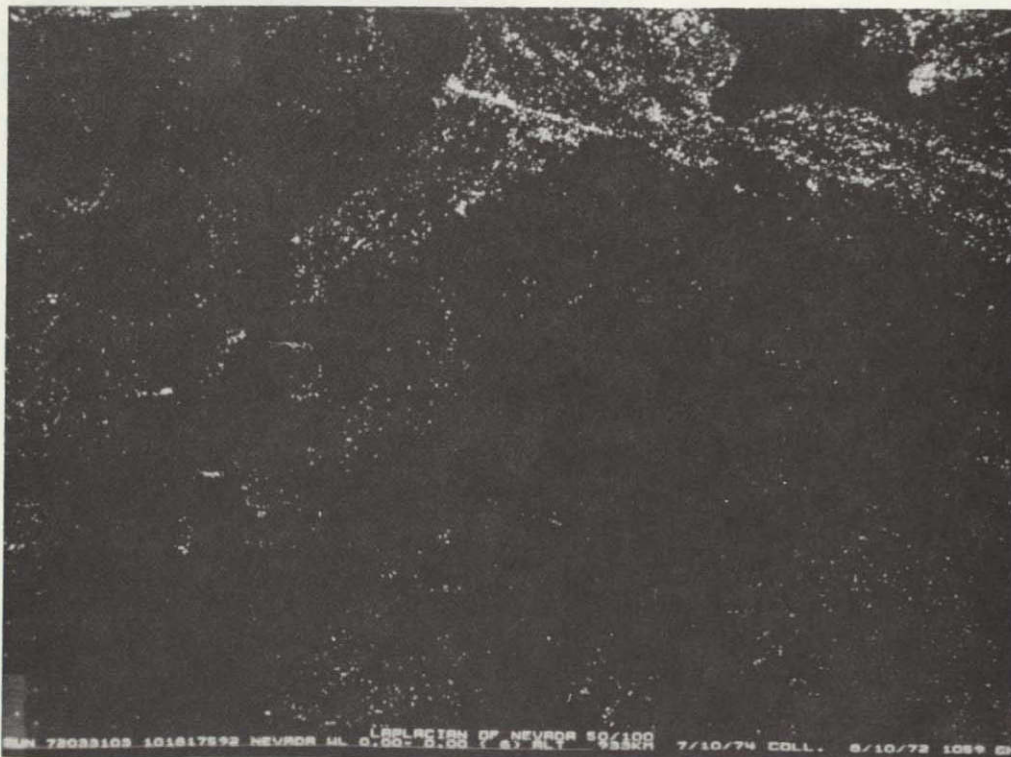


Figure 5d Thresholded Laplacian Image, Threshold = 50.




Figure 5e Thresholded Laplacian Image, Threshold = 60.

lineament detection. Only a small area of the frame was studied. Further work will be required to define an acceptable transform then the entire frame should be enhanced and studied with respect to enhancement of known lineaments.

References

1. Levandowski, D.W., Jennings, T.V., Lehman, W.T., "Applications of ERTS-1 Imagery to Mapping of Lineaments Favorable to the Localization of Ore Deposits in North Central Nevada," LARS Information Note 101073, October 1973.
2. Azriel Rosenfeld, "Picture Processing by Computer," Academic Press, New York, 1969.
3. I.S. Sokolnikoff, R.M. Redheffer, "Mathematics of Physics and Modern Engineering," McGraw Hill, New York, 1958.



DOCUMENT NUMBER CR-151468

TITLED ERTS MULTISPECTRAL IMAGE TRANSFORMATIONS FOR
GEOLOGICAL LINEAMENT ENHANCEMENT

BY PURDUE UNIVERSITY (NAS 9-14016)
HAS BEEN ASSIGNED THE
NASA ACCESSION NUMBER

DOCUMENT RELEASE AUTHORIZATION

NASA Scientific and Technical Information Facility P.O. Box 8757, Balt/Wash International Airport, Maryland 21240		Control No. _____ Date: <u>July 26, 1977</u>									
D E S C R I P T I O N	TITLE: <u>ERTS MULTISPECTRAL IMAGE TRANSFORMATIONS FOR GEOLOGICAL LINEAMENT ENHANCEMENT</u>										
	AUTHOR(S): <u>Anuta, P. E.; Mobasser, B.</u>										
	ORIGINATING ORGANIZATION: <u>Purdue University</u>		COGNIZANT NASA CENTER								
	CONTRACT NO: <u>NAS 9-14916</u>										
	SECURITY CLASSIFICATION: TITLE: <u>U</u> DOCUMENT: <u>U</u>										
	REPORT NO: <u>088 LARS-TN-022575</u>										
	DATE: <u>Feb. 25, 1975</u>										
	NASA CR NO: <u>151468</u>	WORK UNIT NO: _____	NASA TECHNICAL MONITOR <u>I. Dale Browne</u>	OFFICE CODE <u>SF 3</u>							
NASA TMX NO: _____											
THE FOLLOWING TO BE COMPLETED BY THE RESPONSIBLE NASA PROGRAM OFFICER OR HIS DESIGNEE											
(Further information is available in SP-7034 entitled R & D Reporting Guidance for Technical Monitoring of NASA Contracts) I. Document may be processed into the NASA Information System as follows ☒ May be announced in STAR (or CSTAR if a limited availability is checked below) ☐ May not be announced (The attached letter may be consulted for information pertaining to the NASA non-announcement series) ☐ May not be entered into the System because _____ (Provide a brief statement to be quoted in answering requests for the referenced document)											
II. Document may be made available as checked below <table border="0"> <tr> <td>☒ Publicly Available</td> <td>☐ U S Government Agencies, NASA and NASA Contractors Only</td> </tr> <tr> <td>☐ Classified but Unlimited to Security Qualified Requesters</td> <td>☐ NASA and NASA Contractors Only</td> </tr> <tr> <td>☐ U S. Government Agencies and Contractors Only</td> <td>☐ NASA Headquarters and Centers Only</td> </tr> <tr> <td>☐ U S. Government Agencies Only</td> <td>☐ Other Limitations (Specify) _____</td> </tr> </table>				☒ Publicly Available	☐ U S Government Agencies, NASA and NASA Contractors Only	☐ Classified but Unlimited to Security Qualified Requesters	☐ NASA and NASA Contractors Only	☐ U S. Government Agencies and Contractors Only	☐ NASA Headquarters and Centers Only	☐ U S. Government Agencies Only	☐ Other Limitations (Specify) _____
☒ Publicly Available	☐ U S Government Agencies, NASA and NASA Contractors Only										
☐ Classified but Unlimited to Security Qualified Requesters	☐ NASA and NASA Contractors Only										
☐ U S. Government Agencies and Contractors Only	☐ NASA Headquarters and Centers Only										
☐ U S. Government Agencies Only	☐ Other Limitations (Specify) _____										
Signature (Program Officer or Designee): <u>I. D. Browne</u>		Office Code: <u>SF3</u> Telephone No: <u>4617</u>	Date Signed: <u>7/27/77</u>								
MAILING LABEL → Use open window envelope or Clip out and paste		TO: NASA Scientific and Technical Information Facility Attn: Accessioning Department P.O. Box 8757 Balt/Wash International Airport Maryland. 21240									

