

**ENVIRONMENTAL STATEMENT**  
**for the**  
**NATIONAL AERONAUTICS AND SPACE ADMINISTRATION**  
**OFFICE OF SPACE SCIENCE**  
**LAUNCH VEHICLE AND PROPULSION PROGRAMS**



**FINAL STATEMENT**

**July, 1973**

**NATIONAL AERONAUTICS AND SPACE ADMINISTRATION**  
**Washington, D.C. 20546**

SUMMARY

( ) Draft                      ( X ) Final

Responsible Federal Agency: National Aeronautics and Space Administration (NASA),  
Office of Space Science, Launch Vehicle and Propulsion  
Programs

1. (X) Administrative Action                      ( ) Legislative Action
2. NASA OSS Launch Vehicle and Propulsion Programs is responsible for the launch of approximately 20 automated science and applications spacecraft per year. These launches are for NASA programs and those of other U. S. government agencies, private organizations--such as the Comsat Corporation, foreign countries, and international organizations. Launches occur from Cape Kennedy, Florida; Vandenberg Air Force Base, California; Wallops Island, Virginia; and the San Marco Platform in the Indian Ocean off Kenya.
3. Spacecraft launched by this program contribute in a variety of ways to the control of and betterment of the environment (e.g., meteorological satellites). Environmental effects caused by the launch vehicles are limited in extent, duration, and intensity and are considered insignificant.
4. There are no short-term alternatives to the current family of launch vehicles. The possibilities for changes in the family, including new stage and launch vehicle developments, are continuously reviewed. A new booster (first stage) with liquid hydrogen and liquid oxygen propellants, as used in the Centaur upper stage, would produce a more innocuous product of combustion (water). Such a development might cost as much as \$500 million and take as long as 5 years. The Space Shuttle, intended to replace most of the current family of launch vehicles, is expected to be operational about 1979-1980.
5.    Comments requested from:                      Comments received from:
- |                              |                        |
|------------------------------|------------------------|
| CEQ, EPA, OMB, AEC           | CEQ, AEC               |
| DOD                          | DOD                    |
| Department of State          | Department of State    |
| Department of Commerce       | Department of Interior |
| Department of Transportation |                        |
| Department of Interior       |                        |
6. Draft Statement published August 1, 1972.  
Final Statement published July, 1973.

**Page intentionally left blank**

**Page intentionally left blank**

TABLE OF CONTENTS

	<u>Page</u>
SUMMARY. . . . .	1
PROGRAM DESCRIPTION. . . . .	1
TOTAL IMPACT OF THE PROGRAM. . . . .	4
ACTIVITIES WHICH MAY RESULT IN ENVIRONMENTAL IMPACT. . . . .	7
AIR QUALITY. . . . .	9
Source and Nature of Emissions. . . . .	9
Impact on the Environment . . . . .	11
Normal Launch. . . . .	13
Engine Tests . . . . .	29
Abnormal Launches and Accidents. . . . .	30
WATER QUALITY. . . . .	36
Source and Nature of Pollutants . . . . .	36
Impact on the Environment . . . . .	40
Characteristics of the Oceans Near the Launch Sites. . . . .	44
Normal Launch. . . . .	45
Aborted Flights. . . . .	46
NOISE. . . . .	51
Source and Nature . . . . .	51
Impact on the Environment . . . . .	54
REENTRY DEBRIS . . . . .	59
ALTERNATIVES . . . . .	60
THE RELATIONSHIP BETWEEN THE LOCAL SHORT-TERM USES OF THE ENVIRONMENT AND THE MAINTENANCE AND ENHANCEMENT OF LONG-TERM PRODUCTIVITY . . . . .	62
IRREVERSIBLE AND IRRETRIEVABLE COMMITMENTS OF RESOURCES. . . . .	63
DISCUSSION OF COMMENTS RECEIVED FROM OTHER AGENCIES. . . . .	66

TABLE OF CONTENTS  
(Continued)

	<u>Page</u>
<u>APPENDIX</u>	
APPENDIX A. REFERENCES . . . . .	A-1
APPENDIX B. EXAMPLE TRAJECTORY ELEVATIONS AND IMPACT POINT MAPS . . . . .	B-1
APPENDIX C. LAUNCH SITE MAPS, DISTANCE TABLE AND POPULATION DISTRIBUTIONS. . . . .	C-1
APPENDIX D. ATMOSPHERIC DIFFUSION MODELS. . . . .	D-1
APPENDIX E. RESPONSES TO THE DRAFT ENVIRONMENTAL STATEMENT FOR NASA-OSS LAUNCH VEHICLE AND PROPULSION PROGRAMS . . . . .	E-1

LIST OF FIGURES

FIGURE 1. ESTIMATED INSTANTANEOUS PEAK HC1 CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SEA BREEZE METEOROLOGICAL CONDITIONS. . . . .	16
FIGURE 2. ESTIMATED INSTANTANEOUS PEAK HC1 CONCENTRATIONS DOWNWIND OF LAUNCHES DURING FALL METEOROLOGICAL CONDITIONS. . . . .	17
FIGURE 3. ESTIMATED INSTANTANEOUS PEAK HC1 CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SPRING METEOROLOGICAL CONDITIONS. . . . .	18
FIGURE 4. ESTIMATED INSTANTANEOUS PEAK CO CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SEA BREEZE METEOROLOGICAL CONDITIONS . . . . .	19
FIGURE 5. ESTIMATED INSTANTANEOUS PEAK CO CONCENTRATIONS DOWNWIND OF LAUNCHES DURING FALL METEOROLOGICAL CONDITIONS. . . . .	20
FIGURE 6. ESTIMATED INSTANTANEOUS PEAK CO CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SPRING METEOROLOGICAL CONDITIONS. . . . .	21
FIGURE 7. ESTIMATED INSTANTANEOUS PEAK Al <sub>2</sub> O <sub>3</sub> CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SEA BREEZE METEOROLOGICAL CONDITIONS. . . . .	22

TABLE OF CONTENTS  
(Continued)

Page

LIST OF FIGURES  
(Continued)

FIGURE 8.	ESTIMATED INSTANTANEOUS PEAK $Al_2O_3$ CONCENTRATIONS DOWNWIND OF LAUNCHES DURING FALL METEOROLOGICAL CONDITIONS. . . . .	23
FIGURE 9.	ESTIMATED INSTANTANEOUS PEAK $Al_2O_3$ CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SPRING METEOROLOGICAL CONDITIONS. . . . .	24
FIGURE 10.	BOUNDS FOR THE ESTIMATED INSTANTANEOUS PEAK HCl CONCENTRATIONS DOWNWIND OF ON-PAD CASTASTROPHES FOR SEA BREEZE, FALL, AND SPRING METEOROLOGICAL CONDITIONS. . . . .	31
FIGURE 11.	BOUNDS FOR THE ESTIMATED INSTANTANEOUS PEAK CO CONCENTRATIONS DOWNWIND OF ON-PAD CASTASTROPHES FOR SEA BREEZE, FALL, AND SPRING METEOROLOGICAL CONDITIONS. . . . .	32
FIGURE 12.	BOUNDS FOR THE ESTIMATED INSTANTANEOUS PEAK $Al_2O_3$ CONCENTRATIONS DOWNWIND OF ON-PAD CASTASTROPHES FOR SEA BREEZE, FALL, AND SPRING METEOROLOGICAL CONDITIONS. . . . .	33
FIGURE 13.	ESTIMATED MAXIMUM RADIUS AT WHICH THE MAC IS EXCEEDED FOR WORST-CASE TITAN III E/CENTAUR OR TITAN IIIC ABORTS . . . . .	48
FIGURE 14.	ESTIMATED MAXIMUM RADIUS AT WHICH THE MAC IS EXCEEDED FOR WORST-CASE DELTA ABORTS. . . . .	49
FIGURE 15.	APPROXIMATE RELATIONSHIP BETWEEN VEHICLE THRUST AND SOUND PRESSURE LEVEL AT A FIXED DISTANCE. . . . .	53
FIGURE 16.	OVERALL SOUND PRESSURE LEVELS AT A DISTANCE OF 7,710 METERS FROM AN ATLAS LAUNCH AS A FUNCTION OF TIME . . . . .	55
FIGURE 17.	MAXIMUM, FREE-FLIGHT, SPL SPECTRA FOR A SATURN TEST AT THREE DISTANCES . . . . .	56
FIGURE 18.	PROBABILITY OF TITAN DESTRUCT AND HAZARDOUS A-50 CONCENTRATION . . . . .	73
FIGURE B-1.	EXAMPLE TRAJECTORY ELEVATION FOR SCOUT. . . . .	B-3
FIGURE B-2.	EXAMPLE TRAJECTORY ELEVATION FOR SLV3D/CENTAUR. . . . .	B-4
FIGURE B-3.	EXAMPLE TRAJECTORY ELEVATION FOR THOR(3 CASTOR)/DELTA(TSE) . . . . .	B-5

TABLE OF CONTENTS  
(Continued)

Page

LIST OF FIGURES  
(Continued)

FIGURE B-4.	EXAMPLE TRAJECTORY ELEVATION FOR THOR(6 CASTOR)/DELTA(TSE) . . . . .	B-6
FIGURE B-5.	EXAMPLE TRAJECTORY ELEVATION FOR THOR(9 CASTOR)/DELTA(TSE) . . . . .	B-7
FIGURE B-6.	EXAMPLE TRAJECTORY ELEVATION FOR TITAN IIIC. . . . .	B-8
FIGURE B-7.	EXAMPLE TRAJECTORY ELEVATION FOR TITAN IIIE/CENTAUR. . . . .	B-9
FIGURE B-8.	EXAMPLE LOCI OF IMPACT POINTS FOR SCOUT (LAUNCHES FROM WALLOPS ISLAND, WTR, AND SAN MARCO) . . . . .	B-10
FIGURE B-9.	EXAMPLE LOCUS OF IMPACT POINTS FOR SLV3D/CENTAUR (LAUNCH FROM ETR). . . . .	B-11
FIGURE B-10.	EXAMPLE LOCI OF IMPACT POINTS FOR THOR (3 CASTOR)/DELTA(TSE) (LAUNCHES FROM WTR AND ETR) . . . . .	B-12
FIGURE B-11.	EXAMPLE LOCI OF IMPACT POINTS FOR THOR (6 CASTOR)/DELTA(TSE) (LAUNCHES FROM WTR AND ETR). . . . .	B-13
FIGURE B-12.	EXAMPLE LOCI OF IMPACT POINTS FOR THOR (9 CASTOR)/DELTA(TSE) (LAUNCHES FROM WTR AND ETR) . . . . .	B-14
FIGURE B-13.	EXAMPLE LOCUS OF IMPACT POINTS FOR TITAN IIIC (LAUNCHES FROM ETR). . . . .	B-15
FIGURE B-14.	EXAMPLE LOCUS OF IMPACT POINTS FOR TITAN IIIE/CENTAUR (LAUNCHES FROM ETR). . . . .	B-16
FIGURE C-1.	MAP OF KENNEDY SPACE CENTER (ETR) AND SURROUNDINGS . . . . .	C-2
FIGURE C-2.	MAP OF VANDENBERG AIR FORCE BASE (WTR) AND SURROUNDINGS . . . . .	C-3
FIGURE C-3.	MAP OF WALLOPS ISLAND (SCOUT LAUNCH FACILITY). . . . .	C-4
FIGURE C-4.	MAP OF SAN MARCO LAUNCH COMPLEX AND SURROUNDINGS (SCOUT LAUNCH FACILITY). . . . .	C-5

TABLE OF CONTENTS  
(Continued)

Page

LIST OF FIGURES  
(Continued)

FIGURE C-5.	POPULATION DISTRIBUTION AS A FUNCTION OF DISTANCE FROM LC17, LC36 or LC41. . . . .	C-7
FIGURE C-6.	POPULATION DISTRIBUTION AS A FUNCTION OF DISTANCE FROM SLC-2 or SLC-5. . . . .	C-8
FIGURE C-7.	POPULATION DISTRIBUTION AS A FUNCTION OF DISTANCE FROM THE SCOUT LAUNCH PAD ON WOLLOPS ISLAND. . . . .	C-9
FIGURE C-8.	POPULATION DISTRIBUTION AS A FUNCTION OF DISTANCE FROM THE SAN MARCO PLATFORM, KENYA . . . . .	C-10
FIGURE D-1.	COMPARISON OF PREDICTED PEAK GROUND LEVEL HCl CONCENTRATIONS DOWNWIND OF TITAN III LAUNCHES. . . . .	D-7

LIST OF TABLES

TABLE 1.	CURRENT AND NEAR FUTURE LAUNCH VEHICLES USED FOR NASA AUTOMATED MISSIONS. . . . .	2
TABLE 2.	SUMMARY OF ENVIRONMENTAL IMPACT OF NASA OSS LAUNCH VEHICLE AND PROPULSION PROGRAMS. . . . .	6
TABLE 3.	EXPOSURE CRITERIA FOR SOME COMBUSTION PRODUCTS AND PROPELLANTS. . . . .	12
TABLE 4.	DISPERSION CHARACTERISTICS WITHIN SELECTED ATMOSPHERIC LAYERS . . . . .	14
TABLE 5.	QUANTITIES OF POTENTIAL POLLUTANTS EMITTED INTO SELECTED ATMOSPHERIC LAYERS. . . . .	15
TABLE 6.	SUMMARY OF ESTIMATED MAXIMUM RADIUS OF GROUND LEVEL EFFECTS FOR TITAN IIIE/CENTAUR OR TITAN IIIC . . . . .	35
TABLE 7.	SUGGESTED MAXIMUM ALLOWABLE CONCENTRATIONS (MAC) OF PROPELLANTS IN WATER . . . . .	39

TABLE OF CONTENTS  
(Continued)

Page

LIST OF TABLES  
(Continued)

TABLE 8.	PROPELLANT QUANTITIES FOR THE TITAN IIIIE/CENTAUR. . . . .	42
TABLE 9.	PROPELLANT QUANTITIES FOR THE TAT(3C)/DELTA . . . . .	43
TABLE 10.	PEAK SOUND PRESSURE LEVELS (SPL) RESULTING FROM ATLAS AND TITAN IIIC/TITAN IIIIE LAUNCHES. . . . .	52
TABLE 11.	NOISE LEVELS FOR DAMAGE RISK AND ANNOYANCE. . . . .	57
TABLE 12.	ACOUSTIC DOSE RESULTING FROM ATLAS AND TITAN IIIIE/TITAN IIIC LAUNCHES. . . . .	57
TABLE 13.	MATRIX OF ALTERNATIVES. . . . .	61
TABLE 14.	COMPARISON OF EMISSIONS INTO THE LOWER ATMOSPHERE. . . . .	69
TABLE C-1.	DISTANCES FROM LAUNCH PADS TO POINTS OF POTENTIAL CONCERN. . . . .	C-6

PROGRAM DESCRIPTION

The NASA Office of Space Science (OSS) Launch Vehicle and Propulsion Programs provides launch vehicles and launch vehicle operations for automated space missions of OSS, the NASA Office of Applications (OA), the NASA Office of Aeronautics and Space Technology (OAST), other government organizations (e.g., NOAA, DOD, and AEC), commercial firms (e.g., Comsat Corporation), foreign governments, and international organizations. This responsibility is met by a number of on-going launch vehicle programs and appropriate vehicle and propulsion system research and development activities which support current and expected future requirements.

The current and near future family of launch vehicles and a brief description of the significant features of each is given in Table 1.

In the period 1968-1973 (including all launches planned in 1973), these vehicles were launched at a collective average rate of about 16 per year, of which about 9 per year were launches of OSSA\* payloads. Current projections indicate an average launch rate of about 19 per year for the period 1973-1975 and it is expected that a similar launch rate will prevail in the 1975-1980 period. By 1980 it is expected that the Space Shuttle will be operational, and it will replace most of the launch vehicles covered here.

---

\* Office of Space Science and Applications. This office was divided into OSS and OA in late CY 1971.

TABLE 1. CURRENT AND NEAR FUTURE LAUNCH VEHICLES  
USED FOR NASA AUTOMATED MISSIONS(1,2)\*

Vehicle	Vehicle Status	Type of Propellant	Quantity of Propellant(a)** (kg)	Total Thrust Levels at Vehicle Mass (kg)	Maximum Diameter (m)	Length (b) (m)	Launch Site(s)
Scout	Operational	AP/Al/PU	9,687	17,960	2.7	22.6	Wallops Island, WTR, San Marco
Stage 1 (c)		AP/Al/PBAA	3,769				
Stage 2		AP/Al/NC/NG	1,175				
Stage 3		AP/Al/PBAN	276				
Stage 4		AP/Al/NC/NG	86.6				
Stage 5							
86.6 (Stage 5 is optional and is not included in the overall vehicle parameters.)							
Delta(3 Castor) Augmentation	Operational	AP/Al/PBAA	11,250	90,630	4.6	28.0	ETR, WTR
Thor(d)		LOX/RJ-1	66,230				
DSV-JE-3 (e)		IRFNA/UDNH	4,853				
TE-364-3 (f)		AP/Al/CTEB	658				
Delta(6 Castor) Augmentation	Operational	AP/Al/PBAA	22,500	104,200	4.6	28.0	ETR, WTR
[Other stages same as Delta(3 Castor)]							
Delta(9 Castor) Augmentation	Operational	AP/Al/PBAA	33,750	117,800	4.6	28.0	ETR, ETR
[Other stages same as above]							
Atlas/Centaur.	Operational	LOX/RF-1	121,600	146,100	4.9	35.7	ETR
SLV3D		LOX/LH <sub>2</sub>	13,650				
Centaur							
Titan IIIE/Centaur	In Development	AP/Al/PBAA/AN	394,600	634,100	10.1	48.5	ETR
Zero Stage		N <sub>2</sub> O <sub>4</sub> /Aerosine 50	116,100				
Core I		N <sub>2</sub> O <sub>4</sub> /Aerosine 50	30,160				
Core II		LOX/LH <sub>2</sub>	13,650				
Centaur							
Titan IIIC	Operational	AP/Al/PBAA/AN	394,600	625,100	10.1	38.4	ETR
Zero Stage		N <sub>2</sub> O <sub>4</sub> /Aerosine 50	116,100				
Core I		N <sub>2</sub> O <sub>4</sub> /Aerosine 50	30,160				
Core II		N <sub>2</sub> O <sub>4</sub> /Aerosine 50	10,610				
Transtage							

\* Numbers in parentheses are references. See Appendix A.

\*\* Notes on next page.

TABLE 1. CURRENT AND NEAR FUTURE LAUNCH VEHICLES  
USED FOR NASA AUTOMATED MISSIONS (1,2)\*  
(Continued)

- (a) Expended weight, including miscellaneous fluids and gases, TVC fluid, ablatives, etc., in addition to propellant. See note below for nomenclature.
- (b) Length varies with the payload shroud and may be greater than shown for some configurations.
- (c) A somewhat larger first stage (Algol III) of similar characteristics has been developed with a propellant loading of 12,932 kg.
- (d) An improvement program is underway which will increase the Thor propellant to 79,538 kg.
- (e) An improved configuration is being developed which will use 4,690 kg of  $N_2O_4$ /Aerzine 50 propellant.
- (f) An updated version of the TE-364-3 (the TE-364-4) has been developed with a propellant loading of approximately 1,043 kg. The FW-4 is also used as an upper stage replacing the TE-364. Its propellant load is 276 kg.

NOTE: The following notation has been used for propellants:

AP	■ ammonium perchlorate
Al	■ aluminum
FU	■ polyurethane
PBAA	■ polybutadiene-acrylic acid
NC	■ nitrocellulose
NG	■ nitroglycerine
PBAN	■ polybutadiene-acrylic acid-acrylonitrile
LOX	■ liquid oxygen
RJ-1	■ a kerosene type hydrocarbon
IRFNA	■ red fuming nitric acid inhibited with HF
UDSH	■ unsymmetrical dimethyl hydrazine
CTPB	■ carboxy terminated polybutadiene
RP-1	■ a kerosene type hydrocarbon
LH <sub>2</sub>	■ liquid hydrogen
AN	■ acrylonitrile
Aerzine 50	■ equal parts of hydrazine and unsymmetrical dimethyl hydrazine

TOTAL IMPACT OF THE PROGRAM

The potential environmental impact of the National Aeronautics and Space Administration, Office of Space Science, Launch Vehicle and Propulsion Programs activities is summarized in Table 2. No significant impact is expected from normal current and planned future activities. The possible effects of certain types of accidents or flight failures involving Titan vehicles may be of marginal significance. However, the combinations of events leading to such situations are believed to be very rare: no examples have occurred.

In terms of global or even national significance, the contributions of NASA launch vehicles for automated missions to environmental pollution appear to be many orders of magnitude below those of other sources of such pollution.

Conversely, the space science and applications spacecraft launched by these vehicles have made significant contributions to the understanding, prediction, and use of the environment, and, thus, ultimately to its betterment. Future activities are expected to contribute even more to human welfare as the applications areas are further developed.

The commitment of resources to this program is modest and is not of major significance to the national economy. The program is not a major consumer of any scarce or limited resource.

Development activities, undertaken to maintain and improve the reliability and cost effectiveness of the launch vehicles, currently include improvements to the second stage and Thor booster for the Delta vehicle, integration of the Titan IIIE/Centaur vehicle, and improvements of the Centaur stage. Recently completed developments include an updated TE-364 motor (the TE-364-4) and a new Scout first stage (the Algol III). Additionally, certain research and development activities are carried out through the Supporting Research and Technology (SR&T) program, such as technology development of a large (2,670 Newton thrust) hydrazine monopropellant engine.

Vehicles are launched from four sites: Wallops Island, Virginia (Scout), Kennedy Space Center, Florida (Delta, Atlas/Centaur, Titan IIIE/Centaur, and Titan IIIC), Vandenberg Air Force Base, California (Scout and Delta), and San Marco Platform, Kenya (Scout).<sup>\*</sup> The individual vehicle projects are managed by the Lewis Research Center (Atlas/Centaur, Titan IIIE/Centaur), Goddard Space Flight Center (Delta), and Langley Research Center (Scout). Titan IIIC is managed by the Space and Missile Systems Organization of the United States Air Force.

---

\* See Appendix C for site maps.

TABLE 2. SUMMARY OF ENVIRONMENTAL IMPACT OF NASA OSS LAUNCH VEHICLE AND PROPULSION PROGRAMS

Area of Concern	Type of Event or Activity		Development and Test
	Normal Launch	Accident or Abort	
Air Quality	Effects limited to the immediate vicinity of the launch pad.	Limited area within facility boundaries possibly subjected to HCl concentrations above public exposure criteria in event of an on-pad fire or low-level abort of Titan IIIE/Centaur or Titan IIIC. No significant effect for other vehicles.*	No significant effect
Water Quality	No significant effect	Limited ocean volume (about 0.02 cubic miles) possibly subjected to hydrazine and UDMH concentrations above the maximum allowable concentrations as a result of unlikely combinations of failures for Titan IIIE/Centaur and Titan IIIC. No significant effects for other vehicles.*	No significant effect
Noise	No significant effect	No significant effect	No significant effect
Reentry Debris	No significant effect	No significant effect	No significant effect
Environmental Enhancement	Space Science and Applications Spacecraft make positive contributions		
Commitment of Resources	No significant commitment of scarce or limited resources.	No significant commitment of scarce or limited resources.	No significant commitment of scarce or limited resources.

\* i.e., Scout, Delta, and Atlas/Centaur

ACTIVITIES WHICH MAY RESULT IN ENVIRONMENTAL IMPACT

The activities which result from the operation of NASA OSS Launch Vehicle and Propulsion Programs are as follows:

- Advanced Studies
- Research and Development
- Launch Vehicle Manufacture
- Launch Vehicle and Component Testing
- Launches of Automated Spacecraft.

Possible environmental effects which might result from these activities include:

- Air Quality
- Water Quality
- Noise
- Reentry of Launch Vehicle Debris
- Population Shifts (Due to manpower needs for the programs)
- Solid Waste
- Pesticides.

The major activities are concentrated in, but not restricted to, Southern California and Florida.

Of the above possible environmental effects, the first four are considered to be of greatest potential significance and will be considered in greater detail in subsequent sections of this Environmental Statement. No population shifts of significance are expected to result from current or planned future activities. The solid waste generated by these activities is generally of relatively high value and is usually recovered. Use of pesticides is at most only incidental to the manufacture, test and launch of space vehicles. Consequently, population shifts, solid wastes and pesticides will not be considered further.

The advanced studies, most research and development activities, manufacturing, and most testing, are relatively clean and quiet operations and do not directly produce significant environmental effects. However, such activities do consume power, steel, aluminum, paper, etc., and thus, may have some secondary impact on the environment. This secondary impact is difficult to quantify, but probably does not grossly differ from that resulting from the employment of an equal number of people in other activities. Consequently, it will not be considered further.

Some research and development activities and testing, particularly those related to rocket propulsion systems, result in the handling and consumption of propellants and, thus, may affect air and water quality and generate noise. At the present time, acceptance testing of production liquid propellant rocket engines is the major consumer of propellants in these areas of activity. Propellant consumption in current research and development activities is minor. The impact of these activities is considered in the subsequent sections of this statement.

The actual launch and flight of launch vehicles is the major activity which may cause some temporary perturbation in the environment. In addition to normal vehicle flight, the effect of possible abnormal flight conditions will be considered in the following sections. It should be noted that the preparations for all launches include an extensive safety analysis for both normal and possible abnormal events. The vehicle trajectory, flight sequence, launch date and time, and other parameters are adjusted, as necessary, to meet safety requirements. Examples of trajectory plots and corresponding impact points for all launch vehicles considered in this Environmental Statement are shown in Appendix B.

AIR QUALITYSource and Nature of Emissions

All current and near future launch vehicles are powered by chemical rocket engines. These engines operate by the combustion of a fuel and self-contained oxidizer. The types of fuels and oxidizers are listed in Table 1. The products of combustion exhausted from the rocket nozzle may include compounds and molecular fragments which are not stable at ambient conditions, or which may react with the ambient atmosphere. The detailed composition of rocket exhaust gases is based on thermochemical calculations.

The substances emitted by rocket engines may be derived from the nominal propellant, from additives to the propellant, from impurities in the propellant, or from the engine itself (e.g., ablative components). Major chemical species emitted by rocket engines are:

Water

Carbon Dioxide

Carbon Monoxide

Hydrogen Chloride

Nitrogen

Hydrogen

Aluminum Oxide.

Of the major constituents, carbon monoxide and hydrogen chloride are generally recognized as air pollutants and may present a toxicity hazard. Aluminum oxide is emitted as a particulate, and may also be of concern. In the upper atmosphere, water and carbon dioxide may be considered as potential pollutants due to their low natural concentration, and their possible influence on the Earth's heat balance and on the ozone and electron concentration.\*

In a normal launch, the exhaust products are distributed along the vehicle trajectory. Due to the acceleration of the vehicle and the staging process, the quantities emitted per unit length of trajectory are greatest at ground level and decrease continuously. In the event of a vehicle failure in flight, the vehicle destruct system ruptures the propellant tanks and releases all remaining propellants. These will normally ignite and burn; however, only limited information is available concerning the products formed or the extent to which the propellants are consumed.

In the period 1965 through May, 1973, approximately 90 percent of the NASA automated vehicle launches have been successful, and only 3 failures (out of 165 launches) have been on-pad or at relatively low altitudes where significant quantities of propellant remained in the vehicle.

---

\* NASA is conducting investigations on the effects of combustion products on the upper atmosphere. These investigations are being coordinated with the DOT and NOAA. (3)

In addition to the emissions during launch, all liquid propellant rocket engines used in these launch vehicles are subjected to an acceptance firing at the manufacturer's facilities. The quantity of propellant consumed in these tests is in the range of 1/4 to twice the propellant consumed in flight, typically about 1/3. Also, research and developmental activities result in the consumption of propellants other than in flight. At the present time, research and development activities associated with OSS Launch Vehicle and Propulsion Programs result in the consumption of significantly less propellants than does acceptance firing.

#### Impact on the Environment

Potential air pollutants from NASA OSS Launch Vehicle and Propulsion Programs activities may arise from the following situations. The pollutant involved is also indicated.

<u>Situation</u>	<u>Pollutant</u>
Engine Test	Combustion Products
Launch	Combustion Products
On-pad Accident	Propellants, Combustion Products
In-flight Abort	Propellants, Combustion Products.

Table 3 lists the combustion products and propellants of primary concern, together with some reported and estimated human, plant, and animal exposure criteria.

TABLE 3. EXPOSURE CRITERIA FOR SOME COMBUSTION PRODUCTS AND PROPELLANTS

Substance	Controlled Populations (a)		Uncontrolled Populations (b)		Plants		Animals
	TLV, (c) ppm	Short-Term Emergency Limits (5), ppm 10 min. 30 min. 1 hr.	Exposure from Ordinary Operations, ppm 10 min. 30 min. 1 hr.	Emergency Exposure, ppm 10 min. 30 min. 1 hr.	Sensitive (4)	Resistant (4)	
HCl	5	30 20 10	4 (d) 2 (d) 2 (d)	7 (d) 3 (d) 3 (d)	5/2 (14)	1000/1 (14)	Human exposure criteria are normally based on experimental animal
CO	50	50 (9) 200	30 (e)	-- 125 (8)	500/- (49) (1)	100,000/- (50) (k)	exposures using a number of species and considering the most sensitive species tested. Hence, human exposure criteria are probably applicable to most animals. 21-2's could be an exception as they are rarely used as test animals.
Al <sub>2</sub> O <sub>3</sub> (mg/m <sup>3</sup> )	10	25 (9)	--	--	--	--	
NO <sub>2</sub> (ppm)	5	30 20 10	1 (f) 1 (f) 1 (f)	5 (f) 3 (f) 2 (f)	2.5/2 (14)	1000/1 (14)	
Hydrazine	1	30 20 10	1 (g)	--	<25/4 (31)	-25/4 (31)	
UDES	0.5	100 50 30	0.5 (g)	--	<31/4 (31)	-31/4 (31)	
AlCl <sub>3</sub> (mg/m <sup>3</sup> )	10 (h)	--	--	--	--	--	

(a) Controlled populations consist of persons with known medical histories, subject to periodic health checks, and generally under the control of the responsible agency. Such persons are normally employees with jobs that will potentially result in exposure to known contaminants.

(b) Uncontrolled populations consist of persons with unknown medical histories, not subject to periodic health checks, and not generally controlled by the responsible agency. The general public is included in this classification.

(c) No short duration exposure criteria for controlled populations appear applicable for ordinary launch operations. Threshold Limit Values (TLV) are time-weighted concentrations for 7 or 8 hour work days and a 40-hour work week, except that the values for HCl and NO<sub>2</sub> are also considered ceiling values not to be exceeded. (4) TLV's are thought to be conservative for short duration exposures of controlled populations for relatively infrequent normal operations.

(d) While there are no criteria for short-term exposure of uncontrolled populations to HCl which have official standing, the values quoted here have been proposed by a responsible organization after careful study of the problem (See Reference 6).

(e) Based on 1.5% Carboxyhemoglobin in 1 hour exposure. See Reference 7.

(f) There are no officially accepted criteria for short-term exposure of uncontrolled populations to nitrogen oxides. The criteria given here have been proposed by a responsible organization after careful study. (See Reference 10).

(g) Arbitrarily set equal to the 8 hour industrial TLV: i.e., 1/48 of the acceptable industrial dose.

(h) Based on hydrolysis to HCl. In subsequent discussion, AlCl<sub>3</sub> is considered only in terms of its contribution to overall HCl levels.

(i) Concentration in ppm/exposure time in hours.

(j) Epinastic response in tomatoes. Toxic response (leaf abscission) generally observed at ~1% CO for 1 to several days.

(k) No observable effect on Nephrolepis in an exposure of 1 to several days.

Table 4 briefly describes dispersion characteristics within selected atmospheric layers. Table 5 lists the combustion products of concern emitted into these layers. Note that quantities of CO<sub>2</sub> and H<sub>2</sub>O are tabulated for the higher altitudes, due to the concern that these materials may have an influence on the Earth's heat balance or on the ozone or electron concentrations at high altitudes.

#### Normal Launch

Ground Level Effects. Ground level concentrations of the pollutants resulting from space vehicle launches have been estimated using the NASA/MSFC multilayer atmospheric diffusion model and assuming a buoyant rise of the exhaust cloud.<sup>(15)\*</sup> Figures 1 through 9 present the results of these calculations for the combustion products HCl, CO, and Al<sub>2</sub>O<sub>3</sub> for three meteorological conditions; Sea Breeze, Spring, and Fall.\* The regions labeled "Deltas" include within them the Delta(3 Castor), Delta(6 Castor), and Delta(9 Castor). The exposure criteria shown on Figures 1 through 9 are the industrial Threshold Limit Values (TLV's) for controlled populations (considered conservative for short duration, infrequent exposures) and the criteria for exposure from ordinary operations for uncontrolled populations (See Table 3).

---

\* A brief description of this model and of the three meteorological conditions, and a discussion of related information is given in Appendix D.

TABLE 4. DISPERSION CHARACTERISTICS WITHIN  
SELECTED ATMOSPHERIC LAYERS\*

Atmospheric Layer; Altitude Range	Temperature Structure	Wind Structure	Characteristic Mixing Rate
Below nocturnal inversion 0-500 m	Increase with height	Very light or calm	Very Poor
Below subsidence inversion 0-1500 m	Decrease with height to inversion base	Variable	Generally fair to inversion base
Troposphere 0.5-20 km	Decrease with height	Variable; increase with height	Generally very good
Stratosphere 20-67 km	Isothermal or increase with height	Tends to vary seasonally	Poor to fair
Mesosphere-Thermosphere Above 67 km	Decrease with height	Varies seasonally	Good

\* Adapted from References (11) and (12).

Note: To convert to feet, multiply meters by 3.28

TABLE 5. QUANTITIES OF POTENTIAL POLLUTANTS  
EMITTED INTO SELECTED ATMOSPHERIC LAYERS

Note: To convert to pounds, multiply kilograms by 2.20

Atmospheric Layer Altitude Range	Nocturnal Inversion 0-500 m			Subsidence Inversion 0-1500 m			Troposphere 0.5-20 km Emission, kg			Stratosphere 20-67 km			Mesosphere-Thermosphere Above 67 km						
	HCl	CO	NO*	HCl	CO	NO*	HCl	CO	NO*	HCl	CO	NO*	HCl	CO	NO*	CO <sub>2</sub>	H <sub>2</sub> O		
Scout	60	110	nil	180	310	0.5	2,290	4,080	6.4	760	970	2.3	100	340	450	830	1.4	64	198
Delta(3C)	690	2,600	1.8	1,130	4,120	3.2	1,710	10,780	4.5	0	14,400	0	10,700	9,300	0	3,360	70	3,970	2,990
Delta(6C)	830	2,500	2.3	1,840	4,260	5.0	3,920	11,320	11	0	14,900	0	11,100	9,700	0	4,930	70	3,650	3,270
Delta(9C)	1,100	3,020	3.2	1,750	4,550	4.5	5,630	13,740	15	410	13,350	0.9	9,600	8,400	0	5,830	70	4,340	3,800
Atlas/Centaur	0	6,310	0	0	10,030	0	0	24,310	0	0	17,500	0	13,100	11,400	0	4,540	0	3,380	15,760
TIIE/Centaur**	9,800	17,510	30	14,920	26,540	41	47,170	83,000	126	24,040	43,320	750	19,700	18,800	0	3,060	1,530	20,400	47,450

\* The NO formed from N<sub>2</sub> impurity in the stages using liquid oxygen (Atlas, Thor, Centaur) is not included. The concentration of NO in the exhaust of such stages has been estimated at 3 ppm for an N<sub>2</sub> impurity level of 600 ppm. (13) The resulting NO emissions are negligible.

\*\* The Titan IIIC is equivalent to the TIIE/Centaur except for changes in the emissions above 67 km. These changes are not significant in terms of upper atmosphere effects.

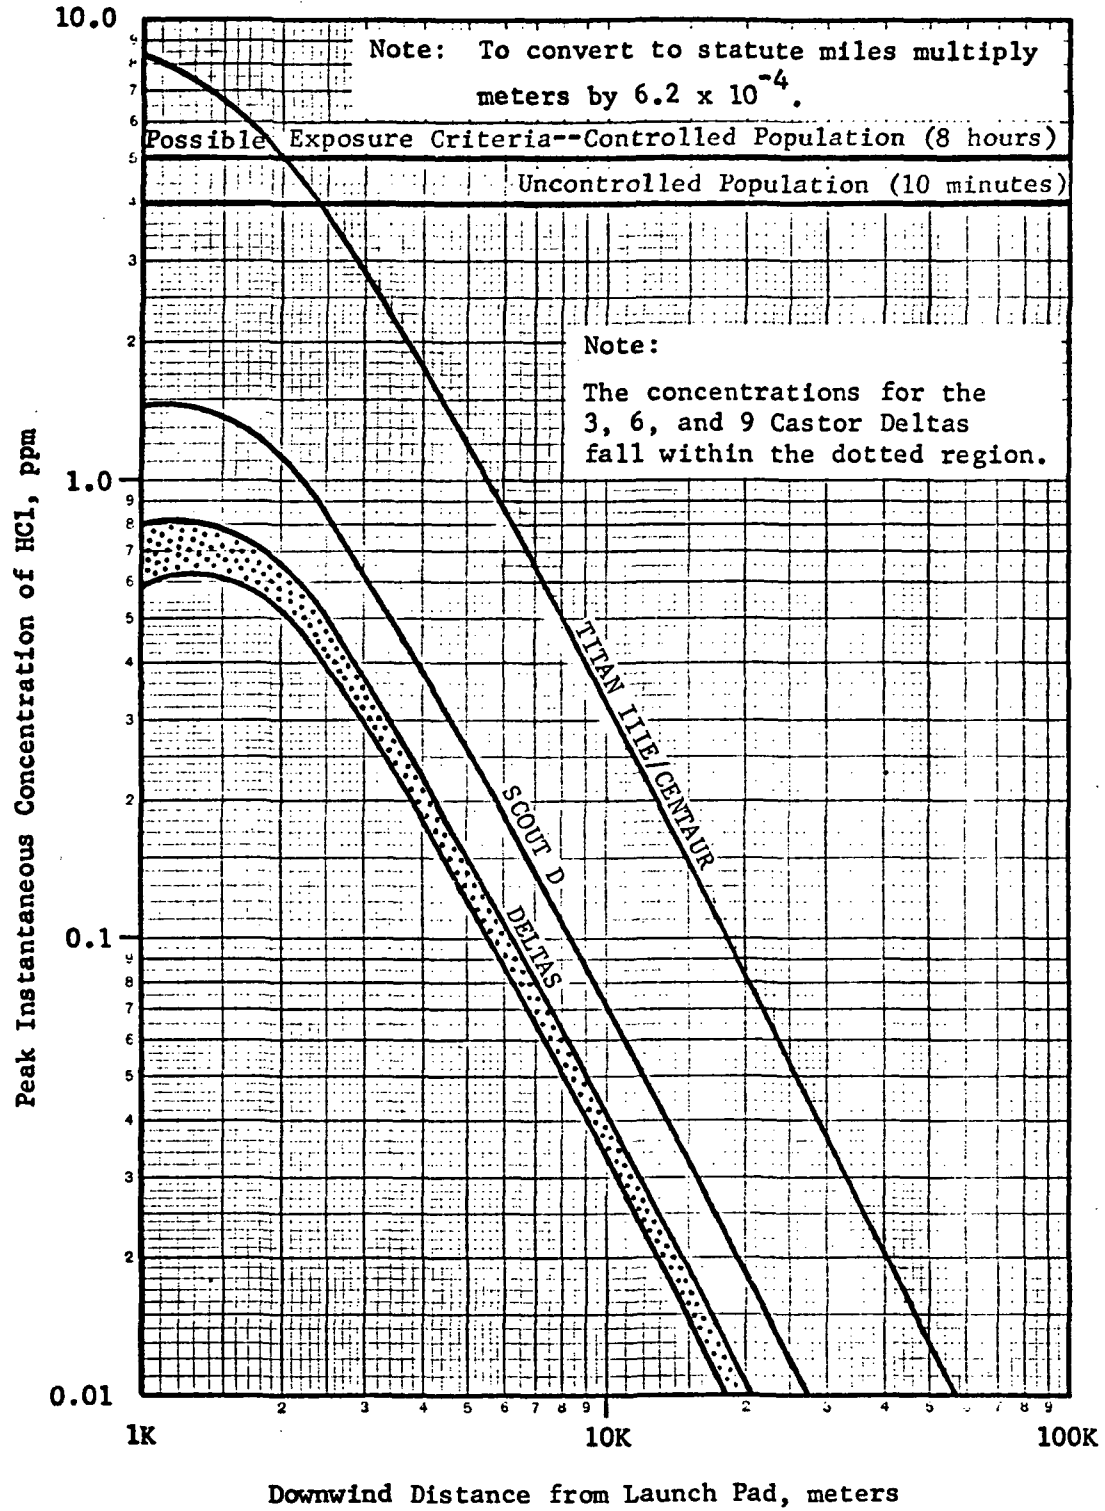


FIGURE 1. ESTIMATED INSTANTANEOUS PEAK HCl CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SEA BREEZE METEOROLOGICAL CONDITIONS

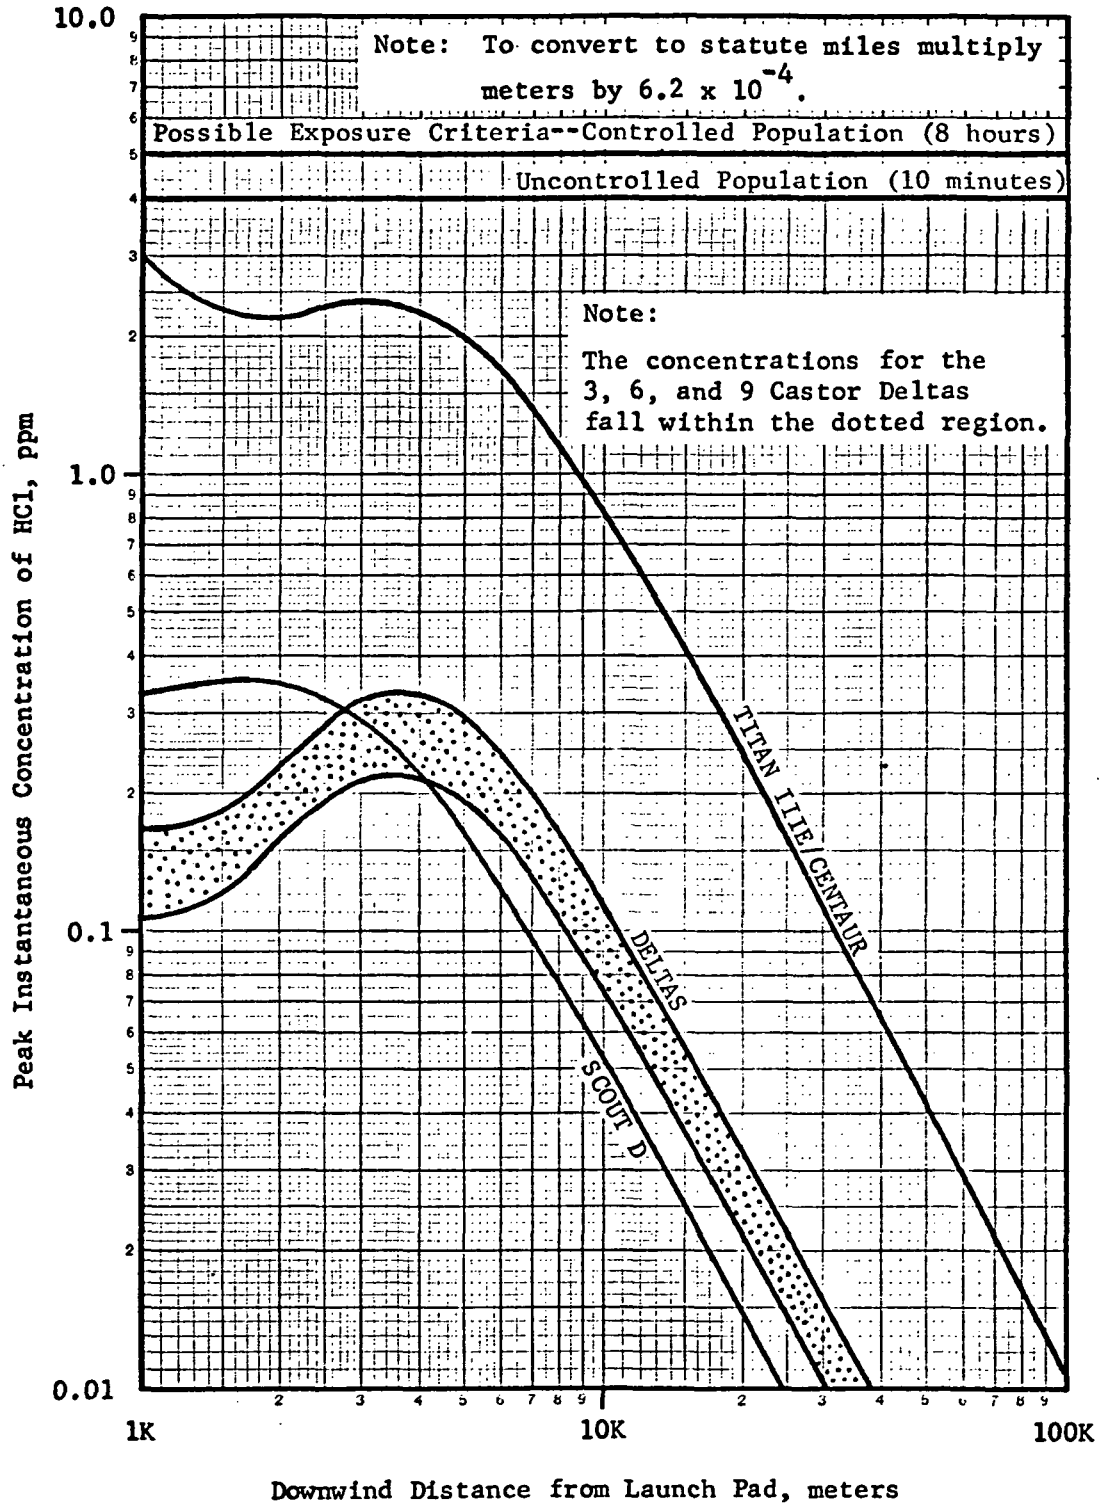
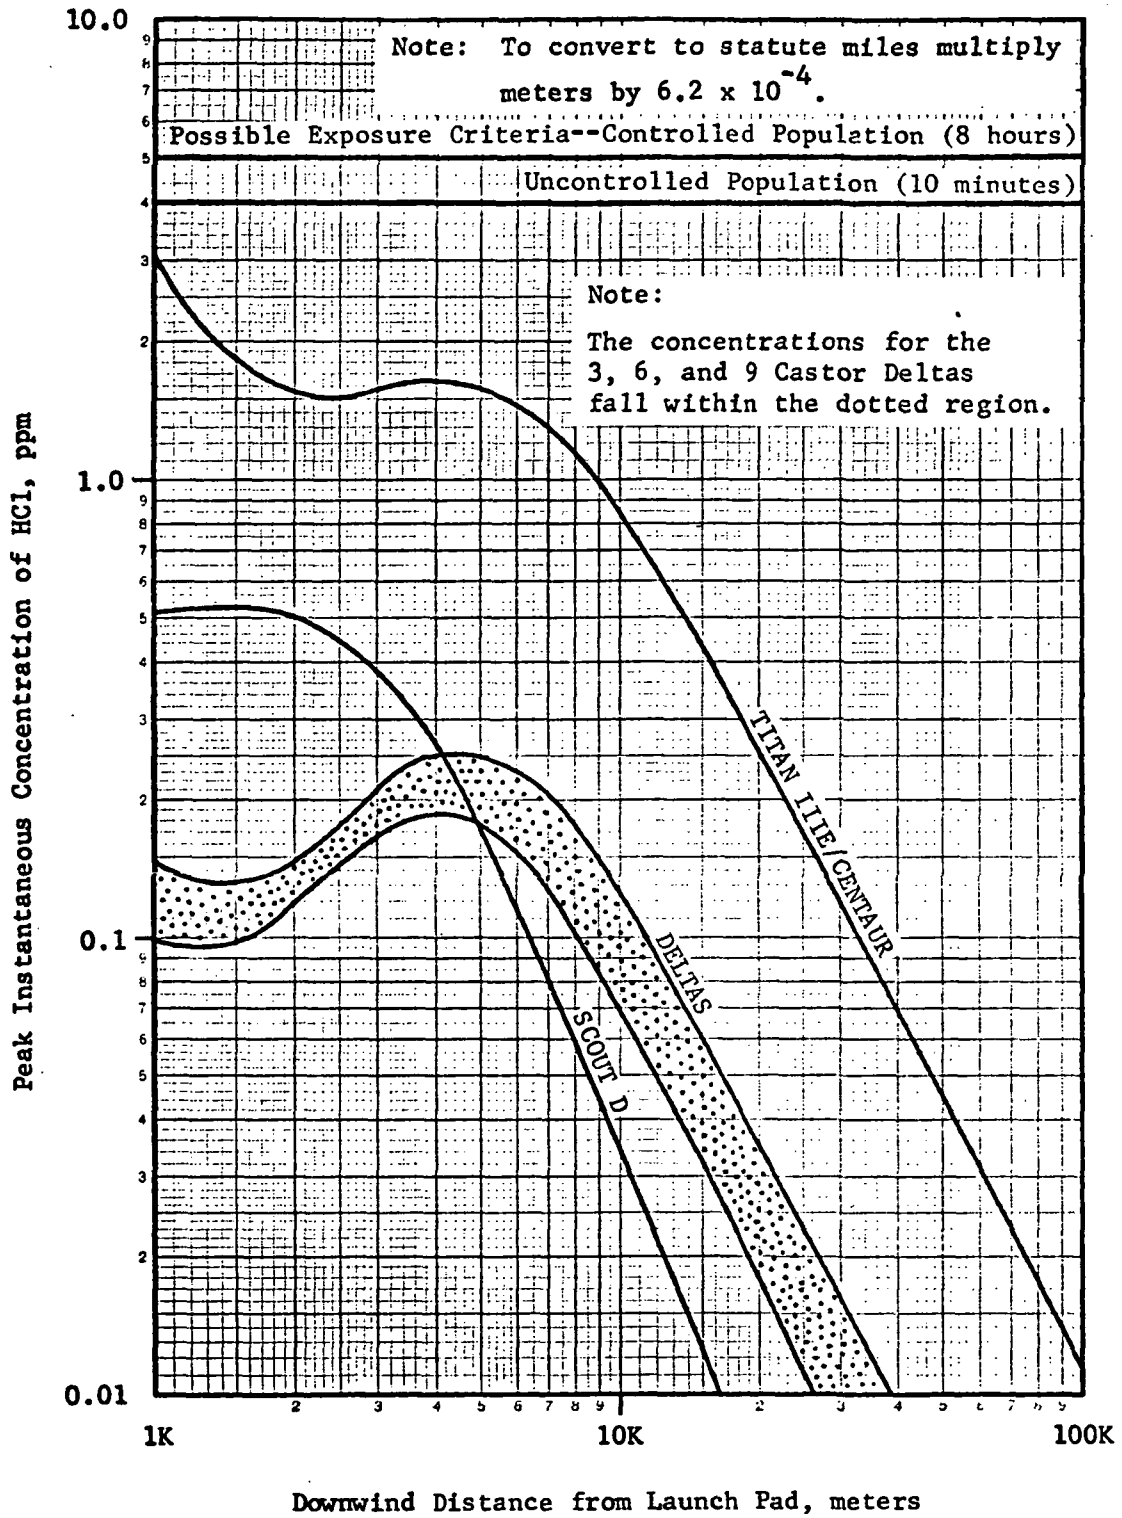


FIGURE 2. ESTIMATED INSTANTANEOUS PEAK HCl CONCENTRATIONS DOWNWIND OF LAUNCHES DURING FALL METEOROLOGICAL CONDITIONS



**FIGURE 3. ESTIMATED INSTANTANEOUS PEAK HCl CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SPRING METEOROLOGICAL CONDITIONS**

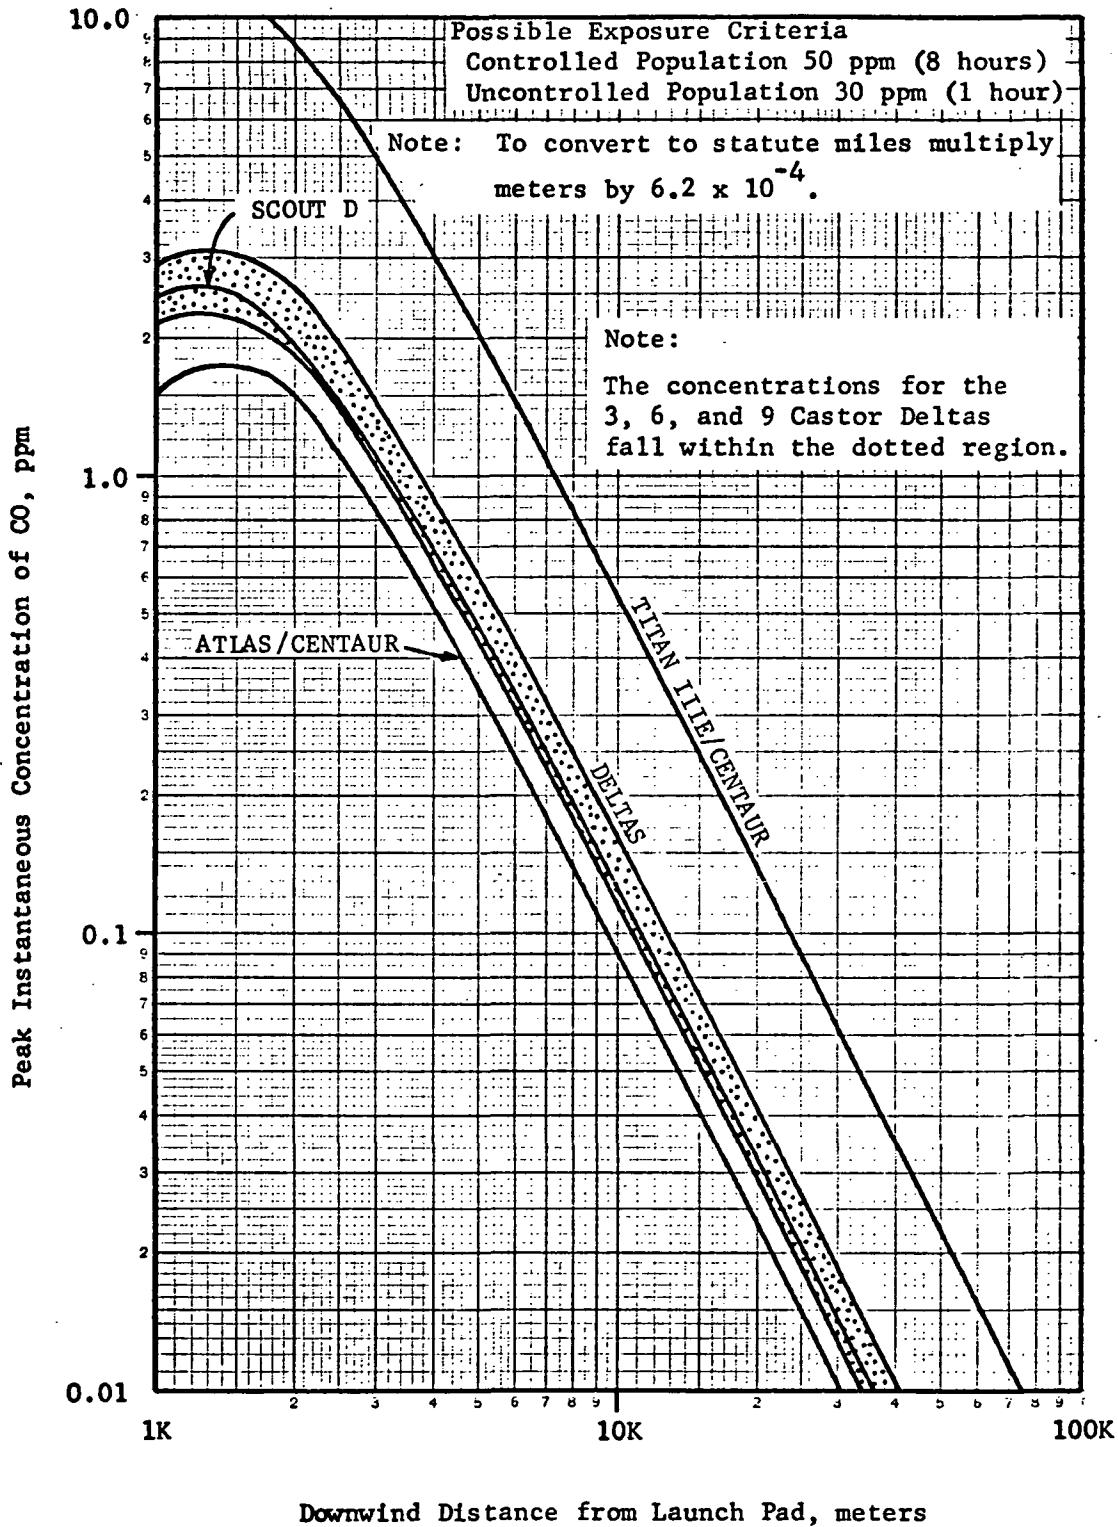


FIGURE 4. ESTIMATED INSTANTANEOUS PEAK CO CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SEA BREEZE METEOROLOGICAL CONDITIONS

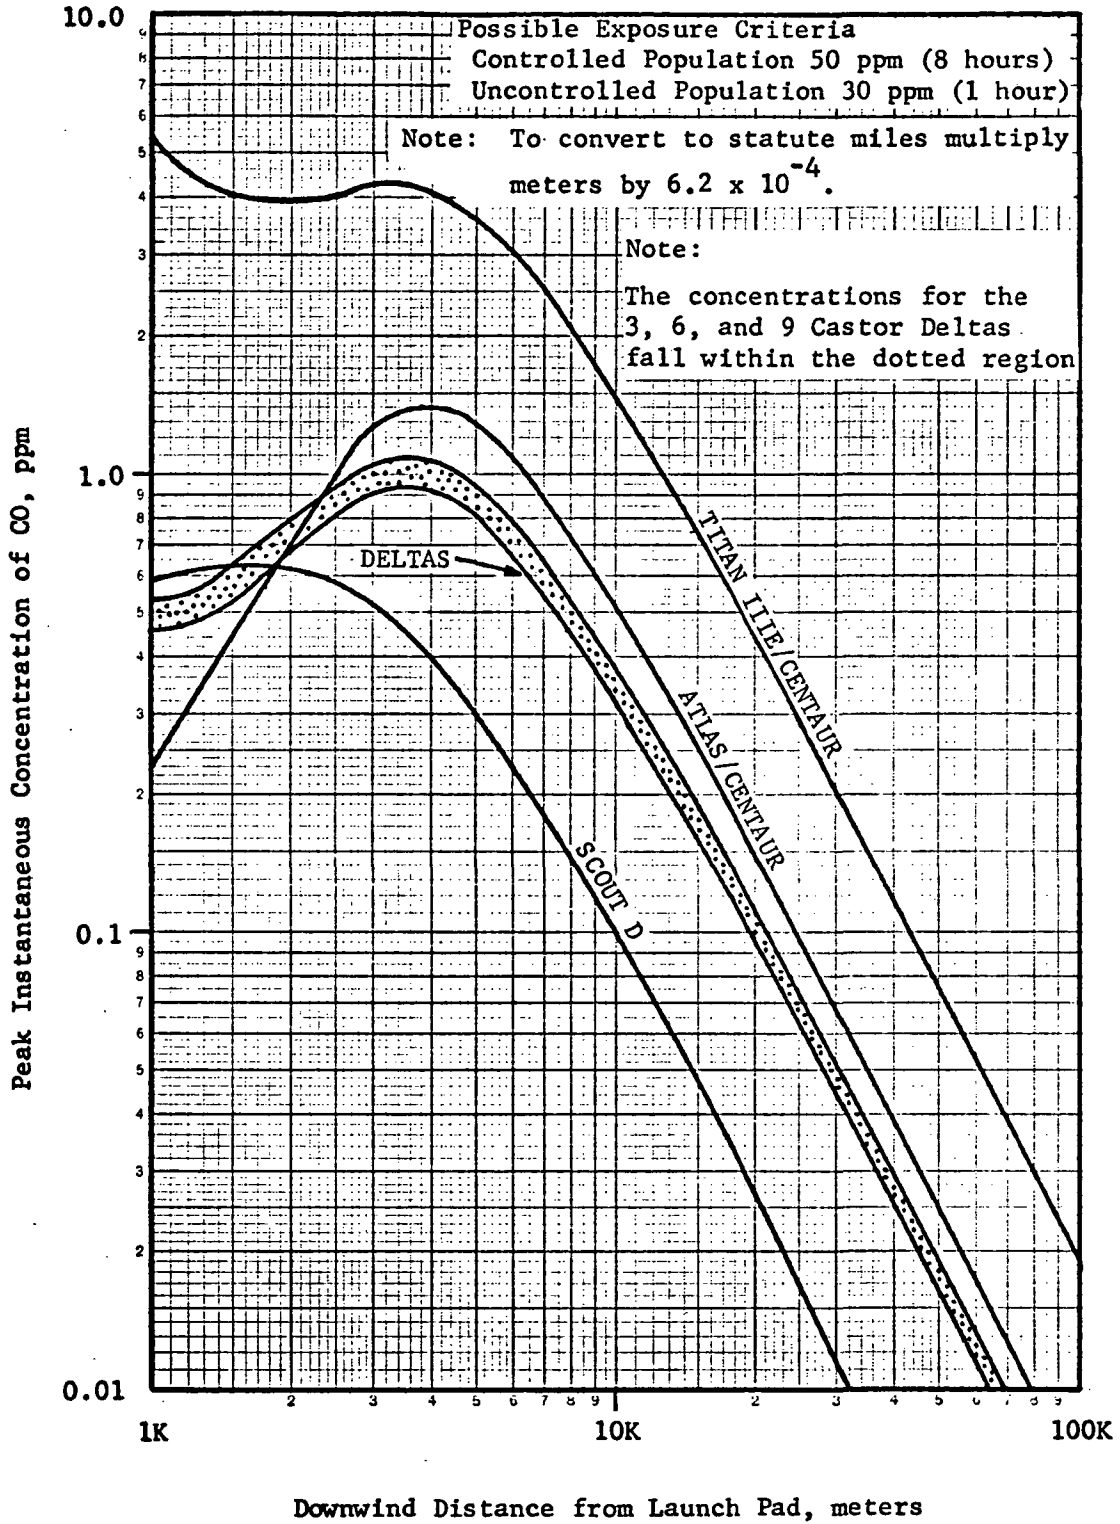


FIGURE 5. ESTIMATED INSTANTANEOUS PEAK CO CONCENTRATIONS DOWNWIND OF LAUNCHES DURING FALL METEOROLOGICAL CONDITIONS

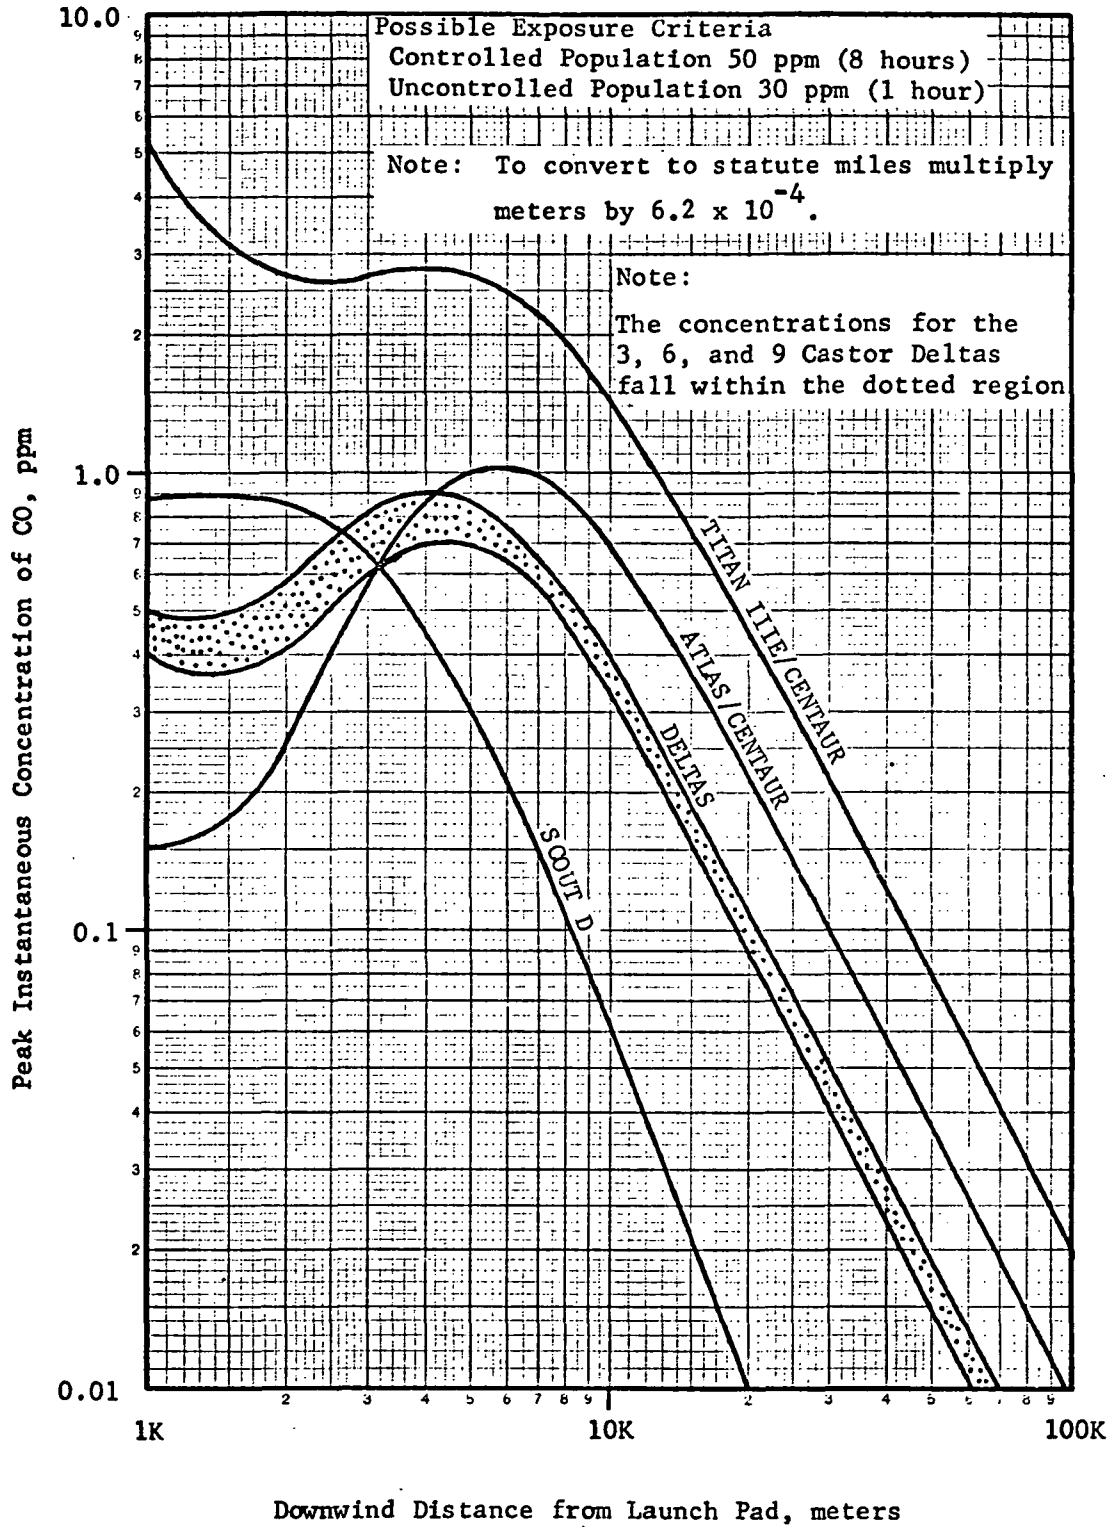


FIGURE 6. ESTIMATED INSTANTANEOUS PEAK CO CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SPRING METEOROLOGICAL CONDITIONS

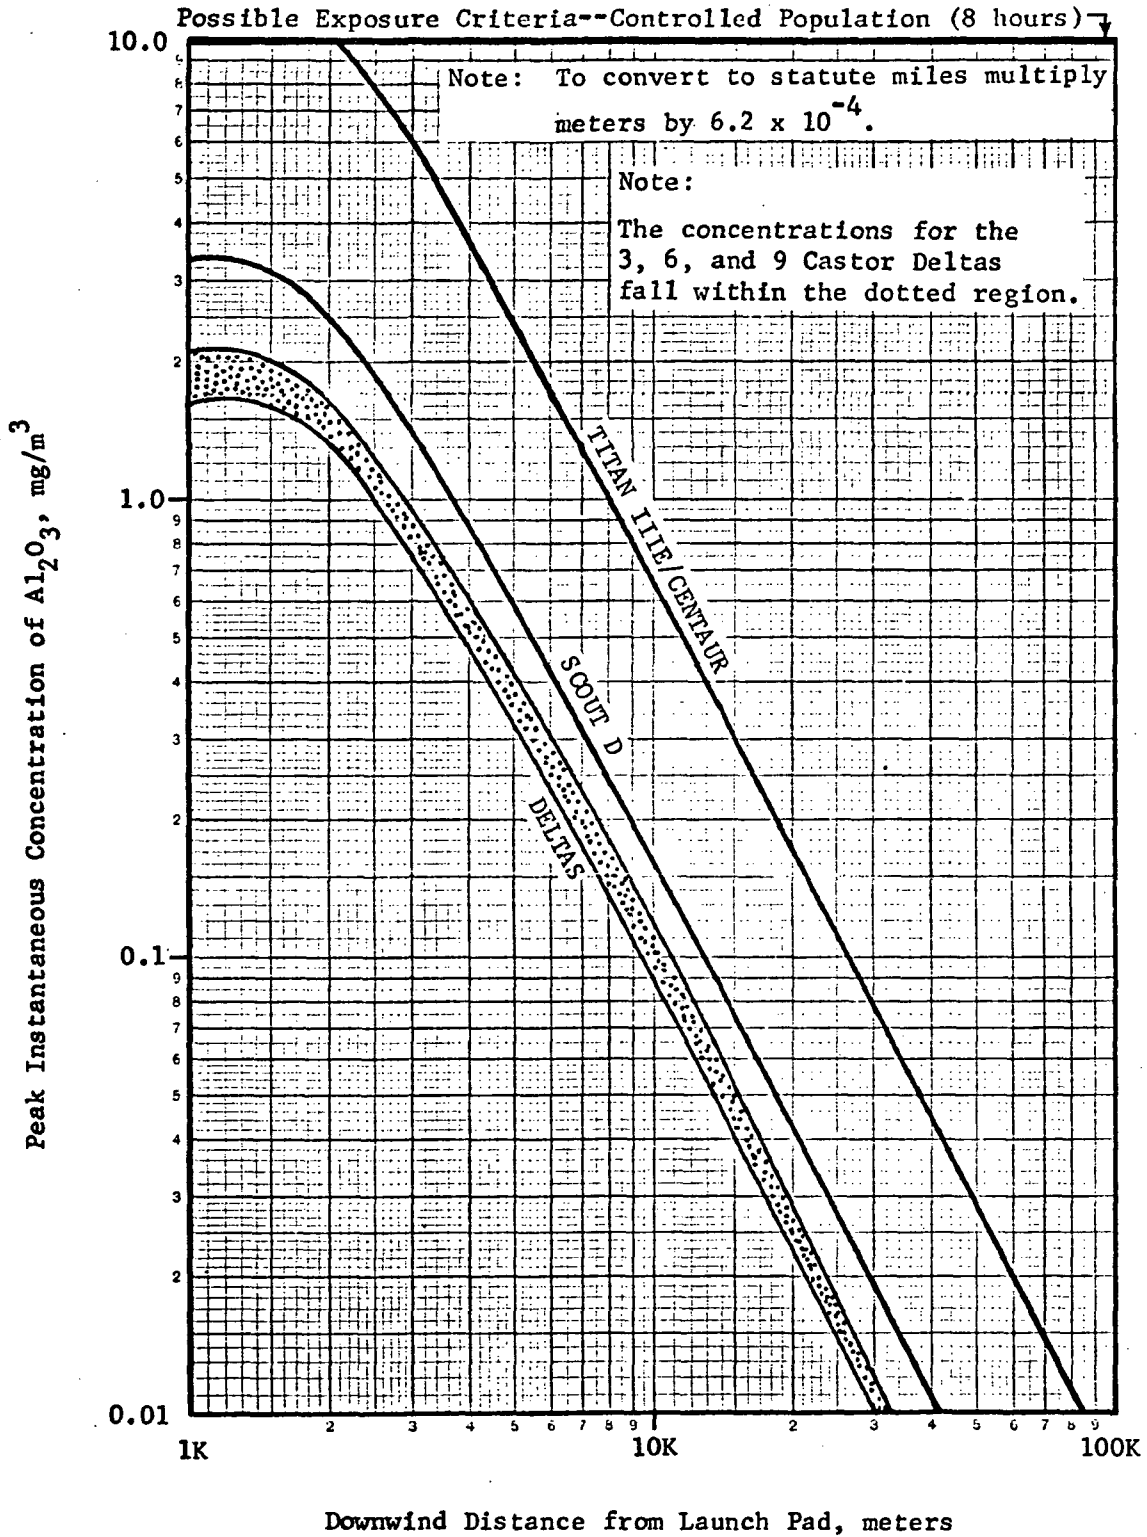


FIGURE 7. ESTIMATED INSTANTANEOUS PEAK  $Al_2O_3$  CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SEABREEZE METEOROLOGICAL CONDITIONS

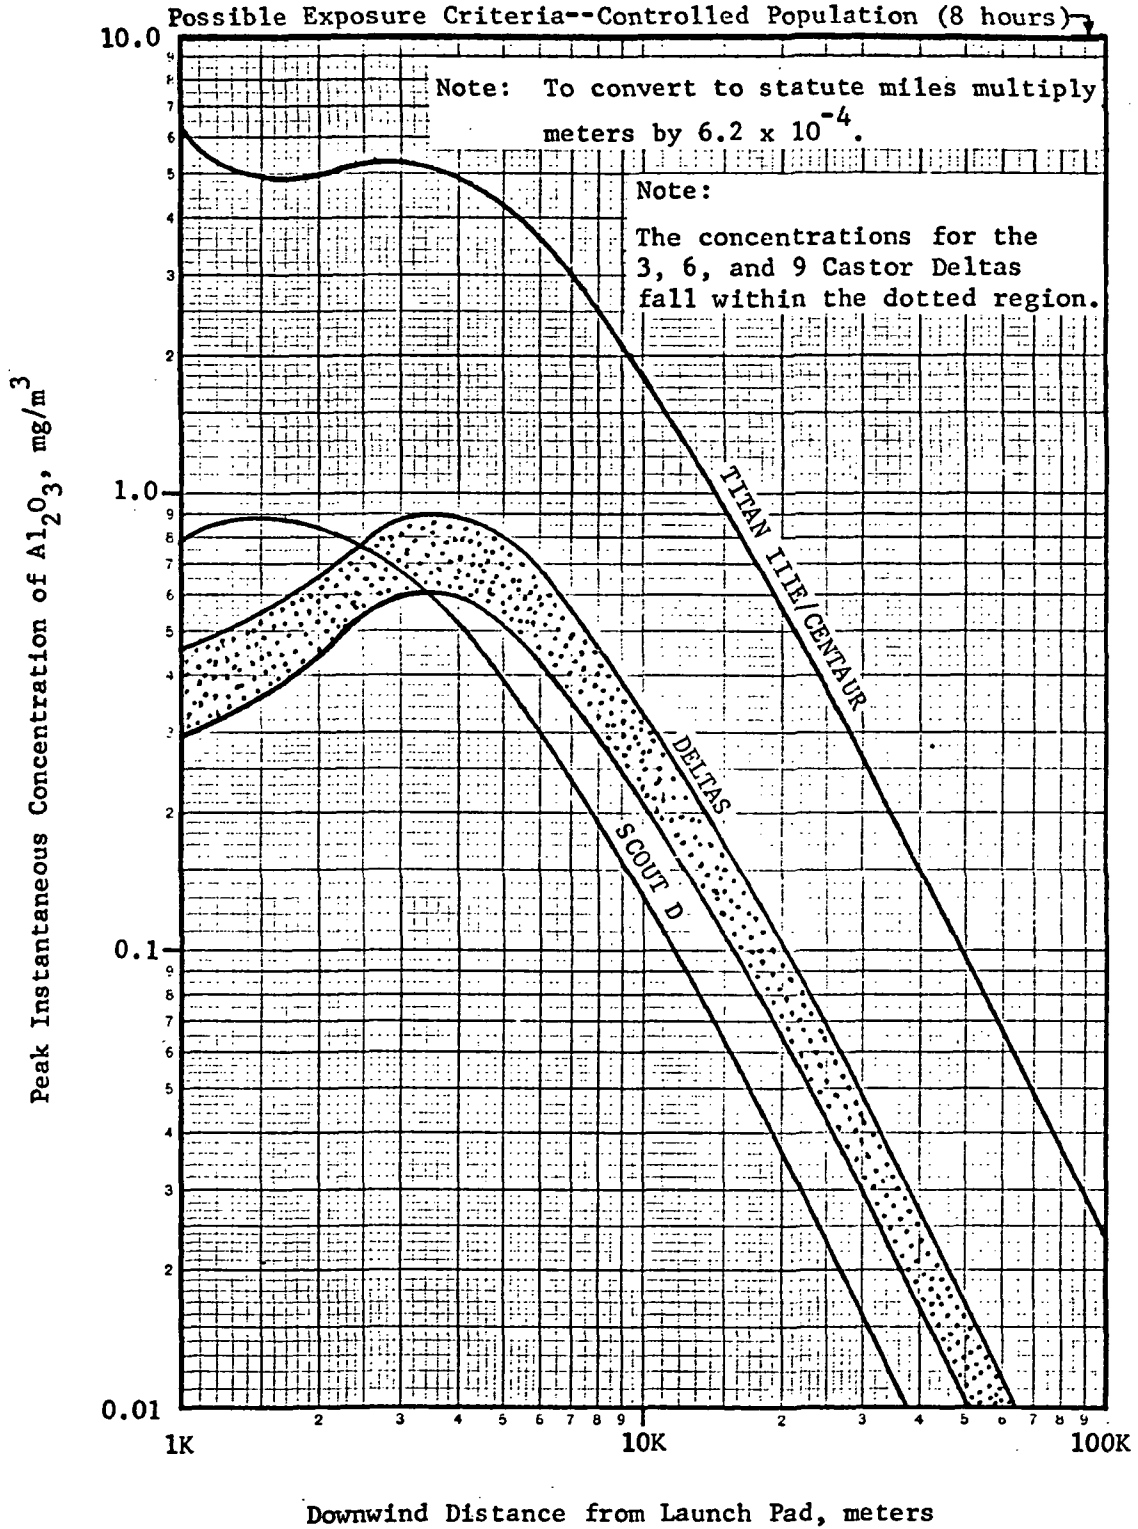


FIGURE 8. ESTIMATED INSTANTANEOUS PEAK  $Al_2O_3$  CONCENTRATIONS DOWNWIND OF LAUNCHES DURING FALL METEOROLOGICAL CONDITIONS

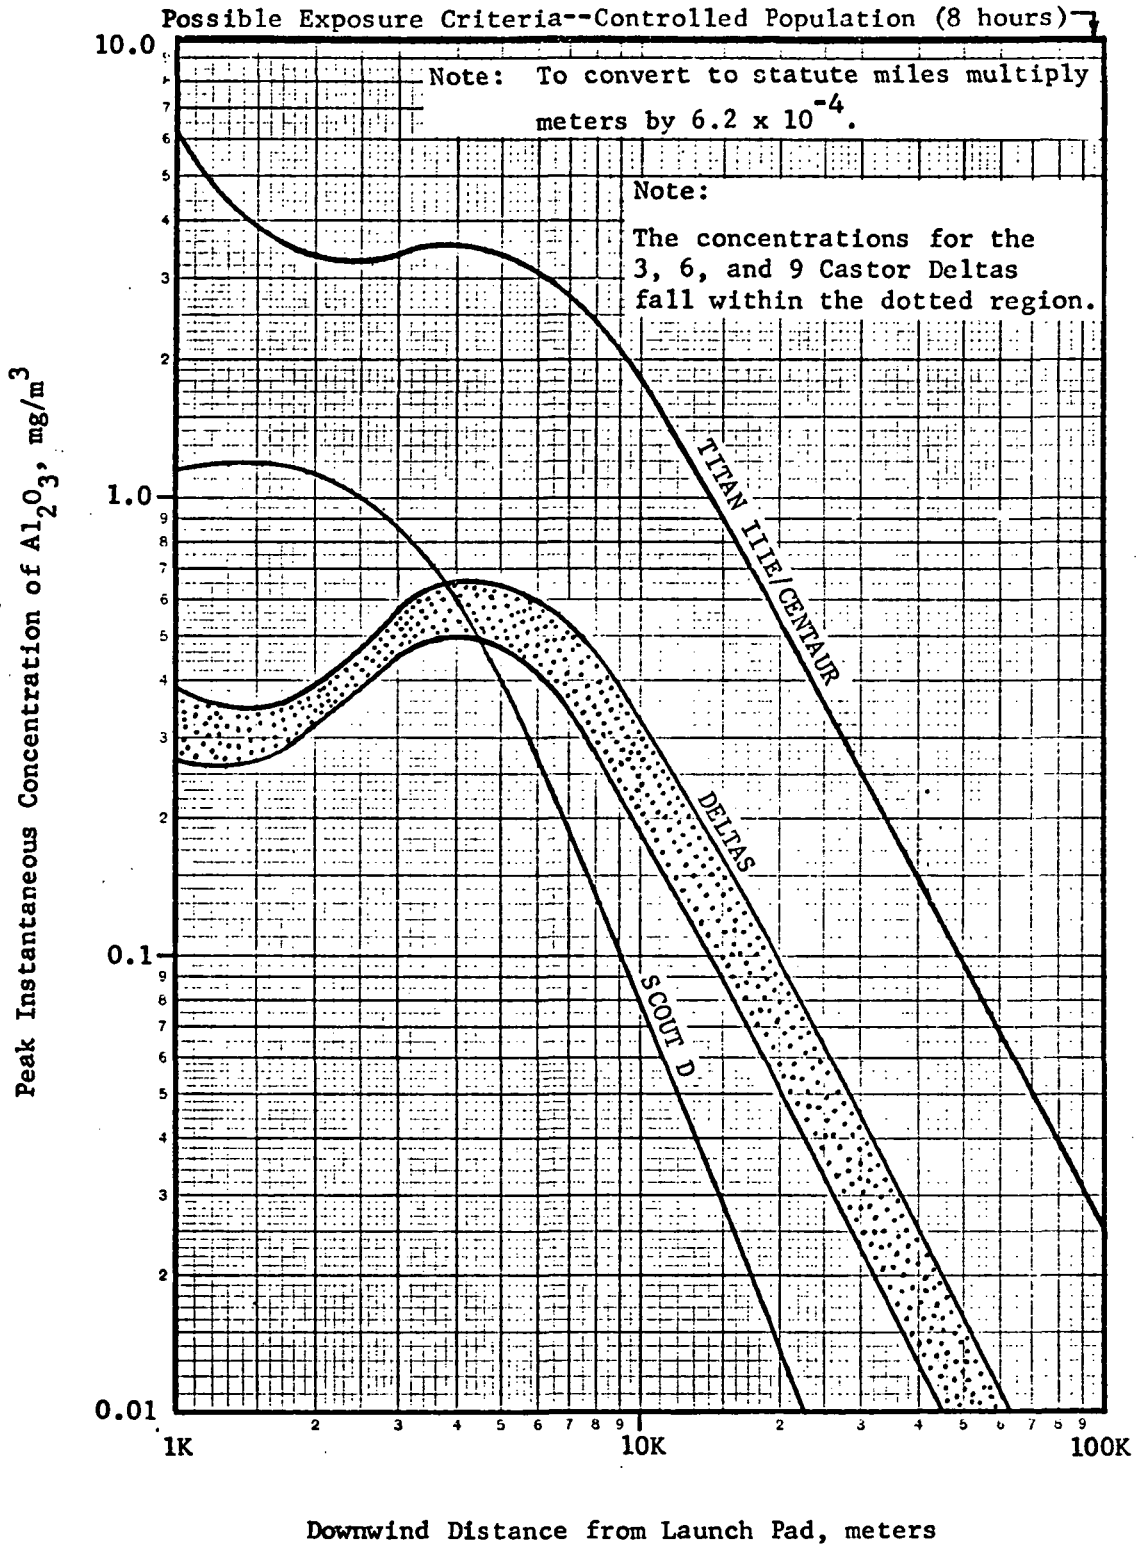


FIGURE 9. ESTIMATED INSTANTANEOUS PEAK  $Al_2O_3$  CONCENTRATIONS DOWNWIND OF LAUNCHES DURING SPRING METEOROLOGICAL CONDITIONS

It should be noted that the distance scales on these figures are the maximum distances at which the stated concentrations would be expected.\* Lines of constant concentration enclose an approximately elliptical area with the major axis equal to the plotted downwind distances.

While the three meteorological conditions are based on data for the ETR launch site, they are also applicable to the Wallops Island launch site. The meteorology at WTR is substantially different than that at the east coast sites and generally is less favorable to dispersion and dilution of rocket exhaust. However, based on a comparison of the predicted dispersion of the exhaust from a Titan III launch at ETR and WTR<sup>(52)</sup>, the difference is not large and probably does not exceed a factor of about 1.6 in terms of ground level concentrations. Of the vehicles considered here, only the Scout and the Deltas are launched from WTR.

As may be noted from Table 3, there are no short-term public exposure criteria for  $Al_2O_3$ . Applicable criteria appear to be the National primary and secondary ambient air quality standards, which specify a maximum 24 hour average concentration of particulates of  $0.260 \text{ mg/m}^3$  and  $0.150 \text{ mg/m}^3$ . The ground level concentrations of  $Al_2O_3$  predicted in Figures 7, 8, and 9 are quite high when compared to these criteria, but the predicted maximum concentrations are fleeting. The maximum predicted dosage of  $Al_2O_3$  is about  $0.137 \text{ mg hr/m}^3$ , and occurs at a distance of about 4 km for the Fall meteorological condition. This dosage is about 1/50 of the dosage corresponding to the primary ambient air quality standard ( $6.24 \text{ mg hr/m}^3$ ) and about 1/25 of the secondary ambient air quality standard ( $3.6 \text{ mg hr/m}^3$ ). As this maximum occurs within a controlled area, no hazard to either the public or to controlled personnel is expected.

---

\* A table of minimum distances from the vehicle launch pads to press sites, facility boundaries, and the nearest communities is located in Appendix C.

\*\* See Appendix D for further discussion.

Emissions into the upper troposphere are rapidly diluted by turbulent mixing and wind shear in that layer. No local or global ground level concentrations of significance will result. Emissions into the upper stratosphere, the mesosphere and the thermosphere will not result in detectable ground level concentrations.

The foregoing figures and table indicate that HCl emissions from the Titan vehicles present the only environmental hazard of significance. This hazard is modest, and even under unfavorable meteorological conditions is estimated to be confined to controlled areas.

Estimates have also been made of the concentrations of nitrogen oxides resulting from these launches. At a distance of 1 km, a maximum concentration of 0.38 ppm was estimated for a Titan IIIE/Centaur launch. This is more than an order of magnitude below the suggested exposure criteria for controlled personnel. Uncontrolled personnel would be subjected to negligible exposure.

#### Upper Atmospheric Effects.

Water. In the stratospheric layer, the vehicles emitting the largest amount of water are the Titan IIIE/Centaur and the Titan IIIC. An estimate of the spread of the exhaust cloud that would be required before the H<sub>2</sub>O concentration fell to the ambient value as given in the U. S. Standard Atmosphere was made. At 25 km altitude,

the effects of the cloud would blend into the ambient background by the time it had expanded to one square kilometer. At 60 km altitude the cloud would have to expand to about 800 square kilometers to reach an equilibrium with ambient  $H_2O$  concentrations.

The quantity of rocket exhaust which would double the concentration of  $H_2O$ ,  $CO_2$ , and  $NO$  in the atmosphere above 105 km has been calculated. <sup>(17)</sup> Results from a comparison of such calculations with actual emissions above 67 km are as follows:

Total Rocket Exhaust Required to Double the Natural Concentration above 105 km (kg)			Actual Total Annual Exhaust Emissions above 67 km Resulting from NASA Launches of Automated Missions (1969-1971 Average) (kg)
$H_2O$	$CO_2$	$NO$	
$5.9 \times 10^8$	$1.3 \times 10^{10}$	$5.9 \times 10^{10}$	$1.4 \times 10^5$

The effect of water vapor (or any other exhaust emission as will be shown subsequently) from a launch vehicle upon the ozone concentration can be considered as negligible from the small area covered by the exhaust cloud. The rocket can create a small hole in the ozone layer but the photochemical processes taking place in the atmosphere will quickly fill up any void of ozone.

The potential effect of  $H_2O$  on the Earth's heat balance is discussed, together with the effect of  $CO_2$ , in the next section.

Carbon Dioxide. Estimates of the area in the stratosphere into which the Titan IIID\* cloud would have to expand before the carbon dioxide density would reach that of the ambient air were made as in the case of water vapor. For  $CO_2$  at 25 km the cloud must expand to less than  $0.1 \text{ km}^2$  before the  $CO_2$  would reach ambient levels. At 60 km the cloud would drop below ambient levels of  $CO_2$  concentration after it expanded to an area of  $4 \text{ km}^2$ .

\* Lower stages for the Titan IIIE/Centaur and Titan IIIC.

The principal concern regarding large increases of  $\text{CO}_2$  and  $\text{H}_2\text{O}$  in the upper atmosphere and above it are the effects these constituents would have on the global radiation balance, through absorption or scattering of incoming or outgoing radiation. The above estimates of the area required for diffusion of  $\text{H}_2\text{O}$  and  $\text{CO}_2$  to background levels indicate that emissions of these compounds will have negligible effects.

**Nitrogen Oxides.** Calculations of natural NO levels in the layers above 60 km have been made which predict concentrations of about  $10^{-2}$  ppm.<sup>(18)</sup>

The NO emitted from the exhaust of the Titan III E and Titan III C dissipates below the  $10^{-2}$  ppm concentration when the exhaust cloud expands beyond  $4.5 \text{ km}^2$  at 25 km and beyond  $600 \text{ km}^2$  at 60 km.

It is reasonable to suppose that NO levels above the natural equilibrium level will be reduced through dissociation by solar ultraviolet radiation until the natural equilibrium is again restored.

**Hydrogen Chloride.** Hydrogen chloride emissions could have an effect on the ionization level in the upper atmosphere. If this change in ionization level is to have an effect on radio wave transmission (the only effect known to be of importance), the emission of HCl in layers above approximately 90 km (the nominal base of the E layer of the ionosphere) would have to be significant. Only the Scout has HCl emissions that would affect the E layer or the D layer below it. The 449 kilograms of HCl per flight emitted by the Scout above 67 km is minimal. Calculations of the effect of firing a TE364-3 motor within the F region, emitting 220 kg HCl, indicate that the global electron density would be reduced by a maximum of 0.028%. The natural ionization in the F region regularly fluctuates by a factor of about 10.<sup>(19)</sup>

In summary, there is no significant effect of the launch vehicles used by NASA for automated missions on the upper atmosphere. Current activities appear to be many orders of magnitude below those which would be expected to produce detectable changes in the upper atmosphere.

#### Engine Tests

Engine tests differ from launches in that all of the propellant used is consumed at ground level. However, the high temperature of the exhaust gases causes them to rise in a buoyant plume. The downwind concentrations of the exhaust gases are dependent on the height of this buoyant rise, and any elevation contributed by the persistence of the exhaust jet.

Ground tests of the Atlas booster engine are probably the critical case for the vehicles considered here. Using the method suggested by Reference 20, a buoyant rise of 487 meters was calculated. Using this as a source height, peak downwind concentrations were estimated by the methods of Reference 16. The maximum downwind concentration of CO predicted was 5 ppm, well within suggested exposure limits.

Tests of the Thor engine would produce essentially the same results. Tests of other engines used by the subject vehicles would have smaller effects due either to the smaller engine sizes or to the lower concentrations of pollutants in the exhaust.

Engine acceptance tests are performed at relatively remote sites, and access to the sites is controlled. Suitable precautions are taken to insure the safety of the test crew, including remote operation and protective equipment.

#### Abnormal Launches and Accidents

On-pad accidents, either a cold spill of liquid propellant (no fire) or an on-pad fire, and early in-flight failures resulting in abort may produce significant ground level concentrations of toxic materials.

In cold spills, nitrogen tetroxide is the propellant of most concern: the volatility of Aerozine-50 is sufficiently low that a serious hazard is not created by spills. Such events have been analyzed for the Titan IIID and Titan IIIC<sup>(21)</sup>, which represent worst cases for the launch vehicles considered here. Under ordinary meteorological conditions the concentration of  $N_2O_4$  downwind of the spill will fall below the public emergency exposure criteria of 2 ppm within 3 km: under adverse conditions, such concentrations may persist to distances of 6 km. Only controlled areas would be involved in either case. Spills of toxic propellants from other NASA vehicles considered here would have smaller effects due to the smaller propellant quantities involved.

Calculations of the effect of an on-pad catastrophe involving the vehicles of concern here, using the buoyant rise, multilayer dispersion model<sup>(15)</sup>, are summarized in Figures 10, 11, and 12. Low level aborts involving complete burning of the propellant should produce results similar to those for on-pad catastrophes.

Possible Exposure Criteria--Controlled Population 30 ppm (10 minutes)

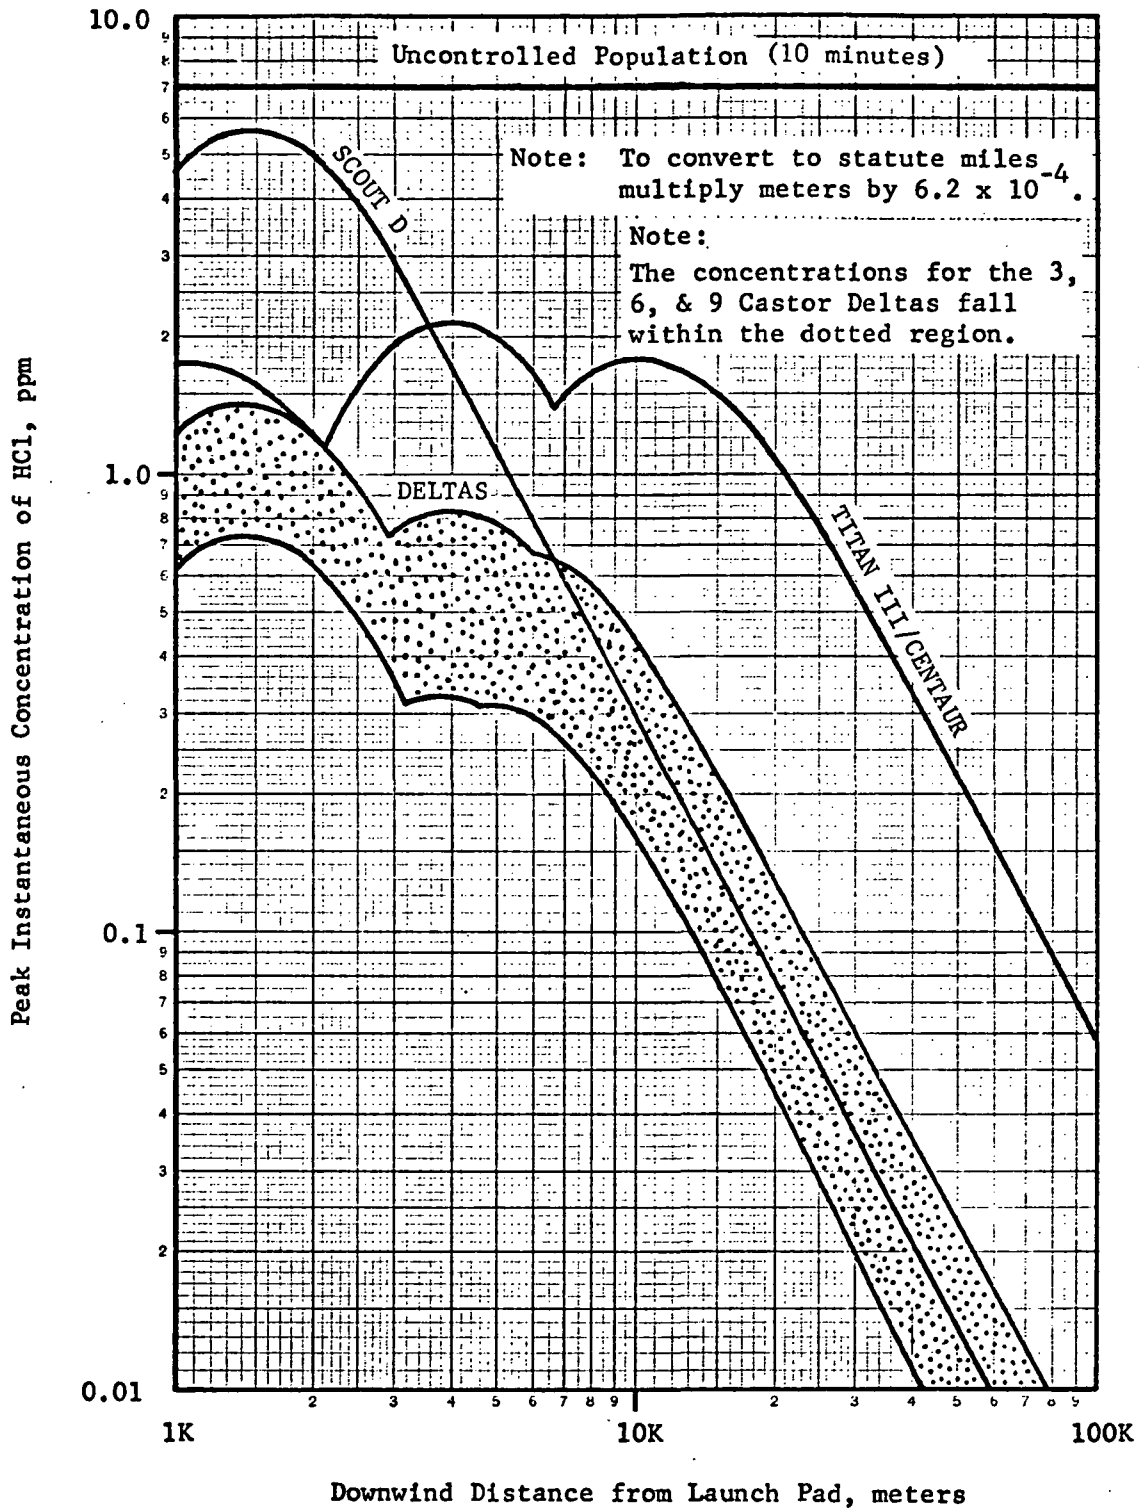


FIGURE 10. BOUNDS FOR THE ESTIMATED INSTANTANEOUS PEAK HCl CONCENTRATIONS DOWNWIND OF ON-PAD CASTASTROPHES FOR SEA BREEZE, FALL, AND SPRING METEOROLOGICAL CONDITIONS

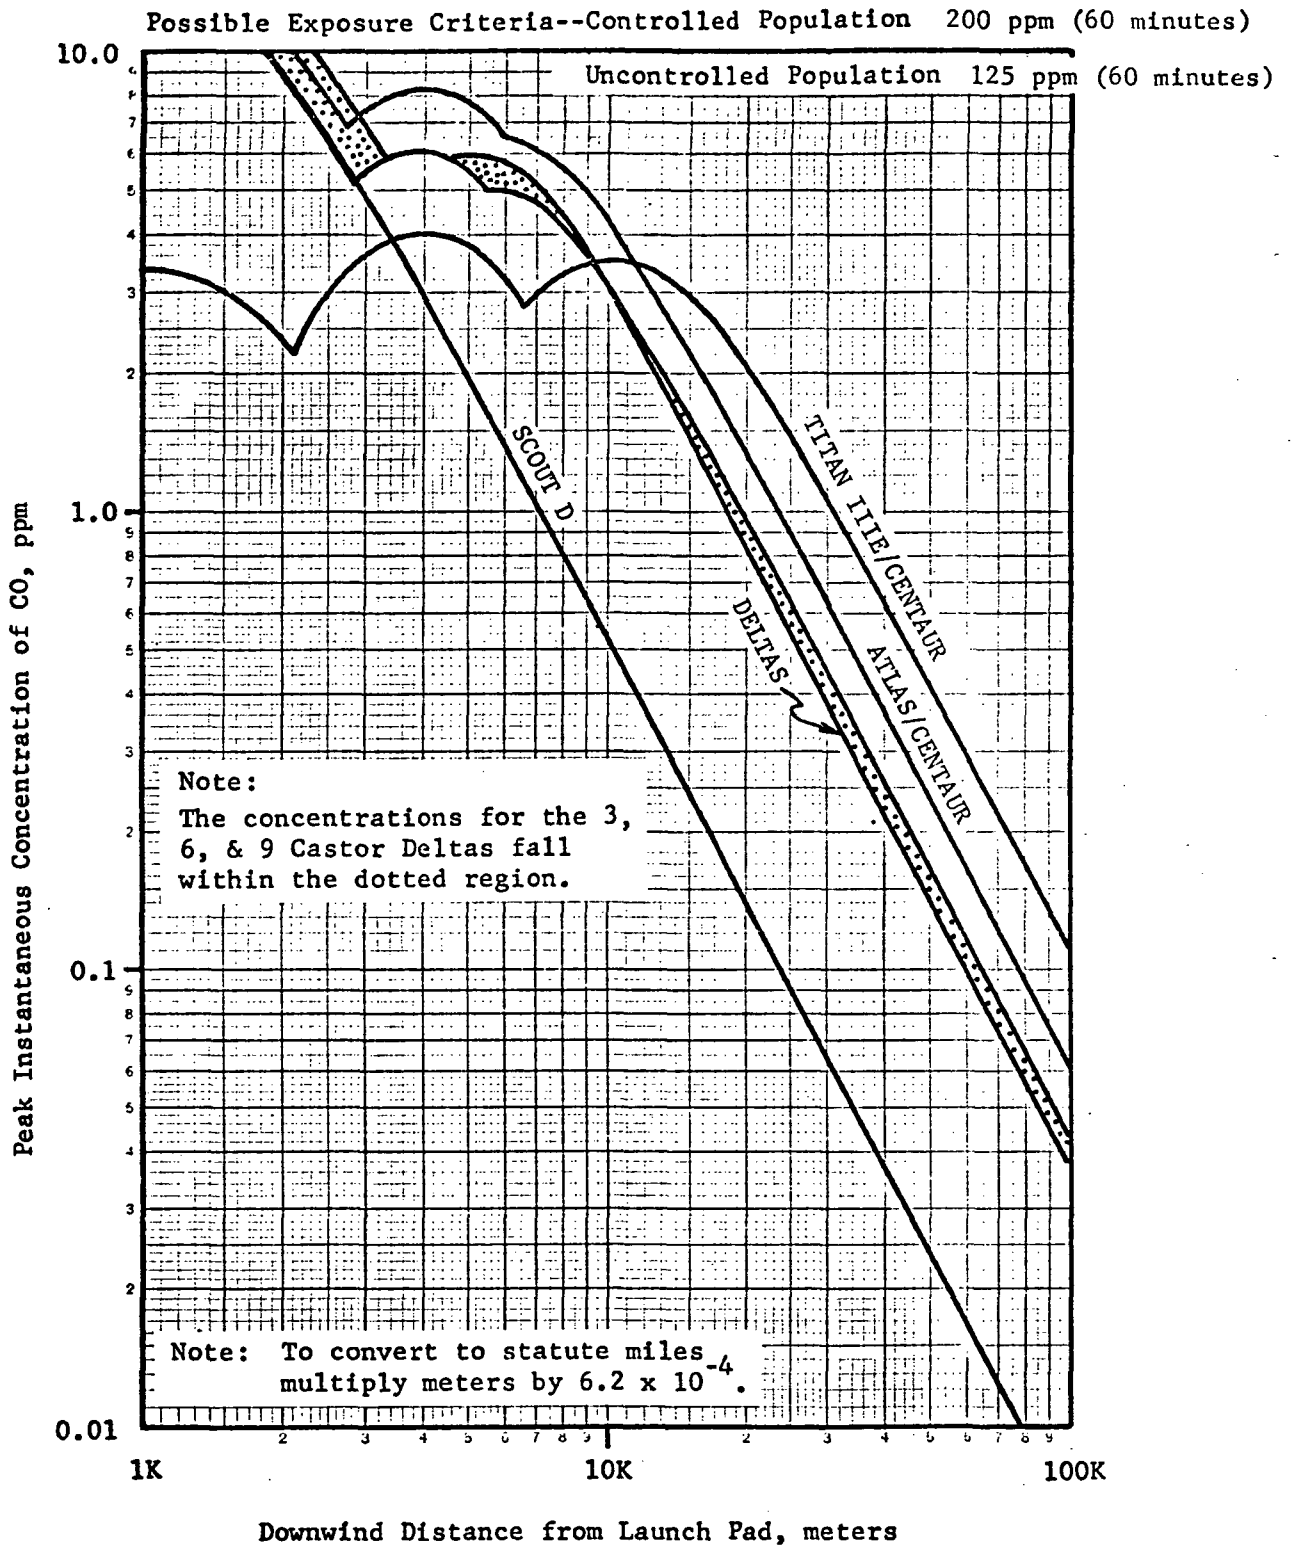


FIGURE 11. BOUNDS FOR THE ESTIMATED INSTANTANEOUS PEAK CO CONCENTRATIONS DOWNWIND OF ON-PAD CASTASTROPHES FOR SEA BREEZE, FALL, AND SPRING METEOROLOGICAL CONDITIONS

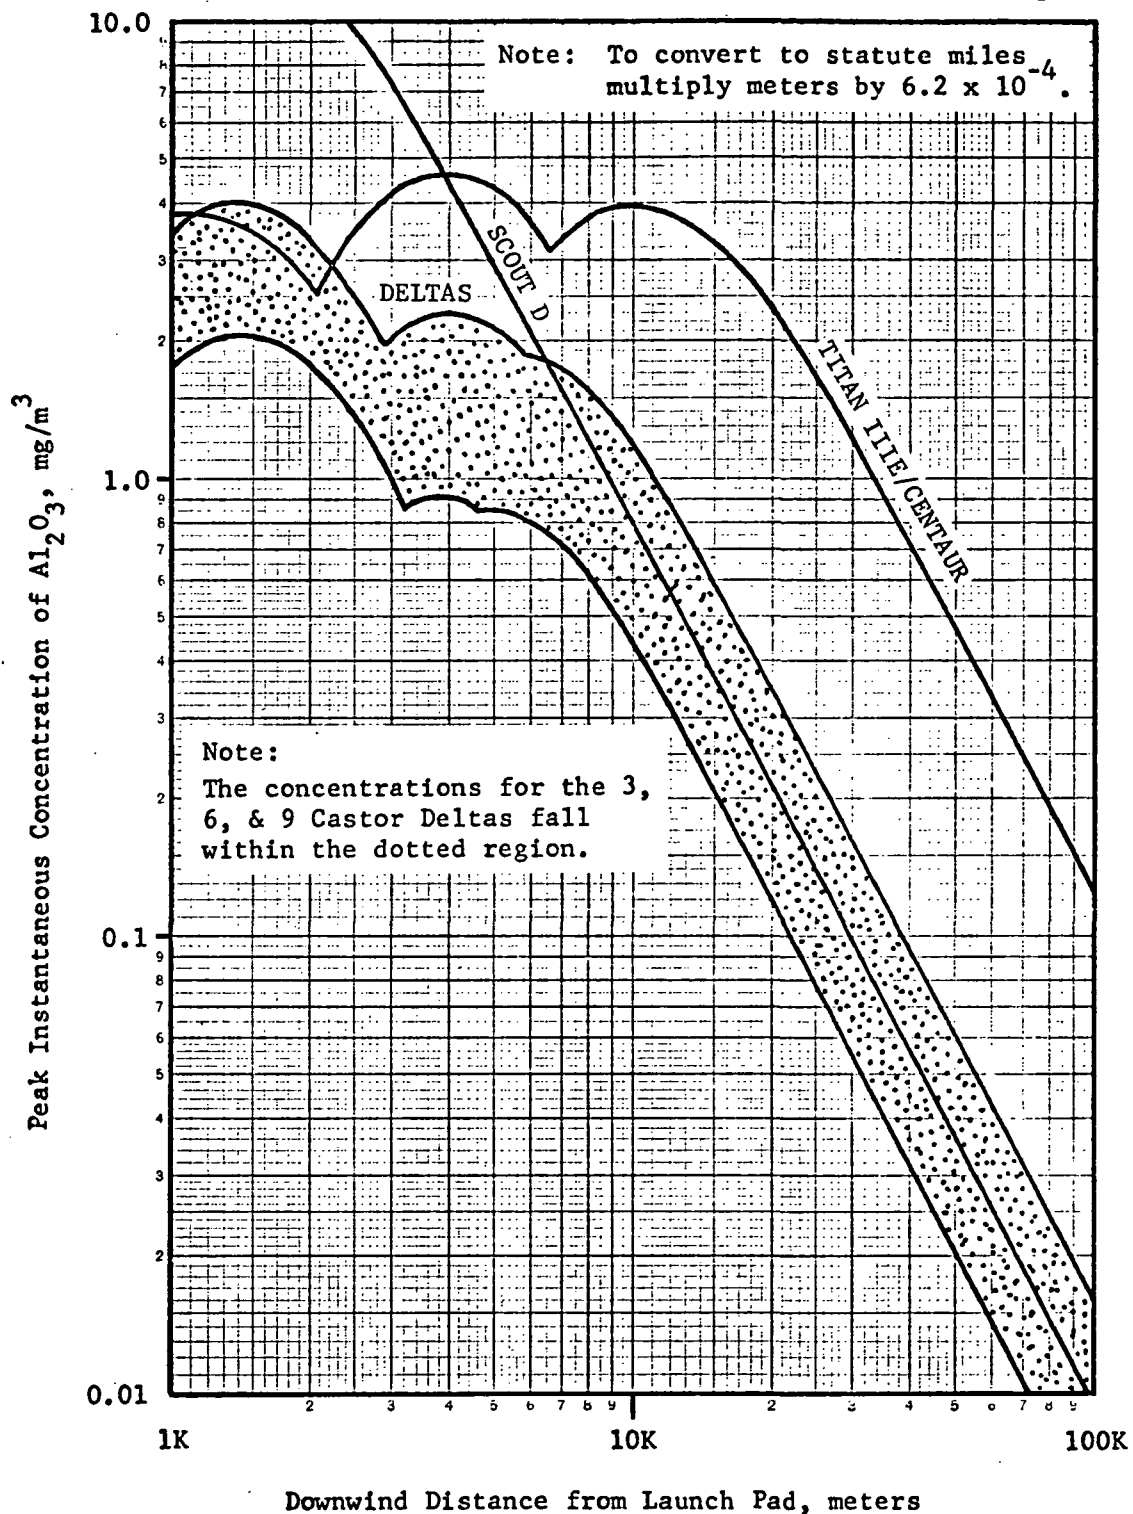
Possible Exposure Criteria--Controlled Population  $50 \text{ mg/m}^3$  (10 minutes)

FIGURE 12. BOUNDS FOR THE ESTIMATED INSTANTANEOUS PEAK  $\text{Al}_2\text{O}_3$  CONCENTRATIONS DOWNWIND OF ON-PAD CASTASTROPHES FOR SEA BREEZE, FALL, AND SPRING METEOROLOGICAL CONDITIONS

There are no criteria for short-term emergency exposure of the public to  $\text{Al}_2\text{O}_3$ . However, various levels of particulate concentrations have been established, based on 24-hour averages, at which an air pollution "Warning" or "Emergency" is to be declared<sup>(8)</sup>. These are  $0.625 \text{ mg/m}^3$  and  $0.875 \text{ mg/m}^3$ , respectively. As in the case of normal launches, the peak concentrations given in Figure 12 are fleeting, the maximum dosage being about  $0.144 \text{ mg hr/m}^3$  at a distance of about 12.5 km. The 24-hour dosages corresponding to the "Warning" and "Emergency" conditions are  $15 \text{ mg hr/m}^3$  and  $21 \text{ mg hr/m}^3$ , which exceed the maximum dosage for a Titan III catastrophe by factors of about 100 and 150. No significant hazard appears to be indicated.

Summarizing, accidents or abnormal launches of the vehicles considered here are not expected to cause air pollutant concentrations exceeding the exposure criteria except in the immediate vicinity of the launch pad where access is carefully controlled. Table 6 gives the maximum radius at which specific ground level effects would be anticipated for both normal and abnormal launches. No other effects of significance, either in the lower or upper atmosphere, are expected.

TABLE 6. SUMMARY OF ESTIMATED MAXIMUM RADIUS  
OF GROUND LEVEL EFFECTS FOR  
TITAN IIIE/CENTAUR OR TITAN IIIC

Event	Maximum Radius at which Exposure Exceeds Criteria	Limiting Pollutant	Criteria Used*
Normal Launch	2.4km	HCl	4ppm
Cold Spill	6km	N <sub>2</sub> O <sub>4</sub>	2ppm
On-pad Catastrophe	Criteria Not Exceeded	HCl	7ppm
Low Level Destruct	Criteria Not Exceeded	HCl	7ppm
Engine Test	Criteria Not Exceeded	CO	30ppm

\*For uncontrolled populations. Criteria for normal operations assumed for normal launch and engine test. Emergency criteria used for accidental exposures. See Table 3.

WATER QUALITYSource and Nature of Pollutants

NASA OSS Launch Vehicle and Propulsion Programs may contribute potential pollutants to bodies of water in the following ways:

- On-pad accidents and propellant spills which may result in run-off of propellants to local drainage systems.
- In-flight failures which may result in vehicle hardware and, possibly, propellants falling into the ocean.
- Normal flight, which results in the impact of spent, suborbital stages (containing some residual propellants) and jettisoned hardware into the ocean.
- Eventual reentry of spent stages which have achieved orbit.

The problem of reentry debris is treated separately in this statement. Provisions are made for containing on-pad spills and disposing of the spilled propellant without contaminating the water (or air) environment. On-pad vehicle failures would normally be expected to result in a fire that consumed most or all of the propellants, and, thus, have been handled as an air pollution problem. Any unconsumed propellant would be treated in the same way as a spill. In the period of 1965 through May, 1973, out of 165 launches, one launch<sup>\*</sup> resulted in an on-pad catastrophic failure.

---

\* Atlas/Centaur Number 5.

In the event of an in-flight failure, the vehicle destruct system ruptures the propellant tanks.\* The propellants then ignite and burn, but the possibility exists that a fraction of the propellants, in addition to vehicle hardware, may reach the surface of the ocean. This possibility is treated, together with normal stage impact. Approximately 90% of NASA space launches for automated missions have been successful. Of the 165 launches mentioned above, two launches resulted in failures during the early phase\*\* of flight when significant quantities of propellant remained unused.

Spent vehicle stages which do not achieve orbital velocity are placed on trajectories which result in an ocean impact. In addition to stage hardware, small quantities of propellants (residuals and reserves) impact with the stage. These propellants are released and dispersed into the environment. Their probable effect on the environment has been estimated.

Vehicle hardware will normally sink in the ocean and slowly corrode; however, isolated occurrences of floating hardware have been reported. In major part, such hardware consists of aluminum, steel, and fiber reinforced plastics. A large number of compounds and elements are used in launch vehicles in small amounts; for example, lead in soldered electrical connections and cadmium from cadmium plated steel

- 
- \* When the Range Safety Official determines that the vehicle will impact within the safe impact area, he may elect not to destroy the vehicle. This option appears to be exercised most commonly during late stages of the flight when little propellant remains in the vehicle.
- \*\* The Delta 59 booster broke up at 103 seconds of flight time, with approximately one-half its propellants remaining. The second stage was subsequently destroyed, releasing all its propellants. The Nimbus B Thor-Agena went out of control and was destroyed with about one-half of the booster propellant and all the second-stage propellant on board. Also, an additional launch had a much later failure; after hydraulic failure of the Delta 73 booster, it was necessary to destroy the second stage after 261 seconds of burn, releasing slightly less than one-half of the second-stage propellants.

fittings. Neither the stage hardware or its corrosion products are believed to represent a significant water pollution problem, as will be discussed in subsequent paragraphs.

Possibilities of water pollution are primarily associated with toxic materials which may be released to and are soluble in the water environment. Rocket propellants are the dominant source of such materials. A secondary consideration relates to oils and other hydrocarbon materials which may be essentially immiscible with water but, if released, may float on the surface of the water, inhibiting oxygen transfer, coating feathers of sea fowl and fouling gills of fish which may come into contact with it.

The toxicity of propellants to marine biota has received relatively little attention: Table 7 shows some aquatic toxicity data and the estimated maximum allowable concentrations (MAC) for the chemical species of concern. Threshold Limit Values in air for man are shown for comparison. Critical materials are hydrazine, unsymmetrical dimethyl hydrazine, and their mixtures (Aerozine 50, i.e., A50). Later discussion will confirm that other materials released should pose no threat to plant and animal life.

Little applicable information exists regarding the "floating oil" problem. However, the maximum physical area and time of persistence can be estimated so that some relative judgement of the environmental impact can be made.

TABLE 7. SUGGESTED MAXIMUM ALLOWABLE CONCENTRATIONS (MAC) ON PROPELLANTS IN WATER

Chemical Species	OBSERVED MEDIAN LETHAL THRESHOLD OR MEDIAN LETHAL DOSE, mg/l*							Suggested MAC
	TLV, (c) ppm	Chlorella pyrenoidosa	Daphnia pulex, magna	Falaemonetes vulgaris	Decapoda	Bony (f) Fish	Trout	
Hydrazine (N <sub>2</sub> H <sub>4</sub> )	1.0	100	1.15	--	--	1.6	--	0.7 (g)
Unsymmetrical Dimethyl Hydrazine [(CH <sub>3</sub> ) <sub>2</sub> N-NH <sub>2</sub> ]	0.5	>100	30.4	--	--	4.6	--	0.35 (h)
Aerozine 50 (A-50)	--	--	--	0.78	--	5.1	--	0.53 (i)
Nitrogen Tetroxide (a)	5	--	107	--	--	0.63	1.6	95 (j)
Ammonium Perchlorate (b) (NH <sub>4</sub> ClO <sub>4</sub> )	--	781	66	--	--	780	--	50
RP-1 and RJ-1	230 (d)	--	752	--	300 (e)	--	100	40 (k)

(a) Based on nitric acid, except TLV.

(b) Based on nitronium perchlorate.

(c) Threshold Limit Value, Reference (4): Concentration in air for human industrial exposure.

(d) Based on the maximum specification aromatic content of 5%, considered as benzene.

(e) Based on "emulsified aromatic hydrocarbons".

(f) Lowest observed value for any specie.

(g) Concentration causing fingerling trout to lose equilibrium in 24 hr. Reference (22).

(h) Based on ratio of TLV's for hydrazine and UDMH.

(i) Based on the sum of the toxic effects of hydrazine and UDMH.

(j) Toxic principal devoid of pH effect (ie, expected MAC in alkaline or buffered water). Reference (22).

(k) Selected from values for trout exposed to gasoline. Reference (22).

\* References (22), (51), (53), and (54).

Impact on the Environment

Potential sources of pollutants to the marine environment and the major pollutants are:

- Hardware - Heavy metal ions and miscellaneous compounds
- Solid Propellants - Ammonium perchlorate
- Liquid Propellants - UDMH, A-50,  $N_2O_4$ , RP-1, RJ-1.

Jettisoned or reentered hardware will corrode and, thus, contribute various metal ions to the environment. The rate of corrosion is slow in comparison with the mixing and dilution rate expected in a marine environment, and, hence, toxic concentrations of metal ions will not be produced. The miscellaneous materials (e.g., battery electrolyte, hydraulic fluid) are present in such small quantities that, at worst, only extremely localized and temporary effects would be expected.

The ammonium perchlorate in solid propellants is mixed in a rubbery binder and will thus dissolve slowly. Toxic concentrations would be expected only in the immediate (within a few meters) vicinity of the propellant if they occur at all. As noted in Table 7, the toxicity is relatively low.

The release of liquid propellants into the marine environment poses the greatest potential threat to the environment, particularly in the case of hydrazine based fuels (see Table 7). Thus, those vehicles employing such fuels (Delta, Titan IIIE/Centaur and Titan IIIC) pose the most serious problem.

A-50, UDMH, nitrogen tetroxide and IRFNA are soluble in water, whereas the hydrocarbon fuels, RP-1 and RJ-1 are relatively insoluble.\* Thus, the latter two materials are less hazardous to marine life. However, the hydrocarbons have a measurable toxicity when dispersed and retained in suspension in sea water. Liquid oxygen (LOX) and liquid hydrogen (LH<sub>2</sub>) pose no toxic threat.

Estimates have been made of the ocean area subjected to toxicant concentrations greater than the MAC for various assumed normal and abnormal vehicle flights. Only those vehicles employing the N<sub>2</sub>O<sub>4</sub>/A-50 propellant system (Delta\*\* and Titan) were considered. The potential hazard would be less in intensity and relate to a smaller area for all other vehicles.

Tables 8 and 9 show the amounts of propellant remaining in the vehicles at various points along the trajectories, the propellants potentially available for release to the environment at that point in normal flight or following an abort, and the downrange location of the corresponding impact point. The quantities in Tables 8 and 9 were estimated using flow rate and trajectory data.<sup>(1)</sup> Example trajectory plots and corresponding impact points are shown for all subject launch vehicles in Appendix B.

- 
- \* A solubility of between 50 and 100 ppm by weight might be expected for hydrocarbons such as RP-1 and RJ-1. Data concerning the solubilities of hydrocarbons in water are scarce, but a value of 72 ppm for decane at 25C has been quoted.<sup>(23)</sup>
- \*\* All Delta configurations are equivalent in terms of the N<sub>2</sub>O<sub>4</sub>/A-50 content.

TABLE 8. PROPELLANT QUANTITIES FOR THE TITAN III/CENTAUR

Time from Launch (sec)	Stage			
	Zero (Solid)	Core I (N <sub>2</sub> O <sub>4</sub> /A-50)	Core II (N <sub>2</sub> O <sub>4</sub> /A-50)	Centaur (LOX/LH <sub>2</sub> )
0	384,610	119,870	27,320	13,670
	Propellant remaining, kg	None	None	None
	Propellant Released, kg	384,610	27,320	13,670
	Normal			
	Accident			
	Location*	Near Launch Pad	Near Launch Pad	Near Launch Pad
40	221,000	119,870	27,320	13,670
	Propellant remaining, kg	None	None	None
	Propellant Released, kg	221,000	27,320	13,670
	Normal			
	Abort			
	Location*	11	11	11
123	111,430	111,430	27,320	13,670
	Propellant remaining, kg	None	None	None
	Propellant Released, kg	111,430	27,320	13,670
	Normal			
	Abort			
	Location*	324	324	324
280	696 (Residual)	696 (Residual)	27,320	13,670
	Propellant remaining, kg	696	None	None
	Propellant Released, kg	696	27,320	13,670
	Normal			
	Abort			
	Location*	1,908	1,908	1,908
466.4	230 (Residual)	230 (Residual)	230 (Residual)	13,670
	Propellant remaining, kg	None	230	None
	Propellant Released, kg	None	230	13,670
	Normal			
	Abort			
	Location*		5,189	5,189
585	10,790	10,790	10,790	10,790
	Propellant remaining, kg	None	None	None
	Propellant Released, kg	10,790	10,790	10,790
	Normal			
	Abort			
	Location*			9,582

\* Downrange location of impact point, km. Note: To convert to pounds, multiply kilograms by 2.20 To convert to nautical miles, multiply kilometers by 0.54

TABLE 9. PROPELLANT QUANTITIES FOR THE TAT(3C)/DELTA

Time from Launch (sec)	Stage			Delta TSE (N <sub>2</sub> O <sub>4</sub> /A-50)
	Castors (Solid)	Thor (LOX/RJ-1)		
0	Propellant remaining, kg	11,250	66,230	4,670
	Propellant Released, kg	None	None	None
	Location* Normal Accident	11,250 Near Launch Pad	66,230 Near Launch Pad	4,670 Near Launch Pad
15.0	Propellant remaining, kg	7,490	61,680	4,670
	Propellant Released, kg	None	None	None
	Location* Normal Abort	7,490 Near Launch Pad	61,680 Near Launch Pad	4,670 Near Launch Pad
38.6	Propellant remaining, kg	None	54,300	4,670
	Propellant Released, kg	None	None	None
	Location* Normal Abort	None Near Launch Pad	54,300 Near Launch Pad	4,670 Near Launch Pad
221	Propellant remaining, kg	None	137 (Residual RJ-1 only)	4,670
	Propellant Released, kg	None	137	None
	Location* Normal Abort	None Near Launch Pad	137 137 1,984	4,670 1,984
415	Propellant remaining, kg	None	137	1,910
	Propellant Released, kg	None	137	None
	Location* Normal Abort	None Near Launch Pad	137 1,984	1,910 3,830

\* Downrange location of impact point, km.

Note: To convert to pounds, multiply kilograms by 2.20  
To convert to nautical miles, multiply kilometers by 0.54

Characteristics of the Oceans Near the Launch Sites\*

The oceans near all the launch facilities are areas of moderate water activity, being neither stagnant nor exceptionally stormy. Major ocean currents run relatively close to all the sites. The three ranges located in the U. S. are in active biological areas and have sport as well as commercial fisheries nearby. Further downrange, the spent stages impact in the open ocean where residual fuel would be of minor significance and quickly dispersed by wave action.

The Eastern Test Range (ETR) is located on the east coast of Florida where the Gulf Stream/Florida Current passes between the Bahama Islands and the mainland at relatively high velocity (up to 1.8 m/sec) during the entire year. The current's influence prevents the typical near-shore green ocean development normally expected for such relatively shallow water. The continental shelf is wide in this area, encompassing the Bahama Islands and extending at least 370 km before dropping off into the Hatteras Abyssal Plain. The area is characterized as a subtropical ocean with an associated moderate level of biological activity typified by a large variety of plant and animal species widely dispersed over the area.

The Western Test Range (WTR) is physically near the edge of the continental shelf in an area of relatively strong currents which vary seasonally. Since most NASA launches from WTR are into polar or near polar orbits, the launch vehicles pass southward over the continental shelf (Santa Barbara Channel). The area is a region of very high

---

\* Discussion based on materials in References 24 through 28.

biological activity influenced by nutrient up-welling along the continental shelf and the seasonally shifting California Current and subsiding counter-currents. The water is cool, permitting a high rate of carbon dioxide fixation characteristic of oceans at higher latitudes.

Wallops Island, Virginia, near the Maryland border, has a temperate climate and moderate water and biological activity. No strong currents pass close to shore and the continental shelf is relatively close to shore. Scout is the only space vehicle launched from this site.

The San Marco Scout Launch Facility is located in Formosa Bay on the coast of Kenya near the equator. The climate and ocean are tropical. The continental shelf in this area is very narrow and the Somali Current system, which shifts with the seasons, passes some distance out to sea. The level of operations involves only an occasional Scout launch.

#### Normal Launch

A normal launch and flight will result in the downrange impact of spent stages containing small quantities of residual propellants. Estimates of the maximum radius at which the MAC will occur were made for the Titan Core I stage (worst case). Estimates were based on symmetric diffusion into a semi-infinite ocean<sup>(29)</sup> and diffusion limited to a depth of 3 m<sup>(30)</sup>, corresponding to a case where the vertical diffusion coefficient is much smaller than the horizontal diffusion coefficient.

<u>Chemical Species</u>	<u>Maximum Radius at which the MAC Occurs, meters</u>	
	<u>Symmetric Diffusion</u>	<u>Depth Limited to 3 m</u>
N <sub>2</sub> O <sub>4</sub> (MAC = 95 mg/l)	8.5	12.2
A-50 (UDMH + Hydrazine) (MAC = 0.53 mg/l)	45.1	132.6

The affected volume is insignificant.

The RP-1 and RJ-1 residuals in the Atlas and Thor stages will result in a non-persistent surface film covering less than  $280 \text{ m}^2$  (31,32) and, thus, do not pose a serious hazard to the environment.

### Aborted Flights

In the event of an in-flight failure in the early stages of flight, the vehicle destruct system ruptures the propellant tanks and disperses the propellants into the air. The propellants then normally ignite and burn. It is possible that some fraction of the propellant may reach the ocean surface. If the destruct system should fail to operate, the vehicle might impact intact and release the entire quantity of remaining propellant into the ocean. As noted previously, the probability of an abort during the early stages of flight appears to be in the order of 1%.

One case is known in which a (non-NASA) vehicle destruct system has failed to operate when called upon. <sup>\*(33)</sup> Assuming this failure rate to be in the order of 1%, leads to an estimate of 1 launch in 10,000 or, at current rates, about 1 launch in 500 years which might involve the the ocean impact of an intact vehicle. <sup>\*\*</sup>

---

\* In-flight failures occasionally destroy the vehicle before the destruct system can be activated, and it is possible that failures other than in the destruct system may disable or limit the capability of the destruct system.

\*\* The probability of failure of an Atlas during the first 148 seconds of flight has been estimated as 0.8%. The probability of the destruct system failing to operate in this same period has been estimated as 0.1%, given a combined probability of about 8 simultaneous failures per million launches. <sup>(34)</sup>

In view of the uncertainty concerning the quantities of propellant that might reach the ocean in an abort, and the probabilistic nature of parts of the problem, estimates of the maximum radius at which the MAC would occur have been made for propellant quantities ranging from 1% to 100% of the total vehicle propellant load. The radii were estimated from the same two diffusion models considered previously.<sup>(29,30)</sup> Diffusion coefficients were estimated from experimentally-determined values for quiescent systems reported in the literature.<sup>(30)</sup>

Calculations were made for a Titan IIIE (or Titan IIIC) failure before ignition of Core I, and for a Delta failure before ignition of the second stage (worst case). Figures 13 and 14 present results of these calculations.

It appears that a near-shore (shallow water) impact of one of these vehicles intact might be regarded as a significant environmental event. As noted above, however, such an extreme event is not considered likely. It would require the simultaneous early failure of the vehicle (estimated at perhaps 1% probability), and failure of the vehicle destruct system (probability estimated to be less than 1%), and additionally, the physically unlikely situation of the hypergolic propellants failing to ignite following rupture of the propellant tanks on impact. Consequently, minimal significance is attached to such an event.

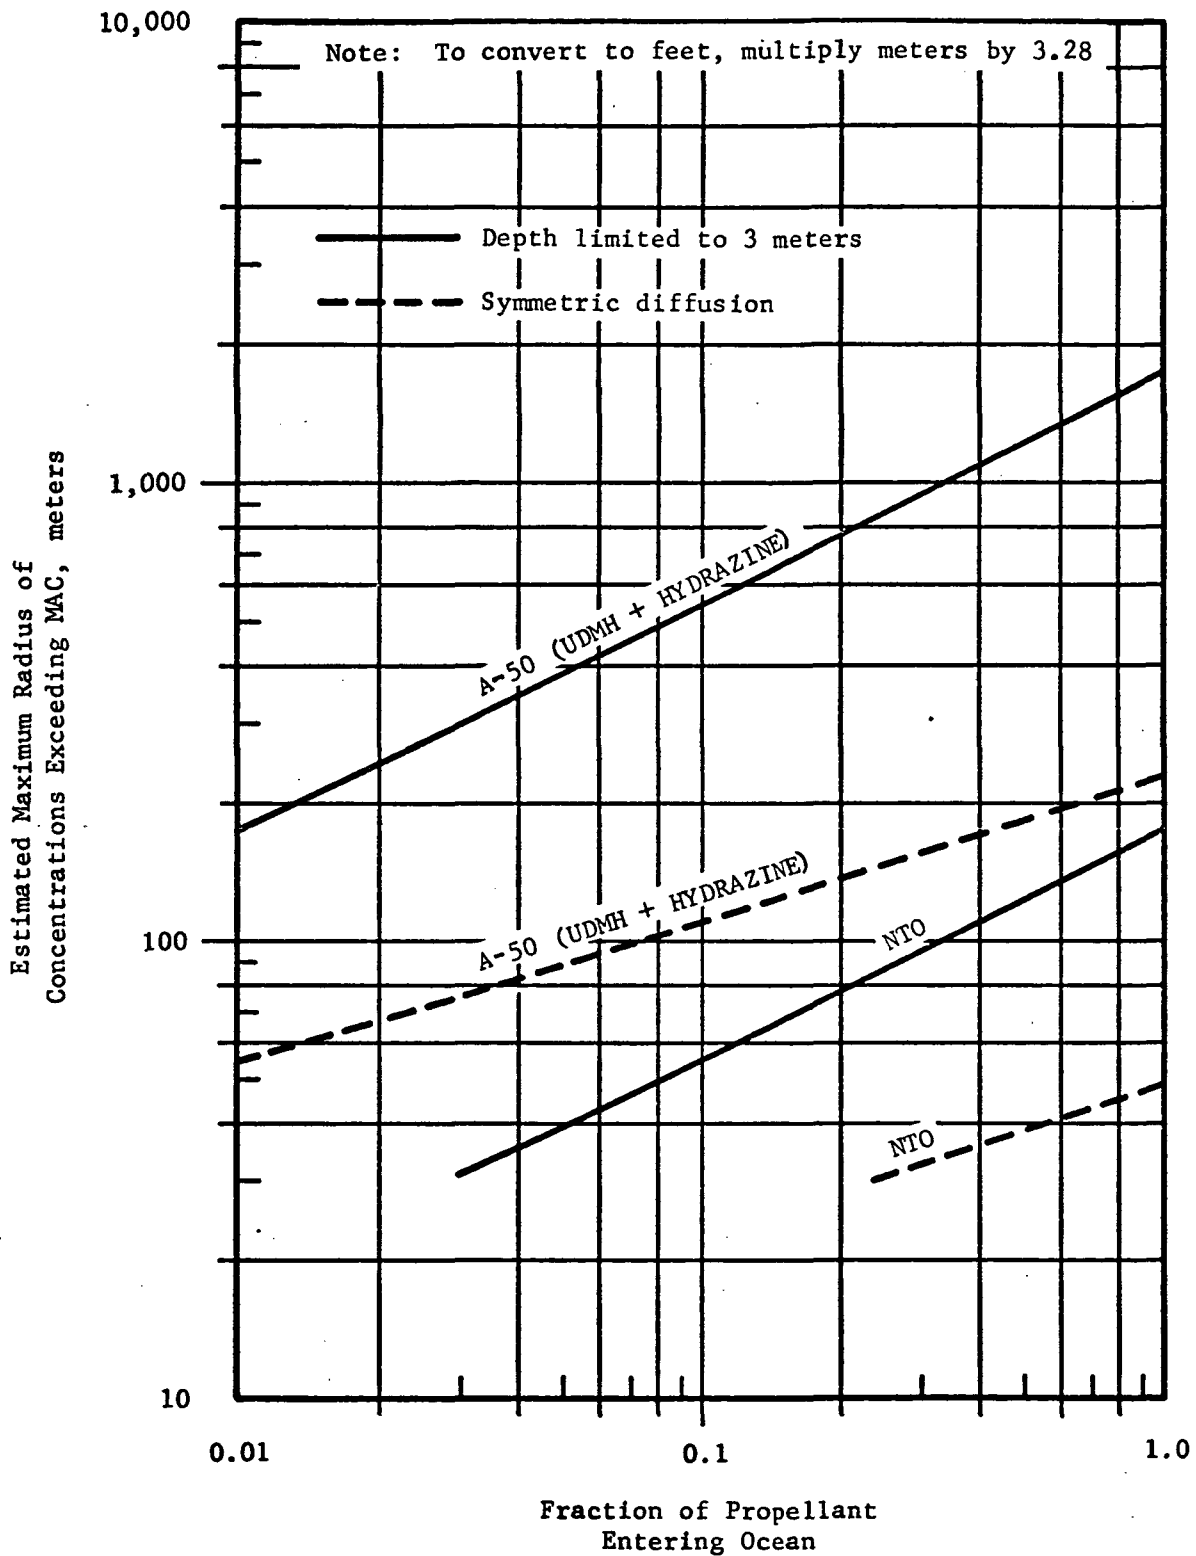


FIGURE 13. ESTIMATED MAXIMUM RADIUS AT WHICH THE MAC IS EXCEEDED FOR WORST-CASE TITAN IIIE/CENTAUR OR TITAN IIIC ABORTS

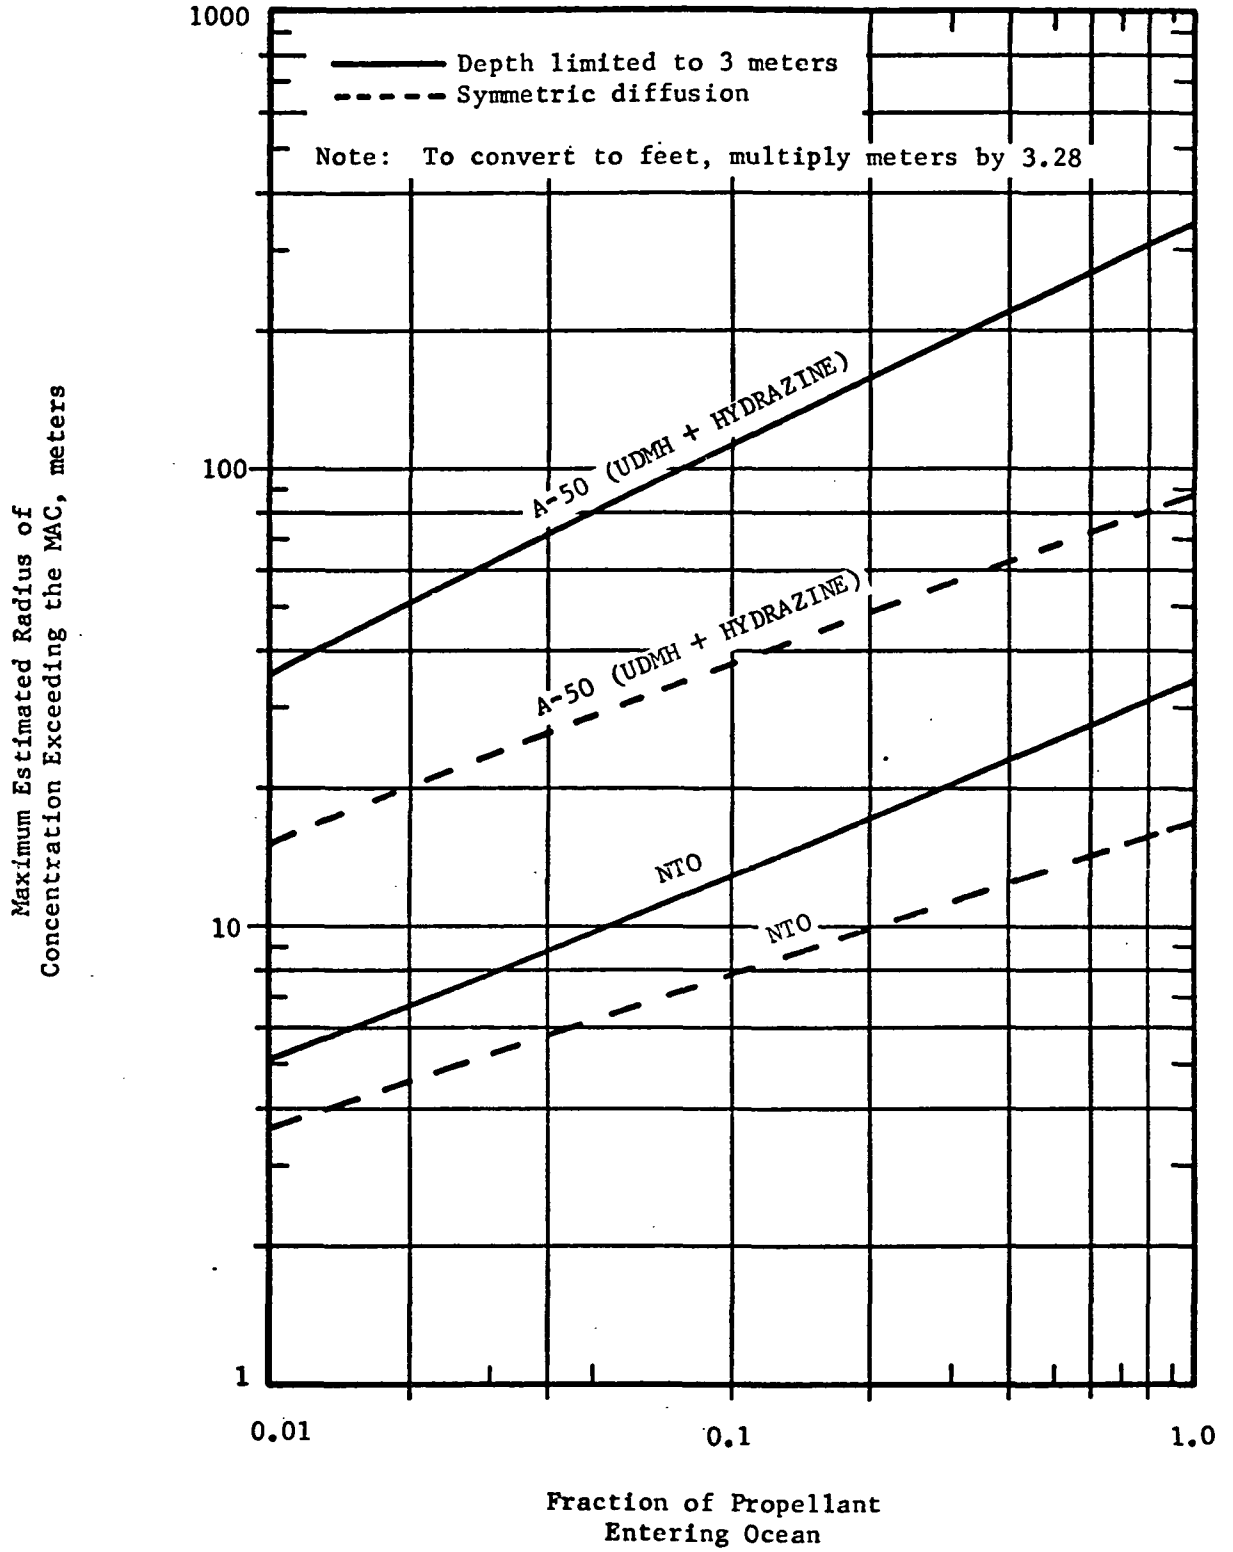


FIGURE 14. ESTIMATED MAXIMUM RADIUS AT WHICH THE MAC IS EXCEEDED FOR WORST-CASE DELTA ABORTS

Titan III or Delta second stage fuels and oxidizer which actually reached the ocean would ultimately end as biologically inert compounds or compounds such as found in commercial fertilizers.

The oxidizer for Titan III and the Delta second stage,  $N_2O_4$ , reacts with water to form nitric acid which then forms ionic compounds, such as sodium nitrate, a commercial fertilizer, with minerals in the sea water. Hydrazine and unsymmetrical dimethyl hydrazine (UDMH), the components of Titan III and Delta fuel, degrade over a period of hours in pure water in contact with the atmosphere. (35) Their degradation is hastened by the presence of minute amounts of metal ions such as  $F_e^{+++}$ ,  $Cu^{++}$ ,  $Al^{+++}$ ,  $Cr^{+++}$ , and  $Ni^{++}$  (36), all of which are present in sea water.

The fundamental reaction of the decomposition of aqueous hydrazine in contact with the atmosphere is  $3N_2H_4 \rightarrow 2NH_3 + 2N_2 + 3H_2$  (after Reference 36). As the pH is reduced, more ammonia is produced and at high pH more gaseous nitrogen and hydrogen are produced. Ammonia is a commercial fertilizer and gaseous nitrogen and hydrogen represent no biological hazard. Another potential reaction is with carbon dioxide dissolved in sea water to form carbazic acid which can decompose to  $CO_2$  and the hydrazine salt of the acid. Hydrazine salts also decompose in the manner of the fundamental equation in basic solutions in contact with the atmosphere (Reference 35). Thus, any hydrazine released in the ocean, which is unable to react with the  $N_2O_4$  oxidizer, will be degraded over a short period of time to less toxic compounds. UDMH, while not as extensively studied, undergoes similar reactions.

The early abort of an Atlas or Thor, which resulted in the entire load of RP-1 or RJ-1 being released into the ocean would result in a surface film covering a maximum of 55,740 m<sup>2</sup>(31,32). Evaporation of such thin films is rapid. The time for complete evaporation has been calculated as 59 hours for favorable conditions (wind velocity of 5m/sec) or 206 hours for unfavorable conditions (wind velocity of 1 m/sec).<sup>(32)</sup> Due to the relatively small area involved and the fleeting nature of the phenomena, no significant environmental effect is expected. As discussed previously, the probability of such an event is regarded as very low.

In summary, water pollution resulting from the operation of launch vehicles for NASA automated missions is expected to be insignificant except for worst-case situations involving highly unlikely combinations of events. Even should such a situation occur, the effects are not persistent, i.e., the toxicants will disperse and degrade to values below the MAC's within a few days to a few weeks. Because of the non-isolation of the areas involved and the lack of persistent effects, needed repopulation should occur rapidly.

## NOISE

### Source and Nature

Significant noise levels are generated in the operation of rocket engines and launch vehicles. The major source of this acoustic disturbance appears to be the jet noise, although a significant

contribution may derive from the combustion process. Both the acoustic power emitted and the frequency spectrum of the noise are affected by the size of the rocket engine (thrust level) and the specific impulse of the engine, as well as by design details.

An approximate relationship between the vehicle thrust level and the generated sound pressure level is shown in Figure 15. Thrust levels of the vehicles considered in this Environmental Statement are indicated on the figure.

The nature of the noise may be described as intense, relatively short, composed predominantly of low frequencies, and infrequent (approximately 20 times per year, including all launch sites). Table 10 shows peak sound intensity levels resulting from Atlas and Titan launches at the closest press sites and the nearest site boundaries. These are the largest, and, thus, the noisiest, of the vehicles considered here.

TABLE 10. PEAK SOUND PRESSURE LEVELS (SPL) RESULTING FROM ATLAS AND TITAN IIIC/TITAN IIIE LAUNCHES (Median/Upper Bound)

Vehicle	SPL at Nearest Press Site (dB)	SPL at Nearest Boundary (dB)
Atlas <sup>(a)</sup>	106/116	102/110
Titan IIIC/IIIE <sup>(b)</sup>	118/123	112/117

(a) Based on 4 Atlas launches. (38)

(b) Based on 2 Titan IIIC launches. (39)

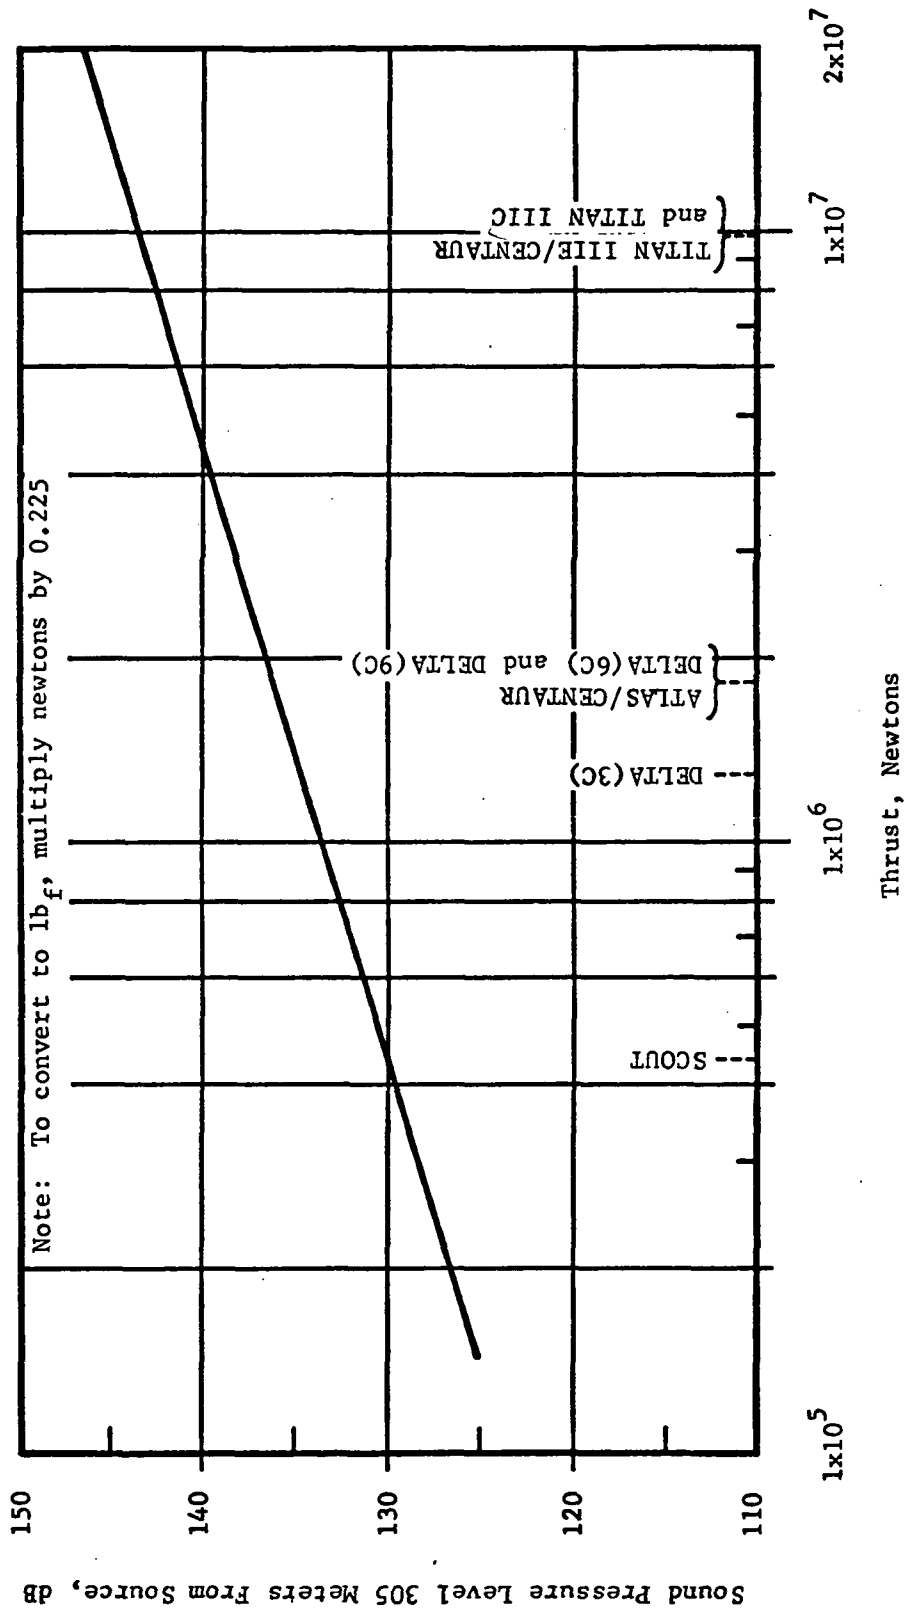


FIGURE 15. APPROXIMATE RELATIONSHIP BETWEEN VEHICLE THRUST AND SOUND PRESSURE LEVEL AT A FIXED DISTANCE (Adapted from Reference 37)

A typical time-intensity history is shown in Figure 16. The total duration of the noise is generally 3 to 4 minutes. A frequency-intensity spectra is shown in Figure 17. Note that the lower frequencies predominate and that the higher frequencies are attenuated more rapidly with distance. This means that the lower frequencies travel farther and affect a greater area. These lower frequencies are less harmful to human hearing, and are less annoying<sup>(40)</sup>, but are the prime cause of structural damage<sup>(37)</sup>.

#### Impact on the Environment

Noise can affect the environment, with its most important effects on man and on physical structures. For this reason, these effects are used here as the criteria for examining the impact of booster noise.

Noise can affect man physiologically and psychologically. Physiologically, high-intensity noise can cause permanent hearing damage and temporary threshold shift, i.e., the sensitivity of hearing is temporarily lowered. Psychologically, noise can create feelings of annoyance and discomfort in some people, while for other people the same noise can create excitement and pleasure. Research on the effect of noise on man has yielded criteria for noise levels and durations which man can generally tolerate. Table 11 shows consensus values of a set of tolerance limits. The Damage Risk Values are thresholds beyond which hearing damage might occur. These thresholds correspond to an integrated "acoustic dose" of about 12 millibar-seconds at the lower intensities, dropping to about 6 millibar-seconds at 130 dB. Table 12 compares the integrated acoustic exposures corresponding to the upper bounds of Table 10 with these threshold criteria.

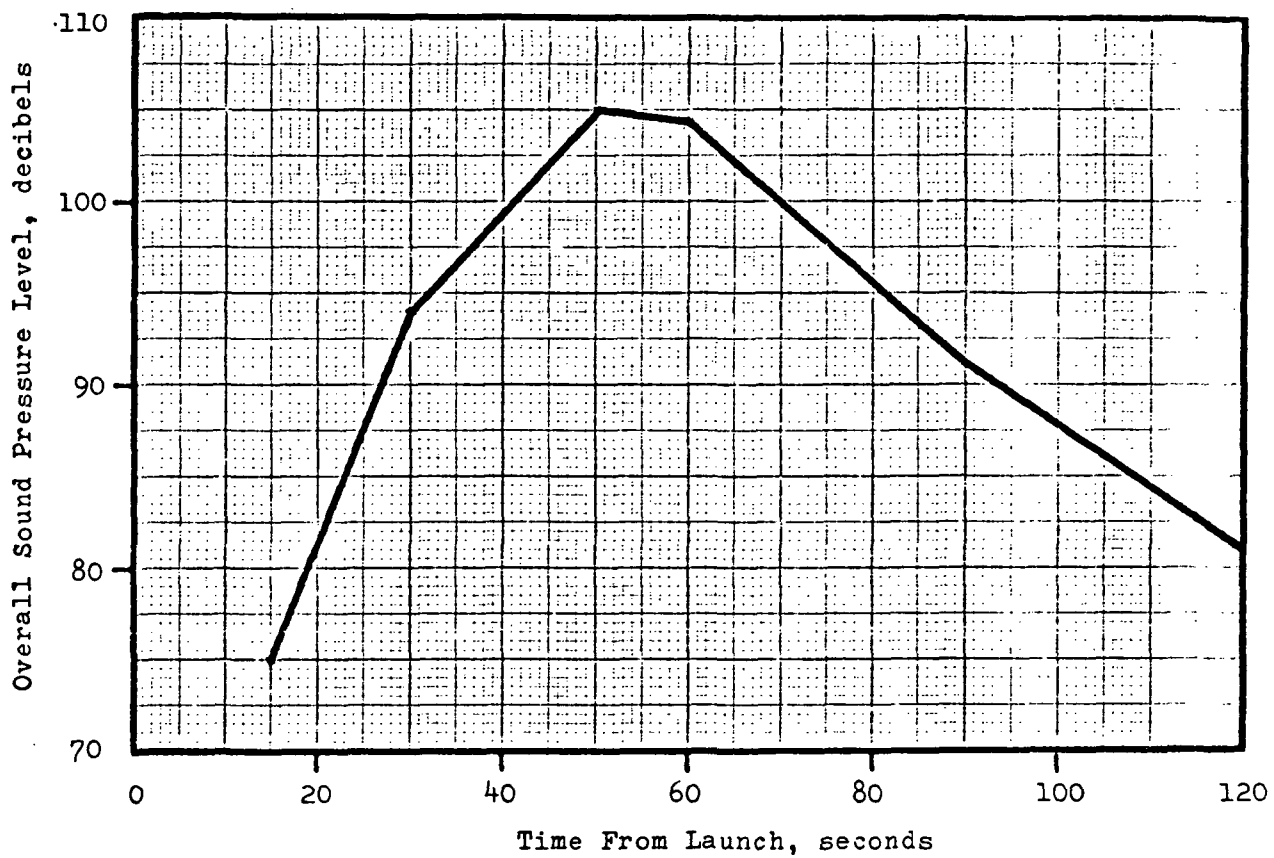


FIGURE 16. OVERALL SOUND PRESSURE LEVELS AT A DISTANCE OF 7,710 METERS FROM AN ATLAS LAUNCH AS A FUNCTION OF TIME (Adapted from Reference 38)

Note: To convert to feet, multiply meters by 3.28

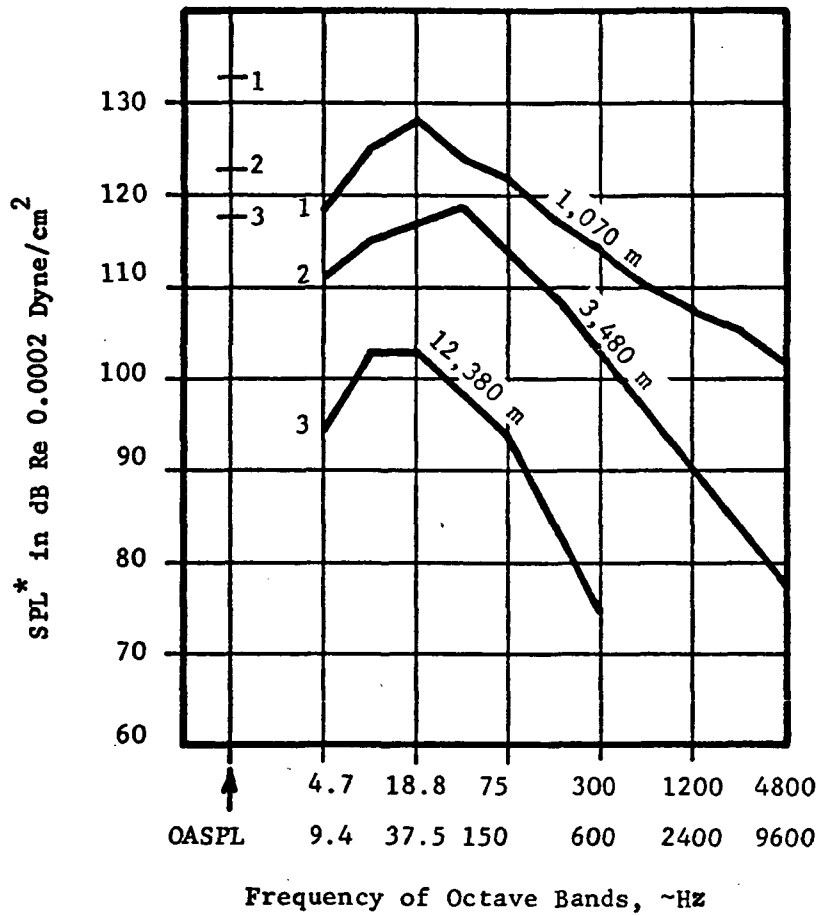


FIGURE 17. MAXIMUM, FREE-FLIGHT, SPL SPECTRA FOR A SATURN TEST AT THREE DISTANCES (38)

\* Sound Pressure Level

TABLE 11. NOISE LEVELS FOR DAMAGE RISK AND ANNOYANCE (37,40)

Damage Risk Values (in dB)	Annoyance Threshold	Damage to Ground Structures Threshold
130 (10 seconds tolerance)	90 dB(A)	130 dB (frequencies lower than 37 Hz)
125 (30 seconds tolerance)		
120 (60 seconds tolerance)		

TABLE 12. ACOUSTIC DOSE RESULTING FROM ATLAS AND TITAN IIIIE/TITAN IIIIC LAUNCHES

	Press Box	Nearest Boundary	Press Box	Nearest Boundary
		<u>Atlas</u>		<u>Titan</u>
Peak SPL, dB	116	110	123	117
Integrated Acoustic Dose *, millibar-seconds	1.78	1.14	4.34	2.84
Threshold Dose, millibar-seconds	12	12	11.5	12

\* Integrated by means of the average duration-distance-intensity relationships of Reference 38 to a level 20 dB below the peak level.

It is clear that a substantial margin of safety exists for any unprotected persons exposed to the noise associated with these rocket launches.

Structural damage is possible with high-intensity noise composed, predominantly, of low frequencies. Measurements of the sound pressure levels associated with Saturn IB launches<sup>(41)</sup> showed peak values of about 120 dB below 37 Hz at a distance of 2,362 m. Measurements at

Atlas launches showed this intensity level at a distance of about 1,524 m<sup>(38)</sup>. Comparing the damage criteria shown in Table 11 with these intensity levels, structural damage would not be expected outside of a 0.9 to 1.8 km radius from launch. Only resistant structures are located within these short distances from the launch pads.

Damage to plants might occur at noise levels similar to those causing structural damage, although no such damage from rocket launches is known to have been observed. The effects of noise on domestic animals and wildlife might be expected to be similar to those on man: hearing damage at sufficiently high noise levels, and various psychological effects. The available information<sup>(62)</sup> suggests that, for the short duration, infrequent noise considered here, the effects on domestic animals and wildlife will be insignificant.

For any single launch vehicle test or launch, "noise pollution" occurs over a relatively wide area. However, with its short total duration of 3 to 4 minutes, its infrequent occurrence (~20 times a year, including all sites), and the imposed safety precautions, the noise from these boosters cannot be considered to have a significant impact on the environment. No uncontrolled areas are close enough to the launch pads for any significant effects to result from exposure of the public or uncontrolled-area structures to these noise levels.

At distances corresponding to the closest permitted approach by any uncontrolled or unprotected person, the peak noise level generated by rocket launches is comparable to that produced by a four-engine jet aircraft at 150 m overhead. Unmuffled motorcycles, construction noise (compressors and hammers), and some rock and roll bands closely approach this noise level. This noise level is exceeded by pneumatic riveters and chippers in close proximity and within a boiler shop at maximum noise levels.

REENTRY DEBRIS

In the usual launch of an Earth satellite, one or more launch vehicle stages are placed in orbit. Over a period of time, small drag forces resulting from the tenuous atmosphere at orbital altitudes will cause the orbit to decay. The time period before the object reenters the denser portion of the atmosphere may range from one orbital revolution to many years, depending upon initial orbit and the ballistic coefficient.

Of the stages in orbit in mid-1972, seven larger rocket bodies with combined mass of approximately 5,440 kg and five smaller rocket bodies with combined mass of approximately 195 kg are expected to reenter the Earth's atmosphere in the 1972-1977 period. Upon reentry, these will break up into fragments of various size. The majority of fragments will burn up during entry. Except within limits of latitude determined by orbital inclination, we are unable to predict in advance of the launch where the surviving pieces will fall.

From 1967 to mid-1972, 23 rocket bodies placed in orbit by the launch vehicles covered in this statement reentered the Earth's atmosphere. The total mass of these bodies before reentry was approximately 102,500 kg. More than 10 times as many other rocket bodies reentered during the same period from all sources. No casualties, injuries or property damage are known to have resulted from impact of any surviving fragments. Fewer than a dozen fragments, ranging in masses up to about 59 kg, have been found. Launches by these cited launch vehicles in the 1970's are expected to add potential orbital debris at a rate no greater than that of the past.

Based on worldwide experience to date, the extent of the hazard from orbital debris is considered small.

ALTERNATIVES

As indicated previously, the launch vehicle activities which contribute to potential environmental impact are the development and testing of propulsion systems and the launch of space vehicles. The matrix in Table 13 displays some of the alternative actions which might be taken in these areas. The only alternative which could be applied on a short-term basis (1-3 years) would be preferred use, when possible, of the "cleaner" of current launch vehicles. However, this would have only a minor effect on total emissions and would involve significant expense and/or have significant effects on spacecraft delivery capability.

In the long-term, a possibly attractive alternative to current vehicles would be the development and use of LOX/LH<sub>2</sub> stages to replace current vehicle stages. Such a development might cost \$250M-\$500M per stage and require five or more years. It should be noted that such stages would still be expendable and not offer the cost advantages expected for the Space Shuttle, which is expected to replace most of the expendable vehicles in the 1978-1980 period.

In view of the limited environmental impact of the current vehicles and the expected introduction of the Space Shuttle, no further analysis of any of the above alternatives would be recommended.

TABLE 13. MATRIX OF ALTERNATIVES

Alternative Activity	Use of Scrubbers, Collectors, etc.	Use of Remote Sites	Development of "Clean" Solid Propellants	Replacement of All Solid Propellant and NTO/A-50 Lower Stages by LOX/ Kerosene Stages	Replacement of All Lower Stages by LOX/LH <sub>2</sub> Stages
Research, Development, and Ground Test	Potentially complete elimination of objectionable emissions.	Already reasonably remote. No effect on global basis.	Reduction or elimination of HCl emissions.	Elimination of HCl emissions. Possible reduction of NO emissions. Reduced impact of accidents.	Elimination of most objectionable emissions. Little or no effect on noise. Effect on NO emission uncertain. Reduced impact of accidents.
Launch	Practical only for first few meters of flight.	Already reasonably remote. Few alternative sites available. No effect on global basis.	Reduction or elimination of HCl emissions.	Elimination of HCl emissions. Possible reduction of NO emissions. Reduced impact of accidents.	Elimination of most objectionable emissions. Little or no effect on noise. Effect on NO emission uncertain. Reduced impact of accidents.
Comment	Increased development and operational expense. Modest overall reduction in emissions.	Extremely expensive.	No formulations known with per- formance comp- arable to current solid propellants. Would require motors of increased size and thus increased objection- able emissions other than HCl.	Non-recurring expense of perhaps \$300M-500M. Some recurring cost effect on overall emissions.	Non-recurring expense of perhaps \$1,000M. Recurring cost increase by factor of, perhaps, 2 or more.

THE RELATIONSHIP BETWEEN THE LOCAL SHORT-TERM USES OF THE  
ENVIRONMENT AND THE MAINTENANCE AND ENHANCEMENT  
OF LONG-TERM PRODUCTIVITY

In fulfilling its responsibility, NASA OSS has followed a philosophy that has always emphasized safety, reliability, and economy in space transportation. Recent studies of the relevance of specific automated space program objectives to broad national goals have helped to identify and document the value of these programs in relation to mankind's historical need to better understand, utilize, predict, protect, and control his life-sustaining environment. (42,43)

It is impractical here to itemize all known and potential environmental benefits generated by past or planned space activities, but the general value can be simply expressed as follows. The automated space program has contributed heavily to the recent rapid increase in knowledge about our immediate environment and that of the solar system. Such knowledge is fundamental to any realistic endeavor to protect the environment. Technically, we are making slow but noticeable improvement in our ability to utilize the recently acquired space capability for such pedestrian and necessary functions as communications, navigation, and meteorology. Perhaps of most significance to maintenance and enhancement of long-term environmental productivity is the current NASA thrust in the area of orbital Earth resource surveys. This as yet embryonic effort has a unique potential for providing mankind with an operational capability to measure, monitor, and manage environmental conditions and natural resources from a local to a global scale.

NASA automated missions represent passive payloads which in themselves have no adverse environmental impact aside from that associated with items in space, reentry items, and the launch process. Reentry items and the launch process represent minor transient effects while items remaining permanently in outer space have no impact on the Earth and its atmosphere. On the other hand, some systems launched into space make immediate contributions to the betterment of mankind while others are directed toward long-term benefits to the Earth, its environment, and inhabitants.

IRREVERSIBLE AND IRRETRIEVABLE  
COMMITMENTS OF RESOURCES

The materials which make up a launch vehicle as it sits on the pad ready for launching are largely irretrievable once the launch process is initiated. However, they are relatively easily replaced and, in general, are replaceable from domestic resources with relatively insignificant expenditure of manpower and energy.

By far the largest portion of materials making up a launch vehicle is the propellants. These have previously been enumerated and defined; they are common chemicals, petroleum-derived hydrocarbons, and liquified atmospheric gases. Resources and energy required for their production are insignificant in comparison with, for example, the resources and energy required to produce 1 million barrels of jet fuel per week, the current production rate for private, commercial, and military jet aircraft.

In the use of cryogenic propellants, it has been the practice to use both liquid and gaseous helium for various purposes including tank pressurization. For example, the Centaur vehicle requires about 6,825 cubic meters of helium from test through launch.<sup>(44)</sup> Helium is often considered to be a valuable natural resource that requires conservation. The estimated amount of recoverable helium is about 5 billion cubic meters with a current annual usage rate of about 28 million cubic meters.<sup>(45)</sup> At current rates, use for all NASA purposes approximates 3.4 million cubic meters per year.<sup>(46)</sup> The actual usage attributable to the vehicles considered here is small. At current use rates, many years of supply are available.

After propellants, the next largest amounts of materials are iron and aluminum. Other materials include plastics and glass, as well as other metals such as nickel, chromium, titanium, lead, zinc, copper, etc.\* There may be small amounts of silver, mercury, and the noble metals, gold and platinum. The quantities of materials of various kinds which are utilized are insignificant in comparison with those used in one year of production (10,000,000) of automobiles, for example.\*\*

---

\* The composition of "typical" launch vehicle hardware can be estimated as 78.3% steels, 20.2% Al, 0.4% Ti, and 1.2% miscellaneous.<sup>(47)</sup>

\*\* In the period 1969-1971, the total hardware mass used in NASA launch vehicles for automated space missions was the equivalent of about 76 automobiles per year.

Perhaps the best available measure of the commitment of resources to NASA launch vehicles for automated space missions is the annual rate of dollar expenditure on such vehicles. This is expected to average approximately \$150M in the period 1970-1976.<sup>(48)</sup> By far the largest fraction of these expenditures are for wages and salaries. These expenditures represent a relatively trivial fraction of the national economy. As illustrated by this and the other examples given, no commitment of any individual resource of major significance to the national economy exists.

DISCUSSION OF COMMENTS RECEIVED FROM OTHER AGENCIES

Of the agencies requested to comment on the draft environmental statement, comments were received from the CEQ, DOD, and Department of Interior. Replies, indicating that they had no comments, were received from the AEC and Department of State. Copies of all replies are included as Appendix E.

Following are discussions and replies to each point raised by the reviewers. Refer to Appendix E for the actual comment.

CEQ-1. Additional calculations and discussion of aluminum oxide have been added to the text. As noted there, public exposure criteria applicable to the short duration exposure to  $Al_2O_3$  expected from rocket launches are not available, but, based on the National primary and secondary ambient air quality criteria, no hazard is anticipated.

CEQ-2. Information on the effects of rocket emissions on plants and animal life has been added to the text in the Air Quality, Water Quality, and Noise sections. Briefly, no effect is predicted except possibly very close to the launch pad. Discussions with launch site personnel have failed to reveal any observed effects. However, at KSC, a substantial effort has been undertaken to determine whether such effects can be detected.

CEQ-3. Since the draft statement was published, a substantially improved atmospheric dispersion model has become available<sup>(15)</sup>, and the normal launch and on-pad catastrophic cases have been re-done with this improved model. Reference (15) describes the model in detail. Additionally, Appendix D briefly describes the model and makes some comments and comparisons with other atmospheric dispersion models.

Measurements of the ground level concentrations of rocket exhaust were made at the Scout 184C (August, 1972) and Delta 92 (November, 1972) launches. Reports have not yet been published, but it is understood that no CO or HCl was detected by atmospheric sampling. A rise in the particulate concentration above the background was observed. At the Scout launch, pH paper exposed near the launch site changed color, indicating an acid environment, presumably HCl. At the Delta launch, a rise in the atmospheric CO<sub>2</sub> concentration was observed downwind of the launch site. Efforts are being made to refine the instrumentation and monitor additional launches.

CEQ-4. Figures C-5 through C-8 have been added to Appendix C. These figures show the human population as a function of distance from the launch pads to a distance of about 40km.

CEQ-5. Table 7 (the reference to Table 9 is an error) has been extensively revised and expanded using all information that could be found. Information on the toxicity of propellants to marine species is almost non-existent. Where the information is available, toxicity data for trout have been chosen, as trout are usually sensitive to toxicants. It may also be noted that some species of trout are sea-run.

CEQ-6. The destruct system on a launch vehicle is deliberately made as independent as possible from vehicle operational systems. However, the destruct system, its antennas and wiring, etc., are supported by the vehicle structure. Consequently, a structural failure could cause a failure of the destruct system, but such a failure would also be expected to destroy the vehicle. It may be noted that the footnote which refines the probability calculation made in the text, considers that all launch vehicle failures at low altitudes will require a range safety destruct. In fact, of the total probability of failure quoted, 0.008, a probability of approximately 0.004 is associated with failures that would, in themselves, be capable of destroying the vehicle.

CEQ-7. This environmental statement concludes that the adverse environmental effects of NASA OSS Launch Vehicle and Propulsion Programs are minimal or not significant except possibly for rare types of abnormal events, of which no examples have occurred. Based on the available criteria for air quality, water quality, noise, etc., it is believed that this conclusion is correct. The subject criteria are based on producing minimum, reversible, or unobservable adverse effects which are considered acceptable by society or some specific segment of it.

Estimation of the cumulative effect on the environment is difficult as the "ultimate fate" and rate of removal of the various chemical species from the environment is largely unknown. This parallels the situation of most common industrial pollutants--for example CO and SO<sub>2</sub>. However, a gross estimate of the overall cumulative effect in comparison with other sources of the same or similar chemical species can be obtained from Table 14. It is evident from this table that the automated vehicle program is a very minor contributor to the national totals.

TABLE 14. COMPARISON OF EMISSIONS INTO THE LOWER ATMOSPHERE

	Emission, 10 <sup>6</sup> kg/year				
	CO	NO <sub>x</sub>	HCl	SO <sub>2</sub>	Ash
NASA Launch Vehicles for automated missions <sup>(a)</sup>	0.414	0.00014	0.060		0.11 <sup>(d)</sup>
Automobiles <sup>(b)</sup>	56,200	5,720	4.1 <sup>(c)</sup>	--	--
Power Plants <sup>(b)</sup>	90	3,200	610 <sup>(c)</sup>	13,400	4,400
Trash Incineration <sup>(b)</sup>	6,890	450	180 <sup>(c)</sup>	--	--
Jet Aircraft <sup>(b)</sup>	270	90	--	--	--

(a) Based on first stage propellants, 1969-1971 average.

(b) For 1966. Source: "The Federal R&D Plan For Air-Pollution Control By Combustion-Process Modification", January, 1971, PB 198-066.

(c) Estimates from Gerstle and Devitt, "Chlorine and Hydrogen Chloride Emissions and Their Control", Paper No. 71-25, Air Pollution Control Association, 1971.

(d) Al<sub>2</sub>O<sub>3</sub> from solid propellants.

CEQ-8. "Multiple" launches of NASA OSS vehicles have been made (for example, some of the planetary missions) but these launches have been separated by a period of several weeks. It is believed that this is more than sufficient time to permit any effects of the first launch to have dissipated before the second launch occurs. Multiple launches with shorter intervening times are usually excluded by any of a number of factors, including the capacity of the data acquisition and tracking network to handle multiple launches and the time required for pad refurbishment and vehicle erection and checkout.

Propellant loading may be accompanied by the venting of propellants, particularly where liquid oxygen and liquid hydrogen are concerned. The vapors from liquid oxygen and liquid hydrogen pose no hazard to the environment. Nitrogen tetroxide vapor resulting from loading propellants in the Titan and Delta vehicles is passed through vent stacks which prevent toxic concentrations at ground level. Traces of hydrazine and UDMH may also be vented when loading propellants in these vehicles. Propellant loading is accomplished under stringent safety supervision, including the application of meteorological restrictions. (55)

CEQ-9. The material on "The Relationship...Long-term Productivity" was not intended to imply that the space program has been responsible for all or most of man's new knowledge of the environment in the last 14 years. The wording has been modified to avoid this implication.

DOD-1. The problem of a launch vehicle falling into shallow, protected water is considered significant only for the Titan IIIC and Titan IIIE vehicles. The Scout, launched from Wallops Island, does not carry toxic materials that could be released into the water, and the Delta vehicles, launched from ETR, do not carry sufficient toxic fuel to create a severe problem (see Figure 14).

To impact in protected water, the Titan vehicles must fly on azimuths outside the range of  $-26^{\circ}$  and  $148^{\circ}$  (see Figure C-1). These azimuths exceed the nominal range safety limits by  $70^{\circ}$  and  $58^{\circ}$ , respectively. Based on the nominal trajectory dispersions of the Titan vehicles, the probability of the instantaneous impact point (IIP) potentially passing over protected water is negligible.\* It is understood that flight so far outside the range safety limits would result in destruction by the range safety officer as soon as the deviation was detected. The probability that the flight termination system would fail to operate is estimated at  $0.00052^{(56)}$ .

The probability that a vehicle component failure could occur in the first 20 seconds\*\* of flight that would cause flight outside the nominal  $3\sigma$  dispersion, or that would cause loss of control of the vehicle without also destroying the vehicle is estimated at  $18 \times 10^{-6}$  (56). Assuming that these failures would be equally likely to cause the flight to deviate in any direction, the probability of their causing the IIP to potentially pass over protected water is estimated as  $9 \times 10^{-7}$ . Again, indications of such flight behavior would result in flight termination as soon as detected, and with the above quoted failure probability of the flight termination system, would result in the probability of potential impact in protected water of  $4.6 \times 10^{-10}$ .

---

\* This probability has been estimated as between  $10^{-2900}$  and  $10^{-4250}$ .  
 \*\* The IIP crosses the shore line at approximately 20 seconds.

In the improbable event that a Titan vehicle impacts in protected water, the extent of the poisoned area may be estimated from Figure 13. The available information concerning the phytotoxicity of hydrazine and UDMH is included in Tables 3 and 7. As a worst case, it may be assumed that all life is destroyed in a volume of water corresponding to that described in Figure 13. However, this toxicity is not permanent.

Solutions of hydrazine (7.5ppm) and UDMH (100 ppm) were found to lose their toxicity to goldfish after 24 and 72 hours, respectively<sup>(51)</sup>, while chemical analyses of Aerozine 50 solutions in sea water indicated that the UDMH fell below detectability "immediately".<sup>(54)</sup>

DOD-2. Should a Titan III C or Titan III E/Centaur suffer a catastrophic failure or range safety destruct on the pad or at low altitude, some fuel might escape the resulting fire ball and drift downwind as either a fine mist or vapor. Estimates of the probability that such an event would occur and result in a hazardous concentration of Aerozine-50 have been made.<sup>(57)</sup> Figure 18 shows the results of this analysis. If the buoyant rise of the cloud caused by the heat of the burning propellants is included in the analysis, hazardous concentrations of Aerozine-50 do not occur at ground level. Only if the event is treated as cold (no buoyant rise) do hazardous concentrations result. Consequently, it may be concluded that the probability of such an event is not greater than about 0.00015 and is likely equal to zero.

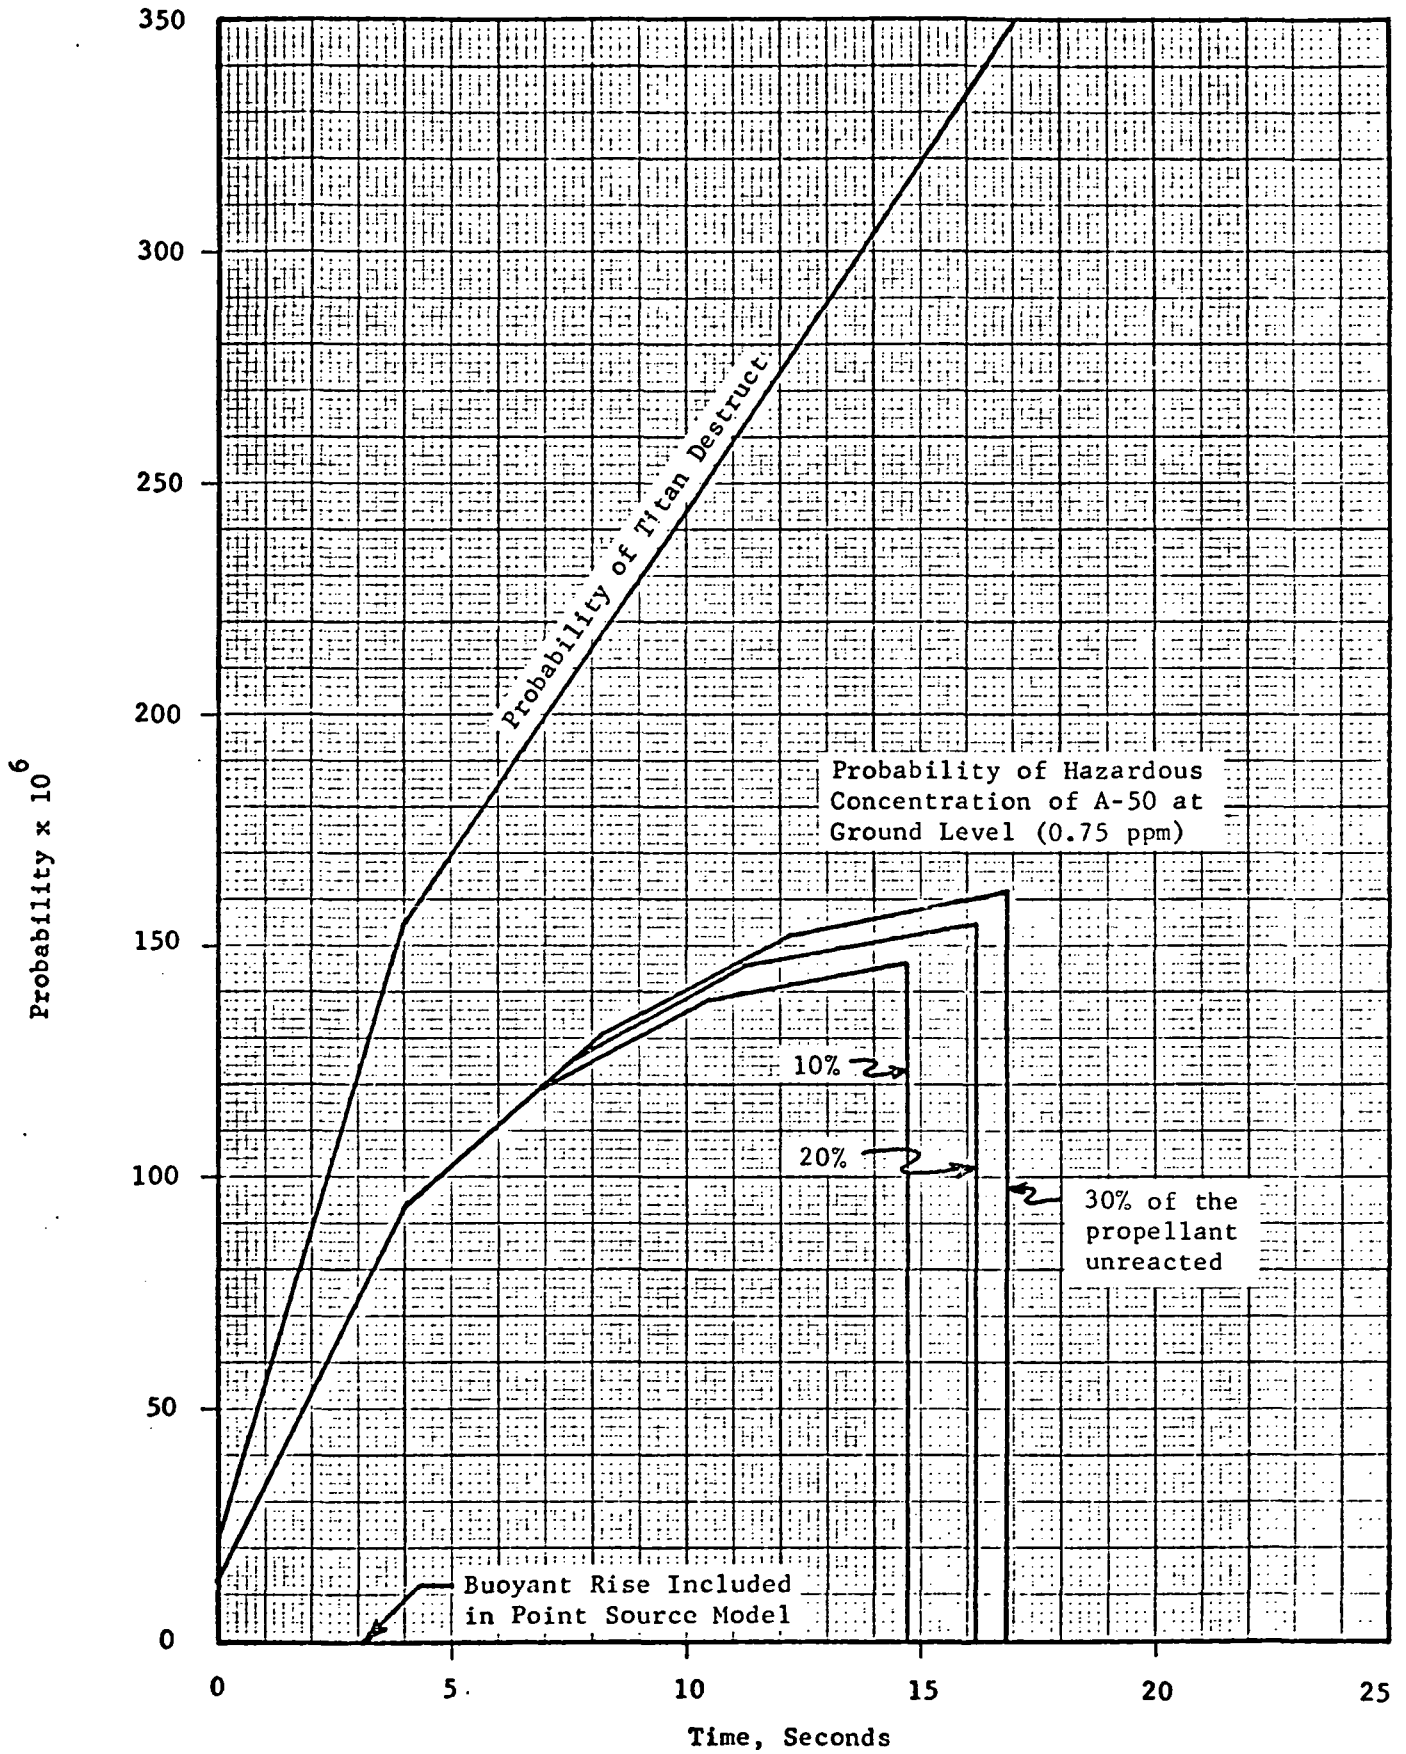


FIGURE 18. PROBABILITY OF TITAN DESTRUCT AND HAZARDOUS A-50 CONCENTRATION

DOD-3. Hydrogen/oxygen fueled vehicles offer a more innocuous space launch capability than does the current family of launch vehicles used by NASA for automated space missions. This possibility is pointed out and discussed in the section on "Alternatives". In view of the fact that NASA expects to replace most of the current launch vehicle family with the Space Shuttle beginning in 1979, and in view of the limited environmental effects of the current family, further exploration of this alternative does not appear to be justified.

DOI-1. On-pad spills of liquid propellants are contained by a system of dikes and ditches and are conveyed to a holding pond. Disposal is accomplished by the U. S. Air Force at the Cape Kennedy Air Force Station. It is reported that the disposal operation meets all applicable Federal, State, and local regulations.

DOI-2. NASA NMI 8800.7B, dated November 15, 1971, "Guidelines for the Preparation of Environmental Statements Required by the National Environmental Policy Act of 1969", specifies the format of NASA environmental statements. This format is a direct and literal adoption of the CEQ Guidelines, paragraph 6(a). This environmental statement follows the NASA and CEQ Guidelines. The environmental effects of the programs are thoroughly discussed in the body of the statement.

DOI-3. Insofar as scrubbers, collectors, etc., are not now used, their use might be considered as an alternative to the present program. Once objectional chemical species are trapped, it is reasonably certain that a non-polluting method of disposing of them could be devised. As this alternative does not appear particularly attractive, even neglecting any ultimate disposal problem, further analysis and study is not justified.

DOI-(National Park Service). NASA operates two small launch facilities at Vandenberg Air Force Base, or WTR, but has no administrative or operational responsibility for the base. NASA's activities are not inconsistent with the site being included in the national register, and will not have any adverse effect thereon.

APPENDIX A

REFERENCES

## APPENDIX A

### REFERENCES

- (1) "Launch Vehicle Performance File", NASA OSSA Launch Vehicle and Propulsion Programs (Code SV), Report No. BMI-NLVP-DD-70-1, March 2, 1970, by R. R. Teeter, A. E. Weller, and D. S. Edgecombe.
- (2) "Launch Vehicle Performance Document", NASA OSSA Launch Vehicle and Propulsion Programs (Code SV).
- (3) Letter to the Honorable Clinton P. Anderson, Chairman, Committee on Aeronautical and Space Sciences, U. S. Senate; from James C. Fletcher, NASA Administrator; September 29, 1971.
- (4) "Threshold Limit Values of Airborne Contaminants and Physical Agents With Intended Changes", American Conference of Governmental Industrial Hygienists, 1971.
- (5) "Compendium of Human Responses to the Aerospace Environment", Vol. III, NASA CR-1205(III), November, 1968.
- (6) "Guide for Short-Term Exposure of the Public to Air Pollutants: II Guide for Hydrogen Chloride", Advisory Center on Toxicology, National Academy of Science-National Research Council, August, 1971.
- (7) "Air Quality Criteria for Carbon Monoxide", U. S. Department of Health, Education and Welfare, March, 1970, Publication AP-62.
- (8) Federal Register, October 23, 1971, Vol. 36, No. 206, page 20513.
- (9) Note from Advisory Center on Toxicology, National Academy of Science-National Research Council, April, 1971.
- (10) "Guide for Short-Term Exposure of the Public to Air Pollutants: I Guide for Oxides of Nitrogen", Advisory Center on Toxicology, National Academy of Science-National Research Council, April, 1971.
- (11) Craig, R. A., The Upper Atmosphere--Meteorology and Physics, Academic Press, New York, 1965.
- (12) Valley, S. A. (Ed.), "Handbook of Geophysics and Space Environments", Air Force Cambridge Research Laboratories, Office of Aerospace Research, 1965.
- (13) Weller, A. E., "Estimate of Nitrogen Oxide Formation from Nitrogen Impurity in Propellant Oxygen", BMI-NLVP-ICM-72-38, Battelle Columbus Laboratories, April 25, 1972.

- (14) Jacobson, J. S., and Hill, A. C., "Recognition of Air Pollution Injury to Vegetation: A Pictorial Atlas", IR No. 1, Air Pollution Control Association, 1970.
- (15) Dumbauld, R. K., Bjorklund, J. R. and Bowers, J. F., "NASA/MSFC Multilayer Diffusion Models and Computer Program for Operational Prediction of the Toxic Fuel Hazards", NASA TR-73-301-02 (Draft), March, 1971.
- (16) Turner, D. B., "Workbook of Atmospheric Dispersion Estimates", Public Health Service Publication No. 999-AP-26, 1967.
- (17) Kellogg, W. W., "Pollution of the Upper Atmosphere By Rockets", Space Science Reviews 3, pp 275-316, 1964.
- (18) Barth, C. A., "Nitrogen and Oxygen Atomic Reactions in the Chemosphere", Paper given at the International Symposium on Chemical Reactions in the Lower and Upper Atmosphere, San Francisco, California, 1961.
- (19) "The Earth's Ionosphere", NASA SP-8049, March, 1971.
- (20) Hage, K. D., Browne, N. E., and Hilst, G. R., "Preliminary Estimates of Environmental Exposure for Fuel and Exhaust Products", NASA CR-61056, January, 1965.
- (21) Cramer, H. E., Dumbauld, R. K., Record, F. A., and Swanson, R. N., "Titan IIID Toxicity Study", Report No. TR-70-3-A, GCA Corporation, June, 1970.
- (22) McKee, J. E., and Wolf, H. W., "Water Quality Criteria", The Resources Agency of California, State Water Quality Control Board, Publication #3-A, 1963.
- (23) Riddick, J. A., and Banger, W. B., Techniques of Chemistry, Vol. II, Wiley Interscience, 1970, (3rd Edition).
- (24) King, C. A. M., An Introduction to Oceanography, McGraw Hill Book Company, New York, 1913.
- (25) Fairbridge, R. E., Editor, The Encyclopedia of Oceanography, Reinhold Publishing Corporation, New York, 1966.
- (26) Odum, H. T., et al., Coastal Ecological Systems of the United States, Institute of Marine Sciences, University of North Carolina, 1969, p. 526-545.
- (27) U. S. Coast and Geological Survey Charts.
- (28) National Geographic Society Charts.

- (29) Crank, J., The Mathematics of Diffusion, Oxford, 1956.
- (30) Perry, R. H., Chilton, C. H., and Kirkpatrick, S. D. (Editors), Chemical Engineers Handbook, 4th Edition, McGraw-Hill, 1964.
- (31) Blokker, P. C., "Spreading and Evaporation of Petroleum Products on Water", Int. Harbour Congress, 4th, Verslageboek, Compte Rendu (Proceedings, Tagungsbuch) Antwerp, 1964.
- (32) Geankoplis, C. J., "Spreading and Vaporization of Rocket Propellant on Water", BMI-NLVP-IM-72-2, Battelle Columbus Laboratories, February 17, 1972.
- (33) Memorandum, NASA, RY/T. Kerr to NASA SPS/J. Rosenberry, December 21, 1971.
- (34) "Pioneer F AEC Safety Study Phase II, Range Safety Equipment, Launch Pad Hazards, Launch Vehicle Failure Probabilities and Reentry Environment", Report No. GDC-BTD70-015, General Dynamics Convair Aerospace Division, January 18, 1971.
- (35) Audrieth, L. F., and Ogg, B. A., The Chemistry of Hydrazine, John Wiley & Sons, Inc., New York, 1951.
- (36) Clark, C. C., Hydrazine, Mathieson Chemical Corporation, Baltimore, Maryland, 1953.
- (37) Regier, A. A., Mayes, W. H., and Edge, P. M., Jr., "Noise Problems Associated with Launching Large Space Vehicles", Sound, No. 6, 7-12 (1962).
- (38) Cole, J. N., Powell, R. G., and Hill, H. K., "Acoustic Noise and Vibration Studies at Cape Canaveral Missile Test Annex, Atlantic Missile Range, Volume 1, Acoustic Noise", Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, TR 61-608(1), 1962, AD296852.
- (39) Cesta, R. P., and McLouth, M. E., "Launch Conditions Produced by the Titan III-C Launch Vehicle", American Industrial Hygiene Association Journal, Vol. 30, pp 635-639, 1969.
- (40) Kryter, K. D., The Effects of Noise on Man, Academic Press, New York (1970).
- (41) Hitchcock, V. G., and Timmons, W. R., "Saturn I Block II Launch Acoustical Environmental Summary", Report No. TR-284, John F. Kennedy Space Center, March 15, 1966.
- (42) Lederman, L. L. and Windus, M. L., "An Analysis of the Allocation of Federal Budget Resources as an Indicator of National Goals and Priorities", Parts I and II, NASA Office of Space Science and Applications, Report No. BMI-NLVP-TR-69-1, February 10, 1969.

- (43) Wukelic, G. E., and Frazier, N. A., "Selected Space Goals and Objectives and Their Relation to National Goals", Prepared by Battelle's Columbus Laboratories, Columbus, Ohio, for NASA Office of Space Science and Applications, July 15, 1969, Report No. BMI-NLVP-TR-69-2.
- (44) Estimate provided by R. Schmidt, NASA, Code SV, November 12, 1971.
- (45) Monograph on Liquid Helium Technology, National Bureau of Standards, 1968.
- (46) Estimate provided by W. R. Harwood, NASA Code BXE, October 5, 1971.
- (47) Teeter, R. R., "Hardware Weight and Composition for Selected Launch Vehicles", BMI-NLVP-ICM-72-29, Battelle Columbus Laboratories, March 27, 1972.
- (48) Memorandum from S/Associate Administrator for Space Science and Applications to A/Administrator, "Program Operating Plan 71-1", May 13, 1971.
- (49) Crocker, W., et al, "Similarities in the Effects of Ethylene and Plant Auxins", Contrib. Boyce Thompson Inst., V7, pp 231-248, 1935.
- (50) Zimmerman, P. W., et al, "The Effect of Carbon Monoxide on Plants", Contrib. Boyce Thompson Inst., V5, pp 195-211, 1933.
- (51) Heck, W. W., et al, "Environmental Pollution by Missile Propellants", Rept. No. AMRL-TDR-63-75, AD422266, August, 1963.
- (52) "Downwind Hazard Calculations for Titan III C Launches at Kennedy Space Center and Vandenberg Air Force Base", in draft, NASA-MSFC Code Aero-Y, H. E. Cramer Co., 1973.
- (53) "Water Quality Criteria Data Book, Vol. 3, Effects of Chemicals on Aquatic Life", Environmental Protection Agency, Project No. 18050 GWV, May, 1971.
- (54) Heinemann, J. M., and Rose, V. E., "Aerozine 50 Marine Bioassays", REHL (KC) Project No. 66-1, Kelly AFB, Texas, February, 1966.
- (55) "Range Safety Manual", Vol. 1, AFETRM 127-1, Patrick AFB, Florida, September 1, 1972.
- (56) "Titan 23C History and Failure Analysis", MCR-72-260, Martin Marietta Corp., October, 1972.
- (57) Rice, E. E., "The Probability that a Titan III Will Destruct and Cause a Hazardous Ground-Level Concentration of Aerozine 50", BMI-NLVP-ICM-72-88, Battelle Columbus Laboratories, December 19, 1972.

- (58) Record, F. A., Swanson, R. N., Cramer, H. E., and Dumbauld, R. K., "Analysis of Lower Atmospheric Data for Diffusion Studies", NASA CR-61327, April, 1970.
- (59) Letter to L. L. DeVries, MSFC Code Aero Y, from H. E. Cramer Co., "Comparison of Peak Ground Level HCl Concentrations for Normal Titan III Launches", January 31, 1973.
- (60) Smith, J. R., "Titan IIID-2 Exhaust Cloud Monitoring", TOR-0172(2124)-6, The Aerospace Corporation, April 17, 1972.
- (61) "Environmental Statement for the Space Shuttle Program", Final Statement, NASA, July, 1972.
- (62) "Effects of Noise on Wildlife and Other Animals", NTID300.5, U. S. Environmental Protection Agency, Office of Noise Abatement and Control, December 31, 1971.

APPENDIX B

EXAMPLE TRAJECTORY ELEVATIONS  
AND IMPACT POINT MAPS

## APPENDIX B

### EXAMPLE TRAJECTORY ELEVATIONS AND IMPACT POINT MAPS

Figures B-1 through B-7 present the relationships between ground range and altitude for the seven vehicles considered in this Environmental Statement. Also shown on these figures are the separation points of jettisoned hardware (spent stages, shrouds, etc.) and the corresponding impact range.

Figures B-8 through B-14 are maps of example impact point loci for the seven vehicles for each site from which the vehicle is launched. The locations of the impact points of jettisoned hardware are shown on these maps.

Plots of the impact points have been terminated at a range of approximately 7,000-9,000 kilometers. At conditions corresponding to such impact ranges, the quantity of propellant remaining in the vehicle is small, and the re-entry of an intact stage is unlikely. Also, as the impact range increases and the re-entry angle becomes small, the exact location of the impact point is increasingly influenced by details of the aerodynamics of the re-entering object, and thus is relatively indeterminate in a generalized sense. It should also be noted that as the vehicle approaches orbit, the instantaneous impact point sweeps down range at extremely high speeds. For example, the instantaneous impact point for a Scout launched easterly from Wallops Island (see Figure B-3) crosses West Africa at a speed greater than 185 kilometers per second (667,000 kilometers per hour).

The ground range-altitude plots and the impact point loci shown in this Appendix should be regarded as examples. They were developed from previously published information<sup>(1)</sup>.

Nearly every mission launched is unique in some sense, and vehicle trajectories are designed to satisfy the unique requirements of the mission. For every launch, trajectories and impact point loci are calculated at a level of detail impossible for the generalized treatment required here. Full consideration is given to the location of the impact points of jettisoned hardware and to the path followed by the instantaneous impact point. When necessary, trajectories may be modified to control the impact point of jettisoned hardware and to control the path of the instantaneous impact point.

Note: To convert to feet, multiply meters by 3.28  
To convert to nautical miles, multiply kilometers by 0.54

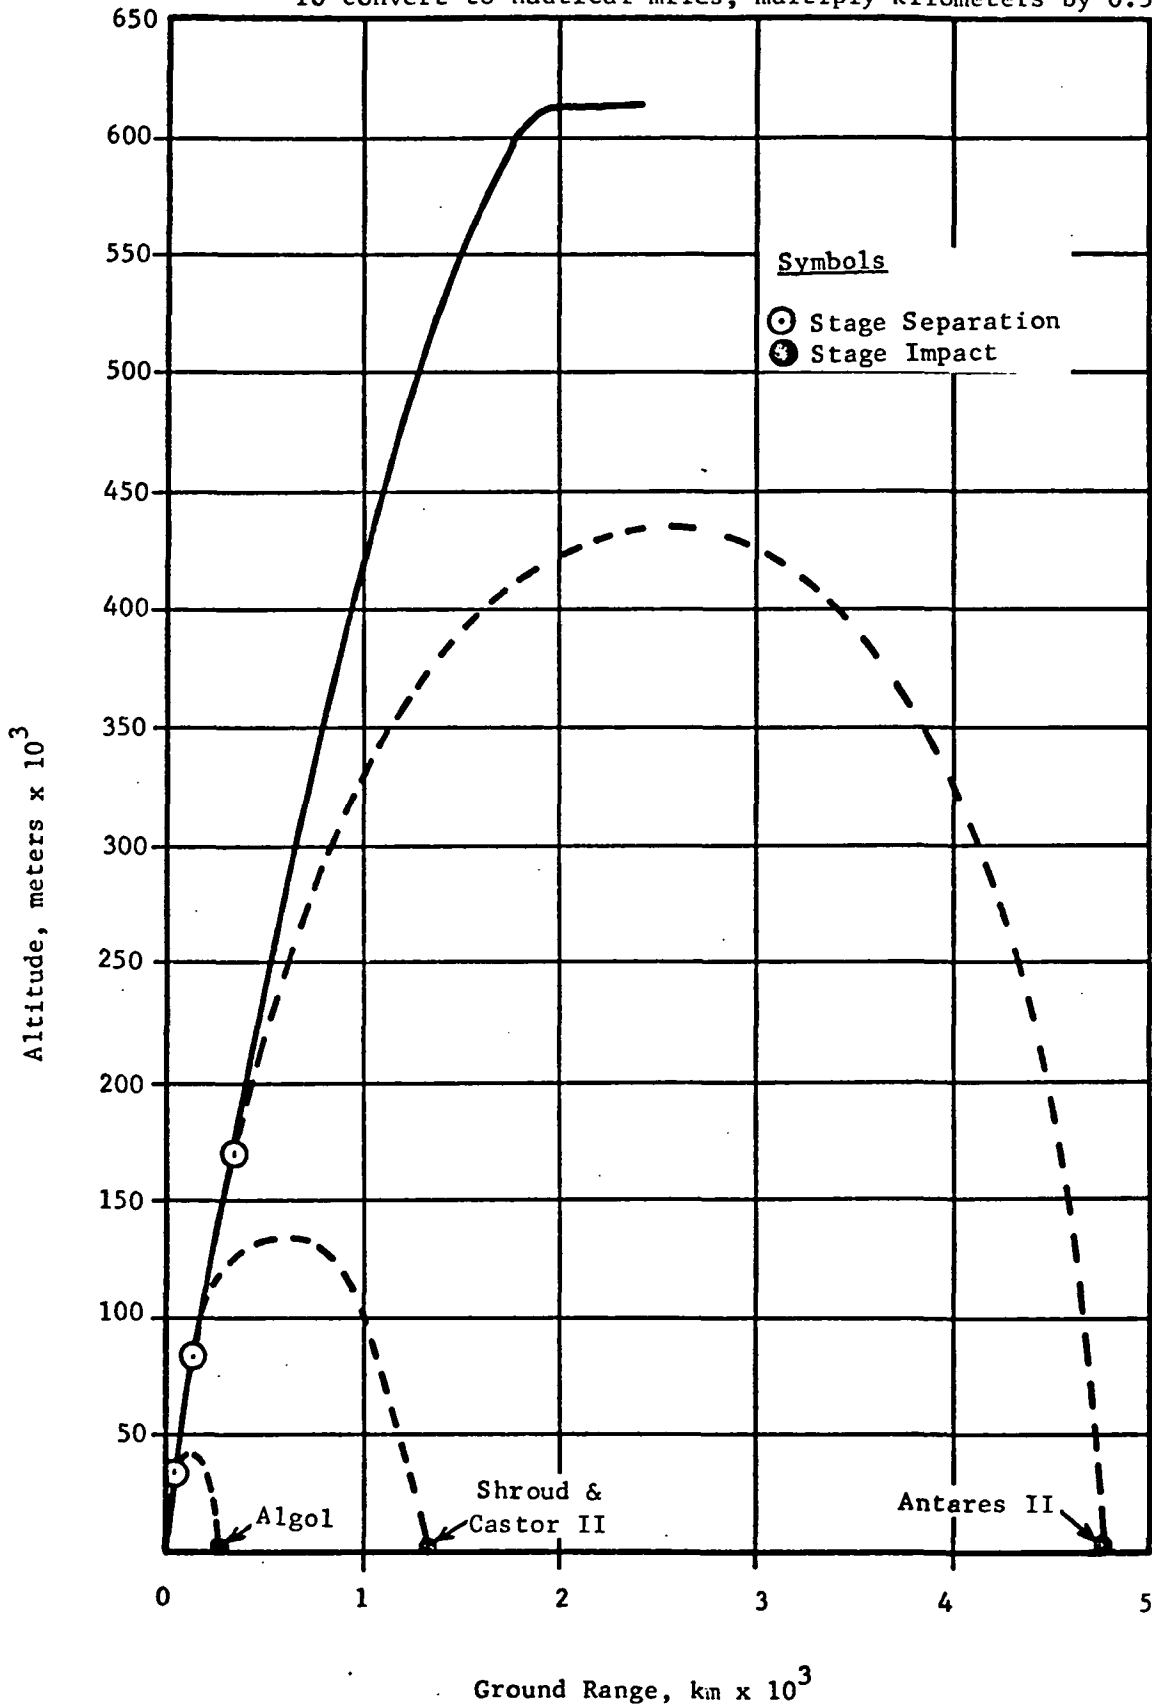


FIGURE B-1. EXAMPLE TRAJECTORY ELEVATION FOR SCOUT

Note: To convert to feet, multiply meters by 3.28  
 To convert to nautical miles, multiply kilometers by 0.54

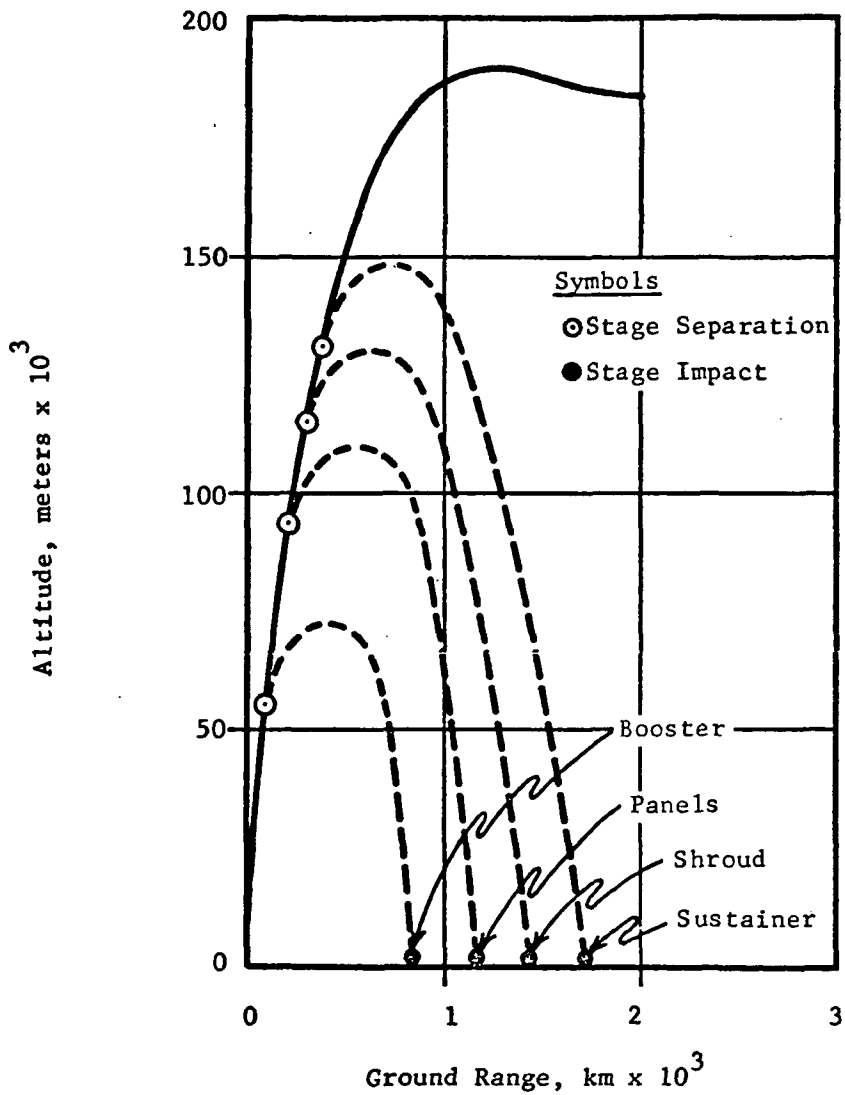


FIGURE B-2. EXAMPLE TRAJECTORY ELEVATION FOR SLV3D/CENTAUR

Note: To convert to feet, multiply meters by 3.28  
 To convert to nautical miles, multiply kilometers by 0.54

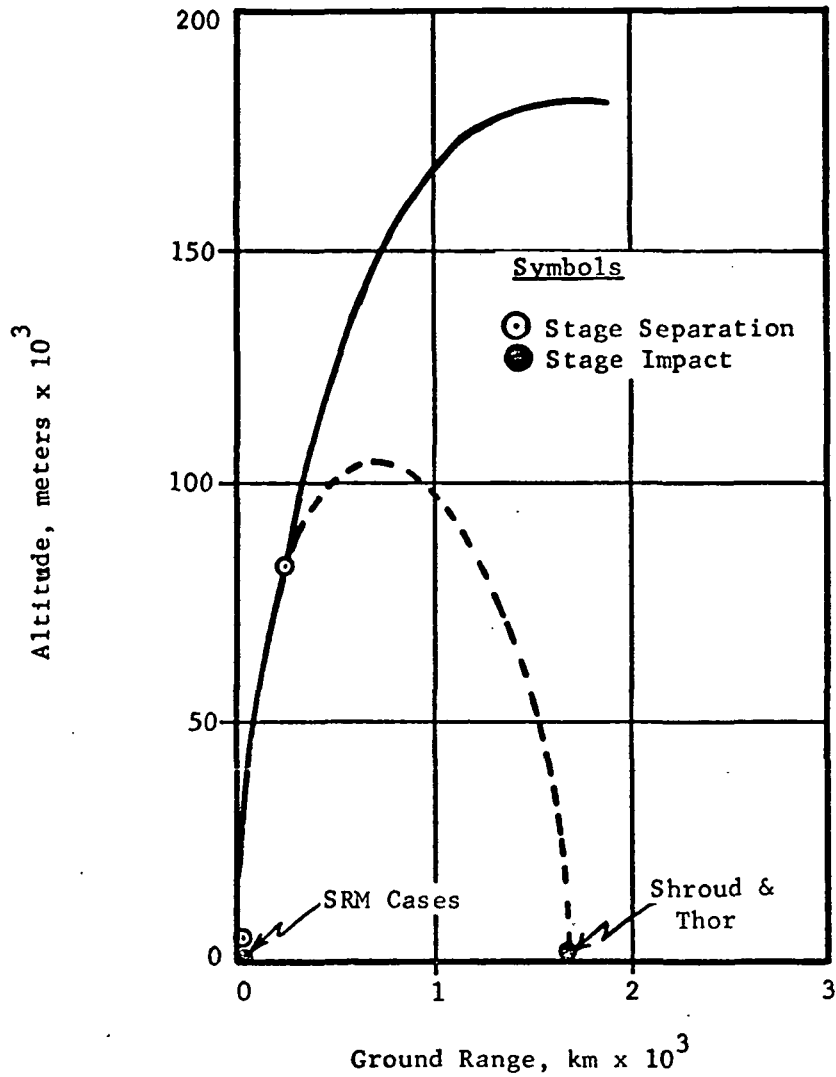


FIGURE B-3. EXAMPLE TRAJECTORY ELEVATION FOR THOR(3 CASTOR)/DELTA (TSE)

Note: To convert to feet, multiply meters by 3.28  
 To convert to nautical miles, multiply kilometers by 0.54

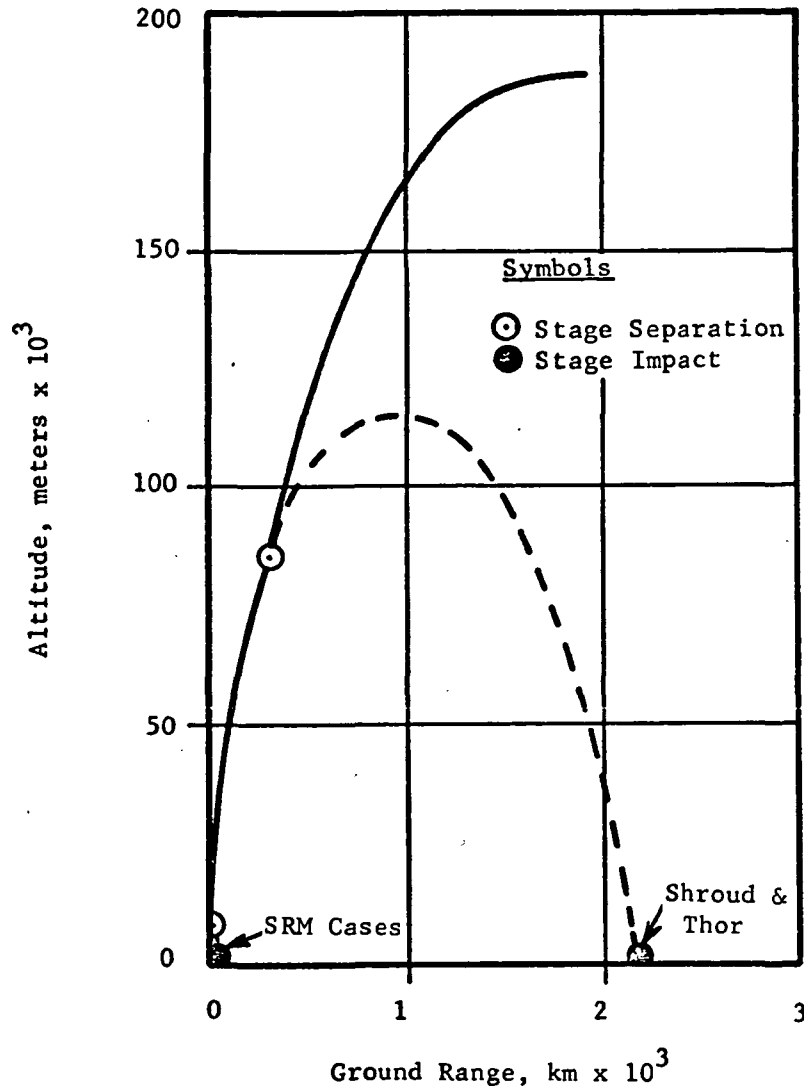


FIGURE B-4. EXAMPLE TRAJECTORY ELEVATION FOR THOR(6 CASTOR)/DELTA(TSE)

Note: To convert to feet, multiply meters by 3.28  
 To convert to nautical miles, multiply kilometers by 0.54

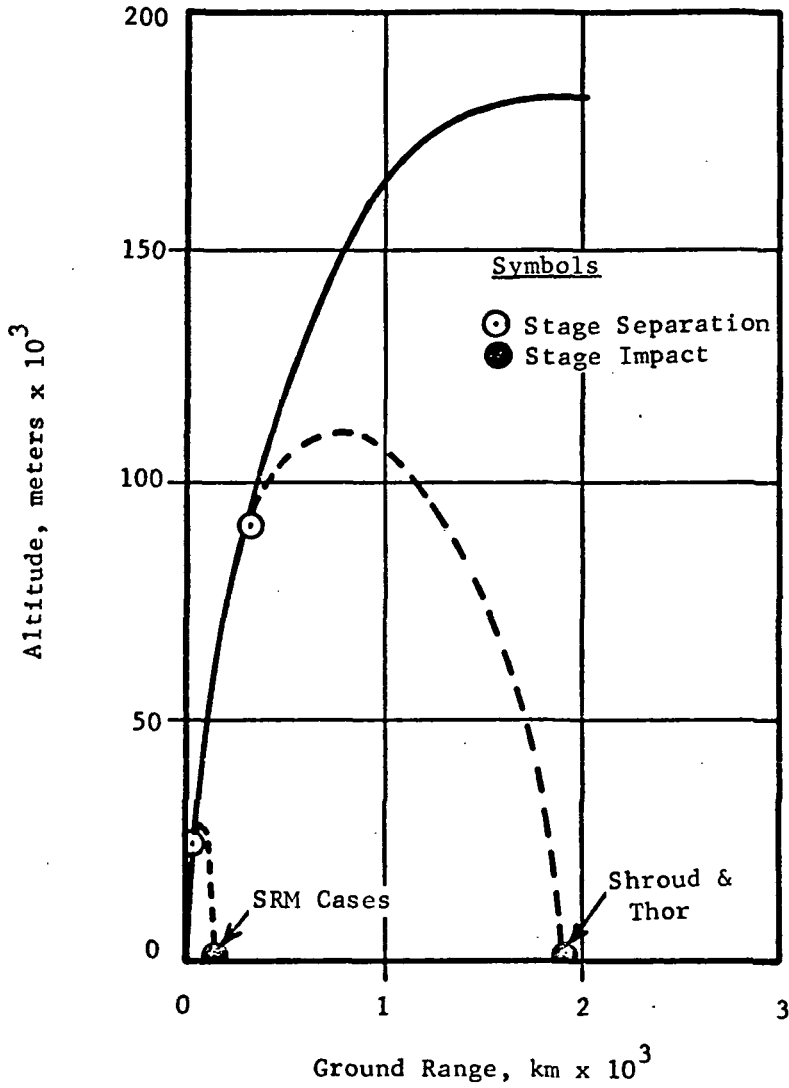


FIGURE B-5. EXAMPLE TRAJECTORY ELEVATION FOR THOR(9 CASTOR)/DELTA(TSE)

Note: To convert to feet, multiply meters by 3.28  
To convert to nautical miles, multiply kilometers by 0.54

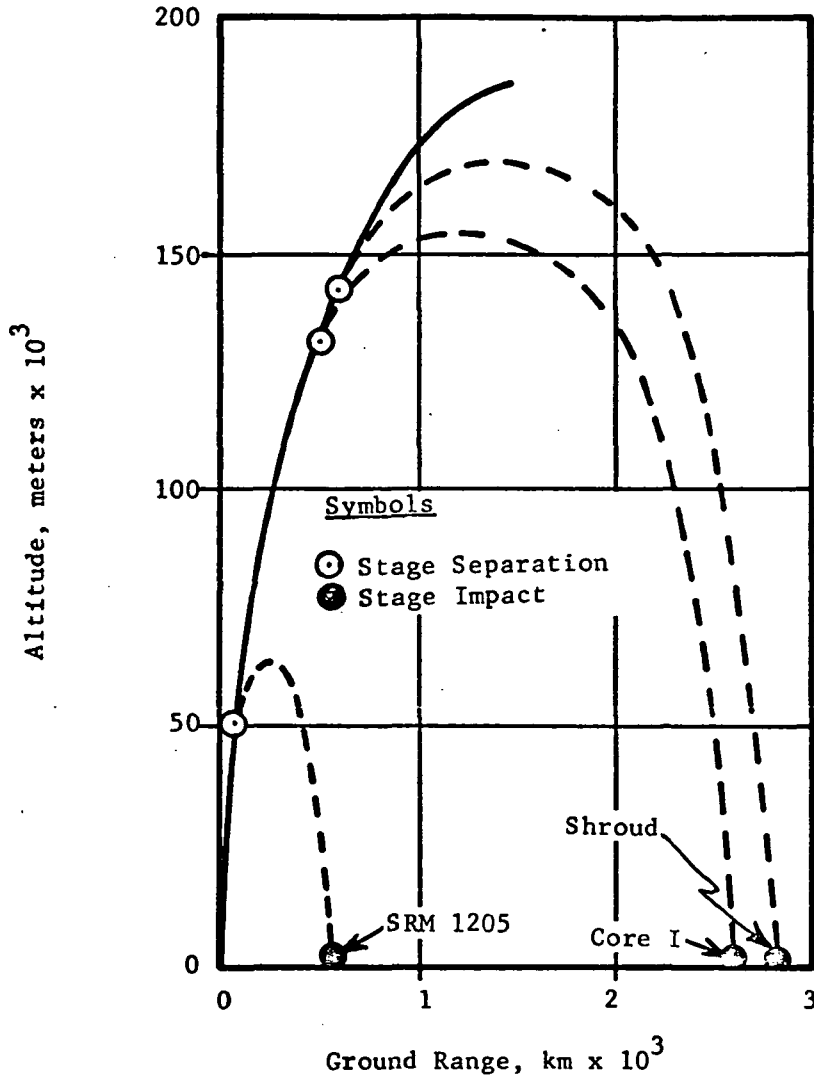


FIGURE B-6. EXAMPLE TRAJECTORY ELEVATION FOR TITAN IIIC

Note: To convert to feet, multiply meters by 3.28  
 To convert to nautical miles, multiply kilometers by 0.54

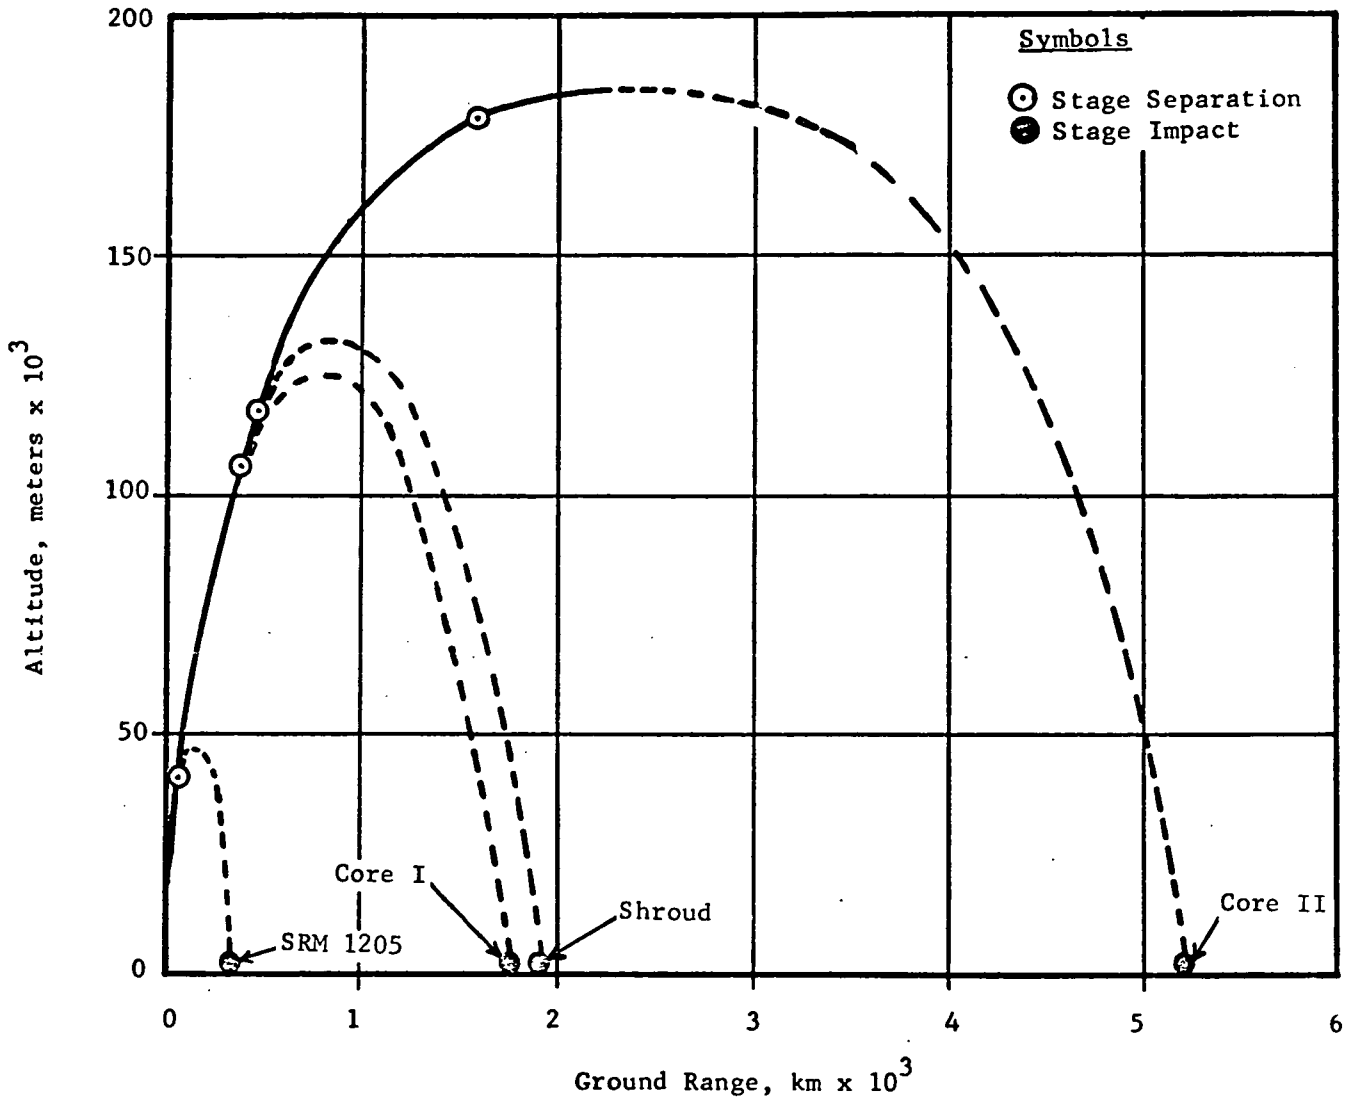


FIGURE B-7. EXAMPLE TRAJECTORY ELEVATION FOR TITAN IIIE/CENTAUR

SYMBOLS

● LAUNCH POINT

⊙ STAGE IMPACT

-- IMPACT POINT RELATIVELY INDETERMINATE. SEE TEXT.

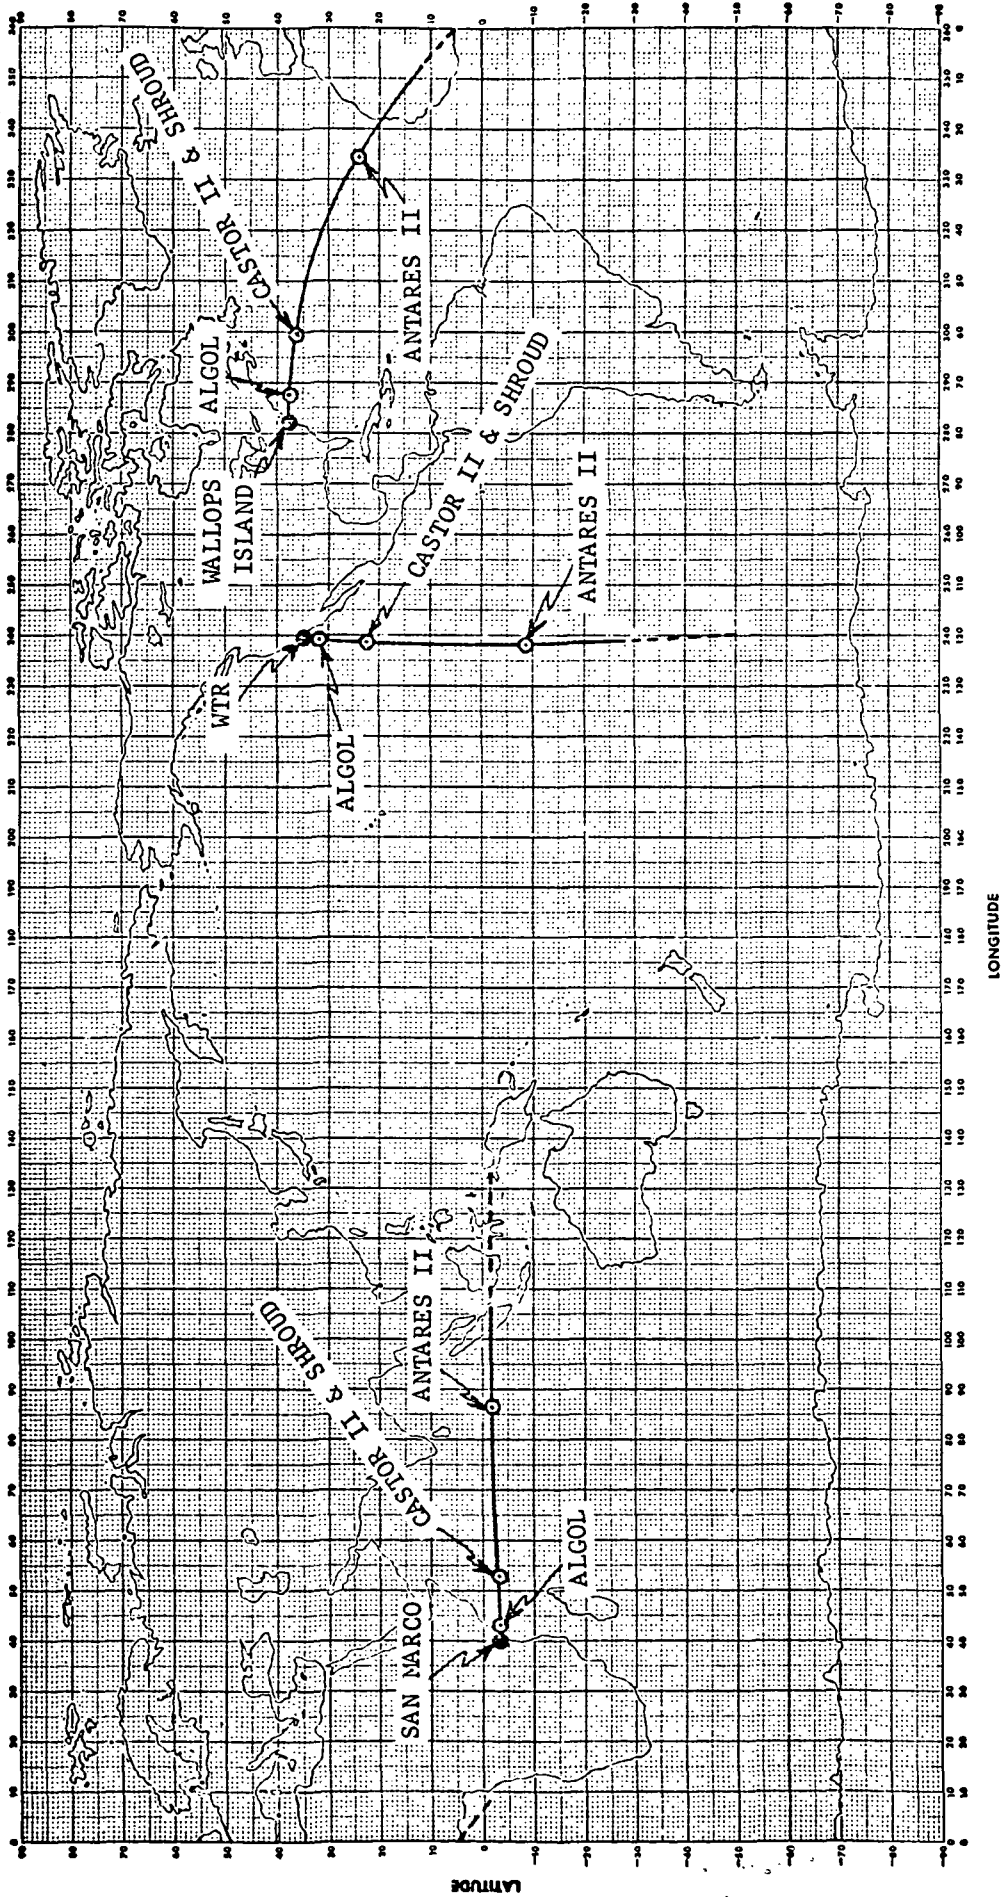


FIGURE B-8. EXAMPLE LOCI OF IMPACT POINTS FOR SCOUT (LAUNCHES FROM WALLOPS ISLAND, WTR, AND SAN MARCO)

SYMBOLS

● LAUNCH POINT

○ STAGE IMPACT

--IMPACT POINT RELATIVELY  
INDETERMINATE. SEE TEXT.

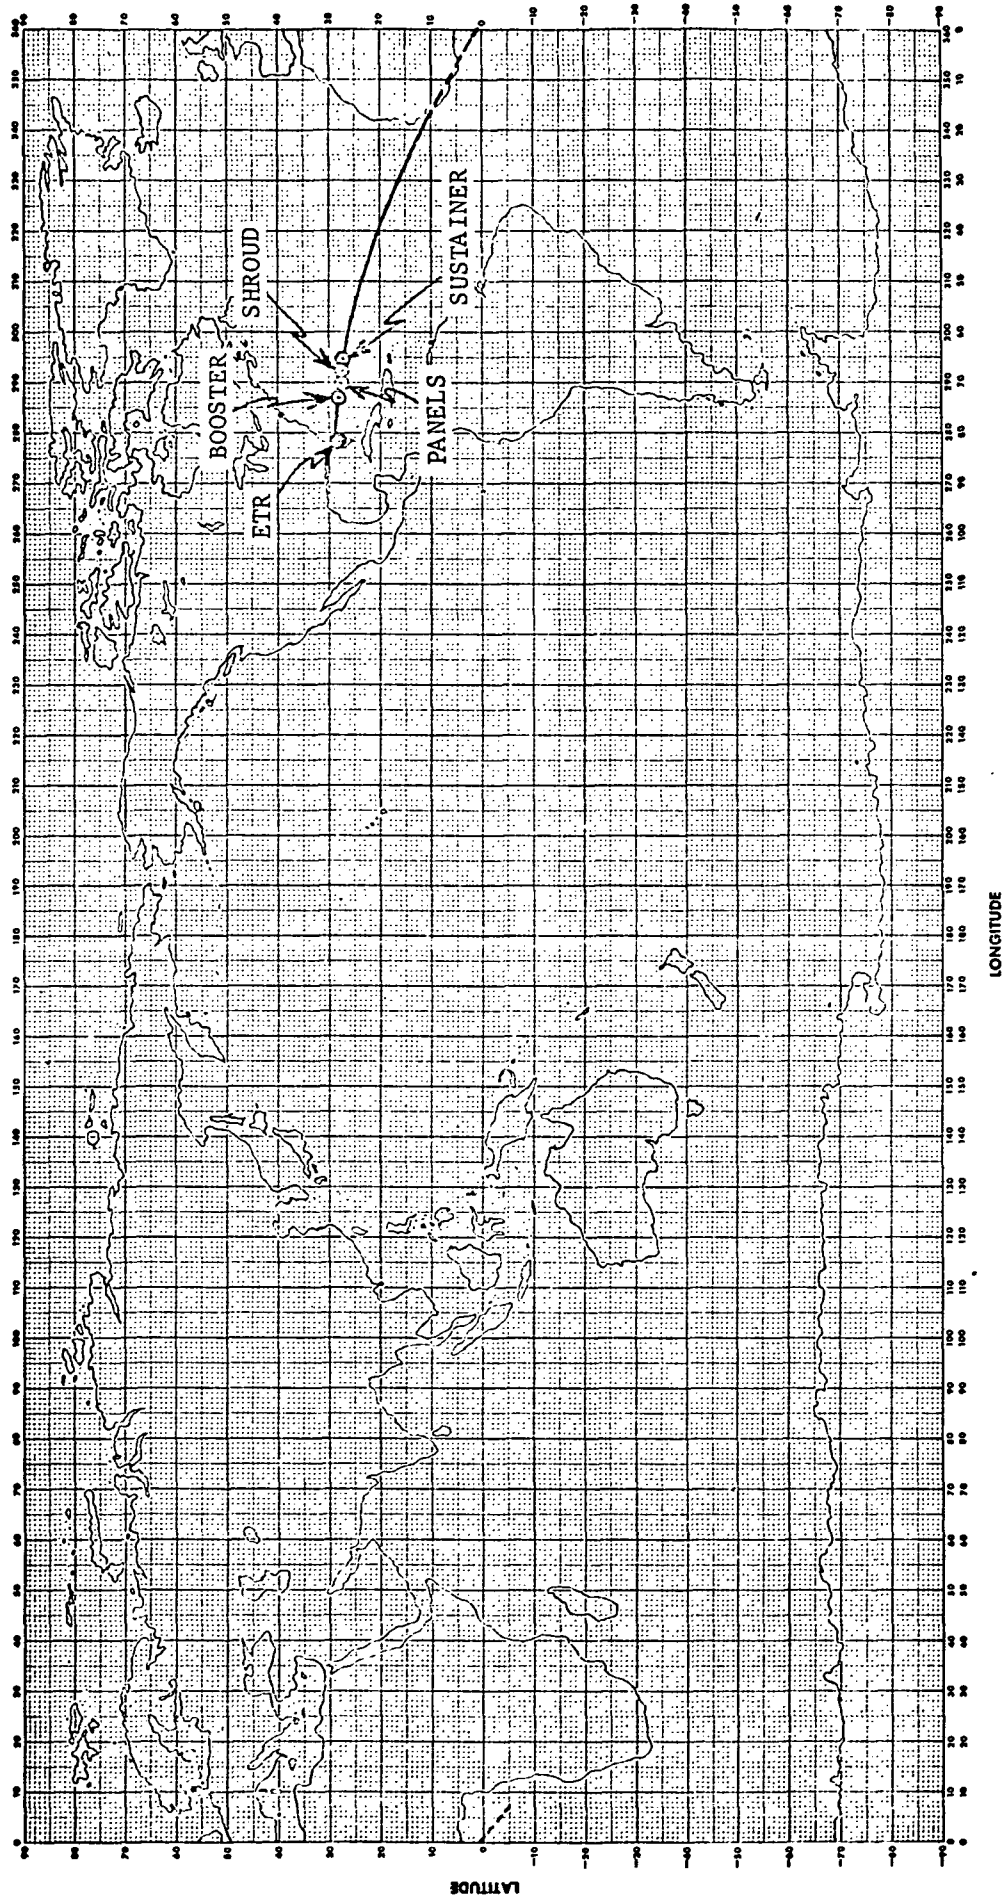


FIGURE B-9. EXAMPLE LOCUS OF IMPACT POINTS FOR SLV3D/CENTAUR  
(LAUNCH FROM ETR)

SYMBOLS

● LAUNCH POINT

○ STAGE IMPACT

--- IMPACT POINT RELATIVELY  
INDETERMINATE. SEE TEXT.

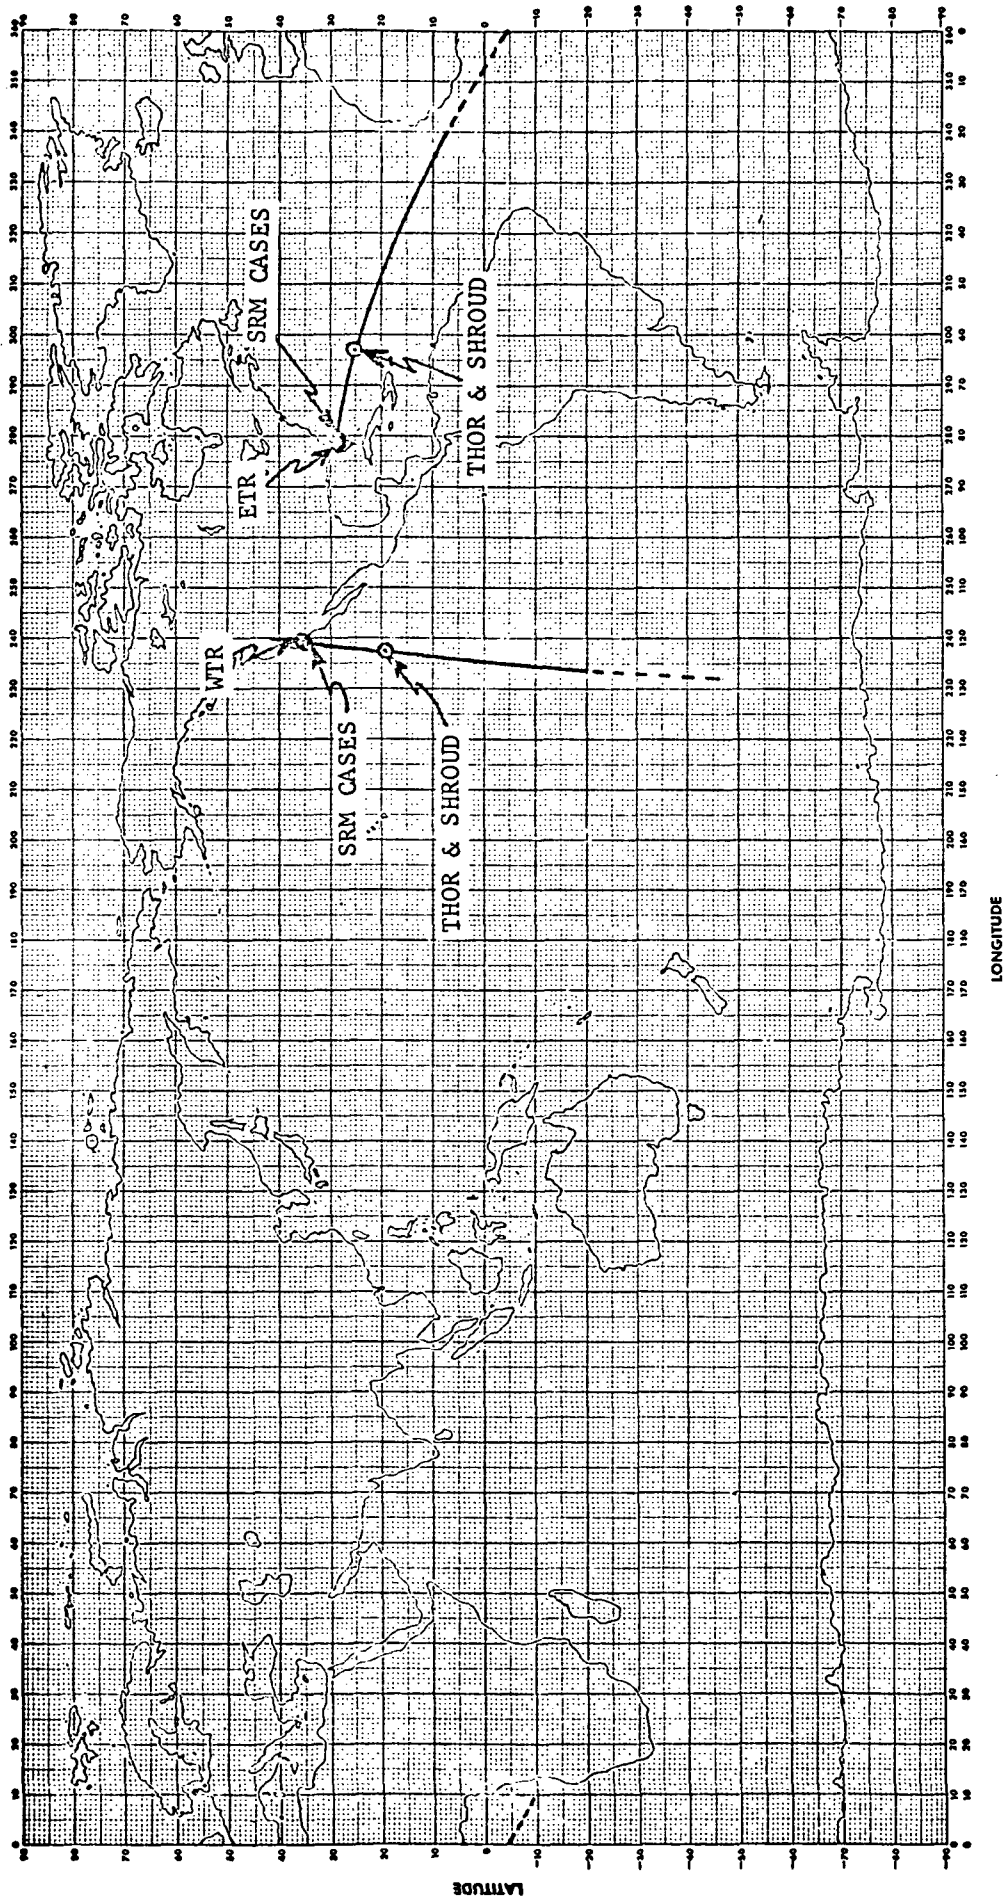


FIGURE B-10. EXAMPLE LOCI OF IMPACT POINTS FOR THOR(3 CASTOR)/DELTA(TSE)  
(LAUNCHES FROM WTR AND ETR)

SYMBOLS

● LAUNCH POINT

○ STAGE IMPACT

-- -- IMPACT POINT RELATIVELY  
INDETERMINATE. SEE TEXT.

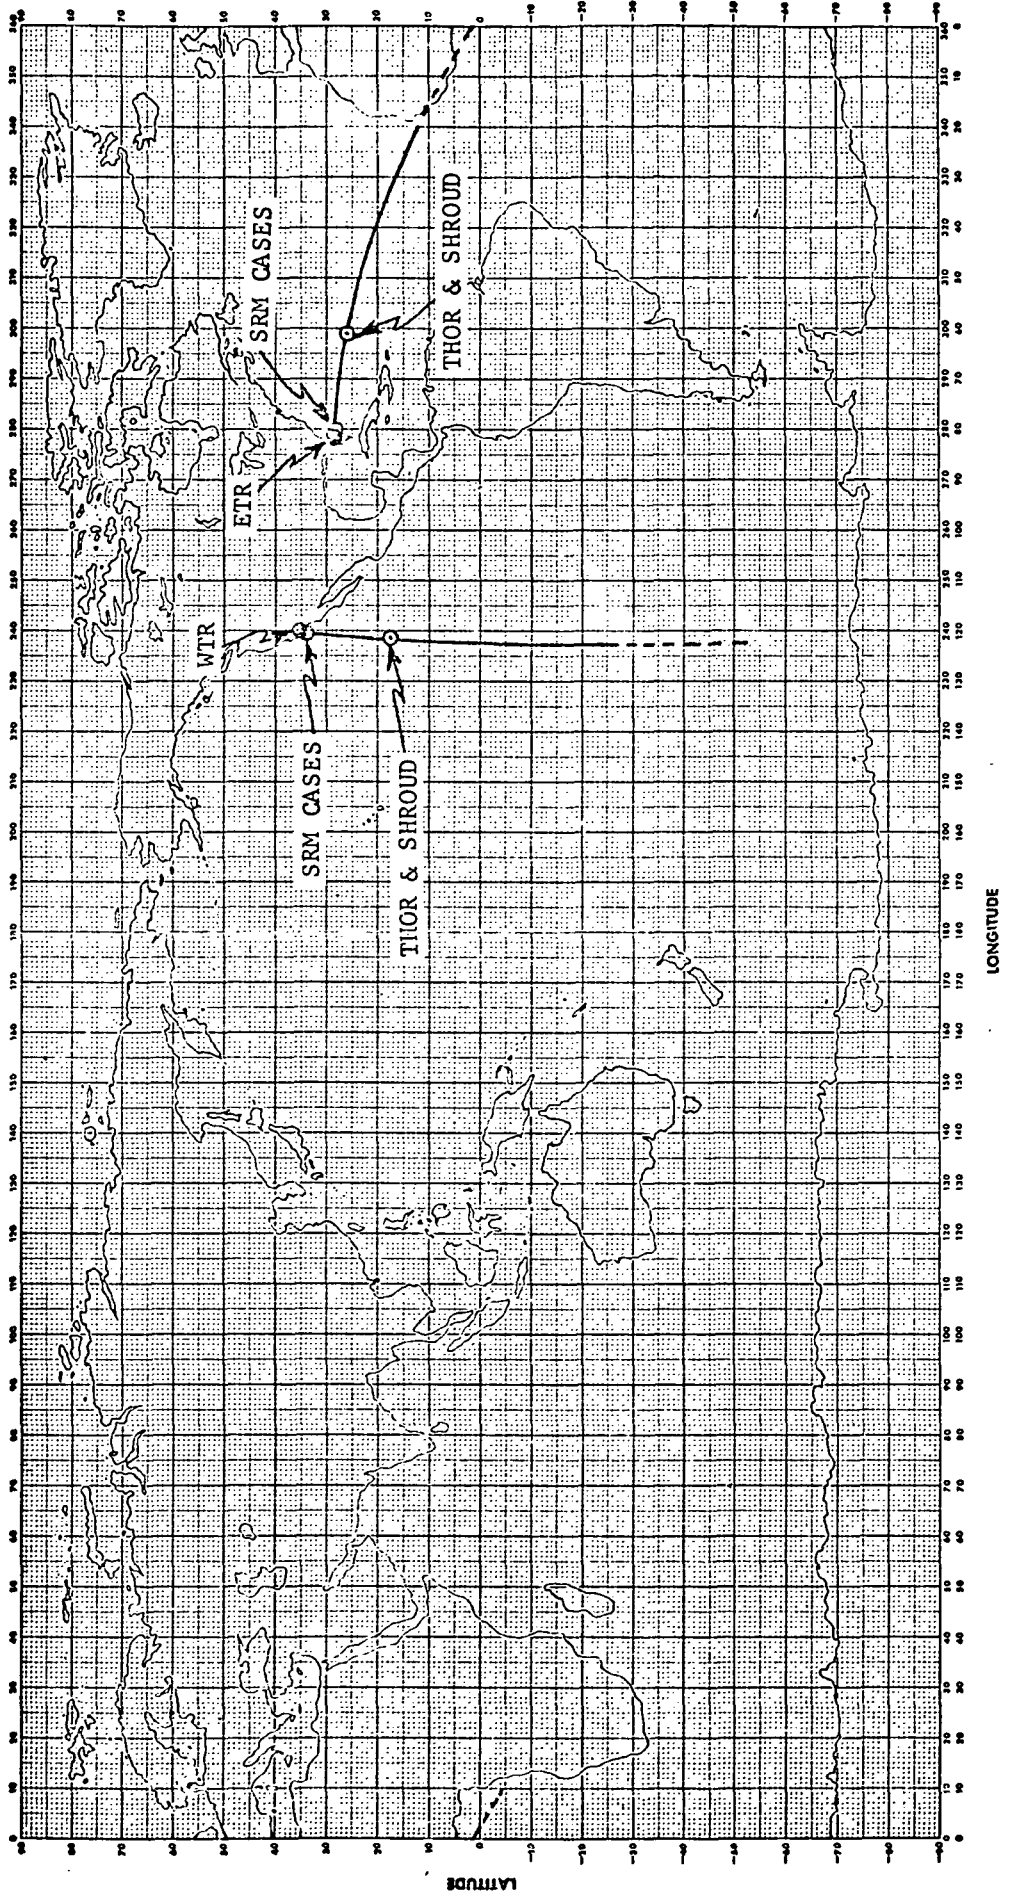


FIGURE B-11. EXAMPLE LOCI OF IMPACT POINTS FOR THOR(6 CASTOR)/DELTA (TSE)  
(LAUNCHES FROM WTR AND ETR)

SYMBOLS

● LAUNCH POINT

○ STAGE IMPACT

-- IMPACT POINT RELATIVELY  
INDETERMINATE. SEE TEXT.

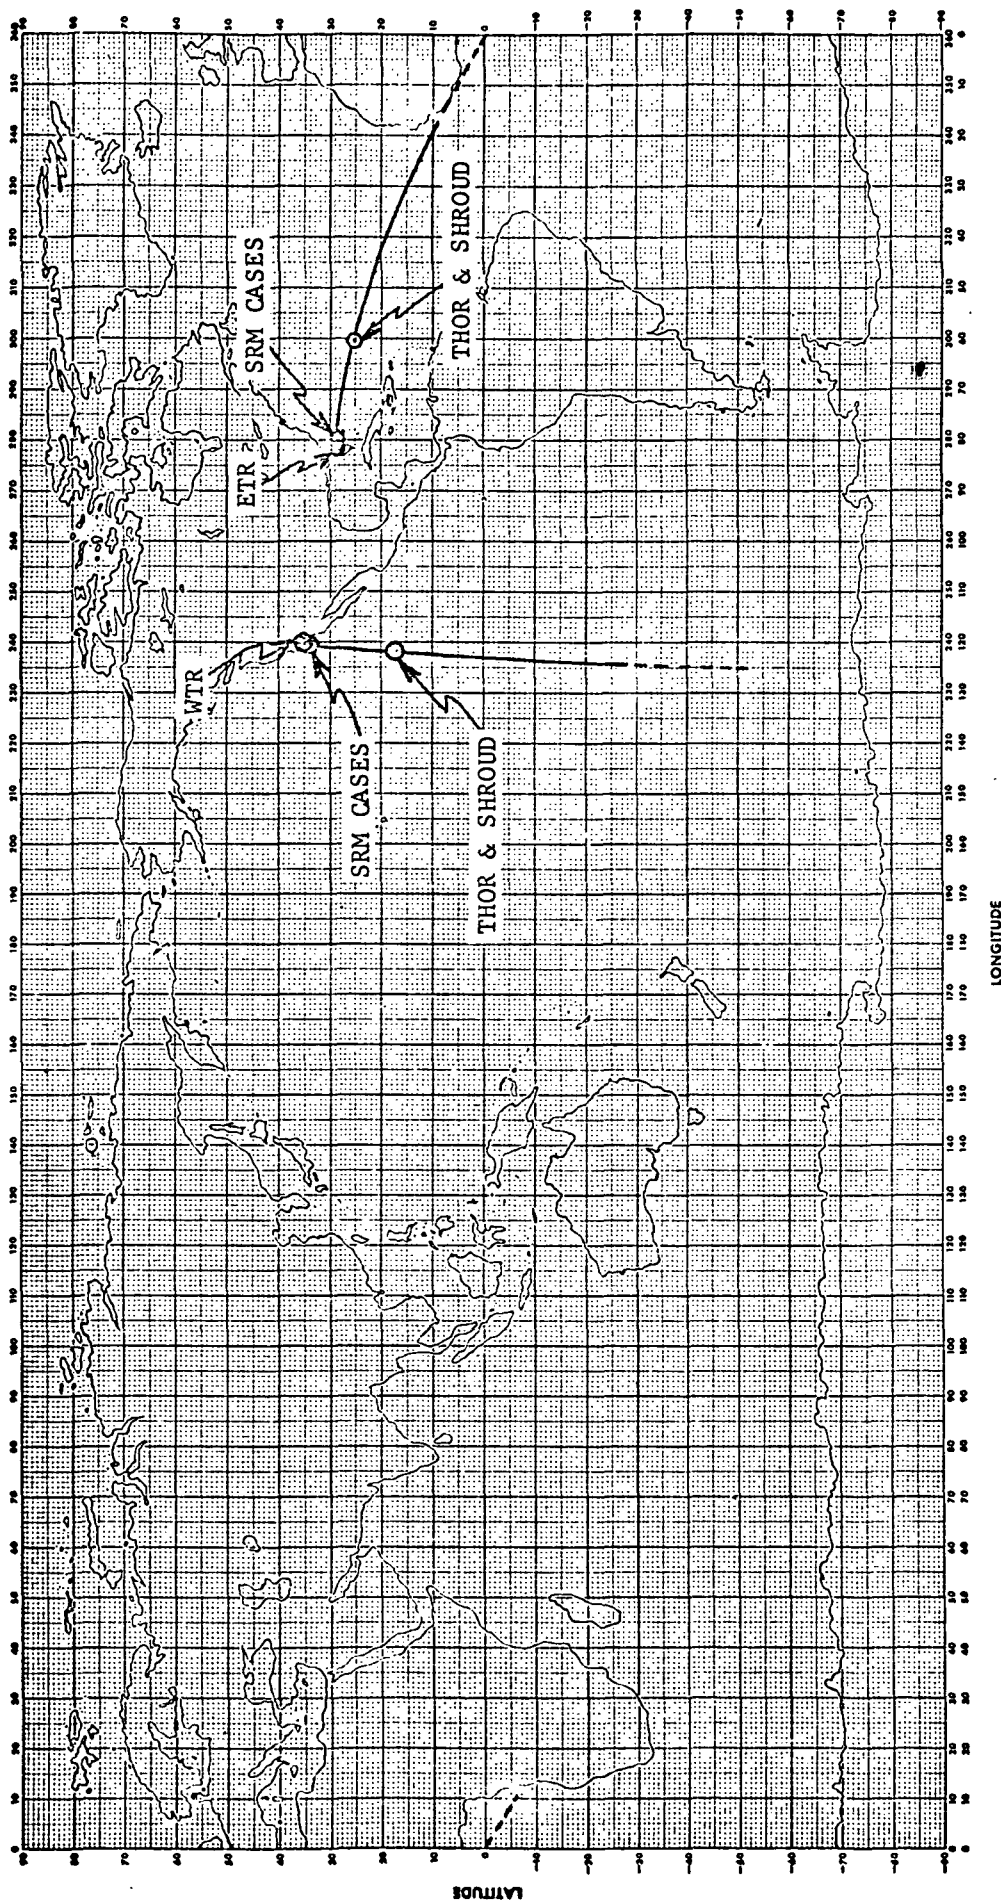


FIGURE B-12. EXAMPLE LOCI OF IMPACT POINTS FOR THOR (9 CASTOR)/DELTA (TSE)  
(LAUNCHES FROM WTR AND ETR)

SYMBOLS

● LAUNCH POINT

○ STAGE IMPACT

--- IMPACT POINT RELATIVELY  
INDETERMINATE. SEE TEXT.

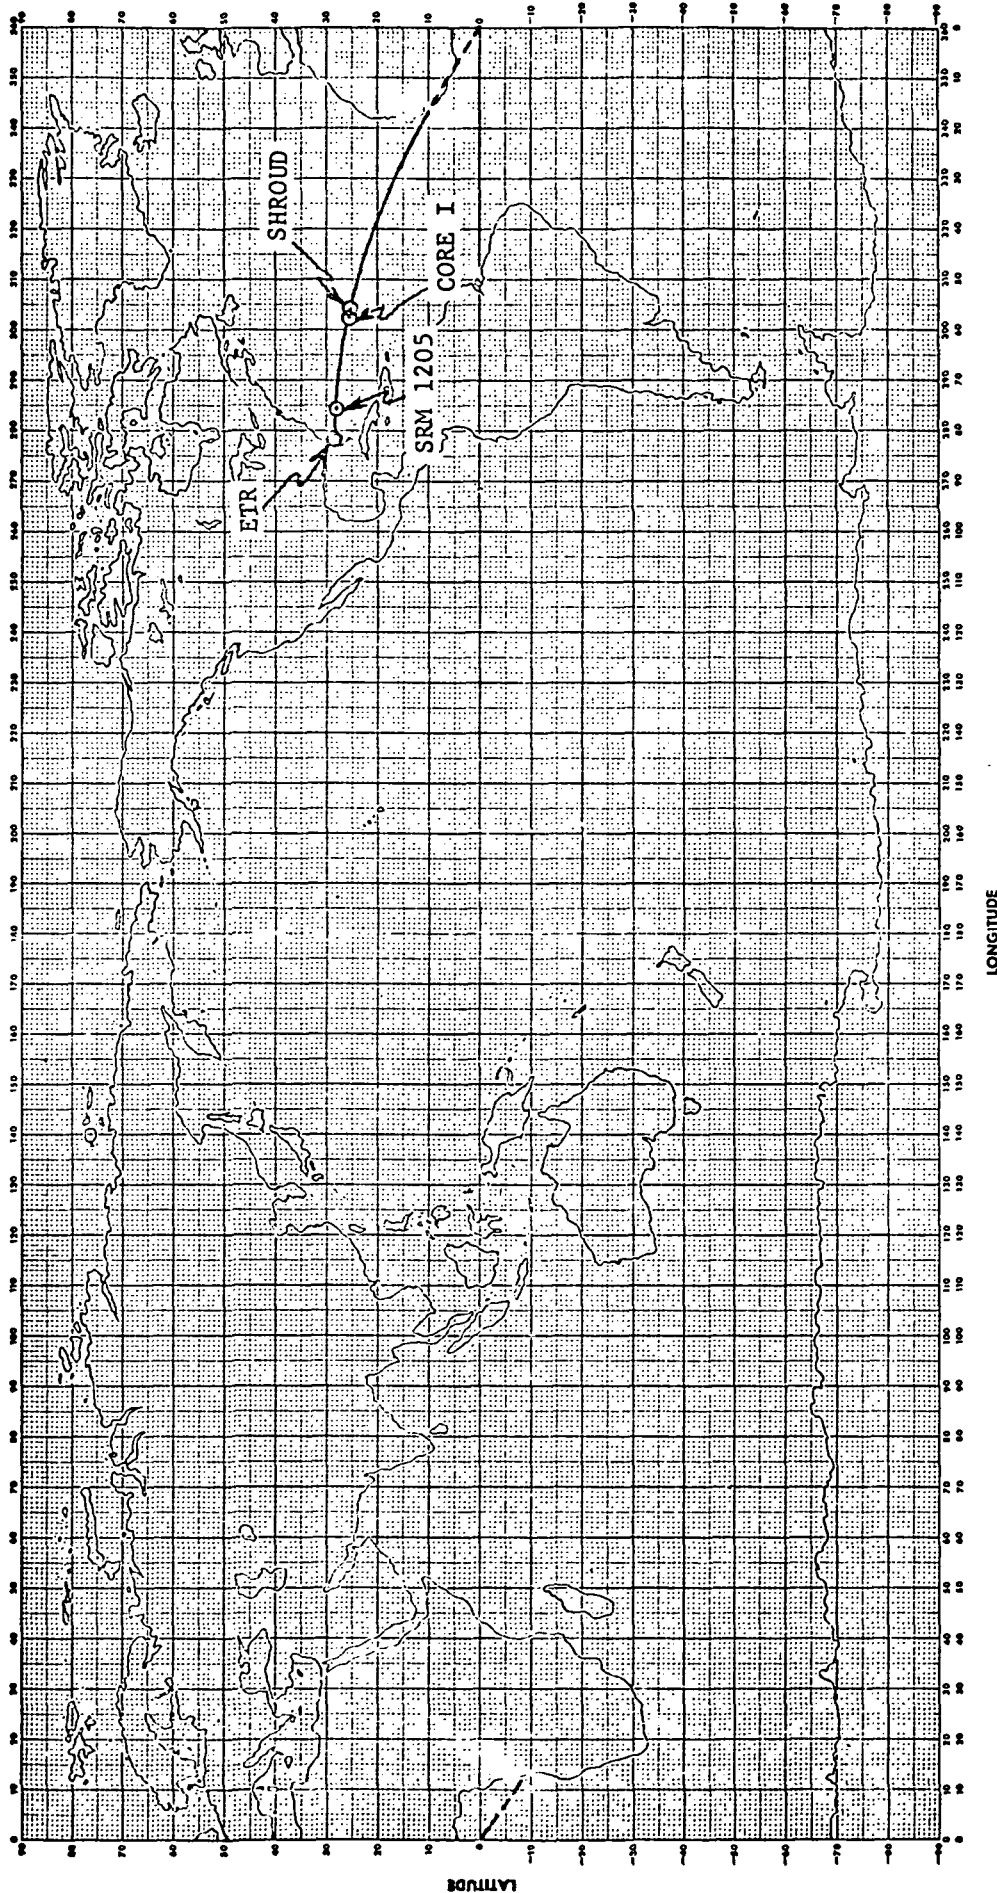


FIGURE B-13. EXAMPLE LOCUS OF IMPACT POINTS FOR TITAN IIIC  
(LAUNCHES FROM ETR)

SYMBOLS

● LAUNCH POINT

○ STAGE IMPACT

---IMPACT POINT RELATIVELY  
INDETERMINATE. SEE TEXT.

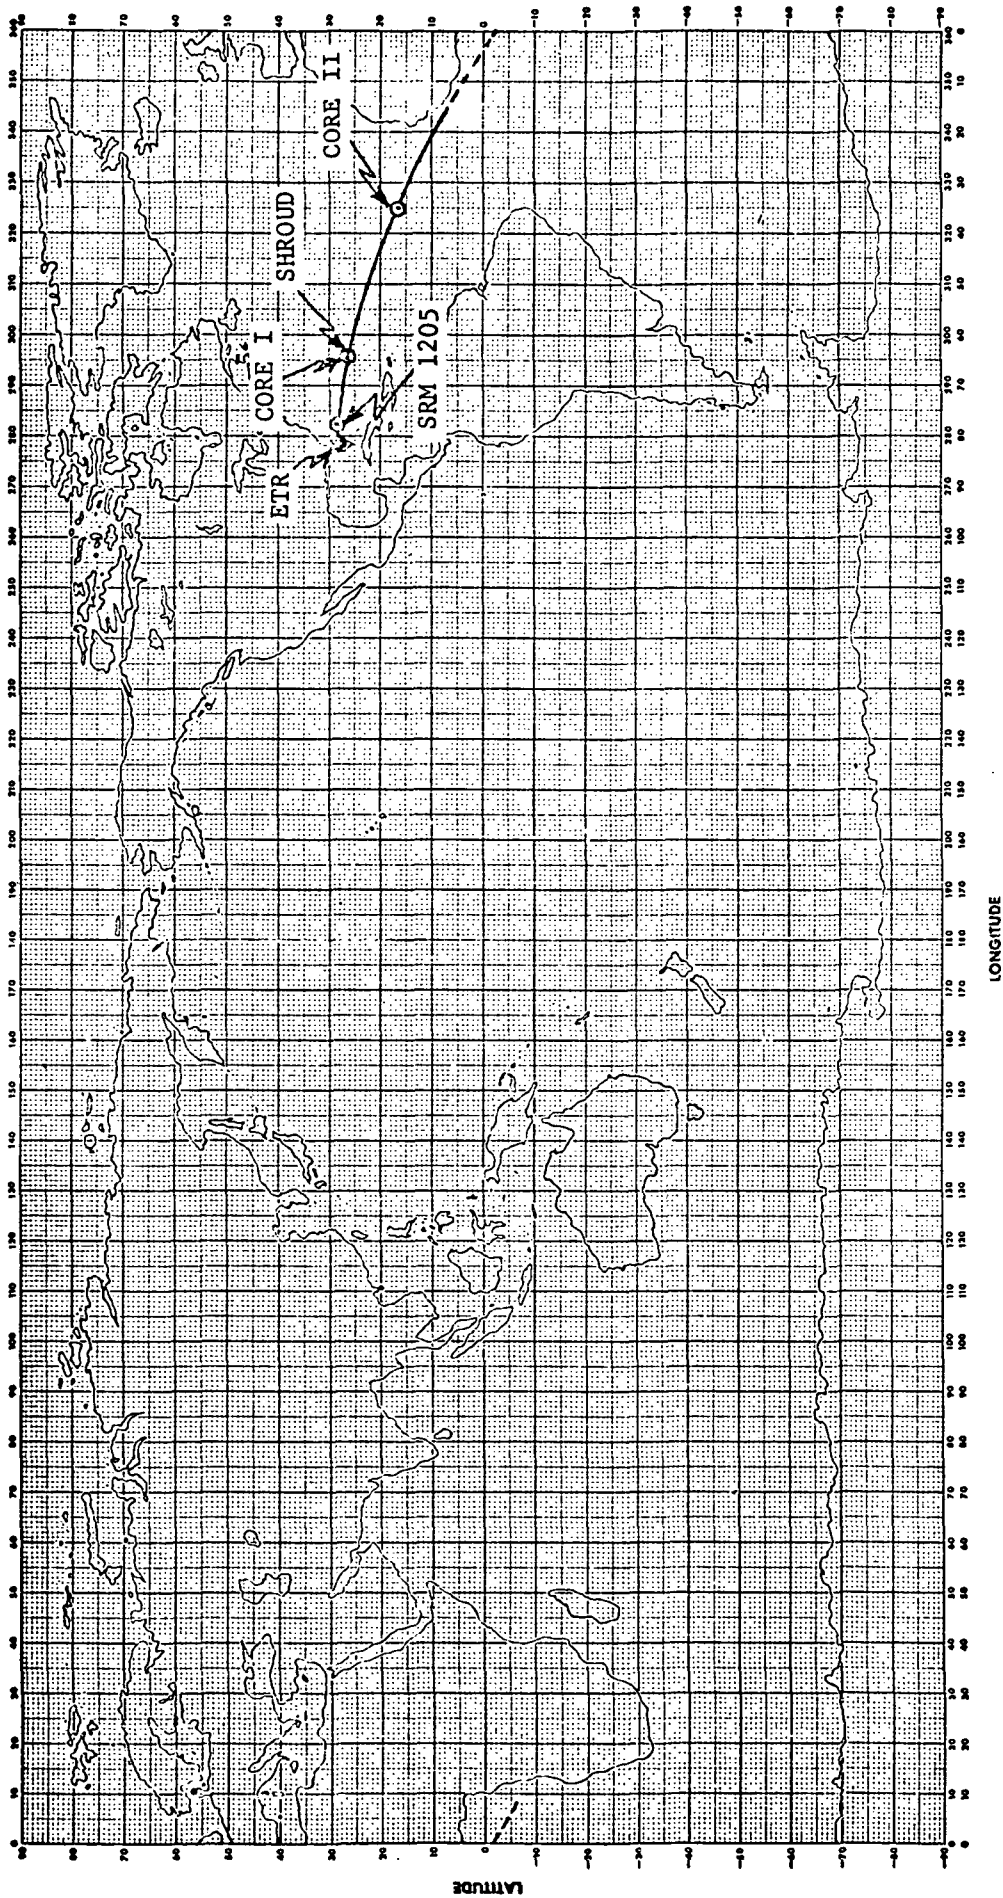


FIGURE B-14. EXAMPLE LOCUS OF IMPACT POINTS FOR TITAN III/CENTAUR  
(LAUNCHES FROM WTR)

APPENDIX C

LAUNCH SITE MAPS, DISTANCE TABLE,  
AND POPULATION DISTRIBUTIONS

## APPENDIX C

### LAUNCH SITE MAPS, DISTANCE TABLE, AND POPULATION DISTRIBUTIONS

Figures C-1 through C-4 are maps of the four launch sites employed by the NASA OSS Launch Vehicle and Propulsion Programs. For the Kennedy Space Center (ETR) and Vandenberg Air Force Base (WTR), the specific launch pads used by this program are identified. Scout is the only space launch vehicle launched from the facilities at Wallops Island and San Marco.

Table C-1 identifies the minimum distances between the specific launch pads and the press site (where appropriate), the nearest facility boundary, and the nearest community. The press site represents the closest permitted approach of uncontrolled personnel to the launch pad during a launch. It should be noted that, while press representatives and other viewers may be uncontrolled in the sense of medical histories and periodic health examinations, their movements are controlled by the responsible agency and they may be provided with and required to use protective equipment. The nearest facility boundary represents the closest possible approach of completely uncontrolled persons.

Figures C-5, C-6, and C-7 are plots of the cumulative population (1970 Census) as a function of distance from the nearest launch pad for ETR, WTR, and Wallops Island. Major communities are noted on these plots. It should be noted that for ETR and WTR, more than one center (launch pad) is involved and hence the distances plotted do not represent simple circular radii.

San Marco, which is an Italian facility, is located in Kilifi District of the Coast Province of Kenya. The average population density of this district is  $24/\text{km}^2$  (1969 Census). Four communities are located within 40 km of San Marco, the largest being Malindi (population 10,757) at a distance of about 30 km. Figure C-8 is a plot of the cumulative population as a function of distance from the San Marco Platform prepared from the 1969 Census.

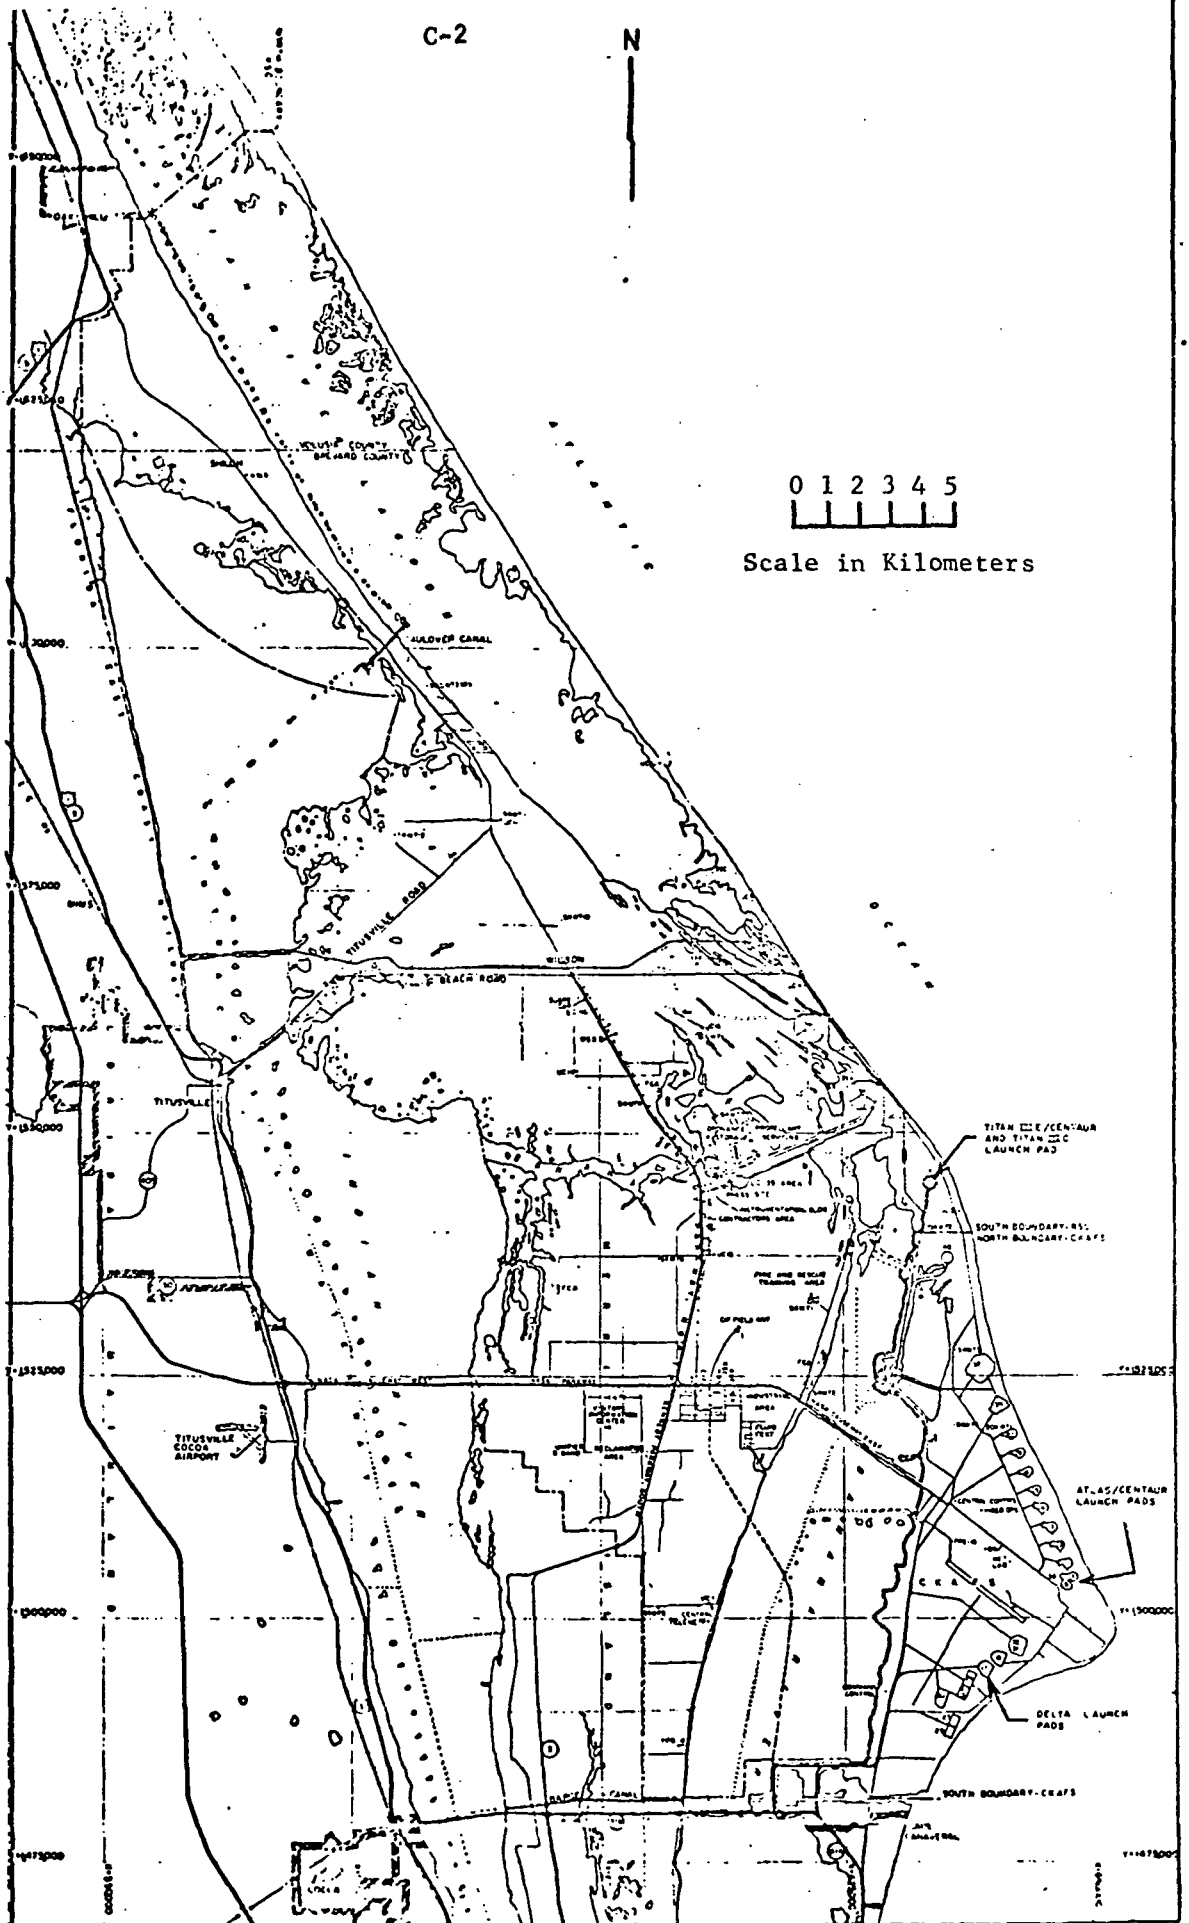


FIGURE C-1. MAP OF KENNEDY SPACE CENTER (ETR) AND SURROUNDINGS

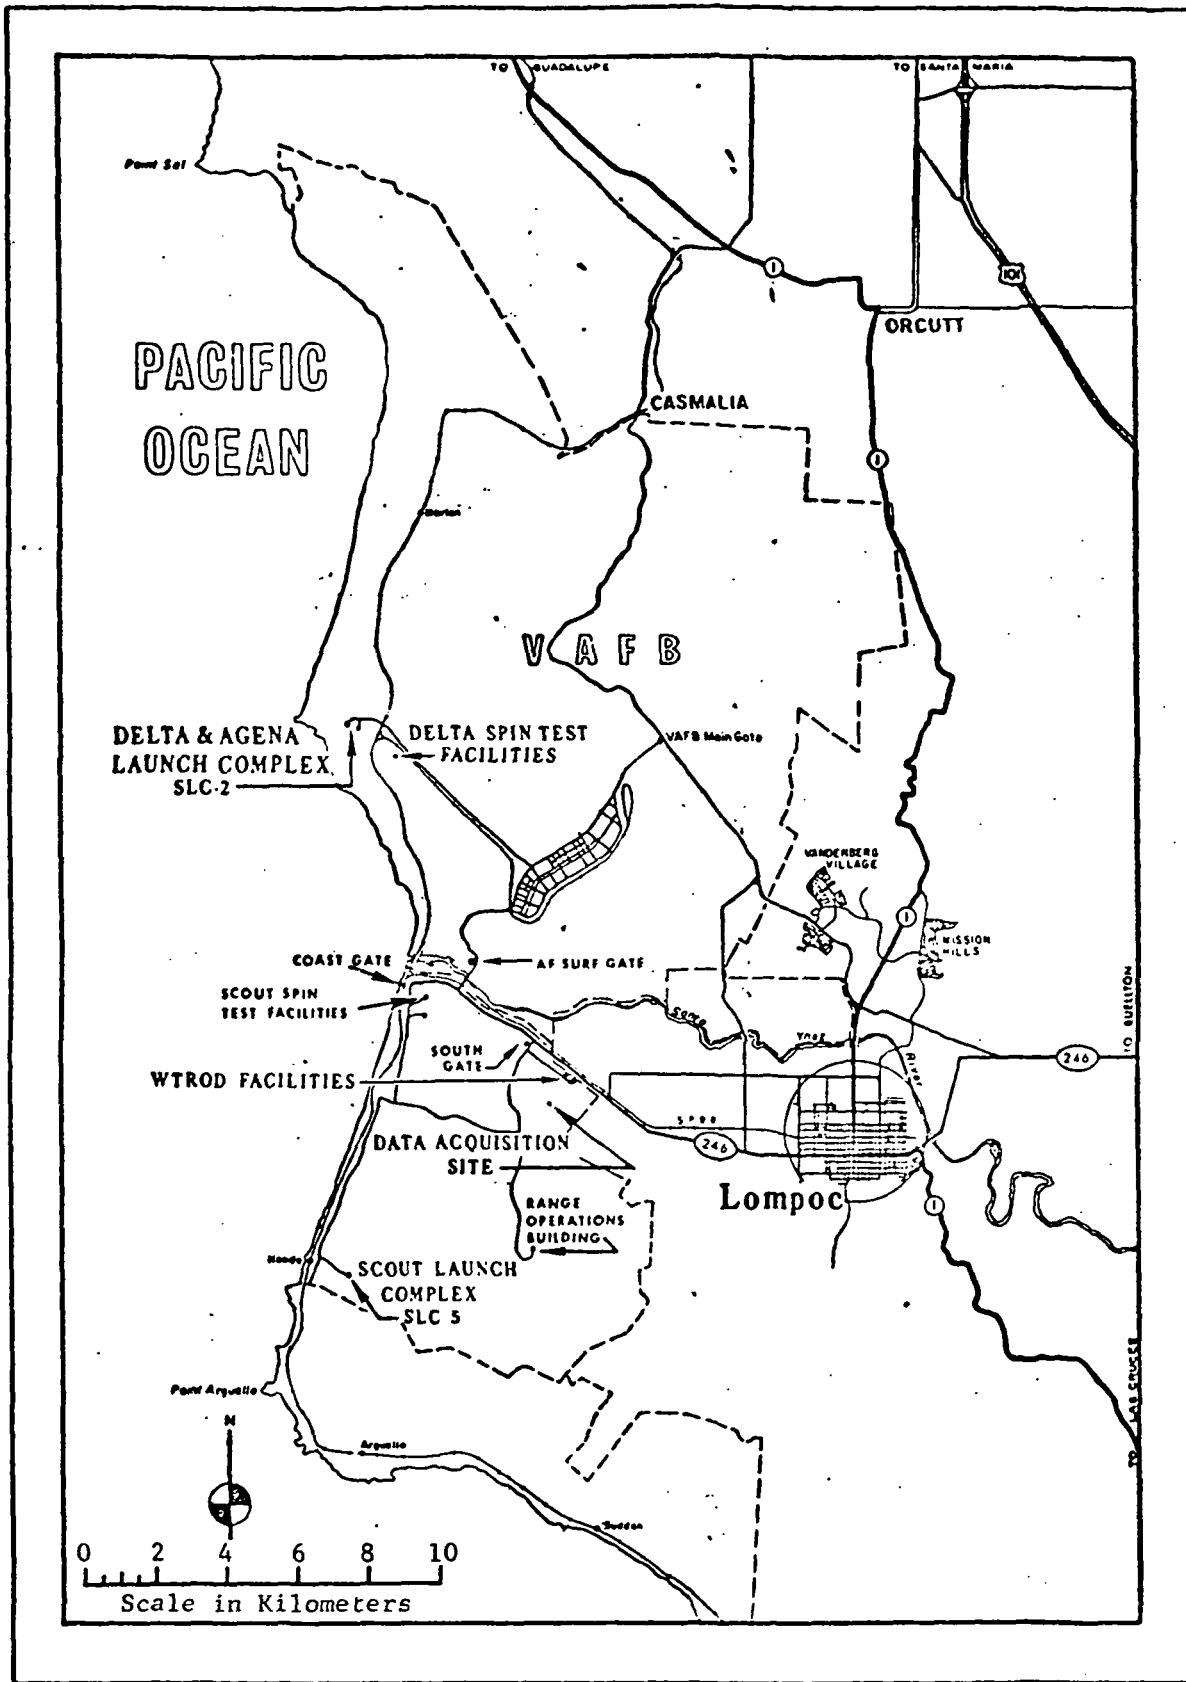


FIGURE C-2. MAP OF VANDENBERG AIR FORCE BASE (WTR) AND SURROUNDINGS

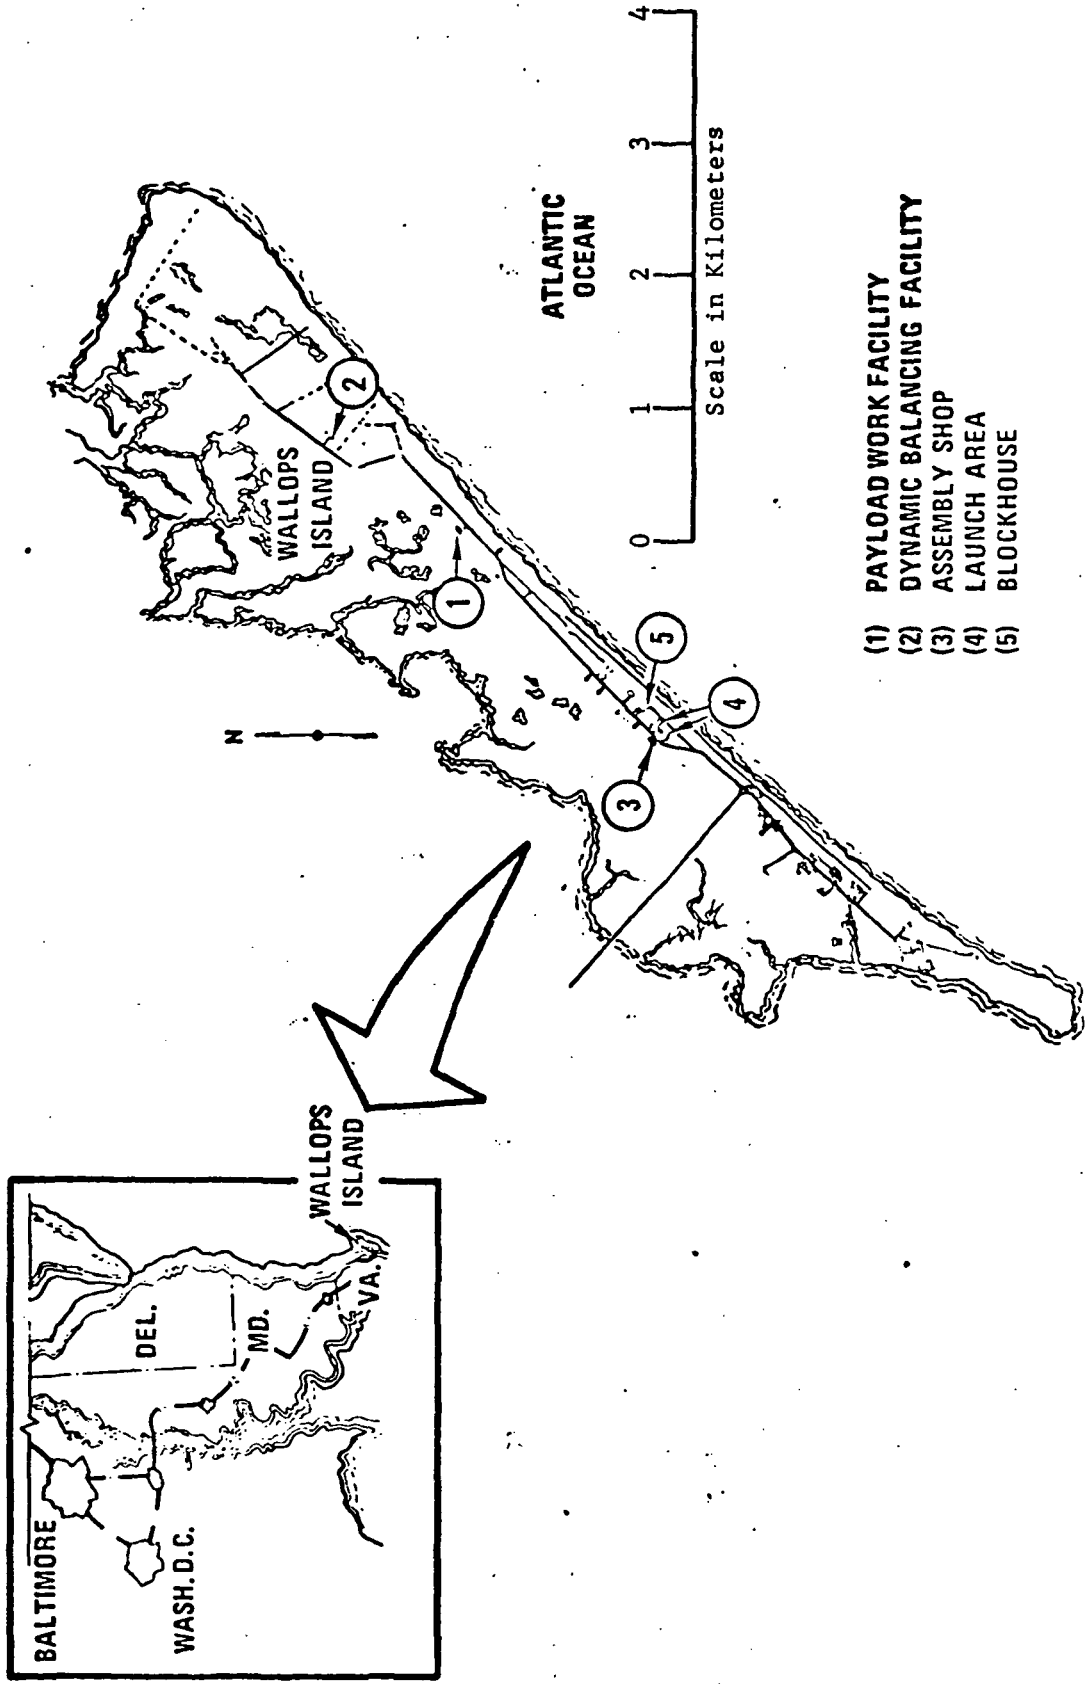


FIGURE C-3. MAP OF WALLOPS ISLAND (SCOUT LAUNCH FACILITY)

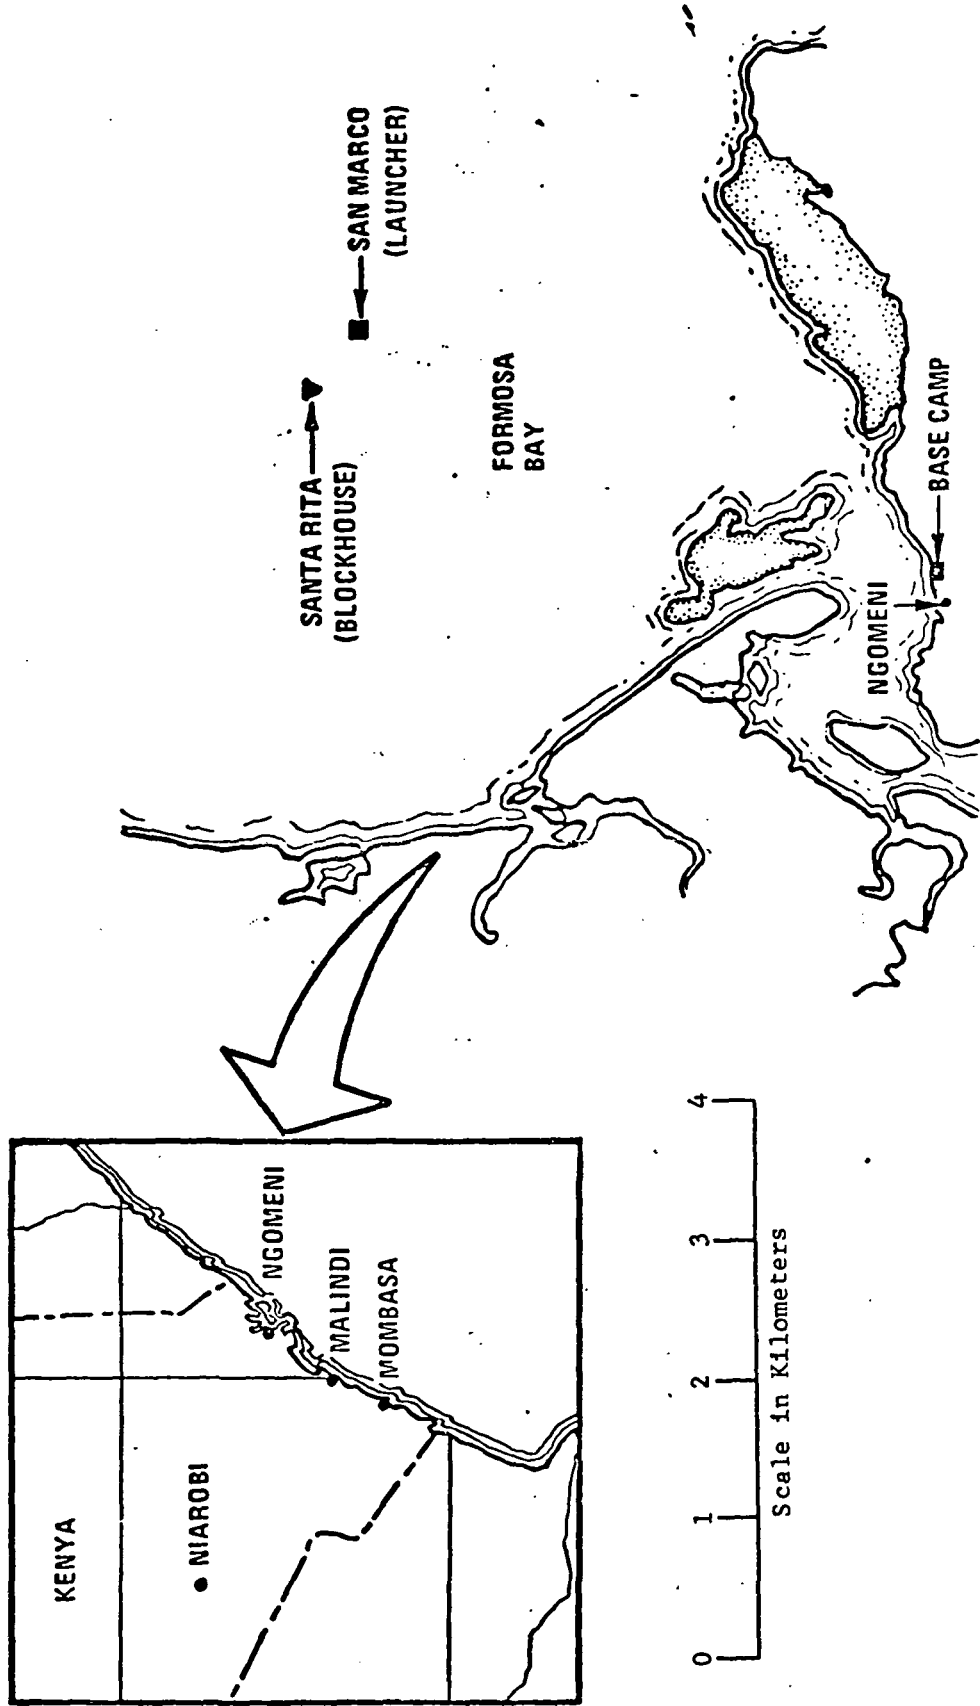


FIGURE C-4. MAP OF SAN MARCO LAUNCH COMPLEX AND SURROUNDINGS. (SCOUT LAUNCH FACILITY)

TABLE C-1. DISTANCES FROM LAUNCH PADS TO POINTS OF POTENTIAL CONCERN

Note: All dimensions are in meters. To convert to feet multiply meters by 3.28.

Vehicle	Press Site	Nearest Boundary	Nearest Community
<u>ETR</u>			
Titan IIIIE/Centaur and Titan IIIC	5,790	14,480	16,890
Atlas/Centaur	4,540	8,045	8,850
Delta	2,710	4,830	5,830
<u>WTR</u>			
Delta	{ No Permanent Facilities }	9,860	13,270
Scout		7,240	10,060
<u>Wallops Island</u>			
Scout	(No Permanent Facility)	900	6,840
<u>San Marco</u>			
Scout	(No Permanent Facility)	( Launch Pad is on a platform in Formosa Bay. Distance to nearest shore is 3,720 m. )	6,300


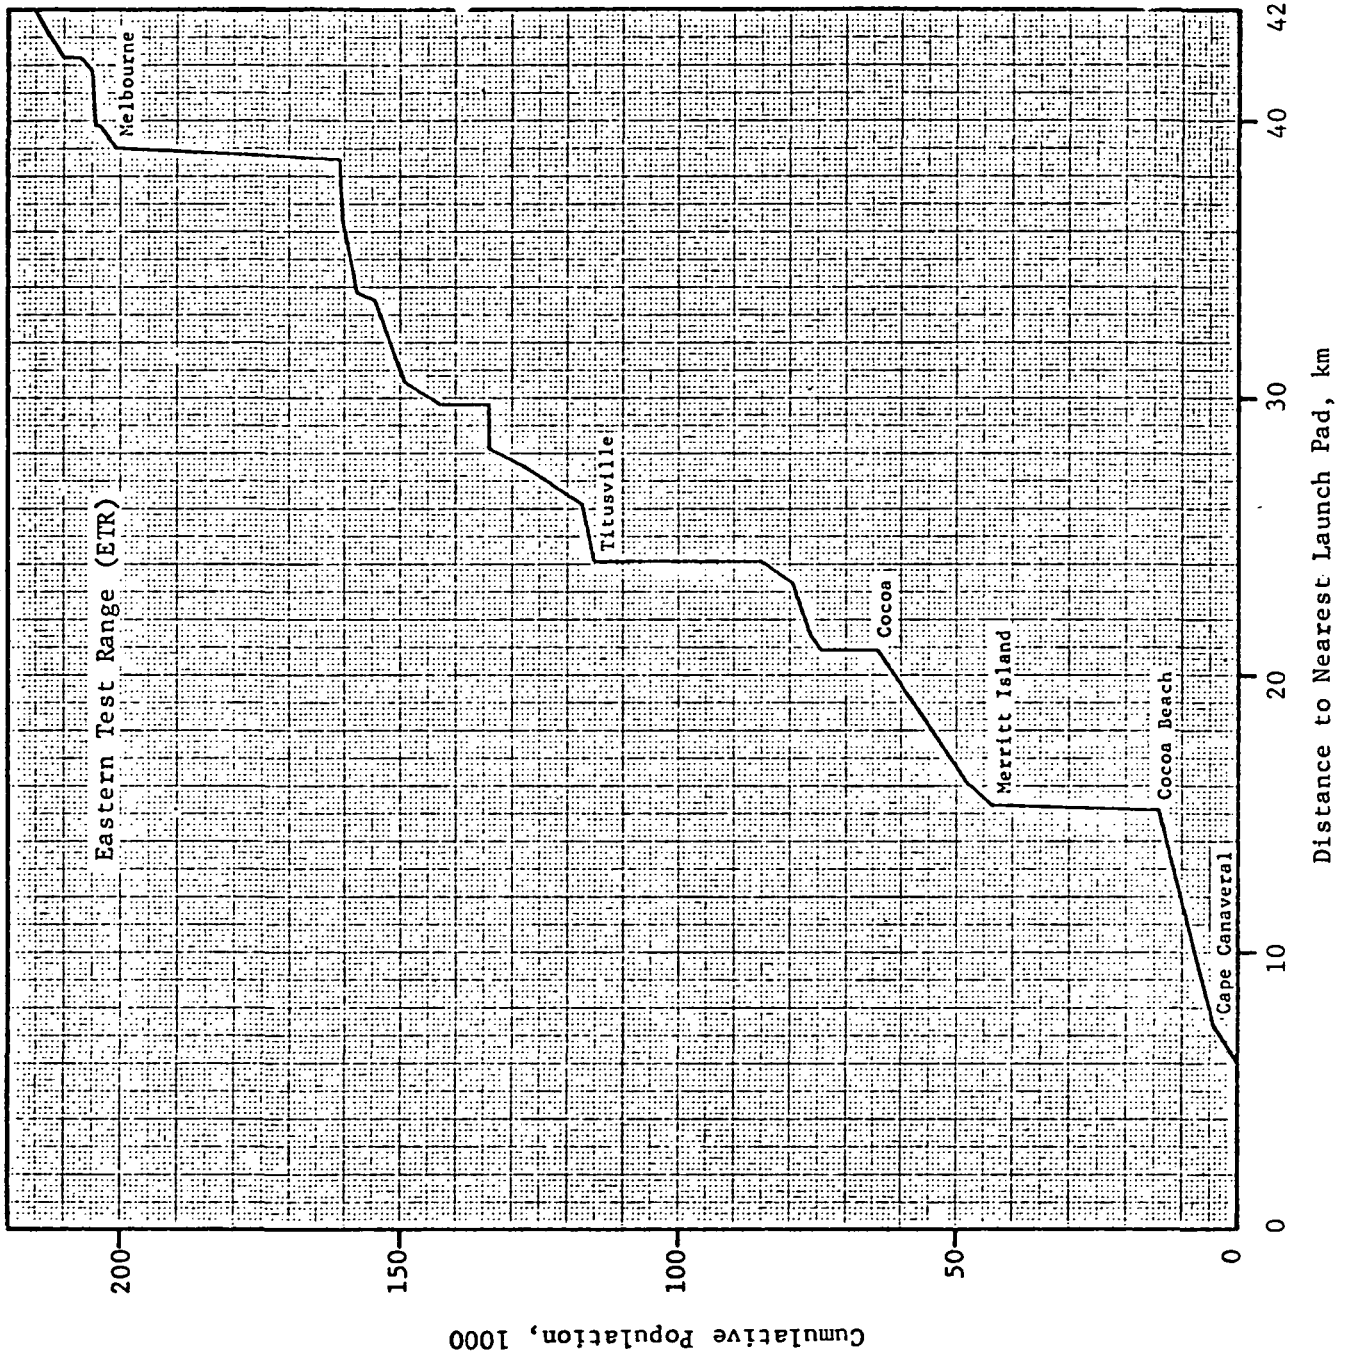


FIGURE C-5. POPULATION DISTRIBUTION AS A FUNCTION OF DISTANCE FROM LC17, LC36 OR LC41

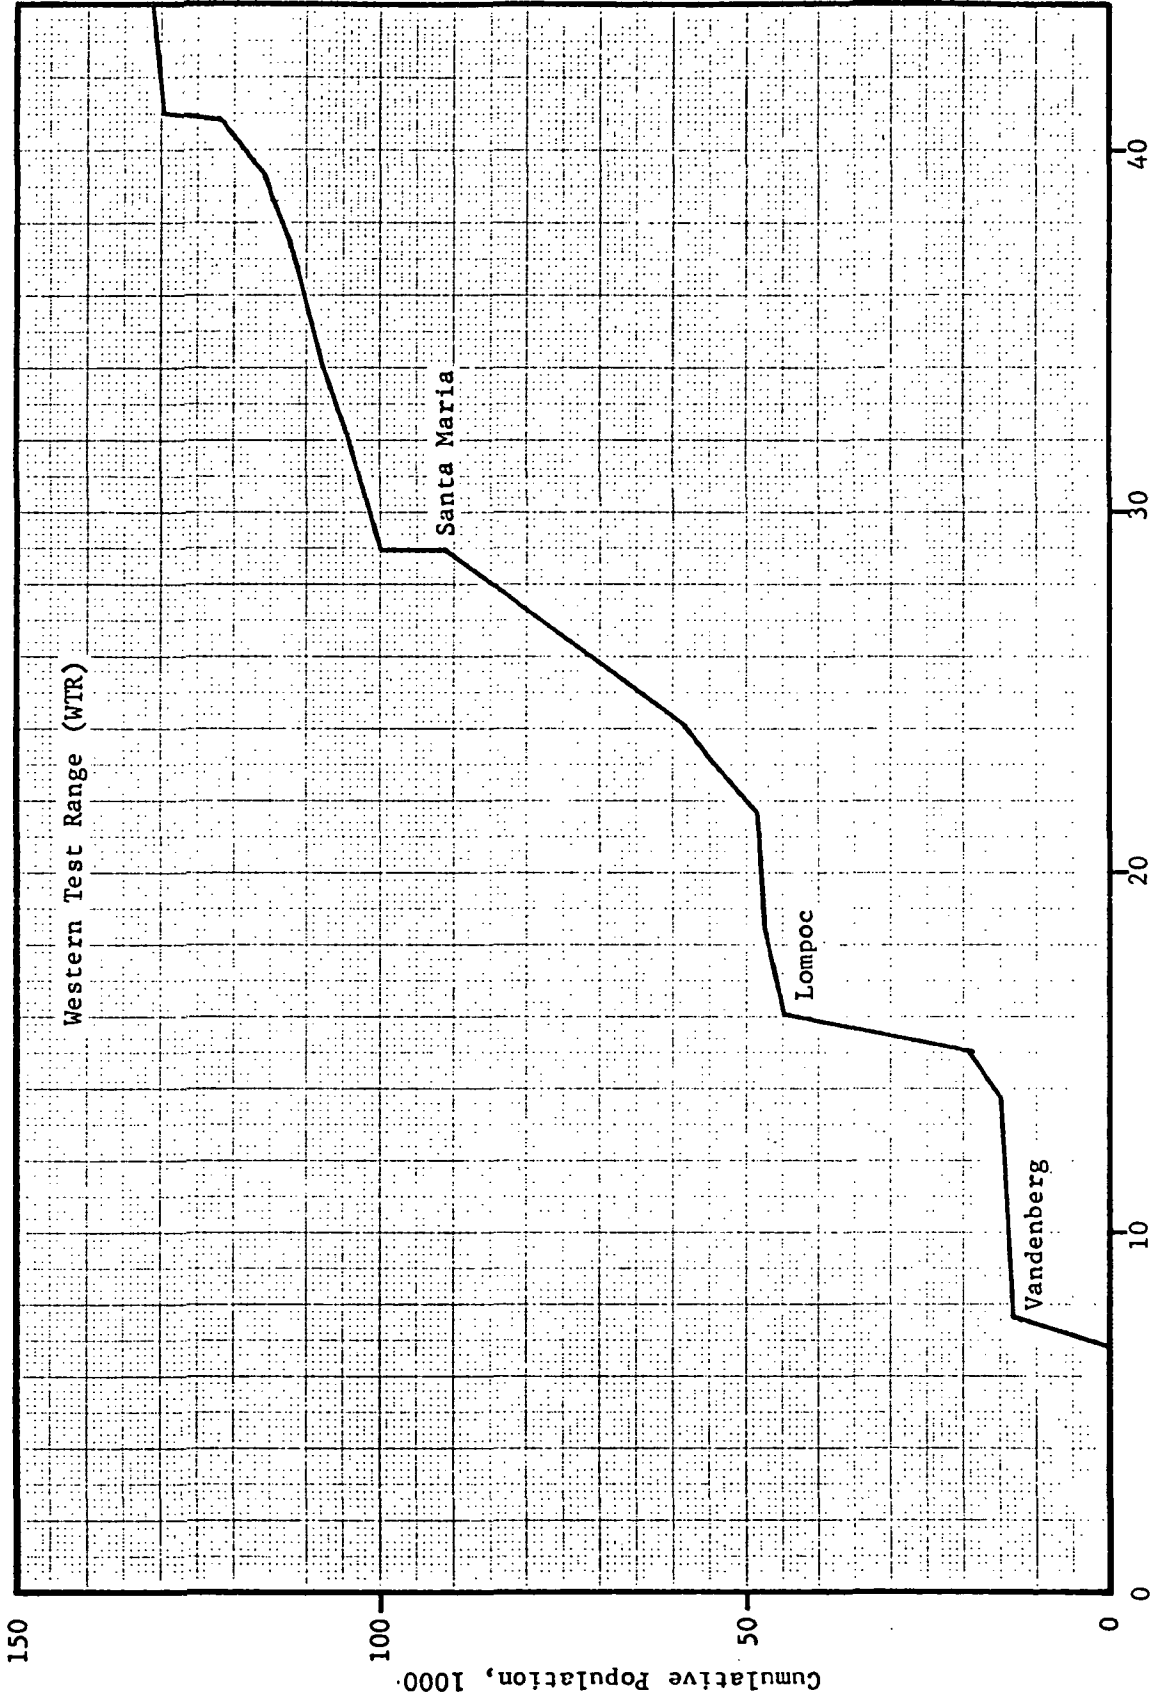

Distance to Nearest Launch Pad, km

FIGURE C-6. POPULATION DISTRIBUTION AS A FUNCTION OF DISTANCE FROM SLC-2 or SLC-5

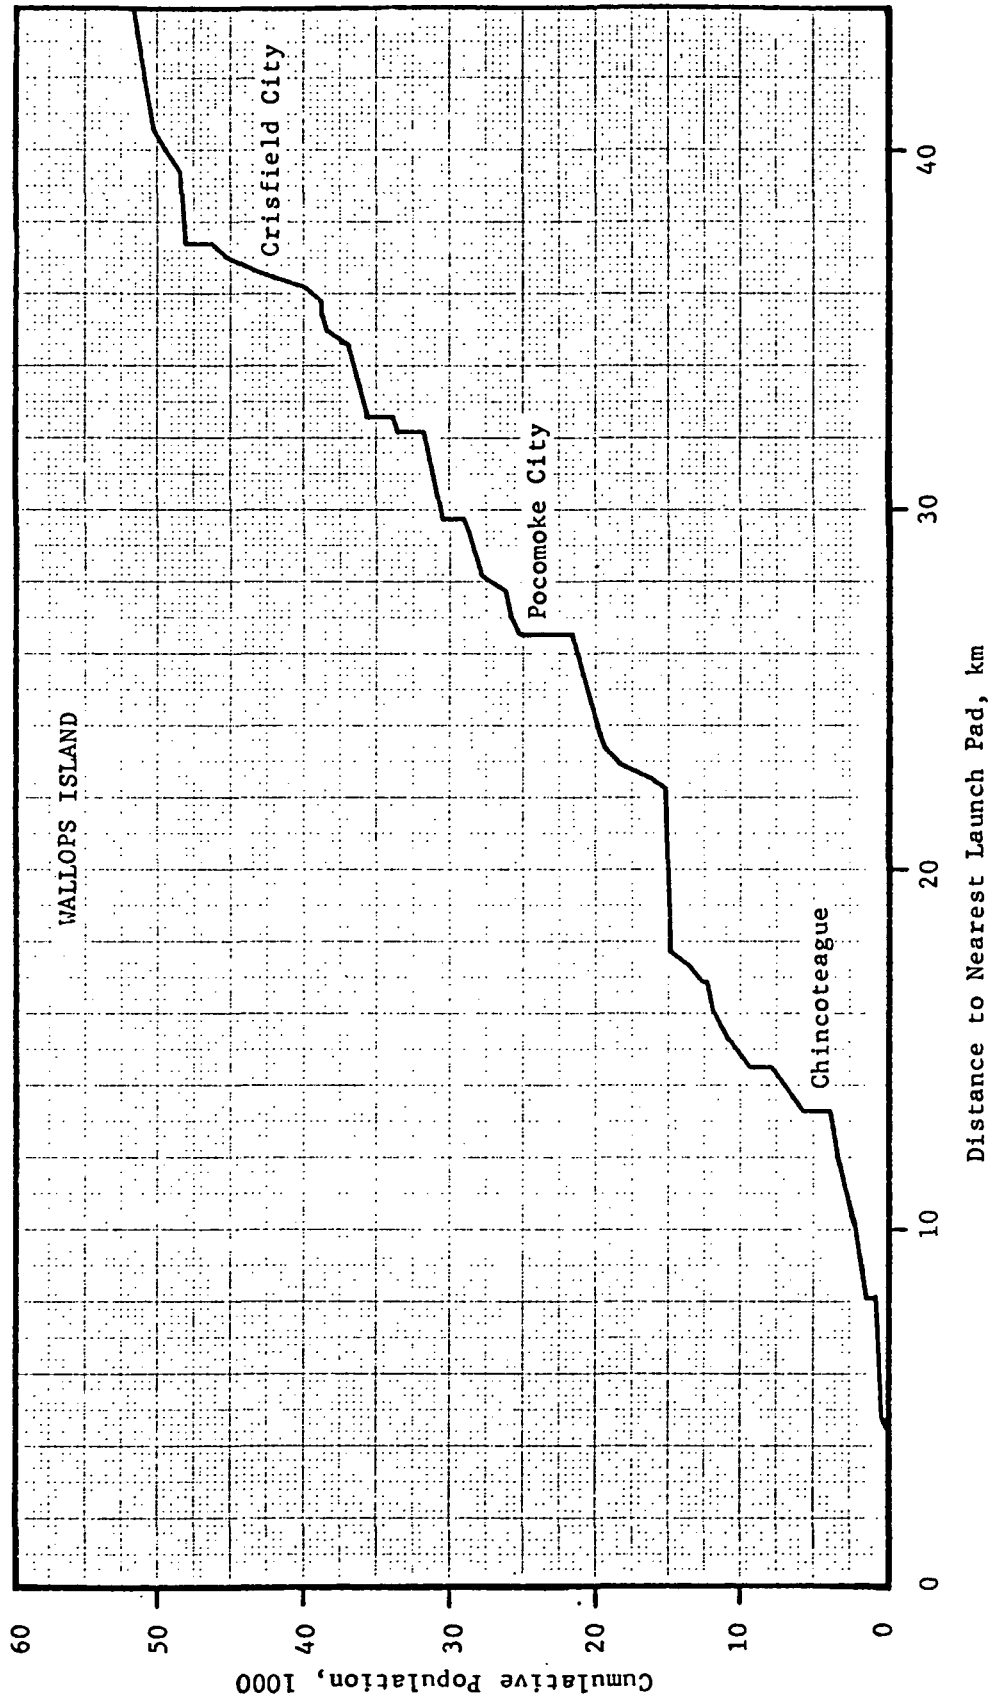


FIGURE C-7. POPULATION DISTRIBUTION AS A FUNCTION OF DISTANCE FROM THE SCOUT LAUNCH PAD ON WALLOPS ISLAND

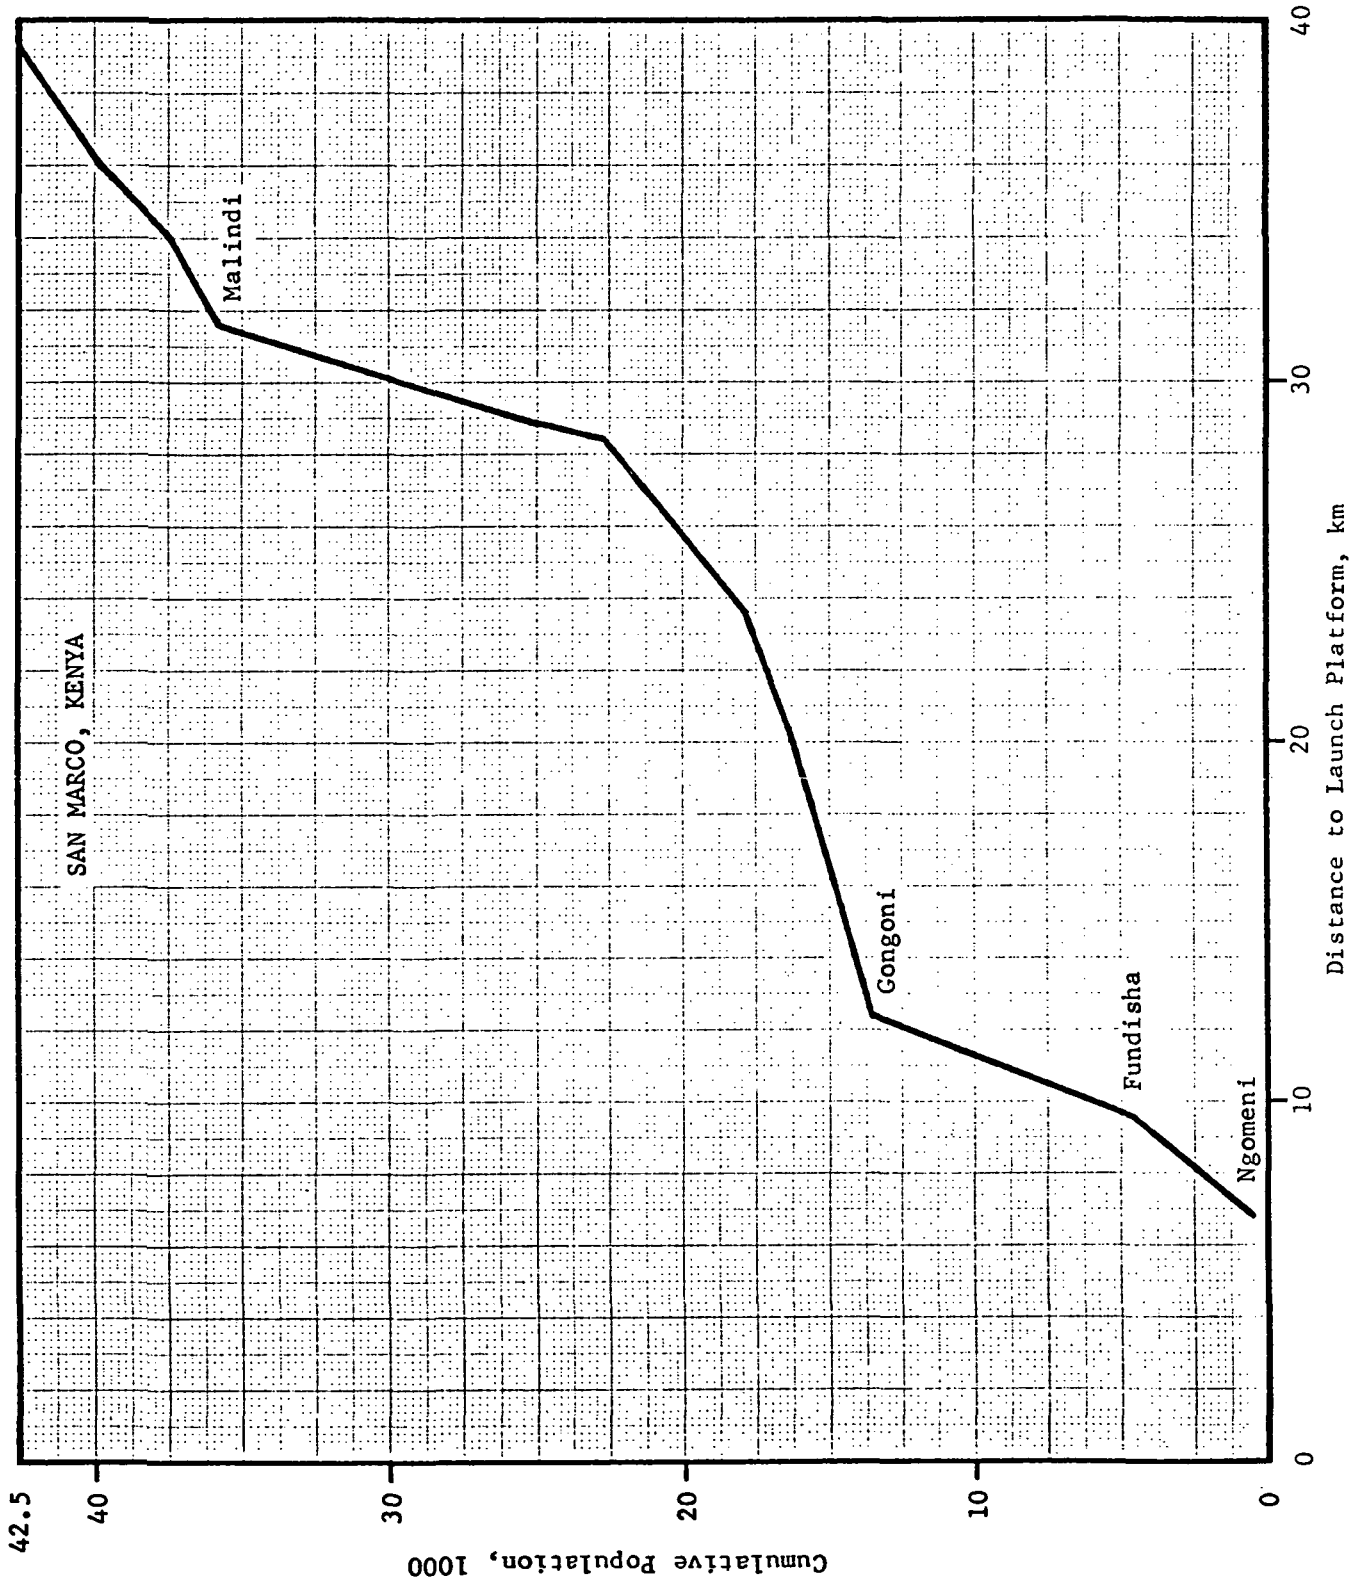


FIGURE C-8. POPULATION DISTRIBUTION AS A FUNCTION OF DISTANCE FROM THE SAN MARCO PLATFORM, KENYA.

APPENDIX D

ATMOSPHERIC DIFFUSION MODELS

D-0

## APPENDIX D

### ATMOSPHERIC DIFFUSION MODELS

If a small quantity of a gas is released in the atmosphere, its subsequent motion and dispersion is shown by observation to be described by a process resembling molecular diffusion, but with an effective diffusion coefficient that is from a few to many orders of magnitude larger than the molecular diffusion coefficient. This effective diffusion coefficient, often called the eddy diffusivity or turbulent diffusivity, results from the non-uniform, non-steady motion of the atmosphere, and depends basically on the degree of turbulence.

In principle, quite complex diffusion problems can be solved. The problem of predicting the dispersion of a pollutant released into the atmosphere thus becomes primarily that of determining the proper diffusion coefficient. Generally, this problem has been handled by defining broad classes of meteorological conditions, for example, "stable", "neutral", and "unstable", and establishing empirical measures of the turbulent diffusion coefficient for each condition<sup>(16)</sup>. However, if suitable meteorological measurements are available, it is possible to relate these empirical measures to more detailed features of the atmosphere. Over a period of years, an atmospheric dispersion model has been created, the NASA/MSFC model<sup>(15)</sup>, using vertical profiles of wind velocity and variations in the wind azimuth and elevation angles to define measures of the turbulent diffusivity.

A second problem, particularly important for predicting the atmospheric dispersion of gases from rocket launches, is defining the source: that is, the initial distribution of the gases resulting from the motion of the vehicle and the exhaust jet, and subsequent motions resulting from the buoyancy of the hot exhaust gases. Observation shows that the exhaust gases

form a cloud elevated above the surface, with the diameter of the cloud about one-half of the height of the center. A combination of theoretical analysis and empirical observations has been used to create a mathematical model of the cloud, and thus, provide a source description for subsequent atmospheric dispersion analyses<sup>(15)</sup>. However, one aspect of the source model may be subject to question and possible future revision. This is the distribution of the exhaust gases within the cloud. For the analysis used in this Environmental Statement, the gases were assumed to have a Gaussian distribution, with the concentration at the visible "edge" of the cloud equal to the  $2.15\sigma$  value. Thus, the cloud has no true edge, and the exhaust gases persist to ground level.

The assumption of a Gaussian distribution is, at the present, not supported by empirical observations. Such observations, when they become available, may suggest other distributions. Of the possible distributions, a uniform concentration within the cloud, with essentially no exhaust gases outside of the cloud, suggests itself as a plausible alternative to the Gaussian distribution. This situation could arise as a result of the intense turbulent motion of the cloud, derived from the kinetic energy of the rocket exhaust, and the radial inflow of air at the base of the cloud as its bouyancy causes it to lift from the ground. Comparisions of the predicted downwind ground level concentrations of exhaust gases using these two distributions have shown that the use of the Gaussian distribution is slightly conservative: that is, it results in higher predicted concentrations than does the uniform concentration.

In addition to the meteorological parameters mentioned previously, which are the principal factors determining the turbulent diffusivity of the atmosphere, the presence of an inversion and its height can profoundly affect the predicted ground level concentrations of rocket exhaust gases. This results from the fact that an inversion is accompanied by a very stable atmospheric layer in which the diffusivity is very small. As a result, an inversion acts effectively as a barrier to diffusion: pollutants located below the inversion height are effectively trapped between the inversion and the ground, while pollutants located above the inversion cannot penetrate the inversion and, thus, theoretically contribute nothing to the ground level concentrations. Consequently, there is an interaction between the inversion height and the height of the source cloud in determining the downwind ground level concentrations of exhaust gases.

In predicting the ground level concentrations of rocket exhaust gases for this Environmental Statement, three descriptive meteorological conditions were chosen: Sea Breeze, Spring, and Fall<sup>(52)</sup>. Sea Breeze describes the atmospheric structure at ETR during the afternoons when the sea breeze (wind blowing onto the land) occurs. Sea Breeze is characterized by a low inversion, typically about 300 meters. Spring and Fall are both characterized by easterly winds (wind blowing onto the land at ETR) and inversion heights of 2000 and 1000 meters, respectively. Table D-1 presents the details of these three meteorological conditions. Further details concerning these conditions, and a general discussion of the climatology at ETR, may be found in Reference (58). Table D-2 presents the results of the analysis of the exhaust cloud formation for the vehicles considered here, for the three meteorological conditions.

TABLE D-1. PARAMETERS DESCRIBING THE MODELED SEA BREEZE FALL, AND SPRING WEATHER CONDITIONS AT KSC.\*

Condition	Sub-layer	Sublayer Boundaries, m	$T_T, K$	$\theta_T, \text{deg}$	$\bar{u}_T, \text{m/s}$	$\sigma_{AT}, \text{deg}$	$\sigma_{ET}, \text{deg}$
Sea Breeze		2	294.0	140	3.8	21.5	17.8
	1	2-50	293.7	142	5.0	7.5	6.2
	2	50-100	293.4	144	6.7	7.2	5.9
	3	100-200	292.7	147	8.0	6.4	5.35
	4	200-300	292.0	149	9.1	5.7	4.75
Fall		2	299.0	90	3.8	15.0	14.7
	1	2-50	298.5	91	5.0	11.0	11.0
	2	50-100	298.0	93	5.5	10.2	10.0
	3	100-200	297.2	96	5.9	9.5	9.2
	4	200-300	296.4	98	6.2	9.1	8.9
	5	300-400	295.5	101	6.4	8.8	8.6
	6	400-500	294.6	104	6.5	8.6	8.4
	7	500-600	293.8	107	6.6	8.4	8.2
	8	600-800	292.0	113	6.8	8.2	8.0
	9	800-1000	290.4	119	7.0	8.0	7.8
Spring		2	300.0	100	5.4	7.8	7.3
	1	2-50	299.6	102	6.1	7.0	6.6
	2	50-100	299.3	104	6.4	6.6	6.2
	3	100-200	298.5	108	6.7	6.3	5.8
	4	200-300	297.7	112	6.9	6.1	5.7
	5	300-400	297.0	116	7.0	6.0	5.6
	6	400-500	296.2	120	7.1	5.95	5.55
	7	500-600	295.5	124	7.15	5.9	5.5
	8	600-800	294.0	132	7.2	5.8	5.45
	9	800-1000	292.5	140	7.3	5.75	5.4
	10	1000-1500	288.7	160	7.4	5.7	5.3
	11	1500-2000	285.0	180	7.5	5.6	5.2

Note:  $T_T$  = The ambient temperature at the top of the given layer

$\theta_T$  = The wind direction at the top of the given layer

$\bar{u}_T$  = The wind speed at the top of the given layer

$\sigma_{AT}$  = The standard deviation of the azimuth wind angle

$\sigma_{ET}$  = The standard deviation of the wind elevation angle.

\* From Reference (52).

TABLE D-2. CLOUD RISE AND EMISSION DATA FOR LAUNCH VEHICLES  
USED ON AUTOMATED MISSIONS.\*

Vehicle	Meteorology	Rise,m	Total Propellant consumed to form ground cloud, kg	Ground Cloud Emissions, kg		
				HC1	CO	Al <sub>2</sub> O <sub>3</sub>
TITAN III E/CENTAUR	SB	644	62,392	13,102	17,407	18,967
	F	1087	79,495	16,694	22,179	24,166
	SP	930	73,935	15,526	20,628	22,476
ATLAS/CENTAUR	SB	610	15,115	0	7,150	0
	F	1139	19,893	0	9,410	0
	SP	969	18,532	0	8,766	0
DELTA 9C	SB	555	7,078/4,249*	1,479	3,617	2,647
	F	1036	9,676/5,521	2,022	4,808	3,619
	SP	841	8,739/5,062	1,826	4,378	3,268
DELTA 6C	SB	544	5,749/3,477	1,202	2,950	2,150
	F	1012	7,767/4,670	1,623	3,972	2,905
	SP	817	6,979/4,221	1,459	3,581	2,610
DELTA 3C	SB	499	3,545/4,279	741	2,829	1,326
	F	964	5,034/5,798	1,052	3,885	1,326
	SP	741	4,362/5,135	912	3,419	1,631
SCOUT D	SB	314	1,248	258	342	401
	F	582	1,786	370	489	573
	SP	368	1,378	285	378	442

Note: SB = Sea Breeze  
F = Fall  
SP = Spring

\* Castor II propellant/Thor propellant

The atmospheric dispersion and exhaust cloud models of Reference (15) are relatively complex, involving inputs of a number of meteorological measurements, and requiring considerable computer capacity and time to make a prediction of ground level concentrations. As a result of these features, the United States Air Force has adopted a substantially simpler model for the purpose of making real-time predictions of ground level HCl concentrations resulting from operational Titan III D launches at WTR. This model assumes that the cloud rises to a height of about 500 meters and contains approximately 9,000 kg of HCl. An inversion at a height of 600 meters is typically assumed.

Figure D-1 compares the maximum ground level HCl concentrations calculated with the NASA/MSFC model for use in this Environmental Statement with those predicted by the USAF operational model, and also with a prediction based on using the NASA/MSFC model but assuming a cloud definition and meteorological parameters identical to those used in the USAF operational model.<sup>(59)</sup>

Also shown in Figure D-1 is a prediction based on using the NASA/MSFC model for a very unfavorable meteorological condition at ETR: the Cold Front regime<sup>(52)</sup>. Examination of the curves in this figure, and of the meteorological parameters and cloud definitions on which the curves are based, suggest that the predictions for the Sea Breeze, Spring, and Fall meteorological regimes should be regarded as "typical" cases, while the Cold Front and the USAF operational model predictions might be considered as "worst" cases. It may be noted that, even with the USAF operational model prediction, the area possibly subjected to HCl concentrations exceeding the criteria for uncontrolled populations is entirely within the facility boundary.

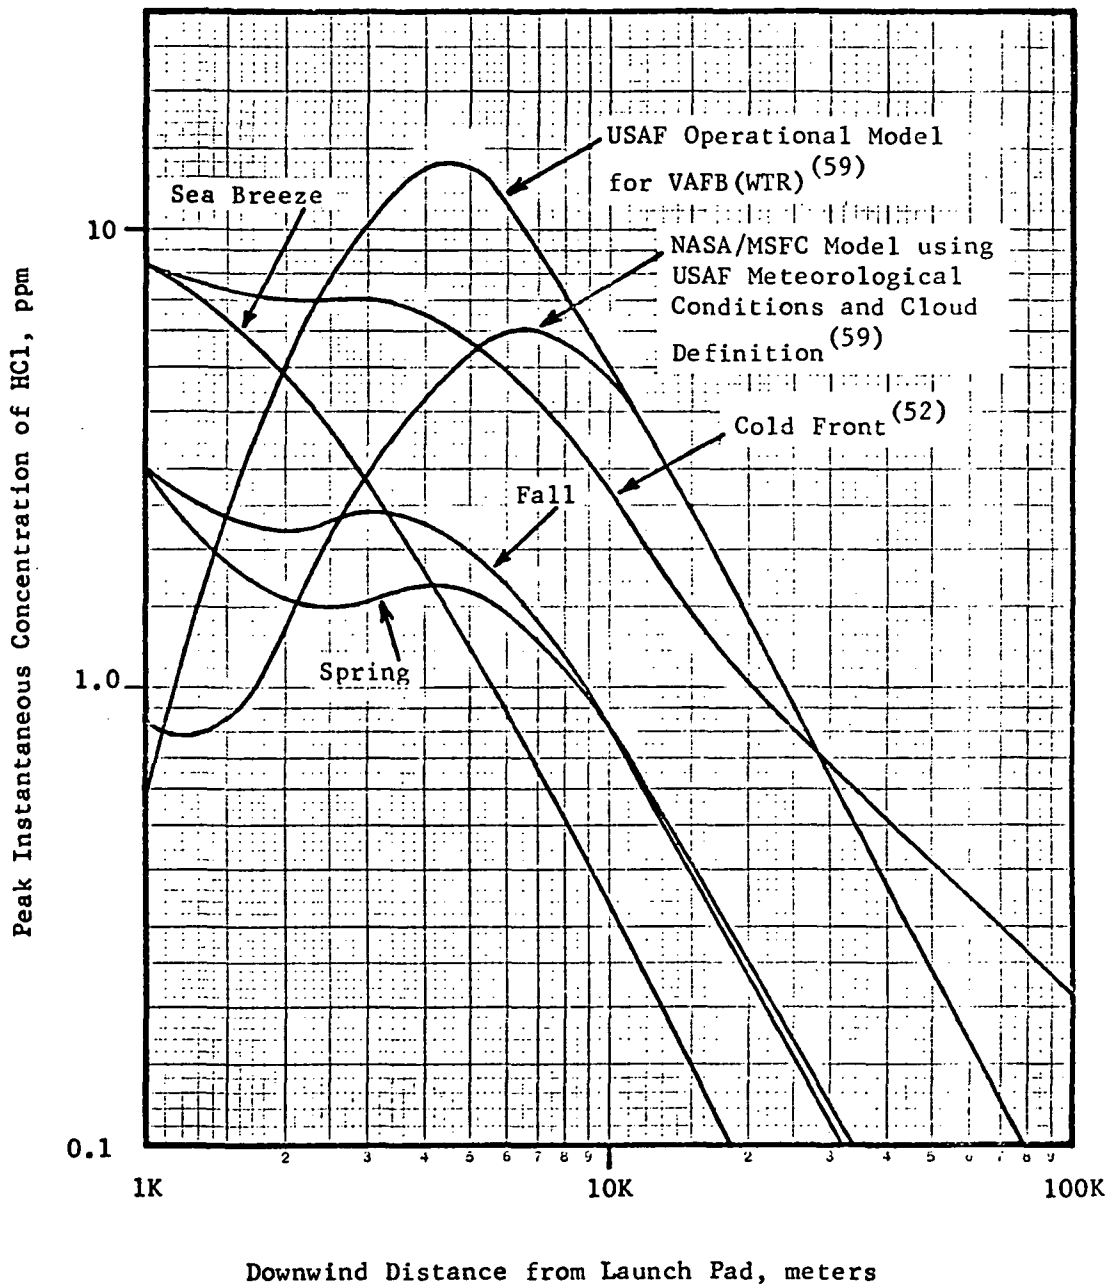


FIGURE D-1. COMPARISON OF PREDICTED PEAK GROUND LEVEL HCL CONCENTRATIONS DOWNWIND OF TITAN III LAUNCHES

Efforts to make quantitative measurements of ground level HCl concentrations downwind from Titan III C and Titan III D launches have been unsuccessful (except for an area within a few hundred meters of the launch pad which is enveloped in the ground cloud prior to the bouyant rise)<sup>(39,60)</sup>. Hence, even the predictions for "typical" cases may be conservative. Efforts to obtain quantitative measurements of ground level HCl concentrations are continuing<sup>(61)</sup>.

APPENDIX E

RESPONSES TO THE DRAFT ENVIRONMENTAL  
STATEMENT FOR NASA-OSS LAUNCH VEHICLE  
AND PROPULSION PROGRAMS.

EXECUTIVE OFFICE OF THE PRESIDENT  
COUNCIL ON ENVIRONMENTAL QUALITY  
722 JACKSON PLACE, N. W.  
WASHINGTON, D. C. 20006

August 4, 1972

MEMORANDUM FOR RALPH CUSHMAN  
NASA

SUBJECT: CEQ Comments on the NASA Draft Environmental  
Statement for Launch Vehicle and Propulsion  
Programs

The Council has reviewed the NASA Draft Environmental Statement for Launch Vehicle and Propulsion Programs and on the whole finds the statement quite satisfactory. The environmental assessment of the entire program rather than just individual launches and tests is a more realistic and accurate framework to work with, and it is hoped that NASA will continue this practice in the future.

The Council has several comments to make on the draft:

1. No mention is made of particulates in the draft. Aluminum oxide is listed on page 9 but there is little discussion of its effects.
2. There is no discussion in the section on ground effects of the impact of the launches upon local plant and animal life.
3. The statement refers to several methods and models for determining dispersion of rocket exhaust products without describing these models. While a detailed description of them is not required, a brief summary of each model would, in accordance with CEQ guidelines, permit an individual to perform an independent analysis of the atmospheric ground level effects. No experimental verification of these predictions are offered.

4. The transient and resident human population should be given as a function of distance out to perhaps 40 kilometers for each of the launch sites, so that the noise and chemical species signatures will have more relevance.

5. On page 28 it is stated that the MAC values in Table 9 are for trout and "are probably not much different for many fish species." This statement should be substantiated, in view of the fact that trout is a freshwater fish and the water referred to is ocean salt water. Furthermore, there is no discussion of rocket propellant effects on other aquatic life, such as phytoplankton, crustacea, etc.

6. On page 36, the figure of one launch in 10,000 for the probability of the ocean impact of an intact vehicle assumes that there is no correlation between the occurrence of launch abort and the failure of the vehicle destruct system. If there is some correlation, the probability of their simultaneous occurrence would be greater. The statement should either explain why there is no relationship between the two events or else estimate the degree of correlation and recompute the probability.

7. The statement does not really address the question of the effects of propellant reactants and products entering the environment. The meeting of standards is reassuring, but it would be incorrect to say that there will be no adverse effects from these species entering the local environment. The incremental impact of the rocket launches should therefore be assessed.

8. The statement estimates the effects of any given single launch on the local environment. Do multiple launchings ever occur? Are there any other means, such as fueling operations, whereby additional quantities of propellants may enter the local environment?

9. Certainly the space program has made important contributions to man's understanding of the earth and its environment, but the wording on page 52 implies that the

space program has been responsible for most or all of man's new knowledge about the environment in the last 14 years. It is also not clear how knowledge of the rest of the solar system "is fundamental to any realistic endeavor to protect the environment." It is suggested that the lofty language of pp. 52-53 be toned down a bit and the good story NASA has to tell of the concrete contributions the space program can make to the environment be outlined in terms of specific programs.

The Council hopes that these comments will be helpful in the preparation of the final statement.



William J. Dircks  
Staff Member



DEPARTMENT OF STATE

Washington, D.C. 20520

August 17, 1972

Mr. Ralph E. Cushman  
Special Assistant  
Office of the Administrator  
National Aeronautics and Space  
Administration  
Washington, D.C. 20546

Dear Mr. Cushman:


The attached draft environmental impact statement for the NASA Launch Vehicle and Propulsion Programs has been reviewed by the Department.

We have no comments or changes to submit for your consideration.

Sincerely,

A handwritten signature in cursive script that reads "C A Herter Jr".

Christian A. Herter, Jr.  
Special Assistant to the Secretary  
for Environmental Affairs.



UNITED STATES  
ATOMIC ENERGY COMMISSION  
WASHINGTON, D.C. 20545

AUG 29 1972

Mr. Ralph E. Cushman  
Special Assistant  
Office of Administration  
National Aeronautics and  
Space Administration  
Washington, D. C. 20546

Dear Mr. Cushman:

This is in response to your letter of August 7, 1972, to Mr. Henderson transmitting a copy of a draft environmental impact statement for the NASA Launch Vehicle and Propulsion Programs for Commission review and comment. We have reviewed the statement and have no suggestions to offer.

Thank you for the opportunity to review the statement. For future reference I have been designated as the Commission point of contact for environmental statement review.

Sincerely,

A handwritten signature in cursive script, appearing to read "R. J. Catlin".

Robert J. Catlin, Director  
Division of Environmental Affairs



ASSISTANT SECRETARY OF DEFENSE  
WASHINGTON, D. C. 20301

HEALTH AND  
ENVIRONMENT

18 September 1972

Mr. Ralph E. Cushman  
Special Assistant  
Office of Administration  
National Aeronautics and Space Administration  
Washington, D. C. 20546

Dear Mr. Cushman:

This is in reply to your request for the comments of the Department of Defense on NASA draft environmental statement, subject: "NASA Launch Vehicle and Propulsion Programs". We have reviewed the environmental statement and believe it appears to consider most situations in reasonable detail. However, it does not cover some of the less likely situations that perhaps should be "considered", even if only to dismiss them as being of little consequence or significance. Taking into account some of the court decisions since NEPA involving environmental impact statements for nuclear power plants, it is suggested that the unlikely incident should be mentioned rather than left out. Since there could be a major impact on DoD launch vehicle programs as a result of the review of the NASA environmental impact statement, there are two situations that should be considered in greater detail. These are:

1. The statement should consider the consequence of the dumping of large quantities of fuel from an early abort into shallow confined local waters and estuaries. The damage to such shallow waterways with little current or tidal flow might be of far greater impact than a similar accident over the ocean. Since the areas around Cape Kennedy and Wallops Island contain such waterways and are also on a major wild bird flyway, specific consideration of the effects of launch vehicle operations on these natural resources is warranted.


2. The statement should consider the consequence of a pad or early abort explosion of a TITAN IIC; the assumption is apparently made that there there would be almost complete burnup of unsymmetrical dimethyl hydrazine (UDMH). There is some question

as to the validity of this assumption; if complete burnup of the UDMH did not occur, the residual UDMH might well drift down wind as a mist. Because of the very low threshold limiting values of UDMH in air, this situation warrants closer examination.

3. The section on Alternatives appears to be extremely weak with respect to the discussion of the use of LO<sub>2</sub>/LH<sub>2</sub> fuel vehicles and should be expanded.

If consideration is given to the three comments described above, the draft environmental impact statement will present a reasonable assessment of the environmental impact of NASA's Launch Vehicle and Propulsion Programs.

Sincerely,

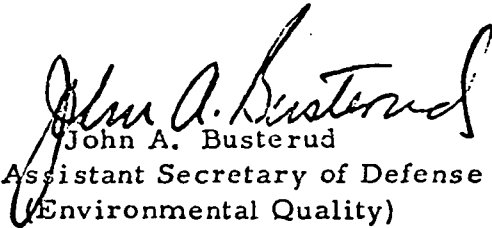

John A. Busterud  
Deputy Assistant Secretary of Defense  
(Environmental Quality)



# United States Department of the Interior

OFFICE OF THE SECRETARY  
WASHINGTON, D.C. 20240

SEP 26 1972

ER-72/1026

Dear Mr. Cushman:

Thank you for providing us with the opportunity to review the draft environmental impact statement on the proposed Launch Vehicle and Propulsion Programs. Our comments follow:

1. The possibility of on-pad accidents and spills of toxic propellants which may result in run-off to local drainage systems is recognized on page 26 of the statement. Mention is made of provisions that exist for containing and disposing these spills without contaminating the water or the air. Such provisions should be described and discussed.
2. The statement does not include the required section on Unavoidable Adverse Impacts, although such impacts appear to be discussed separately in other sections.
3. Table 13, Alternatives Section, lists use of scrubbers, collectors, etc. These do not represent an alternative to the program, but rather a clean up effort applicable to any propellant used. Final disposal of the liquids and solids from the clean up process should be described.

Sincerely yours,

A handwritten signature in dark ink, appearing to read "H. P. Lyman".

Deputy Assistant Secretary of the Interior

Mr. Ralph E. Cushman  
Special Assistant  
Office of Administration  
National Aeronautics and Space Administration  
Washington, D.C. 20546



# United States Department of the Interior

OFFICE OF THE SECRETARY  
WASHINGTON, D.C. 20240


ER-72/1026

00120 012

Dear Mr. Cushman:

This supplements the Department of the Interior's letter of September 26, 1972, commenting on your draft environmental statement on Launch Vehicle and Propulsion Programs and transmits additional comments from the National Park Service for inclusion in the final statement and for consideration in your continuing decision in regard to the proposed action.

Sincerely yours,

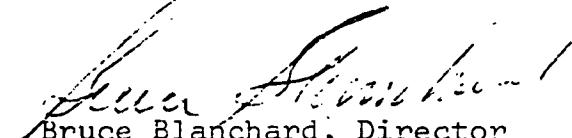  
Bruce Blanchard, Director  
Environmental Project Review

Mr. Ralph E. Cushman  
Special Assistant  
Office of Administration  
National Aeronautics and  
Space Administration  
Washington, D. C. 20546

Enclosure



# United States Department of the Interior

NATIONAL PARK SERVICE  
WASHINGTON, D.C. 20240

IN REPLY REFER TO:

L7427-OCC

OCT 17 1972

Memorandum

To: Deputy Science Adviser  
Through: Assistant Secretary for Fish and Wildlife and Parks

*R. Cummings  
for  
A/S FWS*

From: ~~Acting~~ Assistant Director, Cooperative Activities

Subject: Review of draft environmental statement on Launch  
Vehicle and Propulsion Programs (ER-72/1026)

The National Park Service has reviewed the subject statement transmitted with Mr. Blanchard's memorandum of August 25 and our comments follow.

The proposed action will not directly affect any existing or proposed units of the National Park System, or any sites that are eligible or recommended for registration as National Historic, Natural or Environmental Education Landmarks. A natural landmark under eligibility study is involved as noted in the following paragraph.

Vandenberg Launch Site. Although the statement considers only the environmental effects of the launchings themselves, the operation of related facilities may adversely affect a potentially eligible natural landmark located within Vandenberg Air Force Base. This potential landmark is to be nominated in a study of the South Pacific Border natural region being conducted by the National Park Service. It is a 43,000-acre undisturbed area extending from Surf southward to Sudden Peak, the mouth of the Santa Ynez River and the beaches to Point Conception.

In the case of properties under the control or jurisdiction of the United States Government, the statement should include a discussion of steps taken to comply with Section 2(b) of Executive Order 11593 of May 13, 1971, entitled "Protection and Enhancement of the Cultural Environment."

*Chilton Brown*



National Parks Centennial 1872-1972