

Made available under NASA sponsorship
In the interest of early and wide dis-
semination of Earth Resources Survey
Program information and without liability
for any use made thereof."

^{Jm61}
7.9-100.33
CR151837

JSC-14471
SEP 5 1978

GENERATION OF UNIFORM CHROMATICITY SCALE
IMAGERY FROM LANDSAT DATA

Job Order 73-743

(E79-10033)	GENERATION OF UNIFORM	N79-13440
CHROMATICITY SCALE IMAGERY FROM LANDSAT DATA		
(Lockheed Electronics Co.)	42 p HC A03/NF	
A01	CSCI 20F	Unclas
		G3/43 00033

Prepared By

Lockheed Electronics Company, Inc.
Systems and Services Division
Houston, Texas

Contract NAS 9-15200

For

EARTH OBSERVATIONS DIVISION
SPACE AND LIFE SCIENCES DIRECTORATE



National Aeronautics and Space Administration
LYNDON B. JOHNSON SPACE CENTER
Houston, Texas

August 1978

LEC-11867

DISTRIBUTION

JSC/G. Badhwar/SF3	LEC/M. L. Bertrand
K. Baker/SF3	J. E. Davis
T. L. Barnett/SF3	P. L. Krumm
R. M. Bizzell/SF4	W. G. Straight
I. D. Browne/SF3	P. C. Swanzy
L. F. Childs/SF*	R. E. Tokerud*
K. J. Demel/SF3	Data Research and Control (3)*
H. G. deVezin/FM8	Technical Library (2)*
J. L. Dragg/SF4	Job Order File*
R. B. Erb/SF2	
J. D. Erickson/SF3*	ERIM/Q. A. Holmes
J. G. Garcia/SF3	R. F. Nalepka
G. E. Graybeal/SF2*	KSU/A. M. Feyerherm
F. G. Hall/SF2*	E. T. Kanemasu
C. R. Hallum/SF4	
D. J. Henderson/SF4	LARS/M. E. Bauer
W. E. Hensley/SF4	D. A. Landgrebe
R. P. Heydorn/SF3*	T. L. Phillips
J. D. Hill/SF2	P. H. Swain
R. O. Hill/SF4	
A. G. Houston/SF3	TAMU/L. F. Guseman
R. D. Juday/SF5*	J. C. Harlan
R. Noaves/SF3	H. O. Hartley
A. W. Patteson*	UCB/R. N. Colwell
T. W. Pendleton/SF3	C. M. Hay
D. E. Pitts/SF3	R. W. Thomas
R. G. Stuff/SF3	
D. R. Thompson/SF4	UH/H. P. Decell
M. C. Trichel/SF3*	SRS/W. H. Wigton
Technical Library/JM61 (3)*	
USDA/G. O. Boatwright/SF3	
J. D. Murphy/SF2	

*NOTE: Distribution of this document is limited to those people whose names are followed by an asterisk in the above list; all others receive an abstract (JSC Form 1424) only.

Original photography may be purchased from:
EROS Data Center

Sioux Falls, SD 57198

**ORIGINAL CONTAINS
COLOR ILLUSTRATIONS**

GENERATION OF UNIFORM CHROMATICITY SCALE
IMAGERY FROM LANDSAT DATA

Job Order 73-743

PREPARED BY

Richard Juday
R. D. Juday
Earth Observations Division, NASA

J.C. Minter for
R. A. Abotteen
Lockheed Electronics Company, Inc.

Fran Johnson by RDJ
F. Johnson
Earth Observations Division, NASA

Mike Pore
M. D. Pore
Lockheed Electronics Company, Inc.

APPROVED BY

LEC

NASA

J.C. Minter
T. C. Minter, Supervisor
Techniques Development Section

Jon G. Erickson
J. D. Erickson, Chief
Research, Test, and Evaluation Branch

B.L. Carroll
B. L. Carroll, Manager
LACIE Development and
Evaluation Department

A.W. Patteson
A. W. Patteson, Chief
Exploratory Investigations Branch

Prepared By

Lockheed Electronics Company, Inc.

For

Earth Observations Division
Space and Life Sciences Directorate

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
LYNDON B. JOHNSON SPACE CENTER
HOUSTON, TEXAS

August 1978

1 Report No JSC-14417		2 Government Accession No		3. Recipient's Catalog No	
4 Title and Subtitle Generation of Uniform Chromaticity Scale Imagery From Landsat Data				5 Report Date August 1978	
				6 Performing Organization Code	
7 Author(s) R. D. Juday, F. Johnson, R. A. Abotteen, and M. D. Pore				8 Performing Organization Report No LEC-11867	
9 Performing Organization Name and Address Lockheed Electronics Company, Inc. Systems and Services Division 1830 NASA Rd. I Houston, Texas 77058				10 Work Unit No	
				11 Contract or Grant No NAS 9-15200	
				13 Type of Report and Period Covered Technical Report	
12 Sponsoring Agency Name and Address National Aeronautics and Space Administration Lyndon B. Johnson Space Center Houston, Texas 77058				14 Sponsoring Agency Code	
15 Supplementary Notes					
16 Abstract A method used for generating uniform chromaticity scale (UCS) imagery from Landsat data is presented. An algorithm that utilizes the (L*, a*, b*) UCS transformation is developed and some UCS color film products are generated.					
17 Key Words (Suggested by Author(s)) Colorimetry Digital data Image enhancement Satellite-borne photography				18 Distribution Statement	
19 Security Classif (of this report) Unclassified		20 Security Classif (of this page) Unclassified		21 No of Pages 42	
				22 Price*	

*For sale by the National Technical Information Service, Springfield, Virginia 22161

CONTENTS

Section	Page
1. INTRODUCTION	1-1
2. DESCRIPTION OF THE UCS TRANSFORMATION USED IN THIS STUDY.	2-1
3. FORMULATION OF THE UCS ALGORITHM.	3-1
3.1 <u>COLORIMETRIC DESCRIPTION OF THE TRANSPARENCY GENERATION PROCESS.</u>	3-1
3.2 <u>FITTING LANDSAT DATA SPACE INTO THE UCS SPACE.</u>	3-3
4. CONCLUSIONS AND RECOMMENDATIONS	4-1
5. REFERENCES.	5-1

~~PRECEDING PAGE BLANK NOT FILMED~~

1. INTRODUCTION

This paper documents a method used for generating uniform chromaticity scale imagery from Landsat data. A previous study (ref. 1) was made to map multi-channel Landsat data into color space using a maximal chromatic expansion method. This study extends the work of reference 1 to the utilization of a uniform chromaticity scale (UCS) in the form of color film products.

Familiarity on the part of the reader with standard colorimetric nomenclature is assumed; references 2 and 3 are recommended for the novice.

The motivation behind generating UCS imagery from Landsat data is uniform, controlled perceptibility of color difference caused by differences in Landsat data vectors. One can move a certain distance around any color center before noticing the difference between the color center and the translated point. The distance one can move depends on the direction of the motion and on the location of the color center itself. The generally ellipsoidal surface surrounding the color center is one step in perceptibility from the color center. The nonlinear transformation to a UCS space is such that the ellipsoids become spheres with the same radius at all color centers. In this circumstance, the color difference is simply the length of the straight line connecting the points whose color difference is desired.

One of these transformations was used to generate the UCS imagery from the Landsat data reported herein. A description of this transformation is given in section 2. Formulation of the algorithm used for generating UCS imagery is presented in section 3. Conclusions and recommendations of this study can be found in section 4.

2. DESCRIPTION OF THE UCS TRANSFORMATION USED IN THIS STUDY

The (L^*, a^*, b^*) UCS transformation (ref. 4) was used in this report. In a UCS space, a Euclidean metric is proportional (approximately) to perceptibility of color difference. (See reference 2 for a description of some color-difference formulas and a more thorough exposition of the subject.) The (L^*, a^*, b^*) transformation was adopted by the International Illumination Committee [(IIC); better known as the Commission Internationale de l'Eclairage (CIE)].

Let X , Y , and Z be the tristimulus values; the UCS space is generated from the tristimulus values as follows:

$$L^* = 25 \left(100 \frac{Y}{Y_0} \right)^{1/3} - 16 \quad ; \quad 1 \leq Y \leq 100 \quad (1)$$

$$a^* = 500 \left[\left(\frac{X}{X_0} \right)^{1/3} - \left(\frac{Y}{Y_0} \right)^{1/3} \right] \quad (2)$$

$$b^* = 200 \left[\left(\frac{Y}{Y_0} \right)^{1/3} - \left(\frac{Z}{Z_0} \right)^{1/3} \right] \quad (3)$$

where X_0 , Y_0 , and Z_0 define the color of the nominally white object-color stimulus; i.e., the illumination spectrum, taken here as that of the light table illuminating the transparencies. The L^* coordinate may be thought of as the lightness or brightness of a color, a^* as the green/magenta balance, and b^* as the yellow/blue balance.

Slices of the (L^*, a^*, b^*) space (at constant values of a^*) that are accessible to the color gun cube of the production film converter (PFC) were generated. Plots of some of those slices are shown in figure 1 for a^* values of -10, -5, 0, 5, and 10. In these plots, an edge marked $B = 0$ indicates that the blue gun count of the PFC is zero at that edge. An edge marked $R = 1$ indicates that the red gun count of the PFC is 255 at that edge. A point in the enclosed area of any of the plots in figure 1 corresponds to red (R), blue (B), and green (G) PFC gun counts between 0 and 255. A PFC

$a^* = -10.00$


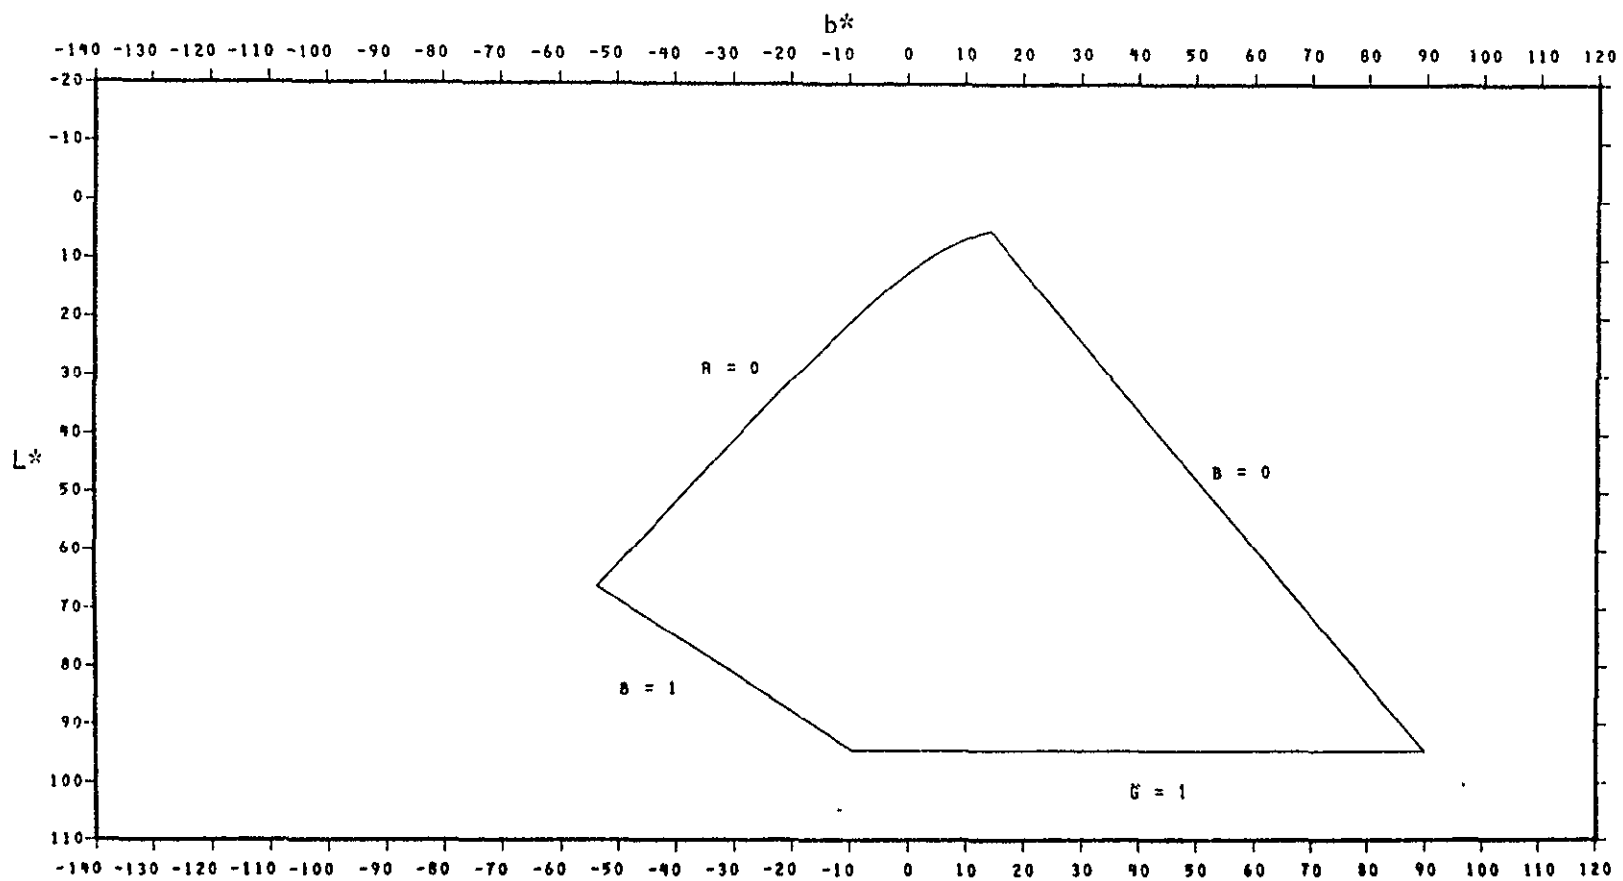


Figure 1.— Slices of the (L^*, a^*, b^*) space at constant values of a^* that are accessible to the color gun cube of the PFC.

$a^* = -5.00$

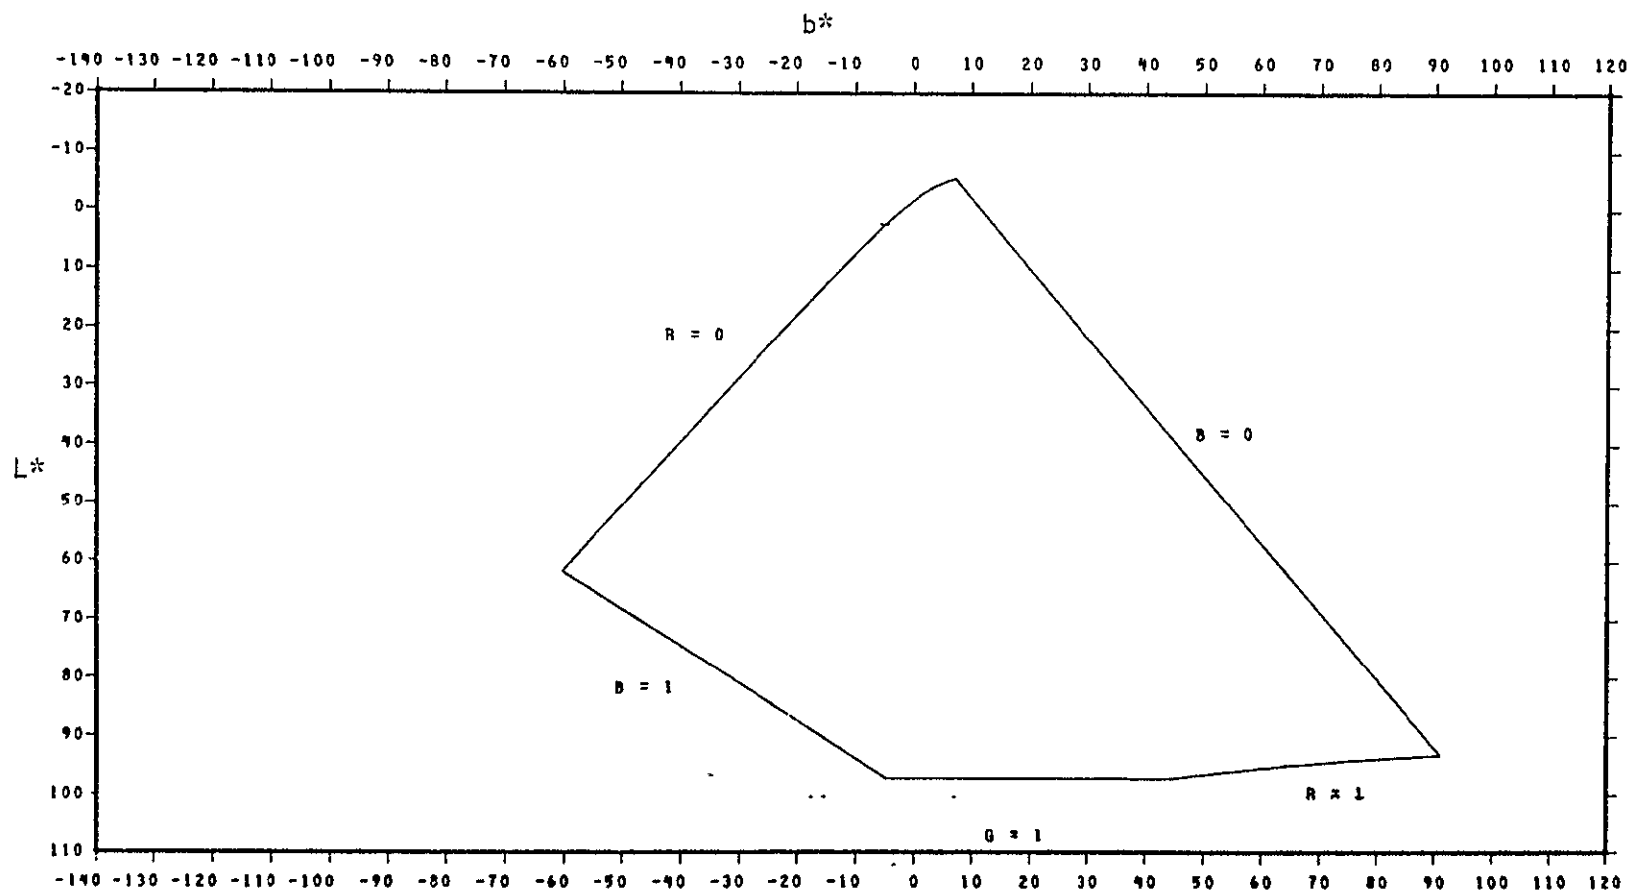

ORIGINAL PAGE IS
OF POOR QUALITY

Figure 1.— Continued.

$a^* = 0.00$


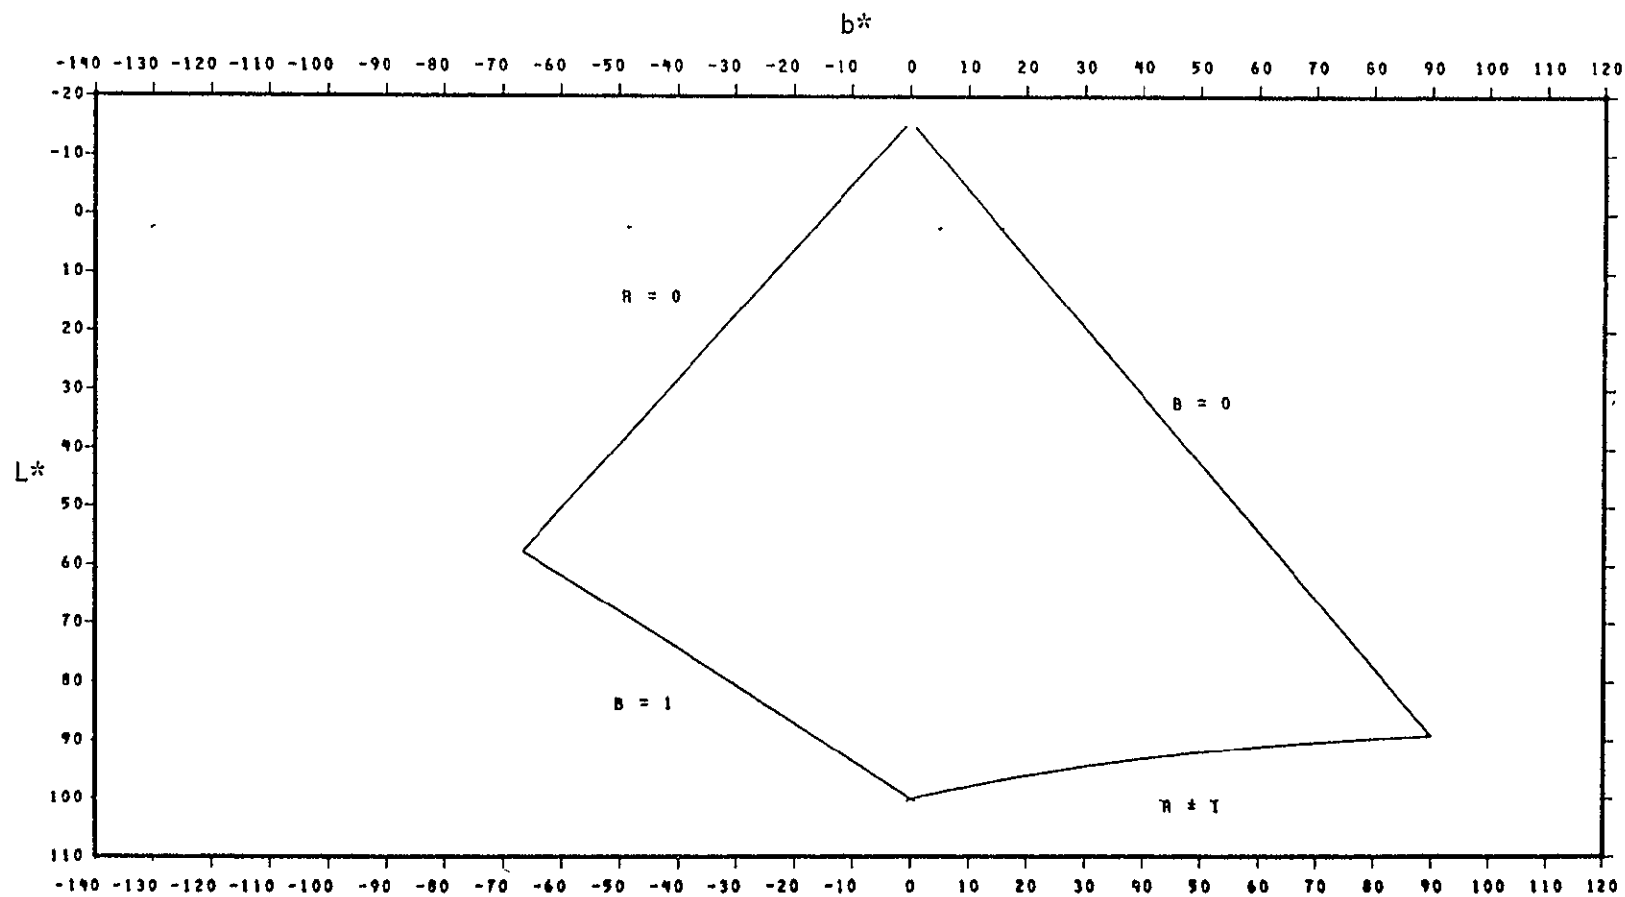


Figure 1.— Continued.

ORIGINAL PAGE IS
OF POOR QUALITY

$a^* = 5.00$

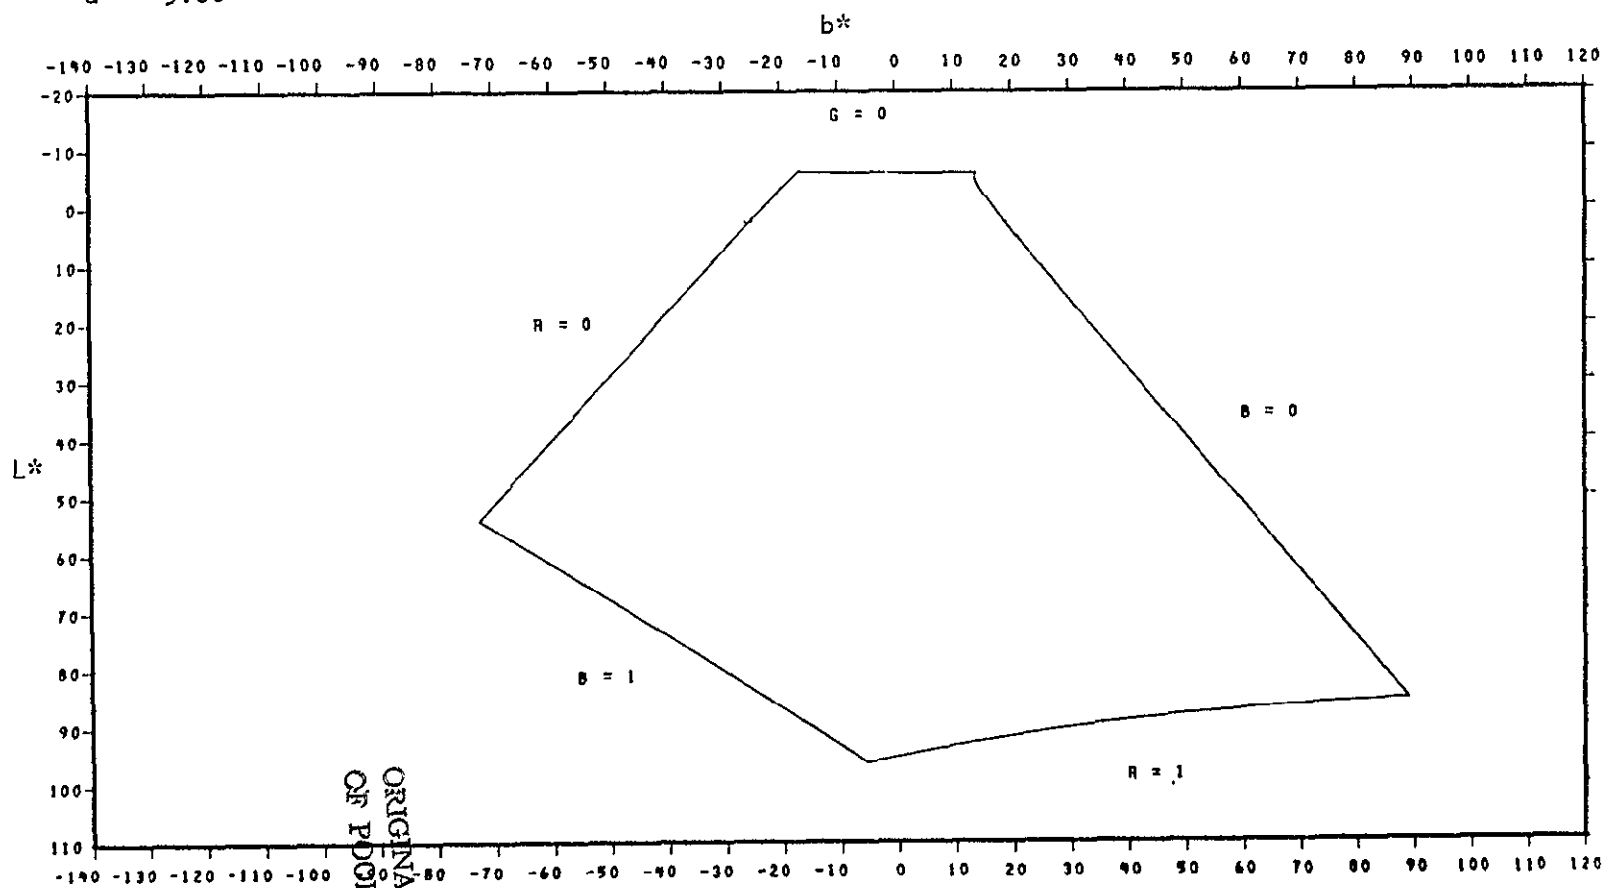

ORIGINAL PAGE IS
OF POOR QUALITY

Figure 1.— Continued.

$a^* = 10.00$

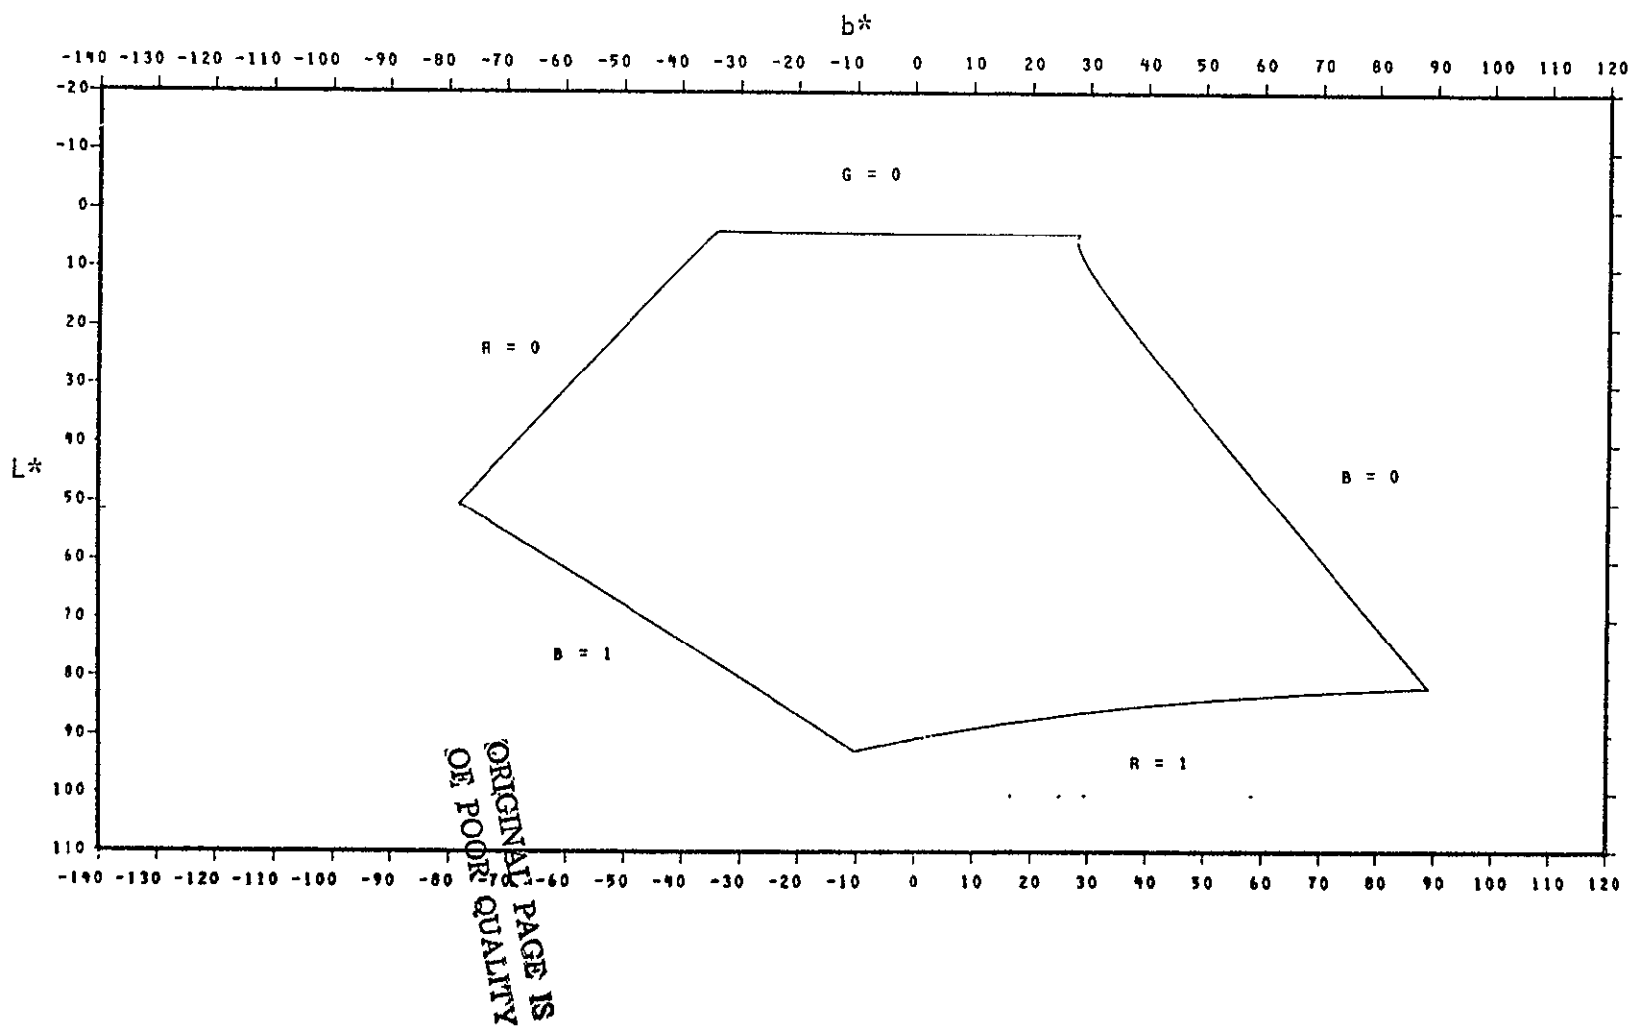


Figure 1.— Concluded.

product of the (L^*, a^*, b^*) space, sliced at $a^* = 10$, is shown in figure 2. Formulas used for calculating gun counts in figure 2 can be found in section 3.

Other UCS transformations exist in the literature (refs. 5, 6). These transformations might be considered in later research. The (L^*, a^*, b^*) space was chosen over those discussed in references 5 and 6 for the following reasons.

- a. The (L^*, a^*, b^*) space has been adopted by the CIE as the principal approximation to a true UCS for the object-color solid.
- b. Inversion from the (L^*, a^*, b^*) UCS approximation into the CIE (x, y, Y) system is mathematically tractable. According to MacAdam (ref. 7), the $(\mathcal{L}, j, g)$ system (ref. 5) is philosophically preferable to the (L^*, a^*, b^*) system for this application. However, there are some considerations, such as the incorporation of Semmelroth's (ref. 8) crispening factor, that create difficulties in using the $(\mathcal{L}, j, g)$ system.

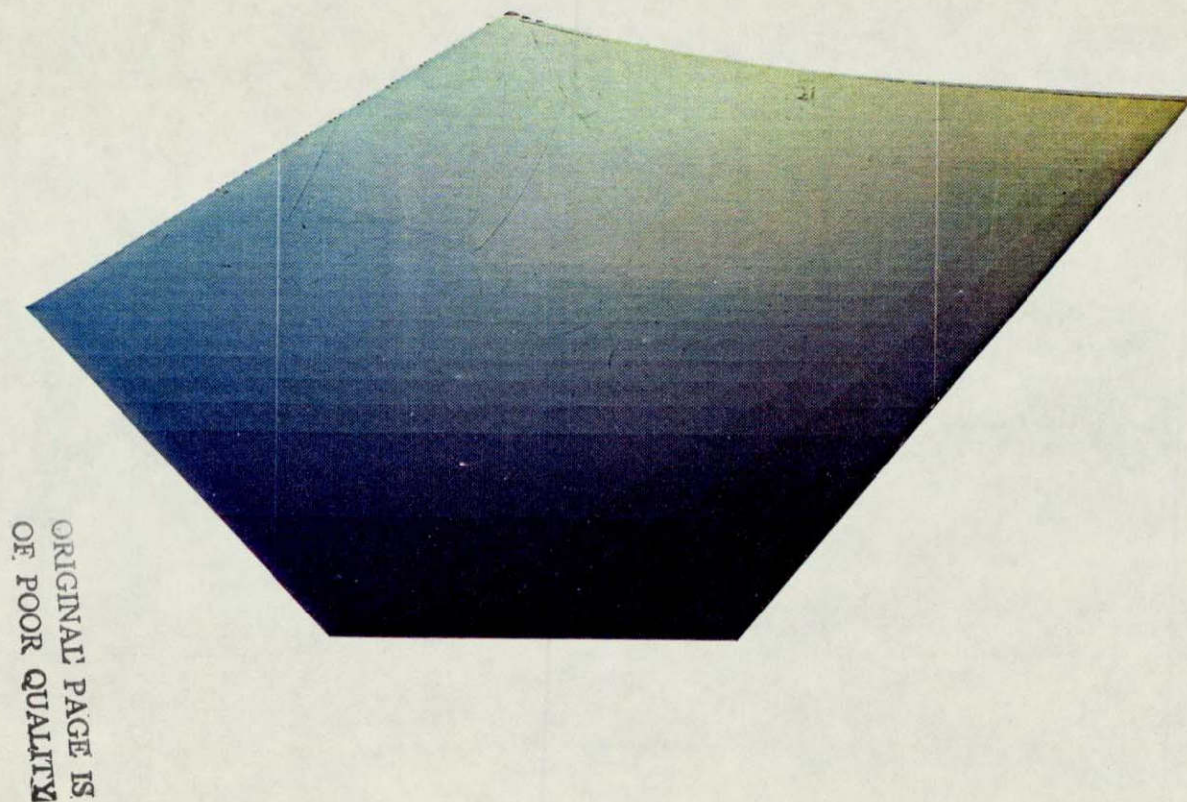


Figure 2.— A PFC product of the (L^*, a^*, b^*) space sliced at $a^* = 10$.

3. FORMULATION OF THE UCS ALGORITHM

In generating UCS imagery, the light table and film parameters are taken into account. The transformation from PFC counts to transmission (wavelength dependent) is regarded as stable. The primary colors considered in this study are red (R), green (G), and blue (B). This section is divided into three parts. The first part deals with calculating the primaries of light table and film chromaticities. The second part deals with fitting a prototype Landsat data structure into the (L^* , a^* , b^*) UCS space. The third part presents the algorithm that generates color gun counts from (L^* , a^* , b^*) values for PFC product along with four UCS images of a Large Area Crop Inventory Experiment (LACIE) segment.

3.1 COLORIMETRIC DESCRIPTION OF THE TRANSPARENCY GENERATION PROCESS

The PFC images a cathode-ray tube (CRT) through color filtration onto color reversal film, which is then developed. The CRT display is controlled by numerical input; for each color, the film density is very nearly linear with respect to input counts. The counts-to-density relationship is carefully maintained in exposing and developing the film, and the relationship is herein regarded as stable.

An approximation is made that the manner of addition of sequential images can be expressed in the form

$$X = \sum_i X_i \quad (4)$$

where X is the first tristimulus value and i is an index for the red, green, and blue PFC primaries. This also exists for Y and Z assuming that the film system produces the same final result as would be obtained by separation images projectively added. The approach avoids certain real-world problems such as masking (ref. 9). (The matter is further discussed in reference 10.) More elegant mathematics are available; therefore, a follow-on study to investigate the effect of more highly precise work is proposed.

Measurements of the spectral radiance of the light table and of the wavelength-dependent transmission of film patches from full activation of each primary in the PFC were made. These measurements were reduced to the CIE chromaticity coordinates of the four sources.

<u>Parameter</u>	<u>x</u>	<u>y</u>
Light table	0.3684	0.4131
Red	.5529	.4458
Green	.3603	.5730
Blue	.1919	.1540

Under the usual definition (ref. 4) for the reference white, Y, for the light table, was taken to be 100. By requiring that the primaries be added at full activation to give the light table's own illumination, one finds that the tristimulus values for the primaries (fully activated) and for the light table are

$$\begin{pmatrix} X_0 & X_R & X_G & X_B \\ Y_0 & Y_R & Y_G & Y_B \\ Z_0 & Z_R & Z_G & Z_B \end{pmatrix} = \begin{pmatrix} 89.18 & 39.74 & 35.90 & 13.53 \\ 100.00 & 32.04 & 57.09 & 10.86 \\ 52.89 & .09343 & 6.646 & 46.13 \end{pmatrix} \quad (5)$$

The activation a_i of the i th primary is defined as the ratio of the transmission (measured straddling the peak wavelength) at a given input to the transmission produced by full activation. The tristimulus values produced by the vector activation $\underline{a}$ are then

$$\begin{pmatrix} X \\ Y \\ Z \end{pmatrix} = \begin{pmatrix} X_R & X_G & X_B \\ Y_R & Y_G & Y_B \\ Z_R & Z_G & Z_B \end{pmatrix} \begin{pmatrix} a_R \\ a_G \\ a_B \end{pmatrix} \quad (6)$$

with the 3-by-3 matrix elements taken from equation (5). Conversely, to produce a given tristimulus value vector, the activation vector

$$\begin{pmatrix} a_R \\ a_G \\ a_B \end{pmatrix} = \frac{1}{100} \begin{pmatrix} 4.966 & -3.037 & -0.7418 \\ -2.864 & 3.552 & .003732 \\ .4025 & -.5056 & 2.169 \end{pmatrix} \begin{pmatrix} X \\ Y \\ Z \end{pmatrix} \quad (7)$$

is required. The details of the counts-to-activation relationship derive from the definition

$$D = -\log_{10} \tau \quad (8)$$

of the relationship between density, D , and transmission, τ . As mentioned earlier, the density is essentially linear with respect to input counts; therefore, the relationship is fully determined from the following table.

	<u>Red</u>		<u>Green</u>		<u>Blue</u>	
Counts	0	255	0	255	0	255
Density	2.52	0.753	2.182	0.306	2.513	0.694

With all the above information, one can pass in either direction between a primary-counts vector and a tristimulus values vector.

3.2 FITTING LANDSAT DATA SPACE INTO THE UCS SPACE

Two multitemporal LACIE segments were used to generate scatter plots. The Landsat data in each unitemporal segment were rotated using the Kauth transformation (ref. 11) with a bias. The Kauth brightness K_b , Kauth greenness K_g , and Kauth yellowness K_y biases were taken to be 0, 30, and 53 counts, respectively. The scatter plots of Landsat data in the (K_b, K_g) space for segments 1618 and 1645 are shown in figure 3. Figure 4 shows scatter plots of the data in the (K_b, K_y) space. The scatter plots in figure 3 were used to produce an overall Landsat (K_b, K_g) data space scatter envelope. This data space scatter envelope contains the raw K_b and K_g counts; i.e., the bias was removed and was fitted into the (L^*, b^*) UCS space as shown in figure 5. The UCS space, sliced at $a^* = 10$ (figure 2), was used because it had the best shape and was near-centrally located.

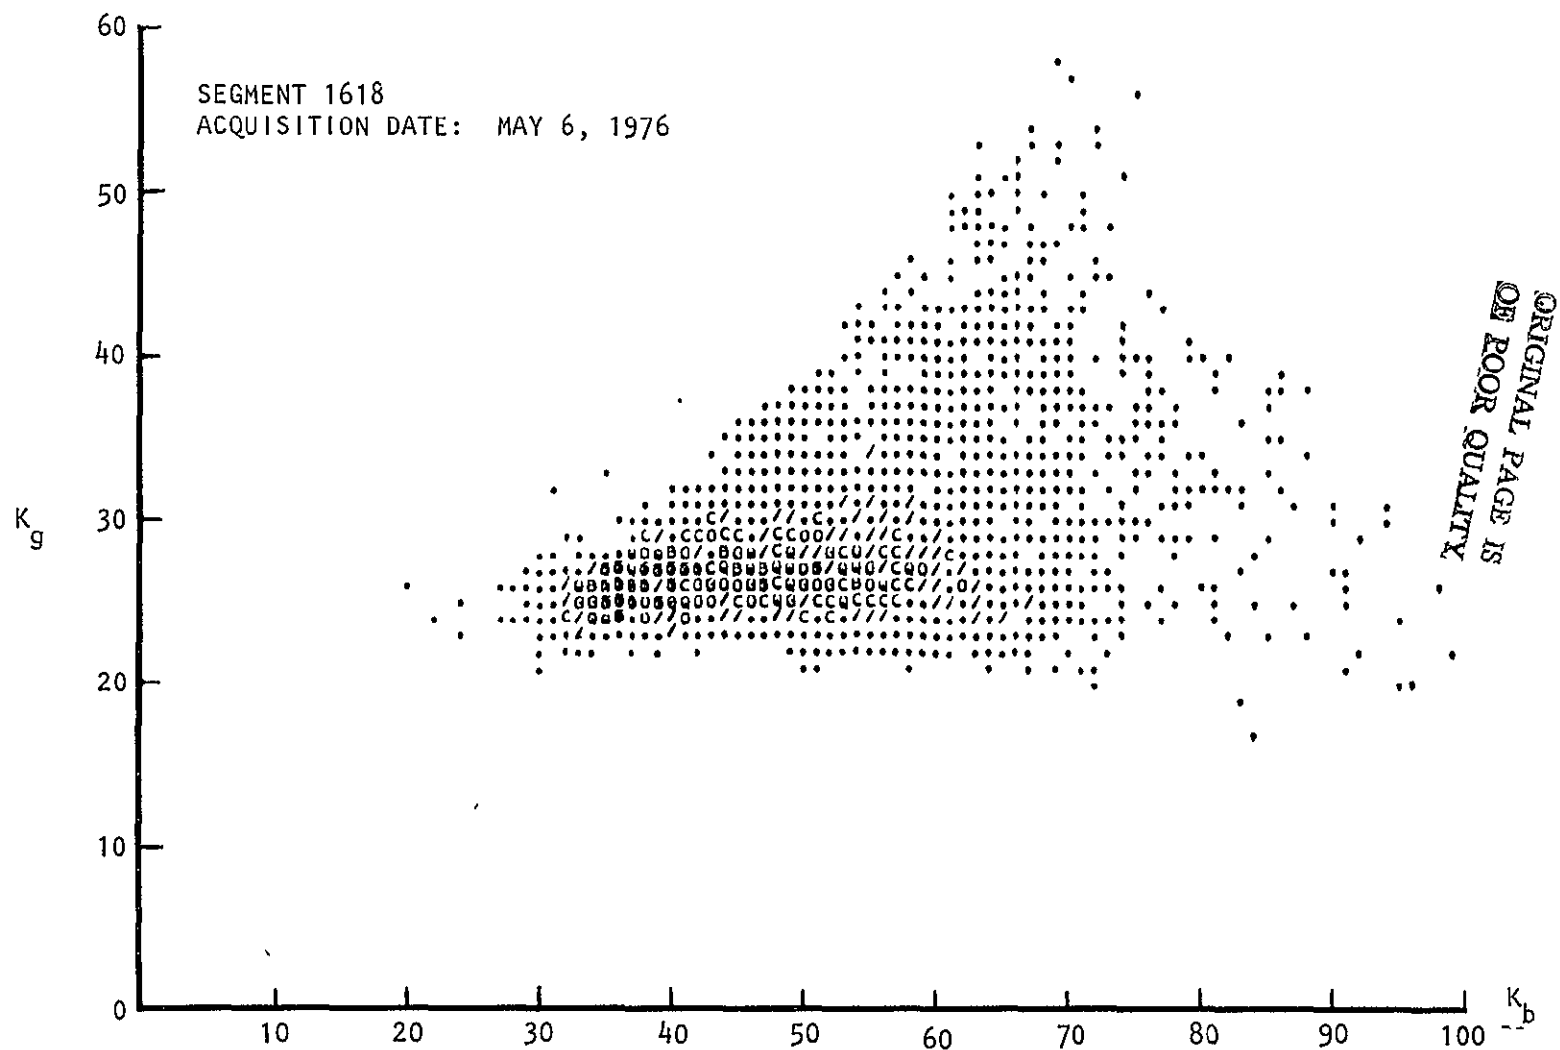


Figure 3.— Scatter plots of Landsat data in the (K_b, K_g) space for LACIE segments 1618 and 1645.


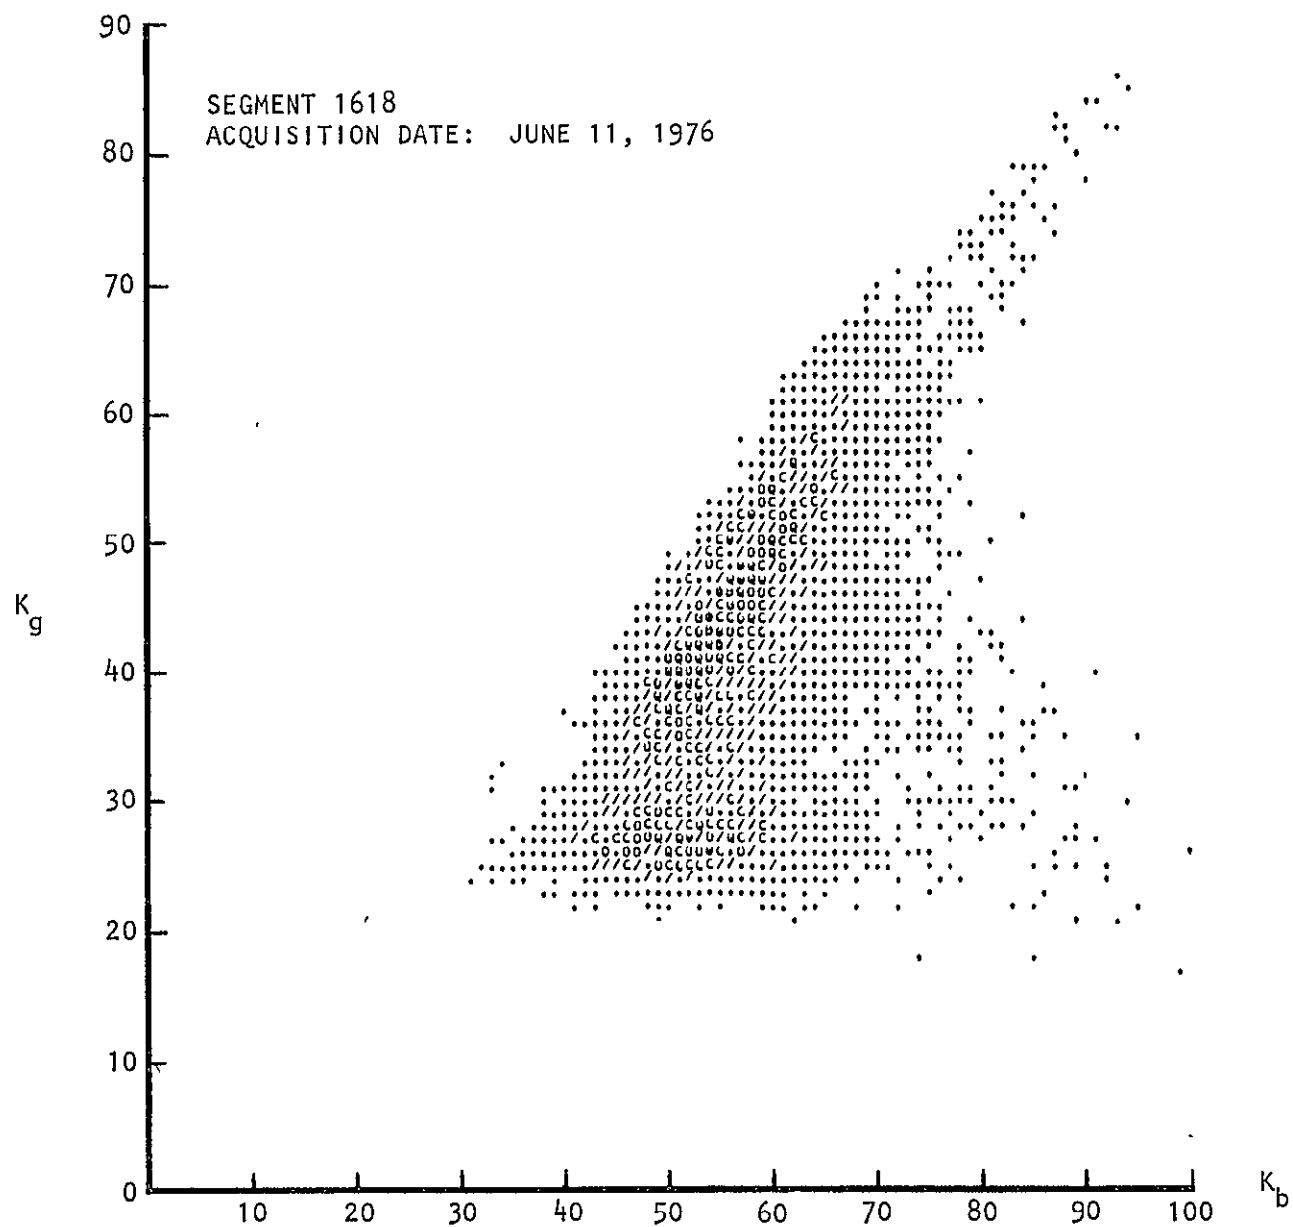


Figure 3.— Continued.

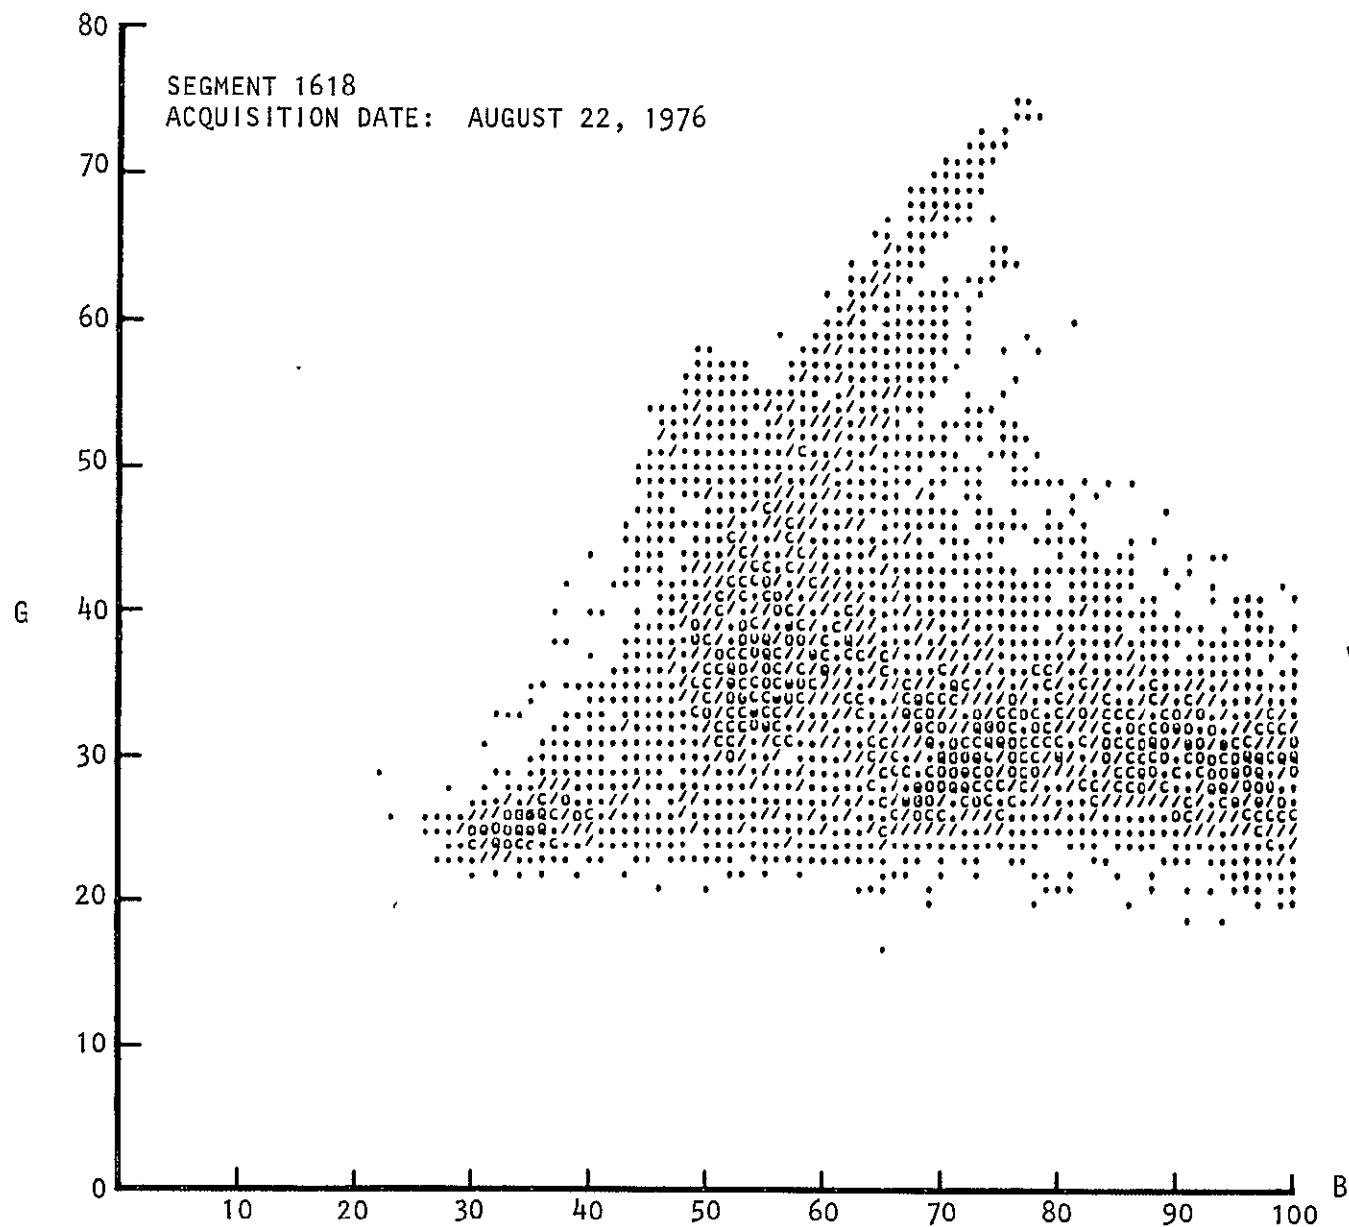

ORIGINAL PAGE IS
OF POOR QUALITY

Figure 3.— Continued.

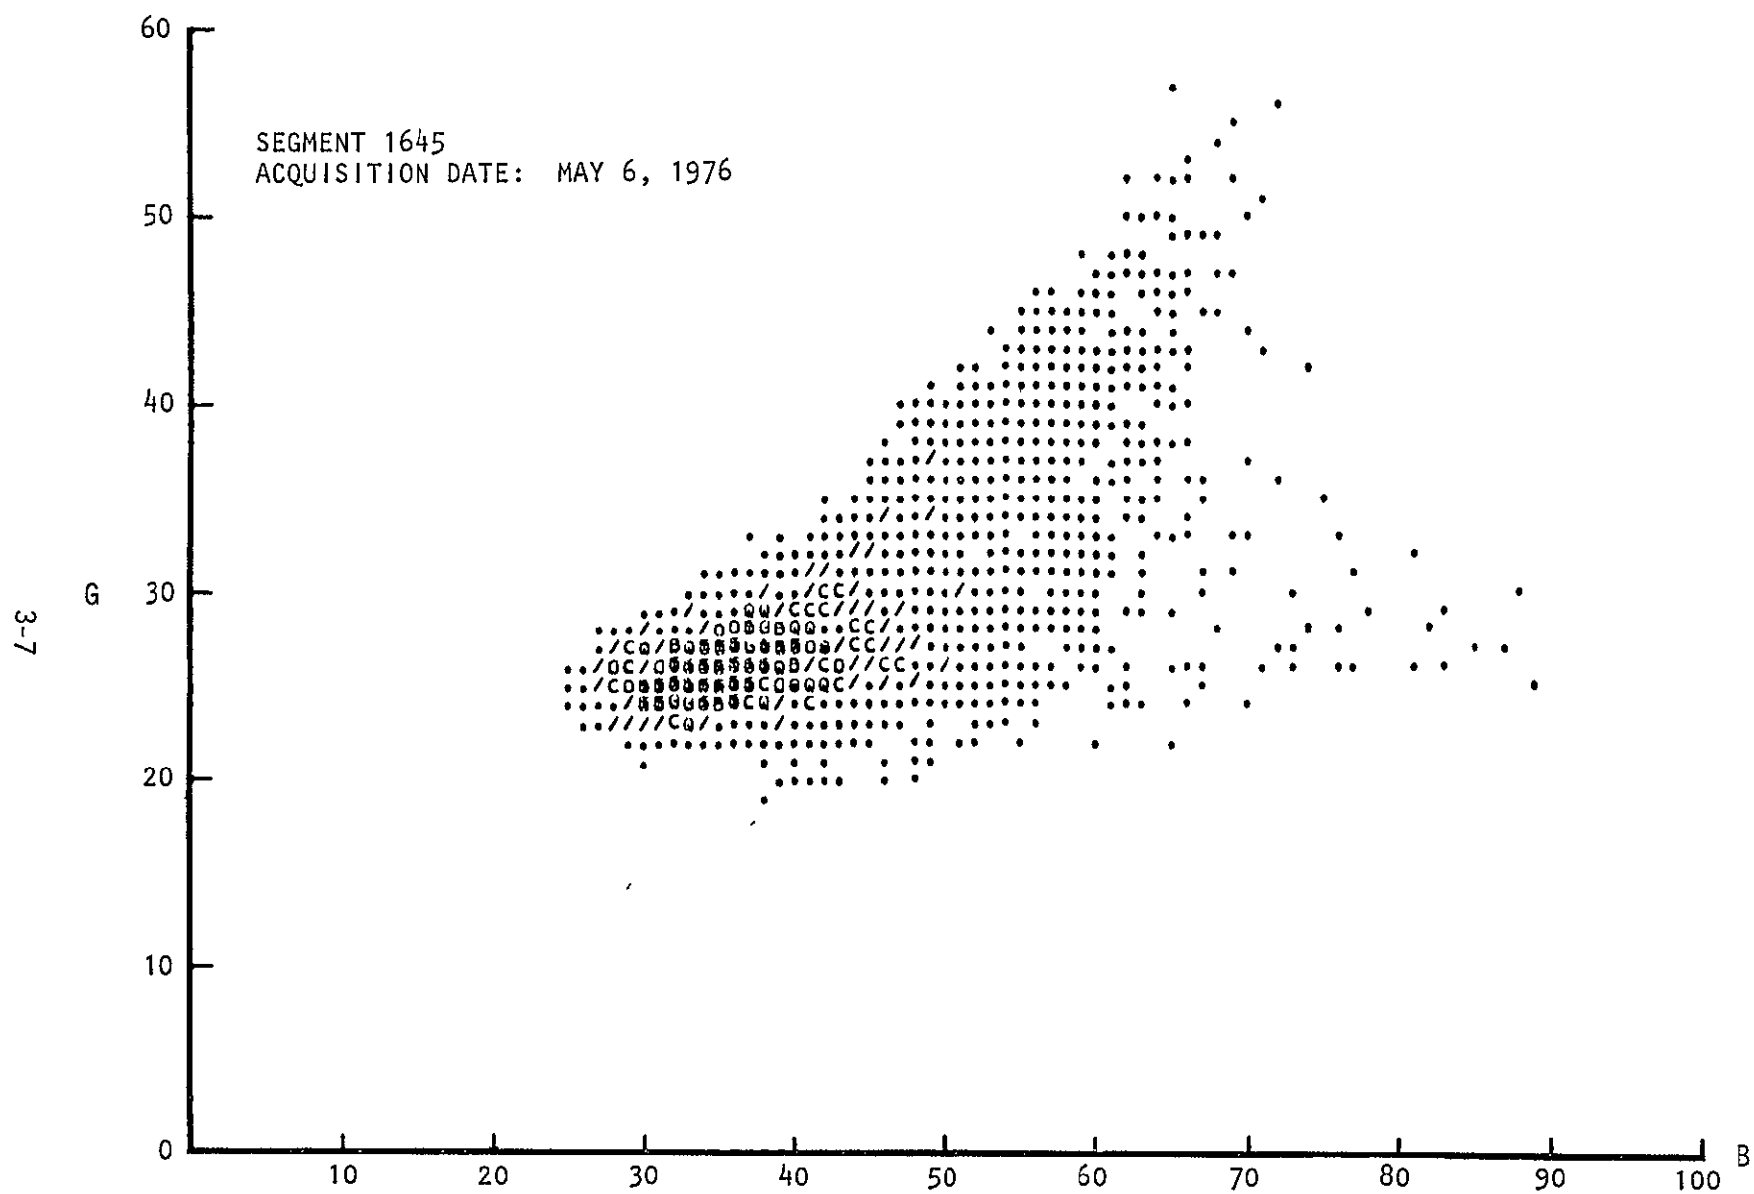


Figure 3.— Continued.


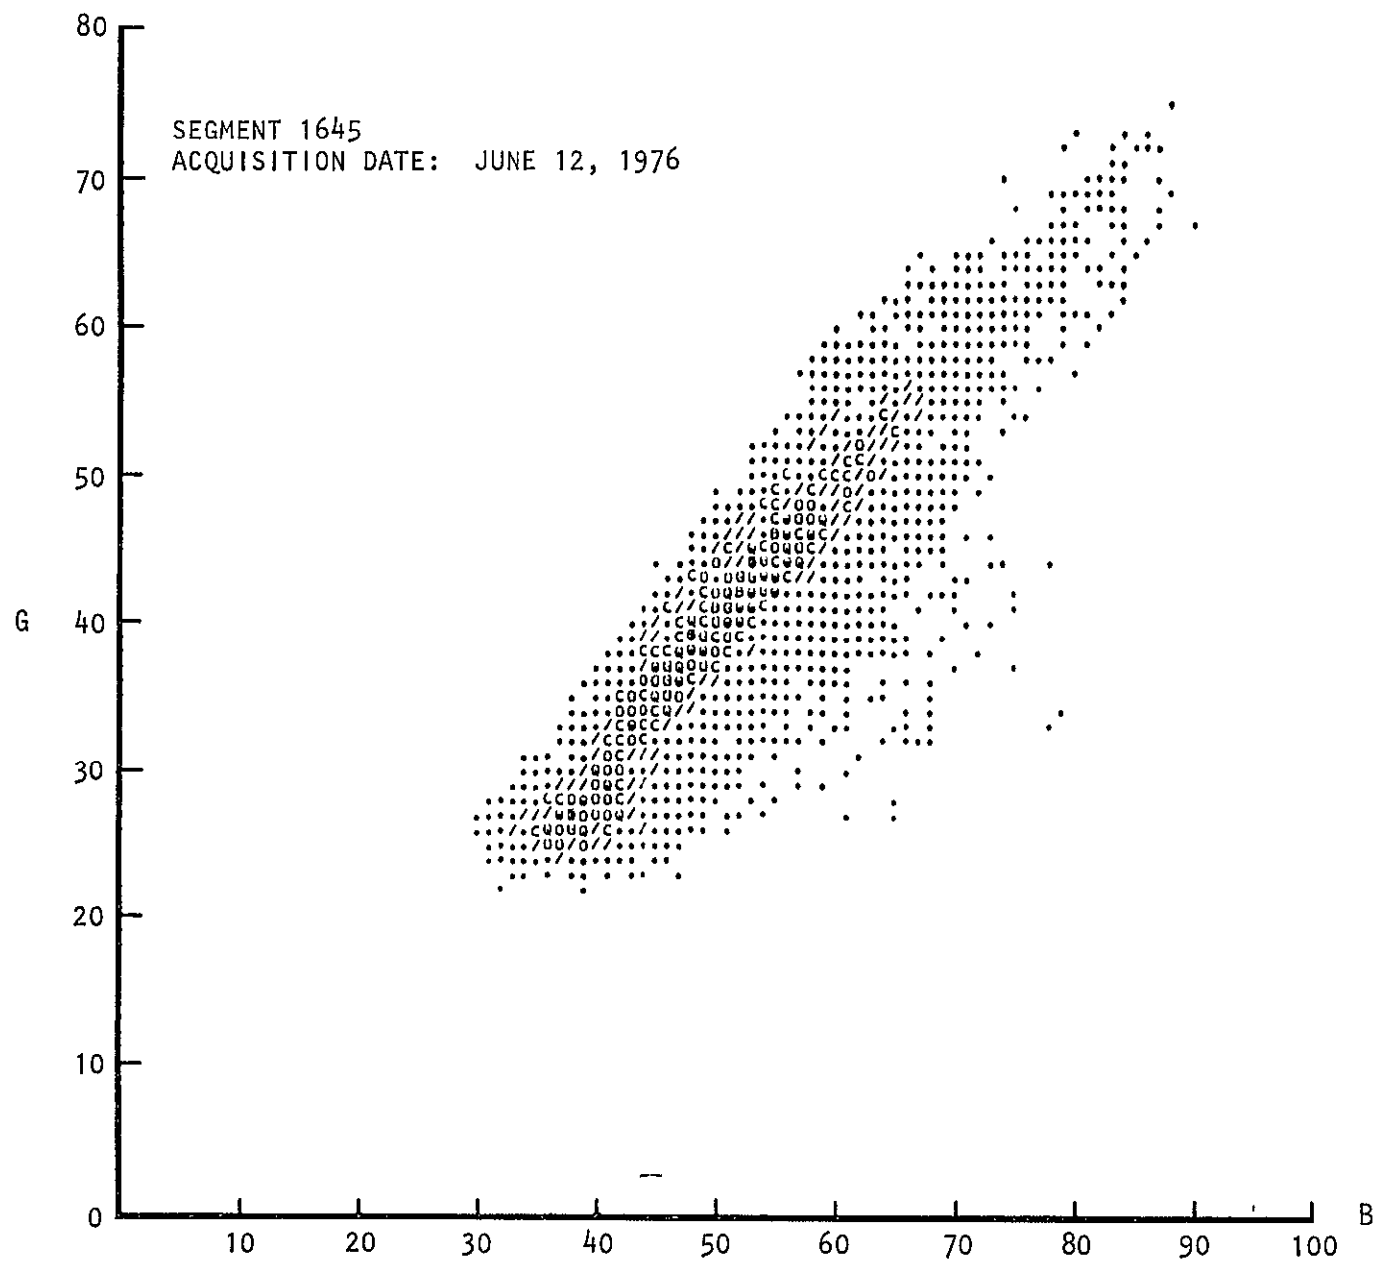


Figure 3.— Continued.

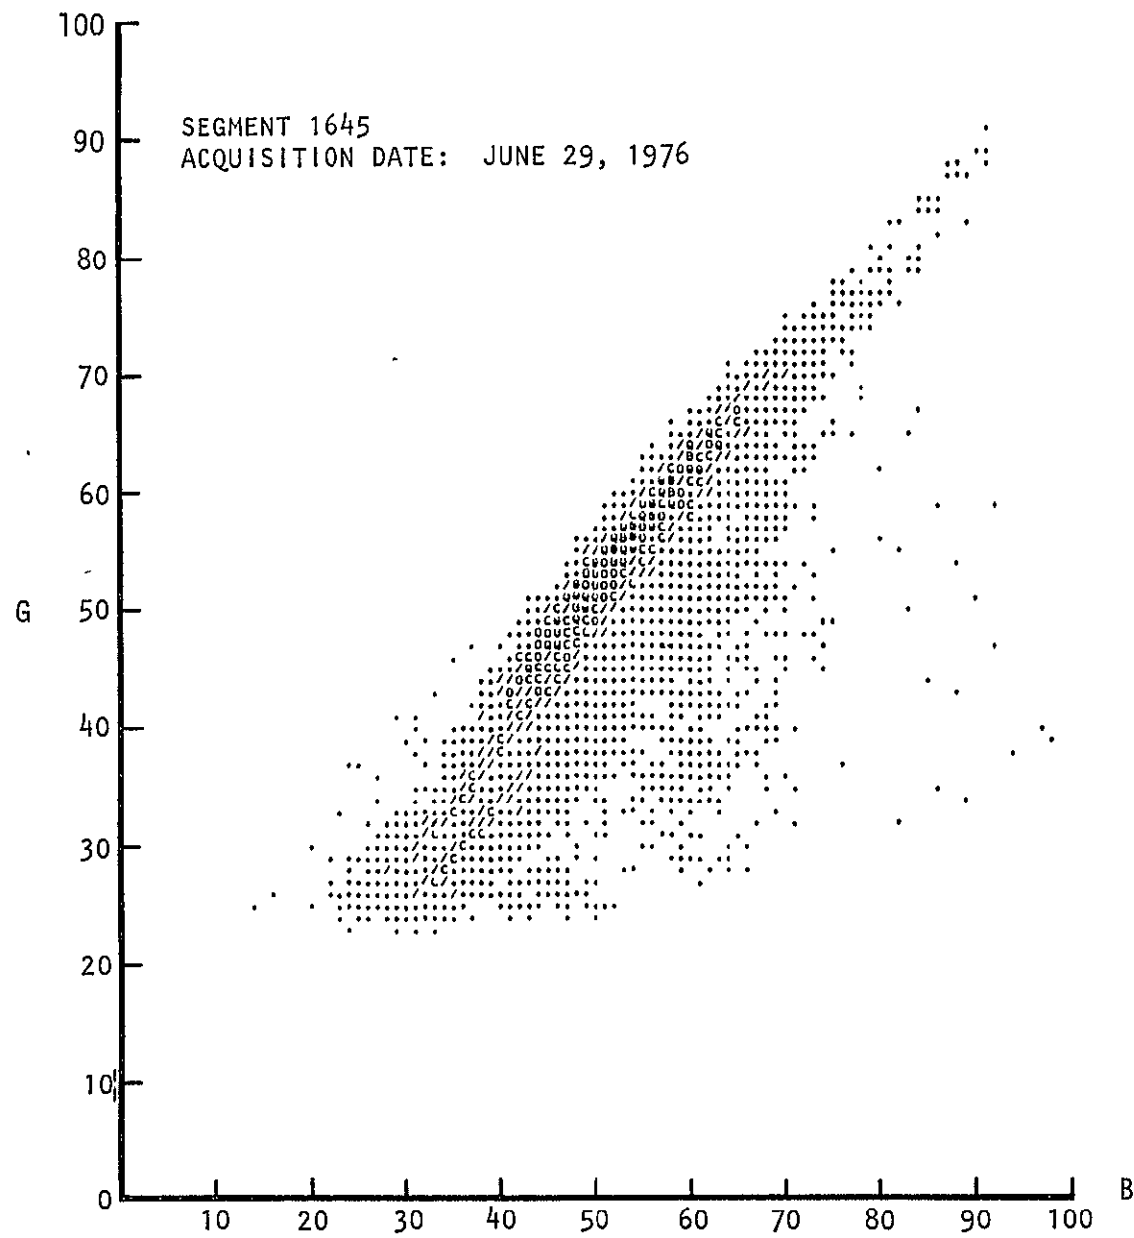

ORIGINAL PAGE IS
OF POOR QUALITY

Figure 3.— Continued.

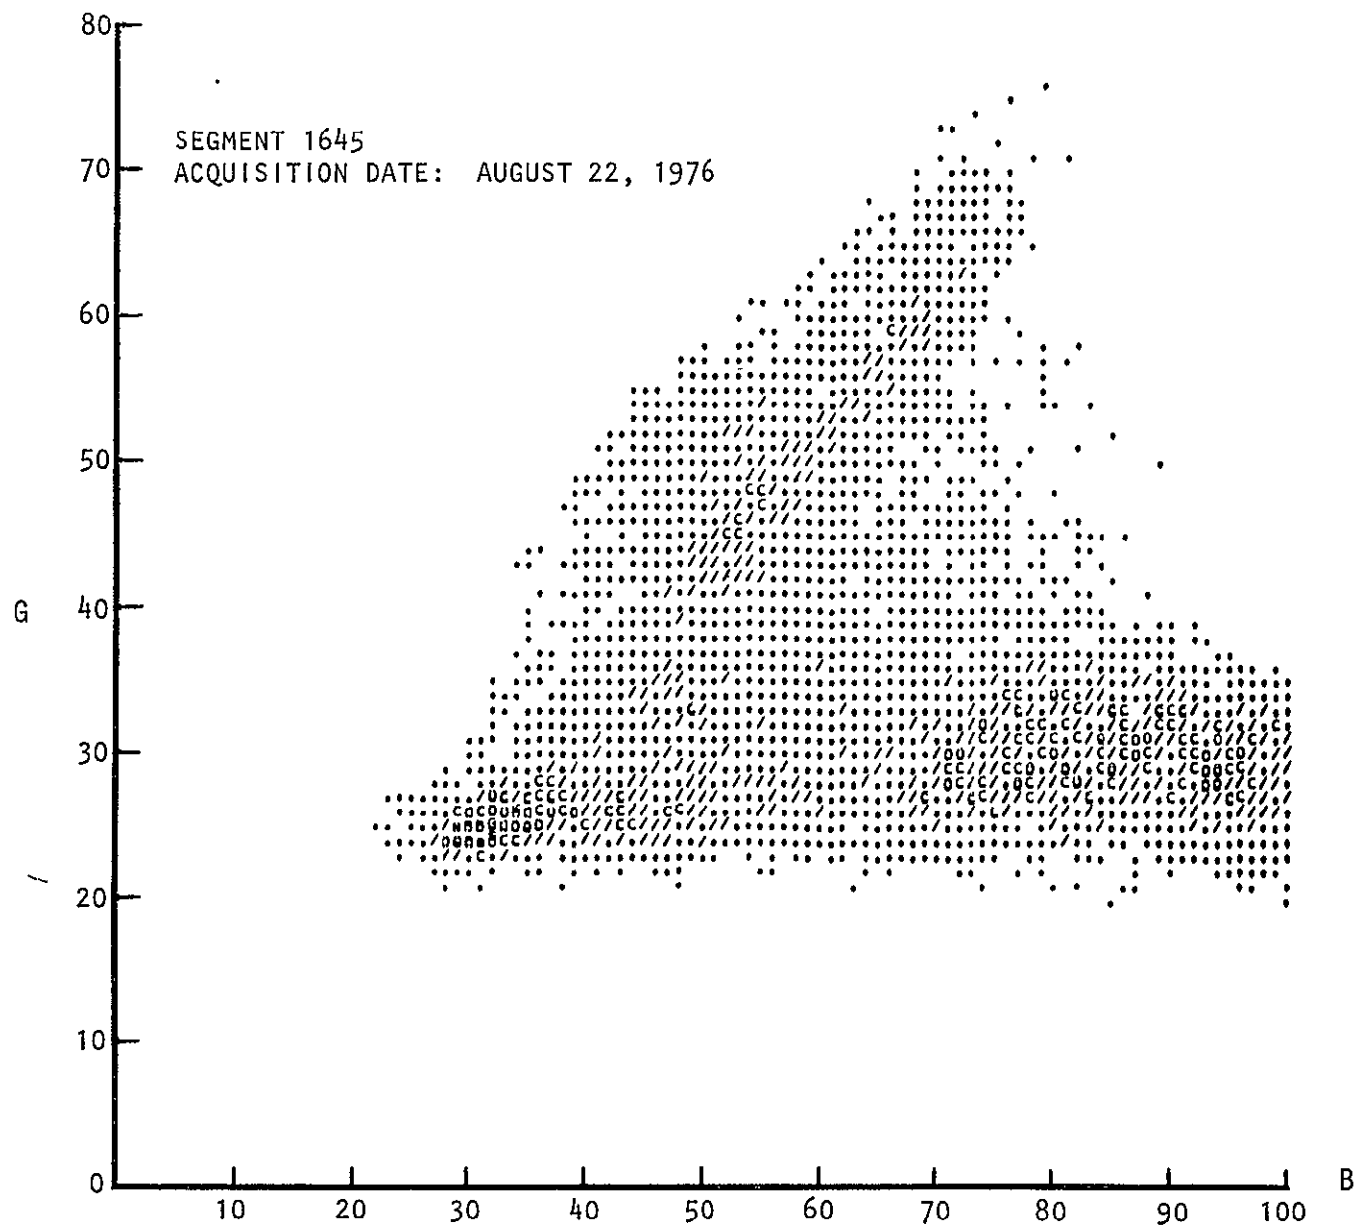


Figure 3.— Concluded.

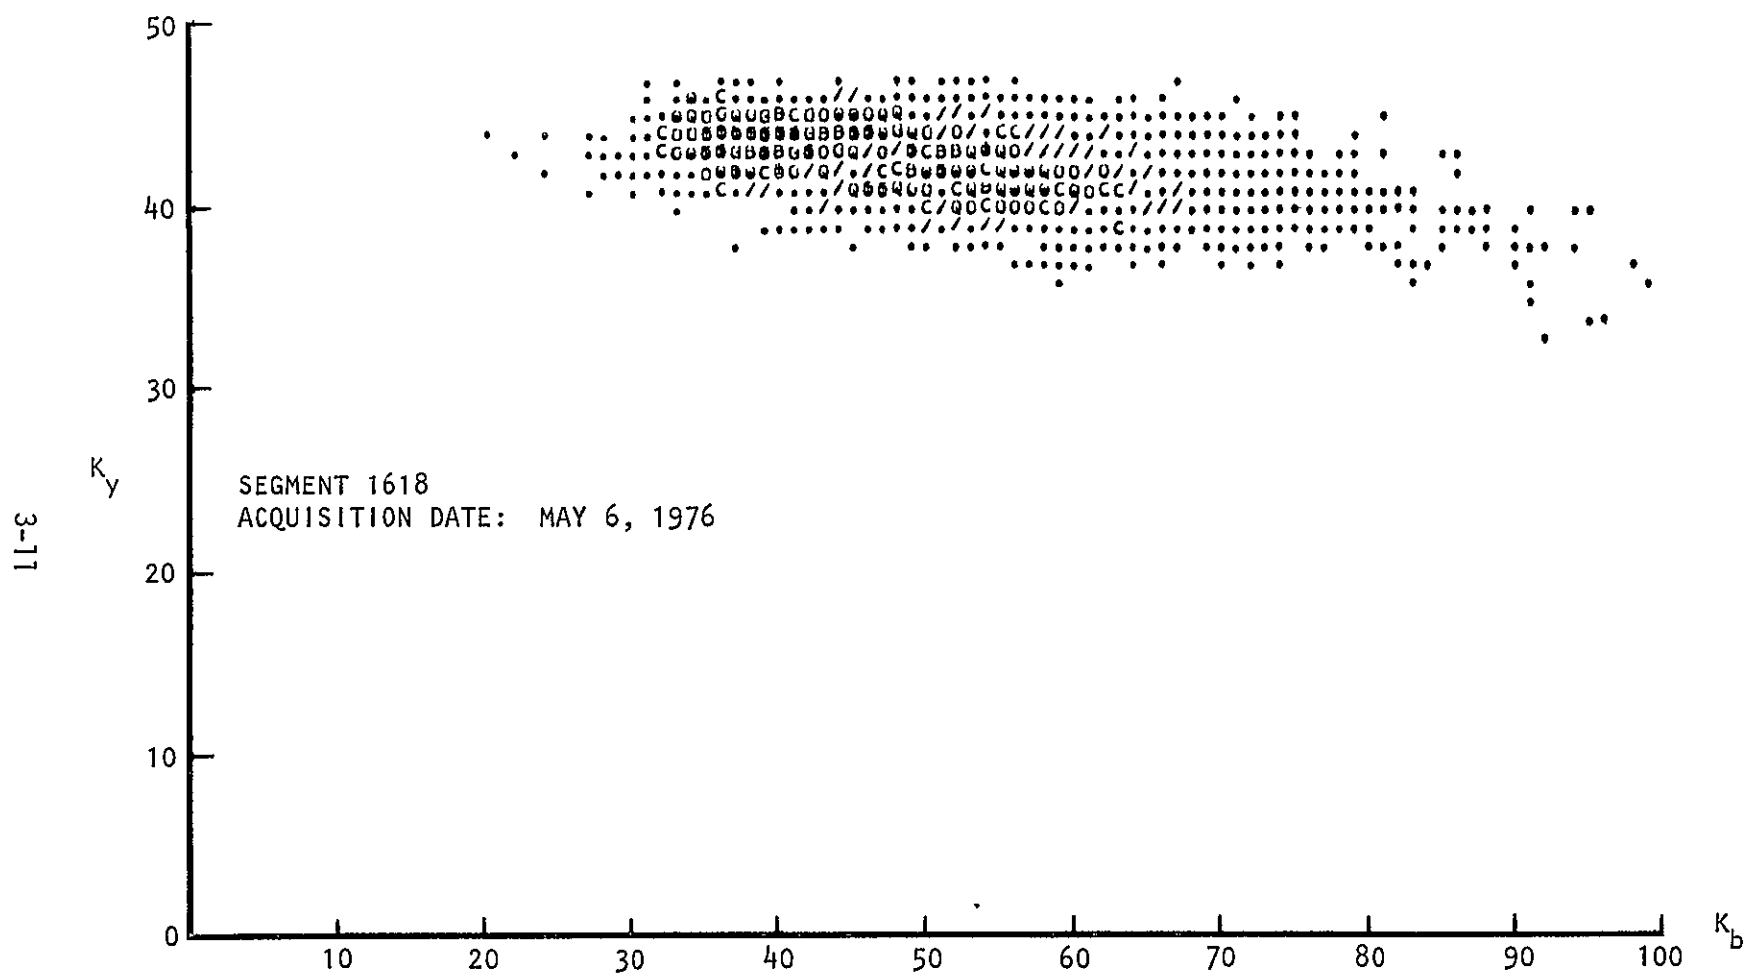


Figure 4.— Scatter plots of Landsat data in the (K_b, K_y) space for LACIE segments 1618 and 1645.

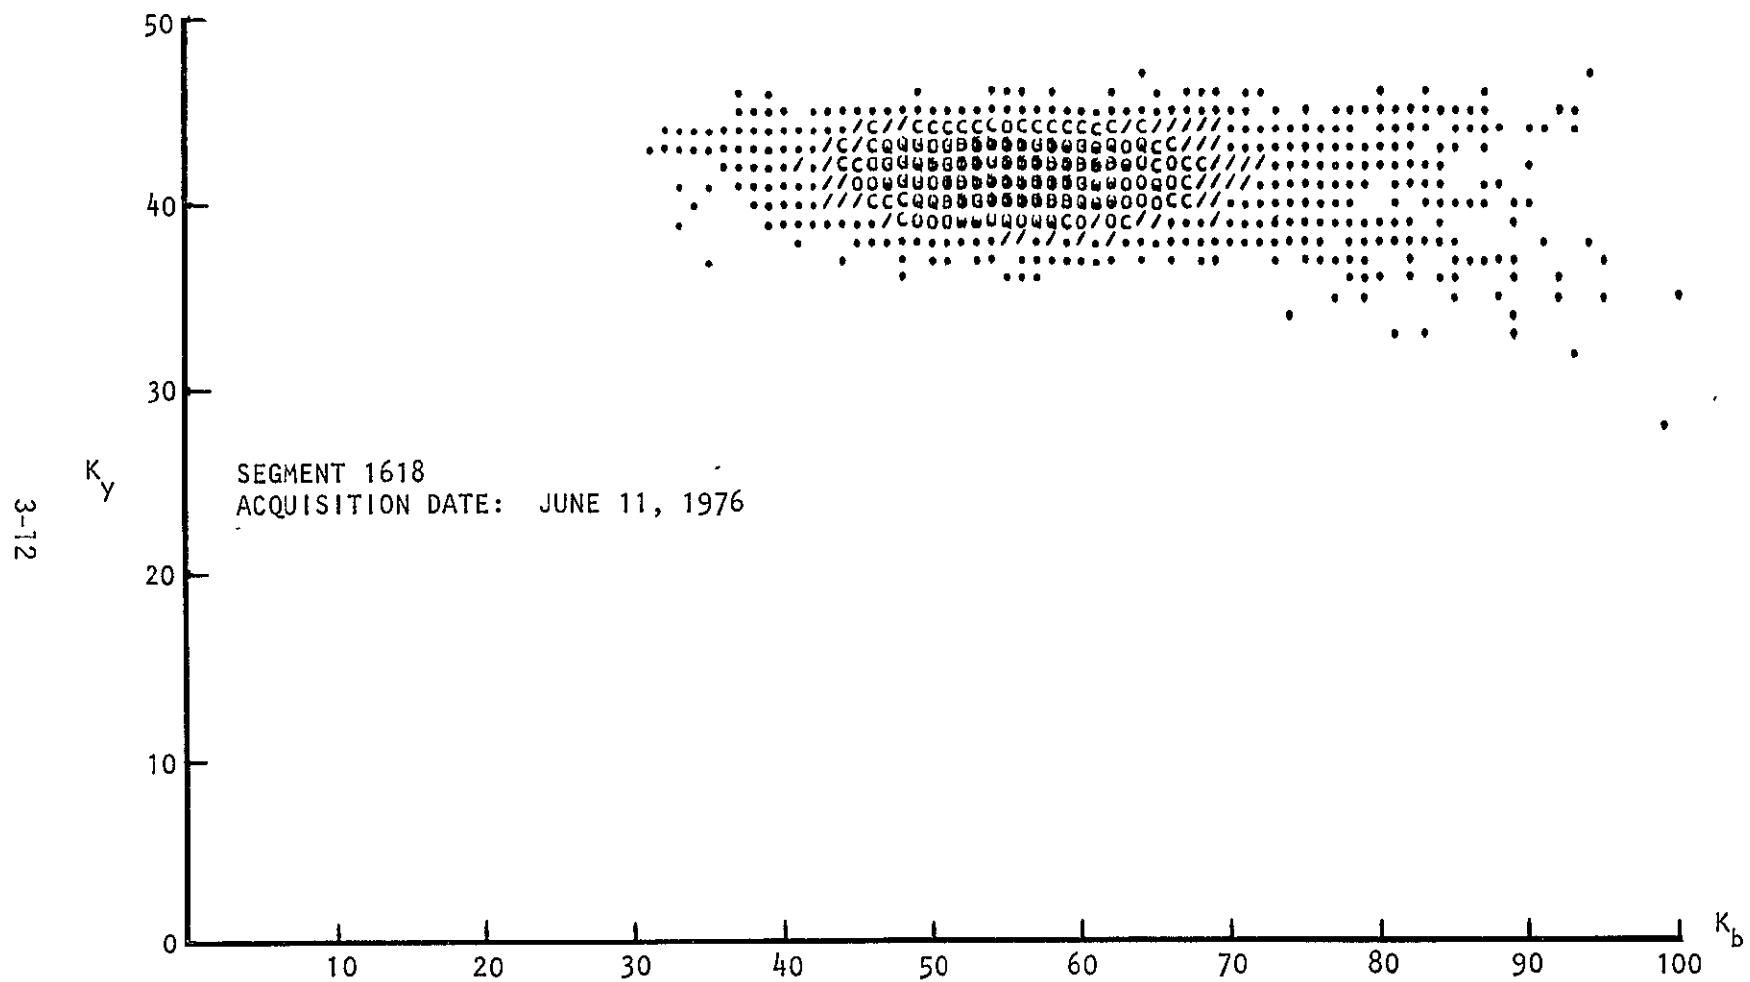


Figure 4.— Continued.

3-13

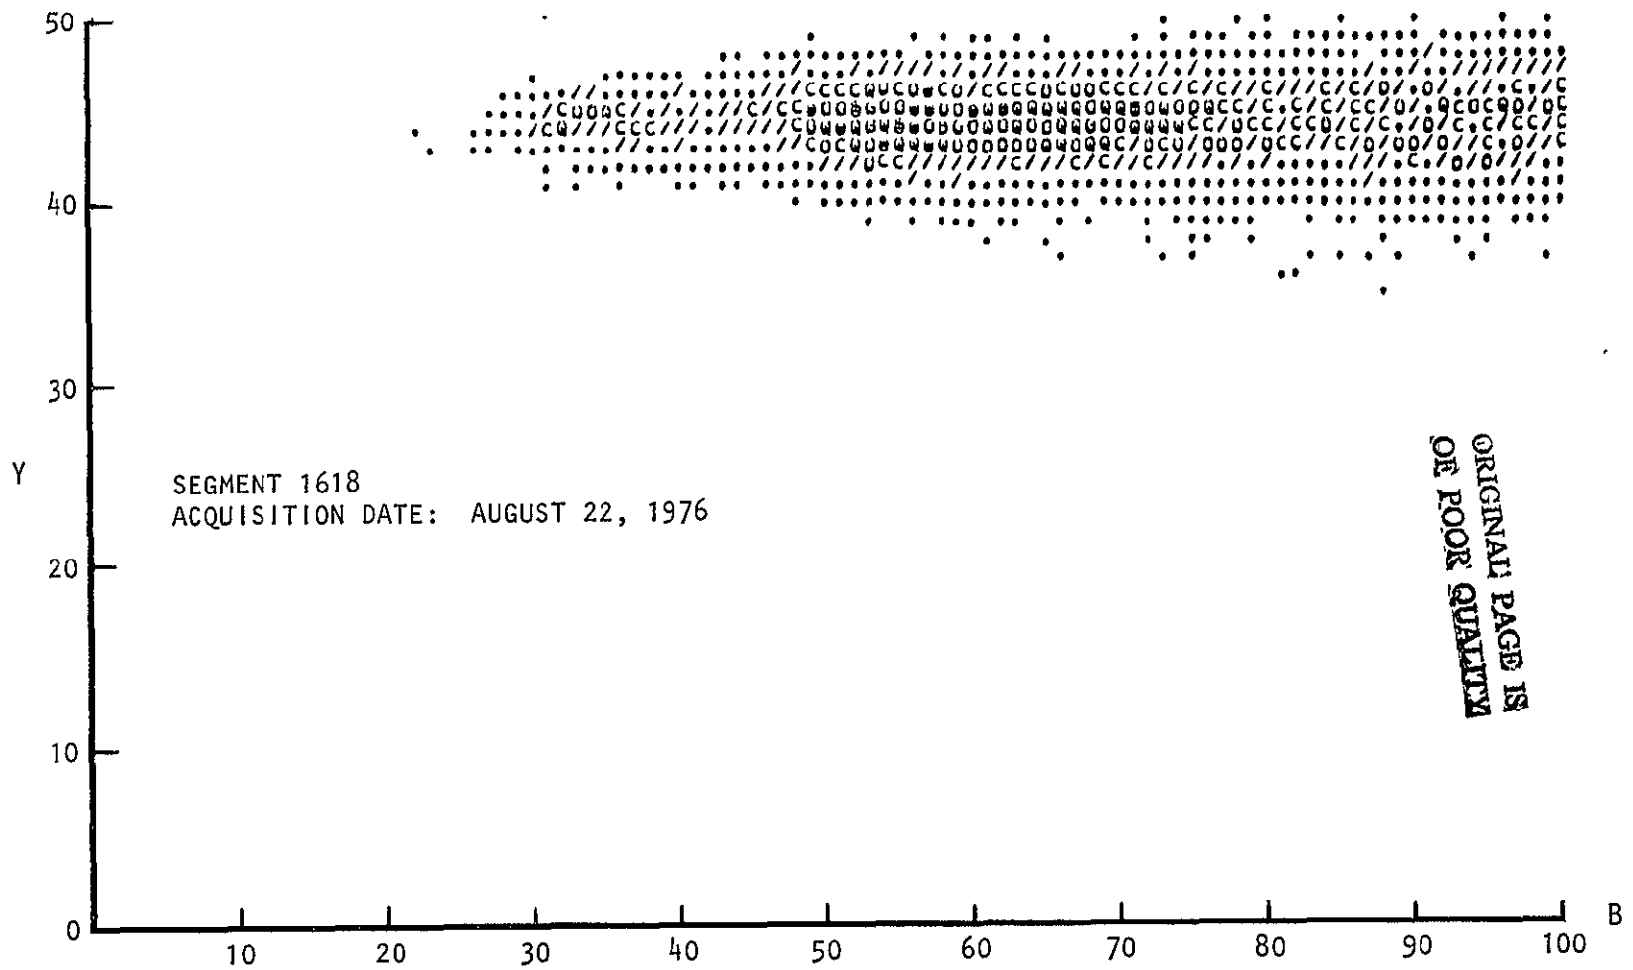


Figure 4.— Continued.

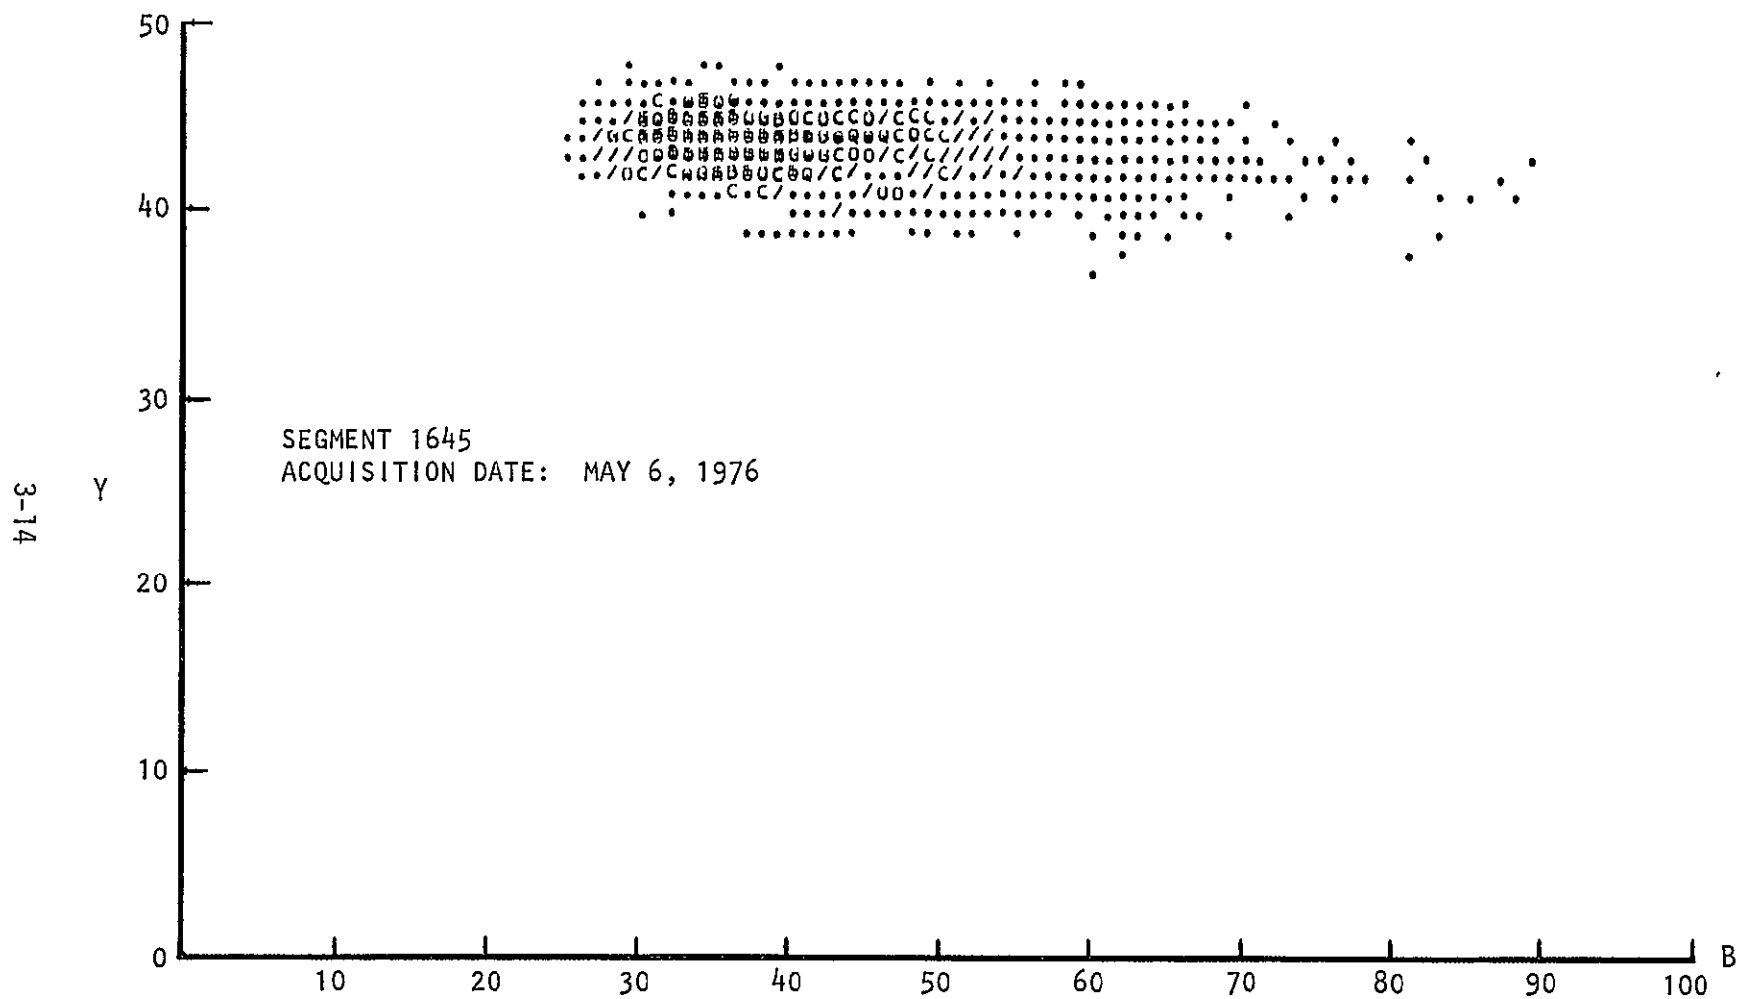


Figure 4.— Continued.

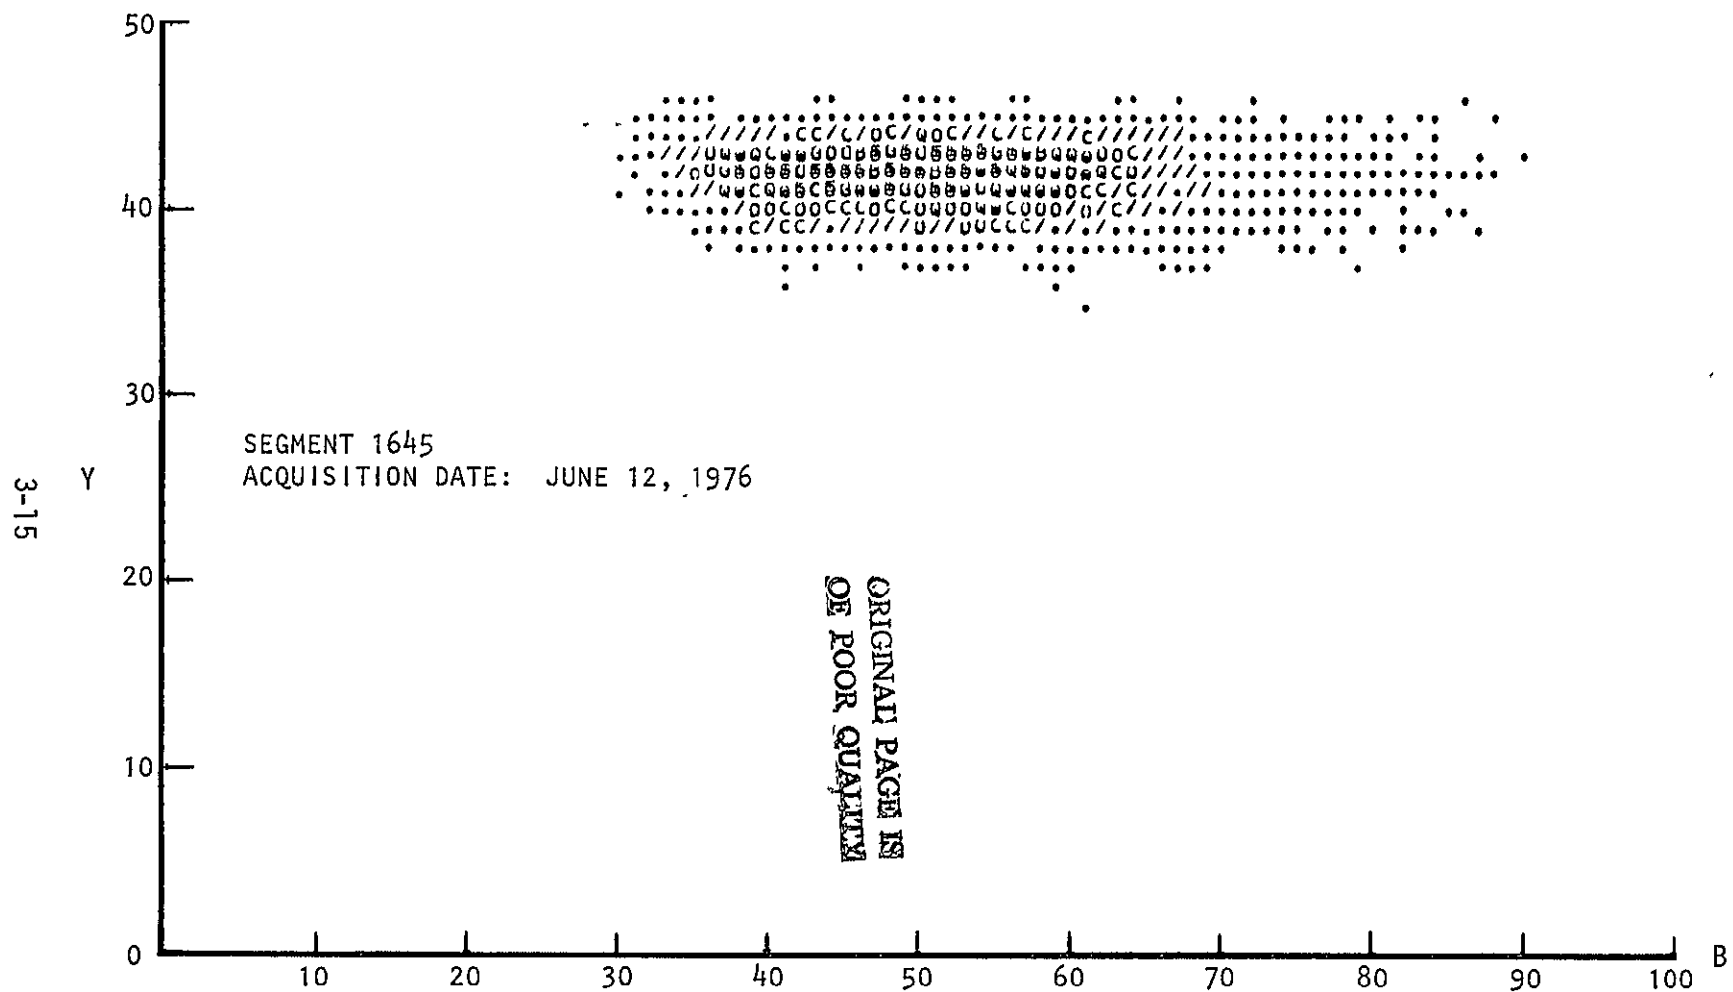


Figure 4.— Continued.

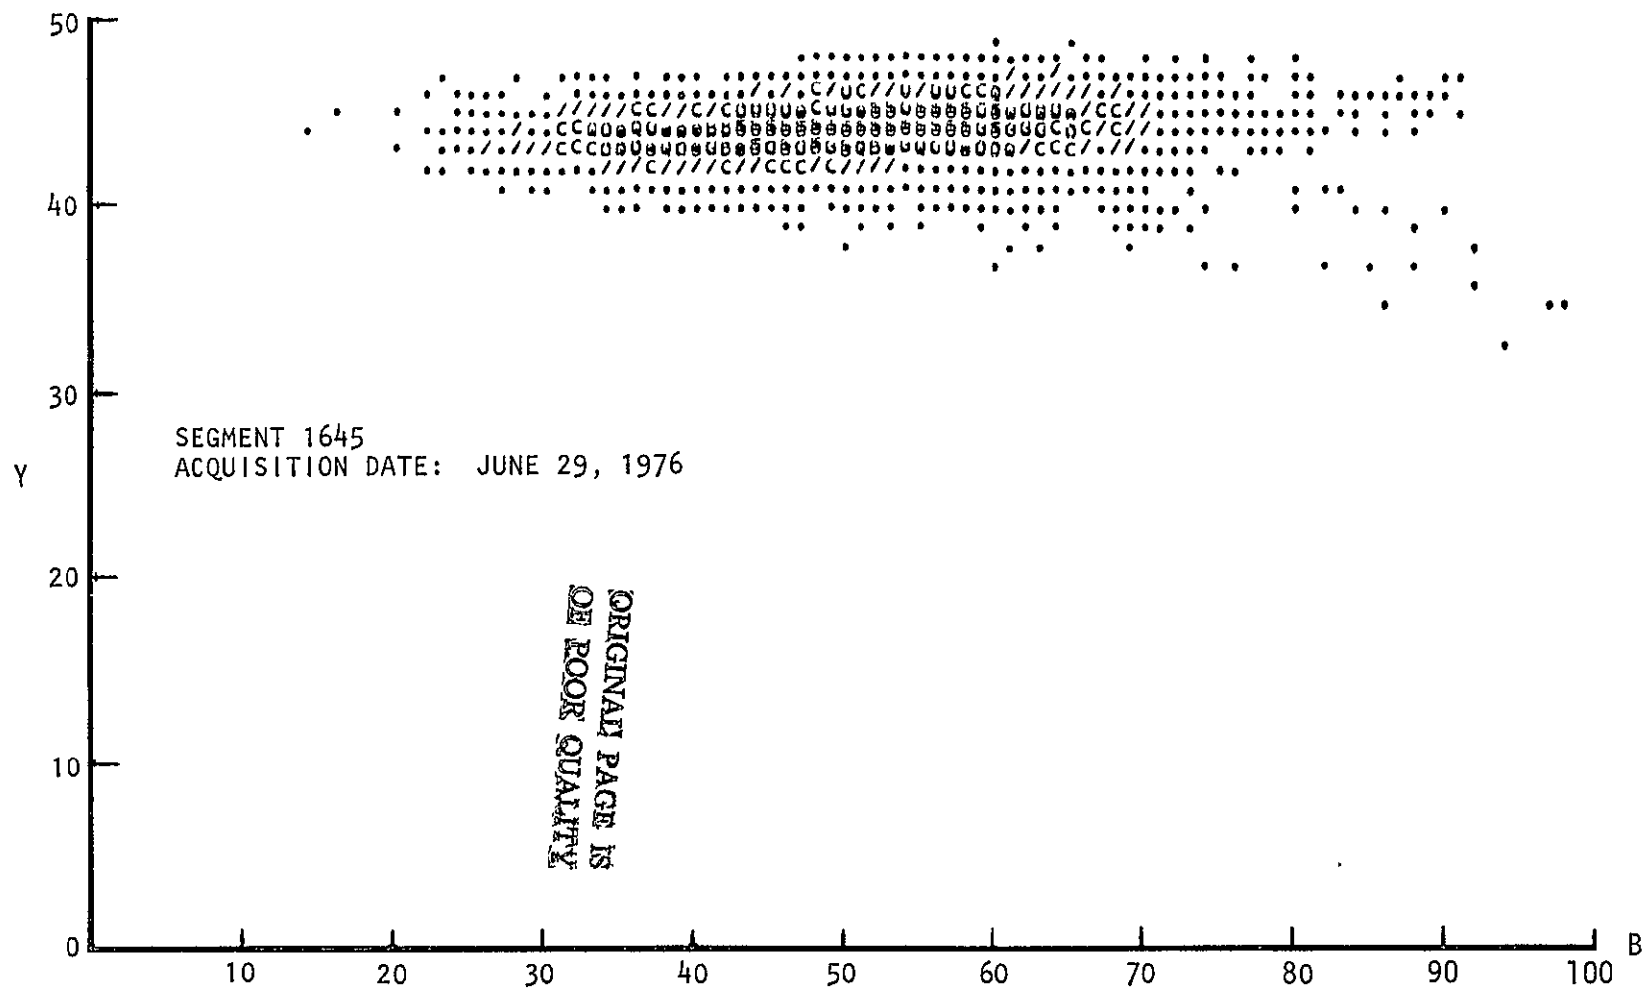


Figure 4.— Continued.

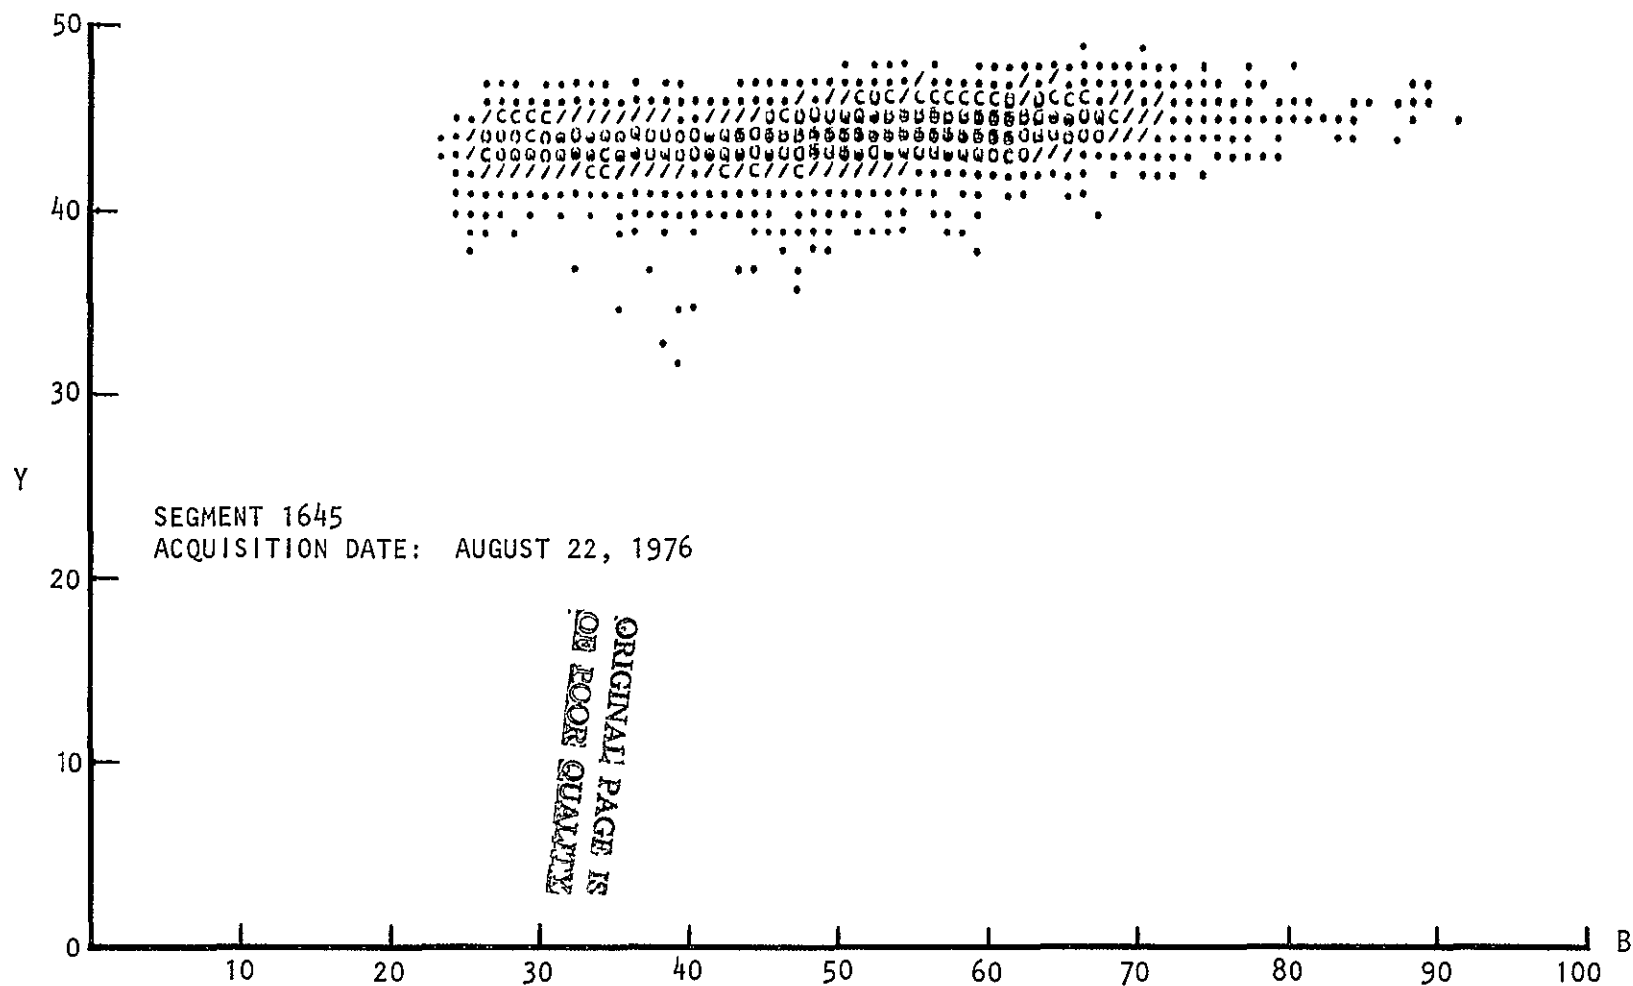


Figure 4.— Concluded.

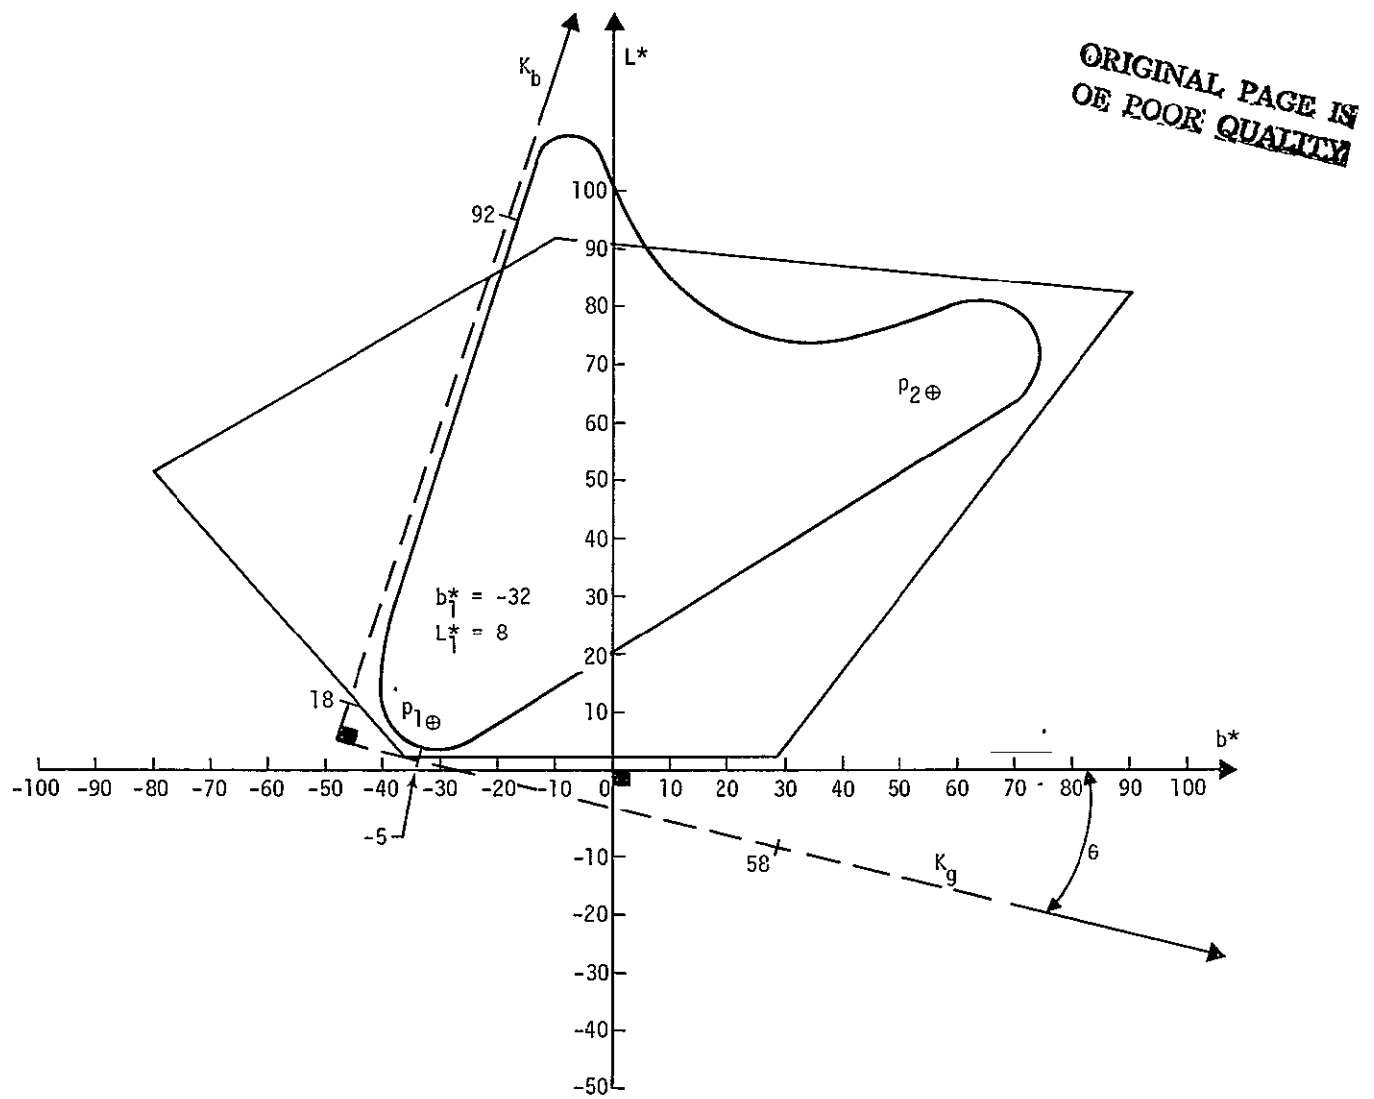


Figure 5.— Fitting Landsat (K_b , K_g) data space scatter envelope into the (L^* , b^*) UCS space sliced at $a^* = 10$.

The Landsat K_y is taken parallel to the a^* dimension of the UCS space. Using figure 5 and analyzing K_g and K_b into two components along b^* and L^* yields:

$$L^* = S(K_g \sin \theta + K_b \cos \theta) + A_3 \quad (9)$$

$$b^* = S(K_g \cos \theta - K_b \sin \theta) + A_6 \quad (10)$$

where S is a scale factor, and A_3 and A_6 are biases. The two points p_1 and p_2 shown in figure 5 were used to calculate θ , S , A_3 , and A_6 in equations (9) and (10). Let $\eta = \sin \theta$; substituting p_1 and p_2 into equations (9) and (10) yields:

$$(L_1^* - L_2^*) = S\eta(K_{g1} - K_{g2}) + S\sqrt{1 - \eta^2}(K_{b1} - K_{b2}) \quad (11)$$

$$(b_1^* - b_2^*) = S\sqrt{1 - \eta^2}(K_{g1} - K_{g2}) + S\eta(K_{b1} - K_{b2}) \quad (12)$$

Using equations (11) and (12), θ is given by:

$$\theta = \tan^{-1}\left(\frac{\eta}{\sqrt{1 - \eta^2}}\right) = \tan^{-1}\left[\frac{(L_1^* - L_2^*)(K_{g1} - K_{g2}) - (b_1^* - b_2^*)(K_{b1} - K_{b2})}{(b_1^* - b_2^*)(K_{g1} - K_{g2}) + (L_1^* - L_2^*)(K_{b1} - K_{b2})}\right] \quad (13)$$

The scale factor S and the biases A_3 and A_6 are given by:

$$S = \frac{L_1^* - L_2^*}{\sin \theta (K_{g1} - K_{g2}) + \cos \theta (K_{b1} - K_{b2})} \quad (14)$$

$$A_3 = L_1^* - S(K_{g1} \sin \theta + K_{b1} \cos \theta) \quad (15)$$

$$A_6 = b_1^* + S(K_{b1} \sin \theta - K_{g1} \cos \theta) \quad (16)$$

The a^* dimension of the UCS space is given by:

$$a^* = A_7 + S(K_y) \quad (17)$$

where A_7 is a bias factor. The overall scatter plot of figure 4 shows that the data center is at raw K_y of -8 counts. This center should correspond to a^* of 10 where the UCS space was sliced to fit the Landsat data as shown in figure 5. Hence, A_7 is given by:

$$A_7 = 10 + 8S \quad (18)$$

Let

$$\begin{pmatrix} A_1 & A_2 \\ A_4 & A_5 \end{pmatrix} = S \begin{pmatrix} \sin \theta & \cos \theta \\ \cos \theta & -\sin \theta \end{pmatrix} \quad (19)$$

then, fitting Landsat (K_b , K_g , K_y) data space into the UCS space is achieved through the following affine transformation:

$$\underline{u} = F\underline{e} + \underline{\delta} \quad (20)$$

where

$\underline{u}$ = a column vector of L^* , b^* , and a^*

$\underline{e} = [K_g \ K_b \ K_y]^T$, and $\underline{e}^T$ is the transpose of $\underline{e}$.

$\underline{\delta} = [A_3 \ A_6 \ A_7]^T$

The matrix F is defined as:

$$F = \begin{pmatrix} A_1 & A_2 & 0 \\ A_4 & A_5 & 0 \\ 0 & 0 & S \end{pmatrix} \quad (21)$$

Using the numerical values of p_1 and p_2 of figure 5, F and $\underline{\delta}$ are computed to be:

$$F = \begin{pmatrix} -0.3012 & 1.0267 & 0 \\ 1.0267 & .3012 & 0 \\ 0 & 0 & 1.0670 \end{pmatrix} \quad (22)$$

$$\underline{\delta} = \begin{pmatrix} -11.594 \\ -32.288 \\ 18.560 \end{pmatrix} \quad (23)$$

3.3 ALGORITHM THAT GENERATES COLOR GUN COUNTS FROM (L*, a*, b*) PICTURE ELEMENT (PIXEL) VALUES FOR PFC PRODUCT

It was shown in section 3.2 that given the $\underline{e}$ vector for a picture element (pixel) in a Landsat scene, the L*, b*, and a* values for that pixel were computed according to equation (20). The tristimulus values X, Y, and Z for a pixel are computed from the pixel's L*, b*, and a* values by inverting equations (1) through (3) as follows:

$$Y = Y_0 \frac{(L^* + 16)^3}{1562500} \quad (24)$$

$$X = X_0 \left[\frac{a^*}{500} + \left(\frac{Y}{Y_0} \right)^{1/3} \right]^3 \quad (25)$$

$$Z = Z_0 \left[\left(\frac{Y}{Y_0} \right)^{1/3} - \frac{b^*}{200} \right]^3 \quad (26)$$

Let a_i , where $i = R, G, \text{ and } B$ primaries, be activations proportional to the tristimulus values. They are proportional to radiance and, hence, to film transmission τ . Film transmission and optical density D are related by:

$$\left. \begin{array}{l} \tau = 10^{-D} \\ D = -\log_{10} \tau \end{array} \right\} \quad \text{or} \quad (27)$$

The activations a_i ($0 \leq a_i \leq 1$) are produced from the tristimulus values of a pixel's color according to the following:

$$\underline{a} = T^{-1} \underline{t} \quad (28)$$

where

$$\underline{a} = [a_R \ a_G \ a_B]^T$$

$$\underline{t} = [X \ Y \ Z]^T$$

$$T = \begin{pmatrix} 39.74 & 35.90 & 13.53 \\ 32.04 & 57.09 & 10.86 \\ .09343 & 6.646 & 46.13 \end{pmatrix}$$

The film transmission and the pixel's activations are linearly related by:

$$\tau_i = \tau_{i,\min} + a_i(\tau_{i,\max} - \tau_{i,\min}) \quad ; \quad i = R, G, \text{ and } B \quad (29)$$

where $\tau_{i,\min}$ and $\tau_{i,\max}$ were measured and found to be:

$$\left. \begin{array}{l} \tau_{R,\max} = 0.1762202 \quad ; \quad \tau_{R,\min} = 0.0030142 \quad ; \quad \tau_{G,\max} = 0.4933794 \quad ; \\ \tau_{G,\min} = 0.0065697 \quad ; \quad \tau_{B,\max} = 0.2020853 \quad ; \quad \tau_{B,\min} = 0.0030685 \end{array} \right\} \quad (30)$$

Let

$$\left. \begin{array}{l} D_{i,\max} = -\log_{10} \tau_{i,\min} \\ \Delta D_i = \log_{10}(\tau_{i,\max} / \tau_{i,\min}) \end{array} \right\} \quad i = R, G, \text{ and } B \quad (31)$$

then the color gun counts C_i , $i = R, G$, and B of the PFC for the pixel, are given by:

$$C_i = \left(\log_{10} \tau_i + D_{i,\max} \right) \left(\frac{255}{\Delta D_i} \right) \quad ; \quad i = R, G, \text{ and } B \quad (32)$$

Equations (20), (24), (25), (26), (28), (29), and (32) constitute an algorithm for generating UCS imagery from Landsat data. These equations were used to produce the UCS color film products shown in figure 6 for LACIE segment 1618. Figure 6 shows four images of segment 1618, corresponding to four multitemporal acquisitions and covering all the biological stages of small grains. Figure 3, with figure 5, provides an interpretive key for the images in figure 6; i.e., small-grains fields in biostage 1 appear to have a blue color (low greenness

ORIGINAL PAGE IS
OF POOR QUALITY



Figure 6.— UCS Film product of LACIE segment 1618.
Acquisition date: May 6, 1976.

ORIGINAL PAGE IS
OF POOR QUALITY

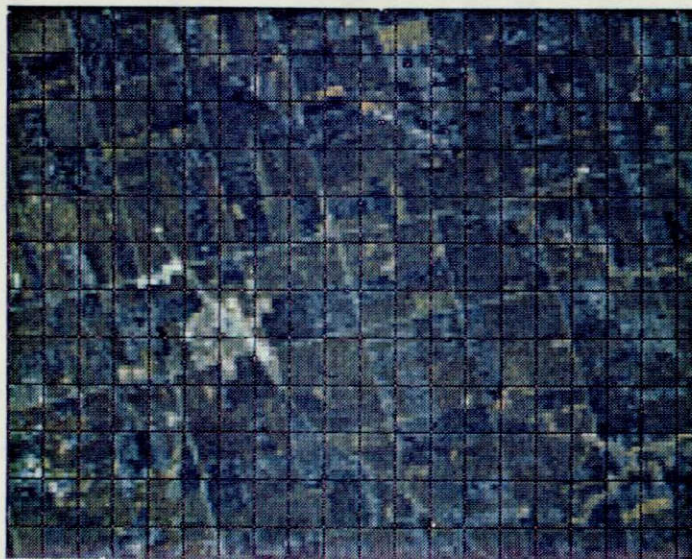


Figure 6.— Continued. Acquisition date: June 17, 1976.

ORIGINAL PAGE IS
OF POOR QUALITY

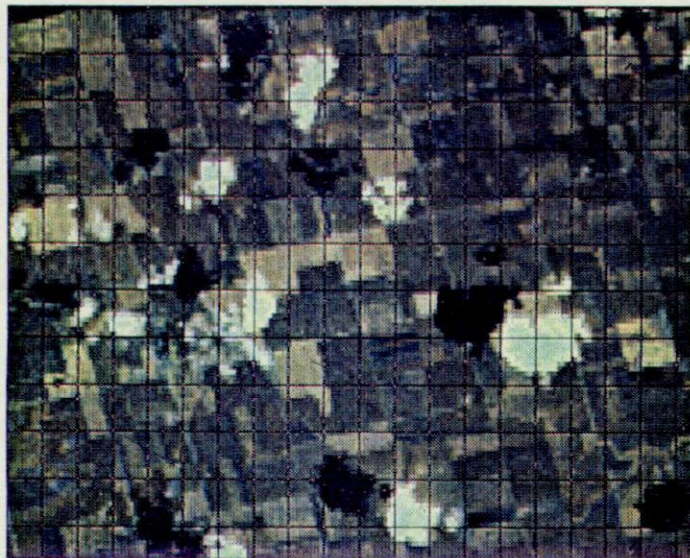


Figure 6.— Continued. Acquisition date: July 17, 1976.

ORIGINAL PAGE IS
OF POOR QUALITY



Figure 6.— Concluded. Acquisition date: Aug. 22, 1976.

value K_{g_1}) while they change from light yellow orange ($K_{g_2} > K_{g_1}$) to a darker yellow orange ($K_{g_3} > K_{g_2}$) in going from biostage 2 to 3. In biostage 4 ($K_{g_4} < K_{g_3}$), the small-grains fields appear to have a pinkish color. This is in agreement with how the data were fit into the UCS space as shown in figure 5 and given by equations (9), (10), and (17). The pinkish cast shows an increase in the Kauth yellow component; K_y is scaled toward positive a^* , which is in the general direction of the PFC red gun.

4. CONCLUSIONS AND RECOMMENDATIONS

An algorithm for generating uniform chromaticity scale imagery from Landsat data has been presented. A computer program was written to implement the algorithm, and UCS film products were generated. The colors in the film and their temporal change are consistent with what was expected for the particular scaling of Kauth components into the (L^* , a^* , b^*) color space. The UCS film product has yet to be put to the practical test of competing with previous transformations. In that competition (to be done outside the purview of this report), the philosophically satisfying notion of transforming Landsat data so that a one-count difference is equally perceptible at all locations in data space will be tested.

The authors recommend that analyst-interpreters (AI's) test the UCS imagery using a variety of LACIE segments. Preliminary examination indicates that the UCS product offers the possibilities of the following.

- a. A single film product that will supplant two film products in current use.
- b. Improved visibility of data differences in regions in data space which are critical to crop identification.
- c. An analytic route to the determination of data-space transformations that will be optimal for particular discrimination problems. For example, in another project, the transformation has been used to display water bodies in Landsat data, with encouraging results.

~~PRECEDING PAGE~~ PRECEDING PAGE BLANK NOT FILMED

5. REFERENCES

1. Juday, R. D.; and Abotteen, R. A.: A Maximal Chromatic Expansion Method of Mapping Multichannel Imagery Into Color Space. LEC-10830, Jan. 1978.
2. Wyszecki, G.; and Stiles, W. S.: Color Science. John Wiley and Sons, 1967.
3. Nimeroff, I.: Colorimetry. NBS Monograph 104, Jan. 1968.
4. Proposal for Study of Uniform Color Spaces and Color-Difference Evaluations. CIE Compte Rendu 18^e Session. CIE Publication no. 36, 1976, p. 171.
5. MacAdam, D. L.: Uniform Color Scales. JOSA 64, 1691, Dec. 1974.
6. MacAdam, D. L.: Geodesic Chromaticity Diagram. Die Farbe 18, no. 77, 1969.
7. MacAdam, D. L.: Private communication.
8. Semmelroth, Carl C.: Prediction of Lightness and Brightness on Different Backgrounds. JOSA 60, 1685, 1970.
9. Eynard, R. A., ed.: Color: Theory and Imaging Systems. Society of Photographic Scientists and Engineers (Wash., D.C.), 1973.
10. Juday, R. D.: Colorimetric Principles as Applied to Multichannel Imagery. (Masters thesis, in writing.)
11. Kauth, R. J.; and Thomas, G. S.: The Tasselled Cap — A Graphic Description of the Spectral-Temporal Development of Agricultural Crops as Seen by Landsat. Proc. Symp. on Machine Processing of Remotely Sensed Data, Purdue Univ. (W. Lafayette, Ind.), June 29, 1976.

