#### **General Disclaimer**

#### One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some
  of the material. However, it is the best reproduction available from the original
  submission.

# NASA CR-159935



(NASA-CR-159935) CTS 11.7 GHz ISOLATION DATA FOR THE CALENDAR YEAR 1978 Interim Report (Virginia Polytechnic Inst. and State Univ.) 37 p EC A03/MF A01 CSCL 20N

N79-30427

Unclas G3/32 34938



## Virginia Polytechnic Institute and State University

Electrical Engineering
BLACKSBURG, VIRGINIA 24061

CTS 11.7 GHz Isolation Data for the Calendar Year 1978

#### Text by

C. W. Bostian J. R. Dent

#### with contributions from

R. E. Dombroski S. O. Lane E. A. Manus R. E. Marshall D. N. Meadows W. L. Stutzman P. H. Wiley

Computer Artwork and Programming by Peter Santago

> Graphics by Cynthia Will

Electrical Engineering Department
Virginia Polytechnic Institute and State University
Blacksburg, Virginia 24061

Prepared for

NASA Goddard Space Flight Center Greenbelt, Maryland 20771

Contract NASS-22577

May 4, 1979

#### TABLE OF CONTENTS

		Page
۱.	Introduction	1
2.	Polarization Isolation	2
3.	Data Reduction Procedure	4
4.	Data	6
5.	Relating Isolation to Attenuation	22
6.	Conclusions	29
7.	References	30

#### LIST OF FIGURES

		<u>Pag</u>	e
Figure	1.	Isolation statistics for January, 1978	6
Figure	2.	Isolation statistics for February, 1978 8	
Figure	3.	Isolation statistics for March, 1978	
Figure	4.	Isolation statistics for April, 1978 10	
Fi gure	5.	Isolation statistics for May, 1978	
Figure	6.	Isolation statistics for June, 1978 12	
Figure	7.	Isolation statistics for July, 1978 13	
Figure	8.	Isolation statistics for August, 1978 14	
Figure	9.	Isolation statistics for September, 1978 15	
Figure	10.	Isolation statistics for October, 1978 16	
Figure	11.	Isolation statistics for November, 1978 17	
Figure	12.	Isolation statistics for December, 1978 18	
Figure	13.	Isolation statistics for the year 1978 19	
Figure	14.	Theoretical isolation statistics for <a href="ideal">ideal</a> antennas based on measured rain data	
Figure	15.	1978 yearly scatter plot of isolation versus attenuation for A > 3 dB. Also show are curve fits for 3 < A < 30 and 5 < A < 30 dB	
Figure	16.	For each 1978 observed value of attenuation greater than 3 dB, this plot shows the mean value of isolation. The error bars extend $\pm$ one standard deviation from the mean	
Figure	17.	For each 1978 integer value of attenuation greater than 3 dB, this plot shows the mean value of isolation. The error bars extend ± one standard deviation from the mean	

#### LIST OF TABLES

		Page
Table 1.	Results of least-square fitting I = U - V*log (A) to 1978 isolation and attenuation data. Except where noted, values are for 3 A 30 dB. The quantity R indicates goodness of fit (1.0 indicates a perfect fit) and P is the number of data points used in the	
	analysis	. 23
Table 2.	Integer values of isolation that approximately correspond to integer values of attenuation for each month in 1978 and for the year. See text for	27
	explanation	. 27

#### 1. INTRODUCTION

This report summarizes isolation measurements made on the CTS spacecraft 11.7 GHz circularly-polarized downlink during the 1978 calendar year. Attenuation statistics for the same time period were published in Final Report for Third Year of Work on A Depolarization and Attenuation Experiment Using the Comstar and CTS Satellites by C. W. Bostian et al, submitted for Contract NASS-22577 and dated February 9, 1979. For information on the experimental hardware the reader should consult Quarterly Technical Progress Report I by C. W. Bostian et al, issued December 22, 1976, for the same contract. Details on the data reduction procedure used appear in Final Report (Second Year of Work) by C. W. Bostian, et al, issued February 9, 1978. Complete bibliographical information on these documents appears at the end of the report.

#### 2. POLARIZATION ISOLATION

Isolation measured from a beacon signal is an indication of the crosstalk that precipitation scattering would introduce into a dual-polarized satellite communications system. With a single-polarized transmitter, isolation is the decibel ratio of the co-polarized component of the received signal to the cross-polarized component. CTS transmits a right-hand circularly polarized signal; when this encounters raindrops or ice crystals a small left-hand circularly polarized component is generated. The dual-polarized feed at the VPIESU earth station antenna separates the right-hand and left-hand circular components and routes them to a dual-channel signal-processing receiver that measures the power level of each incoming signal. If the co- and cross-polarized signal power levels in watts are P<sub>R</sub> and P<sub>L</sub>, respectively, then the isolation I in dB is given by

$$I = 10 log_{10} (P_R/P_L)$$
 (1)

If both the transmitting and receiving antenns were ideal, isolation I would be infinite in clear weather. In practice, both antennas possess some residual cross-polarization, and clear-weather values of I tend to be about 30 dB. When a small amount of precipitation is present, the cross-polarized signal that it generates may combine in-phase or out of phase with the residual cross-polarized signals from the antennas and cause the net I to increase or decrease from its clear-weather value. As the precipitation intensifies, path depolarization overrides antenna effects and I decreases. Generally rain effects begin to

dominate at attenuation (A) values above 1 or 2 dB.

Because A and I are really two different measures of the same scattering phenomena, the two quantities should be related, at least for propagation through rain. (The attenuation caused by ice is negligible and ice depolarizes without introducing significant fades.) Several authors have postulated a relationship in the form

$$I = U - V \log (A) \tag{2}$$

where U and V are constants. (The literature is inconsistent about the appropriate base for the logarithm; some authors use 10 and others use e.) Unanswered questions about these equations include:

- 1. Can universal U and V constants be found that describe the observed real-time behavior of I and A for a particular frequency and elevation angle?
- 2. Can isolation statistics be predicted from attenuation statistics using (2), thus avoiding the expense of separate isolation measurements?

This report addresses these two questions and provides monthly and annual percent-of-time data for I as measured at our earth station.

#### 3. DATA REDUCTION PROCEDURE

The VPI&SU earth station receives CTS at a nominal elevation angle of 33 degrees. As described in earlier reports (See our equipment monitors the incoming signals Section 1), continuously and records a data point whenever a significant (approximately 1 dB) change occurs. These data are maintained on magnetic tape in a format that allows us to determine the value of any data variable at any time. The data reduction and display software samples the stored information and builds a file containing the values of measured quantities at thirty second intervals. These are used to study the instantaneous relationships between selected variables and to compute percentof-time information. The processing is done with instantaneous signal values taken from detectors with 10-second time constants: no digital averaging is involved.

We normally process data for one calendar month at a time. Attentuation is calculated with respect to the monthly mean signal level and any negative values are set to zero. This reduces the uncertainty caused by spacecraft orbital motion. When the necessary signal levels are missing (because of receiver maintenance, equipment malfunction, spacecraft shutdown, a fade that exceeded the dynamic range of the receiver, attenuation values are filled in by scaling from one of the Unfortunately there is no accepted way to COMSTAR downlinks. scale isolation data, and the problem of how to handle missing isolation values had to be resolved befor isolation statistics could be determined. In preparing this report, we followed several alternative approaches.

To determine the U and V coefficients that best relate simultaneous values of attenuation and isolation, we simply excluded any missing values. This means that our curve fits relating I to A on a real-time basis were derived from measured data alone; no scaled values were used.

For the percent-of-time data, we used two methods. In one, missing isolation values were ignored and the time base was corrected to include only those times when valid signals were present. In the second, missing values of isolation were arbitrarily set equal to 30 dB. The reason was that, with CTS (which never lost phaselock during any 1978 rain events) missing values should result only from receiver down-time for maintenance during clear weather. Hence it is reasonable to set the missing values equal to our nominal clear-weather level of 30 dB. for the isolation range of interest (I less than 30 dB), the two methods yielded essentially identical percent-of-time distributions.

#### 4. DATA

Figures 1 through 13 display the percentages of time that the CTS 11.7 GHz isolation was less than the indicated values for each month of 1978 and for the year. These 'lessence' plots were made for exactly the same time periods as were the attenuation and rain rate distributions published in Reference 1.

Most of the figures contain three curves. As discussed in the previous section, these are

- (1) measured isolation statistics with missing values set to 30 dB
- (2) measured isolation statistics with missing values excluded from the data base
- (3) isolation statistics PREDICTED from the attenuation statistics measured for the same time period.

For all except Figure 13, the predictions in (3) were based on a least-squares fit of equation (2) to simultaneous values of I and A for 5 < A < 30 dB, when the data supported such a fit. The plotted points show the results that could be expected if isolation statistics were predicted from attenuation data, provided that the necessary coefficients U and V were known. For the yearly data (Figure 13), the prediction was based on equation 3 (p. 28), determined by statistical methods. For any one month, insufficient statistical data were available to provide meaningful values of U and V; hence we used the instantaneous fits.

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR JAN 1978



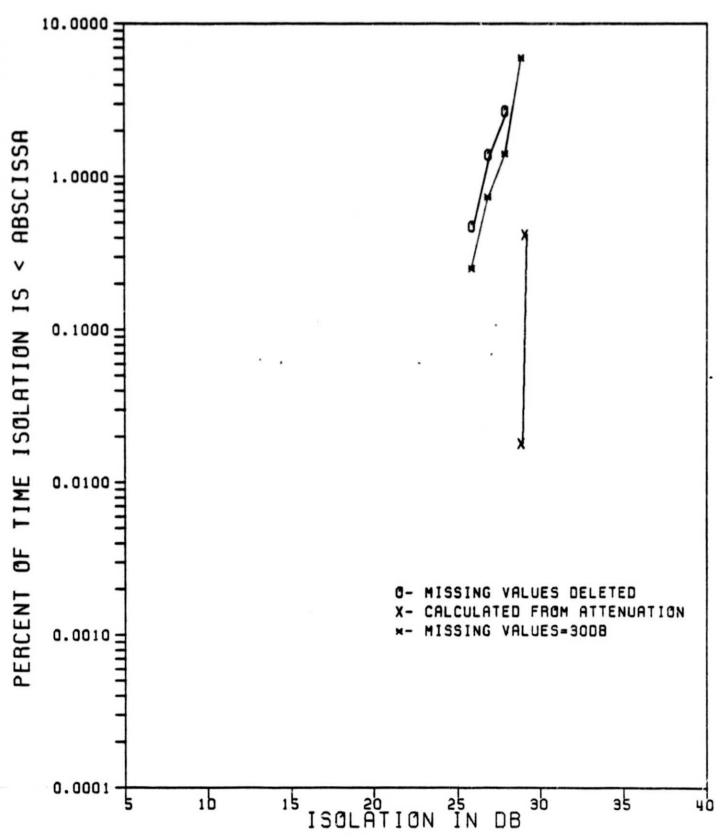


Figure 1. Isolation statistics for January, 1978.

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR FEB 1978

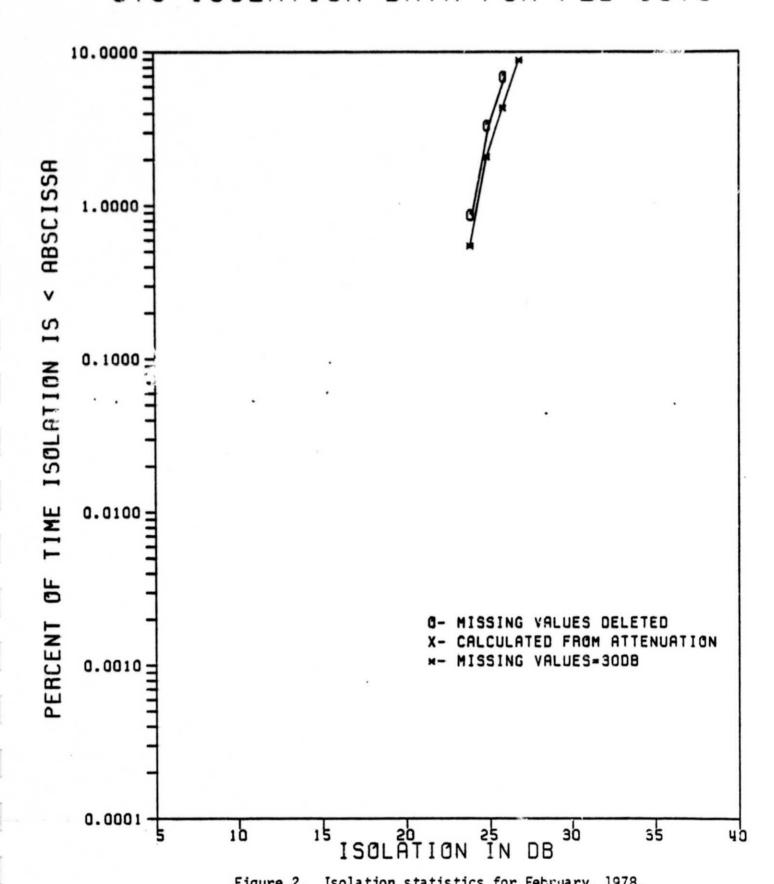

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR MAR 1978

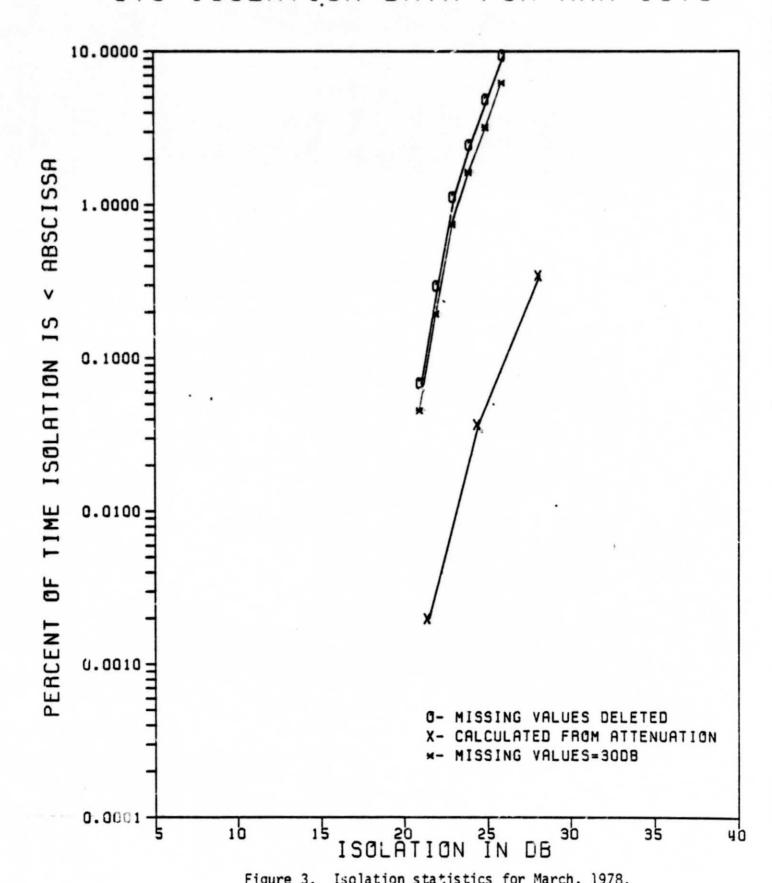

#### VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR APR 1978

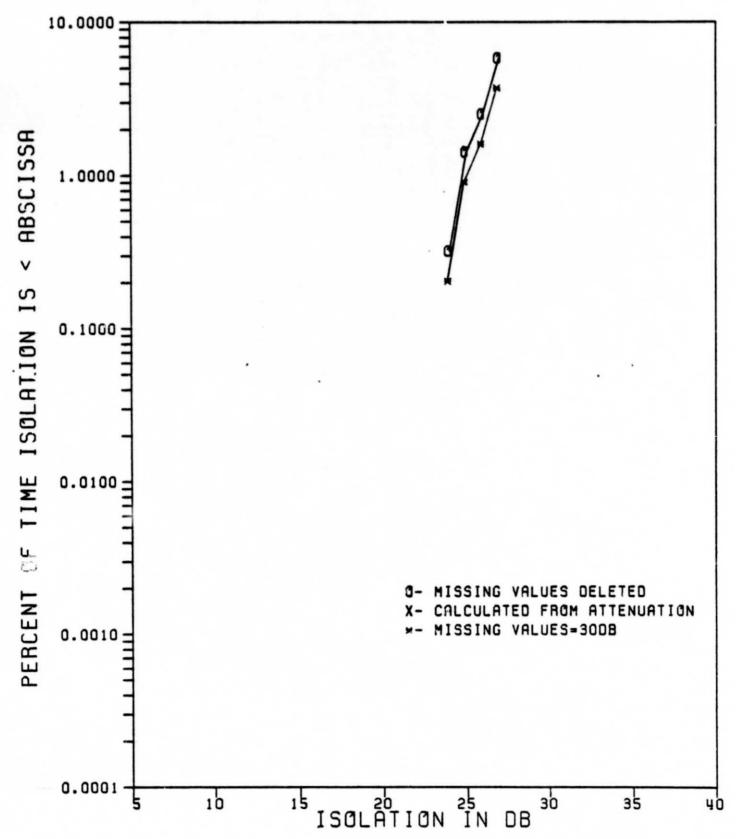


Figure 4. Isolation statistics for April, 1978.

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR MAY 1978



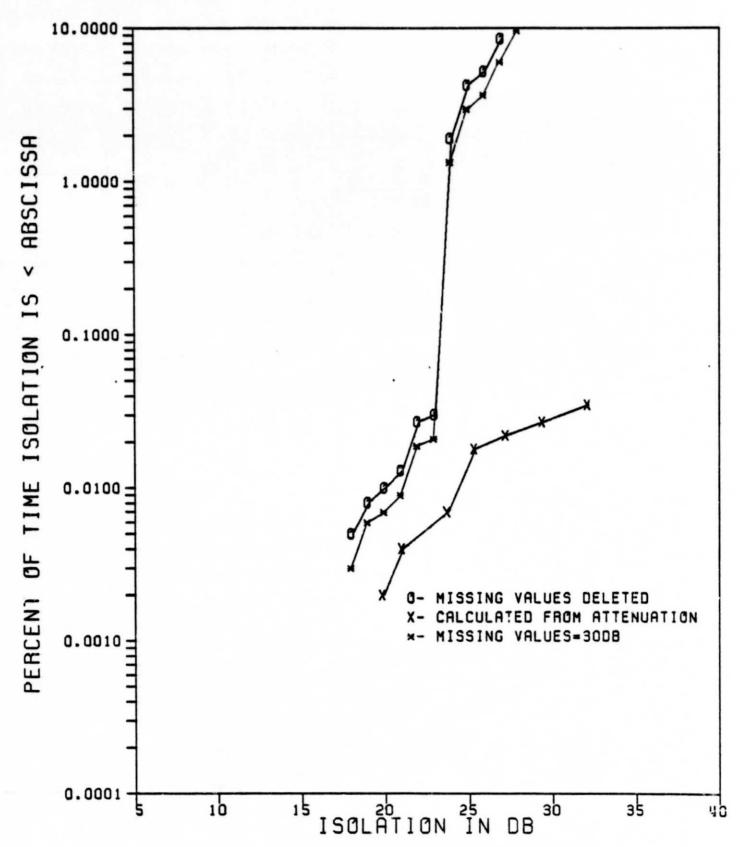


Figure 5. Isolation statistics for May, 1978.

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR JUN 1978

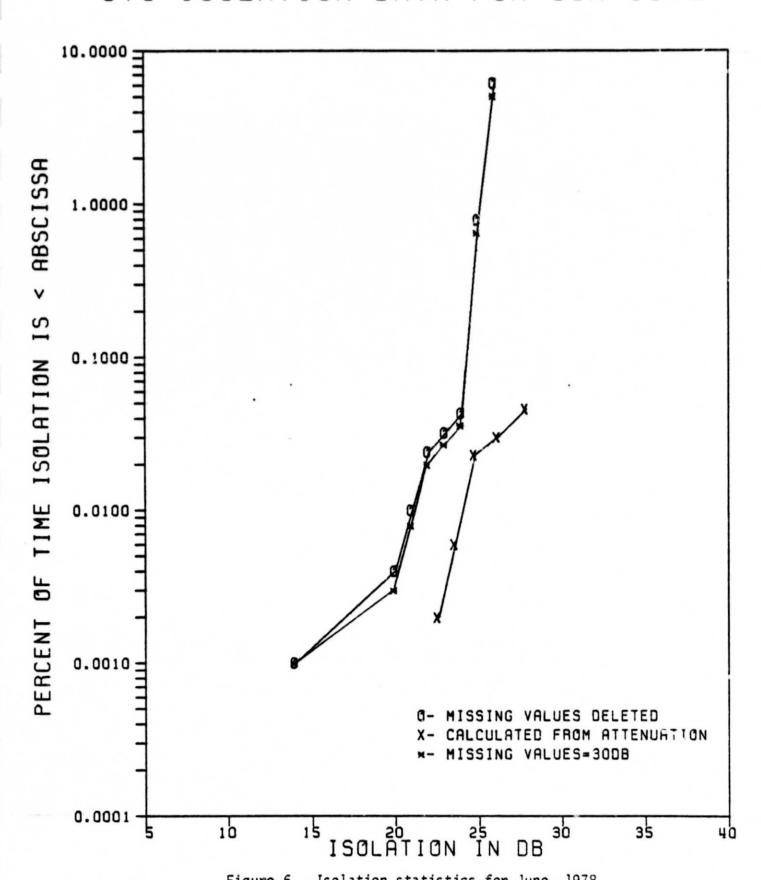

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR JUL 1978

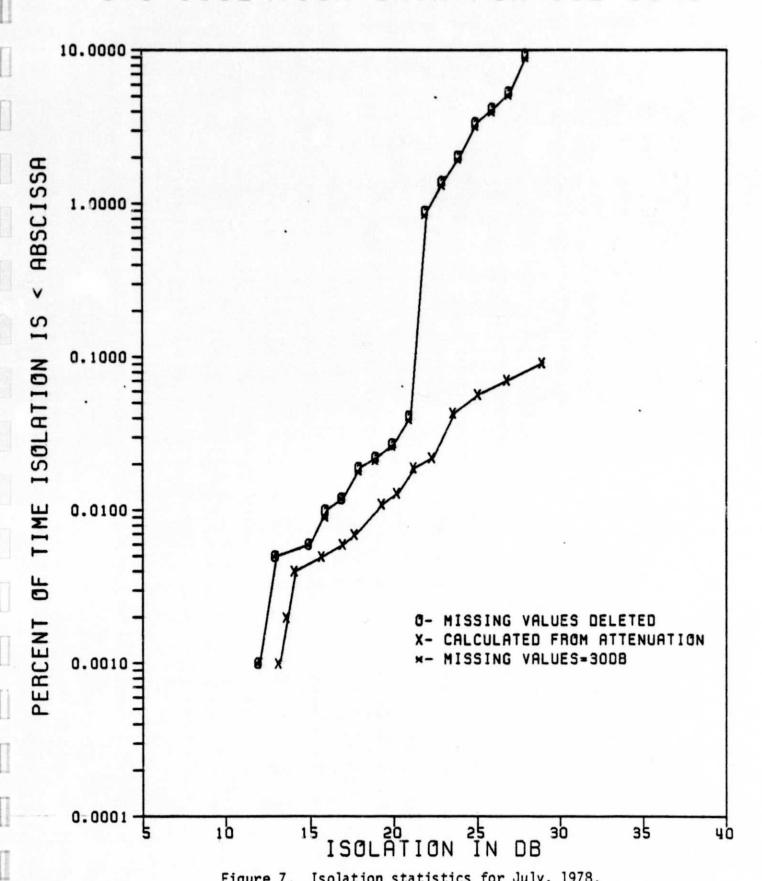

#### VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR AUG 1978



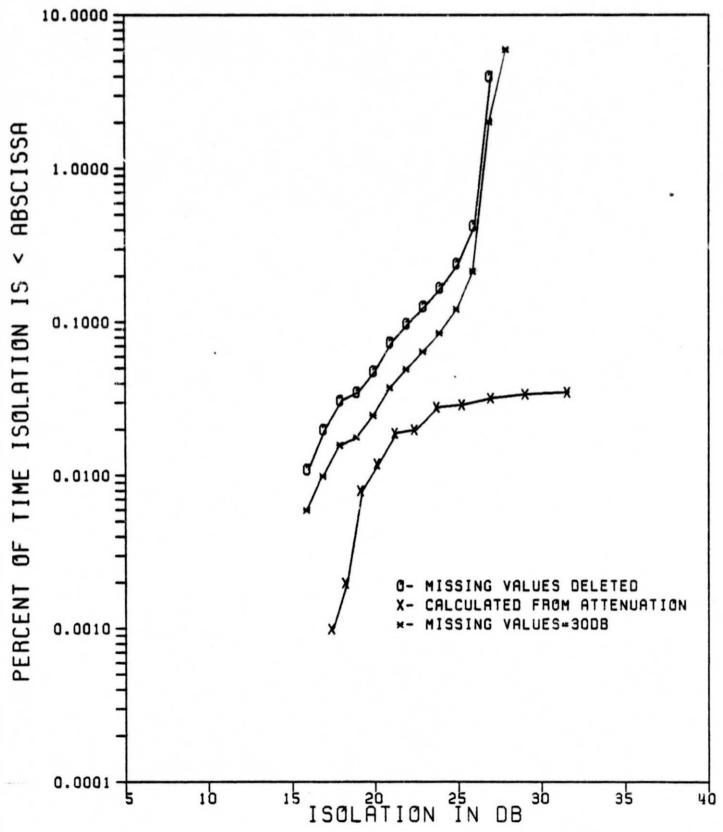


Figure 8. Isolation statistics for August, 1978.

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR SEP 1978

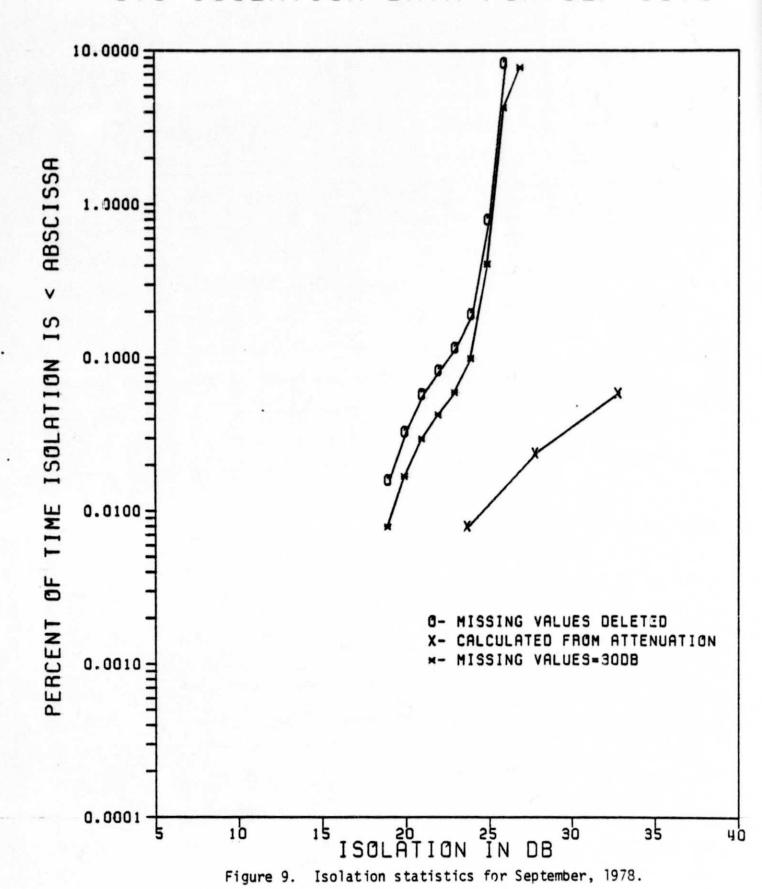

#### VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR OCT 1978

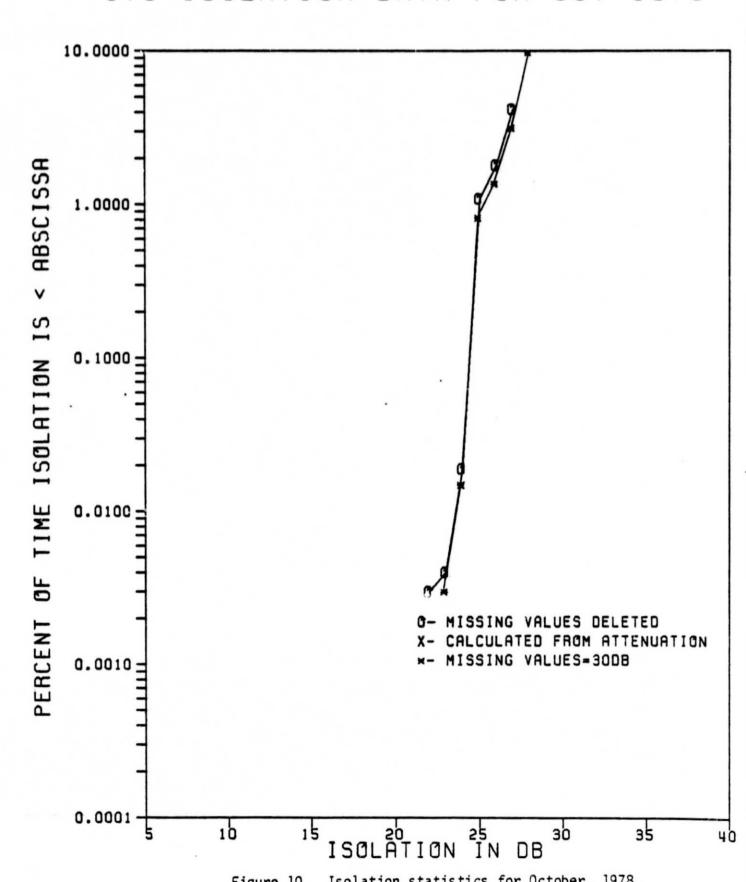

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR NOV 1978

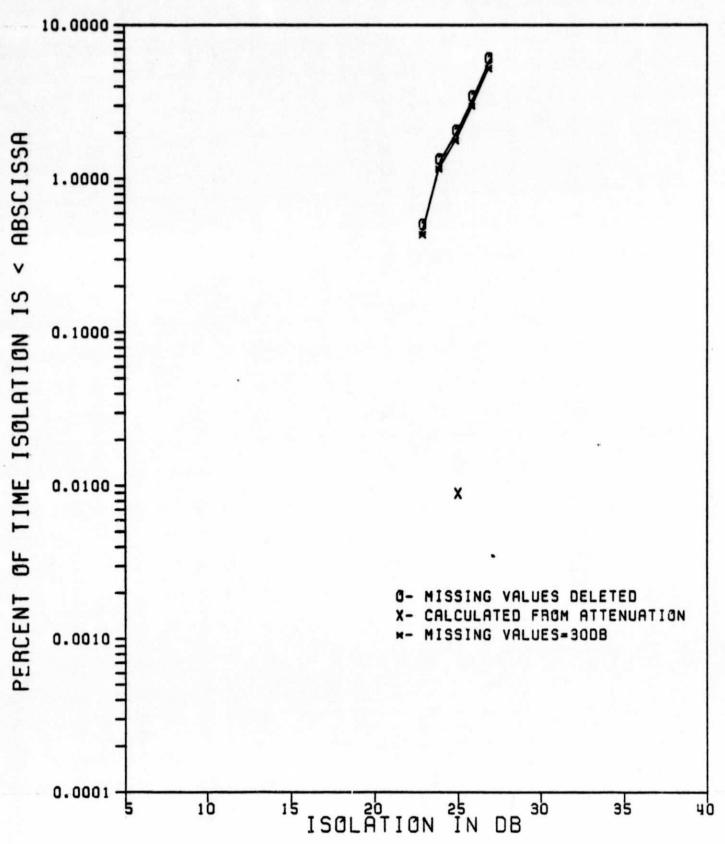


Figure 11. Isolation statistics for November, 1978.

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR DEC 1978

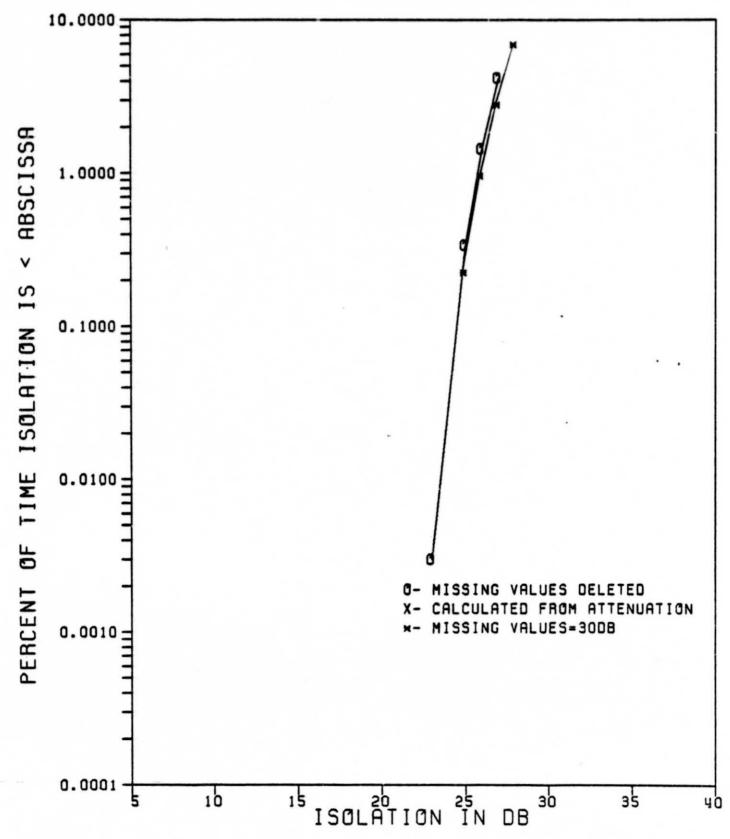


Figure 12. Isolation statistics for December, 1978

## VPI AND SU SATELLITE GROUP CTS ISOLATION DATA FOR YEAR 1978


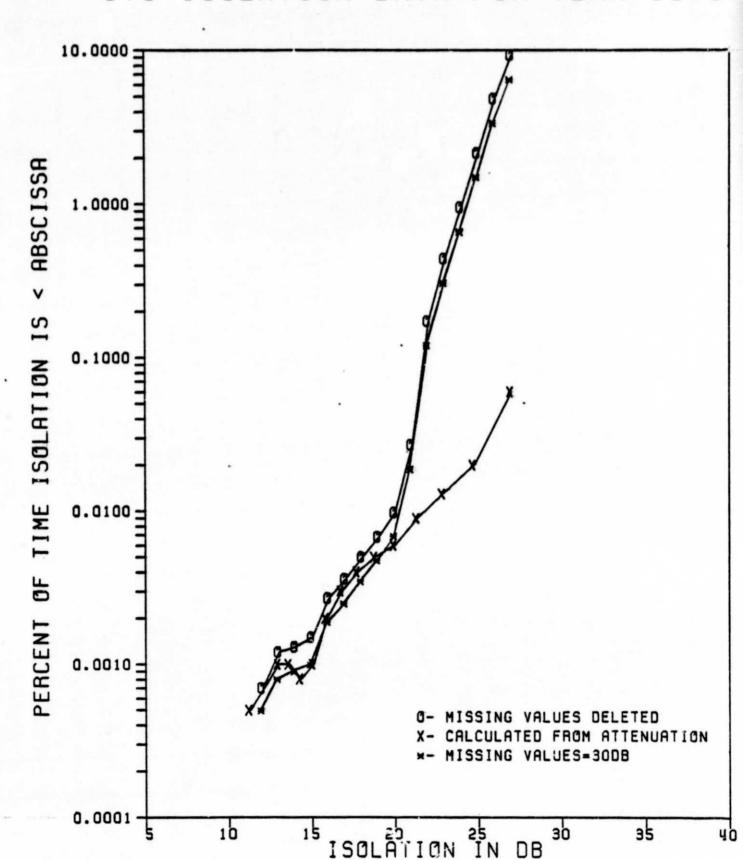


Figure 14 is a theoretical plot of yearly isolation statistics calculated from our measured rain rate data under the assumption of ideal antennas at both ends of the path. The theoretical calculation also ignores the effects of ice. At 11.7 GHz our theoretical model tends to underestimate attenuation and overestimate isolation; hence the theoretical curve shows better isolation for a given percent of time than was measured. Antenna effects and possible ice depolarization also cause the measured isolation to be poorer than the theoretical value. Of course what happens with ideal antennas is somewhat academic; practical communications systems use real antennas and imperfect pointing techniques and they will experience isolation that is poorer than that predicted theoretically for ideal conditions.

## VPI AND SU SATELLITE GRØUP CTS ISØLATIØN DATA FØR YEAR 1978

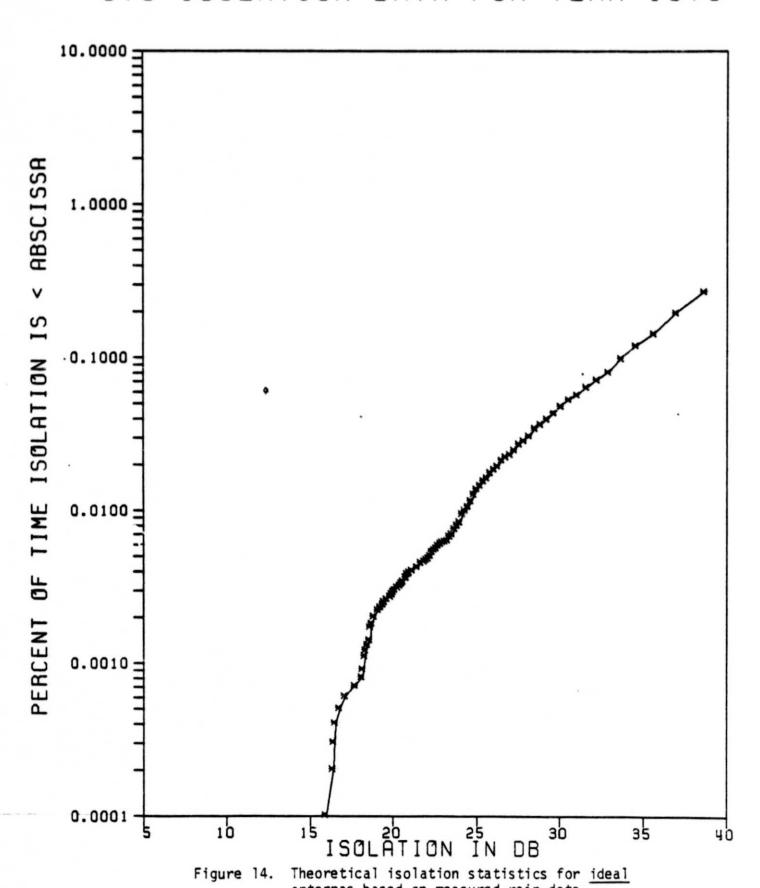

#### 5. RELATING ISOLATION TO ATTENUATION

Parts a and b of Table 1 summarize the results of fitting equation (2) to simultaneous I and A values for 3 < A < 30 dB and 5 < A < 30 dB, respectively. Better fits are obtained in the second case because it eliminates the wide isolation scatter generally observed at attenuations in the 3 to 5 dB range. The coefficients in part b of Table 1 correspond to those published by W. J. Vogel of the University of Texas on page 10 of Reference 4.

Figure 15 is a scatter plot of isolation versus attenuation for all the A > 3 dB data taken during 1978. Superimposed on it are plots from the A > 3 dB and A > 5 dB curve fits. Figure 16 plots the mean value of I observed in 1978 for all attenuations greater that 3 dB; the error bars extend plus and minus one standard deviation from the mean. Figure 17 presents the same information after the isolations for each integer value of attenuation have been combined.

Another approach to relating I and A is to determine U and V values statistically. To do this we find the values A(P) that the attenuation was greater than and I(P) that the isolation was less than for P percent of the time. A curve fit in the form of equation (2) can then be developed if the data set contains sufficiently many P values for which we have both A(P) and I(P)

To illustrate the month-to-month variation in corresponding I-A values, Table 2 lists the integer values of I that correspond to each integer value of A during each wonth of the year and for the year as a whole. Since it is rare to find a percentage P for which both the attenuation exceeded for P percent of time and the

Results of leasu-square fitting  $I=U-V*log_{10}(A)$  to 1978 isolation and attenuation data. Except where noted, values are for  $3 < A < 30 \ dB$ . The quantity R indicates goodness of fit (1.0 indicates a perfect fit) and P is the number of data points used in the analysis. Table 1.

A constant

Land Land band band

I

I


								_							
al. from	R <sup>2</sup>	1.00		1.00		.88	96.	.57	1.00	.79	1.00		1.00	98.	.95
c. Statistical. Values taken from Table 2.	>	4.97		4.19		7.99	24.15	14.55	1.80	6.47	6.54		6.65	12.00	23.23
c. S Values T	n n	29.00	‡	26.00	‡	27.66	41.68	29.22	25.00	25.36	27.02	*	27.00	29.43	40.99
	۵	22		309		30	38	74	28	20		7		574	***
Instantaneous. 5 < A < 30	R <sup>2</sup>	8.		.63		.90	99.	.80	.47	.32		8.		.36	
	>	2.62		38.18		27.93	17.53	21.94	25.99	51.93		4.11		16.22	
ė.	<b>¬</b>	30.79	*	51.18	**	49.01	38.42	42.23	47.31	64.20	**	27.59	*	36.29	
	۵	66	2471	3667	87	1420	19	1255	38	146	262	3111	8	10670	nth
taneous. < 30	R <sup>2</sup>	00.	00.	.47	8.	.03	19.	Ξ.	07.	.62	.21	91.	.37	.15	this month
Instant 3 < A <	>	1.71	-11.63	18.13	71	5.69	15.51	8.04	18.79	50.54	17.64	-35.32	24.91	12.17	No rain fell
a.	n	30.57	33.55	35.74	25.33	28.14	36.70	28.22	39.73	62.05	35.87	4.92	42.13	32.50	* No r
	Month	r	*	Σ	A	Σ	ŋ	r	A	S	0	Z	O	Year	

No rain fell this month.

Insufficient data to support a curve fit. \*\*

\*\*\* Fit for A > 5.


## VPI AND SU SATELLITE GROUP I VS A FOR YEAR 1978

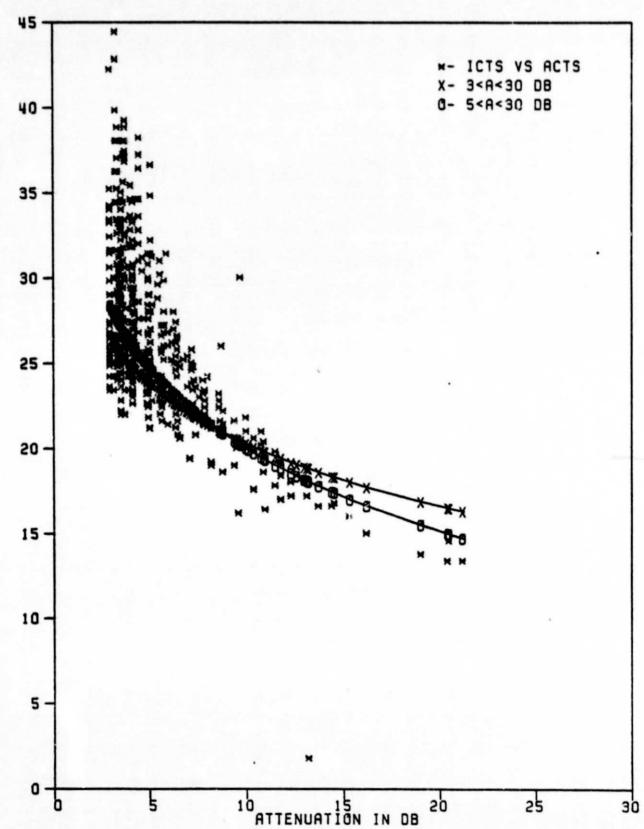

ISOLATION IN DB


Figure 15. 1978 yearly scatter plot of isolation versus attenuation for A > 3 dB.

Also shown are curve fits for 3 < A < 30 and 5 < A < 30 dB.

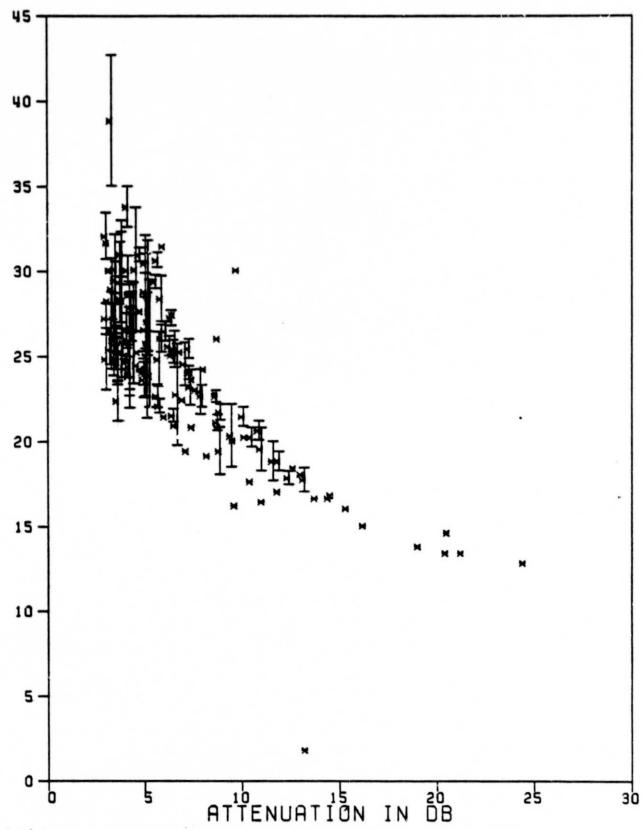

ISOLATION IN

Figure 16. For each 1978 observed value of attenuation greater than 3 dB, this plot shows the mean value of isolation. The error bars extend  $\pm$  one standard deviation from the mean.

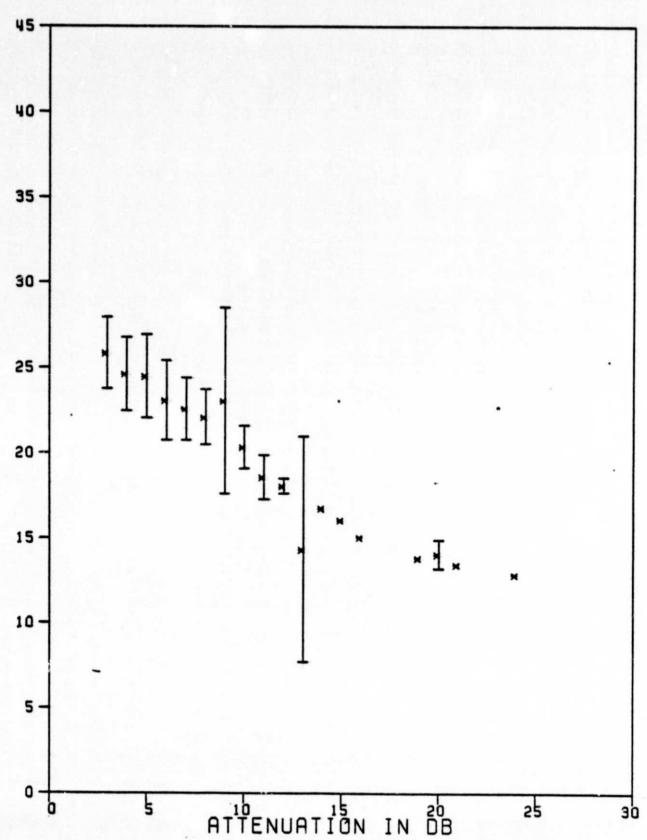

ISOLRTION IN DB

Figure 17. For each 1978 integer value of attenuation greater than 3 dB, this plot shows the mean value of isolation. The error bars extend ± one standard deviation from the mean.

Table 2. Integer values of isolation that approximately correspond to integer values of attenuation for each month in 1978 and for the year. See text for explanation.

Α	J	F	М	A	М	J	J	A	S	0	N	D	Υ
1	29	27	26	26	28			25	25	27		27	26
2			24		24		23			24	24		
4 5	26								23 21	23		23	21
6 7					23 22	23 21			19				
8 9					20	20	20 18						20 19
10 11					18								18 17
12 13								23					15
14 15							14						13
16 17				•			13	•					
18 19													12
20 21							12						

value that the measured isolation was less than for P percent of time are available, some of the entries in Table 2 are approximate and should be interpreted as being correct to within about 1 dB.

Values of U and V based on Table 2 appear in part c of Table

1. The yearly fit for A > 5 dB,

$$I = 40.99 - 23.23*log_{10}(A)$$
 (3)

is quite similar to the result

$$I = 41 - 20.6*log_{10}(A)$$
 (4)

published in Reference 4. For ideal antennas, our theoretical
model predicts

$$I = 36.05 - 18.35*log_{10}(A)$$
 (5)

Over the range  $5 \le A \le 20$ , the I values predicted by (3) and (5) differ by less than 1.5 dB.

#### 6. CONCLUSIONS

Like other investigators, we find considerable scatter in the values of isolation observed at a given attenuation (5) and in the U, V coefficients for different time periods (4). Presumably this occurs because isolation is much more sensitive to the fine details of drop shape and orientation than attenuation. Another potential factor is scattering by ice crystals, which depolarize but do not attenuate (6). These effects make the prediction of monthly isolation statistics from monthly attenuation statistics difficult, as Figures 1-12 illustrate.

#### 7. REFERENCES

- 1. C. W. Bostian, S. M. Babula, J. R. Dent, R. E. Dombroski, S. O. Lane, E. A. Manus, R. E. Marshall, D. N. Meadows, W. L. Stutzman, P. H. Wiley, FINAL REPORT FOR THIRD YEAR OF WORK ON A DEPOLARIZATION AND ATTENUATION EXPERIMENT USING THE COMSTAR AND CTS SATELLITES, NASA Contract NASS-22577, VPIESU, February 9, 1979.
- 2. C. W. Bostian, S. B. Holt, S. R. Kauffman, E. A. Manus, R. E. Marshall, W. P. Overstreet, R. R. Persinger, W. L. Stutcman, P. H. Wiley, QUARTERLY TECHNICAL PROGRESS REPORT I ON A DEPOLARIZATION AND ATTENUATION EXPERIMENT USING THE COMSTAR AND CTS SATELLITES, NASA Contract NASS-22577, VPIESU, December 22, 1976.
- 3. C. W. Bostian, S. R. Kauffman, E. A. Manus, R. E. Marshall, W. P. Overstreet, R. R. Persinger, W. L. Stutzman, P. H. Wiley, FINAL REPORT (SECOND YEAR OF WORK) ON A DEPOLARIZATION AND ATTENUATION EXPERIMENT USING THE COMSTAR AND CTS SATELLITES, NASA Contract NASS-22577, VPI&SU, February 9, 1978.
- 4. W. J. Vogel, CTS ATTENUATION AND CROSS POLARIZATION MEASUREMENTS AT 11.7 GHz (Final Report Covering the Period 18 October 1976 to 31 January 1978 under Contract NASS-22576), NASA Contract NASS-22576, The University of Texas at Austin, September, 1978.
- 5. H. W. Arnold, D. C. Cox, H. H. Hoffman, E. 2. Leck, Characteristics of Rain and Ice Depolarization for a 19 and 28 GHz Propagation Path from a COMSTAR

Satellite, ICC PROCEEDINGS, 1979.

6. C. W. Bostian and J. E. Allnutt, Ice Crystal
Depolarization on Satellite-to-Earth Microwave
Radio Paths, PROC. IEE (London), to be published
in 1979.