



NASA CR-159,149

NASA Contractor Report No. 159149

NASA-CR-159149

1980 000 1956

Study of the Feasibility Aspects of Flight Testing an Aerolastically Tailored Forward Swept Research Wing on a BQM-34F Drone Vehicle

D. J . Mourey

TELEDYNE RYAN AERONAUTICAL
San Diego, California 92138

Contract NAS1 - 15624
3 September 1979

LIBRARY COPY

NOV 2 1979

LANGLEY RESEARCH CENTER
LIBRARY, NASA
HAMPTON, VIRGINIA

NASA

National Aeronautics and
Space Administration

Langley Research Center
Hampton, Virginia 23665
AC 804 827-3966




PREFACE

This study of THE FEASIBILITY ASPECTS OF FLIGHT TESTING AN AEROELASTICALLY TAILORED FORWARD SWEPT RESEARCH WING ON A BQM-34F DRONE VEHICLE, was conducted by Teledyne Ryan Aeronautical at San Diego, California during the period November 1978 through June 1979. This study was conducted under Contract NAS1-15624 for the NASA Langley Research Center, Hampton, Virginia. The NASA Technical Manager was H.N. Murrow.

Acknowledgement is made to the following TRA Engineers for their contributions to this study.

N.M. Bowers	Structural Analysis
R.W. Bowman	Structural Mechanics
G.C. Childers	Structural Dynamics
W.H. Hoy	Mechanical Design
H.A. James	Advanced Design
D.J. Mourey	Vehicle Analysis
D.O. Nevinger	Mass Properties
T.C. Nietz	Flight Performance
G.H. Painter	Flutter Analysis
W.C. Parks	Stability and Control
M.M. Rodriguez	Aeroelasticity
H.L. Rozelle	Structural Analysis
L.M. Shaffer	External Loads
R.E. Shankle	Structural Design

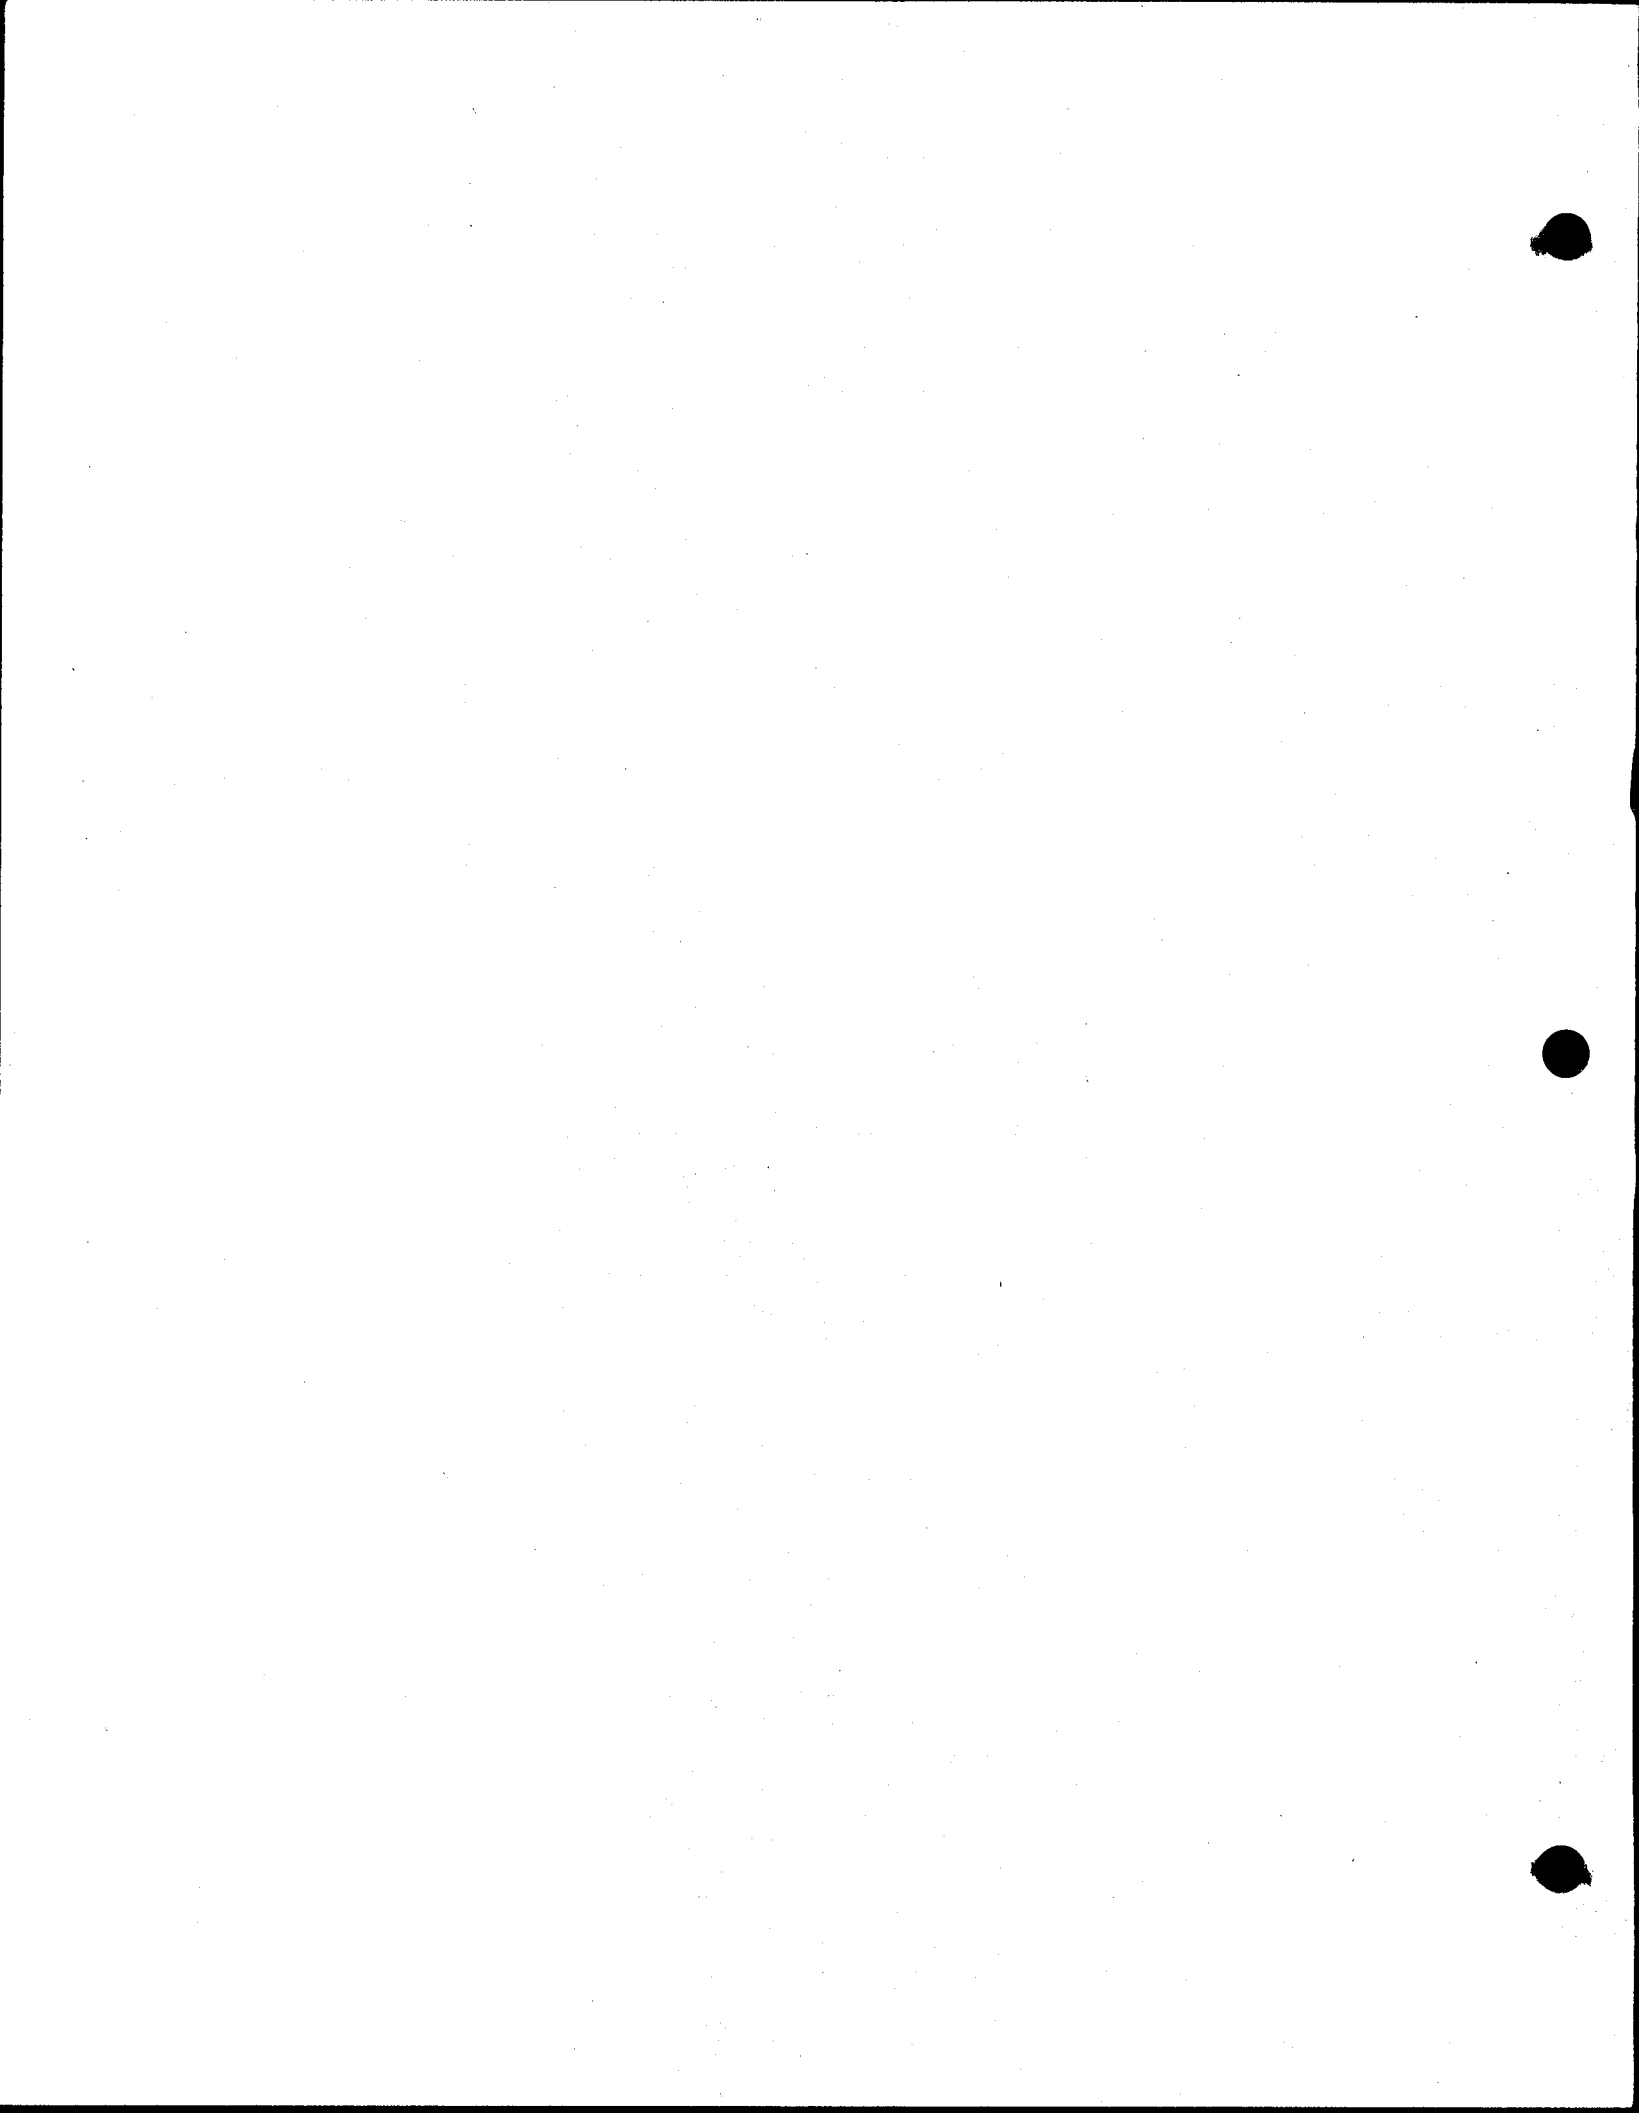

SUMMARY

A study has been completed which investigated the feasibility aspects of flight testing an aeroelastically tailored forward swept research wing on a BQM-34F drone vehicle. The study encompassed two broad tasks;

1. Define the geometry of a forward swept wing which can be incorporated into the BQM-34F maintaining satisfactory flight performance, stability and control.
2. Perform a preliminary design of an aeroelastically tailored forward swept wing.

The BQM-34F is a jet powered conventionally configured aircraft. The basic aft swept wing is mounted shoulder high to the circular fuselage at about the mid point of its length. This study shows that a wing designed with leading edge forward sweep of 20-degrees can be mounted using existing wing mounting points. Satisfactory flight stability and control are predicted with the addition of about 300 pounds of ballast external to the forward fuselage. Research mission endurance exceeding 30 minutes is available at the NASA specified design point of Mach number 0.90 at 30,000 feet.

Only minor modifications are required to the basic target to accommodate the forward swept research wing. Forward fuselage ballast must be installed to maintain the proper a.c./c.g. relationship. The ballast must be installed external because of the lack of internal volume. Because of the additional ballast weight, forward fuselage structural reinforcement is required. Four external 1/8-inch stainless steel straps running fore and aft will provide the increased bending modulus required. A preliminary study, assuming rigid fuselage mounting, shows forward-swept wing mounting loads exceeding allowables at one fuselage frame. It is expected that a more detailed analysis which includes fuselage flexibility will show loads do not exceed allowable levels, however, if frame beef-up is required this can be accomplished by adding an inner and outer angle flange extending about 150 degrees around the lower portion of the frame.

SUMMARY (continued)

Installation of the forward ballast produces a center of gravity which would cause the vehicle to hang nose-down while descending beneath the recovery parachutes. A modification is recommended which will allow the large parachute deployment loads to still be taken by the existing structure but then shift the forward parachute attachment point more forward so that the vehicle attitude is level.

The forward swept wing preliminary aeroelastic design was completed making extensive use of the FASTOP structural optimization program. The program can be used to optimize metallic or fibrous composite structure for strength, deflection and flutter. The wing construction consists of graphite/epoxy skins and full depth HFT glass reinforced phenolic honeycomb core. The graphite thickness distributions and ply fiber orientation were chosen to meet strength, deflection and flutter constraints. Skin thickness varied from approximately 0.445 inches (89 plies) at the wing leading edge root to .015 inches (3 plies) near the trailing edge. A weight savings for an outer wing panel on the order of 65 percent is predicted through the use of advanced composite graphite material over conventional aluminum to meet deflection constraints.

The preliminary design effort of this study has shown that a forward swept wing of advanced composite material can be designed to overcome the inherent static divergence tendencies without undo weight penalties. A detail design of this forward swept research wing should encompass studies to insure that deformations normal to the chord are properly controlled, and that ply orientations and layers are chosen, as much as possible, to ease the fabrication process.

CONTENTS

<u>SECTION</u>		<u>PAGE</u>
	SUMMARY	
1.0	INTRODUCTION	1-1
2.0	STUDY PROCESS	2-1
3.0	PRELIMINARY DESIGN FEASIBILITY	3-1
4.0	PERFORMANCE BASIS	4-1
4.1	Performance Basis	4-1
4.2	Performance	4-6
5.0	STABILITY AND CONTROL	5-1
5.1	Longitudinal Stability And Control	5-1
5.1.1	Parametric Studies	5-1
5.1.2	Estimated Longitudinal Characteristics	5-3
5.2	Lateral - Directional Stability And Control	5-3
5.2.1	Dihedral Effect	5-3
5.2.2	Estimated Lateral-Directional Characteristics	5-8
6.0	STRUCTURAL DESIGN CRITERIA	6-1
7.0	STRUCTURAL LOADS	7-1
7.1	Fuselage Loads	7-1
7.2	Wing Loads	7-1
7.3	Empennage Loads	7-13
8.0	LOAD INDUCED ELASTIC DEFORMATIONS	8-1
8.1	Method Of Approach	8-1
8.2	Aeroelastic Design/Material Analysis	8-5
8.2.1	Wing Finite Element Structural Analysis	8-6
8.2.2	Geometry	8-6
8.2.3	Wing Surface Membranes	8-7
8.2.4	Honeycomb Core Shear Panels	8-7
8.2.5	Root Rib	8-7
8.2.6	Reactions	8-22
8.2.7	Material Properties	8-22
8.2.8	External Loads	8-22
8.3	Results	8-22
8.3.1	Discussion	8-22
8.3.2	Conclusions From Wing Preliminary Design Effort	8-58
9.0	FLUTTER ANALYSIS	9-1
10.0	STRESS ANALYSIS	10-1
10.2	Fuselage Analysis	10-4
11.0	DESIGN	11-1
11.1	Fuselage	11-1
11.1.1	Structural Modifications	11-1
11.1.2	Ballast Installations	11-1

CONTENTS (continued)

<u>SECTION</u>		<u>PAGE</u>
11.1.3	Recovery System Modifications	11-1
11.2	Wing	11-3
12.0	WEIGHT & BALANCE	12-1
13.0	REFERENCES	13-1
APPENDIX A	NASA STATEMENT OF WORK	A-1
APPENDIX B	MONTHLY PROGRESS REPORTS	B-1
APPENDIX C	FINAL FASTOP-3 STRUCTURAL ANALYSIS	C-1
APPENDIX D	FASTOP-3 FLUTTER ANALYSIS	D-1
APPENDIX E	STRESS ANALYSIS, FUSELAGE EQUIPMENT COMPARTMENT AREA	E-1

LIST OF FIGURES

<u>FIGURE</u>		<u>PAGE</u>
1-1	General Arrangement BQM-34F Drone with Forward Swept Wing	1-3
1-2	Conversion Factors	1-4
2-1	Calendar of Major Events	2-2
2-2	NASA Forward Swept Wing Geometric Characteristics	2-4
2-3	Wing Weight Matrix	2-5
2-4	NASA Forward Swept Wing - Ballast Weight Requirements	2-6
2-5	Wing/Fuselage Mounting Study	2-7
2-6	NASA Forward Swept Wing - Recovery CG vs. Wing Location	2-9
2-7	NASA Forward Swept Wing	2-10
2-8	Effect of Canard on Aerodynamic Center	2-12
2-9	Supercritical Airfoil Coordinates	2-14
4-1	Zero Lift Drag Buildup	4-2
4-2	Zero Lift Drag Coefficient - BQM-34F Forward Swept Research Wing	4-3
4-3	Drag Due to Lift BQM-34F Forward Swept Research Wing	4-4
4-4	Lift Curve Slope BQM-34F Forward Swept Research Wing	4-5
4-5	Flight Envelope Forward Swept Research Wing	4-7
4-6	Flight Envelope Forward Swept Research Wing	4-8
4-7	Mission Endurance BQM-34F Forward Swept Research Wing	4-9
5-1	Forward Swept Wing Estimated CG Location Required for Various Wing Positions	5-2
5-2	Effect of Wing Location on Static Stability	5-4
5-3	Estimated Longitudinal Stability Derivatives	5-5
5-4	Estimated Longitudinal Control Effectiveness and Static Stability Margin	5-6
5-5	Longitudinal Trim Requirements	5-7
5-6	Comparison of Wing Contribution to $C_{L\beta}$	5-9
5-7	Effect of $C_{L\beta}$ on Dynamic Stability in Turns (Sheet 1 of 3)	5-10
5-8	Estimated Static Lateral-Directional Stability Derivatives	5-13
6-1	BQM-34F/Forward Swept Wing Structural Design Speeds	6-1
7-1	Wing Limit Loads	7-2
7-2	Forward Fuselage Loading Comparison	7-3
7-3	Fuselage Shear & Moment Diagrams Forward Swept Wing Proposal Added Ballast Effects	7-4
7-4	Aerodynamic Loads, NZ = 6	7-6
7-5	Aerodynamic Loads to Structural Nodes, NZ = 2	7-7
7-6	Aerodynamic Loads to Structural Nodes, NZ = -3	7-8
7-7	Aerodynamic Loads to Structural Nodes, NZ = 6, Distribution to Nodes	7-9

LIST OF FIGURES (continued)

<u>FIGURE</u>		<u>PAGE</u>
7-8	Aerodynamic Loads to Structural Nodes, NZ = 2, Distribution to Nodes	7-10
7-9	Aerodynamic Loads to Structural Nodes, NZ = -3, Distribution of Nodes	7-11
7-10	Aerodynamic Loads Distributed Loading NZ = 6	7-12
7-11	Aerodynamic Loads Distributed Loading, NZ = 2	7-12
7-12	Aerodynamic Loads Distributed Loading, NZ = -3	7-12
7-13	Horizontal Tail Load Survey, 426 KEAS	7-14
7-14	Horizontal Tail Loads Survey	7-15
8-1	Detail Items in the Basic Structural Analysis	8-1
8-2	<u>FASTOP-3 Modular Flow Chart</u>	8-2
8-3	Wing Construction and Materials Selection	8-4
8-4	Wing Geometry	8-8
8-5	Wing Upper Skin Grid Points	8-9
8-6	Wing Lower Skin Grid Points	8-10
8-7	Root Rib Geometry and Grid Points	8-11
8-8	Upper Surface-Membrane Elements	8-15
8-9	Lower Surface-Membrane Elements	8-16
8-10	Spanwise Shear Panels	8-17
8-11	Chordwise Shear Webs	8-18
8-12	Shear Web Vertical Pseudo Rods	8-19
8-13	Root Rib Structural Model	8-21
8-14	Reactions at Root Rib	8-23
8-15	External Loads, NZ = 6	8-24
8-16	External Loads, NZ = 9, 69 Loads x 1.5	8-25
8-17	External Loads, NZ = 2	8-26
8-18	External Loads, NZ = -3	8-27
8-19	All Graphite/Epoxy Wing (0°, 90°, 45°, -45°)	8-29
8-20	All Graphite/Epoxy Wing (0°, 90°, 45°, -45°)	8-30
8-21	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-31
8-22	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-32
8-23	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-33
8-24	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-35
8-25	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-36
8-26	All Graphite/Epoxy (0°, 90°, 45°, -45°)	8-38
8-27	All Graphite/Epoxy Wing (0°, 90°, 45°, -45°)	8-39
8-28	All Graphite/Epoxy Wing (0°, 90°, 45°, -45°)	8-40
8-29	All Graphite/Epoxy Wing (0°, 90°, 45°, -45°)	8-41
8-30	All Graphite/Epoxy Wing (0°, 90°, 45°, -45°)	8-42
8-31	All Graphite/Epoxy Wing (0°, 90°, 45°, -45°)	8-43
8-32	Aluminum Wing	8-45
8-33	Graphite/Epoxy Wing	8-46
8-34	Graphite - Kevlar Wing	8-47
8-35	<u>Spanwise Twist Deflections</u>	8-48
8-36	All Graphite Wing (45°, 0, 45°)	8-49
8-37	All Graphite/Epoxy Wing (45°, 0, -45°)	8-50
8-38	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-52
8-39	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-53
8-40	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-54

LIST OF FIGURES (continued)

<u>FIGURE</u>		<u>PAGE</u>
8-41	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-55
8-42	All Graphite/Epoxy Wing (45°, 0°, -45°)	8-56
8-43	Spanwise Twist Distributions, All Graphite Wing	8-57
9-1	NASA Forward Swept Wing, Dynamic Model	9-2
9-2	Grid Arrangement	9-3
10-1	Fuselage Shell Structure	10-5
10-2	Beef-Up Straps Equipment Compartment	10-6
10-3	Fuselage Wing Attach Frames, 6-g Loads x 1.5	10-7
11-1	Forward Fuselage External Strap Beef-Up and Ballast Installation	11-2
11-2	Riser Configuration	11-4
11-3	Wing Upper Surface Ply Thickness	11-5
11-4	Wing Lower Surface Ply Thickness	11-6
11-5	Wing Upper Skin Ply Contours	11-8
11-6	Wing Lower Sking Ply Contours	11-9
11-7	Preliminary Design of Forward Swept Research Wing for BQM-34F	11-10

LIST OF TABLES

<u>TABLE</u>		<u>PAGE</u>
6-1	BQM-34F/Forward Swept Research Wing Structural Design Criteria Summary	6-3
8-1	Wing/Root Rib Coordinates	8-11
12-1	Weight Breakdown	12-2
12-2	NASA Swept Forward Wing - Summary Weight Statement (1)	12-3



SYMBOLS

- A - Aspect ratio
 AR - Aspect ratio
 A_{WET} - Wetted Area
 b - Wing span
 BL - Butt line
 C - Chord
 \bar{C} - Wing MAC
 $\bar{C}/2$ - Mid-chord location of MAC
 $\bar{C}/4$ - Quarter-chord location of MAC
 C_{D_L} - Drag due to lift
 C_{D_0} - Drag coefficient at zero lift
 C_f - Skin friction coefficient
 $C_{R\beta}$ - Slope of rolling moment coefficient vs. angle of sideslip
 C_L - Lift coefficient
 $C_{L_{MAX}}$ - Maximum lift coefficient
 C_{L_T} - Trim lift coefficient
 $C_{L_{TRIMMED}}$ - Trimmed lift coefficient
 C_{L_W} - Lift coefficient of wing
 C_{L_α} - Slope of lift coefficient vs. angle of attack
 $C_{L_{\delta e}}$ - Slope of lift coefficient vs. elevator deflection
 C_M - Moment coefficient
 $C_{M_{C_L}}$ - Static margin
 C_{M_α} - Slope of pitching moment coefficient vs. angle of attack
 $C_{M_{\delta e_{C/4}}}$ - Slope of pitching moment coefficient about $\bar{C}/4$ vs. elevator deflection

C_R - Wing root chord
 C_T - Wing tip chord
 C.G. - Center of Gravity
 DGW - Design gross weight
 DIA - Diameter
 D.O.F. - Degrees of freedom
 e_1 - Strain in primary material direction
 e_2 - Strain in secondary material direction
 E_x - Youngs Modulus of Elasticity in principal material direction
 E_y - Youngs Modulus of Elasticity in secondary material direction
 E_1 - Youngs Modulus of Elasticity in primary material direction
 E_2 - Youngs Modulus of Elasticity in secondary material direction
 f - Drag area
 fps(EAS) - Feet per second in equivalent airspeed
 f_s - Stress in core
 F_{cyd} - Facing stress at which intracellular buckling occurs
 F_s - Allowable shear force
 F_{xc} - Allowable compressive force in the X-direction
 F_{xt} - Allowable tensile force in the X-direction
 g - 32.2 ft/sec²
 G - Shear modulus of elasticity
 G.W. - Gross weight
 H - Pertaining to horizontal tail
 K_F - Form factor
 KEAS - Knot equivalent air speed
 λ_{REF} - Characteristic length
 L_H - Horizontal tail arm
 L.E. - Wing leading edge
 L.E.MAC - Leading edge station of mean aerodynamic chord
 M - Mach number
 $M_{C/2}$ - Root bending
 M_{SL} - Equivalent design Mach no. at sea level
 M_x - Moment about x or longitudinal axis

M_y - Moment about y or lateral axis
 MAC - Mean aerodynamic chord
 MAR - Mid-air retrieval
 M.S. - Margin of safety
 n_{ULT} - Ultimate load factor
 n_X - Load factor, X
 n_Y - Load factor, Y
 n_Z - Load Factor, Z
 n_Z^W - Product of normal load factor and weight
 P_{SHEAR} - Bolt allowable shear load
 $P_{TENSION}$ - Bolt allowable tension load
 PSI - Pounds per square inch
 R_N - Reynolds number
 s - Core cell size
 S - Planform area
 S_W - Wing planform area
 S_Z - Shear in Z or vertical direction
 $SEC \Lambda_{\frac{1}{4}C}$ - Secant of quarter chord sweep angle
 S.L. - Sea level
 S.M. - Static margin
 t - Thickness, inches
 $T_{C/2}$ - Root torsion
 t_f - Laminate thickness
 t/c - Thickness ratio
 T.E. - Wing trailing edge
 TR - Thickness of theoretical root chord
 V_L - Free flight limit speed
 WL - Water line
 X - Pertains to longitudinal direction
 X_{ac} - Fuselage station location at aerodynamic center
 X_{cg} - Fuselage station location of center of gravity
 X_F - X coordinate in fuselage coordinate system
 XF - Fuselage longitudinal location

\downarrow - Pertains to lateral direction
 Y_F - Y coordinate in fuselage coordinate system
 Y_W - Y coordinate in wing coordinate system
 YEA - Lateral dimension along elastic axis
 $Y(LWR)$ - Y coordinate of airfoil lower surface
 $Y(UPR)$ - Y coordinate of airfoil upper surface
 Z - Pertains to vertical direction
 Z_F - Z coordinate in fuselage coordinate system
 Z.F.W. - Zero fuel weight
 α - Angle of attack
 α_1 - Thermal expansion coefficient in primary material direction
 α_2 - Thermal expansion coefficient in secondary material direction
 γ_{12} - Shearing strain
 δ_e - Elevator deflection, deg.
 δ_r - Rudder deflection
 ΔX - Distance aft from wing apex at (BL=0)
 e_α - Downwash derivative
 θ - Pitch angle
 θ_X - Rotation about X axis
 θ_Y - Rotation about Y axis

 λ - Taper ratio
 Λ - Wing sweep angle
 $\Lambda_{C/4}$ - Wing sweep angle of quarter cord
 $\Lambda_{C/2}$ - Wing sweep angle of half cord
 Λ_{LE} - Wing leading edge sweep
 μ - Poisson's ratio
 μ_X - Poisson's ratio in principle laminate direction
 μ_Y - Poisson's ratio in secondary laminate direction
 ρ - Density
 ϕ - Bank angle
 ' - Feet
 # - Lb

1.0 INTRODUCTION

A number of years ago the National Aeronautics and Space Administration (NASA) established a program utilizing modified BQM-34F FIREBEE II targets as test vehicles for flight research. The program is known by the acronym DAST for Drones for Aerodynamic and Structural Testing.

The feasibility of using the FIREBEE II target for flight investigation of research wings was substantiated as a result of a TRA study conducted under NASA contract (NASI-11758; Reference 1.1). The study provided aerodynamic performance information for several research wing planforms as well as wing design and integration aspects. Under separate NASA contract (NASI-11758; Reference 1.2), TRA designed an aspect ratio 6.8 supercritical research wing. This wing has been fabricated by NASA and outfitted with active controls for flutter suppression. First flight of the BQM-34F with this wing is scheduled about the time of publication of this report. A second research wing for the BQM-34F is presently being designed by Boeing under NASA contract. This wing, of aspect ratio 10.3, will be equipped with multiple active controls for flight research of gust and maneuver load alleviation, flutter suppression and reduced static stability. Further details of the DAST program are presented in Reference 1.3.

The advent of structures fabricated with isotropic laminates of advanced composite materials provides a means of efficiently tailoring the aeroelastic characteristics of lifting surfaces. The NASA HIMAT vehicle is a significant example of this emerging technology. The flutter characteristics of the aspect ratio 6.8 wing mentioned previously were tailored by means of composite materials. This aeroelastic tailoring capability of composite materials has sparked a renewed interest in forward swept wings which have generally not been used because of inherent static divergent tendencies. Reference 1.4 investigates divergence elimination through use of advanced composites.

This report documents the results of a study conducted by TRA to investigate the feasibility aspects of flight testing an aeroelastically tailored forward swept research wing on a BQM-34F drone vehicle. The study was conducted under NASA contract NASI-15624 during the period November 1978

through June 1979. The program was initiated by NASA RFP 1-12-2720-0142 dated 15 August 1978. TRA's response to the RFP was the proposal document of Reference 1.5. The NASA statement of work is included as Appendix A in Volume II of this report.

The study effort addressed the following major tasks:

1. Determine the range of wing geometry which can be adopted to the BQM-34F and meet the specified requirements.
2. Identify any modifications required of the basic airframe.
3. Perform a preliminary structural design of an aeroelastically tailored swept forward wing.
4. Document the study results and present an oral report at Langley.

A three-view of the BQM-34F equipped with the forward swept research wing is shown in Figure 1-1.

Measurement values employed in this technical report are expressed in customary units. As stipulated by the contract a table has been provided for converting the customary units used in this document to the International System of Units (SI). The conversion units are provided in Figure 1-2.

1-3

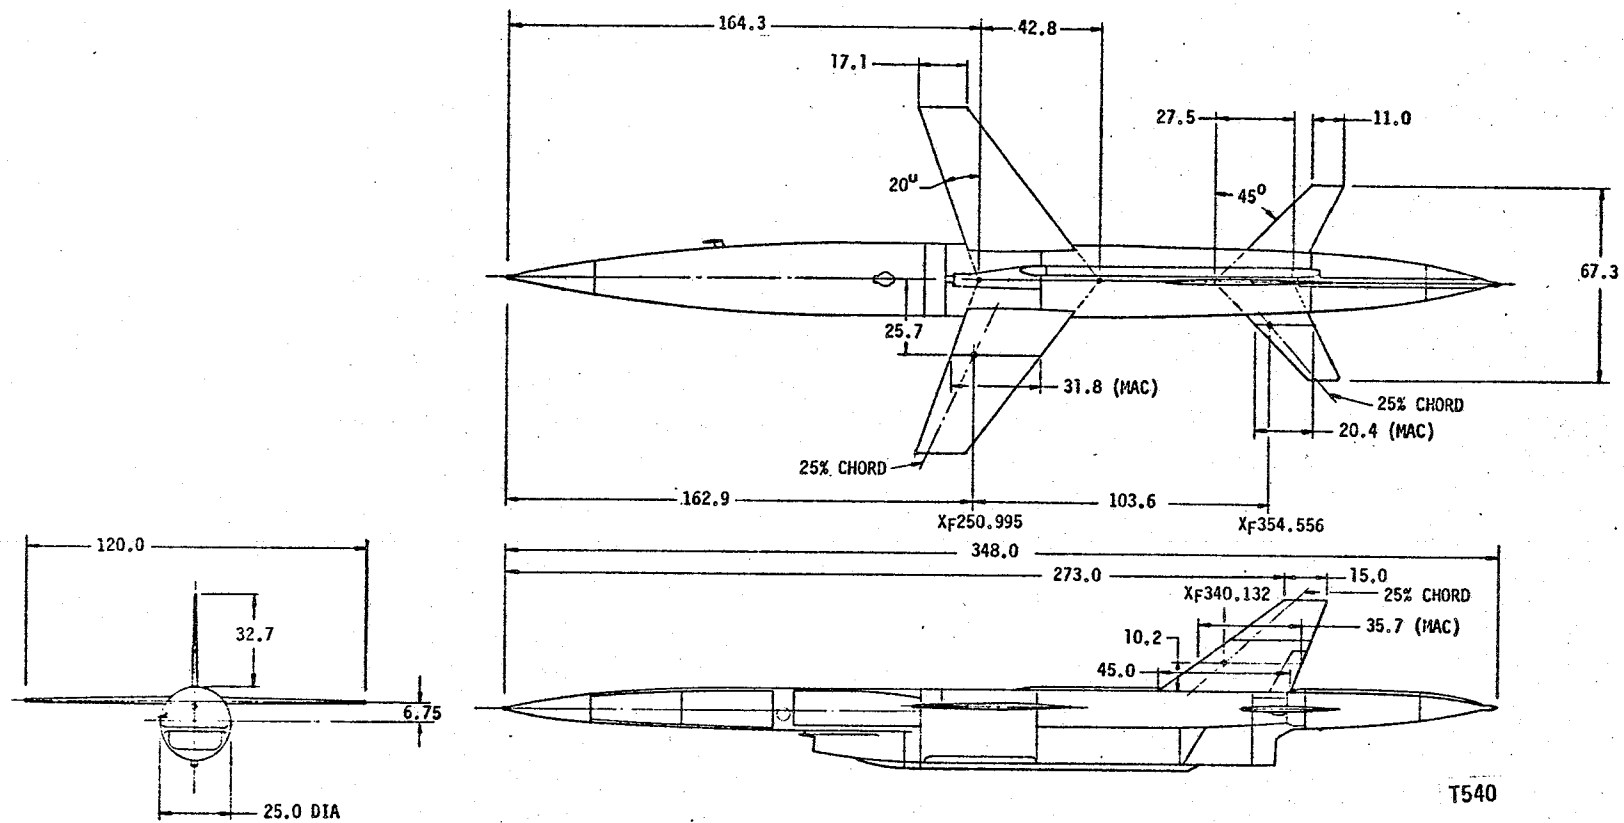


Figure 1-1. General Arrangement BQM-34F Drone with Forward Swept Wing

PHYSICAL QUANTITY	TO CONVERT FROM	TO	MULTIPLY BY
Acceleration	Foot/Second ²	Meter/Second ²	*3.048.10 ⁻¹
Area	Foot ²	Meter ²	*9.290304.10 ⁻²
Density	lbm/Inch ³	Kilogram/Meter ³	2.767990.10 ⁴
Density	lbm/Foot ³	Kilogram/Meter ³	1.601846.10 ¹
Force	lbf	Newton	4.448221.10 ⁰
Length	Inch	Meter	*2.54.10 ⁻²
Length	Foot	Meter	*3.048.10 ⁻¹
Mass	lbm	Kilogram	4.535924.10 ⁻¹
Moment	In-lbf	Meter-Newton	1.129848.10 ⁻¹
Pressure	lbf/Inch ²	Newton/Meter ²	6.894757.10 ³
Speed	Foot/Second	Meter/Second	*3.048.10 ⁻¹
Speed	Knot	Meter/Second	5.144444.10 ⁻¹
Volume	Hogshead	Meter ³	2.384809.10 ⁻¹

NOTE: An asterisk precedes each number which expresses an exact definition.

Figure 1-2. Conversion Factors

T541

2.0 STUDY PROCESS

Subsequent sections of this document report on the details and results of the study effort. This section presents a concise description of the study process and chronology. Figure 2-1 provides a calendar of major study events.

A chronology of the events during the study has been captured in the progress reports which were prepared and submitted to NASA on a monthly basis. Copies of these six program reports are presented as Appendix B in Volume II of this report.

This study effort was comprised of two major elements. During the first element the range of wing planform variables provided by the NASA statement of work were evaluated in terms of their impact upon meeting the specified flight research objectives and in terms of their integration with the BQM-34F target. Following selection of a wing planform the second major study element commenced and consisted of a more detailed investigation of integrating the wing with the vehicle and a preliminary design of the wing.

The NASA statement of work asked for consideration of wing planforms with the following geometries:

Reference Wing Area, Sq. Ft.	25 to 36
Airfoil	Supercritical
Root Airfoil Thickness Ratio	Approx. .05
Tip Airfoil Thickness Ratio	Approx. .05
Wing Aspect Ratio	4 to 7
Span, Ft.	11 to 17
Leading Edge Sweep Angle, Deg.	-20 to -35
Twist, Deg.	TBD
Taper Ratio	0.40

In addition, an optional close coupled canard with approximately the following characteristics was to be considered during the study:

Reference Exposed Canard Area, Sq. Ft.	8
Exposed Canard Aspect Ratio	4

EVENT	CALENDAR YEAR	
	1978	1979
NASA RFP 1-12-2720.0142 ISSUED	▼	
TRA PROPOSAL	■	
STUDY CONTRACT AWARD		▼
STUDY PHASE	■	
NASA/TRA STUDY REVIEW		▼
DFRC COORDINATION MEETING		▼
MONTHLY PROGRESS REPORTS	▼▼▼▼▼▼▼▼	▼▼▼▼▼▼▼▼
ORAL REVIEW AT LANGLEY		▼
FINAL TECHNICAL REPORT		▼
CONTRACT END		▼

T542

Figure 2-1. Calendar of Major Events

Canard Thickness Ratio	TBD
Leading Edge Sweep Angle, Deg.	-30
Taper Ratio	0.2
Twist, Deg.	0

The matrix of wing geometric characteristics considered in this study is shown in Figure 2-2. Estimates of wing weights for parametric evaluation have been made from the following empirically based formula:

$$\text{Wing Weight} = F \left[.1604 (\text{DGW} - n_{\text{ULT}})^{.297} (S_{\text{W}})^{.48} (b)^{.7} (\text{SEC } \Lambda_{\frac{1}{4}\text{C}})^{.37} (1 + \lambda)^{.4} (M_{\text{SL}})^{.25} \right] / (\text{TR})^{.3}$$

F = Factor = 1.0 for Aluminum = 0.8 for Composites

DGW = Design Gross Weight = 2500 lbs.

n_{ULT} = Ultimate Load Factor = 9

S_{W} = Gross Wing Area = variable

b = Wing Span = variable

$\text{SEC } \Lambda_{\frac{1}{4}\text{C}}$ = Secant of Quarter Chord Sweep Angle = variable

λ = Taper Ratio = 0.4

M_{SL} = Equivalent Design Mach No. at Sea Level = 0.65

TR = Thickness of Theoretical Root Chord = variable

Wing weights based upon this formula are presented in Figure 2-3.

Placing a forward swept wing on the BQM-34F at the same wing mounting location as the basic target moves the aerodynamic center of the vehicle forward. This requires forward ballast to maintain a constant level of longitudinal static stability. This is illustrated by the curves of Figure 2-4. These curves show the amount of ballast required at the X_{F} 118.6 bulkhead to maintain a static margin of 10%. Ballast requirements of at least 150 pounds are indicated. The largest influence on quantity of ballast required is the forward sweep angle and fore-aft position of the wing.

The conventional target wing is mounted to the fuselage by means of five bolts per side. For mounting the forward swept research wing a minimum of three mounting bolts is considered required with four desirable. This is illustrated by the sketch of Figure 2-5. The most aft position for the various

NO.	ASPECT RATIO (A)	L.E. SWEEP (Δ_{LE}) DEG.	PLANF. AREA (S) FT ²	ROOT CHORD CR IN.	TIP CHORD CT IN.	TAPER RATIO	WING SPAN b IN.	WING MAC \bar{c} IN.	WING SWEEP ANGLE		WING WETTED AREA SQ. FT.
									$\Delta_c/4$ DEG.	$\Delta_c/2$ DEG.	
1	4	-20	25	42.857	17.142	0.4	120.000	31.837	-25.226	-30.039	36.15
2		-28							-32.573	-36.723	
3		-36							-39.817	-43.254	
4	4	-20	30	46.948	18.779	0.4	131.453	34.876	-25.226	-30.039	44.83
5		-28							-32.573	-36.723	
6		-36							-39.817	-43.254	
7	4	-20	36	51.429	20.571	0.4	144.000	38.204	-25.226	-30.039	55.20
8		-28							-32.573	-36.723	
9		-36							-39.817	-43.254	
10	5	-20	25	38.333	15.333	0.4	134.164	28.476	-24.213	-28.165	37.62
11		-28							-31.692	-35.113	
12		-36							-39.085	-41.923	
13	5	-20	30	41.991	16.797	0.4	146.969	31.198	-24.213	-28.165	46.31
14		-28							-31.692	-35.113	
15		-36							-39.085	-41.923	
16	5	-20	36	45.999	18.400	0.4	160.997	34.171	-24.213	-28.165	56.98
17		-28							-31.692	-35.113	
18		-36							-39.085	-41.923	
19	6	-20	25	34.993	13.997	0.4	146.969	25.995	-23.528	-26.877	39.39
20		-28							-31.096	-34.002	
21		-36							-36.589	-41.004	
22	6	-20	30	38.333	15.333	0.4	160.997	28.476	-23.528	-26.877	48.31
23		-28							-31.096	-34.002	
24		-36							-38.589	-41.004	
25	6	-20	36	41.991	16.797	0.4	176.363	31.194	-23.528	-26.877	59.23
26		-28							-31.096	-34.002	
27		-36							-38.589	-41.004	

T543

Figure 2-2. NASA Forward Swept Wing Geometric Characteristics

WING AREA SQ. FT.	ASPECT RATIO	SWEEP ANGLE, DEGREE		WING WEIGHT (ALUM.) LB.	WING WEIGHT (COMPOSITES) LB.
		L.E..	1/4 CHORD		
25	4	20	25.23	132.27	105.82
		28	32.57	135.79	108.63
		36	39.82	140.53	112.42
	5	20	24.21	147.22	117.78
		28	31.69	150.05	120.04
		36	39.09	156.27	125.02
	6	20	23.53	161.00	128.80
		28	31.10	165.13	132.10
		36	38.58	170.79	136.63
30	4	20	25.23	149.46	119.57
		28	32.57	153.43	122.74
		36	39.82	158.79	127.03
	5	20	24.21	166.75	133.40
		28	31.69	171.09	136.87
		36	39.09	177.01	141.61
	6	20	23.53	182.34	145.79
		28	31.10	186.91	149.53
		36	38.58	193.31	154.65
36	4	20	25.23	169.40	135.52
		28	32.57	173.90	139.12
		36	39.82	179.98	143.98
	5	20	24.21	188.68	150.98
		28	31.69	193.59	154.87
		36	39.09	200.29	160.23
	6	20	23.53	206.38	165.10
		28	31.10	211.67	169.34
		36	38.58	218.92	175.14

T544

Figure 2-3. Wing Weight Matrix

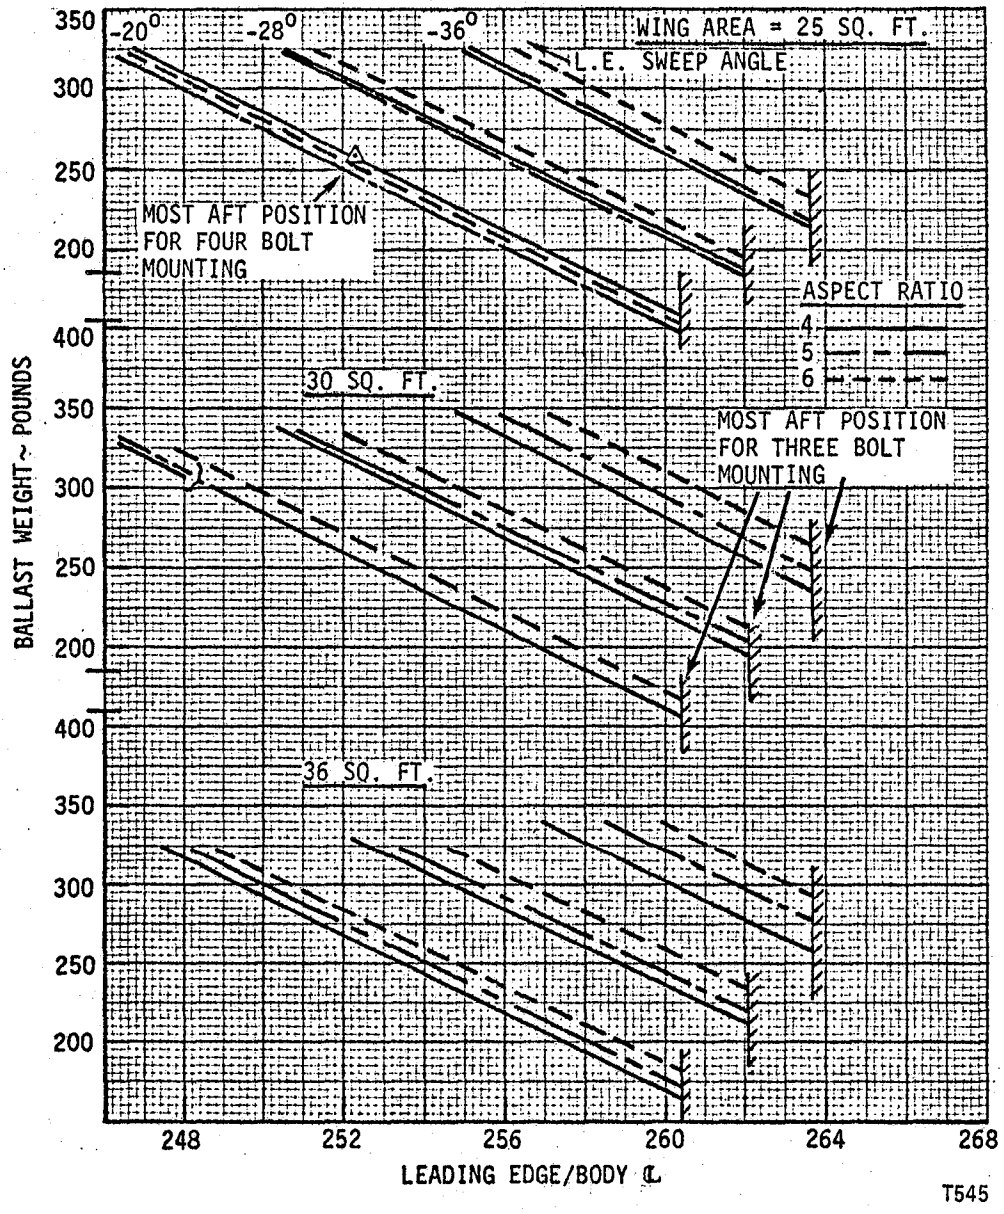


Figure 2-4. NASA Forward Swept Wing - Ballast Weight Requirements

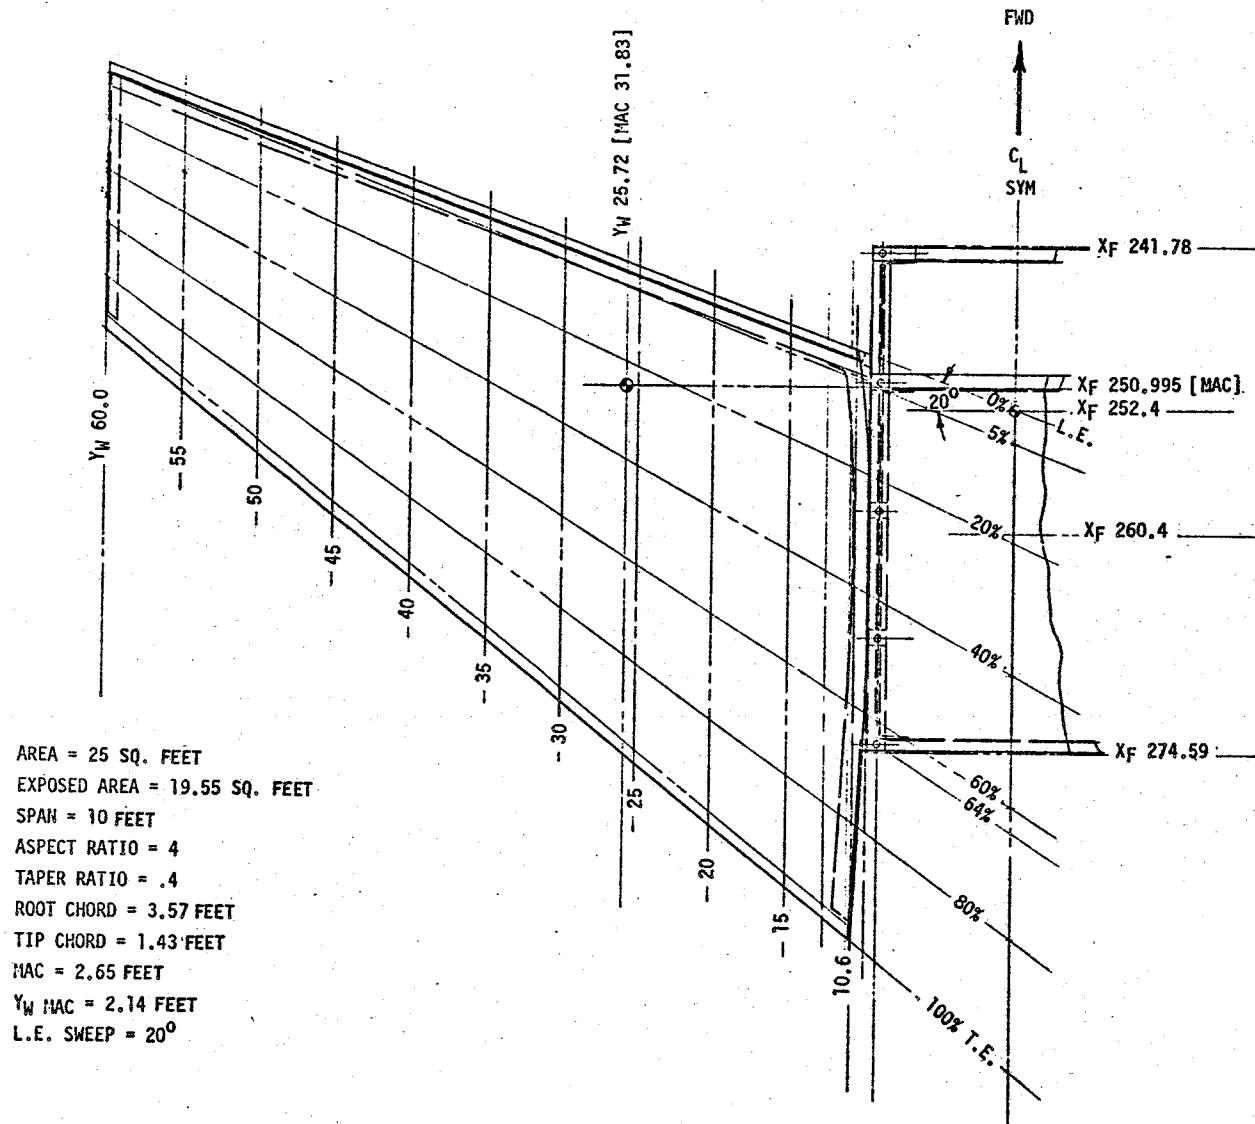


Figure 2-5. Wing/Fuselage Mounting Study

wing geometries to maintain three-bolt per side mounting is shown on Figure 2-4. The most aft positioning for the wing of Figure 2-5 which permits use of four mounting bolts per side is an intersection of the leading edge and the fuselage centerline at station 252.4. This requires about 257 pounds of ballast as shown by the indicated point on Figure 2-4.

It was recognized that large amounts of forward ballast may require fuselage structural modifications to sustain the greater loads. Another problem with forward ballast is its effect upon the vehicle center of gravity when suspended beneath the recovery parachute. Deployment of the recovery parachutes, which are stowed in the aft end of the vehicle, moves the vehicle c.g. forward. For most of the wings, wing mounting locations, and forward ballast requirements, the recovery c.g. falls forward of the forward parachute mounting point. For the wing of Figure 2-5 this would mean a nose-down attitude of about 50 degrees at mid-air helicopter pickup and during towing and docking which is considered unsatisfactory. This problem is illustrated by Figure 2-6. The figure shows that only the 20-degree swept forward wing at the most rearward mounting location would result in a recovery c.g. within the parachute mounting points. This would result in a wing which picks up only three of the existing mounts and a recovery c.g. almost coincident with the forward parachute mount, both undesirable.

Two other alternatives were investigated, dropping ballast at recovery and repositioning the forward parachute attach point. The wing of Figure 2-5 requires more than 90 pounds of droppable ballast as illustrated by the preliminary weight/c.g. curves of Figure 2-7. Although dropping ballast is feasible and has been discussed with safety people at DFRC, repositioning the forward parachute attachment appears more desirable.

During the recovery process, large main parachute loads are transmitted to the fuselage through the forward attachment fitting. Imposing these loads upon a more forward fuselage frame would probably require significant structural modifications to the new frame. A scheme has thus been developed wherein the peak forces of parachute deployment would be taken through the existing fittings and then, once the vehicle is in stabilized descent, a bridle restraint is released allowing the vehicle to swing level prior to Mid Air


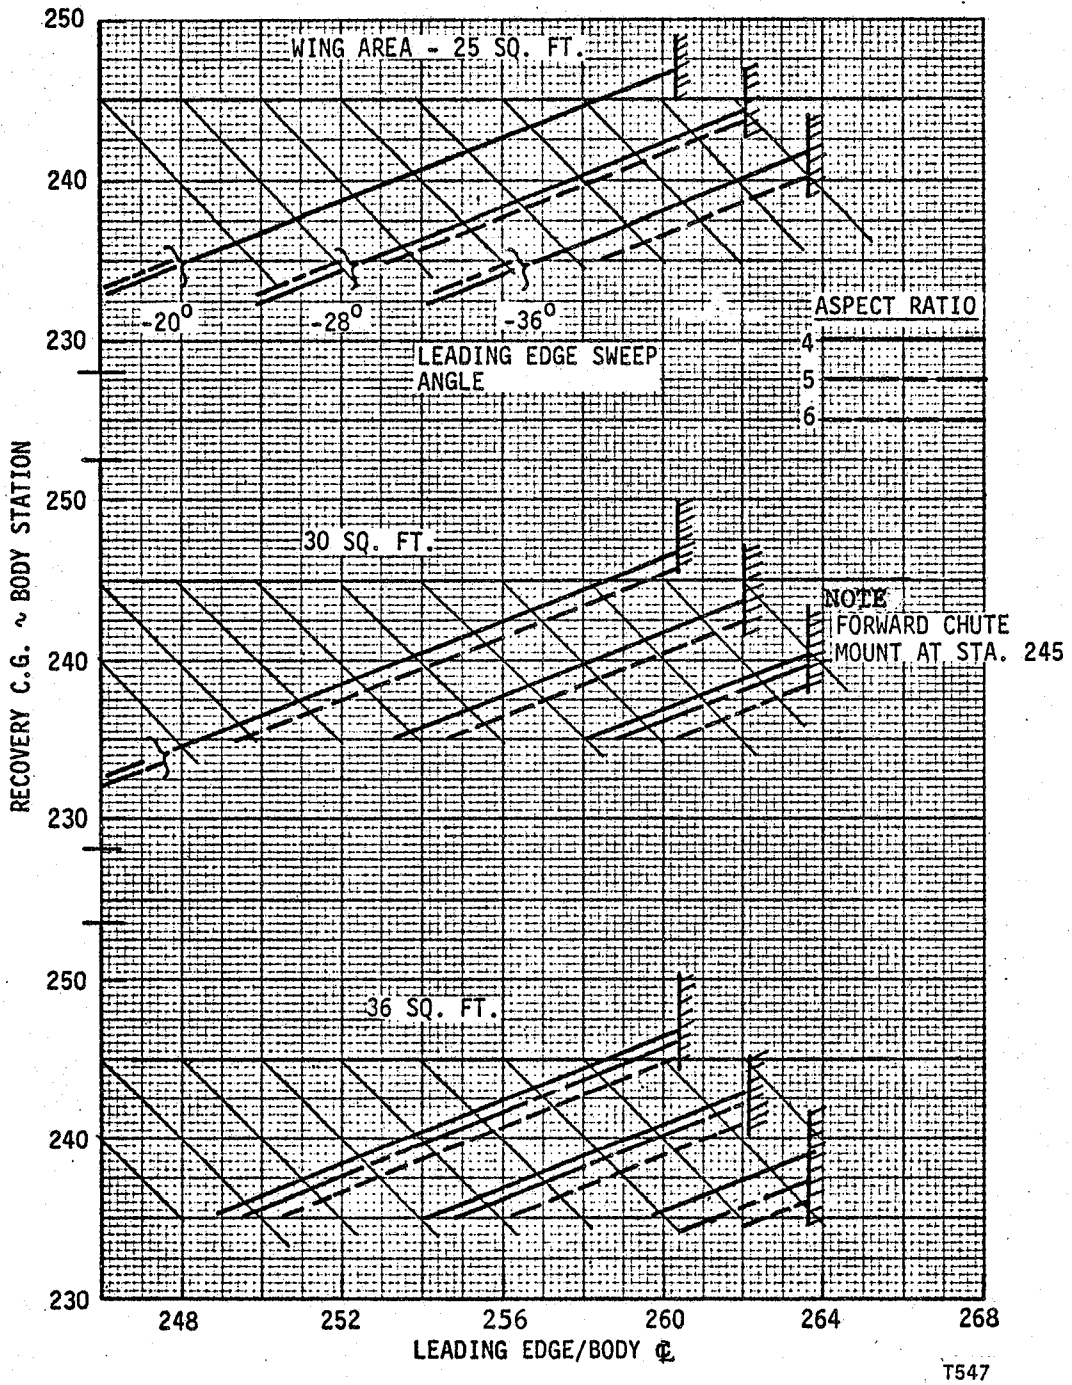


Figure 2-6. NASA Forward Swept Wing - Recovery CG vs. Wing Location

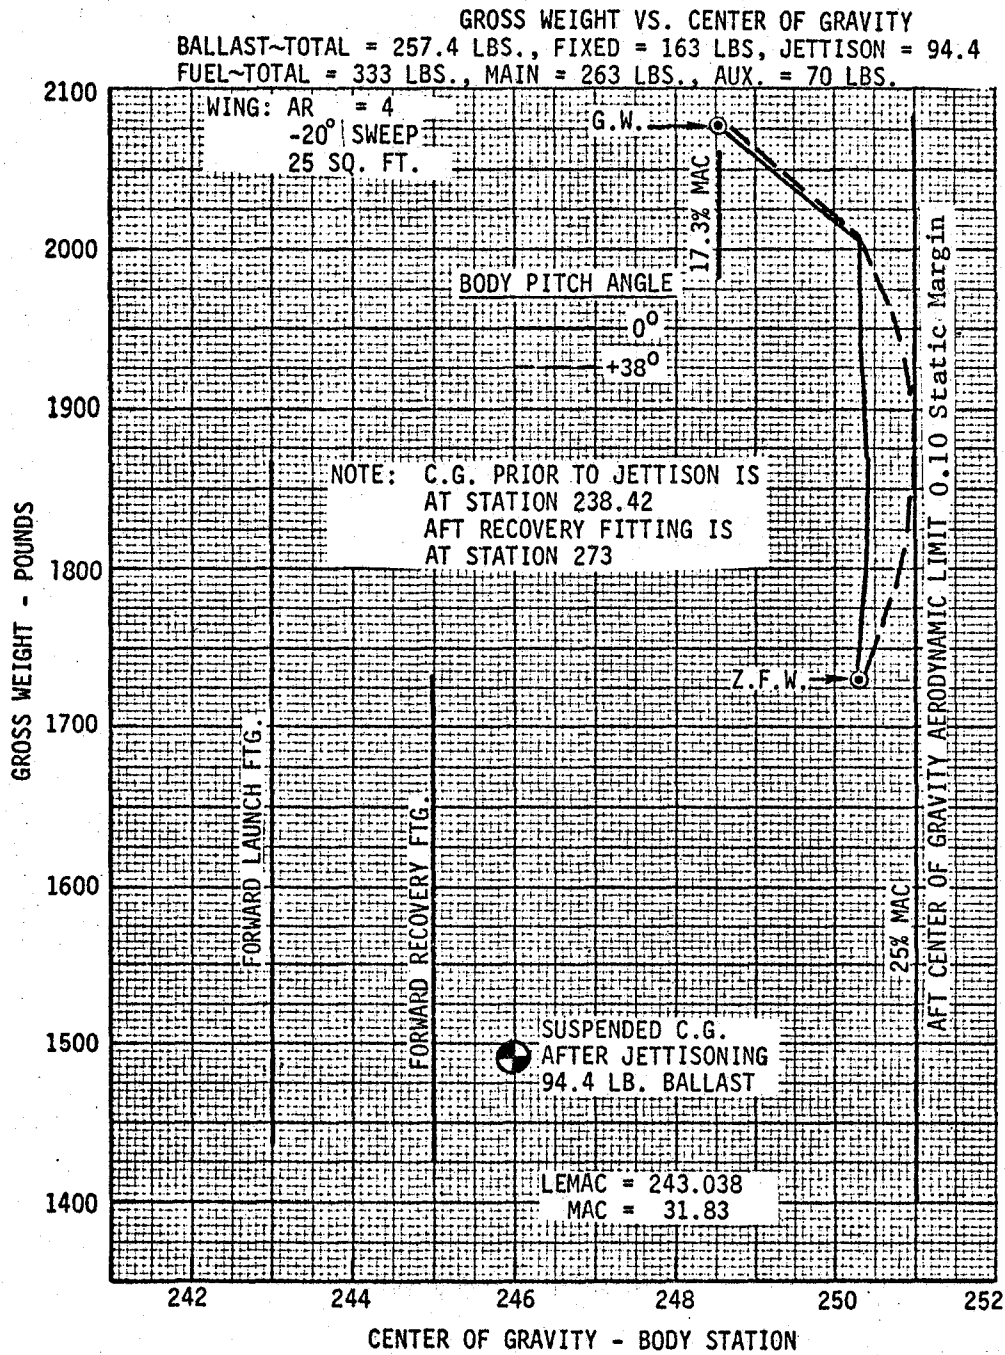

T548

Figure 2-7. NASA Forward Swept Wing

Retrieval (MAR). This concept is presented in more detail in Section 11.1.3.


Adding a canard surface to the BQM-34F will result in a further shift forward of the aerodynamic center of the vehicle. Data from Reference 2.1 have been reviewed in order to estimate this effect. The wing of Reference 2.1 has an aspect ratio of 1.25, taper ratio of 0.25 and leading edge sweep of 32.13 degrees. The close-coupled canard has about the same sweep angle and the exposed canard area is 15.9 percent of the wing reference area. The effect of the canard on aerodynamic center location is shown on Figure 2.8. A forward shift of 24 percent MAC is indicated. For the BQM-34F a canard area of 8.0 square feet is specified which produces an area ratio 0.32 for a 25 square foot wing. A forward shift of the aerodynamic center of considerably more than 24 percent MAC would be expected. A ballast weight increase of about 100 pounds would be needed for a 24 percent forward shift and considerably more than that for the canard/wing area ratios specified for the BQM-34F application. Because of this large increase in required ballast and because of the obvious problems associated with mounting a canard no further consideration was given to the canard configuration.

The choice of wing planform was not influenced by flight performance limits. Preliminary estimates shown in Reference 1.5 and past experience with the BQM-34E/F assure that the required speed and altitude regime can be attained. Flight performance aspects of the BQM-34F with the swept forward wing are presented in Section 4.0.

The choice of a wing planform for further study was influenced primarily by two factors:

- 1) Wing planform must be consistent with NASA research objectives.
- 2) Minimize ballast requirements and modifications to basic target airframe.

A 25.0 square foot aspect ratio 4 wing with -20.0 degree forward sweep was chosen. This wing minimizes ballast requirements and airframe structural modifications. NASA concurrence with this choice was obtained by telephone in late January 1979 with Jim Campbell and Hal Murrow of NASA and at a subsequent study review at TRA with Mr. Murrow on 5 March 1979.

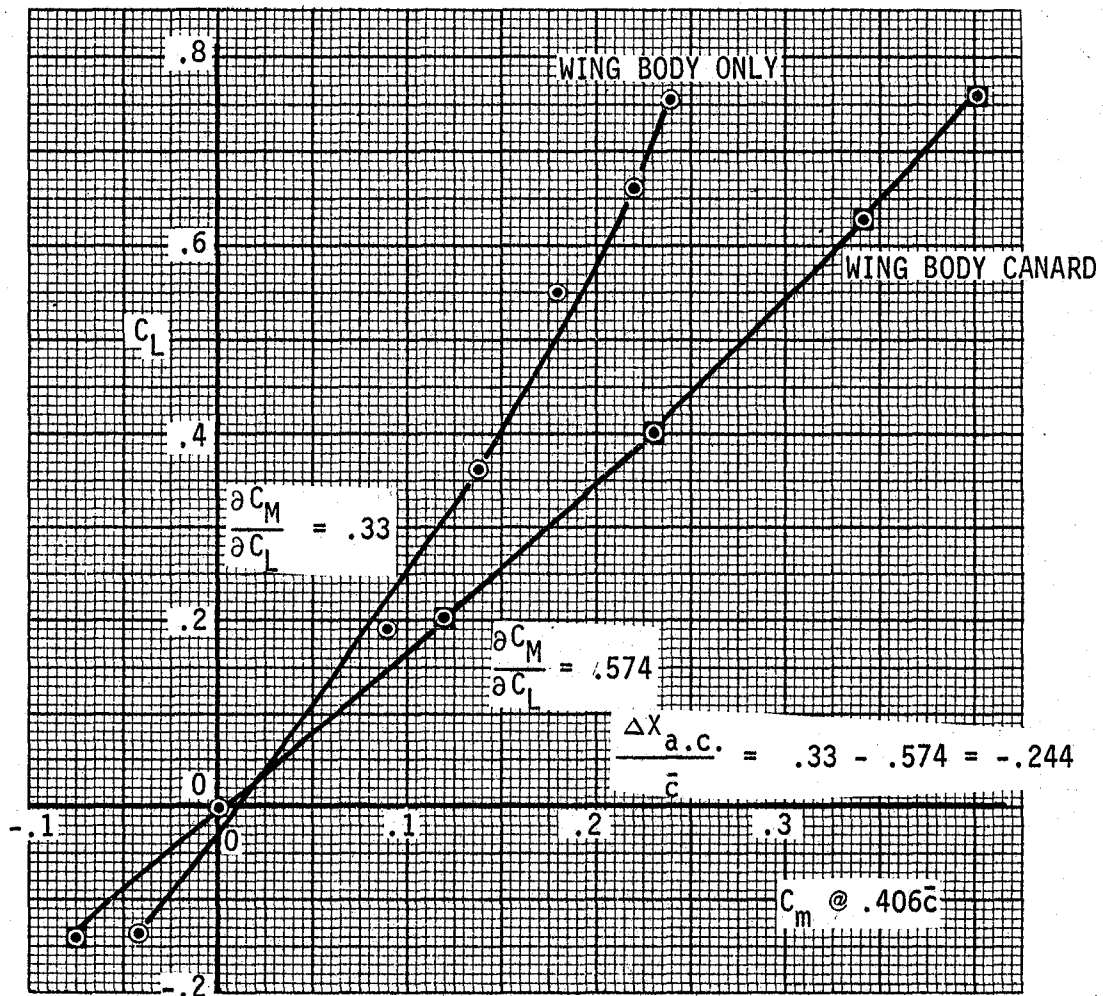

T549

Figure 2-8. Effect of Canard on Aerodynamic Center Location

The NASA SOW stipulates an unspecified supercritical airfoil for the wing. The airfoil which was chosen was the airfoil of Table II of Reference 2.2. The coordinates for the referenced airfoil are for a thickness ratio of 13 percent. These coordinates have been modified to produce the 5 percent thick supercritical airfoil used in this study. The coordinates are shown on Figure 2-9.

Selection of the wing permitted this study to progress into the more detailed stability and control, flight performance, structural, weight and balance and design efforts reported in subsequent sections of this report.

LS(1)-4050 MOD

DATE-----4/18/79

	X	Y(UPR.)	Y(LWR.)	MEAN LINE
1	0.000000	0.000000	0.000000	0.000000
2	0.002500	0.004439	-0.002607	0.000276
3	0.005000	0.006115	-0.003615	0.000544
4	0.007500	0.007385	-0.004368	0.000806
5	0.010000	0.008442	-0.004979	0.001061
6	0.012500	0.009370	-0.005498	0.001308
7	0.015000	0.010224	-0.005962	0.001549
8	0.017500	0.011019	-0.006380	0.001782
9	0.020000	0.011766	-0.006758	0.002009
10	0.025000	0.013154	-0.007427	0.002441
11	0.030000	0.014418	-0.008012	0.002845
12	0.035000	0.015551	-0.008530	0.003221
13	0.040000	0.016573	-0.008996	0.003569
14	0.045000	0.017474	-0.009420	0.003889
15	0.050000	0.018308	-0.009808	0.004179
16	0.075000	0.021692	-0.011500	0.005094
17	0.100000	0.024192	-0.012808	0.005674
18	0.125000	0.026154	-0.013846	0.006149
19	0.150000	0.027769	-0.014692	0.006525
20	0.175000	0.029077	-0.015385	0.006830
21	0.200000	0.030115	-0.015962	0.007077
22	0.225000	0.030962	-0.016423	0.007268
23	0.250000	0.031615	-0.016769	0.007421
24	0.275000	0.032115	-0.017038	0.007537
25	0.300000	0.032462	-0.017231	0.007614
26	0.325000	0.032654	-0.017346	0.007651
27	0.350000	0.032692	-0.017385	0.007658
28	0.375000	0.032577	-0.017308	0.007634
29	0.400000	0.032346	-0.017192	0.007580
30	0.425000	0.032000	-0.017000	0.007499
31	0.450000	0.031538	-0.016731	0.007401
32	0.475000	0.030962	-0.016385	0.007286
33	0.500000	0.030269	-0.015962	0.007157
34	0.525000	0.029462	-0.015423	0.007015
35	0.550000	0.028538	-0.014808	0.006862
36	0.575000	0.027500	-0.014077	0.006708
37	0.600000	0.026346	-0.013231	0.006560
38	0.625000	0.025115	-0.012269	0.006417
39	0.650000	0.023769	-0.011192	0.006281
40	0.675000	0.022346	-0.010077	0.006128
41	0.700000	0.020846	-0.008923	0.005954
42	0.725000	0.019269	-0.007769	0.005744
43	0.750000	0.017615	-0.006615	0.005497
44	0.775000	0.015923	-0.005462	0.005222
45	0.800000	0.014154	-0.004308	0.004918
46	0.825000	0.012346	-0.003231	0.004551
47	0.850000	0.010500	-0.002269	0.004112
48	0.875000	0.008615	-0.001500	0.003549
49	0.900000	0.006692	-0.001000	0.002846
50	0.925000	0.004731	-0.000808	0.001952
51	0.950000	0.002692	-0.001077	0.000808
52	0.975000	0.000577	-0.001962	-0.000733
53	1.000000	-0.001654	-0.003615	-0.002635

Figure 2-9. Supercritical Airfoil Coordinates

3.0 PRELIMINARY DESIGN FEASIBILITY

The stated objective of this study was to evaluate the feasibility of incorporating an aeroelastically tailored forward swept wing on to a BQM-34F for flight research testing and to perform a preliminary design of the wing. This section evaluates the feasibility of accomplishing those objectives based upon the details of the study presented in other sections of this report.

The evaluation can be treated in two parts:

- (1) The feasibility of designing an aeroelastically tailored forward swept wing and
- (2) The feasibility of incorporating such a wing onto the BQM-34F.

The feasibility of number (1) will not be further addressed in this section since it has been shown by others that a swept forward wing can be designed and flown.

A number of issues were uncovered and addressed during the course of the study. The issues and their resolutions are listed below.

ISSUE

RESOLUTION

Wing Position

Wing is positioned at the existing wing mounting location. Wing is located as far aft as possible to reduce ballast requirements.

Wing geometry

The selected wing (see Figure 1-1) was chosen to simultaneously meet NASA planform configuration requirements and to minimize ballast requirements.

Canard surface

Extensive structural modifications would be required to mount a canard and an increase in forward ballast of more than 100 pounds. Canard configuration was discarded.

ISSUE

RESOLUTION

Ballast

Forward ballast is required to maintain proper aircraft balance. The lack of internal volume requires mounting the ballast externally. A recovery cg problem is solved by a redesign of the main parachute attachment system rather than having to jettison ballast.

Airframe Modifications

Modifications will be required to mount the forward fuselage external ballast, provide forward fuselage external structural beef-up, provide a minor beef-up of wing mount frame at station 250.06, provide a more-forward parachute fitting and alter the main parachute attaching hardware.

Flight Performance

Vehicle flight envelopes and mission durations are adequate for the research application.

Stability and Control

Ballast provisions insure adequate static longitudinal and directional stability. Preliminary analysis indicates satisfactory dynamic lateral/directional stability and control. More than adequate longitudinal control is available to achieve 3.0 g's and C_L of 0.7 at the design condition.

The conclusion is that it is entirely feasible to accomplish the stated objectives and that this can be accomplished without extensive modification (other than the wing) to the basic airframe of the BQM-34F.

4.0 FLIGHT PERFORMANCE

4.1 PERFORMANCE BASIS

Performance capabilities for the BQM-34F configured with an aero-elastically tailored forward swept research wing are based on the Reference 4.1 installed characteristics of the CAE J69-T-406 turbojet engine and estimated vehicle aerodynamics data. The physical description of the wing is as follows:

Gross Area	25 Ft ²
Exposed Area	18.9 Ft ²
M.A.C.	2.66 Ft
Span	10.0 Ft
Aspect Ratio	4.0
Taper Ratio	0.4
Sweep, L.E.	-20 Deg.
Sweep, Max. t/c	-27 Deg.
Sweep, T.E.	-38 Deg.
Airfoil, t/c	5 %
Airfoil Type	Supercritical

The vehicle lift and drag bases were derived using computerized estimation methods described in Reference 4.2. For comparison, cross checks were made of the computerized methodology against existing wind tunnel derived BQM-34F characteristics. The estimating procedures were developed for conventional aft-swept wing configurations but it was assumed, for the purpose of this feasibility study that the aerodynamics would be representative of a forward swept wing.

Figure 4-1 presents an example of the basic zero lift drag buildup at 0.9 Mach number, 30,000 feet, obtained from the above referenced method. Figure 4-2 presents zero lift drag throughout the Mach-altitude range of interest.

Drag due to lift and lift curve slope data are shown in Figures 4-3 and 4-4 respectively. These data were also developed from the Reference 4.2 method assuming a fixed elevator and by the method described in Section

ALTITUDE - 30,000 FT
 MACH NO. - 0.9
 REF. AREA - 25 FT²

COMPONENTS	A _{WET} FT ²	l _{REF} FT	RN 10 ⁶	C _f	K _f	f FT ²	C _{D0}
Fuselage	148.5	29.0	74.3	.00208	1.057	.3268	.01307
Wing	37.8	2.66	6.8	.00299	1.179	.1333	.00533
Horizontal Tail	11.0	1.45	3.7	.00332	1.062	.0388	.00155
Vertical Tail	13.6	2.70	6.9	.00298	1.043	.0423	.00169
Interference						.0783	.00313
Base						.0105	.00042
Camber						.0110	.00044
Surface Roughness						.0370	.00148
Drag Rise						.0580	.00232
TOTAL						.7358	.02943

T550

Figure 4-1. Zero Lift Drag Buildup

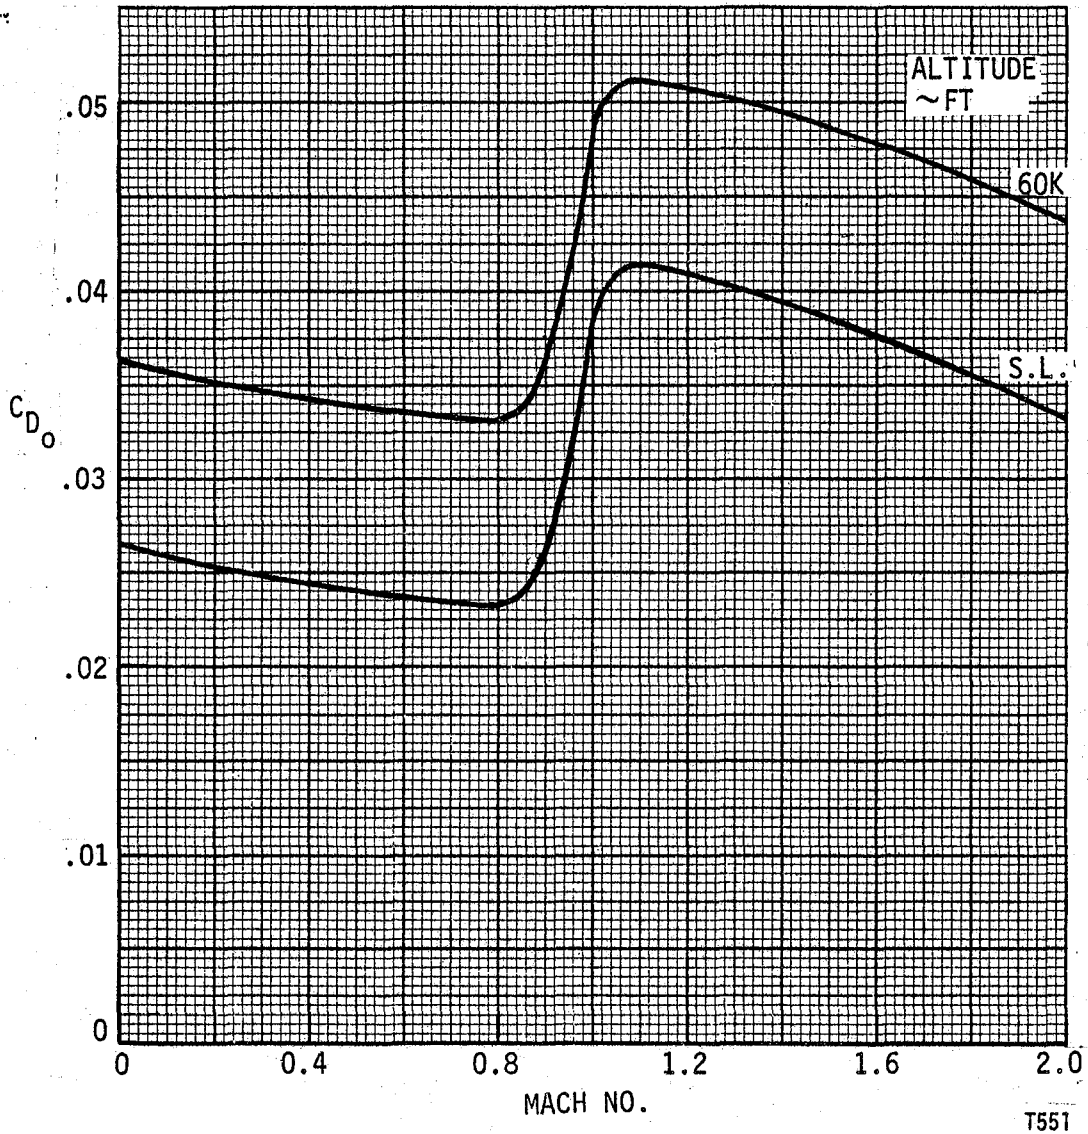


Figure 4-2. Zero Lift Drag Coefficient - BQM-34F
Forward Swept Research Wing


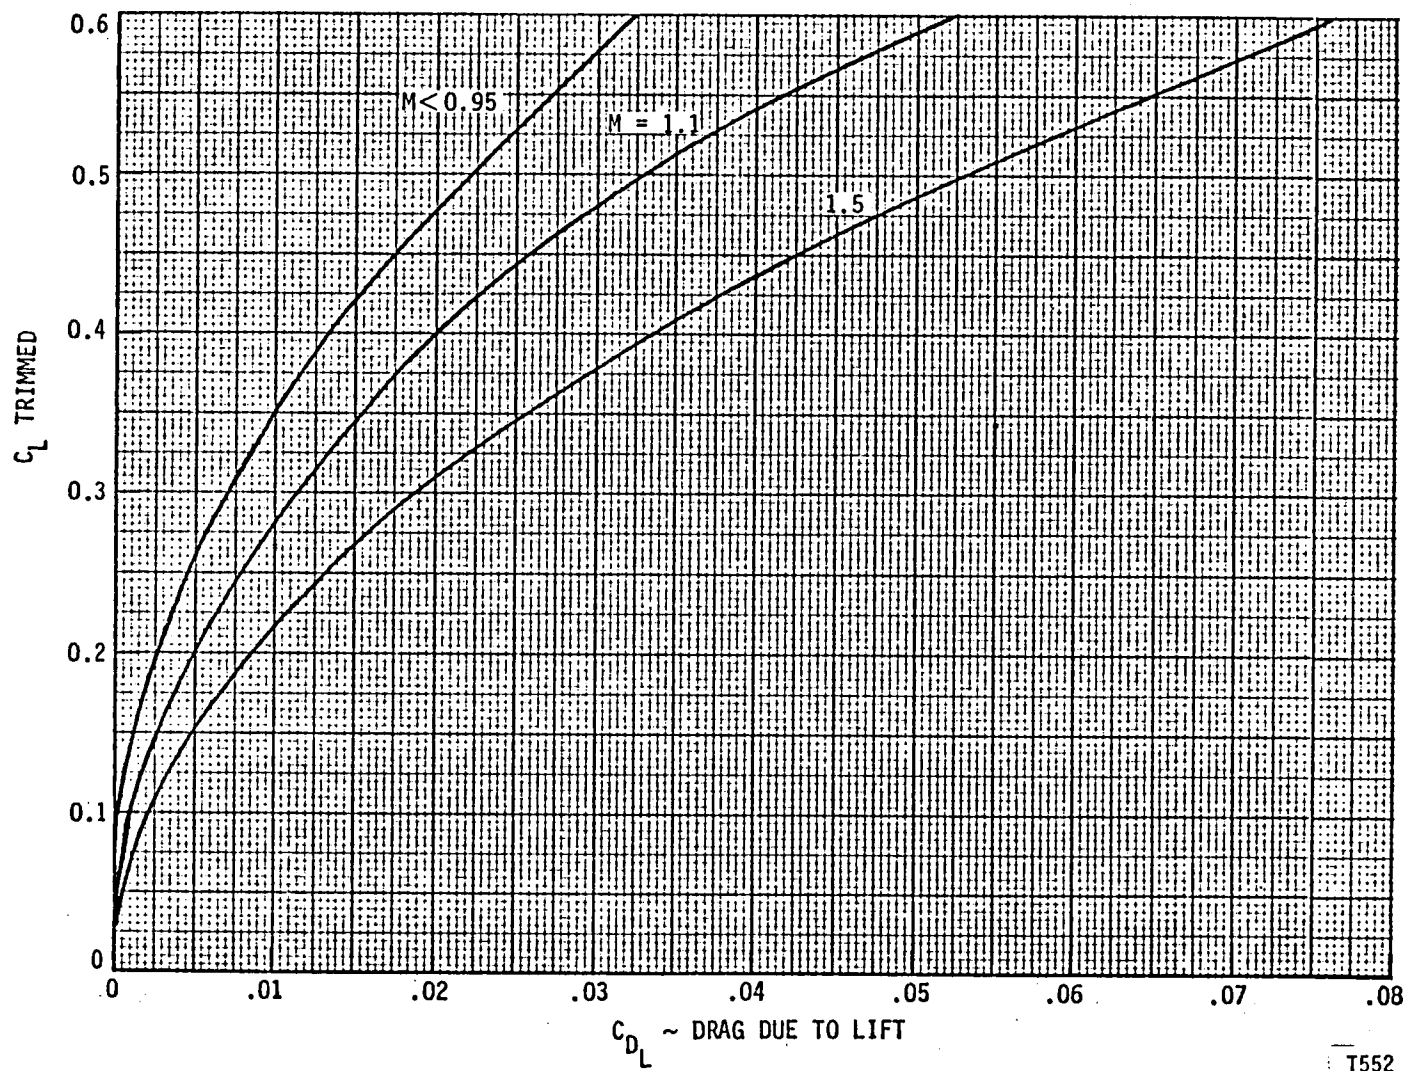


Figure 4-3. Drag Due to Lift BQM-34F Forward Swept Research Wing

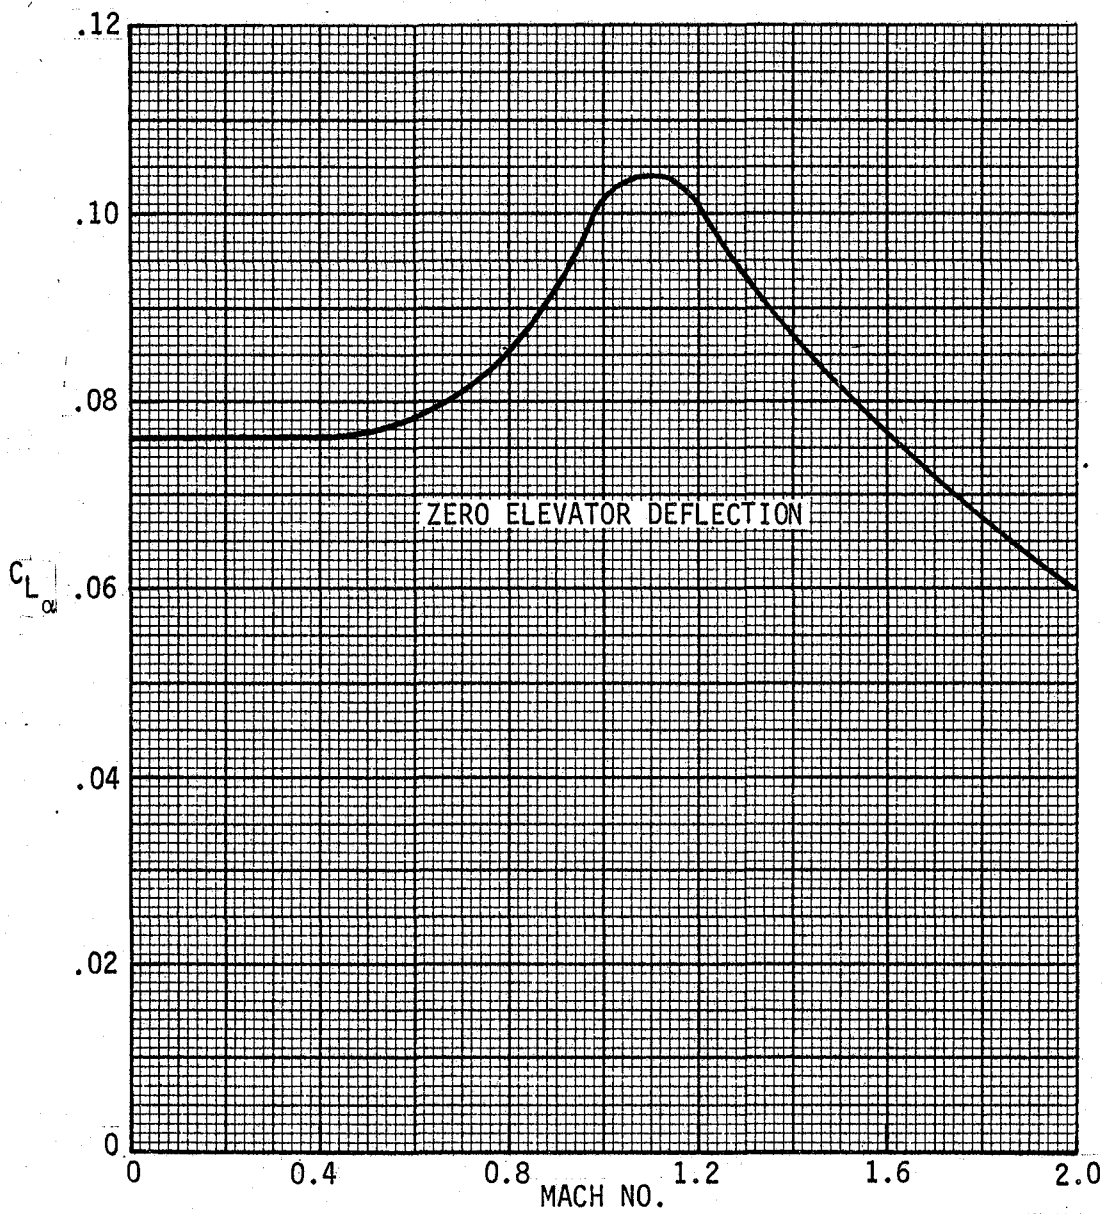

T553

Figure 4-4 Lift Curve Slope BQM-34F Forward Swept Research Wing

5.1.2 This is an acceptable approximation in as much as vehicle stability levels are low and elevator control power is high.

4.2: PERFORMANCE

Theoretical speed altitude envelopes at constant load factors and variable load factors are illustrated in Figures 4-5 and 4-6 respectively. It is recognized that these envelopes, in some instances, exceed chosen wing structural design limits. However, they do serve to point up the performance capabilities available.

Typical mission endurance capabilities for the research vehicle are summarized in Figure 4-7. The missions assume airlaunch from 30,000 feet at 0.7 Mach number. A launch weight of 2071 lbs. and total mission fuel weight of 333 lbs. is assumed. At 30,000 feet, 40 minutes of flight research time is available at 0.9 Mach number. Flight at higher altitude, increases the on-station time.

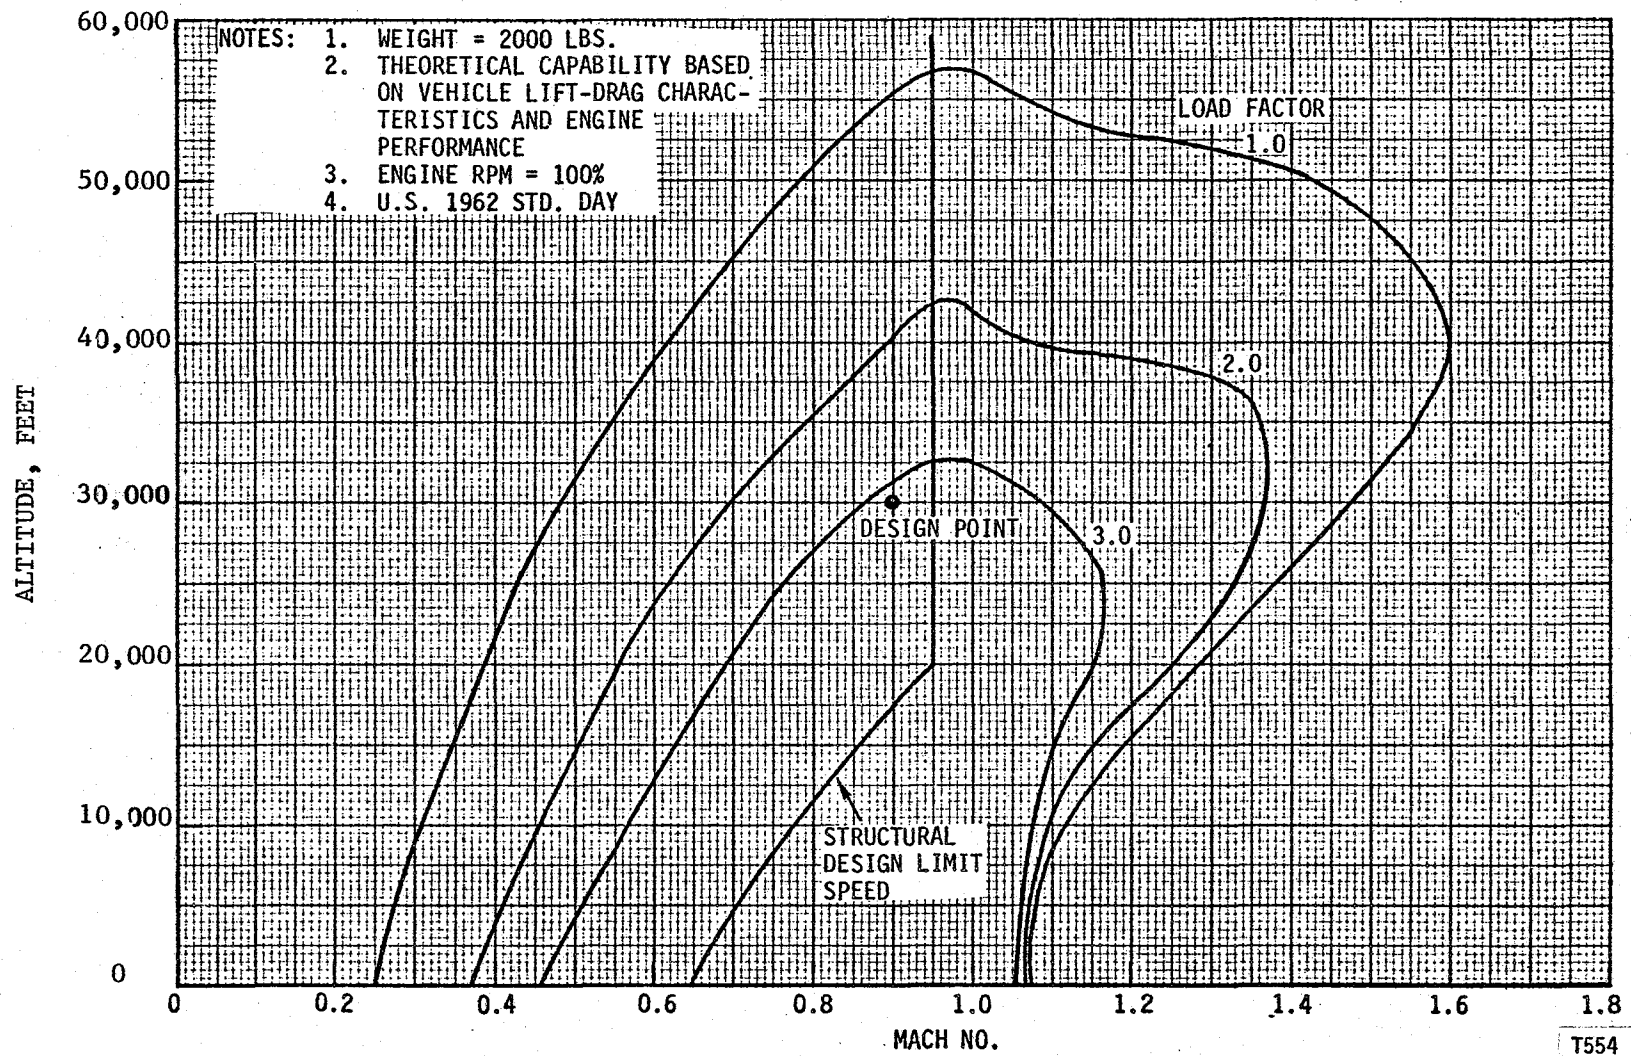


Figure 4-5. Flight Envelope Forward Swept Research Wing


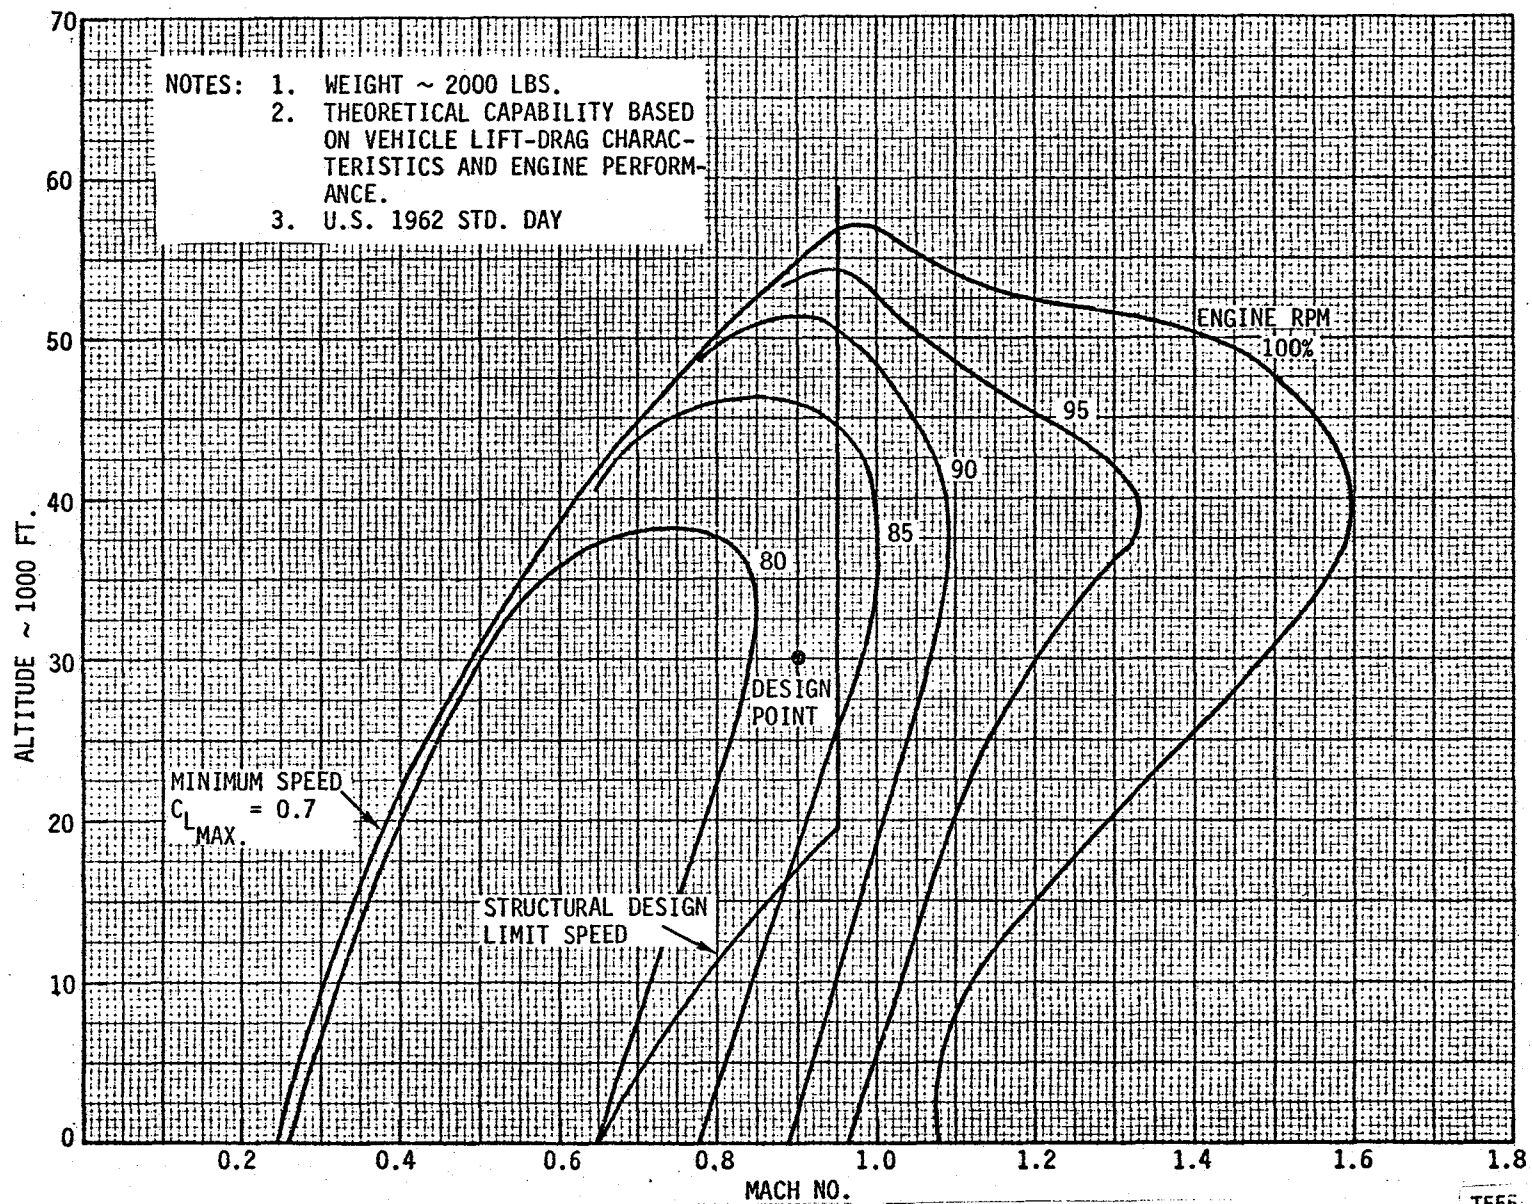


Figure 4-6. Flight Envelope Forward Swept Research Wing

T555

LAUNCH ALTITUDE ~ 30K
MISSION FUEL AVAIL. ~ 333 LBS

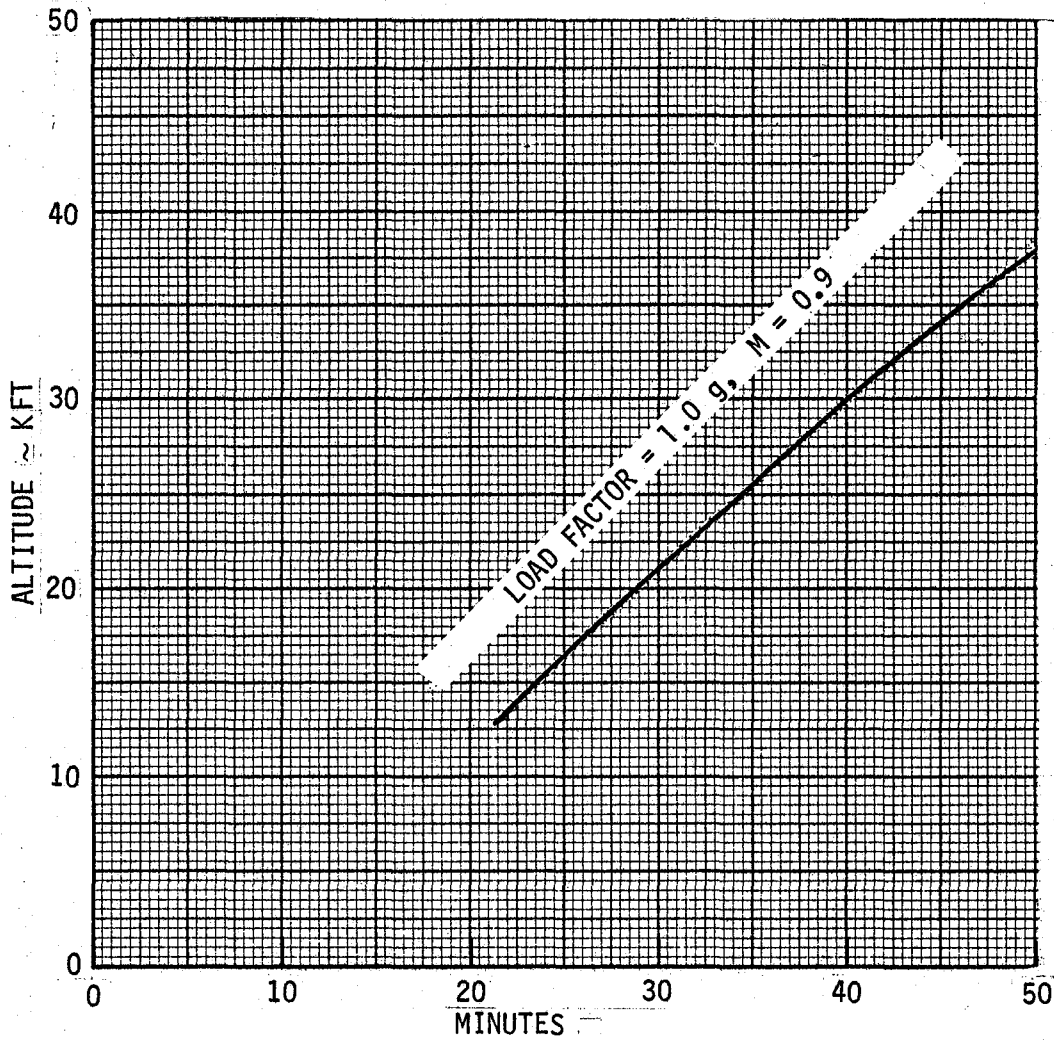

T556

Figure 4-7. Mission Endurance BQM-34F Forward Swept Research Wing

4-17-77 6:15 PM

4-17-77 6:15 PM

4-17-77 6:15 PM

5.0 STABILITY AND CONTROL

The principal objectives of the stability and control analyses conducted for this study were to determine wing placement and center of gravity location requirements for a positive longitudinal static stability margin, to develop preliminary estimates of stability and control characteristics for the BQM-34F/swept forward wing, and to point out potential problem areas which might be unique to this configuration.

5.1 LONGITUDINAL STABILITY AND CONTROL

5.1.1 Parametric Studies

The initial stability analyses were concerned with locating the wing and center of gravity to obtain a desired level of static stability. The specified range of wing planform geometric parameters were utilized in a parametric analyses combining the wing, body, and horizontal tail stability contributions for a range of wing locations. The center of gravity location was then determined for each wing location which resulted in a constant value of static longitudinal stability C_{mC_L} .

The initial calculations assumed the wing aerodynamic center acted at the wing quarter-chord. The downwash derivative at the horizontal tail was calculated by an empirical method from Reference 5.1 as a function of the wing planform variables. The selected minimum stability margin was 15%.

A second iteration was performed wherein the wing aerodynamic center location, based on a lifting line theory, was approximately 5% chord farther aft. The estimated downwash derivative ϵ_{α} was reduced by 0.10 based on comparison of downwash characteristics calculated by the empirical method with trends indicated by test data for a forward swept wing wind tunnel model (Reference 5.2). In addition, in order to provide further relief on ballast requirements, the minimum stability margin was reduced from 15% to 10%. Typical results are shown in Figure 5-1 for a wing area of 25 ft². The center of gravity location required for a given wing location is fairly insensitive to both wing area and aspect ratio. The predominant factor is sweep angle, requiring increasingly more aft wing locations as the leading edge sweep is increased.

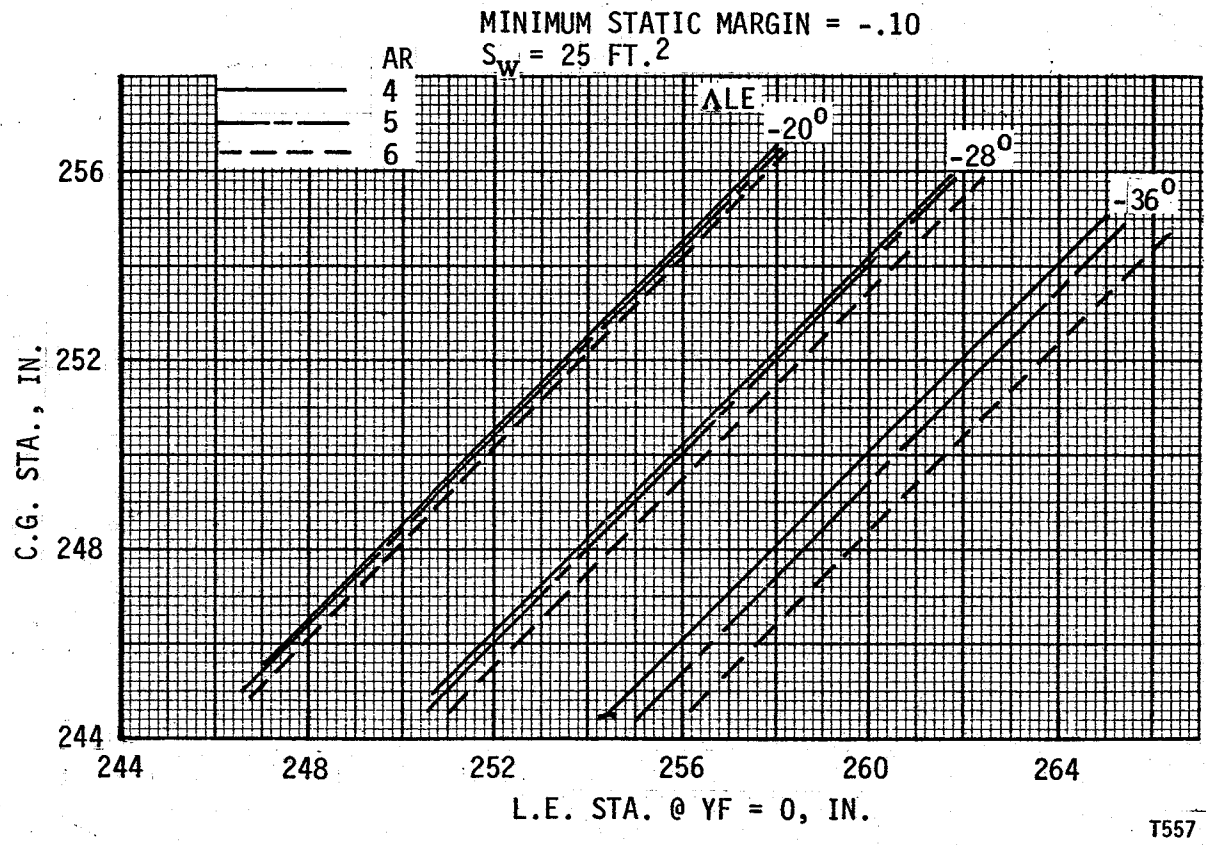


Figure 5-1. Forward Swept Wing Estimated CG Location Required for Various Wing Positions

T557

The effect of wing location on static stability is shown in Figure 5-2 for the selected wing. The plot of $C_{m_{CL}}$ versus center of gravity location in percent chord can be used in conjunction with the curves of wing and center of gravity location to determine the required combination for any level of static stability.

5.1.2 Estimated Longitudinal Characteristics

The estimated lift and pitching moment curve slopes are shown in Figure 5-3 for the BQM-34F with the forward swept wing. The wing lift curve slope was estimated by methods from Reference 5.1 and the corresponding pitching moment contribution calculated for two values of wing aerodynamic center location, since the exact location is not known.


The effect of elasticizing the horizontal tail contribution is shown by the difference in the pitching moment curve slopes for a rigid airframe and for an altitude of sea level where the elastic losses are greatest. The variation of the expected static stability margin with Mach number is shown in Figure 5-4 along with the longitudinal control effectiveness derivatives.

Longitudinal trim requirements are presented in Figure 5-5 in terms of the elevator deflection required as functions of trimmed lift coefficient and center of gravity location. Two flight conditions are shown, one representative of air launch and the other for the design condition of Mach 0.9 at 30,000 feet. For the air launch condition small positive load factors in excess of one require an angle of attack of approximately 10 degrees. For the design flight condition, a normal load factor of 3 should be attainable with an angle of attack of about 8 degrees, corresponding to a lift coefficient of 0.70.

5.2 LATERAL - DIRECTIONAL STABILITY AND CONTROL

5.2.1 Dihedral Effect

One of the characteristics of swept forward wings is a positive variation of rolling moment with sideslip angle in the linear angle of attack range. This parameter was calculated for the selected wing by the method of Reference 5.1 which in turn is based partly on the methods of Reference 5.3. As

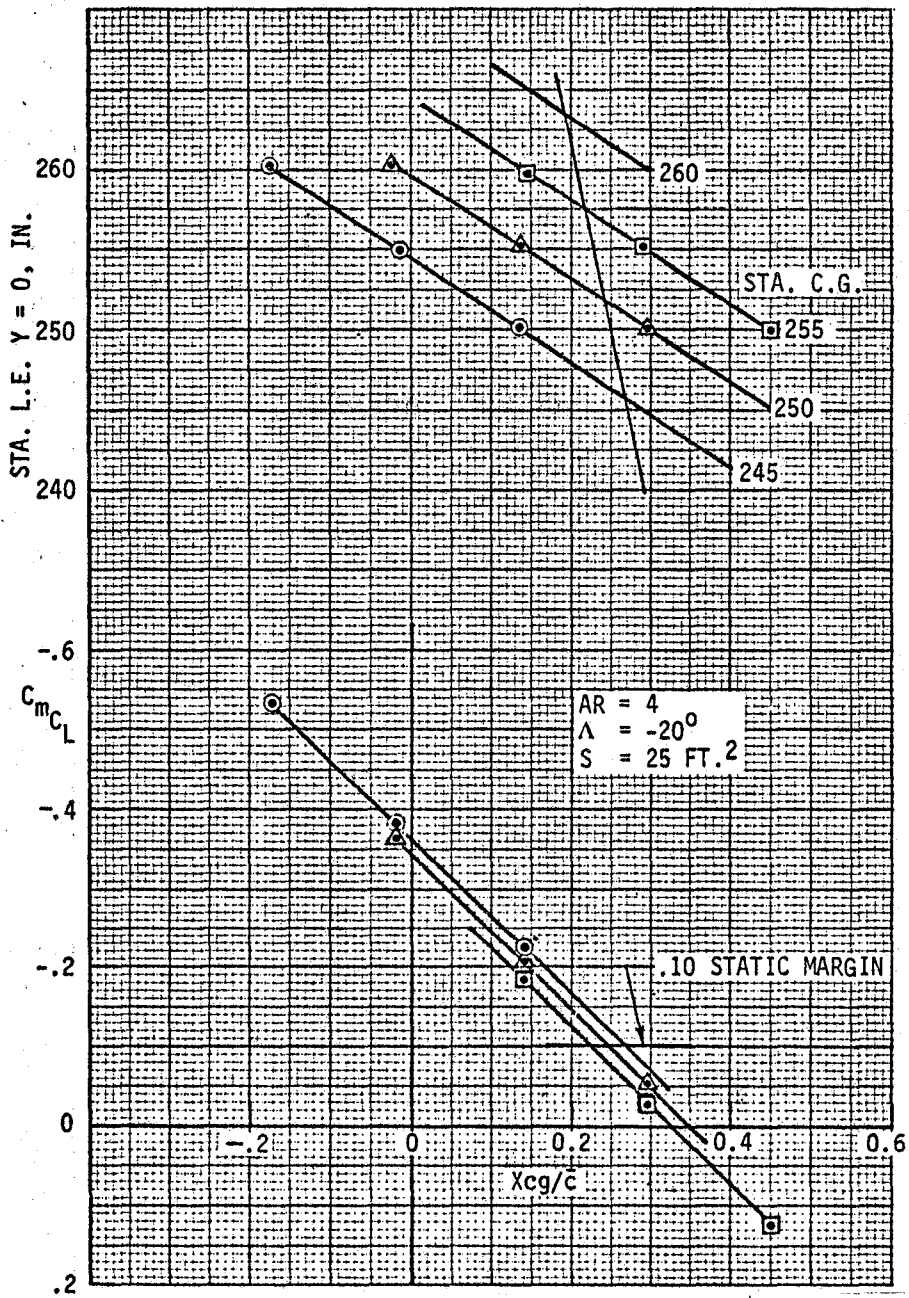

T558

Figure 5-2. Effect of Wing Location on Static Stability

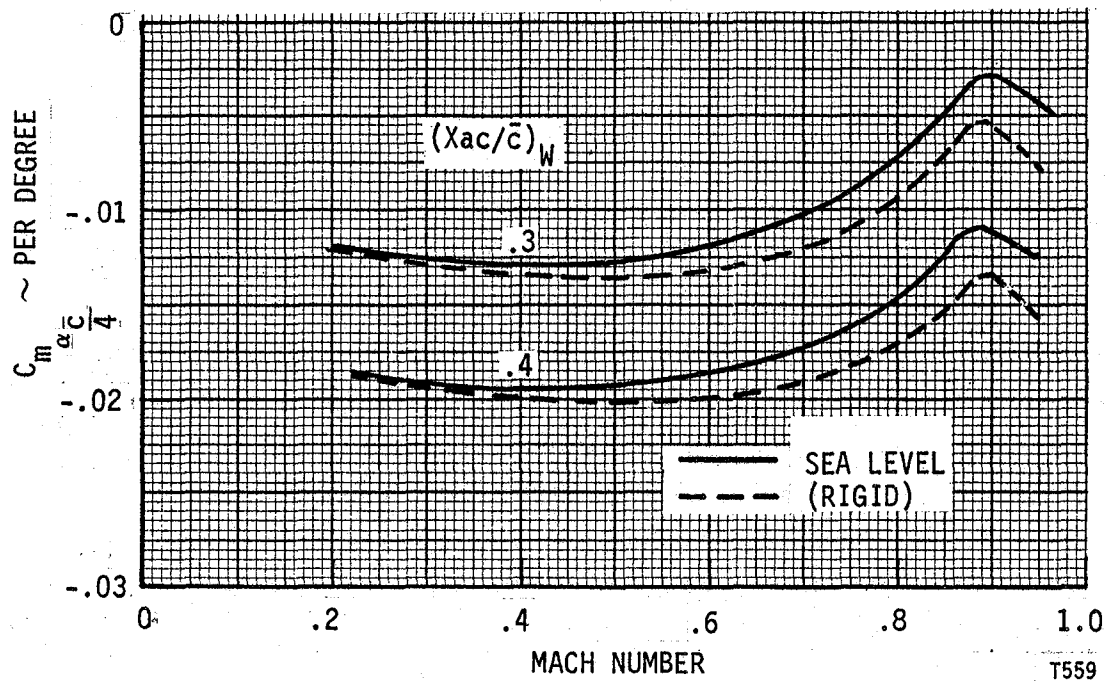
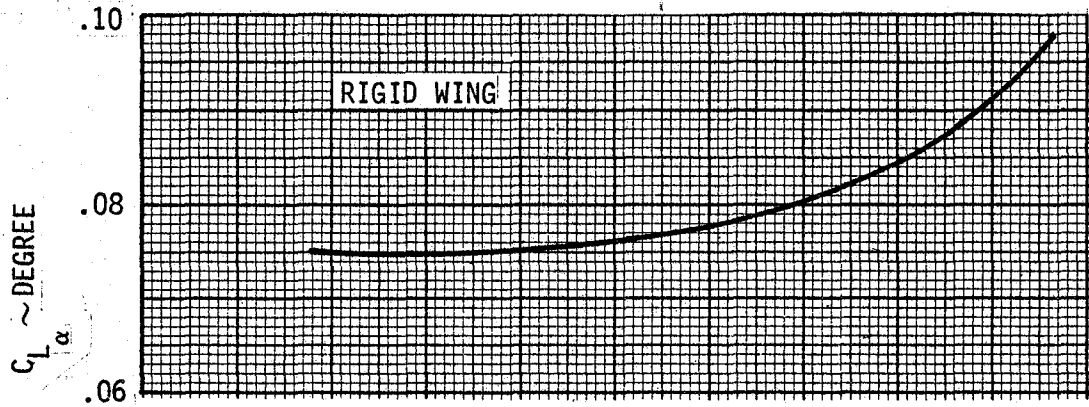


Figure 5-3. Estimated Longitudinal Stability Derivatives



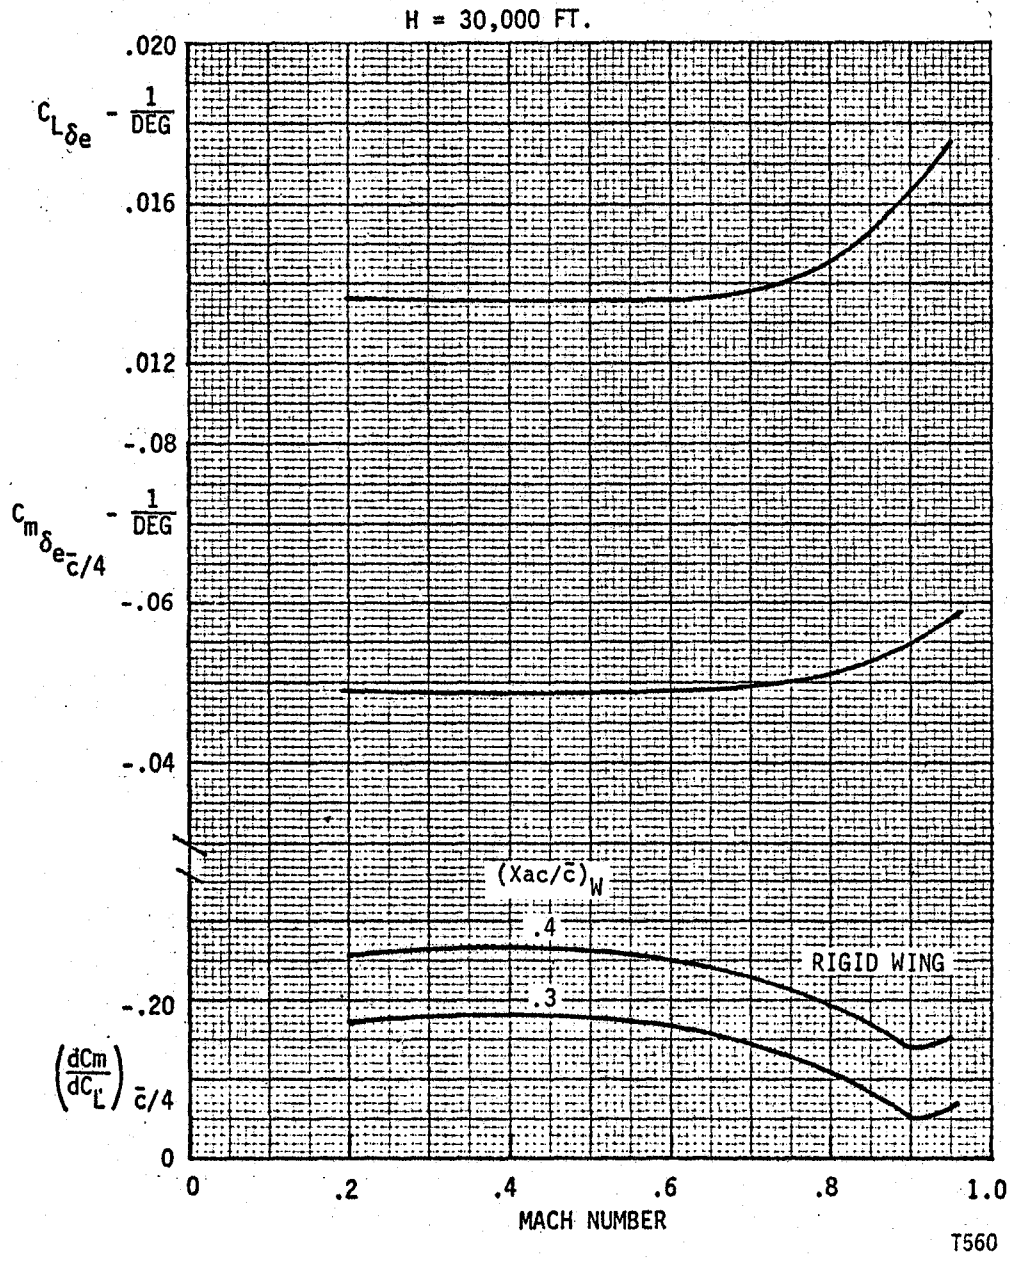


Figure 5-4. Estimated Longitudinal Control Effectiveness and Static Stability Margin

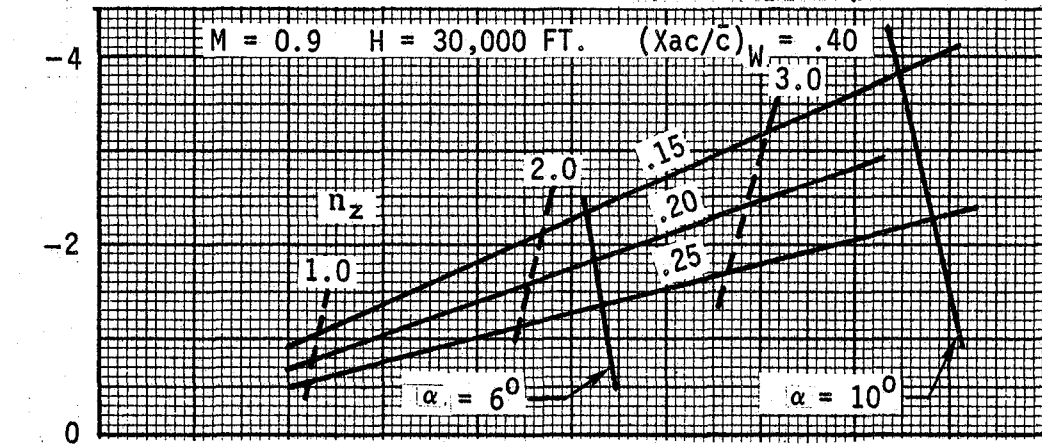

ELEVATOR DEFLECTION $\sim \delta_e$, DEG.

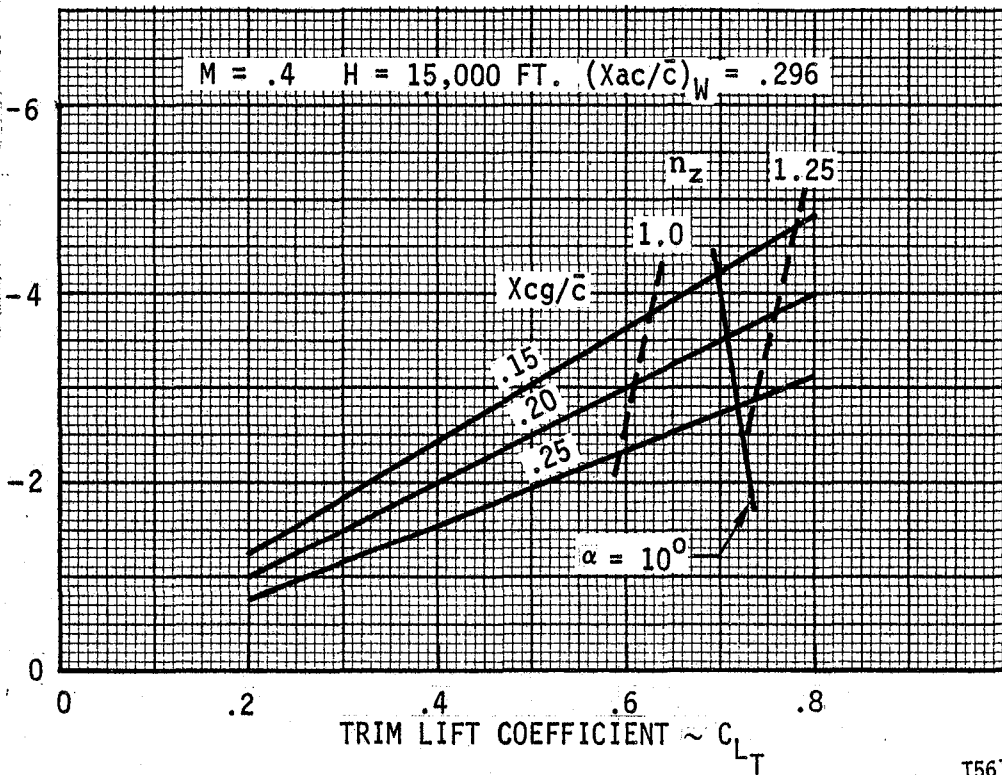

T561

Figure 5-5. Longitudinal Trim Requirements

applied to negative sweep the method is restricted to -20° sweep of the half-chord line, requiring extrapolation for higher sweep angles. The results are shown in Figure 5-6 in comparison with the wing contribution to $C_{l\beta}$ for a swept forward wing wind tunnel model and for the basic BQM-34F. The β small-scale model data were developed by subtracting the fuselage increment from the wing-body combination of References 5.2 and 2.1.


The model data are seen to be reasonably linear up to 12° angle of attack and in general agreement with the calculated value of $C_{l\beta}$, although there are significant differences in the planforms of the two wings. The effect of wing sweep orientation on $C_{l\beta}$ is also discussed in Reference 5.4 which shows large reductions in the rolling moment due to roll displacement parameter for forward sweep compared to a normally aft-swept wing.

The effect of reduced dihedral effect was preliminarily evaluated on the BQM-34F 6 DOF flight simulation program by adding a constant increment in $C_{l\beta}$ of $+0.004$ to the basic BQM-34F level. Comparison was made between the basic β BQM-34F and the simulated forward swept wing configuration during turn maneuvers at several flight conditions.

The transient dynamics are shown in Figures 5-7(a) through 5-7(c) for the two configurations arranged in tandem along the time scale. At all flight conditions evaluated, the differential aileron excursion required to execute turns and turn reversals is less for the forward swept wing configuration than for the basic BQM-34F. As a result of this study it was concluded that the positive increment in $C_{l\beta}$ will not have an adverse effect on vehicle flight control in the research β configuration.


5.2.2 Estimated Lateral-Directional Characteristics

The BQM-34F with the swept forward wing is estimated to have a satisfactory level of static directional stability since the wing contribution is small. The increment for the swept forward wing of the wind tunnel model of Reference 5.2 actually indicates a small stabilizing effect. The vertical tail increment for the same model decreased with increasing angle of attack in the presence of the swept forward wing and remained essentially constant in the presence of the swept back wing. This effect may not occur with the

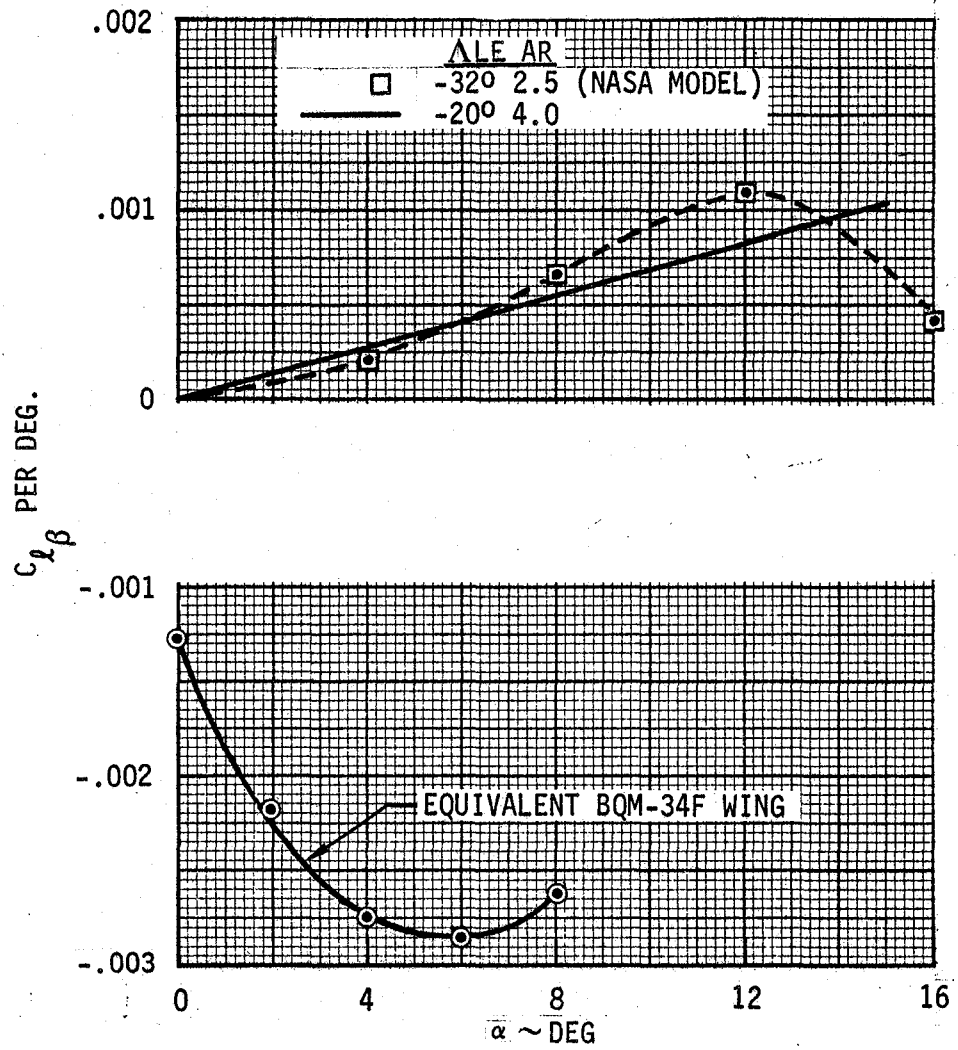

T562


Figure 5-6 Comparison of Wing Contribution to $C_{l\beta}$

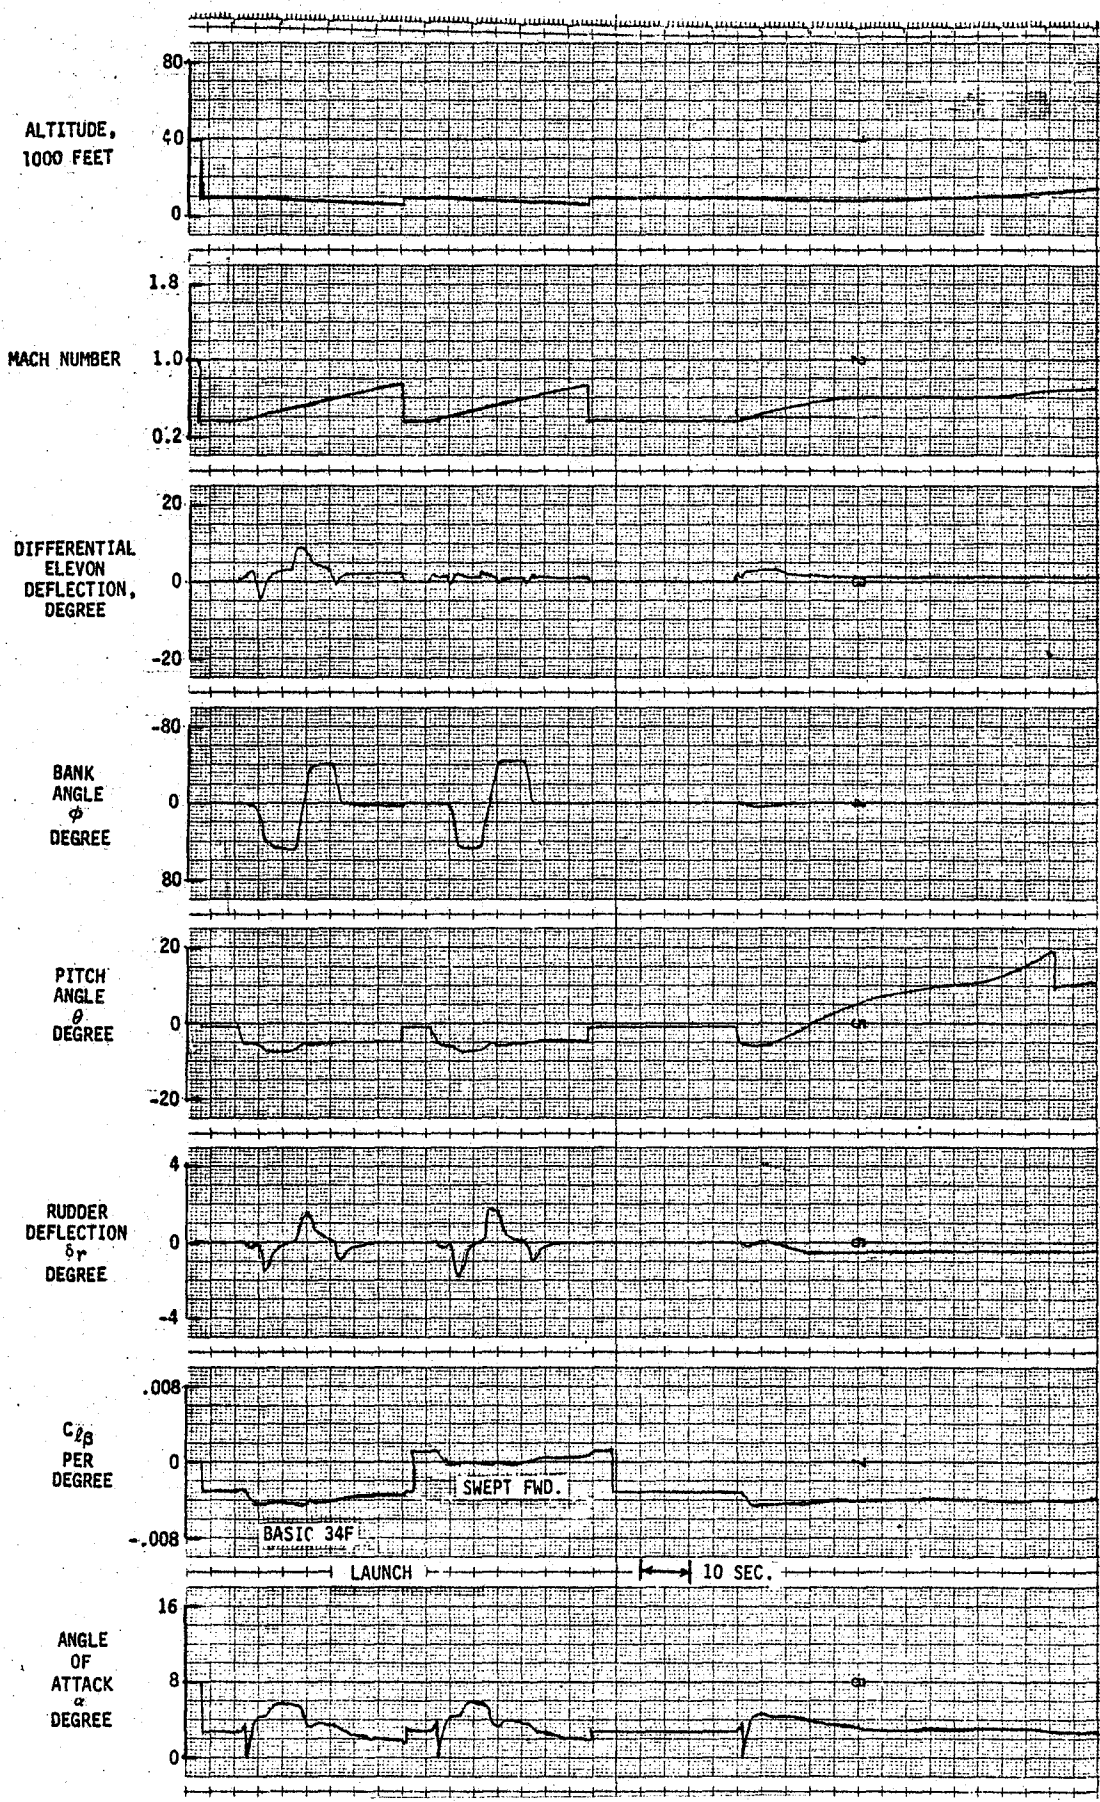

(a) Launch-Release Mode


T563

Figure 5-7. Effect of $C_{l\beta}$ on Dynamic Stability in Turns (Sheet 1 of 3)

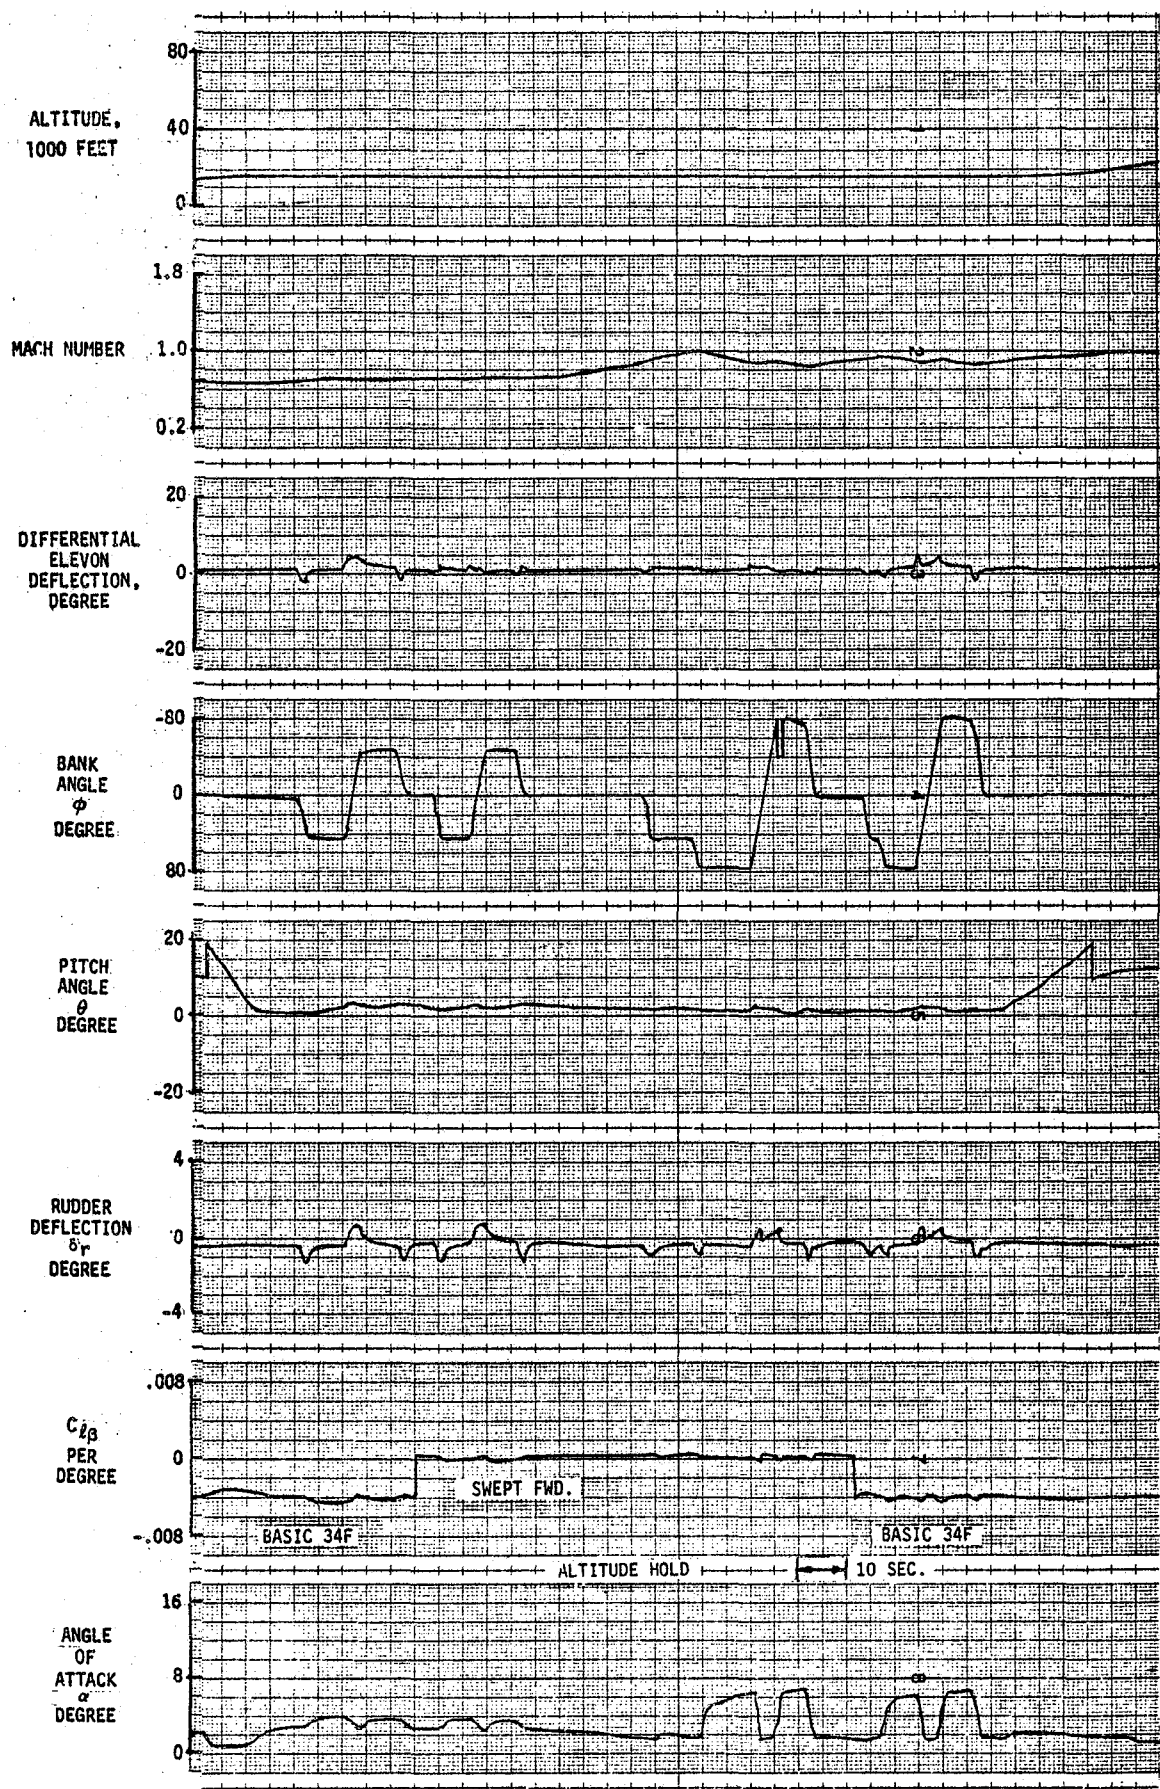

(b) Altitude Hold Mode

Figure 5-7. Effect of $C_{l\beta}$ on Dynamic Stability in Turns (Sheet 2 of 3)

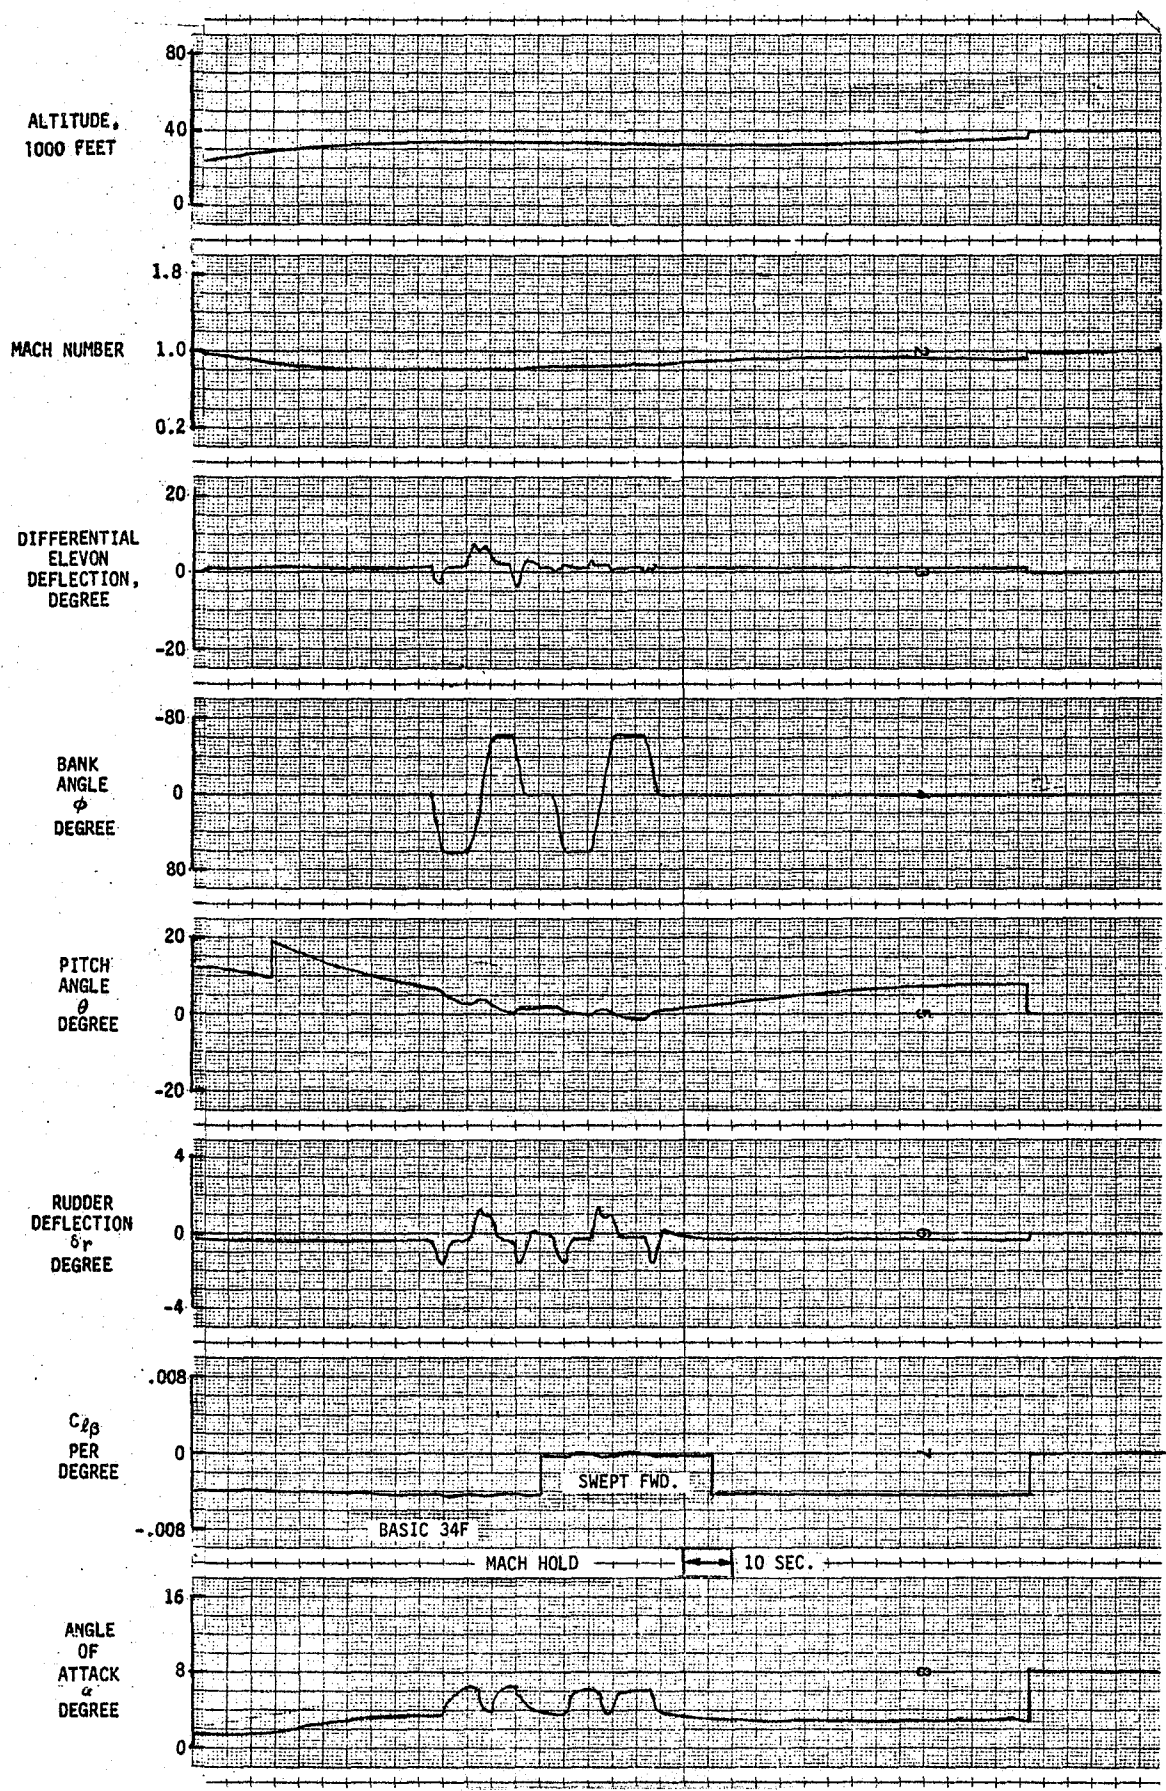

(c) Mach Hold Mode

Figure 5-7. Effect of $C_{L\beta}$ on Dynamic Stability in Turns (Sheet 3 of 3)

BQM-34F configuration however, since the research wing has a higher aspect ratio and lower sweep angle.

The estimated static stability derivatives are shown in Figure 5-8 for the BQM-34F/forward swept wing configuration. The effect of elasticizing the vertical tail contribution is indicated for the directional stability derivative, but was determined to have a negligible effect on $C_{l\beta}$. It is noted that $C_{l\beta}$ is negative at low angles of attack due to the vertical tail contribution and becomes positive at an angle of attack of about 8 degrees.


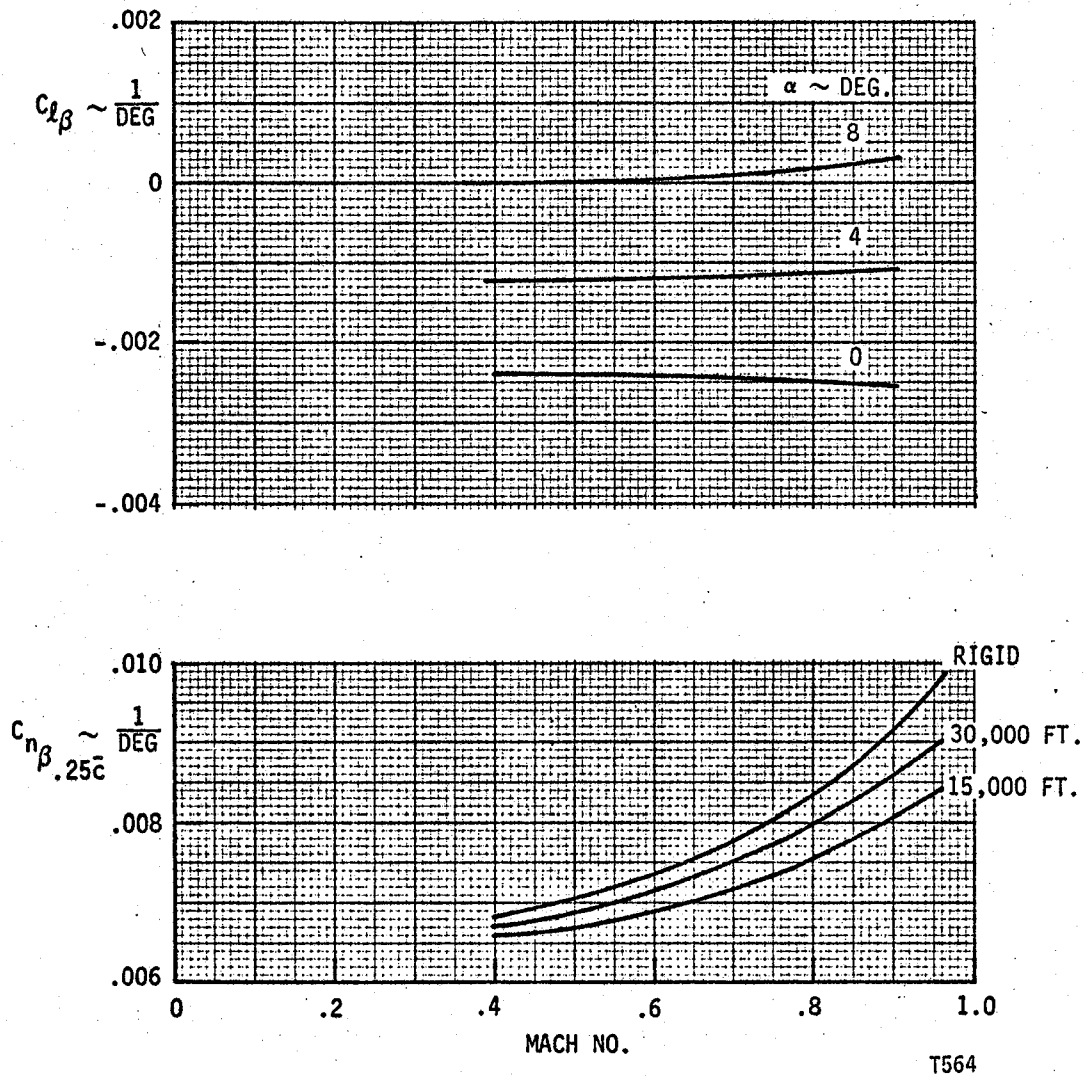


Figure 5-8. Estimated Static Lateral-Directional Stability Derivatives

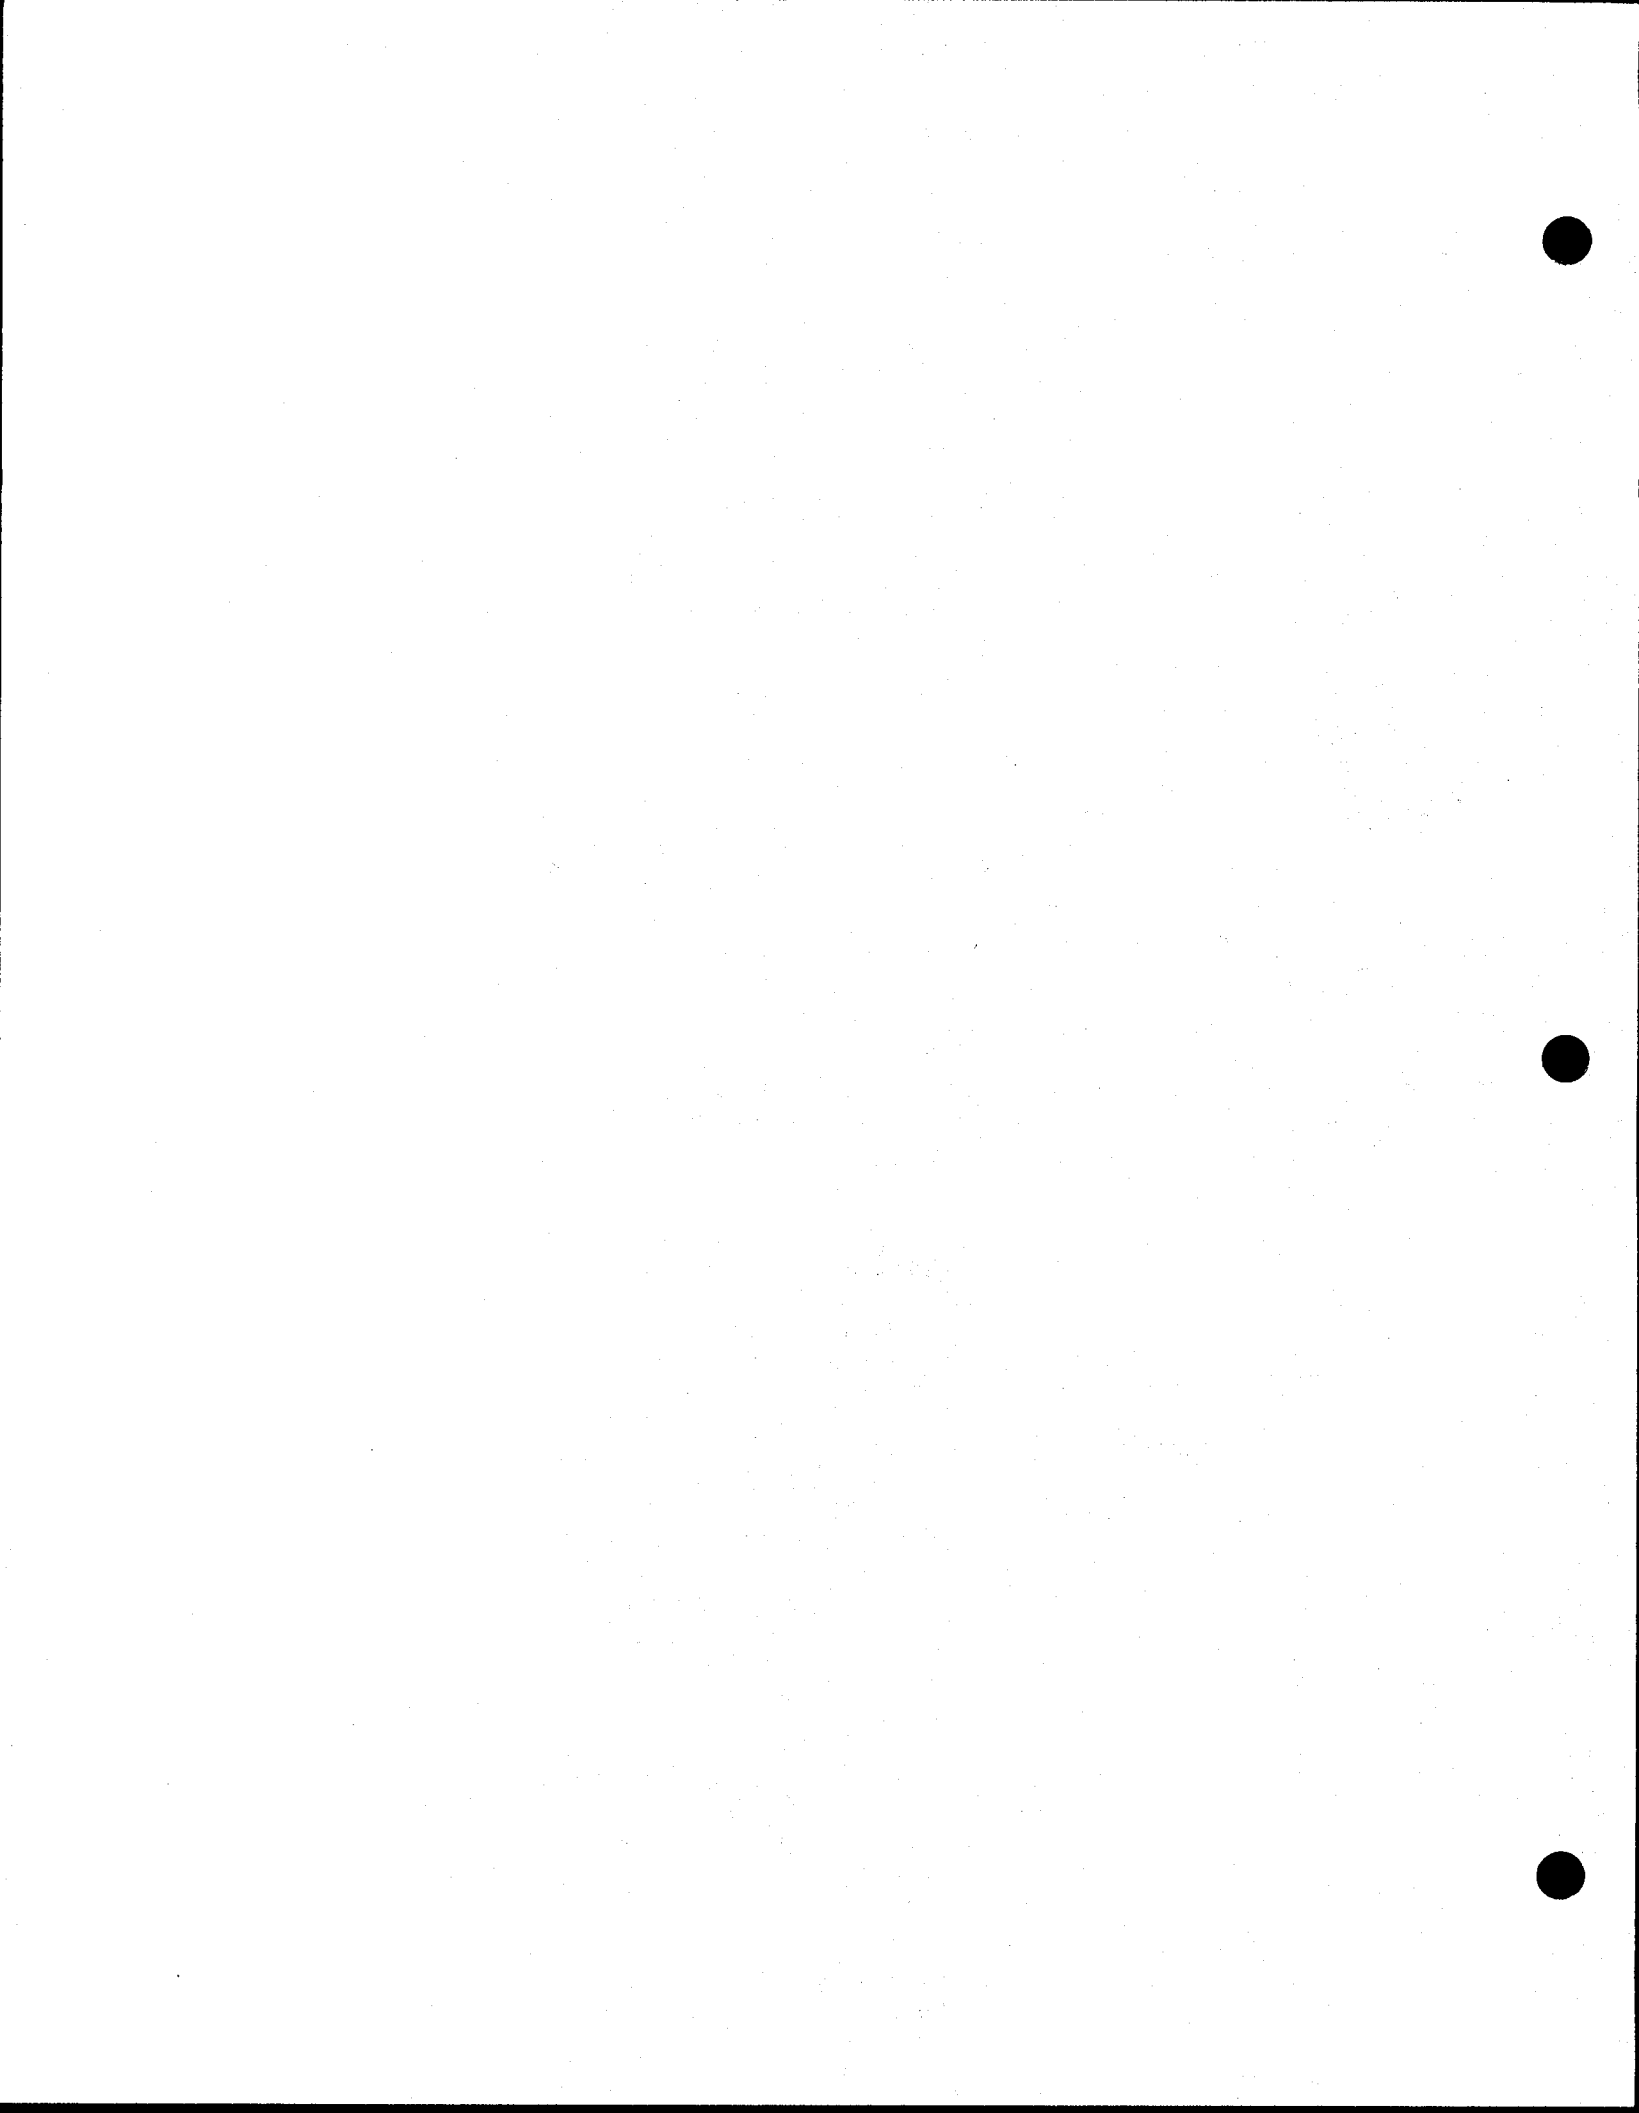

6.0 STRUCTURAL DESIGN CRITERIA

The structural design criteria for the BQM-34F/Forward Swept Wing consists of a merger of the criteria for the basic BQM-34F with the design requirements of a research oriented forward swept wing. For wing design only, a 1.5 ultimate factor of safety shall apply. Ultimate factors of safety for the existing target shall be retained from the basic BQM-34F criteria.

Free Flight Criteria - Free flight limit speeds are shown on Figure 6-1. These were selected to be consistent with the design cruise point requirement, allow a suitable tolerance for maneuvering and minimize flutter impact on wing design. Basic design symmetrical load factors of -3.0 to +6.0 are applicable. For purposes of wing design, these factors will be conservatively applied to a design free flight gross weight of 2500 pounds. Unsymmetrical maneuvering factors of 1.0 to 4.0 shall be retained from the basic BQM-34F criteria.

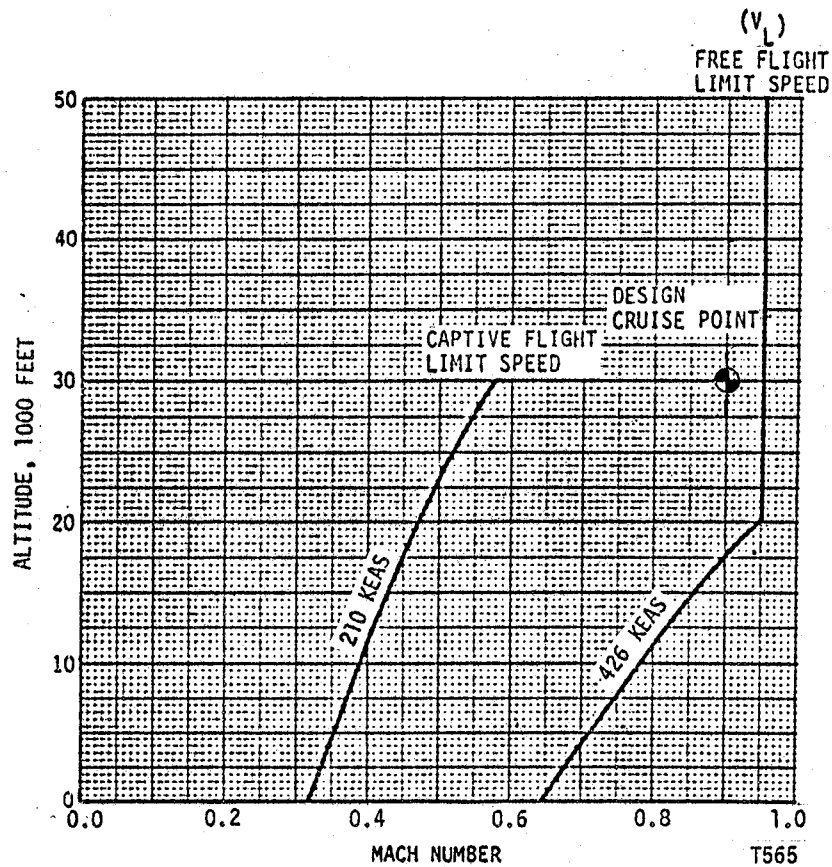


Figure 6-1. BQM-34F/Forward Swept Wing Structural Design Speeds

Captive Flight Criteria - Captive flight limit speeds are also shown on Figure 6-1. These encompass the air launch speeds of the basic BQM-34E/F target from the DP-2E and the DC-130 aircraft. Launch of the BQM-34F/Forward Swept Wing from the B-52 must be verified by launch simulation. Captive flight maneuver limits shall be 0.0 to 2.5g. Design captive flight gust velocity shall be ± 50 fps (EAS) for all flight speeds up to the maximum shown on Figure 6-1.


Recovery Criteria - Recovery conditions for small winged drones such as the basic BQM-34E/F have generally not been critical for wing design. However, for larger winged drones, the rapid pitch-up and associated high angles of attack at main parachute deployment have tended to be critical for wing design. Although this feasibility study will not encompass recovery envelopes studies, should critical design wing loads be encountered later, limitations upon normal recovery procedures can be identified such that critical loads are eliminated.

Additional Criteria - Additional criteria to be retained from the basic target design criteria are summarized along with design gross weights and factors of safety in Table 6-1.

TABLE 6-1. BQM-34F/FORWARD SWEEP RESEARCH WING STRUCTURAL DESIGN CRITERIA SUMMARY

CONDITION	DESIGN GROSS WEIGHT (pounds)	ULTIMATE FACTOR OF SAFETY	MAXIMUM LIMIT LOAD FACTOR			COMMENTS
			n_x	n_y	n_z	
FREE FLIGHT Complete Target Symmetrical Maneuvers Asymmetrical Maneuvers Gust	2500 2037	1.25			-3.0 to 6.0 1.0 to 4.0	Subsonic (with fuel pod) Subsonic (without fuel pod) $\omega_{max} = 1.5 \text{ rad./sec.}^2$, basic 27 fps (EAS) at V_L
CAPTIVE FLIGHT Taxi, Takeoff, Landing Gust	2544	1.50	± 2.50	± 1.50	-3.0 to 6.0	For design of attachments and sway braces. Loads act simultaneously. 50 fps (EAS) at V_L of DC-130
PARACHUTE RECOVERY Drag Parachute Deployment Main/Engagement Parachute Deployment	1250 to 2028 1922	1.25	$\pm 12.0^*$	$\pm 3.0^*$	6.0*	Based upon 15,000-lb. parachute load. Based on test or analysis (Minimum load of 12,000 lb. per BQM-34E criteria.)
HELICOPTER RETRIEVAL Pickup and Towing Stabilization Parachute Docking	1571 to 1720	1.50	0 0 ± 1.0	0 ± 1.0 0	2.0 1.0 1.0	Maximum load factor of 2.0 acting within 45° of positive Z axis of target. Limit load of 1139 lb. acting aft anywhere within 45° of longitudinal axis.
GROUND LOADS Ground Handling Loads Shipping Hoisting Jacking Carting	1900 2944 2544 2544	1.50	± 4.0 ± 0.4 ± 0.5 ± 2.0	± 1.33 ± 0.4 ± 0.5 ± 1.33	± 2.0 2.67 2.0 2.0	n_z acts alone and in combination with horizontal load factors.

*Used for equipment installations.

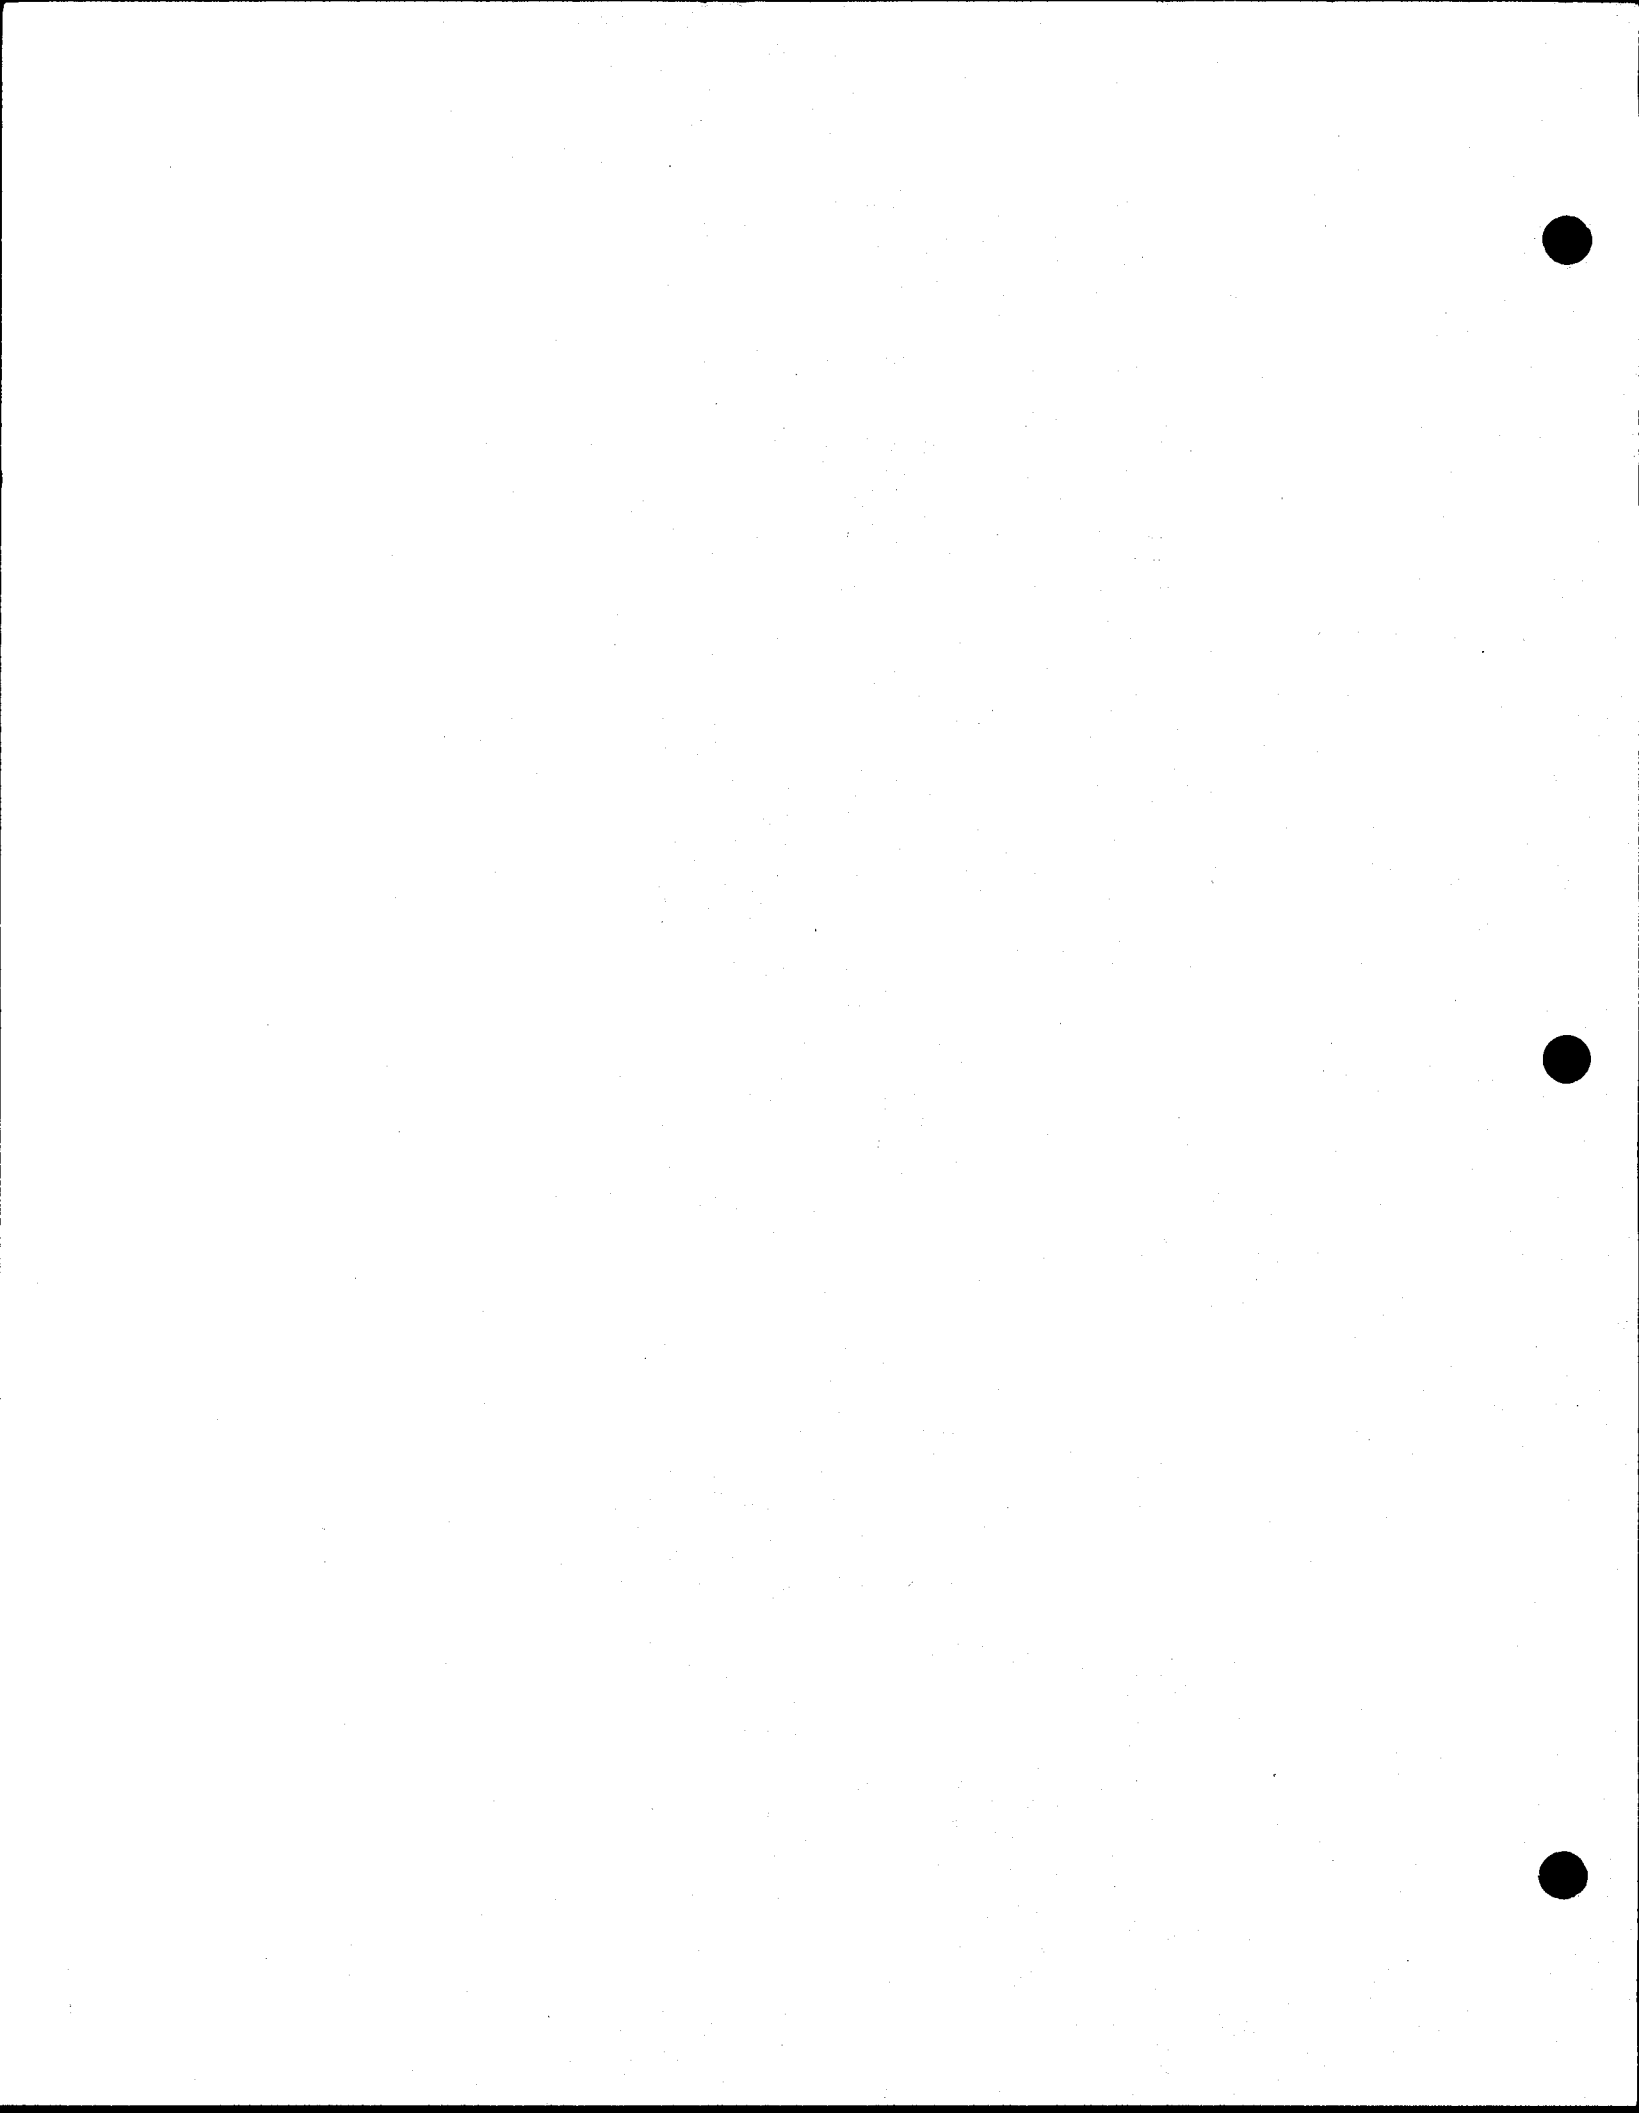

7.0 STRUCTURAL LOADS

7.1 FUSELAGE LOADS

Fuselage loads analyses were primarily devoted to two areas:

1. Evaluation of 27 candidate wing configurations in relation to strength requirements of the wing/fuselage juncture (Figure 2-2.)
2. Evaluation of the effects of installing additional ballast in the forward fuselage compartment.

A 6g (limit) pullup maneuver was the design condition for critical wing/fuselage interface loads. Applicable design gross weight and maximum flight Mach number were 2500 lbs. and 0.90, respectively. To simplify analysis the entire aerodynamic maneuvering load ($N_Z W = 15,000$ lbs) was applied to the two exposed wing panels. Resultant root shear, per panel, is thus 7500 lbs., while bending/torsional moments vary with the respective centers of pressure associated with planform geometry. The net component loads, summarized in Figure 7-1, were derived from theoretical wing loading distributions. Computational methods employed a modified version of the lifting line theory concept.

Additional ballast in the forward fuselage compartment increases the inertia effects that contribute to forebody shear and bending. Previous loads/structural analyses, Reference 7.1, of the basic airframe show that critical loads are developed during the induced pitch-up dynamics subsequent to deployment of the main parachute.

Wing planform #1 of Figure 2-2, selected for detailed study, requires a total of about 300 pounds of ballast. A comparison of the effects of this revised ballast configuration with the basic BQM-34F is shown in Figures 7-2 and 7-3.

7.2 WING LOADS

Wing airloads for wing strength design and stiffness optimization were generated for a 2500 lb. airplane at 30,000 feet at load factors of 6.0, 2.0 and -3.0. Since the wing twist and camber distributions have not yet

WING (LEFT PANEL) SHEAR, BENDING AND TORSION (LIMIT LOAD)						*ORIGIN OF BODY AXES X (IN)
CONF. NO.	ROOT SHEAR (LBS)	ROOT BENDING, $M_{C/2}$ (IN-LBS)	ROOT TORSION $T_{C/2}$ (IN-LBS)	*BODY AXIS MOMENTS		
				M_x (IN-LBS)	M_y (IN-LBS)	
1	7500	193,374	34,008	149,509	125,740	15.452
2		210,221	36,052	146,942	154,599	13.718
3		232,685	36,774	144,272	186,228	11.704
4		214,285	37,624	166,669	139,839	17.497
5		234,061	39,895	163,749	171,933	15.763
6		258,949	40,706	160,706	207,087	13.750
7		238,319	41,578	183,495	155,294	19.738
8		260,228	44,100	182,213	190,950	18.004
9		287,767	45,000	178,754	229,962	15.990
10		208,951	31,116	169,522	126,059	13.633
11		226,818	33,415	166,321	157,798	11.899
12		250,290	34,358	163,252	192,791	9.885
13		232,294	34,376	188,562	139,951	15.462
14		252,045	36,925	184,942	175,179	13.728
15		278,006	37,980	181,475	214,004	11.714
16		257,920	37,952	209,467	155,200	17.466
17		279,751	40,772	205,387	194,262	15.732
18		308,404	41,943	201,440	237,262	13.718
19		224,835	28,768	187,547	127,303	12.258
20		242,793	31,162	183,854	161,609	10.524
21		267,330	32,182	180,624	199,685	8.510
22		249,599	31,754	208,280	141,162	13.928
23		269,414	34,405	204,107	179,185	12.194
24		296,466	35,542	200,413	221,337	10.180
35		276,786	35,018	231,054	156,364	15.757
26		298,648	37,948	226,361	198,470	14.023
27		328,505	39,213	222,181	245,128	12.010

- NOTE: 1. $M_{C/2}$ (+ = WING TIP UP); $T_{C/2}$ (+ = L.E. UP);
 ULT. FACTOR OF SAFETY = 1.5
 2. M_x (LEFT HAND RULE, + = AFT) } ORIGIN AT ROOT (BL 10.33582)
 3. M_y (LEFT HAND RULE, + = LEFT) } MID CHORD
 4. X = DISTANCE AFT FROM WING APEX (AT BL = 0)

T566

Figure 7-1. Wing Limit Loads

STATION INCHES	LONGITUDINAL SHEAR POUNDS		VERTICAL SHEAR POUNDS		VERTICAL BENDING MOMENT INCH-POUNDS	
	BASIC TARGET	RESEARCH CONFIG.	BASIC TARGET	RESEARCH CONFIG.	BASIC TARGET	RESEARCH CONFIG.
80.00	0	0	0	0	0	0
105.00	- 5	- 5	- 25	- 25	- 253	- 253
118.50	- 73	- 558	- 354	-2706	- 1694	- 1694
135.00	- 165	- 650	- 795	-3147	- 12499	- 53496
150.00	- 296	- 781	-1413	-3765	- 29659	-105937
167.00	- 458	- 943	-2161	-4513	- 61147	-177409
180.00	- 552	-1037	-2575	-4927	-92805	-239643
189.95	- 630	-1115	-2916	-5268	-120467	-290707
200.00	- 706	-1191	-3240	-5592	-151785	-345663
209.75	- 828	-1313	-3760	-6112	-186624	-403434
220.00	- 961	-1446	-4321	-6673	-228193	-469111
233.50	-1151	-1636	-5117	-7469	-292937	-565607
242.28	-1195	-1680	-5301	-7653	-338864	-632184
242.28	-1297	-1781	-5185	-7537	-339574	-632894
245.20	-1327	-1812	-5309	-7661	-354792	-654980
245.20	1602	+1117	6328	-3976	-318179	-618367

- NOTES: 1. PARACHUTE RECOVERY CONDITION AT INSTANT BEFORE AFT
LINE IS EFFECTIVE (CONDITION 4PX02 OF REFERENCE 7-1)
2. RESEARCH CONFIGURATION
BALLAST AT STATION 118.6
GROSS WEIGHT = 1572 POUNDS, $n_x = 1.863$,
 $n_z = 7.403$, $q = 5.061 \text{ RAD./SEC.}^2$, $X_{CG} = 250.79$

T567

Figure 7-2. Forward Fuselage Loading Comparison

NOTE:
LIMIT LOADS FOR RECOVERY
CONDITION 4PX02

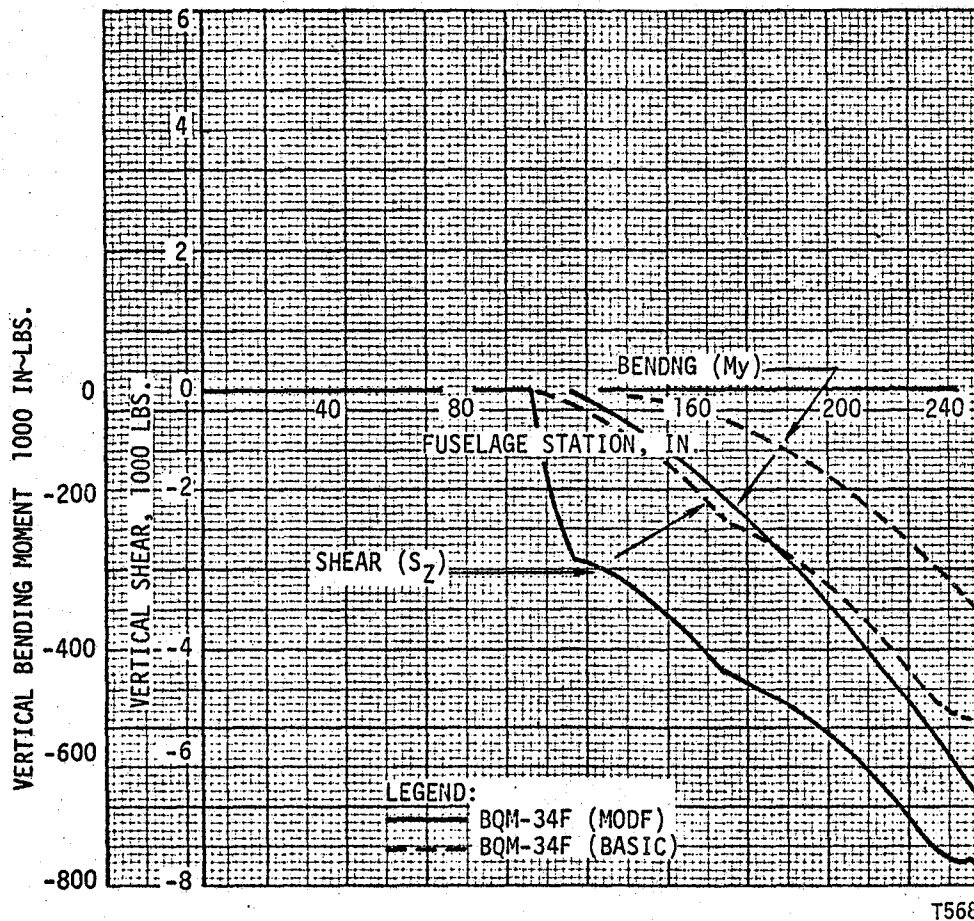


Figure 7-3. Fuselage Shear & Moment Diagrams Forward Swept Wing Proposal Added Ballast Effects

been identified it was necessary to make several assumptions regarding the wing lift distributions:

- 1) The exposed wing lift is assumed to be 95% of the airplane total lift.
- 2) Spanwise distributions for all conditions will be elliptical.
- 3) Chordwise distributions for the 6g case at $M=0.90$ were obtained from a combination of theory and experiment for a similar super-critical airfoil. The chordwise center-of-pressure is approximately 40-percent chord along the entire span.
- 4) The chordwise distribution at approximately $C_{LW} = .2$ is rectangular for the 2g condition.
- 5) Airloads for the -3g condition were extrapolated linearly utilizing the 6g and 2g conditions.

TRA computer program No. 1584, which transforms pressure loading into an equivalent set of point loads at structural grids was used to distribute wing airloads to the structural grids for ASOP-3 strength and aeroelastic studies. These data are contained in Figures 7-4 thru 7-12. Figures 7-4 thru 7-9 contain pressure loading in the form of loads at the centroids of the aerodynamic panels and at the structural nodes. Figures 7-10 thru 7-12 contain an integration of the aerodynamic loads into shear, moment, and torsion along a load axis.

The wing loads thus determined were used for the wing structural optimization and deflection studies of Section 8.0. These loads were not altered during the course of the wing preliminary design to account for redistribution of airloads due to wing flexibility. Instead, for aeroelastic tailoring and divergence studies, a wing deformation criteria was established for the worst case condition (6.0 g loads). It was assumed that the wing could be tailored to meet this deflection constraint and thus the wing loads provided would be approximately correct. The deflection constraint was established as 0.2 degrees streamwise twist along the length of the span. An exact aerodynamic shape at any particular flight condition could be obtained by

AERODYNAMIC LOADS:

PANEL	LOAD	BODY X	BODY Y	WING X	WING Y
1	77.44	248.713	12.700	248.713	12.700
2	225.19	252.454	12.700	252.454	12.700
3	274.14	259.000	12.700	259.000	12.700
4	107.28	266.482	12.700	266.482	12.700
5	107.28	273.963	12.700	273.963	12.700
6	47.71	281.445	12.700	281.445	12.700
7	70.95	246.914	17.500	246.914	17.500
8	212.86	250.450	17.500	250.450	17.500
9	260.30	256.636	17.500	256.636	17.500
10	153.88	263.706	17.500	263.706	17.500
11	130.16	270.777	17.500	270.777	17.500
12	75.61	277.847	17.500	277.847	17.500
13	71.96	245.041	22.500	245.041	22.500
14	193.87	248.362	22.500	248.362	22.500
15	232.45	254.174	22.500	254.174	22.500
16	166.01	260.815	22.500	260.815	22.500
17	132.89	267.457	22.500	267.457	22.500
18	88.52	274.099	22.500	274.099	22.500
19	76.58	243.168	27.500	243.168	27.500
20	209.13	246.274	27.500	246.274	27.500
21	221.74	251.711	27.500	251.711	27.500
22	147.89	257.924	27.500	257.924	27.500
23	110.87	264.137	27.500	264.137	27.500
24	89.83	270.351	27.500	270.351	27.500
25	76.96	241.294	32.500	241.294	32.500
26	210.76	244.187	32.500	244.187	32.500
27	230.76	249.248	32.500	249.248	32.500
28	123.18	255.033	32.500	255.033	32.500
29	97.42	260.818	32.500	260.818	32.500
30	76.92	266.603	32.500	266.603	32.500
31	59.34	239.421	37.500	239.421	37.500
32	173.60	242.099	37.500	242.099	37.500
33	199.22	246.786	37.500	246.786	37.500
34	127.16	252.142	37.500	252.142	37.500
35	127.16	257.498	37.500	257.498	37.500
36	76.26	262.854	37.500	262.854	37.500
37	53.66	237.547	42.500	237.547	42.500
38	153.80	240.011	42.500	240.011	42.500
39	178.96	244.323	42.500	244.323	42.500
40	128.73	249.251	42.500	249.251	42.500
41	107.40	254.179	42.500	254.179	42.500
42	71.55	259.106	42.500	259.106	42.500
43	49.21	235.674	47.500	235.674	47.500
44	135.67	237.924	47.500	237.924	47.500
45	153.80	241.860	47.500	241.860	47.500
46	113.87	246.360	47.500	246.360	47.500
47	89.17	250.859	47.500	250.859	47.500
48	61.52	255.358	47.500	255.358	47.500
49	36.73	233.801	52.500	233.801	52.500
50	105.23	235.836	52.500	235.836	52.500
51	127.28	239.398	52.500	239.398	52.500
52	90.51	243.469	52.500	243.469	52.500
53	70.98	247.539	52.500	247.539	52.500
54	49.02	251.610	52.500	251.610	52.500
55	19.79	231.927	57.500	231.927	57.500
56	60.83	233.748	57.500	233.748	57.500
57	73.11	236.935	57.500	236.935	57.500
58	57.80	240.578	57.500	240.578	57.500
59	42.61	244.220	57.500	244.220	57.500
60	30.50	247.862	57.500	247.862	57.500

Figure 7-4. Aerodynamic Loads, NZ = 6

AERODYNAMIC LOADS:

PANEL	LOAD	BODY X	BODY Y	WING X	WING Y
1	13.00	248.713	12.700	248.713	12.700
2	39.00	252.454	12.700	252.454	12.700
3	52.00	259.000	12.700	259.000	12.700
4	52.00	266.482	12.700	266.482	12.700
5	52.00	273.963	12.700	273.963	12.700
6	52.01	281.445	12.700	281.445	12.700
7	14.02	246.914	17.500	246.914	17.500
8	42.07	250.450	17.500	250.450	17.500
9	56.10	256.636	17.500	256.636	17.500
10	56.10	263.706	17.500	263.706	17.500
11	56.10	270.777	17.500	270.777	17.500
12	56.10	277.847	17.500	277.847	17.500
13	13.71	245.041	22.500	245.041	22.500
14	41.12	248.362	22.500	248.362	22.500
15	54.83	254.174	22.500	254.174	22.500
16	54.83	260.815	22.500	260.815	22.500
17	54.83	267.457	22.500	267.457	22.500
18	54.83	274.099	22.500	274.099	22.500
19	13.28	243.168	27.500	243.168	27.500
20	39.83	246.274	27.500	246.274	27.500
21	53.10	251.711	27.500	251.711	27.500
22	53.10	257.924	27.500	257.924	27.500
23	53.11	264.137	27.500	264.137	27.500
24	53.11	270.351	27.500	270.351	27.500
25	12.66	241.294	32.500	241.294	32.500
26	37.97	244.187	32.500	244.187	32.500
27	50.62	249.248	32.500	249.248	32.500
28	50.62	255.033	32.500	255.033	32.500
29	50.62	260.818	32.500	260.818	32.500
30	50.63	266.603	32.500	266.603	32.500
31	11.84	239.421	37.500	239.421	37.500
32	35.51	242.099	37.500	242.099	37.500
33	47.34	246.786	37.500	246.786	37.500
34	47.34	252.142	37.500	252.142	37.500
35	47.34	257.498	37.500	257.498	37.500
36	47.34	262.854	37.500	262.854	37.500
37	10.75	237.547	42.500	237.547	42.500
38	32.24	240.011	42.500	240.011	42.500
39	42.98	244.323	42.500	244.323	42.500
40	42.98	249.251	42.500	249.251	42.500
41	42.98	254.179	42.500	254.179	42.500
42	42.98	259.106	42.500	259.106	42.500
43	9.35	235.674	47.500	235.674	47.500
44	28.05	237.924	47.500	237.924	47.500
45	37.41	241.860	47.500	241.860	47.500
46	37.41	246.360	47.500	246.360	47.500
47	37.41	250.859	47.500	250.859	47.500
48	37.40	255.358	47.500	255.358	47.500
49	7.45	233.801	52.500	233.801	52.500
50	22.35	235.836	52.500	235.836	52.500
51	29.81	239.398	52.500	239.398	52.500
52	29.81	243.469	52.500	243.469	52.500
53	29.81	247.539	52.500	247.539	52.500
54	29.81	251.610	52.500	251.610	52.500
55	4.41	231.927	57.500	231.927	57.500
56	13.23	233.748	57.500	233.748	57.500
57	17.64	236.935	57.500	236.935	57.500
58	17.64	240.578	57.500	240.578	57.500
59	17.64	244.220	57.500	244.220	57.500
60	17.64	247.862	57.500	247.862	57.500

Figure 7-5. Aerodynamic Loads to Structural Nodes, NZ = 2

AERODYNAMIC LOADS:

PANEL	LOAD	BODY X	BODY Y	WING X	WING Y
1	-61.14	248.713	12.700	248.713	12.700
2	-175.35	252.454	12.700	252.454	12.700
3	-204.25	259.000	12.700	259.000	12.700
4	-15.47	266.482	12.700	266.482	12.700
5	-15.47	273.963	12.700	273.963	12.700
6	51.93	281.445	12.700	281.445	12.700
7	-51.71	246.914	17.500	246.914	17.500
8	-155.14	250.450	17.500	250.450	17.500
9	-180.26	256.636	17.500	256.636	17.500
10	-59.85	263.706	17.500	263.706	17.500
11	-33.01	270.777	17.500	270.777	17.500
12	28.70	277.847	17.500	277.847	17.500
13	-53.50	245.041	22.500	245.041	22.500
14	-135.59	248.362	22.500	248.362	22.500
15	-151.32	254.174	22.500	254.174	22.500
16	-76.15	260.815	22.500	260.815	22.500
17	-38.69	267.457	22.500	267.457	22.500
18	11.51	274.099	22.500	274.099	22.500
19	-59.60	243.168	27.500	243.168	27.500
20	-155.49	246.274	27.500	246.274	27.500
21	-142.72	251.711	27.500	251.711	27.500
22	-59.17	257.924	27.500	257.924	27.500
23	-17.29	264.137	27.500	264.137	27.500
24	6.52	270.351	27.500	270.351	27.500
25	-61.30	241.294	32.500	241.294	32.500
26	-161.12	244.187	32.500	244.187	32.500
27	-157.98	249.248	32.500	249.248	32.500
28	-36.27	255.033	32.500	255.033	32.500
29	-7.12	260.818	32.500	260.818	32.500
30	16.07	266.603	32.500	266.603	32.500
31	-43.03	239.421	37.500	239.421	37.500
32	-124.10	242.099	37.500	242.099	37.500
33	-128.98	246.786	37.500	246.786	37.500
34	-47.45	252.142	37.500	252.142	37.500
35	-47.45	257.498	37.500	257.498	37.500
36	10.13	262.854	37.500	262.854	37.500
37	-38.83	237.547	42.500	237.547	42.500
38	-108.36	240.011	42.500	240.011	42.500
39	-114.94	244.323	42.500	244.323	42.500
40	-58.11	249.251	42.500	249.251	42.500
41	-33.98	254.179	42.500	254.179	42.500
42	6.58	259.106	42.500	259.106	42.500
43	-36.63	235.674	47.500	235.674	47.500
44	-96.36	237.924	47.500	237.924	47.500
45	-97.83	241.860	47.500	241.860	47.500
46	-52.65	246.360	47.500	246.360	47.500
47	-24.71	250.859	47.500	250.859	47.500
48	6.57	255.358	47.500	255.358	47.500
49	-26.39	233.801	52.500	233.801	52.500
50	-73.53	235.836	52.500	235.836	52.500
51	-83.30	239.398	52.500	239.398	52.500
52	-41.70	243.469	52.500	243.469	52.500
53	-19.61	247.539	52.500	247.539	52.500
54	5.24	251.610	52.500	251.610	52.500
55	-13.41	231.927	57.500	231.927	57.500
56	-41.88	233.748	57.500	233.748	57.500
57	-46.79	236.935	57.500	236.935	57.500
58	-29.47	240.578	57.500	240.578	57.500
59	-12.29	244.220	57.500	244.220	57.500
60	1.41	247.862	57.500	247.862	57.500

Figure 7-6. Aerodynamic Loads to Structural Nodes, NZ = -3

NODE	LOAD	BODY X	BODY Y	WING X	WING Y
1 / 13	0.0	230.562	60.000	230.562	60.000
2 / 27	9.35	232.382	55.000	232.382	55.000
3 / 41	17.44	234.201	50.000	234.201	50.000
4 / 55	23.48	236.021	45.000	236.021	45.000
5 / 69	25.71	237.841	40.000	237.841	40.000
6 / 83	28.52	239.661	35.000	239.661	35.000
7 / 97	37.08	241.481	30.000	241.481	30.000
8 / 111	36.99	243.301	25.000	243.301	25.000
9 / 125	34.82	245.121	20.000	245.121	20.000
10 / 139	41.70	246.940	15.000	246.940	15.000
11 / 159	29.69	249.124	9.000	249.124	9.000
12 / 11	9.89	231.419	60.000	231.419	60.000
13 / 25	47.64	233.346	55.000	233.346	55.000
14 / 39	75.51	235.273	50.000	235.273	50.000
15 / 53	92.70	237.200	45.000	237.200	45.000
16 / 67	104.47	239.127	40.000	239.127	40.000
17 / 81	123.06	241.053	35.000	241.053	35.000
18 / 95	141.27	242.980	30.000	242.980	30.000
19 / 109	138.31	244.907	25.000	244.907	25.000
20 / 123	129.88	246.800	20.000	246.800	20.000
21 / 137	167.95	248.761	15.000	248.761	15.000
22 / 157	86.32	251.074	9.000	251.074	9.000
23 / 9	30.41	233.990	60.000	233.990	60.000
24 / 23	88.82	236.238	55.000	236.238	55.000
25 / 37	130.90	238.486	50.000	238.486	50.000
26 / 51	153.37	240.734	45.000	240.734	45.000
27 / 65	175.74	242.983	40.000	242.983	40.000
28 / 79	204.48	245.231	35.000	245.231	35.000
29 / 93	219.56	247.479	30.000	247.479	30.000
30 / 107	207.57	249.727	25.000	249.727	25.000
31 / 121	222.63	251.975	20.000	251.975	20.000
32 / 135	273.28	254.223	15.000	254.223	15.000
33 / 155	105.09	256.921	9.000	256.921	9.000
34 / 7	36.55	237.418	60.000	237.418	60.000
35 / 21	92.53	240.094	55.000	240.094	55.000
36 / 35	121.49	242.771	50.000	242.771	50.000
37 / 49	147.27	245.447	45.000	245.447	45.000
38 / 63	164.29	248.124	40.000	248.124	40.000
39 / 77	180.74	250.800	35.000	250.800	35.000
40 / 91	174.71	253.477	30.000	253.477	30.000
41 / 105	191.72	256.153	25.000	256.153	25.000
42 / 119	215.68	258.830	20.000	258.830	20.000
43 / 133	233.21	261.506	15.000	261.506	15.000
44 / 151	41.12	264.718	9.000	264.718	9.000
45 / 5	28.90	240.800	60.000	240.800	60.000
46 / 19	66.65	243.800	55.000	243.800	55.000
47 / 33	94.50	247.055	50.000	247.055	50.000
48 / 47	109.02	250.100	45.000	250.100	45.000
49 / 61	118.80	253.300	40.000	253.300	40.000
50 / 75	125.08	256.400	35.000	256.400	35.000
51 / 89	123.00	259.500	30.000	259.500	30.000
52 / 103	139.75	262.700	25.000	262.700	25.000
53 / 117	143.52	265.800	20.000	265.800	20.000
54 / 131	131.44	269.000	15.000	269.000	15.000
55 / 147	41.12	272.600	9.000	272.600	9.000
56 / 3	21.30	244.274	60.000	244.274	60.000
57 / 17	51.83	247.807	55.000	247.807	55.000
58 / 31	69.65	251.340	50.000	251.340	50.000
59 / 45	85.63	254.873	45.000	254.873	45.000
60 / 59	99.76	258.407	40.000	258.407	40.000
61 / 73	87.51	261.940	35.000	261.940	35.000
62 / 87	94.06	265.473	30.000	265.473	30.000
63 / 101	110.68	269.006	25.000	269.006	25.000
64 / 115	108.94	272.539	20.000	272.539	20.000
65 / 129	93.37	276.072	15.000	276.072	15.000
66 / 143	20.90	279.782	9.750	279.782	9.750
67 / 1	15.25	247.702	60.000	247.702	60.000
68 / 15	25.36	251.663	55.000	251.663	55.000
69 / 29	32.00	255.625	50.000	255.625	50.000
70 / 43	37.20	259.586	45.000	259.586	45.000
71 / 57	39.66	263.548	40.000	263.548	40.000
72 / 71	39.97	267.509	35.000	267.509	35.000
73 / 85	46.35	271.471	30.000	271.471	30.000
74 / 99	45.83	275.432	25.000	275.432	25.000
75 / 113	39.27	279.394	20.000	279.394	20.000
76 / 127	25.73	283.355	15.000	283.355	15.000
77 / 141	0.0	286.921	10.500	286.921	10.500

EQUILIBRIUM CHECK (WING COORDINATE SYSTEM)
LOAD INPUT: LOAD= 7125. LBS NODE DISTRIBUTION: LOAD= 7125. LBS
MX= 224768. IN-LB MY= 1796050. IN-LB
MY= 1796050. IN-LB MX= 224767. IN-LB

Figure 7-7. Aerodynamic Loads to Structural Nodes,
NZ = 6, Distribution to Nodes

NODE	LOAD	BODY X	BODY Y	WING X	WING Y
1 / 13	0.0	230.562	60.000	230.562	60.000
2 / 27	2.08	232.382	55.000	232.382	55.000
3 / 41	3.54	234.201	50.000	234.201	50.000
4 / 55	4.46	236.021	45.000	236.021	45.000
5 / 69	5.15	237.841	40.000	237.841	40.000
6 / 83	5.69	239.661	35.000	239.661	35.000
7 / 97	6.10	241.481	30.000	241.481	30.000
8 / 111	6.41	243.301	25.000	243.301	25.000
9 / 125	6.63	245.121	20.000	245.121	20.000
10 / 139	8.00	246.940	15.000	246.940	15.000
11 / 153	4.98	249.124	9.000	249.124	9.000
12 / 11	2.20	231.419	60.000	231.419	60.000
13 / 25	10.09	233.346	55.000	233.346	55.000
14 / 39	15.48	235.273	50.000	235.273	50.000
15 / 53	18.97	237.200	45.000	237.200	45.000
16 / 67	21.59	239.127	40.000	239.127	40.000
17 / 81	23.62	241.053	35.000	241.053	35.000
18 / 95	25.17	242.980	30.000	242.980	30.000
19 / 109	26.32	244.907	25.000	244.907	25.000
20 / 123	27.01	246.800	20.000	246.800	20.000
21 / 137	31.45	248.761	15.000	248.761	15.000
22 / 151	14.95	251.074	9.000	251.074	9.000
23 / 9	6.61	233.990	60.000	233.990	60.000
24 / 23	19.87	236.238	55.000	236.238	55.000
25 / 37	28.74	238.486	50.000	238.486	50.000
26 / 51	34.60	240.734	45.000	240.734	45.000
27 / 65	39.02	242.983	40.000	242.983	40.000
28 / 79	42.42	245.231	35.000	245.231	35.000
29 / 93	44.99	247.479	30.000	247.479	30.000
30 / 107	46.89	249.727	25.000	249.727	25.000
31 / 121	48.36	251.975	20.000	251.975	20.000
32 / 135	53.21	254.223	15.000	254.223	15.000
33 / 155	19.94	256.921	9.000	256.921	9.000
34 / 7	8.82	237.418	60.000	237.418	60.000
35 / 21	23.59	240.094	55.000	240.094	55.000
36 / 35	33.08	242.771	50.000	242.771	50.000
37 / 49	40.18	245.447	45.000	245.447	45.000
38 / 63	44.91	248.124	40.000	248.124	40.000
39 / 77	49.13	250.800	35.000	250.800	35.000
40 / 91	51.99	253.477	30.000	253.477	30.000
41 / 105	54.08	256.153	25.000	256.153	25.000
42 / 119	55.95	258.830	20.000	258.830	20.000
43 / 133	61.31	261.506	15.000	261.506	15.000
44 / 151	19.93	264.718	9.000	264.718	9.000
45 / 5	8.82	240.800	60.000	240.800	60.000
46 / 19	23.54	243.800	55.000	243.800	55.000
47 / 33	34.13	247.055	50.000	247.055	50.000
48 / 47	39.98	250.100	45.000	250.100	45.000
49 / 61	45.54	253.300	40.000	253.300	40.000
50 / 75	48.95	256.400	35.000	256.400	35.000
51 / 89	51.83	259.500	30.000	259.500	30.000
52 / 103	54.33	262.700	25.000	262.700	25.000
53 / 117	55.42	265.800	20.000	265.800	20.000
54 / 131	60.09	269.000	15.000	269.000	15.000
55 / 147	19.93	272.600	9.000	272.600	9.000
56 / 3	8.82	244.274	60.000	244.274	60.000
57 / 17	24.03	247.807	55.000	247.807	55.000
58 / 31	33.60	251.340	50.000	251.340	50.000
59 / 45	40.41	254.873	45.000	254.873	45.000
60 / 59	45.02	258.407	40.000	258.407	40.000
61 / 73	48.86	261.940	35.000	261.940	35.000
62 / 87	51.75	265.473	30.000	265.473	30.000
63 / 101	53.47	269.006	25.000	269.006	25.000
64 / 115	55.00	272.539	20.000	272.539	20.000
65 / 129	56.04	276.072	15.000	276.072	15.000
66 / 143	22.78	279.782	9.750	279.782	9.750
67 / 1	8.82	247.702	60.000	247.702	60.000
68 / 15	15.39	251.663	55.000	251.663	55.000
69 / 29	19.46	255.625	50.000	255.625	50.000
70 / 43	22.36	259.586	45.000	259.586	45.000
71 / 57	24.59	263.548	40.000	263.548	40.000
72 / 71	26.25	267.509	35.000	267.509	35.000
73 / 85	27.50	271.471	30.000	271.471	30.000
74 / 99	28.34	275.432	25.000	275.432	25.000
75 / 113	28.96	279.394	20.000	279.394	20.000
76 / 127	27.64	283.355	15.000	283.355	15.000
77 / 141	0.0	286.921	10.500	286.921	10.500

EQUILIBRIUM CHECK (WING COORDINATE SYSTEM)
LOAD INPUT: LOAD= 2209. LBS NODE DISTRIBUTION: LOAD= 2209. LBS
MX= 69697. IN-LB MY= 69697. IN-LB
MY= 564631. IN-LB MY= 564631. IN-LB

Figure 7-8. Aerodynamic Loads to Structural Nodes,
NZ = 2, Distribution to Nodes

NODE	LOAD	BODY X	BODY Y	WING X	WING Y
1 / 13	0.0	230.562	60.000	230.562	60.000
2 / 27	-6.33	232.382	55.000	232.382	55.000
3 / 41	-12.53	234.201	50.000	234.201	50.000
4 / 55	-17.47	236.021	45.000	236.021	45.000
5 / 69	-18.60	237.841	40.000	237.841	40.000
6 / 83	-20.68	239.661	35.000	239.661	35.000
7 / 97	-29.53	241.481	30.000	241.481	30.000
8 / 111	-28.79	243.301	25.000	243.301	25.000
9 / 125	-25.89	245.121	20.000	245.121	20.000
10 / 139	-30.87	246.940	15.000	246.940	15.000
11 / 159	-23.44	249.124	9.000	249.124	9.000
12 / 11	-6.70	231.419	60.000	231.419	60.000
13 / 25	-33.34	233.346	55.000	233.346	55.000
14 / 39	-53.90	235.273	50.000	235.273	50.000
15 / 53	-66.24	237.200	45.000	237.200	45.000
16 / 67	-74.24	239.127	40.000	239.127	40.000
17 / 81	-91.13	241.053	35.000	241.053	35.000
18 / 95	-108.57	242.980	30.000	242.980	30.000
19 / 109	-102.88	244.907	25.000	244.907	25.000
20 / 123	-91.93	246.800	20.000	246.800	20.000
21 / 137	-125.98	248.761	15.000	248.761	15.000
22 / 157	-67.22	251.074	9.000	251.074	9.000
23 / 9	-20.94	233.990	60.000	233.990	60.000
24 / 23	-60.02	236.238	55.000	236.238	55.000
25 / 37	-89.57	238.486	50.000	238.486	50.000
26 / 51	-103.05	240.734	45.000	240.734	45.000
27 / 65	-119.37	242.983	40.000	242.983	40.000
28 / 79	-144.95	245.231	35.000	245.231	35.000
29 / 93	-156.77	247.479	30.000	247.479	30.000
30 / 107	-139.36	249.727	25.000	249.727	25.000
31 / 121	-153.39	251.975	20.000	251.975	20.000
32 / 135	-200.81	254.223	15.000	254.223	15.000
33 / 155	-78.30	256.921	9.000	256.921	9.000
34 / 7	-23.39	237.418	60.000	237.418	60.000
35 / 21	-56.65	240.094	55.000	240.094	55.000
36 / 35	-70.08	242.771	50.000	242.771	50.000
37 / 49	-84.80	245.447	45.000	245.447	45.000
38 / 63	-94.40	248.124	40.000	248.124	40.000
39 / 77	-104.44	250.800	35.000	250.800	35.000
40 / 91	-91.79	253.477	30.000	253.477	30.000
41 / 105	-106.79	256.153	25.000	256.153	25.000
42 / 119	-130.08	258.830	20.000	258.830	20.000
43 / 133	-139.00	261.506	15.000	261.506	15.000
44 / 151	-5.93	264.718	9.000	264.718	9.000
45 / 5	-14.74	240.800	60.000	240.800	60.000
46 / 19	-27.47	243.800	55.000	243.800	55.000
47 / 33	-37.41	247.055	50.000	247.055	50.000
48 / 47	-41.92	250.100	45.000	250.100	45.000
49 / 61	-41.66	253.300	40.000	253.300	40.000
50 / 75	-41.83	256.400	35.000	256.400	35.000
51 / 89	-33.60	259.500	30.000	259.500	30.000
52 / 103	-47.46	262.700	25.000	262.700	25.000
53 / 117	-49.51	265.800	20.000	265.800	20.000
54 / 131	-26.33	269.000	15.000	269.000	15.000
55 / 147	-5.93	272.600	9.000	272.600	9.000
56 / 3	-6.14	244.274	60.000	244.274	60.000
57 / 17	-9.70	247.807	55.000	247.807	55.000
58 / 31	-10.37	251.340	50.000	251.340	50.000
59 / 45	-14.58	254.873	45.000	254.873	45.000
60 / 59	-21.19	258.407	40.000	258.407	40.000
61 / 73	0.49	261.940	35.000	261.940	35.000
62 / 87	-1.02	265.473	30.000	265.473	30.000
63 / 101	-16.34	269.006	25.000	269.006	25.000
64 / 115	-11.25	272.539	20.000	272.539	20.000
65 / 129	8.49	276.072	15.000	276.072	15.000
66 / 143	22.75	279.782	9.750	279.782	9.750
67 / 1	0.71	247.702	60.000	247.702	60.000
68 / 15	2.66	251.663	55.000	251.663	55.000
69 / 29	3.42	255.625	50.000	255.625	50.000
70 / 43	3.44	259.586	45.000	259.586	45.000
71 / 57	5.21	263.548	40.000	263.548	40.000
72 / 71	8.24	267.509	35.000	267.509	35.000
73 / 85	3.56	271.471	30.000	271.471	30.000
74 / 99	5.87	275.432	25.000	275.432	25.000
75 / 113	14.54	279.394	20.000	279.394	20.000
76 / 127	27.17	283.355	15.000	283.355	15.000
77 / 141	0.0	286.921	10.500	286.921	10.500

EQUILIBRIUM CHECK (WING COORDINATE SYSTEM)

LOAD INPUT: LOAD= -3562. LBS NODE DISTRIBUTION: LOAD= -3562. LBS
 MX=-112361. IN-LB MX=-112360. IN-LB
 MY=-882162. IN-LB MY=-882162. IN-LB

Figure 7-9. Aerodynamic Loads to Structural Nodes,
 NZ = -3, Distribution to Nodes

YEA	SHEAR	MOMENT	TORQUE
47.100	30.	0.	23.
42.100	334.	1423.	2616.
37.100	826.	5245.	5806.
32.100	1439.	12083.	8238.
27.100	2138.	22392.	9158.
22.100	2901.	36514.	8237.
17.100	3730.	54716.	5656.
12.100	4585.	77198.	522.
7.100	5458.	104109.	-7203.
2.300	6394.	134281.	-16334.
2.300	7125.	134281.	-24689.

Figure 7-10. Aerodynamic Loads Distributed Loading,
NZ = 6

YEA	SHEAR	MOMENT	TORQUE
47.100	18.	0.	13.
42.100	118.	441.	620.
37.100	275.	1627.	1224.
32.100	467.	3748.	1447.
27.100	686.	6944.	1087.
22.100	926.	11323.	15.
17.100	1182.	16968.	-1853.
12.100	1449.	23941.	-4568.
7.100	1725.	32284.	-8155.
2.300	2001.	41640.	-12456.
2.300	2209.	41640.	-15394.

Figure 7-11. Aerodynamic Loads Distributed Loading,
NZ = 2

YEA	SHEAR	MOMENT	TORQUE
47.100	-142.	-0.	-1683.
42.100	-382.	-712.	-4032.
37.100	-683.	-2621.	-6305.
32.100	-1031.	-6037.	-8003.
27.100	-1412.	-11192.	-8999.
22.100	-1820.	-18251.	-10030.
17.100	-2247.	-27349.	-9600.
12.100	-2691.	-38585.	-7619.
7.100	-3142.	-52040.	-5181.
2.300	-3562.	-67123.	-3417.

Figure 7-12. Aerodynamic Loads Distributed Loading,
NZ = -3

designing in a proper jig shape.

7.3 EMPENNAGE LOADS

A preliminary analysis of horizontal tail loads has been conducted in support of this feasibility study. Only symmetrical balanced maneuvers were examined at this time. Fuselage and horizontal tail aerodynamic data for this study were obtained from wind tunnel test data of the BQM-34E/F target. Wing data were based on the wing airload distributions described in Section 7.2 for 0.90 Mach number and adjusted by Glauert compressibility factors for other Mach numbers.

The results of the study are shown in Figure 7-13 and 7-14. A potential strength problem is indicated which must be addressed in more detail during a detail design effort. Several observations can be made, however, at this time. The horizontal tail loads were determined on the basis of a rather crude estimation of wing aerodynamics. A follow-on analysis, made with the knowledge of such wing parameters as required twist and camber distributions may substantially alter the level of the calculated loads. If, at that time, horizontal tail loads are still a potential problem, it may be possible to alter or restrict the flight envelope such that tail loads are reduced but flight research objectives are still obtained.

- NOTES: 1. MOST CRITICAL GW/CG COMBINATION
 GW = 1975 LBS., CG @ $X_F = 251.5"$
 2. SYMMETRICAL BALANCED MANEUVER
 3. LIMIT LOADS
 4. LOAD FACTOR = 6.0



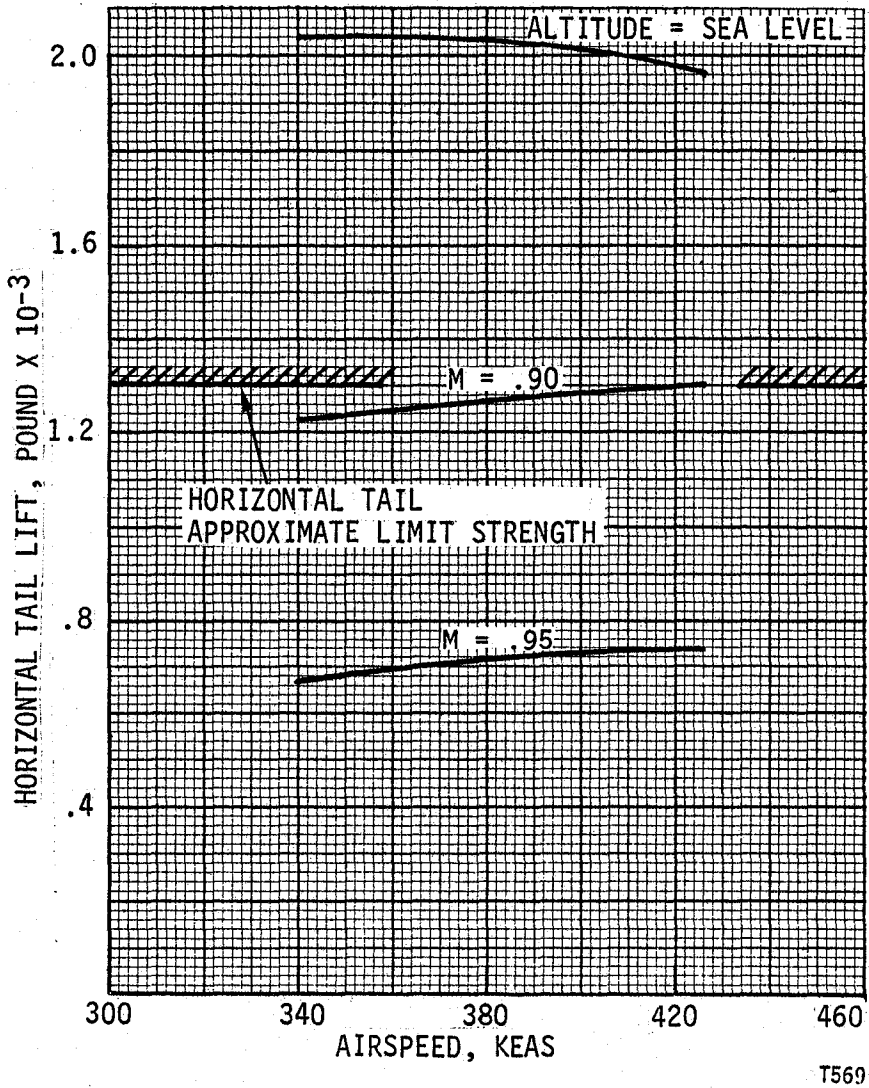


Figure 7-13. Horizontal Tail Load Survey, 426 KEAS

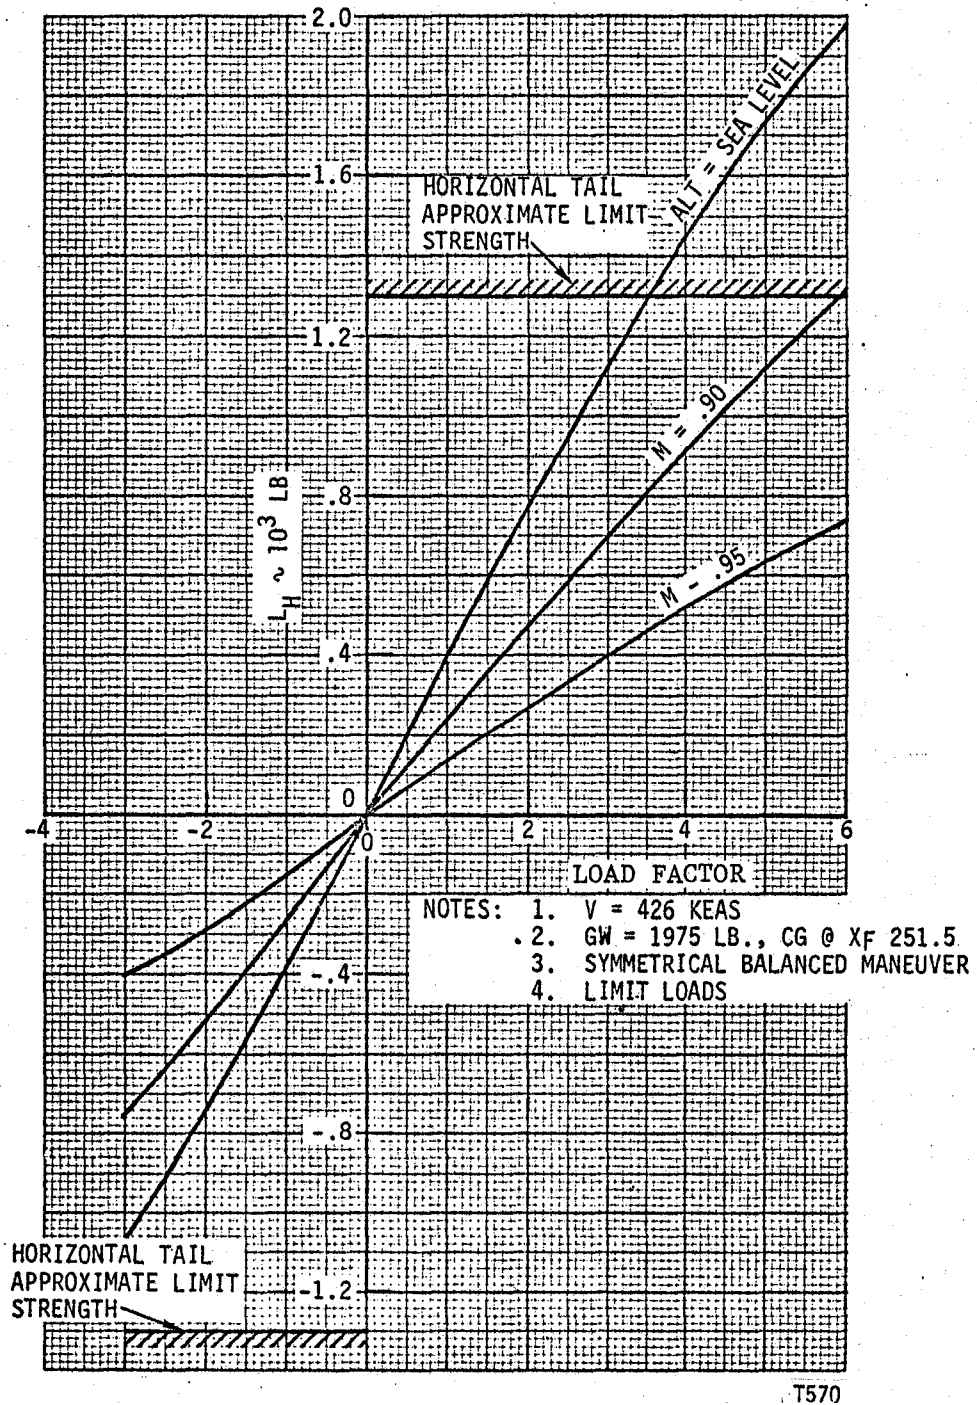

T570

Figure 7-14. Horizontal Tail Loads Survey

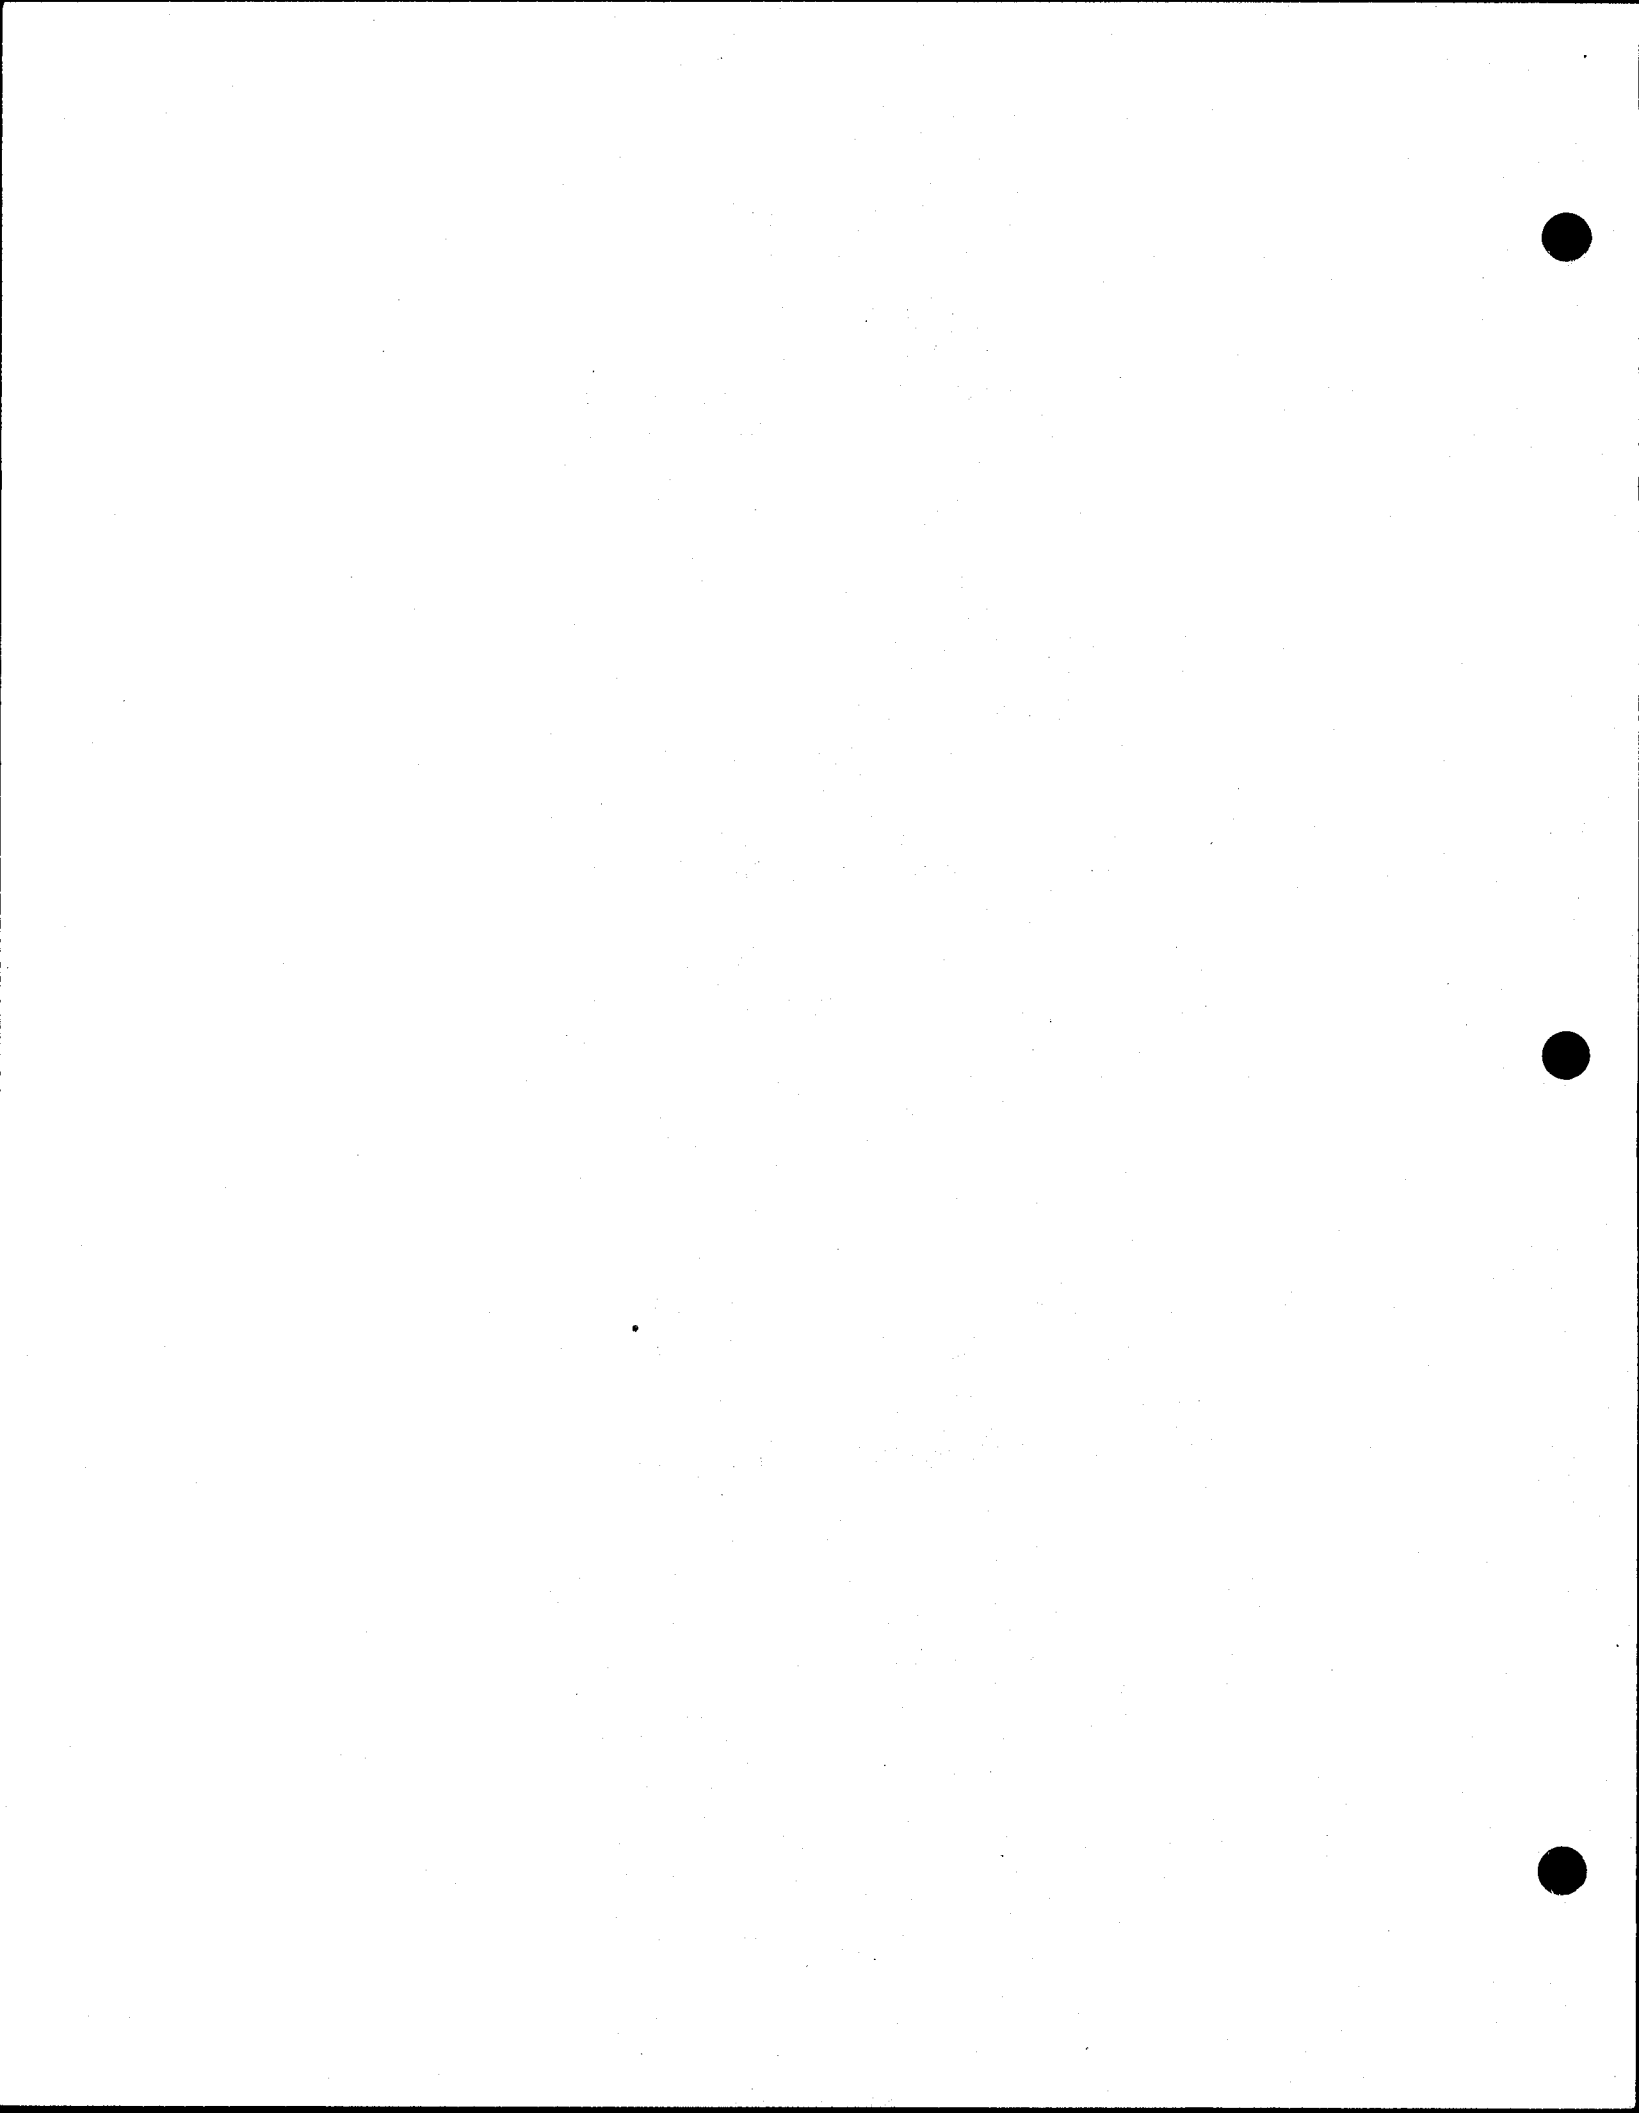

8.0 LOAD INDUCED ELASTIC DEFORMATIONS

8.1 METHOD OF APPROACH

General

An automated strength/displacement/flutter redesign process was used to aeroelastically tailor the forward swept research wing. The approach consists of the following elements:

- a. Design criteria
- b. Materials and structural configuration
- c. Analysis techniques

Detail items in the approach are shown in Figure 8-1.

The approach is embodied in two large scale computer program systems named ASOP-3 and FASTOP-3 (Flutter and Strength Optimization Program) used to implement the preliminary design study. The programs perform interactive strength/flutter redesign for minimum weight.


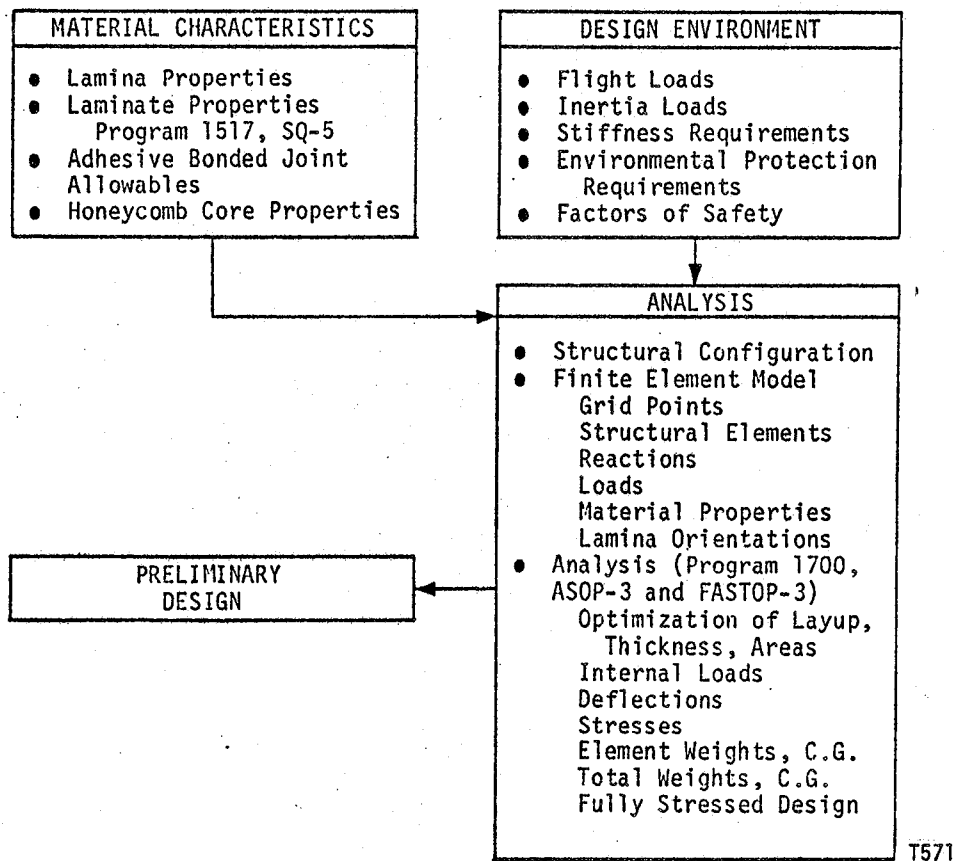


Figure 8-1. Detail Items in the Basic Structural Analysis Approach

The FASTOP system is divided into two major programs, the first which addresses static analysis and redesign functions, and the second which addresses the dynamic analysis and redesign. Each of these two programs, Strength Optimization Program (SOP) and the Flutter Optimization Program (FOP), consist of a number of special purpose modules. Figure 8-2 is a FASTOP-3 modular flow chart. For complete details on these two program systems see Reference 8.1.

ASOP-3 was employed primarily to perform trade-off studies for selecting materials and a structural configuration. The FASTOP-3 system used the CDC version with computing time on the CYBERNET NOS/BATCH System made available by AFFDL. The ASOP-3 program, obtained from AFFDL, was an IBM version run on TRA's IBM computing system.

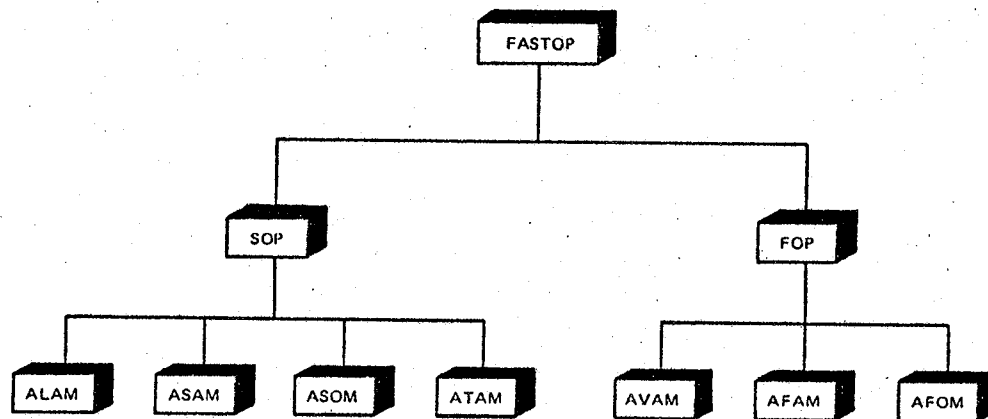

- SOP - Structural Optimization Program
- ALAM - Automated Load Analysis Module
- ASAM - Automated Structural Analysis Module
- ASOM - Automated Structural Optimization Module
- ATAM - Automated Transformation Analysis Module
- FOP - Flutter Optimization Program
- AVAM - Automated Vibration Analysis Module
- AFAM - Automated Flutter Analysis Module
- AFOM - Automated Flutter Optimization Module

T572

Figure 8-2. FASTOP-3 Modular Flow Chart

Design Criteria

A detail description of the structural design criteria and structural loads is given in Sections 6.0 and 7.0 respectively. The following items, summarized from these sections, have a significant driving influence on the aeroelastic tailoring design of the forward swept research wing:

1. Flight load conditions:
 - a. 6 g limit
 - b. 1.5 x 6 g limit loads
 - c. 2 g cruise
 - d. -3 g limit
2. The wing is aeroelastically tailored for torsional twist = $0^\circ \pm .2^\circ$ when subjected to the 6 g limit loads.
3. Must be strength adequate for all the load cases.
4. Ultimate factor of safety shall be 1.50.
5. The wing will be designed to provide satisfactory static aeroelastic and flutter characteristics throughout the flight envelope with a margin of 15 percent on speed.

Materials and Structural Configuration

Primary wing construction consists of graphite/epoxy skin bonded to full depth HFT glass reinforced phenolic honeycomb core. A machined aluminum fuel tank cover and graphite/epoxy root ribs and fore/aft closures complete the wing center section. Further discussion of the wing preliminary design is provided in Section 11.2.

The basic layup of the advanced composite skins is balanced and consists of plies oriented at 0° and $\pm 45^\circ$. Materials used for the different parts are shown in Figure 8-3.

A weight comparison study was performed by substituting aluminum skins for the graphite epoxy skins. Another candidate used low modulus KEVLAR/epoxy skins aft of the 40 percent chord and graphite/epoxy skins forward.

The mechanical properties of the different materials used in the study are presented in Section 8.2.7.

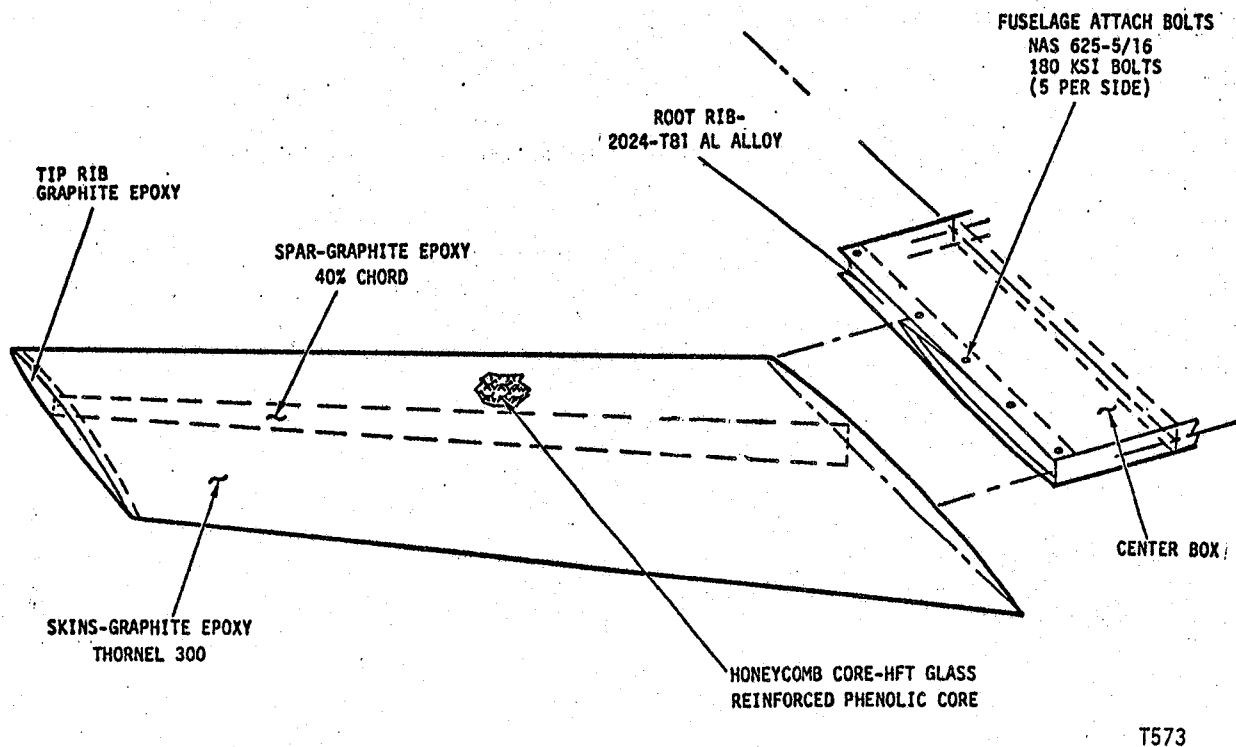


Figure 8-3. Wing Construction and Materials Selection

Analysis Techniques

The use of swept forward wings in the past has not been feasible due to the structural weight penalty associated with divergence prevention. This weight penalty is known to be very severe for conventional metal wings. By the judicious use of advanced composite materials now commercially available the weight penalty can be alleviated. With advanced composites the basic material properties can be tailored to suit a load condition and control the wing displacement behavior.

Full realization of the potential of advanced composite materials requires the availability of powerful and convenient automated analysis tools. The Air Force Flight Dynamics Laboratory has sponsored the development of a series of computer programs directed toward this end. ASOP-3 and FASTOP-3 represent the latest developments in this series of programs.

The ASOP-3 program, which operates on a finite element model of the structure, uses the fully stressed design approach for the satisfaction of strength requirements. Up to 20 load cases can be applied in stress-constraint resizing. Deflection constraint resizing is limited to only one load case. The forward swept research wing was designed with constraints on angle-of-twist at several spanwise stations. This was done by means of successive submissions of the program. In the first submission, only the innermost constraint near the root was applied. A second submission was made, in which only the next outboard constraint was applied, with the sizes of the members inboard of the first constraint submission being fixed at the values yielded by the first submission. This procedure is repeated, moving outboard to the tip. ASOP-3 can accommodate composite laminates with up to six ply directions and the directions can be arbitrary.

FASTOP-3 incorporates all the features of ASOP-3 and in addition can analyze designs with respect to vibration and flutter. The program is capable of obtaining near optimum designs subjected to strength, displacement, and flutter-speed requirements.

ASOP-3 was used extensively to perform configuration trade studies and integrate the composite materials into the design. FASTOP-3 was employed to optimize the wing for strength and twist constraints in addition to performing a vibration and flutter-spread check.

8.2 AEROELASTIC DESIGN/MATERIAL ANALYSIS

The following automated integrated analyses were used in the design process of the swept forward research wing:

- Finite element fully stressed design to satisfy strength requirements and twist displacement requirements.
- Vibration analysis
- Flutter analysis

Each analysis requires a model as shown below:

- Structures model
- Dynamics model
- Flutter model

Transformations between the structures model and the dynamics and flutter models are performed by the automated transformation analysis module (ATAM) in FASTOP-3

8.2.1 Wing Finite Element Structural Analysis

The structure is idealized into an analysis model which describes the wing geometry, support reactions, materials of construction, and the structural elements. The finite elements include rods, shear panels, and membranes. The advanced composite skins are represented as orthotropic membrane elements. These elements and the computer program formulations are described in Reference 8.1.

The idealized structural model consists of the complete outer wing panel, including a root rib. All honeycomb core is idealized into discrete spar and rib shear panels. These panels are bounded by pseudo vertical rods with compressive stiffness equivalent to the core. Five spanwise shear webs are placed at 0.05, 20.0, 40.0, 60.0, and 80.0 percent chord. The core is idealized as streamwise ribs at 5 inch intervals starting at Y_F 15.0. These elements were made non-candidate members for redesign. A spanwise spar web, fabricated from composite materials, was placed at the 40 percent chord as a candidate member for redesign. This member proved to be ineffective and not really required. The laminated skins are represented as orthotropic membrane elements. Basic layup is 0, ± 45 degree balanced laminates oriented along the 40.0 percent chord. The rib is represented by rods and shear panels. Reactions are provided at the bolt attachment locations on the root rib.

The structural model consists of 347 elements interconnected at 166 grid points and has 406 degrees of freedom.

8.2.2 Geometry

The structures model is defined with 166 grid points whose coordinates were generated by the loft department. The grids are defined by the intersection of spanwise percent chord lines and Y_F stations at 5.0 inch intervals.

This geometry is shown in Figure 8-4. Upper and lower surface grid numbers are shown in Figures 8-5 and 8-6. Upper surface grids are defined with odd numbers and are incremented by +1 to obtain the lower surface grid number directly below. Root rib geometry and grids are presented in Figure 8-7. Grid coordinate geometry is given in Table 8-1.

8.2.3 Wing Surface Membranes

The laminated wing skins are represented with 120 quadrilateral membrane elements. Basic layup is 0, ± 45 degree balanced laminates oriented along the 40.0 percent chord. Figures 8-8 and 8-9 identify the membrane elements and the grid numbers which describe them. (See also Section 8.3.1).

8.2.4 Honeycomb Core Shear Panels

The honeycomb core is "egg-crated" into spanwise and streamwise shear webs representing spars and ribs. Five spanwise shear webs are placed at 0.05, 20.0, 40.0, 60.0, and 80.0 percent chord. The rib webs are spaced at 5 inch intervals starting at $Y_F = 15.0$. Each element is assigned an identification number and defined with grid numbers.

The core ribbon direction is oriented parallel with the 40.0 percent chord line. The "L" direction properties apply to the spanwise elements representing spar webs. The transverse or "W" direction properties are used for the rib webs.

The panels are bounded at each end by pseudo vertical rods with stiffness equivalent to the core.

Figure 8-10 identifies the spanwise shear webs and the grid numbers associated with each element. Figure 8-11 identifies the streamwise rib webs.

Figure 8-12 identifies the pseudo rods which bound the webs at each end. Their location is defined by the intersection of the spanwise and streamwise webs.

8.2.5 Root Rib

The root rib is represented with quadrilateral shear panels, triangular membranes, and bar elements. Five places are provided for a bolt attachment to the fuselage.

Figure 8-13 identifies the finite elements and their grid numbers.



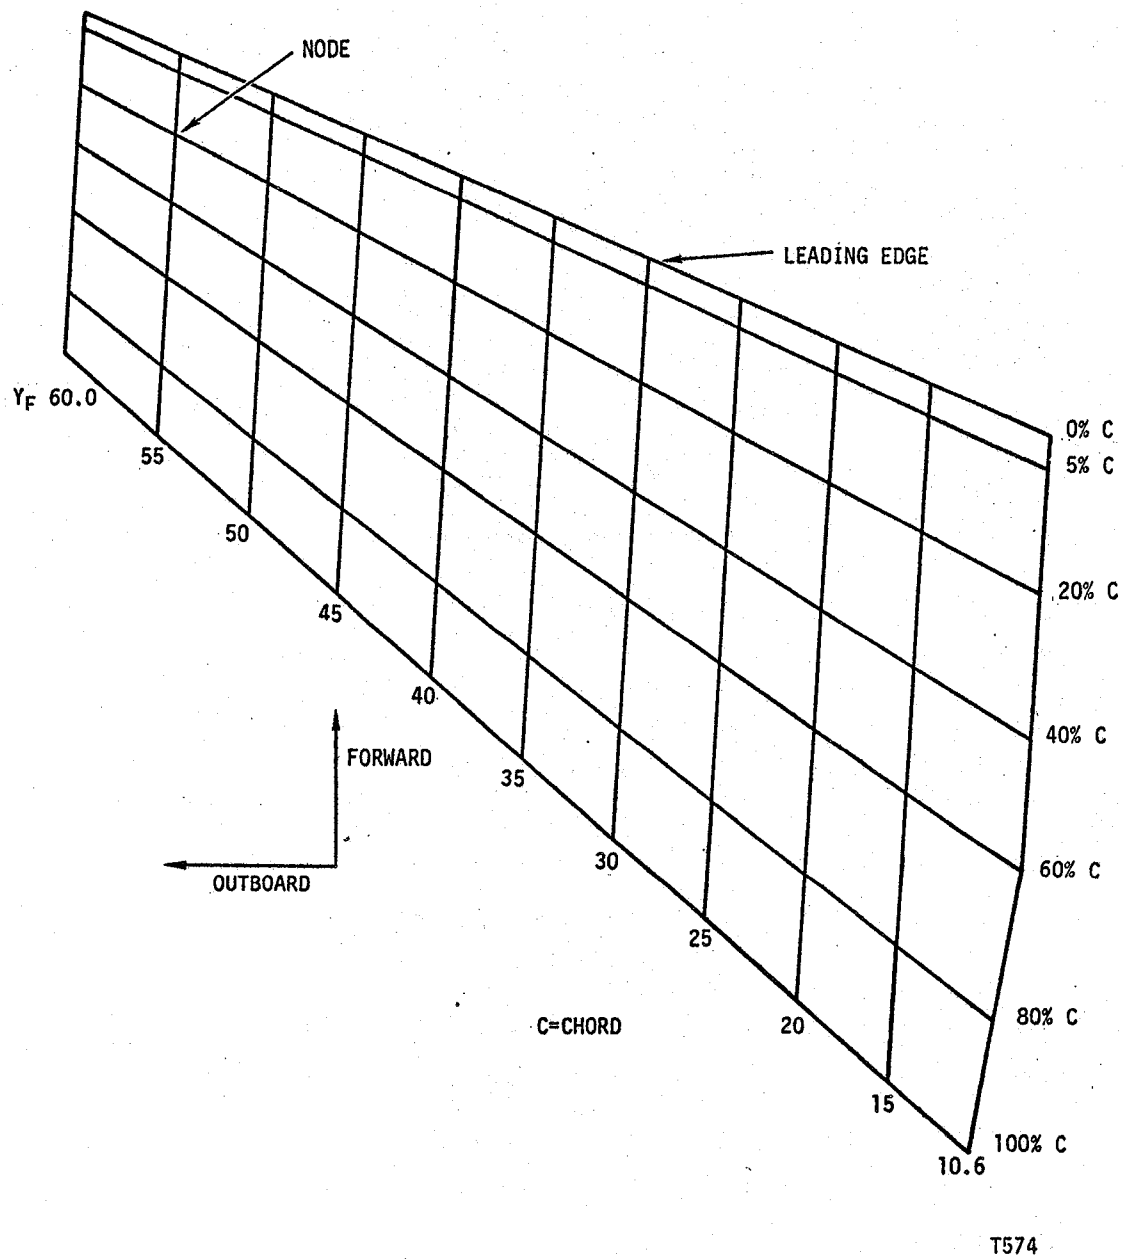


Figure 8-4. Wing Geometry

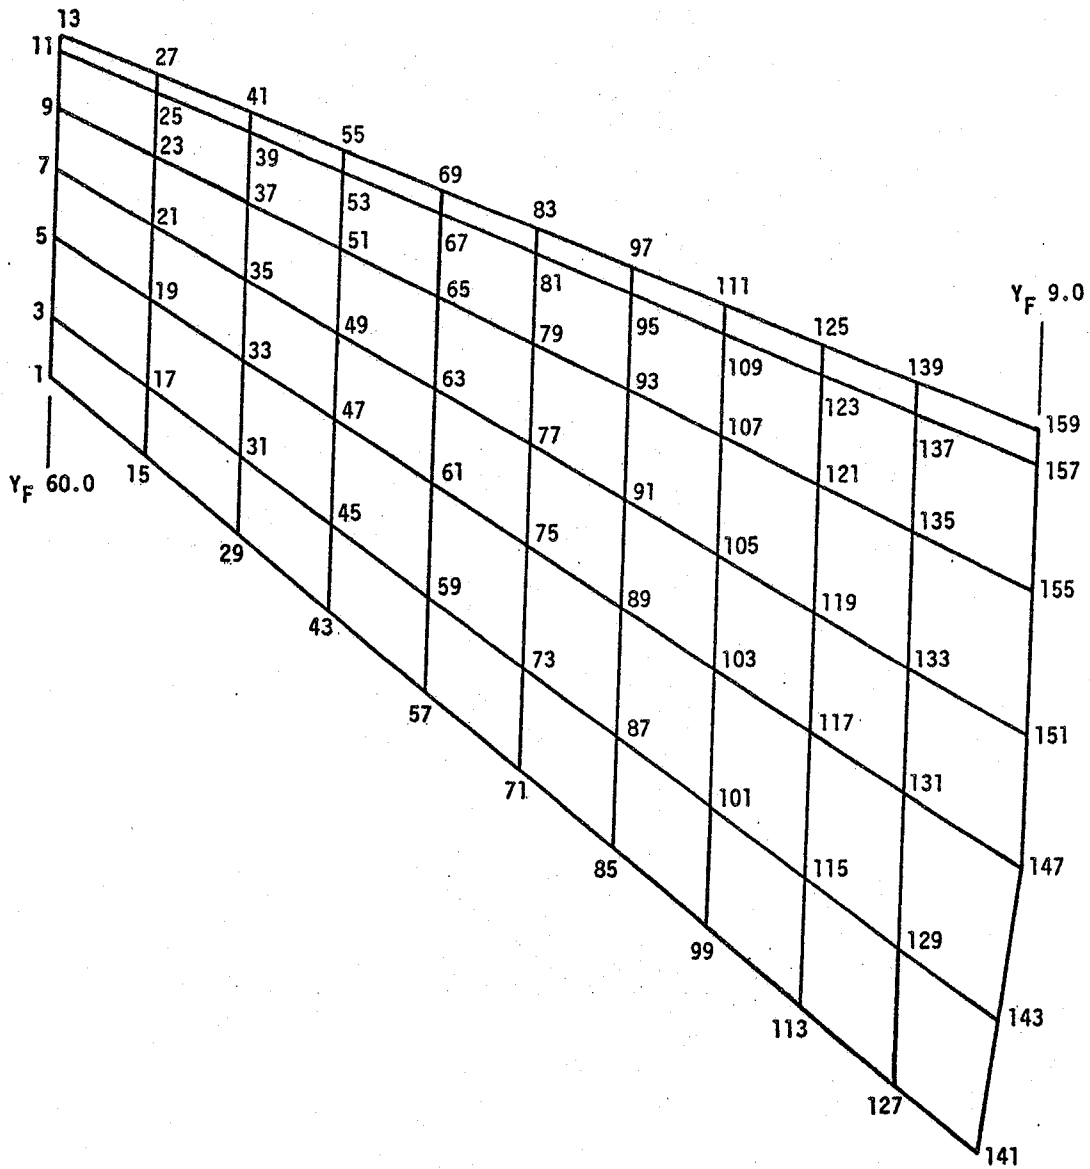


T575

Figure 8-5. Wing Upper Skin Grid Points

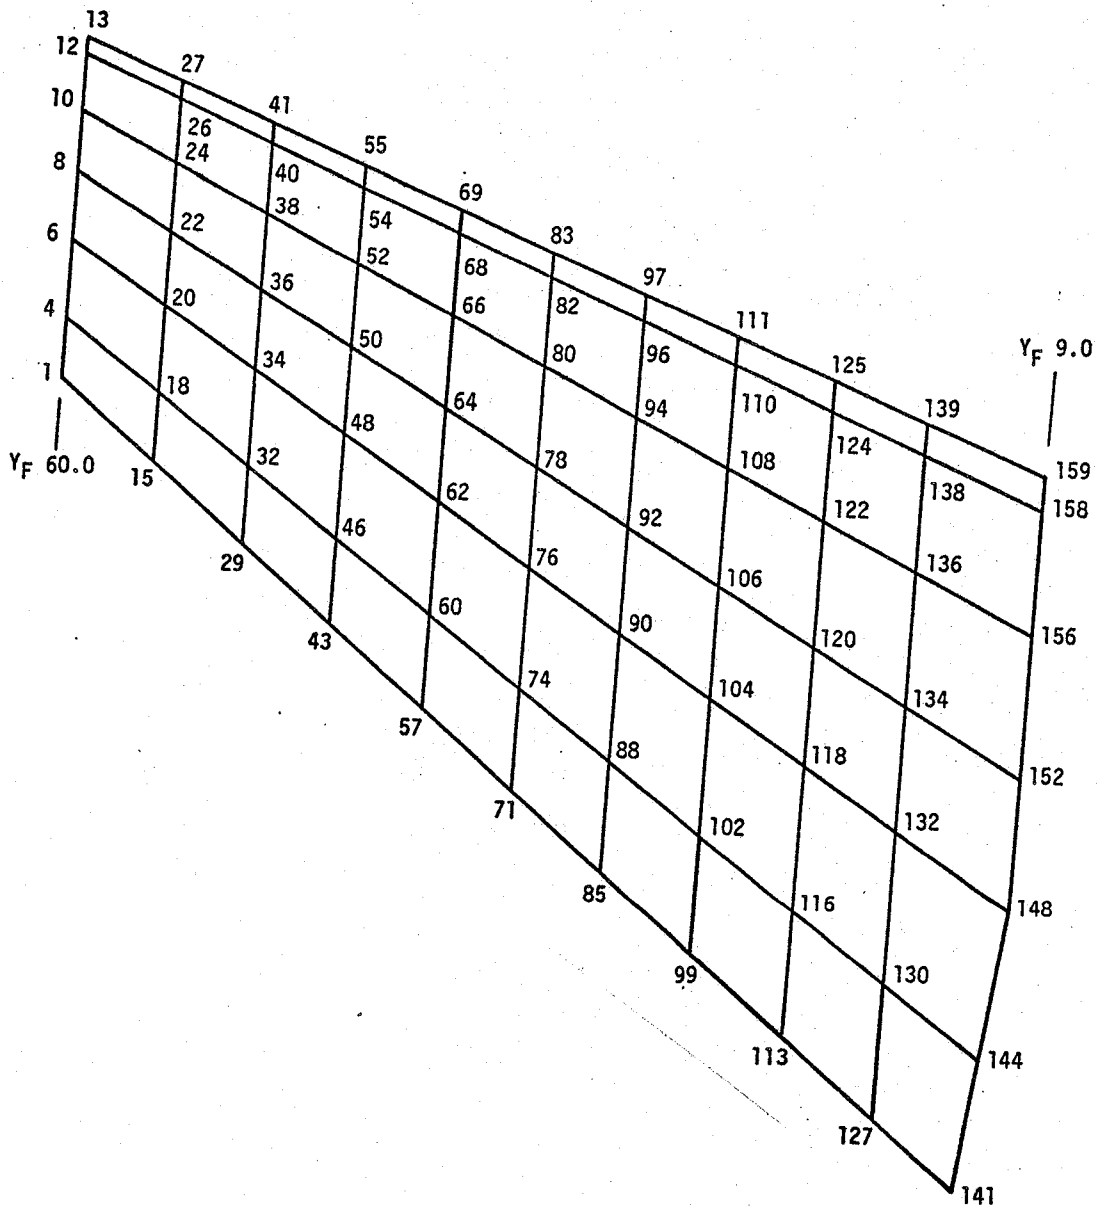

T576

Figure 8-6. Wing Lower Skin Grid Points

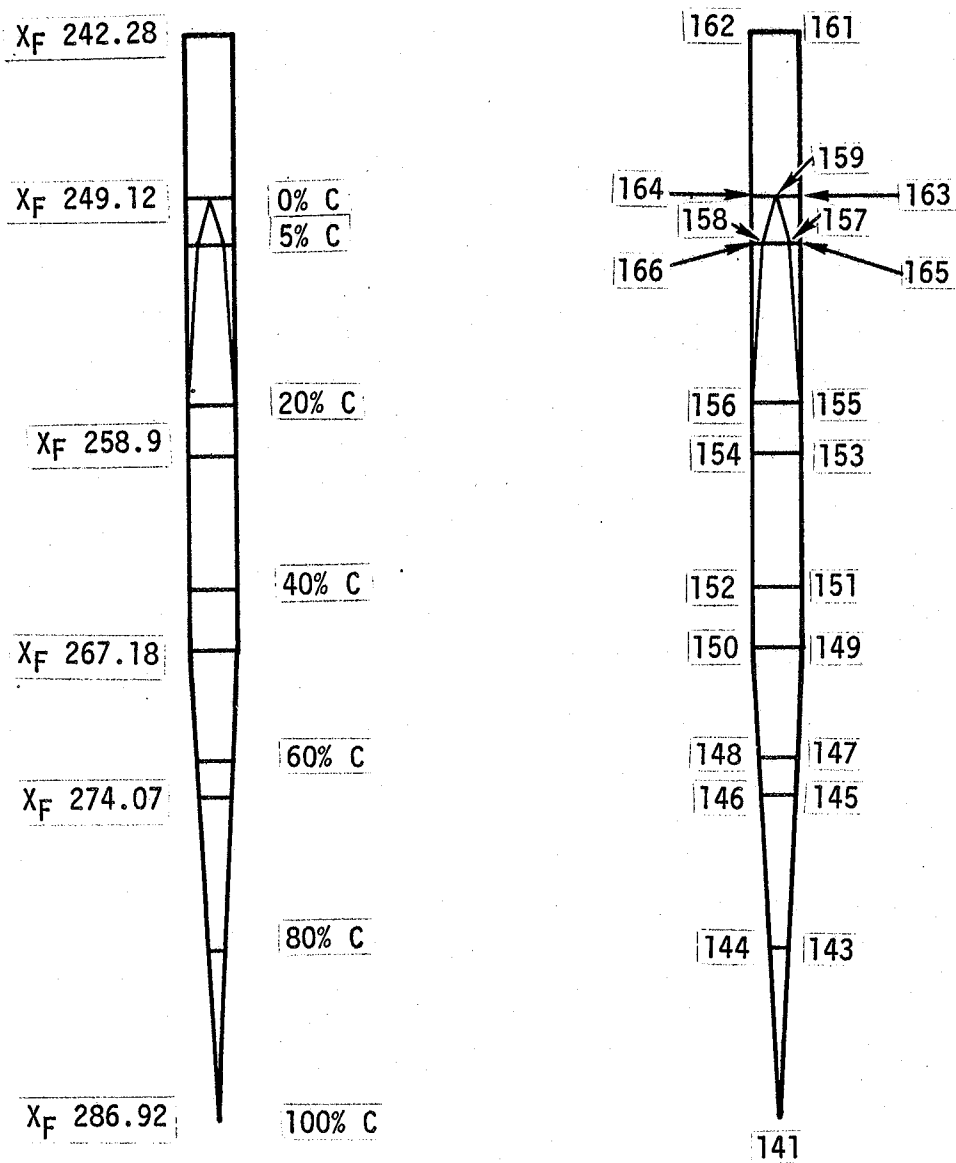

T577

Figure 8-7. Root Rib Geometry and Grid Points

TABLE 8-1
WING/ROOT RIB COORDINATES
(Sheet 1 of 3)


NODE	X	Y	Z
1	247.701786	60.000000	56.721653
2			
3	244.273786	60.000000	56.992597
4	244.273786	60.000000	56.676166
5	240.845786	60.000000	57.201573
6	240.845786	60.000000	56.523225
7	237.417786	60.000000	57.304413
8	237.417786	60.000000	56.455324
9	233.989786	60.000000	57.260178
10	233.989786	60.000000	56.476419
11	231.418786	60.000000	57.063794
12	231.418786	60.000000	56.581896
13	230.561786	60.000000	56.750000
14			
15	251.663304	55.000000	56.718111
16			
17	247.306970	55.000000	57.022910
18	247.306970	55.000000	56.566940
19	243.950637	55.000000	57.257998
20	243.950637	55.000000	56.494889
21	240.094304	55.000000	57.373688
22	240.094304	55.000000	56.418504
23	236.237970	55.000000	57.330675
24	236.237970	55.000000	56.442235
25	233.345720	55.000000	57.103003
26	233.345720	55.000000	56.560891
27	232.381637	55.000000	56.750000
28			
29	255.624822	50.000000	56.714569
30			
31	251.340155	50.000000	57.053223
32	251.340155	50.000000	56.657715
33	247.055488	50.000000	57.314422
34	247.055488	50.000000	56.466553
35	242.770822	50.000000	57.442962
36	242.770822	50.000000	56.381684
37	238.486155	50.000000	57.395172
38	238.486155	50.000000	56.408050
39	235.272655	50.000000	57.142212
40	235.272655	50.000000	56.535886
41	234.201488	50.000000	56.750000
42			
43	259.586339	45.000000	56.711027
44			
45	254.873339	45.000000	57.083535
46	254.873339	45.000000	56.648489
47	250.160339	45.000000	57.370847
48	250.160339	45.000000	56.438217
49	245.447339	45.000000	57.512237
50	245.447339	45.000000	56.344863
51	240.734339	45.000000	57.455669
52	240.734339	45.000000	56.373866
53	237.195589	45.000000	57.181421
54	237.195589	45.000000	56.518881
55	236.021339	45.000000	56.750000

TABLE 8-1
WING/ROOT RIB COORDINATES
(Sheet 2 of 3)

NODE	X	Y	Z
56			
57	263.547857	40.000000	56.707485
58			
59	258.406524	40.000000	57.113848
60	258.406524	40.000000	56.639263
61	253.265191	40.000000	57.427272
62	253.265191	40.000000	56.409881
63	248.123957	40.000000	57.581512
64	248.123957	40.000000	56.308043
65	242.982524	40.000000	57.524166
66	242.982524	40.000000	56.335682
67	239.126524	40.000000	57.220630
68	239.126524	40.000000	56.497877
69	237.841191	40.000000	56.750000
70			
71	267.509375	35.000000	56.703943
72			
73	261.939708	35.000000	57.144161
74	261.939708	35.000000	56.630038
75	256.370042	35.000000	57.483696
76	256.370042	35.000000	56.381545
77	250.800375	35.000000	57.650786
78	250.800375	35.000000	56.271223
79	245.230708	35.000000	57.588663
80	245.230708	35.000000	56.305498
81	241.053458	35.000000	57.259839
82	241.053458	35.000000	56.476872
83	239.661042	35.000000	56.750000
84			
85	271.470893	30.000000	56.700401
86			
87	265.472893	30.000000	57.174474
88	265.472893	30.000000	56.620812
89	259.474893	30.000000	57.540121
90	259.474893	30.000000	56.353209
91	253.476893	30.000000	57.720061
92	253.476893	30.000000	56.234403
93	247.478893	30.000000	57.653160
94	247.478893	30.000000	56.271313
95	242.980393	30.000000	57.299048
96	242.980393	30.000000	56.455867
97	241.480893	30.000000	56.750000
98			
99	275.432411	25.000000	56.696859
100			
101	269.006077	25.000000	57.204767
102	269.006077	25.000000	56.611586
103	262.579744	25.000000	57.596546
104	262.579744	25.000000	56.324874
105	256.153411	25.000000	57.789336
106	256.153411	25.000000	56.197583
107	249.727077	25.000000	57.717658
108	249.727077	25.000000	56.237129
109	244.907327	25.000000	57.338257
110	244.907327	25.000000	56.434862
111	243.307744	25.000000	56.750000


TABLE 8-1
WING/ROOT RIB COORDINATES
(Sheet 3 of 3)

NODE	X	Y	Z
112			
113	279.293929	20.000000	56.693317
114			
115	272.539262	20.000000	57.235100
116	272.539262	20.000000	56.502361
117	265.684595	20.000000	57.652970
118	265.684595	20.000000	56.296538
119	258.829929	20.000000	57.858610
120	258.829929	20.000000	56.160763
121	251.975262	20.000000	57.782155
122	251.975262	20.000000	56.202945
123	246.834262	20.000000	57.377466
124	246.834262	20.000000	56.413857
125	245.120595	20.000000	56.750000
126			
127	283.355446	15.000000	56.689775
128			
129	276.072446	15.000000	57.265412
130	276.072446	15.000000	56.593135
131	268.789446	15.000000	57.709395
132	268.789446	15.000000	56.268202
133	261.506446	15.000000	57.927885
134	261.506446	15.000000	56.123942
135	254.223446	15.000000	57.846652
136	254.223446	15.000000	56.168761
137	248.761196	15.000000	57.416675
138	248.761196	15.000000	56.392852
139	246.940446	15.000000	56.750000
140			
141	286.920813	10.500000	56.686587
142			
143	279.782290	9.750000	57.297241
144	279.782290	9.750000	56.583448
145	274.074668	9.000000	57.698091
146	274.074668	9.000000	56.296533
147	272.515268	9.000000	57.777105
148	272.515268	9.000000	56.234199
149	267.180000	9.000000	57.968294
150	267.180000	9.000000	56.104451
151	264.718268	9.000000	58.011015
152	264.718268	9.000000	56.079758
153	258.900000	9.000000	57.983204
154	258.900000	9.000000	56.095890
155	256.921268	9.000000	57.924048
156	256.921268	9.000000	56.127740
157	251.073518	9.000000	57.463726
158	251.073518	9.000000	56.367647
159	249.124268	9.000000	56.750000
160			
161	242.28	9.0	53.0
162	242.28	9.0	56.0
163	249.124268	9.0	58.0
164	249.124268	9.0	56.0
165	251.073518	9.0	53.0
166	251.073518	9.0	56.0

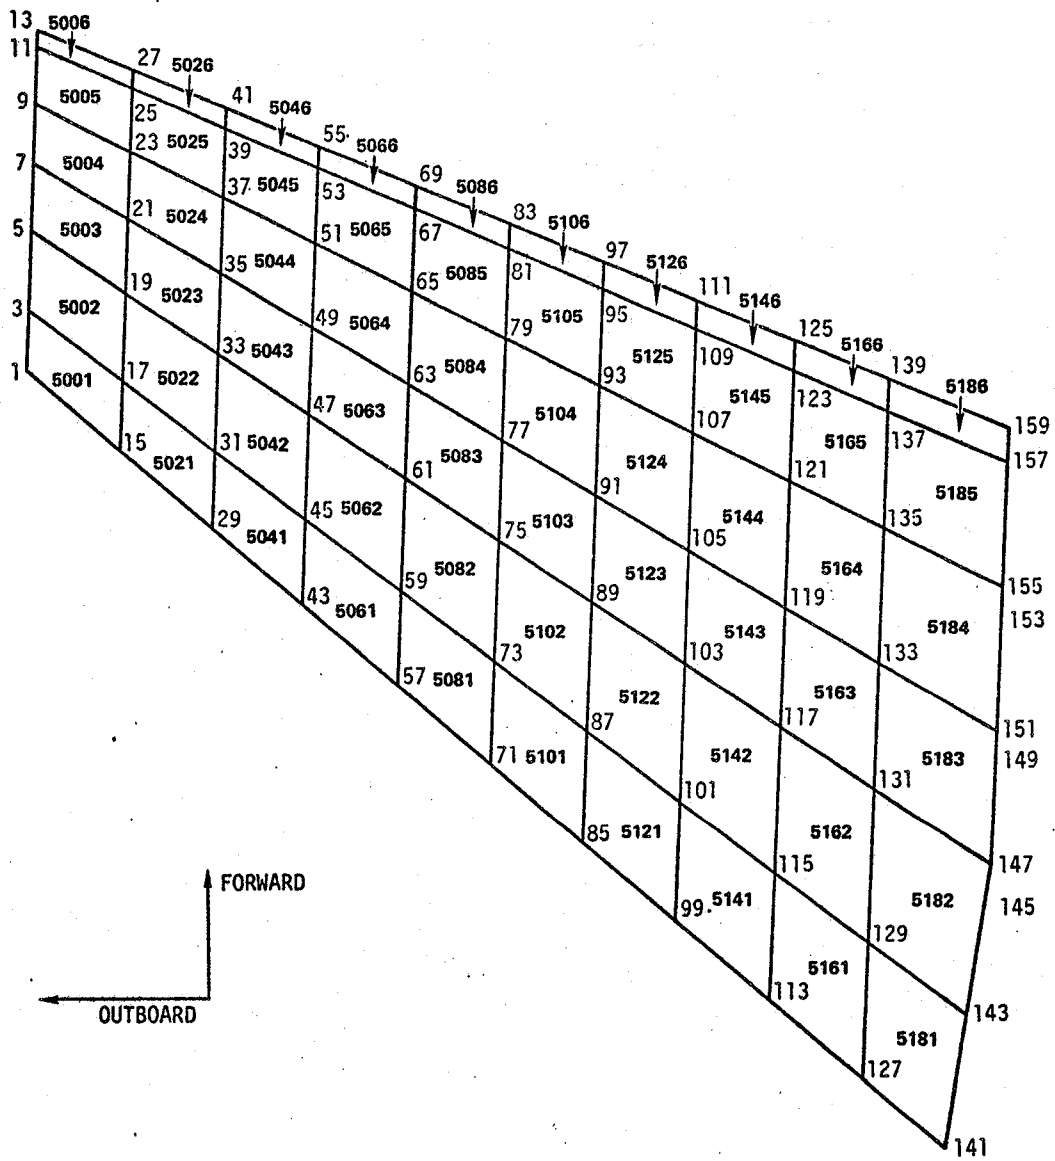


T578

Figure 8-8. Upper Surface-Membrane Elements

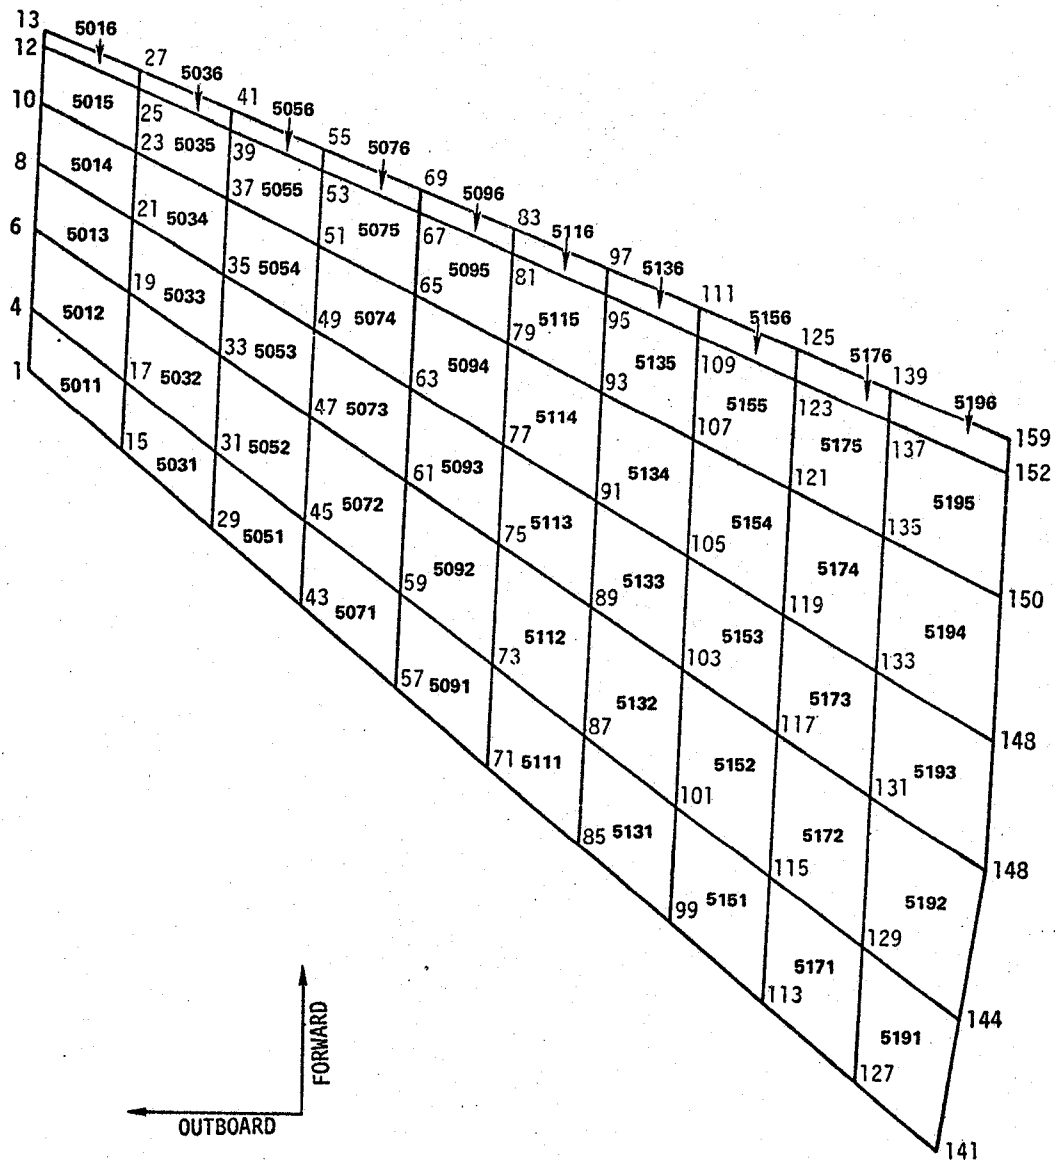


T579

Figure 8-9. Lower Surface-Membrane Elements

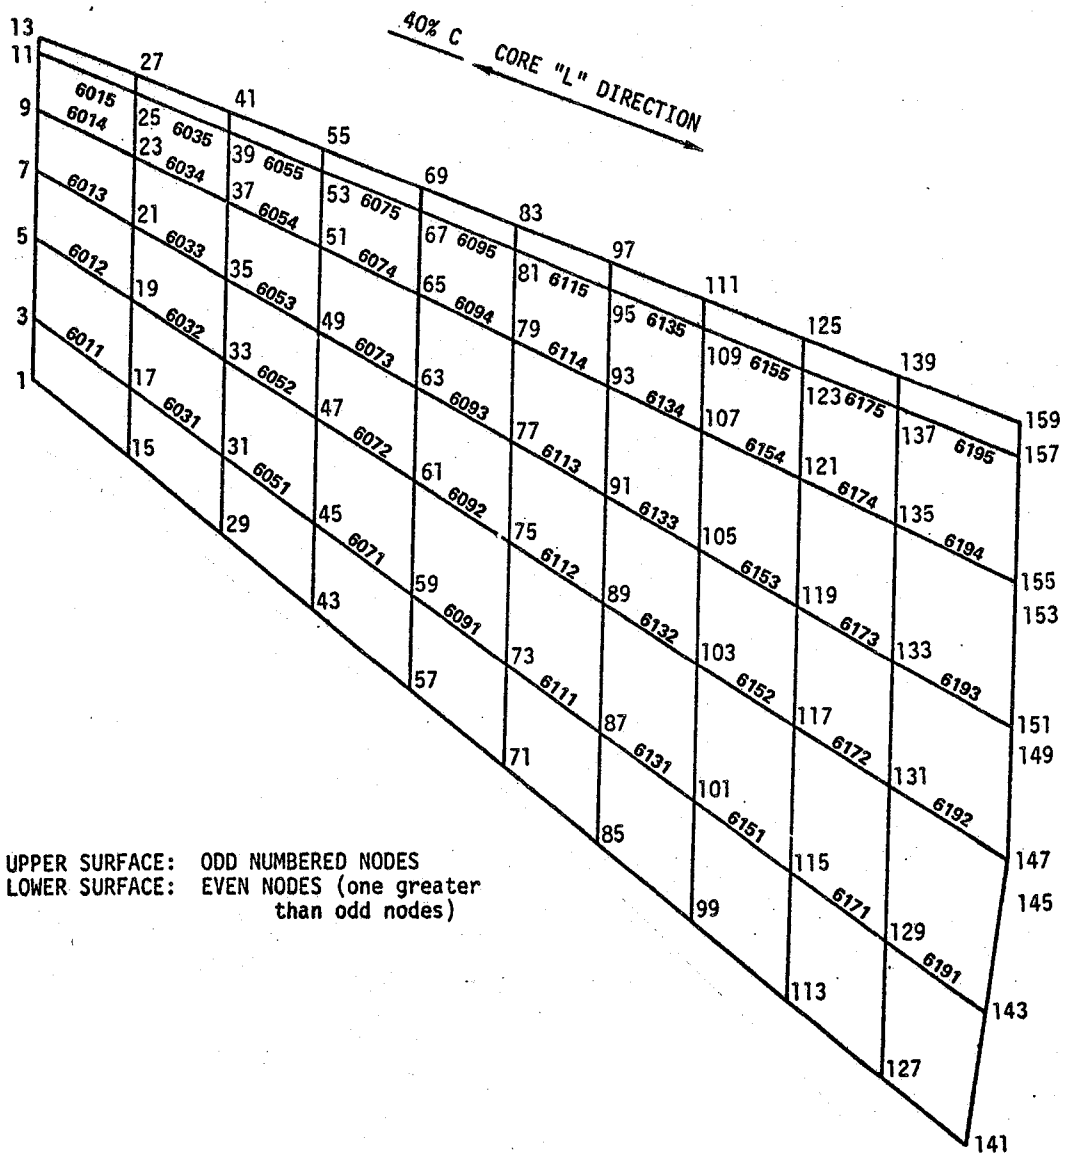

T580


Figure 8-10. Spanwise Shear Panels

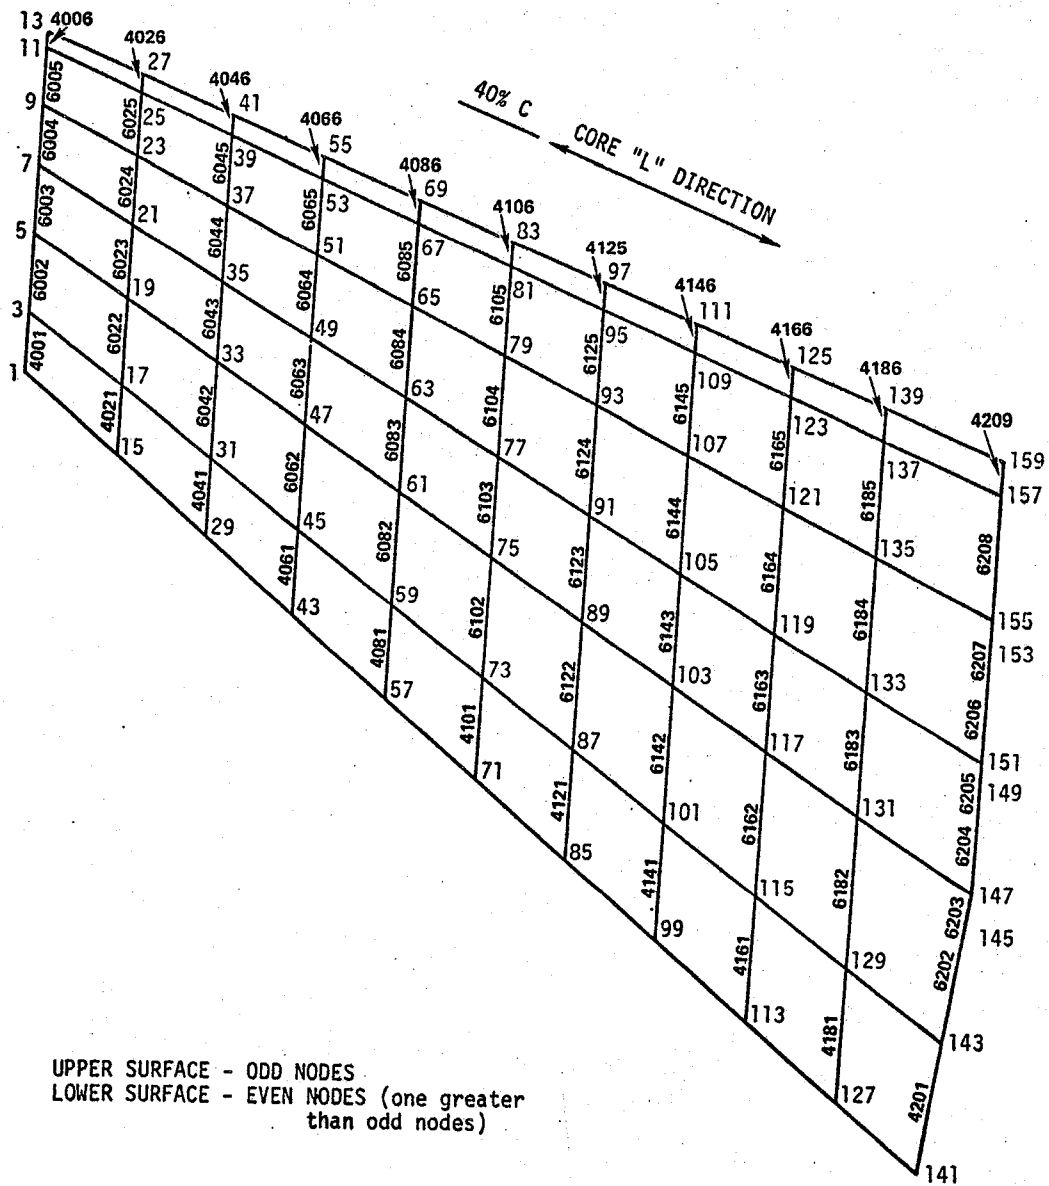


T581

Figure 8-11. Chordwise Shear Webs

80% CHORD

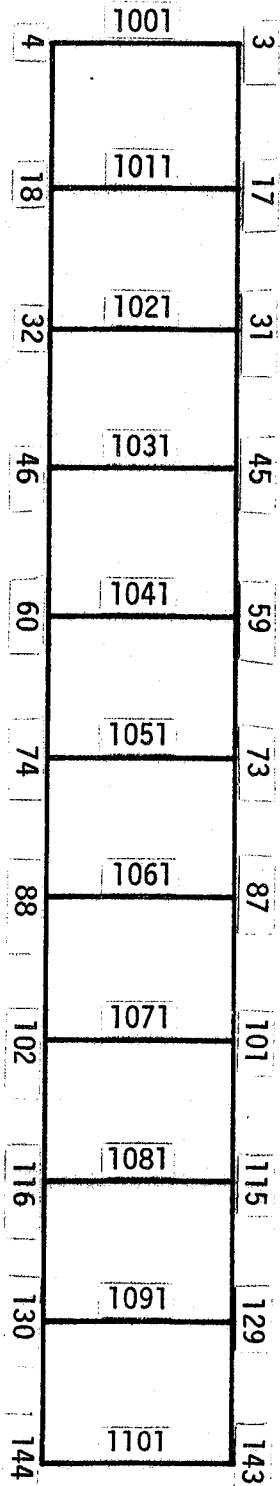

60% CHORD

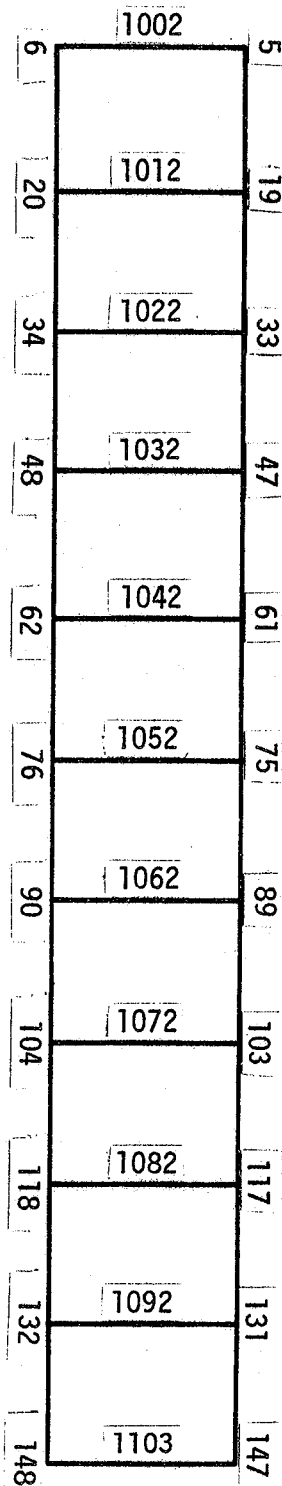

T582

Figure 8-12. Shear Web Vertical Pseudo Rods
(Sheet 1 of 2)




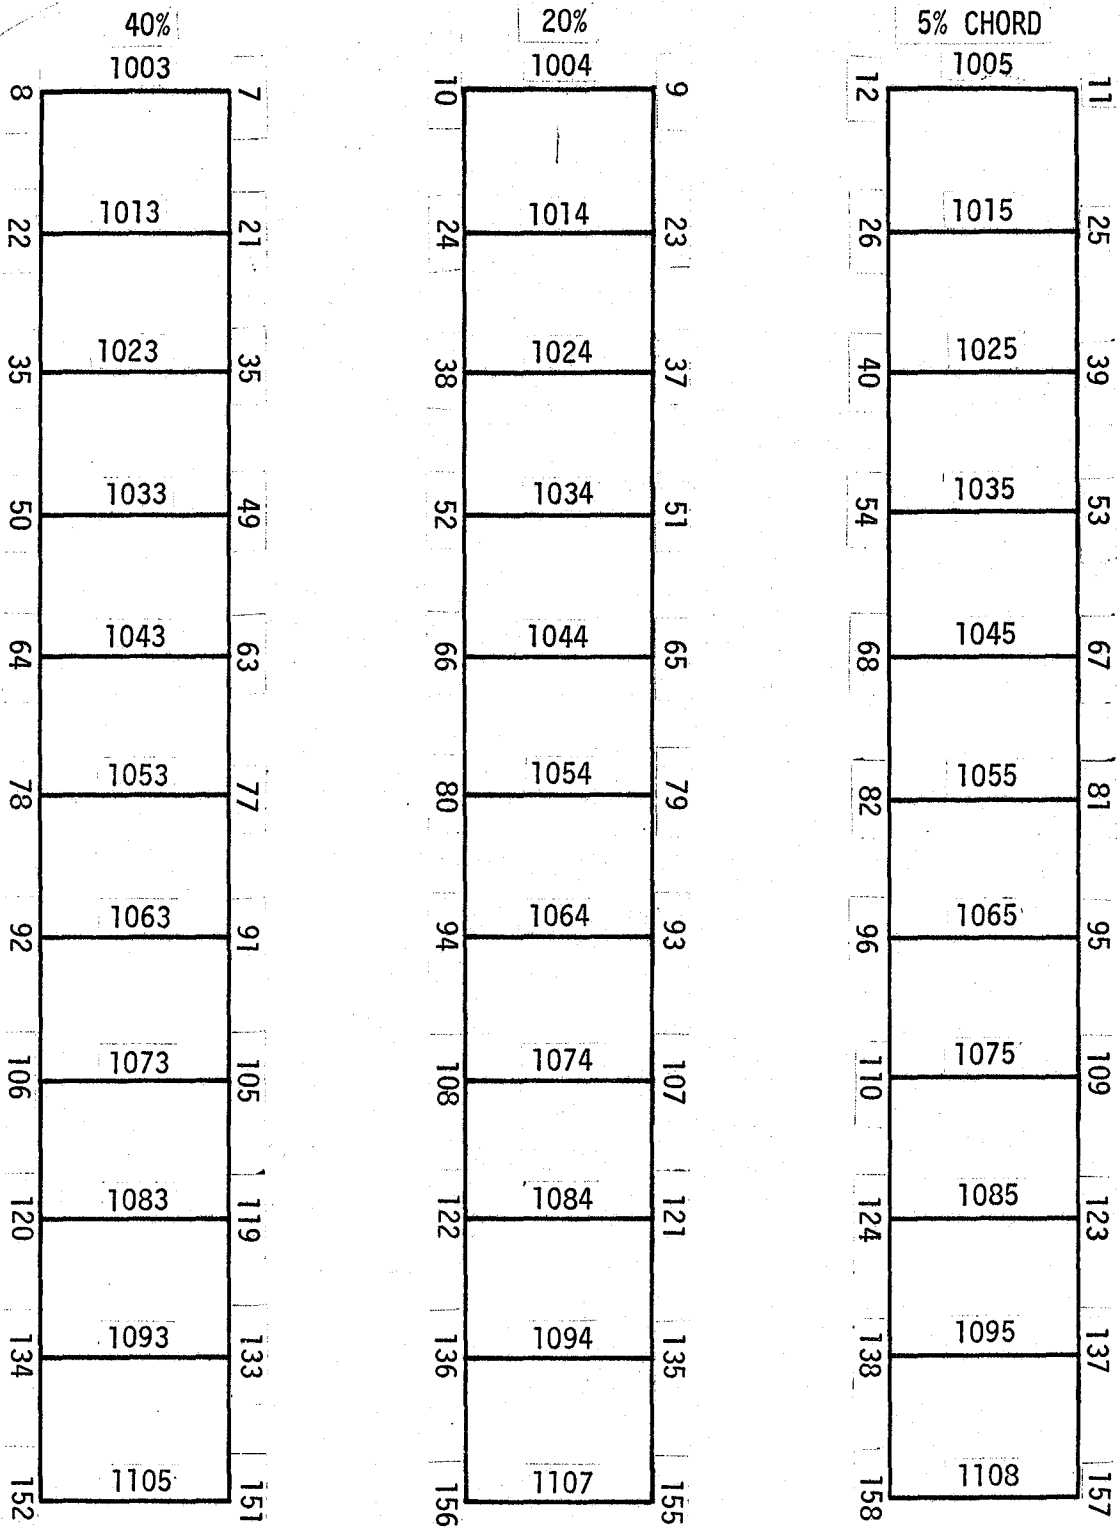


Figure 8-12. Shear Web Vertical Pseudo Rods
(Sheet 2 of 2)

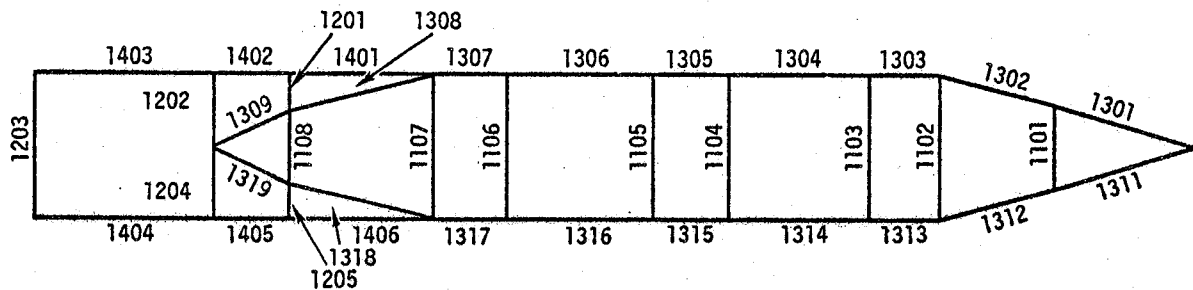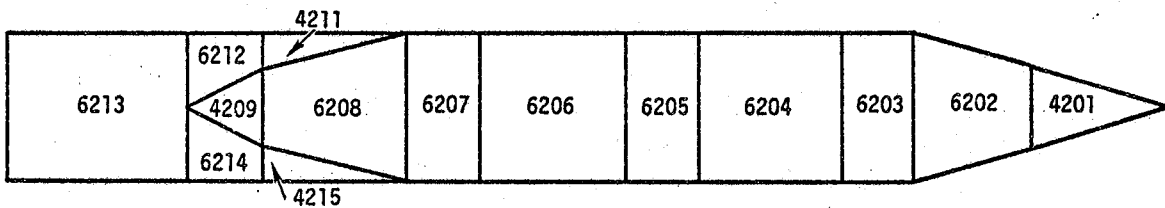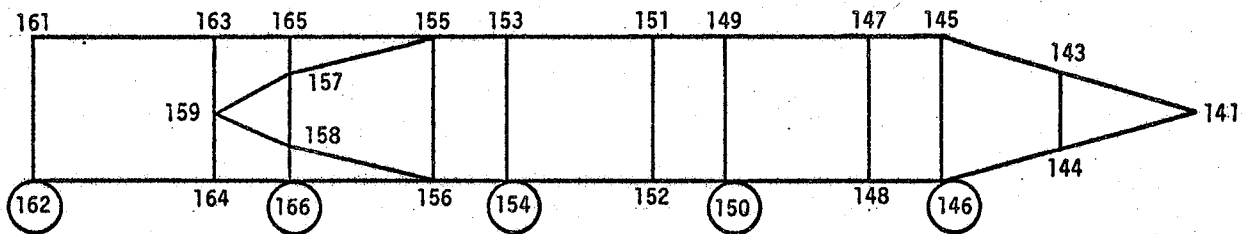

166 INDICATES FUSELAGE ATTACHMENT
 GRID (5 PLACES)

→ AFT

T583

Figure 8-13. Root Rib Structural Model

8.2.6 Reactions

The wing is reacted along the root rib at Y_F 9.0. Vertical reactions are specified at grids corresponding to the five bolts provided for attaching to the fuselage frames. Wing bending is coupled out at 10 upper and lower grids each, representing points where the bending loads are introduced into the center box.

Grid points and reaction directions are shown in Figure 8-14. Rigid reactions are used in this study. However, a detail design analysis should use flexible supports to reflect the fuselage elasticity.

8.2.7 Material Properties

Properties published in standard References 8.2, 8.3 and 8.4 were used in the analysis study. Three principal materials are used.

8.2.8 External Loads

The load conditions are defined as panel point loads and applied to the upper surface grids. Loads for $N_z = 6, 9, 2,$ and -3 are presented in Figures 8-15 thru 8-18, respectively.

The wing is designed to be strength adequate for all the conditions and is aeroelastically tailored to meet specified twist constraints when subjected to $N_z = 6$ loads.


The loads are based on a gross weight of 2500 pounds and it was conservatively assumed the exposed wing carried 95 percent of the total lift of the aircraft.

8.3 RESULTS

8.3.1 Discussion

The study was performed in four phases which culminated in a preliminary wing design tailored to meet specific strength and displacement requirements. By using advanced composite materials effectively, the severe weight penalty associated with divergence prevention of swept forward wings was alleviated.

The study phases consisted of certain tasks which directed the design process in an orderly and logical fashion.

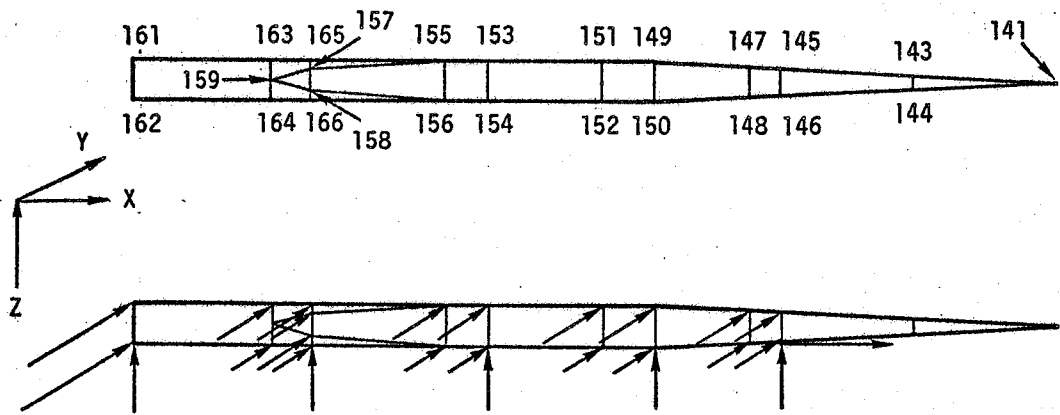

REACTIONS

GRID POINT	DIRECTION		
	X	Y	Z
141			
143			
144			
145		X	
146	X	X	X
147		X	
148		X	
149		X	
150		X	X
151		X	
152		X	
153		X	
154		X	X
155		X	
156		X	
157		X	
158		X	
159			
161		X	
162		X	X
163		X	
164		X	
165		X	
166		X	X

T584

Figure 8-14. Reactions at Root Rib

NODE NO.	TOTAL LOAD (LB.)
1	15.25
3	21.30
5	28.90
7	36.55
9	30.41
11	9.89
15	25.36
17	51.83
19	66.65
21	92.53
23	88.82
25	47.64
27	9.35
29	32.00
31	69.65
33	94.50
35	121.49
37	130.90
39	75.51
41	17.44
43	37.20
45	85.63
47	109.02
49	147.27
51	153.37
53	92.70
55	23.48
57	39.66
59	99.76
61	118.80
63	164.29
65	175.74
67	104.47
69	25.71
71	39.97
73	87.51
75	125.08
77	180.74

NODE NO.	TOTAL LOAD (LB.)
79	204.48
81	123.06
83	28.52
85	46.35
87	94.06
89	123.00
91	174.71
93	219.56
95	141.27
97	37.08
99	45.83
101	110.68
103	139.75
105	191.72
107	207.57
109	138.31
111	36.99
113	39.27
115	108.94
117	143.52
119	215.68
121	222.63
123	129.88
125	34.82
127	25.73
129	93.37
131	131.44
133	233.21
135	273.28
137	167.95
139	41.70
143	20.90
147	41.12
151	41.12
155	105.09
157	86.32
159	29.69

Figure 8-15. External Loads, NZ = 6

NODE NO.	TOTAL LOAD (LB.)
1	22.875
3	31.95
5	43.35
7	54.825
9	45.615
11	14.835
15	38.04
17	77.745
19	99.975
21	138.795
23	133.23
25	71.46
27	14.025
29	48.00
31	104.475
33	141.75
35	182.235
37	196.35
39	113.265
41	26.16
43	55.80
45	128.445
47	163.53
49	220.905
51	230.055
53	139.05
55	35.22
57	59.49
59	149.64
61	178.2
63	246.436
65	263.61
67	156.705
69	38.565
71	59.955
73	131.265
75	187.62
77	271.11

NODE NO.	TOTAL LOAD (LB.)
79	306.72
81	184.58
83	42.78
85	69.525
87	141.09
89	184.5
91	262.065
93	329.34
95	211.905
97	55.62
99	68.745
101	166.02
103	209.625
105	287.58
107	311.355
109	207.465
111	55.485
113	58.905
115	163.41
117	215.28
119	323.52
121	333.945
123	194.82
125	52.23
127	38.595
129	140.055
131	197.16
133	349.815
135	409.92
137	251.925
139	62.55
143	31.35
147	61.68
151	61.68
155	157.635
157	129.48
159	44.535

Figure 8-16. External Loads, NZ = 9,
69 Loads x 1.5

NODE NO.	TOTAL LOAD (LB.)
1	8.82
3	8.82
5	8.82
7	8.82
9	6.61
11	2.20
15	15.39
17	24.03
19	23.54
21	23.59
23	19.87
25	10.09
27	2.08
29	19.46
31	33.60
33	34.13
35	33.08
37	28.74
39	15.48
41	3.54
43	22.36
45	40.41
47	39.98
49	40.18
51	34.60
53	18.97
55	4.46
57	24.59
59	45.02
61	45.54
63	44.91
65	39.02
67	21.57
69	5.15
71	26.25
73	48.86
75	48.95
77	49.13

NODE NO.	TOTAL LOAD (LB.)
79	42.42
81	23.62
83	5.69
85	27.50
87	51.75
89	51.83
91	51.99
93	44.99
95	25.17
97	6.10
99	28.34
101	53.47
103	54.33
105	54.08
107	46.89
109	26.32
111	6.41
113	28.96
115	55.00
117	55.42
119	55.95
121	48.36
123	27.01
125	6.63
127	27.64
129	56.04
131	60.09
133	61.31
135	53.21
137	31.45
139	8.0
143	22.78
147	19.93
151	19.93
155	19.94
157	14.95
159	4.98

Figure 8-17. External Loads, NZ - 2

NODE NO.	TOTAL LOAD (LB.)
1	0.71
3	-6.14
5	-14.74
7	-23.39
9	-20.94
11	-6.70
15	2.66
17	-9.70
19	-27.47
21	-56.65
23	-60.02
25	-33.34
27	-6.33
29	3.42
31	-10.37
33	-37.41
35	-70.08
37	-89.57
39	-53.90
41	-12.53
43	3.44
45	-14.58
47	-41.92
49	-84.80
51	-103.05
53	-66.24
55	-17.47
57	5.21
59	-21.19
61	-41.66
63	-94.40
65	-119.37
67	-74.24
69	-18.60
71	8.24
73	.49
75	-41.83
77	-104.44

NODE NO.	TOTAL LOAD (LB.)
79	-144.95
81	-91.13
83	-20.68
85	3.56
87	-1.02
89	-33.60
91	-91.79
93	-156.77
95	-108.57
97	-29.53
99	5.87
101	-16.34
103	-47.46
105	-106.79
107	-139.36
109	-102.83
111	-28.79
113	14.54
115	-11.25
117	-49.51
119	-130.08
121	-153.39
123	-91.93
125	-25.89
127	27.17
129	8.49
131	-26.33
133	-139.00
135	-200.81
137	-125.98
139	-30.87
143	22.75
147	-5.93
151	-5.43
155	-78.30
157	-67.22
159	-23.44

Figure 8-18. External Loads, NZ = -3

The phases and tasks performed are shown as follows:

1. Design Sensitivity Considerations
 - a. Laminate layup and displacement constraint influence.
 - b. Rigid versus flexible supports.
 - c. Graphite/epoxy shear web at 40 percent chord.
 - d. Leading edge non-participating in twist control.
 - e. Camber constraint.
2. Configuration/Material Trade Studies
 - a. Aluminum wing.
 - b. Graphite/epoxy wing.
 - c. Graphite-KEVLAR wing.
3. Computer Optimized Wing
4. Smoothed Wing Design
 - a. Strength and displacement analysis.
 - b. Vibration/flutter check.

Laminate Layup and Constraint Influence

The laminate is sensitive to the ply orientations and the severity of constraint. A 0° , $\pm 45^\circ$ basic layup appears to have a weight advantage over a 0° , 90° , $\pm 45^\circ$ laminate. The optimization procedure doesn't utilize the 90° ply effectively in either the strength or deflection constraint modes.

Figure 8-19 is a 0° , 90° , $\pm 45^\circ$ laminate optimized for strength only. Figure 8-20 is the twist displacement the laminate experiences when subjected to 6 g loads. All wing twist distributions shown in this report have been determined by the differential deflections of the most forward and most rearward set of grid points. The 90° basic one ply does not increase in number when subjected to deflection constraints indicating the layup is not sensitive to its presence.

Figure 8-21 is a 0° $\pm 45^\circ$ laminate optimized for strength only. Figure 8-22 is optimized for strength plus a tip twist constraint at $Y_w = 60.0$ of 0° . Figure 8-23 shows the twist behavior under 6 g loads.



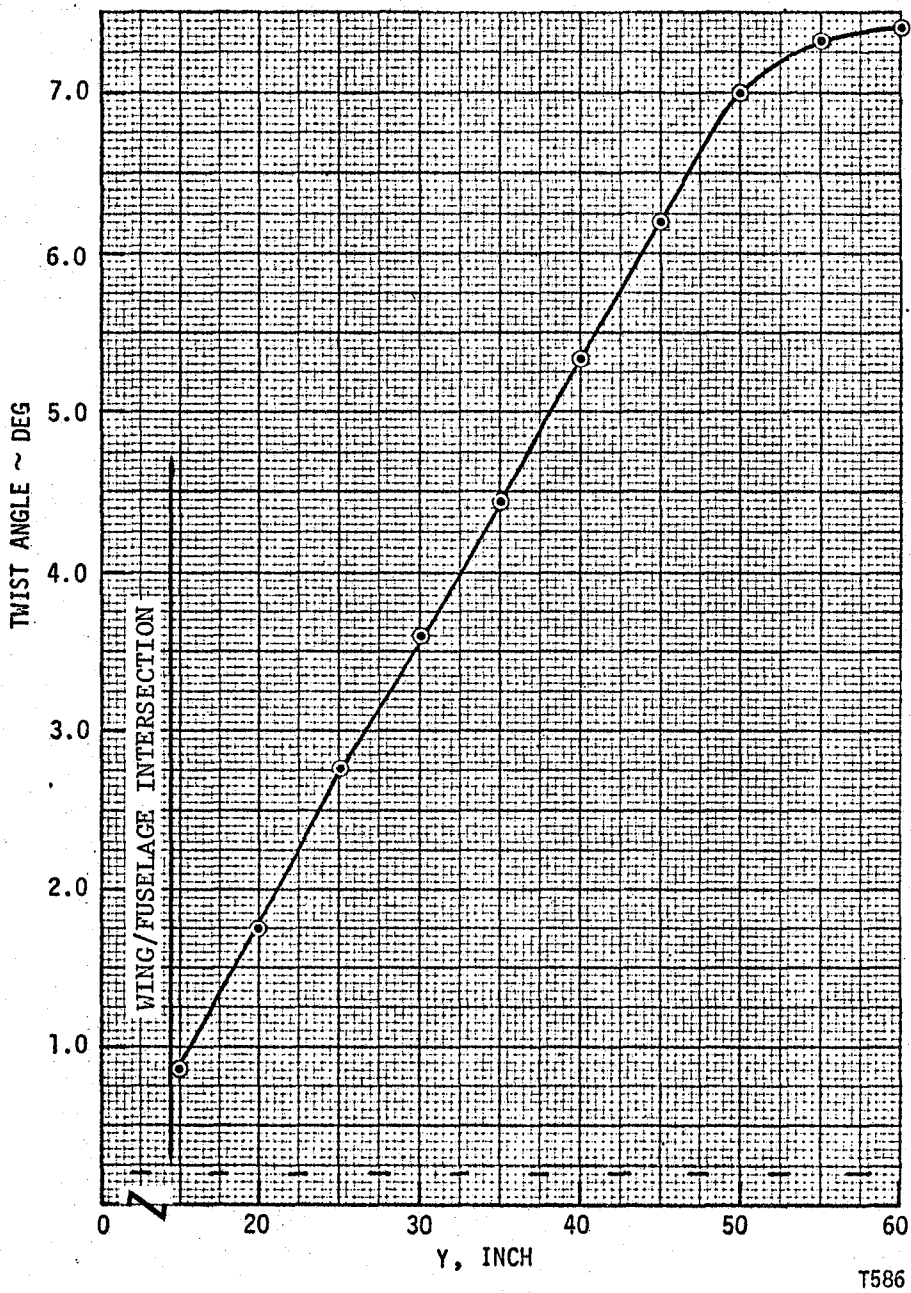


Figure 8-20. All Graphite/Epoxy Wing (0° , 90° , 45° , -45°)
 ASOP 3 Load = 6 g
 Strength Optimization Only

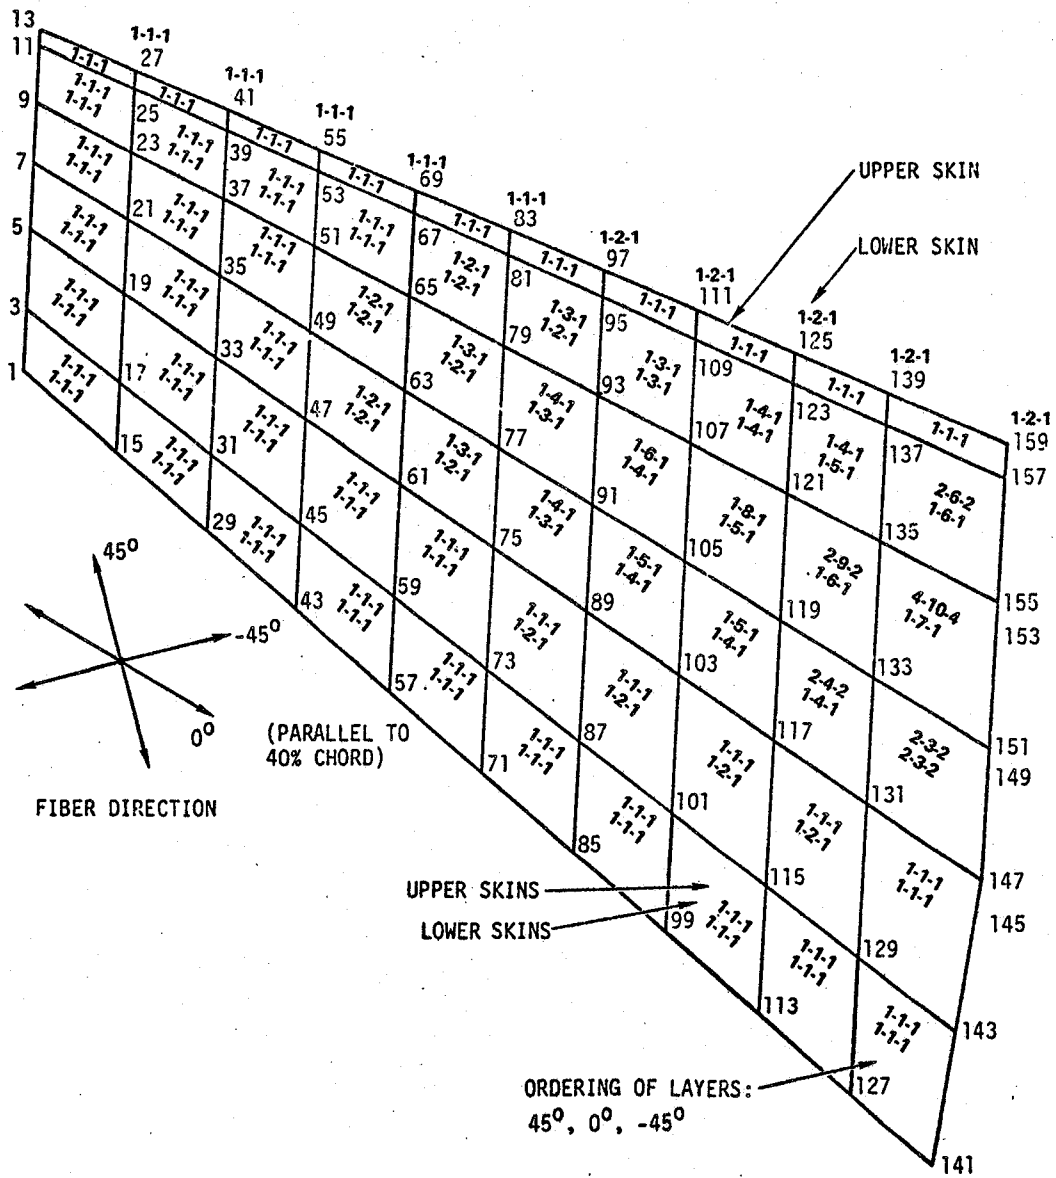

T587

Figure 8-21. All Graphite/Epoxy Wing (45° , 0° , -45°)
 ASOP 3 Load = 6 g, 9 g, 2 g
 1 Cut Wing, Stress Constraint
 Wgt. = 16.37

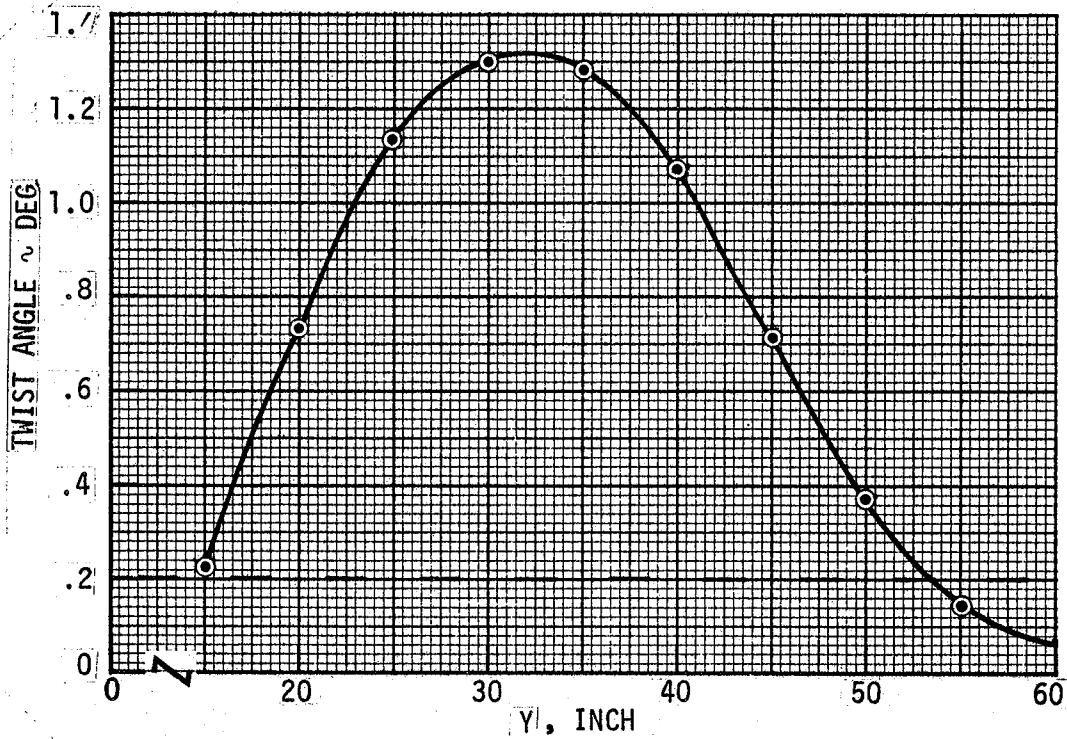

T589

Figure 8-23. All Graphite/Epoxy Wing (45° , 0° , -45°)
 ASOP 3 Load = 6 g
 1 Cut Wing Displacement Constraint @ Y = 60

Figure 8-24 is a laminate design with the wing constrained to 0° twist at $Y_W = 25.0, 40.0,$ and 60.0 . As the constraint severity increases the laminate layers change more abruptly. Figure 8-25 shows the spanwise twist behavior.

The twist angles at the constraint locations of $Y = 25, 40,$ and 60 inches are not precisely zero degrees for several reasons. First of all a tolerance of about $.05$ degrees (or a maximum number of iterations) was allowed in the solution. In addition the structure outboard of each constraint station (except the tip) effects the deformation at the constraint station by the manner in which the internal loads and stresses are distributed inboard. This structure obviously changes as the constraint station moves outboard thus affecting the deformation. This was observed during the study. A second series of optimization runs starting with the laminate layers of Figure 8-24 would probably show near zero rotation at the constraint stations.

The deflection curve of Figure 8-25 shows a reversal of curvature at station 55. It is believed that this may be due to reaching the minimum number of plies at the outer row or two of panels.

Rigid Versus Flexible Supports


The distribution of wing loads into the supports is sensitive to the fuselage flexibility which also influences the laminate layup. Flexible supports as opposed to rigid support causes an increase in numbers of plies in local areas near the support. The wing twist displacement is also influenced by the support flexibility.

Graphite/Epoxy Shear Web

A graphite shear web was placed along the 40 percent chord in conjunction with the core. This member was permitted to participate in the optimization. This member's effectiveness was similar to the 90° ply in the skin laminate. The thickness never changed from its manufacturing minimum of $.01$, indicating the design is not sensitive to its presence.


Leading Edge Effectiveness

Analyses were performed with the leading edge participating and non-participating in the optimization process. These results indicate the laminate is greatly influenced by the leading edge structure. The optimization

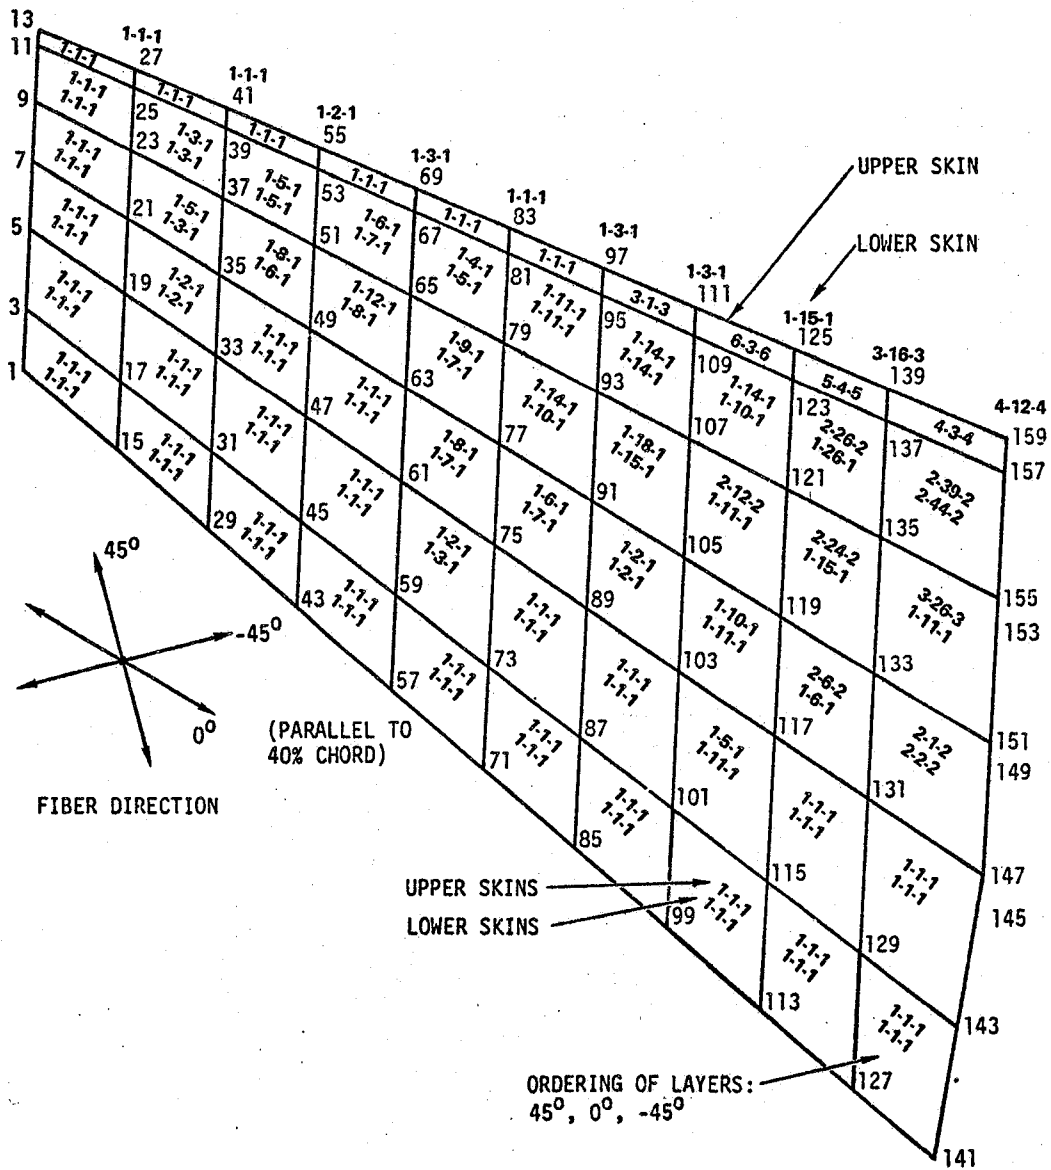

T590

Figure 8-24. All Graphite/Epoxy Wing (45° , 0° , -45°)
 ASOP 3, Load = 6 g, 9 g, 2 g, 3 Cut Wing
 Displacement Constraint @ $Y = 25, Y = 40, Y = 60$
 Wgt. = 19.74 lb., Δ Wgt. = 20.57%

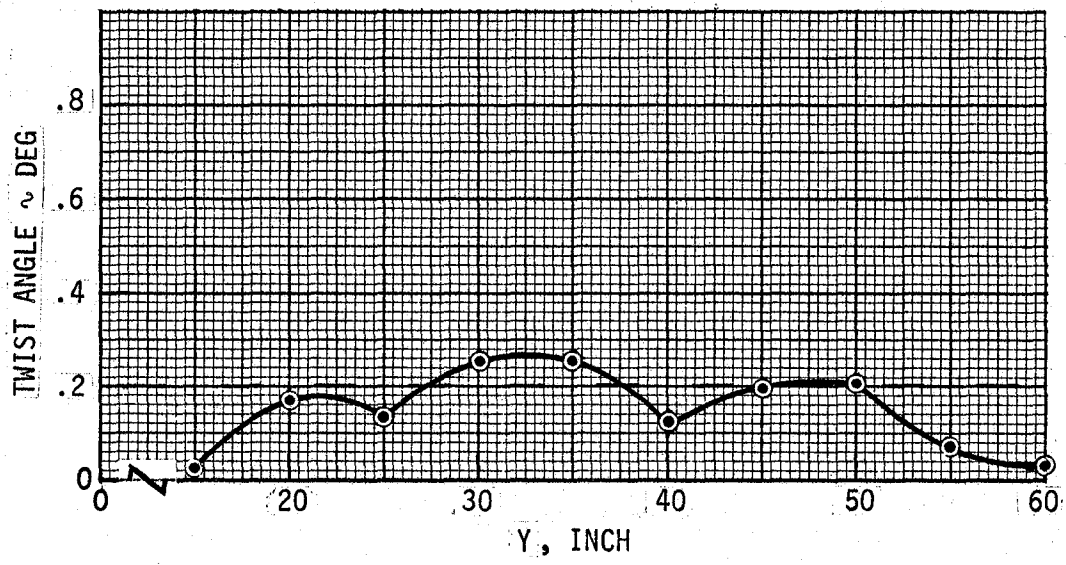

T591

Figure 8-25. All Graphite/Epoxy Wing (45° , 0° , -45°)
 ASOP 3 Load 6 g, 3 Cut Wing,
 Displacement Constraint @ $|Y| = 25$,
 $Y = 40$, $Y = 60$

program tends to concentrate layers forward of the 40 percent chord and making the leading edge non-effective has a very disturbing effect on the remaining skin laminate.


Deformations Normal To Chordline

Analyses were performed to optimize the wing for twist and simultaneously restrict deflections normal to the chordline in order to retain the built-in camber. All attempts were fruitless since a suitable single constraint equation could not be found. Figure 8-26 shows the layup resulting from a typical attempt at a combined twist/camber constraint at $Y = 20$. Figure 8-27 shows the displacements along the chord at span station 20.0 for the 6.0 g load case. Neither the twist nor the deflections normal to the chordline were constrained to zero.

Further analyses were performed in an attempt to optimize for retention of the built-in camber and limit the twist by performing two separate optimizations. First, a constraint to retain the built-in camber was imposed at $Y = 20$. Figure 8-28 shows the resulting layup. Built-in camber was retained at $Y = 20$ and camber deformations outboard of $Y = 20$ were essentially eliminated. Figure 8-29 shows the displacements along the chord at $Y = 20$ and $Y = 30$ for the 6.0 g load. Further outboard the camber deformations were negligible. Second, the ply layup was initialized as in Figure 8-28 and a twist constraint was imposed at $Y = 20$. Figure 8-30 shows the layup after optimization and Figure 8-31 shows the deflections for the 6.0 g load. At $Y = 20$ the twist was held to zero, however, deformations normal to the chordline are evident and the built-in camber was lost.


Configuration/Material Trade Studies

Weight optimization analyses were performed for a graphite wing, a graphite-KEVLAR wing, and an aluminum structure. All three configurations used the same honeycomb core and root rib internal structure. Only the skins differed. The same load and displacement criteria applied to each version. Displacement constraints were placed progressively at span stations 20, 30, 40, 50, and 60.

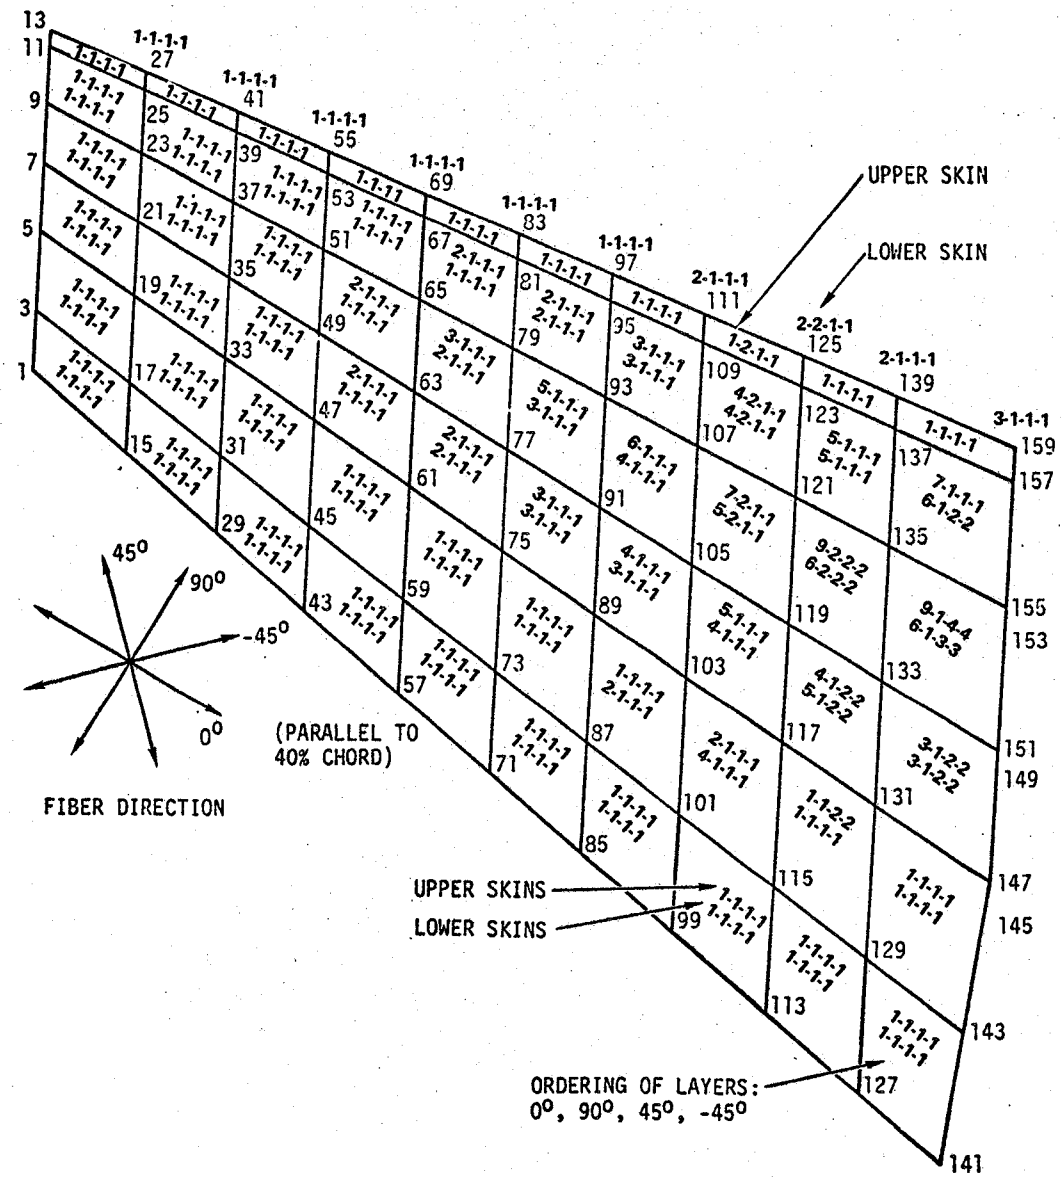

T592


Figure 8-26. All Graphite/Epoxy (0°, 90°, 45°, -45°)
 ASOP 3 Load = 6 g, 9 g, 2 g
 Combined Camber/Twist Constraint
 Wgt. = 16.77 lb., Δ Wgt. = .76%

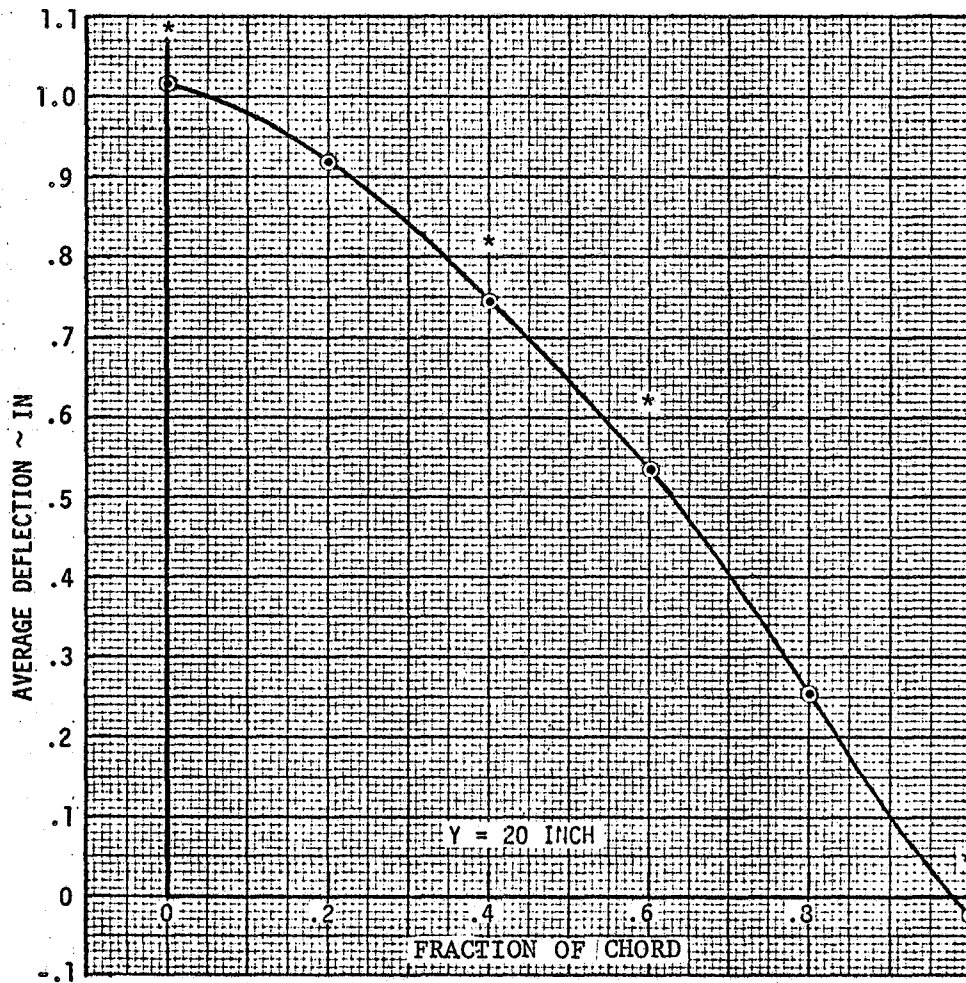

T599

* STATIONS PARTICIPATING IN CAMBER/TWIST CONSTRAINT

Figure 8-27. All Graphite/Epoxy Wing (0° , 90° , 45° , -45°)
 ASOP 3 Load = 6 g
 Combined Camber/Twist Constraint

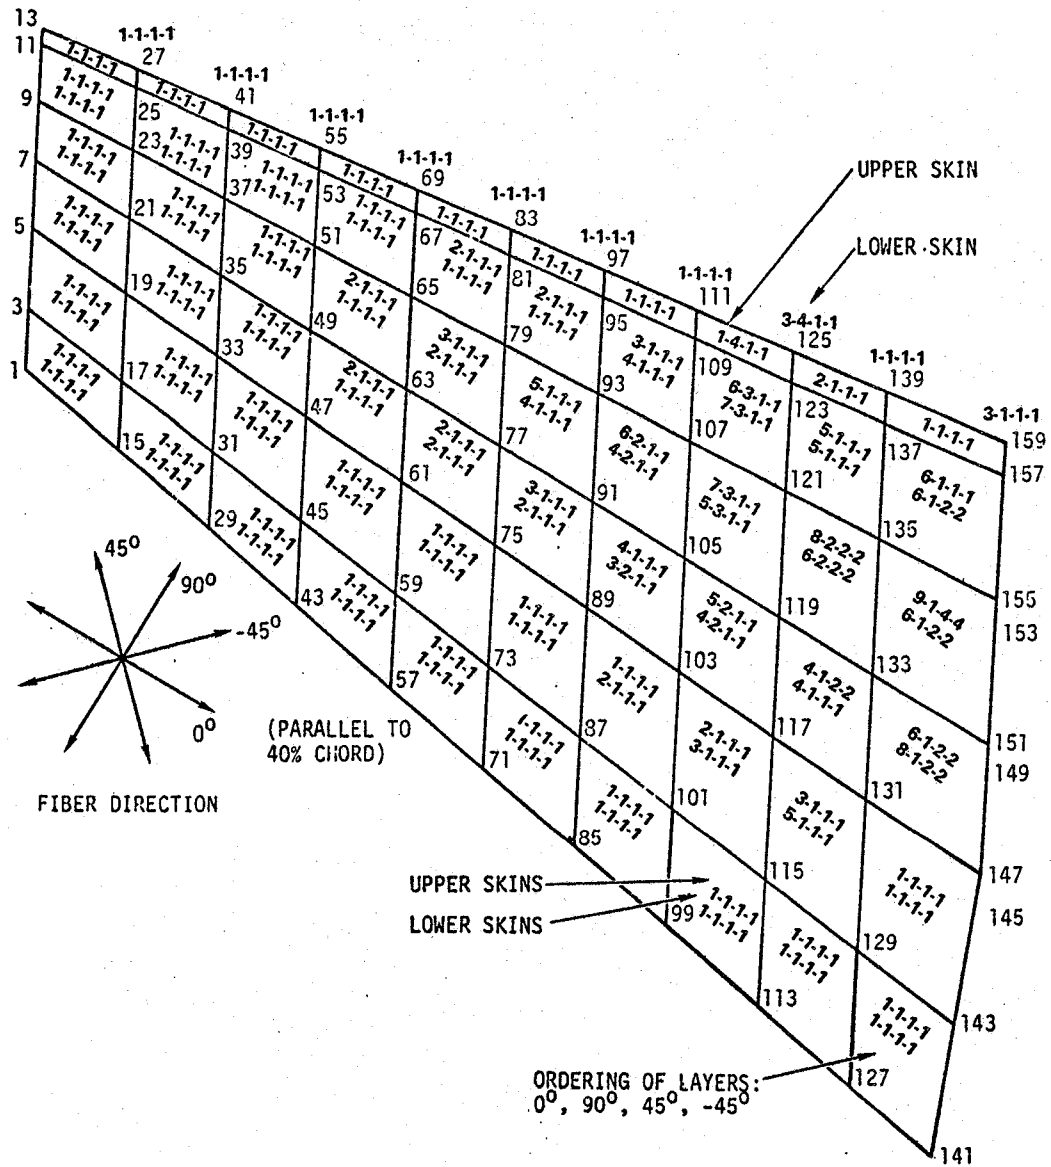

T594

Figure 8-28. All Graphite/Epoxy Wing (0° , 90° , 45° , -45°)
 ASOP 3 Load = 6 g, 9 g, 2 g
 Camber Restraint @ Y = 20
 Wgt. = 17.07 lb., Δ Wgt. = 2.67%



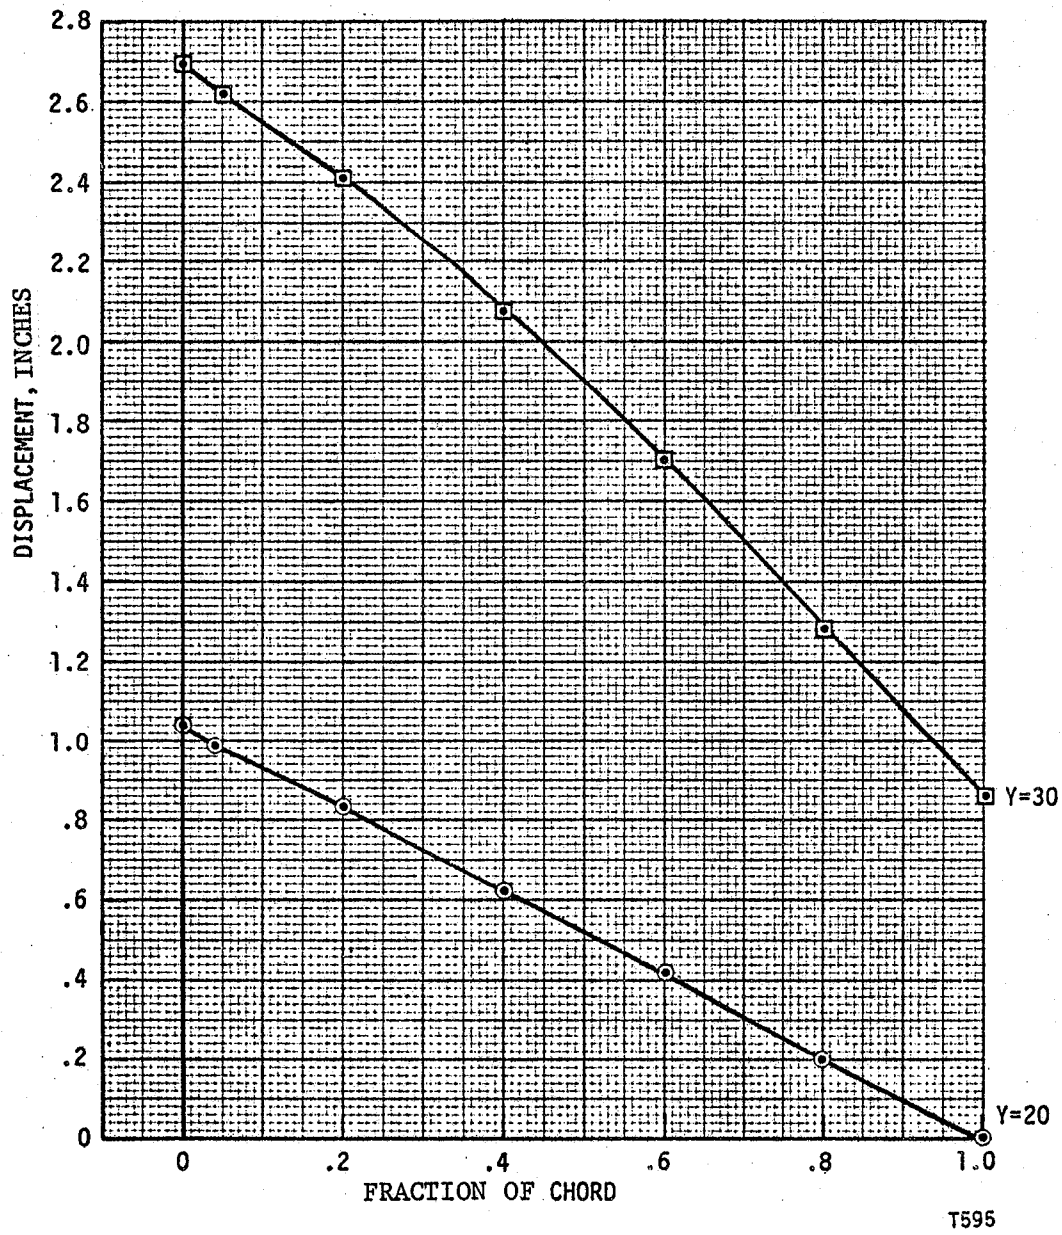


Figure 8-29. All Graphite/Epoxy Wing (0° , 90° , 45° , -45°)
 ASOP 3 Load = 6 g
 Camber Constraint @ Y = 20

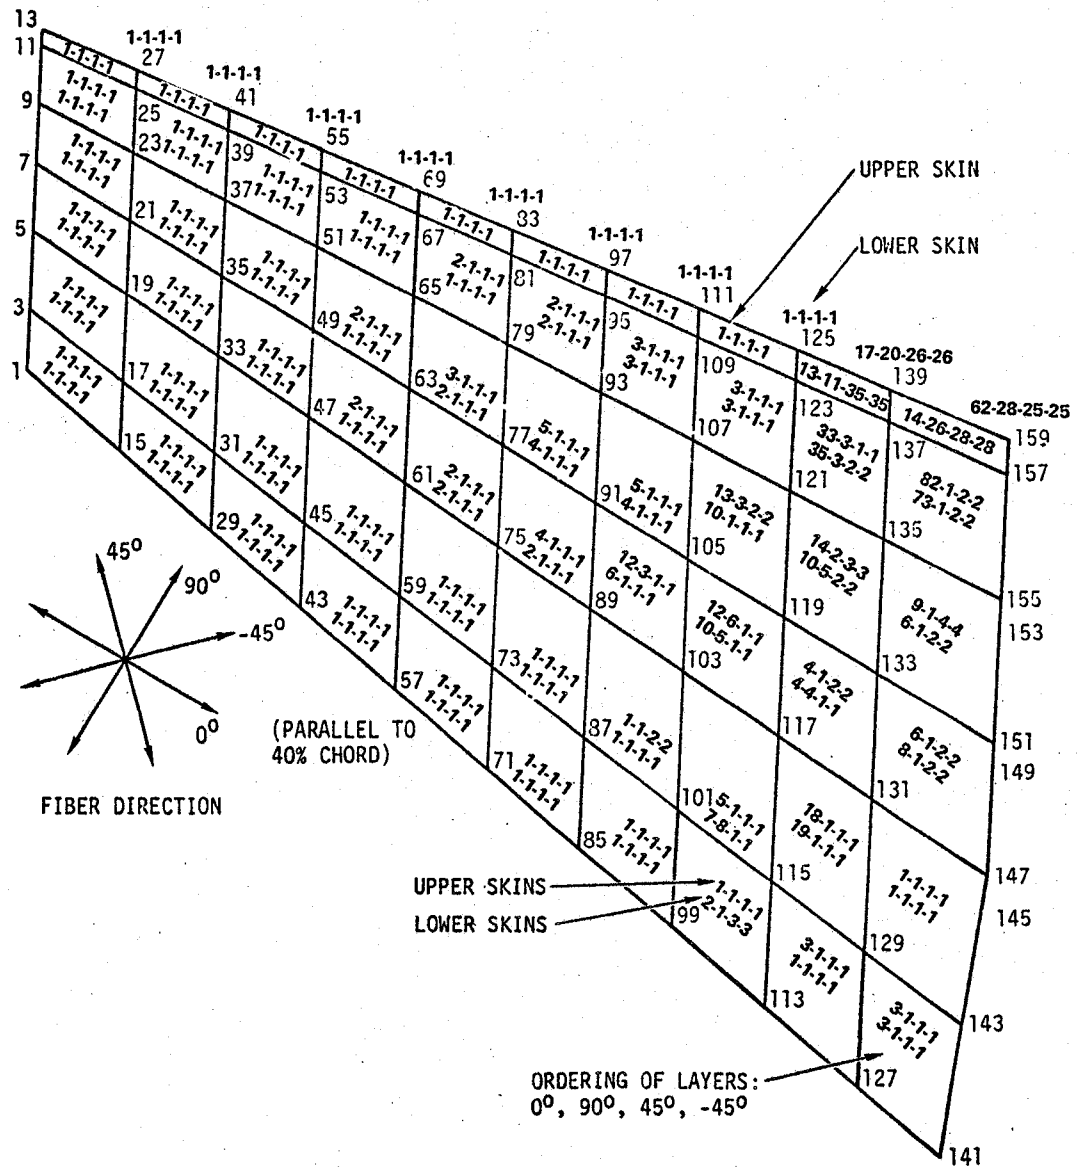

T596

Figure 8-30. All Graphite/Epoxy Wing (0° , 90° , 45° , -45°)
 ASOP 3 Load = 6 g, 9 g, 2 g
 Minimum Layers for Cambers
 Rum with Twist Constraint @ Y = 20
 Wgt. = 21.48 lb., Δ Wgt. = 28.32%

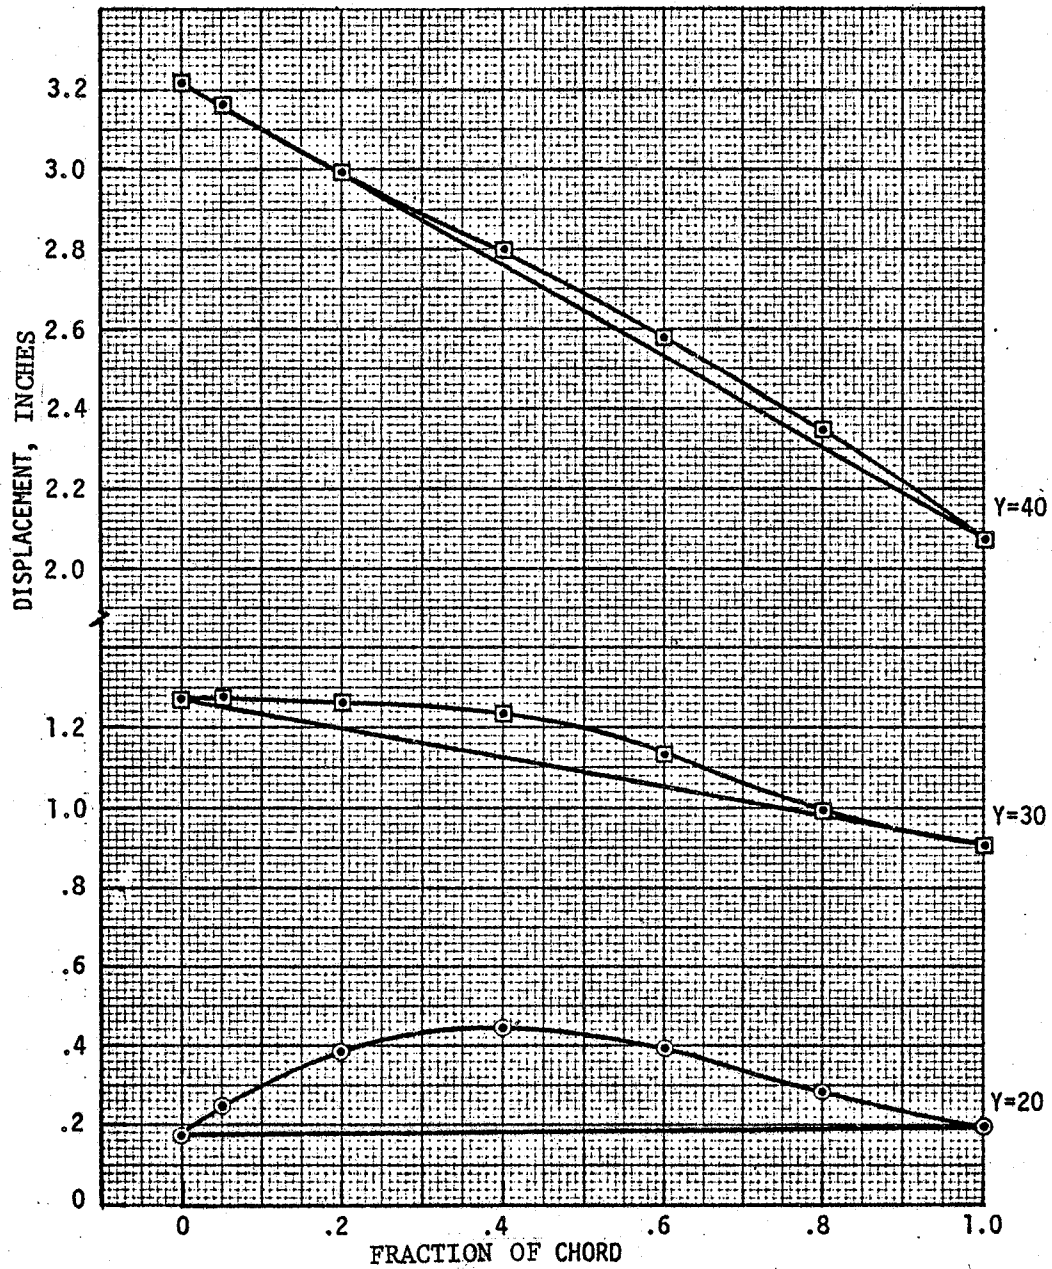

T597

Figure 8-31. All Graphite/Epoxy Wing (0° , 90° , 45° , -45°)
 ASOP 3 Load = 6 g
 Minimum Layers for Camber, Run with Twist
 Constraint @ Y = 20

The weight comparisons are shown below for one wing panel.

Candidate	Weight-Strength Constraint (lb)	Weight-Deflection Constraint (lb)	Δ Weight Percent
Aluminum	23.09	59.07	155.83
Gr/Ep	17.25	20.27	17.51
Gr fwd 40% chord, KEV. aft 40% chord	18.97	23.82	25.57

The graphite/epoxy construction shows a slight weight advantage over the hybrid Gr-KEV construction. The aluminum wing design weight for divergence is 59.07 pounds compared to 20.27 pounds for graphite materials. Those results are in full agreement with past studies regarding the impracticality of using swept-forward metal wing designs.


The thickness of the aluminum wing is shown in Figure 8-32. The laminate plies of the composite wings are shown in Figures 8-33 and 8-34. Deflections for all three wings are shown in Figure 8-35. As mentioned previously, a second sequence of optimization runs starting with the structure of Figures 8-32 through 8-34 would be expected to produce a wing with better deflection characteristics. These analyses were performed with ASOP-3.

Computer Optimized Wing

The wing candidate using graphite/epoxy laminated skins was run on the FASTOP-3 system. Following the strength optimization the wing was designed for a twist displacement of $0^\circ \pm .2^\circ$. Twist constraints were applied at stations 25.0, 40.0 and 60.0 with the leading and trailing edge grid numbers participating in the constraint.

Figure 8-36 is the ordering of plies over the upper and lower surfaces. The spanwise twist behavior is shown in Figure 8-37. Weight for this configuration is 24.44 pounds.

Note that Figure 8-36 shows two sets of fiber orientations. It was intended that all fiber orientation be parallel to and ± 45 degrees to the forty percent chord line. It was discovered late in the study that because of a change in data input format (field) between ASOP-3 and FASTOP-3, the

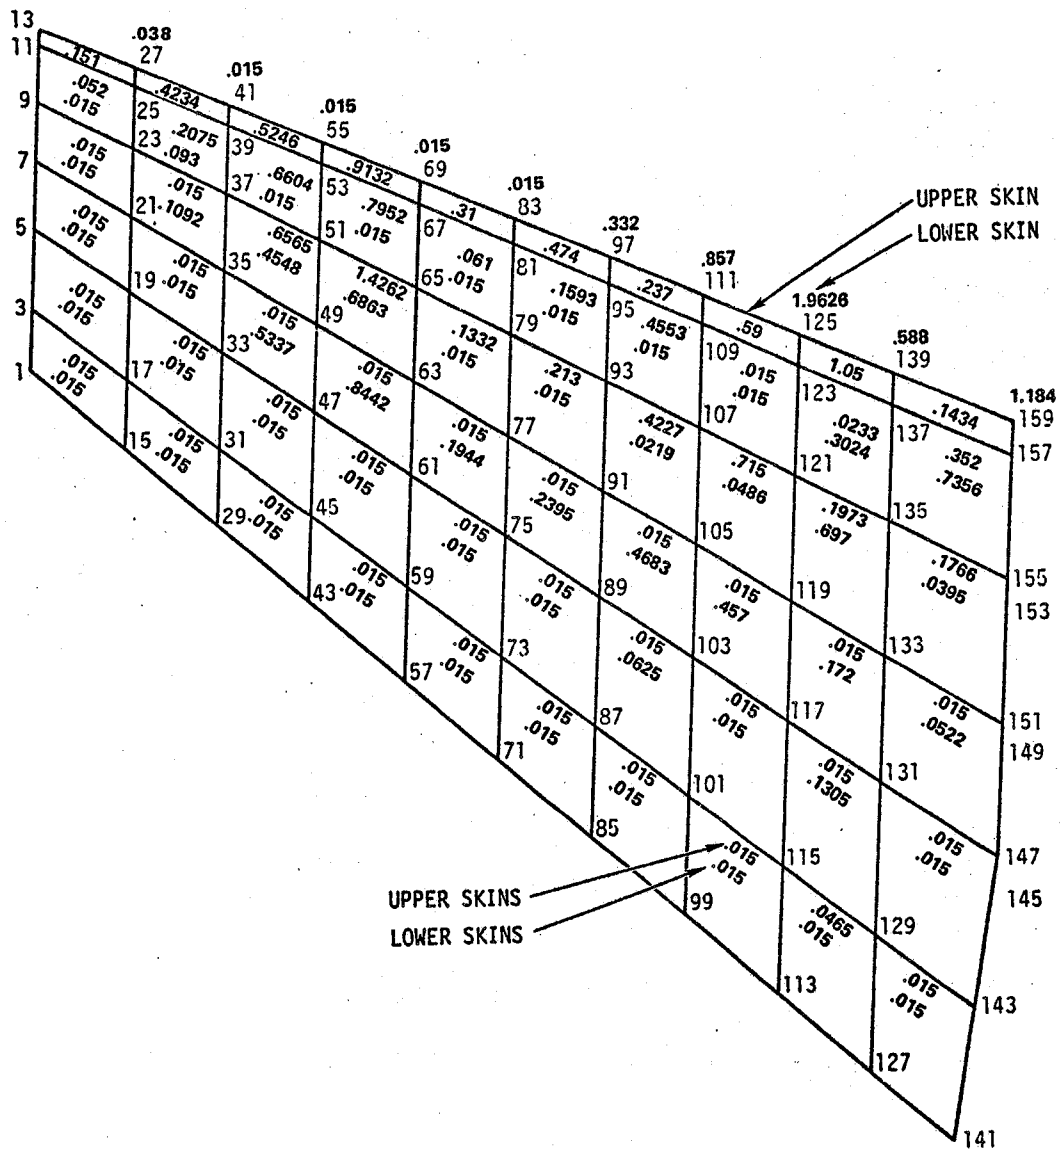

T598

Figure 8-32. Aluminum Wing
 ASOP 3 Load = 6 g, 9 g, 2 g
 All Aluminum
 Wgt. = 59.07 lb., Δ Wgt. = 155.83%


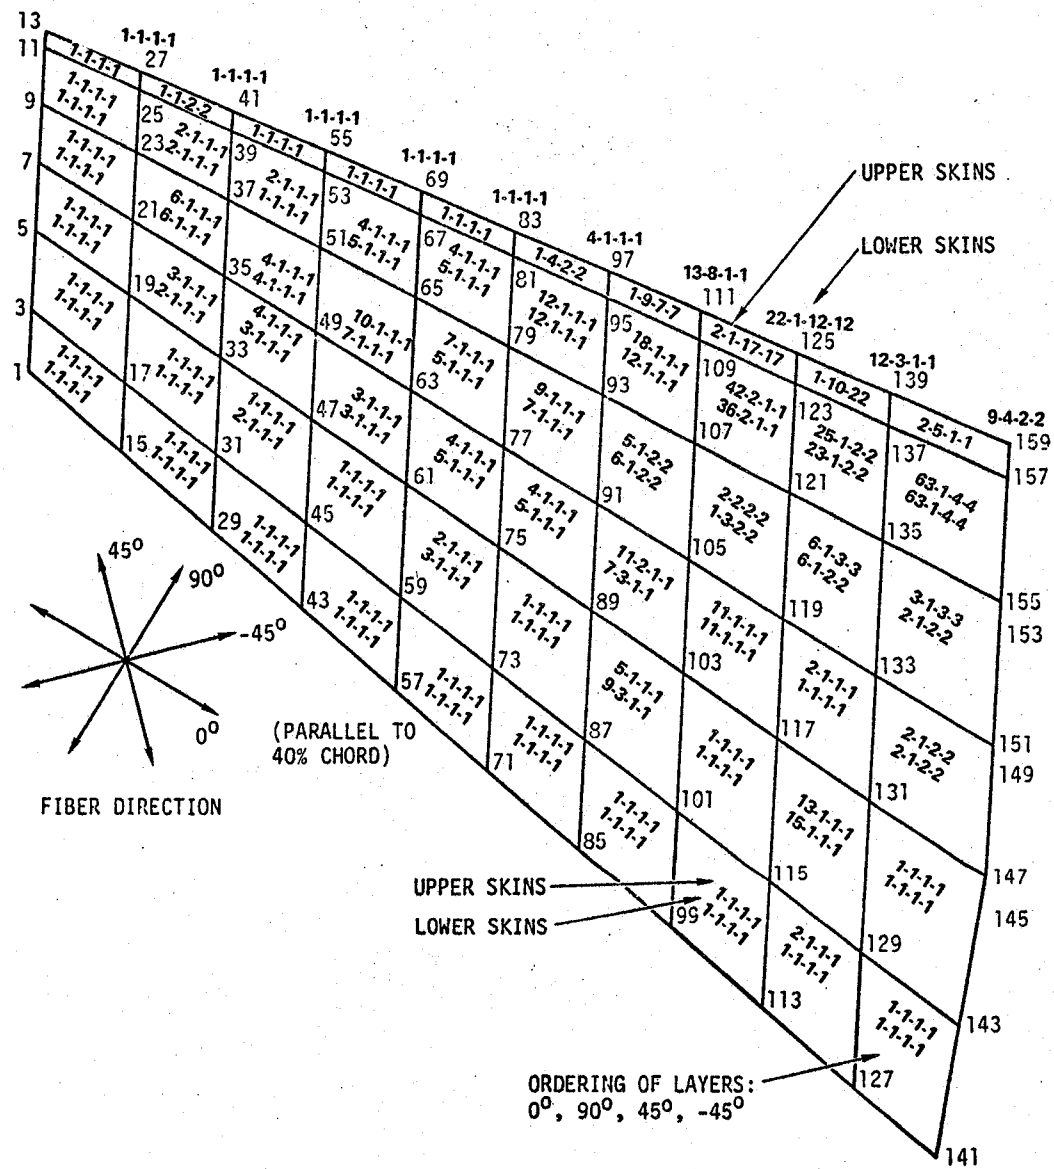


Figure 8-33. Graphite/Epoxy Wing

ASOP 3 Load = 6 g, 9 g, 2 g
 All Graphite Epoxy (0°, 90°, 45°, -45°)
 Wgt. = 20.27 lb., Δ Wgt. = 17.51%

ORDERING OF LAYERS:
 $0^\circ, 90^\circ, 45^\circ, -45^\circ$

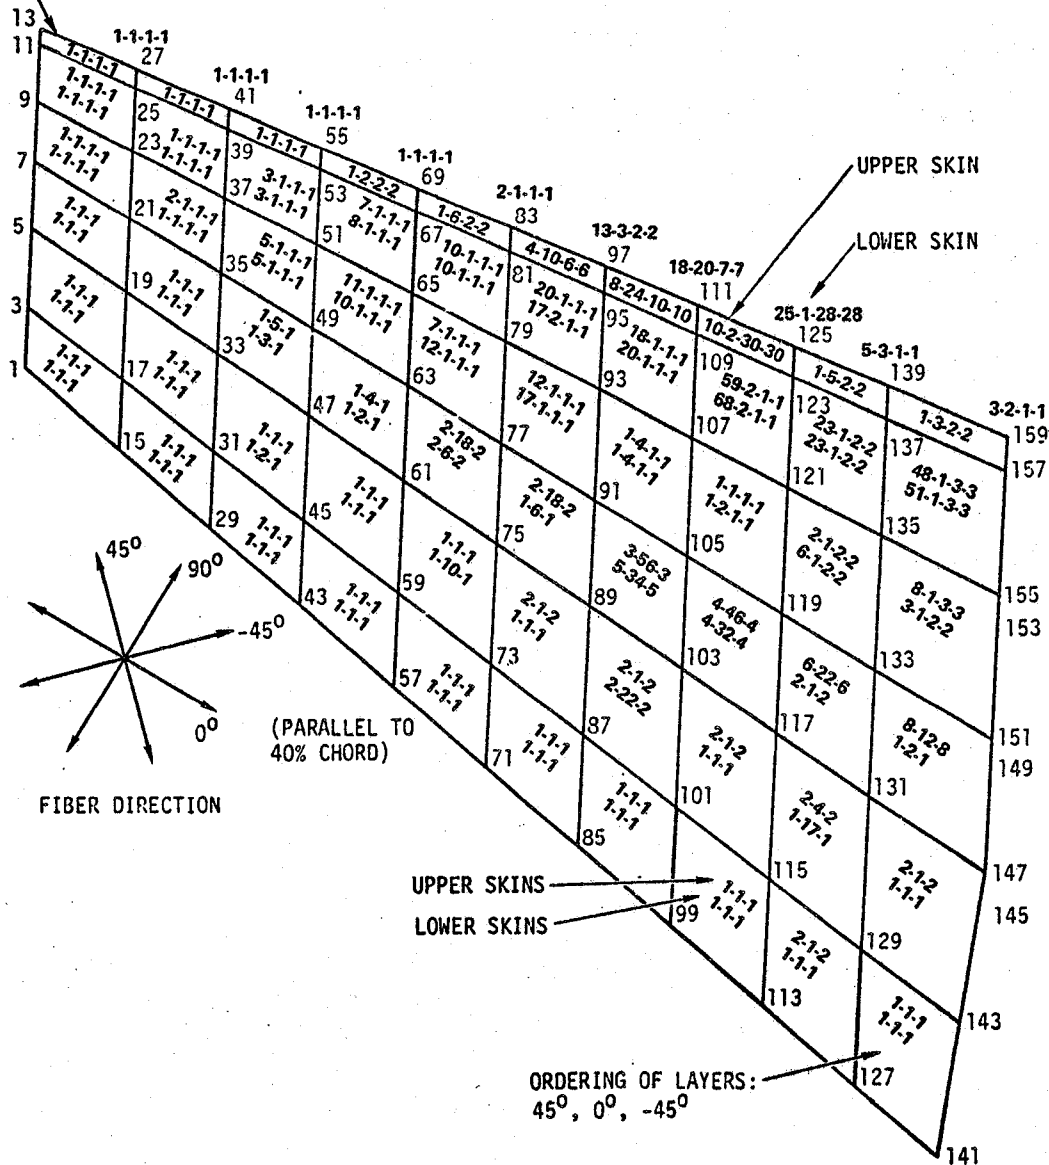

T600

Figure 8-34. Graphite - Kevlar Wing
 ASOP 3 Load = 6 g, 9 g, 2 g
 Forward of 40% Chord Graphite ($0^\circ, 90^\circ, 45^\circ, -45^\circ$)
 Aft of 40% Chord Kevlar ($45, 0, -45$)
 Wgt. = 23.82 lb., Δ Wgt. = 25.57%




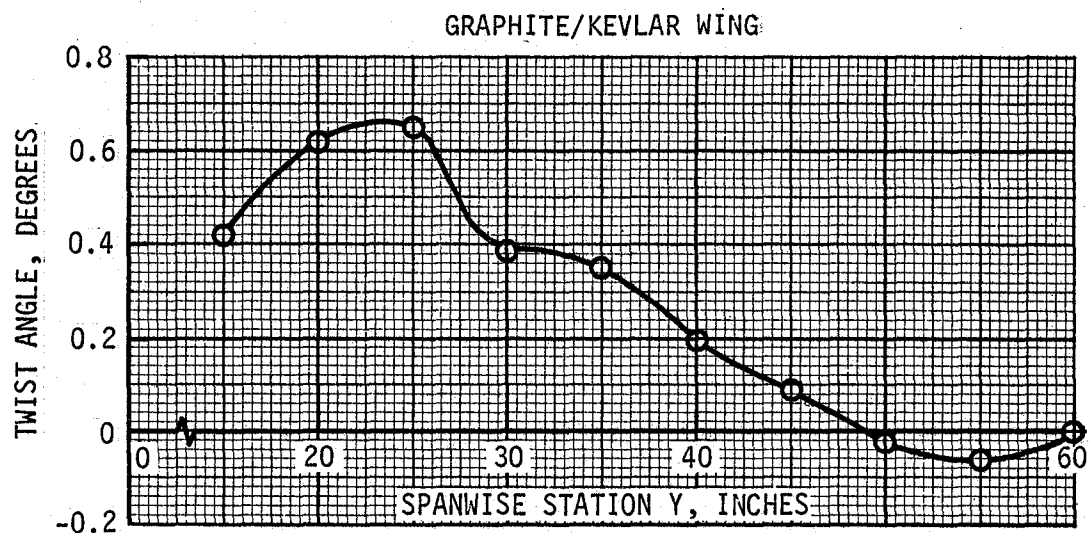



Figure 8-35. Spanwise Twist Deflections, Wing for Configuration/
Material Trade Studies. Progressive Constraints at
Y = 20,30,40,50 and 60

PANEL SET

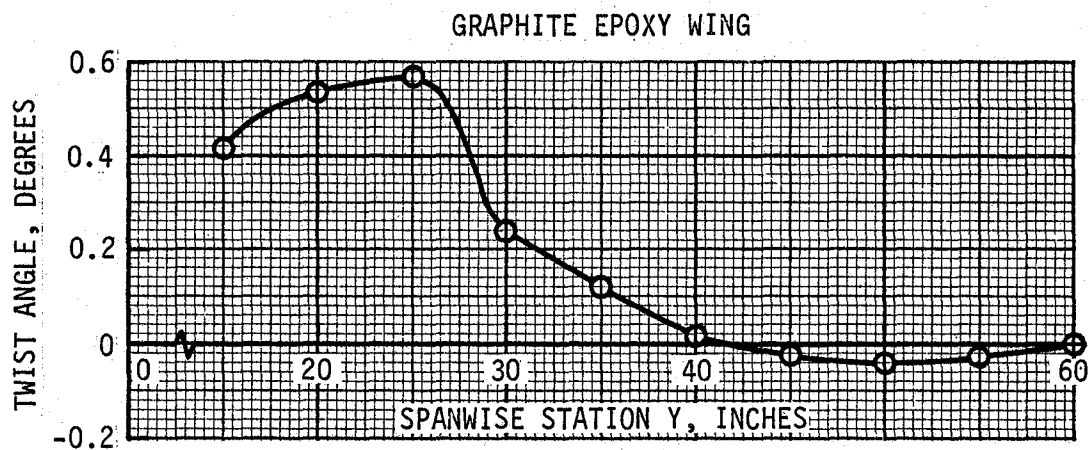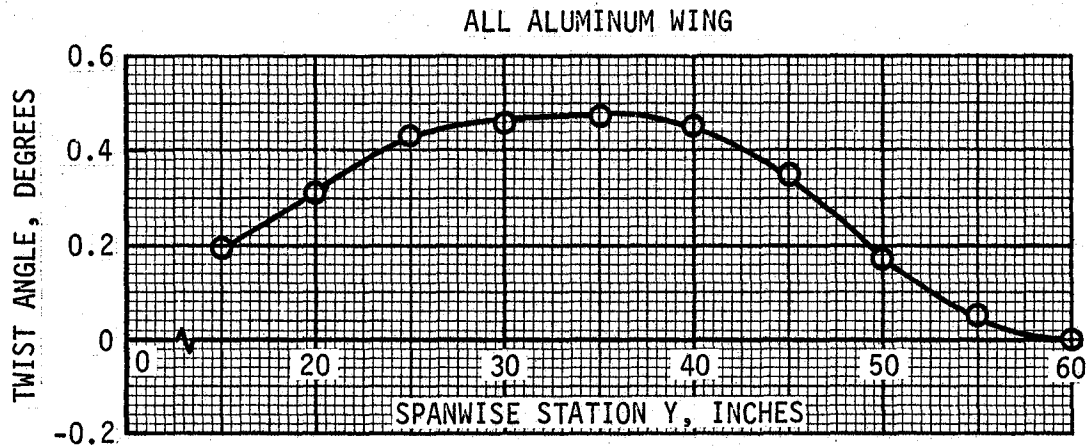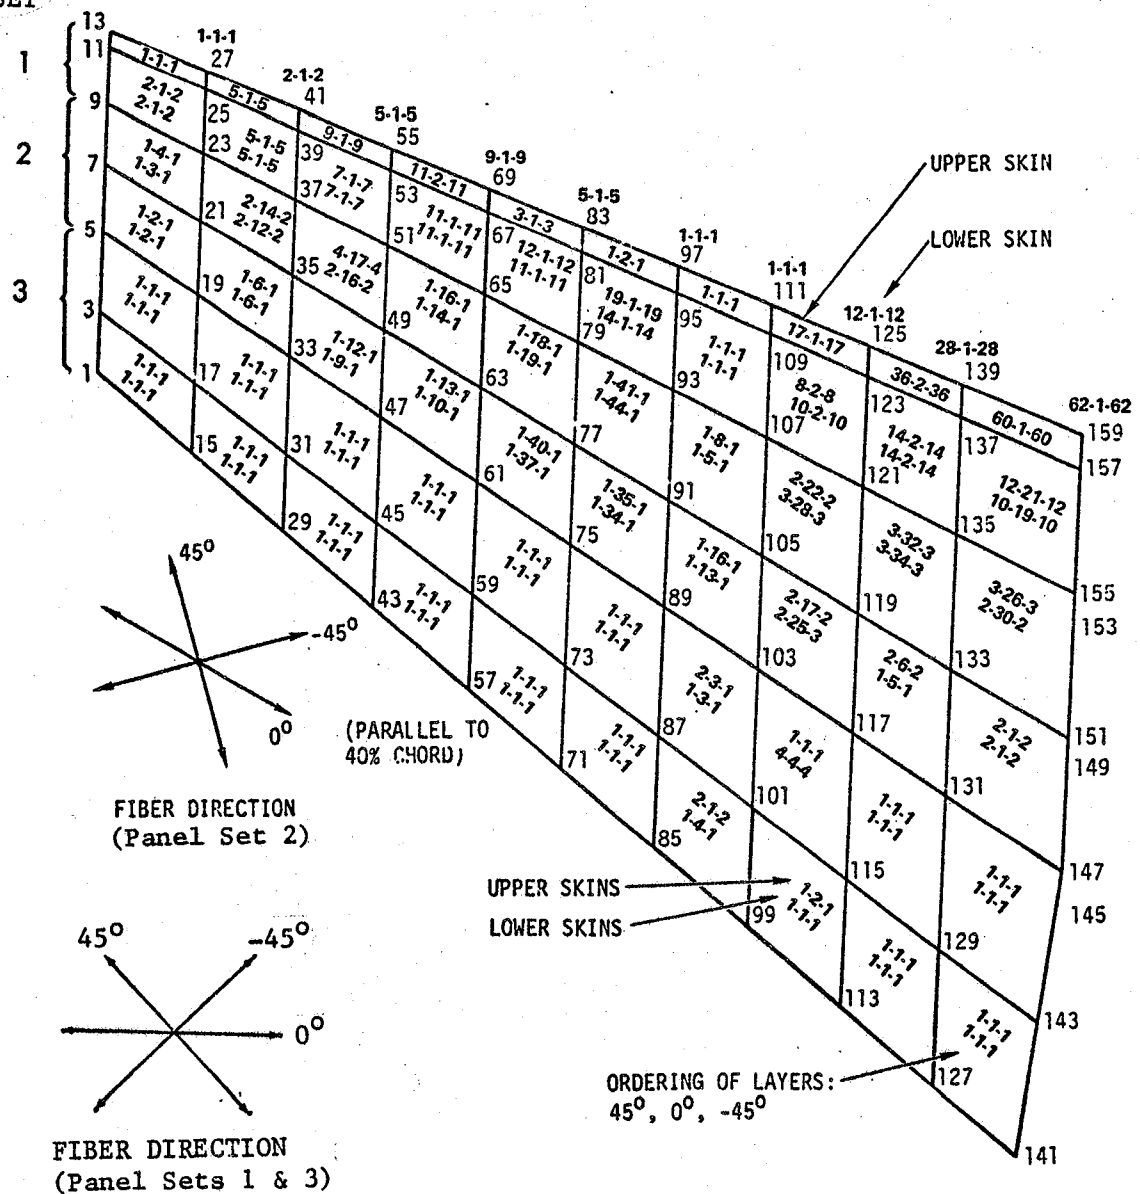

T601

Figure 8-36. All Graphite Wing (45°, 0, -45°)
 FASTOP 3 Load 6 g, 9 g, 2 g, -3 g
 Computer Optimized Wing
 Wgt. = 24.44 lb., Δ Wgt. = 51.90%

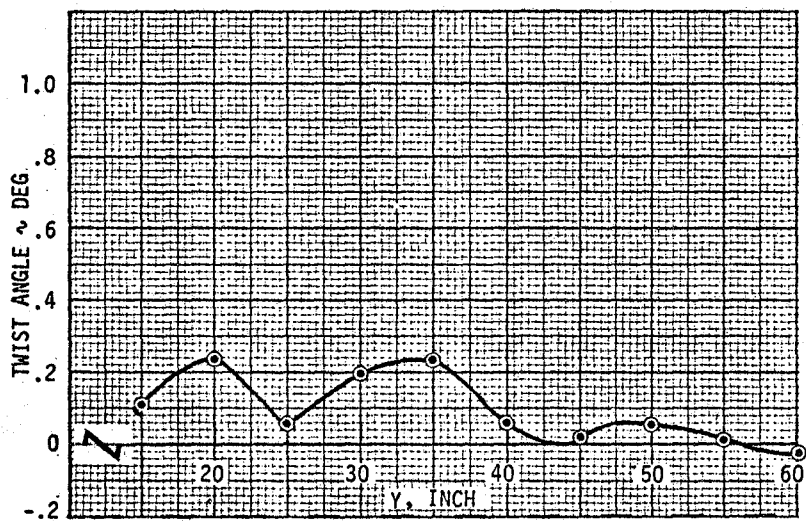

T602

Figure 8-37. All Graphite/Epoxy Wing (45° , 0 , -45°)
 FASTOP 3 Load = 6 g
 Computer Optimized Wing

FASTOP-3 program considered the two sets of orientations as shown on Figure 8-36. This is illustrated by the computer output of Appendix C. Line 380 of page 11 of the printout shows the input of the two-point coordinate system for fiber orientation. The single line on page 53 illustrates the manner in which the input data was interpreted by FASTOP-3. The data input format is correct for ASOP-3. A separate option of the program was used in defining the fiber orientation for the middle set of panels.

Smoothed Wing Design

The computer optimized wing was used as the basis for achieving a design with smoother ply distributions. The procedure required the joint effort of stress, design, and manufacturing engineers revising the ordering of plies from FASTOP-3 into a smoother more continuous layup shown in Figure 8-38. This configuration was submitted to FASTOP-3 for deflection calculations and the resulting twist behavior is shown in Figure 8-39. By making changes with successive submissions to FASTOP-3 a smoother design evolved.


Figure 8-40 shows the smoothed laminate layup. The spanwise twist behavior is shown in Figure 8-41. Computer calculated weight is 24.13 pounds for one outboard panel.

This configuration was submitted to the FOP program in the FASTOP-3 system for a vibration and flutter check. The analysis indicated the wing has good flutter speed margins as discussed in Section 9.0.

This FASTOP-3 analysis is shown in Appendix C in its entirety.


The smooth wing of Figure 8-40 and 8-41 also consist of the two sets of ply orientations resulting from the program input problems discussed above. An alteration has been made to the ply laminates of Figure 8-40 and all fiber directions oriented as originally intended. The layup is shown in Figure 8-42 and the deflection characteristics are shown in Figure 8-43. Further efforts could probably improve the deflection characteristics however it is apparent that a successful wing design can be accomplished. The wing of Figure 8-42 was not subjected to a flutter check but it is believed from the previous studies that it will exhibit satisfactory flutter speeds.

PANEL SET

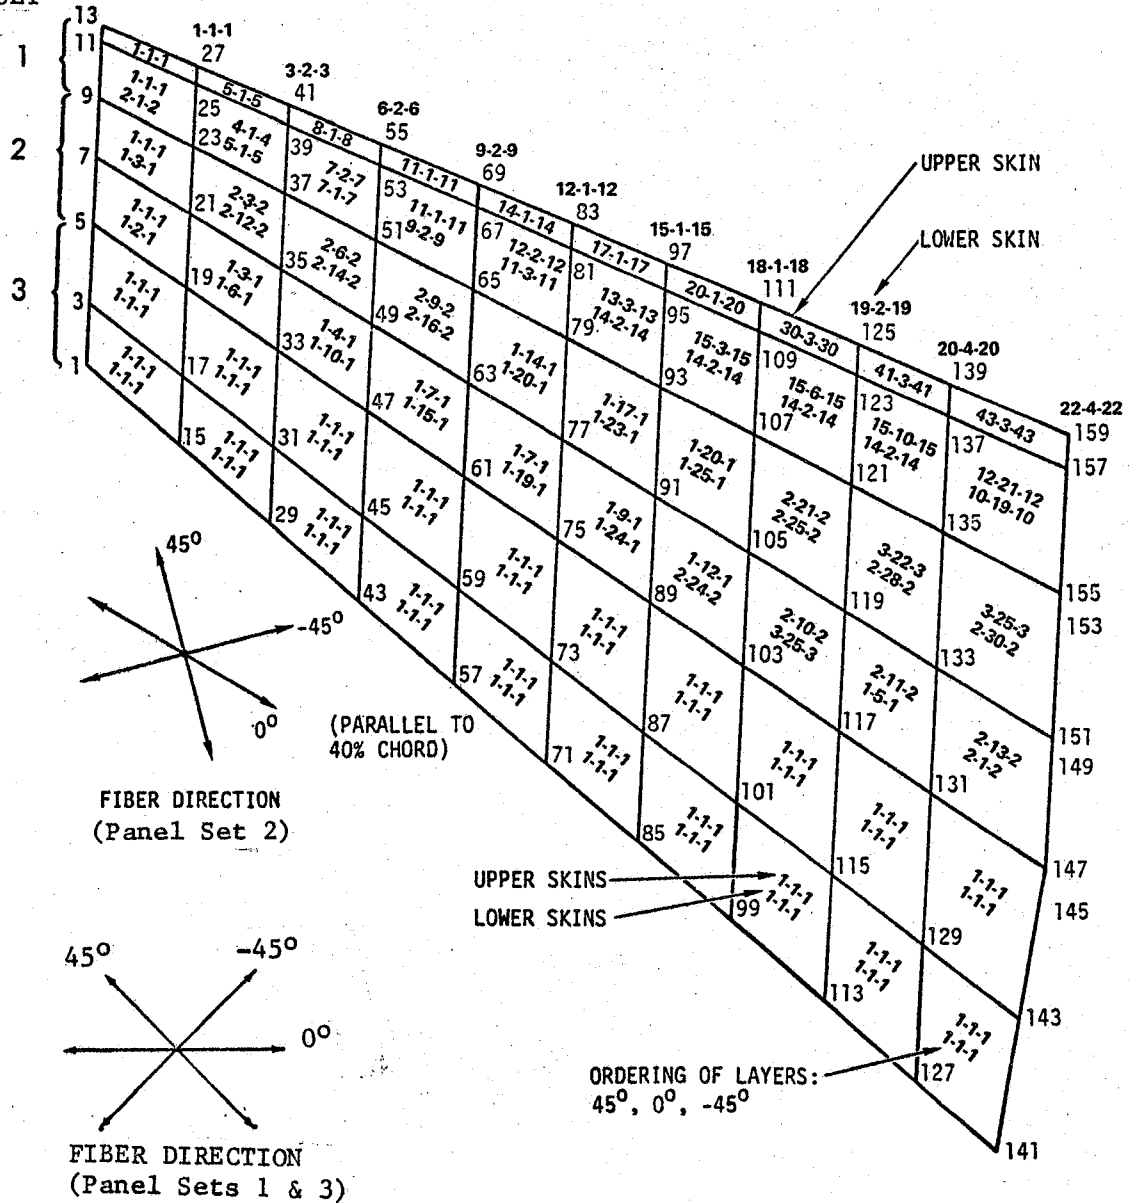

T604


Figure 8-38. All Graphite/Epoxy Wing (45°, 0°, -45°)
 FASTOP 3 Load = 6 g, 9 g, 2 g, -3 g
 Intermediate Smoothed Wing
 Wgt. = 23.86 lb. ΔWgt. = 48.29%

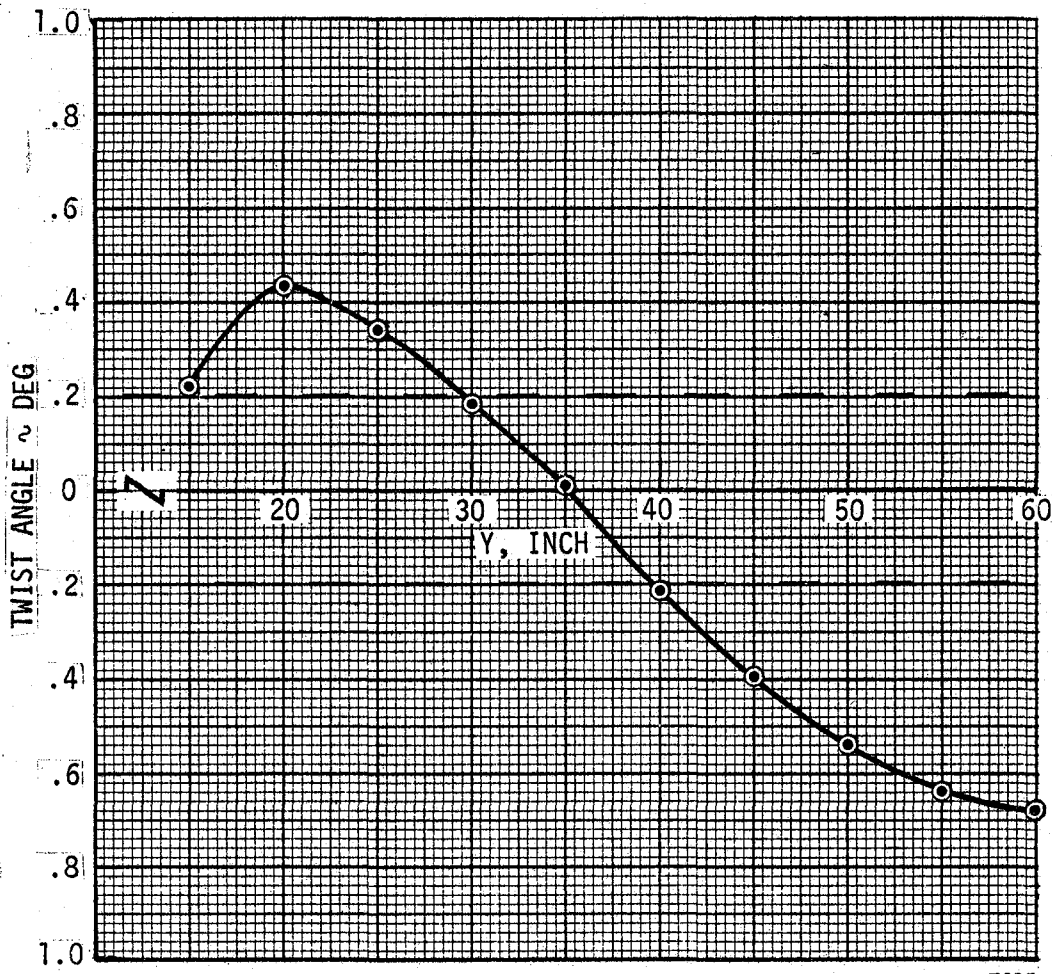

T605


Figure 8-39. All Graphite/Epoxy Wing (45° , 0° , -45°)
 FASTOP 3 Load = 6 g
 Intermediate Smoothed Wing

PANEL SET

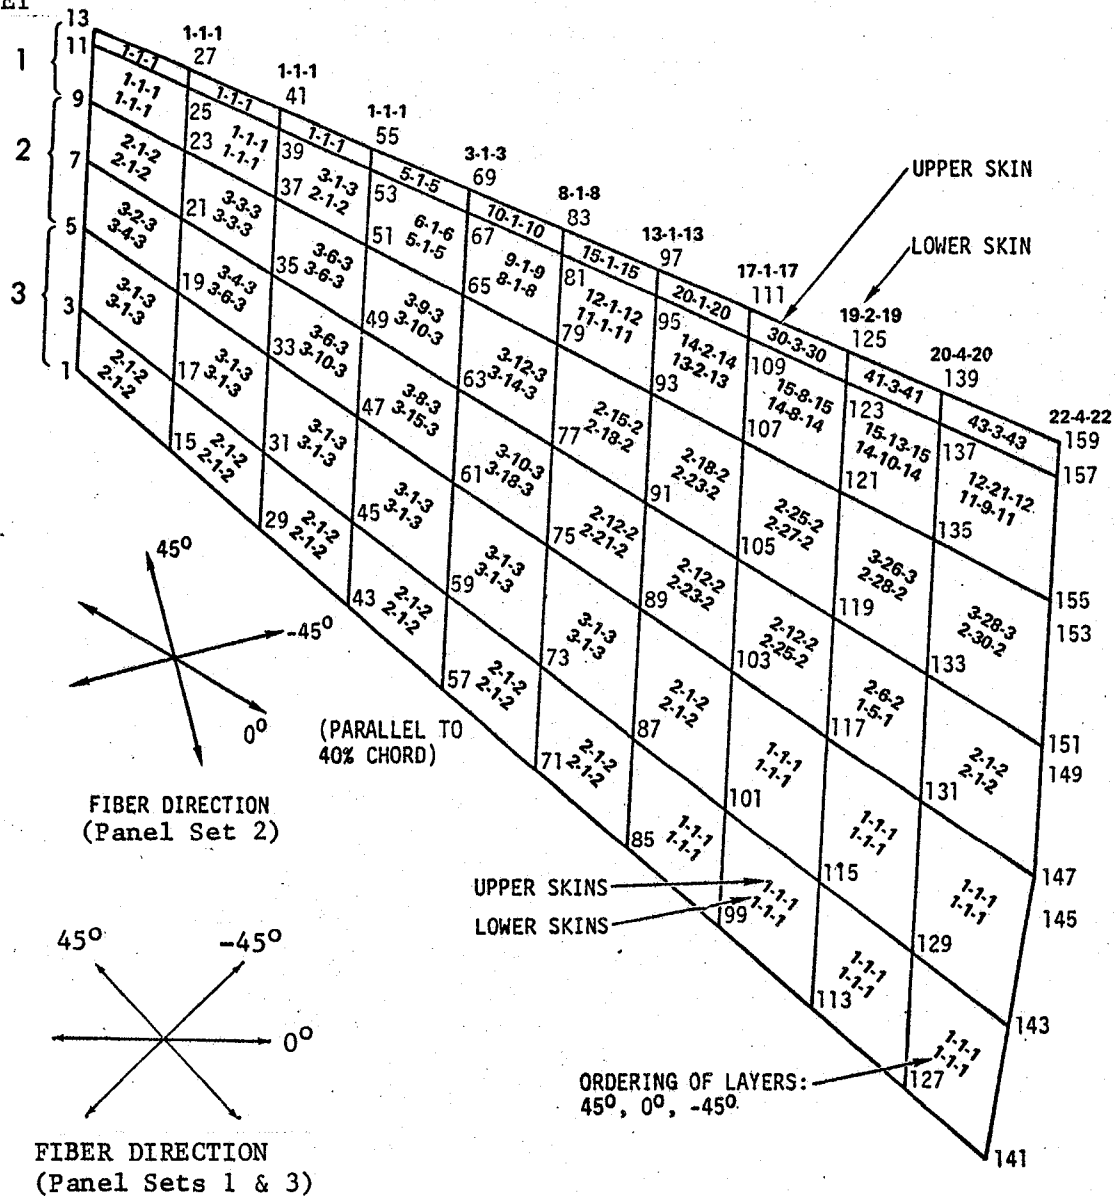

T606

Figure 8-40. All Graphite/Epoxy Wing (45° , 0° , -45°)
 FASTOP 3 Load = 6 g, 9 g, 2 g -3 g
 Final Smoothed Wing
 Wgt. = 24.13 lb., Δ Wgt. = 49.97%

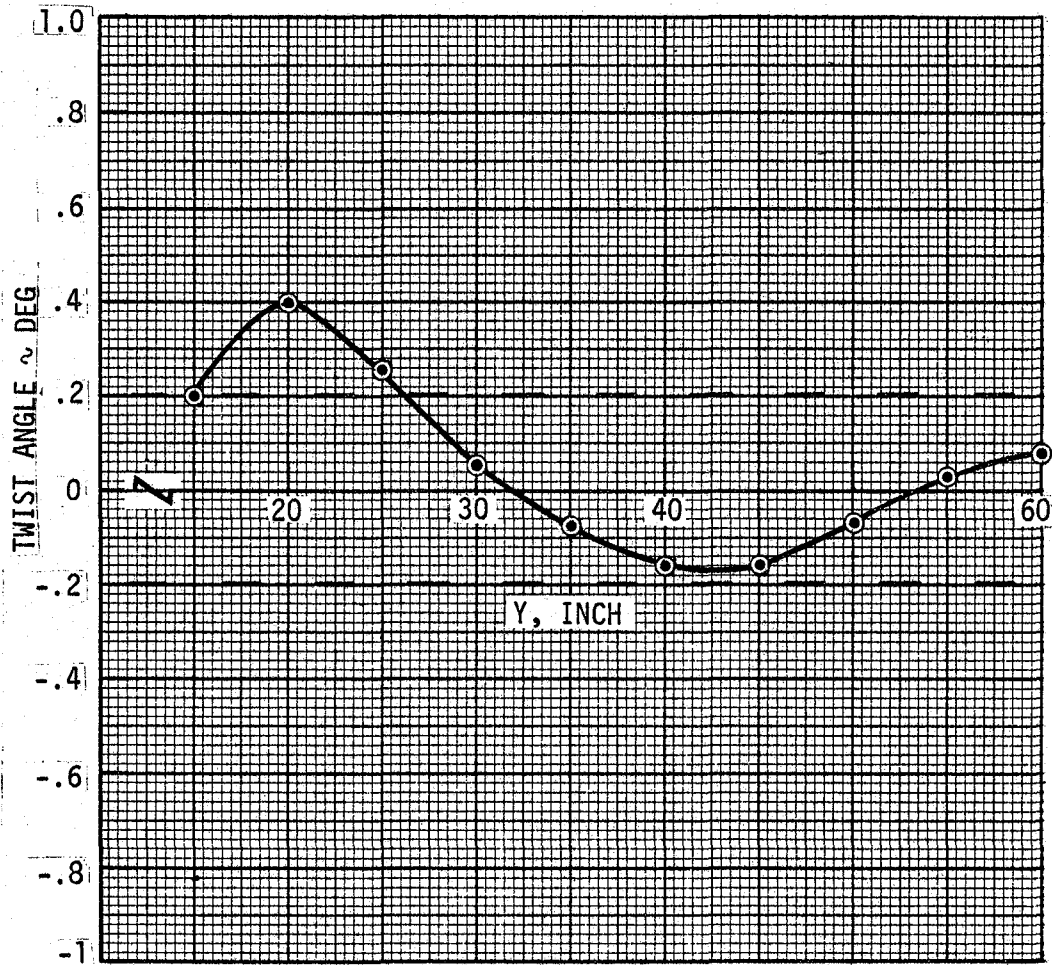

T607

Figure 8-41. All Graphite/Epoxy Wing (45° , 0° , -45°)
 FASTOP 3 Load = 6 g
 Final Smoothed Wing

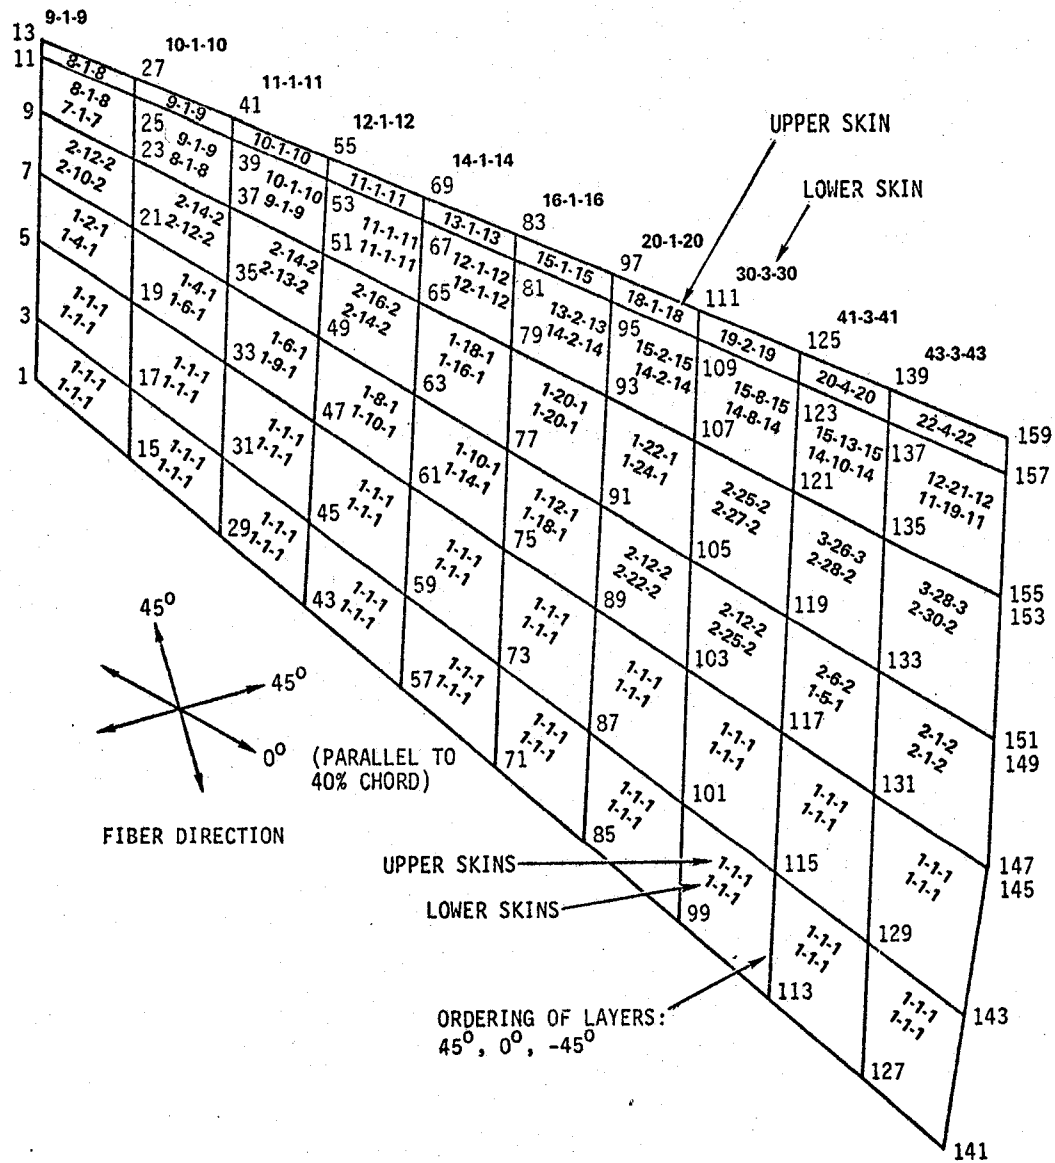


Figure 8-42. All Graphite/Epoxy Wing (45°, 0°, -45°) ASOP 3 Load = 6g, 9g, 2g, -3g Corrected Fiber Orientation Weight = 24.85 Pounds

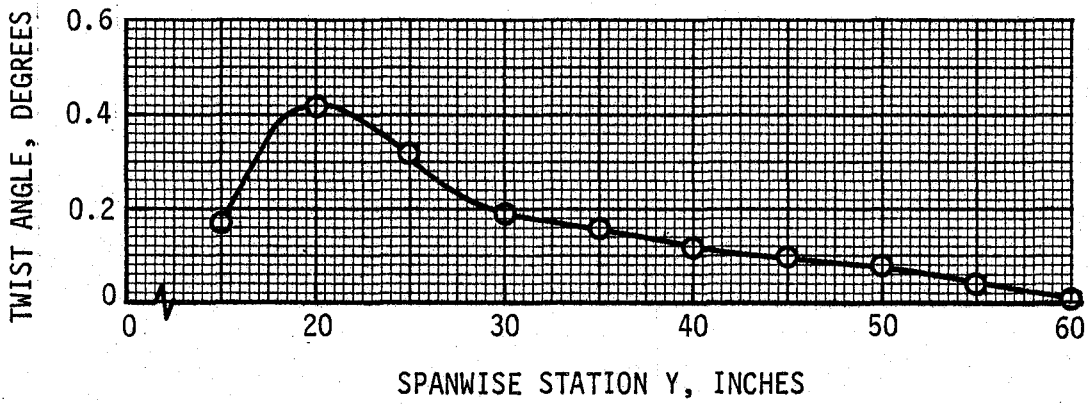


Figure 8-43. Spanwise Twist Distribution All Graphite/Epoxy Wing.
 (45°, 0°, -45°) Corrected Fiber Orientation

8.3.2: Conclusions From Wing Preliminary Design Efforts

A number of conclusions can be reached as a result of the wing preliminary aeroelastic design effort.

1. The ASOP-3/FASTOP-3 computer programs are a valuable aid in optimizing the wing structure for strength and deflections. The addition of an aerodynamic module to provide a closed form static aeroelastic optimization would provide a major additional help.

2. By using advanced composite materials the weight penalty associated with divergence prevention of conventional metallic wings is alleviated.

3. A preliminary evaluation of three candidate wing construction concepts, aluminum, graphite epoxy, and graphite/kevlar confirmed the weight penalties which result from an all-metal construction.

4. A 0° +45 $^\circ$ basic layup is more efficient than a 0° , 90° +45 $^\circ$. A large portion of the wing surface requires only the minimum layers specified by the basic layup, making the 90° ply superfluous.


5. The tailoring for twist constraints is sensitive to whether the wing support is rigid or flexible. A detail wing design analysis should reflect the fuselage elasticity.

6. The tailoring is sensitive to the severity of twist constraint. As the wing approaches an over-constraint condition the number of plies in the skin layup vary widely from one element to an adjacent element. These abrupt changes are impractical from a manufacturing standpoint. Engineering judgement is required to smooth the layup into more gradual changes in number of plies acceptable for fabrication.

7. The laminate is sensitive to the leading edge participating in the optimization process.

8. Attempts to constrain the chordwise camber displacement behavior in conjunction with twist constraint became unwieldy because when camber was maintained the twist behavior exceeded the tolerance and vice versa.

9. A wing fabricated from graphite/epoxy is attractive from a weight point of view. The weight optimum sizes specified by the optimization program require some hand tailoring to achieve a final practical design.

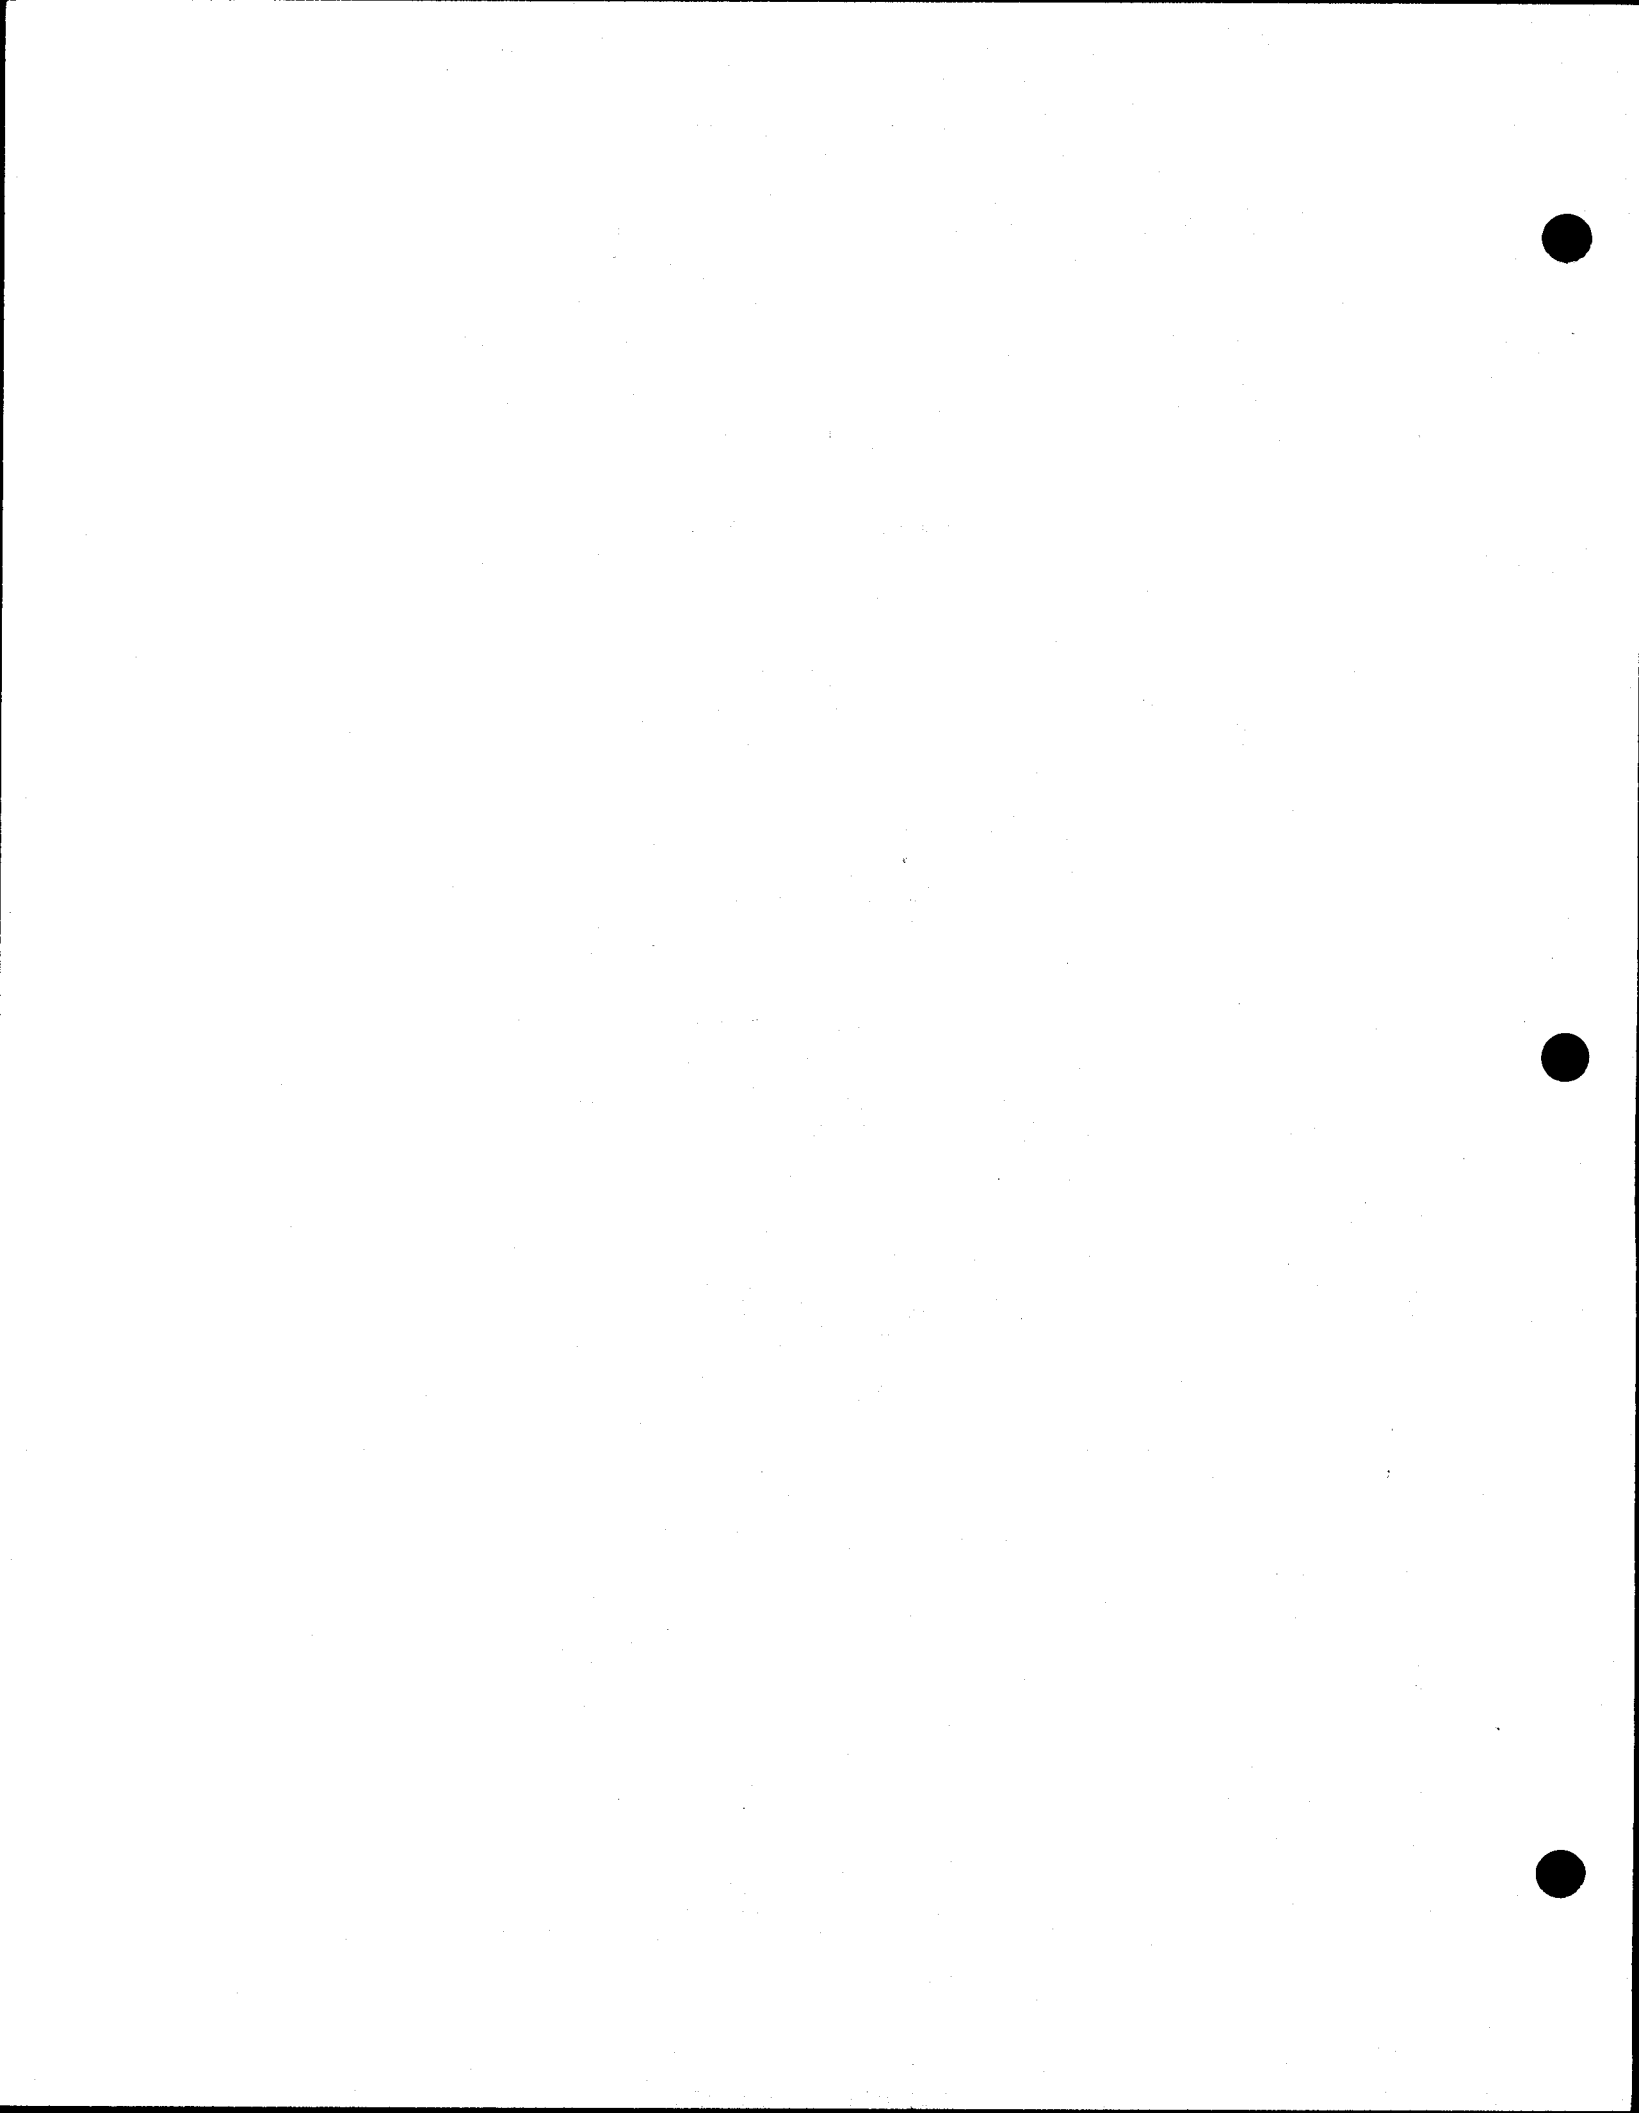


9.0 FLUTTER ANALYSIS

The FASTOP-3 program of reference 8.1 was utilized to conduct a flutter analysis of the forward swept wing. The flutter optimization option of the program was not exercised and the primary objective of this analysis was to determine if the forward swept wing, after strength and restraint optimizations, displayed an adequate flutter margin. The analysis shows the wing to be flutter free to greater than Mach = .90 at sea level. This is a substantial margin over the design V_L at sea level which is 426 knots, Mach = .65.

The vibration analysis was conducted via the AVAM module of FASTOP-3 utilizing the flexibility approach. For the flexibility approach, a separate dynamics model was created. This model, as shown in Figure 9-1, is a reduction of the structural finite element model shown in Figure 9-2. In the dynamics model the structure was assumed to be fixed just inboard of grids 1, 7, 13 and 19 thus providing the boundary conditions for a cantilevered structure. Only out of plane displacements at the grid points were considered yielding a total of 28 degrees of freedom, of which four have zero displacements. Eight modes were calculated and subsequently used in the flutter analysis. Natural frequencies range from 40.4 Hz to 427 Hz. Mode shapes are presented in Appendix D in both tabular and graphical form. Mode shapes in graphical form are shown on pages 38 thru 53 of Appendix D.

The mass matrix used in the vibration analysis was obtained by using the "fully automated" approach, that is, the mass matrix was automatically computed based on the computed weights of all the structural members. There were neither fixed-mass items nor mass-balance weights in the wing.


The flutter analysis was conducted utilizing the AFAM segment of FASTOP-3. The aerodynamics model is identical to the structural model as shown in Figure 9-2. The wing is modeled as one aerodynamic panel which is divided into 10 spanwise elements and six chordwise elements. The subsonic doublet-lattice procedure was used to arrive at oscillatory aerodynamics for a Mach number of 0.90, and nine reduced frequencies ranging from .2 to 2.6. The flutter solution was obtained by using the K-method, zero structural damping, and sea level air density. A printout of the flutter solution is presented in Appendix D along with the conventional velocity versus damping and velocity versus frequency plots. All other pertinent results from the AVAM and AFAM modules are also shown in Appendix D.

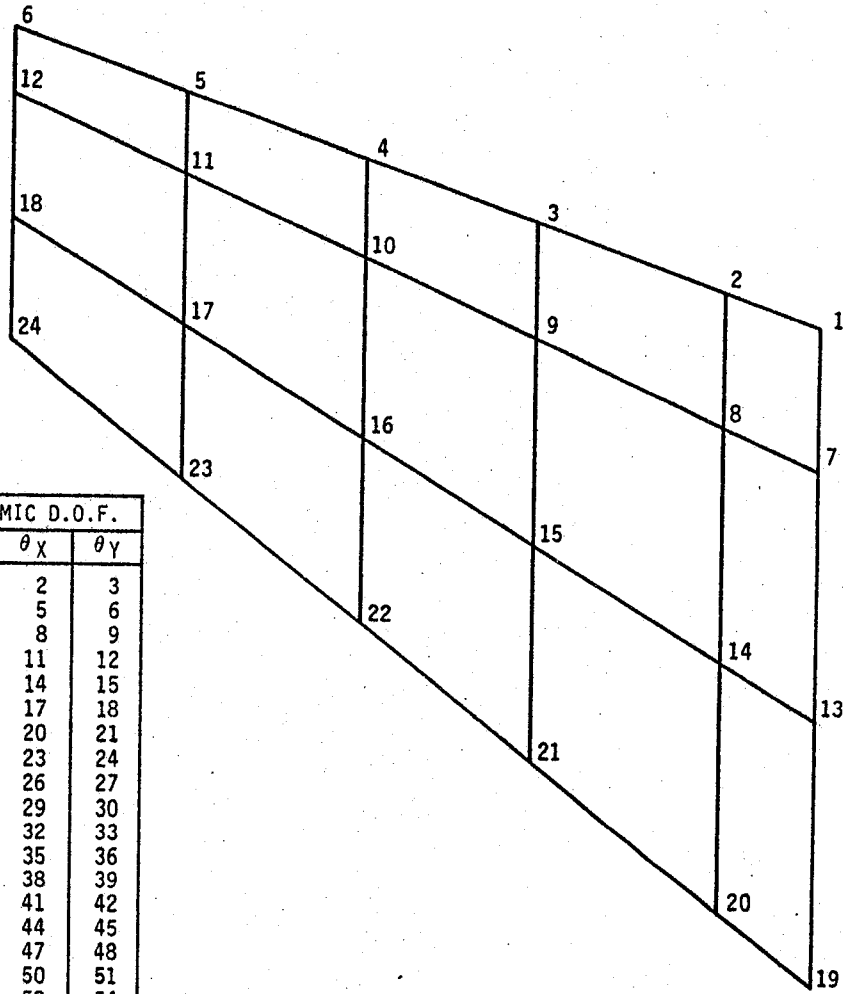

NODE	DYNAMIC D.O.F.		
	Z	θ_X	θ_Y
1	1	2	3
2	4	5	6
3	7	8	9
4	10	11	12
5	13	14	15
6	16	17	18
7	19	20	21
8	22	23	24
9	25	26	27
10	28	29	30
11	31	32	33
12	34	35	36
13	37	38	39
14	40	41	42
15	43	44	45
16	46	47	48
17	49	50	51
18	52	53	54
19	55	56	57
20	58	59	60
21	61	62	63
22	64	65	66
23	67	68	69
24	70	71	72


T608

Figure 9-1. NASA Forward Swept Wing, Dynamics Model

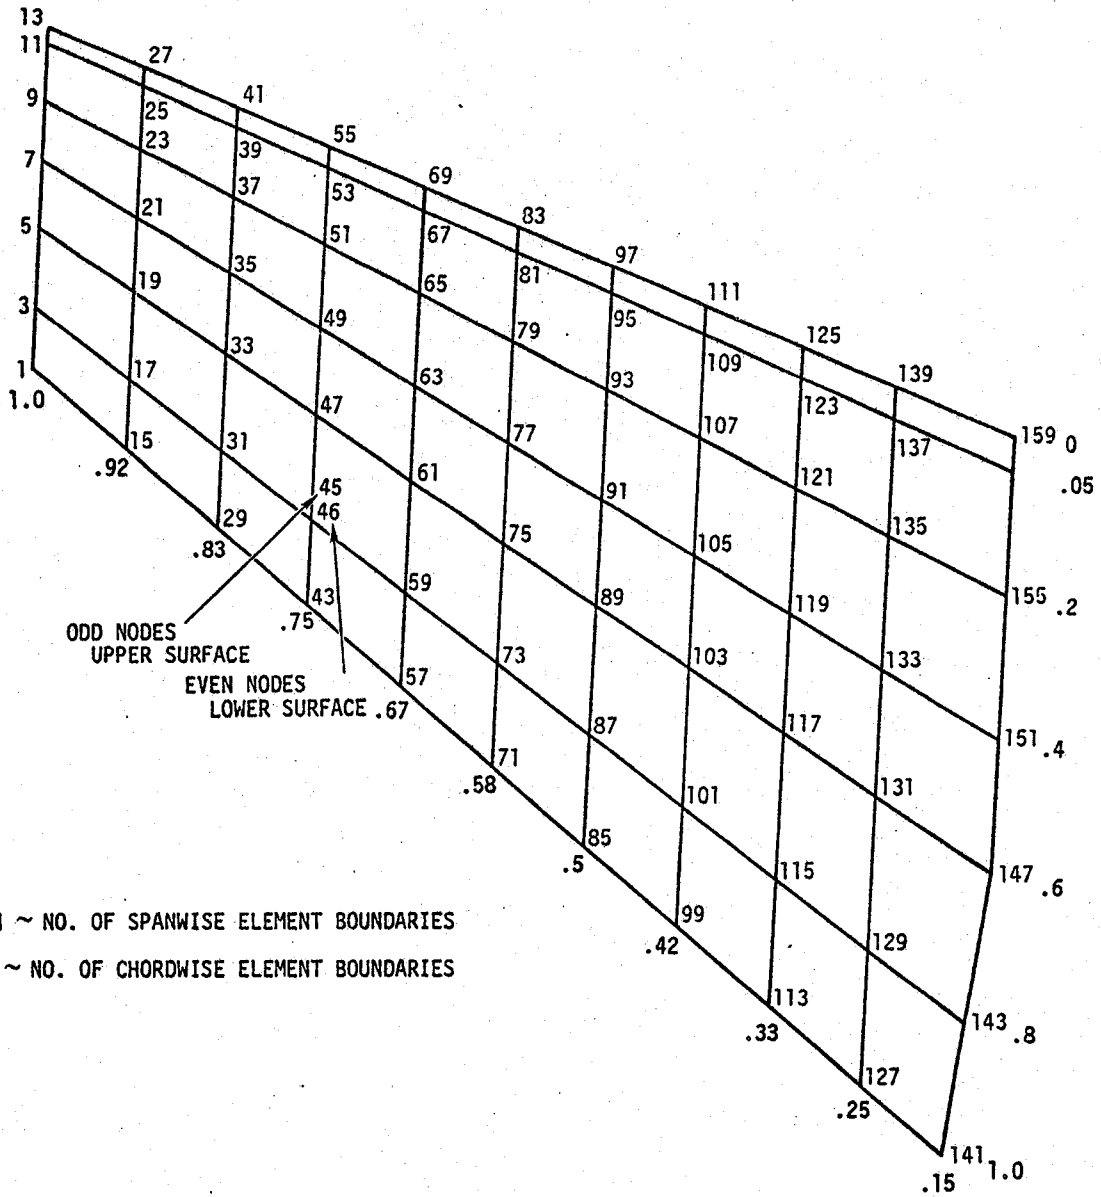

T609

Figure 9-2. Grid Arrangement

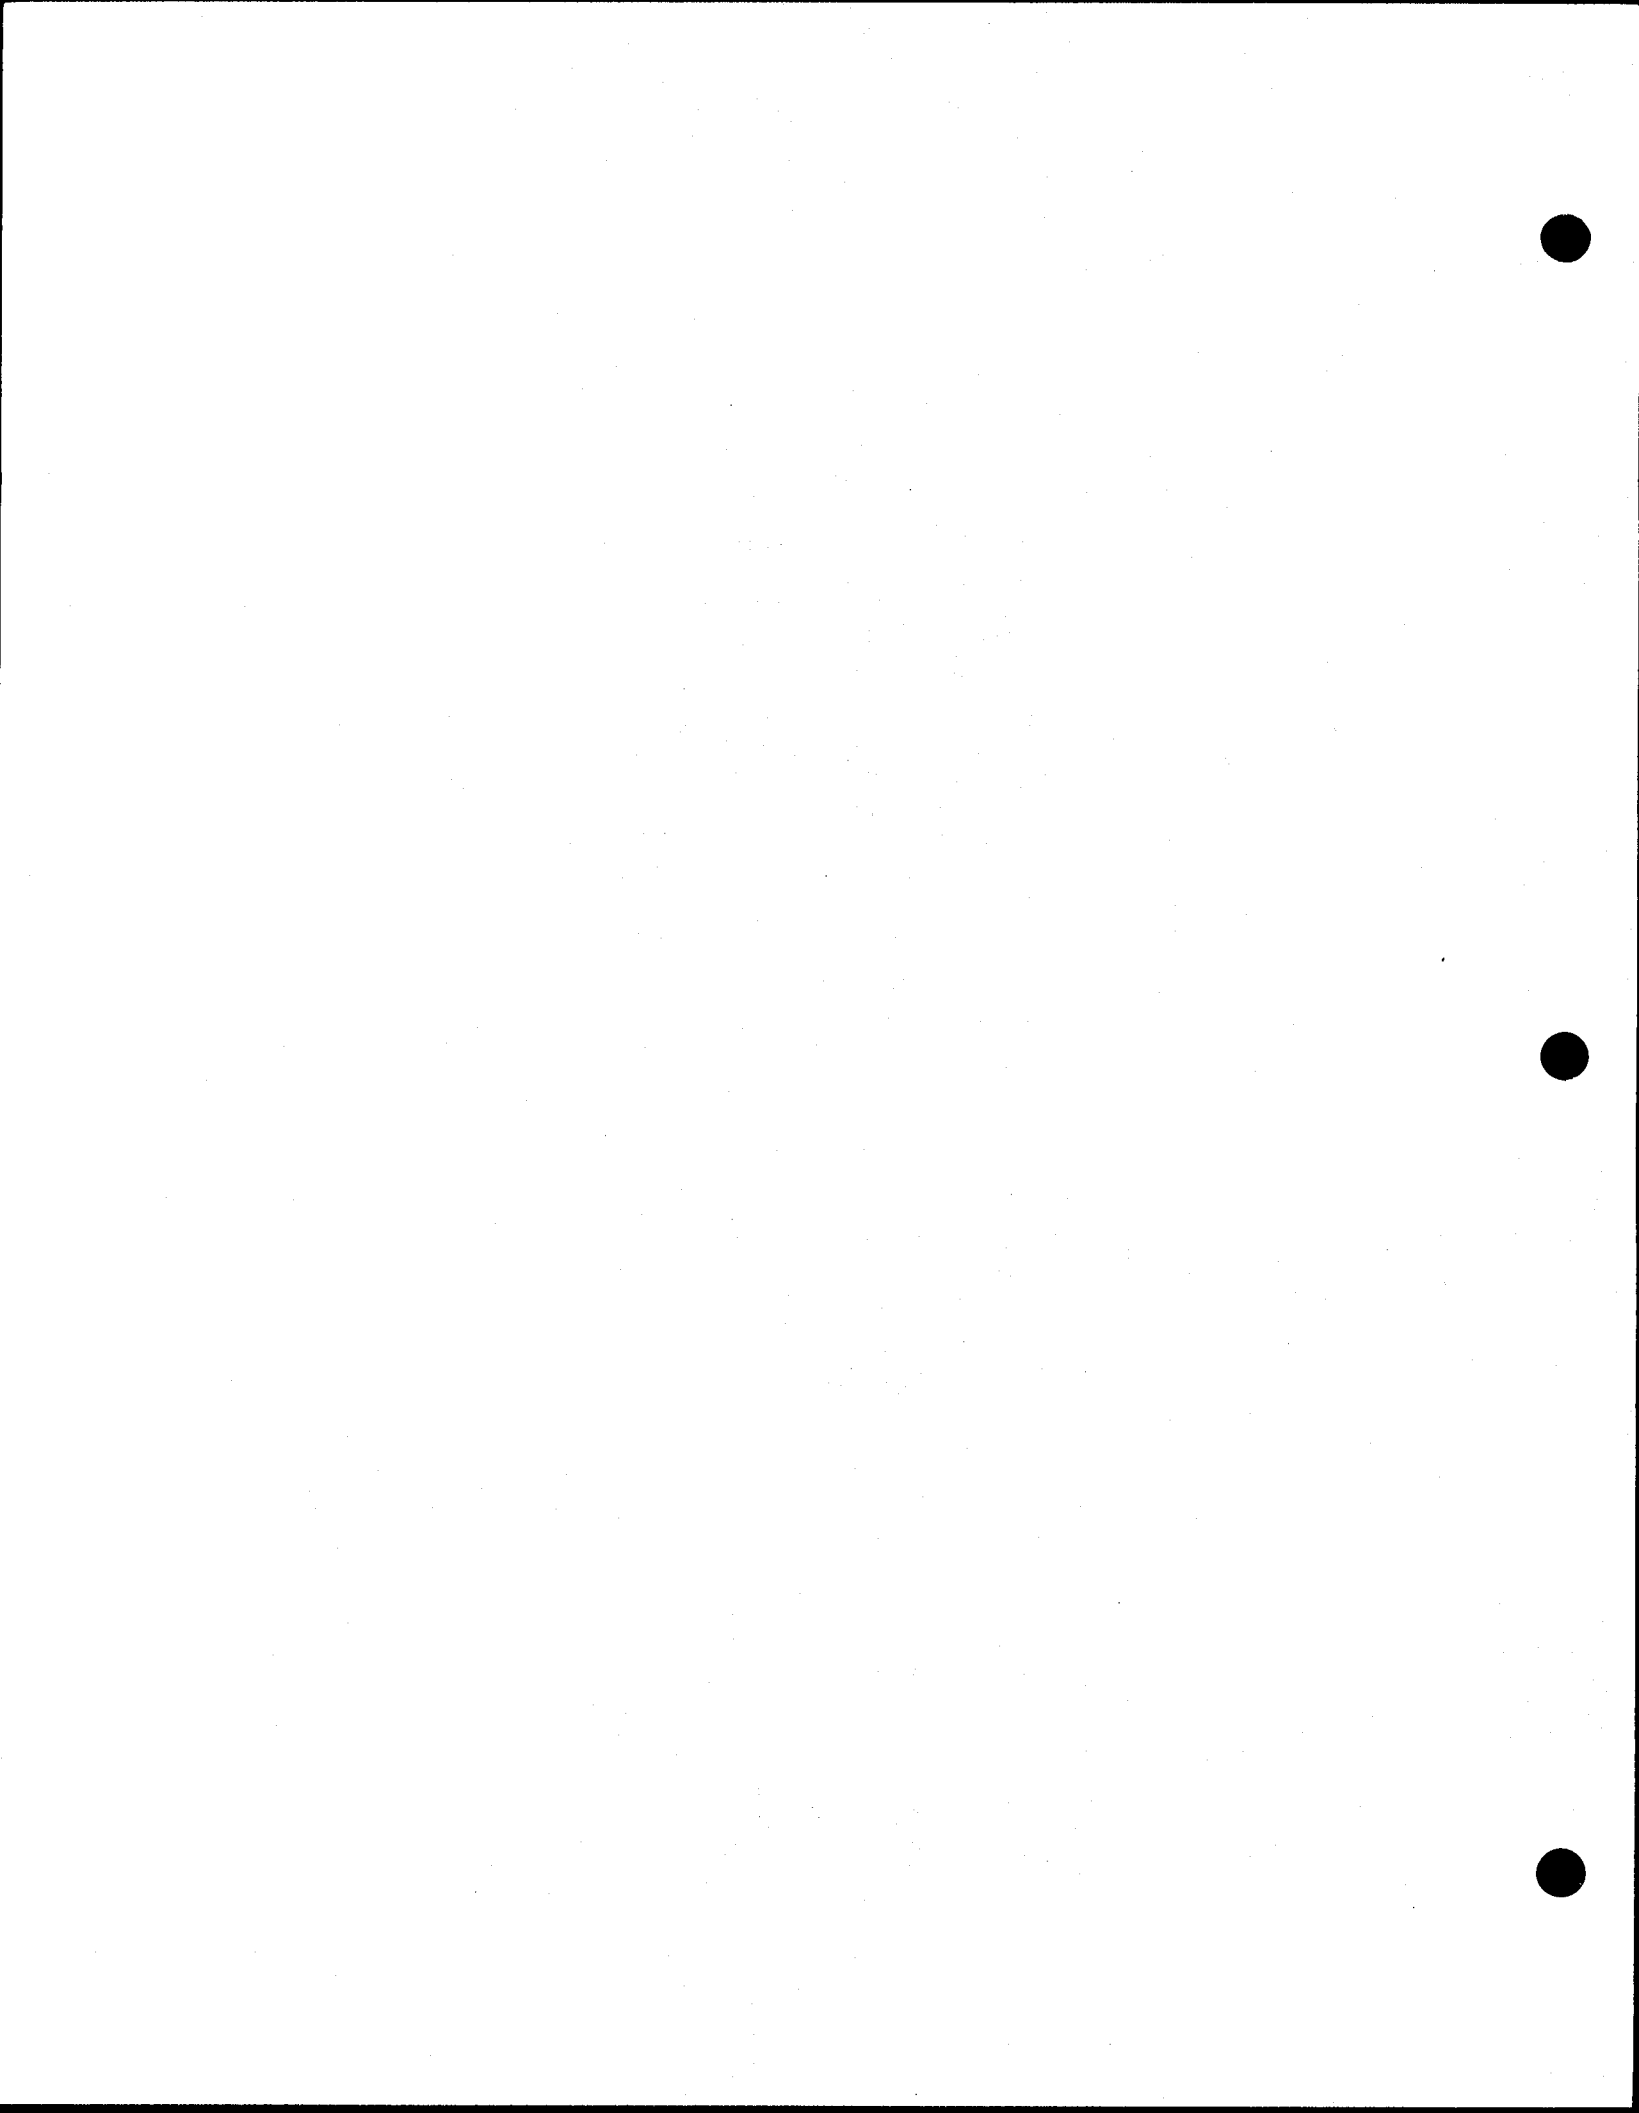

10.0 STRESS ANALYSIS

A stress analysis was performed to substantiate the preliminary wing design details. In addition, preliminary stress checks were made to ascertain modifications required for the BQM-34F fuselage/empennage structure.

10.1 WING ANALYSIS

The wing stress analysis involved the following components:

- a. Laminated skins
 - (1) Strength
 - (2) Intracell buckling
- b. Honeycomb core
- c. Wing to fuselage attachment bolts

Laminated Skin Analysis

The graphite/epoxy skins are analyzed for the following failure modes:

- a. Laminate strength
- b. Intracell buckling

Laminate strength is based on the allowable strength of each lamina and its orientation. Intracell buckling is a local stability failure mode which the laminate may experience and is an interaction between the laminate and the honeycomb core. One of the primary functions of the core is to stabilize the laminate until the full compressive strength allowable is developed.

The ASOP-3 and FASTOP-3 systems have the strength failure criterion built into the program and the resizing algorithm is formulated not to violate the strength requirements. Conservative assumptions are made so that interaction between layers may be properly taken into account.

The following material data at room temperature were used:

$$\begin{aligned} E_1 &= 20.1 \times 10^6 \text{ psi} \\ E_2 &= 1.6 \times 10^6 \text{ psi} \\ \mu &= .294 \\ G &= .8 \times 10^6 \text{ psi} \end{aligned}$$

$$\alpha_1 = .01 \times 10^{-6} \text{ in/in/f}^\circ$$

$$\alpha_2 = 11.5 \times 10^{-6} \text{ in/in/F}^\circ$$

Allowable strain data at room temperature:

$$e_1 \text{ compression} = -.0092 \text{ in/in}$$

$$e_2 \text{ compression} = -.015 \text{ in/in}$$

$$\gamma_{1,2} \text{ negative} = -.0106 \text{ in/in}$$

$$e_1 \text{ tension} = .0105 \text{ in/in}$$

$$e_2 \text{ tension} = .0045 \text{ in/in}$$

$$\gamma_{1,2} \text{ positive} = .0106 \text{ in/in}$$

Intracellular Buckling

This is a localized mode of instability facing failure and occurs in regions directly above core cells. The facings buckle in plate-like fashion with the cell walls acting as edge supports. The progressive growth of these buckles can eventually precipitate a face-wrinkling failure mode.

The facing stress at which intracellular buckling will occur is given by the following equation:

$$F_{\text{cyd}} = \frac{2(E_x E_y)^{1/2}}{1 - \mu_x \mu_y} \left(\frac{t_f}{s} \right)^2 \quad (\text{Reference 10.1})$$

where

$$E_x, E_y = \text{Laminate Young's moduli } 6,800,000 + 3,900,000 \text{ psi}$$

$$t_f = \text{Laminate thickness, } .025 \text{ inches}$$

$$\mu_x \mu_y = \text{Poisson's ratios, } .72, .43$$

$$s = \text{Core cell size, } 0.125 \text{ inches}$$

$$F_{\text{cyd}} = 6,670 \text{ psi}$$

An interaction formula is used for biaxial compressive stresses.

Honeycomb Core Stress Analysis

In addition to having the proper stiffness and geometry required to stabilize the laminated skins, the core must have adequate strength. The span-wise wing shear loads are transferred by the honeycomb core, during which time the core experiences shear stresses.

Core Shear

The HFT glass reinforced phenolic core experiences maximum shear stress in element 6185.

$$f_s = 142 \text{ psi (ult.) Appendix C}$$

$$F_s = 225 \text{ psi (L direction) Reference 8.4}$$


$$MS = \frac{225}{142} - 1 = .58$$

NAS 625 - Fuselage Attachment Bolts

The wing is attached to the fuselage with five 5/16 NAS 625 H.T. 180 KSI bolts, left and right hand side.

Maximum bolt loads occur during the 9 g ultimate load case and are based on rigid support. Studies indicate reactions are sensitive to fuselage flexibility.

Wing/Fuselage Loads - 9 g ultimate

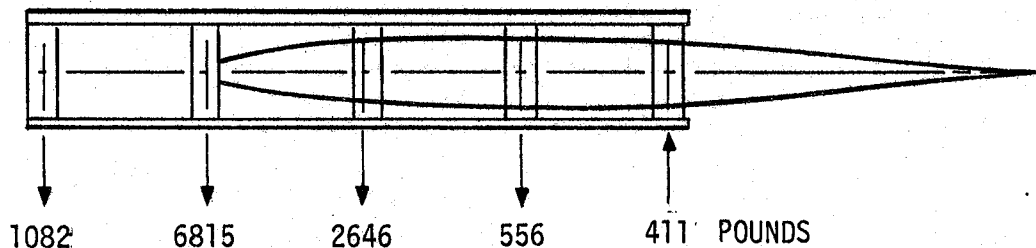

Bolt Allowable Loads

NAS 625, 5/16 dia. H.T. 180 KSI

$$P \text{ tension} = 9660 \text{ lb}$$

$$P \text{ shear} = 8280 \text{ lb.}$$

Margin of Safety, M.S.

$$M.S. = \frac{9660}{6815} - 1 = .416$$

10.2 FUSELAGE ANALYSIS

The fuselage analysis involves stress checks of the equipment compartment and centerbody sections. Figure 10-1 is an exploded view of the fuselage shell structure. The wing attaches to five frames in the centerbody section.

Equipment Compartment

The addition of about 300 pounds of ballast in the fuselage nose imposes bending loads on the equipment compartment section which exceeds its present structural capability. The added ballast effects on the loads are compared in Figure 7-3 with the original design loads for parachute recovery.


Figure 10-2 shows a structural beef-up which will satisfy the increased loads. It consists of the addition of four steel straps along the upper and lower, left and right hand fuselage sides as shown. The straps extend the full length of the equipment compartment and the forward end of the centerbody section. This ensures adequate strength at the joint where the two sections mate, station 233.50.

Appendix E shows the sizing of external straps at various stations to increase the structural capability of the equipment compartment sections. The sizing is based on determining the increase in structural properties required to meet the new loads. Advantage is taken to reduce high margins of safety where they exist and maintain the neutral axis location and original stress levels.

Centerbody Section


The swept forward wing study is based on rigid support and the reactions on the centerbody frames are shown in Figure 10-3. Analyses performed early in the study indicate the support reactions are sensitive to the fuselage/frame flexibility, however, the centerbody was not in the finite element analysis model.

Based on the rigid support reactions the frame at X_p 250.06 is loaded by the ultimate loads from the 6.0 g condition in excess of its structural capability. The frame analysis shown in reference 10.2 is used to estimate the frame capability.

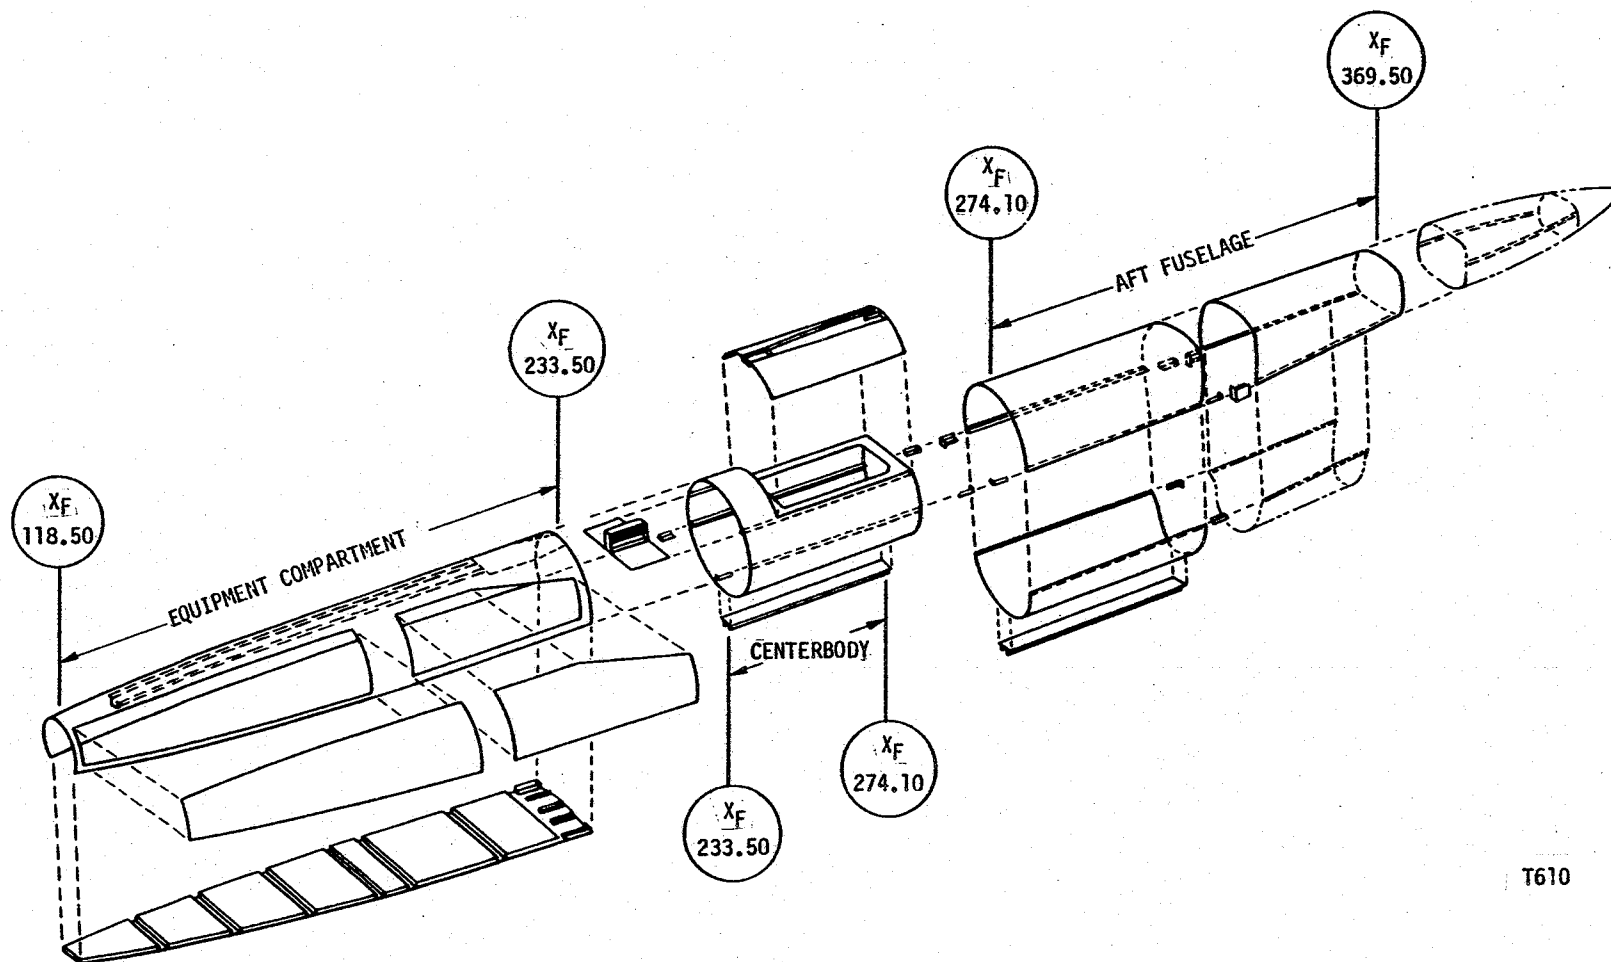

T610


Figure 10-1. Fuselage Shell Structure

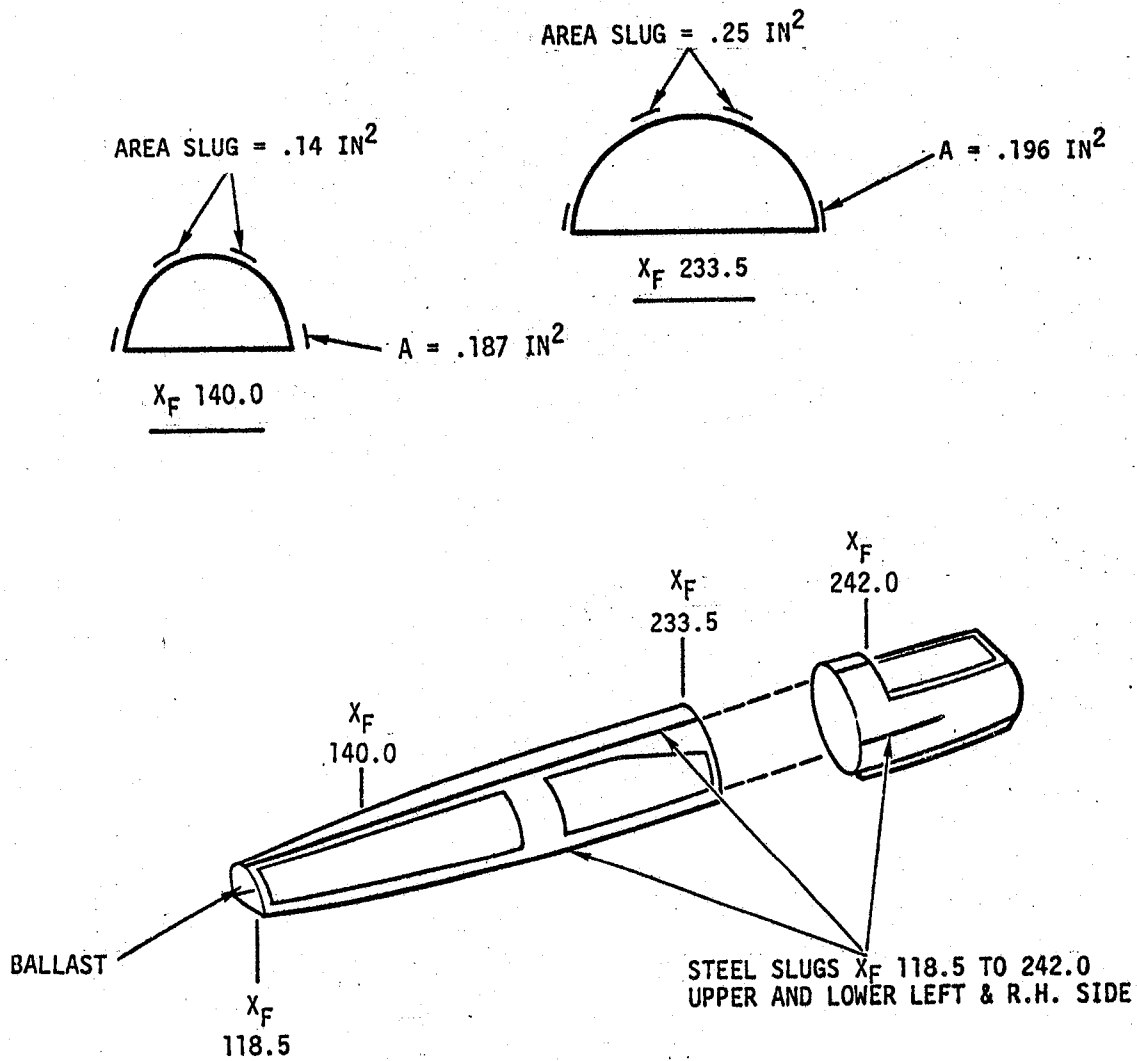

T611

Figure 10-2. Beef-Up Straps Equipment Compartment


REACTIONS BASED ON
RIGID SUPPORT.
CONDITION 9g ULTIMATE

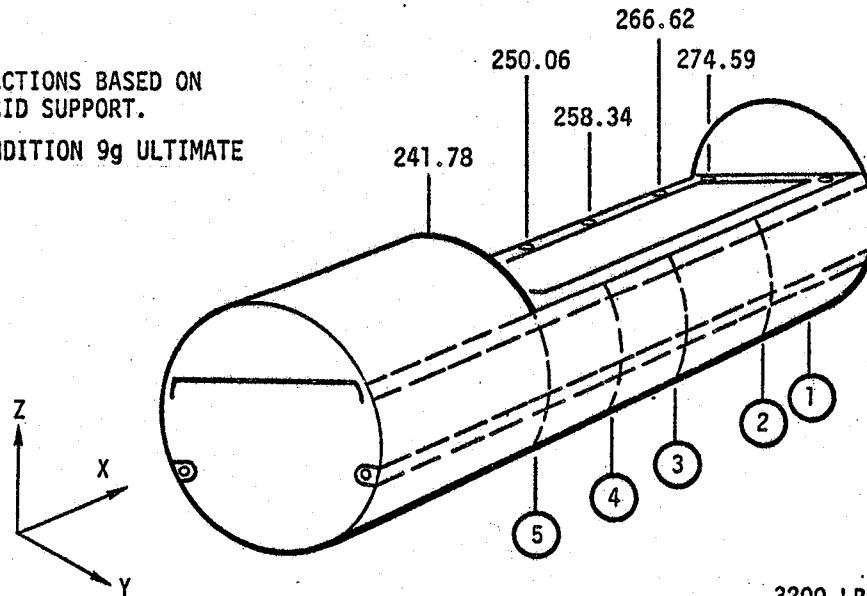

WING REACTIONS, P_z
9g ULTIMATE

NO.	P_z (PER SIDE) LB. ULTIMATE
1	-411
2	556
3	2646
4	6815
5	1082

3200 LB. (MAX.)

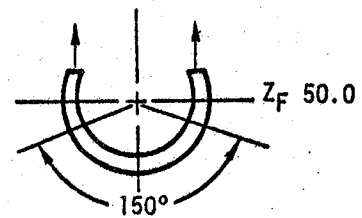


FRAME X_F 250.06

INCREASE IN LOAD REQUIRES
ADDING INNER AND OUTER FLANGES
EXTENDING 150° AROUND LOWER
PORTION.


T612

Figure 10-3. Fuselage Wing Attach Frames,
6-g Loads x 1.5

Maximum allowable frame load is 3200 pounds/side. Critical failure mode is flange compression crippling.

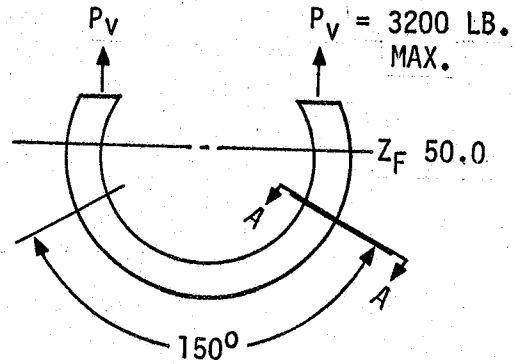

For $P_V = 6815 \text{ lb}$ ultimate the frame at $X_F 250.06$ requires some beef-up. It is recommended an inner and outer angle flange be added to the channel frame extending approximately 150° around the lower portion.



It should be noted that a more detailed analysis with fuselage flexibility considered may show this modification not required.

11.0 DESIGN

11.1 FUSELAGE

Several modifications must be made to the basic fuselage to accommodate a forward swept wing. These modifications are discussed in the following sections.

11.1.1 Structural Modifications

Structural reinforcement of the fuselage as shown in Figure 11-1 is required forward of XF 233.50 in order to support the 300 pounds of ballast. The reinforcement consists of .125 inch thick stainless steel (18-8) straps of sufficient width to increase the forward fuselage bending modulus so that the available strength of the existing aluminum fuselage will not be exceeded (See Section 10.2). Stainless steel was chosen both for high corrosion resistance as well as high modulus thus presenting the least (compared to aluminum) increase to the vehicle cross sectional area. The strap will be installed by picking up existing rivets along with additional rivets where required. A sealant and wet dipped rivets will prevent galvanic coupling between the steel straps and aluminum fuselage.

11.1.2 Ballast Installations

The lead ballast will consist of commercial tin based lead (4% sb) that has a tensile allowable strength of 4000 psi which is twice that of common lead. The lead density is 0.398 lb. per cu. in. The lead sheet will be fastened to the existing structure with flush machine screws installed through relatively large steel washers with countersunk holes. Back up countoured steel washers will be utilized where required to locally reinforce the existing aluminum structure.

11.1.3 Recovery System Modifications

It has been shown that incorporating a forward swept wing on the BQM-34F will require a large amount of forward fuselage ballast to maintain static aerodynamic stability. The resulting forward shift in vehicle center of gravity produces a problem with the recovery system geometry. With the ballast in place, the cg of the vehicle when suspended beneath the main and engagement parachutes is forward of the most forward parachute attachment point. To provide a level vehicle attitude two alternatives were considered

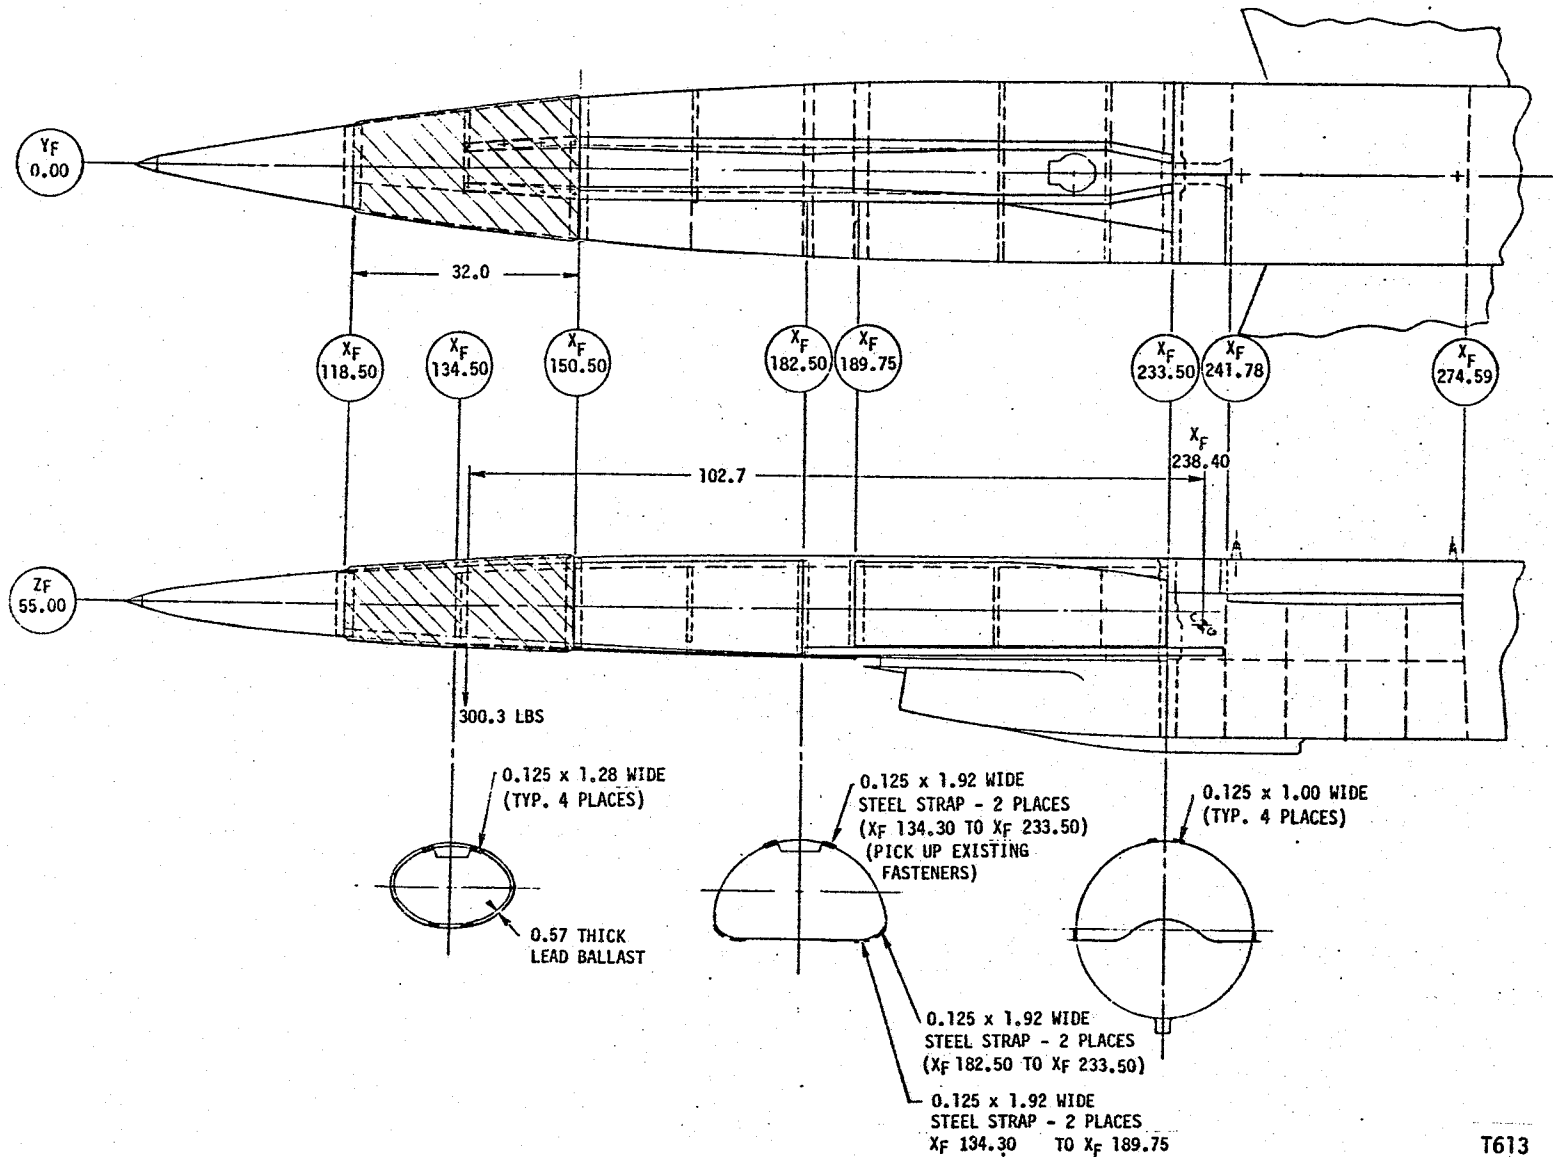


Figure 11-1. Forward Fuselage External Strap Beef-Up and Ballast Installation

as discussed in Section 2.0. Of the two alternatives, dropping ballast or moving the forward fitting forward, the latter seems most attractive if it can be done without requiring major structural modification.

The approach which has been chosen is illustrated by Figure 11-2. The existing parachute fittings are at stations 245 and 273. The main parachute deployment forces for the target are taken primarily by the forward fitting. The concept proposed for the research configuration also uses the fitting at station 245 to take the large deployment loads. After the initial deployment shock, and after the vehicle attains stabilized descent, the explosive bolt is detonated shifting the forward attach point to station 233. This forms a parachute bridle which encompasses the cg producing a level vehicle attitude for mid-air pickup.

Detailed development work will be required to insure the success of this concept however, based upon this initial evaluation, the concept appears to be feasible. There is adequate strength in the fitting and backup structure at station 245 since they are already designed for these conditions. At station 233 a new fitting must be incorporated however, since this is a major bulkhead and the loads will not be large, a major modification is not expected. The new bridle between stations 233 and 273 must be developed including the apex fitting and its explosive bolt attachment and electrical wiring.

11.2 WING

The outer wing panels are of full depth sandwich honeycomb construction. The skins or facings are fabricated from graphite/epoxy advanced composite material. The skins are adhesive bonded to an HFT glass reinforced phenolic honeycomb core with 1/8 inch cell size and four-pound density. At the more heavily loaded local area near the leading edge root a 5.5 pound density core is required. Upper and lower skin are fabricated in one piece from wing tip to wing tip. The upper and lower wing halves are joined at the wing reference plane (WRP) by bonding the two machined faces of the core with METLBOND 1113. Leading and trailing edges are closed with plies of fiberglass or graphite fabric tape.

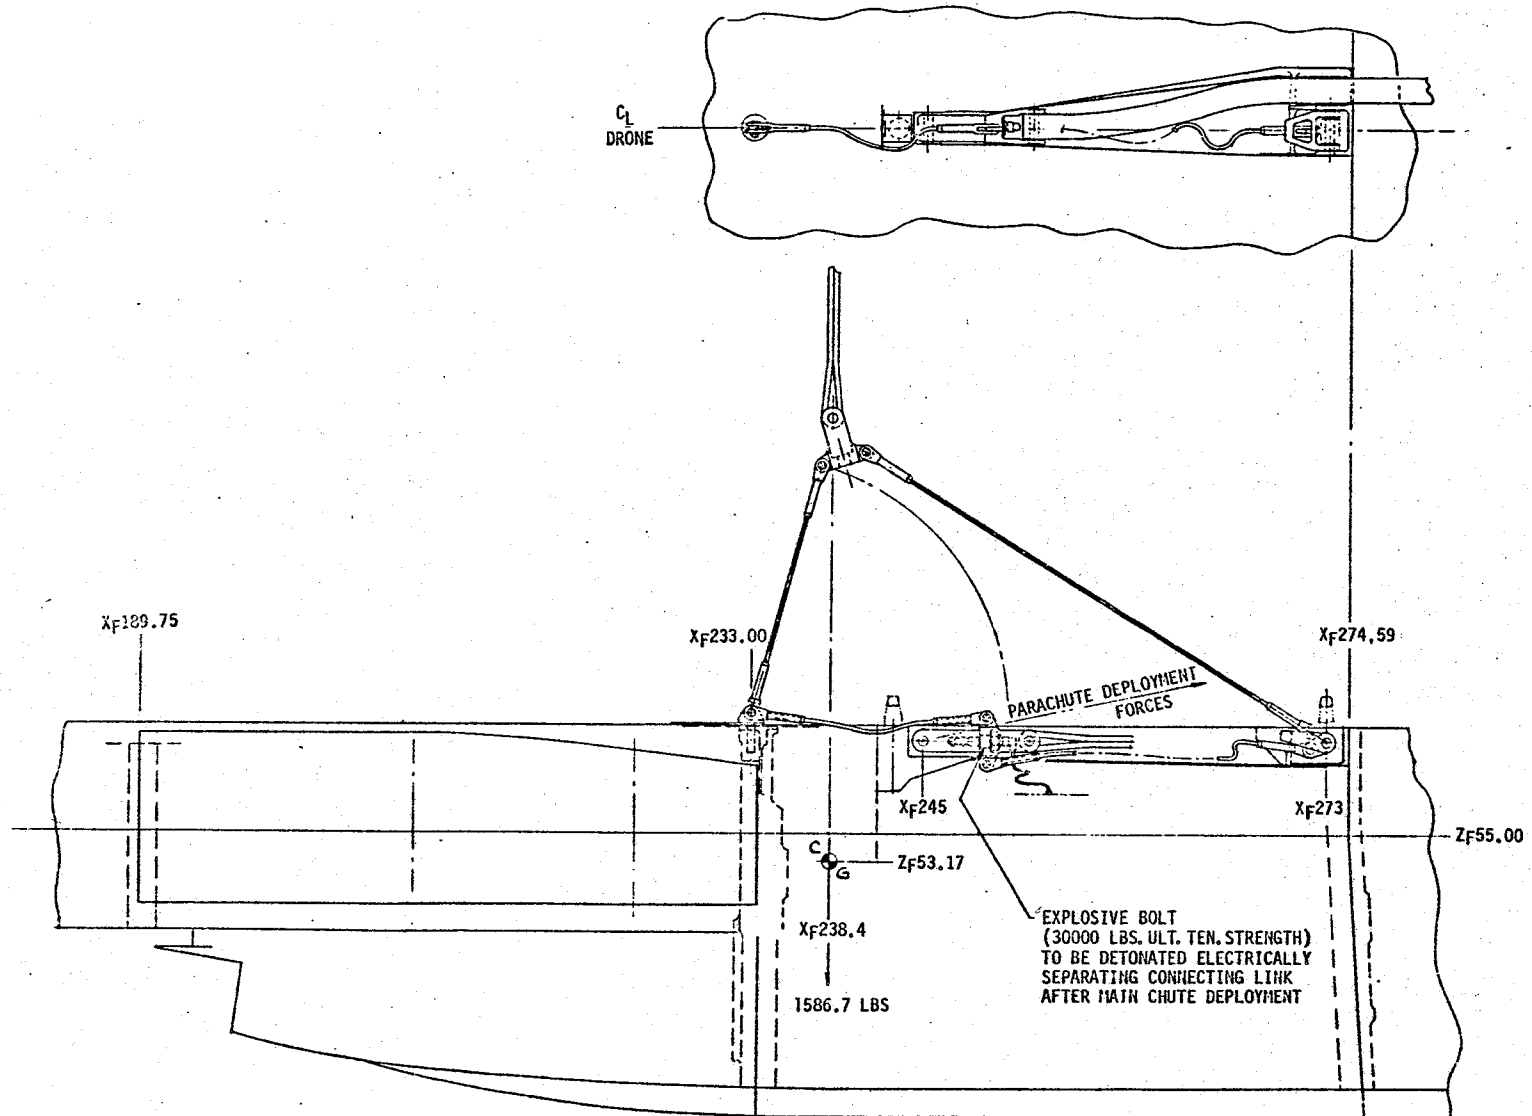


Figure 11-2. Riser Configuration

3	3	3	11	21	31	41	63	85	89
3	3	7	13	19	25	30	38	43	65
5	9	12	15	18	19	22	29	32	34
8	10	12	14	16	16	16	16	10	5
7	7	7	7	7	7	5	3	3	3
5	5	5	5	5	5	3	3	3	3

Figure 11-3. Wing Upper Surface Ply Thickness

3													
3	3												
5	3	3	7										
10	9	5	11	17									
7	12	12	16	17	27								
5	7	16	21	20	23	35							
	5	7	24	22	28	40							
		5	7	25	27	36	44						
			5	7	27	31	38	48					
				5	5	29	32	41					
					5	3	7	34					
						3	3	5					
							3	3					
								3					
									3				
										3			
											3		
												3	
													3

Figure 11-4. Wing Lower Surface Ply Thickness

The skin layup is discussed in the analysis Section 8.3.2 and shown in Figure 8-40 of that section. During a detail wing design effort it may be to advantage to re-orient the plies slightly for ease of manufacture. Figures 11-3 and 11-4 show total ply thickness at the various locations. Ply thickness contour lines are shown in Figures 11-5 and 11-6. Wing preliminary design details are shown on Figure 11-7.

The wing center section consists of the graphite/epoxy center carry-through structure and a machined aluminum fuel tank cover. The machined aluminum piece serves both as a fuel tank cover and as a contoured rest for the composite wing center section. Graphite root ribs and fore and aft closures complete the graphite center wing structure. Five bolts per side are used for attaching the wing to the fuselage. Four of the bolts join the wing and aluminum pieces to the fuselage, the fifth passes only through the aluminum piece.

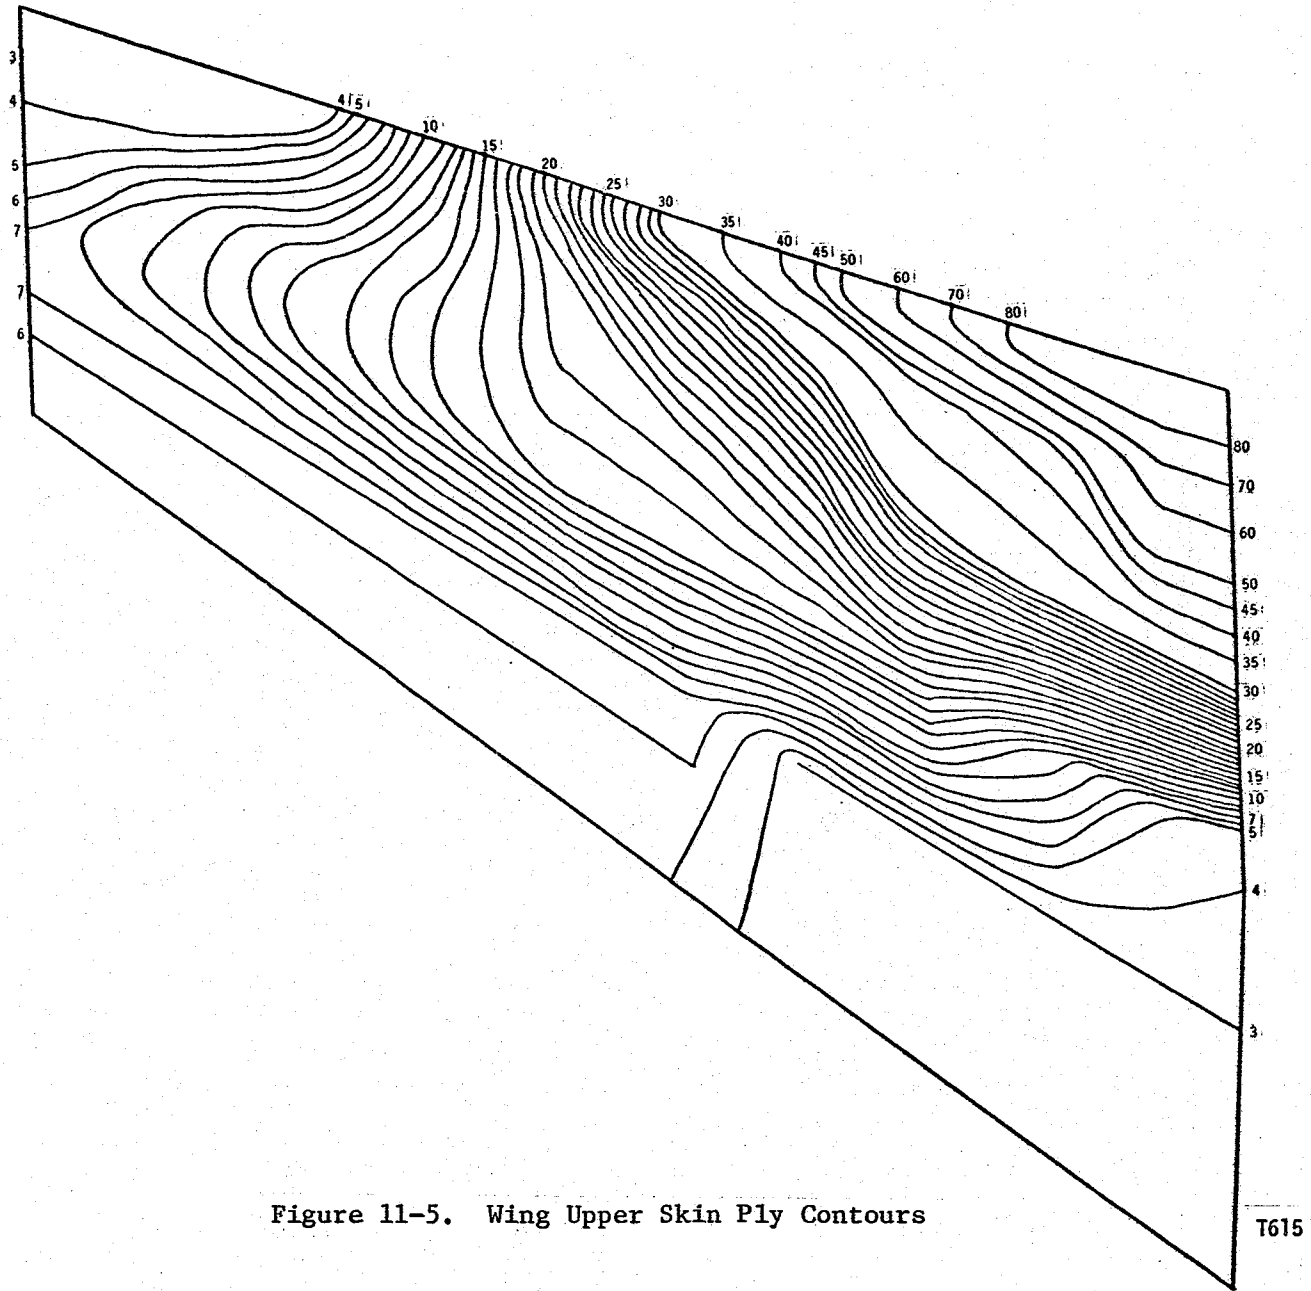


Figure 11-5. Wing Upper Skin Ply Contours

T615

11-9

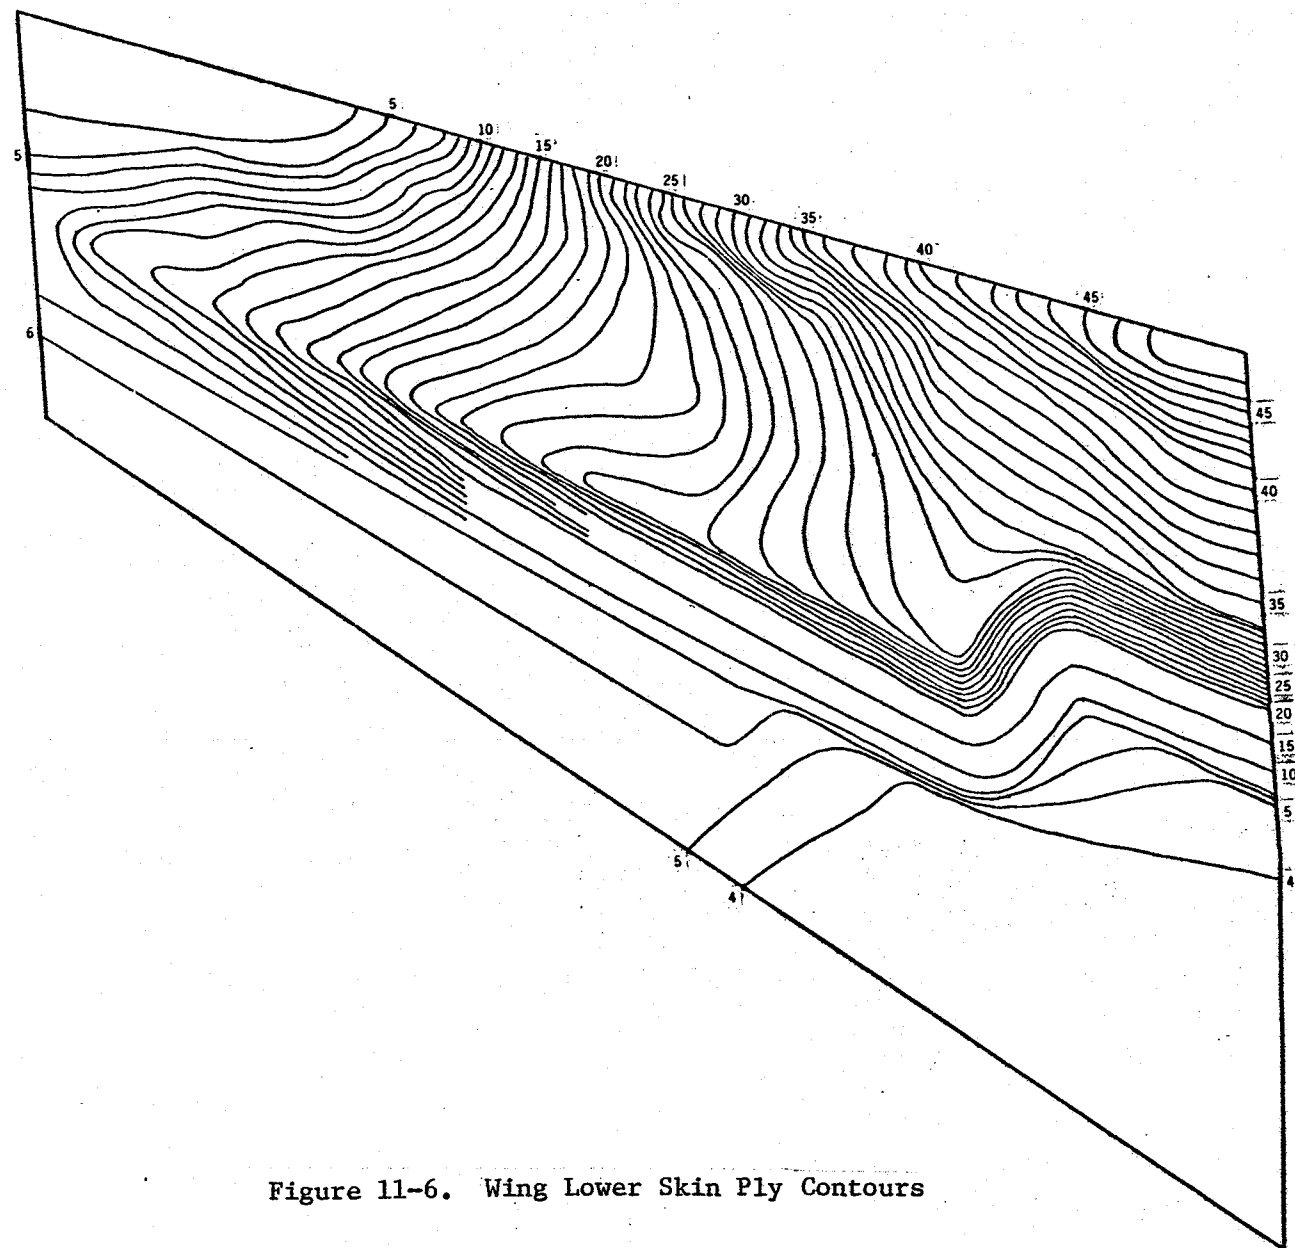


Figure 11-6. Wing Lower Skin Ply Contours

11-11

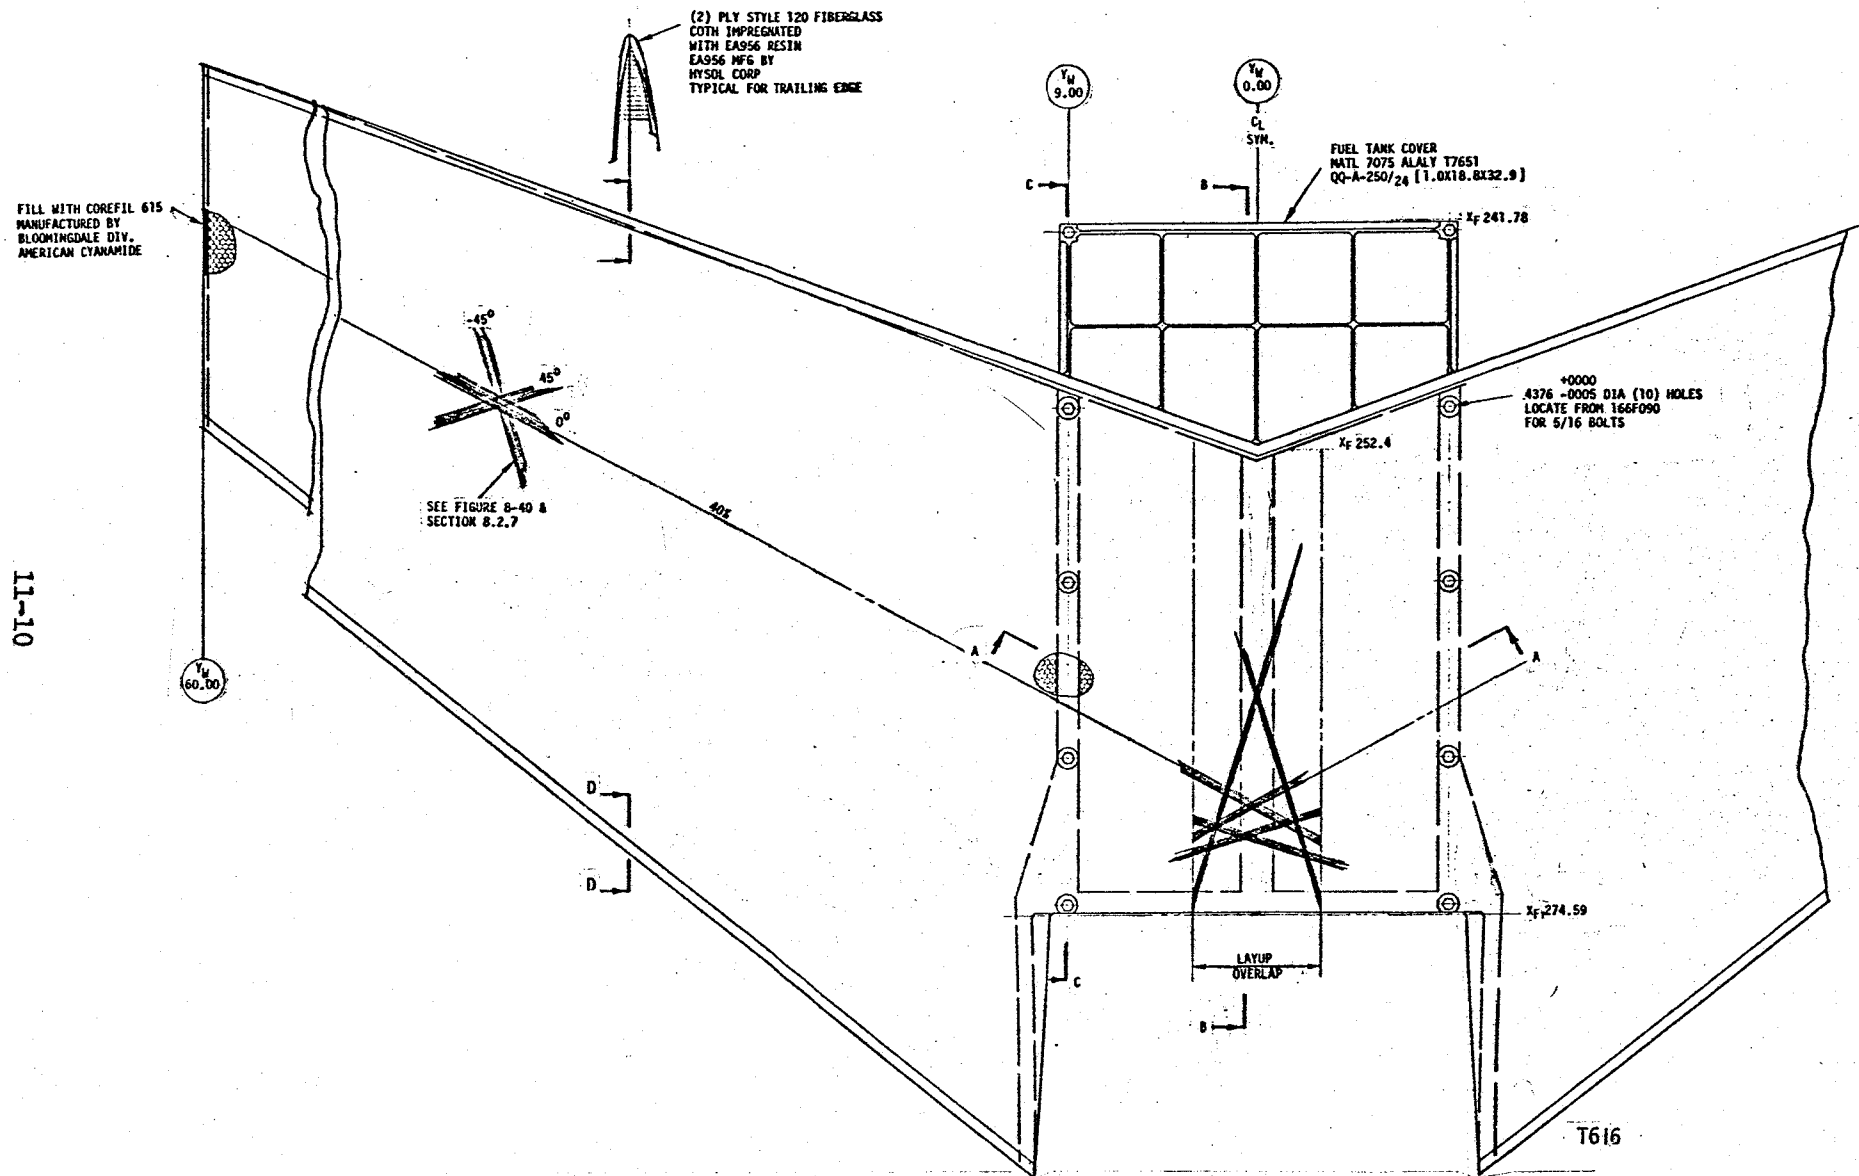


Figure 11-7. Preliminary Design of Forward Swept Research Wing for BQM-34F (Sheet 1 of 2)

11-11

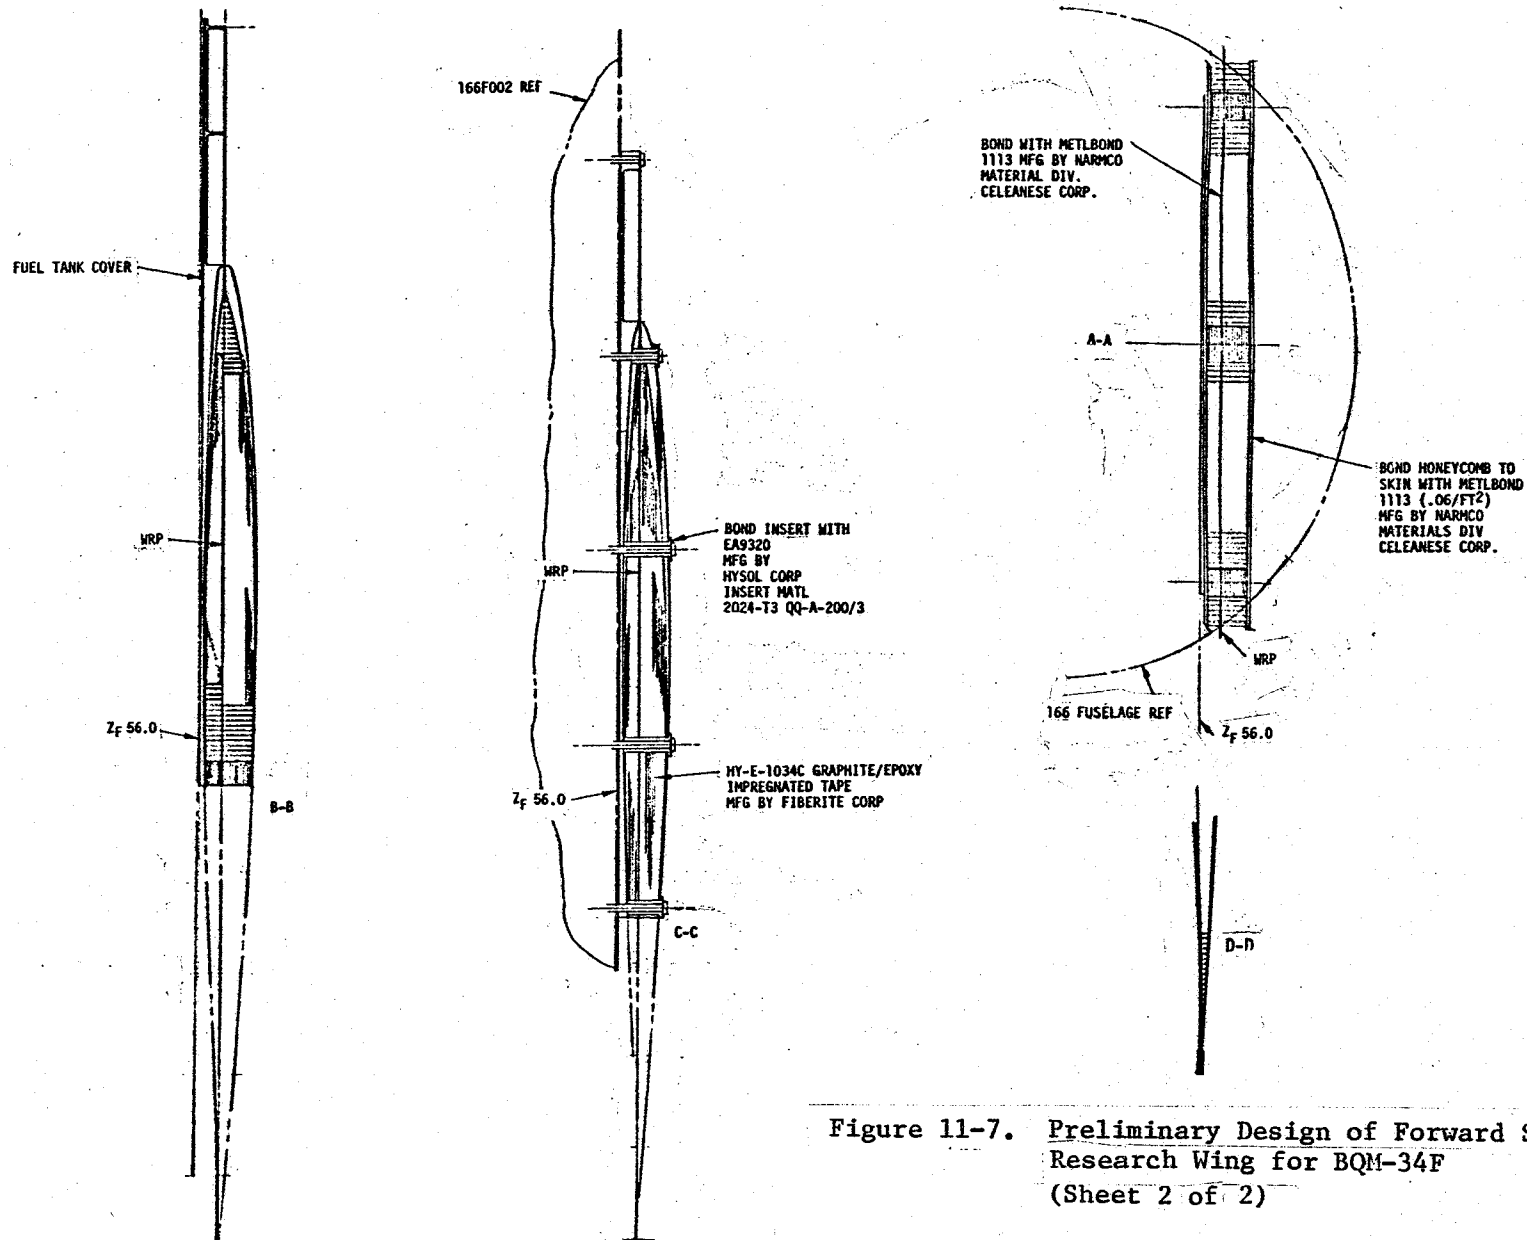


Figure 11-7. Preliminary Design of Forward Swept Research Wing for BQM-34F (Sheet 2 of 2)



12.0 WEIGHT & BALANCE

The total weight of the point design wing is 75.25 pounds. The distribution of the weight is 38.51 pounds for the outboard wing and 36.74 pounds for the center section. A weight breakdown for the wing is presented in Table 12.1 along with the unit weights of each component. These weights were calculated based on design layouts and stress data presented in section 10.2, not on the computer calculated weight.

The fuselage weight penalty of 22.49 pounds is attributed to steel steps on the outside forward fuselage for beef-up due to ballast weight of 297.60 pounds distributed forward and aft of body station 135.7.

The weight penalty assigned to the recovery system redesign of the forward recovery attach points is estimated to be 4.5 pounds.

The summary weight statement for the NASA swept forward wing is presented in Table 12.2.

The center of gravity travel, based upon preliminary data is presented in Figure 2-7. The final data did not alter the curve significantly as to require a new analysis. The major change from the data presented alleviates the requirement for dropable ballast.

TABLE 12-1
WEIGHT BREAKDOWN

OUTBOARD WING

UPPER SKINS (.057 #/in ³)	12.87
LOWER SKINS (.057 #/in ³)	12.62
ADHESIVE (.07 #/ft ²)	4.31
CORE (4.25 #/ft ²)	6.32
SPAR (.057 #/in ³)	0.09
LEADING & TRAILING EDGES (.065 #/in ³)	0.66
PAINT (.042 #/ft ²)	<u>1.64</u>
TOTAL	38.51

CENTER SECTION

UPPER SKIN (.057 #/in ³)	4.94
LOWER SKIN (.057 #/in ³)	3.43
ADHESIVE (.07 #/ft ²)	0.65
CORE (4.5 #/ft ²)	1.73
SPAR (.057 #/in ³)	2.82
RIBS (.057 #/in ³)	7.79
PLATE (.101 #/in ³)	13.62
ATTACHMENT HARDWARE	1.50
PAINT (.042 #/ft ¹)	<u>0.26</u>
TOTAL	36.74

TOTAL WING 75.25 lbs.

TABLE 12-2

NASA SWEEP FWD WING - SUMMARY WEIGHT STATEMENT (1)

	<u>(POUNDS)</u>
AERO SURFACE GROUP	126.95
WING	75.25
TAIL - VERTICAL	31.73
TAIL - HORIZONTAL	19.97
BODY GROUP (2)	260.10
TAKE-OFF & RECOVERY GROUP (3)	175.60
PROPULSION GROUP	479.30
POWER GENERATING GROUP	132.40
ORIENTATION CONTROL GROUP	35.90
GUIDANCE GROUP	43.50
ELECTRONICS GROUP (4)	122.90
ENVIRONMENTAL PROTECTION GROUP	35.90
MISC.	2.10
BALLAST @ F.S. = 135.7	297.60
<hr/>	
WEIGHT EMPTY	1712.25
<hr/>	
UNUSABLE FUEL (MAIN & AUX)	4.70
LUBRICANT - USABLE	9.30
- UNUSABLE	2.30
REFRIGERANT	8.30
AUX. FUEL TANK	16.10
<hr/>	
ZERO FUEL WEIGHT	1752.95
<hr/>	
FUEL	333.00
MAIN	263.00
AUX.	70.00
<hr/>	
GROSS WEIGHT	2085.95

- (1) BASELINE REFERENCE: TRA REPORT 16644-33, "ACTUAL WEIGHT REPORT FOR BQM-34F SUPERSONIC AERIAL TARGET SERIAL NO. AF 72-1566, SLIP 99" DATED 16 APRIL 1974.
- (2) INCLUDES EXTERNAL STRAPS OF 22.49 POUNDS.
- (3) INCLUDES WEIGHT PENALTY OF 4.5 POUNDS FOR FORWARD RECOVERY SUSPENSION SYSTEM.
- (4) MAJOR PORTION OF THIS GROUP IS MISSION ORIENTATED AND MAY BE ALLOCATED FOR PAYLOAD WEIGHT & VOLUME.



13.0 REFERENCES

- 1.1 James, H.A., Feasibility Study of Modifications to BQM-34E Drone For NASA Research Applications, Ryan ASTM 72-40, December 1972, NASA CR-112323, 1972.
- 1.2 Anon., Design Analysis of a Supercritical Wing For Test With a BQM-34F Drone Aircraft, TRA Report 16669-11, 10 April 1975 (Confidential).
- 1.3 Murrow, H.N. and C.V. Eckstrom, Drones for Aerodynamic and Structural Testing (DAST) - A Status Report, Presented at AIAA Aircraft Systems and Technology Conference, Los Angeles, CA, August 21-23, 1978.
- 1.4 Krone, Norris J., Divergence Elimination With Advanced Composites, AIAA Paper No. 75-1009, 1975.
- 1.5 Anon., Technical Proposal for the Study of Feasibility Aspects of Flight Testing an Aeroelastically Tailored Forward Swept Research Wing On a BQM-34F Vehicle, TRA Report 16671-1, 25 September 1978.
- 2.1 Huffman, J.K. and C.H. Fox Jr., Subsonic Longitudinal and Lateral-Directional Static Aerodynamic Characteristics For a Close-Coupled Wing-Canard Model in Both Swept Back and Swept Forward Configurations, NASA TM 74092, 1978.
- 2.2 McGhee, Robert J. and William D. Beasley, Low-Speed Wind Tunnel Results For A Modified 13-Percent Thick Airfoil, NASA TM X-74018, May 1977.
- 4.1 McCunney, S.J., Propulsion System Report for BQM-34F Supersonic Aerial Target, TRA Report 16603-10, 15 February 1974.
- 4.2 Schemershy, R.T., Development of an Empirically Based Computer Program to Predict The Aerodynamic Characteristics of Aircraft, AFFDL-TR-73-144, October 1973.
- 5.1 Douglas Aircraft Company, Inc. USAF Stability and Control Handbook, Contract AF33(616)-6480, October 1960.

- 5.2 Huffman, Jarrett K., and Fox, Charles H., Jr., Subsonic Longitudinal and Lateral-Directional Static Aerodynamic Characteristics for a Model With Swept Back and Swept Forward Wings. NASA TM-74093, 1978.
- 5.3 Polhamus, Edward C., and Sleeman, William C., Jr., The Rolling Moment Due to Sideslip of Swept Wings at Subsonic and Transonic Speeds. NASA TN D-209, 1960
- 5.4 Boyden, Richmond P, Subsonic Roll Damping of a Model With Swept-Back and Swept-Forward Wings, NASA TM 78677, 1978
- 7.1 "Structural Loads Report for BQM-34F Supersonic Aerial Target" TRA Report No. 16642-22, 28 August 73.
- 8.1 Markowitz, Joel and Gabriel Isakson, FASTOP-3, A Strength, Deflection and Flutter Optimization Program for Metallic and Composite Structures, AFFDL-TR-78-50, May 1978.
- 8.2 Advanced Composites Design Guide, Volume IV Materials, Third Edition, Los Angeles Division of North American Rockwell International Corp., 1977.
- 8.3 Metallic Materials and Elements for Aerospace Vehicle Structures, Volumes I and II, MIL-HDBK-5C, 15 September 1976.
- 8.4 Mechanical Properties of Hexcel Honeycomb Material ISB120, Hexcel 1978 Revision.
- 10.1 Structural Sandwich Composites, MIL-HD-BK-23A, December 1968.
- 10.2 TRA Report 16642-19 Fuselage Structural Analysis Report for BQM-34E Supersonic Aerial Target, Volume I, 21 February 1973.

APPENDIX A
NASA STATEMENT OF WORK



STATEMENT OF WORK

STUDY OF THE FEASIBILITY ASPECTS OF
FLIGHT TESTING AN AEROELASTICALLY
TAILORED FORWARD SWEPT RESEARCH
WING ON A BQM-34F DRONE VEHICLE

1-12-2720.0142
EXHIBIT A

JULY 27, 1978

NASA — LANGLEY RESEARCH CENTER —

HAMPTON, VA
23665



TECHNICAL STATEMENT OF WORK
FOR
STUDY OF THE FEASIBILITY ASPECTS OF FLIGHT TESTING AN
AEROELASTICALLY TAILORED FORWARD SWEEP RESEARCH WING
ON A BQM-34F DRONE VEHICLE

1.0 PURPOSE AND SCOPE

- 1.1 Purpose - The purpose of this Statement of Work is to identify and define the engineering and technical support work required for study of the feasibility aspects and preliminary design of an Aeroelastically Tailored Research Wing for tests on a NASA Model BQM-34F RPRV.
- 1.2 Scope - This program is limited to the effort required to accomplish analyses for the preliminary design of a wing suitable for flight testing on a NASA BQM-34F Drone Vehicle. Fabrication, testing, target modifications, flight control system, aerospace ground equipment (AGE) and launch interfaces are not included in this effort. Data on documentation submittals will be in contractor format similar to that submitted for the supercritical wing study accomplished for NASA under Contract No. NAS1-13541.
- 1.3 Background - NASA has an established program utilizing modified BQM-34F vehicles as test beds for flight investigations on research wings. The program is called "DAST" for Drones for Aerodynamic and Structural Testing. An early feasibility study was conducted under Contract (NAS1-11758) which yielded aerodynamic performance information for several candidate wing planforms as well as wing construction and integration aspects. Later a research wing configuration was selected for detailed design which was accomplished under Contract NAS1-13541. This wing with aspect ratio 6.8 was subsequently fabricated in-house by NASA and will be used to study loads and an application of active controls for flutter suppression. A second research wing of aspect ratio 10.3 is presently being designed under Contract NAS1-14665 for flight test on a Firebee II vehicle. The design involves incorporation of multiple active controls for gust and maneuver load alleviation and flutter suppression. Of particular interest in this design effort is the development of an integrated design technique incorporating an iterative loop which allows the structural design to take full advantage of the benefits provided by the active controls. NASA is pursuing studies concerning potential applications of the use of anisotropic laminates of advanced composite materials for tailoring the aeroelastic characteristics of structures. This work includes analytical studies, wind tunnel tests and flight test validation experiments. More recently significant

renewed interest has been shown in the unconventional swept-forward wing. Significant performance benefits are indicated, especially if the major structural problem of aeroelastic divergence can be solved without addition of weight such that the potential performance benefit would be eliminated. Research investigations will include study of the use of advanced composites and/or active controls to avoid aeroelastic divergence. It is believed that DAST-type flight tests would provide early research data at relatively low cost and with no human risk involved.

- 1.4 Objective - The objective of the present work effort is to establish a feasible preliminary design of a swept forward wing of moderate aspect ratio with sufficient performance and stability and control analysis to assure compatibility with the existing NASA BQM-34E/F Drone system. The wing will be used to study aerodynamic and structural interactions (aeroelastic effects), and to measure flight loads, primarily in the transonic speed regime.

2.0 CONDITIONS

2.1 Design Guidelines

- 2.1.1 The wing shall be designed for a cruise Mach number of 0.9 at 30,000 ft. altitude and will have approximately the following geometric characteristics.

Reference Wing Area, Sq. Ft.	25 to 36
Airfoil	Supercritical
Root Airfoil Thickness Ratio	Approx. .05
Tip Airfoil Thickness Ratio	Approx. .05
Wing Aspect Ratio	4 to 7
Span, Ft.	11 to 17
Leading Edge Sweep Angle, Deg	-20 to -35
Twist, Deg	TBD
Taper Ratio	0.40

An optional close coupled canard having approximately the following characteristics shall be considered in this study:

Reference Exposed Canard Area, Sq. Ft.	8
Exposed Canard Aspect Ratio	4

Canard Thickness Ratio	TBD
Leading Edge Sweep Angle, Deg.	-30
Taper Ratio	0.20
Twist, Deg	0

- 2.1.2 The wing shall be designed to provide satisfactory static aeroelastic and flutter characteristics throughout the flight envelope with a margin of 15 percent on speed.
- 2.1.3 The wing shall be designed to be mounted on the BQM-34E/F aircraft using the same carry through area as the standard wing.
- 2.1.4 Load factors and safety factors shall be applied as follows: Symmetrical maneuver load factor limits shall be approximately +6 and -3 g's. The ultimate factor of safety shall be 1.50.
- 2.1.5 A vehicle weight of approximately 2200 lbs. (excluding wing) should be used for this study.
- 2.1.6 Work shall be performed under procedures appropriate for feasibility studies. Drawings shall be checked "in group" and released for record purposed only.
- 2.1.7 The wing size shall be as large as practical consistent with the constraints of vehicle weight, controllability and flight capabilities at Mach .90 at 30,000 feet.
- 2.2 Tasks
The Contractor shall:
- 2.2.1 Prepare preliminary design layouts to establish practical ranges of wing aspect ratio, sweep, thickness, and area that are compatible with the existing NASA BQM-34F vehicle modified for DAST.
- 2.2.2 Conduct detailed drag build-up and sufficient aerodynamic analysis appropriate for supercritical wing including operational envelopes to provide inputs for general performance and research capabilities.
- 2.2.3 Prepare structural layouts and conduct loads, weights stress static aeroelastic and flutter analyses in sufficient depth to establish approximate wing structure necessary to comply with Paragraph 2.1.
- 2.2.4 Provide dimensional drawings defining the structural concept including sizing of the primary structural members. Volumes available for control surfaces, actuators, and research instrumentation, shall be identified.

- 2.2.5 Estimate stability characteristics including estimates for aeroelastic effects with the research wing in sufficient depth to assure compatibility with the NASA DAST vehicle control system.
- 2.2.6 Use existing BQM-34F data and data available from NASA to establish design criteria of the modified vehicle.
- 2.2.7 Establish wing placement and allowable C.G. travel based on existing or estimated data.
- 2.2.8 Estimate flight performance and maneuvering capabilities of the modified vehicle.
- 2.2.9 Establish preliminary wing stiffness requirements to provide satisfactory static aeroelastic characteristics.
- 2.2.10 Develop preliminary structural design loads.
- 2.2.11 Prepare preliminary layouts for wing and required BQM-34F structural modifications. Layouts shall identify structural concepts and include material type, thickness and ply orientation as applicable.
- 2.2.12 Conduct preliminary wing stress analysis.
- 2.2.13 Conduct preliminary wing flutter analysis.
- 2.2.14 Prepare dimensional layouts of wing, control surface and wing fuselage attachment.

APPENDIX B
MONTHLY PROGRESS REPORTS



TITLE: Study of the Feasibility Aspects of Flight Testing an Aeroelastically Tailored Forward Swept Research Wing on a BQM-34F Drone Vehicle

SUBJECT: Technical Progress Report for 13 November to 13 December 1978

Initial planning, study task assignments and work schedule were accomplished with the principle engineers assigned to this program.

A geometric and dimensional matrix with 27 wings and three forward sweep angles, three aspect ratios and three wing areas was developed. The locus of the 0.25 m.a.c. position for the subject wing matrix was also determined.



Monthly Technical Letter Progress Report - Swept Forward Wing Feasibility Study -
NASA Contract NAS1-15624

This report describes the progress of the program for December 1978 and is the second monthly report as required by the above contract. (Sales Order 15066, Part III, Item B).

The work in the technical areas described below was performed for the purpose of establishing feasible swept forward wing configurations and their locations on the BQM-34F drone.

AERODYNAMICS: A wing planform geometry parametric analysis was conducted to determine the locus of the quarter-point of the mean aerodynamic chord with wing position on the BQM-34F. Planform parameters selected were aspect ratios 4, 5 and 6 with leading edge sweep angles from -20 to -36 degrees and wing areas from 25 to 36 square feet. The planform areas were then utilized in a longitudinal stability parametric study combining wing, body, and horizontal tail contributions. This study provides a preliminary indication of the required center of gravity location for various wing positions for a fixed minimum stability margin of 15%. The above center of gravity data was passed to the mass properties group in order to determine ballast requirements.

MASS PROPERTIES: The wing weights for 27 wings were estimated by imperial formula. These 27 wings represent the number of possible wing combinations based on the ranges of aspect ratio, sweep and wing area to be considered in this feasibility study. This wing weight matrix is presently being combined with the required C.G. data from aerodynamics (stability and control), for various wing positions, to determine the ballast required matrix. The ballast requirements will be then passed to the stress group and structural dynamics group for loads and structural evaluation as to the adequacy of the existing airframe to support the revised mass distribution.

STRESS ANALYSIS: The approach for stress analysis which will be followed is summarized as follows:

- (1) Determine preliminary fuselage reactions for complete range of wing configurations under study.
- (2) Evaluate results of (1) for approximate allowable reactions.
- (3) Evaluate structural upper limit for ballast in forward fuselage and determine feasibility of fuselage beef-up if required.
- (4) Perform Asop-3 and Fastop computerized analysis of a selected wing configuration.

STRUCTURAL DYNAMICS: Initiated structural design criteria and loads evaluation for wing positions and configurations considered in this study. Established contact with AFFDL/FBRB (T. Harris, 53297) to request an allotment of AFFDL computer time (Cybernet Cyber-175) in the use of Fastop-3. This computer program will be utilized and evaluated in the design analysis (Stress, Flutter and Static Aeroelastic) of the swept forward wing program. This request has been granted up to a budget of \$2000. See attached TRA letter.

DESIGN: Preliminary structural layout has been prepared to access the feasibility of fuselage attachment of a -20° swept forward wing, 25 square feet, span 10 feet, aspect ratio 4.

Work to be performed in next reporting period (January 1979):

- (1) Continue ballast determination for wing configuration matrix.
- (2) Determine wing attachment loads. Determine fuselage loads due to ballast requirements.
- (3) Evaluate Fastop-3
- (4) Evaluate recently received report AFFDL-TR-78-116, "Aeroelastic Stability and Performance Characteristics of Aircraft with Advanced Composite Swept Forward Wing Structures".
- (5) Continue design layouts for wing attachment
- (6) Determine allowable structural ballast installation

POTENTIAL PROBLEMS: None during the second reporting period.

 **TELEDYNE
RYAN AERONAUTICAL**

2701 HARBOR DRIVE

SAN DIEGO, CALIFORNIA 92138

(714) 291-7311 TWX (910) 335-1180

13 December 1978

Air Force Flight Dynamics Laboratory
Wright Patterson Air Force Base
Ohio 45433

Attention: AFFDL/FBRB (T. Harris, 53297)

Dear Terry,

Teledyne Ryan is currently under contract to NASA Langley, Contract No. NAS1-15624, to study the feasibility of adopting a swept forward composite wing design to the BQM-34F target drone. The wing will be designed for a cruise Mach number of 0.9 at 30,000 feet and have approximately the following characteristics:


Reference Wing Area, Sq. Ft.	25 to 36
Airfoil	Supercritical
t/c	.05
Aspect Ratio	4 to 7
Span Ft.	11 to 17
Leading Edge Sweep, Deg.	-20 to -35
Taper Ratio	0.4

The requirements for aeroelastic tailoring to provide satisfactory static aeroelastic and flutter characteristics make FASTOP-3 an ideal tool for use in this study. The Teledyne Ryan Aeronautical Co., (TRA) is currently using an IBM version of both FASTOP-1 and ASOP-3, however, we have been unable to exercise the FOP portion of FASTOP-1 to a satisfactory conclusion.

From our telephone conversation, it is understood that a limited amount of computer time, if any, could be allotted to TRA for CYBERNET CYBER-175. To make effective use of allotted time we could debug our model on our in-house ASOP-3 program. This would also be useful to help you evaluate FASTOP-3.

Request that TRA be allotted approximately 0.5 to 1.0 hours of CYBER-175 CPU time for our swept forward composite wing study program.

Very truly yours,

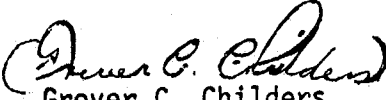
Grover C. Childers
Group Engineer
Structural Dynamics



MONTHLY TECHNICAL LETTER PROGRESS REPORT - SWEEP FORWARD WING FEASIBILITY STUDY -
NASA CONTRACT NAS1-15624

This report describes the progress of the program for January 1979 and is the third monthly report as required by the above contract (Sales Order 15066, Part III, Item B).

AERODYNAMICS: A second iteration was performed in the longitudinal stability parametric study utilizing more refined wing aerodynamic center location data and reduced downwash at the horizontal tail. The wing a.c. location was based on lifting line theory and the downwash derivative (ϵ_α) reduced by 0.10. This was based on comparison of downwash characteristics calculated by an empirical method with trends indicated by test data for a forward swept wing wind tunnel model. In addition, the longitudinal static stability margin was reduced from 0.15 to 0.10. The combined effect of these corrections resulted in an allowable aft shift in center of gravity location of approximately five (5) inches for all the wing planforms being considered.

MASS PROPERTIES: Revised ballast requirements for the ranges in wing sweep, aspect ratio and wing area were calculated versus wing positions on the fuselage. Ballast in amounts of 200 to 300 pounds, located at the nosecone bulkhead were required, with wing position being the most sensitive parameter. These large requirements for nose ballast raised concerns for the c.g. positions at air launch gross weight and at recovery weight. The requirement that the recovery c.g. fall between the existing parachute riser locations was the critical case and could not be met without jettisoning ballast at recovery. The amount of jettisonable ballast (up to 90 pounds) increases as the wing position moves forward and the forward sweep increases. The droppable ballast situation was coordinated with Don Gatlin at NASA DFRC (Edwards AFB, CA.) who in turn contacted LCOL. Kellock in the USAF Safety Office who saw no problem in dropping lead shot.

STRESS ANALYSIS: Fuselage reactions for -20° swept forward 25 sq. ft. wing are being evaluated. Fuselage structural reinforcement feasibility and requirements are being evaluated for up to 300 pounds of ballast.

STRUCTURAL DYNAMICS: Determined wing shear, moment and torque curves for the purpose of evaluating wing root reactions at the wing/fuselage interface. Performed further coordination with TRA computing facility and AFFDL concerning use of AFFDL computer time in performing FASTOP-3 analysis (see attached letter).

DESIGN: Proceeded with evaluation of design layout of -20° swept forward wing, 25 sq. ft., aspect ratio 4 in two positions on the fuselage. The most aft location with the leading edge intersecting the fuselage centerline at $X_F 260.4$ which requires 175 pounds total ballast (0 pounds jettisonable). The most forward wing location with a leading edge intersection with the fuselage centerline at $X_F 252.0$ which requires 280 pounds total ballast (90 pounds jettisonable). The most feasible location for the wing center box is its existing location, picking up the existing ten fuselage attachments (five per side). The wing semi-spans then will be located in relation to the center box considering ballast requirements (most aft is favorable) and structural requirements (most forward favorable).

The possible wing configurations within practical ballast requirements has been narrowed down to one, -20° sweep, 25 sq. ft. area, aspect ratio 4. Two wing positions on the fuselage are currently under consideration with the most forward one appearing to be the most favorable selection.

Work to be performed in the next reporting period (February 1979):

- 1) Select wing position on fuselage
- 2) Determine wing panel point loads
- 3) Start aeroelastic tailoring analysis
- 4) Continue fuselage beef-up requirements analysis
- 5) Detail design layout of wing on fuselage in the selected position

DEPARTMENT OF THE AIR FORCE
AIR FORCE FLIGHT DYNAMICS LABORATORY
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433



REPLY TO
IN OFFICE

FBR (T. M. Harris, 53297)

9 January 1979

SUBJECT: CYBERNET NOS/BATCH Resources Available for FASTOP-3

TO: Teledyne Ryan Aeronautical
Attn: Mr. Jack C. Grams
Engr. Dept 340-4A
2701 Harbor Drive
San Diego, CA 92112

1. In response to your letter of 13 December 1978 requesting an allocation of CDC CYBERNET resources for the application of FASTOP-3 to a forward swept BQM-34F wing, Control Data Corporation is setting up an account for you. At this time, your account limit is \$2000 worth of CYBERNET computer time. In return, AFFDL/FBR would like a description of your results, computer run times and any problems encountered. In addition, we would be happy to inspect your input listings for errors. Please contact Mr. Jerry Wesbecher of Control Data Corporation (513-294-1751) for information on setting up your account and logging on the CYBERNET NOS/BATCH system.

2. The following information should be helpful in your effort to use FASTOP-3 on the CYBERNET system:

a. The SOP and FOP absolute binaries are now on magnetic tape. The last four pages of the attachment presents examples of using this tape.

b. FASTOP-3 requires intermediate data storage (SOP-to-FOP, SOP-to-SOP, etc.). Reservation of tapes at CDC for this storage can be arranged through Mr. Wesbecher.


c. You should use the NOS/BATCH priority P2 whenever possible. This priority gives overnight turnaround but is cheaper than other priorities. (9 cents per unit for P2 -vs- 15 cents per unit for P4).

d. The first run through SOP for the NOS/BATCH sample problem, the composite skin intermediate complexity wing, was accomplished while expending 443 units of CYBERNET resources. Under priority P2, this would cost $443 \times \$0.09 = \40 . With one hundred finite elements, this sample problem is relatively small. One may initially estimate that each pass of your models through SOP or FOP will cost \$200. Thus, your \$2000 allotment may give ten FASTOP-3 runs at priority P2. Of course, after the first few runs you will be better able to estimate the extent of the funding available.

e. We are sending you a set of CYBERNET manuals in a separate package. Together with information from your local CYBERNET installation, these manuals should enable you to use NOS/BATCH without major problems.

Dale E. Cooley
DALE E. COOLEY
Technical Manager
Aeroelastic Group
Analysis & Optimization Branch

Atch: Sample FASTOP-3 JCL



MONTHLY TECHNICAL LETTER PROGRESS REPORT - SWEEP FORWARD WING FEASIBILITY STUDY -
NASA CONTRACT NASI-15624

This report describes the progress of the program for February 1979 and is the fourth monthly report as required by the above contract (Sales Order 15066, Part III, Item B).

AERODYNAMICS: Longitudinal control effectiveness for the BQM-34F with the selected forward swept wing (-20° sweep, 25 sq.ft., A.R. 4) was evaluated to insure that the control sensitivity ($g's/\delta e$) does not exceed levels of approximately 8 to 10 for a reduced static stability margin of 10%. The resulting values were -2.2 and -7.5 $g's/\delta e$ for altitudes of 30,000 feet and sea level, respectively. Estimated dihedral effect for the selected wing was compared with test results for a NASA wind tunnel model with forward sweep. This comparison confirms that the wing contribution to dihedral effect is negative, or in terms of rolling moment with sideslip $c_{l\beta}$ is positive.

MASS PROPERTIES: Recalculated ballast required for selected wing and wing location (leading edge intersection with fuselage centerline at F.S. 252.4). The total ballast required is 257.40 pounds of which 94.4 pounds must be jettisonable to provide a proper recovery configuration if alternate means of solving the problem are not used. A preliminary gross weight statement was made on the selected wing/34F configuration resulting in a vehicle gross weight of 2071.82 pounds. The subsequent horizontal center of gravity travel resulted in a stable flight vehicle through body attitudes of 0° to $+38^\circ$.

STRESS ANALYSIS: Performed fuselage stress analysis that determined that the existing fuselage wing support frames are structurally adequate to support the wing providing that a relatively stiff wing root rib is utilized to distribute wing loads to the five fuselage support frames. Performed analysis of forward fuselage to determine configuration of exterior beef-up required to support added nose ballast. Prepared finite element model of wing and performed ASOP-3 debugging runs.

STRUCTURAL DYNAMICS: Performed fuselage loads analysis for the critical bending condition of main parachute deployment and added ballast of 257.4 pounds at F.S. 118. Performed box beam analysis of wing leading edge torque box to establish wing trial shear web location which is 40% wing chord to achieve a center of twist at the 31% chord. Established structural arrangement of wing for a first trial optimization process using ASOP-3 computer program. Determined wing loads for the high angle of attack condition at $N_z = 6.0$. Chordwise distribution was taken from theoretical supercritical wing data and spanwise distribution assumed elliptical. Also determined wing loads for the 2.0 g maneuver condition using a rectangular chordwise distribution.

DESIGN: Completed design layout of wing in selected fuselage location. Proposed ballast beef-up layout completed using four steel external straps. Design study underway to provide a parachute riser restraint during recovery to eliminate the need for jettisonable ballast.

Conducted program review with NASA representative Hal Murrow. Work to be performed in the next reporting period (March 1979):

- 1) Continue structural arrangement of wing using ASOP-3 and FASTOP-3 computer programs.
- 2) Continue fuselage ballast beef-up stress analysis.
- 3) Continue design study of riser restraint configuration to remove jettisonable ballast.
- 4) Coordinate with NASA Edwards on configuration of DAST drone equipment for possible ballast installation.

Monthly Technical Letter Progress Report - Swept Forward Wing Feasibility Study - NASA Contract NAS1-15624

This report describes the progress of the program for March 1979 and is the fifth monthly report as required by the above contract (Sales Order 15066, Part III, Item B).

AERODYNAMICS:

In the previous month's (February) progress report, it was reported that the forward swept wing's contribution to $C_{L\beta}$ is positive, or opposite to that of normally swept back wings. This effect was qualitatively evaluated utilizing the basic BQM-34F six degree of freedom simulation program. At all flight conditions evaluated, the differential elevon excursion required to execute turns and turn reversals was less for the forward swept wing than for the basic BQM-34F, indicating that the positive increment in $C_{L\beta}$ may not have an adverse effect on vehicle operation in the research configuration. Static elasticized stability derivatives were evaluated for BQM-34F empennage contributions for a range of altitudes and Mach number. These derivatives can be added to the wing elastic derivatives, if significant, to obtain estimates of the stability characteristics of the total configuration.

MASS PROPERTIES:

No further work was performed during this period pending selection of wing structural and material configuration.

STRESS ANALYSIS:

Established three candidate wing designs for evaluation using ASOP-3 computer program. These are an all aluminum (baseline), all graphite and graphite forward section/Kevlar trailing section. Material thickness, ply orientation and structural weight are being evaluated at this time. Submitted contractor prepared FASTOP-3 structural optimization input for review by AFFDL in preparation for utilization of AFFDL supplied computer time for performing FASTOP-3 optimization computations. AFFDL approved of this contractors plan with the comment that our plan was the most complete and best they have seen so far in their FASTOP evaluation program. Computer runs (ASOP-3) have been made for wing twist restraint at five wing stations. Separate computer runs have been started which will evaluate wing stiffness for camber.

STRUCTURAL DYNAMICS:

Generated load set for -3g load factor as called for in the statement of work. Evaluated camber change for the all graphite wing optimized for strength and deflection constraints on ASOP-3 computer program. Results were that chordwise deflection increased 100%. Wing studies will continue on the three different material designs. A forth evaluation of incremental weight required to hold camber (chordwise deflection) within $\pm 10\%$ on the all graphite wing will be conducted. For a specific design, camber changes can be handled by jig shape to obtain a specific camber at the design maneuver/cruise point.

DESIGN:

Visited NASA/Edwards Air Force Base 23 March 1979 to ascertain volume available in DAST BQM-34F for ballast installation and also DAST/B-52 launch plane interface. Ballast will have to be installed externally since the internal nose area of the drone is not available for any additional installations. The purpose of viewing the B-52 pylon/drone interface was to ascertain whether the installation of a riser restraint would be possible in order to eliminate the need for jettisonable ballast. We will proceed with a proposed riser restraint design since there appears to be an adequate amount of room at the interface. Photographs along with weight and balance sheets were obtained which will be beneficial in proceeding with the swept forward wing/BQM-34F study.


Work to be performed in the Next Reporting Period (April 1979):

1. Complete ASOP-3 Aeroelastic tailoring analysis for the three candidate wings.
2. Update flight and mission performance estimates.
3. Submit chosen wing/material configuration to AFFDL for FASTOP-3 evaluation.
4. Start preparation of final drawings.
5. Start summary of results for final technical report.


APPENDIX C
FINAL FASTOP-3 STRUCTURAL ANALYSIS



APPENDIX D
FASTOP-3 FLUTTER ANALYSIS

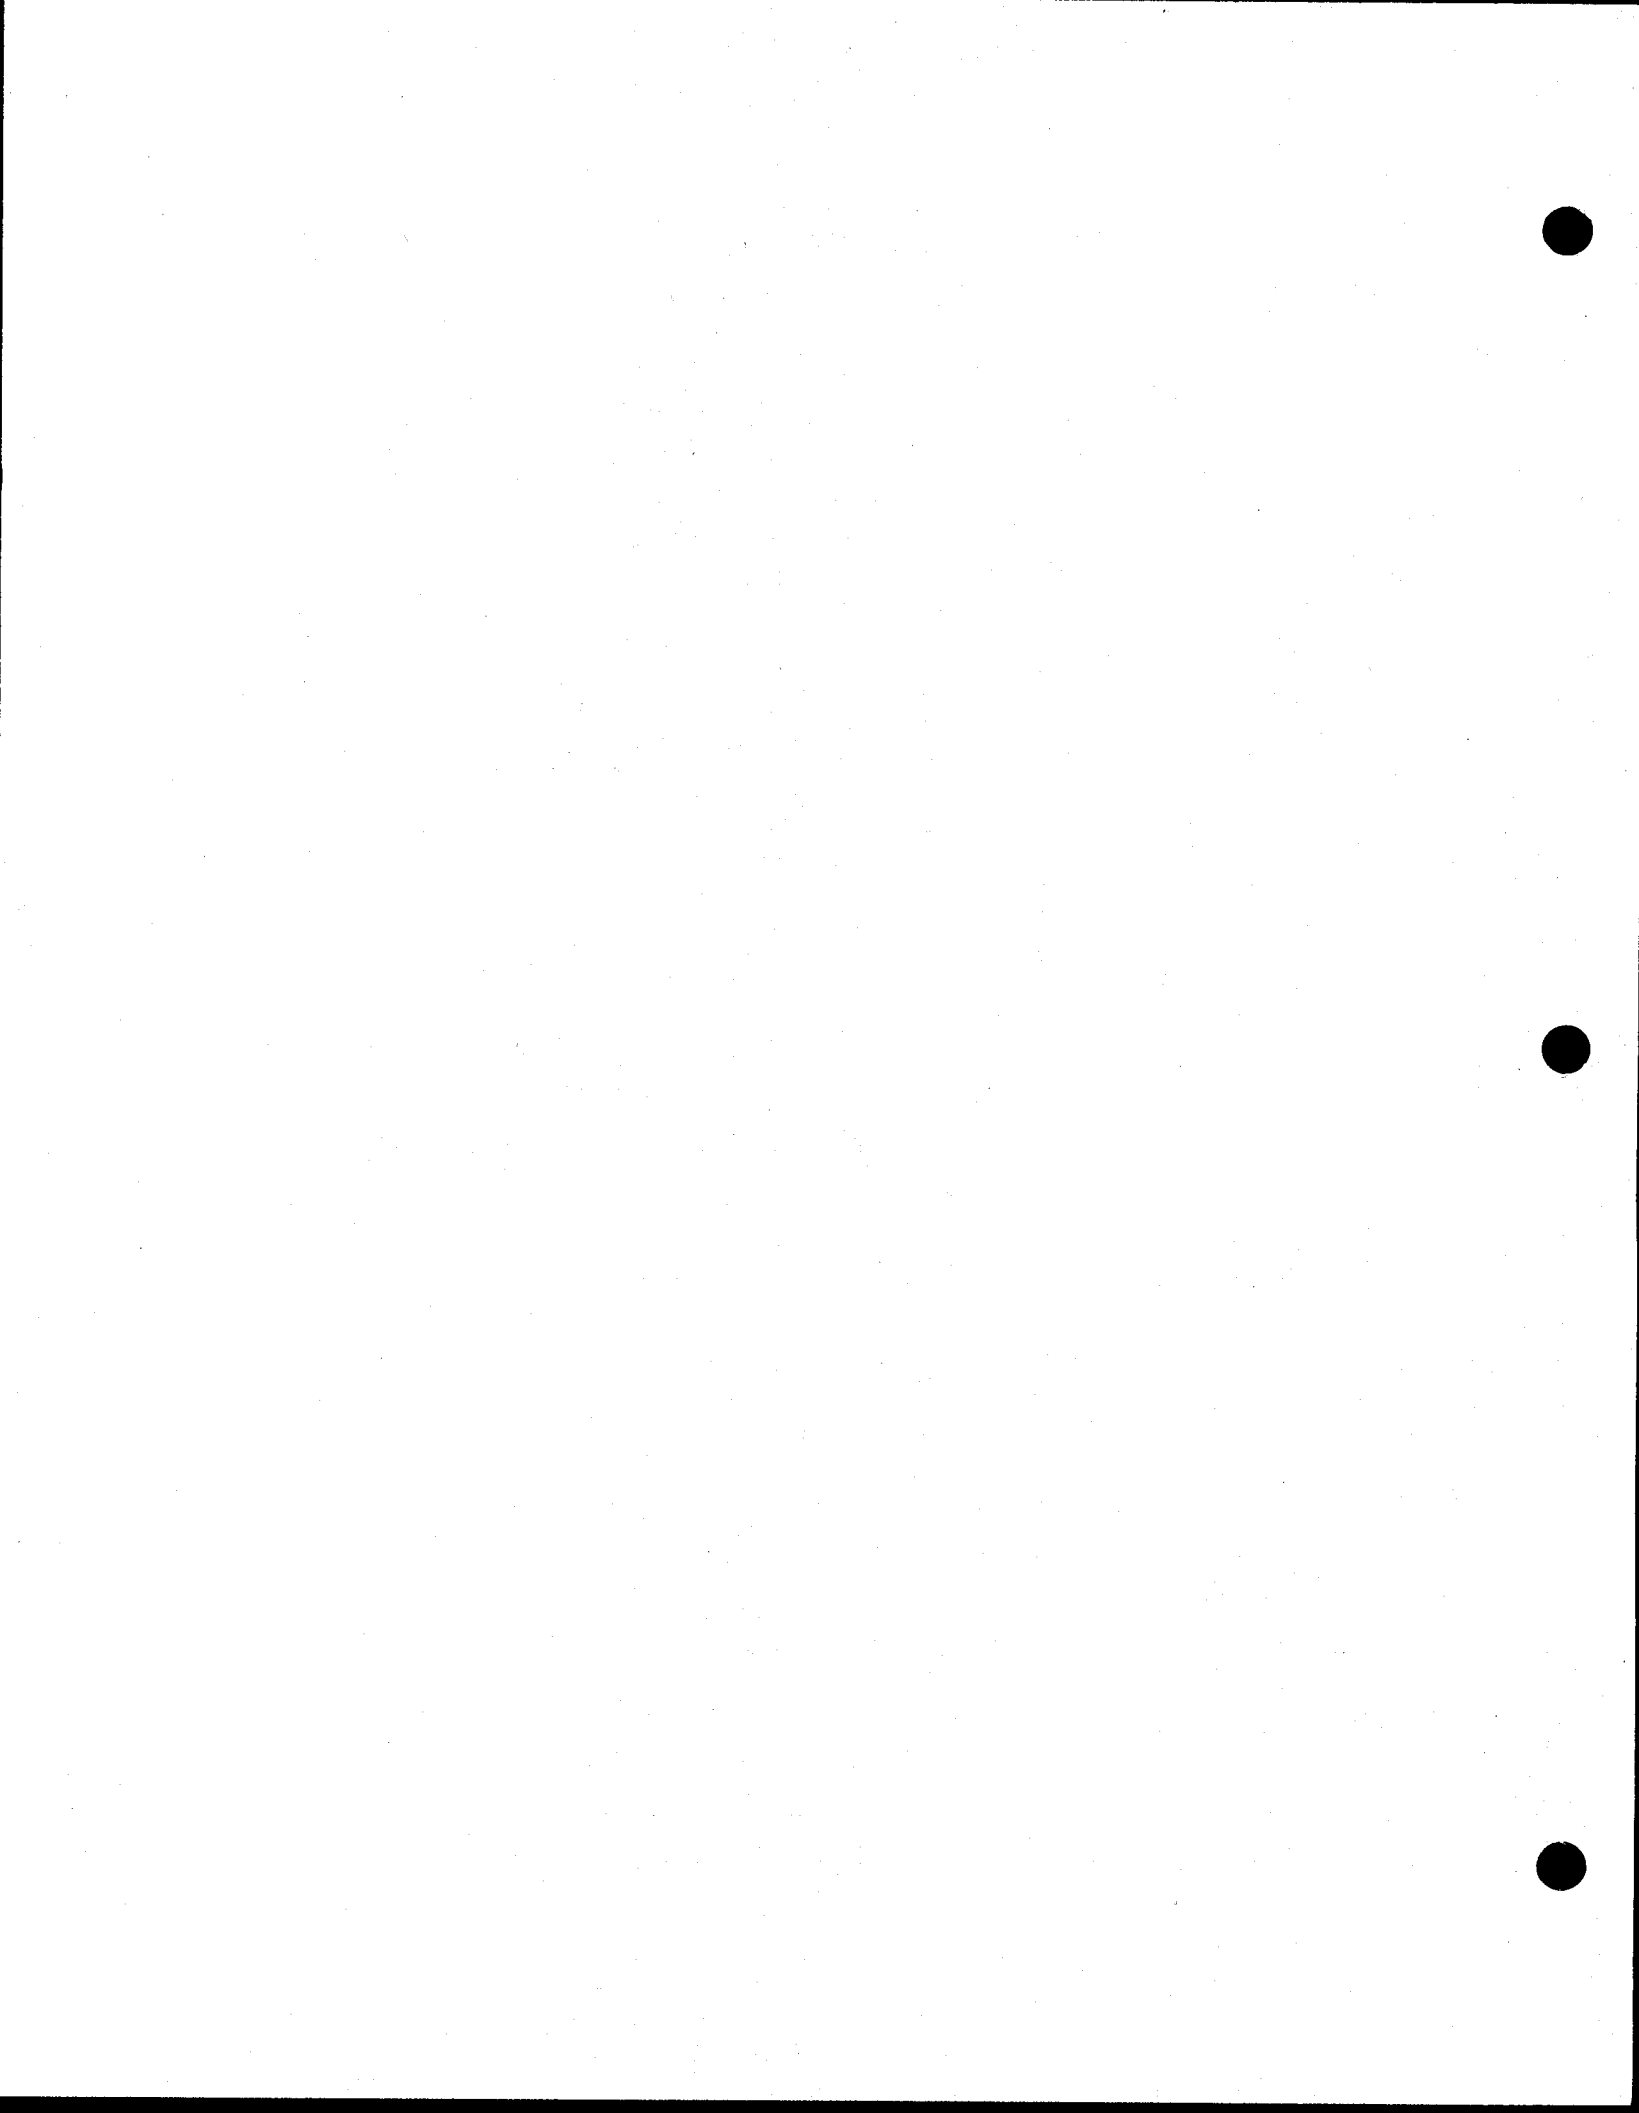

APPENDIX E
FUSELAGE EQUIPMENT COMPARTMENT AREA

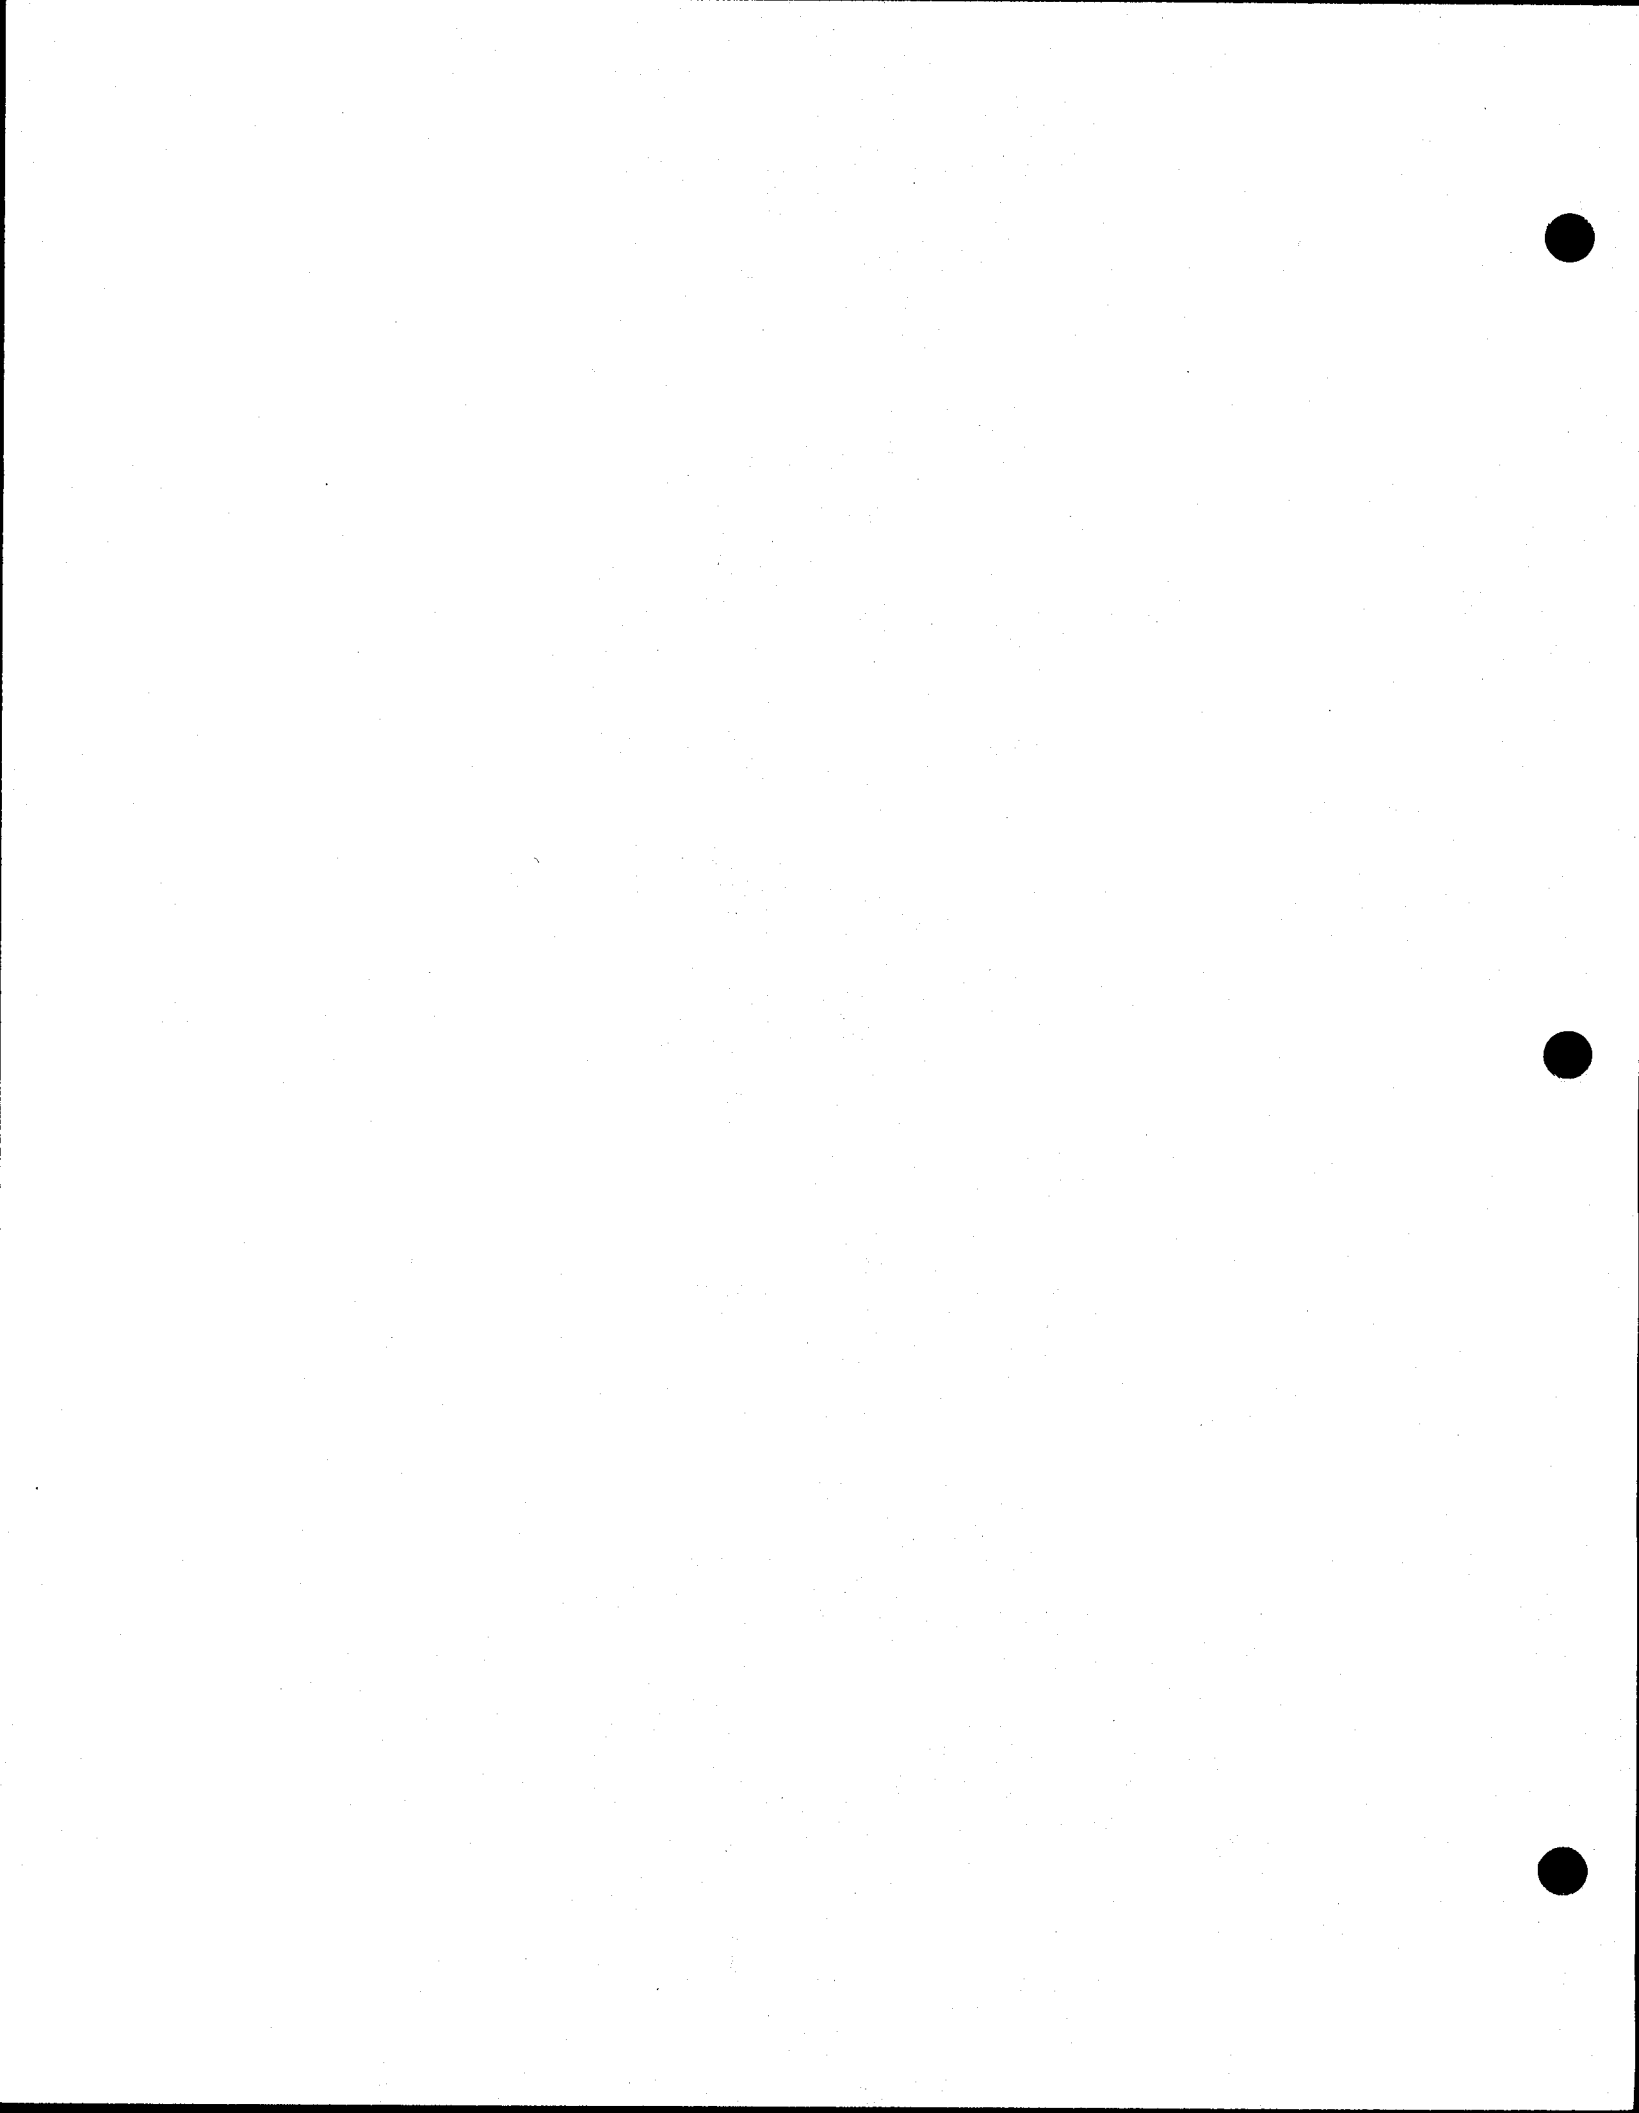

ORIGINAL DESIGN $M = -219000$ IN. LB. (ULT)
 NEW DESIGN $M = 70976 \times 1.25 = -88720$ IN. LB. (ULT)
 ELEMENT 33 CRITICAL = 1858 PSI
 MARGIN OF SAFETY > 2.00
 $I_{REQ.} = \frac{I_{DES} \times M_{NEW}}{M.S. \times M_{ORIG.}}$

$$I_{REQ} = \frac{55.17 \times 88720}{2 \times 21900} = 111.75 \text{ IN}^4$$

$$\Delta I = I_{REQ} - I_{DES}$$

$$\Delta I = 111.75 - 55.17$$

$$\Delta I = 56.58 \text{ IN}^4$$

$$A_U = \frac{4.67}{6.1} \times A_L = .765 A_L \text{ IN}^2$$

$$\Delta I = A_U \cdot 6.1^2 + A_L \cdot 4.67^2$$

$$56.58 = 6.1^2 \times \frac{4.67}{6.1} A_L + A_L \cdot 4.67^2$$

$$A_L = 1.12 \text{ IN}^2$$

$$A_U = .86 \text{ IN}^2$$

ALUMINUM ALLOY

A_U = Upper Strap


A_L = Lower Strap

STRAPS PER SIDE: LOWER: .56 IN² ALUMINUM

.187 IN² STEEL

UPPER: .43 IN² ALUMINUM

.14 IN² STEEL

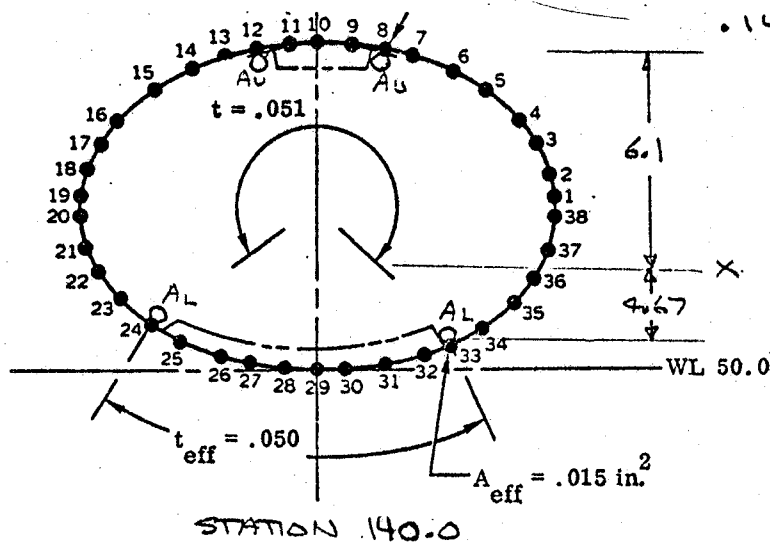

$$I_x = 55.17 \text{ IN}^4$$

$$\bar{y} = 5.699 \text{ IN}$$

$M_{ORIG.} = -112560 \text{ IN. LB. (ULT)}$
 $M_{NEW} = -239643 \times 1.25 = -299554 \text{ IN. LB. (ULT)}$
 $STRESS = -5017 \text{ PSI (ULT) ELEMENT 47}$
 $M.S. = .45 \quad I_{ORIG} = 135.783 \text{ IN}^4$

$$I_{REQ} = \frac{135.783 \times 299554}{1.35 \times 112560}$$

$$I_{REQ} = 267.7 \text{ IN}^4$$

$$\Delta I = 267.7 - 135.783$$

$$\Delta I = 131.9 \text{ IN}^4$$


$$A_U = \frac{6.108}{7.252} A_L$$

$$131.9 = 7.252^2 \times \frac{6.108}{7.252} A_L + 6.108^2 A_L$$

$$A_L = 1.616 \text{ IN}^2 \quad A_U = 1.36 \text{ IN}^2$$

$A_L \text{ PER SIDE} = .80 \text{ IN}^2 \text{ ALUMINUM}$
 $.269 \text{ IN}^2 \text{ STEEL}$

$A_U \text{ PER SIDE} = .68 \text{ IN}^2 \text{ ALUMINUM}$
 $.226 \text{ IN}^2 \text{ STEEL}$

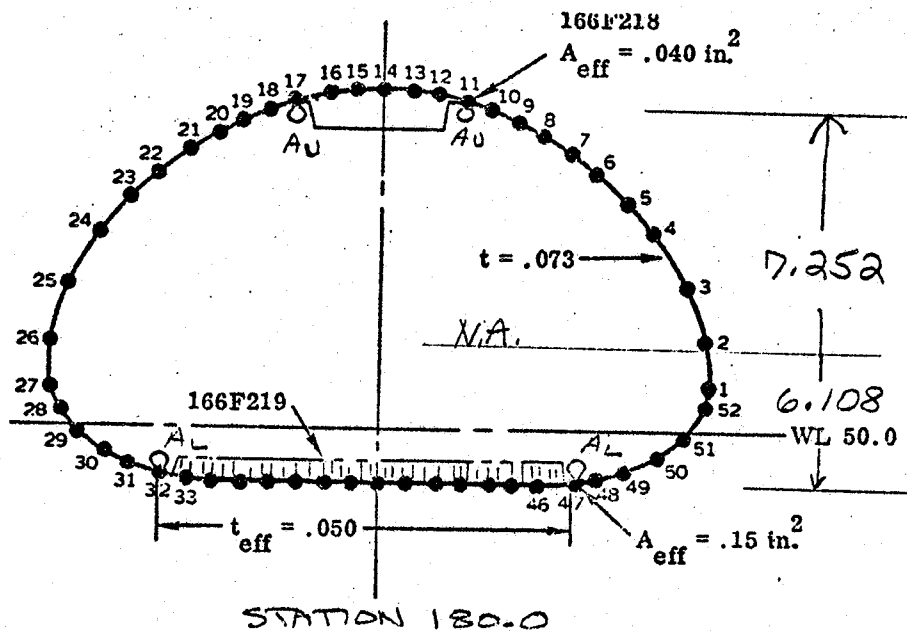

$M_{ORIG} = -185320 \text{ IN. LB. (ULT)}$ $I_{ORIG} = 144.72 \text{ IN}^4$
 $M_{NEW} = -345663 \times 1.25 = -432079 \text{ IN. LB (ULT)}$
 CRITICAL STRESS = $-4964 \text{ PSI (ULT) ELEM. 54}$
 $M.S. = .49$

$$I_{REQ} = \frac{144722 \times 432079}{1.4 \times 185320} = 241 \text{ IN}^4$$

$$\Delta I = 241 - 144.72 = 96.3 \text{ IN}^4$$

$$A_U = \frac{3.87}{7.11} A_L$$


$$96.3 = 7.11^2 \times \frac{3.87}{7.11} A_L + 3.87^2 A_L$$

$$A_L = 2.26 \text{ IN}^2 \quad A_U = 1.23 \text{ IN}^2$$

STRAPS PER SIDE:

LOWER : 1.16 IN^2 ALUMINUM
 $.386 \text{ IN}^2$ STEEL

UPPER : $.61 \text{ IN}^2$ ALUMINUM
 $.20 \text{ IN}^2$ STEEL

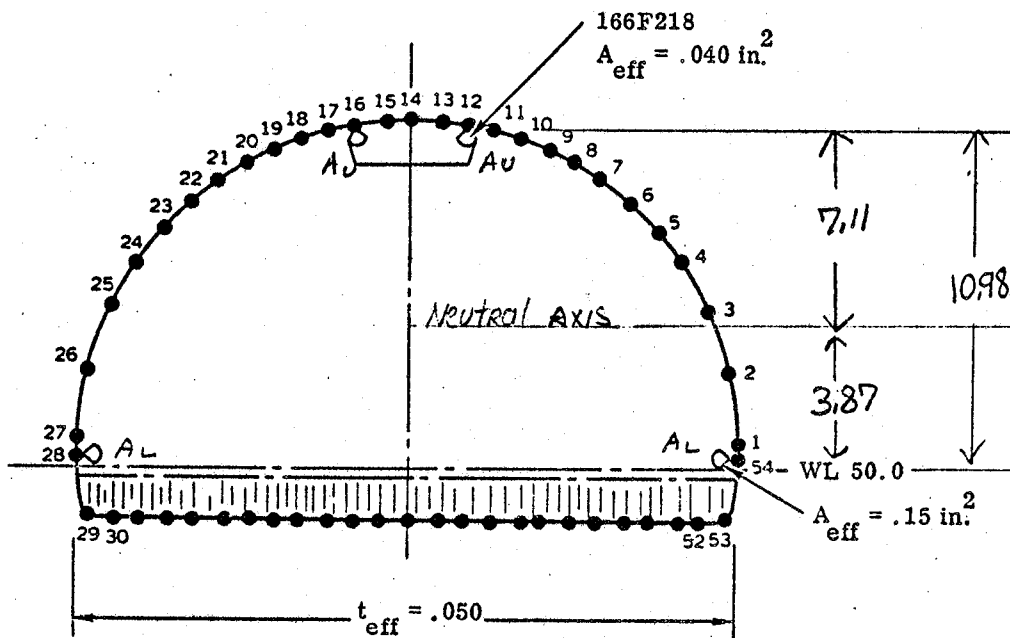

STATION 200.0

$M_{ORIG} = -308770 \text{ IN. LB. (ULT)}$
 $M_{NEW} = 504850 \times 1.25 = 631063 \text{ IN. LB (ULT)}$
 $STRESS = -15114 \text{ PSI (ULT) ELEMENT 52}$
 $M.S. = .19 \quad I_{ORIG.} = 124.8 \text{ IN}^4$

$$I_{REQ} = \frac{124.8 \times 631063}{1.1 \times 308770} = 231.8 \text{ IN}^4$$

$$\Delta I = 231.8 - 124.8 = 107.07 \text{ IN}^4$$


$$A_U = \frac{7.99}{5.86} A_L$$

$$107.07 = 5.86^2 \times \frac{7.99}{5.86} A_L + 7.99^2 A_L$$

$$A_L = .967 \text{ IN}^2 \quad A_U = 1.32$$

$A_L \text{ PER SIDE} = .483 \text{ IN}^2 \text{ ALUMINUM}$
 $\quad \quad \quad .16 \text{ IN}^2 \text{ STEEL}$

$A_U \text{ PER SIDE} = .659 \text{ IN}^2 \text{ ALUMINUM}$
 $\quad \quad \quad .219 \text{ IN}^2 \text{ STEEL}$

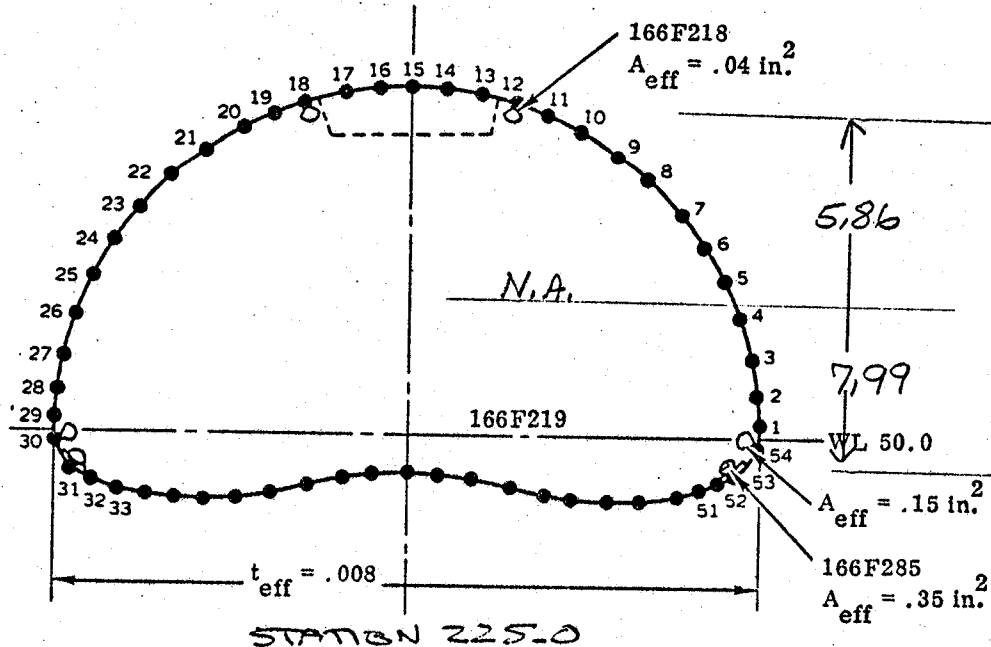

$M_{ORIG} = -358970 \text{ IN. LB. (ULT)}$
 $M_{NEW} = -565607 \times 1.25 = 707009 \text{ IN. LB. (ULT)}$
 $STRESS = -16954 \text{ PSI (ULT) ELEMENT 51}$

$M.S. = 0.19$ $I_{ORIG} = 170.5 \text{ IN}^4$

$$I_{REQ} = \frac{170.5}{1.1} \times \frac{707009}{358970} = 305.2 \text{ IN}^4$$

$$\Delta I = 305.2 - 170.5 = 134.7 \text{ IN}^4$$


$$A_U = \frac{8.05}{6.19} A_L$$


$$134.7 = \frac{8.05}{6.19} \times 6.19^2 A_L + 8.05^2 A_L$$

$$A_L = 1.175 \text{ IN}^2 \quad A_U = 1.53$$

$A_L \text{ PER SIDE} = .587 \text{ IN}^2 \text{ ALUMINUM}$
 $.196 \text{ IN}^2 \text{ STEEL}$

$A_U \text{ PER SIDE} = .76 \text{ IN}^2 \text{ ALUMINUM}$
 $.25 \text{ IN}^2 \text{ STEEL}$

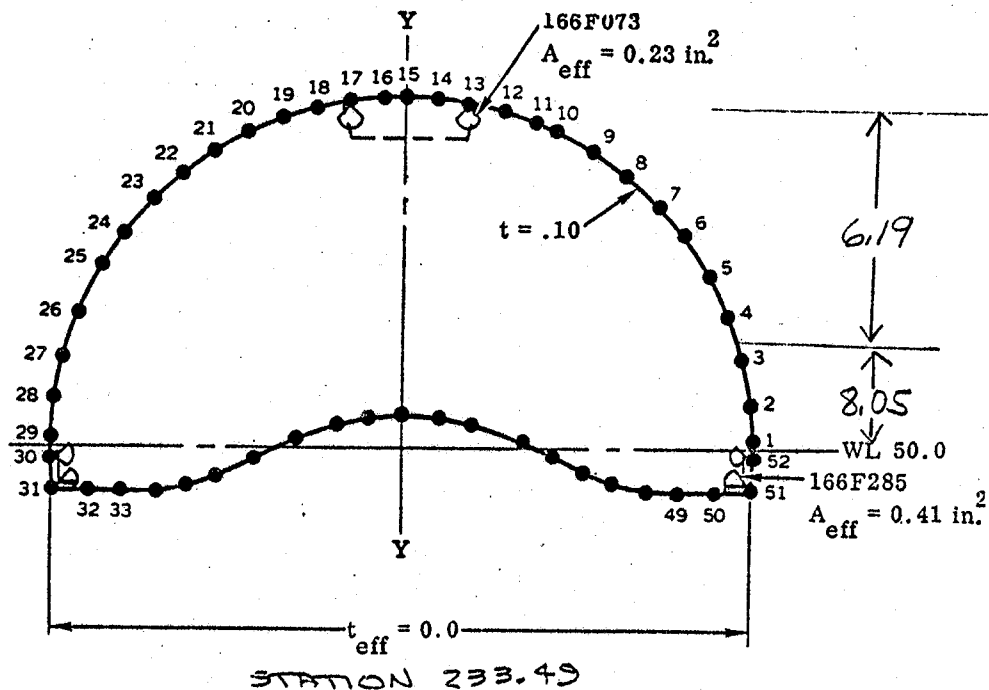

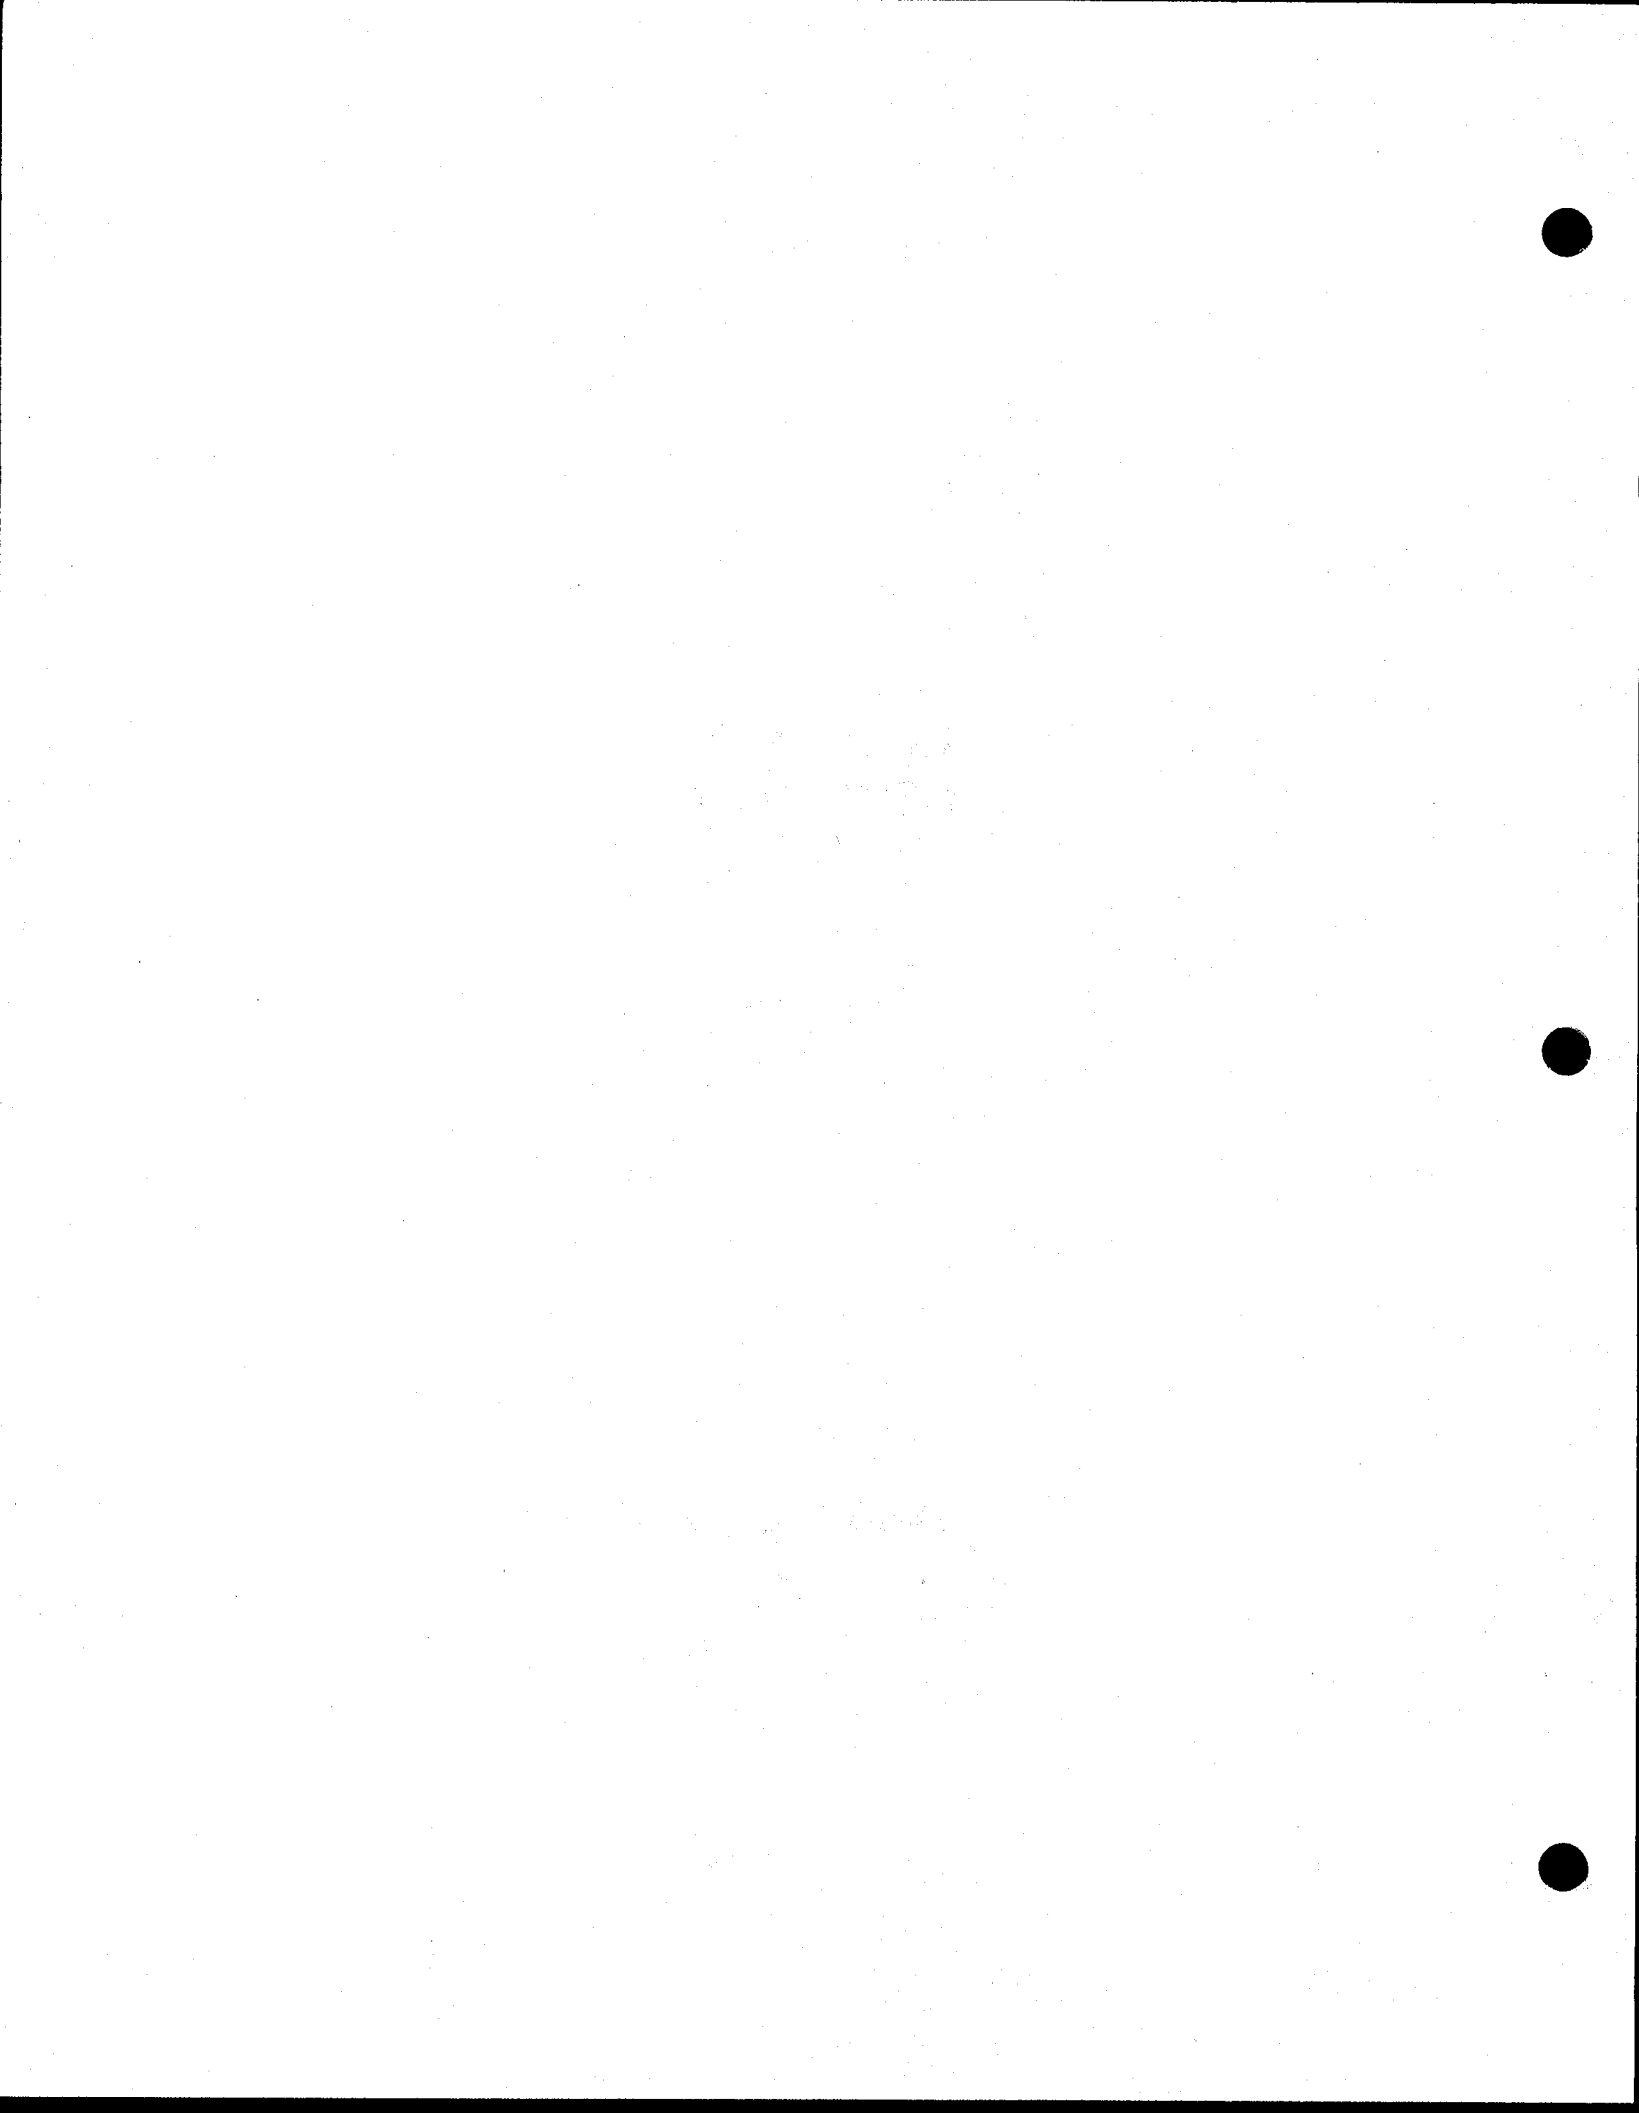

FROM FASTOP, INITIAL TIME

ELAPSED TIME IS	0	MINUTES.	2.56	SECONDS
INCREMENTAL TIME IS	0	MINUTES.	0.00	SECONDS

PROGRAM LISTING OF CARD DATA

CARD1.....2.....3.....4.....5.....6.....7.....8
 NO. 1234567890123456789012345678901234567890123456789012345678901234567890

1 SOP 6 PACAGE, LINES1
 2 NASA FORWARD SWEEP RESEARCH WING ON A BQM-34F VEHICLE, SOP(SA, S0)
 3 EEROELASTICALLY TAILORED WITH ADVANCED COMPOSITES- SMOOTH 7
 4 0 KTITLE
 5 0 2 3 0 5 -6
 6 0 0 0 0 0 0 0 0 0 0
 7 0 0 0 0 0 0 0 0 0 0
 8 SA00 AUTOMATED STRUCTURAL ANALYSIS MODULE
 9 S0 NASA RESEARCH WING. SOP TO FOP PASS
 10 1 0 0 0 0 0 0 8 9 0 KLUES(I), I=01,10
 11 0 0 0 14 15 -16

12 SOPMEMRS
 13 1 0.0 0.0 4
 14 0 0 0 ITENS,ICOMP,ISHEAR

SA01 LABEL (I),	GEOMETRY,BOUNCOND,	GEOMETRY	COORD. AND BOUND. COND.		
16	1247.701786	60.000000	56.721653	111	00000010
17	2				00000020
18	3244.273786	60.000000	56.992597	111	00000030
19	4244.273786	60.000000	56.676166	111	00000040
20	5240.845786	60.000000	57.201573	111	00000050
21	6240.845786	60.000000	56.523225	111	00000060
22	7237.417786	60.000000	57.304413	111	00000070
23	8237.417786	60.000000	56.455324	111	00000080
24	9233.989786	60.000000	57.266178	111	00000090
25	10233.989786	60.000000	56.476419	111	00000100
26	11231.418786	60.000000	57.063794	111	00000110
27	12231.418786	60.000000	56.581896	111	00000120
28	13230.561786	60.000000	56.750000	111	00000130
29	14				00000140
30	15251.663304	55.000000	56.718111	111	00000150
31	16				00000160
32	17247.806970	55.000000	57.022910	111	00000170
33	18247.806970	55.000000	56.666940	111	00000180
34	19243.950637	55.000000	57.257998	111	00000190
35	20243.950637	55.000000	56.494889	111	00000200
36	21240.094304	55.000000	57.373688	111	00000210
37	22240.094304	55.000000	56.418504	111	00000220
38	23236.237970	55.000000	57.330675	111	00000230
39	24236.237970	55.000000	56.442235	111	00000240
40	25233.345720	55.000000	57.103003	111	00000250
41	26233.345720	55.000000	56.560891	111	00000260
42	27232.381637	55.000000	56.750000	111	00000270
43	28				00000280
44	29255.624822	50.000000	56.714569	111	00000290
45	30				00000300
46	31251.340155	50.000000	57.053223	111	00000310

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

47	32251.340155	50.000000	56.657715	111	00000320
48	33247.055488	50.000000	57.314422	111	00000330
49	34247.055488	50.000000	56.466553	111	00000340
50	35242.770822	50.000000	57.442962	111	00000350
51	36242.770822	50.000000	56.381684	111	00000350
52	37238.486155	50.000000	57.395172	111	00000370
53	38238.486155	50.000000	56.408050	111	00000390
54	39235.272655	50.000000	57.142212	111	00000390
55	40235.272655	50.000000	56.539886	111	00000400
56	41234.201488	50.000000	56.750000	111	00000410
57	42				00000420
58	43259.586339	45.000000	56.711027	111	00000430
59	44				00000440
60	45254.873339	45.000000	57.083535	111	00000450
61	46254.873339	45.000000	56.648489	111	00000450
62	47250.160339	45.000000	57.370847	111	00000470
63	48250.160339	45.000000	56.438217	111	
64	49245.447339	45.000000	57.512237	111	00000490
65	50245.447339	45.000000	56.344863	111	00000500
66	51240.734339	45.000000	57.459669	111	00000510
67	52240.734339	45.000000	56.373866	111	00000520
68	53237.199589	45.000000	57.181421	111	00000530
69	54237.199589	45.000000	56.518881	111	00000540
70	55236.021339	45.000000	56.750000	111	00000550
71	56				00000550
72	57263.547857	40.000000	56.707485	111	00000570
73	58				00000580
74	59258.406524	40.000000	57.113848	111	00000590
75	60258.406524	40.000000	56.639263	111	00000600
76	61253.265191	40.000000	57.427272	111	00000610
77	62253.265191	40.000000	56.409881	111	00000620
78	63248.123857	40.000000	57.581512	111	00000630
79	64248.123857	40.000000	56.308043	111	00000640
80	65242.982524	40.000000	57.524166	111	00000650
81	66242.982524	40.000000	56.339682	111	00000660
82	67239.126524	40.000000	57.220630	111	00000670
83	68239.126524	40.000000	56.497877	111	00000680
84	69237.841191	40.000000	56.750000	111	00000690
85	70				00000700
86	71267.509375	35.000000	56.703943	111	00000710
87	72				00000720
88	73261.939708	35.000000	57.144161	111	00000730
89	74261.939708	35.000000	56.630038	111	00000740
90	75256.370042	35.000000	57.483696	111	00000750
91	76256.370042	35.000000	56.381545	111	00000750
92	77250.800375	35.000000	57.650786	111	00000770
93	78250.800375	35.000000	56.271223	111	00000780
94	79245.230708	35.000000	57.588663	111	00000790

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
	12345678901	23456789012	34567890123	45678901234	56789012345	67890123456	78901234567	8901234567890
95	80245.230708	35.000000	56.305498	111	00000800			
96	81241.053458	35.000000	57.259839	111	00000810			
97	82241.053458	35.000000	56.476872	111	00000820			
98	83239.661042	35.000000	56.750000	111	00000830			
99	84				00000840			
100	85271.470893	30.000000	56.700401	111	00000850			
101	86				00000850			
102	87265.472893	30.000000	57.174474	111	00000870			
103	88265.472893	30.000000	56.620812	111	00000890			
104	89259.474893	30.000000	57.540121	111	00000890			
105	90259.474893	30.000000	56.353209	111	00000900			
106	91253.476893	30.000000	57.720061	111	00000910			
107	92253.476893	30.000000	56.234403	111	00000920			
108	93247.478893	30.000000	57.653160	111	00000930			
109	94247.478893	30.000000	56.271313	111	00000940			
110	95242.980393	30.000000	57.299048	111	00000950			
111	96242.980393	30.000000	56.455867	111	00000950			
112	97241.480893	30.000000	56.750000	111	00000970			
113	98				00000990			
114	99275.432411	25.000000	56.696859	111	00000990			
115	100				00001000			
116	101269.006077	25.000000	57.204787	111	00001010			
117	102269.006077	25.000000	56.611586	111	00001020			
118	103262.579744	25.000000	57.596546	111	00001030			
119	104262.579744	25.000000	56.324874	111	00001040			
120	105256.153411	25.000000	57.789336	111	00001050			
121	106256.153411	25.000000	56.197583	111	00001050			
122	107249.727077	25.000000	57.717658	111	00001070			
123	108249.727077	25.000000	56.237129	111	00001090			
124	109244.907327	25.000000	57.338257	111	00001090			
125	110244.907327	25.000000	56.434862	111	00001100			
126	111243.300744	25.000000	56.750000	111	00001110			
127	112				00001120			
128	113279.393929	20.000000	56.693317	111	00001130			
129	114				00001140			
130	115272.539262	20.000000	57.235100	111	00001150			
131	116272.539262	20.000000	56.602361	111	00001150			
132	117265.684595	20.000000	57.652970	111	00001170			
133	118265.684595	20.000000	56.296538	111	00001190			
134	119258.829929	20.000000	57.858610	111	00001190			
135	120258.829929	20.000000	56.160763	111	00001200			
136	121251.975262	20.000000	57.782155	111	00001210			
137	122251.975262	20.000000	56.202945	111	00001220			
138	123246.834262	20.000000	57.377466	111	00001230			
139	124246.834262	20.000000	56.413857	111	00001240			
140	125245.120595	20.000000	56.750000	111	00001250			
141	126				00001250			
142	127283.355446	15.000000	56.689775	111	00001270			

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

143	128					00001290
144	129276.072446	15.000000	57.265412	111		00001290
145	130276.072446	15.000000	56.593135	111		00001300
146	131268.789446	15.000000	57.709395	111		00001310
147	132268.789446	15.000000	56.268202	111		00001320
148	133261.506446	15.000000	57.927885	111		00001330
149	134261.506446	15.000000	56.123942	111		00001340
150	135254.223446	15.000000	57.846652	111		00001350
151	136254.223446	15.000000	56.168761	111		00001360
152	137248.761196	15.000000	57.416675	111		00001370
153	138248.761196	15.000000	56.392852	111		00001390
154	139246.940446	15.000000	56.750000	111		00001390
155	140					00001400
156	141286.920813	10.500000	56.686587	111		00001410
157	142					00001420
158	143279.782290	9.750000	57.297241	111		00001430
159	144279.782290	9.750000	56.583448	111		00001440
160	145274.074668	9.000000	57.698091	1 1		00001450
161	146274.074668	9.000000	56.296533	2 2		00001460
162	147272.515268	9.000000	57.777105	121		00001470
163	148272.515268	9.000000	56.234199	121		00001490
164	149267.180000	9.000000	57.968294	1 1		00001490
165	150267.180000	9.000000	56.104451	1 2		00001500
166	151264.718268	9.000000	58.011015	121		00001510
167	152264.718268	9.000000	56.079758	121		00001520
168	153258.900000	9.000000	57.983204	1 1		00001530
169	154258.900000	9.000000	56.095890	1 2		00001540
170	155256.921268	9.000000	57.924048	121		00001550
171	156256.921268	9.000000	56.127740	121		00001550
172	157251.073518	9.000000	57.463726	121		00001570
173	158251.073518	9.000000	56.367647	121		00001580
174	159249.124268	9.000000	56.750000	111		00001590
175	160					00001600
176	161 242.28	9.0	58.0	1 1		
177	162 242.28	9.0	56.0	1 2		
178	163 249.124268	9.0	58.0	1 1		
179	164 249.124268	9.0	56.0	1 1		
180	165 251.073518	9.0	58.0	1 1		
181	166 251.073518	9.0	56.0	1 2		

SA06 LABEL (6), SA LOADS (4)	LOAD CONDITIONS				
184 1 3 1 15.25	1 3 2 22.875	1 3	3	8.82	
185 1 2 4 0.71					
186 3 3 1 21.30	3 3 2 31.95	3 3	3	8.82	
187 3 2 4-6.14					
188 5 3 1 28.90	5 3 2 43.35	5 3	3	8.82	
189 5 2 4-14.74					
190 7 3 1 36.55	7 3 2 54.825	7 3	3	8.82	

.....1.....2.....3.....4.....5.....6.....7.....8
 123456789012345678901234567890123456789012345678901234567890

CARD
NO.

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

191	7 Z	4-23.39						
192	9 3	1 30.41	9 3	2	45.615	9 3	3	6.61
193	9 Z	4-20.94						
194	11 3	1 9.89	11 3	2	14.835	11 3	3	2.20
195	11 Z	4-6.70						
196	15 3	1 25.36	15 3	2	38.04	15 3	3	15.39
197	15 Z	4 2.66						
198	17 3	1 51.83	17 3	2	77.745	17 3	3	24.03
199	17 Z	4-9.70						
200	19 3	1 66.65	19 3	2	99.975	19 3	3	23.54
201	19 Z	4-27.47						
202	21 3	1 92.53	21 3	2	138.795	21 3	3	23.59
203	21 Z	4-56.65						
204	23 3	1 88.82	23 3	2	133.23	23 3	3	19.87
205	23 Z	4-60.02						
206	25 3	1 47.64	25 3	2	71.46	25 3	3	10.09
207	25 Z	4-33.34						
208	27 3	1 9.35	27 3	2	14.025	27 3	3	2.08
209	27 Z	4-6.33						
210	29 3	1 32.00	29 3	2	48.00	29 3	3	19.46
211	29 Z	4 3.42						
212	31 3	1 69.65	31 3	2	104.475	31 3	3	33.60
213	31 Z	4-10.37						
214	33 3	1 94.50	33 3	2	141.75	33 3	3	34.13
215	33 Z	4-37.41						
216	35 3	1 121.49	35 3	2	182.235	35 3	3	33.08
217	35 Z	4-70.08						
218	37 3	1 130.90	37 3	2	196.35	37 3	3	28.74
219	37 Z	4-89.57						
220	39 3	1 75.51	39 3	2	113.265	39 3	3	15.48
221	39 Z	4-53.90						
222	41 3	1 17.44	41 3	2	26.16	41 3	3	3.54
223	41 Z	4-12.53						
224	43 3	1 37.20	43 3	2	55.80	43 3	3	22.36
225	43 Z	4 3.44						
226	45 3	1 85.63	45 3	2	128.445	45 3	3	40.41
227	45 Z	4-14.58						
228	47 3	1 109.02	47 3	2	163.53	47 3	3	39.98
229	47 Z	4-41.92						
230	49 3	1 147.27	49 3	2	220.905	49 3	3	40.18
231	49 Z	4-84.80						
232	51 3	1 153.37	51 3	2	230.055	51 3	3	34.60
233	51 Z	4-103.05						
234	53 3	1 92.70	53 3	2	139.05	53 3	3	18.97
235	53 Z	4-66.24						
236	55 3	1 23.48	55 3	2	35.22	55 3	3	4.46
237	55 Z	4-17.47						
238	57 3	1 39.66	57 3	2	59.49	57 3	3	24.59

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

239	57 Z	4 5.21					
240	59 3	1 99.76	59 3	2 149.64	59 3	3 45.02	
241	59 Z	4-21.19					
242	61 3	1 118.80	61 3	2 178.2	61 3	3 45.54	
243	61 Z	4-41.66					
244	63 3	1 164.29	63 3	2 246.436	63 3	3 44.91	
245	63 Z	4-94.40					
246	65 3	1 175.74	65 3	2 263.61	65 3	3 39.02	
247	65 Z	4-119.37					
248	67 3	1 104.47	67 3	2 156.705	67 3	3 21.57	
249	67 Z	4-74.24					
250	69 3	1 25.71	69 3	2 38.565	69 3	3 5.15	
251	69 Z	4-18.60					
252	71 3	1 39.97	71 3	2 59.955	71 3	3 26.25	
253	71 Z	4 8.24					
254	73 3	1 87.51	73 3	2 131.265	73 3	3 48.86	
255	73 Z	4 .49					
256	75 3	1 125.08	75 3	2 187.62	75 3	3 48.95	
257	75 Z	4-41.83					
258	77 3	1 180.74	77 3	2 271.11	77 3	3 49.13	
259	77 Z	4-104.44					
260	79 3	1 204.48	79 3	2 306.72	79 3	3 42.42	
261	79 Z	4-144.95					
262	81 3	1 123.06	81 3	2 184.58	81 3	3 23.62	
263	81 Z	4-91.13					
264	83 3	1 28.52	83 3	2 42.78	83 3	3 5.69	
265	83 Z	4-20.68					
266	85 3	1 46.35	85 3	2 69.525	85 3	3 27.50	
267	85 Z	4 3.56					
268	87 3	1 94.06	87 3	2 141.09	87 3	3 51.75	
269	87 Z	4-1.02					
270	89 3	1 123.00	89 3	2 184.5	89 3	3 51.83	
271	89 Z	4-33.60					
272	91 3	1 174.71	91 3	2 262.065	91 3	3 51.99	
273	91 Z	4-91.79					
274	93 3	1 219.56	93 3	2 329.34	93 3	3 44.99	
275	93 Z	4-156.77					
276	95 3	1 141.27	95 3	2 211.905	95 3	3 25.17	
277	95 Z	4-108.57					
278	97 3	1 37.08	97 3	2 55.62	97 3	3 6.10	
279	97 Z	4-29.53					
280	99 3	1 45.83	99 3	2 68.745	99 3	3 28.34	
281	99 Z	4 5.87					
282	101 3	1 110.68	101 3	2 166.02	101 3	3 53.47	
283	101 Z	4-16.34					
284	103 3	1 139.75	103 3	2 209.625	103 3	3 54.33	
285	103 Z	4-47.46					
286	105 3	1 191.72	105 3	2 287.58	105 3	3 54.08	

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

287	105 Z	4-106.79						
288	107 3	1 207.57	107 3	2	311.355	107 3	3	46.89
289	107 Z	4-139.36						
290	109 3	1 138.31	109 3	2	207.465	109 3	3	26.32
291	109 Z	4-102.88						
292	111 3	1 36.99	111 3	2	55.485	111 3	3	6.41
293	111 Z	4-28.79						
294	113 3	1 39.27	113 3	2	58.905	113 3	3	28.96
295	113 Z	4 14.54						
296	115 3	1 108.94	115 3	2	163.41	115 3	3	55.00
297	115 Z	4-11.25						
298	117 3	1 143.52	117 3	2	215.28	117 3	3	55.42
299	117 Z	4-49.51						
300	119 3	1 215.68	119 3	2	323.52	119 3	3	55.95
301	119 Z	4-130.08						
302	121 3	1 222.63	121 3	2	333.945	121 3	3	48.36
303	121 Z	4-153.39						
304	123 3	1 129.88	123 3	2	194.82	123 3	3	27.01
305	123 Z	4-91.93						
306	125 3	1 34.82	125 3	2	52.23	125 3	3	6.63
307	125 Z	4-25.89						
308	127 3	1 25.73	127 3	2	38.595	127 3	3	27.64
309	127 Z	4 27.17						
310	129 3	1 93.37	129 3	2	140.055	129 3	3	56.04
311	129 Z	4 8.49						
312	131 3	1 131.44	131 3	2	197.16	131 3	3	60.09
313	131 Z	4-26.33						
314	133 3	1 233.21	133 3	2	349.815	133 3	3	61.31
315	133 Z	4-139.00						
316	135 3	1 273.28	135 3	2	409.92	135 3	3	53.21
317	135 Z	4-200.81						
318	137 3	1 167.95	137 3	2	251.925	137 3	3	31.45
319	137 Z	4-125.98						
320	139 3	1 41.70	139 3	2	62.55	139 3	3	8.0
321	139 Z	4-30.87						
322	143 3	1 20.90	143 3	2	31.35	143 3	3	22.78
323	143 Z	4 22.75						
324	147 3	1 41.12	147 3	2	61.68	147 3	3	19.93
325	147 Z	4-5.93						
326	151 3	1 41.12	151 3	2	61.68	151 3	3	19.93
327	151 Z	4-5.93						
328	155 3	1 105.09	155 3	2	157.635	155 3	3	19.94
329	155 Z	4-78.30						
330	157 3	1 86.32	157 3	2	129.48	157 3	3	14.95
331	157 Z	4-67.22						
332	159 3	1 29.69	159 3	2	44.535	159 3	3	4.98
333	159 Z	4-23.44						
334								

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD1.....2.....3.....4.....5.....6.....7.....8
 NO. 1234567890123456789012345678901234567890123456789012345678901234567890

SA04 LABEL (4), MATERIAL										
335										
336	4	11	CORE-FWD SPANWIS	.00116	2.5			97000.	.36	
337	4	12		375.	375.	300.				
338	5	11	CORE-FWD STRMWIS	.00116	5.0	5.0		33000.	.36	
339	5	12		375.	375.	150.				
340	6	11	CORE-AFT SPANWIS	.00116	2.5			97000.	.36	
341	6	12		375.	375.	300.				
342	7	11	CORE-AFT STRMWIS	.00116	5.0	5.0		33000.	.36	
343	7	12		375.	375.	150.				
344	8	11	SPAR WEB GR/EP	.057	.01			2.85+06.	.778	
345	8	12		1.77+05	1.77+05	50000.				
346	9	11	PSEUDO RIB RODS	1.3	.1	.1		1.0+6	.360	
347	9	12		3000.	3000.	185.				
348	11	11	2024-T81 RIB	.1	.08			1.05+07.	.33	
349	11	12		65000.	57000.	39000.				
350	12	11	5.5 CORE LE-SPAN	.00159	2.5			11424.0	.36	
351	12	12		575.0	575.0	425.0				
352	13	11	5.5 CORE LE-STRM	.00159	5.0	5.0		46.24+3	.36	
353	13	12		575.0	575.0	225.0				
354	17	61	THORNFL 300		1	1		45.0		1
355	17	62		0.005	0.057					
356	17	63		20.1E6	1.6E6	0.8E6		0.294		
357	17	64		212.0E3	185.0E3					
358	17	65	THORNEL 300		1	1		0.0		
359	17	66		0.005	0.057					
360	17	67		20.1E6	1.6E6	0.8E6		0.294		
361	17	68		212.0E3	185.0E3					
362	17	71	THORNEL 300		1	1		-45.0		1
363	17	72		0.005	0.057					
364	17	73		20.1E6	1.6E6	0.8E6		0.294		
365	17	74		212.0E3	185.0E3					
366	18	61	GR/EP AFT SKIN		1	1		45.0		1
367	18	62		0.005	0.057					
368	18	63		20.1E6	1.6E6	0.8E6		0.294		
369	18	64		212.0E3	185.0E3					
370	18	65	GR/EP AFT SKIN		1	1		0.0		
371	18	66		0.005	0.057					
372	18	67		20.1E6	1.6E6	0.8E6		0.294		
373	18	68		212.0E3	185.0E3					
374	18	71	GR/EP AFT SKIN		1	1		-45.0		1
375	18	72		0.005	0.057					
376	18	73		20.1E6	1.6E6	0.8E6		0.294		
377	18	74		212.0E3	185.0E3					

SA05 LABEL (5), MEMBPROP										
379										
380	1	237.417786	60.0	57.304413	264.718268	9.0		58.011015		
381										
382	4301 4 8	11	4 3 1	.01				RIB	1	

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....8
	1234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890												
431	5011 518	11	4	18	1	15	.015						1LOW 23
432	5011	61					2	2		45.0		1	
433	5011	71					2	2		-45.0		1	
434	5012 518	11	6	20	4	18	.015					1	24
435	5012	61					3	3		45.0		1	
436	5012	71					3	3		-45.0		1	
437	5013 518	11	8	22	6	20	.015						25
438	5013	61					3	3		45.0		1	
439	5013	65					4	4		0.0			
440	5013	71					3	3		-45.0		1	
441	5014 517	11	8	22	10	24	.015						26
442	5014	61					2	2		45.0		1	
443	5014	71					2	2		-45.0		1	
444	5015 517	11	10	24	12	26	.015					1	27
445	5016 517	11	12	26	13	27	.015					1	29
446	4021 4 7	11	18	17	15		5.0					RIB	29
447	6022 6 7	11	18	17	20	19	5.0						30
448	6023 6 7	11	20	19	22	21	5.0						31
449	6024 6 5	11	22	21	24	23	5.0						32
450	6025 6 5	11	24	23	26	25	5.0						33
451	4026 4 5	11	26	25	27		5.0						34
452	1011 1 9	11	17	18			.1					ROD	35
453	1012 1 9	11	19	20			.1						36
454	1013 1 9	11	21	22			.1						37
455	1014 1 9	11	23	24			.1						38
456	1015 1 9	11	25	26			.1						39
457	6031 6 6	11	18	32	17	31	3.3					SP	40
458	6031	52					3.3	3.3				SP1040	
459	6032 6 6	11	20	34	19	33	3.4					SP	41
460	6032	52					3.4	3.4				SP1041	
461	6033 6 4	11	22	36	21	35	3.5					SP	42
462	6033	52					3.5	3.5				SP1042	
463	6034 6 4	11	24	38	23	37	3.6					SP	43
464	6034	52					3.6	3.6				SP1043	
465	6035 6 4	11	26	40	25	39	1.9					SP	44
466	6035	52					1.9	1.9				SP1044	
467	9033 6 8	11	22	36	21	35	.01					SP2044	
468	5021 518	11	17	31	15	29	.015					IUP	45
469	5021	61					2	2		45.0		1	
470	5021	71					2	2		-45.0		1	
471	5022 518	11	19	33	17	31	.015					1	46
472	5022	61					3	3		45.0		1	
473	5022	71					3	3		-45.0		1	
474	5023 518	11	21	35	19	33	.015						47
475	5023	61					3	3		45.0		1	
476	5023	65					4	4		0.0			
477	5023	71					3	3		-45.0		1	
478	5024 517	11	21	35	23	37	.015						48

.....1.....2.....3.....4.....5.....6.....7.....8
 123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
 12345678901234567890123456789012345678901234567890123456789012345678901234567890

479	5024	61						3	3	45.0	1	
480	5024	65						3	3	0.0		
481	5024	71						3	3	-45.0	1	
482	5025 517	11 23 37 25 39					.015				1	49
483	5026 517	11 25 39 27 41					.015				1	50
484	5031 518	11 18 32 15 29					.015				1LOW	51
485	5031	61					2	2	45.0		1	
486	5031	71					2	2	-45.0		1	
487	5032 518	11 20 34 18 32					.015				1	52
488	5032	61					3	3	45.0		1	
489	5032	71					3	3	-45.0		1	
490	5033 518	11 22 36 20 34					.015				1	53
491	5033	61					3	3	45.0		1	
492	5033	65					6	6	0.0			
493	5033	71					3	3	-45.0		1	
494	5034 517	11 22 36 24 38					.015				1	54
495	5034	61					3	3	45.0		1	
496	5034	65					3	3	0.0			
497	5034	71					3	3	-45.0		1	
498	5035 517	11 24 38 26 40					.015				1	55
499	5036 517	11 26 40 27 41					.015				1	56
500	4041 4 7	11 32 31 29					5.0				RIB	57
501	6042 6 7	11 32 31 34 33					5.0					58
502	6043 6 7	11 34 33 36 35					5.0					59
503	6044 6 5	11 36 35 38 37					5.0					60
504	6045 6 5	11 38 37 40 39					5.0					61
505	4046 4 5	11 40 39 41					5.0					62
506	1021 1 9	11 32 31					.1				ROD	63
507	1022 1 9	11 34 33					.1					64
508	1023 1 9	11 36 35					.1					65
509	1024 1 9	11 38 37					.1					65
510	1025 1 9	11 40 39					.1					67
511	6051 6 6	11 32 46 31 45					3.7				SP	68
512	6051	52					3.7	3.7			SP1068	
513	6052 6 6	11 34 48 33 47					3.8				SP	69
514	6052	52					3.8	3.8			SP1069	
515	6053 6 4	11 36 50 35 49					3.95				SP	70
516	6053	52					3.95	3.95			SP1070	
517	6054 6 4	11 38 52 37 51					4.1				SP	71
518	6054	52					4.1	4.1			SP1071	
519	6055 6 4	11 40 54 39 53					2.1				SP	72
520	6055	52					2.1	2.1			SP1072	
521	9053 6 8	11 36 50 35 49					.01				SP2072	
522	5041 518	11 31 45 29 43					.015				1UP	73
523	5041	61					2	2	45.0		1	
524	5041	71					2	2	-45.0		1	
525	5042 518	11 33 47 31 45					.015				1	74
526	5042	61					3	3	45.0		1	

.....1.....2.....3.....4.....5.....6.....7.....8
 12345678901234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
527	5042	71				3		-45.0 1
528	5043 518	11 35 49 33 47	.015					75
529	5043	61				3		45.0 1
530	5043	65				6		.0
531	5043	71				3		-45.0 1
532	5044 517	11 35 49 37 51	.015					75
533	5044	61				3		45.0 1
534	5044	65				6		0.0
535	5044	71				3		-45.0 1
536	5045 517	11 37 51 39 53	.015					77
537	5045	61				3		45.0 1
538	5045	71				3		-45.0 1
539	5046 517	11 39 53 41 55	.015					79
540	5051 518	11 32 46 29 43	.015					LOW 79
541	5051	61				2		45.0 1
542	5051	71				2		-45.0 1
543	5052 518	11 34 48 32 46	.015					80
544	5052	61				3		45.0 1
545	5052	71				3		-45.0 1
546	5053 518	11 36 50 34 48	.015					81
547	5053	61				3		45.0 1
548	5053	65				10		0.0
549	5053	71				3		-45.0 1
550	5054 517	11 36 50 38 52	.015					82
551	5054	61				3		45.0 1
552	5054	65				6		0.0
553	5054	71				3		-45.0 1
554	5055 517	11 38 52 40 54	.015					83
555	5055	61				2		45.0 1
556	5055	71				2		-45.0 1
557	5056 517	11 40 54 41 55	.015					84
558	4061 4 7	11 46 45 43	5.0					RIB 85
559	6062 6 7	11 46 45 48 47	5.0					85
560	6063 6 7	11 48 47 50 49	5.0					87
561	6064 6 5	11 50 49 52 51	5.0					89
562	6065 6 5	11 52 51 54 53	5.0					89
563	4066 4 5	11 54 53 55	5.0					90
564	1031 1 9	11 46 45	.1					ROD 91
565	1032 1 9	11 48 47	.1					92
566	1033 1 9	11 50 49	.1					93
567	1034 1 9	11 52 51	.1					94
568	1035 1 9	11 54 53	.1					95
569	6071 6 6	11 46 60 45 59	4.0					Sp 96
570	6071	52	4.0		4.0			SP1096
571	6072 6 6	11 48 62 47 61	4.15					SP 97
572	6072	52	4.15		4.15			SP1097
573	6073 6 4	11 50 64 49 63	4.3					SP 98
574	6073	52	4.3		4.3			SP1098

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8		
	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890		
623	6084	6 5	11	64	63	66	65	5.0	116	
624	6085	6 5	11	66	65	68	67	5.0	117	
625	4086	4 5	11	68	67	69		5.0	118	
626	1041	1 9	11	60	59			.1	ROD 119	
627	1042	1 9	11	62	61			.1	120	
628	1043	1 9	11	64	63			.1	121	
629	1044	1 9	11	66	65			.1	122	
630	1045	1 9	11	68	67			.1	123	
631	6091	6 6	11	60	74	59	73	4.45	SP 124	
632	6091		52					4.45	4.45	SP1124
633	6092	6 6	11	62	76	61	75	4.55	SP 125	
634	6092		52					4.55	4.55	SP1125
635	6093	6 4	11	64	78	63	77	4.7	SP 126	
636	6093		52					4.7	4.7	SP1126
637	6094	6 4	11	66	80	65	79	4.85	SP 127	
638	6094		52					4.85	4.85	SP1127
639	6095	6 4	11	68	82	67	81	2.5	SP 128	
640	6095		52					2.5	2.5	SP1128
641	9093	6 8	11	64	78	63	77	.01	SP2128	
642	5081	518	11	59	73	57	71	.015	1UP 129	
643	5081		61					2	2	45.0
644	5081		71					2	2	-45.0
645	5082	518	11	61	75	59	73	.015	1 130	
646	5082		61					3	3	45.0
647	5082		71					3	3	-45.0
648	5083	518	11	63	77	61	75	.015	1 131	
649	5083		61					3	3	45.0
650	5083		65					10	10	.0
651	5083		71					3	3	-45.0
652	5084	517	11	63	77	65	79	.015	1 132	
653	5084		61					3	3	45.0
654	5084		65					12	12	0.0
655	5084		71					3	3	-45.0
656	5085	517	11	65	79	67	81	.015	1 133	
657	5085		61					9	9	45.0
658	5085		71					9	9	-45.0
659	5086	517	11	67	81	69	83	.015	1 134	
660	5086		61					10	10	45.0
661	5086		71					10	10	-45.0
662	5091	518	11	60	74	57	71	.015	1LOW 135	
663	5091		61					2	2	45.0
664	5091		71					2	2	-45.0
665	5092	518	11	62	76	60	74	.015	1 136	
666	5092		61					3	3	45.0
667	5092		71					3	3	-45.0
668	5093	518	11	64	78	62	76	.015	1 137	
669	5093		61					3	3	45.0
670	5093		65					18	18	.0

.....1.....2.....3.....4.....5.....6.....7.....8
 12345678901234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8		
	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890		
671	5093	71				3	3	-45.0	1	
672	5094 517	11	64	78	66	80	.015			138
673	5094	61				3	3	45.0	1	
674	5094	65				14	14	0.0		
675	5094	71				3	3	-45.0	1	
676	5095 517	11	66	80	68	82	.015			139
677	5095	61				8	8	45.0	1	
678	5095	71				8	8	-45.0	1	
679	5096 517	11	68	82	69	83	.015			140
680	5096	61				8	8	45.0	1	
681	5096	71				8	8	-45.0	1	
682	4101 4 7	11	74	73	71		5.0			RIB 141
683	6102 6 7	11	74	73	76	75	5.0			142
684	6103 6 7	11	76	75	78	77	5.0			143
685	6104 6 5	11	78	77	80	79	5.0			144
686	6105 6 5	11	80	79	82	81	5.0			145
687	4106 4 5	11	82	81	83		5.0			146
688	1051 1 9	11	74	73			.1			ROD 147
689	1052 1 9	11	76	75			.1			148
690	1053 1 9	11	78	77			.1			149
691	1054 1 9	11	80	79			.1			150
692	1055 1 9	11	82	81			.1			151
693	6111 6 6	11	74	88	73	87	4.8			SP 152
694	6111	52					4.8	4.8		SP1152
695	6112 6 6	11	76	90	75	89	4.9			SP 153
696	6112	52					4.9	4.9		SP1153
697	6113 6 4	11	78	92	77	91	5.05			SP 154
698	6113	52					5.05	5.05		SP1154
699	6114 6 4	11	80	94	79	93	5.25			SP 155
700	6114	52					5.25	5.25		SP1155
701	6115 6 4	11	82	96	81	95	2.7			SP 156
702	6115	52					2.7	2.7		SP1156
703	9113 6 8	11	78	92	77	91	.01			SP2156
704	5101 518	11	73	87	71	85	.015			1UP 157
705	5101	61					2	2	45.0	1
706	5101	71					2	2	-45.0	1
707	5102 518	11	75	89	73	87	.015			158
708	5102	61					3	3	45.0	1
709	5102	71					3	3	-45.0	1
710	5103 518	11	77	91	75	89	.015			159
711	5103	61					2	2	45.0	1
712	5103	65					12	12	0.0	
713	5103	71					2	2	-45.0	1
714	5104 517	11	77	91	79	93	.015			160
715	5104	61					2	2	45.0	1
716	5104	65					15	15	0.0	
717	5104	71					2	2	-45.0	1
718	5105 517	11	79	93	81	95	.015			161

.....1.....2.....3.....4.....5.....6.....7.....8
 12345678901234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
719	5105	61			12	12	45.0	1
720	5105	71			12	12	-45.0	1
721	5106 517	11	81	95	83	97	.015	1 162
722	5106	61			15	15	45.0	1
723	5106	71			15	15	-45.0	1
724	5111 518	11	74	88	71	85	.015	1 LOW 163
725	5111	61			2	2	45.0	1
726	5111	71			2	2	-45.0	1
727	5112 518	11	76	90	74	88	.015	1 164
728	5112	61			3	3	45.0	1
729	5112	71			3	3	-45.0	1
730	5113 518	11	78	92	76	90	.015	1 165
731	5113	61			2	2	45.0	1
732	5113	65			21	21	0.0	1
733	5113	71			2	2	-45.0	1
734	5114 517	11	78	92	80	94	.015	1 166
735	5114	61			2	2	45.0	1
736	5114	65			18	18	0.0	1
737	5114	71			2	2	-45.0	1
738	5115 517	11	80	94	82	96	.015	1 167
739	5115	61			11	11	45.0	1
740	5115	71			11	11	-45.0	1
741	5116 517	11	82	96	83	97	.015	1 168
742	5116	61			13	13	45.0	1
743	5116	71			13	13	-45.0	1
744	4121 4 7	11	88	87	85		5.0	1 RIB 169
745	6122 6 7	11	88	87	90	89	5.0	170
746	6123 6 7	11	90	89	92	91	5.0	171
747	6124 6 5	11	92	91	94	93	5.0	172
748	6125 6 5	11	94	93	96	95	5.0	173
749	4126 4 5	11	96	95	97		5.0	174
750	1061 1 9	11	88	87			.1	1 ROD 175
751	1062 1 9	11	90	89			.1	175
752	1063 1 9	11	92	91			.1	177
753	1064 1 9	11	94	93			.1	178
754	1065 1 9	11	96	95			.1	179
755	6131 6 6	11	88	102	87	101	5.2	1 SP 180
756	6131	52			5.2	5.2		1 SP1180
757	6132 6 6	11	90	104	89	103	5.3	1 SP 181
758	6132	52			5.3	5.3		1 SP1181
759	6133 6 4	11	92	106	91	105	5.45	1 SP 192
760	6133	52			5.45	5.45		1 SP1182
761	6134 6 4	11	94	108	93	107	5.65	1 SP 193
762	6134	52			5.65	5.65		1 SP1183
763	6135 6 4	11	96	110	95	109	2.9	1 SP 184
764	6135	52			2.9	2.9		1 SP1184
765	9133 6 8	11	92	106	91	105	.01	1 SP2184
766	5121 518	11	87	101	85	99	.015	1 IUP 185

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

767	5122 518	11	89 103	87 101	.015				1	185
768	5122	61				2	2	45.0	1	
769	5122	71				2	2	-45.0	1	
770	5123 518	11	91 105	89 103	.015				1	187
771	5123	61				2	2	45.0	1	
772	5123	65				12	12	0.0		
773	5123	71				2	2	-45.0	1	
774	5124 517	11	91 105	93 107	.015				1	188
775	5124	61				2	2	45.0	1	
776	5124	65				18	18	0.0		
777	5124	71				2	2	-45.0	1	
778	5125 517	11	93 107	95 109	.015				1	189
779	5125	61				14	14	45.0	1	
780	5125	65				2	2	0.0		
781	5125	71				14	14	-45.0	1	
782	5126 517	11	95 109	97 111	.015				1	190
783	5126	61				20	20	45.0	1	
784	5126	71				20	20	-45.0	1	
785	5131 518	11	88 102	85 99	.015				1	191
786	5132 518	11	90 104	88 102	.015				1	192
787	5132	61				2	2	45.0	1	
788	5132	71				2	2	-45.0	1	
789	5133 518	11	92 106	90 104	.015				1	193
790	5133	61				2	2	45.0	1	
791	5133	65				23	23	0.0		
792	5133	71				2	2	-45.0	1	
793	5134 517	11	92 106	94 108	.015				1	194
794	5134	61				2	2	45.0	1	
795	5134	65				23	23	0.0		
796	5134	71				2	2	-45.0	1	
797	5135 517	11	94 108	96 110	.015				1	195
798	5135	65				2	2	0.0		
799	5135	61				13	13	45.0	1	
800	5135	71				13	13	-45.0	1	
801	5136 517	11	96 110	97 111	.015				1	195
802	5136	61				17	17	45.0	1	
803	5136	71				17	17	-45.0	1	
804	4141 4 7	11	102 101	99	5.0					RIB 197
805	6142 6 7	11	102 101	104 103	5.0					198
806	6143 6 7	11	104 103	106 105	5.0					199
807	6144 613	11	106 105	108 107	5.0					200
808	6145 613	11	108 107	110 109	5.0					201
809	4146 413	11	110 109	111	5.0					202
810	1071 1 9	11	102 101		.1					203
811	1072 1 9	11	104 103		.1					204
812	1073 1 9	11	106 105		.1					205
813	1074 1 9	11	108 107		.1					205
814	1075 1 9	11	110 109		.1					207

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
815	6151	6 6	11 102 116 101 115	5.5				SP 208
816	6151		52	5.5	5.5			SP1208
817	6152	6 6	11 104 118 103 117	5.6				SP 209
818	6152		52	5.6	5.6			SP1209
819	6153	612	11 106 120 105 119	5.8				SP 210
820	6153		52	5.8	5.8			SP1210
821	6154	612	11 108 122 107 121	6.0				SP 211
822	6154		52	6.0	6.0			SP1211
823	6155	612	11 110 124 109 123	3.1				SP 212
824	6155		52	3.1	3.1			SP1212
825	9153	6 8	11 106 120 105 119	.01				SP2212
826	5141	518	11 101 115 99 113	.015				1UP 213
827	5142	518	11 103 117 101 115	.015				1 214
828	5143	518	11 105 119 103 117	.015				215
829	5143		61		2	2	45.0	1
830	5143		65		12	12	0.0	
831	5143		71		2	2	-45.0	1
832	5144	517	11 105 119 107 121	.015				216
833	5144		61		2	2	45.0	1
834	5144		65		25	25	0.0	
835	5144		71		2	2	-45.0	1
836	5145	517	11 107 121 109 123	.015				1 217
837	5145		61		15	15	45.0	1
838	5145		65		8	8	0.0	
839	5145		71		15	15	-45.0	1
840	5146	517	11 109 123 111 125	.015				1 218
841	5146		61		30	30	45.0	1
842	5146		65		3	3	0.0	
843	5146		71		30	30	-45.0	1
844	5151	518	11 102 116 99 113	.015				1LOW 219
845	5152	518	11 104 118 102 116	.015				1 220
846	5153	518	11 106 120 104 118	.015				221
847	5153		61		2	2	45.0	1
848	5153		65		25	25	0.0	
849	5153		71		2	2	-45.0	1
850	5154	517	11 106 120 108 122	.015				222
851	5154		61		2	2	45.0	1
852	5154		65		27	27	0.0	
853	5154		71		2	2	-45.0	1
854	5155	517	11 108 122 110 124	.015				1 223
855	5155		61		14	14	45.0	1
856	5155		65		8	8	0.0	
857	5155		71		14	14	-45.0	1
858	5156	517	11 110 124 111 125	.015				1 224
859	5156		61		19	19	45.0	1
860	5156		65		2	2	0.0	
861	5156		71		19	19	-45.0	1
862	4161	4 7	11 116 115 113	5.0				R1B 225

.....1.....2.....3.....4.....5.....6.....7.....8
 12345678901234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
911	5175	61			14	14	45.0	1
912	5175	65			10	10	0.0	
913	5175	71			14	14	-45.0	1
914	5176 517	11 124 138 125 139	.015					1 251
915	5176	61			20	20	45.0	1
916	5176	65			4	4	0.0	
917	5176	71			20	20	-45.0	1
918	4181 4 7	11 130 129 127	5.0					RTB 252
919	6182 6 7	11 130 129 132 131	5.0					253
920	6183 6 7	11 132 131 134 133	5.0					254
921	6184 613	11 134 133 136 135	5.0					255
922	6185 613	11 136 135 138 137	5.0					256
923	4186 413	11 138 137 139	5.0					257
924	1091 1 9	11 130 129	.1					ROD 258
925	1092 1 9	11 132 131	.1					259
926	1093 1 9	11 134 133	.1					260
927	1094 1 9	11 136 135	.1					261
928	1095 1 9	11 138 137	.1					262
929	6191 6 6	11 130 144 129 143	6.2					SP 263
930	6191	52	6.2		6.2			SP1263
931	6192 6 6	11 132 148 131 147	6.45					SP 264
932	6192	52	6.45		6.45			SP1264
933	6193 612	11 134 152 133 151	6.6					SP 265
934	6193	52	6.6		6.6			SP1265
935	6194 612	11 136 156 135 155	6.9					SP 266
936	6194	52	6.9		6.9			SP1266
937	6195 612	11 138 158 137 157	3.5					SP 267
938	6195	52	3.5		3.5			SP1267
939	9193 6 8	11 134 152 133 151	.01					SP2257
940	5181 518	11 129 143 127 141	.015					LUP 268
941	5182 518	11 131 147 129 143	.015					1 269
942	5183 518	11 133 151 131 147	.015					270
943	5183	61		2	2	45.0		1
944	5183	71		2	2	-45.0		1
945	5184 517	11 133 151 135 155	.015					1 271
946	5184	61		3	3	45.0		1
947	5184	65		28	28	0.0		
948	5184	71		3	3	-45.0		1
949	5185 517	11 135 155 137 157	.015					1 272
950	5185	61		12	12	45.0		1
951	5185	65		21	21	0.0		
952	5185	71		12	12	-45.0		1
953	5186 517	11 137 157 139 159	.015					1 273
954	5186	61		43	43	45.0		1
955	5186	65		3	3	0.0		
956	5186	71		43	43	-45.0		1
957	5191 518	11 130 144 127 141	.015					LOW 274
958	5192 518	11 132 148 130 144	.015					1 275

.....1.....2.....3.....4.....5.....6.....7.....8
 12345678901234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
12345678901234567890123456789012345678901234567890123456789012345678901234567890

959	5193 518	11 134 152 132 148 .015							276
960	5193	61				2	2	45.0	1
961	5193	71				2	2	-45.0	1
962	5194 517	11 134 152 136 156 .015							277
963	5194	61				2	2	45.0	1
964	5194	65				30	30	0.0	
965	5194	71				2	2	-45.0	1
966	5195 517	11 136 156 138 158 .015							278
967	5195	61				11	11	45.0	1
968	5195	65				19	19	0.0	
969	5195	71				11	11	-45.0	1
970	5196 517	11 138 158 139 159 .015							279
971	5196	61				22	22	45.0	1
972	5196	65				4	4	0.0	
973	5196	71				22	22	-45.0	1
974	4201 411	11 144 143 141				.1			RR 280
975	6202 611	11 144 143 146 145				.1			281
976	6203 611	11 146 145 148 147				.1			282
977	6204 611	11 148 147 150 149				.1			283
978	6205 611	11 150 149 152 151				.1			284
979	6206 611	11 152 151 154 153				.1			285
980	6207 611	11 154 153 156 155				.1			285
981	6208 611	11 156 155 158 157				.1			287
982	4209 411	11 158 157 159				.1			288
983	4211 411	11 157 165 155				.1			RR 289
984	6212 611	11 157 165 159 163				.1			290
985	6213 611	11 164 163 162 161				.1			291
986	6214 611	11 158 166 159 164				.1			292
987	4215 411	11 158 166 156				.1			293
988	1101 1 9	11 144 143				.1			RR 294
989	1102 111	11 146 145				.1			295
990	1103 1 9	11 148 147				.1			295
991	1104 111	11 150 149				.1			297
992	1105 1 9	11 152 151				.1			299
993	1106 111	11 154 153				.1			299
994	1107 1 9	11 156 155				.1			300
995	1108 111	11 158 157				.1			301
996	1201 111	11 157 165				.1			RR 302
997	1202 111	11 159 163				.1			303
998	1203 111	11 162 161				.1			304
999	1204 111	11 159 164				.1			305
1000	1205 111	11 158 166				.1			306
1001	1301 111	11 141 143				.1			RR 307
1002	1302 111	11 143 145				.1			RR 308
1003	1303 111	11 145 147				.1			309
1004	1304 111	11 147 149				.1			310
1005	1305 111	11 149 151				.1			311
1006	1306 111	11 151 153				.1			312

.....1.....2.....3.....4.....5.....6.....7.....8
12345678901234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

1007	1307 111	11 153 155	.1	313
1008	1308 111	11 155 157	.1	314
1009	1309 111	11 157 159	.1	315
1010	1311 111	11 141 144	.1	RR 316
1011	1312 111	11 144 146	.1	317
1012	1313 111	11 146 148	.1	318
1013	1314 111	11 148 150	.1	319
1014	1315 111	11 150 152	.1	320
1015	1316 111	11 152 154	.1	321
1016	1317 111	11 154 156	.1	322
1017	1318 111	11 156 158	.1	323
1018	1319 111	11 158 159	.1	324
1019	1401 111	11 155 165	.1	RR 325
1020	1402 111	11 165 163	.1	326
1021	1403 111	11 163 161	.1	327
1022	1404 111	11 164 162	.1	328
1023	1405 111	11 166 164	.1	329
1024	1406 111	11 156 166	.1	330
1025				

1026 DEND
 1027 TA00 AUTOMATED TRANSFORMATION MODULE
 1028 TA - GENERATE DYNAMICS TRANSFORMATIONS
 1029 0 0 0 -4
 1030 TA01 STRUCTURES GEOMETRY GRID

KLUET(I) I=1,4

1031	166			
1032	1247.701786	60.000000	56.721653	
1033	2			
1034	3244.273786	60.000000	56.992597	
1035	4244.273786	60.000000	56.676166	
1036	5240.845786	60.000000	57.201573	
1037	6240.845786	60.000000	56.523225	
1038	7237.417786	60.000000	57.304413	
1039	8237.417786	60.000000	56.455324	
1040	9233.989786	60.000000	57.266178	
1041	10233.989786	60.000000	56.476419	
1042	11231.418786	60.000000	57.063794	
1043	12231.418786	60.000000	56.581896	
1044	13230.561786	60.000000	56.750000	
1045	14			
1046	15251.663304	55.000000	56.718111	
1047	16			
1048	17247.806970	55.000000	57.022910	
1049	18247.806970	55.000000	56.666940	
1050	19243.950637	55.000000	57.257998	
1051	20243.950637	55.000000	56.494889	
1052	21240.094304	55.000000	57.373688	
1053	22240.094304	55.000000	56.418504	
1054	23236.237970	55.000000	57.330675	

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
1234567890123456789012345678901234567890123456789012345678901234567890

1055	24236.237970	55.000000	56.442235
1056	25233.345720	55.000000	57.103003
1057	26233.345720	55.000000	56.560891
1058	27232.381637	55.000000	56.750000
1059	28		
1060	29255.624822	50.000000	56.714569
1061	30		
1062	31251.340155	50.000000	57.053223
1063	32251.340155	50.000000	56.657715
1064	33247.055488	50.000000	57.314422
1065	34247.055488	50.000000	56.466553
1066	35242.770822	50.000000	57.442962
1067	36242.770822	50.000000	56.381684
1068	37238.486155	50.000000	57.395172
1069	38238.486155	50.000000	56.408050
1070	39235.272655	50.000000	57.142212
1071	40235.272655	50.000000	56.539886
1072	41234.201488	50.000000	56.750000
1073	42		
1074	43259.586339	45.000000	56.711027
1075	44		
1076	45254.873339	45.000000	57.083535
1077	46254.873339	45.000000	56.648489
1078	47250.160339	45.000000	57.370847
1079	48250.160339	45.000000	56.438217
1080	49245.447339	45.000000	57.512237
1081	50245.447339	45.000000	56.344863
1082	51240.734339	45.000000	57.459669
1083	52240.734339	45.000000	56.373866
1084	53237.199589	45.000000	57.181421
1085	54237.199589	45.000000	56.518881
1086	55236.021339	45.000000	56.750000
1087	56		
1088	57263.547857	40.000000	56.707485
1089	58		
1090	59258.406524	40.000000	57.113848
1091	60258.406524	40.000000	56.639263
1092	61253.265191	40.000000	57.427272
1093	62253.265191	40.000000	56.409881
1094	63248.123857	40.000000	57.581512
1095	64248.123857	40.000000	56.308043
1096	65242.982524	40.000000	57.524166
1097	66242.982524	40.000000	56.339682
1098	67239.126524	40.000000	57.220630
1099	68239.126524	40.000000	56.497877
1100	69237.841191	40.000000	56.750000
1101	70		
1102	71267.509375	35.000000	56.703943

.....1.....2.....3.....4.....5.....6.....7.....8
1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....8
 12345678901234567890123456789012345678901234567890123456789012345678901234567890

1103	72		
1104	73261.939708	35.000000	57.144161
1105	74261.939708	35.000000	56.630038
1106	75256.370042	35.000000	57.483696
1107	76256.370042	35.000000	56.381545
1108	77250.800375	35.000000	57.650786
1109	78250.800375	35.000000	56.271223
1110	79245.230708	35.000000	57.588663
1111	80245.230708	35.000000	56.305498
1112	81241.053458	35.000000	57.259839
1113	82241.053458	35.000000	56.476872
1114	83239.661042	35.000000	56.750000
1115	84		
1116	85271.470893	30.000000	56.700401
1117	86		
1118	87265.472893	30.000000	57.174474
1119	88265.472893	30.000000	56.620812
1120	89259.474893	30.000000	57.540121
1121	90259.474893	30.000000	56.353209
1122	91253.476893	30.000000	57.720061
1123	92253.476893	30.000000	56.234403
1124	93247.478893	30.000000	57.653160
1125	94247.478893	30.000000	56.271313
1126	95242.980393	30.000000	57.299048
1127	96242.980393	30.000000	56.455867
1128	97241.480893	30.000000	56.750000
1129	98		
1130	99275.432411	25.000000	56.696859
1131	100		
1132	101269.006077	25.000000	57.204787
1133	102269.006077	25.000000	56.611586
1134	103262.579744	25.000000	57.596546
1135	104262.579744	25.000000	56.324874
1136	105256.153411	25.000000	57.789336
1137	106256.153411	25.000000	56.197583
1138	107249.727077	25.000000	57.717658
1139	108249.727077	25.000000	56.237129
1140	109244.907327	25.000000	57.338257
1141	110244.907327	25.000000	56.434862
1142	111243.300744	25.000000	56.750000
1143	112		
1144	113279.393929	20.000000	56.693317
1145	114		
1146	115272.539262	20.000000	57.235100
1147	116272.539262	20.000000	56.602361
1148	117265.684595	20.000000	57.652970
1149	118265.684595	20.000000	56.296538
1150	119258.829929	20.000000	57.858610

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD NO.1.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....81.....2.....3.....4.....5.....6.....7.....8
1151	120258.829929	20.000000	56.160763	
1152	121251.975262	20.000000	57.782155	
1153	122251.975262	20.000000	56.202945	
1154	123246.834262	20.000000	57.377466	
1155	124246.834262	20.000000	56.413857	
1156	125245.120595	20.000000	56.750000	
1157	126			
1158	127283.355446	15.000000	56.689775	
1159	128			
1160	129276.072446	15.000000	57.265412	
1161	130276.072446	15.000000	56.593135	
1162	131268.789446	15.000000	57.709395	
1163	132268.789446	15.000000	56.268202	
1164	133261.506446	15.000000	57.927885	
1165	134261.506446	15.000000	56.123942	
1166	135254.223446	15.000000	57.846652	
1167	136254.223446	15.000000	56.168761	
1168	137248.761196	15.000000	57.416675	
1169	138248.761196	15.000000	56.392852	
1170	139246.940446	15.000000	56.750000	
1171	140			
1172	141286.920813	10.500000	56.686587	
1173	142			
1174	143279.782290	9.750000	57.297241	
1175	144279.782290	9.750000	56.583448	
1176	145274.074668	9.000000	57.698091	
1177	146274.074668	9.000000	56.296533	
1178	147272.515268	9.000000	57.777105	
1179	148272.515268	9.000000	56.234199	
1180	149267.180000	9.000000	57.968294	
1181	150267.180000	9.000000	56.104451	
1182	151264.718268	9.000000	58.011015	
1183	152264.718268	9.000000	56.079758	
1184	153258.900000	9.000000	57.983204	
1185	154258.900000	9.000000	56.095890	
1186	155256.921268	9.000000	57.924048	
1187	156256.921268	9.000000	56.127740	
1188	157251.073518	9.000000	57.463726	
1189	158251.073518	9.000000	56.367647	
1190	159249.124268	9.000000	56.750000	
1191	160			
1192	161 242.28	9.0	58.0	
1193	162 242.28	9.0	56.0	
1194	163 249.124268	9.0	58.0	
1195	164 249.124268	9.0	56.0	
1196	165 251.073518	9.0	58.0	
1197	166 251.073518	9.0	56.0	
1198	TADG	DYNAMICS GRID FOR VIBRATION ANALYSIS		

.....1.....2.....3.....4.....5.....6.....7.....8
 1234567890123456789012345678901234567890123456789012345678901234567890

CARD1.....2.....3.....4.....5.....6.....7.....8
NO. 1234567890123456789012345678901234567890123456789012345678901234567890

1247	19 127	U 0 0 1 0 0 0
1248	20 113	U 0 0 1 0 0 0
1249	21 85	U 0 0 1 0 0 0
1250	22 57	U 0 0 1 0 0 0
1251	23 29	U 0 0 1 0 0 0
1252	24 1	U 0 0 1 0 0 0

.....1.....2.....3.....4.....5.....6.....7.....8
1234567890123456789012345678901234567890123456789012345678901234567890

NASA FORWARD SWEEP RESEARCH WING ON A RQM-34F VEHICLE, SOP(SA, SO)
AEROELASTICALLY TAILORED WITH ADVANCED COMPOSITES- SMOOTH 7

FROM SOP, AFTER LDB - LIST INPUT DATA

ELAPSED TIME IS	0 MINUTES,	10.58 SECONDS
INCREMENTAL TIME IS	0 MINUTES,	8.01 SECONDS

INPUT STRUCTURES GEOMETRY, ROW = SEQUENTIAL NODE NO.,
 NODE = STRUCTURAL NODE NO. DESIGNATED BY USER.

NOTE - SUBSEQUENT LOAD ANALYSIS OUTPUT OF AERO., INERTIAL, AND COMBINED
 LOADS IN THE STRUCTURES GRID IS IDENTIFIED BY ROW NO. (SEQUENTIAL).

ROW	NODE	XSGEO(I)	YSGEO(I)	ZSGEO(I)
1	1	2.477018E+02	6.000000E+01	5.672165E+01
2	2	0.	0.	0.
3	3	2.442738E+02	6.000000E+01	5.699260E+01
4	4	2.442738E+02	6.000000E+01	5.667617E+01
5	5	2.408458E+02	6.000000E+01	5.720157E+01
6	6	2.408458E+02	6.000000E+01	5.652323E+01
7	7	2.374178E+02	6.000000E+01	5.730441E+01
8	8	2.374178E+02	6.000000E+01	5.645532E+01
9	9	2.339898E+02	6.000000E+01	5.726618E+01
10	10	2.339898E+02	6.000000E+01	5.647642E+01
11	11	2.314188E+02	6.000000E+01	5.706379E+01
12	12	2.314188E+02	6.000000E+01	5.658190E+01
13	13	2.305618E+02	6.000000E+01	5.675000E+01
14	14	0.	0.	0.
15	15	2.516633E+02	5.500000E+01	5.671811E+01
16	16	0.	0.	0.
17	17	2.478070E+02	5.500000E+01	5.702291E+01
18	18	2.478070E+02	5.500000E+01	5.666694E+01
19	19	2.439506E+02	5.500000E+01	5.725800E+01
20	20	2.439506E+02	5.500000E+01	5.649489E+01
21	21	2.400943E+02	5.500000E+01	5.737369E+01
22	22	2.400943E+02	5.500000E+01	5.641850E+01
23	23	2.362380E+02	5.500000E+01	5.733068E+01
24	24	2.362380E+02	5.500000E+01	5.644224E+01
25	25	2.333457E+02	5.500000E+01	5.710300E+01
26	26	2.333457E+02	5.500000E+01	5.656089E+01
27	27	2.323816E+02	5.500000E+01	5.675000E+01
28	28	0.	0.	0.
29	29	2.556248E+02	5.000000E+01	5.671457E+01
30	30	0.	0.	0.
31	31	2.513402E+02	5.000000E+01	5.705322E+01
32	32	2.513402E+02	5.000000E+01	5.665772E+01
33	33	2.470555E+02	5.000000E+01	5.731442E+01
34	34	2.470555E+02	5.000000E+01	5.646655E+01
35	35	2.427708E+02	5.000000E+01	5.744296E+01
36	36	2.427708E+02	5.000000E+01	5.638168E+01
37	37	2.384862E+02	5.000000E+01	5.739517E+01
38	38	2.384862E+02	5.000000E+01	5.640805E+01
39	39	2.352727E+02	5.000000E+01	5.714221E+01
40	40	2.352727E+02	5.000000E+01	5.653989E+01
41	41	2.342015E+02	5.000000E+01	5.675000E+01
42	42	0.	0.	0.
43	43	2.595863E+02	4.500000E+01	5.671103E+01
44	44	0.	0.	0.
45	45	2.548733E+02	4.500000E+01	5.708354E+01
46	46	2.548733E+02	4.500000E+01	5.664849E+01
47	47	2.501603E+02	4.500000E+01	5.737085E+01

INPUT STRUCTURES GEOMETRY, ROW = SEQUENTIAL NODE NO.,
 NODE = STRUCTURAL NODE NO. DESIGNATED BY USER.

NOTE - SUBSEQUENT LOAD ANALYSIS OUTPUT OF AERO., INERTIAL, AND COMBINED
 LOADS IN THE STRUCTURES GRID IS IDENTIFIED BY ROW NO. (SEQUENTIAL).

ROW	NODE	XSGEO(I)	YSGEO(I)	ZSGEO(I)
48	48	2.501603E+02	4.500000E+01	5.643822E+01
49	49	2.454473E+02	4.500000E+01	5.751224E+01
50	50	2.454473E+02	4.500000E+01	5.634486E+01
51	51	2.407343E+02	4.500000E+01	5.745967E+01
52	52	2.407343E+02	4.500000E+01	5.637387E+01
53	53	2.371996E+02	4.500000E+01	5.718142E+01
54	54	2.371996E+02	4.500000E+01	5.651888E+01
55	55	2.360213E+02	4.500000E+01	5.675000E+01
56	56	0.	0.	0.
57	57	2.635479E+02	4.000000E+01	5.670749E+01
58	58	0.	0.	0.
59	59	2.584065E+02	4.000000E+01	5.711385E+01
60	60	2.584065E+02	4.000000E+01	5.663926E+01
61	61	2.532652E+02	4.000000E+01	5.742727E+01
62	62	2.532652E+02	4.000000E+01	5.640988E+01
63	63	2.481239E+02	4.000000E+01	5.758151E+01
64	64	2.481239E+02	4.000000E+01	5.630804E+01
65	65	2.429825E+02	4.000000E+01	5.752417E+01
66	66	2.429825E+02	4.000000E+01	5.633968E+01
67	67	2.391265E+02	4.000000E+01	5.722063E+01
68	68	2.391265E+02	4.000000E+01	5.649788E+01
69	69	2.378412E+02	4.000000E+01	5.675000E+01
70	70	0.	0.	0.
71	71	2.675094E+02	3.500000E+01	5.670394E+01
72	72	0.	0.	0.
73	73	2.619397E+02	3.500000E+01	5.714416E+01
74	74	2.619397E+02	3.500000E+01	5.663004E+01
75	75	2.563700E+02	3.500000E+01	5.748370E+01
76	76	2.563700E+02	3.500000E+01	5.638155E+01
77	77	2.508004E+02	3.500000E+01	5.765079E+01
78	78	2.508004E+02	3.500000E+01	5.627122E+01
79	79	2.452307E+02	3.500000E+01	5.758866E+01
80	80	2.452307E+02	3.500000E+01	5.630550E+01
81	81	2.410535E+02	3.500000E+01	5.725984E+01
82	82	2.410535E+02	3.500000E+01	5.647687E+01
83	83	2.396610E+02	3.500000E+01	5.675000E+01
84	84	0.	0.	0.
85	85	2.714709E+02	3.000000E+01	5.670040E+01
86	86	0.	0.	0.
87	87	2.654729E+02	3.000000E+01	5.717447E+01
88	88	2.654729E+02	3.000000E+01	5.662081E+01
89	89	2.594749E+02	3.000000E+01	5.754012E+01
90	90	2.594749E+02	3.000000E+01	5.635321E+01
91	91	2.534769E+02	3.000000E+01	5.772006E+01
92	92	2.534769E+02	3.000000E+01	5.623440E+01
93	93	2.474789E+02	3.000000E+01	5.765316E+01
94	94	2.474789E+02	3.000000E+01	5.627131E+01

INPUT STRUCTURES GEOMETRY. ROW = SEQUENTIAL NODE NO.,
 NODE = STRUCTURAL NODE NO. DESIGNATED BY USER.

NOTE - SUBSEQUENT LOAD ANALYSIS OUTPUT OF AERO., INERTIAL, AND COMBINED
 LOADS IN THE STRUCTURES GRID IS IDENTIFIED BY ROW NO. (SEQUENTIAL).

ROW	NODE	XSGEO(I)	YSGEO(I)	ZSGEO(I)
95	95	2.429804E+02	3.000000E+01	5.729905E+01
96	96	2.429804E+02	3.000000E+01	5.645587E+01
97	97	2.414809E+02	3.000000E+01	5.675000E+01
98	98	0.	0.	0.
99	99	2.754324E+02	2.500000E+01	5.669686E+01
100	100	0.	0.	0.
101	101	2.690061E+02	2.500000E+01	5.720479E+01
102	102	2.690061E+02	2.500000E+01	5.661159E+01
103	103	2.625797E+02	2.500000E+01	5.759655E+01
104	104	2.625797E+02	2.500000E+01	5.632487E+01
105	105	2.561534E+02	2.500000E+01	5.778934E+01
106	106	2.561534E+02	2.500000E+01	5.619758E+01
107	107	2.497271E+02	2.500000E+01	5.771766E+01
108	108	2.497271E+02	2.500000E+01	5.623713E+01
109	109	2.449073E+02	2.500000E+01	5.733826E+01
110	110	2.449073E+02	2.500000E+01	5.643486E+01
111	111	2.433007E+02	2.500000E+01	5.675000E+01
112	112	0.	0.	0.
113	113	2.793939E+02	2.000000E+01	5.669332E+01
114	114	0.	0.	0.
115	115	2.725393E+02	2.000000E+01	5.723510E+01
116	116	2.725393E+02	2.000000E+01	5.660236E+01
117	117	2.656846E+02	2.000000E+01	5.765297E+01
118	118	2.656846E+02	2.000000E+01	5.629654E+01
119	119	2.588299E+02	2.000000E+01	5.785861E+01
120	120	2.588299E+02	2.000000E+01	5.616076E+01
121	121	2.519753E+02	2.000000E+01	5.778216E+01
122	122	2.519753E+02	2.000000E+01	5.620295E+01
123	123	2.468343E+02	2.000000E+01	5.737747E+01
124	124	2.468343E+02	2.000000E+01	5.641386E+01
125	125	2.451206E+02	2.000000E+01	5.675000E+01
126	126	0.	0.	0.
127	127	2.833554E+02	1.500000E+01	5.668978E+01
128	128	0.	0.	0.
129	129	2.760724E+02	1.500000E+01	5.726541E+01
130	130	2.760724E+02	1.500000E+01	5.659314E+01
131	131	2.687894E+02	1.500000E+01	5.770940E+01
132	132	2.687894E+02	1.500000E+01	5.626820E+01
133	133	2.615064E+02	1.500000E+01	5.792789E+01
134	134	2.615064E+02	1.500000E+01	5.612394E+01
135	135	2.542234E+02	1.500000E+01	5.784665E+01
136	136	2.542234E+02	1.500000E+01	5.616876E+01
137	137	2.487612E+02	1.500000E+01	5.741668E+01
138	138	2.487612E+02	1.500000E+01	5.639285E+01
139	139	2.469404E+02	1.500000E+01	5.675000E+01
140	140	0.	0.	0.
141	141	2.869208E+02	1.050000E+01	5.668659E+01

INPUT STRUCTURES GEOMETRY, ROW = SEQUENTIAL NODE NO.,
NODE = STRUCTURAL NODE NO. DESIGNATED BY USER.

NOTE - SUBSEQUENT LOAD ANALYSIS OUTPUT OF AERO., INERTIAL, AND COMBINED
LOADS IN THE STRUCTURES GRID IS IDENTIFIED BY ROW NO. (SEQUENTIAL).

ROW	NODE	XSGEO(I)	YSGEO(I)	ZSGEO(I)
142	142	0.	0.	0.
143	143	2.797823E+02	9.750000E+00	5.729724E+01
144	144	2.797823E+02	9.750000E+00	5.658345E+01
145	145	2.740747E+02	9.000000E+00	5.769809E+01
146	146	2.740747E+02	9.000000E+00	5.629653E+01
147	147	2.725153E+02	9.000000E+00	5.777711E+01
148	148	2.725153E+02	9.000000E+00	5.623420E+01
149	149	2.671800E+02	9.000000E+00	5.796829E+01
150	150	2.671800E+02	9.000000E+00	5.610445E+01
151	151	2.647183E+02	9.000000E+00	5.801102E+01
152	152	2.647183E+02	9.000000E+00	5.607976E+01
153	153	2.589000E+02	9.000000E+00	5.798320E+01
154	154	2.589000E+02	9.000000E+00	5.609589E+01
155	155	2.569213E+02	9.000000E+00	5.792405E+01
156	156	2.569213E+02	9.000000E+00	5.612774E+01
157	157	2.510735E+02	9.000000E+00	5.746373E+01
158	158	2.510735E+02	9.000000E+00	5.636765E+01
159	159	2.491243E+02	9.000000E+00	5.675000E+01
160	160	0.	0.	0.
161	161	2.422800E+02	9.000000E+00	5.800000E+01
162	162	2.422800E+02	9.000000E+00	5.600000E+01
163	163	2.491243E+02	9.000000E+00	5.800000E+01
164	164	2.491243E+02	9.000000E+00	5.600000E+01
165	165	2.510735E+02	9.000000E+00	5.800000E+01
166	166	2.510735E+02	9.000000E+00	5.600000E+01

*** ALLOWABLE STRESS MODIFICATION FACTORS ***

LOAD COND.	TENS. FACTOR	COMP. FACTOR	SHEAR FACTOR
1	1.0000	1.0000	1.0000
2	1.0000	1.0000	1.0000
3	1.0000	1.0000	1.0000
4	1.0000	1.0000	1.0000

INPUT STRUCTURES GEOMETRY, KARD = CARD NO., NODE = STRUCTURES NODE NO.

KARD	NODE	X(KARD)	Y(KARD)	Z(KARD)	IBC(KARD,K), K=1,6	
1	1247.701786	60.000000	56.721653	111	00000010	
2	2				00000020	
3	3244.273786	60.000000	56.992597	111	00000030	
4	4244.273786	60.000000	56.676166	111	00000040	
5	5240.845786	60.000000	57.201573	111	00000050	
6	6240.845786	60.000000	56.523225	111	00000060	
7	7237.417786	60.000000	57.304413	111	00000070	
8	8237.417786	60.000000	56.455324	111	00000080	
9	9233.989786	60.000000	57.266178	111	00000090	
10	10233.989786	60.000000	56.476419	111	00000100	
11	11231.418786	60.000000	57.063794	111	00000110	
12	12231.418786	60.000000	56.581896	111	00000120	
13	13230.561786	60.000000	56.750000	111	00000130	
14	14				00000140	
15	15251.663304	55.000000	56.718111	111	00000150	
16	16				00000160	
17	17247.806970	55.000000	57.022910	111	00000170	
18	18247.806970	55.000000	56.666940	111	00000180	
19	19243.950637	55.000000	57.257998	111	00000190	
20	20243.950637	55.000000	56.494889	111	00000200	
21	21240.094304	55.000000	57.373688	111	00000210	
22	22240.094304	55.000000	56.418504	111	00000220	
23	23236.237970	55.000000	57.330675	111	00000230	
24	24236.237970	55.000000	56.442235	111	00000240	
25	25233.345720	55.000000	57.103003	111	00000250	
26	26233.345720	55.000000	56.560891	111	00000260	
27	27232.381637	55.000000	56.750000	111	00000270	
28	28				00000280	
29	29255.624822	50.000000	56.714569	111	00000290	
30	30				00000300	
31	31251.340155	50.000000	57.053223	111	00000310	
32	32251.340155	50.000000	56.657715	111	00000320	
33	33247.055488	50.000000	57.314422	111	00000330	
34	34247.055488	50.000000	56.466553	111	00000340	
35	35242.770822	50.000000	57.442962	111	00000350	
36	36242.770822	50.000000	56.381684	111	00000360	
37	37238.486155	50.000000	57.395172	111	00000370	
38	38238.486155	50.000000	56.408050	111	00000380	
39	39235.272655	50.000000	57.142212	111	00000390	
40	40235.272655	50.000000	56.539886	111	00000400	
41	41234.201488	50.000000	56.750000	111	00000410	
42	42				00000420	
43	43259.586339	45.000000	56.711027	111	00000430	
44	44				00000440	
45	45254.873339	45.000000	57.083535	111	00000450	
46	46254.873339	45.000000	56.648489	111	00000460	
47	47250.160339	45.000000	57.370847	111	00000470	
48	48250.160339	45.000000	56.438217	111		
49	49245.447339	45.000000	57.512237	111	00000490	
50	50245.447339	45.000000	56.344863	111	00000500	
51	51240.734339	45.000000	57.459669	111	00000510	

INPUT STRUCTURES GEOMETRY, KARD = CARD NO., NODE = STRUCTURES NODE NO.

KARD	NODE	X(KARD)	Y(KARD)	Z(KARD)	IBC(KARD,K), K=1,6	
52	52240.734339	45.000000	56.373866	111	00000520	
53	53237.199589	45.000000	57.181421	111	00000530	
54	54237.199589	45.000000	56.518881	111	00000540	
55	55236.021339	45.000000	56.750000	111	00000550	
56	56				00000560	
57	57263.547857	40.000000	56.707485	111	00000570	
58	58				00000580	
59	59258.406524	40.000000	57.113848	111	00000590	
60	60258.406524	40.000000	56.639263	111	00000600	
61	61253.265191	40.000000	57.427272	111	00000610	
62	62253.265191	40.000000	56.409881	111	00000620	
63	63248.123857	40.000000	57.581512	111	00000630	
64	64248.123857	40.000000	56.308043	111	00000640	
65	65242.982524	40.000000	57.524166	111	00000650	
66	66242.982524	40.000000	56.339682	111	00000660	
67	67239.126524	40.000000	57.220630	111	00000670	
68	68239.126524	40.000000	56.497877	111	00000680	
69	69237.841191	40.000000	56.750000	111	00000690	
70	70				00000700	
71	71267.509375	35.000000	56.703943	111	00000710	
72	72				00000720	
73	73261.939708	35.000000	57.144161	111	00000730	
74	74261.939708	35.000000	56.630038	111	00000740	
75	75256.370042	35.000000	57.483696	111	00000750	
76	76256.370042	35.000000	56.381545	111	00000760	
77	77250.800375	35.000000	57.650786	111	00000770	
78	78250.800375	35.000000	56.271223	111	00000780	
79	79245.230708	35.000000	57.588663	111	00000790	
80	80245.230708	35.000000	56.305498	111	00000800	
81	81241.053458	35.000000	57.259839	111	00000810	
82	82241.053458	35.000000	56.476872	111	00000820	
83	83239.661042	35.000000	56.750000	111	00000830	
84	84				00000840	
85	85271.470893	30.000000	56.700401	111	00000850	
86	86				00000860	
87	87265.472893	30.000000	57.174474	111	00000870	
88	88265.472893	30.000000	56.620812	111	00000880	
89	89259.474893	30.000000	57.540121	111	00000890	
90	90259.474893	30.000000	56.353209	111	00000900	
91	91253.476893	30.000000	57.720061	111	00000910	
92	92253.476893	30.000000	56.234403	111	00000920	
93	93247.478893	30.000000	57.653160	111	00000930	
94	94247.478893	30.000000	56.271313	111	00000940	
95	95242.980393	30.000000	57.299048	111	00000950	
96	96242.980393	30.000000	56.455867	111	00000960	
97	97241.480893	30.000000	56.750000	111	00000970	
98	98				00000980	
99	99275.432411	25.000000	56.696859	111	00000990	
100	100				00001000	
101	101269.006077	25.000000	57.204787	111	00001010	
102	102269.006077	25.000000	56.611586	111	00001020	

INPUT STRUCTURES GEOMETRY, KARD = CARD NO., NODE = STRUCTURES NODE NO.

KARD	NODE	X(KARD)	Y(KARD)	Z(KARD)	IBC(KARD,K), K=1,6	
103	103262.579744	25.000000	57.596546	111		00001030
104	104262.579744	25.000000	56.324874	111		00001040
105	105256.153411	25.000000	57.789336	111		00001050
106	106256.153411	25.000000	56.197583	111		00001060
107	107249.727077	25.000000	57.717658	111		00001070
108	108249.727077	25.000000	56.237129	111		00001080
109	109244.907327	25.000000	57.338257	111		00001090
110	110244.907327	25.000000	56.434862	111		00001100
111	111243.300744	25.000000	56.750000	111		00001110
112	112					00001120
113	113279.393929	20.000000	56.693317	111		00001130
114	114					00001140
115	115272.539262	20.000000	57.235100	111		00001150
116	116272.539262	20.000000	56.602361	111		00001160
117	117265.684595	20.000000	57.652970	111		00001170
118	118265.684595	20.000000	56.296538	111		00001180
119	119258.829929	20.000000	57.858610	111		00001190
120	120258.829929	20.000000	56.160763	111		00001200
121	121251.975262	20.000000	57.782155	111		00001210
122	122251.975262	20.000000	56.202945	111		00001220
123	123246.834262	20.000000	57.377466	111		00001230
124	124246.834262	20.000000	56.413857	111		00001240
125	125245.120595	20.000000	56.750000	111		00001250
126	126					00001260
127	127283.355446	15.000000	56.689775	111		00001270
128	128					00001280
129	129276.072446	15.000000	57.265412	111		00001290
130	130276.072446	15.000000	56.593135	111		00001300
131	131268.789446	15.000000	57.709395	111		00001310
132	132268.789446	15.000000	56.268202	111		00001320
133	133261.506446	15.000000	57.927885	111		00001330
134	134261.506446	15.000000	56.123942	111		00001340
135	135254.223446	15.000000	57.846652	111		00001350
136	136254.223446	15.000000	56.168761	111		00001360
137	137248.761196	15.000000	57.416675	111		00001370
138	138248.761196	15.000000	56.392852	111		00001380
139	139246.940446	15.000000	56.750000	111		00001390
140	140					00001400
141	141286.920813	10.500000	56.686587	111		00001410
142	142					00001420
143	143279.782290	9.750000	57.297241	111		00001430
144	144279.782290	9.750000	56.583448	111		00001440
145	145274.074668	9.000000	57.698091	1 1		00001450
146	146274.074668	9.000000	56.296533	2 2		00001460
147	147272.515268	9.000000	57.777105	121		00001470
148	148272.515268	9.000000	56.234199	121		00001480
149	149267.180000	9.000000	57.968294	1 1		00001490
150	150267.180000	9.000000	56.104451	1 2		00001500
151	151264.718268	9.000000	58.011015	121		00001510
152	152264.718268	9.000000	56.079758	121		00001520
153	153258.900000	9.000000	57.983204	1 1		00001530

INPUT STRUCTURES GEOMETRY, KARD = CARD NO., NODE = STRUCTURES NODE NO.

PAGE 44

KARD	NODE	X(KARD)	Y(KARD)	Z(KARD)	IBC(KARD,K), K=1,6	
154	154	258.900000	9.000000	56.095890	1 2	00001540
155	155	256.921268	9.000000	57.924048	121	00001550
156	156	256.921268	9.000000	56.127740	121	00001560
157	157	251.073518	9.000000	57.463726	121	00001570
158	158	251.073518	9.000000	56.367647	121	00001580
159	159	249.124268	9.000000	56.750000	111	00001590
160	160					00001600
161	161	242.28	9.0	58.0	1 1	
162	162	242.28	9.0	56.0	1 2	
163	163	249.124268	9.0	58.0	1 1	
164	164	249.124268	9.0	56.0	1 1	
165	165	251.073518	9.0	58.0	1 1	
166	166	251.073518	9.0	56.0	1 2	
167						

A P P L I E D				L O A D S				
DIRECTI O N	C O N D I T I O N	L O A D	DIRECTI O N	C O N D I T I O N	L O A D	DIRECTI O N	C O N D I T I O N	L O A D
1	3	.1525000E+02	1	3	.2287500E+02	1	3	.8820000E+01
1	Z	.7100000E+00	0	0	0.	0	0	0.
3	3	.2130000E+02	3	3	.3195000E+02	3	3	.8820000E+01
3	Z	-.6140000E+01	0	0	0.	0	0	0.
5	3	.2890000E+02	5	3	.4335000E+02	5	3	.8820000E+01
5	Z	-.1474000E+02	0	0	0.	0	0	0.
7	3	.3655000E+02	7	3	.5482500E+02	7	3	.8820000E+01
7	Z	-.2339000E+02	0	0	0.	0	0	0.
9	3	.3041000E+02	9	3	.4561500E+02	9	3	.6610000E+01
9	Z	-.2094000E+02	0	0	0.	0	0	0.
11	3	.9890000E+01	11	3	.1483500E+02	11	3	.2200000E+01
11	Z	-.6700000E+01	0	0	0.	0	0	0.
15	3	.2536000E+02	15	3	.3804000E+02	15	3	.1539000E+02
15	Z	.2660000E+01	0	0	0.	0	0	0.
17	3	.5183000E+02	17	3	.7774500E+02	17	3	.2403000E+02
17	Z	-.9700000E+01	0	0	0.	0	0	0.
19	3	.6665000E+02	19	3	.9997500E+02	19	3	.2354000E+02
19	Z	-.2747000E+02	0	0	0.	0	0	0.
21	3	.9253000E+02	21	3	.1387950E+03	21	3	.2359000E+02
21	Z	-.5665000E+02	0	0	0.	0	0	0.
23	3	.8882000E+02	23	3	.1332300E+03	23	3	.1987000E+02
23	Z	-.6002000E+02	0	0	0.	0	0	0.
25	3	.4764000E+02	25	3	.7146000E+02	25	3	.1009000E+02
25	Z	-.3334000E+02	0	0	0.	0	0	0.
27	3	.9350000E+01	27	3	.1402500E+02	27	3	.2080000E+01
27	Z	-.6330000E+01	0	0	0.	0	0	0.
29	3	.3200000E+02	29	3	.4800000E+02	29	3	.1946000E+02
29	Z	.3420000E+01	0	0	0.	0	0	0.
31	3	.6965000E+02	31	3	.1044750E+03	31	3	.3360000E+02
31	Z	-.1037000E+02	0	0	0.	0	0	0.
33	3	.9450000E+02	33	3	.1417500E+03	33	3	.3413000E+02
33	Z	-.3741000E+02	0	0	0.	0	0	0.
35	3	.1214900E+03	35	3	.1822350E+03	35	3	.3308000E+02
35	Z	-.7008000E+02	0	0	0.	0	0	0.
37	3	.1309000E+03	37	3	.1963500E+03	37	3	.2874000E+02
37	Z	-.8957000E+02	0	0	0.	0	0	0.
39	3	.7551000E+02	39	3	.1132650E+03	39	3	.1548000E+02
39	Z	-.5390000E+02	0	0	0.	0	0	0.
41	3	.1744000E+02	41	3	.2616000E+02	41	3	.3540000E+01
41	Z	-.1253000E+02	0	0	0.	0	0	0.
43	3	.3720000E+02	43	3	.5580000E+02	43	3	.2236000E+02
43	Z	.3440000E+01	0	0	0.	0	0	0.

A P P L I E D				L O A D S							
DIRECT	COND	LOAD		DIRECT	COND	LOAD					
NO	NO	NO	NO	NO	NO	NO	NO				
E	N	D	E	N	D	E	N				
45	3	1	.8563000E+02	45	3	2	.1284450E+03	45	3	3	.4041000E+02
45	Z	4	-.1458000E+02	0	0	0.		0	0	0.	
47	3	1	.1090200E+03	47	3	2	.1635300E+03	47	3	3	.3998000E+02
47	Z	4	-.4192000E+02	0	0	0.		0	0	0.	
49	3	1	.1472700E+03	49	3	2	.2209050E+03	49	3	3	.4018000E+02
49	Z	4	-.8480000E+02	0	0	0.		0	0	0.	
51	3	1	.1533700E+03	51	3	2	.2300550E+03	51	3	3	.3460000E+02
51	Z	4	-.1030500E+03	0	0	0.		0	0	0.	
53	3	1	.9270000E+02	53	3	2	.1390500E+03	53	3	3	.1897000E+02
53	Z	4	-.6624000E+02	0	0	0.		0	0	0.	
55	3	1	.2348000E+02	55	3	2	.3522000E+02	55	3	3	.4460000E+01
55	Z	4	-.1747000E+02	0	0	0.		0	0	0.	
57	3	1	.3966000E+02	57	3	2	.5949000E+02	57	3	3	.2459000E+02
57	Z	4	.5210000E+01	0	0	0.		0	0	0.	
59	3	1	.9976000E+02	59	3	2	.1496400E+03	59	3	3	.4502000E+02
59	Z	4	-.2119000E+02	0	0	0.		0	0	0.	
61	3	1	.1188000E+03	61	3	2	.1782000E+03	61	3	3	.4554000E+02
61	Z	4	-.4166000E+02	0	0	0.		0	0	0.	
63	3	1	.1642900E+03	63	3	2	.2464360E+03	63	3	3	.4491000E+02
63	Z	4	-.9440000E+02	0	0	0.		0	0	0.	
65	3	1	.1757400E+03	65	3	2	.2636100E+03	65	3	3	.3902000E+02
65	Z	4	-.1193700E+03	0	0	0.		0	0	0.	
67	3	1	.1044700E+03	67	3	2	.1567050E+03	67	3	3	.2157000E+02
67	Z	4	-.7424000E+02	0	0	0.		0	0	0.	
69	3	1	.2571000E+02	69	3	2	.3856500E+02	69	3	3	.5150000E+01
69	Z	4	-.1860000E+02	0	0	0.		0	0	0.	
71	3	1	.3997000E+02	71	3	2	.5995500E+02	71	3	3	.2625000E+02
71	Z	4	.8240000E+01	0	0	0.		0	0	0.	
73	3	1	.8751000E+02	73	3	2	.1312650E+03	73	3	3	.4886000E+02
73	Z	4	.4900000E+00	0	0	0.		0	0	0.	
75	3	1	.1250800E+03	75	3	2	.1876200E+03	75	3	3	.4895000E+02
75	Z	4	-.4183000E+02	0	0	0.		0	0	0.	
77	3	1	.1807400E+03	77	3	2	.2711100E+03	77	3	3	.4913000E+02
77	Z	4	-.1044400E+03	0	0	0.		0	0	0.	
79	3	1	.2044800E+03	79	3	2	.3067200E+03	79	3	3	.4242000E+02
79	Z	4	-.1449500E+03	0	0	0.		0	0	0.	
81	3	1	.1230600E+03	81	3	2	.1845800E+03	81	3	3	.2362000E+02
81	Z	4	-.9113000E+02	0	0	0.		0	0	0.	
83	3	1	.2852000E+02	83	3	2	.4278000E+02	83	3	3	.5690000E+01
83	Z	4	-.2068000E+02	0	0	0.		0	0	0.	
85	3	1	.4635000E+02	85	3	2	.6952500E+02	85	3	3	.2750000E+02
85	Z	4	.3560000E+01	0	0	0.		0	0	0.	

A P P L I E D				L O A D S							
D I R E C T I O N	C O N D I T I O N	L O A D	N O T E	D I R E C T I O N	C O N D I T I O N	L O A D	N O T E				
129	3	1	.9337000E+02	129	3	2	.1400550E+03	129	3	3	.5604000E+02
129	Z	4	.8490000E+01	0	0	0.		0	0	0.	
131	3	1	.1314400E+03	131	3	2	.1971600E+03	131	3	3	.6009000E+02
131	Z	4	-.2633000E+02	0	0	0.		0	0	0.	
133	3	1	.2332100E+03	133	3	2	.3498150E+03	133	3	3	.6131000E+02
133	Z	4	-.1390000E+03	0	0	0.		0	0	0.	
135	3	1	.2732800E+03	135	3	2	.4099200E+03	135	3	3	.5321000E+02
135	Z	4	-.2008100E+03	0	0	0.		0	0	0.	
137	3	1	.1679500E+03	137	3	2	.2519250E+03	137	3	3	.3145000E+02
137	Z	4	-.1259800E+03	0	0	0.		0	0	0.	
139	3	1	.4170000E+02	139	3	2	.6255000E+02	139	3	3	.8000000E+01
139	Z	4	-.3087000E+02	0	0	0.		0	0	0.	
143	3	1	.2090000E+02	143	3	2	.3135000E+02	143	3	3	.2278000E+02
143	Z	4	.2275000E+02	0	0	0.		0	0	0.	
147	3	1	.4112000E+02	147	3	2	.6168000E+02	147	3	3	.1993000E+02
147	Z	4	-.5930000E+01	0	0	0.		0	0	0.	
151	3	1	.4112000E+02	151	3	2	.6168000E+02	151	3	3	.1993000E+02
151	Z	4	-.5930000E+01	0	0	0.		0	0	0.	
155	3	1	.1050900E+03	155	3	2	.1576350E+03	155	3	3	.1994000E+02
155	Z	4	-.7830000E+02	0	0	0.		0	0	0.	
157	3	1	.8632000E+02	157	3	2	.1294800E+03	157	3	3	.1495000E+02
157	Z	4	-.6722000E+02	0	0	0.		0	0	0.	
159	3	1	.2969000E+02	159	3	2	.4453500E+02	159	3	3	.4980000E+01
159	Z	4	-.2344000E+02	0	0	0.		0	0	0.	
0		0	0.	0		0.		0		0.	

RESULTANTS OF APPLIED LOADS

LOAD CONDITION	FX	FY	FZ	MX	MY	MZ
1	0.	0.	7.124970E+03	2.247683E+05	-1.796011E+05	0.
2	0.	0.	1.068745E+04	3.371522E+05	-2.694014E+05	0.
3	0.	0.	2.209140E+03	6.969502E+04	-5.645956E+05	0.
4	0.	0.	-3.562040E+03	-1.123602E+05	8.821496E+05	0.

MATERIAL PROPERTIES

ISOTROPIC MATERIALS

MAT. NO.	DENSITY	MIN. GAGE	MAX. GAGE	E	NU	FT	FC	FS	MATERIAL
1	1.0000E-01	1.0000E-02	0.	1.0500E+07	.300	6.7000E+04	5.7000E+04	3.9000E+04	ALUMINUM
2	2.8500E-01	1.0000E-02	0.	2.9500E+07	.300	2.2000E+05	2.1300E+05	1.2900E+05	STEEL
3	1.6000E-01	1.0000E-02	0.	1.6000E+07	.300	1.3000E+05	1.2600E+05	7.6000E+04	TITANIUM 6-4
4	1.1600E-03	2.5000E+00	0.	8.7000E+04	.360	3.7500E+02	3.7500E+02	3.0000E+02	CORE-FWD SPANWIS
5	1.1600E-03	5.0000E+00	5.0000E+00	3.3000E+04	.360	3.7500E+02	3.7500E+02	1.5000E+02	CORE-FWD STRMWIS
6	1.1600E-03	2.5000E+00	0.	8.7000E+04	.360	3.7500E+02	3.7500E+02	3.0000E+02	CORE-AFT SPANWIS
7	1.1600E-03	5.0000E+00	5.0000E+00	3.3000E+04	.360	3.7500E+02	3.7500E+02	1.5000E+02	CORE-AFT STRMWIS
8	5.7000E-02	1.0000E-02	0.	2.8500E+06	.778	1.7700E+05	1.7700E+05	5.0000E+04	SPAR WEB GR/EP
9	1.3000E+00	1.0000E-01	1.0000E-01	1.0000E+06	.360	3.0000E+03	3.0000E+03	1.8500E+02	PSEUDO RIB RODS
11	1.0000E-01	8.0000E-02	0.	1.0500E+07	.330	6.5000E+04	5.7000E+04	3.9000E+04	2024-T81 RIB
12	1.5900E-03	2.5000E+00	0.	1.1424E+04	.360	5.7500E+02	5.7500E+02	4.2500E+02	5.5 CORE LE-SPAN
13	1.5900E-03	5.0000E+00	5.0000E+00	4.6240E+04	.360	5.7500E+02	5.7500E+02	2.2500E+02	5.5 CORE LE-STRM

MATERIAL PROPERTIES

COMPOSITE MATERIAL NO. 17 (NO. OF LAYERS = 3)

LAYER NUMBER	1	2	3	4	5	6
MATERIAL	THORNEL 300	THORNEL 300	THORNEL 300			
FIBER ANGLE	45.000	0.000	-45.000	0.000	0.000	0.000
BAL. LAYER CLUE	1	0	1	0	0	0
INI. NO. OF LAM.	1	1	1	0	0	0
MIN. NO. OF LAM.	1	1	1	0	0	0
MAX. NO. OF LAM.	0	0	0	0	0	0
LAMINA THICKNESS	5.00000E-03	5.00000E-03	5.00000E-03	0.	0.	0.
DENSITY	5.70000E-02	5.70000E-02	5.70000E-02	0.	0.	0.
E11	2.01000E+07	2.01000E+07	2.01000E+07	0.	0.	0.
E22	1.60000E+06	1.60000E+06	1.60000E+06	0.	0.	0.
G12	8.00000E+05	8.00000E+05	8.00000E+05	0.	0.	0.
NU12	.29400E+00	.29400E+00	.29400E+00	0.	0.	0.
FXT	2.12000E+05	2.12000E+05	2.12000E+05	0.	0.	0.
FXC	1.85000E+05	1.85000E+05	1.85000E+05	0.	0.	0.
GZ	1.00000E+19	1.00000E+19	1.00000E+19	0.	0.	0.

COMPOSITE MATERIAL NO. 18 (NO. OF LAYERS = 3)

LAYER NUMBER	1	2	3	4	5	6
MATERIAL	GR/EP AFT SKIN	GR/EP AFT SKIN	GR/EP AFT SKIN			
FIBER ANGLE	45.000	0.000	-45.000	0.000	0.000	0.000
BAL. LAYER CLUE	1	0	1	0	0	0
INI. NO. OF LAM.	1	1	1	0	0	0
MIN. NO. OF LAM.	1	1	1	0	0	0
MAX. NO. OF LAM.	0	0	0	0	0	0
LAMINA THICKNESS	5.00000E-03	5.00000E-03	5.00000E-03	0.	0.	0.
DENSITY	5.70000E-02	5.70000E-02	5.70000E-02	0.	0.	0.
E11	2.01000E+07	2.01000E+07	2.01000E+07	0.	0.	0.
E22	1.60000E+06	1.60000E+06	1.60000E+06	0.	0.	0.
G12	8.00000E+05	8.00000E+05	8.00000E+05	0.	0.	0.
NU12	.29400E+00	.29400E+00	.29400E+00	0.	0.	0.
FXT	2.12000E+05	2.12000E+05	2.12000E+05	0.	0.	0.
FXC	1.85000E+05	1.85000E+05	1.85000E+05	0.	0.	0.
GZ	1.00000E+19	1.00000E+19	1.00000E+19	0.	0.	0.

COORDINATES OF POINTS DEFINING REFERENCE DIRECTIONS FOR PROPERTY AXES

ZONE	POINT A			POINT B		
	X	Y	Z	X	Y	Z
1	237.418	8600060.000	.001	.304	264.718	800009.000

MEMBER CARDS TO GENERATE MEMBER PSEUDO MATRIX

5012 518	11	6	20	4	18	.015			1	24
5012	61					3		45.0	1	
5012	71					3		-45.0	1	
5013 518	11	8	22	6	20	.015			1	25
5013	61					3		45.0	1	
5013	65					4		0.0		
5013	71					3		-45.0	1	
5014 517	11	8	22	10	24	.015			1	26
5014	61					2		45.0	1	
5014	71					2		-45.0	1	
5015 517	11	10	24	12	26	.015			1	27
5016 517	11	12	26	13	27	.015			1	28
4021 4 7	11	18	17	15		5.0			RIB	29
6022 6 7	11	18	17	20	19	5.0				30
6023 6 7	11	20	19	22	21	5.0				31
6024 6 5	11	22	21	24	23	5.0				32
6025 6 5	11	24	23	26	25	5.0				33
4026 4 5	11	26	25	27		5.0				34
1011 1 9	11	17	18			.1			ROD	35
1012 1 9	11	19	20			.1				36
1013 1 9	11	21	22			.1				37
1014 1 9	11	23	24			.1				38
1015 1 9	11	25	26			.1				39
6031 6 6	11	18	32	17	31	3.3			SP	40
6031	52					3.3	3.3		SP1040	
6032 6 6	11	20	34	19	33	3.4			SP	41
6032	52					3.4	3.4		SP1041	
6033 6 4	11	22	36	21	35	3.5			SP	42
6033	52					3.5	3.5		SP1042	
6034 6 4	11	24	38	23	37	3.6			SP	43
6034	52					3.6	3.6		SP1043	
6035 6 4	11	26	40	25	39	1.9			SP	44
6035	52					1.9	1.9		SP1044	
9033 6 8	11	22	36	21	35	.01			SP2044	
5021 518	11	17	31	15	29	.015			IUP	45
5021	61					2	2	45.0	1	
5021	71					2	2	-45.0	1	
5022 518	11	19	33	17	31	.015			1	46
5022	61					3	3	45.0	1	
5022	71					3	3	-45.0	1	
5023 518	11	21	35	19	33	.015			1	47
5023	61					3	3	45.0	1	
5023	65					4	4	0.0		
5023	71					3	3	-45.0	1	
5024 517	11	21	35	23	37	.015			1	48
5024	61					3	3	45.0	1	
5024	65					3	3	0.0		
5024	71					3	3	-45.0	1	
5025 517	11	23	37	25	39	.015			1	49
5026 517	11	25	39	27	41	.015			1	50
5031 518	11	18	32	15	29	.015			ILOW	51
5031	61					2	2	45.0	1	

MEMBER CARDS TO GENERATE MEMBER PSEUDO MATRIX

5031	71					2	2	-45.0	1	
5032 518	11	20	34	18	32	.015			1	52
5032	61					3	3	45.0	1	
5032	71					3	3	-45.0	1	
5033 518	11	22	36	20	34	.015			1	53
5033	61					3	3	45.0	1	
5033	65					6	6	0.0		
5033	71					3	3	-45.0	1	
5034 517	11	22	36	24	38	.015			1	54
5034	61					3	3	45.0	1	
5034	65					3	3	0.0		
5034	71					3	3	-45.0	1	
5035 517	11	24	38	26	40	.015			1	55
5036 517	11	26	40	27	41	.015			1	56
4041 4 7	11	32	31	29		5.0			RIB	57
6042 6 7	11	32	31	34	33	5.0				58
6043 6 7	11	34	33	36	35	5.0				59
6044 6 5	11	36	35	38	37	5.0				60
6045 6 5	11	38	37	40	39	5.0				61
4046 4 5	11	40	39	41		5.0				62
1021 1 9	11	32	31			.1			ROD	63
1022 1 9	11	34	33			.1				64
1023 1 9	11	36	35			.1				65
1024 1 9	11	38	37			.1				66
1025 1 9	11	40	39			.1				67
6051 6 6	11	32	46	31	45	3.7			SP	68
6051	52					3.7	3.7		SP1068	
6052 6 6	11	34	48	33	47	3.8			SP	69
6052	52					3.8	3.8		SP1069	
6053 6 4	11	36	50	35	49	3.95			SP	70
6053	52					3.95	3.95		SP1070	
6054 6 4	11	38	52	37	51	4.1			SP	71
6054	52					4.1	4.1		SP1071	
6055 6 4	11	40	54	39	53	2.1			SP	72
6055	52					2.1	2.1		SP1072	
9053 6 8	11	36	50	35	49	.01			SP2072	
5041 518	11	31	45	29	43	.015			IUP	73
5041	61					2	2	45.0	1	
5041	71					2	2	-45.0	1	
5042 518	11	33	47	31	45	.015			1	74
5042	61					3	3	45.0	1	
5042	71					3	3	-45.0	1	
5043 518	11	35	49	33	47	.015			1	75
5043	61					3	3	45.0	1	
5043	65					6	6	.0		
5043	71					3	3	-45.0	1	
5044 517	11	35	49	37	51	.015			1	76
5044	61					3	3	45.0	1	
5044	65					6	6	0.0		
5044	71					3	3	-45.0	1	
5045 517	11	37	51	39	53	.015			1	77
5045	61					3	3	45.0	1	

MEMBER CARDS TO GENERATE MEMBER PSEUDO MATRIX

5045	71					3	3	-45.0	1	
5046	517	11	39	53	41	55	.015		1	78
5051	518	11	32	46	29	43	.015		1LOW	79
5051		61					2	2	1	
5051		71					2	2	1	
5052	518	11	34	48	32	46	.015		1	90
5052		61					3	3	1	
5052		71					3	3	1	
5053	518	11	36	50	34	48	.015		1	91
5053		61					3	3	1	
5053		65					10	10	1	
5053		71					3	3	1	
5054	517	11	36	50	38	52	.015	0.0	1	92
5054		61					3	3	1	
5054		65					6	6	1	
5054		71					3	3	1	
5055	517	11	38	52	40	54	.015		1	93
5055		61					2	2	1	
5055		71					2	2	1	
5056	517	11	40	54	41	55	.015		1	94
4061	4 7	11	46	45	43		5.0		RIB	95
6062	6 7	11	46	45	48	47	5.0			96
6063	6 7	11	48	47	50	49	5.0			97
6064	6 5	11	50	49	52	51	5.0			98
6065	6 5	11	52	51	54	53	5.0			99
4066	4 5	11	54	53	55		5.0			90
1031	1 9	11	46	45			.1		ROD	91
1032	1 9	11	48	47			.1			92
1033	1 9	11	50	49			.1			93
1034	1 9	11	52	51			.1			94
1035	1 9	11	54	53			.1			95
6071	6 6	11	46	60	45	59	4.0		SP	96
6071		52					4.0	4.0	SP1096	
6072	6 6	11	48	62	47	61	4.15		SP	97
6072		52					4.15	4.15	SP1097	
6073	6 4	11	50	64	49	63	4.3		SP	98
6073		52					4.3	4.3	SP1098	
6074	6 4	11	52	66	51	65	4.45		SP	99
6074		52					4.45	4.45	SP1099	
6075	6 4	11	54	68	53	67	2.3		SP	100
6075		52					2.3	2.3	SP1100	
9073	6 8	11	50	64	49	63	.01		SP2100	
5061	518	11	45	59	43	57	.015		IUP	101
5061		61					2	2	1	
5061		71					2	2	1	
5062	518	11	47	61	45	59	.015		1	102
5062		61					3	3	1	
5062		71					3	3	1	
5063	518	11	49	63	47	61	.015		1	103
5063		61					3	3	1	
5063		65					8	8	1	
5063		71					3	3	1	

MEMBER CARDS TO GENERATE MEMBER PSEUDO MATRIX

5081 518	11	59	73	57	71	.015				1UP	129
5081	61						2	2	45.0	1	
5081	71						2	2	-45.0	1	
5082 518	11	61	75	59	73	.015				1	130
5082	61						3	3	45.0	1	
5082	71						3	3	-45.0	1	
5083 518	11	63	77	61	75	.015					131
5083	61						3	3	45.0	1	
5083	65						10	10	.0		
5083	71						3	3	-45.0	1	
5084 517	11	63	77	65	79	.015					132
5084	61						3	3	45.0	1	
5084	65						12	12	0.0		
5084	71						3	3	-45.0	1	
5085 517	11	65	79	67	81	.015					133
5085	61						9	9	45.0	1	
5085	71						9	9	-45.0	1	
5086 517	11	67	81	69	83	.015					134
5086	61						10	10	45.0	1	
5086	71						10	10	-45.0	1	
5091 518	11	60	74	57	71	.015				1LOW	135
5091	61						2	2	45.0	1	
5091	71						2	2	-45.0	1	
5092 518	11	62	76	60	74	.015					136
5092	61						3	3	45.0	1	
5092	71						3	3	-45.0	1	
5093 518	11	64	78	62	76	.015					137
5093	61						3	3	45.0	1	
5093	65						18	18	.0		
5093	71						3	3	-45.0	1	
5094 517	11	64	78	66	80	.015					138
5094	61						3	3	45.0	1	
5094	65						14	14	0.0		
5094	71						3	3	-45.0	1	
5095 517	11	66	80	68	82	.015					139
5095	61						8	8	45.0	1	
5095	71						8	8	-45.0	1	
5096 517	11	68	82	69	83	.015					140
5096	61						8	8	45.0	1	
5096	71						8	8	-45.0	1	
4101 4 7	11	74	73	71		5.0				RIB	141
6102 6 7	11	74	73	76	75	5.0					142
6103 6 7	11	76	75	78	77	5.0					143
6104 6 5	11	78	77	80	79	5.0					144
6105 6 5	11	80	79	82	81	5.0					145
4106 4 5	11	82	81	83		5.0					146
1051 1 9	11	74	73			.1				ROD	147
1052 1 9	11	76	75			.1					148
1053 1 9	11	78	77			.1					149
1054 1 9	11	80	79			.1					150
1055 1 9	11	82	81			.1					151
6111 6 6	11	74	88	73	87	4.8				SP	152

MEMBER CARDS TO GENERATE MEMBER PSEUDO MATRIX

5135	65					2			0.0		
5135	61					13	13		45.0	1	
5135	71					13	13		-45.0	1	
5136	517	11	96	110	97	111	.015			1	196
5136	61					17	17		45.0	1	
5136	71					17	17		-45.0	1	
4141	4	7	11	102	101	99	5.0				RIB 197
6142	6	7	11	102	101	104	103	5.0			198
6143	6	7	11	104	103	106	105	5.0			199
6144	613	11	106	105	108	107	5.0				200
6145	613	11	108	107	110	109	5.0				201
4146	413	11	110	109	111	5.0					202
1071	1	9	11	102	101	.1					203
1072	1	9	11	104	103	.1					204
1073	1	9	11	106	105	.1					205
1074	1	9	11	108	107	.1					206
1075	1	9	11	110	109	.1					207
6151	6	6	11	102	116	101	115	5.5			SP 208
6151	52					5.5		5.5			SP1208
6152	6	6	11	104	118	103	117	5.6			SP 209
6152	52					5.6		5.6			SP1209
6153	612	11	106	120	105	119	5.8				SP 210
6153	52					5.8		5.8			SP1210
6154	612	11	108	122	107	121	6.0				SP 211
6154	52					6.0		6.0			SP1211
6155	612	11	110	124	109	123	3.1				SP 212
6155	52					3.1		3.1			SP1212
9153	6	8	11	106	120	105	119	.01			SP2212
5141	518	11	101	115	99	113	.015				IUP 213
5142	518	11	103	117	101	115	.015				1 214
5143	518	11	105	119	103	117	.015				215
5143	61					2	2		45.0	1	
5143	65					12	12		0.0		
5143	71					2	2		-45.0	1	
5144	517	11	105	119	107	121	.015				216
5144	61					2	2		45.0	1	
5144	65					25	25		0.0		
5144	71					2	2		-45.0	1	
5145	517	11	107	121	109	123	.015				217
5145	61					15	15		45.0	1	
5145	65					8	8		0.0		
5145	71					15	15		-45.0	1	
5146	517	11	109	123	111	125	.015				218
5146	61					30	30		45.0	1	
5146	65					3	3		0.0		
5146	71					30	30		-45.0	1	
5151	518	11	102	116	99	113	.015				ILOW 219
5152	518	11	104	118	102	116	.015				1 220
5153	518	11	106	120	104	118	.015				221
5153	61					2	2		45.0	1	
5153	65					25	25		0.0		
5153	71					2	2		-45.0	1	

MEMBER CARDS TO GENERATE MEMBER PSEUDO MATRIX

5154 517	11 106 120 108 122 .015							222
5154	61				2	2	45.0	1
5154	65				27	27	0.0	
5154	71				2	2	-45.0	1
5155 517	11 108 122 110 124 .015							223
5155	61				14	14	45.0	1
5155	65				8	8	0.0	
5155	71				14	14	-45.0	1
5156 517	11 110 124 111 125 .015							224
5156	61				19	19	45.0	1
5156	65				2	2	0.0	
5156	71				19	19	-45.0	1
4161 4 7	11 116 115 113			5.0				RIB 225
6162 6 7	11 116 115 118 117			5.0				226
6163 6 7	11 118 117 120 119			5.0				227
6164 613	11 120 119 122 121			5.0				228
6165 613	11 122 121 124 123			5.0				229
4166 413	11 124 123 125			5.0				230
1081 1 9	11 116 115			.1				ROD 231
1082 1 9	11 118 117			.1				232
1083 1 9	11 120 119			.1				233
1084 1 9	11 122 121			.1				234
1085 1 9	11 124 123			.1				235
6171 6 6	11 116 130 115 129			5.8				SP 236
6171	52			5.8	5.8			SP1236
6172 6 6	11 118 132 117 131			6.0				SP 237
6172	52			6.0	6.0			SP1237
6173 612	11 120 134 119 133			6.2				SP 238
6173	52			6.2	6.2			SP1238
6174 612	11 122 136 121 135			6.45				SP 239
6174	52			6.45	6.45			SP1239
6175 612	11 124 138 123 137			3.3				SP 240
6175	52			3.3	3.3			SP1240
9173 6 8	11 120 134 119 133			.01				SP2240
5161 518	11 115 129 113 127 .015							1UP 241
5162 518	11 117 131 115 129 .015							1 242
5163 518	11 119 133 117 131 .015							243
5163	61				2	2	45.0	1
5163	65				6	6	0.0	
5163	71				2	2	-45.0	1
5164 517	11 119 133 121 135 .015							243
5164	61				3	3	45.0	1
5164	65				26	26	0.0	
5164	71				3	3	-45.0	1
5165 517	11 121 135 123 137 .015							244
5165	61				15	15	45.0	1
5165	65				13	13	0.0	
5165	71				15	15	-45.0	1
5166 517	11 123 137 125 139 .015							245
5166	61				41	41	45.0	1
5166	65				3	3	0.0	
5166	71				41	41	-45.0	1

MEMBER CARDS TO GENERATE MEMBER PSEUDO MATRIX

5186	61					43	43	45.0	1	
5186	65					3	3	0.0		
5186	71					43	43	-45.0	1	
5191	518	11	130	144	127	141	.015		1	LOW 274
5192	518	11	132	148	130	144	.015		1	275
5193	518	11	134	152	132	148	.015			276
5193	61					2	2	45.0	1	
5193	71					2	2	-45.0	1	
5194	517	11	134	152	136	156	.015			277
5194	61					2	2	45.0	1	
5194	65					30	30	0.0		
5194	71					2	2	-45.0	1	
5195	517	11	136	156	138	158	.015		1	278
5195	61					11	11	45.0	1	
5195	65					19	19	0.0		
5195	71					11	11	-45.0	1	
5196	517	11	138	158	139	159	.015		1	279
5196	61					22	22	45.0	1	
5196	65					4	4	0.0		
5196	71					22	22	-45.0	1	
4201	411	11	144	143	141		.1		RR	280
6202	611	11	144	143	146	145	.1			281
6203	611	11	146	145	148	147	.1			282
6204	611	11	148	147	150	149	.1			283
6205	611	11	150	149	152	151	.1			284
6206	611	11	152	151	154	153	.1			285
6207	611	11	154	153	156	155	.1			286
6208	611	11	156	155	158	157	.1			287
4209	411	11	158	157	159		.1			288
4211	411	11	157	165	155		.1		RR	289
6212	611	11	157	165	159	163	.1			290
6213	611	11	164	163	162	161	.1			291
6214	611	11	158	166	159	164	.1			292
4215	411	11	158	166	156		.1			293
1101	1 9	11	144	143			.1		RR	294
1102	111	11	146	145			.1			295
1103	1 9	11	148	147			.1			296
1104	111	11	150	149			.1			297
1105	1 9	11	152	151			.1			298
1106	111	11	154	153			.1			299
1107	1 9	11	156	155			.1			300
1108	111	11	158	157			.1			301
1201	111	11	157	165			.1		RR	302
1202	111	11	159	163			.1			303
1203	111	11	162	161			.1			304
1204	111	11	159	164			.1			305
1205	111	11	158	166			.1			306
1301	111	11	141	143			.1		RR	307
1302	111	11	143	145			.1		RR	308
1303	111	11	145	147			.1			309
1304	111	11	147	149			.1			310
1305	111	11	149	151			.1			311

MEMBER CARDS TO GENERATE MEMBER PSEUDO MATRIX

1306 111	11 151 153	.1			312
1307 111	11 153 155	.1			313
1308 111	11 155 157	.1			314
1309 111	11 157 159	.1			315
1311 111	11 141 144	.1			316
1312 111	11 144 146	.1	RR		317
1313 111	11 146 148	.1			318
1314 111	11 148 150	.1			319
1315 111	11 150 152	.1			320
1316 111	11 152 154	.1			321
1317 111	11 154 156	.1			322
1318 111	11 156 158	.1			323
1319 111	11 158 159	.1			324
1401 111	11 155 165	.1	RR		325
1402 111	11 165 163	.1			326
1403 111	11 163 161	.1			327
1404 111	11 164 162	.1			328
1405 111	11 166 164	.1			329
1406 111	11 156 166	.1			330

THE NUMBER OF CORNER FORCES IN THE TOTAL STRUCTURE = 5931
 ALL INPUT IN SUBROUTINE CARDIN HAS BEEN COMPLETED

		G E O M E T R Y			B O U N D A R Y C O N D I T I O N S					
KARD	NODE	X	Y	Z	X	Y	Z	MX	MY	MZ
1	1	2.477018E+02	6.000000E+01	5.672165E+01	1	2	3	0	0	0
2	2	0.	0.	0.	0	0	0	0	0	0
3	3	2.442738E+02	6.000000E+01	5.699260E+01	4	5	6	0	0	0
4	4	2.442738E+02	6.000000E+01	5.667617E+01	7	8	9	0	0	0
5	5	2.408458E+02	6.000000E+01	5.720157E+01	10	11	12	0	0	0
6	6	2.408458E+02	6.000000E+01	5.652323E+01	13	14	15	0	0	0
7	7	2.374178E+02	6.000000E+01	5.730441E+01	16	17	18	0	0	0
8	8	2.374178E+02	6.000000E+01	5.645532E+01	19	20	21	0	0	0
9	9	2.339898E+02	6.000000E+01	5.726618E+01	22	23	24	0	0	0
10	10	2.339898E+02	6.000000E+01	5.647642E+01	25	25	27	0	0	0
11	11	2.314188E+02	6.000000E+01	5.706379E+01	28	29	30	0	0	0
12	12	2.314188E+02	6.000000E+01	5.658190E+01	31	32	33	0	0	0
13	13	2.305618E+02	6.000000E+01	5.675000E+01	34	35	36	0	0	0
14	14	0.	0.	0.	0	0	0	0	0	0
15	15	2.516633E+02	5.500000E+01	5.671811E+01	37	38	39	0	0	0
16	16	0.	0.	0.	0	0	0	0	0	0
17	17	2.478070E+02	5.500000E+01	5.702291E+01	40	41	42	0	0	0
18	18	2.478070E+02	5.500000E+01	5.666694E+01	43	44	45	0	0	0
19	19	2.439506E+02	5.500000E+01	5.725800E+01	46	47	48	0	0	0
20	20	2.439506E+02	5.500000E+01	5.649489E+01	49	50	51	0	0	0
21	21	2.400943E+02	5.500000E+01	5.737369E+01	52	53	54	0	0	0
22	22	2.400943E+02	5.500000E+01	5.641850E+01	55	55	57	0	0	0
23	23	2.362380E+02	5.500000E+01	5.733068E+01	58	59	60	0	0	0
24	24	2.362380E+02	5.500000E+01	5.644224E+01	61	62	63	0	0	0
25	25	2.333457E+02	5.500000E+01	5.710300E+01	64	65	66	0	0	0
26	26	2.333457E+02	5.500000E+01	5.656089E+01	67	68	69	0	0	0
27	27	2.323816E+02	5.500000E+01	5.675000E+01	70	71	72	0	0	0
28	28	0.	0.	0.	0	0	0	0	0	0
29	29	2.556248E+02	5.000000E+01	5.671457E+01	73	74	75	0	0	0
30	30	0.	0.	0.	0	0	0	0	0	0
31	31	2.513402E+02	5.000000E+01	5.705322E+01	76	77	78	0	0	0
32	32	2.513402E+02	5.000000E+01	5.665772E+01	79	80	81	0	0	0
33	33	2.470555E+02	5.000000E+01	5.731442E+01	82	83	84	0	0	0
34	34	2.470555E+02	5.000000E+01	5.646655E+01	85	86	87	0	0	0
35	35	2.427708E+02	5.000000E+01	5.744296E+01	88	89	90	0	0	0
36	36	2.427708E+02	5.000000E+01	5.638168E+01	91	92	93	0	0	0
37	37	2.384862E+02	5.000000E+01	5.739517E+01	94	95	96	0	0	0
38	38	2.384862E+02	5.000000E+01	5.640805E+01	97	98	99	0	0	0
39	39	2.352727E+02	5.000000E+01	5.714221E+01	100	101	102	0	0	0
40	40	2.352727E+02	5.000000E+01	5.653989E+01	103	104	105	0	0	0
41	41	2.342015E+02	5.000000E+01	5.675000E+01	106	107	108	0	0	0
42	42	0.	0.	0.	0	0	0	0	0	0
43	43	2.595863E+02	4.500000E+01	5.671103E+01	109	110	111	0	0	0
44	44	0.	0.	0.	0	0	0	0	0	0
45	45	2.548733E+02	4.500000E+01	5.708354E+01	112	113	114	0	0	0
46	46	2.548733E+02	4.500000E+01	5.664849E+01	115	116	117	0	0	0
47	47	2.501603E+02	4.500000E+01	5.737085E+01	118	119	120	0	0	0
48	48	2.501603E+02	4.500000E+01	5.643822E+01	121	122	123	0	0	0
49	49	2.454473E+02	4.500000E+01	5.751224E+01	124	125	126	0	0	0
50	50	2.454473E+02	4.500000E+01	5.634486E+01	127	128	129	0	0	0

		G E O M E T R Y			B O U N D A R Y C O N D I T I O N S					
KARD	NODE	X	Y	Z	X	Y	Z	Mx	My	Mz
51	51	2.407343E+02	4.500000E+01	5.745967E+01	130	131	132	0	0	0
52	52	2.407343E+02	4.500000E+01	5.637387E+01	133	134	135	0	0	0
53	53	2.371996E+02	4.500000E+01	5.718142E+01	136	137	138	0	0	0
54	54	2.371996E+02	4.500000E+01	5.651888E+01	139	140	141	0	0	0
55	55	2.360213E+02	4.500000E+01	5.675000E+01	142	143	144	0	0	0
56	56	0.	0.	0.	0	0	0	0	0	0
57	57	2.635479E+02	4.000000E+01	5.670749E+01	145	146	147	0	0	0
58	58	0.	0.	0.	0	0	0	0	0	0
59	59	2.584065E+02	4.000000E+01	5.711385E+01	148	149	150	0	0	0
60	60	2.584065E+02	4.000000E+01	5.663926E+01	151	152	153	0	0	0
61	61	2.532652E+02	4.000000E+01	5.742727E+01	154	155	156	0	0	0
62	62	2.532652E+02	4.000000E+01	5.640988E+01	157	158	159	0	0	0
63	63	2.481239E+02	4.000000E+01	5.758151E+01	160	161	162	0	0	0
64	64	2.481239E+02	4.000000E+01	5.630804E+01	163	164	165	0	0	0
65	65	2.429825E+02	4.000000E+01	5.752417E+01	166	167	168	0	0	0
66	66	2.429825E+02	4.000000E+01	5.633968E+01	169	170	171	0	0	0
67	67	2.391265E+02	4.000000E+01	5.722063E+01	172	173	174	0	0	0
68	68	2.391265E+02	4.000000E+01	5.649788E+01	175	176	177	0	0	0
69	69	2.378412E+02	4.000000E+01	5.675000E+01	178	179	180	0	0	0
70	70	0.	0.	0.	0	0	0	0	0	0
71	71	2.675094E+02	3.500000E+01	5.670394E+01	181	182	183	0	0	0
72	72	0.	0.	0.	0	0	0	0	0	0
73	73	2.619397E+02	3.500000E+01	5.714416E+01	184	185	186	0	0	0
74	74	2.619397E+02	3.500000E+01	5.663004E+01	187	188	189	0	0	0
75	75	2.563700E+02	3.500000E+01	5.748370E+01	190	191	192	0	0	0
76	76	2.563700E+02	3.500000E+01	5.638155E+01	193	194	195	0	0	0
77	77	2.508004E+02	3.500000E+01	5.765079E+01	196	197	198	0	0	0
78	78	2.508004E+02	3.500000E+01	5.627122E+01	199	200	201	0	0	0
79	79	2.452307E+02	3.500000E+01	5.758866E+01	202	203	204	0	0	0
80	80	2.452307E+02	3.500000E+01	5.630550E+01	205	206	207	0	0	0
81	81	2.410535E+02	3.500000E+01	5.725984E+01	208	209	210	0	0	0
82	82	2.410535E+02	3.500000E+01	5.647687E+01	211	212	213	0	0	0
83	83	2.396610E+02	3.500000E+01	5.675000E+01	214	215	216	0	0	0
84	84	0.	0.	0.	0	0	0	0	0	0
85	85	2.714709E+02	3.000000E+01	5.670040E+01	217	218	219	0	0	0
86	86	0.	0.	0.	0	0	0	0	0	0
87	87	2.654729E+02	3.000000E+01	5.717447E+01	220	221	222	0	0	0
88	88	2.654729E+02	3.000000E+01	5.662081E+01	223	224	225	0	0	0
89	89	2.594749E+02	3.000000E+01	5.754012E+01	226	227	228	0	0	0
90	90	2.594749E+02	3.000000E+01	5.635321E+01	229	230	231	0	0	0
91	91	2.534769E+02	3.000000E+01	5.772006E+01	232	233	234	0	0	0
92	92	2.534769E+02	3.000000E+01	5.623440E+01	235	236	237	0	0	0
93	93	2.474789E+02	3.000000E+01	5.765316E+01	238	239	240	0	0	0
94	94	2.474789E+02	3.000000E+01	5.627131E+01	241	242	243	0	0	0
95	95	2.429804E+02	3.000000E+01	5.729905E+01	244	245	246	0	0	0
96	96	2.429804E+02	3.000000E+01	5.645587E+01	247	248	249	0	0	0
97	97	2.414809E+02	3.000000E+01	5.675000E+01	250	251	252	0	0	0
98	98	0.	0.	0.	0	0	0	0	0	0
99	99	2.754324E+02	2.500000E+01	5.669686E+01	253	254	255	0	0	0
100	100	0.	0.	0.	0	0	0	0	0	0

G E O M E T R Y			B O U N D A R Y C O N D I T I O N S							
KARD	NODE	X	Y	Z	X	Y	Z	Mx	My	MZ
101	101	2.690061E+02	2.500000E+01	5.720479E+01	256	257	258	0	0	0
102	102	2.690061E+02	2.500000E+01	5.661159E+01	259	260	261	0	0	0
103	103	2.625797E+02	2.500000E+01	5.759655E+01	262	263	264	0	0	0
104	104	2.625797E+02	2.500000E+01	5.632487E+01	265	266	267	0	0	0
105	105	2.561534E+02	2.500000E+01	5.778934E+01	268	269	270	0	0	0
106	106	2.561534E+02	2.500000E+01	5.619758E+01	271	272	273	0	0	0
107	107	2.497271E+02	2.500000E+01	5.771766E+01	274	275	276	0	0	0
108	108	2.497271E+02	2.500000E+01	5.623713E+01	277	278	279	0	0	0
109	109	2.449073E+02	2.500000E+01	5.733826E+01	280	281	282	0	0	0
110	110	2.449073E+02	2.500000E+01	5.643486E+01	283	284	285	0	0	0
111	111	2.433007E+02	2.500000E+01	5.675000E+01	286	287	288	0	0	0
112	112	0.	0.	0.	0	0	0	0	0	0
113	113	2.793939E+02	2.000000E+01	5.669332E+01	289	290	291	0	0	0
114	114	0.	0.	0.	0	0	0	0	0	0
115	115	2.725393E+02	2.000000E+01	5.723510E+01	292	293	294	0	0	0
116	116	2.725393E+02	2.000000E+01	5.660236E+01	295	296	297	0	0	0
117	117	2.656846E+02	2.000000E+01	5.765297E+01	298	299	300	0	0	0
118	118	2.656846E+02	2.000000E+01	5.629654E+01	301	302	303	0	0	0
119	119	2.588299E+02	2.000000E+01	5.785861E+01	304	305	306	0	0	0
120	120	2.588299E+02	2.000000E+01	5.616076E+01	307	308	309	0	0	0
121	121	2.519753E+02	2.000000E+01	5.778216E+01	310	311	312	0	0	0
122	122	2.519753E+02	2.000000E+01	5.620295E+01	313	314	315	0	0	0
123	123	2.468343E+02	2.000000E+01	5.737747E+01	316	317	318	0	0	0
124	124	2.468343E+02	2.000000E+01	5.641386E+01	319	320	321	0	0	0
125	125	2.451206E+02	2.000000E+01	5.675000E+01	322	323	324	0	0	0
126	126	0.	0.	0.	0	0	0	0	0	0
127	127	2.833554E+02	1.500000E+01	5.668978E+01	325	326	327	0	0	0
128	128	0.	0.	0.	0	0	0	0	0	0
129	129	2.760724E+02	1.500000E+01	5.726541E+01	328	329	330	0	0	0
130	130	2.760724E+02	1.500000E+01	5.659314E+01	331	332	333	0	0	0
131	131	2.687894E+02	1.500000E+01	5.770940E+01	334	335	336	0	0	0
132	132	2.687894E+02	1.500000E+01	5.626820E+01	337	338	339	0	0	0
133	133	2.615064E+02	1.500000E+01	5.792789E+01	340	341	342	0	0	0
134	134	2.615064E+02	1.500000E+01	5.612394E+01	343	344	345	0	0	0
135	135	2.542234E+02	1.500000E+01	5.784665E+01	346	347	348	0	0	0
136	136	2.542234E+02	1.500000E+01	5.616876E+01	349	350	351	0	0	0
137	137	2.487612E+02	1.500000E+01	5.741668E+01	352	353	354	0	0	0
138	138	2.487612E+02	1.500000E+01	5.639285E+01	355	356	357	0	0	0
139	139	2.469404E+02	1.500000E+01	5.675000E+01	358	359	360	0	0	0
140	140	0.	0.	0.	0	0	0	0	0	0
141	141	2.869208E+02	1.050000E+01	5.668659E+01	361	362	363	0	0	0
142	142	0.	0.	0.	0	0	0	0	0	0
143	143	2.797823E+02	9.750000E+00	5.729724E+01	364	365	366	0	0	0
144	144	2.797823E+02	9.750000E+00	5.658345E+01	367	368	369	0	0	0
145	145	2.740747E+02	9.000000E+00	5.769809E+01	370	0	371	0	0	0
146	146	2.740747E+02	9.000000E+00	5.629653E+01	-1	0	-2	0	0	0
147	147	2.725153E+02	9.000000E+00	5.777711E+01	372	-3	373	0	0	0
148	148	2.725153E+02	9.000000E+00	5.623420E+01	374	-4	375	0	0	0
149	149	2.671800E+02	9.000000E+00	5.796829E+01	376	0	377	0	0	0
150	150	2.671800E+02	9.000000E+00	5.610445E+01	378	0	-5	0	0	0

			G E O M E T R Y			B O U N D A R Y C O N D I T I O N S				
KARD NODE		X	Y	Z	X	Y	Z	Mx	My	MZ
151	151	2.647183E+02	9.000000E+00	5.801102E+01	379	-6	380	0	0	0
152	152	2.647183E+02	9.000000E+00	5.607976E+01	381	-7	382	0	0	0
153	153	2.589000E+02	9.000000E+00	5.798320E+01	383	0	384	0	0	0
154	154	2.589000E+02	9.000000E+00	5.609589E+01	385	0	-8	0	0	0
155	155	2.569213E+02	9.000000E+00	5.792405E+01	386	-9	387	0	0	0
156	156	2.569213E+02	9.000000E+00	5.612774E+01	388	-10	389	0	0	0
157	157	2.510735E+02	9.000000E+00	5.746373E+01	390	-11	391	0	0	0
158	158	2.510735E+02	9.000000E+00	5.636765E+01	392	-12	393	0	0	0
159	159	2.491243E+02	9.000000E+00	5.675000E+01	394	395	396	0	0	0
160	160	0.	0.	0.	0	0	0	0	0	0
161	161	2.422800E+02	9.000000E+00	5.800000E+01	397	0	398	0	0	0
162	162	2.422800E+02	9.000000E+00	5.600000E+01	399	0	-13	0	0	0
163	163	2.491243E+02	9.000000E+00	5.800000E+01	400	0	401	0	0	0
164	164	2.491243E+02	9.000000E+00	5.600000E+01	402	0	403	0	0	0
165	165	2.510735E+02	9.000000E+00	5.800000E+01	404	0	405	0	0	0
166	166	2.510735E+02	9.000000E+00	5.600000E+01	406	0	-14	0	0	0

MEMBER TYPE	TYPE NO.	NODE	NODE	NODE	NODE	GEOMETRIC PROPERTIES			ELASTIC		PROPERTIES	
						(26) (29)	(27) (30)	(28) (31)	(36) (40)	(37) (41)	(38)	(39)
						ALLOWABLE STRESSES				MIN/MAX GAGES		
						FXT (81)	FXC (82)	FYT (83)	FYC (84)	FS (85)	MIN (86)	MAX (87)
BAR	1	I	J			AREA			E			
BEAM	2	I	J	K		AREA I-ZZ	BETA J	I-YY	E			
TRIANGLE (NODE FORCE)	4	I	J	K		T		BETA	A23 A11 A22	A13 A22	A33	A12
QUADRILATERAL	5	I	J	K	L	T	BETA		A23 A11 A22	A13 A22	A33	A12
SHEAR PANEL	6	I	J	K	L	T			A23 E	A13 G		
KINKED QUAD. (4 NODES)	8	I	J	K	L	T	BETA		A11 A23	A22 A13	A33	A12
KINKED QUAD. (8 NODES)	8	I M	J N	K O	L P	T	BETA		A11 A23	A22 A13	A33	A12
HINGED BEAM	11	SAME AS TYPE 2										
PLATE BENDING TRIANGLE	15	SAME AS TYPE 4										
PLATE BENDING QUAD	16	SAME AS TYPE 5										
PLATE-MEMBRANE TRIANGLE	17	SAME AS TYPE 15										
PLATE-MEMBRANE QUAD	18	SAME AS TYPE 16										

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
4301	4	4	3	1		1.00000E-02 1.77000E+05	1.77000E+05	0. 1.77000E+05	7.22038E+06 1.77000E+05	7.22038E+06 5.00000E+04	8.01462E+05 1.00000E-02	5.61746E+06 0.
6302	6	4	3	6	5	1.00000E-02 1.77000E+05 ****MEMBER NUMBER 6302 HAS	1.77000E+05 0.	1.77000E+05 WARP	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
6303	6	6	5	8	7	1.00000E-02 1.77000E+05 ****MEMBER NUMBER 6303 HAS	1.77000E+05 0.	1.77000E+05 WARP	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
6304	6	8	7	10	9	1.00000E-02 1.77000E+05 ****MEMBER NUMBER 6304 HAS	1.77000E+05 0.	1.77000E+05 WARP	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
6305	6	10	9	12	11	1.00000E-02 1.77000E+05 ****MEMBER NUMBER 6305 HAS	1.77000E+05 0.	1.77000E+05 WARP	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
4306	4	12	11	13		1.00000E-02 1.77000E+05	1.77000E+05	0. 1.77000E+05	7.22038E+06 1.77000E+05	7.22038E+06 5.00000E+04	8.01462E+05 1.00000E-02	5.61746E+06 0.
4001	4	4	3	1		2.50000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 2.50000E+00	1.36489E+04 2.50000E+00
6002	6	4	3	6	5	2.50000E+00 3.75000E+02 ****MEMBER NUMBER 6002 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	2.50000E+00	2.50000E+00
6003	6	6	5	8	7	2.50000E+00 3.75000E+02 ****MEMBER NUMBER 6003 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	2.50000E+00	2.50000E+00
6004	6	8	7	10	9	2.50000E+00 3.75000E+02 ****MEMBER NUMBER 6004 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	2.50000E+00	2.50000E+00
6005	6	10	9	12	11	2.50000E+00 3.75000E+02 ****MEMBER NUMBER 6005 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	2.50000E+00	2.50000E+00
4006	4	12	11	13		2.50000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 2.50000E+00	1.36489E+04 2.50000E+00
1001	1	3	4			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)	
1002	1	5	6			1.00000E-01 3.00000E+03		3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1003	1	7	8			1.00000E-01 3.00000E+03		3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1004	1	9	10			1.00000E-01 3.00000E+03		3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1005	1	11	12			1.00000E-01 3.00000E+03		3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
6011	6	4	18	3	17	3.00000E+00 3.75000E+02		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.00000E+00	3.00000E+00
				****MEMBER NUMBER 6011 HAS 0. WARP									
6012	6	6	20	5	19	3.10000E+00 3.75000E+02		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.10000E+00	3.10000E+00
				****MEMBER NUMBER 6012 HAS 1.421085D-14 WARP									
6013	6	8	22	7	21	3.20000E+00 3.75000E+02		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.20000E+00	3.20000E+00
				****MEMBER NUMBER 6013 HAS 1.421085D-14 WARP									
6014	6	10	24	9	23	3.30000E+00 3.75000E+02		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.30000E+00	3.30000E+00
				****MEMBER NUMBER 6014 HAS 1.421085D-14 WARP									
6015	6	12	26	11	25	1.70000E+00 3.75000E+02		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	1.70000E+00	1.70000E+00
				****MEMBER NUMBER 6015 HAS 1.421085D-14 WARP									
9013	6	8	22	7	21	1.00000E-02 1.77000E+05		1.77000E+05	1.77000E+05	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
				****MEMBER NUMBER 9013 HAS 1.421085D-14 WARP									
5001	5	3	17	1	15	COMP MAT 18		3.55128E+01					
5002	5	5	19	3	17	COMP MAT 18		3.20570E+01					
5003	5	7	21	5	19	COMP MAT 18		0.					
5004	5	7	21	9	23	COMP MAT 17		0.					
5005	5	9	23	11	25	COMP MAT 17		-2.37696E+01					

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
5006	5	11	25	13	27	COMP MAT 17	-1.80232E+01					
5011	5	4	18	1	15	COMP MAT 18	3.51722E+01					
5012	5	6	20	4	18	COMP MAT 18	3.15520E+01					
5013	5	8	22	6	20	COMP MAT 18	0.					
5014	5	8	22	10	24	COMP MAT 17	0.					
5015	5	10	24	12	26	COMP MAT 17	-2.44242E+01					
5016	5	12	26	13	27	COMP MAT 17	-2.17331E+01					
4021	4	18	17	15		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
6022	6	18	17	20	19	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6022	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6023	6	20	19	22	21	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6023	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6024	6	22	21	24	23	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6024	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6025	6	24	23	26	25	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6025	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
4026	4	26	25	27		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
1011	1	17	18			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1012	1	19	20			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1013	1	21	22			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1014	1	23	24			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (31) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
1015	1	25	26			1.00000E-01 3.00000E+03		3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01 1.00000E-01
6031	6	18	32	17	31	3.30000E+00 3.75000E+02 ****MEMBER NUMBER 6031		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.30000E+00 3.30000E+00
							HAS	1.4210850-14	WARP			
6032	6	20	34	19	33	3.40000E+00 3.75000E+02 ****MEMBER NUMBER 6032		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.40000E+00 3.40000E+00
							HAS	1.4210850-14	WARP			
6033	6	22	36	21	35	3.50000E+00 3.75000E+02 ****MEMBER NUMBER 6033		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.50000E+00 3.50000E+00
							HAS	0.	WARP			
6034	6	24	38	23	37	3.60000E+00 3.75000E+02 ****MEMBER NUMBER 6034		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.60000E+00 3.60000E+00
							HAS	0.	WARP			
6035	6	26	40	25	39	1.90000E+00 3.75000E+02 ****MEMBER NUMBER 6035		3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	1.90000E+00 1.90000E+00
							HAS	7.1054270-15	WARP			
9033	6	22	36	21	35	1.00000E-02 1.77000E+05 ****MEMBER NUMBER 9033		1.77000E+05	1.77000E+05	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02 0.
							HAS	0.	WARP			
5021	5	17	31	15	29	COMP MAT 18		3.55128E+01				
5022	5	19	33	17	31	COMP MAT 18		3.20570E+01				
5023	5	21	35	19	33	COMP MAT 18		0.				
5024	5	21	35	23	37	COMP MAT 17		0.				
5025	5	23	37	25	39	COMP MAT 17		-2.37696E+01				
5026	5	25	39	27	41	COMP MAT 17		-1.80232E+01				
5031	5	18	32	15	29	COMP MAT 18		3.51722E+01				
5032	5	20	34	18	32	COMP MAT 18		3.15520E+01				
5033	5	22	36	20	34	COMP MAT 18		0.				
5034	5	22	36	24	38	COMP MAT 17		0.				

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
5035	5	24	38	26	40	COMP MAT 17	-2.44242E+01					
5036	5	26	40	27	41	COMP MAT 17	-2.17331E+01					
4041	4	32	31	29		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
6042	6	32	31	34	33	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6042 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6043	6	34	33	36	35	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6043 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6044	6	36	35	38	37	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6044 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6045	6	38	37	40	39	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6045 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
4046	4	40	39	41		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
1021	1	32	31			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1022	1	34	33			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1023	1	36	35			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1024	1	38	37			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1025	1	40	39			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
6051	6	32	46	31	45	3.70000E+00 3.75000E+02 ****MEMBER NUMBER 6051 HAS	3.75000E+02 1.421085D-14	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.70000E+00	3.70000E+00

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6052	6	34	48	33	47	3.80000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.80000E+00	3.80000E+00
****MEMBER NUMBER 6052 HAS						0.	WARP					
6053	6	36	50	35	49	3.95000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	3.95000E+00	3.95000E+00
****MEMBER NUMBER 6053 HAS						0.	WARP					
6054	6	38	52	37	51	4.10000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.10000E+00	4.10000E+00
****MEMBER NUMBER 6054 HAS						1.4210850-14	WARP					
6055	6	40	54	39	53	2.10000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	2.10000E+00	2.10000E+00
****MEMBER NUMBER 6055 HAS						7.1054270-15	WARP					
9053	6	36	50	35	49	1.00000E-02 1.77000E+05	1.77000E+05	1.77000E+05	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
****MEMBER NUMBER 9053 HAS						0.	WARP					
5041	5	31	45	29	43	COMP MAT 18	3.55128E+01					
5042	5	33	47	31	45	COMP MAT 18	3.20570E+01					
5043	5	35	49	33	47	COMP MAT 18	0.					
5044	5	35	49	37	51	COMP MAT 17	0.					
5045	5	37	51	39	53	COMP MAT 17	-2.37696E+01					
5046	5	39	53	41	55	COMP MAT 17	-1.80232E+01					
5051	5	32	46	29	43	COMP MAT 18	3.51722E+01					
5052	5	34	48	32	46	COMP MAT 18	3.15520E+01					
5053	5	36	50	34	48	COMP MAT 18	0.					
5054	5	36	50	38	52	COMP MAT 17	0.					
5055	5	38	52	40	54	COMP MAT 17	-2.44242E+01					
5056	5	40	54	41	55	COMP MAT 17	-2.17331E+01					
4061	4	46	45	43		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6062	6	46	45	48	47	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6062 HAS 0.	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6063	6	48	47	50	49	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6063 HAS 0.	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6064	6	50	49	52	51	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6064 HAS 0.	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6065	6	52	51	54	53	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6065 HAS 0.	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
4066	4	54	53	55		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
1031	1	46	45			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1032	1	48	47			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1033	1	50	49			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1034	1	52	51			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1035	1	54	53			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
6071	6	46	60	45	59	4.00000E+00 3.75000E+02 ****MEMBER NUMBER 6071 HAS 0.	3.75000E+02 0.	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.00000E+00	4.00000E+00
6072	6	48	62	47	61	4.15000E+00 3.75000E+02 ****MEMBER NUMBER 6072 HAS 1.421085D-14	3.75000E+02 1.421085D-14	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.15000E+00	4.15000E+00
6073	6	50	64	49	63	4.30000E+00 3.75000E+02 ****MEMBER NUMBER 6073 HAS 1.421085D-14	3.75000E+02 1.421085D-14	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.30000E+00	4.30000E+00

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODF (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6074	6	52	66	51	65	4.45000E+00 3.75000E+02						
****MEMBER NUMBER 6074 HAS						0.		3.75000E+02	WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.45000E+00 4.45000E+00
6075	6	54	68	53	67	2.30000E+00 3.75000E+02						
****MEMBER NUMBER 6075 HAS						1.421085D-14		3.75000E+02	WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	2.30000E+00 2.30000E+00
9073	6	50	64	49	63	1.00000E-02 1.77000E+05						
****MEMBER NUMBER 9073 HAS						1.421085D-14		1.77000E+05	WARP	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02 0.
5061	5	45	59	43	57	COMP MAT 18	3.55128E+01					
5062	5	47	61	45	59	COMP MAT 18	3.20570E+01					
5063	5	49	63	47	61	COMP MAT 18	0.					
5064	5	49	63	51	65	COMP MAT 17	0.					
5065	5	51	65	53	67	COMP MAT 17	-2.37696E+01					
5066	5	53	67	55	69	COMP MAT 17	-1.80232E+01					
5071	5	46	60	43	57	COMP MAT 18	3.51722E+01					
5072	5	48	62	46	60	COMP MAT 18	3.15520E+01					
5073	5	50	64	48	62	COMP MAT 18	0.					
5074	5	50	64	52	66	COMP MAT 17	0.					
5075	5	52	66	54	68	COMP MAT 17	-2.44242E+01					
5076	5	54	68	55	69	COMP MAT 17	-2.17331E+01					
4081	4	60	59	57		5.00000E+00 3.75000E+02		0. 3.75000E+02		3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00
6082	6	60	59	62	61	5.00000E+00 3.75000E+02						
****MEMBER NUMBER 6082 HAS						0.		3.75000E+02	WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00 5.00000E+00
6083	6	62	61	64	63	5.00000E+00 3.75000E+02						
****MEMBER NUMBER 6083 HAS						0.		3.75000E+02	WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00 5.00000E+00

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6084	6	64	63	66	65	5.00000E+00 3.75000E+02	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
****MEMBER NUMBER 6084 HAS												
6085	6	66	65	68	67	5.00000E+00 3.75000E+02	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
****MEMBER NUMBER 6085 HAS												
4086	4	68	67	69		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
1041	1	60	59			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1042	1	62	61			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1043	1	64	63			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1044	1	66	65			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1045	1	68	67			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
6091	6	60	74	59	73	4.45000E+00 3.75000E+02	3.75000E+02 2.8421710-14	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.45000E+00	4.45000E+00
****MEMBER NUMBER 6091 HAS												
6092	6	62	76	61	75	4.55000E+00 3.75000E+02	3.75000E+02 2.8421710-14	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.55000E+00	4.55000E+00
****MEMBER NUMBER 6092 HAS												
6093	6	64	78	63	77	4.70000E+00 3.75000E+02	3.75000E+02 0.	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.70000E+00	4.70000E+00
****MEMBER NUMBER 6093 HAS												
6094	6	66	80	65	79	4.85000E+00 3.75000E+02	3.75000E+02 0.	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.85000E+00	4.85000E+00
****MEMBER NUMBER 6094 HAS												
6095	6	68	82	67	81	2.50000E+00 3.75000E+02	3.75000E+02 0.	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	2.50000E+00	2.50000E+00
****MEMBER NUMBER 6095 HAS												

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
9093	6	64	78	63	77	1.00000E-02 1.77000E+05 ****MEMBER NUMBER 9093 HAS	1.77000E+05 0.	1.77000E+05 WARP	2.85000E+06 1.77000E+05	9.01462E+05 5.00000E+04	1.00000E-02	0.
5081	5	59	73	57	71	COMP MAT 18	3.55128E+01					
5082	5	61	75	59	73	COMP MAT 18	3.20570E+01					
5083	5	63	77	61	75	COMP MAT 18	0.					
5084	5	63	77	65	79	COMP MAT 17	0.					
5085	5	65	79	67	81	COMP MAT 17	-2.37696E+01					
5086	5	67	81	69	83	COMP MAT 17	-1.80232E+01					
5091	5	60	74	57	71	COMP MAT 18	3.51722E+01					
5092	5	62	76	60	74	COMP MAT 18	3.15520E+01					
5093	5	64	78	62	76	COMP MAT 18	0.					
5094	5	64	78	66	80	COMP MAT 17	0.					
5095	5	66	80	68	82	COMP MAT 17	-2.44242E+01					
5096	5	68	82	69	83	COMP MAT 17	-2.17331E+01					
4101	4	74	73	71		5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6102 HAS	3.75000E+02 0.	0. 3.75000E+02 WARP	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
6102	6	74	73	76	75	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6102 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6103	6	76	75	78	77	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6103 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6104	6	78	77	80	79	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6104 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6105	6	80	79	82	81	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6105 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
4106	4	82	81	83		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
1051	1	74	73			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1052	1	76	75			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1053	1	78	77			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1054	1	80	79			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1055	1	82	81			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
6111	6	74	88	73	87	4.80000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.80000E+00	4.80000E+00
****MEMBER NUMBER 6111 HAS 1.421085D-14 WARP												
6112	6	76	90	75	89	4.90000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	4.90000E+00	4.90000E+00
****MEMBER NUMBER 6112 HAS 0. WARP												
6113	6	78	92	77	91	5.05000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.05000E+00	5.05000E+00
****MEMBER NUMBER 6113 HAS 1.421085D-14 WARP												
6114	6	80	94	79	93	5.25000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.25000E+00	5.25000E+00
****MEMBER NUMBER 6114 HAS 0. WARP												
6115	6	82	96	81	95	2.70000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	2.70000E+00	2.70000E+00
****MEMBER NUMBER 6115 HAS 0. WARP												
9113	6	78	92	77	91	1.00000E-02 1.77000E+05	1.77000E+05	1.77000E+05	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
****MEMBER NUMBER 9113 HAS 1.421085D-14 WARP												
5101	5	73	87	71	85	COMP MAT 18	3.55128E+01					
5102	5	75	89	73	87	COMP MAT 18	3.20570E+01					

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
5103	5	77	91	75	89	COMP MAT 18	0.					
5104	5	77	91	79	93	COMP MAT 17	0.					
5105	5	79	93	81	95	COMP MAT 17	-2.37696E+01					
5106	5	81	95	83	97	COMP MAT 17	-1.80232E+01					
5111	5	74	88	71	85	COMP MAT 18	3.51722E+01					
5112	5	76	90	74	88	COMP MAT 18	3.15520E+01					
5113	5	78	92	76	90	COMP MAT 18	0.					
5114	5	78	92	80	94	COMP MAT 17	0.					
5115	5	80	94	82	96	COMP MAT 17	-2.44242E+01					
5116	5	82	96	83	97	COMP MAT 17	-2.17331E+01					
4121	4	88	87	85		5.00000E+00 3.75000E+02	0. 3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
6122	6	88	87	90	89	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6122 HAS	0. 3.75000E+02 0.	0. 3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6123	6	90	89	92	91	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6123 HAS	0. 3.75000E+02 0.	0. 3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6124	6	92	91	94	93	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6124 HAS	0. 3.75000E+02 0.	0. 3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6125	6	94	93	96	95	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6125 HAS	0. 3.75000E+02 0.	0. 3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
4126	4	96	95	97		5.00000E+00 3.75000E+02	0. 3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
1061	1	88	87			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1062	1	90	89			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODF (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)	
1063	1	92	91			1.00000E-01 3.00000E+03		3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1064	1	94	93			1.00000E-01 3.00000E+03		3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1065	1	96	95			1.00000E-01 3.00000E+03		3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
6131	6	88	102	87	101	5.20000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.20000E+00	5.20000E+00	
****MEMBER NUMBER 6131 HAS 1.421085D-14 WARP													
6132	6	90	104	89	103	5.30000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.30000E+00	5.30000E+00	
****MEMBER NUMBER 6132 HAS 1.421085D-14 WARP													
6133	6	92	106	91	105	5.45000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.45000E+00	5.45000E+00	
****MEMBER NUMBER 6133 HAS 1.421085D-14 WARP													
6134	6	94	108	93	107	5.65000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.65000E+00	5.65000E+00	
****MEMBER NUMBER 6134 HAS 0. WARP													
6135	6	96	110	95	109	2.90000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	2.90000E+00	2.90000E+00	
****MEMBER NUMBER 6135 HAS 1.421085D-14 WARP													
9133	6	92	106	91	105	1.00000E-02 1.77000E+05	1.77000E+05	1.77000E+05	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.	
****MEMBER NUMBER 9133 HAS 1.421085D-14 WARP													
5121	5	87	101	85	99	COMP MAT 18	3.55128E+01						
5122	5	89	103	87	101	COMP MAT 18	3.20570E+01						
5123	5	91	105	89	103	COMP MAT 18	0.						
5124	5	91	105	93	107	COMP MAT 17	0.						
5125	5	93	107	95	109	COMP MAT 17	-2.37696E+01						
5126	5	95	109	97	111	COMP MAT 17	-1.80232E+01						
5131	5	88	102	85	99	COMP MAT 18	3.51722E+01						

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (94)	O (37) (41) (85)	R (38) (86)	S (39) (87)
5132	5	90	104	88	102	COMP MAT 18	3.15520E+01					
5133	5	92	106	90	104	COMP MAT 18	0.					
5134	5	92	106	94	108	COMP MAT 17	0.					
5135	5	94	108	96	110	COMP MAT 17	-2.44242E+01					
5136	5	96	110	97	111	COMP MAT 17	-2.17331E+01					
4141	4	102	101	99		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
6142	6	102	101	104	103	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6142 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6143	6	104	103	106	105	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6143 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6144	6	106	105	108	107	5.00000E+00 5.75000E+02 ****MEMBER NUMBER 6144 HAS	5.75000E+02 0.	5.75000E+02 WARP	4.62400E+04 5.75000E+02	1.70000E+04 2.25000E+02	5.00000E+00	5.00000E+00
6145	6	108	107	110	109	5.00000E+00 5.75000E+02 ****MEMBER NUMBER 6145 HAS	5.75000E+02 0.	5.75000E+02 WARP	4.62400E+04 5.75000E+02	1.70000E+04 2.25000E+02	5.00000E+00	5.00000E+00
4146	4	110	109	111		5.00000E+00 5.75000E+02	5.75000E+02	0. 5.75000E+02	5.31250E+04 5.75000E+02	5.31250E+04 2.25000E+02	1.70000E+04 5.00000E+00	1.91250E+04 5.00000E+00
1071	1	102	101			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1072	1	104	103			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1073	1	106	105			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1074	1	108	107			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1075	1	110	109			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6151	6	102	116	101	115	5.50000E+00 3.75000E+02 ****MEMBER NUMBER 6151 HAS	3.75000E+02 1.421085D-14 WARP	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.50000E+00	5.50000E+00
6152	6	104	118	103	117	5.60000E+00 3.75000E+02 ****MEMBER NUMBER 6152 HAS	3.75000E+02 0.	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.60000E+00	5.60000E+00
6153	6	106	120	105	119	5.80000E+00 5.75000E+02 ****MEMBER NUMBER 6153 HAS	5.75000E+02 0.	5.75000E+02 WARP	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	5.80000E+00	5.80000E+00
6154	6	108	122	107	121	6.00000E+00 5.75000E+02 ****MEMBER NUMBER 6154 HAS	5.75000E+02 0.	5.75000E+02 WARP	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	6.00000E+00	6.00000E+00
6155	6	110	124	109	123	3.10000E+00 5.75000E+02 ****MEMBER NUMBER 6155 HAS	5.75000E+02 7.105427D-15 WARP	5.75000E+02	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	3.10000E+00	3.10000E+00
9153	6	106	120	105	119	1.00000E-02 1.77000E+05 ****MEMBER NUMBER 9153 HAS	1.77000E+05 0.	1.77000E+05 WARP	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
5141	5	101	115	99	113	COMP MAT 18	3.55128E+01					
5142	5	103	117	101	115	COMP MAT 18	3.20570E+01					
5143	5	105	119	103	117	COMP MAT 18	0.					
5144	5	105	119	107	121	COMP MAT 17	0.					
5145	5	107	121	109	123	COMP MAT 17	-2.37696E+01					
5146	5	109	123	111	125	COMP MAT 17	-1.80232E+01					
5151	5	102	116	99	113	COMP MAT 18	3.51722E+01					
5152	5	104	118	102	116	COMP MAT 18	3.15520E+01					
5153	5	106	120	104	118	COMP MAT 18	0.					
5154	5	106	120	108	122	COMP MAT 17	0.					
5155	5	108	122	110	124	COMP MAT 17	-2.44242E+01					

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
5156	5	110	124	111	125	COMP MAT 17	-2.17331E+01					
4161	4	116	115	113		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
6162	6	116	115	118	117	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6162 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6163	6	118	117	120	119	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6163 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
6164	6	120	119	122	121	5.00000E+00 5.75000E+02 ****MEMBER NUMBER 6164 HAS	5.75000E+02 0.	5.75000E+02 WARP	4.62400E+04 5.75000E+02	1.70000E+04 2.25000E+02	5.00000E+00	5.00000E+00
6165	6	122	121	124	123	5.00000E+00 5.75000E+02 ****MEMBER NUMBER 6165 HAS	5.75000E+02 0.	5.75000E+02 WARP	4.62400E+04 5.75000E+02	1.70000E+04 2.25000E+02	5.00000E+00	5.00000E+00
4166	4	124	123	125		5.00000E+00 5.75000E+02	5.75000E+02	0. 5.75000E+02	5.31250E+04 5.75000E+02	5.31250E+04 2.25000E+02	1.70000E+04 5.00000E+00	1.91250E+04 5.00000E+00
1081	1	116	115			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1082	1	118	117			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1083	1	120	119			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1084	1	122	121			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1085	1	124	123			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
6171	6	116	130	115	129	5.80000E+00 3.75000E+02 ****MEMBER NUMBER 6171 HAS	3.75000E+02 0.	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	5.80000E+00	5.80000E+00
6172	6	118	132	117	131	6.00000E+00 3.75000E+02 ****MEMBER NUMBER 6172 HAS	3.75000E+02 1.421085D-14	3.75000E+02 WARP	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	6.00000E+00	6.00000E+00

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6173	6	120	134	119	133	6.20000E+00 5.75000E+02 ****MEMBER NUMBER 6173 HAS	5.75000E+02 0.	5.75000E+02 WARP	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	6.20000E+00	6.20000E+00
6174	6	122	136	121	135	6.45000E+00 5.75000E+02 ****MEMBER NUMBER 6174 HAS	5.75000E+02 1.4210850-14	5.75000E+02 WARP	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	6.45000E+00	6.45000E+00
6175	6	124	138	123	137	3.30000E+00 5.75000E+02 ****MEMBER NUMBER 6175 HAS	5.75000E+02 0.	5.75000E+02 WARP	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	3.30000E+00	3.30000E+00
9173	6	120	134	119	133	1.00000E-02 1.77000E+05 ****MEMBER NUMBER 9173 HAS	1.77000E+05 0.	1.77000E+05 WARP	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
5161	5	115	129	113	127	COMP MAT 18	3.55128E+01					
5162	5	117	131	115	129	COMP MAT 18	3.20570E+01					
5163	5	119	133	117	131	COMP MAT 18	0.					
5164	5	119	133	121	135	COMP MAT 17	0.					
5165	5	121	135	123	137	COMP MAT 17	-2.37696E+01					
5166	5	123	137	125	139	COMP MAT 17	-1.80232E+01					
5171	5	116	130	113	127	COMP MAT 18	3.51722E+01					
5172	5	118	132	116	130	COMP MAT 18	3.15520E+01					
5173	5	120	134	118	132	COMP MAT 18	0.					
5174	5	120	134	122	136	COMP MAT 17	0.					
5175	5	122	136	124	138	COMP MAT 17	-2.44242E+01					
5176	5	124	138	125	139	COMP MAT 17	-2.17331E+01					
4181	4	130	129	127		5.00000E+00 3.75000E+02	3.75000E+02	0. 3.75000E+02	3.79136E+04 3.75000E+02	3.79136E+04 1.50000E+02	1.21324E+04 5.00000E+00	1.36489E+04 5.00000E+00
6182	6	130	129	132	131	5.00000E+00 3.75000E+02 ****MEMBER NUMBER 6182 HAS	3.75000E+02 0.	3.75000E+02 WARP	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6183	6	132	131	134	133	5.00000E+00 3.75000E+02	3.75000E+02	3.75000E+02	3.30000E+04 3.75000E+02	1.21324E+04 1.50000E+02	5.00000E+00	5.00000E+00
****MEMBER NUMBER 6183 HAS						0.		WARP				
6184	6	134	133	136	135	5.00000E+00 5.75000E+02	5.75000E+02	5.75000E+02	4.62400E+04 5.75000E+02	1.70000E+04 2.25000E+02	5.00000E+00	5.00000E+00
****MEMBER NUMBER 6184 HAS						0.		WARP				
6185	6	136	135	138	137	5.00000E+00 5.75000E+02	5.75000E+02	5.75000E+02	4.62400E+04 5.75000E+02	1.70000E+04 2.25000E+02	5.00000E+00	5.00000E+00
****MEMBER NUMBER 6185 HAS						0.		WARP				
4186	4	138	137	139		5.00000E+00 5.75000E+02	5.75000E+02	0. 5.75000E+02	5.31250E+04 5.75000E+02	5.31250E+04 2.25000E+02	1.70000E+04 5.00000E+00	1.91250E+04 5.00000E+00
1091	1	130	129			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1092	1	132	131			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1093	1	134	133			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1094	1	136	135			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1095	1	138	137			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
6191	6	130	144	129	143	6.20000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	6.20000E+00	6.20000E+00
****MEMBER NUMBER 6191 HAS						0.		WARP				
6192	6	132	148	131	147	6.45000E+00 3.75000E+02	3.75000E+02	3.75000E+02	8.70000E+04 3.75000E+02	3.19853E+04 3.00000E+02	6.45000E+00	6.45000E+00
****MEMBER NUMBER 6192 HAS						2.8421710-14		WARP				
6193	6	134	152	133	151	6.60000E+00 5.75000E+02	5.75000E+02	5.75000E+02	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	6.60000E+00	6.60000E+00
****MEMBER NUMBER 6193 HAS						1.4210850-14		WARP				
6194	6	136	156	135	155	6.90000E+00 5.75000E+02	5.75000E+02	5.75000E+02	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	6.90000E+00	6.90000E+00
****MEMBER NUMBER 6194 HAS						0.		WARP				

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6195	6	138	158	137	157	3.50000E+00 5.75000E+02 ***MEMBER NUMBER 6195 HAS	5.75000E+02 0.	5.75000E+02 WARP	1.14240E+04 5.75000E+02	4.20000E+03 4.25000E+02	3.50000E+00	3.50000E+00
9193	6	134	152	133	151	1.00000E-02 1.77000E+05 ***MEMBER NUMBER 9193 HAS	1.77000E+05 1.421085D-14 WARP	1.77000E+05	2.85000E+06 1.77000E+05	8.01462E+05 5.00000E+04	1.00000E-02	0.
5181	5	129	143	127	141	COMP MAT 18	3.55128E+01					
5182	5	131	147	129	143	COMP MAT 18	3.20570E+01					
5183	5	133	151	131	147	COMP MAT 18	0.					
5184	5	133	151	135	155	COMP MAT 17	0.					
5185	5	135	155	137	157	COMP MAT 17	-2.37696E+01					
5186	5	137	157	139	159	COMP MAT 17	-1.80232E+01					
5191	5	130	144	127	141	COMP MAT 18	3.51722E+01					
5192	5	132	148	130	144	COMP MAT 18	3.15520E+01					
5193	5	134	152	132	148	COMP MAT 18	0.					
5194	5	134	152	136	156	COMP MAT 17	0.					
5195	5	136	156	138	158	COMP MAT 17	-2.44242E+01					
5196	5	138	158	139	159	COMP MAT 17	-2.17331E+01					
4201	4	144	143	141		1.00000E-01 6.50000E+04 ***MEMBER NUMBER 6202 HAS	5.70000E+04 0.	0. 6.50000E+04 WARP	1.17832E+07 5.70000E+04	1.17832E+07 3.90000E+04	3.94737E+06 8.00000E-02	3.88845E+06 0.
6202	6	144	143	146	145	1.00000E-01 6.50000E+04 ***MEMBER NUMBER 6202 HAS	5.70000E+04 0.	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
6203	6	146	145	148	147	1.00000E-01 6.50000E+04 ***MEMBER NUMBER 6203 HAS	5.70000E+04 0.	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
6204	6	148	147	150	149	1.00000E-01 6.50000E+04 ***MEMBER NUMBER 6204 HAS	5.70000E+04 0.	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
6205	6	150	149	152	151	1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
****MEMBER NUMBER 6205 HAS						0.						
6206	6	152	151	154	153	1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
****MEMBER NUMBER 6206 HAS						0.						
6207	6	154	153	156	155	1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
****MEMBER NUMBER 6207 HAS						0.						
6208	6	156	155	158	157	1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
****MEMBER NUMBER 6208 HAS						0.						
4209	4	158	157	159		1.00000E-01 6.50000E+04	5.70000E+04	0. 6.50000E+04	1.17832E+07 5.70000E+04	1.17832E+07 3.90000E+04	3.94737E+06 8.00000E-02	3.88845E+06 0.
4211	4	157	165	155		1.00000E-01 6.50000E+04	5.70000E+04	0. 6.50000E+04	1.17832E+07 5.70000E+04	1.17832E+07 3.90000E+04	3.94737E+06 8.00000E-02	3.88845E+06 0.
6212	6	157	165	159	163	1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
****MEMBER NUMBER 6212 HAS						0.						
6213	6	164	163	162	161	1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
****MEMBER NUMBER 6213 HAS						0.						
6214	6	158	166	159	164	1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04 WARP	1.05000E+07 5.70000E+04	3.94737E+06 3.90000E+04	8.00000E-02	0.
****MEMBER NUMBER 6214 HAS						0.						
4215	4	158	166	156		1.00000E-01 6.50000E+04	5.70000E+04	0. 6.50000E+04	1.17832E+07 5.70000E+04	1.17832E+07 3.90000E+04	3.94737E+06 8.00000E-02	3.88845E+06 0.
1101	1	144	143			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1102	1	146	145			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1103	1	148	147			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODF (K) (O)	NODE (L) (P)	F	A	C	T	O	R	S
						(26) (29) (81)	(27) (30) (82)	(28) (83)	(36) (40) (84)	(37) (41) (85)	(38) (86)	(39) (87)
1104	1	150	149			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1105	1	152	151			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1106	1	154	153			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1107	1	156	155			1.00000E-01 3.00000E+03	3.00000E+03	3.00000E+03	1.00000E+06 3.00000E+03	1.85000E+02	1.00000E-01	1.00000E-01
1108	1	158	157			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1201	1	157	165			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1202	1	159	163			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1203	1	162	161			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1204	1	159	164			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1205	1	158	166			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1301	1	141	143			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1302	1	143	145			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1303	1	145	147			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1304	1	147	149			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1305	1	149	151			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1306	1	151	153			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
1307	1	153	155			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1308	1	155	157			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1309	1	157	159			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1311	1	141	144			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1312	1	144	146			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1313	1	146	148			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1314	1	148	150			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1315	1	150	152			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1316	1	152	154			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1317	1	154	156			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1318	1	156	158			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1319	1	158	159			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1401	1	155	165			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1402	1	165	163			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1403	1	163	161			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.
1404	1	164	162			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.

MEMB NO	MEMB TYPE	NODE (I) (M)	NODE (J) (N)	NODE (K) (O)	NODE (L) (P)	F (26) (29) (81)	A (27) (30) (82)	C (28) (83)	T (36) (40) (84)	O (37) (41) (85)	R (38) (86)	S (39) (87)
1405	1	166	164			1.00000E-01 6.50000E+04			1.05000E+07 5.70000E+04		3.90000E+04 8.00000E-02	0.
1406	1	156	166			1.00000E-01 6.50000E+04	5.70000E+04	6.50000E+04	1.05000E+07 5.70000E+04	3.90000E+04	8.00000E-02	0.

TOTAL NUMBER OF MEMBERS = 347

NUMBER OF MEMBERS ADJACENT TO CONSTRAINED NODES = 57

BAND WIDTH OF STRUCTURE STIFFNESS MATRIX = 48

***** STEP 1 FROM PROGRAM SBMAIN *****

STACK THE ELEMENT STIFFNESSES TO OBTAIN THE STIFFNESS MATRIX (KS)
THE TOTAL STIFFNESS MATRIX WAS STACKED IN 2 BLOCKS

***** STEP 2 FROM PROGRAM SBMAIN *****

SOLVE THE EQUATION $KS = L * LT$. SPLIT THE STIFFNESS MATRIX TO OBTAIN
THE STIFFNESS MATRIX LOWER TRIANGLE (L) AND THE TRANSPOSE OF THE
STIFFNESS MATRIX LOWER TRIANGLE (LT) BY THE CHOLESKY FACTORIZATION METHOD
LOWER TRIANGLE EXCEEDS STORAGE IN CORE

***** STEP 3 FROM PROGRAM SBMAIN *****

SOLVE THE EQUATION $L * ZF = F$. USING THE LOAD MATRIX INPUT (F) SOLVE
FOR THE INTERMEDIATE SOLUTION (ZF) BY THE FORWARD SOLUTION METHOD

***** STEP 4 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE STIFFNESS MATRIX LOWER TRIANGLE (LT) TO OBTAIN
THE REVERSE STIFFNESS MATRIX LOWER TRIANGLE (LTR) FOR USE IN THE
SOLUTION OF $LTR * XR = XFR$ FOR XR.

***** STEP 5 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE INTERMEDIATE SOLUTION (ZF) TO OBTAIN THE
REVERSE INTERMEDIATE SOLUTION (ZFR) FOR USE IN THE SOLUTION OF
 $LTR * XR = ZFR$ FOR XR.

***** STEP 6 FROM PROGRAM SBMAIN *****

SOLVE $LTR * XR = ZFR$. USING THE REVERSED SOLUTIONS LTR AND ZFR OBTAINED
PREVIOUSLY SOLVE FOR THE REVERSED DEFLECTIONS (XR) DUE TO THE FORCE
MATRIX INPUT. USE THE BACKWARD SOLUTION METHOD
TOTAL MATRIX EXCEEDS STORAGE IN CORE

***** STEP 7 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE REVERSE DEFLECTIONS (XR) TO OBTAIN THE
DEFLECTIONS (X)

***** STEP 8 FROM PROGRAM SBMAIN *****

SOLVE $C = U * X$. USING THE STRESS PER UNIT DEFLECTION (U) AND THE
DEFLECTIONS (X) SOLVE FOR THE CORNER FORCES (C)

REDESIGN CYCLE NO. 0 IN STRESS CONSTRAINT MODE

MEMBER GAGES IN CURRENT CYCLE

MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE
4301	1.000000E-02	6302	1.000000E-02	6303	1.000000E-02	6304	1.000000E-02
6305	1.000000E-02	4306	1.000000E-02	4001	2.500000E+00	6002	2.500000E+00
6003	2.500000E+00	6004	2.500000E+00	6005	2.500000E+00	4006	2.500000E+00
1001	1.000000E-01	1002	1.000000E-01	1003	1.000000E-01	1004	1.000000E-01
1005	1.000000E-01	6011	3.000000E+00	6012	3.100000E+00	6013	3.200000E+00
6014	3.300000E+00	6015	1.700000E+00	9013	1.000000E-02	5001	2 1 2 0 0 0
5002	3 1 3 0 0 0	5003	3 2 3 0 0 0	5004	2 1 2 0 0 0	5005	1 1 1 0 0 0
5006	1 1 1 0 0 0	5011	2 1 2 0 0 0	5012	3 1 3 0 0 0	5013	3 4 3 0 0 0
5014	2 1 2 0 0 0	5015	1 1 1 0 0 0	5016	1 1 1 0 0 0	4021	5.000000E+00
6022	5.000000E+00	6023	5.000000E+00	6024	5.000000E+00	6025	5.000000E+00
4026	5.000000E+00	1011	1.000000E-01	1012	1.000000E-01	1013	1.000000E-01
1014	1.000000E-01	1015	1.000000E-01	6031	3.300000E+00	6032	3.400000E+00
6033	3.500000E+00	6034	3.600000E+00	6035	1.900000E+00	9033	1.000000E-02
5021	2 1 2 0 0 0	5022	3 1 3 0 0 0	5023	3 4 3 0 0 0	5024	3 3 3 0 0 0
5025	1 1 1 0 0 0	5026	1 1 1 0 0 0	5031	2 1 2 0 0 0	5032	3 1 3 0 0 0
5033	3 6 3 0 0 0	5034	3 3 3 0 0 0	5035	1 1 1 0 0 0	5036	1 1 1 0 0 0
4041	5.000000E+00	6042	5.000000E+00	6043	5.000000E+00	6044	5.000000E+00
6045	5.000000E+00	4046	5.000000E+00	1021	1.000000E-01	1022	1.000000E-01
1023	1.000000E-01	1024	1.000000E-01	1025	1.000000E-01	6051	3.700000E+00
6052	3.800000E+00	6053	3.950000E+00	6054	4.100000E+00	6055	2.100000E+00
9053	1.000000E-02	5041	2 1 2 0 0 0	5042	3 1 3 0 0 0	5043	3 6 3 0 0 0
5044	3 6 3 0 0 0	5045	3 1 3 0 0 0	5046	1 1 1 0 0 0	5051	2 1 2 0 0 0
5052	3 1 3 0 0 0	5053	3 10 3 0 0 0	5054	3 6 3 0 0 0	5055	2 1 2 0 0 0
5056	1 1 1 0 0 0	4061	5.000000E+00	6062	5.000000E+00	6063	5.000000E+00
6064	5.000000E+00	6065	5.000000E+00	4066	5.000000E+00	1031	1.000000E-01
1032	1.000000E-01	1033	1.000000E-01	1034	1.000000E-01	1035	1.000000E-01
6071	4.000000E+00	6072	4.150000E+00	6073	4.300000E+00	6074	4.450000E+00
6075	2.300000E+00	9073	1.000000E-02	5061	2 1 2 0 0 0	5062	3 1 3 0 0 0
5063	3 8 3 0 0 0	5064	3 9 3 0 0 0	5065	6 1 6 0 0 0	5066	5 1 5 0 0 0
5071	2 1 2 0 0 0	5072	3 1 3 0 0 0	5073	3 15 3 0 0 0	5074	3 10 3 0 0 0
5075	5 1 5 0 0 0	5076	3 1 3 0 0 0	4081	5.000000E+00	6082	5.000000E+00
6083	5.000000E+00	6084	5.000000E+00	6085	5.000000E+00	4086	5.000000E+00
1041	1.000000E-01	1042	1.000000E-01	1043	1.000000E-01	1044	1.000000E-01
1045	1.000000E-01	6091	4.450000E+00	6092	4.350000E+00	6093	4.700000E+00
6094	4.850000E+00	6095	2.500000E+00	9093	1.000000E-02	5081	2 1 2 0 0 0
5082	3 1 3 0 0 0	5083	3 10 3 0 0 0	5084	3 12 3 0 0 0	5085	9 1 9 0 0 0
5086	10 1 10 0 0 0	5091	2 1 2 0 0 0	5092	3 1 3 0 0 0	5093	3 1A 3 0 0 0
5094	3 14 3 0 0 0	5095	8 1 8 0 0 0	5096	8 1 8 0 0 0	4101	5.000000E+00
6102	5.000000E+00	6103	5.000000E+00	6104	5.000000E+00	6105	5.000000E+00
4106	5.000000E+00	1051	1.000000E-01	1052	1.000000E-01	1053	1.000000E-01
1054	1.000000E-01	1055	1.000000E-01	6111	4.800000E+00	6112	4.900000E+00
6113	5.050000E+00	6114	5.250000E+00	6115	2.700000E+00	9113	1.000000E-02
5101	2 1 2 0 0 0	5102	3 1 3 0 0 0	5103	2 12 2 0 0 0	5104	2 15 2 0 0 0
5105	12 1 12 0 0 0	5106	15 1 15 0 0 0	5111	2 1 2 0 0 0	5112	3 1 3 0 0 0
5113	2 21 2 0 0 0	5114	2 18 2 0 0 0	5115	11 1 11 0 0 0	5116	13 1 13 0 0 0
4121	5.000000E+00	6122	5.000000E+00	6123	5.000000E+00	6124	5.000000E+00
6125	5.000000E+00	4126	5.000000E+00	1061	1.000000E-01	1062	1.000000E-01
1063	1.000000E-01	1064	1.000000E-01	1065	1.000000E-01	6131	5.200000E+00

REDESIGN CYCLE NO. 0 IN STRESS CONSTRAINT MODE

MEMBER GAGES IN CURRENT CYCLE

MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE
6132	5.300000E+00	6133	5.450000E+00	6134	5.650000E+00	6135	2.900000E+00
9133	1.000000E-02	5121	1 1 1 0 0 0	5122	2 1 2 0 0 0	5123	2 12 2 0 0 0
5124	2 18 2 0 0 0	5125	14 2 14 0 0 0	5126	20 1 20 0 0 0	5131	1 1 1 0 0 0
5132	2 1 2 0 0 0	5133	2 23 2 0 0 0	5134	2 23 2 0 0 0	5135	13 2 13 0 0 0
5136	17 1 17 0 0 0	4141	5.000000E+00	6142	5.000000E+00	6143	5.000000E+00
6144	5.000000E+00	6145	5.000000E+00	4146	5.000000E+00	1071	1.000000E-01
1072	1.000000E-01	1073	1.000000E-01	1074	1.000000E-01	1075	1.000000E-01
6151	5.500000E+00	6152	5.600000E+00	6153	5.800000E+00	6154	6.000000E+00
6155	3.100000E+00	9153	1.000000E-02	5141	1 1 1 0 0 0	5142	1 1 1 0 0 0
5143	2 12 2 0 0 0	5144	2 25 2 0 0 0	5145	15 8 15 0 0 0	5146	30 3 30 0 0 0
5151	1 1 1 0 0 0	5152	1 1 1 0 0 0	5153	2 25 2 0 0 0	5154	2 27 2 0 0 0
5155	14 8 14 0 0 0	5156	19 2 19 0 0 0	4161	5.000000E+00	6162	5.000000E+00
6163	5.000000E+00	6164	5.000000E+00	6165	5.000000E+00	4166	5.000000E+00
1081	1.000000E-01	1082	1.000000E-01	1083	1.000000E-01	1084	1.000000E-01
1085	1.000000E-01	6171	5.800000E+00	6172	6.000000E+00	6173	6.200000E+00
6174	6.450000E+00	6175	3.300000E+00	9173	1.000000E-02	5161	1 1 1 0 0 0
5162	1 1 1 0 0 0	5163	2 6 2 0 0 0	5164	3 26 3 0 0 0	5165	15 13 15 0 0 0
5166	41 3 41 0 0 0	5171	1 1 1 0 0 0	5172	1 1 1 0 0 0	5173	1 5 1 0 0 0
5174	2 28 2 0 0 0	5175	14 10 14 0 0 0	5176	20 4 20 0 0 0	4181	5.000000E+00
6182	5.000000E+00	6183	5.000000E+00	6184	5.000000E+00	6185	5.000000E+00
4186	5.000000E+00	1091	1.000000E-01	1092	1.000000E-01	1093	1.000000E-01
1094	1.000000E-01	1095	1.000000E-01	6191	6.200000E+00	6192	6.450000E+00
6193	6.600000E+00	6194	6.900000E+00	6195	3.500000E+00	9193	1.000000E-02
5181	1 1 1 0 0 0	5182	1 1 1 0 0 0	5183	2 1 2 0 0 0	5184	3 28 3 0 0 0
5185	12 21 12 0 0 0	5186	43 3 43 0 0 0	5191	1 1 1 0 0 0	5192	1 1 1 0 0 0
5193	2 1 2 0 0 0	5194	2 30 2 0 0 0	5195	11 19 11 0 0 0	5196	22 4 22 0 0 0
4201	1.000000E-01	6202	1.000000E-01	6203	1.000000E-01	6204	1.000000E-01
6205	1.000000E-01	6206	1.000000E-01	6207	1.000000E-01	6208	1.000000E-01
4209	1.000000E-01	4211	1.000000E-01	6212	1.000000E-01	6213	1.000000E-01
6214	1.000000E-01	4215	1.000000E-01	1101	1.000000E-01	1102	1.000000E-01
1103	1.000000E-01	1104	1.000000E-01	1105	1.000000E-01	1106	1.000000E-01
1107	1.000000E-01	1108	1.000000E-01	1201	1.000000E-01	1202	1.000000E-01
1203	1.000000E-01	1204	1.000000E-01	1205	1.000000E-01	1301	1.000000E-01
1302	1.000000E-01	1303	1.000000E-01	1304	1.000000E-01	1305	1.000000E-01
1306	1.000000E-01	1307	1.000000E-01	1308	1.000000E-01	1309	1.000000E-01
1311	1.000000E-01	1312	1.000000E-01	1313	1.000000E-01	1314	1.000000E-01
1315	1.000000E-01	1316	1.000000E-01	1317	1.000000E-01	1318	1.000000E-01
1319	1.000000E-01	1401	1.000000E-01	1402	1.000000E-01	1403	1.000000E-01
1404	1.000000E-01	1405	1.000000E-01	1406	1.000000E-01		

STRESS CONSTRAINT RATIO IN CURRENT CYCLE = .975518 OCCURRING IN MEMBER NUMBER 1307

TOTAL WEIGHT OF INITIAL DESIGN = 2.4494730E+01

THE ABOVE RESULTS ARE FOR THE INITIAL DESIGN

***** STEP 1 FROM PROGRAM SBMAIN *****

STACK THE ELEMENT STIFFNESSES TO OBTAIN THE STIFFNESS MATRIX (KS)
THE TOTAL STIFFNESS MATRIX WAS STACKED IN 2 BLOCKS

***** STEP 2 FROM PROGRAM SBMAIN *****

SOLVE THE EQUATION $KS = L * LT$. SPLIT THE STIFFNESS MATRIX TO OBTAIN
THE STIFFNESS MATRIX LOWER TRIANGLE (L) AND THE TRANSPOSE OF THE
STIFFNESS MATRIX LOWER TRIANGLE (LT) BY THE CHOLESKY FACTORIZATION METHOD
LOWER TRIANGLE EXCEEDS STORAGE IN CORE

***** STEP 3 FROM PROGRAM SBMAIN *****

SOLVE THE EQUATION $L * ZF = F$. USING THE LOAD MATRIX INPUT (F) SOLVE
FOR THE INTERMEDIATE SOLUTION (ZF) BY THE FORWARD SOLUTION METHOD

***** STEP 4 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE STIFFNESS MATRIX LOWER TRIANGLE (LT) TO OBTAIN
THE REVERSE STIFFNESS MATRIX LOWER TRIANGLE (LTR) FOR USE IN THE
SOLUTION OF $LTR * XR = XFR$ FOR XR.

***** STEP 5 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE INTERMEDIATE SOLUTION (ZF) TO OBTAIN THE
REVERSE INTERMEDIATE SOLUTION (ZFR) FOR USE IN THE SOLUTION OF
 $LTR * XR = ZFR$ FOR XR.

***** STEP 6 FROM PROGRAM SBMAIN *****

SOLVE $LTR * XR = ZFR$. USING THE REVERSED SOLUTIONS LTR AND ZFR OBTAINED
PREVIOUSLY SOLVE FOR THE REVERSED DEFLECTIONS (XR) DUE TO THE FORCE
MATRIX INPUT. USE THE BACKWARD SOLUTION METHOD
TOTAL MATRIX EXCEEDS STORAGE IN CORE

***** STEP 7 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE REVERSE DEFLECTIONS (XR) TO OBTAIN THE
DEFLECTIONS (X)

***** STEP 8 FROM PROGRAM SRMAIN *****

SOLVE $C = U * X$. USING THE STRESS PER UNIT DEFLECTION (U) AND THE
DEFLECTIONS (X) SOLVE FOR THE CORNER FORCES (C)

REDESIGN CYCLE NO. 1 IN STRESS CONSTRAINT MODE

MEMBER GAGES IN CURRENT CYCLE

MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE
4301	1.000000E-02	6302	1.000000E-02	6303	1.000000E-02	6304	1.000000E-02
6305	1.000000E-02	4306	1.000000E-02	4001	2.500000E+00	6002	2.500000E+00
6003	2.500000E+00	6004	2.500000E+00	6005	2.500000E+00	4006	2.500000E+00
1001	1.000000E-01	1002	1.000000E-01	1003	1.000000E-01	1004	1.000000E-01
1005	1.000000E-01	6011	3.000000E+00	6012	3.100000E+00	6013	3.200000E+00
6014	3.300000E+00	6015	1.700000E+00	9013	1.000000E-02	5001	2 1 2 0 0 0
5002	3 1 3 0 0 0	5003	3 2 3 0 0 0	5004	2 1 2 0 0 0	5005	1 1 1 0 0 0
5006	1 1 1 0 0 0	5011	2 1 2 0 0 0	5012	3 1 3 0 0 0	5013	3 4 3 0 0 0
5014	2 1 2 0 0 0	5015	1 1 1 0 0 0	5016	1 1 1 0 0 0	4021	5.000000E+00
6022	5.000000E+00	6023	5.000000E+00	6024	5.000000E+00	6025	5.000000E+00
4026	5.000000E+00	1011	1.000000E-01	1012	1.000000E-01	1013	1.000000E-01
1014	1.000000E-01	1015	1.000000E-01	6031	3.300000E+00	6032	3.400000E+00
6033	3.500000E+00	6034	3.600000E+00	6035	1.900000E+00	9033	1.000000E-02
5021	2 1 2 0 0 0	5022	3 1 3 0 0 0	5023	3 4 3 0 0 0	5024	3 3 3 0 0 0
5025	1 1 1 0 0 0	5026	1 1 1 0 0 0	5031	2 1 2 0 0 0	5032	3 1 3 0 0 0
5033	3 6 3 0 0 0	5034	3 3 3 0 0 0	5035	1 1 1 0 0 0	5036	1 1 1 0 0 0
4041	5.000000E+00	6042	5.000000E+00	6043	5.000000E+00	6044	5.000000E+00
6045	5.000000E+00	4046	5.000000E+00	1021	1.000000E-01	1022	1.000000E-01
1023	1.000000E-01	1024	1.000000E-01	1025	1.000000E-01	6051	3.700000E+00
6052	3.800000E+00	6053	3.950000E+00	6054	4.100000E+00	6055	2.100000E+00
9053	1.000000E-02	5041	2 1 2 0 0 0	5042	3 1 3 0 0 0	5043	3 6 3 0 0 0
5044	3 6 3 0 0 0	5045	3 1 3 0 0 0	5046	1 1 1 0 0 0	5051	2 1 2 0 0 0
5052	3 1 3 0 0 0	5053	3 10 3 0 0 0	5054	3 6 3 0 0 0	5055	2 1 2 0 0 0
5056	1 1 1 0 0 0	4061	5.000000E+00	6062	5.000000E+00	6063	5.000000E+00
6064	5.000000E+00	6065	5.000000E+00	4066	5.000000E+00	1031	1.000000E-01
1032	1.000000E-01	1033	1.000000E-01	1034	1.000000E-01	1035	1.000000E-01
6071	4.000000E+00	6072	4.150000E+00	6073	4.300000E+00	6074	4.450000E+00
6075	2.300000E+00	9073	1.000000E-02	5061	2 1 2 0 0 0	5062	3 1 3 0 0 0
5063	3 8 3 0 0 0	5064	3 9 3 0 0 0	5065	6 1 6 0 0 0	5066	5 1 5 0 0 0
5071	2 1 2 0 0 0	5072	3 1 3 0 0 0	5073	3 15 3 0 0 0	5074	3 10 3 0 0 0
5075	5 1 5 0 0 0	5076	3 1 3 0 0 0	4081	5.000000E+00	6082	5.000000E+00
6083	5.000000E+00	6084	5.000000E+00	6085	5.000000E+00	4086	5.000000E+00
1041	1.000000E-01	1042	1.000000E-01	1043	1.000000E-01	1044	1.000000E-01
1045	1.000000E-01	6091	4.450000E+00	6092	4.550000E+00	6093	4.700000E+00
6094	4.850000E+00	6095	2.500000E+00	9093	1.000000E-02	5081	2 1 2 0 0 0
5082	3 1 3 0 0 0	5083	3 10 3 0 0 0	5084	3 12 3 0 0 0	5085	9 1 9 0 0 0
5086	10 1 10 0 0 0	5091	2 1 2 0 0 0	5092	3 1 3 0 0 0	5093	3 18 3 0 0 0
5094	3 14 3 0 0 0	5095	8 1 8 0 0 0	5096	8 1 8 0 0 0	4101	5.000000E+00
6102	5.000000E+00	6103	5.000000E+00	6104	5.000000E+00	6105	5.000000E+00
4106	5.000000E+00	1051	1.000000E-01	1052	1.000000E-01	1053	1.000000E-01
1054	1.000000E-01	1055	1.000000E-01	6111	4.900000E+00	6112	4.900000E+00
6113	5.050000E+00	6114	5.250000E+00	6115	2.700000E+00	9113	1.000000E-02
5101	2 1 2 0 0 0	5102	3 1 3 0 0 0	5103	2 12 2 0 0 0	5104	2 15 2 0 0 0
5105	12 1 12 0 0 0	5106	15 1 15 0 0 0	5111	2 1 2 0 0 0	5112	3 1 3 0 0 0
5113	2 21 2 0 0 0	5114	2 18 2 0 0 0	5115	11 1 11 0 0 0	5116	13 1 13 0 0 0
4121	5.000000E+00	6122	5.000000E+00	6123	5.000000E+00	6124	5.000000E+00
6125	5.000000E+00	4126	5.000000E+00	1061	1.000000E-01	1062	1.000000E-01
1063	1.000000E-01	1064	1.000000E-01	1055	1.000000E-01	6131	5.200000E+00

REDESIGN CYCLE NO. 1 IN STRESS CONSTRAINT MODE

MEMBER GAGES IN CURRENT CYCLE

MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE
6132	5.300000E+00	6133	5.450000E+00	6134	5.650000E+00	6135	2.900000E+00
9133	1.000000E-02	5121	1 1 1 0 0 0	5122	2 1 2 0 0 0	5123	2 12 2 0 0 0
5124	2 18 2 0 0 0	5125	14 2 14 0 0 0	5126	20 1 20 0 0 0	5131	1 1 1 0 0 0
5132	2 1 2 0 0 0	5133	2 23 2 0 0 0	5134	2 23 2 0 0 0	5135	13 2 13 0 0 0
5136	17 1 17 0 0 0	4141	5.000000E+00	6142	5.000000E+00	6143	5.000000E+00
6144	5.000000E+00	6145	5.000000E+00	4146	5.000000E+00	1071	1.000000E-01
1072	1.000000E-01	1073	1.000000E-01	1074	1.000000E-01	1075	1.000000E-01
6151	5.500000E+00	6152	5.600000E+00	6153	5.900000E+00	6154	6.000000E+00
6155	3.100000E+00	9153	1.000000E-02	5141	1 1 1 0 0 0	5142	1 1 1 0 0 0
5143	2 12 2 0 0 0	5144	2 25 2 0 0 0	5145	15 8 15 0 0 0	5146	30 3 30 0 0 0
5151	1 1 1 0 0 0	5152	1 1 1 0 0 0	5153	2 25 2 0 0 0	5154	2 27 2 0 0 0
5155	14 8 14 0 0 0	5156	19 2 19 0 0 0	4161	5.000000E+00	6162	5.000000E+00
6163	5.000000E+00	6164	5.000000E+00	6165	5.000000E+00	4166	5.000000E+00
1081	1.000000E-01	1082	1.000000E-01	1083	1.000000E-01	1084	1.000000E-01
1085	1.000000E-01	6171	5.400000E+00	6172	6.000000E+00	6173	6.200000E+00
6174	6.450000E+00	6175	3.300000E+00	9173	1.000000E-02	5161	1 1 1 0 0 0
5162	1 1 1 0 0 0	5163	2 6 2 0 0 0	5164	3 26 3 0 0 0	5165	15 13 15 0 0 0
5166	41 3 41 0 0 0	5171	1 1 1 0 0 0	5172	1 1 1 0 0 0	5173	1 5 1 0 0 0
5174	2 28 2 0 0 0	5175	14 10 14 0 0 0	5176	20 4 20 0 0 0	4181	5.000000E+00
5182	5.000000E+00	6183	5.000000E+00	6184	5.000000E+00	6185	5.000000E+00
4186	5.000000E+00	1091	1.000000E-01	1092	1.000000E-01	1093	1.000000E-01
1094	1.000000E-01	1095	1.000000E-01	6191	6.200000E+00	6192	6.450000E+00
6193	6.600000E+00	6194	6.900000E+00	6195	3.500000E+00	9193	1.000000E-02
5181	1 1 1 0 0 0	5182	1 1 1 0 0 0	5183	2 1 2 0 0 0	5184	3 28 3 0 0 0
5185	12 21 12 0 0 0	5186	43 3 43 0 0 0	5191	1 1 1 0 0 0	5192	1 1 1 0 0 0
5193	2 1 2 0 0 0	5194	2 30 2 0 0 0	5195	11 19 11 0 0 0	5196	22 4 22 0 0 0
4201	8.000000E-02	6202	8.000000E-02	6203	8.000000E-02	6204	8.000000E-02
6205	8.000000E-02	6206	8.000000E-02	6207	8.000000E-02	6208	8.000000E-02
4209	8.000000E-02	4211	8.000000E-02	6212	8.000000E-02	6213	8.000000E-02
6214	9.655305E-02	4215	8.000000E-02	1101	1.000000E-01	1102	8.000000E-02
1103	1.000000E-01	1104	8.000000E-02	1105	1.000000E-01	1106	8.000000E-02
1107	1.000000E-01	1108	8.000000E-02	1201	8.000000E-02	1202	8.000000E-02
1203	8.000000E-02	1204	8.000000E-02	1205	8.000000E-02	1301	8.000000E-02
1302	8.000000E-02	1303	8.000000E-02	1304	8.000000E-02	1305	8.000000E-02
1306	8.000000E-02	1307	9.755183E-02	1308	8.000000E-02	1309	8.000000E-02
1311	8.000000E-02	1312	8.000000E-02	1313	8.000000E-02	1314	8.000000E-02
1315	8.000000E-02	1316	8.000000E-02	1317	8.000000E-02	1318	8.000000E-02
1319	8.000000E-02	1401	8.000000E-02	1402	8.000000E-02	1403	8.000000E-02
1404	8.000000E-02	1405	8.000000E-02	1406	8.000000E-02		

STRESS CONSTRAINT RATIO IN PRECEDING CYCLE = .975518
 STRESS CONSTRAINT RATIO IN CURRENT CYCLE = 1.049690 OCCURRING IN MEMBER NUMBER 6214

TOTAL WEIGHT OF DESIGN ANALYZED IN PRECEDING CYCLE = 2.4496730E+01
 TOTAL WEIGHT OF DESIGN ANALYZED IN CURRENT CYCLE = 2.4130814E+01

THE ABOVE RESULTS ARE FOR REDESIGN CYCLE NO. 1 IN THE STRESS CONSTRAINT MODE

ITERATIONS IN STRESS CONSTRAINT MODE NOW COMPLETE

GAGES DETERMINED IN FINAL STRESS CONSTRAINT RESIZING

(NOTE THAT THIS REPRESENTS A DESIGN FOR WHICH AN ANALYSIS HAS NOT BEEN DONE. IT IS USEFUL PRIMARILY TO CHECK CONVERGENCE)

MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE
4301	1.000000E-02	6302	1.000000E-02	6303	1.000000E-02	6304	1.000000E-02
6305	1.000000E-02	4306	1.000000E-02	4001	2.500000E+00	6002	2.500000E+00
6003	2.500000E+00	6004	2.500000E+00	6005	2.500000E+00	4005	2.500000E+00
1001	1.000000E-01	1002	1.000000E-01	1003	1.000000E-01	1004	1.000000E-01
1005	1.000000E-01	6011	3.000000E+00	6012	3.100000E+00	6013	3.200000E+00
6014	3.300000E+00	6015	1.700000E+00	9013	1.000000E-02	5001	2 1 2 0 0 0
5002	3 1 3 0 0 0	5003	3 2 3 0 0 0	5004	2 1 2 0 0 0	5005	1 1 1 0 0 0
5006	1 1 1 0 0 0	5011	2 1 2 0 0 0	5012	3 1 3 0 0 0	5013	3 4 3 0 0 0
5014	2 1 2 0 0 0	5015	1 1 1 0 0 0	5016	1 1 1 0 0 0	4021	5.000000E+00
6022	5.000000E+00	6023	5.000000E+00	6024	5.000000E+00	6025	5.000000E+00
4026	5.000000E+00	1011	1.000000E-01	1012	1.000000E-01	1013	1.000000E-01
1014	1.000000E-01	1015	1.000000E-01	6031	3.300000E+00	6032	3.400000E+00
6033	3.500000E+00	6034	3.600000E+00	6035	1.900000E+00	9033	1.000000E-02
5021	2 1 2 0 0 0	5022	3 1 3 0 0 0	5023	3 4 3 0 0 0	5024	3 3 3 0 0 0
5025	1 1 1 0 0 0	5026	1 1 1 0 0 0	5031	2 1 2 0 0 0	5032	3 1 3 0 0 0
5033	3 6 3 0 0 0	5034	3 3 3 0 0 0	5035	1 1 1 0 0 0	5036	1 1 1 0 0 0
4041	5.000000E+00	6042	5.000000E+00	6043	5.000000E+00	6044	5.000000E+00
6045	5.000000E+00	4046	5.000000E+00	1021	1.000000E-01	1022	1.000000E-01
1023	1.000000E-01	1024	1.000000E-01	1025	1.000000E-01	6051	3.700000E+00
6052	3.800000E+00	6053	3.950000E+00	6054	4.100000E+00	6055	2.100000E+00
9053	1.000000E-02	5041	2 1 2 0 0 0	5042	3 1 3 0 0 0	5043	3 6 3 0 0 0
5044	3 6 3 0 0 0	5045	3 1 3 0 0 0	5046	1 1 1 0 0 0	5051	2 1 2 0 0 0
5052	3 1 3 0 0 0	5053	3 10 3 0 0 0	5054	3 6 3 0 0 0	5055	2 1 2 0 0 0
5056	1 1 1 0 0 0	4061	5.000000E+00	6062	5.000000E+00	6063	5.000000E+00
6064	5.000000E+00	6065	5.000000E+00	4066	5.000000E+00	1031	1.000000E-01
1032	1.000000E-01	1033	1.000000E-01	1034	1.000000E-01	1035	1.000000E-01
6071	4.000000E+00	6072	4.150000E+00	6073	4.300000E+00	6074	4.450000E+00
6075	2.300000E+00	9073	1.000000E-02	5061	2 1 2 0 0 0	5062	3 1 3 0 0 0
5063	3 8 3 0 0 0	5064	3 9 3 0 0 0	5065	6 1 6 0 0 0	5066	5 1 5 0 0 0
5071	2 1 2 0 0 0	5072	3 1 3 0 0 0	5073	3 15 3 0 0 0	5074	3 10 3 0 0 0
5075	5 1 5 0 0 0	5076	3 1 3 0 0 0	4081	5.000000E+00	6082	5.000000E+00
6083	5.000000E+00	6084	5.000000E+00	6085	5.000000E+00	4086	5.000000E+00
1041	1.000000E-01	1042	1.000000E-01	1043	1.000000E-01	1044	1.000000E-01
1045	1.000000E-01	6091	4.450000E+00	6092	4.550000E+00	6093	4.700000E+00
6094	4.850000E+00	6095	2.500000E+00	9093	1.000000E-02	5081	2 1 2 0 0 0
5082	3 1 3 0 0 0	5083	3 10 3 0 0 0	5084	3 12 3 0 0 0	5085	9 1 9 0 0 0
5086	10 1 10 0 0 0	5091	2 1 2 0 0 0	5092	3 1 3 0 0 0	5093	3 18 3 0 0 0
5094	3 14 3 0 0 0	5095	8 1 8 0 0 0	5096	8 1 8 0 0 0	4101	5.000000E+00
6102	5.000000E+00	6103	5.000000E+00	6104	5.000000E+00	6105	5.000000E+00
4106	5.000000E+00	1051	1.000000E-01	1052	1.000000E-01	1053	1.000000E-01
1054	1.000000E-01	1055	1.000000E-01	6111	4.900000E+00	6112	4.900000E+00
6113	5.050000E+00	6114	5.250000E+00	6115	2.700000E+00	9113	1.000000E-02
5101	2 1 2 0 0 0	5102	3 1 3 0 0 0	5103	2 12 2 0 0 0	5104	2 15 2 0 0 0
5105	12 1 12 0 0 0	5106	15 1 15 0 0 0	5111	2 1 2 0 0 0	5112	3 1 3 0 0 0
5113	2 21 2 0 0 0	5114	2 18 2 0 0 0	5115	11 1 11 0 0 0	5116	13 1 13 0 0 0
4121	5.000000E+00	6122	5.000000E+00	6123	5.000000E+00	6124	5.000000E+00
6125	5.000000E+00	4126	5.000000E+00	1061	1.000000E-01	1062	1.000000E-01

GAGES DETERMINED IN FINAL STRESS CONSTRAINT RESIZING

(NOTE THAT THIS REPRESENTS A DESIGN FOR WHICH AN ANALYSIS HAS NOT BEEN DONE. IT IS USEFUL PRIMARILY TO CHECK CONVERGENCE)

MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE	MEMBER	GAGE
1063	1.000000E-01	1064	1.000000E-01	1065	1.000000E-01	6131	5.200000E+00
6132	5.300000E+00	6133	5.450000E+00	6134	5.650000E+00	6135	2.900000E+00
9133	1.000000E-02	5121	1 1 1 0 0 0	5122	2 1 2 0 0 0	5123	2 12 2 0 0 0
5124	2 18 2 0 0 0	5125	14 2 14 0 0 0	5126	20 1 20 0 0 0	5131	1 1 1 0 0 0
5132	2 1 2 0 0 0	5133	2 23 2 0 0 0	5134	2 23 2 0 0 0	5135	13 2 13 0 0 0
5136	17 1 17 0 0 0	4141	5.000000E+00	6142	5.000000E+00	6143	5.000000E+00
6144	5.000000E+00	6145	5.000000E+00	4146	5.000000E+00	1071	1.000000E-01
1072	1.000000E-01	1073	1.000000E-01	1074	1.000000E-01	1075	1.000000E-01
6151	5.500000E+00	6152	5.600000E+00	6153	5.900000E+00	6154	6.000000E+00
6155	3.100000E+00	9153	1.000000E-02	5141	1 1 1 0 0 0	5142	1 1 1 0 0 0
5143	2 12 2 0 0 0	5144	2 25 2 0 0 0	5145	15 8 15 0 0 0	5146	30 3 30 0 0 0
5151	1 1 1 0 0 0	5152	1 1 1 0 0 0	5153	2 25 2 0 0 0	5154	2 27 2 0 0 0
5155	14 8 14 0 0 0	5156	19 2 19 0 0 0	4161	5.000000E+00	6162	5.000000E+00
6163	5.000000E+00	6164	5.000000E+00	6165	5.000000E+00	4166	5.000000E+00
1081	1.000000E-01	1082	1.000000E-01	1083	1.000000E-01	1084	1.000000E-01
1085	1.000000E-01	6171	5.800000E+00	6172	6.000000E+00	6173	6.200000E+00
6174	6.450000E+00	6175	3.300000E+00	9173	1.000000E-02	5161	1 1 1 0 0 0
5162	1 1 1 0 0 0	5163	2 6 2 0 0 0	5164	3 26 3 0 0 0	5165	15 13 15 0 0 0
5166	41 3 41 0 0 0	5171	1 1 1 0 0 0	5172	1 1 1 0 0 0	5173	1 5 1 0 0 0
5174	2 28 2 0 0 0	5175	14 10 14 0 0 0	5176	20 4 20 0 0 0	4181	5.000000E+00
6182	5.000000E+00	6183	5.000000E+00	6184	5.000000E+00	6185	5.000000E+00
4186	5.000000E+00	1091	1.000000E-01	1092	1.000000E-01	1093	1.000000E-01
1094	1.000000E-01	1095	1.000000E-01	6191	6.200000E+00	6192	6.450000E+00
6193	6.600000E+00	6194	6.900000E+00	6195	3.500000E+00	9193	1.000000E-02
5181	1 1 1 0 0 0	5182	1 1 1 0 0 0	5183	2 1 2 0 0 0	5184	3 28 3 0 0 0
5185	12 21 12 0 0 0	5186	43 3 43 0 0 0	5191	1 1 1 0 0 0	5192	1 1 1 0 0 0
5193	2 1 2 0 0 0	5194	2 30 2 0 0 0	5195	11 19 11 0 0 0	5196	22 4 22 0 0 0
4201	8.000000E-02	6202	8.000000E-02	6203	8.000000E-02	6204	8.000000E-02
6205	8.000000E-02	6206	8.000000E-02	6207	8.000000E-02	6208	8.000000E-02
4209	8.000000E-02	4211	8.000000E-02	6212	8.000000E-02	6213	8.000000E-02
6214	1.013508E-01	4215	8.000000E-02	1101	1.000000E-01	1102	8.000000E-02
1103	1.000000E-01	1104	8.000000E-02	1105	1.000000E-01	1106	8.000000E-02
1107	1.000000E-01	1108	8.000000E-02	1201	8.000000E-02	1202	8.000000E-02
1203	8.000000E-02	1204	8.000000E-02	1205	8.000000E-02	1301	8.000000E-02
1302	8.000000E-02	1303	8.000000E-02	1304	8.000000E-02	1305	8.000000E-02
1306	8.000000E-02	1307	9.962442E-02	1308	8.000000E-02	1309	8.000000E-02
1311	8.000000E-02	1312	8.000000E-02	1313	8.000000E-02	1314	8.000000E-02
1315	8.000000E-02	1316	8.000000E-02	1317	8.000000E-02	1318	8.000000E-02
1319	8.000000E-02	1401	8.000000E-02	1402	8.000000E-02	1403	8.000000E-02
1404	8.000000E-02	1405	8.000000E-02	1406	8.000000E-02		

R E A C T I O N S A T R I G I D S U P P O R T S

NODE COMPONENT	1	2	3	4	5	6	7	8
	9 17	10 18	11 19	12 20	13	14	15	16
146 FX	-3.750638E-07	-5.640422E-07	-1.015687E-07	2.182420E-07				
146 FZ	2.742692E+02	4.114023E+02	-9.760123E+01	-5.090289E+02				
147 FY	5.560676E+03	8.341014E+03	2.402802E+03	-1.397998E+03				
148 FY	-6.134948E+03	-9.202422E+03	-2.588252E+03	1.670038E+03				
150 FZ	-3.705673E+02	-5.558535E+02	-2.491262E+02	-8.805860E+01				
151 FY	2.779700E+04	4.169546E+04	9.024253E+03	-1.307056E+04				
152 FY	-2.855759E+04	-4.283635E+04	-9.246816E+03	1.347781E+04				
154 FZ	-1.763686E+03	-2.645529E+03	-6.526122E+02	6.663564E+02				
155 FY	3.565621E+04	5.348426E+04	1.061073E+04	-1.873108E+04				
156 FY	-3.175474E+04	-4.763206E+04	-9.406065E+03	1.677042E+04				
157 FY	3.197322E+04	4.795977E+04	8.957010E+03	-1.793206E+04				
158 FY	-3.453446E+04	-5.180163E+04	-9.752295E+03	1.921015E+04				
162 FZ	-7.214425E+02	-1.082162E+03	-1.621782E+02	4.859235E+02				
166 FZ	-4.543544E+03	-6.815304E+03	-1.047622E+03	3.006848E+03				

R E S U L T A N T S O F R E A C T I O N S

LOAD CONDITION	FX	FY	FZ	MX	MY	MZ
1	-3.750638E-07	5.361286E+00	-7.124970E+03	-2.251440E+05	1.796011E+06	1.469389E+03
2	-5.640422E-07	8.041922E+00	-1.068745E+04	-3.377157E+05	2.694014E+06	2.204082E+03
3	-1.015687E-07	1.363727E+00	-2.209140E+03	-6.977212E+04	5.645956E+05	3.737620E+02
4	2.182420E-07	-3.288172E+00	3.562040E+03	1.126282E+05	-8.821496E+05	-9.012026E+02

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX ROUNCOND

DEFLECTIONS FOR NODE 1 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.705088E-03	-5.557608E-03	-6.846694E-04	2.797370E-03
DY	2.102409E-02	3.153613E-02	7.006035E-03	-9.517976E-03
DZ	3.954382E+00	5.931570E+00	1.256444E+00	-1.915064E+00

DEFLECTIONS FOR NODE 3 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.443036E-03	-5.164561E-03	-2.743521E-03	-1.691364E-03
DY	-9.992700E-03	-1.498905E-02	-3.147661E-03	4.895057E-03
DZ	3.956997E+00	5.935492E+00	1.229545E+00	-1.972795E+00

DEFLECTIONS FOR NODE 4 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.830020E-03	-5.745002E-03	-3.750135E-04	3.569197E-03
DY	2.594892E-02	3.892337E-02	8.360507E-03	-1.233129E-02
DZ	3.956991E+00	5.935483E+00	1.229543E+00	-1.972792E+00

DEFLECTIONS FOR NODE 5 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.972755E-03	-4.459162E-03	-4.198668E-03	-5.186031E-03
DY	-3.454763E-02	-5.182143E-02	-1.111027E-02	1.644122E-02
DZ	3.960678E+00	5.941013E+00	1.203855E+00	-2.029266E+00

DEFLECTIONS FOR NODE 6 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.933289E-03	-5.899887E-03	7.349616E-04	5.945887E-03
DY	4.334050E-02	6.501072E-02	1.374193E-02	-2.104797E-02
DZ	3.960578E+00	5.940862E+00	1.203824E+00	-2.029216E+00

DEFLECTIONS FOR NODE 7 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.813252E-03	-4.219920E-03	-4.920962E-03	-6.836987E-03
DY	-4.724472E-02	-7.086707E-02	-1.525538E-02	2.238286E-02
DZ	3.966657E+00	5.949981E+00	1.179046E+00	-2.086542E+00

DEFLECTIONS FOR NODE 8 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.954731E-03	-5.932042E-03	1.226771E-03	6.971388E-03
DY	5.161901E-02	7.742849E-02	1.613852E-02	-2.553305E-02
DZ	3.966499E+00	5.949744E+00	1.179008E+00	-2.086442E+00

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE		9 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-2.793325E-03	-4.190026E-03	-4.618814E-03	-6.244061E-03	
DY	-4.315449E-02	-6.473173E-02	-1.408692E-02	2.013496E-02	
DZ	3.973135E+00	5.959698E+00	1.154655E+00	-2.143530E+00	

DEFLECTIONS FOR NODE		10 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-4.018135E-03	-6.027151E-03	1.044133E-03	6.670950E-03	
DY	4.957735E-02	7.436600E-02	1.524360E-02	-2.504558E-02	
DZ	3.973014E+00	5.959517E+00	1.154629E+00	-2.143447E+00	

DEFLECTIONS FOR NODE		11 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-3.169716E-03	-4.754589E-03	-3.188660E-03	-2.906441E-03	
DY	-1.934882E-02	-2.902322E-02	-6.701423E-03	8.243061E-03	
DZ	3.977607E+00	5.966406E+00	1.136292E+00	-2.185975E+00	

DEFLECTIONS FOR NODE		12 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-3.822418E-03	-5.733588E-03	2.995101E-04	4.933363E-03	
DY	3.703808E-02	5.555710E-02	1.115400E-02	-1.918772E-02	
DZ	3.977596E+00	5.966388E+00	1.136289E+00	-2.185968E+00	

DEFLECTIONS FOR NODE		13 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-3.600609E-03	-5.400893E-03	-9.179919E-04	2.203771E-03	
DY	1.736774E-02	2.605160E-02	4.878222E-03	-9.714261E-03	
DZ	3.978918E+00	5.968372E+00	1.130112E+00	-2.200039E+00	

DEFLECTIONS FOR NODE		15 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-3.557891E-03	-5.336811E-03	-4.094589E-04	3.191355E-03	
DY	2.141767E-02	3.212649E-02	7.334884E-03	-9.293505E-03	
DZ	3.380676E+00	5.071012E+00	1.100480E+00	-1.583625E+00	

DEFLECTIONS FOR NODE		17 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-2.896508E-03	-4.344770E-03	-2.502273E-03	-1.818492E-03	
DY	-1.252638E-02	-1.878956E-02	-3.903045E-03	6.223141E-03	
DZ	3.389013E+00	5.083516E+00	1.073444E+00	-1.648109E+00	

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 18 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.706517E-03	-5.559743E-03	-8.813579E-05	4.013751E-03
DY	2.678632E-02	4.017946E-02	8.868684E-03	-1.224379E-02
DZ	3.388991E+00	5.083483E+00	1.073435E+00	-1.648104E+00

DEFLECTIONS FOR NODE 19 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.069496E-03	-4.604280E-03	-4.325076E-03	-5.334187E-03
DY	-3.943297E-02	-5.914944E-02	-1.269180E-02	1.876575E-02
DZ	3.389230E+00	5.083841E+00	1.044242E+00	-1.707816E+00

DEFLECTIONS FOR NODE 20 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.336721E-03	-5.005030E-03	1.305309E-03	6.432530E-03
DY	4.570574E-02	6.855858E-02	1.475830E-02	-2.165409E-02
DZ	3.388970E+00	5.083452E+00	1.044149E+00	-1.707712E+00

DEFLECTIONS FOR NODE 21 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.462697E-03	-5.194093E-03	-5.244887E-03	-6.762059E-03
DY	-5.374337E-02	-8.061503E-02	-1.728722E-02	2.559730E-02
DZ	3.388399E+00	5.082595E+00	1.015087E+00	-1.766242E+00

DEFLECTIONS FOR NODE 22 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.075662E-03	-4.613433E-03	1.902618E-03	7.353233E-03
DY	5.487647E-02	8.231467E-02	1.737910E-02	-2.669204E-02
DZ	3.387959E+00	5.081935E+00	1.014972E+00	-1.765977E+00

DEFLECTIONS FOR NODE 23 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.679958E-03	-5.519981E-03	-4.994835E-03	-6.007007E-03
DY	-5.018680E-02	-7.528018E-02	-1.620773E-02	2.377185E-02
DZ	3.387062E+00	5.080588E+00	9.861613E-01	-1.823623E+00

DEFLECTIONS FOR NODE 24 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.985359E-03	-4.477980E-03	1.757595E-03	6.955642E-03
DY	5.319784E-02	7.979674E-02	1.651878E-02	-2.654471E-02
DZ	3.386670E+00	5.080001E+00	9.860743E-01	-1.823357E+00

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 25 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.110665E-03	-4.666015E-03	-3.201839E-03	-3.000099E-03
DY	-2.413001E-02	-3.619501E-02	-8.071763E-03	1.086136E-02
DZ	3.388064E+00	5.082091E+00	9.647451E-01	-1.868360E+00

DEFLECTIONS FOR NODE 26 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.614070E-03	-5.421060E-03	7.686191E-04	5.652925E-03
DY	3.975514E-02	5.963269E-02	1.207246E-02	-2.039110E-02
DZ	3.388001E+00	5.081997E+00	9.647316E-01	-1.868316E+00

DEFLECTIONS FOR NODE 27 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.448822E-03	-5.173211E-03	-6.165628E-04	2.645858E-03
DY	1.743152E-02	2.614726E-02	4.985498E-03	-9.567970E-03
DZ	3.389010E+00	5.083510E+00	9.576789E-01	-1.883816E+00

DEFLECTIONS FOR NODE 29 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.378085E-03	-5.067100E-03	-2.461550E-04	3.320252E-03
DY	2.160122E-02	3.240182E-02	7.540412E-03	-9.082828E-03
DZ	2.825233E+00	4.237848E+00	9.429484E-01	-1.276048E+00

DEFLECTIONS FOR NODE 31 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.076824E-03	-3.115243E-03	-2.107382E-03	-1.941518E-03
DY	-1.372599E-02	-2.058898E-02	-4.331660E-03	6.707445E-03
DZ	2.842725E+00	4.264085E+00	9.190857E-01	-1.344423E+00

DEFLECTIONS FOR NODE 32 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.639772E-03	-5.459625E-03	3.078747E-05	4.180211E-03
DY	2.703098E-02	4.054646E-02	9.150754E-03	-1.194620E-02
DZ	2.842693E+00	4.264038E+00	9.190713E-01	-1.344416E+00

DEFLECTIONS FOR NODE 33 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.975800E-03	-4.463737E-03	-4.251632E-03	-5.290740E-03
DY	-4.232454E-02	-6.348679E-02	-1.371450E-02	1.995443E-02
DZ	2.841724E+00	4.262584E+00	8.888171E-01	-1.404924E+00

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 34 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.504830E-03	-3.757190E-03	1.752975E-03	6.403076E-03
DY	4.652899E-02	6.979347E-02	1.530195E-02	-2.147841E-02
DZ	2.841313E+00	4.261967E+00	8.886669E-01	-1.404765E+00

DEFLECTIONS FOR NODE 35 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-4.579425E-03	-6.869192E-03	-5.564549E-03	-6.149836E-03
DY	-5.809640E-02	-8.714458E-02	-1.869646E-02	2.765221E-02
DZ	2.832945E+00	4.249414E+00	8.562345E-01	-1.461336E+00

DEFLECTIONS FOR NODE 36 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.421165E-03	-2.131682E-03	2.624858E-03	6.952354E-03
DY	5.647345E-02	8.471015E-02	1.811295E-02	-2.700440E-02
DZ	2.832308E+00	4.248459E+00	8.560559E-01	-1.460979E+00

DEFLECTIONS FOR NODE 37 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-5.855632E-03	-8.783498E-03	-5.612836E-03	-4.804382E-03
DY	-5.548419E-02	-8.322627E-02	-1.779509E-02	2.653245E-02
DZ	2.817538E+00	4.226303E+00	8.220544E-01	-1.513503E+00

DEFLECTIONS FOR NODE 38 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-6.780186E-04	-1.016964E-03	2.679505E-03	6.222864E-03
DY	5.546455E-02	8.319680E-02	1.736785E-02	-2.738830E-02
DZ	2.816953E+00	4.225426E+00	8.219268E-01	-1.513101E+00

DEFLECTIONS FOR NODE 39 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-4.498216E-03	-6.747345E-03	-3.561982E-03	-2.164114E-03
DY	-2.826457E-02	-4.239685E-02	-9.244041E-03	1.315168E-02
DZ	2.802709E+00	4.204059E+00	7.950533E-01	-1.551705E+00

DEFLECTIONS FOR NODE 40 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.106469E-03	-3.159655E-03	1.509744E-03	5.456949E-03
DY	4.199650E-02	6.299473E-02	1.280058E-02	-2.144408E-02
DZ	2.802607E+00	4.203907E+00	7.950326E-01	-1.551633E+00

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 41 (DEGREES OF FREEDOM = 3)					
	1	2	3	4	
DX	-2.886495E-03	-4.329718E-03	-2.416718E-04	2.773236E-03	
DY	1.740345E-02	2.610516E-02	5.045702E-03	-9.413611E-03	
DZ	2.798921E+00	4.198378E+00	7.860916E-01	-1.565668E+00	

DEFLECTIONS FOR NODE 43 (DEGREES OF FREEDOM = 3)					
	1	2	3	4	
DX	-3.174250E-03	-4.761349E-03	-1.563168E-04	3.272550E-03	
DY	2.160657E-02	3.240985E-02	7.641918E-03	-8.882460E-03	
DZ	2.299521E+00	3.449280E+00	7.881480E-01	-9.965380E-01	

DEFLECTIONS FOR NODE 45 (DEGREES OF FREEDOM = 3)					
	1	2	3	4	
DX	-8.336488E-04	-1.250480E-03	-1.566163E-03	-2.245821E-03	
DY	-1.384058E-02	-2.076086E-02	-4.444662E-03	6.607068E-03	
DZ	2.331360E+00	3.497038E+00	7.702099E-01	-1.069079E+00	

DEFLECTIONS FOR NODE 46 (DEGREES OF FREEDOM = 3)					
	1	2	3	4	
DX	-3.564051E-03	-5.346045E-03	5.947934E-05	4.152908E-03	
DY	2.688885E-02	4.033327E-02	9.252737E-03	-1.157788E-02	
DZ	2.331317E+00	3.496973E+00	7.701911E-01	-1.069068E+00	

DEFLECTIONS FOR NODE 47 (DEGREES OF FREEDOM = 3)					
	1	2	3	4	
DX	-2.486665E-03	-3.730036E-03	-3.936341E-03	-5.202059E-03	
DY	-4.295047E-02	-6.442568E-02	-1.404802E-02	1.998350E-02	
DZ	2.331739E+00	3.497606E+00	7.412207E-01	-1.128535E+00	

DEFLECTIONS FOR NODE 48 (DEGREES OF FREEDOM = 3)					
	1	2	3	4	
DX	-1.711678E-03	-2.567461E-03	2.016636E-03	6.042638E-03	
DY	4.615754E-02	6.923629E-02	1.539576E-02	-2.086728E-02	
DZ	2.331216E+00	3.496822E+00	7.410262E-01	-1.128339E+00	

DEFLECTIONS FOR NODE 49 (DEGREES OF FREEDOM = 3)					
	1	2	3	4	
DX	-5.541987E-03	-8.313038E-03	-5.696659E-03	-5.330043E-03	
DY	-5.972887E-02	-8.959328E-02	-1.927193E-02	2.832723E-02	
DZ	2.315629E+00	3.473441E+00	7.066827E-01	-1.180637E+00	

(BC=1) USING DEFL. MATRIX DEFLECT AND H.C. MATRIX ROUNCOND

DEFLECTIONS FOR NODE		50 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	3.418652E-04	5.128674E-04	3.209766E-03	6.148977E-03	
DY	5.630390E-02	8.445582E-02	1.825694E-02	-2.651945E-02	
DZ	2.314775E+00	3.472159E+00	7.064405E-01	-1.180163E+00	

DEFLECTIONS FOR NODE		51 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-7.991296E-03	-1.198700E-02	-6.097699E-03	-3.375785E-03	
DY	-5.834154E-02	-8.751229E-02	-1.860594E-02	2.811386E-02	
DZ	2.284235E+00	3.426350E+00	6.678974E-01	-1.224096E+00	

DEFLECTIONS FOR NODE		52 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	2.274107E-03	3.411232E-03	3.610190E-03	4.778388E-03	
DY	5.588936E-02	8.383402E-02	1.757850E-02	-2.743188E-02	
DZ	2.283495E+00	3.425239E+00	6.677275E-01	-1.223604E+00	

DEFLECTIONS FOR NODE		53 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-6.159159E-03	-9.238763E-03	-3.956516E-03	-1.088566E-03	
DY	-3.010803E-02	-4.516203E-02	-9.741398E-03	1.422451E-02	
DZ	2.247841E+00	3.371757E+00	6.347122E-01	-1.250495E+00	

DEFLECTIONS FOR NODE		54 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	1.336251E-03	2.004431E-03	2.620356E-03	3.823824E-03	
DY	4.162237E-02	6.243354E-02	1.277310E-02	-2.107702E-02	
DZ	2.247757E+00	3.371632E+00	6.346939E-01	-1.250438E+00	

DEFLECTIONS FOR NODE		55 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-1.261638E-03	-1.892430E-03	3.557882E-04	2.151648E-03	
DY	1.642884E-02	2.464324E-02	4.802339E-03	-8.806689E-03	
DZ	2.234257E+00	3.351382E+00	6.227640E-01	-1.259457E+00	

DEFLECTIONS FOR NODE		57 (DEGREES OF FREEDOM = 3)			
		1	2	3	4
DX	-3.101638E-03	-4.652434E-03	-1.533932E-04	3.196541E-03	
DY	2.134666E-02	3.201998E-02	7.642065E-03	-8.587827E-03	
DZ	1.798439E+00	2.697657E+00	6.358364E-01	-7.398139E-01	

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 59 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.087090E-03	1.630629E-03	-8.150198E-04	-2.889409E-03
DY	-1.323446E-02	-1.985168E-02	-4.346518E-03	6.121252E-03
DZ	1.857418E+00	2.786125E+00	6.283488E-01	-8.217844E-01

DEFLECTIONS FOR NODE 60 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.824215E-03	-5.736294E-03	-6.777069E-05	4.188295E-03
DY	2.644617E-02	3.966924E-02	9.219362E-03	-1.114506E-02
DZ	1.857363E+00	2.786044E+00	6.283263E-01	-8.217687E-01

DEFLECTIONS FOR NODE 61 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.512936E-03	-2.269441E-03	-3.375863E-03	-5.162373E-03
DY	-4.157101E-02	-6.235649E-02	-1.376640E-02	1.899648E-02
DZ	1.866888E+00	2.800331E+00	6.040490E-01	-8.819776E-01

DEFLECTIONS FOR NODE 62 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.404487E-03	-2.106678E-03	2.019401E-03	5.700745E-03
DY	4.494519E-02	6.741776E-02	1.517536E-02	-1.994463E-02
DZ	1.866273E+00	2.799408E+00	6.038089E-01	-8.817706E-01

DEFLECTIONS FOR NODE 63 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-6.020600E-03	-9.030956E-03	-5.543878E-03	-4.477573E-03
DY	-5.864529E-02	-8.796789E-02	-1.898769E-02	2.768027E-02
DZ	1.846115E+00	2.769171E+00	5.694588E-01	-9.289108E-01

DEFLECTIONS FOR NODE 64 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.669649E-03	2.504541E-03	3.524383E-03	5.287561E-03
DY	5.473303E-02	8.209952E-02	1.789388E-02	-2.548170E-02
DZ	1.845074E+00	2.767609E+00	5.691594E-01	-9.283426E-01

DEFLECTIONS FOR NODE 65 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-9.617022E-03	-1.442559E-02	-6.319277E-03	-1.987923E-03
DY	-5.843286E-02	-8.764925E-02	-1.853472E-02	2.836224E-02
DZ	1.800835E+00	2.701250E+00	5.277434E-01	-9.626282E-01

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE		66 (DEGREES OF FREEDOM = 3)			
	1	2	3	4	
DX	4.646938E-03	6.970482E-03	4.271455E-03	3.440631E-03	
DY	5.446712E-02	8.170064E-02	1.716584E-02	-2.666326E-02	
DZ	1.799892E+00	2.699835E+00	5.275233E-01	-9.620089E-01	

DEFLECTIONS FOR NODE		67 (DEGREES OF FREEDOM = 3)			
	1	2	3	4	
DX	-7.157607E-03	-1.073644E-02	-4.129291E-03	-3.109582E-04	
DY	-3.077773E-02	-4.616659E-02	-9.850434E-03	1.476005E-02	
DZ	1.749080E+00	2.623617E+00	4.908482E-01	-9.792049E-01	

DEFLECTIONS FOR NODE		68 (DEGREES OF FREEDOM = 3)			
	1	2	3	4	
DX	3.982469E-03	5.973763E-03	3.452743E-03	2.525255E-03	
DY	4.008962E-02	6.013441E-02	1.234482E-02	-2.021512E-02	
DZ	1.748928E+00	2.623388E+00	4.908094E-01	-9.791114E-01	

DEFLECTIONS FOR NODE		69 (DEGREES OF FREEDOM = 3)			
	1	2	3	4	
DX	2.455395E-04	3.683399E-04	8.814814E-04	1.517098E-03	
DY	1.543130E-02	2.314694E-02	4.553721E-03	-8.184466E-03	
DZ	1.729054E+00	2.593577E+00	4.770699E-01	-9.846055E-01	

DEFLECTIONS FOR NODE		71 (DEGREES OF FREEDOM = 3)			
	1	2	3	4	
DX	-2.907661E-03	-4.361473E-03	-1.069046E-04	3.071817E-03	
DY	2.078087E-02	3.117129E-02	7.565586E-03	-8.103453E-03	
DZ	1.320391E+00	1.980587E+00	4.862668E-01	-5.035676E-01	

DEFLECTIONS FOR NODE		73 (DEGREES OF FREEDOM = 3)			
	1	2	3	4	
DX	3.933724E-03	5.900579E-03	2.644108E-04	-3.911865E-03	
DY	-1.172924E-02	-1.759385E-02	-3.962338E-03	5.200701E-03	
DZ	1.417814E+00	2.126720E+00	4.931728E-01	-5.997213E-01	

DEFLECTIONS FOR NODE		74 (DEGREES OF FREEDOM = 3)			
	1	2	3	4	
DX	-4.538033E-03	-6.807025E-03	-3.809406E-04	4.358238E-03	
DY	2.559432E-02	3.839147E-02	9.033842E-03	-1.055913E-02	
DZ	1.417773E+00	2.126658E+00	4.931526E-01	-5.997156E-01	

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 75 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	6.238820E-04	9.357891E-04	-2.403992E-03	-5.600902E-03
DY	-3.858060E-02	-5.787087E-02	-1.300744E-02	1.715894E-02
DZ	1.450019E+00	2.175027E+00	4.783864E-01	-6.662635E-01

DEFLECTIONS FOR NODE 76 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.875804E-03	-2.813660E-03	1.684772E-03	5.552668E-03
DY	4.284492E-02	6.426735E-02	1.466507E-02	-1.860772E-02
DZ	1.449331E+00	2.173995E+00	4.781119E-01	-6.660445E-01

DEFLECTIONS FOR NODE 77 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-6.052078E-03	-9.078168E-03	-5.194666E-03	-3.730946E-03
DY	-5.509349E-02	-8.264019E-02	-1.795125E-02	2.577272E-02
DZ	1.431221E+00	2.146829E+00	4.468125E-01	-7.092898E-01

DEFLECTIONS FOR NODE 78 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	2.810278E-03	4.215479E-03	3.688170E-03	4.330742E-03
DY	5.162408E-02	7.743608E-02	1.701741E-02	-2.374940E-02
DZ	1.429988E+00	2.144980E+00	4.464576E-01	-7.086176E-01

DEFLECTIONS FOR NODE 79 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.073545E-02	-1.610322E-02	-6.292118E-03	-6.674261E-04
DY	-5.579023E-02	-8.368529E-02	-1.756301E-02	2.735144E-02
DZ	1.375366E+00	2.063047E+00	4.042432E-01	-7.327835E-01

DEFLECTIONS FOR NODE 80 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	6.856223E-03	1.028440E-02	4.779834E-03	1.976540E-03
DY	5.121775E-02	7.682658E-02	1.611440E-02	-2.512841E-02
DZ	1.374124E+00	2.061184E+00	4.039586E-01	-7.319579E-01

DEFLECTIONS FOR NODE 81 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-8.210624E-03	-1.231595E-02	-4.267547E-03	5.987794E-04
DY	-2.999685E-02	-4.499525E-02	-9.480293E-03	1.463044E-02
DZ	1.312303E+00	1.968452E+00	3.655399E-01	-7.402508E-01

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 82 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	6.299056E-03	9.448640E-03	4.124588E-03	1.272628E-03
DY	3.761900E-02	5.642846E-02	1.156318E-02	-1.901185E-02
DZ	1.312106E+00	1.968156E+00	3.654885E-01	-7.401328E-01

DEFLECTIONS FOR NODE 83 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.399904E-03	2.099887E-03	1.277567E-03	1.017740E-03
DY	1.401280E-02	2.101918E-02	4.159113E-03	-7.383299E-03
DZ	1.286301E+00	1.929448E+00	3.502779E-01	-7.419121E-01

DEFLECTIONS FOR NODE 85 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.814401E-03	-2.721585E-03	3.544958E-04	2.774480E-03
DY	2.000792E-02	3.001187E-02	7.494586E-03	-7.373675E-03
DZ	8.853664E-01	1.328049E+00	3.476974E-01	-2.935969E-01

DEFLECTIONS FOR NODE 87 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	6.945446E-03	1.041816E-02	1.368291E-03	-5.071122E-03
DY	-9.803796E-03	-1.470569E-02	-3.477676E-03	4.009359E-03
DZ	1.010818E+00	1.516227E+00	3.641933E-01	-4.019295E-01

DEFLECTIONS FOR NODE 88 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-4.918099E-03	-7.377127E-03	-5.097797E-04	4.525776E-03
DY	2.486563E-02	3.729843E-02	8.956001E-03	-9.893253E-03
DZ	1.010811E+00	1.516216E+00	3.641874E-01	-4.019329E-01

DEFLECTIONS FOR NODE 89 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	5.111359E-03	7.667007E-03	-5.782029E-04	-6.959870E-03
DY	-3.413522E-02	-5.120280E-02	-1.174437E-02	1.470191E-02
DZ	1.077218E+00	1.615827E+00	3.630408E-01	-4.793950E-01

DEFLECTIONS FOR NODE 90 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-4.023199E-03	-6.034759E-03	7.008722E-04	5.978613E-03
DY	4.005564E-02	6.008344E-02	1.390137E-02	-1.700737E-02
DZ	1.076483E+00	1.614724E+00	3.627254E-01	-4.792056E-01

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 91 (DEGREES OF FREEDOM = 3)			
	1	2	3
DX	-3.752169E-03	-5.628296E-03	-3.901823E-03
DY	-4.796044E-02	-7.194061E-02	-1.568019E-02
DZ	1.076145E+00	1.614217E+00	3.406412E-01

DEFLECTIONS FOR NODE 92 (DEGREES OF FREEDOM = 3)			
	1	2	3
DX	2.419422E-03	3.629183E-03	3.161235E-03
DY	4.621798E-02	6.932694E-02	1.529440E-02
DZ	1.074872E+00	1.612308E+00	3.402411E-01

DEFLECTIONS FOR NODE 93 (DEGREES OF FREEDOM = 3)			
	1	2	3
DX	-1.181227E-02	-1.771844E-02	-6.136065E-03
DY	-5.003468E-02	-7.505196E-02	-1.557100E-02
DZ	1.015512E+00	1.523267E+00	3.001909E-01

DEFLECTIONS FOR NODE 94 (DEGREES OF FREEDOM = 3)			
	1	2	3
DX	9.159812E-03	1.373977E-02	5.180124E-03
DY	4.574781E-02	6.862167E-02	1.428978E-02
DZ	1.014176E+00	1.521263E+00	2.998969E-01

DEFLECTIONS FOR NODE 95 (DEGREES OF FREEDOM = 3)			
	1	2	3
DX	-8.816959E-03	-1.322546E-02	-4.231101E-03
DY	-2.772839E-02	-4.159255E-02	-8.618570E-03
DZ	9.423174E-01	1.413474E+00	2.606503E-01

DEFLECTIONS FOR NODE 96 (DEGREES OF FREEDOM = 3)			
	1	2	3
DX	8.455721E-03	1.268364E-02	4.649812E-03
DY	3.416178E-02	5.124262E-02	1.042882E-02
DZ	9.420105E-01	1.413014E+00	2.605689E-01

DEFLECTIONS FOR NODE 97 (DEGREES OF FREEDOM = 3)			
	1	2	3
DX	2.671352E-03	4.007056E-03	1.655569E-03
DY	1.249802E-02	1.874701E-02	3.717221E-03
DZ	9.113083E-01	1.366960E+00	2.444449E-01

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 99 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.974963E-03	-5.962431E-03	-3.470920E-04	3.790207E-03
DY	1.467341E-02	2.201011E-02	5.824602E-03	-4.739256E-03
DZ	4.607727E-01	6.911591E-01	2.071984E-01	-9.934936E-02

DEFLECTIONS FOR NODE 101 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	9.577104E-03	1.436565E-02	2.367799E-03	-6.013143E-03
DY	-9.260540E-03	-1.389081E-02	-3.545592E-03	3.256469E-03
DZ	6.242379E-01	9.363566E-01	2.371795E-01	-2.232307E-01

DEFLECTIONS FOR NODE 102 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-5.700769E-03	-8.551136E-03	-6.999330E-04	5.024105E-03
DY	2.497131E-02	3.745695E-02	9.294883E-03	-9.322740E-03
DZ	6.241754E-01	9.362629E-01	2.371557E-01	-2.232085E-01

DEFLECTIONS FOR NODE 103 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.144163E-02	1.716242E-02	2.005971E-03	-8.859172E-03
DY	-2.894896E-02	-4.342343E-02	-1.021994E-02	1.193895E-02
DZ	7.396893E-01	1.109533E+00	2.552376E-01	-3.170695E-01

DEFLECTIONS FOR NODE 104 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-7.947489E-03	-1.192120E-02	-9.410758E-04	7.074660E-03
DY	3.739471E-02	5.609204E-02	1.317039E-02	-1.548561E-02
DZ	7.387685E-01	1.108152E+00	2.548747E-01	-3.167669E-01

DEFLECTIONS FOR NODE 105 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	3.432663E-04	5.148663E-04	-1.954879E-03	-4.369004E-03
DY	-3.769109E-02	-5.653660E-02	-1.237025E-02	1.745013E-02
DZ	7.854011E-01	1.178101E+00	2.525868E-01	-3.741815E-01

DEFLECTIONS FOR NODE 106 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	4.748315E-04	7.122869E-04	2.109945E-03	3.759226E-03
DY	3.900653E-02	5.850976E-02	1.295715E-02	-1.774320E-02
DZ	7.839093E-01	1.175863E+00	2.521468E-01	-3.733898E-01

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 107 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.227412E-02	-1.841121E-02	-5.746698E-03	2.183855E-03
DY	-4.036648E-02	-6.054966E-02	-1.241991E-02	2.037572E-02
DZ	7.315008E-01	1.097250E+00	2.187873E-01	-3.820293E-01

DEFLECTIONS FOR NODE 108 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.145512E-02	1.718271E-02	5.484740E-03	-1.790754E-03
DY	3.790639E-02	5.685953E-02	1.172693E-02	-1.900372E-02
DZ	7.303588E-01	1.095537E+00	2.185290E-01	-3.812632E-01

DEFLECTIONS FOR NODE 109 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-8.731484E-03	-1.309724E-02	-3.926794E-03	1.881836E-03
DY	-2.463709E-02	-3.695559E-02	-7.494194E-03	1.261140E-02
DZ	6.376547E-01	9.564807E-01	1.756026E-01	-3.637971E-01

DEFLECTIONS FOR NODE 110 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.045604E-02	1.568409E-02	4.993727E-03	-1.660283E-03
DY	3.009883E-02	4.514819E-02	9.099601E-03	-1.552111E-02
DZ	6.378105E-01	9.567143E-01	1.756512E-01	-3.638744E-01

DEFLECTIONS FOR NODE 111 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	3.617370E-03	5.426075E-03	1.879381E-03	-2.653907E-04
DY	1.121637E-02	1.682454E-02	3.333306E-03	-5.901393E-03
DZ	6.041438E-01	9.062143E-01	1.595955E-01	-3.584812E-01

DEFLECTIONS FOR NODE 113 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-7.806173E-03	-1.170925E-02	-1.809364E-03	5.146577E-03
DY	1.019813E-02	1.529719E-02	4.270492E-03	-2.841209E-03
DZ	1.132695E-01	1.699043E-01	8.281723E-02	4.049540E-02

DEFLECTIONS FOR NODE 115 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	7.133233E-03	1.069985E-02	1.730967E-03	-4.545006E-03
DY	-9.001268E-03	-1.350190E-02	-3.820918E-03	2.402554E-03
DZ	2.765592E-01	4.148388E-01	1.172405E-01	-7.413481E-02

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 116 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-9.447757E-03	-1.417162E-02	-2.242109E-03	6.122531E-03
DY	1.819197E-02	2.728794E-02	7.199153E-03	-5.920880E-03
DZ	2.765022E-01	4.147532E-01	1.172189E-01	-7.411413E-02

DEFLECTIONS FOR NODE 117 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.560312E-02	2.340466E-02	3.955965E-03	-9.596358E-03
DY	-2.554435E-02	-3.831652E-02	-9.291658E-03	9.977631E-03
DZ	4.216734E-01	6.325098E-01	1.500583E-01	-1.714754E-01

DEFLECTIONS FOR NODE 118 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-9.526540E-03	-1.428978E-02	-1.621728E-03	7.475072E-03
DY	3.766609E-02	5.649912E-02	1.350386E-02	-1.511360E-02
DZ	4.205626E-01	6.308437E-01	1.496264E-01	-1.710985E-01

DEFLECTIONS FOR NODE 119 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	5.189192E-03	7.783763E-03	1.926307E-04	-5.478239E-03
DY	-2.792110E-02	-4.188163E-02	-9.174487E-03	1.290497E-02
DZ	4.769812E-01	7.154714E-01	1.553087E-01	-2.233543E-01

DEFLECTIONS FOR NODE 120 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-7.323377E-04	-1.098475E-03	1.341722E-03	3.560560E-03
DY	3.179055E-02	4.768580E-02	1.060759E-02	-1.436424E-02
DZ	4.751844E-01	7.127762E-01	1.548368E-01	-2.222825E-01

DEFLECTIONS FOR NODE 121 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-6.500473E-03	-9.750730E-03	-3.339136E-03	5.545914E-04
DY	-2.868493E-02	-4.302735E-02	-8.712992E-03	1.470887E-02
DZ	4.428177E-01	6.642259E-01	1.331792E-01	-2.297666E-01

DEFLECTIONS FOR NODE 122 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.088543E-02	1.632817E-02	4.704480E-03	-2.735084E-03
DY	2.768638E-02	4.152953E-02	8.459081E-03	-1.409624E-02
DZ	4.413187E-01	6.619774E-01	1.328539E-01	-2.287332E-01

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 123 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.513448E-03	-5.270187E-03	-2.023041E-03	-1.447655E-04
DY	-1.973069E-02	-2.959600E-02	-5.872505E-03	1.036307E-02
DZ	3.725017E-01	5.587518E-01	1.019588E-01	-2.137916E-01

DEFLECTIONS FOR NODE 124 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	9.396798E-03	1.409522E-02	4.278274E-03	-1.918814E-03
DY	2.571234E-02	3.856848E-02	7.688775E-03	-1.343161E-02
DZ	3.725457E-01	5.588178E-01	1.019609E-01	-2.138371E-01

DEFLECTIONS FOR NODE 125 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	4.729454E-03	7.094194E-03	2.093474E-03	-1.087528E-03
DY	1.014401E-02	1.521599E-02	3.000431E-03	-5.366093E-03
DZ	3.504641E-01	5.256953E-01	9.066474E-02	-2.118585E-01

DEFLECTIONS FOR NODE 127 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.798020E-03	-5.697023E-03	-4.922291E-04	3.294198E-03
DY	1.296119E-02	1.944178E-02	5.226310E-03	-4.020767E-03
DZ	3.599777E-02	5.399670E-02	5.007273E-02	6.123432E-02

DEFLECTIONS FOR NODE 129 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.098127E-04	-3.147129E-04	-6.720766E-04	-1.131114E-03
DY	-1.051410E-03	-1.577120E-03	-1.119212E-03	-1.089520E-03
DZ	6.989161E-02	1.048375E-01	4.149531E-02	5.427635E-03

DEFLECTIONS FOR NODE 130 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-3.791550E-03	-5.687318E-03	-4.636873E-04	3.345002E-03
DY	8.926029E-03	1.338904E-02	3.888071E-03	-2.180811E-03
DZ	6.984057E-02	1.047609E-01	4.147596E-02	5.445976E-03

DEFLECTIONS FOR NODE 131 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.477321E-02	2.215980E-02	4.074229E-03	-8.416639E-03
DY	-2.067267E-02	-3.100901E-02	-8.052181E-03	6.990338E-03
DZ	1.523762E-01	2.285643E-01	5.655305E-02	-5.722453E-02

(BC=1) USING DEFL. MATRIX DEFLECT AND H.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 132 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.546764E-02	-2.320144E-02	-4.520342E-03	8.293779E-03
DY	2.429612E-02	3.644417E-02	9.301217E-03	-8.546121E-03
DZ	1.513608E-01	2.270412E-01	5.609046E-02	-5.701782E-02

DEFLECTIONS FOR NODE 133 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	7.649921E-03	1.147486E-02	1.489696E-03	-5.620881E-03
DY	-1.670683E-02	-2.506023E-02	-5.530365E-03	7.638864E-03
DZ	2.236500E-01	3.354749E-01	7.375824E-02	-1.028222E-01

DEFLECTIONS FOR NODE 134 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-2.950403E-03	-4.425584E-03	-1.883795E-04	2.954125E-03
DY	1.868689E-02	2.803031E-02	6.163185E-03	-8.590288E-03
DZ	2.209664E-01	3.314494E-01	7.298918E-02	-1.013521E-01

DEFLECTIONS FOR NODE 135 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	3.557207E-04	5.335654E-04	-7.090730E-04	-1.846280E-03
DY	-1.504318E-02	-2.256474E-02	-4.550600E-03	7.751901E-03
DZ	2.215066E-01	3.322596E-01	6.707308E-02	-1.140097E-01

DEFLECTIONS FOR NODE 136 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	3.741322E-03	5.612002E-03	1.989503E-03	-1.814340E-04
DY	1.288154E-02	1.932229E-02	3.936388E-03	-6.557159E-03
DZ	2.187828E-01	3.281740E-01	6.645457E-02	-1.121878E-01

DEFLECTIONS FOR NODE 137 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.084178E-03	1.626252E-03	-3.720446E-04	-1.984119E-03
DY	-1.328490E-02	-1.992734E-02	-3.861473E-03	7.166076E-03
DZ	1.693500E-01	2.540247E-01	4.627818E-02	-9.734935E-02

DEFLECTIONS FOR NODE 138 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	8.006631E-03	1.200996E-02	3.369578E-03	-2.196500E-03
DY	1.881019E-02	2.821525E-02	5.485010E-03	-1.011078E-02
DZ	1.687147E-01	2.530717E-01	4.609714E-02	-9.699921E-02

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 139 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	5.708180E-03	8.562277E-03	2.163937E-03	-2.051281E-03
DY	8.699131E-03	1.304868E-02	2.537447E-03	-4.674301E-03
DZ	1.548631E-01	2.322943E-01	3.866858E-02	-9.645558E-02

DEFLECTIONS FOR NODE 141 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.158509E-03	-1.737762E-03	-2.348536E-04	8.323615E-04
DY	1.494651E-02	2.241976E-02	5.413595E-03	-5.885281E-03
DZ	-6.028109E-02	-9.042163E-02	-7.504698E-03	5.291448E-02

DEFLECTIONS FOR NODE 143 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	3.474000E-03	5.211001E-03	7.929417E-04	-2.315517E-03
DY	1.758170E-03	2.637243E-03	-1.220699E-03	-4.474550E-03
DZ	-2.187821E-02	-3.281731E-02	-3.534686E-03	1.755341E-02

DEFLECTIONS FOR NODE 144 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	-1.401707E-03	-2.102558E-03	-3.077633E-04	9.590410E-04
DY	1.158452E-02	1.737678E-02	5.434812E-03	-2.038801E-03
DZ	-2.187948E-02	-3.281921E-02	-3.536913E-03	1.755031E-02

DEFLECTIONS FOR NODE 145 (DEGREES OF FREEDOM = 2)

	1	2	3	4
DX	3.955942E-03	5.933914E-03	1.043016E-03	-2.351530E-03
DZ	-2.322637E-04	-3.483944E-04	8.132171E-05	4.283578E-04

DEFLECTIONS FOR NODE 147 (DEGREES OF FREEDOM = 2)

	1	2	3	4
DX	3.587980E-03	5.381971E-03	1.020779E-03	-1.980511E-03
DZ	3.403953E-03	5.105935E-03	1.634246E-03	-5.231036E-04

DEFLECTIONS FOR NODE 148 (DEGREES OF FREEDOM = 2)

	1	2	3	4
DX	3.703975E-04	5.555965E-04	3.104523E-05	-3.558389E-04
DZ	2.628876E-03	3.943320E-03	1.261318E-03	-4.056924E-04

DEFLECTIONS FOR NODE 149 (DEGREES OF FREEDOM = 2)

	1	2	3	4
DX	3.417377E-03	5.126062E-03	9.265679E-04	-1.979331E-03
DZ	4.206024E-04	6.309065E-04	2.795496E-04	9.340340E-05

(BC=1) USING DEFL. MATRIX DEFLECT AND B.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 150 (DEGREES OF FREEDOM = 1)
 1 2 3 4
 DX 8.127847E-04 1.219181E-03 2.258668E-04 -4.596208E-04

DEFLECTIONS FOR NODE 151 (DEGREES OF FREEDOM = 2)
 1 2 3 4
 DX 1.053309E-02 1.579962E-02 3.036A34E-03 -5.732175E-03
 DZ 1.078764E-02 1.618145E-02 3.650487E-03 -4.770536E-03

DEFLECTIONS FOR NODE 152 (DEGREES OF FREEDOM = 2)
 1 2 3 4
 DX -6.058482E-03 -9.087709E-03 -1.798167E-03 3.192279E-03
 DZ 8.245627E-03 1.236843E-02 2.744952E-03 -3.738756E-03

DEFLECTIONS FOR NODE 153 (DEGREES OF FREEDOM = 2)
 1 2 3 4
 DX 1.534245E-03 2.301369E-03 4.047257E-04 -9.116023E-04
 DZ 2.028955E-03 3.043433E-03 7.475A14E-04 -7.730714E-04

DEFLECTIONS FOR NODE 154 (DEGREES OF FREEDOM = 1)
 1 2 3 4
 DX 6.073078E-03 9.109614E-03 1.840717E-03 -3.122247E-03

DEFLECTIONS FOR NODE 155 (DEGREES OF FREEDOM = 2)
 1 2 3 4
 DX 8.908622E-03 1.336292E-02 2.476798E-03 -5.034A36E-03
 DZ 2.039254E-04 3.058960E-04 2.860917E-04 3.517255E-04

DEFLECTIONS FOR NODE 156 (DEGREES OF FREEDOM = 2)
 1 2 3 4
 DX -1.790674E-03 -2.685999E-03 -3.232765E-04 1.367432E-03
 DZ -3.655412E-04 -5.483051E-04 1.903A39E-04 8.012145E-04

DEFLECTIONS FOR NODE 157 (DEGREES OF FREEDOM = 2)
 1 2 3 4
 DX 7.053452E-03 1.058017E-02 1.860A23E-03 -4.190425E-03
 DZ 1.373222E-03 2.059829E-03 2.995176E-04 -9.436267E-04

DEFLECTIONS FOR NODE 158 (DEGREES OF FREEDOM = 2)
 1 2 3 4
 DX 5.528379E-04 8.292684E-04 5.078087E-04 4.085681E-04
 DZ 3.781960E-04 5.672931E-04 9.129742E-05 -2.419450E-04

(BC=1) USING DEFL. MATRIX DEFLECT AND R.C. MATRIX BOUNCOND

DEFLECTIONS FOR NODE 159 (DEGREES OF FREEDOM = 3)

	1	2	3	4
DX	1.381799E-03	2.072706E-03	5.903174E-04	-3.611824E-04
DY	7.030468E-03	1.054569E-02	1.945042E-03	-3.992869E-03
DZ	1.978636E-02	2.967949E-02	4.519485E-03	-1.318128E-02

DEFLECTIONS FOR NODE 161 (DEGREES OF FREEDOM = 2)

	1	2	3	4
DX	-3.861720E-03	-5.792557E-03	-5.684935E-04	3.211083E-03
DZ	8.588601E-04	1.288288E-03	1.930693E-04	-5.784804E-04

DEFLECTIONS FOR NODE 162 (DEGREES OF FREEDOM = 1)

	1	2	3	4
DX	9.275817E-03	1.391371E-02	2.404727E-03	-5.597031E-03

DEFLECTIONS FOR NODE 163 (DEGREES OF FREEDOM = 2)

	1	2	3	4
DX	6.196392E-03	9.294582E-03	1.692542E-03	-3.563501E-03
DZ	1.853671E-02	2.780501E-02	4.235303E-03	-1.234622E-02

DEFLECTIONS FOR NODE 164 (DEGREES OF FREEDOM = 2)

	1	2	3	4
DX	-7.822945E-04	-1.173428E-03	1.436919E-04	1.177553E-03
DZ	1.903476E-02	2.855208E-02	4.347127E-03	-1.268196E-02

DEFLECTIONS FOR NODE 165 (DEGREES OF FREEDOM = 2)

	1	2	3	4
DX	7.884894E-03	1.182733E-02	2.053619E-03	-4.738434E-03
DZ	1.527359E-03	2.291035E-03	3.309661E-04	-1.053964E-03

DEFLECTIONS FOR NODE 166 (DEGREES OF FREEDOM = 1)

	1	2	3	4
DX	-5.925183E-04	-8.887628E-04	2.331885E-04	1.145099E-03

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MAT<L	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	MICROBUCKLING	
											DES. CONST.	CRIT. LOAD COND.
4301	4	8	4 3 1 0	.5424	.0100	2	3.730E+02	3.766E+02	5.550E+02	.011	M/M	
6302	6	8	4 3 6 5	1.7051	.0100	2	-5.766E+00	-2.541E-08	-3.527E+02	.007	M/M	
6303	6	8	6 5 8 7	2.6180	.0100	2	4.416E+00	-6.668E-09	4.333E+02	.009	M/M	
6304	6	8	8 7 10 9	2.8090	.0100	2	-3.024E+00	2.579E-08	6.047E+02	.012	M/M	
6305	6	8	10 9 12 11	1.6347	.0100	2	-1.277E+01	3.261E-08	3.388E+02	.007	M/M	
4306	4	8	12 11 13 0	.2065	.0100	2	3.214E+02	2.794E+02	2.211E+02	.005	M/M	
4001	4	7	4 3 1 0	.5424	2.5000	2	1.478E+00	1.533E+00	8.402E+00	.056	M/M	
6002	6	7	4 3 6 5	1.7051	2.5000	2	-8.725E-02	9.550E-12	-5.337E+00	.036	M/M	
6003	6	7	6 5 8 7	2.6180	2.5000	2	6.684E-02	2.337E-10	6.558E+00	.044	M/M	
6004	6	5	8 7 10 9	2.8090	2.5000	2	-4.577E-02	4.187E-10	9.154E+00	.061	M/M	
6005	6	5	10 9 12 11	1.6347	2.5000	2	-1.932E-01	-2.967E-10	5.125E+00	.034	M/M	
4006	4	5	12 11 13 0	.2065	2.5000	2	1.525E+00	8.984E-01	3.347E+00	.023	M/M	
1001	1	9	3 4 0 0	.3164	.1000	2	2.807E+01	0.	0.	.009	M/M	
1002	1	9	5 6 0 0	.6783	.1000	2	2.216E+02	0.	0.	.074	M/M	
1003	1	9	7 8 0 0	.8491	.1000	2	2.789E+02	0.	0.	.093	M/M	
1004	1	9	9 10 0 0	.7898	.1000	2	2.299E+02	0.	0.	.077	M/M	
1005	1	9	11 12 0 0	.4819	.1000	2	3.651E+01	0.	0.	.012	M/M	
6011	6	6	4 18 3 17	2.0583	3.0000	2	5.290E-02	-1.134E-01	-1.755E+01	.059	M/M	
6012	6	6	6 20 5 19	4.2419	3.1000	2	2.824E-01	-4.223E-01	-2.932E+01	.098	M/M	
6013	6	4	8 22 7 21	5.1163	3.2000	2	2.522E-01	-3.633E-01	-1.942E+01	.065	M/M	
6014	6	4	10 24 9 23	4.6001	3.3000	2	1.296E-01	-1.871E-01	-1.039E+01	.035	M/M	
6015	6	4	12 26 11 25	2.7436	1.7000	2	9.909E-03	-1.420E-02	-1.264E+00	.004	M/M	
9013	6	8	8 22 7 21	5.1163	.0100	2	6.318E+00	-9.103E+00	-4.866E+02	.010	M/M	

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
										CRIT. LOAD COND.	MAX. STRESS RATIO
5001	5	18	3 17 1 15	18.3024	1 2	2	-3.035E+03	.016	M/M	2	.000
							-3.915E+03	.021	M/M		
							-2.757E+02	.001	M/M		
5002	5	18	5 19 3 17	18.2666	1 3	2	-8.571E+02	.005	M/M	2	.000
							-6.420E+03	.035	M/M		
							-3.988E+03	.022	M/M		
5003	5	18	7 21 5 19	18.2272	1 3	4	-1.187E+03	.006	M/M	2	.000
							-1.112E+04	.060	M/M		
							-1.236E+03	.007	M/M		
5004	5	17	7 21 9 23	18.2125	1 2	2	-2.383E+03	.013	M/M	2	.000
							-1.093E+04	.059	M/M		
							2.475E+03	.012	M/M		
5005	5	17	9 23 11 25	13.7038	1 1	2	-4.731E+03	.026	M/M	2	.000
							8.526E+02	.004	M/M		
							1.414E+02	.001	M/M		
5006	5	17	11 25 13 27	4.8861	1 1	2	-4.263E+02	.002	M/M	4	.000
							9.276E+02	.004	M/M		
							1.932E+02	.001	M/M		
5011	5	18	4 18 1 15	18.2136	1 2	2	2.926E+03	.013	M/M	4	.000
							3.183E+03	.015	M/M		
							-5.966E+02	.003	M/M		
5012	5	18	6 20 4 18	18.2391	1 3	2	8.163E+02	.004	M/M	4	.000
							8.120E+03	.038	M/M		
							1.682E+03	.008	M/M		
5013	5	18	8 22 6 20	18.2173	1 3	4	1.202E+03	.006	M/M	4	.000
							7.496E+03	.035	M/M		
							7.203E+02	.003	M/M		
5014	5	17	8 22 10 24	18.2113	1 2	2	2.902E+03	.013	M/M	4	.000
							9.389E+03	.044	M/M		
							-3.444E+03	.019	M/M		
5015	5	17	10 24 12 26	13.6705	1 1	2	4.684E+03	.022	M/M	4	.000
							-1.066E+03	.006	M/M		
							4.113E+02	.002	M/M		

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES				AREA OR LENGTH	GAGE			CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
																	CRIT. LOAD COND.	MAX. STRESS RATIO
5016	5	17	12	26	13	27	4.6508	1	1	2	5.277E+02	.002	M/M	2	.000			
								2	1	2	-1.069E+03	.006	M/M					
								3	1	4	-2.610E+02	.001	M/M					
4021	4	7	18	17	15	0	.6864	5.0000	4	-5.264E-01	-5.265E-02	4.080E+00	.027	M/M				
6022	6	7	18	17	20	19	2.1578	5.0000	2	-2.778E-01	-2.153E-10	-1.699E+01	.113	M/M				
6023	6	7	20	19	22	21	3.3132	5.0000	2	-3.095E-02	-9.895E-11	-3.037E+00	.020	M/M				
6024	6	5	22	21	24	23	3.5548	5.0000	2	-2.486E-02	-8.509E-11	4.972E+00	.033	M/M				
6025	6	5	24	23	26	25	2.0698	5.0000	2	-3.634E-01	1.523E-11	9.642E+00	.064	M/M				
4026	4	5	26	25	27	0	.2613	5.0000	2	6.798E+00	2.979E+00	1.726E+00	.019	M/M				
1011	1	9	17	18	0	0	.3560	.1000	2	9.204E+01	0.	0.	.031	M/M				
1012	1	9	19	20	0	0	.7631	.1000	2	5.108E+02	0.	0.	.170	M/M				
1013	1	9	21	22	0	0	.9552	.1000	2	6.913E+02	0.	0.	.230	M/M				
1014	1	9	23	24	0	0	.8884	.1000	2	6.611E+02	0.	0.	.220	M/M				
1015	1	9	25	26	0	0	.5421	.1000	2	1.735E+02	0.	0.	.058	M/M				
6031	6	6	18	32	17	31	2.3004	3.3000	2	5.950E-02	-1.275E-01	-1.974E+01	.066	M/M				
6032	6	6	20	34	19	33	4.7408	3.4000	2	6.583E-01	-9.847E-01	-6.837E+01	.228	M/M				
6033	6	4	22	36	21	35	5.7180	3.5000	2	7.503E-01	-1.081E+00	-5.778E+01	.193	M/M				
6034	6	4	24	38	23	37	5.1411	3.6000	2	5.748E-01	-8.296E-01	-4.608E+01	.154	M/M				
6035	6	4	26	40	25	39	3.0662	1.9000	2	1.833E-01	-2.627E-01	-2.337E+01	.078	M/M				
9033	6	8	22	36	21	35	5.7180	.0100	2	1.880E+01	-2.709E+01	-1.448E+03	.029	M/M				
5021	5	18	17	31	15	29	20.4548	1	2	2	-4.124E+03	.022	M/M	2	.000			
								2	1	2	-7.918E+03	.042	M/M					
								3	2	2	-1.252E+03	.007	M/M					
5022	5	18	19	33	17	31	20.4148	1	3	2	-1.758E+03	.010	M/M	2	.000			
								2	1	2	-2.140E+04	.116	M/M					
								3	3	2	-6.415E+03	.035	M/M					

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING			
										CRIT. LOAD COND.	MAX. STRESS RATIO		
5023	5	18	21 35 19 33	20.3708	1 3 2	-5.875E+03	.032	M/M	2	.000			
					2 4 2	-1.984E+04	.107	M/M					
					3 3 2	2.212E+03	.010	M/M					
5024	5	17	21 35 23 37	20.3544	1 3 4	7.306E+02	.003	M/M	2	.000			
					2 3 2	-2.261E+04	.122	M/M					
					3 3 4	-3.128E+03	.017	M/M					
5025	5	17	23 37 25 39	15.3154	1 1 2	-1.628E+04	.088	M/M	2	.000			
					2 1 2	-2.052E+03	.011	M/M					
					3 1 2	7.662E+03	.036	M/M					
5026	5	17	25 39 27 41	5.4607	1 1 2	-7.673E+03	.041	M/M	2	.000			
					2 1 2	2.766E+03	.013	M/M					
					3 1 2	5.514E+03	.026	M/M					
5031	5	18	18 32 15 29	20.3556	1 2 2	4.087E+03	.019	M/M	4	.000			
					2 1 2	6.596E+03	.032	M/M					
					3 2 2	1.446E+03	.007	M/M					
5032	5	18	20 34 18 32	20.3841	1 3 2	2.027E+03	.010	M/M	4	.000			
					2 1 2	2.108E+04	.099	M/M					
					3 3 2	3.216E+03	.015	M/M					
5033	5	18	22 36 20 34	20.3598	1 3 2	5.657E+03	.027	M/M	4	.000			
					2 6 2	1.602E+04	.076	M/M					
					3 3 2	-9.337E+02	.005	M/M					
5034	5	17	22 36 24 38	20.3531	1 3 2	2.114E+03	.010	M/M	4	.000			
					2 3 2	1.944E+04	.092	M/M					
					3 3 2	-3.080E+03	.017	M/M					
5035	5	17	24 38 26 40	15.2782	1 1 2	1.571E+04	.079	M/M	4	.000			
					2 1 4	1.561E+03	.007	M/M					
					3 1 2	-4.500E+03	.024	M/M					
5036	5	17	26 40 27 41	5.1978	1 1 2	5.521E+03	.027	M/M	2	.000			
					2 1 2	-8.166E+02	.004	M/M					
					3 1 2	-3.797E+03	.021	M/M					
4041	4	7	32 31 29 0	.8473	5.0000	4	-5.927E-01	-5.905E-02	5.806E+00	.039	M/M		
6042	6	7	32 31 34 33	2.6637	5.0000	2	-3.425E-01	4.256E-10	-2.096E+01	.140	M/M		
6043	6	7	34 33 36 35	4.0900	5.0000	2	-3.183E-02	6.494E-11	-3.123E+00	.021	M/M		

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING			
										CRIT. LOAD COND.	MAX. STRESS RATIO		
5045	5	17	37 51 39 53	16.9271	1 3 2	-1.920E+04	.104	M/M	2	.000			
					2 1 2	-2.163E+04	.117	M/M					
					3 3 2	1.087E+04	.051	M/M					
5046	5	17	39 53 41 55	6.0354	1 1 2	-1.454E+04	.079	M/M	2	.000			
					2 1 2	5.960E+03	.028	M/M					
					3 1 2	1.595E+04	.080	M/M					
5051	5	18	32 46 29 43	22.4976	1 2 2	5.153E+03	.024	M/M	4	.000			
					2 1 2	9.384E+03	.044	M/M					
					3 2 2	2.036E+03	.010	M/M					
5052	5	18	34 48 32 46	22.5291	1 3 2	1.769E+03	.008	M/M	4	.000			
					2 1 2	3.174E+04	.150	M/M					
					3 3 4	-2.866E+03	.015	M/M					
5053	5	18	36 50 34 48	22.5022	1 3 2	1.146E+04	.054	M/M	4	.000			
					2 10 2	2.184E+04	.103	M/M					
					3 3 2	-6.338E+03	.034	M/M					
5054	5	17	36 50 38 52	22.4948	1 3 2	-3.573E+03	.019	M/M	4	.000			
					2 6 2	2.701E+04	.127	M/M					
					3 3 4	4.353E+03	.021	M/M					
5055	5	17	38 52 40 54	16.8860	1 2 2	2.454E+04	.116	M/M	4	.000			
					2 1 2	1.526E+04	.072	M/M					
					3 2 2	-1.000E+04	.054	M/M					
5056	5	17	40 54 41 55	5.7448	1 1 2	1.856E+04	.088	M/M	4	.000			
					2 1 2	7.367E+03	.035	M/M					
					3 1 2	-1.019E+04	.055	M/M					
4061	4	7	46 45 43 0	1.0252	5.0000	2	5.639E+00	2.002E+00	-8.582E+00	.059	M/M		
6062	6	7	46 45 48 47	3.2229	5.0000	2	-4.149E-01	3.829E-10	-2.538E+01	.169	M/M		
6063	6	7	48 47 50 49	4.9487	5.0000	2	-5.176E-02	7.551E-11	-5.078E+00	.034	M/M		
6064	6	5	50 49 52 51	5.3096	5.0000	2	-5.243E-02	-4.457E-11	1.049E+01	.070	M/M		
6065	6	5	52 51 54 53	3.0900	5.0000	2	3.663E-02	-5.265E-12	-9.718E-01	.006	M/M		
4066	4	5	54 53 55 0	.3903	5.0000	2	6.881E+00	1.772E+00	-3.079E+00	.026	M/M		
1031	1	9	46 45 0 0	.4350	.1000	2	1.491E+02	0.	0.	.050	M/M		

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
												CRIT. LOAD COND.	MAX. STRESS RATIO
1032	1	9	48 47 0 0	.9326	.1000	2	8.410E+02	0.	0.	.280	M/M		
1033	1	9	50 49 0 0	1.1674	.1000	2	1.098E+03	0.	0.	.366	M/M		
1034	1	9	52 51 0 0	1.0858	.1000	2	1.023E+03	0.	0.	.341	M/M		
1035	1	9	54 53 0 0	.6625	.1000	2	1.892E+02	0.	0.	.063	M/M		
6071	6	6	46 60 45 59	2.7845	4.0000	2	5.609E-02	-1.202E-01	-1.861E+01	.062	M/M		
6072	6	6	48 62 47 61	5.7385	4.1500	2	1.311E+00	-1.961E+00	-1.362E+02	.454	M/M		
6073	6	4	50 64 49 63	6.9214	4.3000	2	1.597E+00	-2.300E+00	-1.230E+02	.410	M/M		
6074	6	4	52 66 51 65	6.2231	4.4500	2	8.246E-01	-1.190E+00	-6.612E+01	.220	M/M		
6075	6	4	54 68 53 67	3.7115	2.3000	2	7.360E-01	-1.055E+00	-9.388E+01	.313	M/M		
9073	6	8	50 64 49 63	6.9214	.0100	2	4.001E+01	-5.764E+01	-3.081E+03	.062	M/M		
5061	5	18	45 59 43 57	24.7597	1 2 2 1 3 2	2 2 2		-6.170E+03 -1.317E+04 -6.347E+02		.033 .071 .003	M/M M/M M/M	2	.000
5062	5	18	47 61 45 59	24.7112	1 3 2 1 3 3	4 2 2		-2.321E+03 -4.764E+04 -7.029E+03		.013 .258 .038	M/M M/M M/M	2	.000
5063	5	18	49 63 47 61	24.6579	1 3 2 8 3 3	2 2 2		-2.085E+04 -3.509E+04 1.680E+04		.113 .195 .079	M/M M/M M/M	2	.000
5064	5	17	49 63 51 65	24.6381	1 3 2 9 3 3	2 2 2		1.635E+04 -3.956E+04 -7.167E+03		.077 .214 .039	M/M M/M M/M	2	.000
5065	5	17	51 65 53 67	18.5387	1 6 2 1 3 6	2 2 2		-1.732E+04 -5.552E+04 8.987E+03		.094 .300 .042	M/M M/M M/M	2	.000
5066	5	17	53 67 55 69	6.6100	1 5 2 1 3 5	2 4 2		-1.176E+04 -4.040E+03 1.383E+04		.064 .022 .065	M/M M/M M/M	2	.000

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS			MICROBUCKLING	
							MAX. STRESS	MAX. STRESS RATIO	DES. CONST.	CRIT. LOAD COND.	MAX. STRESS RATIO
5071	5	18	46 60 43 57	24.6396	1 2	2	6.710E+03	.032	M/M	4	.000
					2 1	2	1.176E+04	.055	M/M		
					3 2	2	1.961E+03	.009	M/M		
5072	5	18	48 62 46 60	24.6740	1 3	4	1.735E+03	.008	M/M	4	.000
					2 1	2	3.984E+04	.188	M/M		
					3 3	4	-2.403E+03	.013	M/M		
5073	5	18	50 64 48 62	24.6446	1 3	2	1.842E+04	.087	M/M	4	.000
					2 15	2	2.437E+04	.115	M/M		
					3 3	2	-1.448E+04	.078	M/M		
5074	5	17	50 64 52 66	24.6365	1 3	2	-1.302E+04	.070	M/M	4	.000
					2 10	2	3.086E+04	.146	M/M		
					3 3	4	4.557E+03	.021	M/M		
5075	5	17	52 66 54 68	18.4937	1 5	2	1.988E+04	.094	M/M	4	.000
					2 1	2	4.471E+04	.211	M/M		
					3 5	2	-9.025E+03	.049	M/M		
5076	5	17	54 68 55 69	6.2917	1 3	2	1.710E+04	.081	M/M	4	.000
					2 1	2	1.338E+04	.063	M/M		
					3 3	2	-1.030E+04	.056	M/M		
4081	4	7	60 59 57 0	1.2200	5.0000	2	6.575E+00	2.527E+00	-2.027E+01	.136	M/M
6082	6	7	60 59 62 61	3.8354	5.0000	2	-4.242E-01	1.537E-11	-2.595E+01	.173	M/M
6083	6	7	62 61 64 63	5.8890	5.0000	2	-1.249E-01	4.943E-11	-1.226E+01	.082	M/M
6084	6	5	64 63 66 65	6.3186	5.0000	4	2.507E-02	-2.503E-11	-5.014E+00	.033	M/M
6085	6	5	66 65 68 67	3.6772	5.0000	4	1.218E-02	1.516E-11	-3.233E-01	.002	M/M
4086	4	5	68 67 69 0	.4645	5.0000	2	9.618E+00	-2.281E+00	-1.636E+00	.031	M/M
1041	1	9	60 59 0 0	.4746	.1000	2	1.717E+02	0.	0.	.057	M/M
1042	1	9	62 61 0 0	1.0174	.1000	2	9.069E+02	0.	0.	.302	M/M
1043	1	9	64 63 0 0	1.2735	.1000	2	1.226E+03	0.	0.	.409	M/M
1044	1	9	66 65 0 0	1.1845	.1000	2	1.195E+03	0.	0.	.398	M/M
1045	1	9	68 67 0 0	.7228	.1000	2	3.163E+02	0.	0.	.105	M/M

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
										CRIT. LOAD COND.	MAX. STRESS RATIO
6091	6	6	60 74 59 73	3.0266	4.4500	2	5.788E-02 -1.240E-01 -1.921E+01	.064	M/M		
6092	6	6	62 76 61 75	6.2374	4.5500	2	1.408E+00 -2.105E+00 -1.462E+02	.487	M/M		
6093	6	4	64 78 63 77	7.5231	4.7000	2	1.853E+00 -2.570E+00 -1.427E+02	.476	M/M		
6094	6	4	66 80 65 79	6.7641	4.8500	2	9.871E-01 -1.425E+00 -7.915E+01	.264	M/M		
6095	6	4	68 82 67 81	4.0342	2.5000	2	7.140E-01 -1.023E+00 -9.106E+01	.304	M/M		
9093	6	8	64 78 63 77	7.5231	.0100	2	4.644E+01 -6.591E+01 -3.577E+03	.072	M/M		
5081	5	18	59 73 57 71	26.9121	1 2 3	2 2 2	-8.115E+03 -1.715E+04 1.142E+03	.044 .093 .005	M/M M/M M/M	2	.000
5082	5	18	61 75 59 73	26.8595	1 2 3	3 1 2 2 2 2	-3.216E+03 -6.120E+04 -3.386E+03	.017 .331 .018	M/M M/M M/M	2	.000
5083	5	18	63 77 61 75	26.8015	1 2 3	3 10 2 2 2 2	-2.926E+04 -4.079E+04 2.861E+04	.153 .221 .135	M/M M/M M/M	2	.000
5084	5	17	63 77 65 79	26.7800	1 2 3	3 12 2 2 2 2	2.479E+04 -4.661E+04 -1.631E+04	.117 .252 .088	M/M M/M M/M	2	.000
5085	5	17	65 79 67 81	20.1503	1 2 3	9 1 2 2 2 2	-1.905E+04 -9.911E+04 7.987E+03	.103 .536 .037	M/M M/M M/M	2	.000
5086	5	17	67 81 69 83	7.1846	1 2 3	10 1 4 2 2 2	-1.262E+04 -6.049E+03 9.548E+03	.068 .033 .045	M/M M/M M/M	2	.000
5091	5	18	60 74 57 71	26.7815	1 2 3	2 1 2 2 2 2	9.131E+03 1.366E+04 2.610E+03	.043 .064 .012	M/M M/M M/M	4	.000
5092	5	18	62 76 60 74	26.8190	1 2 3	3 1 2 2 2 2	2.236E+03 4.777E+04 -1.800E+03	.011 .225 .010	M/M M/M M/M	4	.000

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES				AREA OR LENGTH	GAGE			CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
																	CRIT. LOAD COND.	MAX. STRESS RATIO
5093	5	18	64	78	62	76	26.7871	1	3	2	2.599E+04	.127	M/M	4	.000			
								2	18	2						2.755E+04	.130	M/M
								3	3	2						-2.546E+04	.138	M/M
5094	5	17	64	78	66	80	26.77A2	1	3	2	-2.207E+04	.119	M/M	4	.000			
								2	14	2						3.586E+04	.169	M/M
								3	3	2						1.343E+04	.063	M/M
5095	5	17	66	80	68	82	20.1014	1	8	2	1.935E+04	.091	M/M	4	.000			
								2	1	2						8.154E+04	.385	M/M
								3	8	2						-7.771E+03	.042	M/M
5096	5	17	68	82	69	83	6.83A7	1	8	2	1.721E+04	.081	M/M	4	.000			
								2	1	2						2.941E+04	.139	M/M
								3	8	2						-8.883E+03	.048	M/M
4101	4	7	74	73	71	0	1.4317	5.0000	2	6.093E+00	5.860E+00	-1.833E+01	.123	M/M				
6102	6	7	74	73	76	75	4.5011	5.0000	2	-3.149E-01	-1.583E-11	-1.927E+01	.128	M/M				
6103	6	7	76	75	78	77	6.9112	5.0000	2	-1.588E-01	-4.161E-11	-1.558E+01	.104	M/M				
6104	6	5	78	77	80	79	7.4153	5.0000	4	1.234E-02	-3.268E-11	-2.469E+00	.016	M/M				
6105	6	5	80	79	82	81	4.3154	5.0000	2	-3.779E-01	8.185E-12	1.003E+01	.067	M/M				
4106	4	5	82	81	83	0	.5451	5.0000	2	1.191E+01	-1.483E+00	-9.173E-01	.034	M/M				
1051	1	9	74	73	0	0	.5141	.1000	2	1.207E+02	0.	0.	.040	M/M				
1052	1	9	76	75	0	0	1.1022	.1000	2	9.357E+02	0.	0.	.312	M/M				
1053	1	9	78	77	0	0	1.3796	.1000	2	1.341E+03	0.	0.	.447	M/M				
1054	1	9	80	79	0	0	1.2832	.1000	2	1.452E+03	0.	0.	.484	M/M				
1055	1	9	82	81	0	0	.7830	.1000	2	3.772E+02	0.	0.	.126	M/M				
6111	6	6	74	88	73	87	3.26A7	4.8000	2	6.321E-02	-1.354E-01	-2.097E+01	.070	M/M				
6112	6	6	76	90	75	89	6.7362	4.9000	2	1.395E+00	-2.087E+00	-1.449E+02	.483	M/M				
6113	6	4	78	92	77	91	8.1248	5.0500	2	2.037E+00	-2.935E+00	-1.569E+02	.523	M/M				
6114	6	4	80	94	79	93	7.3050	5.2500	2	1.304E+00	-1.882E+00	-1.046E+02	.349	M/M				

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
										CRIT. LOAD COND.	MAX. STRESS RATIO
6115	6	4	82 96 81 95	4.3568	2.7000	2	6.924E-01 -9.925E-01 -8.832E+01	.294	M/M		
9113	6	8	78 92 77 91	8.1248	.0100	2	5.105E+01 -7.355E+01 -3.931E+03	.079	M/M		
5101	5	18	73 87 71 85	29.0646	1 2 2 1 3 2	2 2 2	-7.927E+03 -1.744E+04 3.192E+03	.043 .094 .015	M/M M/M M/M	2	.000
5102	5	18	75 89 73 87	29.0077	1 3 2 1 3 3	4 2 4	-3.594E+03 -7.047E+04 2.440E+03	.019 .381 .012	M/M M/M M/M	2	.000
5103	5	18	77 91 75 89	28.9451	1 2 2 12 3 2	2 2 2	-5.219E+04 -4.281E+04 5.447E+04	.282 .231 .257	M/M M/M M/M	2	.000
5104	5	17	77 91 79 93	28.9219	1 2 2 15 3 2	2 2 2	5.038E+04 -5.429E+04 -3.289E+04	.238 .293 .178	M/M M/M M/M	2	.000
5105	5	17	79 93 81 95	21.7619	1 12 2 1 3 12	2 2 2	-2.260E+04 -1.521E+05 6.907E+03	.122 .822 .033	M/M M/M M/M	2	.000
5106	5	17	81 95 83 97	7.7593	1 15 2 1 3 15	2 4 2	-1.288E+04 -7.445E+03 6.532E+03	.070 .040 .031	M/M M/M M/M	2	.000
5111	5	18	74 88 71 85	28.9235	1 2 2 1 3 2	2 2 2	9.536E+03 1.036E+04 5.976E+03	.045 .049 .028	M/M M/M M/M	4	.000
5112	5	18	76 90 74 88	28.9640	1 3 2 1 3 3	2 2 2	3.014E+03 5.078E+04 -3.622E+03	.014 .240 .020	M/M M/M M/M	4	.000
5113	5	18	78 92 76 90	28.9295	1 2 2 21 3 2	2 2 2	5.264E+04 2.883E+04 -5.197E+04	.248 .136 .281	M/M M/M M/M	4	.000
5114	5	17	78 92 80 94	28.9200	1 2 2 18 3 2	2 2 2	-4.662E+04 4.158E+04 3.042E+04	.252 .196 .143	M/M M/M M/M	4	.000

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES				AREA OR LENGTH	GAGE		CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
																CRIT. LOAD COND.	MAX. STRESS RATIO
5115	5	17	80	94	82	96	21.7091	1	11	2	2.255E+04	.106	M/M	4	.000		
								2	1	2	1.235E+05	.583	M/M				
								3	11	2	-6.838E+03	.037	M/M				
5116	5	17	82	96	83	97	7.3856	1	13	2	1.718E+04	.081	M/M	4	.000		
								2	1	2	5.184E+04	.245	M/M				
								3	13	2	-6.223E+03	.034	M/M				
4121	4	7	88	87	85	0	1.6604	5.0000	2	5.563E+00	1.354E+01	9.333E+00	.070	M/M			
6122	6	7	88	87	90	89	5.2200	5.0000	2	-3.121E-01	-6.366E-12	-1.909E+01	.127	M/M			
6123	6	7	90	89	92	91	8.0150	5.0000	2	-2.464E-01	4.184E-11	-2.417E+01	.161	M/M			
6124	6	5	92	91	94	93	8.5996	5.0000	2	6.602E-02	-1.592E-11	-1.320E+01	.088	M/M			
6125	6	5	94	93	96	95	5.0046	5.0000	2	-6.967E-01	-5.048E-11	1.848E+01	.123	M/M			
4126	4	5	96	95	97	0	.6322	5.0000	2	1.741E+01	-1.688E+00	-1.114E+00	.049	M/M			
1061	1	9	88	87	0	0	.5517	.1000	2	2.083E+01	0.	0.	.007	M/M			
1062	1	9	90	89	0	0	1.1869	.1000	2	9.290E+02	0.	0.	.310	M/M			
1063	1	9	92	91	0	0	1.4857	.1000	2	1.285E+03	0.	0.	.428	M/M			
1064	1	9	94	93	0	0	1.3818	.1000	2	1.451E+03	0.	0.	.484	M/M			
1065	1	9	96	95	0	0	.8432	.1000	2	5.460E+02	0.	0.	.182	M/M			
6131	6	6	88	102	87	101	3.5108	5.2000	2	6.364E-02	-1.364E-01	-2.111E+01	.070	M/M			
6132	6	6	90	104	89	103	7.2351	5.3000	2	1.283E+00	-1.919E+00	-1.333E+02	.444	M/M			
6133	6	4	92	106	91	105	8.7265	5.4500	2	2.053E+00	-2.958E+00	-1.581E+02	.527	M/M			
6134	6	4	94	108	93	107	7.8460	5.6500	2	1.634E+00	-2.358E+00	-1.310E+02	.437	M/M			
6135	6	4	96	110	95	109	4.6795	2.9000	2	7.840E-01	-1.124E+00	-1.000E+02	.333	M/M			
9133	6	8	92	106	91	105	8.7265	.0100	2	5.144E+01	-7.412E+01	-3.962E+03	.079	M/M			
5121	5	18	87	101	85	99	31.2170	1	1	2	-1.333E+04	.072	M/M	2	.000		
								2	1	2	-7.964E+03	.043	M/M				
								3	1	2	8.486E+03	.040	M/M				

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING		
										CRIT. LOAD COND.	MAX. STRESS RATIO	
5122	5	18	89 103 87 101	31.1559	1	2	2	-8.209E+03	.044	M/M	2	.000
					2	1	2	-6.104E+04	.330	M/M		
					3	2	2	5.855E+03	.028	M/M		
5123	5	18	91 105 89 103	31.0887	1	2	2	-7.509E+04	.406	M/M	2	.000
					2	12	2	-4.511E+04	.244	M/M		
					3	2	2	7.675E+04	.362	M/M		
5124	5	17	91 105 93 107	31.0637	1	2	2	8.500E+04	.406	M/M	2	.000
					2	18	2	-6.354E+04	.343	M/M		
					3	2	2	-4.948E+04	.267	M/M		
5125	5	17	93 107 95 109	23.3736	1	14	2	-2.773E+04	.150	M/M	2	.000
					2	2	2	-1.199E+05	.648	M/M		
					3	14	2	1.170E+04	.055	M/M		
5126	5	17	95 109 97 111	8.3339	1	20	2	-1.191E+04	.064	M/M	2	.000
					2	1	2	-1.439E+04	.078	M/M		
					3	20	2	3.488E+03	.016	M/M		
5131	5	18	88 102 85 99	31.0655	1	1	2	6.030E+03	.028	M/M	4	.000
					2	1	2	1.062E+04	.050	M/M		
					3	1	2	7.458E+03	.035	M/M		
5132	5	18	90 104 88 102	31.1090	1	2	2	1.259E+04	.059	M/M	4	.000
					2	1	2	4.027E+04	.190	M/M		
					3	2	2	-8.512E+03	.046	M/M		
5133	5	18	92 106 90 104	31.0719	1	2	2	7.853E+04	.370	M/M	4	.000
					2	23	2	2.756E+04	.130	M/M		
					3	2	2	-7.972E+04	.425	M/M		
5134	5	17	92 106 94 108	31.0617	1	2	2	-8.478E+04	.458	M/M	4	.000
					2	23	2	4.701E+04	.222	M/M		
					3	2	2	4.472E+04	.211	M/M		
5135	5	17	94 108 96 110	23.3168	1	13	2	2.744E+04	.129	M/M	4	.000
					2	2	2	9.593E+04	.452	M/M		
					3	13	2	-1.066E+04	.058	M/M		
5136	5	17	96 110 97 111	7.9326	1	17	2	1.890E+04	.089	M/M	4	.000
					2	1	2	5.167E+04	.244	M/M		
					3	17	2	-3.306E+03	.018	M/M		
4141	4	7	102 101 99 0	1.9061	5.0000	4	-6.675E-01 1.571E+00 8.104E+00	.054	M/M			

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
												CRIT. LOAD COND.	MAX. STRESS RATIO
6142	6	7	102 101 104 103	5.9921	5.0000	2	-2.039E-01	-1.364E-12	-1.248E+01	.083	M/M		
6143	6	7	104 103 106 105	9.2007	5.0000	2	6.447E-02	5.286E-12	6.326E+00	.042	M/M		
6144	6	13	106 105 108 107	9.8718	5.0000	2	8.474E-02	-5.116E-11	-1.695E+01	.075	M/M		
6145	6	13	108 107 110 109	5.7450	5.0000	2	1.287E+00	-6.048E-11	-3.414E+01	.152	M/M		
4146	4	13	110 109 111 0	.7257	5.0000	4	2.652E+00	-3.529E+00	-9.873E+00	.045	M/M		
1071	1	9	102 101 0 0	.5932	.1000	2	1.580E+02	0.	0.	.053	M/M		
1072	1	9	104 103 0 0	1.2717	.1000	2	1.086E+03	0.	0.	.362	M/M		
1073	1	9	106 105 0 0	1.5918	.1000	2	1.406E+03	0.	0.	.469	M/M		
1074	1	9	108 107 0 0	1.4805	.1000	2	1.157E+03	0.	0.	.386	M/M		
1075	1	9	110 109 0 0	.9034	.1000	2	-2.586E+02	0.	0.	.086	M/M		
6151	6	6	102 116 101 115	3.7528	5.5000	2	1.302E-01	-2.790E-01	-4.320E+01	.144	M/M		
6152	6	6	104 118 103 117	7.7340	5.6000	2	1.543E+00	-2.308E+00	-1.602E+02	.534	M/M		
6153	6	12	106 120 105 119	9.3282	5.8000	2	1.392E+00	-2.005E+00	-1.072E+02	.252	M/M		
6154	6	12	108 122 107 121	8.3870	6.0000	2	1.419E+00	-2.048E+00	-1.138E+02	.268	M/M		
6155	6	12	110 124 109 123	5.0021	3.1000	2	2.862E-01	-4.102E-01	-3.650E+01	.086	M/M		
9153	6	8	106 120 105 119	9.3282	.0100	2	2.656E+02	-3.927E+02	-2.045E+04	.409	M/M		
5141	5	18	101 115 99 113	33.3694	1 1 2 1 3 1	2 2 2 2 2 2		-1.303E+04 -9.202E+03 -5.192E+03		.070 .050 .028	M/M M/M M/M	2	.000
5142	5	18	103 117 101 115	33.3041	1 1 2 1 3 1	2 2 2 2 2 2		-1.306E+04 -4.363E+04 -4.932E+03		.071 .236 .027	M/M M/M M/M	2	.000
5143	5	18	105 119 103 117	33.2323	1 2 2 12 3 2	2 2 2 2 2 2		-9.528E+04 -4.188E+04 8.692E+04		.520 .226 .410	M/M M/M M/M	2	.000

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MICROBUCKLING					
								MAX. STRESS RATIO	DES. CONST.	CRIT. LOAD COND.	MAX. STRESS RATIO		
5144	5	17	105 119 107 121	33.2056	1 2 2	1.179E+05	.556	M/M	2	.000			
					2 25 2	-5.790E+04	.313	M/M					
					3 2 2	-8.193E+04	.443	M/M					
5145	5	17	107 121 109 123	24.9852	1 15 2	-2.863E+04	.155	M/M	2	.000			
					2 8 2	-5.747E+04	.311	M/M					
					3 15 2	1.534E+04	.077	M/M					
5146	5	17	109 123 111 125	8.9085	1 30 2	-1.384E+04	.075	M/M	2	.000			
					2 3 4	-3.689E+03	.020	M/M					
					3 30 2	8.493E+03	.040	M/M					
5151	5	18	102 116 99 113	33.2075	1 1 2	8.207E+03	.039	M/M	4	.000			
					2 1 2	2.339E+04	.110	M/M					
					3 1 2	9.230E+03	.044	M/M					
5152	5	18	104 118 102 116	33.2540	1 1 4	7.435E+03	.035	M/M	4	.000			
					2 1 2	3.366E+04	.159	M/M					
					3 1 2	-2.400E+03	.013	M/M					
5153	5	18	106 120 104 118	33.2144	1 2 2	1.016E+05	.479	M/M	4	.000			
					2 25 2	2.533E+04	.119	M/M					
					3 2 2	-9.656E+04	.522	M/M					
5154	5	17	106 120 108 122	33.2034	1 2 2	-1.131E+05	.611	M/M	4	.000			
					2 27 2	4.975E+04	.235	M/M					
					3 2 2	7.202E+04	.340	M/M					
5155	5	17	108 122 110 124	24.9245	1 14 2	3.313E+04	.156	M/M	4	.000			
					2 8 2	4.773E+04	.225	M/M					
					3 14 2	-1.576E+04	.085	M/M					
5156	5	17	110 124 111 125	8.4795	1 19 2	2.240E+04	.106	M/M	4	.000			
					2 2 2	1.056E+04	.050	M/M					
					3 19 2	-6.788E+03	.037	M/M					
4161	4	7	116 115 113 0	2.1686	5.0000	2	2.910E+00	-4.310E+00	4.350E+01	.291	M/M		
6162	6	7	116 115 118 117	6.8176	5.0000	4	-4.580E-02	2.558E-12	-2.802E+00	.019	M/M		
6163	6	7	118 117 120 119	10.4680	5.0000	2	-3.974E-01	9.550E-12	-3.899E+01	.260	M/M		
6164	6	13	120 119 122 121	11.2316	5.0000	2	2.085E-01	-5.912E-12	-4.171E+01	.185	M/M		
6165	6	13	122 121 124 123	6.5363	5.0000	2	1.557E+00	1.182E-11	-4.131E+01	.184	M/M		

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
												CRIT. LOAD COND.	MAX. STRESS RATIO
4166	4	13	124 123 125 0	.8257	5.0000	2	-8.981E-01	6.305E+00	1.329E+01	.060	M/M		
1081	1	9	116 115 0 0	.6327	.1000	2	1.352E+02	0.	0.	.045	M/M		
1082	1	9	118 117 0 0	1.3564	.1000	2	1.228E+03	0.	0.	.409	M/M		
1083	1	9	120 119 0 0	1.6978	.1000	2	1.587E+03	0.	0.	.529	M/M		
1084	1	9	122 121 0 0	1.5792	.1000	2	1.424E+03	0.	0.	.475	M/M		
1085	1	9	124 123 0 0	.9616	.1000	2	-6.851E+01	0.	0.	.023	M/M		
6171	6	6	116 130 115 129	3.9949	5.8000	2	2.353E-01	-5.042E-01	-7.807E+01	.260	M/M		
6172	6	6	118 132 117 131	8.2378	6.0000	2	1.169E+00	-1.749E+00	-1.214E+02	.405	M/M		
6173	6	12	120 134 119 133	9.9299	6.2000	2	1.519E+00	-2.189E+00	-1.170E+02	.275	M/M		
6174	6	12	122 136 121 135	8.9280	6.4500	2	1.531E+00	-2.210E+00	-1.228E+02	.289	M/M		
6175	6	12	124 138 123 137	5.3248	3.3000	2	2.628E-01	-3.766E-01	-3.352E+01	.079	M/M		
9173	6	8	120 134 119 133	9.9299	.0100	2	2.899E+02	-4.177E+02	-2.232E+04	.446	M/M		
5161	5	18	115 129 113 127	35.5219	1 1 2 1 3 1	2 2 2	8.306E+03 -1.269E+04 -3.114E+04			.039 .069 .168	M/M M/M M/M	2	.000
5162	5	18	117 131 115 129	35.4524	1 1 2 1 3 1	2 2 2	-2.220E+04 -4.381E+04 -4.997E+04			.120 .237 .270	M/M M/M M/M	2	.000
5163	5	18	119 133 117 131	35.3759	1 2 2 6 3 2	2 2 2	-1.052E+05 -5.601E+04 5.650E+04			.568 .303 .266	M/M M/M M/M	2	.000
5164	5	17	119 133 121 135	35.3475	1 3 2 26 3 3	2 2 2	6.834E+04 -6.239E+04 -1.120E+05			.322 .337 .506	M/M M/M M/M	2	.000
5165	5	17	121 135 123 137	26.5968	1 15 2 13 3 15	2 2 2	-3.619E+04 -5.275E+04 1.842E+04			.196 .285 .087	M/M M/M M/M	2	.000

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MICROBUCKLING			
								MAX. STRESS RATIO	DES. CONST.	CRIT. LOAD COND.	MAX. STRESS RATIO
5166	5	17	123 137 125 139	9.4831	1 41	2	-1.164E+04	.063	M/M	2	.000
					2 3	2	-2.541E+04	.143	M/M		
					3 41	2	1.032E+04	.049	M/M		
5171	5	18	116 130 113 127	35.3495	1 1	2	-9.943E+03	.054	M/M	4	.000
					2 1	2	2.240E+04	.106	M/M		
					3 1	2	2.710E+04	.128	M/M		
5172	5	18	118 132 116 130	35.3990	1 1	2	1.821E+04	.086	M/M	4	.000
					2 1	2	6.376E+04	.301	M/M		
					3 1	2	4.376E+04	.206	M/M		
5173	5	18	120 134 118 132	35.3568	1 1	2	1.648E+05	.777	M/M	4	.000
					2 5	2	6.277E+04	.296	M/M		
					3 1	2	-7.548E+04	.408	M/M		
5174	5	17	120 134 122 136	35.3451	1 2	2	-8.890E+04	.481	M/M	4	.000
					2 28	2	6.010E+04	.283	M/M		
					3 2	2	1.890E+05	.991	M/M		
5175	5	17	122 136 124 138	26.5322	1 14	2	3.532E+04	.167	M/M	4	.000
					2 10	2	5.901E+04	.278	M/M		
					3 14	2	-2.110E+04	.114	M/M		
5176	5	17	124 138 125 139	9.0265	1 20	2	2.532E+04	.124	M/M	4	.000
					2 4	2	2.147E+04	.101	M/M		
					3 20	2	-1.313E+04	.071	M/M		
4181	4	7	130 129 127 0	2.4481	5.0000	2	2.852E+00 -2.517E+00 1.237E+01	.083	M/M		
6182	6	7	130 129 132 131	7.6962	5.0000	2	-1.408E+00 -3.538E-12 -8.613E+01	.574	M/M		
6183	6	7	132 131 134 133	11.8172	5.0000	2	-5.392E-01 9.095E-13 -5.290E+01	.353	M/M		
6184	6	13	134 133 136 135	12.6791	5.0000	2	3.375E-01 -4.547E-12 -6.750E+01	.300	M/M		
6185	6	13	136 135 138 137	7.3787	5.0000	2	5.337E+00 1.919E-12 -1.416E+02	.629	M/M		
4186	4	13	138 137 139 0	.9321	5.0000	2	4.762E+01 1.271E+01 -2.468E+01	.132	M/M		
1091	1	9	130 129 0 0	.6723	.1000	2	1.139E+02 0. 0.	.038	M/M		
1092	1	9	132 131 0 0	1.4412	.1000	2	1.057E+03 0. 0.	.352	M/M		
1093	1	9	134 133 0 0	1.8039	.1000	2	2.231E+03 0. 0.	.744	M/M		

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
												CRIT. LOAD COND.	MAX. STRESS RATIO
1094	1	9	136 135 0 0	1.6779	.1000	2	2.435E+03	0.	0.	.912	M/M		
1095	1	9	138 137 0 0	1.0238	.1000	2	9.309E+02	0.	0.	.310	M/M		
6191	6	6	130 144 129 143	4.4552	6.2000	2	-1.369E-01	2.933E-01	4.541E+01	.151	M/M		
6192	6	6	132 148 131 147	10.5379	6.4500	2	1.127E+00	-1.686E+00	-1.171E+02	.390	M/M		
6193	6	12	134 152 133 151	12.7101	6.6000	2	1.593E+00	-2.295E+00	-1.227E+02	.289	M/M		
6194	6	12	136 156 135 155	11.4277	6.9000	2	1.986E+00	-2.966E+00	-1.592E+02	.375	M/M		
6195	6	12	138 158 137 157	6.8156	3.5000	2	6.184E-01	-8.863E-01	-7.887E+01	.186	M/M		
9193	6	8	134 152 133 151	12.7101	.0100	2	3.040E+02	-4.379E+02	-2.341E+04	.468	M/M		
5181	5	18	129 143 127 141	36.7002	1 1 2 1 3 1	4 2 4	-2.647E+03 -1.139E+03 3.701E+03			.014 .006 .017	M/M M/M M/M	2	.000
5182	5	18	131 147 129 143	42.4456	1 1 2 1 3 1	2 2 2	-2.477E+04 -5.879E+04 -5.500E+04			.134 .318 .303	M/M M/M M/M	2	.000
5183	5	18	133 151 131 147	45.2806	1 2 2 1 3 2	2 2 2	-1.231E+05 -1.096E+05 -3.740E+03			.566 .593 .020	M/M M/M M/M	2	.000
5184	5	17	133 151 135 155	45.2442	1 3 2 28 3 3	2 2 2	2.865E+04 -6.052E+04 -1.447E+05			.135 .327 .782	M/M M/M M/M	2	.000
5185	5	17	135 155 137 157	34.0435	1 12 2 21 3 12	2 2 2	-4.115E+04 -5.505E+04 1.007E+04			.222 .303 .048	M/M M/M M/M	2	.000
5186	5	17	137 157 139 159	12.1383	1 43 2 3 3 43	2 2 2	-2.792E+04 -5.227E+04 6.985E+03			.151 .283 .032	M/M M/M M/M	2	.000
5191	5	18	130 144 127 141	36.5221	1 1 2 1 3 1	2 2 2	3.222E+03 2.975E+03 -2.346E+03			.015 .014 .013	M/M M/M M/M	4	.000

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR. LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS	MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
										CRIT. LOAD COND.	MAX. STRESS RATIO
5192	5	18	132 148 130 144	42.3818	1 1	2	2.582E+04	.122	M/M	4	.000
					2 1	2	7.220E+04	.341	M/M		
					3 1	2	5.923E+04	.279	M/M		
5193	5	18	134 152 132 148	45.2562	1 2	2	1.196E+05	.564	M/M	4	.000
					2 1	2	1.300E+05	.513	M/M		
					3 2	2	-2.249E+03	.012	M/M		
5194	5	17	134 152 136 156	45.2412	1 2	2	-4.924E+04	.266	M/M	4	.000
					2 30	2	5.692E+04	.269	M/M		
					3 2	2	1.916E+05	.857	M/M		
5195	5	17	136 156 138 158	33.9608	1 11	2	3.487E+04	.164	M/M	4	.000
					2 19	2	6.902E+04	.326	M/M		
					3 11	2	-6.542E+03	.035	M/M		
5196	5	17	138 158 139 159	11.5538	1 22	2	6.106E+04	.288	M/M	2	.000
					2 4	2	-8.713E+03	.047	M/M		
					3 22	2	-2.529E+04	.137	M/M		
4201	4	11	144 143 141 0	2.5617	.0800	2	6.455E+01 1.110E+02 2.848E+01	.002	M/M		
6202	6	11	144 143 146 145	6.0887	.0800	2	2.867E+01 -2.619E-10 1.448E+03	.037	M/M		
6203	6	11	146 145 148 147	2.2958	.0800	4	3.863E+01 1.455E-11 3.611E+03	.093	M/M		
6204	6	11	148 147 150 149	9.0880	.0800	2	-1.522E+02 -2.329E-10 -1.321E+04	.339	M/M		
6205	6	11	150 149 152 151	4.6713	.0800	2	-5.527E+01 5.921E-11 -7.548E+03	.194	M/M		
6206	6	11	152 151 154 153	11.1087	.0800	2	5.683E+01 4.557E-10 -2.831E+04	.726	M/M		
6207	6	11	154 153 156 155	3.6445	.0800	2	1.822E+02 -2.910E-11 -1.320E+04	.339	M/M		
6208	6	11	156 155 158 157	8.4570	.0800	2	1.290E+03 0. -3.422E+04	.978	M/M		
4209	4	11	158 157 159 0	1.0683	.0800	2	2.035E+04 1.934E+04 2.278E+04	.656	M/M		
4211	4	11	157 165 155 0	1.5680	.0800	2	6.219E+03 5.127E+03 7.862E+03	.220	M/M		
6212	6	11	157 165 159 163	1.7409	.0800	2	-1.227E+04 9.313E-10 3.350E+04	.985	M/M		
6213	6	11	164 163 162 161	13.6885	.0800	2	0. 0. -6.764E+03	.173	M/M		
6214	6	11	158 166 159 164	1.0893	.0966	2	7.975E+03 -9.313E-10 -4.066E+04	1.050	STR		

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS			MAX. STRESS RATIO	DES. CONST.	MICROBUCKLING	
												CRIT. LOAD COND.	MAX. STRESS RATIO
4215	4	11	158 166 156	0	1.0750	.0800	2	1.659E+04	1.176E+03	-1.794E+04	.522	M/M	
1101	1	9	144 143	0 0	.7138	.1000	4	4.347E+00	0.	0.	.001	M/M	
1102	1	11	146 145	0 0	1.4016	.0800	4	3.209E+03	0.	0.	.049	M/M	
1103	1	9	148 147	0 0	1.5429	.1000	2	7.535E+02	0.	0.	.251	M/M	
1104	1	11	150 149	0 0	1.8638	.0800	2	3.554E+03	0.	0.	.055	M/M	
1105	1	9	152 151	0 0	1.9313	.1000	2	1.974E+03	0.	0.	.658	M/M	
1106	1	11	154 153	0 0	1.8873	.0800	2	1.693E+04	0.	0.	.260	M/M	
1107	1	9	156 155	0 0	1.7963	.1000	2	4.755E+02	0.	0.	.159	M/M	
1108	1	11	158 157	0 0	1.0961	.0800	2	1.430E+04	0.	0.	.220	M/M	
1201	1	11	157 165	0 0	.5363	.0800	2	4.527E+03	0.	0.	.070	M/M	
1202	1	11	159 163	0 0	1.2500	.0800	2	-1.575E+04	0.	0.	.276	M/M	
1203	1	11	162 161	0 0	2.0000	.0800	2	6.764E+03	0.	0.	.104	M/M	
1204	1	11	159 164	0 0	.7500	.0800	2	1.578E+04	0.	0.	.243	M/M	
1205	1	11	158 166	0 0	.3676	.0800	2	1.620E+04	0.	0.	.249	M/M	
1301	1	11	141 143	0 0	7.2037	.0800	2	8.281E+01	0.	0.	.001	M/M	
1302	1	11	143 145	0 0	5.7706	.0800	4	-3.158E+03	0.	0.	.055	M/M	
1303	1	11	145 147	0 0	1.5614	.0800	2	5.563E+03	0.	0.	.086	M/M	
1304	1	11	147 149	0 0	5.3387	.0800	2	1.878E+02	0.	0.	.003	M/M	
1305	1	11	149 151	0 0	2.4621	.0800	2	-4.436E+04	0.	0.	.778	M/M	
1306	1	11	151 153	0 0	5.8183	.0800	2	2.447E+04	0.	0.	.377	M/M	
1307	1	11	153 155	0 0	1.9796	.0976	2	-5.821E+04	0.	0.	1.021	STR	
1308	1	11	155 157	0 0	5.8658	.0800	2	4.719E+03	0.	0.	.073	M/M	
1309	1	11	157 159	0 0	2.0758	.0800	2	-7.626E+03	0.	0.	.134	M/M	

CONDENSED TABLE OF MEMBER OUTPUT DATA

MEM. NO.	TYPE	MATL.	NODES	AREA OR LENGTH	GAGE	CRIT. LOAD COND.	MAX. STRESS		MICROBUCKLING		
									MAX. STRESS RATIO	DES. CONST.	CRIT. LOAD COND.
1311	1	11	141 144 0 0	7.1786	.0800	2	9.073E+01	0.	0.	.001	M/M
1312	1	11	144 146 0 0	5.7638	.0800	2	-2.650E+03	0.	0.	.046	M/M
1313	1	11	146 148 0 0	1.5606	.0800	2	-4.795E+03	0.	0.	.084	M/M
1314	1	11	148 150 0 0	5.3368	.0800	2	-1.117E+03	0.	0.	.020	M/M
1315	1	11	150 152 0 0	2.4619	.0800	2	4.343E+04	0.	0.	.568	M/M
1316	1	11	152 154 0 0	5.8183	.0800	2	-3.290E+04	0.	0.	.577	M/M
1317	1	11	154 156 0 0	1.9790	.0800	2	6.253E+04	0.	0.	.962	M/M
1318	1	11	156 158 0 0	5.8527	.0800	2	-6.219E+03	0.	0.	.109	M/M
1319	1	11	158 159 0 0	1.9864	.0800	2	2.317E+04	0.	0.	.356	M/M
1401	1	11	155 165 0 0	5.8482	.0800	2	2.803E+03	0.	0.	.043	M/M
1402	1	11	165 163 0 0	1.9493	.0800	2	1.364E+04	0.	0.	.210	M/M
1403	1	11	163 161 0 0	6.8443	.0800	2	2.315E+04	0.	0.	.356	M/M
1404	1	11	164 162 0 0	6.8443	.0800	2	-2.315E+04	0.	0.	.406	M/M
1405	1	11	166 164 0 0	1.9493	.0800	2	1.533E+03	0.	0.	.024	M/M
1406	1	11	156 166 0 0	5.8491	.0800	2	-3.247E+03	0.	0.	.057	M/M

NORMAL END OF PROBLEM

L I S T O F O V E R S T R E S S E D M E M B E R S

6214 1307

SUMMARY OF FINAL MEMBER GAGES AND WEIGHTS

MEMBER	GAGE	WEIGHT	MEMBER	GAGE	WEIGHT
4301	1.000000E-02	3.091468E-04	6302	1.000000E-02	9.718792E-04
6303	1.000000E-02	1.492275E-03	6304	1.000000E-02	1.601122E-03
6305	1.000000E-02	9.317876E-04	4306	1.000000E-02	1.177012E-04
4001	2.500000E+00	1.572852E-03	6002	2.500000E+00	4.944649E-03
6003	2.500000E+00	7.592278E-03	6004	2.500000E+00	8.146058E-03
6005	2.500000E+00	4.740674E-03	4006	2.500000E+00	5.988305E-04
1001	1.000000E-01	4.113603E-02	1002	1.000000E-01	8.818524E-02
1003	1.000000E-01	1.103816E-01	1004	1.000000E-01	1.026687E-01
1005	1.000000E-01	6.264674E-02	6011	3.000000E+00	7.163034E-03
6012	3.100000E+00	1.525390E-02	6013	3.200000E+00	1.899169E-02
6014	3.300000E+00	1.760917E-02	6015	1.700000E+00	5.410295E-03
9013	1.000000E-02	2.916288E-03	5001	2 1 2 0 0 0	2.608091E-02
5002	3 1 3 0 0 0	3.644181E-02	5003	3 2 3 0 0 0	4.155794E-02
5004	2 1 2 0 0 0	2.595286E-02	5005	1 1 1 0 0 0	1.171677E-02
5006	1 1 1 0 0 0	4.177630E-03	5011	2 1 2 0 0 0	2.595436E-02
5012	3 1 3 0 0 0	3.638696E-02	5013	3 4 3 0 0 0	5.191943E-02
5014	2 1 2 0 0 0	2.595115E-02	5015	1 1 1 0 0 0	1.168831E-02
5016	1 1 1 0 0 0	3.976467E-03	4021		5.000000E+00
6022	5.000000E+00	1.251507E-02	6023		5.000000E+00
6024	5.000000E+00	2.061793E-02	6025		5.000000E+00
4026	5.000000E+00	1.515659E-03	1011		1.000000E-01
1012	1.000000E-01	9.920417E-02	1013		1.000000E-01
1014	1.000000E-01	1.154972E-01	1015		1.000000E-01

SUMMARY OF FINAL MEMBER GAGES AND WEIGHTS

MEMBER	GAGE						WEIGHT	MEMBER	GAGE						WEIGHT
6031	3.300000E+00						8.805980E-03	6032	3.400000E+00						1.869761E-02
6033	3.500000E+00						2.321504E-02	6034	3.600000E+00						2.146918E-02
6035	1.900000E+00						6.757931E-03	9033	1.000000E-02						3.259254E-03
5021	2	1	2	0	0	0	2.914813E-02	5022	3	1	3	0	0	0	4.072752E-02
5023	3	4	3	0	0	0	5.805665E-02	5024	3	3	3	0	0	0	5.220904E-02
5025	1	1	1	0	0	0	1.309471E-02	5026	1	1	1	0	0	0	4.668937E-03
5031	2	1	2	0	0	0	2.900670E-02	5032	3	1	3	0	0	0	4.066521E-02
5033	3	6	3	0	0	0	6.963043E-02	5034	3	3	3	0	0	0	5.220559E-02
5035	1	1	1	0	0	0	1.306290E-02	5036	1	1	1	0	0	0	4.444117E-03
4041	5.000000E+00						4.914398E-03	6042	5.000000E+00						1.544962E-02
6043	5.000000E+00						2.372217E-02	6044	5.000000E+00						2.545246E-02
6045	5.000000E+00						1.481230E-02	4046	5.000000E+00						1.871056E-03
1021	1.000000E-01						5.141604E-02	1022	1.000000E-01						1.102230E-01
1023	1.000000E-01						1.379661E-01	1024	1.000000E-01						1.283259E-01
1025	1.000000E-01						7.830238E-02	6051	3.700000E+00						1.091232E-02
6052	3.800000E+00						2.309633E-02	6053	3.950000E+00						2.895681E-02
6054	4.100000E+00						2.702396E-02	6055	2.100000E+00						8.255277E-03
9053	1.000000E-02						3.602221E-03	5041	2	1	2	0	0	0	3.221534E-02
5042	3	1	3	0	0	0	4.501322E-02	5043	3	6	3	0	0	0	7.699905E-02
5044	3	6	3	0	0	0	7.693723E-02	5045	3	1	3	0	0	0	3.376950E-02
5046	1	1	1	0	0	0	5.160243E-03	5051	2	1	2	0	0	0	3.205903E-02
5052	3	1	3	0	0	0	4.494546E-02	5053	3	10	3	0	0	0	1.026101E-01
5054	3	6	3	0	0	0	7.693215E-02	5055	2	1	2	0	0	0	2.406248E-02

SUMMARY OF FINAL MEMBER GAGES AND WEIGHTS

MEMBER	GAGE	WEIGHT	MEMBER	GAGE	WEIGHT
5056	1 1 1 0 0 0	4.911766E-03	4061	5.000000E+00	5.946078E-03
6062	5.000000E+00	1.869299E-02	6063	5.000000E+00	2.870222E-02
6064	5.000000E+00	3.079575E-02	6065	5.000000E+00	1.792187E-02
4066	5.000000E+00	2.263849E-03	1031	1.000000E-01	5.655598E-02
1032	1.000000E-01	1.212419E-01	1033	1.000000E-01	1.517585E-01
1034	1.000000E-01	1.411544E-01	1035	1.000000E-01	8.613020E-02
6071	4.000000E+00	1.292030E-02	6072	4.150000E+00	2.762517E-02
6073	4.300000E+00	3.452388E-02	6074	4.450000E+00	3.212346E-02
6075	2.300000E+00	9.902329E-03	9073	1.000000E-02	3.945191E-03
5061	2 1 2 0 0 0	3.528256E-02	5062	3 1 3 0 0 0	4.929892E-02
5063	3 8 3 0 0 0	9.838516E-02	5064	3 9 3 0 0 0	1.053280E-01
5065	6 1 6 0 0 0	6.868586E-02	5066	5 1 5 0 0 0	2.072234E-02
5071	2 1 2 0 0 0	3.511136E-02	5072	3 1 3 0 0 0	4.922471E-02
5073	3 15 3 0 0 0	1.474982E-01	5074	3 10 3 0 0 0	1.123425E-01
5075	5 1 5 0 0 0	5.797763E-02	5076	3 1 3 0 0 0	1.255196E-02
4081	5.000000E+00	7.075999E-03	6082	5.000000E+00	2.224516E-02
6083	5.000000E+00	3.415642E-02	6084	5.000000E+00	3.664775E-02
6085	5.000000E+00	2.132749E-02	4086	5.000000E+00	2.694037E-03
1041	1.000000E-01	6.169605E-02	1042	1.000000E-01	1.322608E-01
1043	1.000000E-01	1.655510E-01	1044	1.000000E-01	1.539829E-01
1045	1.000000E-01	9.395789E-02	6091	4.450000E+00	1.562340E-02
6092	4.550000E+00	3.292085E-02	6093	4.700000E+00	4.101585E-02
6094	4.850000E+00	3.805456E-02	6095	2.500000E+00	1.169909E-02

SUMMARY OF FINAL MEMBER GAGES AND WEIGHTS

MEMBER	GAGE	WEIGHT	MEMBER	GAGE	WEIGHT
9093	1.000000E-02	4.288157E-03	5081	2 1 2 0 0 0	3.834978E-02
5082	3 1 3 0 0 0	5.358462E-02	5083	3 10 3 0 0 0	1.222149E-01
5084	3 12 3 0 0 0	1.373814E-01	5085	9 1 9 0 0 0	1.091140E-01
5086	10 1 10 0 0 0	4.299997E-02	5091	2 1 2 0 0 0	3.816370E-02
5092	3 1 3 0 0 0	5.350396E-02	5093	3 18 3 0 0 0	1.832236E-01
5094	3 14 3 0 0 0	1.526359E-01	5095	8 1 8 0 0 0	9.739114E-02
5096	8 1 8 0 0 0	3.313374E-02	4101	5.000000E+00	8.304132E-03
6102	5.000000E+00	2.610611E-02	6103	5.000000E+00	4.008473E-02
6104	5.000000E+00	4.300847E-02	6105	5.000000E+00	2.502917E-02
4106	5.000000E+00	3.161626E-03	1051	1.000000E-01	6.683599E-02
1052	1.000000E-01	1.432796E-01	1053	1.000000E-01	1.793432E-01
1054	1.000000E-01	1.668115E-01	1055	1.000000E-01	1.017857E-01
6111	4.800000E+00	1.820005E-02	6112	4.900000E+00	3.828877E-02
6113	5.050000E+00	4.759494E-02	6114	5.250000E+00	4.448771E-02
6115	2.700000E+00	1.364557E-02	9113	1.000000E-02	4.631123E-03
5101	2 1 2 0 0 0	4.141700E-02	5102	3 1 3 0 0 0	5.787033E-02
5103	2 12 2 0 0 0	1.319897E-01	5104	2 15 2 0 0 0	1.566119E-01
5105	12 1 12 0 0 0	1.550538E-01	5106	15 1 15 0 0 0	6.855298E-02
5111	2 1 2 0 0 0	4.121604E-02	5112	3 1 3 0 0 0	5.778321E-02
5113	2 21 2 0 0 0	2.061227E-01	5114	2 18 2 0 0 0	1.813281E-01
5115	11 1 11 0 0 0	1.423070E-01	5116	13 1 13 0 0 0	5.683238E-02
4121	5.000000E+00	9.630508E-03	6122	5.000000E+00	3.027589E-02
6123	5.000000E+00	4.648722E-02	6124	5.000000E+00	4.987796E-02

SUMMARY OF FINAL MEMBER GAGES AND WEIGHTS

MEMBER	GAGE	WEIGHT	MEMBER	GAGE	WEIGHT
6125	5.000000E+00	2.902694E-02	4126	5.000000E+00	3.666615E-03
1061	1.000000E-01	7.197606E-02	1062	1.000000E-01	1.542986E-01
1063	1.000000E-01	1.931355E-01	1064	1.000000E-01	1.796401E-01
1065	1.000000E-01	1.096135E-01	6131	5.200000E+00	2.117690E-02
6132	5.300000E+00	4.448140E-02	6133	5.450000E+00	5.516877E-02
6134	5.650000E+00	5.142291E-02	6135	2.900000E+00	1.574176E-02
9133	1.000000E-02	4.974091E-03	5121	1 1 1 0 0 0	2.669053E-02
5122	2 1 2 0 0 0	4.439716E-02	5123	2 12 2 0 0 0	1.417644E-01
5124	2 18 2 0 0 0	1.947696E-01	5125	14 2 14 0 0 0	1.998440E-01
5126	20 1 20 0 0 0	9.738137E-02	5131	1 1 1 0 0 0	2.656102E-02
5132	2 1 2 0 0 0	4.433033E-02	5133	2 23 2 0 0 0	2.390985E-01
5134	2 23 2 0 0 0	2.390196E-01	5135	13 2 13 0 0 0	1.860680E-01
5136	17 1 17 0 0 0	7.912751E-02	4141		5.000000E+00
6142	5.000000E+00	3.475446E-02	6143		5.000000E+00
6144	5.000000E+00	7.848045E-02	6145		5.000000E+00
4146	5.000000E+00	5.769232E-03	1071		1.000000E-01
1072	1.000000E-01	1.653174E-01	1073		1.000000E-01
1074	1.000000E-01	1.924698E-01	1075		1.000000E-01
6151	5.500000E+00	2.394304E-02	6152		5.600000E+00
6153	5.800000E+00	8.602438E-02	6154		6.000000E+00
6155	3.100000E+00	2.465551E-02	9153		1.000000E-02
5141	1 1 1 0 0 0	2.853086E-02	5142	1 1 1 0 0 0	2.847503E-02
5143	2 12 2 0 0 0	1.515392E-01	5144	2 25 2 0 0 0	2.744443E-01

SUMMARY OF FINAL MEMBER GAGES AND WEIGHTS

MEMBER	GAGE						WEIGHT	MEMBER	GAGE						WEIGHT
5145	15	8	15	0	0	0	2.705896E-01	5146	30	3	30	0	0	0	1.599522E-01
5151	1	1	1	0	0	0	2.839243E-02	5152	1	1	1	0	0	0	2.843216E-02
5153	2	25	2	0	0	0	2.745168E-01	5154	2	27	2	0	0	0	2.933521E-01
5155	14	8	14	0	0	0	2.557254E-01	5156	19	2	19	0	0	0	9.666677E-02
4161							5.000000E+00	1.257792E-02	6162						5.000000E+00
6163							5.000000E+00	6.071458E-02	6164						5.000000E+00
6165							5.000000E+00	5.196371E-02	4166						5.000000E+00
1081							1.000000E-01	8.225607E-02	1082						1.000000E-01
1083							1.000000E-01	2.207201E-01	1084						1.000000E-01
1085							1.000000E-01	1.252692E-01	6171						5.800000E+00
6172							6.000000E+00	5.730049E-02	6173						6.200000E+00
6174							6.450000E+00	9.156123E-02	6175						3.300000E+00
9173							1.000000E-02	5.660024E-03	5161	1	1	1	0	0	0
5162	1	1	1	0	0	0	3.031176E-02	3.031176E-02	5163	2	6	2	0	0	0
5164	3	26	3	0	0	0	3.223689E-01	3.223689E-01	5165	15	13	15	0	0	0
5166	41	3	41	0	0	0	2.297289E-01	2.297289E-01	5171	1	1	1	0	0	0
5172	1	1	1	0	0	0	3.026613E-02	3.026613E-02	5173	1	5	1	0	0	0
5174	2	28	2	0	0	0	3.223476E-01	3.223476E-01	5175	14	10	14	0	0	0
5176	20	4	20	0	0	0	1.131923E-01	1.131923E-01	4181						5.000000E+00
6182							5.000000E+00	4.463797E-02	6183						5.000000E+00
6184							5.000000E+00	1.007998E-01	6185						5.000000E+00
4186							5.000000E+00	7.409900E-03	1091						1.000000E-01
1092							1.000000E-01	1.873551E-01	1093						1.000000E-01

SUMMARY OF FINAL MEMBER GAGES AND WEIGHTS

MEMBER	GAGE	WEIGHT	MEMBER	GAGE	WEIGHT
1094	1.000000E-01	2.181258E-01	1095	1.000000E-01	1.330970E-01
6191	6.200000E+00	3.204156E-02	6192	6.450000E+00	7.884457E-02
6193	6.600000E+00	1.333706E-01	6194	6.900000E+00	1.253735E-01
6195	3.500000E+00	3.792906E-02	9193	1.000000E-02	7.244748E-03
5181	1 1 1 0 0 0	3.137863E-02	5182	1 1 1 0 0 0	3.629103E-02
5183	2 1 2 0 0 0	6.452483E-02	5184	3 28 3 0 0 0	4.384165E-01
5185	12 21 12 0 0 0	4.366081E-01	5186	43 3 43 0 0 0	3.078872E-01
5191	1 1 1 0 0 0	3.122638E-02	5192	1 1 1 0 0 0	3.623640E-02
5193	2 1 2 0 0 0	6.449005E-02	5194	2 30 2 0 0 0	4.383875E-01
5195	11 19 11 0 0 0	3.968323E-01	5196	22 4 22 0 0 0	1.580557E-01
4201	8.000000E-02	2.049389E-02	6202	8.000000E-02	4.870965E-02
6203	8.000000E-02	1.836639E-02	6204	8.000000E-02	7.270368E-02
6205	8.000000E-02	3.737008E-02	6206	8.000000E-02	8.886988E-02
6207	8.000000E-02	2.915560E-02	6208	8.000000E-02	6.765582E-02
4209	8.000000E-02	8.546128E-03	4211	9.000000E-02	1.254399E-02
6212	8.000000E-02	1.392758E-02	6213	9.000000E-02	1.095083E-01
6214	9.655305E-02	1.051740E-02	4215	9.000000E-02	8.599631E-03
1101	1.000000E-01	9.279309E-02	1102	8.000000E-02	1.121246E-02
1103	1.000000E-01	2.005778E-01	1104	8.000000E-02	1.491074E-02
1105	1.000000E-01	2.510634E-01	1106	9.000000E-02	1.509851E-02
1107	1.000000E-01	2.335200E-01	1108	8.000000E-02	8.768632E-03
1201	8.000000E-02	4.290192E-03	1202	9.000000E-02	1.000000E-02
1203	8.000000E-02	1.600000E-02	1204	8.000000E-02	6.000000E-03

SUMMARY OF FINAL MEMBER GAGES AND WEIGHTS

MEMBER	GAGE	WEIGHT	MEMBER	GAGE	WEIGHT
1205	8.000000E-02	2.941176E-03	1301	8.000000E-02	5.762994E-02
1302	8.000000E-02	4.616501E-02	1303	8.000000E-02	1.249120E-02
1304	8.000000E-02	4.270954E-02	1305	8.000000E-02	1.969682E-02
1306	8.000000E-02	4.654668E-02	1307	9.755183E-02	1.931152E-02
1308	8.000000E-02	4.692672E-02	1309	8.000000E-02	1.660547E-02
1311	8.000000E-02	5.742844E-02	1312	8.000000E-02	4.611066E-02
1313	8.000000E-02	1.248516E-02	1314	8.000000E-02	4.269476E-02
1315	8.000000E-02	1.969485E-02	1316	8.000000E-02	4.654632E-02
1317	8.000000E-02	1.583191E-02	1318	8.000000E-02	4.682135E-02
1319	8.000000E-02	1.589117E-02	1401	8.000000E-02	4.678595E-02
1402	8.000000E-02	1.559400E-02	1403	8.000000E-02	5.475414E-02
1404	8.000000E-02	5.475414E-02	1405	8.000000E-02	1.559400E-02
1406	8.000000E-02	4.679316E-02			

TOTAL WEIGHT OF STRUCTURE AT END OF STRESS CONSTRAINT MODE (AFTER 1 CYCLES) = .241308E+02

***** STEP 1 FROM PROGRAM SBMAIN *****

STACK THE ELEMENT STIFFNESSES TO OBTAIN THE STIFFNESS MATRIX (KS)

THE TOTAL STIFFNESS MATRIX WAS STACKED IN 2 BLOCKS

***** STEP 2 FROM PROGRAM SBMAIN *****

SOLVE THE EQUATION $KS = L * LT$. SPLIT THE STIFFNESS MATRIX TO OBTAIN THE STIFFNESS MATRIX LOWER TRIANGLE (L) AND THE TRANSPOSE OF THE STIFFNESS MATRIX LOWER TRIANGLE (LT) BY THE CHOLSKY FACTORIZATION METHOD

LOWER TRIANGLE EXCEEDS STORAGE IN CORE

***** STEP 3 FROM PROGRAM SBMAIN *****

SOLVE THE EQUATION $L * ZT = T$. USING THE DYNAMIC TRANSFORMATION MATRIX INPUT (T) SOLVE FOR THE INTERMEDIATE SOLUTION (ZT) BY THE FORWARD SOLUTION METHOD

***** STEP 4 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE STIFFNESS MATRIX LOWER TRIANGLE (LT) TO OBTAIN THE REVERSE STIFFNESS MATRIX LOWER TRIANGLE (LTR) FOR USE IN THE SOLUTION OF $LTR * YR = ZTR$ FOR YR.

***** STEP 5 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE INTERMEDIATE SOLUTION (ZT) TO OBTAIN THE REVERSE INTERMEDIATE SOLUTION (ZTR) FOR USE IN THE SOLUTION OF $LTR * YR = ZTR$ FOR YR.

***** STEP 6 FROM PROGRAM SBMAIN *****

SOLVE $LTR * YR = ZTR$. USING THE REVERSED SOLUTIONS LTR AND ZTR OBTAINED PREVIOUSLY SOLVE FOR THE REVERSED DEFLECTIONS (YR) DUE TO THE TRANSFORMATION MATRIX INPUT. USE THE BACKWARD SOLUTION METHOD
TOTAL MATRIX EXCEEDS STORAGE IN CORE
TOTAL MATRIX EXCEEDS STORAGE IN CORE

***** STEP 7 FROM PROGRAM SBMAIN *****

REVERSE THE ORDER OF THE REVERSE DEFLECTIONS (YR) TO OBTAIN THE DEFLECTIONS (Y)

***** STEP 8 FROM PROGRAM SBMAIN *****

SOLVE $KF = TT * Y$. USING THE TRANSPOSE OF THE DYNAMIC TRANSFORMATION MATRIX (TT) AND THE DEFLECTIONS (Y) SOLVE FOR THE FLEXIBILITY MATRIX (KF)





.....1.....2.....3.....4.....5.....6.....7.....8
 CARD NO. 12345678901234567890123456789012345678901234567890123456789012345678901234567890

47	7	256.92	9.0	233.99	60.0	VGP, XTER1, YTER1, XTER2, YTER2
48	9.0	15.0	20.0	30.0	40.0	50.0 60.0
49	7	272.52	9.0	240.85	60.0	NGP(3)
50	9.0	15.0	20.0	30.0	40.0	50.0 60.0
51	7	288.109	9.0	247.7	60.0	NGP(4)
52	9.0	15.0	20.0	30.0	40.0	50.0 60.0
53	1	KLUGLB				

.....1.....2.....3.....4.....5.....6.....7.....8
 12345678901234567890123456789012345678901234567890123456789012345678901234567890





PAGES 9 THROUGH 12 MISSING FROM ORIGINAL DOCUMENT.

MATRIX NAME= MD (24 X 24) PRINT LOWER TRIANGLE
(MASS MATRIX TO BE USED IN VIBRATION ANALYSIS)

ROW	COL	VALUE	VALUE	VALUE	VALUE	VALUE	VALUE	VALUE	VALUE
1	1	7.097075E-01							
2	1	-5.117239E-03	7.305376E-01						
3	1	-2.691503E-02	1.418397E-01	6.453762E-01					
4	1	9.168717E-04	-5.007828E-03	1.029798E-01	2.877876E-01				
5	1	1.310402E-04	-3.234059E-04	7.132978E-03	2.198108E-02	9.814944E-02			
6	1	-5.934884E-05	4.029981E-05	-5.692986E-04	1.806230E-03	8.717788E-03	4.853547E-02		
7	1	5.497758E-02	-2.583274E-02	-2.119514E-02	-8.793840E-04	2.044096E-04	8.345982E-08	1.383799E+00	
8	1	-3.578576E-02	5.298062E-02	-8.866029E-02	-1.041485E-02	7.491613E-04	-2.029650E-05	1.260039E-01	
8	8	1.248141E+00							
9	1	3.887654E-03	9.858083E-03	-5.739099E-01	-1.461274E-01	-4.249395E-03	2.887313E-04	4.805721E-02	
9	8	3.351385E-01	3.064693E+00						
10	1	1.360160E-02	-6.377665E-02	-1.544733E-01	-2.706331E-01	-6.916699E-02	1.559476E-03	-3.089994E-04	
10	8	2.634243E-02	6.140720E-01	1.776457E+00					
11	1	-1.663763E-03	3.198906E-03	-4.119486E-02	-4.419338E-02	-1.365789E-01	-2.200822E-02	-1.394560E-03	
11	8	-6.995464E-03	-1.497826E-03	3.290094E-01	1.214228E+00				
12	1	1.298499E-04	-1.612036E-04	3.981186E-03	-1.538303E-02	-4.789916E-03	-1.000479E-01	3.947322E-05	
12	8	1.429232E-04	-2.052415E-03	-9.706860E-03	1.344597E-01	6.073635E-01			
13	1	-3.822057E-03	-7.057242E-03	5.061197E-03	-1.878545E-04	-6.053578E-04	-1.378924E-04	9.360817E-02	
13	8	-2.192224E-03	-3.414137E-02	-3.807713E-03	9.710287E-04	1.178514E-04	7.361516E-01		
14	1	-3.014923E-02	-1.906774E-02	-4.704764E-02	1.423716E-04	1.131821E-03	9.257126E-06	8.429095E-02	
14	8	1.683465E-01	1.619056E-01	-1.373805E-02	-6.281875E-03	1.861576E-04	2.817313E-02	9.486461E-01	

MATRIX NAME= MD (24 X 24) PRINT LOWER TRIANGLE
(MASS MATRIX TO BE USED IN VIBRATION ANALYSIS)

ROW	COL	VALUE	VALUE	VALUE	VALUE	VALUE	VALUE	VALUE
15	1	-1.012738E-02	-5.488598E-02	-1.318932E-01	-3.997841E-03	3.597816E-03	-1.034246E-04	3.000069E-02
15	8	9.181264E-02	3.202699E-01	-3.942937E-03	-1.923800E-02	7.113369E-04	-4.260951E-02	3.030149E-01
15	15	1.092556E+00						
16	1	2.875630E-03	-3.356109E-02	-1.085177E-01	-7.445568E-02	2.140170E-03	6.319151E-04	1.786513E-03
16	8	3.477210E-03	1.411357E-01	1.350264E-01	-2.678324E-02	-4.541804E-03	-2.953989E-04	-3.328209E-02
16	15	1.796364E-01	8.723521E-01					
17	1	-4.782280E-05	1.443688E-03	-2.373793E-02	-8.803305E-02	-5.953837E-02	5.823234E-03	-1.277175E-03
17	8	-4.324104E-03	-7.831219E-03	1.271940E-01	1.001007E-01	-2.819438E-02	2.363083E-03	-4.886216E-03
17	15	-2.899001E-02	1.288380E-01	7.001912E-01				
18	1	2.627340E-04	4.419790E-04	3.841091E-03	-1.333418E-02	-3.433891E-02	-1.368359E-02	-6.398067E-05
18	8	-3.072109E-04	-6.463231E-03	-1.539372E-02	8.666203E-02	-8.906652E-03	7.879616E-04	-7.399038E-05
18	15	9.511629E-04	-1.868733E-02	8.832566E-02	2.745846E-01			
19	1	-5.643278E-04	6.117739E-04	1.597852E-04	1.231105E-04	5.867561E-05	1.124438E-05	-7.206905E-04
19	8	-1.629069E-04	4.045192E-04	-1.349595E-04	-8.049922E-05	-9.346517E-06	-3.694411E-02	8.459563E-03
19	15	-2.128153E-05	-1.411739E-04	-1.826808E-04	-5.965889E-05	6.039393E-02		
20	1	3.441111E-03	1.438638E-03	2.529092E-03	8.336508E-05	-4.073898E-05	-3.039327E-06	-1.561702E-02
20	8	-1.289707E-02	-6.904491E-03	1.217257E-04	1.813651E-04	-1.422889E-06	3.468559E-02	2.949278E-02
20	15	8.802576E-04	-8.796656E-04	2.148252E-04	1.960955E-05	1.232328E-03	4.835377E-02	
21	1	-1.295927E-03	9.558363E-04	9.501759E-03	1.297674E-03	-1.301162E-05	3.352604E-06	-4.968994E-03
21	8	-1.365458E-02	-3.483508E-02	-4.253342E-03	3.348274E-04	5.872524E-06	3.788060E-03	4.971819E-02
21	15	5.324234E-02	8.278772E-04	-5.362135E-04	5.779110E-05	-1.143061E-04	5.962900E-03	5.625303E-02
22	1	-1.334097E-03	-2.578828E-03	4.500392E-03	3.676718E-03	7.962147E-04	-2.908558E-05	2.315325E-04
22	8	-4.865972E-03	-2.920615E-02	-1.758832E-02	-4.088823E-03	1.053350E-04	-1.698605E-03	6.307559E-04
22	15	5.417257E-02	5.634372E-02	6.018006E-04	-3.438373E-04	-2.300622E-05	-6.087422E-05	5.589714E-03
22	22	5.737263E-02						
23	1	-7.308902E-05	-5.369388E-04	-1.140184E-03	-2.722053E-03	1.866503E-03	5.724114E-04	-3.047597E-04
23	8	-1.629300E-03	-9.664377E-03	-4.827303E-03	-1.351662E-02	-2.927056E-03	3.552123E-04	-1.870608E-03
23	15	-2.249350E-03	4.525950E-02	4.789194E-02	-3.721166E-04	-2.089779E-05	3.801852E-05	-2.894136E-05
23	22	3.480180E-03	4.649231E-02					
24	1	2.347236E-05	2.831757E-04	7.505314E-04	-2.285356E-03	-3.884552E-03	2.860111E-03	-3.181965E-05

MATRIX NAME= MD (24 X 24) PRINT LOWER TRIANGLE
(MASS MATRIX TO BE USED IN VIBRATION ANALYSIS)

ROW	COL	VALUE	VALUE	VALUE	VALUE	VALUE	VALUE	VALUE
24	8	-1.992366E-04	-3.056138E-03	-6.209417E-03	2.851016E-03	-1.081020E-02	1.907996E-04	-3.777065E-05
24	15	-2.702510E-05	-4.404120E-03	3.915634E-02	2.522883E-02	-1.365436E-05	5.672249E-06	2.644008E-05
24	22	-1.075331E-04	1.939552E-03	2.364737E-02				



M FREQUENCIES, CPS

1	40.4275
2	105.3595
3	144.3544
4	213.1469
5	294.0645
6	337.0482
7	363.3346
8	426.6627

NORMALIZED EIGEN VECTORS FOR ALL REQUESTED DEGREES OF FREEDOM (ABSOLUTE MOTION)

IOLD	M =	1	2	3	4	5	6	7	8
1	2.712177E-02	-7.549283E-03	-1.300646E-01	-2.274855E-03	2.046879E-01	-3.371469E-03	2.355145E-02	-8.429530E-02	
2	6.427574E-02	-1.522877E-02	-2.582002E-01	-1.348464E-02	3.206127E-01	-1.036013E-03	4.695725E-02	-1.702611E-04	
3	1.805161E-01	-9.272162E-04	-5.228213E-01	-7.362341E-02	2.426666E-01	2.773503E-02	4.545729E-02	3.381151E-01	
4	3.698704E-01	1.052380E-01	-6.633175E-01	-1.375901E-01	-2.659212E-01	8.159306E-02	-8.257065E-02	1.633800E-01	
5	6.486854E-01	4.174887E-01	-5.269089E-01	8.010193E-02	-7.160659E-01	4.669618E-02	-1.680900E-01	-5.518826E-01	
6	1.000000E+00	1.000000E+00	-6.022672E-02	1.000000E+00	-3.694496E-01	-4.323481E-01	3.786862E-01	-4.154219E-01	
7	3.648139E-02	-5.799126E-02	-6.139452E-02	6.382236E-02	1.918112E-01	-1.428603E-03	-3.853037E-02	-4.242016E-01	
8	7.806202E-02	-9.954115E-02	-1.407583E-01	7.850961E-02	2.962487E-01	-8.156083E-03	-5.515728E-03	-3.359171E-01	
9	1.937587E-01	-1.311553E-01	-2.966107E-01	3.174624E-03	1.741568E-01	-1.450962E-02	5.226235E-02	1.980854E-01	
10	3.780507E-01	-5.065964E-02	-3.706833E-01	-1.347529E-01	-1.474805E-01	2.225071E-02	-1.585735E-02	1.067831E-01	
11	6.441561E-01	2.271735E-01	-2.346060E-01	-6.859068E-02	-3.613903E-01	6.889061E-02	-1.276248E-01	-2.898020E-01	
12	8.44647E-01	7.806281E-01	1.723988E-01	6.473307E-01	3.826144E-02	-2.068738E-01	2.044391E-01	3.177534E-02	
13	2.015409E-02	-8.032710E-02	1.053976E-02	1.229751E-01	3.498350E-02	6.430229E-02	-8.026405E-02	-9.537429E-02	
14	6.456550E-02	-1.889976E-01	1.543173E-02	2.386230E-01	4.218642E-02	1.004535E-01	-1.094996E-01	-9.235208E-02	
15	1.950365E-01	-3.473575E-01	2.408959E-02	2.305884E-01	-7.054913E-02	-1.647893E-02	-7.729185E-03	1.417774E-01	
16	3.781681E-01	-3.584240E-01	9.042432E-02	-5.489599E-02	-1.830934E-01	-1.151406E-01	9.473145E-02	-4.708042E-02	
17	6.321018E-01	-1.436021E-01	2.785707E-01	-3.006493E-01	3.323739E-02	4.045010E-02	-3.023060E-02	-1.928737E-01	
18	9.556126E-01	3.636105E-01	6.155767E-01	4.229093E-02	6.831954E-01	1.197116E-01	-3.607177E-02	5.747300E-01	
19	-6.984619E-03	8.537559E-03	1.704490E-02	2.745906E-02	-3.168291E-01	1.000000E+00	1.000000E+00	-8.991270E-01	
20	-2.821269E-03	-5.181049E-02	5.859522E-02	1.901830E-01	-3.628725E-01	9.530627E-01	4.252942E-01	-6.154173E-02	
21	1.299271E-01	-4.272244E-01	2.016628E-01	6.249316E-01	-4.943724E-01	4.832764E-01	-3.282517E-01	1.000000E+00	
22	3.325821E-01	-6.276519E-01	3.508628E-01	2.816718E-01	-5.853454E-01	-2.291875E-01	1.370792E-01	3.104887E-01	
23	5.943547E-01	-5.363246E-01	6.211110E-01	-4.122552E-01	-1.634774E-01	-1.765669E-01	1.767570E-01	-6.953387E-01	
24	9.240933E-01	-4.052969E-02	1.000000E+00	-4.525607E-01	1.000000E+00	2.753719E-01	-1.438645E-01	5.159794E-01	

GENERALIZED MASS, LBS
(NORMALIZATION/LARGEST VALUE IN EACH MODE IS UNITY)

MN =	1	2	3	4	5	6	7	8
1	2.592592E+00	-5.273559E-16	6.328271E-14	-1.565414E-14	-2.420286E-14	6.217249E-15	-5.551115E-15	2.042810E-14
2	-5.273559E-16	1.096850E+00	1.930400E-14	-1.239980E-14	3.157197E-14	2.844947E-15	5.013351E-16	5.884182E-15
3	6.328271E-14	1.930400E-14	1.229013E+00	-2.220446E-14	3.752554E-14	1.071365E-14	-3.330569E-16	3.308465E-14
4	-1.565414E-14	-1.239980E-14	-2.220446E-14	6.016879E-01	-3.885781E-15	6.133982E-15	1.984524E-15	4.363176E-14
5	-2.420286E-14	3.157197E-14	3.752554E-14	-3.885781E-15	9.458282E-01	3.885781E-15	-1.210143E-14	7.327472E-15
6	6.217249E-15	2.844947E-15	1.071365E-14	6.133982E-15	3.885781E-15	2.100029E-01	8.132384E-15	7.410739E-15
7	-5.551115E-15	5.013351E-16	-3.330669E-16	1.984524E-15	-1.210143E-14	8.132384E-15	1.558602E-01	-1.097733E-14
8	2.042810E-14	5.884182E-15	3.308465E-14	4.363176E-14	7.327472E-15	7.410739E-15	-1.097733E-14	9.615235E-01

NORMALIZED EIGEN VECTORS FOR REDUCED DEGREES OF FREEDOM (ABSOLUTE MOTION)

IN	OLD	M =	1	2	3	4	5	6	7	8
2	1	0.	0.	0.	0.	0.	0.	0.	0.	0.
2	1	2.712177E-02	-7.549283E-03	-1.300646E-01	-2.274855E-03	2.045879E-01	-3.371469E-03	2.355145E-02	-8.429530E-02	
3	2	6.427574E-02	-1.522877E-02	-2.582002E-01	-1.348464E-02	3.205127E-01	-1.036013E-03	4.695725E-02	-1.702611E-04	
4	3	1.805161E-01	-9.272162E-04	-5.228213E-01	-7.362341E-02	2.426666E-01	2.773503E-02	4.545729E-02	3.381151E-01	
5	4	3.698704E-01	1.052380E-01	-6.633175E-01	-1.375901E-01	-2.659212E-01	8.159306E-02	-8.257065E-02	1.633800E-01	
6	5	6.486854E-01	4.174887E-01	-5.269089E-01	8.010193E-02	-7.160659E-01	4.669618E-02	-1.680900E-01	-5.518826E-01	
7	6	1.000000E+00	1.000000E+00	-6.022672E-02	1.000000E+00	-3.694496E-01	-4.323481E-01	3.786862E-01	-4.154219E-01	
9	7	0.	0.	0.	0.	0.	0.	0.	0.	
9	7	3.648139E-02	-5.799126E-02	-6.139452E-02	6.382236E-02	1.918112E-01	-1.428603E-03	-3.853037E-02	-4.242016E-01	
10	8	7.806202E-02	-9.954115E-02	-1.407583E-01	7.850961E-02	2.962487E-01	-8.156083E-03	-5.515728E-03	-3.359171E-01	
11	9	1.937587E-01	-1.311553E-01	-2.966107E-01	3.174624E-03	1.741568E-01	-1.450962E-02	5.226235E-02	1.980854E-01	
12	10	3.780507E-01	-5.065964E-02	-3.706833E-01	-1.347529E-01	-1.474805E-01	2.225071E-02	-1.585735E-02	1.067831E-01	
13	11	6.441561E-01	2.271735E-01	-2.346060E-01	-6.859068E-02	-3.613903E-01	6.889061E-02	-1.276248E-01	-2.898020E-01	
14	12	9.844647E-01	7.806281E-01	1.723988E-01	6.473307E-01	3.826144E-02	-2.068738E-01	2.044391E-01	3.177534E-02	
15	13	0.	0.	0.	0.	0.	0.	0.	0.	
16	13	2.015409E-02	-8.032710E-02	1.053976E-02	1.229751E-01	3.498350E-02	6.430229E-02	-8.026405E-02	-9.537429E-02	
17	14	6.456550E-02	-1.889976E-01	1.543173E-02	2.386230E-01	4.218642E-02	1.004535E-01	-1.094996E-01	-9.235208E-02	
18	15	1.950365E-01	-3.473575E-01	2.408959E-02	2.305484E-01	-7.054913E-02	-1.647893E-02	-7.729185E-03	1.417774E-01	
19	16	3.781681E-01	-3.584240E-01	9.042432E-02	-5.489599E-02	-1.830934E-01	-1.151406E-01	9.473145E-02	-4.708042E-02	
20	17	6.321018E-01	-1.436021E-01	2.785707E-01	-3.006493E-01	3.323739E-02	4.045010E-02	-3.023060E-02	-1.928737E-01	
21	18	9.556126E-01	3.636105E-01	6.155767E-01	4.229993E-02	6.831954E-01	1.197116E-01	-3.607177E-02	5.747300E-01	
23	19	0.	0.	0.	0.	0.	0.	0.	0.	
23	19	-6.984619E-03	8.537559E-03	1.704490E-02	2.745906E-02	-3.168291E-01	1.000000E+00	1.000000E+00	-8.991270E-01	
24	20	-2.821269E-03	-5.181049E-02	5.859522E-02	1.901830E-01	-3.628725E-01	9.530627E-01	4.252942E-01	-6.154173E-02	
25	21	1.299271E-01	-4.272244E-01	2.016628E-01	6.249316E-01	-4.943724E-01	4.832764E-01	-3.282517E-01	1.000000E+00	
26	22	3.325821E-01	-6.276519E-01	3.508628E-01	2.816718E-01	-5.853454E-01	-2.291875E-01	1.370792E-01	3.104887E-01	
27	23	5.943547E-01	-5.363246E-01	6.211110E-01	-4.122552E-01	-1.634774E-01	-1.765669E-01	1.767570E-01	-6.953387E-01	
28	24	9.240933E-01	-4.052969E-02	1.000000E+00	-4.525607E-01	1.000000E+00	2.753719E-01	-1.438645E-01	5.159794E-01	

ENTER VIBRATION DATA FOR FLUTTER ANALYSIS

VIBRATION DATA HAS BEEN ENTERED FROM ONE FILE ON TAPE

GENERALIZED MASS, FREQUENCY, AND GENERALIZED MODAL STIFFNESS

GENERALIZED MASS, LB

MODE	MODF= 1	2	3	4	5	6	7	8
1	2.592592E+00	-5.273559E-16	6.328271E-14	-1.565414E-14	-2.420286E-14	6.217249E-15	-5.551115E-15	2.042810E-14
2	-5.273559E-16	1.096850E+00	1.930400E-14	-1.239980E-14	3.157197E-14	2.844947E-15	5.013351E-16	5.884182E-15
3	6.328271E-14	1.930400E-14	1.229013E+00	-2.220446E-14	3.752554E-14	1.071365E-14	-3.330569E-16	3.308465E-14
4	-1.565414E-14	-1.239980E-14	-2.220446E-14	6.016879E-01	-3.885781E-15	6.133982E-15	1.984524E-15	4.363176E-14
5	-2.420286E-14	3.157197E-14	3.752554E-14	-3.885781E-15	9.458282E-01	3.885781E-15	-1.210143E-14	7.327472E-15
6	6.217249E-15	2.844947E-15	1.071365E-14	6.133982E-15	3.885781E-15	2.100029E-01	8.132384E-15	7.410739E-15
7	-5.551115E-15	5.013351E-16	-3.330669E-16	1.984524E-15	-1.210143E-14	8.132384E-15	1.558602E-01	-1.097733E-14
8	2.042810E-14	5.884182E-15	3.308465E-14	4.363176E-14	7.327472E-15	7.410739E-15	-1.097733E-14	9.615235E-01

MODE	FREQUENCY CYC/SEC	FREQUENCY RAD/SEC	DAMPING NO UNITS
1	4.042748E+01	2.540133E+02	0.
2	1.053595E+02	6.619930E+02	0.
3	1.443544E+02	9.070051E+02	0.
4	2.131469E+02	1.339241E+03	0.
5	2.940645E+02	1.847661E+03	0.
6	3.370482E+02	2.117736E+03	0.
7	3.633346E+02	2.282898E+03	0.
8	4.266627E+02	2.680800E+03	0.

COMPLEX GENERALIZED MODAL STIFFNESS, (REAL, IMAG), LB/IN

MODE	MODF= 1	2	3	4
1	(2.5926E+00, 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
2	(0. , 0.)	(7.4497E+00, 0.)	(0. , 0.)	(0. , 0.)
3	(0. , 0.)	(0. , 0.)	(1.5670E+01, 0.)	(0. , 0.)
4	(0. , 0.)	(0. , 0.)	(0. , 0.)	(1.6725E+01, 0.)
5	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
6	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
7	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
8	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)

MODE	MODF= 5	6	7	8
1	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
2	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
3	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
4	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)

COMPLEX GENERALIZED MODAL STIFFNESS, (REAL, IMAG), LB/IN

MODE	MODF=	5	6	7	8
5		(5.0043E+01, 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)

COMPLEX GENERALIZED MODAL STIFFNESS, (REAL, IMAG), LB/IN

MODE	MODF=	5	6	7	8
6		(0. , 0.)	(1.4597E+01, 0.)	(0. , 0.)	(0. , 0.)
7		(0. , 0.)	(0. , 0.)	(1.2589E+01, 0.)	(0. , 0.)
8		(0. , 0.)	(0. , 0.)	(0. , 0.)	(1.0710E+02, 0.)

PANEL 1 HAS 60 ELEMENTS WITH 77 VERTICES.
THE Y COORDINATES OF THESE VERTICES ARE

65	5.574660E+01	5.574660E+01	5.574660E+01	5.574660E+01	5.574660E+01	5.574660E+01	6.000000E+01	6.000000E+01
73	6.000000E+01	6.000000E+01	6.000000E+01	6.000000E+01	6.000000E+01	6.000000E+01		

PANEL 1 HAS 60 ELEMENTS WITH 77 VERTICES.
THE Z COORDINATES OF THESE VERTICES ARE

1	0.	0.	0.	0.	0.	0.	0.	0.	0.
9	0.	0.	0.	0.	0.	0.	0.	0.	0.
17	0.	0.	0.	0.	0.	0.	0.	0.	0.
25	0.	0.	0.	0.	0.	0.	0.	0.	0.
33	0.	0.	0.	0.	0.	0.	0.	0.	0.
41	0.	0.	0.	0.	0.	0.	0.	0.	0.
49	0.	0.	0.	0.	0.	0.	0.	0.	0.
57	0.	0.	0.	0.	0.	0.	0.	0.	0.
65	0.	0.	0.	0.	0.	0.	0.	0.	0.
73	0.	0.	0.	0.	0.	0.	0.	0.	0.

PANEL 1 HAS 10 XI-J ELEMENTS - XIJ(I)

1	2.454118E+02	2.437105E+02	2.421642E+02	2.406170E+02	2.390699E+02	2.375236E+02	2.359764E+02	2.344289E+02
9	2.328827E+02	2.313358E+02						

PANEL 1 HAS 10 C.WIGGLES - CWIG(I)

1	3.461602E+01	3.261393E+01	3.079424E+01	2.897345E+01	2.715267E+01	2.533298E+01	2.351220E+01	2.169108E+01
9	1.987139E+01	1.805094E+01						

INTERPOLATED MODES FOR PRIMARY AND CONTROL SURFACES

INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 1

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
1	2.4671E+02	1.9200E+01	6.1121E-02	3.0933E-02
2	2.5104E+02	1.9200E+01	6.9450E-02	1.5359E-02
3	2.5753E+02	1.9200E+01	7.1669E-02	-6.9417E-03
4	2.6445E+02	1.9200E+01	6.1137E-02	-2.9326E-02
5	2.7137E+02	1.9200E+01	3.8110E-02	-5.0261E-02
6	2.7830E+02	1.9200E+01	3.4214E-03	-6.9748E-02
7	2.4493E+02	2.3874E+01	1.0547E-01	3.2965E-02
8	2.4901E+02	2.3874E+01	1.1472E-01	2.1149E-02
9	2.5513E+02	2.3874E+01	1.2025E-01	-1.5489E-04
10	2.6165E+02	2.3874E+01	1.1292E-01	-2.7615E-02
11	2.6817E+02	2.3874E+01	8.9343E-02	-5.9965E-02
12	2.7469E+02	2.3874E+01	4.6849E-02	-9.7204E-02
13	2.4332E+02	2.8122E+01	1.5678E-01	3.0834E-02
14	2.4717E+02	2.8122E+01	1.6559E-01	2.3521E-02
15	2.5294E+02	2.8122E+01	1.7304E-01	6.1385E-03
16	2.5910E+02	2.8122E+01	1.6963E-01	-2.0884E-02
17	2.6526E+02	2.8122E+01	1.5010E-01	-5.6661E-02
18	2.7142E+02	2.8122E+01	1.0997E-01	-1.0119E-01
19	2.4170E+02	3.2373E+01	2.2081E-01	2.8237E-02
20	2.4533E+02	3.2373E+01	2.2875E-01	2.3670E-02
21	2.5076E+02	3.2373E+01	2.3656E-01	9.3687E-03
22	2.5655E+02	3.2373E+01	2.3543E-01	-1.5743E-02
23	2.6235E+02	3.2373E+01	2.1972E-01	-5.1028E-02
24	2.6814E+02	3.2373E+01	1.8451E-01	-9.6487E-02
25	2.4009E+02	3.6624E+01	2.9892E-01	2.5266E-02
26	2.4348E+02	3.6624E+01	3.0561E-01	2.1396E-02
27	2.4857E+02	3.6624E+01	3.1227E-01	8.6129E-03
28	2.5400E+02	3.6624E+01	3.1136E-01	-1.4251E-02
29	2.5943E+02	3.6624E+01	2.9794E-01	-4.6643E-02
30	2.6486E+02	3.6624E+01	2.6770E-01	-8.8561E-02
31	2.3847E+02	4.0872E+01	3.9236E-01	1.8597E-02
32	2.4164E+02	4.0872E+01	3.9695E-01	1.5583E-02
33	2.4639E+02	4.0872E+01	4.0123E-01	4.8416E-03
34	2.5146E+02	4.0872E+01	3.9942E-01	-1.4845E-02
35	2.5652E+02	4.0872E+01	3.8750E-01	-4.3027E-02
36	2.6159E+02	4.0872E+01	3.6189E-01	-7.9703E-02
37	2.3686E+02	4.5123E+01	5.0297E-01	5.2497E-03
38	2.3980E+02	4.5123E+01	5.0430E-01	5.0100E-03
39	2.4421E+02	4.5123E+01	5.0511E-01	-1.8960E-03
40	2.4891E+02	4.5123E+01	5.0152E-01	-1.7921E-02
41	2.5361E+02	4.5123E+01	4.8990E-01	-4.2883E-02
42	2.5831E+02	4.5123E+01	4.6675E-01	-7.6784E-02

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
43	2.3524E+02	4.9375E+01	6.2812E-01	-1.1585E-02
44	2.3795E+02	4.9375E+01	6.2587E-01	-8.9482E-03
45	2.4202E+02	4.9375E+01	6.2260E-01	-1.1704E-02
46	2.4636E+02	4.9375E+01	6.1651E-01	-2.3520E-02
47	2.5070E+02	4.9375E+01	6.0449E-01	-4.4498E-02
48	2.5504E+02	4.9375E+01	5.8323E-01	-7.4639E-02
49	2.3363E+02	5.3623E+01	7.6655E-01	-3.0193E-02
50	2.3611E+02	5.3623E+01	7.6084E-01	-2.5511E-02
51	2.3984E+02	5.3623E+01	7.5325E-01	-2.4647E-02
52	2.4381E+02	5.3623E+01	7.4412E-01	-3.1873E-02
53	2.4779E+02	5.3623E+01	7.3121E-01	-4.7507E-02
54	2.5176E+02	5.3623E+01	7.1172E-01	-7.1551E-02
55	2.3201E+02	5.7873E+01	9.1729E-01	-4.8217E-02
56	2.3427E+02	5.7873E+01	9.0869E-01	-4.3625E-02
57	2.3765E+02	5.7873E+01	8.9690E-01	-4.0847E-02
58	2.4126E+02	5.7873E+01	8.8438E-01	-4.3320E-02
59	2.4487E+02	5.7873E+01	8.7027E-01	-5.1405E-02
60	2.4848E+02	5.7873E+01	8.5288E-01	-6.5102E-02

INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 2

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
1	2.4671E+02	1.9200E+01	-3.0025E-02	-1.4445E-01
2	2.5104E+02	1.9200E+01	-7.9951E-02	-1.3058E-01
3	2.5753E+02	1.9200E+01	-1.4036E-01	-8.8543E-02
4	2.6445E+02	1.9200E+01	-1.7180E-01	-1.5629E-02
5	2.7137E+02	1.9200E+01	-1.5282E-01	8.6268E-02
6	2.7830E+02	1.9200E+01	-6.6686E-02	2.1715E-01
7	2.4493E+02	2.3874E+01	-3.6663E-02	-1.9713E-01
8	2.4901E+02	2.3874E+01	-1.0272E-01	-1.8940E-01
9	2.5513E+02	2.3874E+01	-1.9086E-01	-1.5116E-01
10	2.6165E+02	2.3874E+01	-2.5400E-01	-7.5106E-02
11	2.6817E+02	2.3874E+01	-2.6591E-01	3.7346E-02
12	2.7469E+02	2.3874E+01	-2.0680E-01	1.8619E-01
13	2.4332E+02	2.8122E+01	-3.2162E-02	-2.4362E-01
14	2.4717E+02	2.8122E+01	-1.0957E-01	-2.3717E-01
15	2.5294E+02	2.8122E+01	-2.1730E-01	-2.0639E-01
16	2.5910E+02	2.8122E+01	-3.0887E-01	-1.4566E-01
17	2.6526E+02	2.8122E+01	-3.6189E-01	-5.6142E-02
18	2.7142E+02	2.8122E+01	-3.6158E-01	6.2175E-02
19	2.4170E+02	3.2373E+01	-1.4136E-02	-2.8548E-01
20	2.4533E+02	3.2373E+01	-9.9974E-02	-2.8198E-01
21	2.5076E+02	3.2373E+01	-2.2367E-01	-2.6140E-01
22	2.5655E+02	3.2373E+01	-3.4054E-01	-2.1915E-01
23	2.6235E+02	3.2373E+01	-4.3195E-01	-1.5595E-01
24	2.6814E+02	3.2373E+01	-4.8778E-01	-7.1800E-02
25	2.4009E+02	3.6624E+01	2.4497E-02	-3.2553E-01
26	2.4348E+02	3.6624E+01	-6.7940E-02	-3.2704E-01

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
27	2.4857E+02	3.6624F+01	-2.0514E-01	-3.1736E-01
28	2.5400E+02	3.6624F+01	-3.4347E-01	-2.9126E-01
29	2.5943E+02	3.6624F+01	-4.6630E-01	-2.4886E-01
30	2.6486E+02	3.6624F+01	-5.6626F-01	-1.9017E-01
31	2.3847E+02	4.0872E+01	9.3773E-02	-3.7441E-01
32	2.4164E+02	4.0872F+01	-5.5181E-03	-3.7752E-01
33	2.4639E+02	4.0872E+01	-1.5480E-01	-3.7542E-01
34	2.5146E+02	4.0872F+01	-3.1128E-01	-3.6422E-01
35	2.5652E+02	4.0872E+01	-4.6107E-01	-3.4377E-01
36	2.6159E+02	4.0872F+01	-6.0027E-01	-3.1408E-01
37	2.3686E+02	4.5123F+01	2.0276E-01	-4.4404E-01
38	2.3980E+02	4.5123E+01	9.4441E-02	-4.4065E-01
39	2.4421E+02	4.5123E+01	-6.6776E-02	-4.3737E-01
40	2.4891E+02	4.5123F+01	-2.3787E-01	-4.3625E-01
41	2.5361E+02	4.5123E+01	-4.0900E-01	-4.3759E-01
42	2.5831E+02	4.5123F+01	-5.8115E-01	-4.4139E-01
43	2.3524E+02	4.9375E+01	3.5485E-01	-5.2680E-01
44	2.3795E+02	4.9375E+01	2.3732E-01	-5.1444E-01
45	2.4202E+02	4.9375F+01	6.4748E-02	-5.0591E-01
46	2.4636E+02	4.9375E+01	-1.1848E-01	-5.1005E-01
47	2.5070E+02	4.9375F+01	-3.0568E-01	-5.2785E-01
48	2.5504E+02	4.9375E+01	-5.0179E-01	-5.5931E-01
49	2.3363E+02	5.3623E+01	5.5517E-01	-6.2093E-01
50	2.3611E+02	5.3623F+01	4.2890E-01	-6.0042E-01
51	2.3984E+02	5.3623E+01	2.4540E-01	-5.8455E-01
52	2.4381E+02	5.3623E+01	5.1901E-02	-5.8733E-01
53	2.4779E+02	5.3623E+01	-1.4588E-01	-6.1045E-01
54	2.5176E+02	5.3623F+01	-3.5470E-01	-6.5391E-01
55	2.3201E+02	5.7873E+01	8.0921E-01	-7.2419E-01
56	2.3427E+02	5.7873F+01	6.7533E-01	-7.0093E-01
57	2.3765E+02	5.7873E+01	4.8117E-01	-6.7839E-01
58	2.4126E+02	5.7873F+01	2.7865E-01	-6.7070E-01
59	2.4487E+02	5.7873E+01	7.5915E-02	-6.7988E-01
60	2.4848E+02	5.7873F+01	-1.3212E-01	-7.0592E-01

INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 3

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
1	2.4671E+02	1.9200E+01	-2.1426E-01	2.0201E-01
2	2.5104E+02	1.9200F+01	-1.4613E-01	1.7577E-01
3	2.5753E+02	1.9200E+01	-6.1996E-02	1.3505E-01
4	2.6445E+02	1.9200F+01	2.9558E-03	8.9806E-02
5	2.7137E+02	1.9200E+01	4.1270E-02	4.2704E-02
6	2.7830E+02	1.9200E+01	5.1872E-02	-6.2593E-03
7	2.4493E+02	2.3874E+01	-3.3251E-01	3.1396E-01
8	2.4901E+02	2.3874F+01	-2.3237E-01	2.7562E-01
9	2.5513E+02	2.3874E+01	-1.0647E-01	2.1856E-01
10	2.6165E+02	2.3874E+01	-4.0762E-03	1.5829E-01

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
11	2.6817E+02	2.3874E+01	6.5724E-02	9.8633E-02
12	2.7469E+02	2.3874E+01	1.0326E-01	3.9588E-02
13	2.4332E+02	2.8122E+01	-4.3551E-01	4.3016E-01
14	2.4717E+02	2.8122E+01	-3.0622E-01	3.7644E-01
15	2.5294E+02	2.8122E+01	-1.4345E-01	3.0116E-01
16	2.5910E+02	2.8122E+01	-8.0001E-03	2.2787E-01
17	2.6526E+02	2.8122E+01	9.1689E-02	1.6181E-01
18	2.7142E+02	2.8122E+01	1.5933E-01	1.0298E-01
19	2.4170E+02	3.2373E+01	-5.2318E-01	5.4189E-01
20	2.4533E+02	3.2373E+01	-3.6902E-01	4.8014E-01
21	2.5076E+02	3.2373E+01	-1.7173E-01	3.9244E-01
22	2.5655E+02	3.2373E+01	-3.5048E-03	3.0541E-01
23	2.6235E+02	3.2373E+01	1.2432E-01	2.2512E-01
24	2.6814E+02	3.2373E+01	2.1499E-01	1.5155E-01
25	2.4009E+02	3.6624E+01	-5.8411E-01	6.4079E-01
26	2.4348E+02	3.6624E+01	-4.1129E-01	5.8107E-01
27	2.4857E+02	3.6624E+01	-1.8410E-01	4.8954E-01
28	2.5400E+02	3.6624E+01	1.4863E-02	3.8933E-01
29	2.5943E+02	3.6624E+01	1.6788E-01	2.8647E-01
30	2.6486E+02	3.6624E+01	2.7375E-01	1.8095E-01
31	2.3847E+02	4.0872E+01	-6.0523E-01	7.2514E-01
32	2.4164E+02	4.0872E+01	-4.2065E-01	6.7288E-01
33	2.4639E+02	4.0872E+01	-1.7146E-01	5.8410E-01
34	2.5146E+02	4.0872E+01	5.2764E-02	4.7567E-01
35	2.5652E+02	4.0872E+01	2.2822E-01	3.5306E-01
36	2.6159E+02	4.0872E+01	3.4890E-01	2.1627E-01
37	2.3686E+02	4.5123E+01	-5.7320E-01	7.8666E-01
38	2.3980E+02	4.5123E+01	-3.8533E-01	7.4591E-01
39	2.4421E+02	4.5123E+01	-1.2509E-01	6.6735E-01
40	2.4891E+02	4.5123E+01	1.1627E-01	5.6052E-01
41	2.5361E+02	4.5123E+01	3.1110E-01	4.2989E-01
42	2.5831E+02	4.5123E+01	4.5008E-01	2.7546E-01
43	2.3524E+02	4.9375E+01	-4.8829E-01	8.2714E-01
44	2.3795E+02	4.9375E+01	-3.0427E-01	7.9970E-01
45	2.4202E+02	4.9375E+01	-4.3260E-02	7.3605E-01
46	2.4636E+02	4.9375E+01	2.0611E-01	6.3841E-01
47	2.5070E+02	4.9375E+01	4.1464E-01	5.1008E-01
48	2.5504E+02	4.9375E+01	5.7122E-01	3.5103E-01
49	2.3363E+02	5.3623E+01	-3.4628E-01	8.4421E-01
50	2.3611E+02	5.3623E+01	-1.7290E-01	8.2896E-01
51	2.3984E+02	5.3623E+01	7.8013E-02	7.8256E-01
52	2.4381E+02	5.3623E+01	3.2472E-01	7.0194E-01
53	2.4779E+02	5.3623E+01	5.3942E-01	5.8919E-01
54	2.5176E+02	5.3623E+01	7.1145E-01	4.4432E-01
55	2.3201E+02	5.7873E+01	-1.4269E-01	8.3462E-01
56	2.3427E+02	5.7873E+01	1.3615E-02	8.2636E-01
57	2.3765E+02	5.7873E+01	2.4294E-01	7.9629E-01
58	2.4126E+02	5.7873E+01	4.7477E-01	7.4082E-01
59	2.4487E+02	5.7873E+01	6.8627E-01	6.6121E-01
60	2.4848E+02	5.7873E+01	8.7020E-01	5.5746E-01

INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 4

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
1	2.4671E+02	1.9200E+01	5.2480E-03	1.4903E-01
2	2.5104E+02	1.9200E+01	6.1654E-02	1.6088E-01
3	2.5753E+02	1.9200E+01	1.4630E-01	1.4549E-01
4	2.6445E+02	1.9200E+01	2.1503E-01	8.5218E-02
5	2.7137E+02	1.9200E+01	2.3592E-01	-2.0330E-02
6	2.7830E+02	1.9200E+01	1.8287E-01	-1.7115E-01
7	2.4493E+02	2.3874E+01	-1.6668E-02	1.6294E-01
8	2.4901E+02	2.3874E+01	4.3273E-02	1.8771E-01
9	2.5513E+02	2.3874E+01	1.4328E-01	1.9975E-01
10	2.6165E+02	2.3874E+01	2.4787E-01	1.7937E-01
11	2.6817E+02	2.3874E+01	3.3206E-01	1.2470E-01
12	2.7469E+02	2.3874E+01	3.7722E-01	3.5739E-02
13	2.4332E+02	2.8122E+01	-4.5816E-02	1.5452E-01
14	2.4717E+02	2.8122E+01	7.4512E-03	1.7771E-01
15	2.5294E+02	2.8122E+01	1.0156E-01	2.1371E-01
16	2.5910E+02	2.8122E+01	2.2145E-01	2.5374E-01
17	2.6526E+02	2.8122E+01	3.6231E-01	2.9545E-01
18	2.7142E+02	2.8122E+01	5.2500E-01	3.3883E-01
19	2.4170E+02	3.2373E+01	-8.7749E-02	1.2691E-01
20	2.4533E+02	3.2373E+01	-4.7207E-02	1.4390E-01
21	2.5076E+02	3.2373E+01	2.8091E-02	1.9360E-01
22	2.5655E+02	3.2373E+01	1.4078E-01	2.7863E-01
23	2.6235E+02	3.2373E+01	3.0251E-01	3.9673E-01
24	2.6814E+02	3.2373E+01	5.2926E-01	5.4789E-01
25	2.4009E+02	3.6624E+01	-1.2701E-01	7.3497E-02
26	2.4348E+02	3.6624E+01	-1.0515E-01	8.4298E-02
27	2.4857E+02	3.6624E+01	-5.9807E-02	1.3669E-01
28	2.5400E+02	3.6624E+01	2.3667E-02	2.4045E-01
29	2.5943E+02	3.6624E+01	1.6528E-01	3.9363E-01
30	2.6486E+02	3.6624E+01	3.8739E-01	5.9623E-01
31	2.3847E+02	4.0872E+01	-1.3754E-01	-2.1714E-02
32	2.4164E+02	4.0872E+01	-1.4269E-01	-1.3786E-02
33	2.4639E+02	4.0872E+01	-1.3955E-01	3.7573E-02
34	2.5146E+02	4.0872E+01	-1.0299E-01	1.4456E-01
35	2.5652E+02	4.0872E+01	-9.8932E-03	3.0542E-01
36	2.6159E+02	4.0872E+01	1.6250E-01	5.2018E-01
37	2.3686E+02	4.5123E+01	-1.0084E-01	-1.7756E-01
38	2.3980E+02	4.5123E+01	-1.4277E-01	-1.6225E-01
39	2.4421E+02	4.5123E+01	-1.9391E-01	-1.1038E-01
40	2.4891E+02	4.5123E+01	-2.2012E-01	-1.6829E-02
41	2.5361E+02	4.5123E+01	-2.0195E-01	1.1617E-01
42	2.5831E+02	4.5123E+01	-1.2392E-01	2.8862E-01
43	2.3524E+02	4.9375E+01	2.3310E-02	-3.9429E-01
44	2.3795E+02	4.9375E+01	-6.2681E-02	-3.6573E-01
45	2.4202E+02	4.9375E+01	-1.7766E-01	-3.1019E-01
46	2.4636E+02	4.9375E+01	-2.7657E-01	-2.3415E-01
47	2.5070E+02	4.9375E+01	-3.4486E-01	-1.4076E-01

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
48	2.5504E+02	4.9375E+01	-3.7626E-01	-3.0030E-02
49	2.3363E+02	5.3623E+01	2.6748E-01	-6.8118E-01
50	2.3611E+02	5.3623E+01	1.3134E-01	-6.3448E-01
51	2.3984E+02	5.3623E+01	-5.5213E-02	-5.6790E-01
52	2.4381E+02	5.3623E+01	-2.3216E-01	-5.0146E-01
53	2.4779E+02	5.3623E+01	-3.8789E-01	-4.3975E-01
54	2.5176E+02	5.3623E+01	-5.2397E-01	-3.8278E-01
55	2.3201E+02	5.7873E+01	6.6466E-01	-1.0519E+00
56	2.3427E+02	5.7873E+01	4.7340E-01	-9.8348E-01
57	2.3765E+02	5.7873E+01	2.0917E-01	-8.9254E-01
58	2.4126E+02	5.7873E+01	-4.6695E-02	-8.1105E-01
59	2.4487E+02	5.7873E+01	-2.8045E-01	-7.4558E-01
60	2.4848E+02	5.7873E+01	-4.9692E-01	-6.9613E-01

INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 5

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
1	2.4671E+02	1.9200E+01	3.1148E-01	9.7053E-03
2	2.5104E+02	1.9200E+01	2.9860E-01	-7.9225E-02
3	2.5753E+02	1.9200E+01	2.2441E-01	-1.9070E-01
4	2.6445E+02	1.9200E+01	8.7011E-02	-2.8063E-01
5	2.7137E+02	1.9200E+01	-9.3638E-02	-3.4063E-01
6	2.7830E+02	1.9200E+01	-3.0027E-01	-3.7070E-01
7	2.4493E+02	2.3874E+01	3.3663E-01	-4.8219E-02
8	2.4901E+02	2.3874E+01	3.0574E-01	-1.3187E-01
9	2.5513E+02	2.3874E+01	2.1062E-01	-2.3749E-01
10	2.6165E+02	2.3874E+01	5.6820E-02	-3.2388E-01
11	2.6817E+02	2.3874E+01	-1.3657E-01	-3.8316E-01
12	2.7469E+02	2.3874E+01	-3.5481E-01	-4.1532E-01
13	2.4332E+02	2.8122E+01	2.7998E-01	-1.0697E-01
14	2.4717E+02	2.8122E+01	2.3717E-01	-1.5977E-01
15	2.5294E+02	2.8122E+01	1.4156E-01	-2.3735E-01
16	2.5910E+02	2.8122E+01	-1.0475E-03	-3.1798E-01
17	2.6526E+02	2.8122E+01	-1.8447E-01	-3.9642E-01
18	2.7142E+02	2.8122E+01	-4.0759E-01	-4.7266E-01
19	2.4170E+02	3.2373E+01	1.3866E-01	-5.2227E-02
20	2.4533E+02	3.2373E+01	1.1481E-01	-1.0644E-01
21	2.5076E+02	3.2373E+01	4.6943E-02	-1.9480E-01
22	2.5655E+02	3.2373E+01	-7.1751E-02	-2.9840E-01
23	2.6235E+02	3.2373E+01	-2.4280E-01	-4.1163E-01
24	2.6814E+02	3.2373E+01	-4.7084E-01	-5.3449E-01
25	2.4009E+02	3.6624E+01	-6.3502E-02	1.3765E-01
26	2.4348E+02	3.6624E+01	-3.8002E-02	4.2413E-02
27	2.4857E+02	3.6624E+01	-5.0793E-02	-1.0328E-01
28	2.5400E+02	3.6624E+01	-1.3340E-01	-2.6244E-01
29	2.5943E+02	3.6624E+01	-2.8891E-01	-4.2547E-01
30	2.6486E+02	3.6624E+01	-5.1907E-01	-5.9238E-01
31	2.7847E+02	4.0872E+01	-2.8486E-01	4.0062E-01

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
32	2.4164E+02	4.0872F+01	-1.9704E-01	2.6460E-01
33	2.4639E+02	4.0872F+01	-1.3337E-01	5.6232E-02
34	2.5146E+02	4.0872F+01	-1.5756F-01	-1.7177E-01
35	2.5652E+02	4.0872F+01	-2.7926E-01	-4.0570E-01
36	2.6159E+02	4.0872F+01	-5.0098E-01	-6.4556E-01
37	2.3686E+02	4.5123F+01	-4.9688E-01	7.0664E-01
38	2.3980E+02	4.5123F+01	-3.4168E-01	5.5840E-01
39	2.4421E+02	4.5123E+01	-1.8119E-01	3.1015E-01
40	2.4891E+02	4.5123F+01	-1.1709F-01	1.1101E-02
41	2.5361E+02	4.5123F+01	-1.7711E-01	-3.2330E-01
42	2.5831E+02	4.5123F+01	-3.7509E-01	-6.9305E-01
43	2.3524E+02	4.9375E+01	-6.3303E-01	1.0216E+00
44	2.3795E+02	4.9375E+01	-4.1835E-01	8.7428E-01
45	2.4202E+02	4.9375E+01	-1.6622E-01	6.0361E-01
46	2.4636E+02	4.9375E+01	-1.0027E-02	2.4917E-01
47	2.5070E+02	4.9375E+01	5.7656E-03	-1.7311E-01
48	2.5504E+02	4.9375F+01	-1.4337E-01	-6.6324E-01
49	2.3363E+02	5.3623E+01	-6.3971E-01	1.2963E+00
50	2.3611E+02	5.3623F+01	-3.8471E-01	1.1618E+00
51	2.3984E+02	5.3623F+01	-6.3412E-02	8.9483E-01
52	2.4381E+02	5.3623E+01	1.7398E-01	5.2395E-01
53	2.4779E+02	5.3623F+01	2.7383E-01	6.4151E-02
54	2.5176E+02	5.3623E+01	2.0666E-01	-4.8458E-01
55	2.3201E+02	5.7873E+01	-4.6342E-01	1.4624E+00
56	2.3427E+02	5.7873E+01	-1.9845E-01	1.3508E+00
57	2.3765E+02	5.7873E+01	1.5244E-01	1.1259E+00
58	2.4126E+02	5.7873E+01	4.4564E-01	8.1018E-01
59	2.4487E+02	5.7873E+01	6.3207E-01	4.1609E-01
60	2.4848E+02	5.7873E+01	6.8815E-01	-5.6348E-02

INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 6

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
1	2.4671E+02	1.9200F+01	5.5851E-04	1.2203E-02
2	2.5104E+02	1.9200E+01	-4.0052E-03	-2.7268E-02
3	2.5753E+02	1.9200F+01	-9.8217E-03	2.8819E-02
4	2.6445E+02	1.9200F+01	6.0485E-02	2.4114E-01
5	2.7137E+02	1.9200F+01	2.9870F-01	6.1088E-01
6	2.7830E+02	1.9200E+01	7.9563E-01	1.1380E+00
7	2.4493E+02	2.3874E+01	4.9443E-03	-2.4280E-02
8	2.4901E+02	2.3874E+01	-8.5717E-03	-4.6467E-02
9	2.5513E+02	2.3874E+01	-2.0500E-02	1.9501E-02
10	2.6165E+02	2.3874E+01	3.8764E-02	2.2114E-01
11	2.6817E+02	2.3874E+01	2.4446E-01	5.5829E-01
12	2.7469E+02	2.3874E+01	6.7025E-01	1.0309E+00
13	2.4332E+02	2.8122F+01	1.5479E-02	-5.6577E-02
14	2.4717E+02	2.8122E+01	-7.7484E-03	-8.0205E-02
15	2.5294E+02	2.8122E+01	-3.7452E-02	-2.5165E-02

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
16	2.5910E+02	2.8122E+01	-9.8739E-03	1.5322E-01
17	2.6526E+02	2.8122E+01	1.4096E-01	4.5514E-01
18	2.7142E+02	2.8122E+01	4.7845E-01	8.8060E-01
19	2.4170E+02	3.2373E+01	3.4752E-02	-9.2593E-02
20	2.4533E+02	3.2373E+01	2.1693E-03	-1.1704E-01
21	2.5076E+02	3.2373E+01	-4.6303E-02	-8.2954E-02
22	2.5655E+02	3.2373E+01	-5.8875E-02	4.6983E-02
23	2.6235E+02	3.2373E+01	1.4621E-02	2.7352E-01
24	2.6814E+02	3.2373E+01	2.2083E-01	5.9665E-01
25	2.4009E+02	3.6624E+01	5.7610E-02	-1.2335E-01
26	2.4348E+02	3.6624E+01	1.9364E-02	-1.4365E-01
27	2.4857E+02	3.6624E+01	-4.1480E-02	-1.3544E-01
28	2.5400E+02	3.6624E+01	-9.1213E-02	-7.5552E-02
29	2.5943E+02	3.6624E+01	-1.0190E-01	3.7125E-02
30	2.6486E+02	3.6624E+01	-4.9649E-02	2.0259E-01
31	2.7847E+02	4.0872E+01	7.7537E-02	-1.2513E-01
32	2.4164E+02	4.0872E+01	4.2163E-02	-1.4233E-01
33	2.4639E+02	4.0872E+01	-1.8155E-02	-1.6101E-01
34	2.5146E+02	4.0872E+01	-8.8690E-02	-1.7149E-01
35	2.5652E+02	4.0872E+01	-1.6160E-01	-1.7223E-01
36	2.6159E+02	4.0872E+01	-2.3276E-01	-1.6324E-01
37	2.3686E+02	4.5123E+01	9.2020E-02	-7.2022E-02
38	2.3980E+02	4.5123E+01	7.2548E-02	-8.8243E-02
39	2.4421E+02	4.5123E+01	3.3581E-02	-1.2672E-01
40	2.4891E+02	4.5123E+01	-2.7156E-02	-1.8648E-01
41	2.5361E+02	4.5123E+01	-1.1510E-01	-2.6557E-01
42	2.5831E+02	4.5123E+01	-2.3781E-01	-3.6397E-01
43	2.3524E+02	4.9375E+01	6.1603E-02	4.8317E-02
44	2.3795E+02	4.9375E+01	7.0423E-02	2.7335E-02
45	2.4202E+02	4.9375E+01	7.0671E-02	-3.1299E-02
46	2.4636E+02	4.9375E+01	4.2674E-02	-1.2977E-01
47	2.5070E+02	4.9375E+01	-2.7625E-02	-2.6532E-01
48	2.5504E+02	4.9375E+01	-1.5363E-01	-4.3796E-01
49	2.3363E+02	5.3623E+01	-4.0480E-02	2.6080E-01
50	2.3611E+02	5.3623E+01	1.0085E-02	2.2518E-01
51	2.3984E+02	5.3623E+01	6.8101E-02	1.4271E-01
52	2.4381E+02	5.3623E+01	9.5532E-02	1.6326E-02
53	2.4779E+02	5.3623E+01	7.4537E-02	-1.4972E-01
54	2.5176E+02	5.3623E+01	-8.0179E-03	-3.5542E-01
55	2.3201E+02	5.7873E+01	-2.4115E-01	6.0085E-01
56	2.3427E+02	5.7873E+01	-1.3424E-01	5.3491E-01
57	2.3765E+02	5.7873E+01	8.9092E-04	4.2018E-01
58	2.4126E+02	5.7873E+01	1.0629E-01	2.7689E-01
59	2.4487E+02	5.7873E+01	1.6533E-01	1.1202E-01
60	2.4848E+02	5.7873E+01	1.7152E-01	-7.4445E-02

INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 7

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
1	2.4671E+02	1.9200F+01	4.0729E-02	-4.8928E-02
2	2.5104E+02	1.9200F+01	4.4845E-03	-1.4016E-01
3	2.5753E+02	1.9200F+01	-7.9249E-02	-1.4258E-01
4	2.6445E+02	1.9200F+01	-1.1979F-01	3.2625E-02
5	2.7137E+02	1.9200E+01	-6.3099E-03	3.9136E-01
6	2.7830E+02	1.9200F+01	3.6708F-01	9.3363E-01
7	2.4493E+02	2.3874F+01	5.4548F-02	-3.2093E-02
8	2.4901E+02	2.3874F+01	3.2831E-02	-9.0483E-02
9	2.5513E+02	2.3874E+01	-2.3493E-02	-1.1869E-01
10	2.6165E+02	2.3874F+01	-7.8517E-02	-7.0252E-02
11	2.6817E+02	2.3874E+01	-8.5177E-02	5.9256E-02
12	2.7469E+02	2.3874F+01	5.9071E-04	2.6983E-01
13	2.4332E+02	2.8122E+01	5.3202E-02	-1.9525E-03
14	2.4717E+02	2.8122F+01	4.9385E-02	-2.2742E-02
15	2.5294E+02	2.8122E+01	2.9005E-02	-6.3981E-02
16	2.5910E+02	2.8122E+01	-1.7946E-02	-1.2127E-01
17	2.6526E+02	2.8122E+01	-9.7820E-02	-1.9228E-01
18	2.7142E+02	2.8122E+01	-2.1766E-01	-2.7702E-01
19	2.4170E+02	3.2373E+01	2.4521E-02	4.9602E-02
20	2.4533E+02	3.2373E+01	4.0095E-02	4.9850E-02
21	2.5076E+02	3.2373F+01	5.5230E-02	8.7687E-03
22	2.5655E+02	3.2373F+01	3.7924E-02	-8.9878E-02
23	2.6235E+02	3.2373E+01	-4.0683E-02	-2.4512E-01
24	2.6814E+02	3.2373E+01	-2.0792E-01	-4.5696E-01
25	2.4009E+02	3.6624E+01	-2.6158E-02	1.1377E-01
26	2.4348E+02	3.6624E+01	6.5168E-03	1.1456E-01
27	2.4857E+02	3.6624F+01	5.0184E-02	8.5170E-02
28	2.5400E+02	3.6624E+01	7.4052E-02	1.3352E-02
29	2.5943E+02	3.6624E+01	5.5969F-02	-1.0023E-01
30	2.6486E+02	3.6624E+01	-2.2969F-02	-2.5559E-01
31	2.3847E+02	4.0872E+01	-8.6981E-02	1.6690E-01
32	2.4164E+02	4.0872E+01	-4.3591E-02	1.6141E-01
33	2.4639E+02	4.0872F+01	1.7703E-02	1.4707E-01
34	2.5146E+02	4.0872E+01	7.5156E-02	1.2369E-01
35	2.5652E+02	4.0872E+01	1.2098E-01	9.1986E-02
36	2.6159E+02	4.0872E+01	1.5166E-01	5.1943E-02
37	2.3686E+02	4.5123E+01	-1.5505E-01	1.8545E-01
38	2.3980E+02	4.5123F+01	-1.1110E-01	1.7446E-01
39	2.4421E+02	4.5123E+01	-4.8353E-02	1.6943E-01
40	2.4891E+02	4.5123F+01	1.9443E-02	1.7919E-01
41	2.5361E+02	4.5123E+01	9.4126E-02	2.0458E-01
42	2.5831E+02	4.5123E+01	1.8182F-01	2.4559E-01
43	2.3524E+02	4.9375F+01	-1.6585E-01	1.3441E-01
44	2.3795E+02	4.9375E+01	-1.3694E-01	1.2371E-01
45	2.4202E+02	4.9375F+01	-9.4259E-02	1.3330E-01
46	2.4636E+02	4.9375E+01	-3.9148E-02	1.7742E-01
47	2.5070E+02	4.9375E+01	3.8236E-02	2.5652E-01
48	2.5504E+02	4.9375F+01	1.5054F-01	3.7062E-01
49	2.3363E+02	5.3623F+01	-7.5936E-02	-3.2544E-02
50	2.3611E+02	5.3623E+01	-8.2519F-02	-2.8415E-02
51	2.3984E+02	5.3623E+01	-8.6683E-02	7.5418E-03

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
52	2.4381E+02	5.3623F+01	-7.2437E-02	8.5262E-02
53	2.4779E+02	5.3623E+01	-2.5722E-02	2.0362E-01
54	2.5176E+02	5.3623F+01	6.6921E-02	3.6261E-01
55	2.3201E+02	5.7873F+01	1.5823E-01	-3.8073E-01
56	2.3427E+02	5.7873F+01	9.0820E-02	-3.3495E-01
57	2.3765E+02	5.7873F+01	7.6685E-03	-2.5178E-01
58	2.4126E+02	5.7873F+01	-5.2347E-02	-1.4389E-01
59	2.4487E+02	5.7873F+01	-7.6927E-02	-1.6213E-02
60	2.4848E+02	5.7873E+01	-6.0117E-02	1.3126E-01

 INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 8

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
1	2.4671E+02	1.9200E+01	-1.2855E-01	-8.7860E-01
2	2.5104E+02	1.9200F+01	-3.3924E-01	-3.1734E-01
3	2.5753E+02	1.9200F+01	-3.4968E-01	2.1730E-01
4	2.6445E+02	1.9200E+01	-1.5688E-01	3.8116E-01
5	2.7137E+02	1.9200F+01	9.4450E-03	1.2550E-01
6	2.7830E+02	1.9200E+01	-9.2750E-02	-5.4969E-01
7	2.4493E+02	2.3874E+01	6.0576E-02	-6.7545E-01
8	2.4901E+02	2.3874E+01	-1.0958E-01	-3.3611E-01
9	2.5513E+02	2.3874E+01	-1.7367E-01	6.2538E-02
10	2.6165E+02	2.3874E+01	-5.6952E-02	3.4179E-01
11	2.6817E+02	2.3874E+01	1.7060E-01	4.7035E-01
12	2.7469E+02	2.3874E+01	4.2708E-01	4.4823E-01
13	2.4332E+02	2.8122E+01	2.4716E-01	-4.0170E-01
14	2.4717E+02	2.8122F+01	1.3306E-01	-3.0366E-01
15	2.5294E+02	2.8122E+01	3.5431E-02	-8.8550E-02
16	2.5910E+02	2.8122F+01	6.7988E-02	2.3090E-01
17	2.6526E+02	2.8122E+01	2.8834E-01	6.4325E-01
18	2.7142E+02	2.8122F+01	7.4417E-01	1.1485E+00
19	2.4170E+02	3.2373E+01	3.2529E-01	-2.2441E-01
20	2.4533E+02	3.2373F+01	2.4663E-01	-2.8196E-01
21	2.5076E+02	3.2373F+01	1.2979E-01	-2.0071E-01
22	2.5655E+02	3.2373E+01	9.8102E-02	1.0759E-01
23	2.6235E+02	3.2373E+01	2.7053E-01	6.4468E-01
24	2.6814E+02	3.2373E+01	7.5755E-01	1.4106E+00
25	2.4009E+02	3.6624E+01	2.7070E-01	-1.5121E-01
26	2.4348E+02	3.6624E+01	2.1039E-01	-2.5969E-01
27	2.4857E+02	3.6624F+01	9.5413E-02	-2.4728E-01
28	2.5400E+02	3.6624F+01	2.9896E-02	-2.4203E-03
29	2.5943E+02	3.6624F+01	1.2929E-01	4.8153E-01
30	2.6486E+02	3.6624E+01	5.0180E-01	1.2046E+00
31	2.3847E+02	4.0872F+01	1.0380E-01	-9.0830E-03
32	2.4164E+02	4.0872F+01	8.2039E-02	-1.4384E-01
33	2.4639E+02	4.0872F+01	6.5386E-03	-2.1055E-01
34	2.5146E+02	4.0872E+01	-6.6075E-02	-1.0259E-01
35	2.5652E+02	4.0872F+01	-5.4073E-02	1.9026E-01

POINT	X INCHES	Y INCHES	H NO UNITS	ALPHA RAD/FT
36	2.6159E+02	4.0872E+01	1.2061E-01	6.6802E-01
37	2.7686E+02	4.5123E+01	-1.9495E-01	3.5261E-01
38	2.3980E+02	4.5123E+01	-1.3276E-01	1.6182E-01
39	2.4421E+02	4.5123E+01	-1.1504E-01	-5.0602E-02
40	2.4891E+02	4.5123E+01	-1.6344E-01	-1.7961E-01
41	2.5361E+02	4.5123E+01	-2.4265E-01	-2.0788E-01
42	2.5831E+02	4.5123E+01	-3.1321E-01	-1.3544E-01
43	2.3524E+02	4.9375E+01	-4.6180E-01	7.8874E-01
44	2.3795E+02	4.9375E+01	-3.1041E-01	5.5147E-01
45	2.4202E+02	4.9375E+01	-1.8367E-01	1.9660E-01
46	2.4636E+02	4.9375E+01	-1.8082E-01	-1.8058E-01
47	2.5070E+02	4.9375E+01	-3.1407E-01	-5.5636E-01
48	2.5504E+02	4.9375E+01	-5.8292E-01	-9.3074E-01
49	2.3363E+02	5.3623E+01	-5.9527E-01	1.2293E+00
50	2.3611E+02	5.3623E+01	-3.6739E-01	9.6722E-01
51	2.3984E+02	5.3623E+01	-1.3549E-01	5.1471E-01
52	2.4381E+02	5.3623E+01	-5.5713E-02	-4.6464E-02
53	2.4779E+02	5.3623E+01	-1.7521E-01	-6.8866E-01
54	2.5176E+02	5.3623E+01	-5.2081E-01	-1.4119E+00
55	2.3201E+02	5.7873E+01	-4.9432E-01	1.5774E+00
56	2.3427E+02	5.7873E+01	-2.2047E-01	1.3289E+00
57	2.3765E+02	5.7873E+01	9.3357E-02	8.8156E-01
58	2.4126E+02	5.7873E+01	2.7452E-01	3.0582E-01
59	2.4487E+02	5.7873E+01	2.6716E-01	-3.7171E-01
60	2.4848E+02	5.7873E+01	4.0652E-02	-1.1510E+00

GRAPHICAL REPRESENTATION OF INTERPOLATED MODES

MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE = 1, MODE = 1

19.20				6	6	7	6	3	0
23.87			10	11	12	11	8	4	
28.12			15	16	17	16	15	10	
32.37			22	22	23	23	21	18	
36.62			29	30	31	31	29	26	
40.87			39	39	40	39	38	36	
45.12			50	50	50	50	48	46	
49.37			62	62	62	61	60	58	
53.62			76	76	75	74	73	71	
57.87			91	90	89	88	87	85	

FREQUENCY = 40.4 Hz


1ST BENDING

MODAL SLOPES (RAD/FT) TIMES 1.0E 2, SURFACE = 1, MODE = 1

19.20				3	1	0		-2	-5	-6
23.87				3	2	0		-2	-5	-9
28.12				3	2	0		-2	-5	-10
32.37				2	2	0		-1	-5	-9
36.62				2	2	0		-1	-4	-8
40.87				1	1	0		-1	-4	-7
45.12				0	0	0		-1	-4	-7
49.37				-1	0	-1		-2	-4	-7
53.62				-3	-2	-2		-3	-4	-7
57.87				-4	-4	-4		-4	-5	-6

MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE = 1, MODE = 2

19.20				-3	-7	-14	-17	-15	-6
23.87				-3	-10	-19	-25	-26	-20
28.12				-3	-10	-21	-30	-36	-36
32.37				-1	-9	-22	-34	-43	-48
36.62			2	-6	-20	-34	-46	-56	
40.87			9	-6	-15	-31	-46	-60	
45.12			20	9	-6	-23	-40	-58	
49.37			35	23	6	-11	-30	-50	
53.62			55	42	24	5	-14	-35	
57.87			80	67	48	27	7	-13	

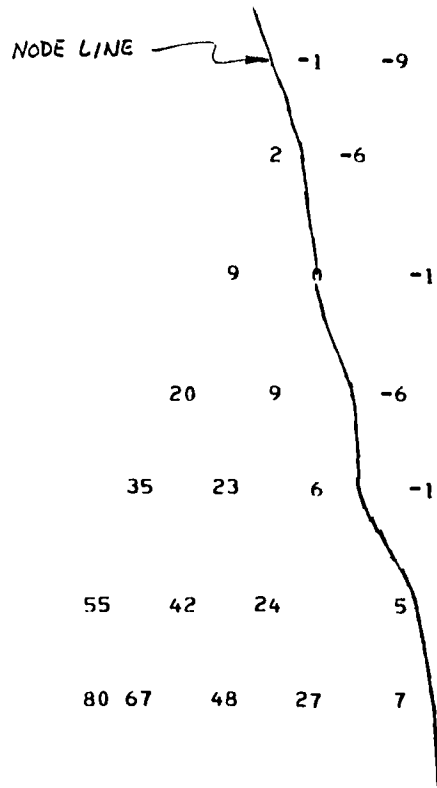


FREQUENCY = 105.4 Hz
2ND BENDING

MODAL SLOPES (RAD/FT) TIMES 1.0E 2, SURFACE = 1, MODE = 2

19.20			-14	-13	-8	-1	8	21
23.87			-19	-18	-15	-7	3	18
28.12			-24	-23	-20	-14	-5	6
32.37			-28	-28	-26	-21	-15	-7
36.62			-32	-32	-31	-29	-24	-19
40.87			-37	-37	-37	-36	-34	-31
45.12			-44	-44	-43	-43	-43	-44
49.37			-52	-51	-50	-51	-52	-55
53.62			-62	-60	-58	-58	-61	-65
57.87			-72-70	-67	-67	-67	-70	

MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE = 1, MODE = 3

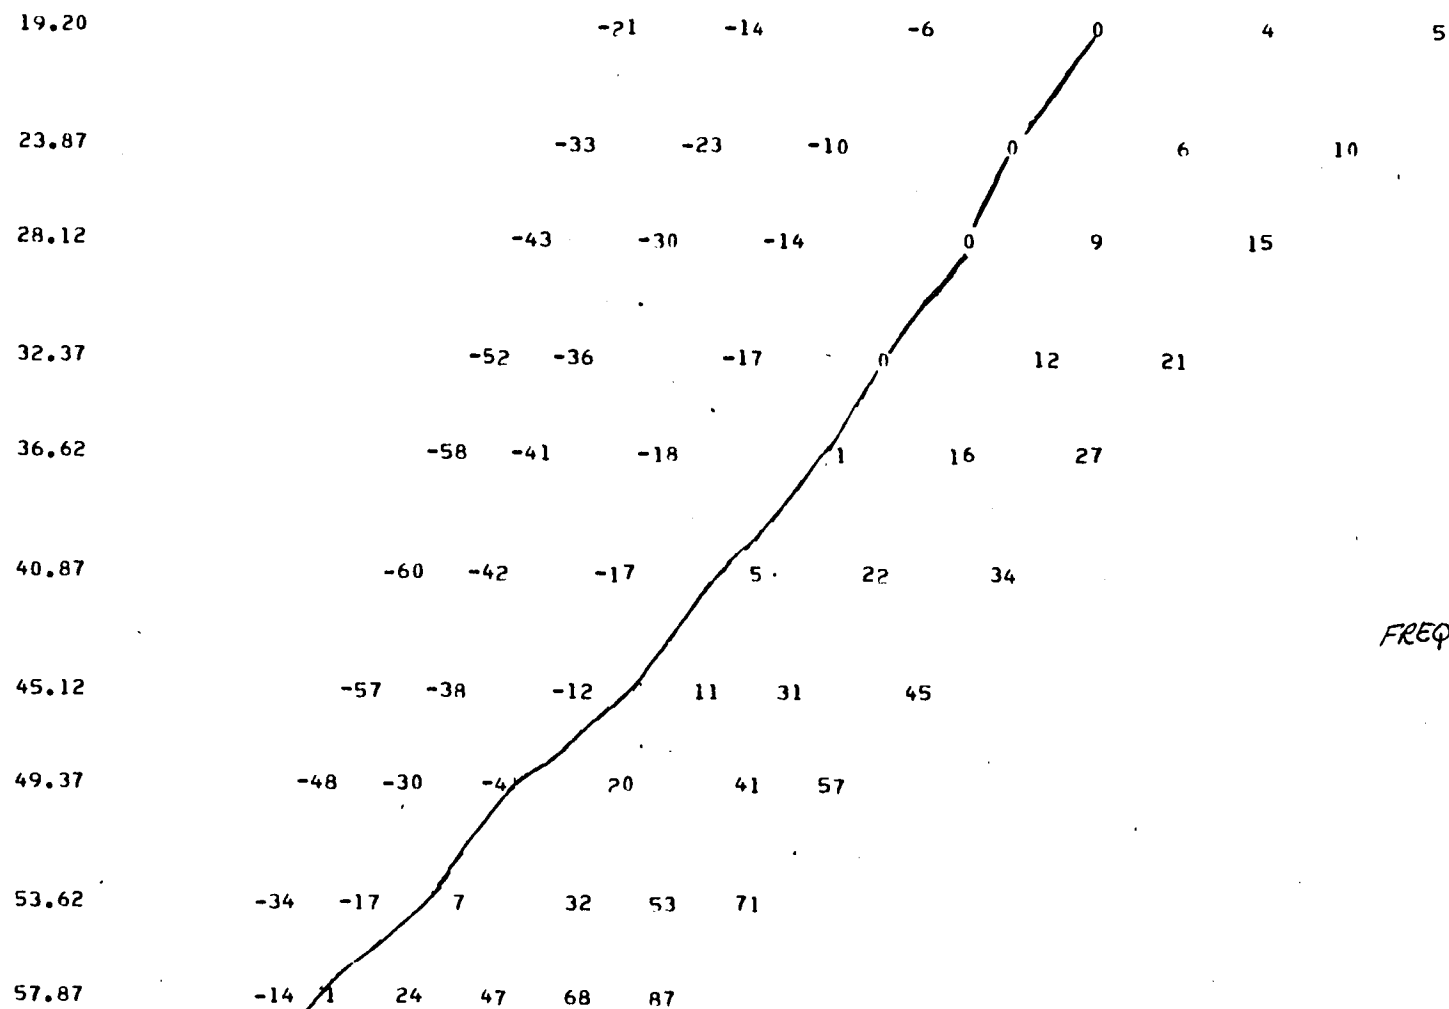

FREQUENCY = 144.4 Hz

TORSION

NODE LINE


MODAL SLOPES (RAD/FT) TIMES 1.0E 2. SURFACE = 1, MODE = 3

19.20				20	17		13	8	4	0
23.87				31	27	21	15	9	3	
28.12				43	37	30	22	16	10	
32.37				54	48	39	30	22	15	
36.62				64	58	48	38	28	18	
40.87				72	67	58	47	35	21	
45.12				78	74	66	56	42	27	
49.37				82	79	71	63	51	35	
53.62				84	82	78	70	58	44	
57.87				83	82	79	74	66	55	

MODAL SLOPFS (RAD/FT) TIMES 1.0E 1. SURFACE = 1. MODE = 4

19.20				1	1	1	0	0	-1
23.87				1	1	1	1	1	0
28.12				1	1	2	2	2	3
32.37				1	1	1	2	3	5
36.62				0	0	1	2	3	5
40.87				0	0	0	1	3	5
45.12				-1	-1	-1	0	1	2
49.37				-3	-3	-3	-2	-1	0
53.62				-6	-6	-5	-5	-4	-3
57.87				-10	-9	-8	-8	-7	-6


MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE = 1, MODE = 5

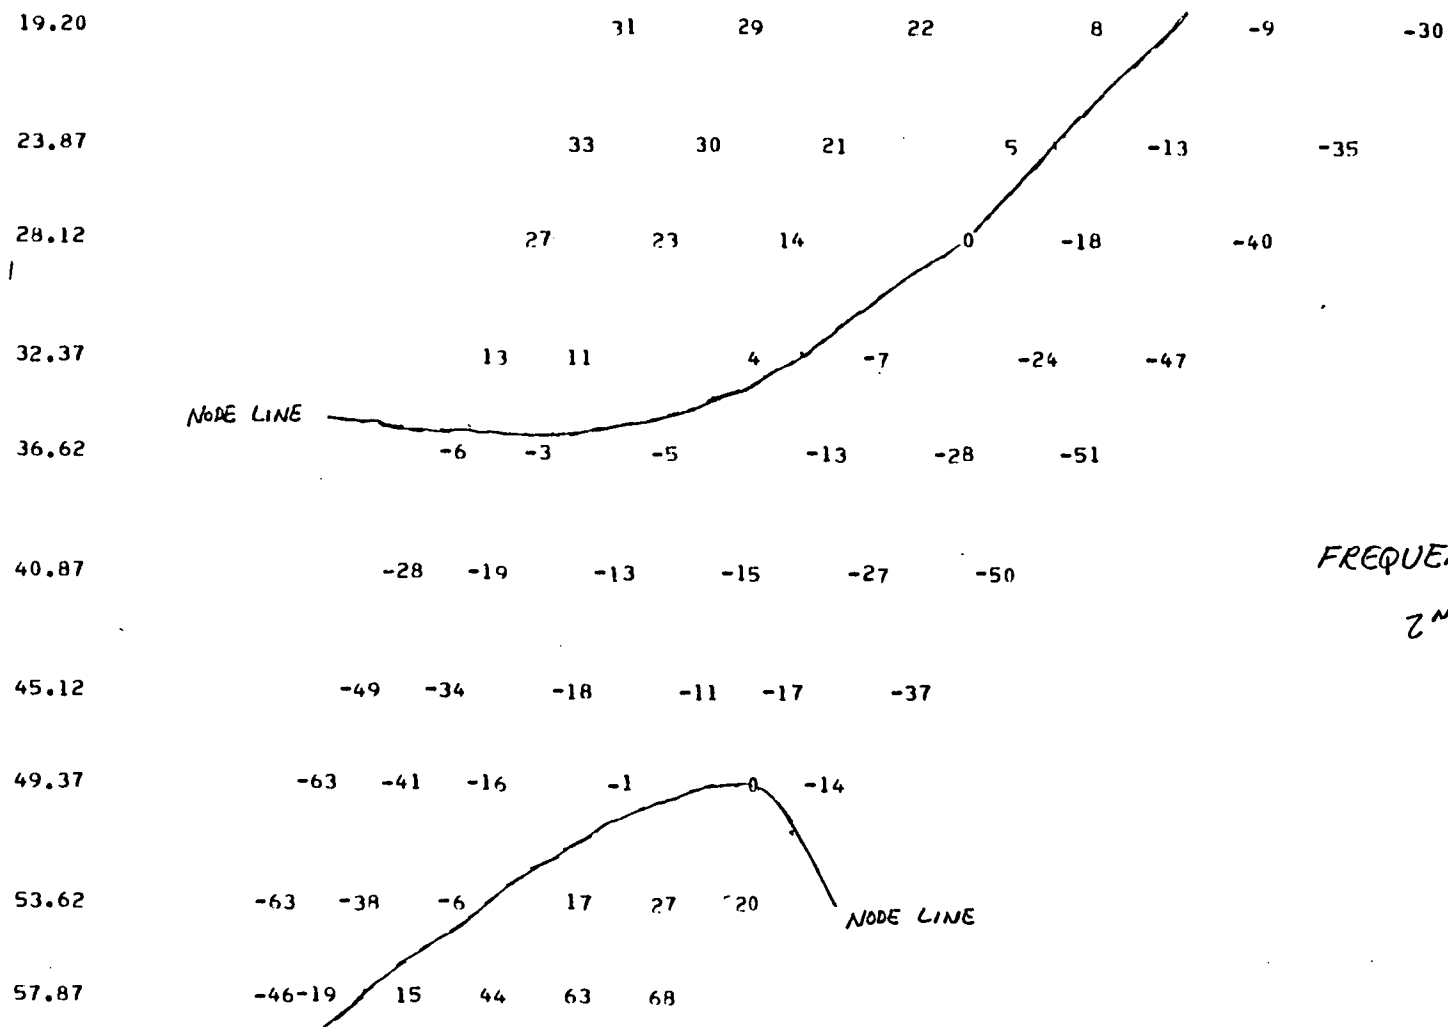

MODAL SLOPES (RAD/FT) TIMES 1.0E 1. SURFACE = 1, MODE = 5

19.20				0	0	-1	-2	-3	-3
23.87				0	-1	-2	-3	-3	-4
28.12				-1	-1	-2	-3	-3	-4
32.37				0	-1	-1	-2	-4	-5
36.62				1	0	-1	-2	-4	-5
40.87				4	2	0	-1	-4	-6
45.12				7	5	3	0	-3	-6
49.37				10	8	6	2	-1	-6
53.62				12	11	8	5	0	-4
57.87				14	13	11	8	4	0

MODAL DEFLCTIONS TIMES 1.0E 2. SURFACE = 1. MODE = 6

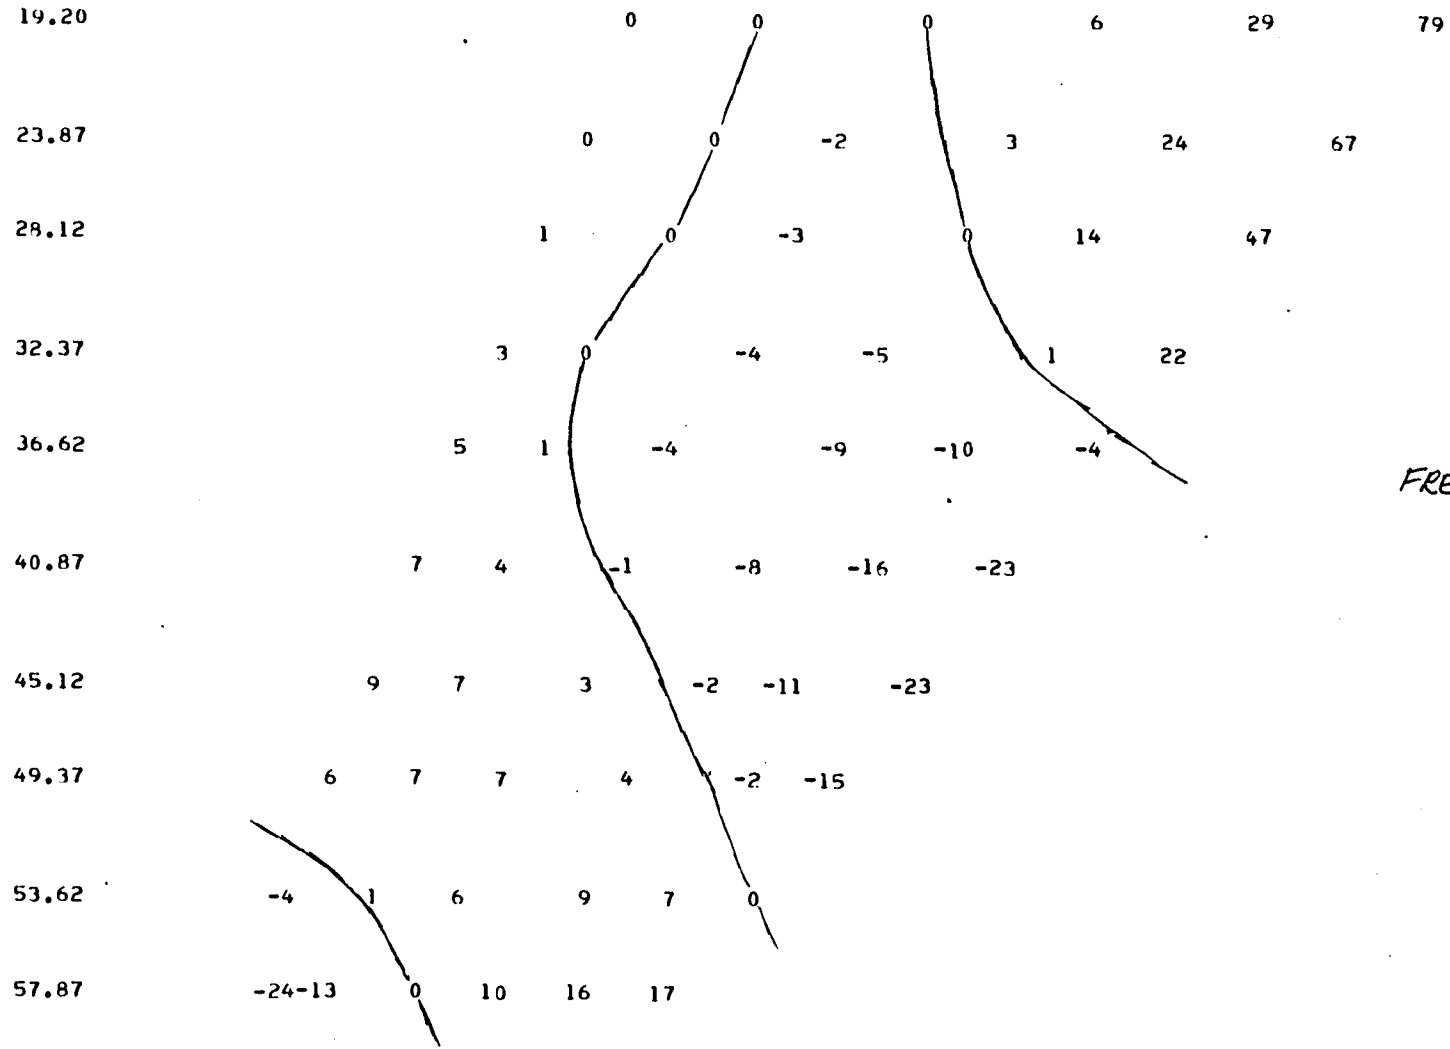


FREQUENCY = 337.0 Hz
4TH BENDING

NODE LINE

MODAL SLOPES (RAD/FT) TIMES 1.0E 1, SURFACE = 1, MODE = 6

19.20				0	0	0	2	6	11
23.87				0	0	0	2	5	10
28.12				0	0	0	1	4	8
32.37				0	-1	0	0	2	5
36.62				-1	-1	-1	0	0	2
40.87				-1	-1	-1	-1	-1	-1
45.12				0	0	-1	-1	-2	-3
49.37				0	0	0	-1	-2	-4
53.62				2	2	1	0	-1	-3
57.87				6	5	4	2	1	0

MODAL DEFLCTIONS TIMES 1.0E 2, SURFACE = 1, MODE = 7

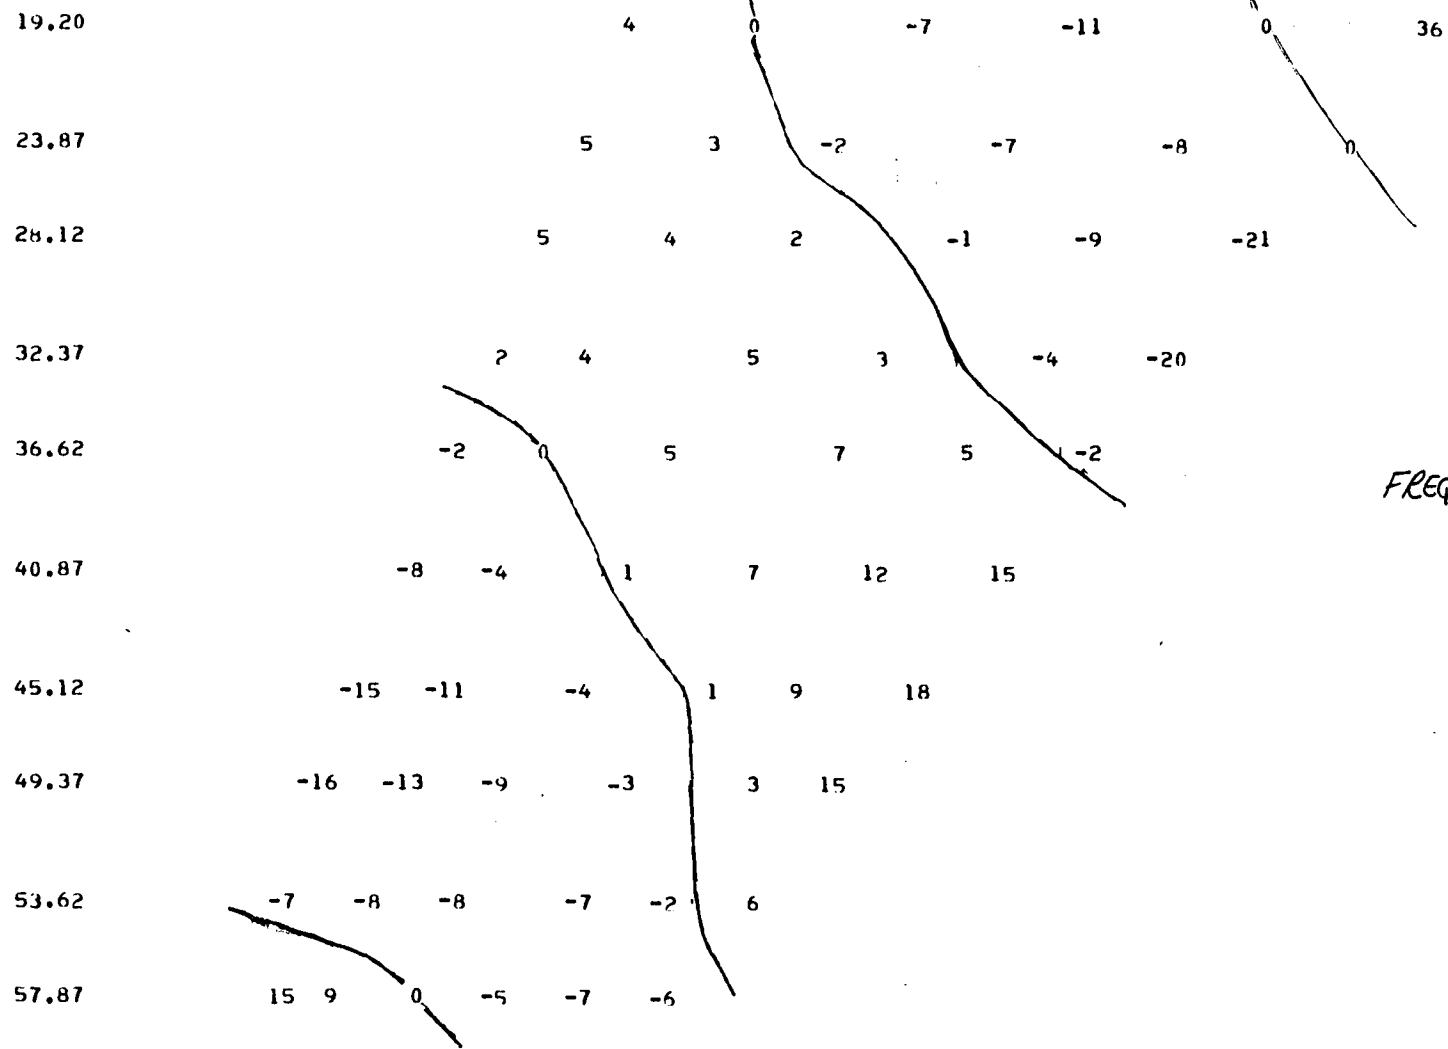


FREQUENCY = 363.3 Hz
5TH BENDING

NODE LINE

MODAL SLOPES (RAD/FT) TIMES 1.0E 2. SURFACE = 1, MODE = 7

19.20				-4	-14	-14		3	39	93
23.87				-3	-9	-11		-7	5	26
28.12				0	-2	-6		-12	-19	-27
32.37				4	4	0		-8	-24	-45
36.62				11	11	8		1	-10	-25
40.87				16	16	14		12	9	5
45.12				18	17	16		17	20	24
49.37				13	12	13		17	25	37
53.62				-3	-2	0		8	20	36
57.87				-38-33	-25	-14		-1	13	

MODAL DEFLECTIONS TIMES 1.0E 2. SURFACE = 1, MODE = 8

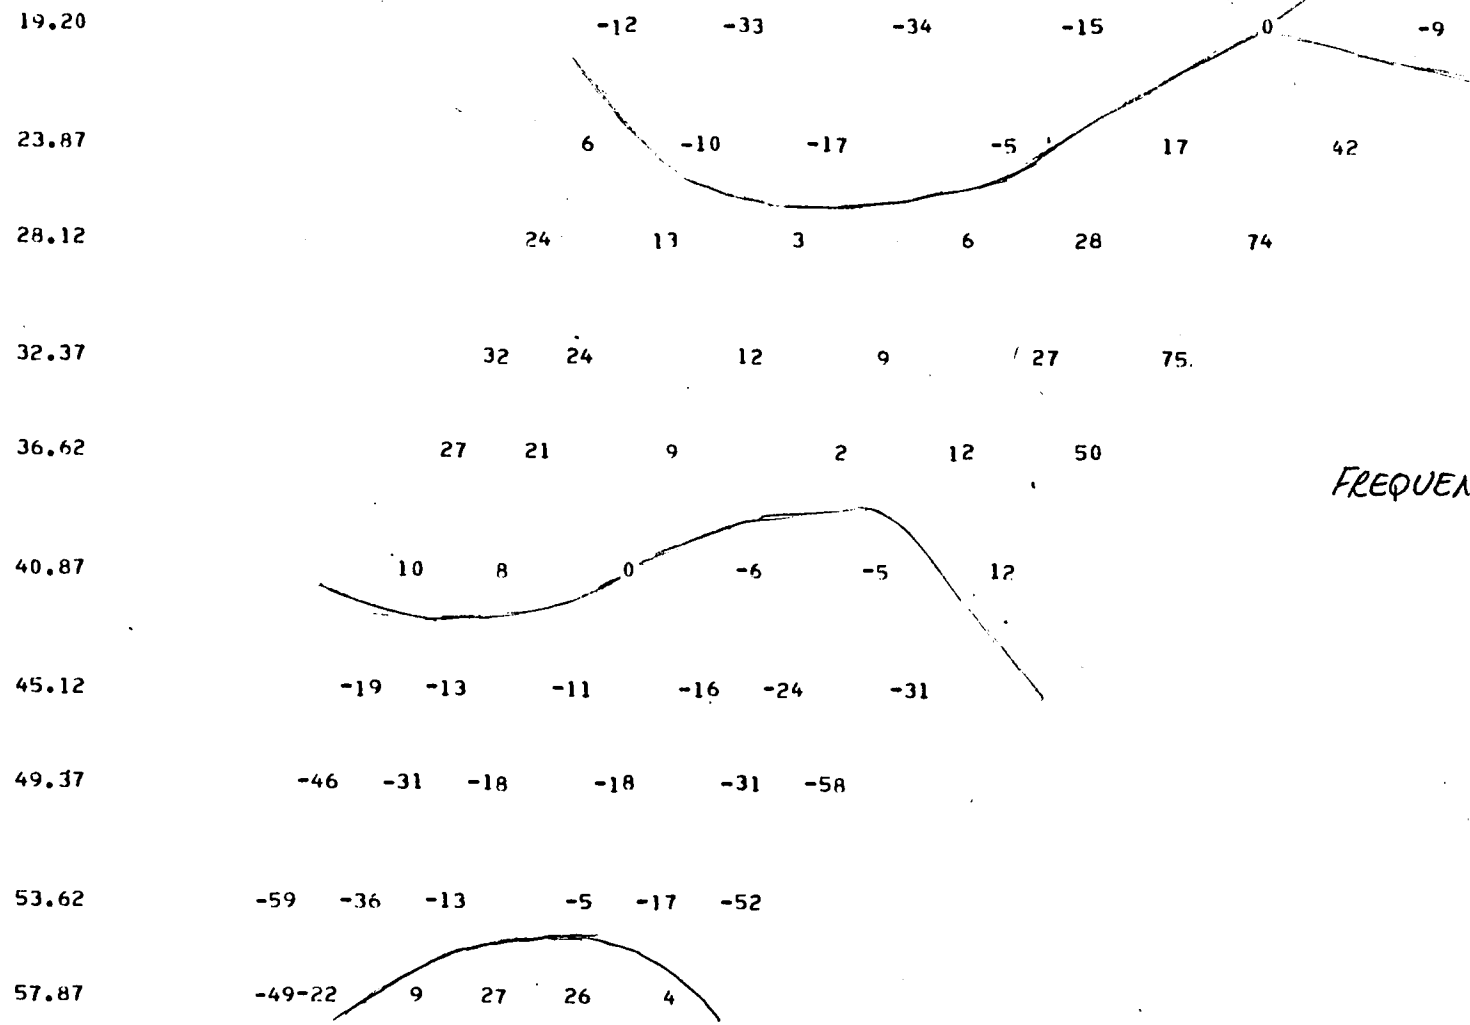

FREQUENCY = 426.7 Hz

MODAL SLOPES (RAD/FT) TIMES 1.0E 1, SURFACE = 1, MODE = 8

19.20				-8	-3		2	3	1	-5
23.87				-6	-3	0	3	4	4	
28.12				-4	-3	0	2	6	11	
32.37				-2	-2		1	5	14	
36.62				-1	-2	-2	0	4	12	
40.87				0	-1	-2	-1	1	6	
45.12				3	1	0	-1	-2	-1	
49.37				7	5	1	-1	-5	-9	
53.62				12	9	5	0	-6	-14	
57.87				15	13	8	3	-3	-11	

PASS= 1, MACH = .90, DEN RATIO = 1.00, FREQ RATIO = 1.00

FLUTTER ANALYSIS USING THE K METHOD

DENSITY VARIATIONS

DENSITY = 7.647400E-02, LR/FT**3

FREQUENCY VARIATIONS

VARIATION IN FREQUENCY FOR MODE NO. 0

GENERALIZED MASS, FREQUENCY, AND MODAL STIFFNESS

GENERALIZED MASS, LB

MODE	MODE= 1	2	3	4	5	6	7	8
1	2.592592E+00	-5.273559E-16	6.328271E-14	-1.565414E-14	-2.420286E-14	6.217249E-15	-5.551115E-15	2.042810E-14
2	-5.273559E-16	1.096850E+00	1.930400E-14	-1.239980E-14	3.157197E-14	2.844947E-15	5.013351E-16	5.884182E-15
3	6.328271E-14	1.930400E-14	1.229013E+00	-2.220446E-14	3.752554E-14	1.071365E-14	-3.330669E-16	3.308465E-14
4	-1.565414E-14	-1.239980E-14	-2.220446E-14	6.016879E-01	-3.885781E-15	6.133982E-15	1.984524E-15	4.363176E-14
5	-2.420286E-14	3.157197E-14	3.752554E-14	-3.885781E-15	9.458282E-01	3.885781E-15	-1.210143E-14	7.327472E-15
6	6.217249E-15	2.844947E-15	1.071365E-14	6.133982E-15	3.885781E-15	2.100029E-01	8.132384E-15	7.410739E-15
7	-5.551115E-15	5.013351E-16	-3.330669E-16	1.984524E-15	-1.210143E-14	8.132384E-15	1.558602E-01	-1.097733E-14
8	2.042810E-14	5.884182E-15	3.308465E-14	4.363176E-14	7.327472E-15	7.410739E-15	-1.097733E-14	9.615235E-01

MODE	FREQUENCY CYC/SEC	FREQUENCY RAD/SEC
1	4.042748E+01	2.540133E+02
2	1.053595E+02	6.619930E+02
3	1.443544E+02	9.070051E+02
4	2.131469E+02	1.339241E+03
5	2.940645E+02	1.847661E+03
6	3.370482E+02	2.117736E+03
7	3.633346E+02	2.282898E+03
8	4.266627E+02	2.680800E+03

COMPLEX GENERALIZED MODAL STIFFNESS, (REAL, IMAG), LB/IN

MODE	MODE= 1	2	3	4
1	(2.5926E+00, 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
2	(0. , 0.)	(7.4497E+00, 0.)	(0. , 0.)	(0. , 0.)
3	(0. , 0.)	(0. , 0.)	(1.5670E+01, 0.)	(0. , 0.)

PASS= 1, MACH = .90, DEN RATIO = 1.00, FREQ RATIO = 1.00

PAGE 55

COMPLEX GENERALIZED MODAL STIFFNESS, (RFAL+ IMAG), LB/IN

MODE	MODE= 1	2	3	4
4	(0. , 0.)	(0. , 0.)	(0. , 0.)	(1.6725E+01, 0.)
5	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
6	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
7	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
8	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)

MODE	MODE= 5	6	7	8
1	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
2	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
3	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
4	(0. , 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
5	(5.0043E+01, 0.)	(0. , 0.)	(0. , 0.)	(0. , 0.)
6	(0. , 0.)	(1.4597E+01, 0.)	(0. , 0.)	(0. , 0.)
7	(0. , 0.)	(0. , 0.)	(1.2589E+01, 0.)	(0. , 0.)
8	(0. , 0.)	(0. , 0.)	(0. , 0.)	(1.0710E+02, 0.)

MODAL ELIMINATION VARIATIONS

NUMBER OF MODES ELIMINATED ARE ZERO



67



LEVA



FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VBO = .2000

C.P.S.	V-EQUIV.	DAMPING	RAD/SEC	VTRJE
40.1918	48.6274	-.023510	252.5333	48.6274
104.7879	126.7811	-.023280	658.4036	126.7811
143.6824	173.8388	-.021514	902.7852	173.8388
211.9943	256.4882	-.027854	1732.0023	256.4882
292.0356	353.3289	-.023049	1834.9184	353.3289
335.3584	405.7443	-.041768	2107.1237	405.7443
362.1656	438.1779	-.012655	2275.5589	438.1779
424.1347	513.1533	-.018530	2664.9233	513.1533

ALL ROOTS CHECK AND ARE UNIQUE

FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VRO = .5000

C.P.S.	V.FOUIV.	DAMPING	RAD/SEC	VTPIUE
39.9501	120.8373	-.051432	251.0144	120.8373
104.9348	317.3968	-.080176	659.3260	317.3968
140.6090	425.3011	-.087307	883.4747	425.3011
210.5656	636.8991	-.098917	1323.0256	636.8991
285.7277	864.2424	-.048577	1795.2840	864.2424
342.9578	1037.3466	-.180691	2154.8722	1037.3466
361.0312	1092.0135	-.034542	2268.4313	1092.0135
422.2831	1277.2825	-.053438	2653.2892	1277.2825

ALL ROOTS CHECK AND ARE UNIQUE

FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VRO = .8000

C.P.S.	V.EQUIV.	DAMPING	RAD/SEC	VTRUE
39.7956	192.5921	-.076496	250.0438	192.5921
104.1556	504.0640	-.180614	654.4302	504.0640
132.4189	640.8451	-.104512	832.0142	640.8451
207.4787	1004.0995	-.165462	1303.6301	1004.0995
279.6749	1353.4954	-.071592	1757.2535	1353.4954
350.8003	1697.7090	-.345529	2204.1486	1697.7090
360.3843	1744.0910	-.048291	2264.3667	1744.0910
418.7761	2026.6800	-.077837	2631.2542	2026.6800

ALL ROOTS CHECK AND ARE UNIQUE

FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VRO = 1.1000

C.P.S.	V.EQUIV.	DAMPING	RAD/SEC	VTRUE
39.6588	263.9037	-.103685	249.1841	263.9037
99.3546	661.1405	-.288851	624.2646	661.1405
126.7533	843.4616	-.064304	796.4165	843.4616
200.4199	1333.6651	-.243993	1259.2783	1333.6651
272.9724	1816.4551	-.089792	1715.1401	1816.4551
352.6491	2346.6524	-.493225	2215.7650	2346.6524
357.8453	2381.2294	-.077972	2248.4134	2381.2294
421.4684	2804.6001	-.051721	2648.1701	2804.6001

ALL ROOTS CHECK AND ARE UNIQUE

FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VRO = 1.4000

C.P.S.	V.EQUIV.	DAMPING	RAD/SEC	VALUE
39.4549	334.1505	-.134115	247.9029	334.1505
91.1730	772.1606	-.324328	572.8583	772.1606
123.9800	1050.0085	-.047515	778.9909	1050.0085
187.5292	1588.2186	-.280186	1178.2837	1588.2186
268.6925	2275.6044	-.102330	1688.2484	2275.6044
350.3179	2966.9048	-.108211	2201.1173	2966.9048
357.4566	3027.3636	-.590724	2245.9711	3027.3636
437.0562	3701.5068	.014842	2746.1113	3701.5068

ALL ROOTS CHECK AND ARE UNIQUE

FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VHD = 1.7000

C.P.S.	V.FOUIV.	DAMPING	RAD/SEC	VTRUE
39.2178	403.3158	-.164912	246.4132	403.3158
83.1518	855.1330	-.296800	522.4591	855.1330
122.4380	1259.1528	-.057478	769.3025	1259.1528
174.2641	1792.1326	-.278490	1094.9362	1792.1326
268.1023	2757.1649	-.125877	1684.5404	2757.1649
342.0552	3517.6971	-.124745	2149.2015	3517.6971
364.8664	3752.2874	-.703563	2292.5287	3752.2874
461.9182	4750.3682	.133021	2902.3245	4750.3682

ALL ROOTS CHECK AND ARE UNIQUE

52

FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VRO = 2.0000

C.P.S.	V.EQUIV.	DAMPING	RAD/SEC	VTRQE
38.9809	471.6231	-.199082	244.9248	471.6231
76.0027	919.5433	-.250426	477.5401	919.5433
122.0592	1476.7726	-.090107	766.9221	1476.7726
160.8541	1946.1459	-.260587	1010.6785	1946.1459
269.6496	3262.4432	-.167056	1694.2621	3262.4432
335.4713	4058.8091	-.138617	2107.8332	4058.8091
368.3399	4456.4812	-.777523	2314.3535	4456.4812
488.0889	5905.3030	.336371	3066.7601	5905.3030

ALL ROOTS CHECK AND ARE UNIQUE

FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VHO = 2.3000

C.P.S.	V.EQUIV.	DAMPING	RAD/SEC	VTRUE
38.7234	538.7840	-.238648	243.3069	538.7840
69.5732	968.0168	-.195027	437.1421	968.0168
123.3120	1715.7196	-.156962	774.7937	1715.7196
147.1428	2047.2940	-.211940	924.5279	2047.2940
271.8798	3782.8413	-.229614	1708.2754	3782.8413
332.7838	4630.2370	-.173443	2090.9469	4630.2370
368.1707	5122.5988	-.760997	2313.2902	5122.5988
497.3416	6919.8374	.631294	3124.8967	6919.8374

ALL ROOTS CHECK AND ARE UNIQUE

FLUTTER SOLUTIONS

MACH NO = .900 RHO/RHO(SL) = 1.0000 VRO = 2.6000


C.P.S.	V.EQUIV.	DAMPING	RAD/SEC	VTRUE
38.4135	604.1851	-.284429	241.3594	604.1851
63.9421	1005.7118	-.132992	401.7610	1005.7118
123.6967	1945.5597	-.302730	777.2108	1945.5597
137.7285	2166.2597	-.095951	865.3759	2166.2597
272.7935	4290.6261	-.314928	1714.0163	4290.6261
321.4146	5055.3611	-.317802	2019.5121	5055.3611
388.3264	6107.7820	-.601567	2439.9324	6107.7820
470.2277	7395.9648	.960563	2954.5348	7395.9648

ALL ROOTS CHECK AND ARE UNIQUE



PASS= 1, MACH = .90, DEN RATIO = 1.00, FREQ RATIO = 1.00


PRINT-PLOT OF DAMPING VS VELOCITY (TRUE)

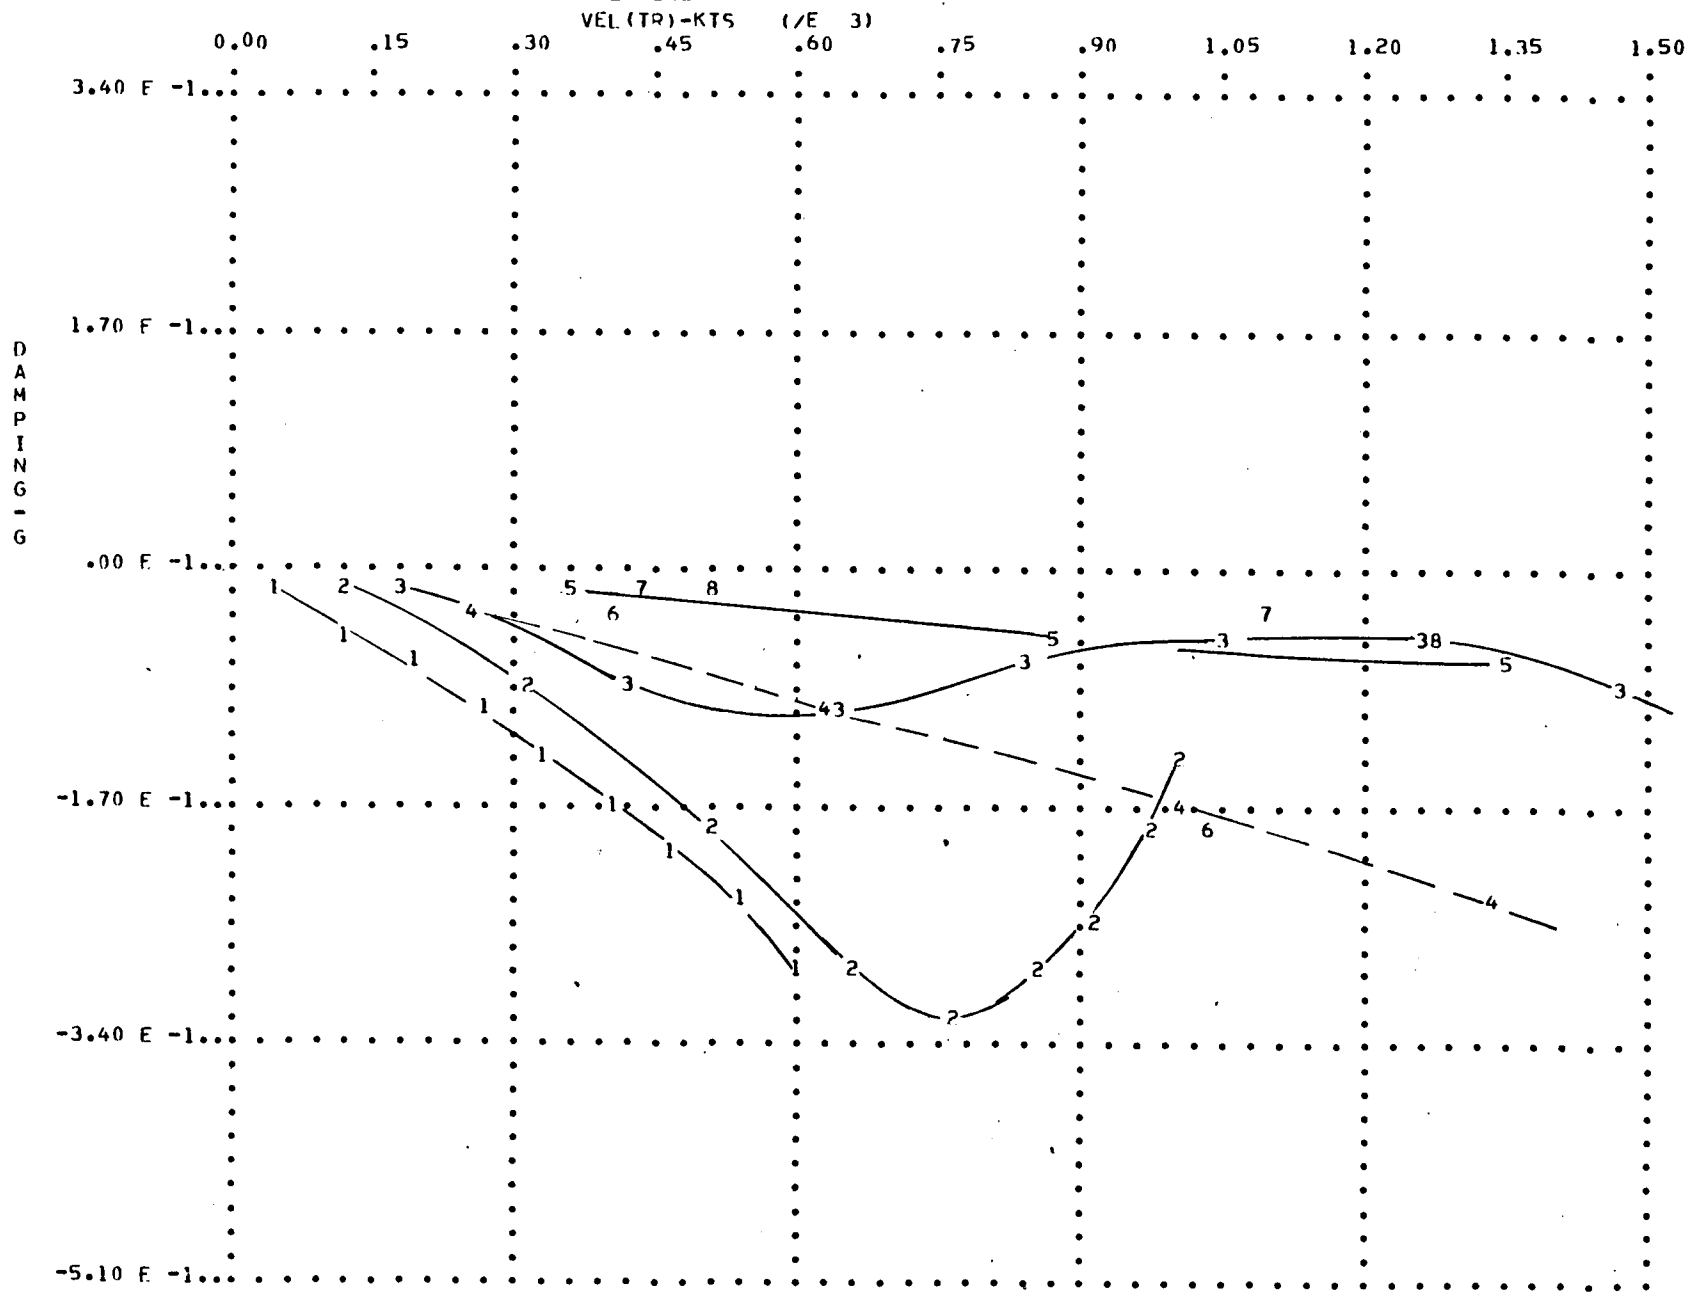



PASS= 1, MACH = .90, DEN RATIO = 1.00, FREQ RATIO = 1.00

PRINT-PLOT OF FREQUENCY VS VELOCITY (TRUE)

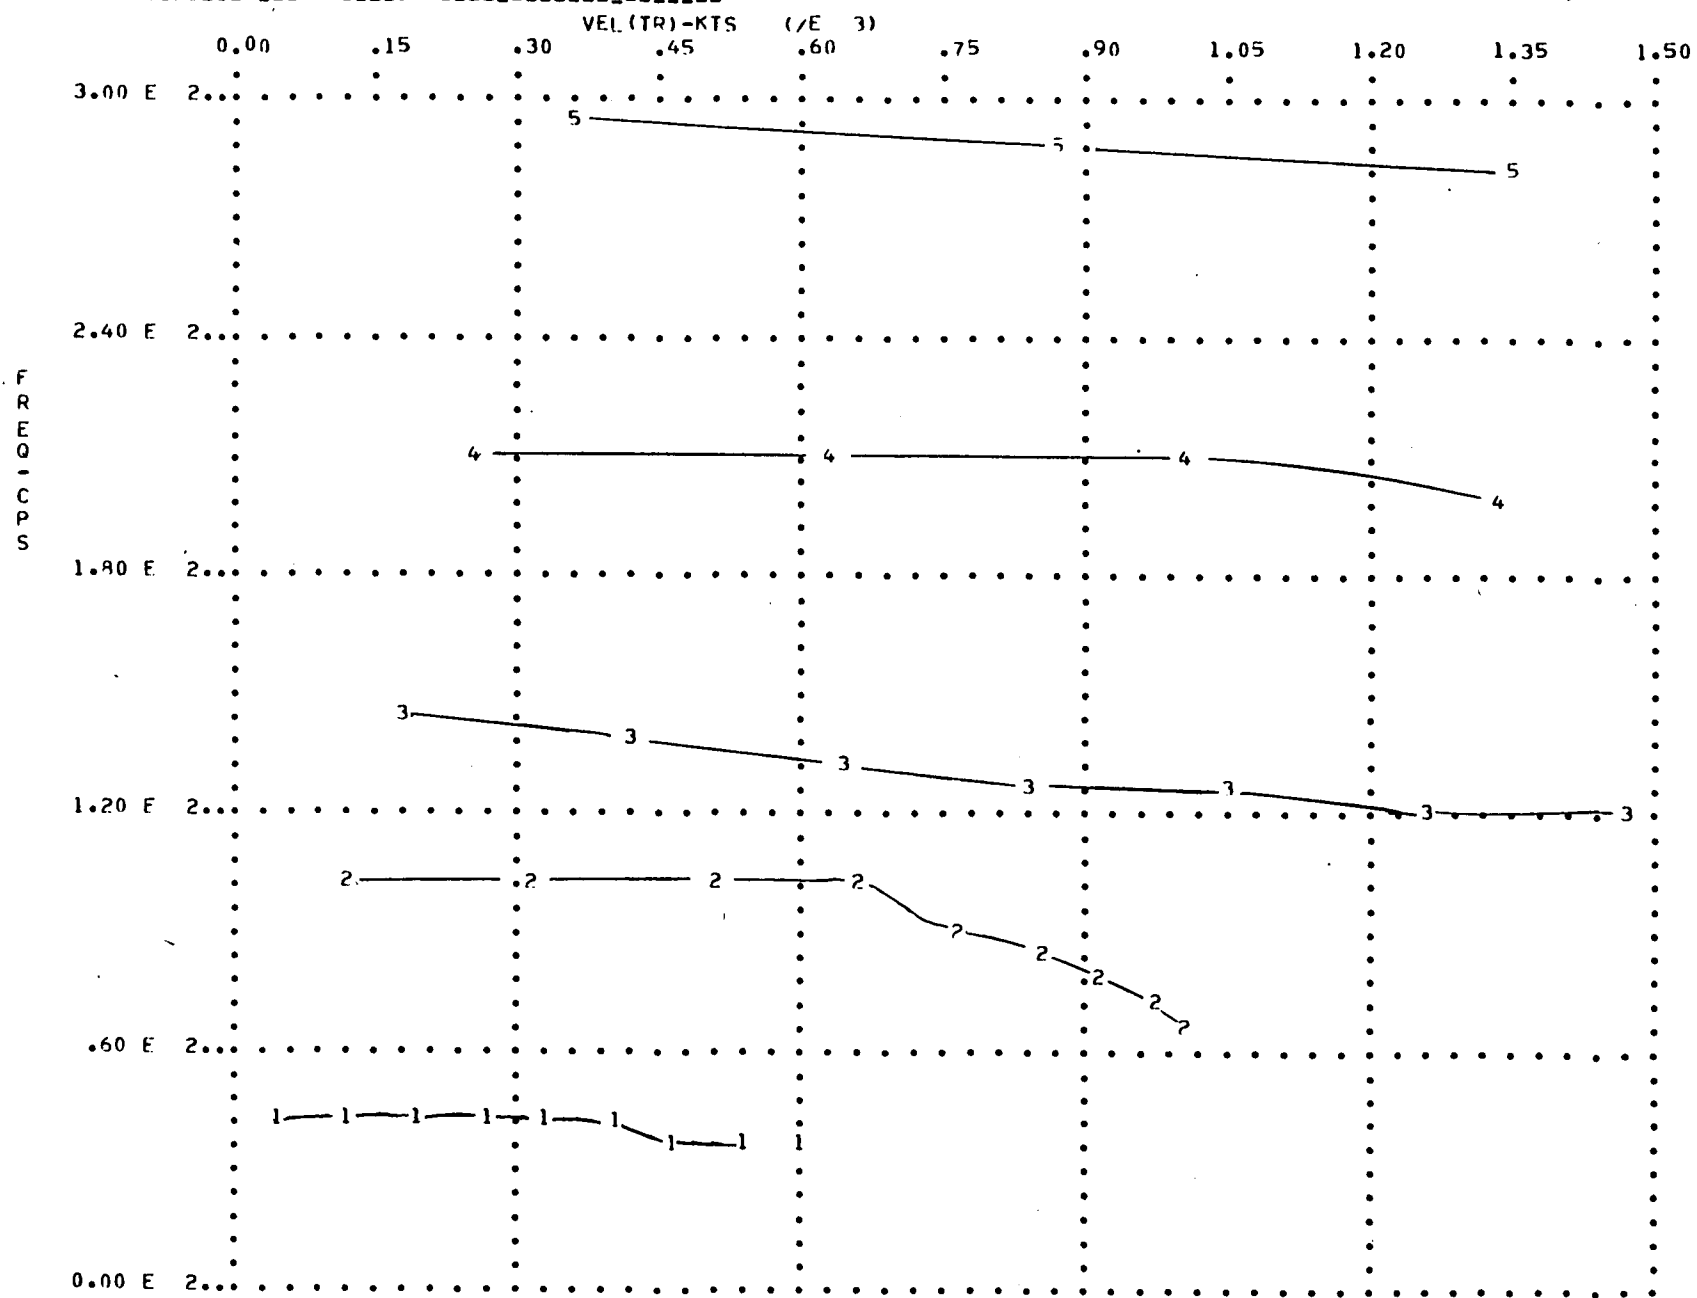

***** TABLE OF CONTENTS *****

PAGE 58
PASS PAGE


***** * * * * * **** - **** - * - * * - **** * * * * * * * * * *	FLUTTER AND STRENGTH OPTIMIZATION PROGRAM	1	1
***** * * * * * **** - * * - **** * * * * * * * * * *	FLUTTER OPTIMIZATION PROGRAM	1	3
PROGRAM LISTING OF CARD DATA		1	4
FLUTTER OPTIMIZATION PACKAGE		1	4
AUTOMATED VIBRATION ANALYSIS MODULE		1	4
AUTOMATED FLUTTER ANALYSIS MODULE		1	4
*** * * * * * * * * * ***** - * * - ***** - * * * * * * * * * * * * * *	AUTOMATED VIBRATION ANALYSIS MODULE	1	7
MASS MATRIX TO BE USED IN VIBRATION ANALYSIS		1	13
VIBRATION RESULTS (FREQUENCIES, MODE SHAPES, GEN. MASS)		1	17
MODE SHAPES FOR FLUTTER ANALYSIS		1	20
*** * * * * * * * * * ***** - ***** - ***** - * * * * * * * * * * * * * *	AUTOMATED FLUTTER ANALYSIS MODULE	1	21
ENTER VIBRATION DATA FOR FLUTTER ANALYSIS		1	22
GENERALIZED MASS, FREQUENCY, AND GENERALIZED MODAL STIFFNESS		1	22
SUBSONIC UNSTEADY AERODYNAMICS USING DOUWLET LATTICE PROCEDURE (RODDEN)		1	24
SURFACE AND BODY GEOMETRY AND ASSOCIATED PARAMETERS		1	24

***** TABLE OF CONTENTS *****

PAGE 59
PASS PAGE

INTERPOLATED MODES FOR PRIMARY AND CONTROL SURFACES	1	26
INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 1	1	26
INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 2	1	27
INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 3	1	28
INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 4	1	30
INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 5	1	31
INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 6	1	32
INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 7	1	33
INTERPOLATED MODES, PRIMARY SURFACES, SURF = 1, MODE = 8	1	35
GRAPHICAL REPRESENTATION OF INTERPOLATED MODES	1	37
MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE= 1, MODE = 1	1	38
MODAL SLOPES (RAD/FT) TIMES 1.0E 2, SURFACE= 1, MODE = 1	1	39
MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE= 1, MODE = 2	1	40
MODAL SLOPES (RAD/FT) TIMES 1.0E 2, SURFACE= 1, MODE = 2	1	41
MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE= 1, MODE = 3	1	42
MODAL SLOPES (RAD/FT) TIMES 1.0E 2, SURFACE= 1, MODE = 3	1	43
MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE= 1, MODE = 4	1	44
MODAL SLOPES (RAD/FT) TIMES 1.0E 1, SURFACE= 1, MODE = 4	1	45
MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE= 1, MODE = 5	1	46
MODAL SLOPES (RAD/FT) TIMES 1.0E 1, SURFACE= 1, MODE = 5	1	47
MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE= 1, MODE = 6	1	48
MODAL SLOPES (RAD/FT) TIMES 1.0E 1, SURFACE= 1, MODE = 6	1	49
MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE= 1, MODE = 7	1	50
MODAL SLOPES (RAD/FT) TIMES 1.0E 2, SURFACE= 1, MODE = 7	1	51
MODAL DEFLECTIONS TIMES 1.0E 2, SURFACE= 1, MODE = 8	1	52
MODAL SLOPES (RAD/FT) TIMES 1.0E 1, SURFACE= 1, MODE = 8	1	53
FLUTTER ANALYSIS USING THE K METHOD	1	54
PASS= 1, MACH = .90, DEN RATIO = 1.00, FREQ RATIO = 1.00	1	54
DENSITY VARIATIONS	1	54
FREQUENCY VARIATIONS.....	1	54
GENERALIZED MASS, FREQUENCY, AND MODAL STIFFNESS	1	54
MODAL ELIMINATION VARIATIONS	1	55
PRINT-PLOT OF DAMPING VS VELOCITY (TRUE)	1	56
PRINT-PLOT OF FREQUENCY VS VELOCITY (TRUE)	1	57





LIBRARY MATERIAL SLIP

DO NOT REMOVE SLIP FROM MATERIAL

Delete your name from this slip when returning material to the library.

NAME	DATE	MS
Barthelme	10/01	159