



Aeronautical
Engineering
A Continuing
Bibliography
with Indexes

NASA SP-7037 (119)
February 1980

National Aeronautics and
Space Administration

Aeronautical Engineering Aer
ering Aeronautical Engineerin
ngineering Aeronautical Engin
cal Engineering Aeronautical E
nautical Engineering Aeronau
Aeronautical Engineering Aer
ering Aeronautical Engineering
ngineering Aeronautical Engin
cal Engineering Aeronautical E
nautical Engineering Aeronaut
Aeronautical Engineering Aer
ring Aeronautical Engineering

AERONAUTICAL ENGINEERING

A Continuing Bibliography

Supplement 119

A selection of annotated references to unclassified reports and journal articles that were introduced into the NASA scientific and technical information system and announced in January 1980 in

- *Scientific and Technical Aerospace Reports (STAR)*
- *International Aerospace Abstracts (IAA)*.

INTRODUCTION

Under the terms of an interagency agreement with the Federal Aviation Administration this publication has been prepared by the National Aeronautics and Space Administration for the joint use of both agencies and the scientific and technical community concerned with the field of aeronautical engineering. The first issue of this bibliography was published in September 1970 and the first supplement in January 1971. Since that time, monthly supplements have been issued.

This supplement to *Aeronautical Engineering -- A Continuing Bibliography* (NASA SP-7037) lists 341 reports, journal articles, and other documents originally announced in January 1980 in *Scientific and Technical Aerospace Reports (STAR)* or in *International Aerospace Abstracts (IAA)*.

The coverage includes documents on the engineering and theoretical aspects of design, construction, evaluation, testing, operation, and performance of aircraft (including aircraft engines) and associated components, equipment, and systems. It also includes research and development in aerodynamics, aeronautics, and ground support equipment for aeronautical vehicles.

Each entry in the bibliography consists of a standard bibliographic citation accompanied in most cases by an abstract. The listing of the entries is arranged in two major sections, *IAA Entries* and *STAR Entries*, in that order. The citations, and abstracts when available, are reproduced exactly as they appeared originally in *IAA* and *STAR*, including the original accession numbers from the respective announcement journals. This procedure, which saves time and money, accounts for the slight variation in citation appearances.

Three indexes -- subject, personal author, and contract number -- are included.

An annual cumulative index will be published.

AVAILABILITY OF CITED PUBLICATIONS

IAA ENTRIES (A80-10000 Series)

All publications abstracted in this Section are available from the Technical Information Service, American Institute of Aeronautics and Astronautics, Inc. (AIAA), as follows: Paper copies of accessions are available at \$6.00 per document up to a maximum of 20 pages. The charge for each additional page is \$0.25. Microfiche⁽¹⁾ of documents announced in *IAA* are available at the rate of \$2.50 per microfiche on demand, and at the rate of \$1.10 per microfiche for standing orders for all *IAA* microfiche. The price for the *IAA* microfiche by category is available at the rate of \$1.25 per microfiche plus a \$1.00 service charge per category per issue. Microfiche of all the current AIAA Meeting Papers are available on a standing order basis at the rate of \$1.35 per microfiche.

Minimum air-mail postage to foreign countries is \$1.00 and all foreign orders are shipped on payment of pro-forma invoices.

All inquiries and requests should be addressed to AIAA Technical Information Service. Please refer to the accession number when requesting publications.

STAR ENTRIES (N80-10000 Series)

One or more sources from which a document announced in *STAR* is available to the public is ordinarily given on the last line of the citation. The most commonly indicated sources and their acronyms or abbreviations are listed below. If the publication is available from a source other than those listed, the publisher and his address will be displayed on the availability line or in combination with the corporate source line.

Avail: NTIS. Sold by the National Technical Information Service. Prices for hard copy (HC) and microfiche (MF) are indicated by a price code followed by the letters HC or MF in the *STAR* citation. Current values for the price codes are given in the tables on page viii.

Documents on microfiche are designated by a pound sign (#) following the accession number. The pound sign is used without regard to the source or quality of the microfiche.

Initially distributed microfiche under the NTIS SRIM (Selected Research in Microfiche) is available at greatly reduced unit prices. For this service and for information concerning subscription to NASA printed reports, consult the NTIS Subscription Section, Springfield, Va. 22161.

NOTE ON ORDERING DOCUMENTS: When ordering NASA publications (those followed by the * symbol), use the N accession number. NASA patent applications (only the specifications are offered) should be ordered by the US-Patent-AppI-SN number. Non-NASA publications (no asterisk) should be ordered by the AD, PB, or other *report* number shown on the last line of the citation, not by the N accession number. It is also advisable to cite the title and other bibliographic identification.

Avail: SOD (or GPO). Sold by the Superintendent of Documents, U.S. Government Printing Office, in hard copy. The current price and order number are given following the availability line. (NTIS will fill microfiche requests, at the standard \$3.50 price, for those documents identified by a # symbol.)

(1) A microfiche is a transparent sheet of film, 105 by 148 mm in size, containing as many as 60 to 98 pages of information reduced to micro images (not to exceed 26:1 reduction).

- Avail: NASA Public Document Rooms. Documents so indicated may be examined at or purchased from the National Aeronautics and Space Administration, Public Documents Room (Room 126), 600 Independence Ave., S.W., Washington, D.C. 20546, or public document rooms located at each of the NASA research centers, the NASA Space Technology Laboratories, and the NASA Pasadena Office at the Jet Propulsion Laboratory.
- Avail: DOE Depository Libraries. Organizations in U.S. cities and abroad that maintain collections of Department of Energy reports, usually in microfiche form, are listed in *Energy Research Abstracts*. Services available from the DOE and its depositories are described in a booklet, *DOE Technical Information Center - Its Functions and Services* (TID-4660), which may be obtained without charge from the DOE Technical Information Center.
- Avail: Univ. Microfilms. Documents so indicated are dissertations selected from *Dissertation Abstracts* and are sold by University Microfilms as xerographic copy (HC) and microfilm. All requests should cite the author and the Order Number as they appear in the citation.
- Avail: USGS. Originals of many reports from the U.S. Geological Survey, which may contain color illustrations, or otherwise may not have the quality of illustrations preserved in the microfiche or facsimile reproduction, may be examined by the public at the libraries of the USGS field offices whose addresses are listed in this introduction. The libraries may be queried concerning the availability of specific documents and the possible utilization of local copying services, such as color reproduction.
- Avail: HMSO. Publications of Her Majesty's Stationery Office are sold in the U.S. by Pendragon House, Inc. (PHI), Redwood City, California. The U.S. price (including a service and mailing charge) is given, or a conversion table may be obtained from PHI.
- Avail: BLL (formerly NLL): British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England. Photocopies available from this organization at the price shown. (If none is given, inquiry should be addressed to the BLL.)
- Avail: Fachinformationszentrum, Karlsruhe. Sold by the Fachinformationszentrum Energie, Physik, Mathematik GMBH, Eggenstein Leopoldshafen, Federal Republic of Germany, at the price shown in deutschmarks (DM).
- Avail: Issuing Activity, or Corporate Author, or no indication of availability. Inquiries as to the availability of these documents should be addressed to the organization shown in the citation as the corporate author of the document.
- Avail: U.S. Patent and Trademark Office. Sold by Commissioner of Patents and Trademarks, U.S. Patent and Trademark Office, at the standard price of 50 cents each, postage free.
- Other availabilities: If the publication is available from a source other than the above, the publisher and his address will be displayed entirely on the availability line or in combination with the corporate author line.

GENERAL AVAILABILITY

All publications abstracted in this bibliography are available to the public through the sources as indicated in the *STAR Entries* and *IAA Entries* sections. It is suggested that the bibliography user contact his own library or other local libraries prior to ordering any publication inasmuch as many of the documents have been widely distributed by the issuing agencies, especially NASA. A listing of public collections of NASA documents is included on the inside back cover.

SUBSCRIPTION AVAILABILITY

This publication is available on subscription from the National Technical Information Service (NTIS). The annual subscription rate for the monthly supplements is \$50.00 domestic; \$100.00 foreign. All questions relating to the subscriptions should be referred to NTIS, Attn: Subscriptions, 5285 Port Royal Road, Springfield Virginia 22161.

ADDRESSES OF ORGANIZATIONS

American Institute of Aeronautics
and Astronautics
Technical Information Service
555 West 57th Street, 12th Floor
New York, New York 10019

British Library Lending Division,
Boston Spa, Wetherby, Yorkshire,
England

Commissioner of Patents and
Trademarks
U.S. Patent and Trademark Office
Washington, D.C. 20231

Department of Energy
Technical Information Center
P.O. Box 62
Oak Ridge, Tennessee 37830

ESA-Information Retrieval Service
ESRIN
Via Galileo Galilei
00044 Frascati (Rome) Italy

Her Majesty's Stationery Office
P.O. Box 569, S.E. 1
London, England

NASA Scientific and Technical Information
Facility
P.O. Box 8757
B. W. I. Airport, Maryland 21240

National Aeronautics and Space
Administration
Scientific and Technical Information
Branch (NST-41)
Washington, D.C. 20546

National Technical Information Service
5285 Port Royal Road
Springfield, Virginia 22161

Pendragon House, Inc.
899 Broadway Avenue
Redwood City, California 94063

Superintendent of Documents
U.S. Government Printing Office
Washington, D.C. 20402

University Microfilms
A Xerox Company
300 North Zeeb Road
Ann Arbor, Michigan 48106

University Microfilms, Ltd.
Tylers Green
London, England

U.S. Geological Survey
1033 General Services Administration
Building
Washington, D.C. 20242

U.S. Geological Survey
601 E. Cedar Avenue
Flagstaff, Arizona 86002

U.S. Geological Survey
345 Middlefield Road
Menlo Park, California 94025

U.S. Geological Survey
Bldg. 25, Denver Federal Center
Denver, Colorado 80225

Fachinformationszentrum Energie, Physik,
Mathematik GMBH
7514 Eggenstein Leopoldshafen
Federal Republic of Germany

NTIS PRICE SCHEDULES

Schedule A

STANDARD PAPER COPY PRICE SCHEDULE

(Effective January 1, 1980)

Price Code	Page Range	North American Price	Foreign Price
A01	Microfiche	\$ 3.50	\$ 5.25
A02	001-025	5.00	10.00
A03	026-050	6.00	12.00
A04	051-075	7.00	14.00
A05	076-100	8.00	16.00
A06	101-125	9.00	18.00
A07	126-150	10.00	20.00
A08	151-175	11.00	22.00
A09	176-200	12.00	24.00
A10	201-225	13.00	26.00
A11	226-250	14.00	28.00
A12	251-275	15.00	30.00
A13	276-300	16.00	32.00
A14	301-325	17.00	34.00
A15	326-350	18.00	36.00
A16	351-375	19.00	38.00
A17	376-400	20.00	40.00
A18	401-425	21.00	42.00
A19	426-450	22.00	44.00
A20	451-475	23.00	46.00
A21	476-500	24.00	48.00
A22	501-525	25.00	50.00
A23	526-550	26.00	52.00
A24	551-575	27.00	54.00
A25	576-600	28.00	56.00
A99	601-up	1/	2/

1/ Add \$1.00 for each additional 25 page increment or portion thereof for 601 pages up.

2/ Add \$2.00 for each additional 25 page increment or portion thereof for 601 pages and more.

Schedule E

EXCEPTION PRICE SCHEDULE


Paper Copy & Microfiche

Price Code	North American Price	Foreign Price
E01	\$ 5.50	\$ 11.50
E02	6.50	13.50
E03	8.50	17.50
E04	10.50	21.50
E05	12.50	25.50
E06	14.50	29.50
E07	16.50	33.50
E08	18.50	37.50
E09	20.50	41.50
E10	22.50	45.50
E11	24.50	49.50
E12	27.50	55.50
E13	30.50	61.50
E14	33.50	67.50
E15	36.50	73.50
E16	39.50	79.50
E17	42.50	85.50
E18	45.50	91.50
E19	50.50	100.50
E20	60.50	121.50
E99 - Write for quote		
N01	28.00	40.00


TABLE OF CONTENTS

IAA Entries	1
STAR Entries	17
Subject Index	A-1
Personal Author Index	B-1
Contract Number Index	C-1

TYPICAL CITATION AND ABSTRACT FROM STAR

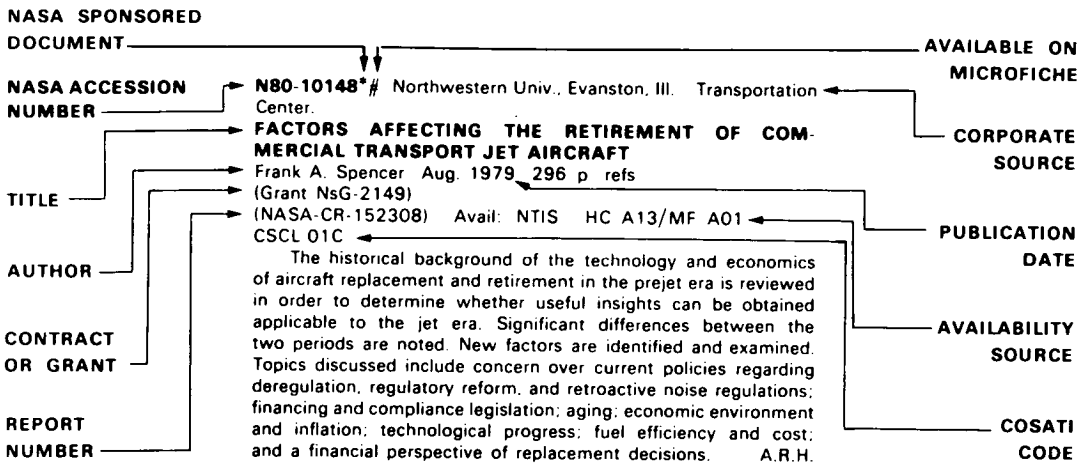

TYPICAL CITATION AND ABSTRACT FROM IAA

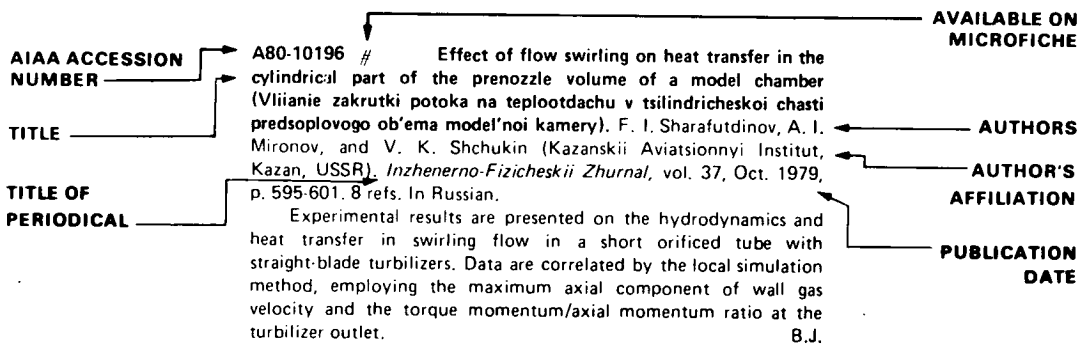

AERONAUTICAL ENGINEERING

A Continuing Bibliography (Suppl. 119)

FEBRUARY 1980

IAA ENTRIES

A80-10011 # Three-dimensional velocity distribution between stator blades and unsteady force on a blade due to passing wakes. T. Adachi (Tsukuba, University, Sakura, Ibaraki, Japan) and Y. Murakami (Osaka University, Toyonaka, Japan). *JSME, Bulletin*, vol. 22, Aug. 1979, p. 1074-1082. 8 refs.

The steady and unsteady three-dimensional velocity distributions between the stator blades due to passing wakes shed by upstream moving cylinders are measured. The method utilizes a hot-wire located in three-coordinate directions respectively. By using 'average response technique' on all hot-wire signal, the fluctuating component due to the Karman vortex is suppressed, and only the periodic component is extracted. The motion of the wake passing through the stator blade row and the effect of it on flow in a passage are considered and compared with the measured results of the unsteady force on the blade. (Author)

A80-10033 * # Identification and dual adaptive control of a turbojet engine. W. Merrill (NASA, Lewis Research Center, Cleveland, Ohio) and G. Leininger (Toledo, University, Toledo, Ohio). *International Federation of Automatic Control, Symposium on Identification and System Parameter Estimation, 5th, Darmstadt, West Germany, Sept. 24-28, 1979, Paper*. 8 p. 14 refs. Grant No. NGR-36-010-024.

The objective of this paper is to utilize the design methods of modern control theory to realize a 'dual-adaptive' feedback control unit for a highly non-linear single spool airbreathing turbojet engine. Using a very detailed and accurate simulation of the non-linear engine as the data source, linear operating point models of unspecified dimension are identified. Feedback control laws are designed at each operating point for a prespecified set of sampling rates using sampled-data output regulator theory. The control system sampling rate is determined by an adaptive sampling algorithm in correspondence with turbojet engine performance. The result is a 'dual-adaptive' control law that is functionally dependent upon the sampling rate selected and environmental operating conditions. Simulation transients demonstrate the utility of the dual-adaptive design to improve on-board computer utilization while maintaining acceptable levels of engine performance. (Author)

A80-10034 * # Turbine engine altitude chamber and flight testing with liquid hydrogen. E. W. Conrad (NASA, Lewis Research Center, Cleveland, Ohio). *Deutsche Gesellschaft für Luft- und Raumfahrt and Deutsche Forschungs- und Versuchsanstalt für Luft- und Raumfahrt, International Symposium on Hydrogen in Air Transportation, Stuttgart, West Germany, Sept. 11-14, 1979, Paper*. 20 p. 12 refs.

In the late fifties the Lewis Research Center evaluated experimentally the use of hydrogen using three different turbojet engines in altitude test chambers. One of these engines was later flown experimentally using liquid hydrogen fuel. This paper is a brief

overview of the significant aspects of this exploratory research and gives a few implications of the results to modern turbine engines. A subsequent contract dealing with a positive displacement pump operating on liquid hydrogen is discussed and some aspects of liquid hydrogen propellant systems, reflected by rocket booster experience are treated briefly. Areas requiring further research and technology effort are delineated. (Author)

A80-10035 * # Computerized systems analysis and optimization of aircraft engine performance, weight, and life cycle costs. L. H. Fishbach (NASA, Lewis Research Center, Flight Performance Section, Cleveland, Ohio). *NATO, AGARD, Symposium on the Use of Computers as a Design Tool, Munich, West Germany, Sept. 3-6, 1979, Paper*. 20 p. 16 refs.

The paper describes the computational techniques employed in determining the optimal propulsion systems for future aircraft applications and to identify system tradeoffs and technology requirements. The computer programs used to perform calculations for all the factors that enter into the selection process of determining the optimum combinations of airplanes and engines are examined. Attention is given to the description of the computer codes including NNEP, WATE, LIFCYC, INSTAL, and POD DRG. A process is illustrated by which turbine engines can be evaluated as to fuel consumption, engine weight, cost and installation effects. Examples are shown as to the benefits of variable geometry and of the tradeoff between fuel burned and engine weights. Future plans for further improvements in the analytical modeling of engine systems are also described. C.F.W.

A80-10123 # Organization of automatic control systems for technological processes in aircraft mechanical engineering (Organizatsiia ASUTP aviatsionnogo mashinostroeniia). R. I. Adgamov, S. V. Dmitriev, Iu. V. Kozhevnikov, and G. P. Shibanov. Moscow, Izdatel'stvo Mashinostroenie, 1979. 176 p. 69 refs. In Russian.

Approaches to the automation of technological processes involved in aircraft mechanical engineering are examined. The mathematical modelling of some typical technological processes is discussed, along with automation and mechanization techniques. The structure and performance of technological control systems is examined. V.P.

A80-10124 # Transient, nearly periodic rotor oscillations (Nestatsionarnye pochti periodicheskie kolebaniia rotorov). G. I. Anikeev. Moscow, Izdatel'stvo Nauka, 1979. 136 p. 50 refs. In Russian.

Nearly periodic rotor oscillations are investigated theoretically for characteristic transient and steady-state processes. Attention is given to the formulation and stability of the equations of a quasi-linear system for resonant, nonresonant and continuous finite variations in parameters, and to the moment equations and correlation functions for transient, nearly periodic oscillations of quasilinear systems with randomly varying parameters. The steady-state, nearly periodic oscillations of rotors undergoing a loss of stability due to internal friction, the effects of a liquid and dry friction are

examined, and transient, nearly periodic rotor oscillations are discussed for the examples of the transition through self-oscillation, a variable-mass rotor, and a gyroscopic rotor. Transient, nearly periodic oscillations in rotor systems subjected to random variations in system parameters are also considered for cases of nonequilibrium rotation, and for a lumber-dressing rotor apparatus. A.L.W.

A80-10196 # Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber (Vliianie zakrutki potoka na teplootdachu v tsilindricheskoi chasti predoplozovogo ob'ema model'noi kamery). F. I. Sharafutdinov, A. I. Mironov, and V. K. Shchukin (Kazanskii Aviasionnyi Institut, Kazan, USSR). *Inzhenerno-Fizicheskii Zhurnal*, vol. 37, Oct. 1979, p. 595-601, 8 refs. In Russian.

Experimental results are presented on the hydrodynamics and heat transfer in swirling flow in a short orificed tube with straight-blade turbilizers. Data are correlated by the local simulation method, employing the maximum axial component of wall gas velocity and the torque momentum/axial momentum ratio at the turbilizer outlet. B.J.

A80-10199 # An engine fuel chemistry solution to the problem of jet fuel supplies (Khimmotologicheskie resheniia problemy resursov reaktivnykh topliv). V. A. Piskunov, K. S. Chernova, P. A. Mikheichev, N. P. Iurukovskii, and V. N. Zrel'ov. *Khimiia i Tekhnologiya Topliv i Masel*, no. 10, 1979, p. 35-38, 8 refs. In Russian.

Fuel refining techniques are discussed as means of increasing jet fuel supplies. It is shown that expanding the boiling range of jet fuel allows a greater yield from crude oil, at the expense of diesel fuel fractions, and increases the concentration of aromatic hydrocarbons in the jet fuel fractions. Investigations of the behavior of lower-quality fuels (with elevated crystallization temperatures) under simulated flight temperatures and means of controlling fuel flow and combustion properties under these conditions are discussed. Results indicating the decrease of low temperature Jet A-1 fuel fluidity with paraffin content and the increase in combustion chamber temperature with increasing hydrocarbon content are presented, emphasizing the applicability of engine fuel chemical analysis to the interactions of fuel properties, aviation technology and operational conditions. A.L.W.

A80-10200 # The chemical stability of hydro-treated fuels and their stabilization by antioxidants (Khimicheskaia stabil'nost' gidrochishchennykh topliv i ikh stabilizatsiia antiokisliteliami). Z. A. Sablina, E. A. Tishina, K. A. Egorova, and T. I. Ermakova. *Khimiia i Tekhnologiya Topliv i Masel*, no. 10, 1979, p. 38-41, 9 refs. In Russian.

The oxidation resistance of jet fuels obtained by hydrogenation and catalytic hydro-treatment is investigated under conditions of artificial aging. The corrosion of jet fuels T-6, T-8 and RT was monitored during multiple exposures to temperatures of 120 °C. Measurements of fuel oxygen activity, optical density and organic oxide content indicate that all fuels studied undergo significant oxidation, accompanied by the formation of soluble products. Amine and phenol antioxidants in concentrations between 0.001 and 0.003 wt. %, however, are found to be effective in inhibiting the oxidation of treated fuels. A.L.W.

A80-10206 # Design and operation of multi-specimen fully reversed fatigue systems for advanced composite materials. G. Waring, K. E. Hofer, Jr., I. Brown (IIT Research Institute, Chicago, Ill.), and R. E. Trabocco (U.S. Naval Material Command, Naval Air Development Center, Warminster, Pa.). *Society for Experimental Stress Analysis, Spring Meeting, San Francisco, Calif., May 20-25, 1979, Paper*. 34 p. 24 refs. Navy-supported research.

Advanced composite materials are finding extensive utilization in aerospace structural applications. The composites appear usually

as the skins (surfacing elements) on sandwich components. The paper describes an experimental system designed to investigate the static compressive strengths of graphite/epoxy composite sandwich structures with various defects, after exposure to combined moisture-saturation and elevated temperature environment in the presence of fatigue stress cycling of the variable amplitude type in a fully reversed mode. The objective of this program was to establish the degradation modes in sandwich construction as it applies to naval aircraft. The feasibility of testing several samples simultaneously in a simulated aerospace environment is clearly demonstrated by the results to date. Removal of blistered and cracked sealant revealed some evidence of aluminum honeycomb corrosion products, the corrosion being of general, not galvanic, nature. S.D.

A80-10234 # Application of the discrete-phase method /DPM/ to the study and control of aircraft turbine engine blade vibrations. I (Zastosowanie metody dyskretno-fazowej /MDF/ do badan i kontroli drgan lopatek lotniczych silnikow turbinowych. I). R. Laczkowski (Gdansk, Politechnika, Gdansk, Poland). *Technika Lotnicza i Astronautyczna*, vol. 34, Sept. 1979, p. 7-10, 5 refs. In Polish.

The paper deals with the discrete-phase method and its instrumentation. The application of the method to the determination of dynamic stresses and the mode shapes of blade vibrations is demonstrated. The design and principle of a blade damage indicator are examined. V.P.

A80-10235 # The variable-geometry wing (Skrzydlo o zmiennej geometrii). J. Borgon. *Technika Lotnicza i Astronautyczna*, vol. 34, Sept. 1979, p. 10-13, 5 refs. In Polish.

The requirements placed on the aerodynamic design of supersonic aircraft are reviewed, and the variable-geometry wing is discussed as an example of matching solutions to incompatible problems. The advantages and drawbacks of the variable-geometry wing are noted. V.P.

A80-10236 # Construction of black boxes and mechanical elaboration of electronic units in aviation (Konstrukcja skrzynek i mechaniczne opracowanie blokow elektronicznych w lotnictwie). J. Dabrowska. *Technika Lotnicza i Astronautyczna*, vol. 34, Sept. 1979, p. 14-18, 24. In Polish.

The paper deals with various aspects of black box design and construction, and the preparation of aircraft electronics. The standards of the United States ARINC-404 air transport equipment and racking are reviewed. V.P.

A80-10237 # Method of determining the load classification number, LCN, of a semirigid composite runway surface (Sposob wyznaczenia wskaznika nosnosc LCN lotniskowej nawierzchni zlozonej-polsztywnej): F. Kazmierczyk (Instytut Techniczny Wojsk Lotniczych, Warsaw, Poland). *Technika Lotnicza i Astronautyczna*, vol. 34, Sept. 1979, p. 27-29, 6 refs. In Polish.

The load classification number (LCN), introduced by the ICAO, expresses the ratio of aircraft impact on the runway to the carrying capacity of the runway surface. In the present paper, a method is proposed for determining the LCN of a composite runway as a function of the thicknesses of the concrete bed and the upper asphalt concrete layer. V.P.

A80-10268 Nova satellite time experiment. L. J. Rueger and A. G. Bates (Johns Hopkins University, Laurel, Md.). (*International Union of Radio Science, Open Symposium on Time and Frequency, 1st, Helsinki, Finland, Aug. 1-4, 1978.*) *Radio Science*, vol. 14, July-Aug. 1979, p. 707-714.

A time transfer experiment was carried out between the master clocks of the U.S. Naval Observatory and the U.S. National Bureau of Standards in Boulder, Colorado, using passively recovered Nova

satellite time signals at each ground station. Timing correlation of the master clocks derived from the satellite signals agreed with comparisons made by Cs clock transfers within 50 ns. (Author)

A80-10289 **Component evaluation and engine demonstration of gamma/gamma-prime-delta D.S. eutectic solid turbine blades.** A. D. Cetel, M. Gell (United Technologies Corp., Pratt and Whitney Aircraft Group, East Hartford, Conn.), and J. W. Glatz (U.S. Naval Air Propulsion Test Center, Trenton, N.J.). In: Conference on In Situ Composites, 3rd, Boston, Mass., November 29-December 1, 1978, Proceedings. Lexington, Mass., Ginn Custom Publishing, 1979, p. 292-301; Discussion, p. 302. 21 refs. Contracts No. N00019-77-C-0121; No. N62269-76-C-0303.

The paper discusses the component and engine testing used to evaluate the capability of the directionally solidified eutectic alloy gamma/gamma prime-delta to perform as a solid first stage turbine blade in a small engine application (T400-WV-4Q2). Attention is given to component testing which was conducted to assess the airfoil and root attachment behavior of the eutectic blade and to compare this behavior with that predicted by a comprehensive stress analysis. Also covered is the airfoil testing which consisted of creep-rupture, thermal fatigue, high frequency fatigue, and natural frequency testing of components and blades. In addition the root attachment evaluation is discussed. Finally, it is noted that these component tests indicate that the eutectic alloy offers about a 1.5 fold improvement in airfoil creep-rupture life over current bill-of-material alloy, D.S. MAR-M200 while maintaining an adequate fatigue capability. M.E.P.

A80-10310 **Review of superalloy powder metallurgy processing for aircraft gas turbine applications.** J. L. Bartos (General Electric Co., Aircraft Engine Group, Cincinnati, Ohio). In: MiCon 78: Optimization of processing, properties, and service performance through microstructural control; Proceedings of the Symposium, Houston, Tex., April 3-5, 1978. Philadelphia, Pa., American Society for Testing and Materials, p. 564-577. 7 refs.

Superalloy powder metallurgy (P/M) processing for aircraft gas turbine applications is reviewed. P/M fabrication of high-strength nickel-base superalloy for aircraft engine rotating components is discussed, including hot isostatic pressing (HIP) of preforms and die forging to an oversize or a near net shape. The as-HIP processing technology in which the powder is only HIP and heat treated, eliminating secondary metalworking operations, is reviewed and examples of its application to engine hardware are discussed. Finally, the future of P/M processing in aircraft engine manufacture is considered, with emphasis on development of advanced superalloy materials uses. A.T.

A80-10343 # **Escape system technology.** T. Ford. *Aircraft Engineering*, vol. 51, Sept. 1979, p. 2-5.

The design and performance characteristics of several Martin-Baker ejection seats are surveyed, noting that the RAF and the U.S. Navy, among others, have been equipped with these systems for a number of years. Attention is given to the factors involved in the design of automatic seats, such as drogue deployment, occupant restraint and subsequent release, duplex drogues and the need for increased trajectory height due to the advent of aircraft with high fins. Other topics cover details on rocket assistance, an improved design that reduces complexity, the Mk. 10 seat and finally the ejection sequence. M.E.P.

A80-10482 # **Experimental investigation of the strength of rotor materials in the presence of surface cracks (Eksperimental'noe issledovanie prochnosti rotornykh materialov pri nalichii poverkhnostnykh treshchin).** N. N. Zorev, G. S. Vasil'chenko, A. V. Amel'ianchik, and D. N. Klauch (Tsentral'nyi Nauchno-Issledovatel'skii Institut Tekhnologii i Mashinostroeniia, Moscow, USSR). *Problemy Prochnosti*, Aug. 1979, p. 58-63. 8 refs. In Russian.

Comparative tests were carried out with 150-mm thick disk models made of 25KhN3MFA and 24KhN2MFA steels, spinning at rpms of up to 23,750 and 26,550, respectively. Each type of model was provided with fatigue cracks and with artificial rectilinear and semielliptic surface (part-through) cracks. The critical stresses are plotted vs the depth of the surface cracks. The distribution of elastic and elastoplastic stresses arising from inertial loads in disks is identified. The crack resistance limits determined in the tests are applied to an analysis of the strength of maximum-stress areas in a rotor assembled by welding. V.P.

A80-10607 **Calculation of working process in 'slow compression' piston-type aerodynamic tube.** A. B. Berezovskii and V. B. Panfilovich. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 3-10.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 1-5. Translation.

The thermodynamic processes during the compression phase of the cycle of a piston-type slow compression wind tunnel are analyzed on the following assumptions: (1) the process is quasi-steady-state; (2) the gas is ideal; (3) the piston is massless; (4) heat exchange between the gas and the external medium is neglected; and (5) friction between the piston and wall is absent. The fundamental equations are the work equation of Leuchter (1965) and a given relation between the pressure of the working gas and the instantaneous volume. The resulting equations were numerically integrated to obtain plots of temperature and barotropic index as a function of time during compression and of the temperature of the compressed gas as a function of the pressure rise during passage of the gas through the nozzle. P.T.H.

A80-10608 **Gas curtains in gas turbine engines.** I. S. Varganov. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 11-16.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 6-10. 13 refs. Translation.

The use of a gas curtain in the bypass circuit of a turbofan engine permitting variation of the flow rate ratio according to flight conditions is analyzed. To achieve a ratio of pressure behind turbine to pressure behind the fan of at least 2 during thrust reversal at constant rotational speed of the high pressure rotor, it is proposed to change the operating condition of the fan by reducing the slot area relative to the area of the exit nozzle of the main circuit. A method for establishing the energetic foundation for such a process is developed. P.T.H.

A80-10610 **Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation.** O. A. Evin, V. M. Iankovskii, and I. N. Diatlov. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 24-29.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 16-19. Translation.

A80-10611 **Measurement of liquid pump torque in the starting regime.** N. S. Ershov, V. V. Ramodina, and V. V. Chervakov. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 30-35.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 20-25. Translation.

An experimental method was developed for determining the moment required by a high-speed bladed pump during transient regimes that makes use of coaxial input and output multipliers. A method for calculating the moments acting in the multipliers during startup with allowance for the friction in the supports and the inertia of the rotating masses is given. Experiments on empty and flooded pumps were performed to determine coefficients in the relationships. P.T.H.

A80-10612 **Computer calculation of stationary temperature fields in air-cooled turbine rotor blades.** V. I. Lokai, Iu. N. Ivan'shin, and Sh. Sh. Abdrakhmanov. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 36-40.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 26-29. 6 refs. Translation.

A simple engineering method using a digital computer is proposed for calculating the steady-state temperature fields in the blades of turbines with longitudinal cooling channels under variable boundary conditions pertaining to the gas and coolant with allowance for the change in cross-sectional area of the blade and the dependence of the heat conduction coefficient on temperature. The blade is divided into sections, to each of which is applied the solution of the one-dimensional heat conduction problem with matched solutions at the section divisions. P.T.H.

A80-10613 Selection of optimal parameters of heat-pipe heat exchanger for a gas turbine engine. N. V. Lokai and I. I. Mosin. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 41-46.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 30-34. 5 refs. Translation.

Some means of achieving maximum degree of regeneration in a heat exchanger with heat pipes are investigated by extending some previous analysis methods for heat exchangers with intermediate heat carrier. Two conditions are found which must be satisfied in order to achieve maximum degree of regeneration: (1) the heat transmitting power of the heat pipes must exceed the heat release intensity from both the gas and air directions; and (2) two dimensionless parameters for the gas and air sides must be equal. P.T.H.

A80-10614 Computer calculation of stationary temperature fields in cooled turbine discs. V. I. Lokai, V. V. Zhuikov, and R. D. Fakhruddinov. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 47-50.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 35-38. Translation.

The calculation of the steady-state temperature field in a cooled turbine disk of arbitrary shape is based on the solution of the Bessel equation for a disk of constant thickness. The variable-thickness disk is divided into a series of concentric rings such that at the edges of each ring the relevant parameters can be regarded as constant, and the Bessel equation solution is worked out for each ring. An algorithm for the method is given, and some computer calculation results are presented and compared with temperature field measurements in a real disk. P.T.H.

A80-10616 Systematization of simple detail parts of regulable nozzle of gas turbine engine. I. E. Sapozhkov and E. D. Sten'kin. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 57-63.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 44-49. Translation.

A systematic approach to the classification of gas turbine engine nozzle parts is based on function of the part in its module, its connection modes, surface types, type of initial forming, type of finishing, type of strength calculation, and basic shape. Such a subsystem approach reveals that in a regulated nozzle 30-70% of the parts are not subjected to strength analysis and that their shape and dimensions are determined from structural considerations, and also enables establishing the most common type of connection and the most massive shape. P.T.H.

A80-10619 Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers. V. G. Chumachenko, V. M. Iankovskii, and A. V. Talantov. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 81-85.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 64-67. Translation.

The oxygen excess coefficient in the primary zone of a combustion chamber depends on the amount of air reaching the primary zone from jets of secondary air. This paper is concerned with determining this amount by a combined experimental-theoretical technique for combustion chambers in which the flow pattern in the primary zone is formed by secondary flow jets of the first belt of openings. P.T.H.

A80-10627 On the influence of short shroud platforms on turbine stage operation. R. V. Kuz'michev and G. V. Proskuriakov. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 105-107.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 90-92. 6 refs. Translation.

The present experiments, carried out with an experimental air-driven turbine, showed that the use of shortened shrouds (at the concave and convex blade surfaces) did not improve noticeably the structure of the flow while complicating appreciably the manufacturing procedure. Nor was there any noticeable increase in stage efficiency at commonly used tip clearances and blade-ring spacings. V.P.

A80-10630 On axial turbine stage rotor blade twist with tangential tilt of the stator vanes. Iu. I. Mitiushkin, A. V. Perevovnikov, and V. P. Iakovlev. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 112-115.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 99-101. 5 refs. Translation.

Tangential inclination of nozzle blades in an axial turbine is an effective way to reduce the reactivity gradient along the turbine blades. This paper presents experimental results on the influence of turbine blade twist on the efficiency of axial turbines in the case of tangential inclination of nozzle blades; investigations were conducted at nozzle outlet velocities of $M = 0.48-0.5$ and nozzle outlet Reynolds numbers of 500,000 to 570,000. B.J.

A80-10632 Study of size distribution of oil drops formed in GTE oil system lines. P. G. Petrov and O. A. Povarov. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 117-119.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 105-107. Translation.

A80-10633 Nonstationarity of heat transfer in axial turbine blading during engine startup. A. M. Poliakov, V. S. Petrovskii, and V. I. Krichakin. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 119-123.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 108-111. Translation.

In the thermal design of gas-turbine elements, it is conventionally assumed that the heat transfer coefficients are independent of the nonstationarity of the heat transfer process. In the present paper, the time dependence of the coefficient of local heat transfer at the surface of the rotor blades of an axial-flow gas-turbine is determined on the basis of temperature measurement during start-up of the engine. V.P.

A80-10635 Pneumatic distributor for turbojet engine control system. M. G. Khabibullin. (*Aviatsionnaia Tekhnika*, vol. 22, no. 1, 1979, p. 126, 127.) *Soviet Aeronautics*, vol. 22, no. 1, 1979, p. 115, 116. Translation.

A pneumatic distributor developed for the thrust reverser control system of the NK-8-2U turbojet engine used in the TU-154 is described. The load bearing rings are made of metallographite which acts as a lubricant for the contact surfaces. The distributor partition is significantly thinner than the load bearing rings, a design feature which reduces the driving stroke of the sleeve valve and the overall dimensions of the distributor. C.K.D.

A80-10763 The impact of the limits of simulation in extending the use of simulators in training. D. R. Tait (CAE Electronics, Ltd., St. Laurent, Quebec, Canada). In: 50 years of flight simulation; Proceedings of the Conference, London, England, April 23-25, 1979. Session 1. London, Royal Aeronautical Society, 1979, p. 50-57.

While there is no limit to how closely a simulation model can approach the faithful representation of an aircraft in its operating environment, exact duplication of its characteristics can never be achieved regardless of the computing power which is applied to the task. Flight simulator specifications normally resolve this dilemma by defining the maximum error which is acceptable in simulating the various features of the aircraft. This paper examines the role of limits of simulation in extending the use of training simulators. B.J.

A80-10765* The development and use of large-motion simulator systems in aeronautical research and development. J. C.

Dusterberry (NASA, Ames Research Center, Moffett Field, Calif.) and M. D. White (G. E. Cooper Associates, Saratoga, Calif.). In: 50 years of flight simulation; Proceedings of the Conference, London, England, April 23-25, 1979. Session 2. London, Royal Aeronautical Society, 1979, p. 1-16. 23 refs.

The paper examines the evolution of manned aircraft simulators with large-motion systems and provides a brief description of important design details along with physical descriptions of a number of systems. Attention is given to the use of large translational motions in providing the simulator pilot with a close approximation of the cues of aircraft flight; examples are cited comparing pilot reactions to simulators with and without motion. How these simulators have been used in programs that effectively influenced aircraft design and operating problems is discussed. B.J.

A80-10766 Recent advances in control loading and motion systems used in simulation. M. Lacroix (Le Matériel Téléphonique, Boulogne-Billancourt, Hauts-de-Seine, France). In: 50 years of flight simulation; Proceedings of the Conference, London, England, April 23-25, 1979. Session 2. London, Royal Aeronautical Society, 1979, p. 17-29.

As part of a program of improvements to cabin motion systems, LMT has designed a new servo jack, using hydrostatic bearings and a modified servovalve, which has resulted in a considerable reduction of the acceleration noise level. In addition, a control loading system was developed which considerably reduces parasitic cues in the flight controls, while facilitating maintenance of the system. These results are due to the combination of a low-friction jack with a high-speed digital control computer. B.J.

A80-10768 The capability of CGI in flight simulation. T. W. Rowley (Marconi Radar Systems, Ltd., Leicester, England). In: 50 years of flight simulation; Proceedings of the Conference, London, England, April 23-25, 1979. Session 2. London, Royal Aeronautical Society, 1979, p. 43-50.

CGI flight simulation techniques are examined with reference to the example of the Marconi TEPIGEN (TElevision Picture GENERator). Consideration is given to visuals-to-task matching, constant image density, visual perception, surface information, color, texture, surface shading, modeling languages, instant scenery, and fuzzy objects. B.J.

A80-10776 Recent and future engineering developments in flight training simulators. M. Bolton, D. Campbell, P. Murray, G. Olive, and M. Roberts (Redifon Simulation, Ltd., Crawley, Sussex, England). In: 50 years of flight simulation; Proceedings of the Conference, London, England, April 23-25, 1979. Session 3. London, Royal Aeronautical Society, 1979, p. 53-71.

31 refs.

In the present paper, the current status of flight training simulators is reviewed from an engineering point of view, and possible improvements to next-generation training simulators are examined. Such future improvements include: increased realism; more effective training; more cost effective operation; less instructor involvement in non-training tasks; increased reliability; and more data acquisition and analyses from training. Some suggestions contributing to these areas are presented. V.P.

A80-10777 The interrelationships between engineering development simulation and flight simulation. E. R. Jones (McDonnell Douglas Corp., St. Louis, Mo.). In: 50 years of flight simulation; Proceedings of the Conference, London, England, April 23-25, 1979. Session 3. London, Royal Aeronautical Society, 1979, p. 72-86. 24 refs.

High-fidelity engineering simulators, which are currently used in the development of a new aircraft, can improve the flight simulators and training programs for that aircraft. The present paper deals with the problem of blending the two manned simulator developments in a symbiotic relationship that can result in a smoother transition to the new aircraft and in a flight simulator that incorporates

empirically derived critical tasks, proficiency assessment capabilities, and instructional concepts. V.P.

A80-10823 # Development of an aircraft-derivative gas turbine with high performance and large output. Y. Shimura (Ishikawajima-Harima Heavy Industries Co., Ltd., Turbine and Compressor Engineering Div., Tokyo, Japan) and K. Takeo (Ishikawajima-Harima Heavy Industries Co., Ltd., Turbine Design Dept., Tokyo, Japan). *IHI Engineering Review*, vol. 12, July 1979, p. 29-32.

The design and performance of the 50,000 horsepower IM5000 industrial gas turbine are examined. Attention is given to the gas generator which is an industrial version of the GE CF-6 turbofan engine. The power turbine is described, noting that it can be used for generating 50/60-Hz power and mechanical drive applications. Areas of the power turbine examined include aerodynamic design, basic construction design concept, and component design such as buckets, vanes, rotor, transition duct, turbine casing, exhaust casing, and exhaust scroll. Finally, it is reported that tests revealed higher performance than predicted, and that NO(x) emissions are reduced with a water injection system. M.E.P.

A80-10866 # Lubricants for the aircraft gas turbine. F. T. Barcroft (Shell Research, Ltd., Chester, England). *Aircraft Engineering*, vol. 51, Oct. 1979, p. 7-9.

The article reviews three decades of synthetic oil development. It is noted that after WWII, the newly emerging gas turbine could not take advantage of state of art man-made lubricants because such data was still classified. Attention is given to problems associated with mineral oils in use at the time such as oxidation and short life. Also covered are the emergence of synthetic oils following the declassification of pertinent information, and the development of lubricants for the Concorde. Finally, possible advances in lubricant technology are assessed noting that fluids that can cope with the oxidative regime predicted in the absence of antioxidants will be necessary. These are discussed according to their major classes: (a) organometalloids, (b) aromatic hydrocarbons or ethers, (c) fluorinated hydrocarbons or ethers, and (d) inorganic polymers. M.E.P.

A80-10884 A helmet-mounted sight using C.C.D. technology. M. D. Stephenson (Marconi Avionics, Ltd., Rochester, Kent, England). *Radio and Electronic Engineer*, vol. 49, Oct. 1979, p. 511-513.

A helmet mounted sight system using CCD technology is described which can be used outside the restricted viewing area of the head up display, but with reduced accuracy. It is noted that the system consists of two parts: the helmet mounted display and the helmet optical position sensor. It is reported that a limited amount of essential information (i.e. aiming reticule, weapon lock, etc.) can be displayed on the surface of the helmet mounted display, noting that the limit is set by the pilot's inability to assimilate further data. Attention is given to the helmet optical position sensor which consists of two triads of LED's mounted on the sides of the helmet and two CCD cameras mounted in the cockpit. Finally, it is concluded that using the CCD to its full capability enables a small compact system to be produced without the need for fast analog to digital converters and a large digital store. M.E.P.

A80-10897 Prediction of surge-point in multi-stage axial compressors. N. Yamaguchi (Mitsubishi Heavy Industries, Ltd., Takasago Technical Institute, Takasago, Japan). *Mitsubishi Heavy Industries Technical Review*, vol. 16, June 1979, p. 92-108. 8 refs.

The paper presents a method for the prediction of surge-points in multistage axial compressors. The method simulates a compressor-duct system, which is basically an air column with distributed parameters, by alternate applications of field-transfer and point-transfer matrices. Advantages cited are that the equations are reasonably accurate and easy to handle. It is reported that they allow quick and reliable calculation of characteristic roots of the oscillation and their modes. Finally, several examples are given to demonstrate the practicability of the method and to describe the nature of compressor surge. M.E.P.

A80-10899 **The Tornado Two takes off.** *Air International*, vol. 17, Nov. 1979, p. 214-221, 243, 244.

The design and specifications of the Tornado F Mk 2, designed to meet the specifically British need for a long range multi-purpose interceptor to replace the RAF's Lightnings and Phantoms in the mid 1980's is surveyed. Attention is given to those needs which include the need to counter mass-raid tactics, give protection against enemy attacks, and to counter the high level of ECM support accompanying an enemy attack. Details discussed include the lengthened fuselage to allow the use of four fuselage mounted Sky Flash air-to-air missiles and an additional fuel tank. Additional length also results from the use of a new air intercept radar which is detailed. Also covered are the wing changes made to counter the resulting CG shift forward. Finally, the development program and progress are discussed as well as new features such as SPILS (spin prevention and incidence limiting system) and auto-sweep for automatic selection of the wing sweepback angle. M.E.P.

A80-10900 **In Soviet service. VII - Mikoyan Foxbat.** *Air International*, vol. 17, Nov. 1979, p. 245-252.

The design, specifications, and performance of the MiG-25 Foxbat are surveyed. Attention is given to the fact that the aircraft was intended to intercept the B-70 supersonic bomber which resulted in a design that placed all emphasis on straight-line supersonic flight at extreme altitudes. The aircraft, publicly introduced in 1967, employs a conservative design which adheres to proven design principles and techniques by using arc-welded nickel steel, and restricting the use of titanium to the most highly heat-stressed areas. Also noted are the aircraft's vacuum tube avionics, and missiles such as the AA-5 Ash, and AA-6 Acrid. The Fox Fire phased array search and tracking radar and the Sirena radar warning system is covered as well as the Tumansky R-31 engines which do not utilize a bypass system or variable compressor geometry. Finally, the latest versions, the MiG 25-R Foxbat B reconnaissance and ELINT version and the Foxbat D, a dedicated ELINT version, are covered. M.E.P.

A80-10919 **Numerical computation of neighboring optimum feedback control schemes in real-time.** H. J. Pesch (München, Technische Universität, Munich, West Germany). *Applied Mathematics and Optimization*, vol. 5, no. 3, 1979, p. 231-252. 32 refs.

A modification of the theory of neighboring extremals is presented which leads to a new formulation of a linear boundary value problem for the perturbation of the state and adjoint variables around a reference trajectory. On the basis of the multiple shooting algorithm, a numerical method for stable and efficient computation of perturbation feedback schemes is developed. This method is then applied to guidance problems in astronautics. Using as much stored a priori information about the precalculated flight path as possible, the only computational work to be done on the board computer for the computation of a regenerated optimal control program is a single integration of the state differential equations and the solution of a few small systems of linear equations. The amount of computation is small enough to be carried through on modern board computers for real-time. Nevertheless, the controllability region is large enough to compensate realistic flight disturbances, so that optimality is preserved. (Author)

A80-11057 # **Lubrication of aircraft gas-turbine engines (Smazka aviatzionnykh gazoturbinnykh dvigatelei).** M. M. Bich, E. V. Veinberg, and D. N. Surnov. Moscow, Izdatel'stvo Mashinostroenie, 1979. 176 p. 50 refs. In Russian.

The book deals with some aspects of designing lubrication systems for aircraft gas-turbine engines. The friction properties of a number of representative lubricants are noted, and the operational characteristics of some lubrication schemes are described. The designs and characteristics of the principal lubrication system components are discussed. V.P.

A80-11154 **The array processor AP-120B/190L for simulation applications.** K. Kemmler and W. Martson (Floating Point Systems GmbH, Unterhaching, West Germany). In: *Military Electronics Defence Expo '78; Proceedings of the Conference*, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 43-52.

The paper describes a peripheral or digital array processor (AP) designed as a programmable auxiliary processor to a host computer. The main function of the processor is to perform high-speed array processing, indexing and control, as well as floating-point computations at an execution speed of up to 60 million instructions per second. Attention is given to the AP's floating-point adder and multiplier, memory register, table and data memory operations, and to the program source memory and its address calculation system with associated registers. It is noted that both floating-point add and multiply computations can be carried out simultaneously, and also that pipeline processing allows the computations to proceed at a high rate. Five simulation applications that employ the AP are discussed, including target, vocal track and flight simulation. C.F.W.

A80-11164 **Radar remoting.** W. Goodwin and M. Beyer (4C Corp., Lomita, Calif.). In: *Military Electronics Defence Expo '78; Proceedings of the Conference*, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 237-260.

Remoting of multiple radars from the command and control center offers some advantages for the conduct of offensive and defensive air operations. These include better radar coverage through geographic dispersion; command and control center protection from homing antiradiation missiles; improved operations in a jamming environment; ability to make a better tactical site selection; and improvement in automatic track initiation and tracking. Methods used to remote radars are discussed, along with factors influencing the methodology chosen for radar remoting. V.P.

A80-11167 **AEW Nimrod system and operation.** A. C. Leacy (Marconi Avionics, Ltd., Borehamwood, Herts., England). In: *Military Electronics Defence Expo '78; Proceedings of the Conference*, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 313-320.

An Airborne Early Warning (AEW) Nimrod system that incorporates the significant advances in component and digital technology of the last six years is described. The Mission System Avionics (as it has been named) is divided into three groups: a group of sensors, a communication system, and a data handling system that includes the central processor and display, the mission software, and the operators. These three systems are discussed in detail, showing their effectiveness and some advantages. Attention is given to the mission software concerned with both automatic tracking and data management, and emphasis is placed on its three tasks. C.F.W.

A80-11168 **E-3A sentry, airborne early warning and control for Europe.** H. A. Williams (Boeing Co., Seattle, Wash.). In: *Military Electronics Defence Expo '78; Proceedings of the Conference*, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 321-333.

The Airborne Warning and Control System (AWACS), officially designated as the E-3A, is described. The key system elements are described, noting that the E-3A provides timely detection, tracking, and identification of aircraft within its surveillance volume during all kinds of weather and above all kinds of terrain. Attention is given to the operational radar and its modes: pulse Doppler nonelevation scan (PDNES), pulse Doppler elevation scan (PDES), beyond-the-horizon (BTH), passive, maritime, interleaved mode, test/maintenance, and standby. Also discussed is the data display and control system which offers several control and display options. Finally, attention is given to electronic counter-countermeasures. M.E.P.

A80-11170 **Improvement of weapon system performance in air to air and air to ground operation with airborne radar.** A. Inbar (Elta Electronics, Ltd., Lod, Israel). In: *Military Electronics Defence*

Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 344-357.

The paper describes air-to-air combat, based on target tracking and the snapshot concept. Attention is given to the equations that show the difference in lead angles and emphasis is placed on the types of variables that can cause these equations to change. A discussion of air-to-ground weapons is presented employing equations for free fall space. Three configurations, gunsight with barometer, gunsight with radar, and modern W.D.S. with radar, are analyzed and consideration is given to laser and radar relative accuracies. C.F.W.

A80-11171 The 'Viggen' multimode radar. S.-B. Thelander (LM Ericsson Telefon AB, Molndal, Sweden). In: Military Electronics Defence Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 358-375.

The paper surveys the radar employed in the fighter version of the Viggen aircraft. Attention is given to different tactical requirements for a multipurpose aircraft and specific radar requirements are defined. Also reviewed are candidate radar concepts including waveform considerations. The Viggen radar architecture and essential qualities such as operational modes, key parameters, technical performance, availability and physical design are described. Finally, the display system concept is reviewed in terms of cockpit layout, HDD format, and of an example of displayed information. M.E.P.

A80-11172 Technological trends in electronic warfare. F. Bennett and M. Zimet (Loral Corp., Electronics Systems Div., New York, N.Y.). In: Military Electronics Defence Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 386-407.

Technological trends in electronic warfare (EW) are examined based on the use of radar equipment for aircraft detection and weapons control accuracy in modern air defense systems. In operating against these systems the aircraft must degrade the effectiveness of the system's radars by evasive maneuvers to avoid the weapons system, 'jinking' to overload system's servo-loop response, electronic countermeasures to confuse the radar echo, and disposable countermeasures to conceal the true position of the aircraft. For electronic and disposable countermeasures, the characteristics of the radar being countered shape the character of the response, and are measured by the radar warning receiver (RWR). For evasive maneuvers or avoidance of a radar, it is necessary to know the location of the radar, which is also determined by the RWR. A.T.

A80-11173 The target tracking problem using airborne radar under ECM environment. F. A. Faruqi (Hunting Engineering, Ltd., Ampthill, Beds., England). In: Military Electronics Defence Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 414-432. Research supported by the Ministry of Defence.

The paper deals with the design and operation of a Kalman filter for estimating the state (heading, lateral acceleration, range, and range rate) of an airborne target, using an airborne interceptor radar, in the case where the target state is denied to the radar by electronic countermeasures. In the development of the Kalman filter, it is assumed that the angular information regarding the target is the only measurement available from the radar. V.P.

A80-11174 Technical concept for a strike-RPV flight guidance and weapon delivery system. G. Kriechbaum (Dornier GmbH, Friedrichshafen, West Germany). In: Military Electronics Defence Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 435-454. 17 refs.

Tactical strike RPVs are intended to complement (rather than replace) other weapons systems in such missions where target detection and identification by the pilot are not required. In the

present paper, some experience obtained in the design and development of strike RPVs during the past seven years is reviewed, along with the respective flight guidance and weapon delivery systems.

V.P.

A80-11175 Take-off and landing problems of ship based RPVs. M. Natter (Dornier GmbH, Friedrichshafen, West Germany). In: Military Electronics Defence Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 455-472.

The paper deals with some aspects of takeoff and landing of VTOL remotely piloted vehicles (RPVs) on ship decks. Experience obtained with Dornier's Aerodyne concept of combining VTOL properties with high-speed flight is discussed. Some results of evaluation studies are noted. V.P.

A80-11176 Delta multiplex system DX 15-60. H. J. Rall (Telefunken AG, Backnang, West Germany). In: Military Electronics Defence Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 475-488.

The present paper deals with the physical design, purpose, and use of the DX 15-60 system intended as a communications system for military mobile tactical service. Versatility of the DX 15-60 system is provided by its modular construction and subdivision into a number of separate units. The discussion covers the multiplex unit, the analog-digital converter unit, the bulk encryption unit, the line terminal unit, and the terminating unit. V.P.

A80-11180 IR-camera for day and night fire control. H. Samuelsson (Saab-Scania AB, Goteborg, Sweden). In: Military Electronics Defence Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 573-581.

The paper deals with an optronic fire control system developed for the Swedish Navy's coast artillery to combat airborne targets. The system can be operated at fixed land-based installations or can be mounted on mobile units. The tracking subsystem incorporates a platform with sensors (a daylight TV camera and laser range finder) and digital optronic tracking electronics. An IR camera has been developed and its installation is foreseen. V.P.

A80-11187 Design of a strapdown navigator aided by position measurements. R. Lenz (Messerschmitt-Bölkow-Blöhm GmbH, Ottobrunn, West Germany). In: Military Electronics Defence Expo '78; Proceedings of the Conference, Wiesbaden, West Germany, October 3-5, 1978. Geneva, Interavia, S.A., 1979, p. 719-728.

Recent advances in terrain contour matching (TERCOM) make it possible to provide accurate position measurements over a long travelling distance and to use them for aiding an inertial navigation system (INS). This paper contributes to the problem of updating a strapdown inertial navigation system. An updating algorithm is derived and tested by simulation. It is shown, that the navigation accuracy of the aided navigation system depends no more on time or distance travelled. (Author)

A80-11205 Parameters of spatial flow past a hydrofoil near the free surface of a ponderable liquid. A. B. Lukashevich. (*Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza*, Mar.-Apr. 1979, p. 54-62.) *Fluid Dynamics*, vol. 14, no. 2, Sept. 1979, p. 210-216. 10 refs. Translation.

The three-dimensional flow past a submerged wing is studied on the basis of a singularity method wherein the effect of the free surface of the ponderable fluid is represented as the effect of an infinite layer of sources. Particular consideration is given to the relationship between wave generation behind the wing and the separation of free vortices from the wing. Downwash distribution behind the wing is investigated. B.J.

A80-11208 Hypersonic viscous shock layer on sweptback wings of infinite span at different angles of attack. I. G. Brykina and E. A. Gershbein. (*Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza*, Mar.-Apr. 1979, p. 91-102.) *Fluid Dynamics*, vol. 14, no. 2, Sept. 1979, p. 238-246. 13 refs. Translation.

The paper presents a theoretical investigation of the flow of a viscous compressible gas in a hypersonic shock layer on infinite-span arrow wings with blunt leading edges at angle of attack. The hypersonic shock-layer equations are solved by the method of successive approximations, which permits an analytical solution for the first approximation as well as an exact numerical solution. Formulas are presented for coefficients of friction and heat transfer on the surface of the body as well as for velocity and temperature profiles across the shock layer. B.J.

A80-11221 Some cases of instability of a gyrohorizon compass. S. A. Agafonov. (*Akademiia Nauk SSSR, Izvestiia, Mekhanika Tverdogo Tela*, Jan.-Feb. 1979, p. 5-10.) *Mechanics of Solids*, vol. 14, no. 1, 1979, p. 3-7. 8 refs. Translation.

The stability of the precessional motion of a gyrohorizon compass is studied for the case when the suspension of the gyrosphere is moving along a parallel with constant velocity. Two special cases are considered: (1) internal third-order resonance exists between the frequencies of the linear system and (2) one of the frequencies is zero. It is shown that internal third-order resonance leads to instability. When one of the frequencies is zero, instability is proved by constructing the Chetaev (1965) function. P.T.H.

A80-11255 Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade. B. I. Buryshv and A. G. Navrotskii. (*Problemy Prochnosti*, Feb. 1979, p. 85-87.) *Strength of Materials*, vol. 11, no. 2, Oct. 1979, p. 212-214. 7 refs. Translation.

A80-11345 Aircraft designers follow the birds. M. Hewish. *New Scientist*, vol. 84, Oct. 4, 1979, p. 33-35.

Advanced, lightweight, flexible composite materials and metal joining techniques for future aircraft structures are presented. Advanced composites are shown to require fewer parts to form a structure and less energy to produce than structural metals, in addition to being stronger, stiffer and more corrosion resistant. The fabrication of carbon- and boron-fiber-reinforced plastics is examined and examples of applications of carbon-fiber composites in British fighter aircraft and boron-fiber composites in U.S. bombers and fighters including those of the Air Force/NASA-sponsored Highly Maneuverable Aircraft Technology program are presented. Boron-fiber-reinforced aluminum and boron/carbon/glass fiber epoxy composites and other promising fiber-matrix combinations are indicated, and complementary developments in the powder casting of aluminum, aluminum-lithium alloys and titanium aircraft structures are outlined. Results of the U.S. Air Force Primarily Adhesively Bonded Structure Technology program are presented and the use of new materials for space structures is considered. A.L.W.

A80-11351 A pulse compression, precision DME system (Système DME de précision a compression d'impulsions). M. Schilliger (Le Matériel Téléphonique, Boulogne-Billancourt, Hauts-de-Seine, France). *Navigation* (Paris), vol. 27, Oct. 1979, p. 387-401. In French. Research supported by the Service Technique de la Navigation Aérienne.

Pulse compression, precision distance measuring equipment (DME) systems are discussed as a possible component of a microwave landing system (MLS). Pulse spectrum spreading and the binary phase shift keying and decoding of pulses are considered, and compression of the pulses by an adaptive filter from 3.44 to 0.22 microsec in length with a 31 fold increase in signal level is outlined. Advantages of pulse compression in precision DME systems are discussed, including precision, multitrajectory immunity, code and

frequency selectivity, the utilization of simple pulses and a low power requirement, and the choice of pulse duration, moments and moment duration is considered. The operation of a precision DME system in the presence of a DME/Tacan system is discussed and the compatibility of the two systems with respect to mutual perturbations and ground and airborne equipment is examined. It is concluded that the pulse compression precision DME system appears well suited to distance measurements during landing, particularly as part of an MLS. A.L.W.

A80-11352 Electronic instrumentation in civil aviation (L'instrumentation électronique dans l'aviation civile). F. Muszynski (Compagnie Nationale Air France, Service Environnement-Systèmes, Paris, France). *Navigation* (Paris), vol. 27, Oct. 1979, p. 402-413. In French.

Future developments in the electronic instrument technology of civil aviation aircraft are considered. The digital information systems of planned aircraft and their relationships to onboard instruments are discussed, noting that digitalization has lead many airlines to adopt cathode ray tube instrumentation. The appearance of cathode ray tube displays is discussed, taking into consideration existing attitude director and horizontal situation indicators and possible additional display functions. Various possible cockpit configurations are illustrated, and cathode ray tube technology is presented. Profound changes in equipment/aircraft/environment interfaces are foreseen as a result of the emerging technology of screen displays. A.L.W.

A80-11354 Avionics software and equipment. R. Boudarel (Compagnie d'Informatique Militaire, Spatiale et Aéronautique, Vélizy-Villacoublay, Yvelines, France). *Navigation* (Paris), vol. 27, Oct. 1979, p. 419-426. In English and French.

The advantages and disadvantages of present-generation avionics equipment and software are examined. Reasons for the evolution of microprocessor-based digital techniques are outlined, noting the basic advantage of greater software flexibility, coupled with the requirement of data sampling procedures. The sources and manifestations of software bugs are considered, and various remedies, including specification languages, high-level languages and program test methodologies are presented. The need for equipment qualification covering the unique features of avionics equipment is also pointed out. A.L.W.

A80-11379 A singular perturbation analysis of optimal aerodynamic and thrust magnitude control. A. J. Calise (Drexel University, Philadelphia, Pa.). *IEEE Transactions on Automatic Control*, vol. AC-24, Oct. 1979, p. 720-730. 20 refs.

This paper illustrates the application of singular perturbation methods to optimal thrust magnitude control (TMC) and optimal lift control in flight mechanics. The modeling is restricted to horizontal plane dynamics. A multiple time scale analysis results in nonlinear feedback control solutions for lift and thrust during a turn to a specified down range position. The analysis is carried out to first order with respect to the position state variables. Numerical results for a medium range and a short range air-launched missile are given, and comparisons are made to two alternative propulsion control concepts. The multiple time scaling procedure used here is applicable to solving a wide class of optimal control problems. It avoids the problem in asymptotic methods of picking the unknown adjoints to suppress unstable modes in the boundary layer and reduces the two-point boundary value problem to a series of pointwise function extremizations. Hence, the optimal control solution is essentially analytic and algebraic. (Author)

A80-11393 # Developing an aircraft configuration using a minicomputer. D. P. Raymer (Rockwell International Corp., North American Aircraft Div., El Segundo, Calif.). *Astronautics and Aeronautics*, vol. 17, Nov. 1979, p. 26-34.

The paper describes the use of microcomputers for aircraft configuration development. The advantages and disadvantages of the three-dimensional configuration development system (CDS) are

examined. Attention is given to biquartic surface design, which defines cross sections by using reflex, conic, circular arc, and straight-line curve commands. The analysis tools employed in the system, including initial mission, sizing, tail, tire, strut sizing, cost estimation, and friction and wave drag analysis are discussed. An example of the system is given that depicts a graphic, step-by-step illustration of the CDS in progress. It is concluded that: (1) the CDS enables a reduction of time and cost, and (2) the system provides a three-dimensional computer data set, rather than a simple blue-line drawing print. C.F.W.

A80-11395 # Developing large helicopters. G. J. Tobias (United Technologies Corp. Sikorsky Aircraft Div., Stratford, Conn.). *Astronautics and Aeronautics*, vol. 17, Nov. 1979, p. 52-54.

The paper briefly describes the large helicopter industry and its future. Two groups of helicopters are discussed, those below 14,000 lb and those above. Two possible paths for future helicopter growth are presented: (1) an extension of our ancient history which views large distance flights only by airport-to-airport, fixed-wing missions, and (2) the traditional means of improving aircraft production by increasing its size and speed. Attention is given to the civil and military sides of the industrial market and two opportunities for the helicopter are identified. The first involves missions that cannot reasonably be carried out except by helicopters, while the second includes activities that can be performed in a number of ways. C.F.W.

A80-11396 # Technical challenges in developing the new wave of small and medium helicopters. J. F. Atkins (Bell Helicopter Textron, Fort Worth, Tex.). *Astronautics and Aeronautics*, vol. 17, Nov. 1979, p. 55-57, 86.

The paper presents an overview on some of the problems encountered in the advancement of helicopters for civil use. Growth forecasts for small and medium helicopters are given through 1990 together with actual numbers since 1960. One use that will help the drive for expansion of commercial helicopter applications is the need for energy exploration transportation. Attention is given to the worldwide commercial and industrial growth scene, and it is noted that the excellence of U.S. designs and their proven dependability, especially their outstanding service and logistics support, have thus far offset the foreign competitive advantages. C.F.W.

A80-11397 # Light turbine helicopters to the year 2000. T. R. Stuelpnagel (Hughes Helicopters, Culver City, Calif.). *Astronautics and Aeronautics*, vol. 17, Nov. 1979, p. 58-61.

The light (3000 lb maximum), single-engine helicopter is discussed with respect to its growing use by the year 2000. Attention is given to cost estimates, payload capacities, and operating costs. It is determined that not only is the helicopter the quietest of all aircraft, but it is also the most versatile mobility yet devised by man. The advantages of helicopters are discussed, including the ability to avoid inflight accidents and their emergency landing capabilities. The use of onboard computers, made possible by microprocessor technology, is discussed, and it is noted that it represents the greatest advancement in helicopter technology since the turbine engine. Other factors, including the application of composites to helicopters and the reduction of manufacturing costs, as well as the effect of redundant load path on reliability of critical blades, masts and straps are also discussed. C.F.W.

A80-11398 # The market for large civil helicopters. C. W. Ellis (Boeing Vertol Co., Philadelphia, Pa.). *Astronautics and Aeronautics*, vol. 17, Nov. 1979, p. 62-65.

The expected growth rate of large civil helicopters is discussed and several proposals for heavy-lift (200 passengers) aircraft are presented. Attention is given to the fastest growing segments of the large-helicopter market, such as off-shore oil and gas developments, logging, power line construction and commercial passenger service. Other definitive market segments that include wood-products recovery and remote resource development are also discussed. Graphs are presented for comparative direct operating costs, U.S. fixed-wing short-haul passenger-miles growth, as well as projections for

passenger-mile generation capacity and predicted sales of heavy helicopters between now and the year 2000. C.F.W.

A80-11432 # Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil. D. Favier, J. Rebout, and C. Maresca (Aix-Marseille I, Université; CNRS, Marseille, France). *A/AA Journal*, vol. 17, Nov. 1979, p. 1265-1267. 10 refs. Direction Technique des Constructions Aéronautiques Contract No. 76-98214-00481-7581.

Unsteady flow features due to large-amplitude fluctuations of both velocity and incidence induced by an airfoil executing cyclic time-dependent fore and aft translations were investigated from lift, drag, and skin-friction measurements performed in a low-turbulence open circuit wind tunnel. It is concluded that when combined fluctuations out of phase of velocity and incidence are simulated, unsteady flow features are of a similar nature to those observed when incidence or velocity oscillations are simulated separately. The study has relevance to the three-dimensional aerodynamic behavior of a helicopter blade section in forward flight. B.J.

A80-11453 The Tornado multi-function combat aircraft - An accomplishment of international collaboration (L'aviation de combat polyvalent Tornado - Une réalisation à porter au crédit de la collaboration internationale). B. O. Heath. (*Journée des Pionniers Européens, 4th, Paris, France, Apr. 26, 1979.*) *L'Aéronautique et l'Astronautique*, no. 78, 1979, p. 3-16. In French.

The British-German-Italian Tornado multi-function combat aircraft is presented and the history, organization and results of the international project are discussed. The two-seat, twin-engine jet aircraft with variable wing geometry is described, with attention given to the three possible wing configurations and their applications for various national requirements. Political factors influencing the development of the Tornado are outlined, and the formal organization responsible for project management is presented, considering the division of responsibilities between the project management agency NAMMA, Panavia and Turbo-Union. Practical and operational aspects of project management are related, and the results of the collaboration in the fields of aircraft performance, cost price and project schedule are examined. Implications of the management of the Tornado project for international relations are also pointed out. A.L.W.

A80-11454 Fire on board transport aircraft and passenger safety (L'incendie à bord des avions de transport public et la sécurité des passagers). A.-E. Blavy (Société Nationale Industrielle Aérospatiale, Laboratoire Central, Paris, France). (*Journée des Pionniers Européens, 4th, Paris, France, Apr. 26, 1979.*) *L'Aéronautique et l'Astronautique*, no. 78, 1979, p. 17-28. In French.

The fire safety of passenger aircraft cabin materials is discussed and present materials tests are presented. Crash conditions conducive to jet aircraft fires are outlined and the irritant, narcotic and paralytic effects of gases released from cabin materials are indicated. Past and present aircraft materials are surveyed and the development of fire-proofing procedures and flammability certification tests by the United States, Great Britain and France is outlined. Current flammability, quantitative smoke emission and combustion and pyrolysis gas composition tests are detailed, noting material acceptance criteria, and the use of a protective hood is proposed to prevent exposure to combustion gases and smoke during inflight fires. It is pointed out that, although only 10 flights out of 58 million departures from 1965 to 1976 resulted in accidents in which fire was the cause of death, efforts to improve fire safety will always be necessary. A.L.W.

A80-11647 # Method for calculating wing loading during maneuvering flight along a three-dimensional curved path. J. Katz (Technion - Israel Institute of Technology, Haifa, Israel). *Journal of Aircraft*, vol. 16, Nov. 1979, p. 739-741.

The aerodynamic forces due to the nonsteady motion of a lifting surface along a three-dimensional path are analyzed. For this purpose, available steady-state calculation methods, based on potential theory, were modified by retaining the nonsteady terms in the

governing equations. The surface motion is limited to such cases where the linear analysis can be applied. As an example, the time-dependent forces and moments of a slender wing in various nonsteady motions were studied. (Author)

A80-11648 * # Flight through thunderstorm outflows. W. Frost (FWG Associates, Inc.; Tennessee, University, Space Institute, Tullahoma, Tenn.), B. Crosby (ARO, Inc., Arnold Engineering and Development Center, Arnold Air Force Station, Tenn.), and D. W. Camp (NASA, Marshall Space Flight Center, Space Sciences Laboratory, Huntsville, Ala.). *Journal of Aircraft*, vol. 16, Nov. 1979, p. 749-755. 11 refs.

Computer simulation of aircraft landing through thunderstorm gust fronts is carried out. The 3 degree-of-freedom, nonlinear equations of aircraft motion for the longitudinal variables containing all two-dimensional wind shear terms are solved numerically. The gust front spatial wind field inputs are provided in the form of tabulated experimental data which are coupled with a computer table lookup routine to provide the required wind components and shear at any given position within an approximate 500 m x 1 km vertical plane. The aircraft is considered to enter the wind field at a specified position under trimmed conditions. Both fixed control and automatic control landings are simulated. Flight paths, as well as control inputs necessary to maintain specified trajectories, are presented and discussed for aircraft having characteristics of a DC-8, B-747, and a DHC-6. (Author)

A80-11649 # Required radar ranges for AEW aircraft. J. Bracken and J. H. Grotte (Institute for Defense Analyses, Arlington, Va.). *Journal of Aircraft*, vol. 16, Nov. 1979, p. 792-797.

The paper, through the application of simple analytical models, investigates the minimum radar ranges necessary to permit interdiction of the raid as well as escape to safety of the airborne early warning system. These radar ranges are dependent on characteristics of all the aircraft in the scenario. The results of many calculations are presented, showing the sensitivity of radar range to selected parameters. (Author)

A80-11650 # Burning sprays of jet A fuel-water emulsions. H. Jahani and S. R. Gollahalli (Oklahoma, University, Norman, Okla.). *Journal of Aircraft*, vol. 16, Nov. 1979, p. 798-800. 6 refs.

The paper presents the results of a study of the characteristics of burning Jet A fuel-water emulsions. Attention is given to the effects of (1) adding surfactant to the fuel, (2) varying the surfactant concentration in emulsions, and (3) varying the water concentration of emulsions on (a) flame stand-off distance, (b) flame length, (c) flame spread, and (d) the fraction of heat release radiated by burning sprays over an air-blast atomizer. It is concluded that it seems that the effects of emulsion variables on flame characteristics are not monotonic, and that a properly matched set of emulsion characteristics would be necessary to exploit the benefits of emulsification. (Author)

M.E.P.

A80-11652 Definition of a system concept study for future air traffic control (Definition einer Systemkonzeptstudie für die zukünftige Flugverkehrsführung). *Ortung und Navigation*, no. 2, 1979, p. 211-257. In German.

An attempt is made to outline a concept on which future research and development planning of air traffic control can be based. Attention is given to present systems and their evaluation. Factors to be considered in future planning consist of increased safety, environmental protection, reduction of pilot and controller workload, and profitability of air traffic. Other areas covered include: air traffic expectations, flight safety requirements, function analysis, subsystem characteristics, system configuration, selection and optimization of system concepts, and suggestions for development. (Author)

M.E.P.

A80-11653 Requirements for short instrument runways. W. O. Toepel (Bayerisches Staatsministerium für Wirtschaft und Verkehr, Munich, West Germany). *Ortung und Navigation*, no. 2, 1979, p. 266-271.

The implementation of IFR-traffic on airports with short runways is studied. Criteria are developed for air traffic services which are: the total number of annual aircraft movements, the number of regular passenger services, the number of nonlocal flights, aircraft mix concerning approach speed, the number of IFR/VFR-flights, and local parameters. Discussion of facilities covers radio navigation aids such as VDF, NDB, and VOR, as well as visual aids such as runway edge lights, threshold lights and taxiway lights. Finally, recommendations are made on physical characteristics and obstacle clearance for short runways. (Author)

M.E.P.

A80-11769 An optical technique for the investigation of flow in gas turbine combustors. J. E. C. Topps (National Gas Turbine Establishment, Farnborough, Hants., England). In: Symposium /International/ on Combustion, 17th, Leeds, England, August 20-25, 1978, Proceedings. Pittsburgh, Pa., Combustion Institute, 1979, p. 347-353. 7 refs.

The distribution of a pulse of mercury vapor injected into an airstream flowing past a V-gutter has been investigated at downstream stations by the measurement of the absorption of radiation at 254 nm. Using this technique, the length of the reversal zone and the vortex flow pattern deduced for isothermal flow agree with other observations. The distribution of absorption observed with combustion indicates that recirculation is substantially reduced, and the flame emission observed shows that the fusion of vortices is inhibited. The interpretation of these results as a function of vortex frequency and ignition delay has enabled disparate observations of the length of flow reversal zones with combustion to be reconciled, so that the precision of estimates of post-flame combustion residence time can be improved. (Author)

A80-11773 Predictions of the flow field and local gas composition in gas turbine combustors. W. P. Jones (Imperial College of Science and Technology, London, England) and C. H. Priddin (Rolls-Royce, Ltd., Aero Div., Derby, England). In: Symposium /International/ on Combustion, 17th, Leeds, England, August 20-25, 1978, Proceedings. Pittsburgh, Pa., Combustion Institute, 1979, p. 399-407; Comments, p. 407-409. 12 refs.

A mathematical model for calculating the three-dimensional flow, gas composition, and temperature fields in gas-turbine combustion chambers is described. The model makes use of the density-weighted averaged forms of the governing conservation equations with the two-equation kinetic energy-dissipation rate model for turbulent transport. The chemical reactions associated with heat release are assumed to be fast, and fluctuations in scalar properties are accounted for by use of a beta-probability density function (pdf). For liquid-spray-fuelled combustors the droplet concentration field is described via an equation for the pdf for droplet size. For a propane-fuelled model gas-turbine combustor the method yields calculated fields of gas composition and pollutants (NO, CO and UHC) which are in good overall agreement with measured values. (Author)

A80-11793 Pollutant emissions from 'partially' mixed turbulent flames. H. G. Semerjian, I. C. Ball (United Technologies Corp., Pratt and Whitney Aircraft Group, East Hartford, Conn.), and A. Vranos (United Technologies Research Center, East Hartford, Conn.). In: Symposium /International/ on Combustion, 17th, Leeds, England, August 20-25, 1978, Proceedings. Pittsburgh, Pa., Combustion Institute, 1979, p. 679-686; Comments, p. 686, 687. 12 refs.

Pollutant formation was studied in partially mixed turbulent flames at atmospheric pressure. Jet A fuel was injected into a preheated, unvitiated airstream by means of spray nozzles located at various distances upstream of a perforated plate flameholder. The results show that, for very lean flames, integrated NO levels are

substantially higher than obtained in premixed-prevaporized flames at the same equivalence ratio. Local NO levels correlate approximately with local fuel-air equivalence ratios. Luminous combustion was not observed, thereby indicating that droplet evaporation was very rapid in the premixing section. Therefore, it is concluded that high NO levels result primarily from nonuniform introduction of fuel and insufficient mixing of vaporized fuel and air. (Author)

A80-11869 # Flight-vehicle equipment (Oborudovanie letatel'nykh apparatov). I. V. Kolchin, V. I. Kochetkov, and A. V. Tumanov. Moscow, Izdatel'stvo Mashinostroeni, 1979. 152 p. 51 refs. In Russian.

Design aspects and instrumentation of onboard flight-vehicle equipment are presented. Attention is drawn to physical principles of operation of onboard instruments and systems. Consideration is given to automation of flight-vehicle propulsion systems. Systems for automatic flight control are discussed along with actuators of such systems, as well as navigation and radio equipment. Telemetry systems, avionics, and onboard digital computers are described. Emphasis is placed on testing of onboard equipment and the reliability of this equipment. V.T.

A80-11875 # Operation of airborne equipment and flight safety (Ekspluatatsiia aviatsionnogo oborudovaniia i bezopasnost' poletov). V. G. Denisov, V. V. Kozaruk, A. S. Kuraev, M. I. Pal'chikh, and I. M. Sindeev. Moscow, Izdatel'stvo Transport, 1979. 240 p. 65 refs. In Russian.

The book deals with some aspects of organizing aircraft engineering service and aircraft operation. Particular attention is given to methods of operating and maintaining modern piloting and navigational equipment and aircraft power plants and safety systems. Modern methods of testing and checking various aircraft systems are described. V.P.

A80-11879 # Flaw detection of aircraft components in operation (Defektoskopiia detalei pri ekspluatatsii aviatsionnoi tekhniki). P. I. Beda, Iu. A. Glazkov, S. P. Luts'ko, A. I. Ugarov, and G. S. Shelikhov. Moscow, Voenizdat, 1978. 232 p. 16 refs. In Russian.

The book discusses basic information on optical, liquid penetrant, magnetic particle, eddy current, ultrasonic, and impedance methods of flaw detection applied during operation of aircraft equipment to reveal discontinuity defects in component materials. Possible defects subject to detection are examined, and errors in application and interpretation of flaw detection are indicated. In aircraft operation, flaw detection is used for control of turbine and compressor vanes and disks, bulkhead frames, stringers, and longerons, helicopter propeller blades, landing gear struts and wheels, and other stressed components of gliders and engines. A.T.

A80-11890 # Antennas /Current status and problems/ (Antenny /Sovremennoe sostoianie i problemy/). D. I. Voskresenskii, V. L. Gostiukhin, K. I. Grineva, A. Iu. Grinev, B. Ia. Miakishev, L. I. Ponomarev, and V. S. Filippov. Moscow, Izdatel'stvo Sovetskoe Radio (Biblioteka Radioinzhenera: Sovremennaia Radioelektronika, No. 16), 1979. 208 p. 82 refs. In Russian.

The state of the art of antenna technology, as relating to the fields of radar, telecommunications, and radio astronomy, is reviewed. Particular consideration is given to the basic characteristics of linear and plane antennas, phased arrays, aperture antennas, antennas with signal processing, active arrays, and directional passive and active antennas. Problems of antenna synthesis and automated design of antennas are also discussed. B.J.

A80-12003 Applied technology in turbofan engines. B. Walsh. *Aviation Engineering and Maintenance*, vol. 3, May 1979, p. 24-27.

The article surveys development work performed by NASA's engine component improvement (ECI) program which is leading to design changes in production engines used on standard and wide body commercial transports. It is noted that some of the technology has already been adopted in CF6, JT8D, and JT9D engines. Attention is given to modification goals which include a 5% reduction in specific fuel consumption, as well as improvements in performance retention and lower maintenance costs. CF6 modifications discussed include an improved fan, a redesigned core exhaust system and improved front engine mount. Also covered are high pressure turbine roundness design and improved active control of turbine clearances for the CF6 low pressure and high pressure turbine rotors and their respective shrouds. M.E.P.

A80-12030 # Optimal receivers and discrete-signal processors for hyperbolic radar navigation systems (Optimal'nye ustroistva priema i diskretnoi obrabotki signalov radionavigatsionnykh giperbolicheskikh sistem). M. S. Iarlykov and V. S. Danilin. *Radioelektronika*, vol. 22, Aug. 1979, p. 3-9. 7 refs. In Russian.

An approach involving nonlinear continuous-discrete Markov filtering is applied to optimal discrete processing of continuous radar signals with interference. Useful signals were observed on a background of cumulative Gaussian white noise. The design of an optimal processor for radar signals in a hyperbolic navigation system is described; the accuracy and noise immunity of the processor are evaluated. B.J.

A80-12031 # Use of sign statistics for sequential signal detection in a pulse radar system (Ispol'zovanie znakovykh statistik pri posledovatel'nom obnaruzhenii signala v impul'snoi RLS). Iu. N. Klochan and A. A. Spektor. *Radioelektronika*, vol. 22, Aug. 1979, p. 10-14. 5 refs. In Russian.

The paper discusses a sequential procedure, based on sign statistics, for the detection of unknown signal and noise characteristics. Particular consideration is given to a method for determining the median of noise distribution. The principal characteristics of a sequential sign procedure are examined using an equivalent continuous Markov process. The sign detector is compared with other types of detectors. B.J.

A80-12042 # Experimental and theoretical investigation of the internal-duct hydraulics of stator and rotor blades for a semiclosed-cycle air cooling system (Eksperimental'noe i raschetnoe issledovanie gidravliki vnutrennego trakta soplovykh i rabochikh lopatok dlia vozdushnoi poluzamknutoi sistemy okhlazhdeniia). E. A. Manushin and R. E. Danilov (Moskovskoe Vysshee Tekhnicheskoe Uchilishche, Moscow, USSR). *Energetika*, vol. 22, July 1979, p. 45-51. 6 refs. In Russian.

A80-12076 Diffusion bonding as a production process. Abington, Cambs., England, Welding Institute, 1979. 37 p. \$20.

The fundamentals of diffusion bonding are reviewed and attention is given to practical process considerations. Diffusion bonding is compared with other welding processes, and consideration is given to general engineering, aerospace, and military applications of diffusion bonding. B.J.

A80-12081 Diffusion bonding - Aerospace applications. E. F. Sheldon (Rolls-Royce, Ltd., Derby Engine Div., Derby, England). In: Diffusion bonding as a production process. Abington, Cambs., England, Welding Institute, 1979, p. 26-31.

Potential and existing aerospace applications of diffusion bonding are surveyed. Consideration is given to such applications as surface-to-surface joints, hollow airfoils, complex fabrications, and bonding of double-skin sheets. The advantages of diffusion bonding, as compared with other processes, are stressed. B.J.

A80-12110 The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication. W. Poole and J. L. Sullivan (Aston, University, Birmingham, England). *American Society of Lubrication Engineers, Annual*

Meeting, 34th, St. Louis, Mo., Apr. 30-May 3, 1979, Preprint 79-AM-5E-1. 7 p. 10 refs. Research supported by the Science Research Council, University of Aston, and Lucas Aerospace.

An interest in the wear of steel-nonsteel systems, currently in use in aircraft fuel systems, has led to a study of aluminum bronze sliding on KE961 steel in the presence of kerosene with, and without, the addition of a commercial boundary lubricant. Experiments were conducted to determine wear rates with change of load together with an extensive investigation of the contacting surfaces using physical techniques such as EPMA, SEM and Auger spectroscopy. It was found that the additive had an initial pro-wear effect on the bronze followed by a sharp reduction in wear. The results of the measurements, and of the surface analysis, indicate that the mechanism responsible for this wear is due to preferential segregation of the aluminum to the surface. In the absence of the additive, aluminum is transferred to the steel and forms a solid solution which can cause seizure to occur. (Author)

A80-12157 A regression model of fatigue crack propagation under flight simulation loading. R. Sunder (Kievskii Institut Inzhenerov Grazhdanskoi Aviatsii, Kiev, Ukrainian SSR). *Engineering Fracture Mechanics*, vol. 12, no. 2, 1979, p. 147-154. 8 refs.

A multivariable regression analysis is made of crack propagation data under flight simulation loading for the 2024-T3 and 7075-T6 alloys. The study is made using an equivalent effective stress range concept based on crack closure considerations. A two-variable regression model of the equivalent stress range is suggested. The model is used to calculate fatigue crack propagation lives. Predictions using the proposed model are compared with empirical results. It is shown that the model accounts for the influence of maximum, minimum and mean stress levels of the load spectrum. (Author)

A80-12312 Generating innovation for Navy's F-18. H. K. Lew. *Aviation Engineering and Maintenance*, vol. 3, Oct. 1979, p. 22-25.

The F-18 electrical power system consisting of two 40KVA variable speed constant frequency (VSCF) generators, is examined. The generator is a conventional wound rotor design that replaces the usual hydromechanical constant speed transmission with a system in which a solid state cycle transformer rectifies the variable frequency output to maintain a constant output of 400 Hz alternating current. This is cited as a key factor in the projected MTBF of 3150 hours, exceeding Navy specifications by 1500 hours. Other factors covered are the sharing of cooling oil with the aircraft mounted accessory drive (AMAD) which eliminates the need for a separate cooling system, and the compact generator's high accessibility, for quick removal and replacement of failed parts. M.E.P.

A80-12315 F-16 co-production - An American point of view. J. P. Geddes. *Interavia*, vol. 34, Nov. 1979, p. 1090-1092.

The article examines some doubts still existing about the benefits, current and potential, of the overall F-16 coproduction program between some European nations and the U.S. Attention is given to concurrence risks which involve the taking place of a large number of events in the design, test, and production cycle in parallel. It is noted that pressures to get the program moving have resulted in an imbalance in the national offset shares and complaints that the program has not produced the degree of technology transfer that was anticipated. Also covered are the baseline program, different costs, technology transfer, airframe and engine examples and the avionics and other systems. M.E.P.

A80-12375 On the acoustic power emitted by helicopter rotor blades at low tip speeds. N. G. Humbad and W. L. Harris (MIT, Cambridge, Mass.). *Journal of Sound and Vibration*, vol. 66, Sept. 22, 1979, p. 290-294.

The purpose of this note is to show the effectiveness of a helicopter rotor blade tip region in generating the acoustic power and to show how the acoustic power radiated by the rotor blade varies during a cycle. The simple analysis presented here serves in establishing the dominant region on the rotor disk that contributes more to the overall noise. Two basic source mechanisms are considered in the analysis: (a) turbulent inflow, and (b) boundary layer radiation. (Author)

A80-12423 Blow-down and sled-run simulation of transonic flow (Transsonische Umströmungssimulation durch Fahrtwind und Blaswind). T. Hottner (Stuttgart, Universität, Stuttgart, West Germany). *Zeitschrift für Flugwissenschaften und Weltraumforschung*, vol. 3, Sept.-Oct. 1979, p. 293-303. 16 refs. In German.

In the present paper, blow-down, sled-run, cryogenic, magnetic-suspension, and hybrid transonic simulation techniques are evaluated with respect to energy consumption. It is shown that a high-pressure test track facility provides a means of obtaining sufficiently high Reynolds numbers at power inputs below those of an equivalent blow-down wind tunnel. Furthermore, test-track and hybrid simulation provides substantial investment savings as compared to the blow-down technique. Solution of the wall interference problem for test-track and hybrid facilities, however, requires further research work. V.P.

A80-12537 # Application of the design diagram for a layered viscoelastic medium to the evaluation of the stress-strain state of road and runway surfaces for moving loads (O primeneni raschetnoi skhemy sloistoi viazko-uprugoi sredy k otsenke napriazhennogo sostoianii dorozhnykh i aerodromnykh pokrytii pri podvizhnoi nagruzke). B. S. Radovskii (Gosudarstvennyi Dorozhnyi Nauchno-Issledovatel'skii Institut, Kiev, Ukrainian SSR). *Prikladnaia Mekhanika*, vol. 15, Oct. 1979, p. 50-57. 11 refs. In Russian.

The present analysis deals with the stress-strain state induced by a moving load in a viscoelastic plate resting on a viscoelastic half-space. Numerical results obtained for conditions corresponding to a road surface are examined from the point of view of decreasing traffic damage to the surface and increasing the weight of trucks without impairing surface life. V.P.

A80-12597 # Predicted jet thickness effects on the lift of an augmentor wing. V. Q. Tang and J. Tinkler (Manitoba, University, Winnipeg, Canada). *Canadian Aeronautics and Space Journal*, vol. 25, 3rd Quarter, 1979, p. 260-270. 13 refs. Defence Research Board of Canada Grant No. 9550-52; National Research Council of Canada Grant No. A-5562.

The flow about a two-dimensional augmentor wing is represented by a vortex distribution along its chord, and source and vortex distributions at the jet origin and boundaries. The source strength is related to the jet momentum coefficient and the vortex distributions are calculated by an iterative numerical method which requires the flow to be tangential to the aerofoil and jet boundaries, and the jet shape to be in equilibrium under the pressure loading. The solutions for a very thin jet agree with linear theory and experiments. Increasing the jet thickness gives a very small increase of lift and a small decrease in the nose down pitching moment. (Author)

A80-12598 # On supersonic flow with attached shock waves over delta wings. M. E. Ahrens and W. H. Hui (Waterloo, University, Waterloo, Ontario, Canada). *Canadian Aeronautics and Space Journal*, vol. 25, 3rd Quarter, 1979, p. 271-277. 14 refs. Research supported by the National Research Council of Canada.

The steady supersonic/hypersonic inviscid flow with attached shock waves past the compression side of a plane delta wing is investigated for small sweep back angle epsilon. The square-root singularity of the pressure curve slope at the cross flow sonic point in Hui's (1971) first order solution is removed by the strained coordinates technique, yielding a uniformly valid solution, which

shows excellent agreement with large scale numerical solutions and experiments even for cases with $\epsilon = 0(1)$. The relative merits of Lighthill's original formulation and Prutolo's simplified formulation of the strained coordinate technique are discussed, and it is demonstrated in this problem that, contrary to existing assertion (Crocco, 1972), Lighthill's formulation can be more advantageous.

(Author)

A80-12599 # Extension of Prandtl's biplane theory to wing-tail combinations. E. V. Laitone (California, University, Berkeley, Calif.). *Canadian Aeronautics and Space Journal*, vol. 25, 3rd Quarter, 1979, p. 278-285. 7 refs.

Prandtl's biplane theory is used to calculate the minimum induced drag for several wing-tail combinations with a vertical separation (gap) distance of one fifth of the wing span. It is shown that Prandtl's theory is valid only if both lifting surfaces have the ideal elliptic load distribution, and the mutually induced drag is actually decreased if the rear lifting surface has a larger span and a uniform load distribution. The self-induced drag of the rear lifting surface is increased by the departure from the ideal elliptic load distribution so the total induced drag is not correspondingly decreased, however, but the beneficial result for a canard or tandem aircraft is that now the smaller front span can carry more of the aircraft weight at the minimum induced drag condition. (Author)

A80-12612 Processing noise and vibration data for gas turbine engine development. R. E. Harper (United Technologies Corp., Commercial Products Div., East Hartford, Conn.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 1. Pittsburgh, Pa., Instrument Society of America, 1979, p. 179-183.

Special data processing procedures are required to accommodate some data in the development of gas-turbine engines. Three cases are discussed, each showing a need to modify a more common data reduction process in order to satisfy a particular analysis requirement. The three procedures developed for these cases can be implemented with instruments common to any modern data reduction center, without the need for any special hardware. The solutions discussed involve a means of increasing the spectral resolution of a Fourier-type analyzer through intentional aliasing of the digitized data; a method of extracting phase information from unsteady signals; and a statistical description of the unsteadiness of acoustic signals, using a variant of the amplitude histogram. V.P.

A80-12618 A V/STOL ground effects test facility. T. M. Evans and J. M. Cooksey (Vought Corp., Dallas, Tex.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 1. Pittsburgh, Pa., Instrument Society of America, 1979, p. 245-252. 15 refs.

A test facility for evaluation of the aerodynamic-propulsion interface characteristics of V/STOL aircraft configurations in hover flight mode in proximity to the ground with surface winds is presented. Proximity to the ground results in interactions between the lifting jets and the lower surface of the aircraft, and also reingestion of lifting jet flow into the engine inlets. The design requirements, simulation problems, the outdoor test site approach, wind generator, model support, and instrumentation system of the test facility are discussed. Testing is performed in the open-air to avoid tunnel wall or enclosure wall constraints, and the facility provides controlled ground wind velocities from an azimuth relative to the model. Finally, instrumentation and data acquisition considerations, aerodynamic design requirements, climatology analysis, and model support design features are described. A.T.

A80-12620 Wind tunnel model deflection system. R. F. Jarvis (Grumman Aerospace Corp., Bethpage, N.Y.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 1. Pittsburgh, Pa., Instrument Society of America, 1979, p. 263-271.

The measurement of deformation on a wind tunnel model has met with varying degrees of success. Generally, those techniques that are the most successful from a measurement standpoint tend to be the most expensive due to equipment requirements, set-up time and extensive data reduction procedures. A system has been developed which is simple, economical and capable of producing accurate deflection data both statically and dynamically. The system uses a series of strain gaged beams which are installed in the model and provide a means of measuring the slope at discrete points as the model undergoes deformations. The curve generated from these data is then integrated to produce the model deflection curve. The design, fabrication, installation, calibration and testing of this model deformation system is described. (Author)

A80-12621 * Real-time data acquisition system for the NASA Langley transonic dynamics tunnel. P. H. Cole (NASA, Langley Research Center, Hampton, Va.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 1. Pittsburgh, Pa., Instrument Society of America, 1979, p. 273-286.

The hardware configuration of the Transonic Dynamics Wind Tunnel Data Acquisition System (DAS) which consists of an analog front end that can process up to 260 channels of data is presented. The DAS also has a multi-channel analog-to-digital subsystem that can process up to 50,000 samples of data per sec, and a digital computer with standard and nonstandard devices, with graphics capability. The software configuration of the DAS and complex hardware/software interfaces are described, which can provide automatic amplifier gain and offset adjustment for each data channel. Finally, a summary of specific DAS applications is given including the real-time processing of dynamic deflection data, unsteady pressure measurements, and flutter and buffet data. A.T.

A80-12622 Use of an 'off-the-shelf' data acquisition system for wind tunnel data processing. J. F. Marchman, III and J. J. Kunz (Virginia Polytechnic Institute and State University, Blacksburg, Va.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 1. Pittsburgh, Pa., Instrument Society of America, 1979, p. 287-291.

In July 1977 a commercially manufactured data acquisition system consisting of a scanning voltmeter, a minicomputer, and an X-Y plotter was purchased for the Virginia Tech Stability Wind Tunnel. This facility is used for a wide variety of testing, including aircraft and submarine flowfield research, boundary layer transition research, studies of flow around buildings and structures, aircraft dynamic stability testing, as well as conventional model force and moment measurement. A versatile data acquisition system which can be operated by researchers, faculty, and students with no prior experience is needed to meet these testing requirements. The system chosen has proved readily adaptable to all research and teaching needs and its use in these applications is described for case studies ranging from forces on garbage cans to the examination of turbulence spectra in boundary layers. It is shown that such a general purpose, off-the-shelf system can indeed meet almost any need of a large university wind tunnel operation at minimum time and expense. (Author)

A80-12630 * Measuring unsteady pressure on rotating compressor blades. D. R. Englund (NASA, Lewis Research Center, Cleveland, Ohio), H. P. Grant, and G. A. Lanati (United Technologies Corp., Pratt and Whitney Aircraft Group, East Hartford, Conn.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 2. Pittsburgh, Pa., Instrument Society of America, 1979, p. 413-426. 7 refs.

The capability for accurate measurement of unsteady pressure on the surface of compressor and fan blades during engine operation was established. Tests were run on miniature semiconductor strain gage pressure transducers mounted in several arrangements. Both surface mountings and recessed flush mountings were tested. Test

parameters included mounting arrangement, blade material, temperature, local strain in the blade, acceleration normal to the transducer diaphragm, centripetal acceleration, and pressure. Test results showed no failures of transducers or mountings and indicated an uncertainty of unsteady pressure measurement of approximately + or - 6%, plus 0.1 kPa for a typical application. V.T.

A80-12634 **A Laser Doppler Velocimeter system to investigate unsteady flow separation.** G. W. Sparks, Jr., J. P. Retelle, Jr., J. E. Keesee, M. S. Francis, and J. M. Lind (U.S. Air Force Academy, Colorado Springs, Colo.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 2. Pittsburgh, Pa., Instrument Society of America, 1979, p. 467-476. 7 refs. USAF-sponsored research.

The adaptation of multi-component Laser Doppler Velocimetry (LDV) techniques for the measurement of flow velocity in regions of unsteady separation is discussed. A positionable, two color back-scatter LDV system was employed in conjunction with a disk-based minicomputer to assess unsteady flow separation generated on an airfoil surface behind a controlled, oscillating, fence-type spoiler in a subsonic wind tunnel environment. The solutions to significant optical noise problems created by limited optical access and the nature of the experimental configuration are described. The acquisition of discontinuous data signals provided by the LDV counters using an asynchronous sampling technique is also addressed. The determination of time-varying mean values of the velocity components has been effected through the adaptation of a phase-locked ensemble averaging scheme originally developed for use with continuous (analog) signals. Interactive computer control of the positioning of the measurement value using a two-dimensional traversing mechanism is also described. The resultant measurements using this system are compared with those obtained by a hot-wire anemometer in an unsteady, non-reversing flow environment compatible to both techniques. (Author)

A80-12637 **A fiber-optic link for high-speed, DDAS-to-computer data transmission.** B. G. Mahrenholz and R. R. Little, Jr. (ARO, Inc., Arnold Air Force Station, Tenn.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 2. Pittsburgh, Pa., Instrument Society of America, 1979, p. 501-512.

This paper describes a fiber-optic data link used to transmit data from a ramjet engine test cell for a distance of two kilometers to a base central data processing center. Over this link, data from a minicomputer-controlled, high-speed, digital data acquisition system are transmitted at rates of up to 690,000 sixteen-bit words a second. The practical problems encountered in the installation of a direct-burial cable to an industrial environment are discussed. A description is given of the equipment used to interface the cable at each end as well as the transmission formats and protocols used in the system. (Author)

A80-12638 # **A survey of laser Doppler velocimeter applications at the Arnold Engineering Development Center.** V. A. Cline and F. L. Crossway (ARO, Inc., Arnold Air Force Station, Tenn.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 2. Pittsburgh, Pa., Instrument Society of America, 1979, p. 513-524. 16 refs.

The basic theory of the laser Doppler velocimeter (LDV) is very briefly discussed using the fringe model description of the technique. Applications in six different testing facilities of the Arnold Engineering Development Center (AEDC) are described to demonstrate the capabilities and advantages of the technique, and to point out problems encountered and their possible solutions. The systems used are discussed briefly, and sample data are presented from experimental studies of shock/boundary-layer interaction, multiple wing-store flow fields, two-dimensional slotted walls for wind tunnels, model after-bodies and simulated plume flows, wind tunnel flow angle, free-jet mixing, and jet engine exhausts. (Author)

A80-12640 **Microprocessors as aircraft fatigue monitors.** G. H. Lindsey (U.S. Naval Postgraduate School, Monterey, Calif.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 2. Pittsburgh, Pa., Instrument Society of America, 1979, p. 553-558.

The paper presents the results of a feasibility study employing processor units as aircraft in-flight fatigue-data acquisition systems. These systems are dedicated to sensing significant strain events experienced by wings and recording those events. The system includes various hardware components to monitor, digitize, process, and record signals which are generated by strain gages or other transducers up to a total of eight separate inputs. The software package for the microprocessor controls the hardware components and monitors their functions. Screening, formatting, storing, and recording of data are also functions performed by the software package. Laboratory and flight tests are also described. V.T.

A80-12642 **Calibration of a low cost strapdown inertial guidance system.** H. Musoff (Charles Stark Draper Laboratory, Inc., Cambridge, Mass.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 2. Pittsburgh, Pa., Instrument Society of America, 1979, p. 569-574. 10 refs. Contract No. F08635-78-C-0306.

A set of techniques is presented for calibration of the inertial reference unit of a Low Cost Inertial Guidance Subsystem (LCIGS). Very large instrument error parameters are estimated without the need for external precise knowledge of the system orientation with respect to the earth rate and gravity vectors. This is made possible by utilizing the known nonlinear relations between the components of earth rate and gravity sensed by the instruments and the respective magnitudes of earth rate and gravity at the system test location in addition to the known relations between the error parameters and measurements to allow solution of the parameters from complete sets of simultaneous equations. (Author)

A80-12645 **Design and simulation of a helicopter target hand-off computer.** J. S. Boland, III (Auburn University, Auburn, Ala.), W. W. Malcolm (U.S. Army, Missile Research and Development Command, Redstone Arsenal, Ala.), and L. J. Pinson (Tennessee, University, Tullahoma, Tenn.). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 2. Pittsburgh, Pa., Instrument Society of America, 1979, p. 587-594. Grants No. DAAH01-76-C-0396; No. DAAK40-77-C-0156.

The design of an airborne computer capable of automatic hand-off of a target from a precision pointing and tracing system (PTS) to an imaging missile seeker is considered in this paper. The computer, using the digitized PTS video as a reference, employs a correlation technique to search in the seeker field-of-view (FDV) for the target. The algorithm works in real-time (i.e., the correlation peak is updated on each TV field, 1/60th of a second). When the target is found, the computer generates error signals which are used to slew the seeker line-of-sight (LOS) such that the target is in the center of its FOV. At this time the missile tracker can be activated and the missile can be fired. The emphasis of this paper is on the design of the correlator (or computer) and on simulation of its performance using four digitized scenes. (Author)

A80-12647 **Instrumentation for the determination of aircraft performance from dynamic maneuvers.** H. Pouwels (Nationaal Lucht- en Ruimtevaartlaboratorium, Amsterdam, Netherlands). In: International Instrumentation Symposium, 25th, Anaheim, Calif., May 7-10, 1979, Proceedings. Part 2. Pittsburgh, Pa., Instrument Society of America, 1979, p. 611-621. Research supported by the Nederlands Instituut voor Vliegtuigontwikkeling en Ruimtevaart.

On-board instrumentation for acquisition of aircraft performance data from a single dynamic flight maneuver is described. The instrumentation installed on board a medium size twin turbopfan aircraft consists of a strap-down inertial system, an accurate air data measurement system, an engine-parameter measurement system, and a measurement system for the settings of the aircraft control

surfaces. The data are acquired and stored on magnetic tape by a computer data acquisition system, which also controls a sensor system. It is outlined that the dynamic flight test technique offers a 50% decrease in flight test time at the cost of a more sophisticated instrumentation system and data processing procedures. V.T.

A80-12716 # Singular values and feedback - Design examples. G. Stein (Honeywell Systems and Research Center, Minneapolis, Minn.; MIT, Cambridge, Mass.) and J. C. Doyle (California, University, Berkeley, Calif.). In: Annual Allerton Conference on Communication, Control and Computing, 16th, Monticello, Ill., October 4-6, 1978, Proceedings. Urbana, Ill., University of Illinois, 1978, p. 461-470. Contract No. N00014-75-C-0144.

The purpose of the paper is to explore and illustrate the role which singular-value analysis might play in multivariable design. Several trial control design examples are presented for the longitudinal degrees of freedom of the CH-47 helicopter. Bounding formulas for model perturbations and Doyle's stability-robustness results are reviewed. Specifics of the CH-47 design problems are given and various trial designs are discussed. The examples confirm that the stability-robustness condition used in the study provides a reliable measure of robustness and offers a natural way to limit multivariable bandwidth during the design process. V.T.

A80-12908 # Steady flow over the pressure side of a piecewise-flat delta wing with supersonic leading edges (Stacionarnoe obtekanie nizhnei poverkhnosti kusochno-ploskogo treugol'nogo kryla so sverkhzvukovymi perednimi kromkami). S. M. Ter-Minasiants. *Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza*, Sept.-Oct. 1979, p. 80-90. 18 refs. In Russian.

The analysis deals with the supersonic flow over a wing surface composed of arbitrary flat triangular elements connected to each other at small angles along straight lines that intersect at a point on the leading edge. A three-dimensional shock wave is attached to the leading edge having the shape of a broken line. The pressure distribution over the wing span and the pressure at the center of the wing are calculated. V.P.

A80-12911 # Construction of a nonstationary nonlinear propeller theory (K postroeniiu nestacionarnoi nelineinnoi teorii vozdušnogo vinta). S. M. Belotserkovskii, V. A. Vasin, and B. E. Loktev. *Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza*, Sept.-Oct. 1979, p. 107-113. 8 refs. In Russian.

The paper considers application of the discrete vortex method for construction of a nonlinear nonstationary propeller theory in an incompressible medium. The method allows modelling of propeller transition operations, and of conditions like the 'vortex ring' and 'vortex cushion'. The method is based on substitution of actual load bearing surfaces (propeller blades) with infinitely thin surfaces followed by substitution with a vortex sheet. The impermeability boundary condition is satisfied on the blade surfaces; velocity circulations along the closed fluid are constant with time, so that circulations of free vortices are also constant with time. The Chaplygin-Zhukovsky hypothesis on finiteness of velocities is realized during the take-off flow around the blade rear edges and on the side and front edges. Convergence of free vortices which occurs along the tangent to the propeller surface is assumed at these edges, concluding that the proposed method allows determination of nonstationary dispersed and combined aerodynamic characteristics, velocity fields, and vortex structures behind the propeller. A.T.

A80-12912 # Solution of linear problems of flow about finite span wing (O reshenii zadach obtekaniia kryla konechnogo razmakha v lineinnoi postanovke). N. F. Vorob'ev. *Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza*, Sept.-Oct. 1979, p. 114-125. 9 refs. In Russian.

Correspondence of solutions of direct and inverse problems of the wing theory for a finite span wing is established in the framework

of the linear theory based on the solution of the Volterra wave equation for supersonic flow, and the solution of the Laplace equation in the form of Green's formula for subsonic flow. For the direct problem in the supersonic case, a formula is derived for determining wing loading which most fully considers the wing geometry characteristics. For the inverse supersonic and subsonic flows, formulas are derived for determining wing geometry by specified wing loadings and the change in loading along the wing span. The solution of the inverse problem is presented in the form of integral convergence of internal points on the wing surface, with the wing surface representing a vortical surface of mutually orthogonal vertical lines. A.T.

A80-12930 # The collision avoidance problem requires a mix of partial solutions. J. P. Tymczyszyn (FAA, Systems Research and Development Service, Washington, D.C.). *Aircraft Engineering*, vol. 51, Nov. 1979, p. 18-21.

The article surveys some proposed collision avoidance techniques noting that no single device or procedure can deal adequately with the mid-air collision prevention problem. Attention is given to the need for new systems to be compatible with the current ICAO air traffic control radar beacon system (ATCRBS). Three approaches are presented: automatic traffic advisory and resolution service (ATARS), discrete address beacon system (DABS), and beacon collision avoidance system (BCAS). Finally, the relationship between BCAS and DABS is discussed noting that while the Active and Full versions of BCAS require that the equipped aircraft have a DABS transponder, successful operation of BCAS does not depend on the implementation of DABS sites on the ground. M.E.P.

A80-13052 # Active flutter control in transonic conditions. A. Gravelle (ONERA, Châtillon-sous-Bagneux, Hauts-de-Seine, France). (*International Union of Theoretical and Applied Mechanics, Symposium on Structural Control, Waterloo, Ontario, Canada, June 4-7, 1979.*) ONERA, TP no. 1979-100, 1979. 14 p.

Wind tunnel tests are carried out at ONERA on several aeroelastic models with a view toward investigating the possibility of controlling the flutter instabilities, due to the presence of stores on military aircraft, in the transonic range. The control forces are obtained by using an existing aileron that is controlled by an actuator. The control law used during wind tunnel tests avoids the frequency coalescence which produces the flutter instability by introducing positive or negative stiffness forces on the wing. Two illustrative examples demonstrate the possibility of controlling flutter in the transonic range with a relatively simple control law using only one sensor per wing. S.D.

A80-13060 # Experimental techniques developed at ONERA for advanced compressor testing. J. Fabri (ONERA, Châtillon-sous-Bagneux, Hauts-de-Seine, France). (*Symposium International sur les Compresseurs pour l'Industrie, Prague, Czechoslovakia, Oct. 2-4, 1979.*) ONERA, TP no. 1979-129, 1979. 24 p. 17 refs.

Developments in instrumentation, data acquisition and reduction, and flow visualization at ONERA with regard to the testing of high-performance compressors are reviewed. Experimental techniques include: (1) determination of overall performance and description of the performance map (mass flow, pressure ratio, and efficiency); (2) visualization of the flow field, streamlines, and shock waves; and (3) measurements of local parameters including static and total pressure, flow angle, and total temperature. B.J.

A80-13064 * # UHF coplanar-slot antenna for aircraft-to-satellite data communications. R. W. Myhre (NASA, Lewis Research Center, Cleveland, Ohio). *New Mexico State University and U.S. Army, Printed Circuit Antenna Technology Workshop, Las Cruces, N. Mex., Oct. 17-19, 1979, Paper.* 19 p.

The initiative for starting the Aircraft-to-Satellite Data Relay (ASDAR) Program came from a recognition that much of the world's weather originates in the data sparse area of the tropics which are primarily ocean. The ASDAR system consists of (1) a data acquisition and control unit to acquire, store and format these data; (2) a clock to time the data sampling and transmission periods; and (3) a transmitter and low-profile upper hemisphere coverage antenna to relay the formatted data via satellite to the National Weather Service ground stations, as shown schematically. The low-profile antenna is a conformal antenna based on the coplanar-slot approach. The antenna is circular polarized and has an on-axis gain of nearly 2.5 dB and a HPBW greater than 90 deg. The discussion covers antenna design, radiation characteristics, flight testing, and system performance. S.D.

A80-13066 * # State-of-the-art of SiAlON materials. S. Dutta (NASA, Lewis Research Center, Cleveland, Ohio). *NATO, AGARD, Specialist Meeting on Ceramics for Turbine Engine Applications, Cologne, West Germany, Oct. 7-12, 1979, Paper. 21 p. 41 refs.*

The state of the art of 'SiAlONs' is reviewed, noting that the term has become a generic one applied to Si₃N₄ based materials. Attention is given to work on phase relations, crystal structure, synthesis, fabrication, and properties of various SiAlONs. Also discussed are the essential features of compositions, fabrication methods, and microstructures. In addition, consideration is given to high temperature flexure strength, creep, fracture toughness, oxidation, and thermal shock resistance. Finally, these data are compared to those for some currently produced silicon nitride ceramics to assess the potential of SiAlON materials for use in advanced gas turbine engines. M.E.P.

A80-13068 * # NASA gear research and its probable effect on rotorcraft transmission design. E. V. Zaretsky, D. P. Townsend, and J. J. Coy (NASA, Lewis Research Center, Cleveland, Ohio). *American Helicopter Society, Meeting on Helicopter Propulsion Systems, Williamsburg, Va., Nov. 6-8, 1979, Paper. 17 p. 42 refs.*

The NASA Lewis Research Center devised a comprehensive gear technology research program beginning in 1969, the results of which are being integrated into the NASA civilian Helicopter Transmission System Technology Program. Attention is given to the results of this gear research and those programs which are presently being undertaken. In addition, research programs studying pitting fatigue, gear steels and processing, life prediction methods, gear design and dynamics, elasto-hydrodynamic lubrication, lubrication methods and gear noise are presented. Finally, the impact of advanced gear research technology on rotorcraft transmission design is discussed. M.E.P.

A80-13126 Impression fatigue. J. C. M. Li (Bochum, Ruhr-Universität, Bochum, West Germany) and S. N. G. Chu (Rochester, University, Rochester, N.Y.). *Scripta Metallurgica*, vol. 13, Nov. 1979, p. 1021-1026. 12 refs. Contract No. EY-76-S-02-2296-002.

The effect of variable-amplitude loading on the fatigue crack growth behavior is important in aircraft design considerations. A novel fatigue test is designed to shed some light on the mechanism of fatigue crack propagation. In this test, a cylindrical indenter with a flat end is pressed onto the surface of a beta-tin crystal with cyclic load. The indenter produces an impression whose depth increases with time, thereby creating a situation where a plastic zone propagates into the material without a crack. The increase in depth per cycle dl/dn is fast in the beginning and then decreases to a steady-state value. A power law is found to hold between this steady-state value and the maximum stress with a stress exponent of 4. The effects of overloading and underloading are determined. Since there is no crack in the present test, it is proposed that the overloading and underloading effects of fatigue crack propagation may arise from plastic zone properties rather than crack closure. S.D.

STAR ENTRIES

N80-10003 Allerton Press, Inc., New York, N. Y.
PARAMETRIC METHOD OF AIRCRAFT ENGINE STATUS DIAGNOSTICS BASED ON LIMITED INFORMATION

A. M. Akhmedzyanov, A. P. Tunakov, Kh. S. Gumerov, Yu. D. Degtyarev, and E. I. Morkovnikova *In its Soviet Aeron.*, Vol. 21, No. 3 1978 p 6-11 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 3, 1978 p 12-18

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

An algorithm was developed for engine flow path diagnostics based on limited information on the thermogasdynamic parameters. A mathematical model of the engine is used as the diagnostic communication channel. A.R.H.

N80-10006 Allerton Press, Inc., New York, N. Y.
INFLUENCE OF GAS TURBINE ENGINE COMBUSTION CHAMBERS GEOMETRIC PARAMETERS ON MIXTURE FORMATION CHARACTERISTICS

P. P. Grigorenko, Yu. A. Spiridonov, and A. V. Talantov *In its Soviet Aeron.*, Vol. 21, No. 3 1978 p 20-24 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 3, 1978 p 30-37

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

Results are presented of a study of the number of rows, number n of holes, and area ratio f of a mixer on the mixing quality θ . It is shown that increase of n and f leads to increase of the required flowrate G_3 at the singular point, characterized by the jet penetration depth $h =$ approximately $0.3d(k)$. A design diagram is proposed for selecting the optimal mixer parameters corresponding to minimal temperature field nonuniformity. Author

N80-10011 Allerton Press, Inc., New York, N. Y.
DETERMINATION OF TURNING ANGLE OF A JET IMPINGING ON A BUCKET WITH VISOR

L. M. Kotlyar, S. G. Margulis, and E. D. Nesterov *In its Soviet Aeron.*, Vol. 21, No. 3 1978 p 40-43 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 3, 1978 p 58-62

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

The problem of jet impingement on a bucket with a visor is solved by the singular point method. The dependence of the jet turning angle on several geometric parameters of the bucket is determined. Calculations made on an M-222 computer are compared to experimental results and recommendations are given on estimation of the flow exit angle. K.L.

N80-10022 Allerton Press, Inc., New York, N. Y.
STUDY OF HEAT-PIPE HEAT EXCHANGER IN THE SMALL GAS TURBINE ENGINE SYSTEM

V. K. Shchukin, I. I. Mosin, N. V. Lokai, and Yu. V. Matveev *In its Soviet Aeron.*, Vol. 21, No. 3 1978 p 93-96 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 3, 1978 p 127-132

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

A theoretical optimization of the elements of heat-pipe heat exchangers in application to small gas turbine engines (SGTE), is presented in order to study the possibility of using this type of heat exchanger as a SGTE regenerator. The regeneration ratio σ approximately 0.82 with admissible pressure losses in the heat exchanger passages $\Delta P = 6\%$ was obtained. In order to confirm the validity of the theoretical results, an experimental study was made of a heat exchanger matrix consisting of 49 ribbed sodium heat pipes on a specially developed test stand simulating SGTE regenerator operating conditions. This study confirms the possibility of using the heat-pipe heat exchanger as an SGTE regenerator. M.M.M.

N80-10024 Allerton Press, Inc., New York, N. Y.
ANALYTIC REPRESENTATION OF TURBINE CHARACTERISTICS IN FORM CONVENIENT FOR COMPUTER CALCULATION OF GTE PARAMETERS

V. I. Bakulev, K. A. Malinovskii, and V. S. Yakushev *In its Soviet Aeron.*, Vol. 21, No. 3 1978 p 104-110 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 3, 1978 p 142-144

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

A method is proposed for representing turbine characteristics in a form convenient for computer calculation of gas turbine engine parameters. The method makes it possible to specify the turbine characteristic completely by two functions. The form of the functions is approximated well by polynomials, which makes it possible to specify simply the turbine operating field region and is convenient for computer calculation of GTE characteristics. Author

N80-10027 Allerton Press, Inc., New York, N. Y.
LONG-LIFT GTE OPERATION BASED ON TECHNICAL CONDITION

A. A. Mukhin, A. A. Kovalev, and A. A. Kornoukhov *In its Soviet Aeron.*, Vol. 21, No. 3 1978 p 116-118 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 3, 1978 p 153-156

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

Methods for evaluating turbine rotor blade technical condition during operation of the loads on aircraft engines are examined. Methods include using a service life counter, manual recordings and a computer, and a magnetic flight data recorder to record the accumulated time of operation at takeoff and other operating regimes such as number of takeoffs and landings, the number of transient regimes, and the maximum gas temperature in the turbine inlet under flight conditions. A.W.H.

N80-10028 Allerton Press, Inc., New York, N. Y.
USE OF THE METHOD OF VARIABLE DIRECTIONS FOR NUMERICAL STUDY OF THE TEMPERATURE STATES OF A TURBINE DISK WITH BLADES

A. M. Polyakov, V. S. Petrovskii, and V. I. Krichakin *In its Soviet Aeron.*, Vol. 21, No. 3 1978 p 119-122 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 3, 1978 p 156-160

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

The system of two dimensional unsteady heat conduction equations for a turbine blade and disk is presented. The disk profile, specified by arbitrary functions bounding the side surface contour, is analyzed. The transformation of the curvilinear disk region contour into a rectangular region using linear transformation is described. A.W.H.

N80-10029 Allerton Press, Inc., New York, N. Y.
CHARACTERISTICS OF AFTERBURNING BYPASS TURBOJET ENGINE WITH OXYGEN INJECTION INTO THE AFTERBURNER CHAMBER

B. D. Fishbein *In its Soviet Aeron.*, Vol. 21, No. 3 1978 p 123-126 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.* (USSR), v. 21, no. 3, 1978 p 160-164

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

The thermodynamic effectiveness of increasing the augmentation ratio and thrust of the afterburning bypass turbojet engine with oxygen injection into the afterburner chamber under flight conditions is investigated. The thermodynamic characteristics of the air, mixture of air and oxygen, and products of complete combustion of kerosene in air and in a mixture of air and oxygen are presented. The kerosene flow rate in the turbine and afterburner combustion chambers is determined and the kerosene expansion in the propulsive nozzle is calculated using the temperature dependence of the working fluid specific heat. A.W.H.

N80-10035# Allerton Press, Inc., New York, N. Y.
ANALYTIC DESIGN OF REGULATORS FOR CONTROLLING ELASTIC FLIGHT VEHICLE ROTATION ABOUT THE LONGITUDINAL AXIS

A. A. Baloev *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 16-21 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.* (USSR), v. 21, no. 4 1978 p 23-28

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

On the basis of classical variational calculus an algorithm is developed for synthesis of the optimal control of elastic flight vehicle rotation about the longitudinal axis. The known analogous algorithms developed on the basis of the dynamic programming method are more tedious, since their application requires solution of nonlinear Riccati-type equations. F.O.S.

N80-10037 Allerton Press, Inc., New York, N. Y.
OPTIMAL CONTROL OF FLIGHT VEHICLE WITH ELASTIC ELEMENTS

V. V. Vatolin, G. L. Degtyarev, and N. K. Yunusov *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 27-31 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.* (USSR), v. 21, no. 4, 1978 p 36-42

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The problem is examined of synthesizing an optimal control as is a function of the measured variables. The optimality criterion is the value of a quadratic form of the observed variables at the current instant of time. An analytic expression is obtained for the optimal control and the condition which the flight vehicle state measurement technique must satisfy and analyze the influence of measurement sensor location on controlled motion quality. F.O.S.

N80-10038 Allerton Press, Inc., New York, N. Y.
ANALOG MODELING IN STUDYING SUPERSONIC FLOW AROUND A WING AND ITS GOVERNING ANALOG-CRITERIA

R. I. Vinogradov *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 32-37 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.* (USSR), v. 21, no. 4 1978 p 43-48

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

In examining the gas-hydraulic analogy, no systematic study has been made of the questions for determining the criteria which ensure proper analog modeling. The mathematical similitude analog-criterion concept is introduced. Recommendations are given on the conduct of mixed analog-physical modeling when conducting experiments to study the flow patterns around an oscillating wing by the gas-hydraulic analogy method. F.O.S.

N80-10042 Allerton Press, Inc., New York, N. Y.
BASIC PROBLEM OF AIRCRAFT GAS TURBINE ENGINE ANALYTIC DESIGN. PART 1

Yu. V. Kozhevnikov, V. O. Borovik, V. S. Ivanov, V. A. Talyzin, Agliullin, and Ya. V. Melusov *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 53-57 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.* (USSR), v. 21, no. 4, 1978 p 68-74 (For primary document see N80-10031 01-01)

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The general problem of gas turbine engine design is considered. The problem of modeling and optimizing the engine thermodynamic and gasdynamic parameters is defined as the basic problem; the solution yields the system of basic data for constructive detail design of the gas turbine engine elements. A formulation of the basic analytic design problem is presented accounting for the effect of random factors and the multi-regime nature of engine operation. J.M.S.

N80-10043 Allerton Press, Inc., New York, N. Y.
ANALYSIS OF THIN-WALL BEAMS BY THE METHOD OF SEGMENTS

A. S. Kretov and V. G. Shataev *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 58-61 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.* (USSR), v. 21, no. 4, 1978 p 75-80

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The stress-strain state of thin wall structures such as a flight vehicle wing or body having an irregular structural scheme is examined. It is assumed that the cross-section contour does not change in the deformation process, the skin works in shear, and the stringers work in tension-compression. The structure is broken down into several segments of variable section, which are analyzed numerically by a finite sum method. An algorithm is proposed for constructing the segment coupling matrix equations. The solution is realized in the form of an ALGOL program and the analysis results are compared with experimental data. J.M.S.

N80-10044 Allerton Press, Inc., New York, N. Y.
SELECTING THE GEOMETRIC PARAMETERS AND POSITION OF A NOSE FLAP ON THE ROOT PROFILE OF A SWEEP WING USING TUNNEL TEST DATA, PART 2

A. I. Matyah, V. A. Sterlin, V. A. Popov, V. V. Isaev, and G. A. Cheremukhin *In its Soviet Aeron.*, vol. 21, no. 4, 1978 p 62-66 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.* (USSR), v. 21, no. 4, 1978 p 81-87

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The installation of a nose flap on the swept wing of a transport airplane is analyzed. The aerodynamic effects associated with installation of the flap are identified and evaluated on the basis of data from wind tunnel tests of a full-scale airplane model. It is shown that the use on the nose of the swept wing of combined mechanization in the form of a slat on the outer part of the wing and a nose flap at the root improves the aerodynamic characteristics in the region of both moderate and high angles of attack. Some questions of design nature which may arise when installing a nose flap are included. J.M.S.

N80-10045 Allerton Press, Inc., New York, N. Y.
LAMINAR BOUNDARY LAYER CALCULATION FROM EXPERIMENTAL PRESSURE DISTRIBUTION

V. D. Osorgin, A. N. Popkov, O. P. Sidorov, and S. O. Sidorova *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 67-71 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.* (USSR), v. 21, no. 4, 1978 p 88-93

Copyright Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

A technique for calculating the laminar boundary layer from an experimental pressure distribution is presented. For this the discrete experimental wing profile surface pressure function is approximated by a spline function which is continuous together with its first derivative. A single-parameter method is used to calculate the boundary layer at a profile specified in tabular form and the calculation results are presented. J.M.S.

N80-10046 Allerton Press, Inc., New York, N. Y.
ON MODELING SENSITIVITY OF A LINEAR SYSTEM TO REDUCTION OF ITS ORDER BY THE INFINITESIMAL TRANSFORMATION METHOD IN THE YAW MOTION CONTROL PROBLEM

V. G. Pavlov *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 72-75 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats Tekh.*, (USSR), v. 21, no. 4, 1978 p 94-98

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

A method based on the use of some concepts of continuous group theory is proposed for solving the problem of linear system sensitivity to reduction of its order. The basic idea is that the original process is embedded in a continuous ensemble obtained by transformation of the nominal process. A system of lower order is taken as the original system. The entire process ensemble corresponding to higher-order systems is obtained by transformation of the original system. Use of this method is examined in the yaw motion control problem. It is shown that the sensitivity study can be modeled by a continuous transformation group defined by the Lie algebra of three basis operators. A precise estimate of system sensitivity to reduction of its order is obtained. J.M.S.

N80-10047 Allerton Press, Inc., New York, N. Y.
ON THE EMPENNAGE SNAP-THROUGH PROBLEM

V. A. Pavlov and S. K. Chernikov *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 76-80 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats Tekh.*, (USSR), v. 21, no. 4, 1978 p 99-104

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The structural stability of flight vehicle empennage-type structures is examined. A mathematical model made up of a system on nonlinear integral-differential equations is obtained and solved by the successive loading method with refinement of the roots using the Newton-Kantorovich method. Results of calculations are presented and are confirmed by experiments. J.M.S.

N80-10048 Allerton Press, Inc., New York, N. Y.
ELECTRICAL CHARGING OF FABRIC AND FILM MATERIALS

B. G. Popov, V. N. Baklygin, and I. I. Chistyakov *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 81-86 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.*, (USSR), v. 21, no. 4, 1978 p 105-111

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The mechanism of fabric and film material electrification during contact with one another is examined. Results of an analytic and experimental study are presented which establish the connection between the charge formed on the surface and the properties of the materials and the intensity of their mutual contact. J.M.S.

N80-10050 Allerton Press, Inc., New York, N. Y.
MOTION OF RECTANGULAR WING BETWEEN PARALLEL WALLS

K. V. Rozhdestvenskii *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 92-97 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.*, (USSR), v. 21, no. 4, 1978 p 117-123

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The method of matched decompositions is used to find the asymptotic expression for the potential of the flow around a rectangular wing between parallel walls. Formulas for the lift coefficient are obtained and numerical results are presented illustrating the influence of the walls on the lift force for various wing aspect ratios and distances between the walls. The results are valid for small relative distance of the wing from the lower wall. Author

N80-10053 Allerton Press, Inc., New York, N. Y.
STRUCTURAL ANALYSIS OF VARIABLE-SWEEP WINGS

N. A. Shelqmov and N. A. Gorozhankin *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 106-113 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.*, (USSR), v. 21, no. 4, 1978 p 133-141

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

A technique based on a combined system model in the differential formulation is presented for structural analysis of variable sweep wings. The problem is examined for momentless conical and cylindrical skewed shells located between the wing ribs. The differential equations of equilibrium of a skewed momentless shell element are discussed. A.W.H.

N80-10054 Allerton Press, Inc., New York, N. Y.
DETERMINATION OF STRAIN FIELDS NEAR CONCENTRATORS FROM STRAIN GAGE INDICATORS

A. L. Brushkovskii *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 142-144 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aeron. Tekh.*, (USSR), v. 21, no. 4, 1978 p 114-116

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

A technique is presented for determining the strain fields in stress concentrator zones from strain gage indications without account for, and with partial or complete account for, the design schemes of the objects. The strain determination algorithms (without account for the design schemes of the elements) are discussed due to their poor sensitivity to changes of the field outside the comparison nodes. Methods to account for the physical aspect of the error in the algorithm are described. A.W.H.

N80-10057 Allerton Press, Inc., New York, N. Y.
ON THIN-WALL BEAM EFFECTIVE STIFFNESS

V. A. Pavlov *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 124-128 ref Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.*, (USSR), v. 21, no. 4, 1978 p 151-155

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The bending stiffness of a thin wall beam in a constrained, deplanation zone is analyzed. A condition of the analysis, that the law of planar distribution of the relative elongation is violated, is described. The bending stiffness of a thin wall beam determined from the Odinaikov theory is presented. A.W.H.

N80-10058 Allerton Press, Inc., New York, N. Y.
APPLICATION OF THE FACTOR INTERPOLATION METHOD IN FLIGHT VEHICLE LANDING GEAR ANALYTIC DESIGN

A. V. Svilin *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 129-131 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.*, (USSR), v. 21, no. 4, 1978 p 155-158

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

A technique for solving the problem of landing gear analytic design with random inputs is presented. The probabilities that the landing gear quality indices will lie in given regions with respect to the values of their mathematical expectations and dispersions are discussed. The mathematical expectations and dispersions of the landing gear quality indices are determined using the factor interpolation method. A.W.H.

N80-10060 Allerton Press, Inc., New York, N. Y.
FLOW-AROUND SMALL-ASPECT-RATIO DELTA WING WITH VORTEX 'BURSTING'

G. A. Cheremukhin, E. A. Truneva, and E. Ya. Pivkin *In its Soviet Aeron.*, v. 21, no. 4, 1978 p 135-140 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh.*,

(USSR), v. 21, no. 4, 1978 p 162-167

Copyright. Avail: Allerton Press, Inc., 150 Fifth Avenue, New York, N. Y. 10011; \$45.00

The vortex flow around a delta wing of small aspect ratio is discussed. The connection between the state of the vortex and the flow over the surface of the wing is examined. Influences on the pressure distribution and the aerodynamic characteristics, due to the appearance of the vortex bursting above the wing surface are reported. A.W.H.

N80-10063 Allerton Press, Inc., New York, N. Y.

GAS CURTAINS IN GAS TURBINE ENGINES

I. S. Varganov *In its Soviet Aeron.*, v. 22, no. 1 1979 p 6-10 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 11-16

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

The application of gas curtains for thrust reversal in gas turbine engines is numerically examined. The use of gas curtains in the fan flow makes it possible to vary the flow rate ratio as a function of flight regime. The energy capabilities of this reversal technique are determined in terms of the relative required flow rate. J.M.S.

N80-10065 Allerton Press, Inc., New York, N. Y.

STUDY OF HOMOGENEOUS COMBUSTION CHAMBER TEMPERATURE FIELD NONUNIFORMITY WITH PRIMARY ZONE PARAMETER VARIATION

O. A. Evin, V. M. Yankovskii, and I. N. Pyatlov *In its Soviet Aeron.*, v. 22, no. 1 1979 p 16-19 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 24-29

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

The influence of the primary zone parameters on the temperature field nonuniformity of homogeneous combustion chambers was studied using a flame tube of a production combustion chamber. Results are discussed. J.M.S.

N80-10068 Allerton Press, Inc., New York, N. Y.

SELECTION OF OPTIMAL PARAMETERS OF HEAT-PIPE HEAT EXCHANGER FOR A GAS TURBINE ENGINE

N. V. Lokai and I. I. Mosin *In its Soviet Aeron.*, v. 22, no. 1 1979 p 30-34 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 41-46

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

Requirements that assist in achieving the maximal heat exchanger degree of regeneration are examined. It is shown that in a specific gas turbine engine equipped with a heat exchanger the degree of regeneration can be improved by observing the following conditions: (1) The heat transfer capacity of the heat exchanger heat pipes must exceed the rate of heat transfer from the gas and air sides; (2) the condition of equality of certain dimensionless groupings on the hot and cold sides of the heat exchanger must be satisfied. R.E.S.

N80-10071 Allerton Press, Inc., New York, N. Y.

SYSTEMATIZATION OF SIMPLE DETAIL PARTS OF REGULABLE NOZZLE OF GAS TURBINE ENGINE

I. E. Sapozhkov and E. D. Stenkin *In its Soviet Aeron.*, v. 22, no. 1 1979 p 44-49 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 57-63

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

A subsystem principle of studying gas turbine design which accounts for the characteristics of the working process and which can be used in studying various mechanical systems is proposed.

The structural schemes and 'typizations' of gas turbine engine regulable nozzle details were determined. These schemes are necessary in developing optimal design methods and their computer formalization. M.M.M.

N80-10074 Allerton Press, Inc., New York, N. Y.

DYNAMICS OF DIESEL FUEL COMBUSTION IN TURBULENT FLOW

F. A. Khamidullin, A. F. Kuzin, O. V. Strogonov, Yu. V. Troitskii, and A. V. Talantov *In its Soviet Aeron.*, v. 22, no. 1 1979 p 58-63 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 73-80

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

A study of diesel fuel and also TS-1 kerosene and B-70 gasoline combustion in a turbulent stream is presented. These fuels are compared and the dependence of the combustion zone length and the combustion time on mixture composition, velocity, and initial temperature under the model combustion chamber conditions was established. M.M.M.

N80-10075 Allerton Press, Inc., New York, N. Y.

STUDY OF MASS EXCHANGE BETWEEN PRIMARY ZONE AND SECONDARY AIR JETS IN GAS TURBINE ENGINE COMBUSTION CHAMBERS

V. G. Shumachenko, V. M. Yankovskii, and A. V. Stalantov *In its Soviet Aeron.*, v. 22, no. 1 1979 p 64-67 ref Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 81-85

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

The experimental and theoretical determination of the secondary air jets G sub pz in application to combustion chambers is presented as well as the flow structure in the primary zone which is formed by the secondary air jets of the first row of holes. In such combustion chambers, the air flow rate through the front end assembly G sub pz does not exceed 5-10% of the overall air flow rate through the chamber, and most of the air enters the primary zone from the secondary air jets. M.M.M.

N80-10077 Allerton Press, Inc., New York, N. Y.

AERODYNAMIC EFFICIENCY OF GAS TURBINE INTAKE DUCT

I. G. Gogolev, P. V. Korolev, Yu. D. Kudashev, V. A. Magala, and B. A. Shifrin *In its Soviet Aeron.*, v. 22, no. 1 1979 p 71-73 Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 88-91

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

Cold flow tests were conducted on an aerodynamic stand for a small transport gas turbine power plant segment consisting of a combustion chamber, an intake duct, and a stator cascade. Pneumometric probes were used to measure static pressure, total pressure, and flow angles in the radial and tangential directions at the segment control sections. Velocity fields, mass rate distributions and the streamline shape were found. Energy losses in the segment elements were determined separately and their mutual influence during combined operation was analyzed. Increasing the radius of curvature of the intake duct surface was found to eliminate flow separation and reduce nonuniformity in the radial and circumferential flow parameter distribution. Although the stator cascade efficiency remained unchanged, the efficiency of the entire segment was increased as a result of elimination of energy losses in the flow entering the cascade. K.L.

N80-10083 Allerton Press, Inc., New York, N. Y.

ON THE INFLUENCE OF SHORT SHROUD PLATFORMS ON TURBINE STAGE OPERATION

R. V. Kuzmichev and G. V. Proskuryakov *In its Soviet Aeron.*, v. 22, no. 1 1979 p 90-92 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1,

1979 p 105-107 (For primary document see N80-10061 01-01)
Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

Techniques for improving the efficiency of unshrouded turbine stages using short shroud platforms are examined. Two air turbine engine models were tested for the overall improvement in stage efficiency. The use of short one sided and two sided shroud platforms on the performance of the rotor blades, the blade tips, and the flow structure near the periphery is discussed. Stage efficiency improvement in the limits of the inter row clearance and radial clearance is determined. A.W.H.

N80-10085 Allerton Press, Inc., New York, N. Y.
STUDY OF COMBINED OPERATION OF SELF-EVACUATING VORTEX TUBE WITH DIFFUSER

A. P. Merkulov and V. T. Volov *In its Soviet Aeron.*, v. 22, no. 1 1979 p 96-98 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 109-112

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

The effect created by the self evacuating vortex tube (SEVT) and the cooling of the near axis SEVT layers in certain operating regimes is examined. An isogradient radially symmetric diffuser which transforms the kinetic energy of the gas entering the diffuser into pressure energy is described. The reduction of SEVT dimensions for use in aircraft equipment is discussed. A.W.H.

N80-10088 Allerton Press, Inc., New York, N. Y.
STUDY OF SIZE DISTRIBUTION OF OIL DROPS FORMED IN GTE OIL

P. G. Petrov and O. A. Povarov *In its Soviet Aeron.*, v. 22, no. 1 1979 p 105-107 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 117-119

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

The replica method was used to study the oil drop size distribution. A probe was installed in the air-oil separator housing ahead of the impeller. After reaching steady-state conditions and complete stabilization of the parameters, the sample was taken (measurement time 0.06 to 0.1 sec). Then the drop 'replicas' were photographed through a microscope. Photography of a calibrated wire with identical magnification was used to determine the dimensions of the oil drop replicas. Results show that the air-oil mixture which forms in the oil system lines has a very broad oil drop size spectrum with the maximum number of drops (about 20%) being on the order to 10 microns in diameter.

A.R.H.

N80-10089 Allerton Press, Inc., New York, N. Y.
NONSTATIONARITY OF HEAT TRANSFER IN AXIAL TURBINE BLADING DURING ENGINE STARTUP

A. M. Polyakov, V. S. Petrovskii, and V. I. Krichakin *In its Soviet Aeron.*, v. 22, no. 1 1979 p 108-111 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 119-123

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

In all gas turbine element temperature calculations, the coefficient of heat transfer are assumed to be independent of the nonstationarity of the heat transfer process. Of interest are the time dependence of the local coefficient of heat transfer on axial gas turbine rotor blade surfaces found from the results of temperature survey during startup. The first-stage and second-stage rotor blade temperatures at the mean diameter of the turbine of an aircraft auxiliary power unit engine were continuously recorded. The temperature values through the blade thickness were averaged. A.R.H.

N80-10091 Allerton Press, Inc., New York, N. Y.
PNEUMATIC DISTRIBUTOR FOR TURBOJET ENGINE CONTROL SYSTEM

M. G. Khabibullin *In its Soviet Aeron.*, v. 22, no. 1 1979 p 115-116 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekhn. (USSR)*, v. 22, no. 1, 1979 p 126-127
Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., New York, N. Y. 10011; \$50.00

A distributor, introduced into the thrust reverser control system of the NK-8-2U TJE for the Tu-154 airplane, consists of the housing with sleeve, in the bore of which the spool is installed. The central port in the housing is for air entry from the pressure source - the cavity downstream of the TJE compressor. There are two ports for air supply to the actuator, and two others for discharge of the used air into the atmosphere. The support lands are made from graphite-impregnated metal to ensure small dry-friction forces during displacement, since the graphite-impregnated metal acts as a lubricant for the contacting surfaces and eliminates the possibility of spool binding. The middle distributing land is metal, is integral with the spool and its width is considerably less than the width of the supporting lands, which makes it possible to reduce the spool working travel and the overall dimensions of the unit. In order to eliminate the possibility of contact of the land with the sleeve, since the metal-metal friction pair would not operate satisfactorily under dry-friction conditions, the diameter of the land is less than the diameter of the supporting lands by 0.01 to 0.02 mm. with allowance for thermal expansion. A.R.H.

N80-10097 Engineering Sciences Data Unit, London (England).
WING-BODY YAWING MOMENT AND SIDEFORCE DERIVATIVES DUE TO SIDESLIP: N_y AND Y_y

1979 14 p
(ESDU-79006; ISBN-0-85679-251-9; ISSN-0141-397X) For information on availability of series, sub-series and other individual data items, write NTIS. Attn: ESDU, Springfield, Va. 22161. HC \$386.50

A means is provided for estimating the yawing moment and sideforce derivatives due to sideslip for wing-body combinations at small angles of attack and sideslip at subsonic speeds. For stability calculations, an accurate prediction is more important for N_y than for Y_y . The data are primarily intended for predicting N_y . Because N_y is dependent on the choice of yaw axis position, a knowledge of Y_y is needed to convert N_y from one axis position to another. An accurate estimate of Y_y is difficult and the method given may involve substantial errors for certain configurations, but it is considered adequate in allowing for changes in yaw axis position between 0.41(b) and 0.61(b) as, subject to that limitation, quite large uncertainties in Y_y do not give rise to significant errors in N_y . ESDU

N80-10098 Texas Univ. at Arlington.
CROSS FLOW FAN EXPERIMENT DEVELOPMENT AND FINITE ELEMENT MODELING Ph.D. Thesis

Gary James Harloff 1979 230 p
Avail: Univ. Microfilms Order No. 7922981

A compressible one dimensional finite element differential analysis is presented which accounts for area changes, rotor lumped blade forces, turbulent wall friction, and heat input. The analysis permits integration through the rotors. Good agreement with test data is obtained. The analysis indicates that appreciable heating of the through flow occurs. The heat input is due to viscous dissipation in the airfoils. This heat input causes thermal choking in the second stage rotor fan. An incompressible two dimensional finite element analysis is also presented which also permits integration through the rotors. The flow outside the rotors is treated as potential flow and the flow inside the rotors is treated as rotational flow. Good agreement with low speed test data is obtained. Maximum velocities of twice the rotor tip speed are predicated inside the outlet rotor. Dissert. Abstr.

N80-10101*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

EFFECT OF WINGLETS ON A FIRST-GENERATION JET TRANSPORT WING. 6: STABILITY CHARACTERISTICS FOR A FULL-SPAN MODEL AT SUBSONIC SPEEDS

Stuart G. Flechner Oct. 1979 69 p refs
(NASA-TP-1330; L-12514) Avail: NTIS HC A04/MF A01 CSCL 01A

A wind tunnel investigation to identify changes in stability and control characteristics of a model KC-135A due to the addition of winglets is presented. Static longitudinal and lateral-directional aerodynamic characteristics were determined for the model with and without winglets. Variations in the aerodynamic characteristics at various Mach numbers, angles of attack, and angles of slidslip are discussed. The effect of the winglets on the drag and lift coefficients are evaluated and the low speed and high speed characteristics of the model are reported. A.W.H.

N80-10102*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.
WIND-TUNNEL INVESTIGATION OF THE VALIDITY OF A SONIC-BOOM-MINIMIZATION CONCEPT
 Robert J. Mack and Christine M. Darden Oct. 1979 47 p refs
 (NASA-TP-1421; L-12661) Avail: NTIS HC A03/MF A01 CSCL 01A

The Langley unitary plan unitary plan wind tunnel was used to determine the validity of a sonic-boom-minimization theory. Five models - two reference and three low-boom constrained - were tested at design Mach numbers of 1.5 and 2.7. Results show that the pressure signatures generated by the low-boom models had significantly lower overpressure levels than those produced by the reference models and that small changes in the Mach number and/or the lift caused relatively small changes in the signature shape and overpressure level. Boundary-layer effects were found in the signature shape and overpressure level. Boundary-layer effects were found to be sizable on the low-boom models, and when viscous corrections were included in the analysis, improved agreement between the predicted and the measured signatures was noted. Since this agreement was better at Mach 1.5 than at Mach 2.7, it was concluded that the minimization method was definitely valid at Mach 1.5 and was probably valid at Mach 2.7, with further work needed to resolve the uncertainty. A.R.H.

N80-10103*# Johns Hopkins Univ., Laurel, Md.
ADVANCED MISSILE TECHNOLOGY. A REVIEW OF TECHNOLOGY IMPROVEMENT AREAS FOR CRUISE MISSILES Final Report
 L. L. Cronvich and H. P. Liepman Washington Oct. 1979 66 p refs
 (NASA Order L-75242A)
 (NASA-CR-3187; BFD-0-79-001) Avail: NTIS HC A04/MF A01 CSCL 01A

Technology assessments in the areas of aerodynamics, propulsion, and structures and materials for cruise missile systems are discussed. The cruise missiles considered cover the full speed, altitude, and target range. The penetrativity, range, and maneuverability of the cruise missiles are examined and evaluated for performance improvements. A.W.H.

N80-10104*# National Aeronautics and Space Administration, Washington, D. C.
THE SIGNIFICANCE OF WING END CONFIGURATION IN AIRFOIL DESIGN FOR CIVIL AVIATION AIRCRAFT
 H. Zimmer Oct. 1979 35 p refs Transl. into ENGLISH of "Die Bedeutung der Fluecelendformen Tragfluecelentwurf fuer Flugzeuge der Zivilen Luftfahrt", paper-77-030 Deutsche Gesellschaft fuer Luft-und Raumfahrt, Jahrestagung 10th, Berlin, 15 Sep. 1977 40 p Transl. by Leo Kanner Associates, Redwood City, Calif.
 (Contract NASw-3199)
 (NASA-TM-75711; Paper-77-030) Avail: NTIS HC A03/MF A01 CSCL 01A

Lift-dependent induced drag in commercial aviation aircraft is discussed, with emphasis on the necessary compromises between wing and configuration modifications which better lift performance and the weight gains accompanying such modifications. Triangular, rectangular and elliptical configurations for wing ends are considered; attention is also given to airfoil designs incorporating winglets. Water tunnel tests of several configurations are reported. In addition, applications of wing and modifications to advanced technology commercial aviation aircraft and the Airbus A-300 are mentioned. Author

N80-10105*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.
ESTIMATION OF ATTAINABLE LEADING-EDGE THRUST FOR WINGS AT SUBSONIC AND SUPERSONIC SPEEDS
 Harry W. Carlson, Robert J. Mack, and Raymond L. Barger 1979 62 p refs
 (NASA-TP-1500; L-13032) Avail: NTIS HC A04/MF A01 CSCL 01A

The factors which place limits on the theoretical leading edge thrust are identified. An empirical method for the estimation of attainable thrust is presented. The method is based on the use of simple sweep theory to permit a two dimensional analysis, the use of theoretical airfoil programs to define thrust dependence on local geometric characteristics, and the examination of experimental two dimensional airfoil data to define limitations imposed by local Mach numbers and Reynolds numbers. Comparisons of theoretical and experimental aerodynamic characteristics for a series of wing body configurations are examined. A.W.H.

N80-10106*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.
EFFECT OF SEVERAL AIRFRAME/NOZZLE MODIFICATIONS ON THE DRAG OF A VARIABLE-SWEEP BOMBER CONFIGURATION
 Richard J. Re and David E. Reubush Washington 1979 171 p ref
 (NASA-TM-80129; L-13043) Avail: NTIS HC A08/MF A01 CSCL 01A

A variable sweep bomber aircraft model was investigated to identify modifications for drag reduction. Modifications included simulated two dimensional nozzles, staggered and extended nozzles; short, long, and no interfairings between the nozzles; partial and complete wing-glove fairings; glove-fuselage sidefairing; fuselage underfairing; and wing pods. The variable wing sweep and variable exhaust nozzles of the scale model are discussed. A.W.H.

N80-10107*# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.
WORKSHOP ON THRUST AUGMENTING EJECTORS
 A. E. Lopez, ed., D. G. Koenig, ed., D. S. Green, ed. (Naval Air Development Center, Warminster, Penn.), and K. S. Nagaraja, ed. (Air Force Flight Dynamics Lab) Sep. 1979 509 p Conf. held at Moffett Field, Calif., 28-29 Jun. 1978; Sponsored by NADC and AFFDL
 (NASA-CP-2093; A-7887) Avail: NTIS HC A22/MF A01 CSCL 01A

The state of the art of ejector technology is assessed and the desired direction of future studies in all aspects of ejector thrust augmenting systems is delineated.

N80-10108*# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.
RECENT DEVELOPMENTS IN EJECTOR TECHNOLOGY IN THE AIR FORCE: AN OVERVIEW
 K. S. Nagaraja In NASA, Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 1-22 refs

Avail: NTIS HC A22/MF A01 CSCL 01A

Basic and applied studies in thrust augmentation conducted at the Aerospace Research Laboratory at Wright-Patterson AFB which led to an effective configuration of the jet flap diffuser ejector, are reviewed. A method for compressible ejector flow analysis, developed in support of the preliminary design of an ejector thrust aircraft, is discussed and applied to single- and two-stage ejectors. A.R.H.

N80-10109*# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.
NASA OVERVIEW
 David G. Koenig In its Workshop on Thrust Augmenting Ejectors Sep. 1979 p 23-40 refs

Avail: NTIS HC A22/MF A01 CSCL 01A

The history of NASA efforts at Ames Research Center in researching the performance and application of thrusting augmentors is reviewed. Current objectives include: (1) parametric description of thrust augmentor application to STOL and V/STOL; (2) the use of theoretical and empirical data; (3) aircraft-augmentor integration; and (4) key design considerations for STOL transport and V/STOL fighter aircraft. Test facilities are described and ejector development and performance are assessed. A.R.H.

N80-10119*# Duvvuri Research Associates, Chula Vista, Calif.
INTEGRATION OF EJECTORS INTO HIGH-SPEED AIRCRAFT

Tirumalesa Duvvuri *In* NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 225-238

Avail: NTIS HC A22/MF A01 CSCL 01A

The integration of ejectors into forebodies is considered for transonic and supersonic flight. Topics discussed include mixing flow in ducts, prediction of flow fields and external aerodynamics. K.L.

N80-10120*# Air Force Inst. of Tech., Wright-Patterson AFB, Ohio.

SOME TESTS ON SMALL-SCALE RECTANGULAR THROAT EJECTOR

W. N. Dean, Jr. (Air Force Flight Test Center) and M. E. Franke *In* NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 239-251 refs

Avail: NTIS HC A22/MF A01 CSCL 01A

A small scale rectangular throat ejector with plane slot nozzles and a fixed throat area was tested to determine the effects of diffuser sidewall length, diffuser area ratio, and sidewall nozzle position on thrust and mass augmentation. The thrust augmentation ratio varied from approximately 0.9 to 1.1. Although the ejector did not have good thrust augmentation performance, the effects of the parameters studied are believed to indicate probable trends in thrust augmenting ejectors. Author

N80-10121*# Vought Corp., Dallas, Tex.
AUGMENTING EJECTOR ENDWALL EFFECTS

J. L. Porter and R. A. Squyers *In* NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 253-271 refs

Avail: NTIS HC A22/MF A01 CSCL 01A

Rectangular inlet ejectors which had multiple hypermixing nozzles for their primary jets were investigated for the effects of endwall blowing on thrust augmentation performance. The ejector configurations tested had both straight wall and active boundary layer control type diffusers. Endwall flows were energized and controlled by simple blowing jets suitably located in the ejector. Both the endwall and boundary layer control diffuser blowing rates were varied to determine optimum performance. High area ratio diffusers with insufficient endwall blowing showed endwall separation and rapid degradation of thrust performance. Optimized values of diffuser boundary layer control and endwall nozzle blowing rates in an ejector augmentor were shown to achieve high levels of augmentation performance for maximum compactness. K.L.

N80-10122*# Rockwell International Corp., Columbus, Ohio.
 Columbus Aircraft Div.

AN INVESTIGATION OF CORNER SEPARATION WITHIN A THRUST AUGMENTER HAVING COANDA JETS Final Report

M. R. Seiler *In* NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 273-293 refs

(Contract N62269-76-C-0402)

(NADC-76153-30) Avail: NTIS HC A22/MF A01 CSCL 01A

The development of separation in corners of thrust augmentor wings having Coanda jets was investigated using hot film surface sensors and pressure transducers. Separation on the test augmentor began at a corner very close to the augmentor exit

and then rapidly proceeded upstream. Measurements of the pressure fields in the corner region indicated that a modified form of the Stratford criterion could be used to predict the onset of separation. Testing was conducted over a range of nozzle pressure ratios, aspect ratios, diffuser angles, and designs of the boundary layer and Coanda nozzles. K.L.

N80-10124*# Naval Postgraduate School, Monterey, Calif.
ENTRAINMENT CHARACTERISTICS OF UNSTEADY SUBSONIC JETS

M. F. Platzer, J. M. Simmons (Queensland Univ., Brisbane, Australia), and K. Bremhorst (Queensland Univ., Brisbane, Australia) *In* NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 311-324 refs Submitted for publication

Avail: NTIS HC A22/MF A01 CSCL 01A

The effectiveness of jet unsteadiness in enhancing flow entrainment was assessed. It was conducted that entrainment depends on the type and amount of jet unsteadiness. Apparently, the mere introduction of jet unsteadiness by small sinusoidal flow angle variations is insufficient to enhance entrainment but, it should be noted that the results were obtained at measuring stations which are all many nozzle widths downstream of the jet nozzle. Thus, no fully conclusive statement can be made at this time about the entrainment close to the nozzle. The high entrainment of the fluidically oscillated jet was caused by the high-frequency content of this square wave type of oscillation but more detailed measurements are clearly needed, in particular for the fluidically oscillated and the pulsed jets. Practical ejector application requires the proper trade-off between entrainment and primary nozzle thrust efficiency. M.M.M.

N80-10125*# Calgary Univ. (Alberta). Dept. of Mechanical Engineering.

A SIMPLE APPARATUS FOR THE EXPERIMENTAL STUDY OF NON-STEADY FLOW THRUST-AUGMENTER EJECTOR CONFIGURATIONS

J. M. Khare and J. A. C. Kentfield *In* NASA. Ames Res. Center Workshop on Thrust Augmenting Ejector Sep. 1979 p 325-349 refs

Avail: NTIS HC A22/MF A01 CSCL 01A

A flexible, and easily modified, test rig is described which allows a one dimensional nonsteady flow stream to be generated, economically from a steady flow source of compressed air. This nonsteady flow is used as the primary stream in a nonsteady flow ejector constituting part of the test equipment. Standard piezo-electric pressure transducers etc. allow local pressures to be studied, as functions of time, in both the primary and secondary (mixed) flow portions of the apparatus. Provision is also made for measuring the primary and secondary mass flows and the thrust generated. Sample results obtained with the equipment are presented. M.M.M.

N80-10126*# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.

PRESSURE AND VELOCITY MEASUREMENTS IN A THREE-DIMENSIONAL WALL JET

G. D. Catalano, J. B. Morton (Virginia Univ.), and R. R. Humpris (Virginia Univ.) *In* NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 357-362 refs Presented at the AIAA 17th Aerospace Sciences Meeting, New Orleans, 15-17 Jan. 1979

(Grants NGR-47-005-219; NSF 7522488)

Avail: NTIS HC A22/MF A01 CSCL 01A

The effects on the flow fields of varying the ratio of the velocity at the exit plane of the nozzle to the outer tunnel flow are reported. The pressure-velocity correlations are taken and some trends are discussed. Emphasis is placed on comparing the coherence between the fluctuating pressure and velocity fields at various locations in the different flow configurations. M.M.M.

N80-10127*# Flight Dynamics Research Corp., Van Nuys, Calif.
CONSIDERATIONS OF SOME CRITICAL EJECTOR PROBLEMS

Morton Alperin and Jiunn-Jeng Wu /n NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 363-384 refs
 Avail: NTIS HC A22/MF A01 CSCL 01A

Some aspects of ejector design and application, including, three dimensional effects and cross flow effects are presented.
 M.M.M.

N80-10129*# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio. Aeromechanics Div.

INTERFACE CONCERNS OF EJECTOR INTEGRATION IN V/STOL AIRCRAFT

Randall B. Lowry /n NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 397-415

Avail: NTIS HC A22/MF A01 CSCL 01A

A number of areas which have in the past contributed to weight, complexity, and thrust losses in the ejector-powered V/STOL vehicle were identified. Most of these interfaces taken singly do not represent a severe compromise to the vehicle; however, the bottom line is that the sum of compromises and the subsequent effects on performance, flight operations and maintenance have rendered the ejector V/STOL aircraft unattractive. In addition to some of the unique ejector/aircraft integration problems, the vehicle by virtue of having a V/STOL capability, is compromised in other areas. To be successful and acceptable, the advantages must outweigh the disadvantages and simplicity with minimum penalties must be the rule. It is concluded that more emphasis must be placed on the ejector/aircraft interface for the concept to be successful.
 R.E.S.

N80-10130*# Lockheed-California Co., Burbank.
REACTION CONTROL SYSTEM AUGMENTATION FOR V/STOL AIRCRAFT

H. G. Streiff and R. E. Donham /n NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 417-436 ref

Avail: NTIS HC A22/MF A01 CSCL 01A

Advantages and problems associated with augmentation of reaction controls are discussed. The current status of compact ejector technology and the expected performance of known efficient designs for reaction control applications are presented.
 R.E.S.

N80-10131*# Rockwell International Corp., Columbus, Ohio. Columbus Aircraft Div.

DESIGN AND TEST OF A PROTOTYPE SCALE EJECTOR WING

L. A. Mefferd, R. E. Alden, and P. M. Bevilacqua /n NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 437-448

Avail: NTIS HC A22/MF A01 CSCL 01A

A two dimensional momentum integral analysis was used to examine the effect of changing inlet area ratio, diffuser area ratio, and the ratio of ejector length to width. A relatively wide range of these parameters was considered. It was found that for constant inlet area ratio the augmentation increases with the ejector length, and for constant length: width ratio the augmentation increases with inlet area ratio. Scale model tests were used to verify these trends and to examine the effect of aspect ratio. On the basis of these results, an ejector configuration was selected for fabrication and testing at a scale representative of an ejector wing aircraft. The test ejector was powered by a Pratt-Whitney F401 engine developing approximately 12,000 pounds of thrust. The results of preliminary tests indicate that the ejector develops a thrust augmentation ratio better than 1.65.
 R.E.S.

N80-10132*# De Havilland Aircraft Co. of Canada Ltd., Ottawa (Ontario).

THE EXTERNAL AUGMENTOR CONCEPT FOR V/STOL AIRCRAFT

D. C. Whittely /n NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 449-471 refs

Avail: NTIS HC A22/MF A01 CSCL 01A

The beneficial aspects of an ejector powered V/STOL concept were reviewed. The feasibility of satisfactorily incorporating an ejector system in a high performance V/STOL aircraft was investigated. The external augmentor concept, based on the use of chordwise ejector slots, is presented. It is concluded that the external augmentor concept has a basic inherent simplicity and a sufficient augmentor performance potential to make feasible a high performance V/STOL aircraft based on ejectors.
 R.E.S.

N80-10133*# Naval Air Systems Command, Washington, D. C.
THE XFV-12A THRUST-AUGMENTED WING (TAW) PROTOTYPE AIRCRAFT

Ron Murphy and Ernest L. Lewis /n NASA. Ames Res. Center Workshop on Thrust Augmenting Ejectors Sep. 1979 p 473-480

Avail: NTIS HC A22/MF A01 CSCL 01A

The XFV-12A, a unique V/STOL technology prototype aircraft being developed for the Navy, is described. The innovative design features a thrust augmented wing and a canard ejector. Structural, functional, and control test performances are discussed. Static tether test results are also discussed. Assessment of test results are given along with projections for future modification areas.
 R.E.S.

N80-10134*# Douglas Aircraft Co., Inc., Long Beach, Calif.
AN EFFICIENT USER-ORIENTED METHOD FOR CALCULATING COMPRESSIBLE FLOW IN AN ABOUT THREE-DIMENSIONAL INLETS Final Report, Nov. 1977 - Apr. 1979

John I. Hess, Dun-Pok Mack, and Norbert O. Stockman (NASA, Lewis Res. Center) Apr. 1979 117 p refs
 (Contract NAS3-21135)

(NASA-CR-159578; MDC-J7733) Avail: NTIS HC A06/MF A01 CSCL 01A

A panel method is used to calculate incompressible flow about arbitrary three-dimensional inlets with or without centerbodies for four fundamental flow conditions: unit onset flows parallel to each of the coordinate axes plus static operation. The computing time is scarcely longer than for a single solution. A linear superposition of these solutions quite rigorously gives incompressible flow about the inlet for any angle of attack, angle of yaw, and mass flow rate. Compressibility is accounted for by applying a well-proven correction to the incompressible flow. Since the computing times for the combination and the compressibility correction are small, flows at a large number of inlet operating conditions are obtained rather cheaply. Geometric input is aided by an automatic generating program. A number of graphical output features are provided to aid the user, including surface streamline tracing and automatic generation of curves of curves of constant pressure, Mach number, and flow inclination at selected inlet cross sections. The inlet method and use of the program are described. Illustrative results are presented.
 A.R.H.

N80-10135*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

LOW-SPEED WIND-TUNNEL TESTS OF A 1/10-SCALE MODEL OF AN ADVANCED ARROW-WING SUPERSONIC CRUISE CONFIGURATION DESIGNED FOR CRUISE AT MACH 2.2

Long P. Yip Aug. 1979 265 p refs
 (NASA-TM-80152) Avail: NTIS HC A12/MF A01 CSCL 01A

The low-speed longitudinal and lateral-directional characteristics of a scale model of an advanced arrow-wing supersonic cruise configuration were investigated in tests conducted at a Reynolds number of 4.19×10^6 to the 6th power based on the mean aerodynamic chord, with an angle of attack range from -6 deg to 23 deg and sideslip angle range from -15 deg to 20 deg. The effects of segmented leading-edge flaps, slotted trailing-edge flaps, horizontal and vertical tails, and ailerons and spoilers were determined. Extensive pressure data and flow visualization pictures with non-intrusive fluorescent mini-tufts were obtained.
 A.R.H.

N80-10136*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

A FLIGHT INVESTIGATION OF PERFORMANCE AND LOADS FOR A HELICOPTER WITH NLR-1T MAIN-ROTOR BLADE SECTIONS

Charles E. K. Morris, Jr., Robert L. Tomaine, and Dariene D. Stevens Oct. 1979 176 p refs Prepared in cooperation with Army Research and Technology Labs., Hampton, Va. (DA Proj. 1L2-62209-AH-76) (NASA-TM-80165) Avail: NTIS HC A09/MF A01 CSCL 01A

Data on performance and rotor loads for a teetering-rotor, AH-1G helicopter flown with a main rotor that had the NLR-1T airfoil as the blade-section contour are presented. The test envelope included hover, forward-flight speed sweeps from 35 to 85 m/sec, and collective-fixed maneuvers at about 0.25 tip-speed ratio. The data set for each test point described vehicle flight state, control positions, rotor loads, power requirements, and blade motions. Rotor loads are reviewed primarily in terms of peak-to-peak and harmonic content. Lower frequency components predominated for most loads and generally increased with increased airspeed, but not necessarily with increased maneuver load factor. M.M.M.

N80-10139# Tennessee Technological Univ., Cookeville. Dept. of Engineering Science and Mechanics.

USE OF WAGNER FUNCTIONS IN AIRFOIL DESIGN OPTIMIZATION Final Report, 20 Mar. 1978 - 19 Mar. 1979

Vireshwar Sahai and Chen-Pierce Tsao May 1979 57 p refs (Grant AF-AFOSR-3543-78; AF PROJ. 2307) (AD-A072634; TTU-ESM-79-2; AFOSR-79-0903TR) Avail: NTIS HC A04/MF A01 CSCL 01/3

The feasibility of using a series of Wagner functions to represent airfoil contours in design procedures was investigated. It was demonstrated that a large class of airfoils can be adequately described by a relatively small number of terms. A least squares type of procedure was used to determine the unknown coefficients in the series representation. The use of Wagner function representation in thin symmetrical airfoil design was investigated. Both the direct method of analysis in which the velocity distribution is calculated for a known shape and the inverse method of design in which the airfoil shape corresponding to a specified velocity distribution is determined were considered. Standard airfoil data was used to test the suitability of the Wagner function representation, and the results were found to be satisfactory. Rapid calculations were possible even in the inverse mode since the use of Wagner functions allowed the determination of all the improper integrals that appear in thin airfoil theory in closed form. GRA

N80-10140# Analytical Methods, Inc., Bellevue, Wash.
PREDICTION OF AERODYNAMIC CHARACTERISTICS OF FIGHTER WINGS AT HIGH LIFT Interim Report, 1 Jan. - 31 Dec. 1978

Balusu M. Rao, Brian Maskew, and Frank A. Dvorak 31 Dec. 1978 57 p refs (Contract N00014-78-C-0128; RR0141184) (AD-A072630; ONR-CR215-258-1) Avail: NTIS HC A04/MF A01 CSCL 20/4

A basic viscous/potential flow iterative technique is developed for calculating flow on finite wings up to and beyond the stall. The procedure used is a direct adaptation and extension of successfully validated Analytical Methods, Inc. (AMI) two-dimensional CLMAX separation model to three-dimensional flows. In the potential flow program, the lifting surface is divided into a number of panels with linear and constant vorticity distributions along the chordwise and spanwise directions, respectively. The separation region is modeled in the potential flow analysis using force-free vortex sheets which require an inner iteration to establish their shapes. The program generates a new wake shape using the new separation locations together with the information from the previous iteration and the process is repeated until a convergent solution is obtained. In order to expedite the development process, several simplifying assumptions are made. However, these assumptions do not conflict with the primary

objective of the present investigation which is to demonstrate the feasibility of extending the two-dimensional CLMAX separation model to three-dimensional flows. The separation flow model and the developed computer program are validated by comparing the results with wind tunnel test data for some simple cases.

GRA

N80-10143# Aeronautical Research Inst. of Sweden, Stockholm.
INVESTIGATION OF THE BOUNDARY CONDITION AT A WIND TUNNEL TEST SECTION WALL FOR A LIFTING WING-BODY MDEL AT LOW SUPERSONIC SPEED Final Report, 1 Apr. 1977 - 31 Mar. 1979

Sven-Grik Nyuberg, Sevn G. Hedman, Arthur Rizzi, and Hans Sorenson May 1979 99 p refs (Grant AF-AFOSR-3282-77; AF Proj. 2307) (AD-A072098; AFOSR-79-0868TR) Avail: NTIS HC A05/MF A01 CSCL 01/3

The purpose of the investigation is to study theoretically and experimentally at low supersonic speed the interference-free flow field around a lifting wing-body wind tunnel model at locations where the tunnel walls are normally situated. The undisturbed flow properties are used to establish criteria for cross flow characteristics of wave-attenuating ventilated wind tunnel walls. The flow field has been calculated theoretically by a relaxation method based on the transonic small perturbation (TSP) equation and for one sample case for the body alone with a method based on the solution of the full gas dynamic equations (the Euler equations) in a time-dependent finite volume formulation. A survey of the flow has been made experimentally with a probe in wind tunnel tests. Pressure and flow deflection in the flow field near a delta-wing-body configuration have been calculated at free stream Mach number 1.2 and at angles of attack of 0 deg and 5 deg. The same properties have been determined in wind tunnel tests at Mach number 1.15, 1.20 and 1.30 and at nominal angles of attack 0 deg, 5 deg, 15 deg and 25 deg. The theoretical results obtained using the TSP method show only qualitative agreement with experimental data and the shocks are smeared out. Theoretical results obtained by the time-dependent finite volume method for the body alone show promising agreement with experiments. GRA

N80-10147# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

TECHNICAL EVALUATION REPORT ON THE FLUID DYNAMICS PANEL SYMPOSIUM ON HIGH ANGLE OF ATTACK AERODYNAMICS

Edward C. Polhamus: Aug. 1979 20 p refs Symp. held at Sandefjord, Norway, 4-6 Oct. 1978 Prepared in cooperation with NASA, Langley Res. Center (AGARD-AR-145; ISBN-92-835-1334-7) Avail: NTIS HC A02/MF A01

An overview is presented of 32 formal papers and 7 open session papers. Topics covered include: (1) studies of configurations of practical interest; (2) mathematical modelling and supporting investigations of slender wings, bodies of revolution, and body-wing configurations; (3) design methods; and (4) air intakes. A.R.H.

N80-10148*# Northwestern Univ., Evanston, Ill. Transportation Center.

FACTORS AFFECTING THE RETIREMENT OF COMMERCIAL TRANSPORT JET AIRCRAFT

Frank A. Spencer Aug. 1979 296 p refs (Grant Nsg-2149) (NASA-CR-152308) Avail: NTIS HC A13/MF A01 CSCL 01C

The historical background of the technology and economics of aircraft replacement and retirement in the prejet era is reviewed in order to determine whether useful insights can be obtained applicable to the jet era. Significant differences between the two periods are noted. New factors are identified and examined. Topics discussed include concern over current policies regarding deregulation, regulatory reform, and retroactive noise regulations; financing and compliance legislation; aging; economic environment and inflation; technological progress; fuel efficiency and cost; and a financial perspective of replacement decisions. A.R.H.

N80-10149*# Douglas Aircraft Co., Inc., Long Beach, Calif.
**CARGO LOGISTICS AIRLIFT SYSTEMS STUDY (CLASS).
 VOLUME 4: FUTURE REQUIREMENTS OF DEDICATED
 FREIGHTER AIRCRAFT TO YEAR 2008**

R. J. Burby Oct. 1979 259 p refs
 (Contract NAS1-14948)
 (NASA-CR-158950-Vol-4) Avail: NTIS HC A12/MF A01 CSCL
 01C

The 1978 fleet operations are extended to the year 1992, thus providing an evaluation of current aircraft types in meeting the ensuing increased market demand. Possible changes in the fleet mix and the resulting economic situation are defined in terms of the number of units of each type aircraft and the resulting growth in operational frequency. Among the economic parameters considered are the associated investment required by the airline, the return on investment to the airline, and the accompanying levels of cash flow and operating income. Against this background the potential for a derivative aircraft to enter fleet operations in 1985 is defined as a function of payload size and as affected by 1980 technology. In a similar manner, the size and potential for a new dedicated 1990 technology, freighter aircraft to become operational in 1995 is established. The resulting aircraft and fleet operational and economic characteristics are evaluated over the period 1994 to 2008. The impacts of restricted growth in operational frequency, reduced market demand, variations in aircraft configurations, and military participation, are assessed. A.R.H.

N80-10150*# National Aeronautics and Space Administration,
 Lyndon B. Johnson Space Center, Houston, Tex.

NAVIGATION AND METEOROLOGICAL ERROR EQUATIONS FOR SOME AERODYNAMIC PARAMETERS

Michael J. Krikorian, John Rice, and Paul Mitchell Aug. 1979
 37 p
 (NASA-TM-80804; Rept-79-FM-30; JSC-16074) Avail: NTIS
 HC A03/MF A01 CSCL 17G

Mathematical equations for the analysis of the errors that are expected in a set of postflight aerodynamic parameters are presented. The errors are due to inaccuracies in the Shuttle best estimate trajectory and in the meteorological data obtained in support of the flights. The error analysis shows that the parameter vector, Z, and its associated error covariance matrix, C sub Z, is calculated from a given state vector, X, and its associated covariance matrix, C sub X. A.W.H.

N80-10151# Civil Aeromedical Inst., Oklahoma City, Okla.
PILOT PERFORMANCE DURING SIMULATED APPROACHES AND LANDINGS MADE WITH VARIOUS COMPUTER-GENERATED VISUAL GLIDEPATH INDICATORS

Mark F. Lewis and Henry W. Mertens Sep. 1978 58 p refs
 (AD-A066220; FAA-AM-79-4) Avail: NTIS HC A04/MF A01
 CSCL 17/7

The effectiveness, in terms of pilot performance, of four different visual glidepath indicator systems in severely reduced nighttime visual environment is discussed. An aircraft simulator was used with a computer generated image visual system attached for visual simulation of the airport scene. The flight path profile with regard to altitude deviations from a 3 degree path as a function of distance is examined. The instability in approach paths flown with the different types of glidepath indicators is studied. Altitude deviations from the 3 degree glidepath as a function of indicator type, trials, and subjects are analyzed. A.W.H.

N80-10152*# National Aeronautics and Space Administration,
 Langley Research Center, Hampton, Va.

ALGORITHMS AND LOGIC FOR INCORPORATING ILS NASA TCV B-737 AIRPLANE AREA NAVIGATION SYSTEM

Charles E. Knox Sep. 1979 23 p refs
 (NASA-TM-80167) Avail: NTIS HC A02/MF A01 CSCL
 17G

The algorithms and logic for use in the implementation of instrument landing system (ILS) localizer deviation signals for the generation of navigation and guidance information are

presented. The navigation position estimates, based on range information from a randomly chosen distance measuring equipment (DME) and ILS localizer deviation information, are illustrated. The ILS volumetric coverage and DME geometric checks are described and their addition to area navigation systems with minimum software modification are discussed. A.W.H.

N80-10153# Federal Aviation Administration, Washington, D. C.
 Office of Aviation Policy.

IFR AIRCRAFT HANDLED FORECAST BY AIR ROUTE TRAFFIC CONTROL CENTER, FISCAL YEARS 1979-1990

Bernard Hannan Apr. 1979 54 p
 (AD-A070786; FAA-AVP-79-1) Avail: NTIS
 HC A04/MF A01 CSCL 01/2

The forecasts of instrument flight rule aircraft handled by air route traffic control centers. The forecasts show that total aircraft handled will increase from 28.1 million in 1978 to 45.6 million in 1990. These numbers along with those for the intervening years are broken down by region and by each air route traffic control center. A.W.H.

N80-10173# Draper (Charles Stark) Lab., Inc., Cambridge, Mass.
INTEGRATION OF GPS WITH INERTIAL NAVIGATION SYSTEMS

Duncan B. Cox, Jr. In AGARD Principles and Operational Aspects of Precision Position Determination Systems 1979
 10 p refs

Avail: NTIS HC A20/MF A01

Benefits and means of integrating GPS and inertial systems are described. Emphasis was placed on the data to be transferred and the operations to be performed in attaining varying degrees of integration. An understanding of the mechanisms and degrees of complexities involved was given, as well as a perspective on the technical issues that are involved in the integration problem. It was concluded that very substantial performance improvements can be obtained through integration of GPS and inertial systems in comparison to what can be achieved by either system alone. Some of the improvements are only achieved through substantial increases in system complexity. M.M.M.

N80-10175# Gilbert (Glen A.) and Associates, Washington, D. C.
CIVIL APPLICATIONS OF NAVSTAR GPS

Glen A. Gilbert, E. H. Martin (Magnavox Government and Industrial Electronics Co., Silver Spring, Md.), Denis Symes (Urban Mass Transportation Administration), and Carl Matthews (Maritime Administration) In AGARD Principles and Operational Aspects of Precision Position Determination Systems 1979 26 p refs

Avail: NTIS HC A20/MF A01

Various aspects of potential civil applications of the U.S. Department of Defense satellite based NAVSTAR Global Positioning System (GPS) are discussed. Land, sea and air applications are covered. It was concluded that the GPS offers many promising potential civil applications. However, certain questions need to be resolved before international civil application of GPS can be implemented. M.M.M.

N80-10192 North Carolina State Univ. at Raleigh.
STRUCTURAL STIFFENING AS AN INTERIOR NOISE CONTROL TECHNIQUE FOR LIGHT TWIN-ENGINE AIRCRAFT Ph.D. Thesis

Clyde Kearney Barton 1979 102 p
 Avail: Univ. Microfilms Order No. 7923034

Cabin noise levels in light aircraft due to the transmission of low frequency propeller noise through the fuselage sidewall is examined. The concept of adding stiffness to a light, twin engine aircraft to reduce cabin noise levels is investigated. The attenuation provided by the fuselage sidewall before and after the installation of a suitable treatment is determined. A mass treatment was added and a comparison is presented. Dissert. Abstr.

N80-10193*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.
EXPERIMENTS IN SENSING TRANSIENT ROTATIONAL ACCELERATION CUES ON A FLIGHT SIMULATOR
 Russell V. Parrish Oct. 1979 24 p refs
 (NASA-TP-1537; L-13030) Avail: NTIS HC A02/MF A01 CSDL 01C

Results are presented for two transient motion sensing experiments which were motivated by the identification of an anomalous roll cue (a 'jerk' attributed to an acceleration spike) in a prior investigation of realistic fighter motion simulation. The experimental results suggest the consideration of several issues for motion washout and challenge current sensory system modeling efforts. Although no sensory modeling effort is made it is argued that such models must incorporate the ability to handle transient inputs of short duration (some of which are less than the accepted latency times for sensing), and must represent separate channels for rotational acceleration and velocity sensing.
 A.R.H.

N80-10194# Grumman Aerospace Corp., Bethpage, N.Y. Research Dept.
FLYING QUALITIES RESEARCH FOR HIGHLY AUGMENTED AIRCRAFT

H. T. Breul and R. C. Weston Aug. 1979 104 p refs
 (RE-582) Avail: NTIS HC A06/MF A01

An introductory, single degree of freedom experimental study of aircraft roll control was performed to demonstrate the feasibility of doing flying qualities research via direct manipulation of an aircraft's step response on a flight simulator. This is a very attractive approach for studying the flying qualities requirements of modern aircraft that is expected to incorporate new and sophisticated digital fly by wire control schemes for coordinating all control forces to produce nonclassical responses to pilot commands. The development of a digital simulation technique, based on the mathematical concept of convolution, that provides the means for easy manipulation of the simulated vehicle's step-response characteristics is presented. Two experiments were performed that examined several basic characteristics of an aircraft's roll-rate step-response in a simulated tracking task.
 M.M.M.

N80-10195*# Teledyne Ryan Aeronautical Co., San Diego, Calif.
STUDY OF THE FEASIBILITY ASPECTS OF FLIGHT TESTING AN AEROELASTICALLY TAILORED FORWARD SWEEP RESEARCH WING ON A BQM-34F DRONE VEHICLE
 D. J. Mourey 3 Sep. 1979 409 p refs
 (Contract NAS1-15624)
 (NASA-CR-159149) Avail: NTIS HC A18/MF A01 CSDL 01C

The aspects of flight testing an aeroelastically tailored forward swept research wing on a BQM-34F drone vehicle are examined. The geometry of a forward swept wing, which is incorporated into the BQM-34F to maintain satisfactory flight performance, stability, and control is defined. A preliminary design of the aeroelastically tailored forward swept wing is presented.
 A.W.H.

N80-10196# Air Force Inst. of Tech., Wright-Patterson AFB, Ohio. School of Systems and Logistics.
A STUDY TO DEVELOP OPTIMIZATION ALGORITHMS FOR AIRCRAFT WING STRUCTURES M.S. Thesis
 Gerald W. Abbott and Robert A. McNamara, Jr. Jun. 1979 135 p refs
 (AD-A072668; AFIT-LSSR-23-79A) Avail: NTIS HC A07/MF A01 CSDL 01/3

Increasing cost and complexity of major weapon systems have resulted in many methods that constrain cost while assuring development of weapon systems that meet the military need. Among these methods, the use of cost estimating relationships embodied in computerized mathematical modeling has come to the forefront. This research uses the Vehicle Design Evaluation Program (VDEP), a model which designs a least-weight aircraft. Since a least-weight aircraft may not be a least-cost aircraft, this research examined the feasibility of developing algorithms to relate least-cost to design using VDEP. Various graphic and statistical techniques failed to yield meaningful relationships.

Additional analysis revealed apparent discrepancies in VDEP structural synthesis routines. Further research is recommended using more advanced design/cost models which incorporate revised structural synthesis routines. These models should first be validated for proper design/cost estimating properties. Then research should be conducted to identify cost driving parameters and detailed variable relationships. In this way the attainment of minimum cost aircraft structures which meet mission needs will materialize.
 GRA

N80-10197# Anamet Labs., Inc., San Carlos, Calif. Applied Mechanics Div.

ANGULAR VIBRATION OF AIRCRAFT. VOLUME 1: EXECUTIVE SUMMARY Final Report, Aug. 1977 - Apr. 1979

Conor D. Johnson, Warren C. Gibson, David A. Kienholz, and Ernest B. Paxson Wright-Patterson AFB, Ohio AFFDL Apr. 1979 52 p refs 2 Vol.

(Contract F33615-77-C-3050; AF Proj. 2401)
 (AD-A071895; AFFDL-TR-79-3045-Vol-1) Avail: NTIS HC A04/MF A01 CSDL 20/11

This report describes development work in several distinct areas, all related to prediction of angular vibration of aircraft structures. Angular vibration in this context refers to dynamic rotations or changes in slope at specific points on a vibrating structure. It is of interest primarily in connection with high resolution optical and electro-optical systems. Efforts were directed at both low frequency vibration, where individual normal modes are known, as well as high frequency vibration where they are not. For low frequency predictions, improved accuracy per unit cost was sought by an evolutionary improvement to an existing finite element code. A state-of-the-art shell element, the Semi-Loof, was incorporated into NASTRAN by means of pre- and post-processors and DMAP instructions. Its accuracy is tested against both closed form solutions for simple cases and experiment for an actual fuselage. For high frequency predictions the method of Statistical Energy Analysis was pursued. A demonstration case involving two coupled plates is presented to show how SEA may be used to predict angular vibration in a situation where normal modes are too numerous to be predicted individually. Relationships between linear and angular vibration were developed for various structural forms. Theoretical error bounds are also derived for spectral measurements of angular vibration which are obtained by differencing of signals from translational sensors.
 GRA

N80-10198# Anamet Labs., Inc., San Carlos, Calif. Applied Mechanics Div.

ANGULAR VIBRATION OF AIRCRAFT. VOLUME 2: PREDICTION METHODS FOR ANGULAR VIBRATION Final Report, Aug. 1977 - Apr. 1979

Conor D. Johnson, Warren C. Gibson, David A. Kienholz, and Ernest B. Paxson Wright-Patterson AFB, Ohio AFFDL Apr. 1979 459 p refs 2 Vol.

(Contract F33615-77-C-3050; AF Proj. 2401)
 (AD-A071749; AFFDL-TR-TA-3045-Vol-2) Avail: NTIS HC A04/MF A01 CSDL 01/3

This report describes development work in several distinct areas, all related to prediction of angular vibration of aircraft structures. Angular vibration in this context refers to dynamic rotations or changes in slope at specific points on a vibrating structure. It is of interest primarily in connection with high resolution optical and electro-optical systems. Efforts were directed at both low frequency vibration, where individual normal modes are known, as well as high frequency vibration where they are not. For low frequency predictions, improved accuracy per unit cost was sought by an evolutionary improvement to an existing finite element code. For high frequency predictions the method of Statistical Energy Analysis was pursued.
 GRA

N80-10199# Civil and Environmental Engineering Development Office, Tyndall AFB, Fla.

A LITERATURE SEARCH AND REVIEW OF THE DYNAMICS OF AIRCRAFT-SURFACE INTERACTION Final Report, 1 Oct. 1977 - 31 May 1978

Joseph J. Cox, Jr. (USAF Academy, Colo.), William M. Henghold (USAF Academy, Colo.), and John J. Russell (USAF Academy, Colo.) Jun. 1979 61 p refs
(AF Proj. 2104)
(AD-A070940; CEEDO-TR-78-39) Avail: NTIS
HC A04/MF A01 CSCL 01/5

This report presents a literature survey and review of the research concerned with the dynamics of aircraft-surface interaction. Of primary concern is the determination of surface roughness criteria based on how rough the surface can be without inducing structural damage in the aircraft. Attention is concentrated on analytical research in the form of computer simulation that deals with the aircraft response as a function of the input (external excitation), vehicle model, and the output. Basic conclusions include the fact that no current computer code is satisfactory, but that one could be formulated within the state-of-the-art, to correlate with on-going actual aircraft tests. To facilitate correlation the roll, yaw, and lateral degrees of freedom should be included and a fatigue analysis for the test aircraft should be made. GRA

N80-10200# Aerospace Medical Div. Aerospace Medical Research Labs. (6570th), Wright-Patterson AFB, Ohio.

LEXICON OF AIRCRAFT TRANSPARENT TERMS

Cletus J. Muick Dec. 1978 65 p refs
(AF Proj. 7184)
(AD-A071319; AMRL-TR-78-122) Avail: NTIS
HC A04/MF A01 CSCL 01/3

This lexicon deals with terms and definitions peculiar to personnel working with aircraft transparent enclosures. All types of material currently used in the fabrication of transparent enclosures (acrylic, glass, polycarbonate) is addressed. Terms are either specific or general when applied to materials; and vision /optics terms, in most instances, are common to windscreens, canopies, and windows. GRA

N80-10201# Air Force Weapons Lab., Kirtland AFB, N. Mex.
AIRBLAST VULNERABILITY ENVELOPES FOR SUPERSONIC AEROSPACE VEHICLES Final Report
Gerald M. Campbell Mar. 1979 30 p
(AF Proj. 8809)

(AD-A072247; AD-E200312; AFWL-TR-78-187) Avail: NTIS
HC A09/MF A01 CSCL 19/4

A procedure for constructing airblast vulnerability envelopes for supersonic vehicles has been derived which enables the analyst to determine which portions of the envelope are valid. For simplicity, an overpressure of 1 lb/sq in. is used as a damage criterion throughout this report and nonhomogeneous atmosphere effects are ignored. Maximum and minimum shock front velocities are derived for the catching curve as well as the lower limit for the detonation orientation angle theta. GRA

N80-10202# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AGARD TWO-DIMENSIONAL AEROELASTIC CONFIGURATIONS

S. R. Bland, Comp. Aug. 1979. 16 p refs Submitted for publication Prepared in cooperation with NASA Langley Res. Center

(AGARD-AR-156) Avail: NTIS HC A02/MF A01

The development of reliable, efficient methods for the calculation of unsteady aerodynamic forces in the frequency-critical transonic speed regime can be enhanced by the availability of a limited number of test cases for the comparison of competing methods. Seven test cases are presented for airfoils with thickness from 6.0% to 16.5%: a biconvex parabolic arc airfoil, three conventional airfoils, and three cambered supercritical airfoils. The aerodynamic conditions such as Mach number, mean angle of attack, and oscillation amplitude and frequency are also given. Recommendations are made for uniformity in definition and reporting to enhance desired comparison for the aeroelastician. A.R.H.

N80-10203# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

MANOEUVRE LIMITATIONS OF COMBAT AIRCRAFT

Aug. 1979 33 p refs

(AGARD-AR-155A; ISBN-92-835-1336-3) Avail: NTIS
HC A03/MF A01

The choice of aircraft detail arrangement and configuration is closely related to desired flight speed, altitude and maneuverability. The maneuver limitations that are directly related to configuration, flight speed and attitude are reasonably independent of airplane size and engine thrust. These limiting flight characteristics include pitchup, wing rock, wing drop, nose slice, and buffeting. These configuration and detail-sensitive limitations and the aircraft characteristics that cause them are discussed for 15 NATO aircraft. A.R.H.

N80-10204*# Pratt and Whitney Aircraft Group, East Hartford, Conn.

AERO-ACOUSTIC TESTS OF DUCT-BURNING TURBOFAN EXHAUST NOZZLES

Hilary Kozlowski and Allan B. Packman Jul. 1976 142 p refs

(Contract NAS3-17866)
(NASA-CR-162254; PWA-5296) Avail: NTIS
HC A07/MF A01 CSCL 01E

The acoustic and aerodynamic characteristics of several exhaust systems suitable for duct burning turbofan engines are evaluated. Scale models representing unsuppressed coannular exhaust systems are examined statically under varying exhaust conditions. Ejectors with both hardwall and acoustically treated inserts are investigated. A.W.H.

N80-10205*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

AEROPROPULSION 1979

1979 464 p Proceedings of conf. held at Cleveland, Ohio, 1-16 May 1979

(NASA-CP-2092; E-079) Avail: NTIS HC A20/MF A01 CSCL 21E

State of the art technology in aeronautical propulsion is assessed. Noise and air pollution control techniques, advances in supersonic propulsion for transport aircraft, and composite materials and structures for reliable engine components are covered along with engine design for improved fuel consumption.

N80-10206*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

AIRCRAFT ENERGY EFFICIENCY (ACEE) STATUS REPORT

Donald L. Nored, James F. Dugan, Jr., Neal T. Saunders, and Joseph A. Ziemiński *In its* Aeropropulsion 1979 1979 p 1-58 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

Fuel efficiency in aeronautics, for fuel conservation in general as well as for its effect on commercial aircraft operating economics is considered. Projects of the Aircraft Energy Efficiency Program related to propulsion are emphasized. These include: (1) engine component improvement, directed at performance improvement and engine diagnostics for prolonged service life; (2) energy efficient engine, directed at proving the technology base for the next generation of turbofan engines; and (3) advanced turboprop, directed at advancing the technology of turboprop powered aircraft to a point suitable for commercial airline service. Progress in these technology areas is reported. J.M.S.

N80-10207*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

EMISSION REDUCTION

Donald A. Petrush, Larry A. Diehl, Robert E. Jones, and Edward J. Mularz *In its* Aeropropulsion 1979 1979 p 59-84

Avail: NTIS HC A20/MF A01 CSCL 21E

Control of the gaseous pollutant emissions of aircraft engines is considered in terms of the emission standards for six classes of aircraft engines. Emphasis is placed on combustor design concepts to significantly reduce emissions levels and lean-burning techniques to lower flame temperature, to reduce the oxides of nitrogen in the gaseous emissions. J.M.S.

N80-10208*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

NOISE REDUCTION

Charles E. Feiler, John F. Groeneweg, Francis J. Montegani, John P. Raney (NASA, Langley Research Center), Edward J. Rice, and James R. Stone *In its* Aeropropulsion 1979 1979 p 85-128 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

The turbofan engine's noise-producing components are discussed in terms of efficient and economical noise reduction techniques that do not penalize the engine performance or weight significantly. Specific topics covered include fan noise, acoustic suppression, jet noise technology, combustor noise, and aircraft noise prediction. J.M.S.

N80-10209*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

ALTERNATIVE JET AIRCRAFT FUELS

Jack Grobman *In its* Aeropropulsion 1979 1979 p 129-148 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

Potential changes in jet aircraft fuel specifications due to shifts in supply and quality of refinery feedstocks are discussed with emphasis on the effects these changes would have on the performance and durability of aircraft engines and fuel systems. Combustion characteristics, fuel thermal stability, and fuel pumpability at low temperature are among the factors considered. Combustor and fuel system technology needs for broad specification fuels are reviewed including prevention of fuel system fouling and fuel system technology for fuels with higher freezing points. J.M.S.

N80-10210*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

MATERIALS AND STRUCTURES TECHNOLOGY

Robert A. Signorelli, Thomas K. Glasgow, Gary R. Halford, and Stanley R. Levine *In its* Aeropropulsion 1979 1979 p 149-186 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

Materials and structures performance limitations, particularly for the hot section of the engine in which these limitations limit the life of components, are considered. Failure modes for components such as blades, vanes, and combustors and how they are affected by the environment for such components are discussed. Methods used to improve the materials used for such components are: (1) application of directional structures to turbine components for high strength at high temperatures; (2) improved coatings to increase oxidation and corrosion resistance; (3) increase strength and stiffness with reduced weight by applying higher specific properties of composite materials; and (4) cost effective processing such as near net shape powder methods applied to disks. Life prediction techniques developed to predict component life accurately in advance of service and progress in improving the intermediate and cold section components of turbine engines are covered. J.M.S.

N80-10211*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

COMPUTATIONAL FLUID MECHANICS OF INTERNAL FLOW

David N. Bowditch, William D. McNally, Bernhard H. Anderson, John J. Adamczyk, and Peter M. Sockol *In its* Aeropropulsion 1979 1979 p 187-230 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

Major solution techniques for internal computational fluid mechanics are discussed and some examples are presented. The major steps involved in developing a large computer code are then discussed. R.E.S.

N80-10212*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

TURBOMACHINERY TECHNOLOGY

Cavour H. Hauser, Jeffrey E. Haas (U.S. Army Res. and Technol. Labs., Cleveland, Ohio), Lonnie Reid, and Francis S. Stepka *In its* Aeropropulsion 1979 1979 p 231-272

Avail: NTIS HC A20/MF A01 CSCL 21E

A technology assessment of turbomachinery is presented. The design of the fan, compressor, and turbine components for future advanced aircraft engines is discussed. Basic flow characteristics in compressors and turbines and the heat transfer phenomena in cooled turbines are also discussed. R.E.S.

N80-10213*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

MECHANICAL COMPONENTS

William J. Anderson, Robert C. Bill, John J. Coy, and David Fleming *In its* Aeropropulsion 1979 1979 p 273-308 ref

Avail: NTIS HC A20/MF A01 CSCL 21E

Research on bearings, gears, seals, and rotor dynamics (specifically high speed balancing and dampers) is presented. The research pertains to problems in both aircraft turbine engines and helicopter transmissions. R.E.S.

N80-10215*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

CONTROL TECHNOLOGY

John R. Szuch *In its* Aeropropulsion 1979 1979 p 329-344 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

An overview of engine control technology is presented with emphasis on gas turbine engine controls. The role of the government, and NASA in particular, in advancing this technology is discussed. R.E.S.

N80-10216*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

SUPERSONIC PROPULSION TECHNOLOGY

Albert G. Powers, Robert E. Coltrin, Leonard E. Stitt, Richard J. Weber, and John B. Whitlow, Jr. *In its* Aeropropulsion 1979 1979 p 345-386

Avail: NTIS HC A20/MF A01 CSCL 21E

Propulsion concepts for commercial supersonic transports are discussed. It is concluded that variable cycle engines, together with advanced supersonic inlets and low noise coannular nozzles, provide good operating performance for both supersonic and subsonic flight. In addition, they are reasonably quiet during takeoff and landing and have acceptable exhaust emissions. K.L.

N80-10217*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

HYPERSONIC PROPULSION

H. Lee Beach, Jr. *In its* Aeropropulsion 1979 1979 p 387-408 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

Research on hydrogen fueled scramjet engines for hypersonic flight is reviewed. Component developments, computational methods, and preliminary ground tests of subscale scramjet engine modules at Mach 4 and 7 are emphasized. Airframe integration, structures, and flow diagnostics are also discussed. It is shown that mixed-mode perpendicular and parallel fuel injection controls heat release over a wide Mach range and the fixed geometry inlet gives good performance over a wide range of Mach numbers. K.L.

N80-10218*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

VERTICAL TAKEOFF AND LANDING (VTOL) PROPULSION TECHNOLOGY

Carl C. Ciepluch, John M. Abbott, Royce D. Moore, and James F. Sellers *In its* Aeropropulsion 1979 1979 p 409-444 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

Propulsion problems and advanced technology requirements of VTOL aircraft are discussed. Specific topics covered include inlets with high angle of attack capability, rapid thrust modulation fans, and propulsion-system/aircraft-control integration. K.L.

N80-10219*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

HIGH-PERFORMANCE-VEHICLE TECHNOLOGY

Louis A. Povinelli *In its Aeropropulsion* 1979 1979 p 445-462 refs

Avail: NTIS HC A20/MF A01 CSCL 21E

Propulsion needs of high performance military aircraft are discussed. Inlet performance, nozzle performance and cooling, and afterburner performance are covered. It is concluded that nonaxisymmetric nozzles provide cleaner external lines and enhanced maneuverability, but the internal flows are more complex. Swirl afterburners show promise for enhanced performance in the high altitude, low Mach number region. K.L.

N80-10220*# Pratt and Whitney Aircraft Group, East Hartford, Conn. Commercial Products Div.

FLIGHT EFFECTS ON THE AERO/ACOUSTIC CHARACTERISTICS OF INVERTED PROFILE COANNULAR NOZZLES
Hilary Kozlowski and Allan B. Packman Feb. 1978 195 p refs

(Contract NAS3-17866)

(NASA-CR-162419; PWA-5501) Avail: NTIS HC A09/MF A01 CSCL 21E

The effect of simulated flight speed on the acoustic and aerodynamic characteristics of coannular nozzles is examined. The noise and aerodynamic performance of the coannular nozzle exhaust systems over a large range of operating flight conditions is presented. The jet noise levels of the coannular nozzles are discussed. The impact of fan to primary nozzle area ratio and the presence of an ejector on flight effects are investigated. The impact of flight speed on the individual components of the coannular jet noise was ascertained. A.W.H.

N80-10221*# Pratt and Whitney Aircraft Group, East Hartford, Conn.

EXPERIMENTAL EVALUATION OF A LOW EMISSIONS HIGH PERFORMANCE DUCT BURNER FOR VARIABLE CYCLE ENGINES (VCE) Final Report

R. P. Lohman and R. J. Mador 1979 117 p refs

(Contract NAS3-20602)

(NASA-CR-159694; PWA-5513-32) Avail: NTIS HC A05/MF A01 CSCL 21E

A three-stage Vorxix duct burner was evaluated to determine the performance and emissions characteristics of this concept and to refine the configuration to provide acceptable durability and operational characteristics for its use in the VCE Testbed Program. The tests were conducted at representative takeoff, transonic climb and supersonic cruise inlet conditions for the VSCE-502B study engine. The carbon monoxide and unburned hydrocarbon emissions were low at all three operating conditions with combustion efficiencies in excess of 99.7 percent, as compared to the goal of 99.0 percent. Nitric oxide emissions were moderate but in excess of the program goal of 1 gm/kg at takeoff. The thrust efficiency exceeded the goal level of 94.5 percent reaching a value of 97 percent at supersonic cruise. Soft ignition, the absence of combustion generated acoustic instabilities and liner temperature levels acceptable for experimental hardware were also demonstrated. The total pressure loss across the duct burner, at 6.76 the loss mechanisms have been identified and, in one configuration 40 percent of this excess loss was eliminated without comprising the emissions or thrust efficiency. A.R.H.

N80-10222*# Pratt and Whitney Aircraft, East Hartford, Conn. Chemical Products Div.

VSCE TECHNOLOGY DEFINITION STUDY Final Report

R. A. Howlett and R. B. Hunt Aug. 1979. 114 p refs

(Contract NAS3-21389)

(NASA-CR-159730; PWA-5630-11) Avail: NTIS HC A06/MF A01 CSCL 21E

Refined design definition of the variable stream control engine (VSCE) concept for advanced supersonic transports is presented. Operating and performance features of the VSCE are discussed, including the engine components, thrust specific fuel consumption, weight, noise, and emission system. A preliminary engine design is presented. A.W.H.

N80-10223# Southwest Research Inst., San Antonio, Tex.

MECHANISM OF TURBINE ENGINE LUBRICANT DEPOSITION Final Report, 31 Mar. 1978 - 2 Feb. 1979

J. P. Cuellar, Jr. May 1979 64 p refs

(Contract F33615-76-C-2020; AF PROJ. 3048)

(AD-A072557; SwRi-RS-662; AFAPL-TR-79-2037) Avail: NTIS HC A04/MF A01 CSCL 11/8

An investigation of the degradation and deposition mechanisms for inhibited polyol ester and diester lubricant basestocks is described. Basestocks trimethylolpropane triheptanoate and di(2-ethylhexyl) adipate containing antioxidants p, p' dioctyldiphenylamine and/or phenyl-alpha-naphthylamine were studied in a dynamic thin-film condition with a moist-air atmosphere. Experiments were conducted with a device known as the rotating cylinder rig for the formation of controlled-thickness thin films (0.004 in.) at temperatures in the range of 350 to 550 F. Analytical techniques for detection of lubricant or additive consumption and degradation products included gas liquid chromatography, principally, and gas chromatography/mass spectroscopy. Experiments showed that the antioxidants effectively retarded oxidation and deposition for both ester basestocks up to the time of complete additive consumption. A beneficial synergistic effect on deposition was noted at one concentration using the antioxidants in combination. Findings strongly suggest that an interaction between the ester oxidation products and system wear metals is a significant factor in the deposition mechanism for both ester types. GRA

N80-10224*# Delco Electronics, Santa Barbara, Calif.

ELECTROMECHANICAL FLIGHT CONTROL ACTUATOR Final Report

Feb. 1979 129 p

(Contract NAS9-14952)

(NASA-CR-160348; R79-2) Avail: NTIS HC A07/MF A01 CSCL 01C

The feasibility of using an electromechanical actuator (EMA) as the primary flight control equipment in aerospace flight is examined. The EMA motor design is presented utilizing improved permanent magnet materials. The necessary equipment to complete a single channel EMA using the single channel power electronics breadboard is reported. The design and development of an improved rotor position sensor/tachometer is investigated. A.W.H.

N80-10225*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

COMPARISON OF STABILITY AND CONTROL PARAMETERS FOR A LIGHT, SINGLE-ENGINE, HIGH-WINGED AIRCRAFT USING DIFFERENT FLIGHT TEST AND PARAMETER ESTIMATION TECHNIQUES

William T. Suit and Robert L. Cannaday Sep. 1979 54 p refs

(NASA-TM-80163) Avail: NTIS HC A04/MF A01 CSCL 01C

The longitudinal and lateral stability and control parameters for a high wing, general aviation, airplane are examined. Estimations using flight data, obtained at various flight conditions within the normal range of the aircraft are presented. The estimations techniques, an output error technique (maximum likelihood) and an equation error technique (linear regression), are presented. The longitudinal static parameters are estimated from climbing, descending, and quasi steady state flight data. The lateral excitations involve a combination of rudder and ailerons. The sensitivity of the aircraft modes of motion to variations in the parameter estimates are discussed. A.W.H.

N80-10226# Salford Univ. (England). Dept. of Aeronautical and Mechanical Engineering.

MULTIVARIABLE DIGITAL CONTROL SYSTEMS Final Report, 1 Jun. 1978 - 31 May 1979

B. Porter Jun. 1979 180 p refs

(Grant AF-AFOSR-3005-76)

(AD-A071662; USAME/DC/101/79) Avail: NTIS HC A09/MF A01 CSCL 09/2

The fundamental system-theoretic research and the parallel development of design techniques which have led to the production of the comprehensive software package EIGENFORTRAC are outlined. The capability of EIGENFORTRAC in relation to the computer-aided design of high-performance digital control systems whose functions are simultaneously to reject the unmeasurable

disturbances and to track multiple command inputs is described. Numerous references are provided to the system-theoretic research and to the computer algorithms embodied in EIGENFORTRAC.

GRA

N80-10227# California Univ., Los Angeles. School of Engineering and Applied Science.

METHOD OF CONJUGATE GRADIENTS FOR OPTIMAL CONTROL PROBLEMS WITH STATE VARIABLE CONSTRAINTS Final Report, May 1977 - May 1978

T. S. Fong and C. T. Leondes Jul. 1976 94 p refs
(Contracts F33615-77-C-3013; AF Proj. 3207)

(AD-A072258; AFFDL-TR-78-85) Avail: NTIS
HC A05/MF A01 CSCL 12/1

A review of the computational method of conjugate gradients for linear and nonlinear operator equations is given with emphasis in applying this technique to state variable constraint control problems. The first and second Frechet derivatives of the performance functional are derived. The search directions generated in the iteration process for the optimal control are locally conjugate with respect to the second Frechet derivative. The convergence is along the expanding sequence of sets, the intersection of the linear spaces spanned by the search directions and the set of admissible controls. The computational technique is applied to two state variable constraint problems, in one of which a penalty function is employed to convert the constraint problem to an unconstrained one in addition to the approach considering the constraints directly. For this same problem the method of steepest descent also is studied, and comparison of the results obtained is made and discussed.

GRA

N80-10228# Kaman Aerospace Corp., Bloomfield, Conn.
DESIGN CRITERIA FOR DRY LUBRICATED FLIGHT CONTROL BEARINGS Final Report, 22 Jun. 1976 - Mar. 1978

Edward J. Nagy May 1979 180 p
(Contract DAAJ02-76-C-0035; DA Proj. 1F2-62209-AH-76)
(AD-A071322; R-1456; USARTL-TR-79-17) Avail: NTIS
HC A09/MF A01 CSCL 01/3

The objective of this program was to develop analytical methods for the selection of dry lubricated helicopter control bearings for specific conditions of use. The conditions of use include static radial pressure, cyclic radial pressure, speed of ball oscillation, angle of ball oscillation, static axial load, contamination, and combinations of these variables. Performance was measured by radial clearance which was directly related to wear. Sixty-one bearings were tested in three wear test rigs. The wear test results were used to develop wear life equations. Three approaches to equation development were utilized in this report: empirical, deterministic, and theoretical.

GRA

N80-10229# California Univ., Los Angeles. School of Engineering and Applied Science.

MAXIMUM LIKELIHOOD IDENTIFICATION OF LINEAR DISCRETE STOCHASTIC SYSTEMS Final Report, May 1977 - May 1978

A. J. Glassman and C. T. Leondes Wright-Patterson AFB, Ohio
AFFDL Jul. 1978 205 p refs
(Contract F33615-77-C-3013; AF Proj. 2307)
(AD-A072147; AFFDL-TR-78-84) Avail: NTIS
HC A10/MF A01 CSCL 12/2

The method of maximum likelihood is applied to the identification of parameters in systems described by linear difference equations. The equations are assumed to be completely known except for the state variable coefficients, i.e., the state transition matrix, and, in certain situations, the initial conditions. The estimates are based on known normal operating input and on output measurements corrupted by additive Gaussian noise. Maximum likelihood estimators of the parameters are developed for the following four cases: initial condition known, initial condition unknown parameter, initial condition unknown random variable, and an equivalent equation-error model configuration. Finite sample and asymptotic properties of the estimators as well as computational aspects are investigated. The study is oriented toward real time applications. Application of maximum likelihood to the above four cases differs from the classical situation in statistics because the measurements are not identically

distributed, or are not independent, or both. The resulting estimates are roots or cumbersome nonlinear equations.

GRA

N80-10233# Air Force Human Resources Lab., Brooks AFB, Tex.

ADVANCED SIMULATOR FOR PILOT TRAINING (ASPT): G-SEAT OPTIMIZATION Interim Report, May 1977 - Apr. 1978

Dan C. McGuire (Williams AFB, Ariz.) and David R. Lee (Williams AFB, Ariz.) Feb. 1979 35 p refs

(AF Proj. 1123)
(AD-A068475; AFHRL-TR-78-92) Avail: NTIS
HC A03/MF A01 CSCL 05/9

This report documents Phase I (of III) of a project to optimize the effectiveness of the ASPT g-seat in terms of both hardware and software performance. The transport lag was reduced to 20 ms by moving the Conoflow valves to the platform and using higher diameter hoses. The time constant was reduced to 150 ms by using larger diameter hoses, changing the needle valve location, and optimizing the settings of the booster and needle valve adjustments. The software has been reorganized, improved, streamlined and documented so that it may be more readily used to determine the most effective drive techniques. The optimized system will be used in a Phase II to determine the most effective drive technique and in a Phase III which will emulate new g-cueing devices, geometries, and drive schemes.

GRA

N80-10235# Systems Technology, Inc., Hawthorne, Calif.
MANNED ENGINEERING FLIGHT SIMULATION VALIDATION, PART 1. SIMULATION REQUIREMENTS AND SIMULATOR MOTION SYSTEM PERFORMANCE Final Report, Aug. 1977 - Nov. 1978

L. G. Hoffman and Susan A. Riedel Feb. 1979 209 p
(Contract F33615-77-C-2065)
(AD-A071394; AFFDL-TR-78-192-Pt-1; STI-TR-1110-1) Avail:
NTIS CSCL 14/2

The goal of this research is to establish an orderly, relatively simple method for optimizing the presentation of motion cues in moving base simulations. This is accomplished via choice of the drive logic parameters for a given simulator and flying task. The method developed here is based upon use of motion fidelity criteria. It has been applied to optimize the LAMARS motion base drive logic parameters for an air-to-ground scenario. The methods and procedures of this report can be applied for any given motion base and any desired scenario. Criteria for discerning fidelity of motion reproduction are developed. These criteria are composed of various mean-square error measures which reflect differences between simulated and actual in-flight motion. The criteria can be used to answer three questions which arise for every motion base simulation program: is moving base simulation appropriate for the flying tasks to be investigated, how can motion base drive logic parameters be optimized for the flying tasks to be investigated, and will this set of motion drive logic parameters result in motion within simulator capabilities for the flying tasks to be investigated.

GRA

N80-10236# Army Research Inst. for the Behavioral and Social Sciences, Arlington, Va.

TRAINING EFFECTIVENESS OF THE CH-47 FLIGHT SIMULATORS

Garvin L. Holman May 1979 91 p refs
(DA Proj. 2Q2-63743-A-772)
(AD-A072317; ARI-RR-1209) Avail: NTIS HC A05/MF A01
CSCL 05/9

The training effectiveness of the CH-47 helicopter flight simulator was evaluated in two parts: Part I used a classical two-group transfer-of-training design using aviators undergoing transition training to the CH-47 helicopter, and Part II assessed the training benefits of periodic training of operational CH-47 aviators in the CH-47 flight simulator using a pretest-train-post test design. Cumulative transfer effectiveness ratios and learning curves are presented for 24 maneuvers taught in the simulator and the aircraft. It was concluded that the CH-47 flight simulator is an effective training device for all maneuvers tested except for those, such as hovering maneuvers, that require extensive

visual group referencing at very low altitudes. The simulator was also found to be inadequate for training night operations and terrain flights. GRA

N80-10237# Air Force Human Resources Lab., Brooks AFB, Tex.

SIMULATOR FOR AIR-TO-AIR COMBAT MOTION SYSTEM INVESTIGATION Final Report

John A. Seevers (Calif. State Polytech. Univ., Pomona) and Robert L. Makinney (Williams AFB, Ariz.) Jul. 1979 19 p refs (AF Proj. 1123)

(AD-A072612; AFHRL-TR-79-18) Avail: NTIS HC A02/MF A01 CSCL 05/9

This investigation was conducted to evaluate the Simulator for Air-to-Air Combat (SAAC) motion system response to known input signals, to observe platform movements, to measure leg extension velocities and accelerations, and to establish delay lags through the system electronics and hydraulics. Signal voltages at pre-established levels were input by a signal generator at the analog-to-digital converter simulating pilot's control stick movements. Resulting platform movement was recorded on strip chart recorder measuring accelerations and final positioning from six linear and angular accelerometers mounted beneath the motion platform. Several noticeable factors were revealed that contribute to the status of the motion platform being less than representative of motion of the aircraft. First, the motion platform lags the input command by a noticeable amount. The platform's motion is about a multiple set of axes rather than a single axis as the command would direct. Also, because of physical constraints on the size of the system, the magnitude and deviation of the motion are limited. A fourth major problem is that when the excursion is near the maximum allowable, the motion is stopped too abruptly, and this stopping is readily perceived by the pilot (the washout problem). GRA

N80-10238# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

DYNAMIC CHARACTERISTICS OF FLIGHT SIMULATOR MOTION SYSTEMS

Sep. 1979 40 p refs

(AGARD-AR-144; ISBN-92-835-1338-X) Avail: NTIS HC A03/MF A01

A uniform method of measuring and reporting motion performance characteristics is presented. Such a uniform method, in addition to aiding system comparison, can assist in system diagnosis and might be used in writing performance specifications. The definitive characteristics selected for system description are excursion limits, describing function, linearity and acceleration noise, hysteresis, and dynamic threshold, definitions and methods of measurement and display are given, illustrated by measurements on particular motion systems. R.E.S.

N80-10344*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

ANALYSIS OF THE RESPONSE OF A THERMAL BARRIER COATING TO SODIUM AND VANADIUM DOPED COMBUSTION GASES

Robert A. Miller 1979 23 p refs Presented at 8th Midwest High Temperature Chemistry Conf., Milwaukee, Wis., 4-6 Jun. 1979 Sponsored in part by DOE (Contract EF-77-A-01-2593)

(NASA-TM-79205; DOE/NASA/2593-79/7; E-090) Avail: NTIS HC A02/MF A01 CSCL 11F

Published data on the behavior of zirconia-based thermal barrier coatings exposed to combustion gases doped with sodium and vanadium were analyzed with respect to calculated condensate dew points and melting points. Coating temperatures, failure locations, and depths were reasonably well correlated. Author

N80-10391# Institute of Gas Technology, Chicago, Ill.
DEVELOPMENT OF GAS TURBINE FUELS AND COMBUSTION; AN OVERVIEW

A. A. Fejer 1979 12 p refs Presented at New Fuels and Advances in Combustion Technologies, New Orleans, 26-30 Mar. 1979

(Contract EX-76-C-01-2433)

(CONF-790337-4) Avail: NTIS HC A02/MF A01

The characteristic features of gas turbine engines are described contrasting them with their chief competitor, the steam cycle. The focus is on the aerodynamic processes in the combustion chambers of traditional engines and includes an outline of the changes that are to be expected with the introduction of the synthetic and coal derived fuels. DOE

N80-10397# New Mexico Univ., Albuquerque. Technology Application Center.

HYDROGEN AS A FUEL CITATIONS FROM THE INTERNATIONAL AEROSPACE ABSTRACTS DATA BASE Progress Report, 1977 - Jul. 1979

Gerald F. Zollars Aug. 1979 24 p Sponsored in part by NTIS

(NTIS/PS-79/0771/0) Avail: NTIS HC \$28.00/MF \$28.00 CSCL 21D

The 219 citations concern the use of hydrogen as a fuel for aircraft and automobiles. Topics covered include storage, fuel combustion studies, gas mixtures, and energy conversion efficiency. GRA

N80-10420# Ohio State Univ., Columbus. Electroscience Lab.

SWEPT FREQUENCY SCATTERING MEASUREMENTS OF AIRCRAFT

K. A. Shubert and D. L. Moffatt May 1979 127 p refs

(Contract F19628-77-C-0125; AF Proj. 2305)

(AD-A071474; RADC-TR-79-110) Avail: NTIS HC A07/MF A01 CSCL 20/14

Measured swept frequency complex scattering data are presented for six 1/72 scale models of aircraft and one model of a typical pencil or aerospace vehicle-type target with various vertical stabilizer and simple cavity attachments. The measured data span the model frequency bands 2.2 to 4.0 GHz and/or 4.0 to 7.6 GHz. The measured data are predominantly for vertical polarization (perpendicular to a horizontal plane containing the wings and fuselage of the aircraft) at selected sparse aspects. The measurement system, which utilizes somewhat unique background subtraction techniques, has a bistatic angle of either 30 degrees (most targets) or eight degrees (a few pencil-type target orientations). Synthetic pulse response waveforms (only pulse envelopes are shown) are generated from the measured spectral data. Features of both the spectral and temporal responses are used to extrapolate the potential of substructure target features such as tail stabilizers and cavities in prediction-correlation type identification schemes. GRA

N80-10439# Westinghouse Electric Corp., Lima, Ohio. Aerospace Electrical Div.

PROGRAM FOR THE DEVELOPMENT OF A SUPERCONDUCTING GENERATOR, PHASE 2 AND 3 Final Report, Jan. 1974 - Jan. 1979

J. L. McCabria Feb. 1979 327 p refs

(Contract F33615-71-C-1591; AF Proj. 3145)

(AD-A072093; AFAPL-TR-79-2012) Avail: NTIS HC A15/MF A01 CSCL 10/2

This report summarizes work completed in Phase II and Phase III of a Program for the Development of a Superconducting Generator. A 5MW, 400 Hz, 12000 rpm generator was designed and built during Phase II. The oil cooled stator contained a 3-phase, wye connected, 5 kV, flooded winding within a laminated iron shield. The rotor contained a winding of 0.094 cm x 0.14 cm wire with 438 36 micrometers filaments of Nb-Ti superconducting alloy. A rotating dewar with a cold electro-thermal shield was used. The Phase III work consisted of a warm spin-up of the generator to design speed followed by cool-downs of the rotor. A superconducting state was not obtained in a generator configuration due to high pressure in the vacuum space which resulted in excessive gas conduction into the field winding compartment. A continuous pump-down system was incorporated into the test set-up but the helium leakage rate exceeded the capability of this system. Partial disassembly of the rotor was performed to define the areas of leakage. Further disassembly and work is required to correct this problem. GRA

N80-10476*# ITT Aerospace/Optical Div., Fort Wayne, Ind.
STUDY OF A STEREO ELECTRO-OPTICAL TRACKER SYSTEM FOR THE MEASUREMENT OF MODEL DEFORMATIONS AT THE NATIONAL TRANSONIC FACILITY
Final Report

Richard J. Hertel Oct. 1979 82 p refs
 (Contract NAS1-15629)
 (NASA-CR-159146) Avail: NTIS HC A05/MF A01 CSCL 14B

An electro-optical method to measure the aeroelastic deformations of wind tunnel models is examined. The multi-target tracking performance of one of the two electronic cameras comprising the stereo pair is modeled and measured. The properties of the targets at the model, the camera optics, target illumination, number of targets, acquisition time, target velocities, and tracker performance are considered. The electronic camera system is shown to be capable of locating, measuring, and following the positions of 5 to 50 targets attached to the model at measuring rates up to 5000 targets per second. A.W.H.

N80-10503# Lockheed-Georgia Co., Marietta.
RELIABILITY OF NONDESTRUCTIVE INSPECTIONS Final Report, Jul. 1974 - Dec. 1978

William H. Lewis, William H. Sproat, Bruce D. Dodd, and James M. Hamilton Dec. 1978 429 p refs
 (Contracts F41608-76-D-A005; F41608-77-D-A021)
 (AD-A072097; LG79ER0011; SA-ALC/MME-76-6-38-1) Avail: NTIS HC A19/MF A01 CSCL 01/3

The results of a four-year Air Force Logistics Command program to determine the reliability of Air Force nondestructive inspection capability are presented. The report completely describes the program—its objectives, scope, planning and logistics, participants, data collection, analysis, conclusions and recommendations. Actual aircraft structural samples containing fatigue damage were transported to 21 different Air Force bases and depots, where approximately 300 Air Force technicians performed ultrasonic, eddy current, penetrant and radiographic nondestructive inspections (NDI) on the samples. The same detailed NDI procedures were followed by all participating technicians. The individual results were recorded and accumulated in terms of 'finds', 'misses' and 'false calls', compared to a preliminary knowledge of actual flaw locations. A detailed teardown inspection of the samples at the end of the program verified and refined actual flaw tabulations. Results were computerized for data storage and retrieval and analyzed for each NDI method and structure sample type to provide detection probability versus flaw size (POD) curves. Other analyses provide POD curves for years training, experience, age, etc. The program results indicate that Air Force NDI needs improvement in several specific areas in order to meet existing requirements for inspection of Air Force hardware. Some conclusions were derived concerning factors that apparently affect Air Force inspection reliability. Recommendations for making both short-term and long-term improvements in NDI proficiency are presented. GRA

N80-10512*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.
LIGHT AIRPLANE CRASH TESTS AT THREE ROLL ANGLES

Claude B. Castle and Emilio Alfaro-Bou Washington Oct. 1979 77 p refs
 (NASA-TP-1477; L-12778) Avail: NTIS HC A05/MF A01 CSCL 01C

Three similar twin engine general aviation airplanes were crash tested at the Langley impact dynamics research facility at 27 m/sec and at nominal roll angles of 0 deg, -15 deg, and -30 deg. Other flight parameters were held constant. The test facility, instrumentation, test specimens, and test method are briefly described. Structural damage and accelerometer data for each of the three impact conditions are presented and discussed. Author

N80-10515*# Pratt and Whitney Aircraft Group, East Hartford, Conn. Commercial Products Div.
EFFECT OF TIME DEPENDENT FLIGHT LOADS ON JT9D-7 PERFORMANCE DETERIORATION

A. Jay and B. L. Lewis 21, Aug. 1979 73 p refs
 (Contract NAS3-20632)
 (NASA-CR-159681; PWA-5512-45) Avail: NTIS HC A04/MF A01 CSCL 01C

The results of a modal transient analysis of the engine/aircraft system are presented. The response of the JT9D to analytically simulated vertical gusts and landings was predicted using a NASTRAN finite element mathematical model of the JT9D/747 propulsion system. The NASTRAN finite element model of the propulsion system included engine structural models of the fan, low/high pressure compressors, diffuser/turbine cases, and high/low pressure rotors, as well as nacelle models of the inlet cowl, tailcone, and wing pylon. The analysis conducted predicts that an insignificant level of JT9D-7 performance deterioration would occur due to a typical vertical gust encounter or a typical revenue service landing. Analysis of a high sink rate landing with a heavy fuel load indicates the possibility of local wear, however, the lack of an accurate dynamic rotor/seal interference model precludes an accurate quantitative evaluation of performance change for this once-per-airframe-life event. J.M.S.

N80-10516*# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.
COUPLED ROTOR AND FUSELAGE EQUATIONS OF MOTION

William Warmbrodt Oct. 1979 82 p refs
 (NASA-TM-81153) Avail: NTIS HC A05/MF A01 CSCL 20K

The governing equations of motion of a helicopter rotor coupled to a rigid body fuselage are derived. A consistent formulation is used to derive nonlinear periodic coefficient equations of motion which are used to study coupled rotor/fuselage dynamics in forward flight. Rotor/fuselage coupling is documented and the importance of an ordering scheme in deriving nonlinear equations of motion is reviewed. The nature of the final equations and the use of multiblade coordinates are discussed. A.W.H.

N80-10668# New Mexico Univ., Albuquerque. Technology Application Center.

AIRCRAFT FUEL CITATIONS FROM THE INTERNATIONAL AEROSPACE ABSTRACTS DATA BASE Progress Report, 1974 - Jul. 1979

Gerald F. Zollars Jul. 1979 43 p Sponsored in part by NTIS, Springfield, Va.
 (NTIS/PS-79/0764/5) Avail: NTIS HC \$28.00/MF \$28.00 CSCL 10A

These 160 citations concern means to conserve fuel in airline operations. Articles dealing with aircraft design, fuels, engine design, propulsion efficiency, and operating procedures which conserve fuel are included. GRA

N80-11006 Allerton Press, Inc., New York, N. Y.
STATISTICAL DIAGNOSTICS AIRCRAFT ENGINES

Yu. V. Kozhevnikov *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 20-25 refs Transl. into ENGLISH from Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR), v. 21, no. 2, 1978 p 30-35

Copyright. Avail: Allerton Press Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

The linear formulation of the statistical problem for engine parametric diagnostics is examined in a discrete system of steady-state aircraft engine operating regimes. F.O.S.

N80-11007 Allerton Press, Inc., New York, N. Y.
OPTIMAL THERMOGASDYNAMIC DESIGN OF GAS TURBINE ENGINES USING ELEMENT PROTOTYPES, 1

Yu. V. Kozhevnikov, V. O. Borovik, V. S. Ivanov, V. A. Talyzin, I. N. Agliullin, and Yu. V. Meluzov *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 26-32 refs Transl. into ENGLISH from Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR), v. 21, no. 2, 1978 p 36-43

Copyright. Avail: Allerton Press, Inc. 150 Fifth Ave., N.Y. 10011; \$45.00

The problem of optimal thermogasdynamics design of gas turbine engines (GTE) is examined on the basis of a systematic mathematical model of a two-spool bypass GTE, containing the characteristics of the engine element prototypes in similarity parameters. The multiregime nature of GTE application is considered in the statistical formulation. Some GTE design parameter optimization criteria are presented. J.M.S.

N80-11009 Allerton Press, Inc., New York, N. Y.
SELECTION OF GEOMETRIC PARAMETERS AND LOCATION OF NOSE FLAP ON SWEEP WING ROOT PROFILE FROM TUNNEL TEST DATA. 1

A. I. Matyazh, V. A. Sterlin, V. A. Popov, V. V. Isaev, and G. A. Cheremukhin *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 37-41 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 2, 1978 p 49-54

Copyright. Avail: Allerton Press, Inc. 150 Fifth Ave., N.Y. 10011; \$45.00

The influence of nose flap geometric parameters (curvature and location on profile nose) on the basic aerodynamic coefficients of a mechanized wing segment whose profile corresponds to the typical profile used on swept wings of civil aircraft were examined. Recommendations are made on selection of the curvature and location of a nose flap used in conjunction with a two element slotted trailing-edge flap. R.E.S.

N80-11010 Allerton Press, Inc., New York, N. Y.
ANALYTIC FORMULAS FOR WING PROFILE AERODYNAMIC CHARACTERISTICS IN INCOMPRESSIBLE FLOW

N. M. Monakhov *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 42-47 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 2, 1978 p 55-61

Copyright. Avail: Allerton Press, Inc. 150 Fifth Ave., N.Y. 10011; \$45.00

The conformal mapping method was used to construct in the third approximation the equations for determining the abscissa of the conformal center of gravity of a profile, the mapping circle radius, and the points of the circle corresponding to the profile leading and trailing edges. Analytic formulas for the lift and moment coefficients, aerodynamic center and center of pressure coordinates, and profile surface velocity were obtained with accuracy to quantities of fourth order of smallness. An example (cambered lune) calculation shows that the proposed formulas have very high accuracy. R.E.S.

N80-11011 Allerton Press, Inc., New York, N. Y.
ON A SMOOTH APPROXIMATION METHOD AND ITS APPLICATION TO MATHEMATICAL DESCRIPTION OF WING AERODYNAMIC CHARACTERISTICS

V. A. Ovchinnikov, V. D. Osorgin, V. G. Pavlov, and E. Ya. Fedorov *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 48-51 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 2, 1978 p 62-65

Copyright. Avail: Allerton Press, Inc. 150 Fifth Ave., N.Y. 10011; \$45.00

A method for smooth epsilon approximation of a function of many variables with discontinuities of the first order derivatives at the points of some hypersurface is presented. The method makes it possible to represent any function, specified in the region of smoothness by suitable relations, in the form of a differentiable envelope lying in the epsilon vicinity of the original function. An example is given of specification of the aerodynamic characteristics of a wing with two element trailing-edge flap by the envelope. It is shown that the definition of the function epsilon introduced herein makes it possible with existing limits on its magnitude to obtain an approximation accuracy which is adequate for practical calculations. R.E.S.

N80-11012 Allerton Press, Inc., New York, N. Y.
INFLUENCE OF WING DEFORMATION ON TRAILING-EDGE FLAP DEFLECTIONS

V. A. Pavlov *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 52-53 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 2, 1978 p 66-67

Copyright. Avail: Allerton Press, Inc. 150 Fifth Ave., N.Y. 10011; \$45.00

The interaction of a three hinge trailing-edge flap with a wing is described. The influence of wing bending deformations on displacements of the flap carriages along the rails is also described. An analogy between trailing-edge flap analysis and multihinge control surface analysis is presented. Analysis procedures for various flap extension and retraction mechanism locations are examined. R.E.S.

N80-11019 Allerton Press, Inc., New York, N. Y.
HARMONIC OSCILLATIONS OF ANNULAR WING IN STEADY IDEAL FLUID FLOW

Z. N. Shesternina *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 93-98 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 2, 1978 p 115-121

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

A method is presented to solve the problem of the annular wing with thick profile, performing small harmonic oscillations in ideal incompressible fluid flow. Two cases are examined: axisymmetric flow with oscillations along the axis of symmetry; and flow with periodically varying small angle of attack. M.M.M.

N80-11022 Allerton Press, Inc., New York, N. Y.
OVERALL AERODYNAMIC CHARACTERISTICS OF CARET AND DELTA WINGS AT SUPERSONIC SPEEDS

Yu. P. Gunko and I. I. Mazhul *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 107-110 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 2, 1978 p 129-132

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

The influence of caret angle, design Mach number, and free stream Mach number on the aerodynamic characteristics of caret wings are studied experimentally and theoretically. Caret wings and their equivalent delta wings are compared in the class with constant volume coefficient and aspect ratio. The results obtained relate basically to the flow regimes around caret wings with free stream Mach number less than design Mach number. K.L.

N80-11024 Allerton Press, Inc., New York, N. Y.
SELECTING THE PASSENGER AIRPLANE FUSELAGE

Yu. N. Egorov *In its Soviet Aeron.*, Vol. 21, No. 2 1978 p 114-116 refs Transl. into ENGLISH from *Izv. Vyssh. Ucheb. Zaved. Aviats. Tekh. (USSR)*, v. 21, no. 2, 1978 p 135-138

Copyright. Avail: Allerton Press, Inc., 150 Fifth Ave., N.Y. 10011; \$45.00

The problem of selecting fuselage parameters is examined. A simple approach allows early selection of fundamental regions of goodness for a particular fuselage as a function of its passenger capacity. K.L.

N80-11030* United Technologies Research Center, East Hartford, Conn.

A COMPARISON OF THE PITCHING AND PLUNGING RESPONSE OF AN OSCILLATING AIRFOIL Final Report Franklin O. Carta Washington NASA Oct. 1979 158 p refs (Contract NAS1-14012)

(NASA-CR-3172) Avail: NTIS HC A08/MF A01 SCL 01A

An oscillating SC1095 airfoil model was tested for its aerodynamic stability in a rigid body with a single degree of freedom pitch about its quarter chord, and also in a rigid body with single degree of freedom plunge. The ability of pitching data to model plunging motions was evaluated. A one to one correspondence was established between pairs of pitching and plunging motions according to the potential flow transformation formula $\alpha = ikh$. The imposed variables of the experiment were mean incidence angle, amplitude of motion, free stream velocity, and oscillatory frequency. Results indicate that significant differences exist between the aerodynamic responses to the motions, particularly at high load conditions. At high load

conditions, the normal force for equivalent pitch is significantly greater than that for true pitch at the geometric incidence angle. R.C.T.

N80-11031*# Kentron International, Inc., Hampton, Va.
AIRCRAFT CONTROL BY PROPELLER CYCLIC BLADES
John DeYoung Washington NASA Nov. 1979 61 p refs
(Contract NAS1-13500)

(NASA-CR-3212) Avail: NTIS HC A04/MF A01 CSCL 01A

A theory is developed for aircraft control obtained from the propeller forces and moments generated by blade angle variation during a blade revolution. The propeller blade is pitched harmonically one cycle per propeller revolution which results in vehicle control forces and moments, termed cyclic-control. Using a power series representation of an arbitrary function of cyclic-blade angle, cyclic-control theory is developed which leads to exact solutions in terms of derivatives of steady-state thrust and power with respect to blade angle. An alternative solution, when the cyclic-blade angle function is limited to a sinusoidal cycle, is in terms of Bessel functions. An estimate of non-steady azimuth angle change or lag is presented. Cyclic-control analysis applied to the counter-rotating propeller shows that control forces or moments can be uniquely isolated from each other. Thus the dual rotor, in hovering mode, has propulsion without rotor tilt or moments, or, when in propeller mode at the tail of an air ship or submarine, vehicle control with no vehicle movement. Control isolation is also attainable from three or more propellers in-line. Author

N80-11032# Aeronautical Research Labs., Melbourne (Australia).
PREDICTION OF HELICOPTER ROTOR DOWNWASH IN HOVER AND VERTICAL FLIGHT

K. R. Reddy Jan. 1979 31 p refs
(ARL-AERO-Rept-150; AR-001-335) Avail: NTIS HC A03/MF A01

A vortex-wake method to calculate the rotor downwash in hovering and vertical flight is presented. The blade is represented by a lifting line. The rotor wake is simulated by a vortex sheet and a series of rolled up root and tip vortices, similar in form to that of a classical fixed wing. The concept of rectangularization of the rotor wake is used in obtaining a formula for the normal component of induced velocity. Wake contraction based on experimental data is introduced into the calculations. Numerical calculations are performed for two rotor configurations. Computed induced velocities and blade loadings are compared with the available flight data. A.W.H.

N80-11033*# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.

AERODYNAMIC INTERACTIONS FROM REACTION CONTROLS FOR LATERAL CONTROL OF THE M2-F2 LIFTING-BODY ENTRY CONFIGURATION AT TRANSONIC AND SUPERSONIC AND SUPERSONIC MACH NUMBERS

Rodney O. Bailey and Jack J. Brownson Washington Nov. 1979 125 p refs
(NASA-TM-78534; A-7624) Avail: NTIS HC A06/MF A01 CSCL 01A

Tests were conducted in the Ames 6 by 6 foot wind tunnel to determine the interaction of reaction jets for roll control on the M2-F2 lifting-body entry vehicle. Moment interactions are presented for a Mach number range of 0.6 to 1.7, a Reynolds number range of 1.2×10^6 to the 6th power to 1.6×10^6 to the 6th power (based on model reference length), an angle-of-attack range of -9 deg to 20 deg, and an angle-of-sideslip range of -6 deg to 6 deg at an angle of attack of 6 deg. The reaction jets produce roll control with small adverse yawing moment, which can be offset by horizontal thrust component of canted jets. A.R.H.

N80-11034*# Pennsylvania State Univ., University Park.
CHARACTERISTICS OF LIGHTLY LOADED FAN ROTOR BLADE WAKES Final Report

B. Reynolds and B. Lakshminarayana Washington NASA Oct. 1979 192 p refs
(Grant Nsg-3012)

(NASA-CR-3188; PSU-TURBO-R-78-4) Avail: NTIS HC A09/MF A01 CSCL 01A

Low subsonic and incompressible wake flow downstream of lightly loaded rotor was studied. Measurements of mean velocity, turbulence intensity, Reynolds stress, and static variations across the rotor wake at various axial and radial locations were investigated. Wakes were measured at various rotor blade incidences to discern the effect of blade loading on the rotor wake. Mean velocity and turbulence measurements were carried out with a triaxial hot wire probe both rotating with the rotor and stationary behind the rotor. Results indicate that increased loading slows the decay rates of axial and tangential mean velocity defects and radial velocities in the wake. The presence of large radial velocities in the rotor wake indicate the extent of the interactions between one radius and another. Appreciable static pressure variations across the rotor wake were found in the near wake region. Similarity in the profile shape was found for the axial and tangential components of the mean velocity and in the outer layer for axial, tangential, and radial turbulence intensities. R.C.T.

N80-11035*# National Aeronautics and Space Administration, Hugh L. Dryden Flight Research Center, Edwards, Calif.

FLIGHT-MEASURED AFTERBODY PRESSURE COEFFICIENTS FROM AN AIRPLANE HAVING TWIN SIDE-BY-SIDE JET ENGINES FOR MACH NUMBERS FROM 0.6 TO 1.6

Louis L. Steers Washington Nov. 1979 88 p refs
(NASA-TP-1549; H-1066) Avail: NTIS HC A05/MF A01 CSCL 01A

Afterbody pressure distribution data were obtained in flight from an airplane having twin side-by-side jet exhausts. The data were obtained in level flight at Mach numbers from 0.60 to 1.60 and at elevated load factors for Mach numbers of 0.60, 0.90, and 1.20. The test altitude varied from 2300 meters (7500 feet) to 15,200 meters (50,000 feet) over a speed range that provided a matrix of constant Mach number and constant unit Reynolds number test conditions. The results of the full-scale flight afterbody pressure distribution program are presented in the form of plotted pressure distributions and tabulated pressure coefficients with Mach number, angle of attack, engine nozzle pressure ratio, and unit Reynolds number as controlled parameters. Author

N80-11036*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

FUSELAGE AND NOZZLE PRESSURE DISTRIBUTIONS ON A 1/12-SCALE F-15 PROPULSION MODEL AT TRANSONIC SPEEDS

Odis C. Pendergraft, Jr. Nov. 1979 140 p refs
(NASA-TP-1521; L-12948) Avail: NTIS HC A07/MF A01 CSCL 01A

Static pressure coefficient distributions on the forebody, afterbody, and nozzles of a 1/12 scale F-15 propulsion model were determined. The effects of nozzle power setting and horizontal tail deflection angle on the pressure coefficient distributions were investigated. A.W.H.

N80-11037*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

EXPERIMENTAL STUDY OF LOW ASPECT RATIO COMPRESSOR BLADING

Lonnie Reid and Royce D. Moore 1979 19 p refs Proposed for presentation at the 25th Ann. Intern. Gas Turbine Conf., New Orleans, La., 9-13 Mar. 1980; sponsored by Am. Soc. of Mech. Engr.
(NASA-TM-79280; E-217) Avail: NTIS HC A02/MF A01 CSCL 01A

The effects of low aspect ratio blading on aerodynamic performance were examined. Four individual transonic compressor stages, representative of the inlet stage of an advanced high pressure ratio core compressor, are discussed. The flow phenomena for the four stages are investigated. Comparisons of blade element parameters are presented for the two different aspect ratio configurations. Blade loading levels are compared for the near stall conditions and comparisons are made of loss and diffusion factors over the operating range of incidence angles. A.W.H.

N80-11038*# Old Dominion Univ. Research Foundation, Norfolk, Va.

LEADING EDGE VORTEX-FLAP EXPERIMENTS ON A 74 DEG DELTA WING

Dhanvad M. Rao Nov. 1979 53 p refs
(Grant NsG-1315)
(NASA-CR-159161) Avail: NTIS HC A04/MF A01 CSDL 01A

Exploratory wind tunnel tests are reported on a 74 deg. delta wing model. The potential of a vortex flap concept in reducing the subsonic lift dependent drag of highly swept, slender wings is examined. The suction effect of coiled vortices generated through controlled separation over leading edge flap surfaces to produce a thrust component is discussed. A series of vortex-flap configurations were investigated to explore the effect of some primary geometric variables. A.W.H.

N80-11040# Tennessee Univ. Space Inst., Tullahoma. THE ANALYSIS OF WING-BODY COMBINATIONS AT MODERATE ANGLES OF ATTACK

N. Uchiyama (Japan Defense Agency, Tokyo), R. P. Mikkilineni, and J. M. Wu 1978 7 p refs Presented at the AIAA 16th Aerospace Sci. Meeting, Huntsville, Ala., 16-18 Jan. 1978 (Contract DAAG29-77-G-0108)
(AD-A074284; ARO-14966.1-A-E) Avail: NTIS HC A02/MF A01 CSDL 20/4

A computational scheme is developed to predict the flow over wing-body combinations at moderate angles of attack and the results of computation are presented for two different wing-body combinations. The wing is represented by a system of discrete non-intersecting vortex lines. Each vortex line in the wake is composed of a series of straight finite segments and a semi-infinite segment. The body is represented by a system of source/sink elements distributed on the surface of the body. The effect of lifting nose is taken into account by a horseshoe vortex system, the strength and the location of which are based on the empirical relations. The basic unknowns in the problem are the strengths of the vortex elements and the source/sink elements, and the direction of the vortex elements in the wake. The problem is solved using an iterative approach. The shape of the trailing vortex sheet is shown at different stations along the body. A.R.H.

N80-11044# Aeronautical Research Inst. of Sweden, Stockholm. MEASUREMENTS ON A THREE-DIMENSIONAL SWEEP WING AT LOW SPEEDS. PART 1: THE FLOW AROUND THE LEADING EDGE

Arild Bertelrud Sep. 1977 112 p refs Sponsored by Swed. Defence Mat. Admin. 2 Vol.
(FFA-130-Pt-1; PB-294203/5) Avail: NTIS HC A06/MF A01

As a part of a project on extrapolation from wind tunnel to flight, measurements in the boundary layer of a three dimensional swept wing were made in a low speed wind tunnel. The flow in the region close to the leading edge was studied. Two different flow patterns were investigated; natural transition and bubble transition. The wing tested is outer part of the actual wing of a SAAB 32 Lansen with a NACA 64A010 profile normal to the 25 percent line and a leading edge sweep of 39 deg. It is found that for the present wing the pressure distribution in the leading edge region back to 30 percent of the chord is well described by two-dimensional calculations of attack close to start of separation the attachment line flow probably becomes transitional/turbulent in the tested speed range, followed by relaminarization and bubble. According to calculations there should not be relaminarization in the flight case, despite strong indications from earlier flight tests of bubble separation. Author (ESA)

N80-11045# Aeronautical Research Inst. of Sweden, Stockholm. MEASUREMENTS ON A THREE-DIMENSIONAL SWEEP WING AT LOW SPEEDS. PART 2: THE FLOW IN THE BOUNDARY LAYER ON THE MAIN WING

Arild Bertelrud Sep. 1977 85 p refs Sponsored by Swed. Defence Mat. Admin. 2 Vol.
(FFA-131-Pt-2; PB-294204/3) Avail: NTIS HC A05/MF A01

As a part of a project on extrapolation from wind tunnel to flight, measurements in the boundary layer of three-dimensional

swept wing were made in a low speed tunnel. The flow on the main part of the wing is discussed and essentially time-averaged information is given. The experimental investigation consists of measurements of the static distribution and also of measurements with total head/static probes. These also provide skin friction data. As the flow visualizations and the preliminary measurements indicated that the flow was close to two dimensional, boundary layer rakes were used to get streamwise information on the boundary layer profiles. Calculations of the static pressure distribution and the turbulent boundary layer characteristics were performed and show good agreement with the experimental results. Author (ESA)

N80-11049# Aeronautical Research Inst. of Sweden, Stockholm. Aerodynamics Dept.

A SURVEY OF THE LITERATURE ON SURFACE ROUGHNESS EFFECTS ON THE DRAG OF SUBSONIC AIRCRAFT Final Report

A. Bertelrud Sep. 1978 131 p refs
(Contracts SWEDBD-75-4494; SWEDBD-76-4505)
(FFA-AU-1224) Avail: NTIS HC A07/MF A01

A survey of selected investigations concerning drag associated with isolated or distributed roughness elements in laminar and turbulent flow is given. Basic roughness types tested in laboratory experiments are covered and the results are related to conditions on wings of subsonic aircraft. Whereas considerable information is available on zero-pressure-gradient two-dimensional turbulent flows with roughness effects can be incorporated in current routines for assessing overall drag of aircraft based on wind tunnel and flight tests is demonstrated. It is suggested to develop a computer code which will allow the determination of allowable roughness size, or the effect of given roughness size on drag for new aircraft. This program would also make possible predictions of the degradation in performance associated with maintenance procedures, structural modifications, etc. Such a program involves a detailed analysis of the flow field around wing and body instead of the over-simplified methods based on flat plate relations now in use. Author (ESA)

N80-11050# National Aviation Facilities Experimental Center, Atlantic City, N. J.

CABIN HAZARDS FROM A LARGE EXTERNAL FUEL FIRE ADJACENT TO AN AIRCRAFT FUSELAGE Final Report

Louis J. Brown, Jr. Aug. 1979 59 p refs
(FAA Proj. 181-521-100)
(AD-A073494; FAA-NA-79-27) Avail: NTIS HC A03/MF A01 CSDL 13/12

Fourteen fire tests were conducted with a surplus, fire hardened DC 7 fuselage. The flame penetration and resulting accumulation of heat and smoke inside an aircraft cabin, produced by a large external fuel fire adjacent to a fuselage door opening, was measured and studied. Temperatures, light transmittances, and heat fluxes were measured. The effect of wind direction and velocity on the flame propagation and penetration were investigated. A.W.H.

N80-11051# National Transportation Safety Board, Washington, D. C.

AIRCRAFT ACCIDENT REPORT - UNITED AIRLINES, INC., MCDONNELL-DOUGLAS DC-8-61, N8082U, PORTLAND, OREGON, DECEMBER 28, 1978

7 Jun. 1979 63 p
(NTSB-AAR-79-7) Avail: NTIS HC A04/MF A01

The crash of flight 173, a DC 8 aircraft, is investigated. The cause of the accident is listed as flight crew error in responding to the low fuel state of the aircraft due to a malfunction in the landing gear. Damage to the aircraft and injuries to persons are reported. Wreckage information, an aircraft systems examination, a fuel control test, and a report of the main landing gear retract cylinder assembly are discussed. A.W.H.

N80-11052*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

AIRCREW DISPLAYS AND AVIONICS FOR APPLICATION IN A FUTURE NATIONAL AIRSPACE SYSTEM

Seymour Salmirs Nov. 1979 28 p refs
(NASA-TM-80095) Avail: NTIS HC A03/MF A01 CSCL
O1D

A concept for increased pilot involvement in a future National Airspace System was evolved during the FAA New Initiatives in Engineering and Development Users responsibilities and ways in which they might interact. The technical feasibility of the system is indicated by the sophisticated level of presently manufactured digital computers and display avionics, and the application of that technology under design by the major airframe manufacturers. Data collected during simulations and flights with the Terminal Configured Vehicle Program B-737 airplane are shown to have direct application to the new system concept. The adoption of the operational changes envisioned, offers some potentially significant advantages to the user. Author

N80-11053*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

MULTIROLE CARGO AIRCRAFT OPTIONS AND CONFIGURATIONS

D. William Conner and John C. Vaughan, III (USAF) Oct. 1979 15 p refs Presented at 1979 SAE Aerospace Meeting, 3-9 Dec. 1979

(NASA-TM-80177) Avail: NTIS HC A02/MF A01 CSCL
O1C

A future requirements and advanced market evaluation study indicates derivatives of current wide-body aircraft, using 1980 advanced technology, would be economically attractive through 2008, but new dedicated airfreighters incorporating 1990 technology, would offer little or no economic incentive. They would be economically attractive for all payload sizes, however, if RD and T costs could be shared in a joint civil/military arrangement. For the 1994-2008 cargo market, option studies indicate Mach 0.7 propfans would be economically attractive in trip cost, aircraft price and airline ROI. Spanloaders would have an even lower price and higher ROI but would have a relatively high trip cost because of aerodynamic inefficiencies. Dedicated airfreighters using propfans at Mach 0.8 cruise, laminar flow control, or cryofuels, would not provide any great economic benefits. Air cushion landing gear configurations are identified as an option for avoiding runway constraints on airport requirements and/or operational constraints are noted. Author

N80-11054# Douglas Aircraft Co., Inc., Long Beach, Calif.

EJECTION SEAT FOR HIGH G ESCAPE Final Technical Report, 1 Jun. 1978 - Apr. 1979

Orville E. Howland Apr. 1979 184 p refs
(Contract F33615-78-C-3416; AF Proj. 2402)
(AD-A072444; MDC-J8434; AFFDL-TR-79-3044) Avail: NTIS
HC A09/MF A01 CSCL 06/7

Advanced flight vehicles operating at acceleration loads beyond human functional capabilities require a new reclining seat design. An ejection seat compatible with this requirement must provide safe ejection and aircraft clearances under high-G conditions as well as the requirements associated with high dynamic pressures and low altitudes. Design criteria and interface requirements have been established. Ejection seat subsystems have been developed and seat design concepts generated to meet criteria and interface requirements. Candidate seat concepts have been analyzed to determine cockpit integration effects, accelerations, ejection clearances, escape performance, structural requirements and weights. A final design concept has been selected to meet all requirements of an ejection seat for high-G escape. The final report includes a parametric study of tail clearances and discusses technical design details and conclusions of the work performed. GRA

N80-11055# Rockwell International Corp., El Segundo, Calif. Los Angeles Div.

EXPLORATORY DEVELOPMENT OF AIRCREW WINDBLAST PROTECTION CONCEPTS Final Report, May 1978 - Jan. 1979

Robert J. Cummings and Frank E. Drsata Jun. 1979 100 p refs

(Contract F33615-78-C-0514; AF Proj. 7231)
(AD-A072013; RI/LAD-NA-79-77; AMRL-TR-79-16) Avail:
NTIS HC A05/MF A01 CSCL 06/7

Design requirements for windblast limb protection systems to be used in current ejection seats were defined. The ACES II system was used as a baseline system. Using the baseline seat and the requirements, three arm and three leg restraint concepts were defined. A proposed program was then defined to evaluate and develop the proposed systems. Design requirements were derived from a list of criteria or constraints for the system as defined in the reference to the escape, aircraft, crew flight conditions and using commands' needs. Resulting requirements were then rank ordered and significant interactions between them identified. Identification of negative interactions highlights the significant trades necessary to design a successful windblast protection system. Ejection events and the resulting environment the crew is exposed to were then analyzed to define the physical actions the men and system must contend with. Review of previous ejection injuries and limb restraint systems was included to further refine the understanding of injury mechanisms. Specific injury mechanisms of the knees, shoulder, elbow, and spinal column are presented. Using the requirements and injury mechanisms the six candidate protection systems were defined. A proposed program for concept refinement and final selection is presented. GRA

N80-11057# Sterling Systems, Inc., Washington, D. C.

AN ASSESSMENT OF TERMINAL AIR TRAFFIC CONTROL SYSTEM PERFORMANCE WITH AND WITHOUT BASIC METERING AND SPACING AUTOMATION Final Report

H. C. Wintermoyer, William Pailen, and Donald Meyer Mar. 1979 134 p refs

(Contract DOT-FA79WAI-012)
(AD-A073548; FAA-RD-79-81) Avail: NTIS
HC A07/MF A01 CSCL 17/7

Basic arrival metering and spacing (M&S), developed as an ARTS (automated radar terminal system) 3 enhancement, is discussed. The functions of metering arrival aircraft prior to their acceptance in terminal airspace, sequencing them according to their estimated time at the runway, scheduling each aircraft at fix points along the arrival path to the runway arrival gate, and providing control commands to assure precise and proper spacing for aircraft on final approach to the runway are examined. Simulation tests to determine the landing time interval error, the potential safe landing rate, and the potential excessive delay are described. A.W.H.

N80-11058*# Sperry Flight Systems, Phoenix, Ariz.
STUDY FOR INCORPORATING TIME-SYNCHRONIZED APPROACH CONTROL INTO THE CH-47/VALT DIGITAL NAVIGATION SYSTEM

Walter J. McConnell, Jr. Oct. 1979 226 p refs
(Contract NAS1-14238)

(NASA-CR-159151) Avail: NTIS HC A11/MF A01 CSCL 17G

Techniques for obtaining time synchronized (4D) approach control in the VALT research helicopter is described. Various 4D concepts and their compatibility with the existing VALT digital computer navigation and guidance system hardware and software are examined. Modifications to various techniques were investigated in order to take advantage of the unique operating characteristics of the helicopter in the terminal area. A 4D system is proposed, combining the direct to maneuver with the existing VALT curved path generation capability. A.W.H.

N80-11061# Boeing Aerospace Co., Seattle, Wash. Military Airplane Development Organization.

EVALUATION OF DAIS TECHNOLOGY APPLIED TO THE INTEGRATED NAVIGATION SYSTEM OF A TACTICAL TRANSPORT Final Report, Sep. 1977 - May 1979

Donald Dewey, Richard Bousley, Stephen Behnen, and James Mason May 1979 181 p refs

(Contract F33615-77-C-1233; AF Proj. 2003)
(AD-A073068; AFAL-TR-79-1061) Avail: NTIS
HC A09/MF A01 CSCL 17/7

This effort has provided an independent contractor assessment of the DAIS executive software, industry exposure to the J-73

level one compiler and DAIS software development tools, and a definition of the interface between DAIS and integrated navigation systems. A combination of INS, GPS and air data was used to demonstrate the usefulness of the DAIS/integrated navigation system for tactical air drop and terminal area operations w/transport aircraft. A Boeing Aerospace Lab Simulation jointly managed by AFAL and Boeing, was conducted for the purposes of evaluating the DAIS/integrated navigation system software performance capabilities in a simulated tactical air drop and terminal area navigation flight profile. A 'Hot Bench' simulation was conducted using contractor developed sensor software modules and navigation filter, and the DAIS executive software and processing hardware. Outputs of the program include: Verification of the overall DAIS concept, measurements of executive software overhead and suggestions for improving the DAIS executive software GRA

N80-11064# New Mexico Univ., Albuquerque. Technology Application Center.
INERTIAL NAVIGATION AND GUIDANCE. CITATIONS FROM THE INTERNATIONAL AEROSPACE ABSTRACTS DATA BASE Progress Report, 1976 - Jul. 1979
 Samuel C. Mauk Aug. 1979 50 p Sponsored in part by NTIS
 (NTIS/PS-79/0825/4) Avail: NTIS HC \$28.00/MF \$28.00 CSDL 17G

This bibliography cites 208 articles from the international literature concerning air navigation, navigation instruments and aids, aircraft guidance, missile control, strapdown inertial guidance, gyroscopes, stabilized platforms, position and instrument error, error analysis, and accelerometers. Civil, commercial, and military applications are covered. GRA

N80-11065*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.
A HYDRAULIC ACTUATOR MECHANISM TO CONTROL AIRCRAFT SPOILER MOVEMENTS THROUGH DUAL INPUT COMMANDS Patent Application
 Stephen C. Irick, inventor (to NASA) Filed 17 Aug. 1979 11 p
 (NASA-Case-LAR-12412-1; US-Patent-Appl-SN-067595) Avail: NTIS HC A02/MF A01 CSDL 10C

A conventional, primary spoiler control system retains its operational characteristics while accommodating a secondary input controlled by a conventional computer system to supplement the settings made by the primary input. This is achieved by interposing springs between the primary input and the spoiler control unit. The springs are selected to have a stiffness intermediate to the greater force applied by the primary control linkage and the lesser resistance offered by the spoiler control unit. Thus, operation of the primary input causes the control unit to yield before the springs, yet, operation of the secondary input, acting directly on the control unit, causes the springs to yield and absorb adjustments before they are transmitted into the primary control system. NASA

N80-11066# National Aerospace Lab., Tokyo (Japan). V/STOL Div.

FUEL MINIMAL TAKE-OFF PATH OF JET LIFT VTOL AIRCRAFT, LOG NO. C3558

Hiroshi Nishimura 7 Aug. 1979 40 p refs Backup document for AIAA synoptic scheduled for publication in Journal of Aircraft on Feb. 1980

Avail: NTIS HC A03/MF A01

The fuel minimal take-off path analysis for jet lift type VTOL aircraft is presented. The study is made of two basic configurations, namely, separate type and swivel type. The fuel minimal take-off path problems of the two configurations are analyzed as nonlinear systems with the controls constrained by their magnitude. The solutions for both types are generally composed of two or three discontinuous segments connected by switching points. For the separate type, the singular part is analytically deterministic and unique, and plays a decisive role; but for the swivel type, the

singular part is not unique. Two methods of solution involving different handling of singular parts are considered. Author

N80-11067*# United Technologies Research Center, East Hartford, Conn.

NOISE OF A MODEL HELICOPTER ROTOR DUE TO INGESTION OF TURBULENCE Final Report

Robert W. Paterson and Roy K. Amiet Nov. 1979 131 p refs

(Contract NAS1-15094)

(NASA-CR-3213) Avail: NTIS HC A07/MF A01 CSDL 01C

A theoretical and experimental investigation of the noise of a model helicopter rotor due to ingestion of turbulence was conducted. Experiments were performed with a 0.76 m dia, articulated model rotor for a range of inflow turbulence and rotor operating conditions. Inflow turbulence levels varied from approximately 2 to 19 percent and tip Mach number was varied from 0.3 to 0.52. Test conditions included ingestion of a atmospheric turbulence in outdoor hover as well as ingestion of grid generated isotropic turbulence in the wind tunnel airstream. In wind tunnel testing, both forward flight and vertical ascent (climb) were simulated. Far field noise spectra and directivity were measured in addition to incident turbulence intensities, length scales, and spectra. Results indicate that ingestion of atmospheric turbulence is the dominant helicopter rotor hover noise mechanism at the moderate to high frequencies which determine perceived noise level. R.C.T.

N80-11068*# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.

WIND-TUNNEL/FLIGHT CORRELATION STUDY OF AERODYNAMIC CHARACTERISTICS OF A LARGE FLEXIBLE SUPERSONIC CRUISE AIRPLANE CXB-70-1). 1: WIND-TUNNEL TESTS OF A 0.03-SCALE MODEL AT MACH NUMBERS FROM 0.6 TO 2.53

James Daugherty, C. Nov. 1979 222 p refs

(NASA-TP-1514; A-7712) Avail: NTIS HC A10/MF A01 CSDL 01C

The longitudinal and lateral forces and moments for a 0.03 scale deformed rigid, static force model of the XB-70-1 airplane were determined. Control effectiveness was determined for the elevon in pitch and roll, for the canard, and for the rudders. Component effects of the canard, deflected with tips, variable position canopy, bypass doors, and bleed dump fairing were measured. The effects of small variations in inlet mass flow ratio and small amounts of asymmetric deflection of the wing tips were assessed. A.W.H.

N80-11069*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

APPLICATION OF MODIFIED PROFILE ANALYSIS TO FUNCTION TESTING OF SIMULATED CTOL TRANSPORT TOUCHDOWN-PERFORMANCE DATA

Russell V. Parrish and Burnell T. McKissick Nov. 1979 19 p refs

(NASA-TP-1541; L-13091) Avail: NTIS HC A02/MF A01 CSDL 01C

The modification to the methodology of profile analysis to accommodate the testing of differences between two functions with a single test, rather than multiple tests at various values of the abscissa, is described and demonstrated for two sets of simulation-performance data. The first application was to a flight-simulation comparison of pilot-vehicle performance with a three-element refractive display to performance with a more widely used beam-splitter-reflective-mirror display system. The results demonstrate that the refractive system for out-the-window scene display provides equivalent performance to the reflective system. The second application demonstrates the detection of significant differences by modified profile-analysis procedures. This application compares the effects of two sets of pitch-axis force-feel characteristics on the sink rate at touchdown performance utilizing the refractive system. This experiment demonstrates the dependence of simulator sink-rate performance on force-feel characteristics. Author

N80-11070# Rockwell International Corp., El Segundo, Calif. Los Angeles Div.

IMPROVED METHODS FOR PREDICTING SPECTRUM LOADING EFFECTS, PHASE 1 REPORT, VOLUME 2: TEST DATA Interim Report, 15 Feb. 1978 - 15 Jan. 1979

James B. Chang and John H. Stolpestad 31 Jan. 1979 330 p

(Contract F33615-77-C-3121)

(AD-A072387; NA-78-491-3-Vol-2; AFFDL-TR-79-3036-Vol-2) Avail: NTIS HC A15/MF A01 CSCL 01/3

This report presents the interim status of a program which is aiming to upgrade the crack growth prediction technology required for the implementation of the damage-tolerance and durability control procedures throughout the life cycle of any weapon system. The controlling damage parameters in flight-by-flight loading for all classes of aircraft have been identified. Methodologies which characterize the flight spectra have been developed. Guidelines for development of three levels of crack growth analysis used for detail design, individual aircraft tracking, and preliminary design have been established. Crack growth data generated from the test program has been summarized. GRA

N80-11071# Rockwell International Corp., El Segundo, Calif. Los Angeles Div.

IMPROVED METHODS FOR PREDICTING SPECTRUM LOADING EFFECTS, PHASE 1 REPORT, VOLUME 1: RESULTS AND DISCUSSION Interim Report, 15 Feb. 1978 - 15 Jan. 1979

James B. Chang, John H. Stolpestad, Masanobu Shinozuka, and Rimas Vaicaitis 31 Jan. 1979 333 p refs Prepared in cooperation with Modern Analysis, Inc.

(Contract F33615-77-C-3121)

(AD-A072386; NA-78-491-3-Vol-1; AFFDL-TR-79-3036-Vol-1) Avail: NTIS HC A15/MF A01 CSCL 01/3

This report presents the interim status of a program which aims to upgrade the crack growth prediction technology required for the implementation of the damage-tolerance and durability control procedures throughout the life cycle of any weapon system. The controlling damage parameters in flight-by-flight loading for all classes of aircraft have been identified. Methodologies which characterize the flight spectra have been developed. Guidelines for development of three levels of crack growth analysis used for detail design, individual aircraft tracking, and preliminary design have been established. GRA

N80-11073# Neilsen Engineering and Research, Inc., Mountain View, Calif.

PREDICTION OF LATERAL AERODYNAMIC LOADS ON FIGHTER AIRCRAFT AT HIGH ANGLES OF ATTACK Summary Technical Report, 1 May 1977 - 31 Jul. 1978

S. B. Spangler and S. C. Perkins, Jr. 31 Jul. 1978 86 p refs (Contract N00014-74-C-0344)

(AD-A071893; NEAR-TR-173; ONR-CR212-225-4F) Avail: NTIS HC A05/MF A01 CSCL 20/4

This report presents a brief summary of methods and experimental data developed over a four year period, to predict the static lateral forces acting on a modern fighter-type aircraft at high angles of attack, and small angles of sideslip characteristic of a departure flight attitude. The major part of the report is devoted to application of the methods to two aircraft configurations on which detailed data exist, comparison of the predicted and measured results, and evaluation of the comparisons. The configurations are a research V/STOL fighter configuration and the F-5 aircraft. Comparisons are made on nose vortex positions, circulation distributions in the separated region above the nose, flow velocities in the same region, and loads on the nose alone and complete configuration. Generally, the methods predict all of the correct behavior of these highly nonlinear and complicated flows. However, the agreement in many cases is not sufficiently good to consider the methods as satisfactory design or analysis techniques. Additional work is suggested to provide further verification and improvements. GRA

N80-11074# Polar Research Lab., Inc., Santa Barbara, Calif. **FEASIBILITY TESTS OF USE OF THE TRI TURBO-3 AIRCRAFT FOR ARCTIC AXBT DROPS Interim Report**

B. M. Buck 25 Jul. 1979 17 p

(Contract N00014-79-C-0002; RR0320501)

(AD-A073159; PRL-TR-19) Avail: NTIS HC A02/MF A01 CSCL 08/10

Field feasibility trials of the new Arctic Tri Turbo-3 Aircraft were conducted as part of ONR's Arctic East Program in the Eurasian Basin. One of these trials was a test of its usefulness to collect temperature profiling data in the Greenland-Svalbard Strait in support of underwater acoustics studies. This report describes the aircraft facilities, dropping techniques and results of trial drops. GRA

N80-11075# Kuhn (Richard E.), Newport News, Va.

HEIGHT OF SPRAY PRODUCED BY VERTICAL TAKEOFF AND LANDING (VTOL) AIRCRAFT

Richard E. Kuhn Apr. 1979 30 p refs

(Contract N00167-78-M-2599)

(AD-A073099; DTNSRDC/ASED-79/04) Avail: NTIS HC A03/MF A01 CSCL 01/2

The flow phenomenon involved in the production of spray by a vertical takeoff and landing aircraft hovering over smooth water is examined, and a method for predicting spray height is developed from a correlation of the limited amount of large-scale data available. The method is limited to conditions where the spray height does not exceed the nozzle or rotor height and includes VTOL concepts ranging from the helicopter to jet VTOL'S. Application of the method shows that the spray height is primarily dependent on the operating weight of the aircraft and is only slightly dependent on the disk loading. GRA

N80-11076# Pisa Univ. (Italy). Ist. di Aeronautica.

A METHOD FOR EVALUATING AIRCRAFT TAKE-OFF PERFORMANCE [UN METODO PER LA VALUTAZIONE DELLE PRESTAZIONI DEI VELIVOLI]

C. Casarosa, A. Mancino, and N. Motroni Jun. 1978 74 p refs In ITALIAN; ENGLISH summary

(Contracts CNR-76-00442.07; CNR-76-01620.07)

(Rept-1663; AlA-78-1) Avail: NTIS HC A04/MF A01

A theoretical method and a computation program for aircraft takeoff performance evaluation are presented. The method is based on the integration of the center of gravity motion equation and allows for the evaluation of takeoff performance in function of the main aerodynamic and propulsive characteristics of the aircraft as well as of the takeoff procedure used. Performance evaluation in the case of critical engine failure after a critical point is also possible. The method was tried for the takeoff performance evaluation of a typical executive aircraft having two turbojet engines. Theoretical results were compared with experimental ones and good agreement is shown. Results show that the use of this computerized simulation method for determining aircraft to airfield compatibility is reliable. Author (ESA)

N80-11078# National Transportation Policy Study Commission, Washington, D. C.

NEW AIRCRAFT TECHNOLOGY: REPORT ON THE FARNBOROUGH INTERNATIONAL AIR SHOW

Samuel Colwell Aug. 1979 12 p

(PB-298345/0; NTPSC-WP-79/06) Avail: NTIS HC A02/MF A01 CSCL 01C

Aircraft displayed at the air show are described with emphasis on those that are likely to have significant impact on nonmilitary aviation market for the rest of the century. Categories of aircraft considered include commercial, light transport, general aviation, and helicopters. The Mountbatten (SR.N4) MK.3 hovercraft is also discussed. Of particular interest is the number of STOL aircraft and the reduced noise characteristics. A.R.H.

N80-11079*# Old Dominion Univ., Norfolk, Va.

AVIONICS: PROJECTIONS FOR CIVIL AVIATION, 1995-2000

Griffith J. McRee (Old Dominion Univ.), Russell E. Lueg (Ala. Univ., Tuscaloosa, Ala.), Patricia A. Carlson, ed. (Rose-Hulman Inst. of Tech.), Yearn H. Choi (Jackson State Univ.), John Barrett Crittenden (Va. Polytech. Inst. and State Univ.), Jeffrey C. Dozier

(Coll. of William and Mary), Robert M. Eastman (Missouri-Columbia Univ.), Jerry W. Gravander, ed. (Clarkson Coll. of Tech.), Andrew Hargrove (Hampton Inst.), Alvin E. Keaton, ed. (New Mexico State Univ.) et al Sep. 1979 205 p refs Sponsored by NASA (NASA-CR-159035) Avail: NTIS HC A10/MF A01 CSCL 10D

A view of the 1995-2000 civil aviation avionics system is summarized. Descriptions of the scenarios considered, the avionics technologies, the 1995-2000 avionics system, and an evaluation of the impacts are presented. Recommendations are also presented. R.E.S.

N80-11080# Semcor, Inc., Moorestown, N. J.
AVIONIC SYSTEM ARCHITECTURE INVESTIGATION (AVSAR II)

D. Davino, R. Mereday, M. Minnich, R. Noble, and L. Sorenson 20 Mar. 1979 246 p (Contract DAAB07-78-C-2445; DA Proj. 1L1-62202-AH-85) (AD-A071743) Avail: NTIS HC A11/MF A01 CSCL 09/2

The objective of the Avionic System Architecture Investigation (AVSAR II) was to investigate the extent to which multiplex technology and integrated control/display techniques could be applied to the AH-1S Night Cobra (Step 4). The primary purpose of the study was to determine if the integration of a multiplex data bus system would have a significant impact on aircraft system weight. Secondary objectives were to determine whether a reduction of crew workload and a reduction of cockpit real estate requirements could be effected through implementation of the new architecture. This technical report describes the system analysis, system definition, and system integration considerations that resulted in a Step 4 Night Cobra avionic system with integrated controls/displays and a multiplex data bus. GRA

N80-11083# Arinc Research Corp., Annapolis, Md.
AVIONICS MASTER PLAN DATA BASE MECHANIZATION ARCHITECTURE

J. Maquire and M. Berger Jun. 1979 56 p (Contract F33657-79-C-0475) (AD-A071545; PUBL-1743-01-1-1963) Avail: NTIS HC A04/MF A01 CSCL 05/1

This report addressed the development of the architecture for mechanizing the program tracking system used by the Deputy for Avionics Control ASD/AX in the Avionics Master Plan AMP preparation and in the avionics control function. The effort described is to be utilized by the ASD Data Processing facility ADP in its coding and implementation of the AMP data base storage and retrieval program on the DEC PDP 11T60 computer. GRA

N80-11084# Army Aeromedical Research Lab., Fort Rucker, Ala.

IN-FLIGHT PERFORMANCE EVALUATION OF EXPERIMENTAL INFORMATION Final Report

Michael Lees, Michael G. Sanders, Raymond T. Burden, Jr., and Kent A. Kimball May 1979 27 p refs (DA Proj. 3E7-62773-A-819) (AD-A071701; USAARL-79-8) Avail: NTIS HC A03/MF A01 CSCL 01/4

The objective of this investigation was to evaluate a method of displaying information which permits rapid transmission of flight data to the operator under three viewing conditions: (1) day flights with the unaided eye, (2) night flights with the unaided eye, and (3) night flights using the AN/PVS-5 night vision goggles (40 deg field of view focused at infinity). Information obtained from the analyses of aviator performance data demonstrated the potential of presenting flight information to the aircrew via prototype displays for all viewing modes. GRA

N80-11085# Tactical Air Command, Langley AFB, Va.
F-4 RADAR ALTIMETER AURAL WARNING

29 Jun. 1979 4 p (AD-A072870) Avail: NTIS HC A02/MF A01 CSCL 01/4

The F-4 radar altimeter has a red warning light that lights up when the aircraft goes below a selected altitude. This light is small and will not attract the pilot's attention if it is not in

his field of view. Numerous accidents have occurred in which aircraft have struck the ground in level terrain when the mission required primarily straight and level flight. It has been postulated that an aural warning supplied by the radar altimeter would have alerted the aircrew in sufficient time to avoid contact with the ground. GRA

N80-11088# Air Force Logistics Command, Wright-Patterson AFB, Ohio. Directorate of Management sciences.

OPPORTUNISTIC MAINTENANCE ENGINE SIMULATION MODEL: OMENS 2 Final Report

John L. Madden, Philip A. Persensky, Virginia L. Williamson, and Robert A. Novak Jun. 1979 133 p (AD-A072516; AFLC/XRS-79-137-1) Avail: NTIS HC A08/MF A01 CSCL 21/5

This model simulates the operation of a single engine through a very long period of future time. In operating over this extended period, the engine must be removed for repair from time to time. Repairs become necessary on the engine when one of the modules fails prematurely or whenever it requires replacement of an internal life-limited part. The model tracks all the engine removals and all replacements of each module and offending life-limited part through future simulated time. Records are kept through simulated time of the number of removals and the reasons for removal for each module and for the engine. Reasons for removal include (1) premature failure of one or more parts, (2) reaching the scheduled operating time limit, or (3) being screened out due to the opportunistic maintenance policy. The model also computes maintenance, pipeline, parts costs, and transportation costs associated with the forecasted removals and aggregates the costs for any desired life cycle period (in years) to aid in selecting that optimal maintenance policy which produces the least total cost. GRA

N80-11089# Naval Air Test Center, Patuxent River, Md. Air Vehicle Technology Dept.

SIMULATED MISSION ENDURANCE TEST (SMET) FOR AN AIRCRAFT ENGINE TO BE USED IN A FIGHTER/ATTACK ROLE Final Report

S. M. Cote and J. L. Birkler 23 Apr. 1979 130 p refs (AD-A071907; NADC-77051-30) Avail: NTIS HC A07/MF A01 CSCL 21/5

A 750 hour simulated mission endurance test (SMET) cycle which will closely represent the expected in-service engine duty cycle for the F18 power plant has been developed. The test cycle evolved from an extensive investigation of Navy and Marine fleet engine operating conditions experienced in fighter and attack aircraft during shorebased and carrier operations. The test cycles reflect power lever movements that are an order of magnitude greater than originally thought, and incorporate a representative distribution of time at intermediate and augmented power. It is concluded that this SMET will aid the overall development process to substantiate the suitability of a new engine for service introduction. GRA

N80-11090# Ford Motor Co., Dearborn, Mich.
BRITTLE MATERIALS DESIGN, HIGH TEMPERATURE GAS TURBINE Interim Report, 30 Sep. 1977 - 31 Mar. 1978

Arthur F. Mclean and John R. Secord Army Materials and Research Center, Watertown, Mass. Army Materials and Research Center, Watertown, Mass. May 1979 77 p refs (Contracts DAAG46-71-C-0162; ARPA Order 1849) (AD-A071750; AMMRC TR-79-12) Avail: NTIS HC A05/MF A01 CSCL 21/5

Modifications in the procedure for hot spin testing ceramic rotors resulted in several changes. Of twenty-five rotors being proposed for hot testing, ten were inspected by dye-penetrant methods, dimensionally inspected, and curvic coupling contact patterns checked. Five have now completed hot testing; six are ready for test, and the remainder are in processing. Four ceramic turbine rotors and one rotor hub were qualified for hot testing in the cold spin pit at 55,000 rpm, and three rotors and two rotor hubs were qualified to 70,000 rpm. Blades were lost on all rotors qualified to 70,000 rpm because of gross flaws in the blade cross section. From four to eleven blades per rotor were lost in qualification testing. Six rotors was subjected to a twenty-five hour durability test in the hot spin test rig at

50,000 rpm and 1800 F rim temperature. Four rotors completed the test and two failed during acceleration to test speed. In several instances, post test rotor inspection revealed presence of curvic tooth cracking after disassembly from the test shaft. One of the successful rotors was operated an additional 175 hours to complete the objective of 200 hours at 1800 F rim temperature over a simulated duty cycle speed schedule. GRA

N80-11092# General Motors Corp., Indianapolis, Ind. Detroit Diesel Allison Div.

THE EFFECT OF INTERBLADE PHASE ANGLE AND SOLIDITY ON THE TIME VARIANT AERODYNAMIC RESPONSE OF A COMPRESSOR STATOR Interim Report, 1 May 1978 - 1 May 1979

R. R. Allran Jun. 1979 55 p
(Contract F49620-78-C-0070; AF Proj. 2307)
(AD-A071878; DDA-EDR-9930; AFOSR-79-0853TR) Avail: NTIS HC A04/MF A01 CSCL 21/5

The overall objective of this experimental program was to quantify the effects of the reduced frequency as well as the interblade phase angle and associated solidity variations on the fundamental time-variant aerodynamics relevant to forced response in turbomachinery. This was accomplished in a large, low speed, single-stage research compressor which permitted variation of the interblade phase angle and solidity by varying the number of rotor to stator blades. A single value of interblade phase angle, 36 degrees and a corresponding value of solidity of .758, the aerodynamically induced fluctuating surface pressure distributions on the downstream vane row, with the primary source of excitation being the upstream rotor wakes, were measured over a wide range of compressor operating conditions. The individual vane surface data were investigated to determine the effect of interblade phase angle and solidity on the overall unsteady pressure magnitude as well as to determine the dynamic pressure coefficient and aerodynamic phase lag for the unsteady pressure differential across the vanes. The unsteady pressure differential data were correlated with predictions from a state-of-the-art flat plate cascade transverse gust analysis. GRA

N80-11093# Pratt and Whitney Aircraft, West Palm Beach, Fla. Government Products Div.

DESIGN AND PERFORMANCE EVALUATION OF SUPERCRITICAL AIRFOILS FOR AXIAL FLOW COMPRESSORS Final Report

H. E. Stephens and D. E. Hobbs Jun. 1979 45 p refs
(Contract N00019-77-C-0546)
(AD-A071206; PWA-FR-11455) Avail: NTIS HC A03/MF A01 CSCL 20/4

Pratt Whitney Aircraft has developed an analytical design procedure for producing supercritical cascade airfoils satisfying practical aerodynamic and structural requirements. The purpose of this research is to demonstrate the potential for substantial efficiency improvements in compressor stages incorporating these airfoil designs. The midspan section of a fan exit stator was selected for the design application. An airfoil was designed, fabricated, and tested in a transonic cascade tunnel. Test conditions were varied over a wide range of inlet flow angles and inlet Mach numbers to determine design and off-design performance. Test point information included inlet and exit conditions and airfoil surface pressure distribution. GRA

N80-11094# ARO, Inc., Arnold Air Force Station, Tenn.
EVALUATION OF AN EJECTOR POWERED ENGINE SIMULATOR AT TRANSONIC MACH NUMBERS Final Report

C. E. Robinson AEDC Jul. 1979 248 p refs Sponsored by the Air Force
(AD-A071607; AEDC-TR-78-69) Avail: NTIS HC A11/MF A01 CSCL 20/4

An experimental program was conducted to evaluate an air-driven ejector for use as a turbo-engine simulator in wind tunnel testing. The use of an engine simulator will provide the capability to simultaneously simulate inlet and afterbody flow fields of a turbo-powered vehicle. The ejector-powered engine simulator (EPES) was fitted to the right-wing nacelle of a 0.06 scale B-1 aircraft model. The B-1 model was chosen for

the investigation because of the availability for comparisons of inlet and nozzle afterbody data previously obtained in the Arnold Engineering Development Center (AEDC) Propulsion Wind Tunnel Facility Propulsion Wind Tunnel (16T) using conventional test techniques. A limited amount of flight data from the B-1 flight to wind tunnel correlation program was also available to aid in determining the effectiveness of the EPES as a wind tunnel test tool. GRA

N80-11095# Air Force Inst. of Tech., Wright-Patterson AFB, Ohio. School of Systems and Logistics.

THE USE OF THE MAURER FACTOR FOR ESTIMATING THE COST OF A TURBINE ENGINE IN THE EARLY STAGES OF DEVELOPMENT Final Report, Jun. 1978 - Jun. 1979
Charles W. Barrett, Jr. and Michael J. Koenig Jun. 1979 165 p refs
(AD-A073018; AFIT-LSSR-19-79A) Avail: NTIS HC A08/MF A01 CSCL 14/1

Military managers are faced with increasing systems costs. One area where this increasing cost is especially true is in the acquisition of aircraft weapon systems. A driving factor in the aircraft cost is the turbine engine, and therefore, acquisition managers have been tasked with developing cost estimating methods that will more accurately predict turbine engine cost. At present, several parametric costing models available are briefly discussed in this report. However, the primary objective of this report, is to evaluate a costing technique used extensively by the Navy--the Maurer Factor (MF) technique. The MF technique is a parametric costing technique based on the materials in a turbine engine. The report includes the following: (a) a detailed description of the MF technique; (b) a validation of the MF technique; (c) the development of an estimated MF (EMF) model using engine performance parameters; and (d) statistical analysis and validation of the EMF models. GRA

N80-11096# Defence Research Information Centre, Orpington (England).

ON THE DEVELOPMENT OF THE RB 199

Mariano Gubitosi London Dec. 1978 22 p Transl. into ENGLISH from Rivista Aeron. (Rome), v. 54, no. 3, May-Jun. 1978 p 32-39

(DRIC-Trans-5429; BR67500) Avail: NTIS HC A02/MF A01

The development of the RB 199 engine as a tailor-made solution for the MRCA 'Tornado' project is discussed. Operational requirements, such as very high thrust under combat flight conditions and low fuel consumption under other flight conditions, are considered. Design technological alternatives, principally thrust/weight ratio, and as built characteristics are examined. The triple-shaft configuration is treated in light of the performance principles of a jet engine. Among functional choices, afterburn, the double flow solution, and the setting of the by-pass ratio are particularly detailed. Finally, the RB 199 turbofan is described and a short synopsis of the design evolution of this engine is given. Author (ESA)

N80-11097*# Systems Technology, Inc., Mountain View, Calif.
A COMPILATION AND ANALYSIS OF HELICOPTER HANDLING QUALITIES DATA. VOLUME 1: DATA COMPILATION Report, Sep. 1976 - Feb. 1978

Robert K. Heffley, Wayne F. Jewell, John M. Lehman, and Richard A. VanWinkle Aug. 1979 387 p refs
(Contract NAS2-9344)
(NASA-CR-3144; TR-1087-1) Avail: NTIS HC A17/MF A01 CSCL 01C

A collection of basic descriptive data, stability derivatives and transfer functions for six degrees of freedom, quasi-static model is introduced. The data are arranged in a common, compact format for each of the five helicopters represented. The vehicles studied include the BO-105, AH-1h, and the CH53D. R.C.T.

N80-11099# Naval Surface Weapons Center, White Oak, Md.
INEQUALITIES AND APPROXIMATION WITH APPLICATIONS TO VSTOL AIRCRAFT

William W. Hager and John W. Wingate 3 Dec. 1978 24 p refs

(AD-A071807; NSW/WOL/TR-78-210) Avail: NTIS
HC A02/MF A01 CSCL 01/3

A class of inequalities are discussed that are related to the following topics: (1) error estimates for variational inequality and optimal control approximation; (2) stability for mathematical programs; and (3) solution regularity for optimal control problems. These results are used to study the error in the semidual method for approximating the solution to optimal control problems. The application of the semidual to optimize VSTOL flight trajectories is discussed. GRA

N80-11100# California Univ., Los Angeles. School of Engineering and Applied Science.

ENTROPY ANALYSIS OF FEEDBACK FLIGHT DYNAMIC CONTROL SYSTEMS Final Report, May 1977-May 1978
Henry Lawrence Weidemann and C. T. Leondes Jan. 1979
165 p refs

(Contract F33615-77-C-3013; AF Proj. 2307)
(AD-A072259; AFFDL-TR-78-123) Avail: NTIS
HC A98/MF A01 CSCL 01/2

This report is a study of the application of the entropy function of Information Theory to the analysis of sampled data systems so characteristic of the evolving and important field of digital flight control, including multimode systems. The systems studied are both feed-forward and feedback with the emphasis placed on the regulator problem. The feature common to all the configurations is the presence of a sensor which measures the input signal and which has an output that is usually some random function of the input. For the purposes of the analysis it is convenient to describe the behavior of the sensor by its Sensor Channel Transmittance, which is defined as the mutual information between the input and output of the measuring device. This quantity is not independent of the properties of the input signal; however, in any given problem it need only be calculated once. This research is important because it imbeds the control problem in the communication problem and clearly demonstrates the manner in which the information handling capability of the system elements limits performance, and is, therefore, of considerable potential significance to advanced flight dynamic systems. GRA

N80-11101# Rodden (William P.), La Canada, Calif.
AERO-SERVO-ELASTIC STABILITY ANALYSIS Final Report, 6 Apr. 1976 - 21 Jul. 1977

William P. Rodden, Mildred R. Zeifman, and John M. Powers, Jr. Apr. 1979 205 p refs
(Contract N00019-76-C-0346)

(AD-A072797) Avail: NTIS HC A19/MF A01 CSCL 14/2

A general matrix formulation of the aero-servo-elastic stability problem is presented based on the British method of flutter analysis. The analysis applies to the closed-loop system, and the digital computer program (MPASES) developed to perform the analysis is described. An application is made to a typical air-to-air missile with three feedback loops. GRA

N80-11102*# Virginia Univ., Charlottesville.
EXPERIMENTAL FEASIBILITY STUDY OF THE APPLICATION OF MAGNETIC SUSPENSION TECHNIQUES TO LARGE-SCALE AERODYNAMIC TEST FACILITIES

R. N. Zapata, Robert R. Humphris, and Karl C. Henderson 1975
10 p refs Submitted for publication

(Grants NGR-47-005-029; NGR-47-005-110;
NGR-47-005-112; NsG-1010)
(NASA-CR-146761) Avail: NTIS HC A02/MF A01 CSCL
14B.

Based on the premises that magnetic suspension techniques can play a useful role in large scale aerodynamic testing, and that superconductor technology offers the only practical hope for building large scale magnetic suspensions, an all-superconductor 3-component magnetic suspension and balance facility was built as a prototype and tested successfully. Quantitative extrapolations of design and performance characteristics of this prototype system to larger systems compatible with existing and planned high Reynolds number facilities at Langley Research Center were made and show that this experimental technique should be particularly attractive when used in conjunction with large cryogenic wind tunnels. A.R.H.

N80-11103*# San Jose State Univ., Calif. Dept. of Psychology.

PERCEPTION AND PERFORMANCE IN FLIGHT SIMULATORS: THE CONTRIBUTION OF VESTIBULAR, VISUAL, AND AUDITORY INFORMATION Final Report

Oct. 1979 20 p refs
(Grant NsG-2269)
(NASA-CR-162129) Avail: NTIS HC A02/MF A01 CSCL
14B

The pilot's perception and performance in flight simulators is examined. The areas investigated include: vestibular stimulation, flight management and man cockpit information interfacing, and visual perception in flight simulation. The effects of higher levels of rotary acceleration on response time to constant acceleration, tracking performance, and thresholds for angular acceleration are examined. Areas of flight management examined are cockpit display of traffic information, work load, synthetic speech call outs during the landing phase of flight, perceptual factors in the use of a microwave landing system, automatic speech recognition, automation of aircraft operation, and total simulation of flight training. A.W.H.

N80-11105# Systems Technology, Inc., Hawthorne, Calif.
MANNED ENGINEERING FLIGHT SIMULATION VALIDATION, PART 2: SOFTWARE USER'S GUIDE Final Report, Aug. 1977 - Nov. 1978

Susan A. Riedel Feb. 1979 57 p
(Contract F33615-77-C-206518)
(AD-A071395; STI-TR-1110-2; AFFDL-TR-78-192-Pt-2) Avail:
NTIS HC A04/MF A01 CSCL 14/2

The goal of this research is to establish an orderly, relatively simple method for optimizing the presentation of motion cues in moving base simulations. This is accomplished via choice of the drive logic parameters for a given simulator and flying task. The method developed here is based upon use of motion fidelity criteria. It has been applied to optimize the LAMARS motion base drive logic parameters for an air-to-ground scenario. The methods and procedures can be applied for any given motion base and any desired scenario. This report describes the FORTRAN computer program used for evaluating and optimizing motion base drive logic. GRA

N80-11106# Little (Arthur D.), Inc., Cambridge, Mass.
SYSTEMS ANALYSIS OF ARCTIC FUELS DISPENSING EQUIPMENT Final Report, 1 Jan. - 30 Jun. 1979

Donald B. Rosenfield, Edgar A. Gilbert, III, and John S. Howland
30 Jun. 1979 174 p
(Contract DAAK70-77-D-0024)

(AD-A071815; ADL-80260-18) Avail: NTIS
HC A08/MF A01 CSCL 21/4

A systems analysis was performed to evaluate military fuel dispensing systems for arctic applications. The present systems, the Forward Area Refueling Equipment (FARE) and Fuels System Supply Point (FSSP), encounter problems in the areas because engines fail to start and elastomers become brittle at temperatures of -60 F. The systems analysis consisted of two phases of evaluating and scoring system attributes for numerous combinations of systems concepts and components. The systems with the highest evaluations were the basic designs with gas turbine drives, state-of-the-art elastometrics, and either state-of-the-art batteries or a compressed gas start. It was also concluded that additional development should be undertaken in the area of cold weather elastometrics. GRA

N80-11110# Fondazione Ugo Bordoni, Rome (Italy).
SURVEILLANCE AND COMMUNICATION SYSTEMS USING MOBILE MEDIA ON THE AIRPORT SURFACE [SISTEMI DI SORVEGLIANZA E DI COMUNICAZIONE CON MEZZI MOBILI SULLA SUPERFICIE AEROPORTUALE]

Tullio Corzani (Trieste Univ., Italy) and Gabriele Falciasacca (Bologna Univ.) Sep. 1978 10 p refs IN ITALIAN Presented at 79th A.E.I. Ann. Reunion, Catanzaro, Italy, Sep. 1978
Sponsored by CNR

(FUB-13-1978) Avail: NTIS HC A02/MF A01
The problems of an airport surface traffic control system developed in Italy are examined. A selection among possible

systems is discussed, starting with solutions which use primary radar (now being adopted in many airports) and arriving at a completely automated system for surveillance and control of the airport surface, based on the use of secondary surveillance radar equipment on the ground. Author (ESA)

N80-11201# Failure Analysis Associates, Palo Alto, Calif.
FRACTURE AND FATIGUE PROPERTIES OF 1Cr-Mo-V BAINITIC TURBINE ROTOR STEELS

I. Roman, C. A. Rau, Jr., A. S. Tetelman, and K. Ono Mar. 1979 268 p refs (EPRI Proj. 700-1) (EPRI-NP-1023) Avail: NTIS HC A12/MF A01

The deformation, fracture and fatigue properties of 1Cr-Mo-V turbine rotor steel have been evaluated for a wide range of loading conditions and metallurgical structures controlled by melting and heat treatment practice. The mechanical property differences and corresponding metallurgical differences between older, air-melted steels and newer heats that are vacuum degassed were determined. The effects of prior fatigue cycling on fracture toughness were measured, and a model was developed to predict the effect for various materials and loading conditions. Irrespective of the fracture mode, materials which soften under strain cycling, like this rotor steel, show a toughness which increases with number and magnitude of prior fatigue cycling. DOE

N80-11238*# Union Carbide Corp., Tonawanda, N.Y. Linde Div.

ECONOMICS OF HYDROGEN PRODUCTION AND LIQUEFACTION UPDATED TO 1980

C. R. Baker Nov. 1979 41 p refs (Contract NAS1-14698) (NASA-CR-159163) Avail: NTIS HC A03/MF A01 CSCL 21D

Revised costs for generating and liquefying hydrogen in mid-1980 are presented. Plant investments were treated as straight-forward escalations resulting from inflation. Operating costs, however, were derived in terms of the unit cost of coal, fuel gas and electrical energy to permit the determination of the influence of these parameters on the cost of liquid hydrogen. Inflationary influence was recognized by requiring a 15% discounted rate of return on investment for Discounted Cash Flow financing analysis, up from 12% previously. Utility financing was revised to require an 11% interest rate on debt. The scope of operation of the hydrogen plant was revised from previous studies to include only the hydrogen generation and liquefaction facilities. On-site fuel gas and power generation, originally a part of the plant complex, was eliminated. Fuel gas and power are now treated as purchased utilities. Costs for on-site generation of fuel gas however, are included. A.R.H.

N80-11244# Exxon Research and Engineering Co., Linden, N.J.
FUNDAMENTAL CHARACTERIZATION OF ALTERNATE FUEL EFFECTS IN CONTINUOUS COMBUSTION SYSTEMS

W. S. Blazowski, R. B. Edelman (Science Applications, Inc., Woodland Hills, Calif.), and P. T. Harsha (Science Applications, Inc., Woodland Hills, Calif.) 11 Sep. 1978 86 p refs (Contract EC-77-C-03-1543) (SAN-1543-12) Avail: NTIS HC A05/MF A01

The development of fuel-flexible combustion systems for gas turbines as well as Rankine and Stirling cycle engines is presented. An improved understanding was developed of relationships between alternate fuel properties and continuous combustion system effects, and to provide analytical modeling/correlation capabilities to be used as design aids for development of fuel-tolerant combustion systems. Experimental procedures were evaluated for studying alternate fuel combustion effects and to determine current analytical capabilities for prediction of these effects. Jet Stirred Combustor studies during this period produced new insights into soot formation in strongly back-mixed systems and have provided much information for comparison with analytical predictions. Applications of quasi-global modeling techniques were included as well as comparison of prediction with the experimental results generated. DOE

N80-11247# California Univ., Livermore. Lawrence Livermore Lab.

BEHAVIOR OF LIGHTLY CONFINED HIGH EXPLOSIVES IN A JET-FUEL FIRE

K. J. Scribner and G. J. Tanaka 2 Feb. 1979 23 p (Contract W-7405-eng-48) (UCRL-52659) Avail: NTIS HC A02/MF A01

The effects of a jet-fuel fire on the behavior of several plastic-bonded explosives of military interest were investigated. Eight small spherical explosive assemblies cased in stainless steel and containing thermocouples to record the ambient flame temperature at several points inside the assembly were fabricated. The explosive formulations contained HMX, TATB, NO, or combinations of HMX with either TATB or NQ. When these units were tested, similar behavior for all formulations was observed. There were no detonations. Decomposition began at the outer surface of the high-explosive charge and proceeded slowly toward the center, and all casings vented under the pressure of the decomposition products. Thermograms showed that, under the test conditions, TATB is the most thermally stable and NQ is the least stable of the three explosives tested. DOE

N80-11273# National Aviation Facilities Experimental Center, Atlantic City, N. J.

VOICE DATA ENTRY IN AIR TRAFFIC CONTROL Report, May 1975 - Dec. 1978

Donald W. Connolly Aug. 1979 76 p refs (FAA Proj. 219-151-100)

(AD-A073670; FAA-NA-79-20) Avail: NTIS HC A05/MF A01 CSCL 17/2

The potential operational utility of state-of-the-art word recognition technology in air traffic control applications were studied. Experiment 1, employing 12 operators or talkers, secured baseline data representing the inherent best case recognition accuracy of the system. Three of the subvocabularies of an operational data entry language were tested exhaustively to a total of over 46,000 spoken words. On the average, across all speakers and all three subvocabularies, only 1 percent of the words spoken were erroneously recognized. Subsequent tuning of the recognition algorithm reduced the error rate to less than 0.4 percent. Experiment 2 compared the quality and efficiency of the voice system versus the existing keyboard method of entering complete operational messages. The voice system produced 64 percent fewer errors of all kinds than the keyboard in the messages entered, but showed no advantage (or disadvantage) in rate of entry. Voice entry, however, did demonstrate an advantage in the overall time consumed by the data entry process - less time was required to translate entry requirements into the spoken language than into the keyboard code. Other influential factors were also examined, including the effects of microphone type, individual differences between operators, the stability of operators' word-prints over time, and operator adaptation to the voice entry system. F.O.S.

N80-11275# IIT Research Inst., Annapolis, Md.

EVALUATION OF TRANSPONDER ANTENNA COVERAGE/ATCRBS DURING SIMULATED FLIGHTS OF AIRCRAFT Final Report

Thomas Gibson Apr. 1979 73 p refs (Contracts DOT-FA70WAI-175; F19628-78-C-0006) (AD-A073547; ECAC-PR-76-019; FAA-RD-77-122) Avail: NTIS HC A04/MF A01 CSCL 17/9

A computer model was used to analyze the effect of aircraft orientation on the performance of the Air Traffic Control Radar Beacon System (ATCRBS). Flights by Cessna 150, Boeing 727, Boeing 747, and F-4H aircraft over a common flight route out of La Guardia Airport were simulated. Transponder/antenna performance for various aircraft attitudes and locations along the flight path was analyzed with respect to interrogators located at JFK airport. This performance was compared to a transponder having ideal, omni-directional antenna coverage to illustrate the degree to which the combination of aircraft orientation and transponder antenna pattern may affect ATCRBS performance. Author

N80-11309# Rome Air Development Center, Griffiss AFB, N.Y.
HEMISPHERICAL COVERAGE OF FOUR-FACED AIRCRAFT ARRAYS

Robert J. Mailloux and William G. Mavroides May 1979 19 p refs
(AF Proj. 4600)
(AD-A073079; RADC-TR-79-176) Avail: NTIS
HC A02/MF A01 CSCL 17/1

This report describes the radiating characteristics of a four-faced array with faces arranged in a streamlined configuration for hemispherical coverage. The report presents new experimental and theoretical results giving coverage for a side array in the plane perpendicular to the cylinder and shows that the structure radiates both polarizations efficiently for angles from the zenith to the horizon. In the absence of mutual coupling effects, the circularly polarized radiation remains within approximately 1 dB of the array projection factor. Finally, the report presents coverage contours for a four-faced array with the front and back faces half the size of the side faces. In this case, the proper choice of front array tilt angle can result in a hemispherical gain projection factor within 3.5 dB of peak gain over nearly the whole hemisphere. GRA

N80-11399# Southampton Univ. (England). Dept. of Aeronautics and Astronautics.

A STUDY OF COHERENT STRUCTURES IN AXISYMMETRIC JETS USING AN OPTICAL TECHNIQUE

Gautam T. Kalghatgi Jun. 1979 38 p refs
(Contract MIN-DEF/AT/2040/084)
(AASU-341) Avail: NTIS HC A03/MF A01

Coherent structures in the first six diameters of five axisymmetric jets of different velocities and densities were studied by an optical method using the deflection of laser beams caused by density gradients in the flow. Results show that the average interval between successive events increases with axial distance independently of the density, velocity, or Reynolds number of the jets and that near the nozzle exit plane the interval is very similar to that found for two dimensional mixing layers. The proposition that there are random interactions between the coherent structures as they are convected downstream is used to explain many of the observations. Author (ESA)

N80-11474# Brunswick Corp., Deland, Fla. Technetics Div.
DEVELOPMENT OF IMPROVED ABRADABLE COMPRESSOR GAS PATH SEAL Final Report, 20 Sep. 1976 - 19 May 1978

W. P. Jarvi and A. R. Erickson Jul. 1978 140 p
(Contract F33615-76-C-5302; AF Proj. 7312)
(AD-A072171; ER-382; AFML-TR-78-101) Avail: NTIS
HC A07/MF A01 CSCL 21/5

A number of fiber metal systems were evaluated by rig testing in comparison with the base line material, FM-521 - a 19% dense, Haynes 188, 8 micron fiber metal - which is the standard production material used for the highest temperature compressor blade tip seals in the P and WA F-100 engine. A range of densities and strengths of alternative materials were evaluated including Haynes 188, FeCrAlY, NiCrAlY, and FeNiCrAlY employing fiber diameters in the range of 8 - 23 microns with fiber aspect ratios in the range of 45 - 80. Rig tests employed were high speed rub testing, cyclic static oxidation, cyclic dynamic oxidation, and hot particulate erosion. These data were supplemented with measurements of mechanical, thermal, and chemical properties. The best material tested was a 20.5% dense FeNiCrAlY fiber metal employing 17 micron fibers. This had at least equivalent abrasability and improved oxidation and erosion resistance in comparison with the base line material. GRA

N80-11505*# National Aeronautics and Space Administration.
Langley Research Center, Hampton, Va.
LIGHT AIRPLANE CRASH TESTS AT THREE-PITCH ANGLES

Victor L. Vaughan, Jr. and Emilio Alfaro-Bou Nov. 1979 62 p refs

(NASA-TP-1481) Avail: NTIS HC A04/MF A01 CSCL 01C

Three similar twin-engine general aviation airplane specimens were crash tested at an impact dynamics research facility at 27 m/sec, a flight path angle of -15 deg, and pitch angles of -15 deg, 0 deg, and 15 deg. Other crash parameters were held constant. The test facility, instrumentation, test specimens, and test method are briefly described. Structural damage and accelerometer data for each of the three impact conditions are presented and discussed. Author

N80-11513# Northrop Corp., Hawthorne, Calif. Aircraft Group.

EFFECT OF MULTIAXIAL LOADING ON CRACK GROWTH. VOLUME 1: TECHNICAL SUMMARY Final Report, 15 Sep. 1976 - 15 Sep. 1978

A. F. Liu and D. F. Dittmer Dec. 1978 238 p refs
(Contract F33615-76-C-3121; AF Proj. 486U)
(AD-A072122; NOR-78-161-Vol-1; AFFDL-TR-78-175-Vol-1)
Avail: NTIS HC A11/MF A01 CSCL 20/11

An exploratory research program has been conducted to systematically evaluate the effects of biaxial stress ratio on constant amplitude and variable amplitude fatigue crack growth rates. A series of experiments and analyses have been carried out on the cyclic crack growth behavior of center-cracked cruciform specimens under various biaxial loading conditions. The results may be summarized as follows. Cracks will grow straight in a biaxial stress field when the stress component parallel to the crack is equal to or smaller than the stress component normal to the crack. Elastic K factors are obtainable for both straight and curved cracks and are adequate for correlating the biaxial growth rate data. At a given stress intensity level, the constant amplitude crack growth rates are the same in all the biaxial loading conditions. In out-of-phase loading conditions, the crack growth rate and crack growth directions are the same as those in the in-phase loading conditions. Crack tip plastic zone size variations with biaxial ratio appeared to have no effect on constant-amplitude crack growth rate. As for the variable amplitude tests, it is very evident that cracks grow faster at positive biaxial stress states, but slower at negative biaxial loading conditions. GRA

N80-11524# National Aerospace Lab., Amsterdam (Netherlands). Structures and Materials Div.

FLIGHT SIMULATION FATIGUE CRACK PROPAGATION EVALUATION OF CANDIDATE LOWER WING SKIN MATERIALS WITH PARTICULAR CONSIDERATION OF SPECTRUM TRUNCATION

R. J. H. Wanhill 15 Jan. 1979 34 p refs
(Contract NIVR-1806)

(NLR-TR-77092-U) Avail: NTIS HC A03/MF A01

Flight simulation fatigue crack propagation tests were carried out on 2024-T3, 7475-T761, and mill annealed Ti-6Al-4V sheet in thicknesses up to 3 mm. These materials are representative of transport aircraft lower wing skin stiffened panels of end load capacities 1.5 and 3 MN/m. Results show that the performance of 2024-T3 is much superior, owing mainly to greater retardation of crack growth after severe flights. The effect of load truncation is also greater for 2024-T3. The significance of the results in the choice of advanced structural concepts and materials as well as in the choice of truncation level is discussed. A recommendation for further investigation is given. Author (ESA)

N80-11715# Federal Aviation Administration, Washington, D.C. Systems Research and Development Service.

WIND SHEAR HAZARD DEFINITION FOR A WIDE BODY JET Final Report

Herbert W. Schlickemaier Jun. 1979 80 p ref
(FAA-RD-79-90) Avail: NTIS HC A05/MF A01

A computer program is developed to simulate the flight dynamics and automatic flight control system (AFCS) of a three engine jumbo jet following a 3 deg glideslope during final approach. Wind shear profiles representative of actual encounters are used. The simulation uses both autopilot and autothrottle. An initial effort is made to define specific wind shear conditions that

pose hazards to aircraft. Parameter values are analyzed for each of four categorized wind shear environments and performance scores achieved on computer simulations are assigned for each of the four wind shear types. The most severe situations that can be accommodated by a jumbo tri-jet with current configuration are described for each of the four wind shear types. Conservative controllability criteria is applied and a hazardous condition is presumed to exist when the control action demanded and provided by the simulator exceeds the control limits of the actual aircraft, or when the airspeed and/or touchdown dispersion exceed limit values. Definition of these criteria provide a basis for the formulation of procedures allowing aircraft to anticipate and avoid hazardous wind shear conditions.

A.R.H.

N80-11746# New Mexico Univ., Albuquerque. Technology Application Center.

CLEAR AIR TURBULENCE. CITATIONS FROM THE INTERNATIONAL AEROSPACE ABSTRACTS DATA BASE Progress Report, 1974 - Jul. 1979

Samuel C. Mauk Sep. 1979 37 p Sponsored in part by NTIS
(NTIS/PS-79/O858/5) Avail: NTIS HC \$28.00/MF \$28.00 CSCL 01C

Articles covering research and analysis, theories and experiments, detection and measurement equipment, simulation modeling, and CAT accidents involving aircraft are presented. (Contains 121 citations) GRA

N80-11868*# Kentron International, Inc., Hampton, Va. Technical Center.

A METHOD FOR PREDICTING THE NOISE LEVELS OF COANNULAR JETS WITH INVERTED VELOCITY PROFILES

James W. Russell Washington NASA Oct. 1979 156 p refs

(Contract NAS1-13500)
(NASA-CR-3176) Avail: NTIS HC A08/MF A01 CSCL 20A

A coannular jet was equated with a single stream equivalent jet with the same mass flow, energy, and thrust. The acoustic characteristics of the coannular jet were then related to the acoustic characteristics of the single jet. Forward flight effects were included by incorporating a forward exponent, a Doppler amplification factor, and a Strouhal frequency shift. Model test data, including 48 static cases and 22 wind tunnel cases, were used to evaluate the prediction method. For the static cases and the low forward velocity wind tunnel cases, the spectral mean square pressure correlation coefficients were generally greater than 90 percent, and the spectral sound pressure level standard deviation were generally less than 3 decibels. The correlation coefficient and the standard deviation were not affected by changes in equivalent jet velocity. Limitations of the prediction method are also presented. R.C.T.

N80-11870*# Lockheed-Georgia Co., Marietta.
STUDIES OF THE ACOUSTIC TRANSMISSION CHARACTERISTICS OF COAXIAL NOZZLES WITH INVERTED VELOCITY PROFILES, VOLUME 1 Final Report

P. D. Dean, M. Salikuddin, K. K. Ahuja, H. E. Plumblee, and P. Mungur Cleveland, Ohio NASA May 1979 186 p refs

(Contract NAS3-20797)
(NASA-CR-159698; LG79ER0178-Vol-1) Avail: NTIS HC A09/MF A01 CSCL 20A

The efficiency of internal noise radiation through coannular exhaust nozzle with an inverted velocity profile was studied. A preliminary investigation was first undertaken to: (1) define the test parameters which influence the internal noise radiation; (2) develop a test methodology which could realistically be used to examine the effects of the test parameters; (3) and to validate this methodology. The result was the choice of an acoustic impulse as the internal noise source in the in the jet nozzles. Noise transmission characteristics of a nozzle system were then investigated. In particular, the effects of fan nozzle convergence angle, core extension length to annulus height ratio, and flow Mach number and temperatures were studied. The results are presented as normalized directivity plots. R.C.T.

N80-11953*# National Aeronautics and Space Administration, Washington, D. C.


SMALL TRANSPORT AIRCRAFT TECHNOLOGY. A REPORT FOR THE COMMITTEE ON COMMERCE, SCIENCE, AND TRANSPORTATION, UNITED STATES SENATE Interim Report

Oct. 1979 77 p refs
(NASA-TM-80813) Avail: NTIS HC A05/MF A01 CSCL 05A

A preliminary assessment of the research and technology that NASA could undertake to improve small transport aircraft is presented. The advanced technologies currently under study for potential application to the small transport aircraft of the future are outlined. Background information on the commuter and shorthaul local service air carriers, the regulations pertaining to their aircraft and operations, and the overall airline system interface is included. A.R.H.

SUBJECT INDEX

Typical Subject Index Listing

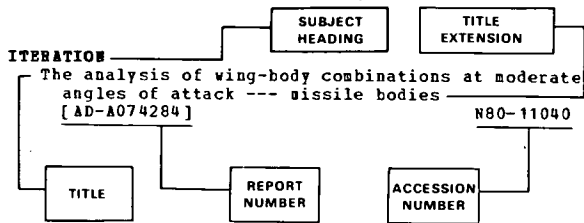

The title is used to provide a description of the subject matter. When the title is insufficiently descriptive of the document content, a title extension is added, separated from the title by three hyphens. The NASA or AIAA accession number is included in each entry to assist the user in locating the abstract in the abstract section of this supplement. If applicable, a report number is also included as an aid in identifying the document.

A

- ABRASION RESISTANCE**
Development of improve- abradable compressor gas path seal
[AD-A072171] N80-11474
- AC GENERATORS**
Program for the development of a superconducting generator, phase 2 and 3
[AD-A072093] N80-10439
- ACCELERATION TOLERANCE**
Ejection seat for high G escape
[AD-A072444] N80-11054
- ACOUSTIC ATTENUATION**
A method for predicting the noise levels of coannular jets with inverted velocity profiles
[NASA-CR-3176] N80-11868
- ACOUSTIC EMISSION**
On the acoustic power emitted by helicopter rotor blades at low tip speeds
A80-12375
- Studies of the acoustic transmission characteristics of coaxial nozzles with inverted velocity profiles, volume 1 --- jet engine noise radiation through coannular exhaust nozzles
[NASA-CR-159698] N80-11870
- ACOUSTIC VELOCITY**
Studies of the acoustic transmission characteristics of coaxial nozzles with inverted velocity profiles, volume 1 --- jet engine noise radiation through coannular exhaust nozzles
[NASA-CR-159698] N80-11870
- ACOUSTICS**
Aero-acoustic tests of duct-burning turbofan exhaust nozzles
[NASA-CR-162254] N80-10204
- Flight effects on the aero/acoustic characteristics of inverted profile coannular nozzles
[NASA-CR-162419] N80-10220
- ACTUATORS**
Electromechanical flight control actuator
[NASA-CR-160348] N80-10224
- A hydraulic actuator mechanism to control aircraft spoiler movements through dual input commands
[NASA-CASE-LAR-12412-1] N80-11065
- ADAPTIVE CONTROL**
Identification and dual adaptive control of a turbojet engine
A80-10033
- ADHESIVE BONDING**
Aircraft designers follow the birds --- lightweight composite materials and metal joining techniques in aircraft structures
A80-11345
- AERIAL EXPLOSIONS**
Airblast vulnerability envelopes for supersonic aerospace vehicles
[AD-A072247] N80-10201
- AEROACOUSTICS**
On the acoustic power emitted by helicopter rotor blades at low tip speeds
A80-12375
- AERODYNAMIC CHARACTERISTICS**
Advanced missile technology. A review of technology improvement areas for cruise missiles --- including missile design, missile configurations, and aerodynamic characteristics
[NASA-CR-3187] N80-10103
- Recent developments in ejector technology in the Air Force: An overview
N80-10108
- Low-speed wind-tunnel tests of a 1/10-scale model of an advanced arrow-wing supersonic cruise configuration designed for cruise at Mach 2.2 --- Langley Full Scale Wind Tunnel
[NASA-TM-80152] N80-10135
- Prediction of aerodynamic characteristics of fighter wings at high lift
[AD-A072630] N80-10140
- Aero-acoustic tests of duct-burning turbofan exhaust nozzles
[NASA-CR-162254] N80-10204
- Flight effects on the aero/acoustic characteristics of inverted profile coannular nozzles
[NASA-CR-162419] N80-10220
- Analytic formulas for wing profile aerodynamic characteristics in incompressible flow
N80-11010
- On a smooth approximation method and its application to mathematical description of wing aerodynamic characteristics
N80-11011
- Wind-tunnel/flight correlation study of aerodynamic characteristics of a large flexible supersonic cruise airplane (CB-70-1). 1: Wind-tunnel tests of a 0.03-scale model at Mach numbers from 0.6 to 2.53
[NASA-TP-1514] N80-11068
- AERODYNAMIC COEFFICIENTS**
Wing-body yawing moment and sideforce derivatives due to sideslip: N_y and Y_v
[ESDU-79006] N80-10097
- Selection of geometric parameters and location of nose flap on swept wing root profile from tunnel test data, 1
N80-11009
- AERODYNAMIC CONFIGURATIONS**
The variable-geometry wing
A80-10235
- Developing an aircraft configuration using a minicomputer
A80-11393
- The significance of wing end configuration in airfoil design for civil aviation aircraft
[NASA-TM-75711] N80-10104
- A simple apparatus for the experimental study of non-steady flow thrust-augmenter ejector configurations
N80-10125

- Technical evaluation report on the fluid dynamics panel Symposium on High Angle of attack aerodynamics --- slender wings, bodies of revolution, and body-wing configurations [AGARD-AR-145] N80-10147
- AGARD two-dimensional aeroelastic configurations [AGARD-AR-156] N80-10202
- Selection of geometric parameters and location of nose flap on swept wing root profile from tunnel test data, 1 N80-11009
- AERODYNAMIC DRAG**
Effect of several airframe/nozzle modifications on the drag of a variable-sweep bomber configuration --- conducted in Langley 16 foot transonic tunnel [NASA-TM-80129] N80-10106
- AERODYNAMIC FORCES**
Wing-body yawing moment and sideforce derivatives due to sideslip: N_y and Y_v [ESDU-79006] N80-10097
- AERODYNAMIC LOADS**
Extension of Prandtl's biplane theory to wing-tail combinations A90-12599
- Effect of time dependent flight loads on JT9D-7 performance deterioration [NASA-CR-159681] N80-10515
- Improved methods for predicting spectrum loading effects, phase 1 report. volume 2: Test data [AD-A072387] N80-11070
- Improved methods for predicting spectrum loading effects, phase 1 report, Volume 1: Results and discussion [AD-A072386] N80-11071
- Prediction of lateral aerodynamic loads on fighter aircraft at high angles of attack [AD-A071893] N80-11073
- AERODYNAMIC NOISE**
On the acoustic power emitted by helicopter rotor blades at low tip speeds A80-12375
- AERODYNAMIC STABILITY**
Measuring unsteady pressure on rotating compressor blades --- with semiconductor strain gages under gas turbine engine operating conditions A80-12630
- Aero-servo-elastic stability analysis [AD-A072797] N80-11101
- AERODYNAMICS**
Solution of linear problems of flow about finite span wing A80-12912
- Navigation and meteorological error equations for some aerodynamic parameters [NASA-TM-80804] N80-10150
- Aerodynamic interactions from reaction controls for lateral control of the M2-P2 lifting-body entry configuration at transonic and supersonic and supersonic Mach numbers --- wind tunnel tests [NASA-TM-78534] N80-11033
- AEROELASTICITY**
Active flutter control in transonic conditions [ONERA, TP NO. 1979-100] A80-13052
- Study of the feasibility aspects of flight testing an aeroelastically tailored forward swept research wing on a BQM-34F drone vehicle [NASA-CR-159149] N80-10195
- AGARD two-dimensional aeroelastic configurations [AGARD-AR-156] N80-10202
- Study of a stereo electro-optical tracker system for the measurement of model deformations at the national transonic facility [NASA-CR-159146] N80-10476
- Aero-servo-elastic stability analysis [AD-A072797] N80-11101
- AERONAUTICAL ENGINEERING**
NASA overview N80-10109
- Small transport aircraft technology. A report for the committee on commerce, science, and transportation, United States Senate [NASA-TM-80813] N80-11953
- AERONAUTICS**
Aircrew displays and avionics for application in a future national airspace system [NASA-TM-80095] N80-11052
- AEROSPACE INDUSTRY**
Diffusion bonding - Aerospace applications A80-12081
- AEROSPACE SYSTEMS**
The development and use of large-motion simulator systems in aeronautical research and development A80-10765
- AEROTHERMODYNAMICS**
Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber A80-10196
- Optimal thermogasdynamic design of gas turbine engines using element prototypes, 1 N80-11007
- AFTERBODIES**
Flight-measured afterbody pressure coefficients from an airplane having twin side-by-side jet engines for Mach numbers from 0.6 to 1.6 [NASA-TP-1549] N80-11035
- AFTERBURNING**
Characteristics of afterburning bypass turbojet engine with oxygen injection into the afterburner chamber --- study of fuel injection into thrust chambers for thrust augmentation N80-10029
- AILERONS**
Active flutter control in transonic conditions [ONERA, TP NO. 1979-100] A80-13052
- AIR CARGO**
Multirole cargo aircraft options and configurations --- economic analysis [NASA-TM-80177] N80-11053
- AIR COOLING**
Computer calculation of stationary temperature fields in air-cooled turbine rotor blades A80-10612
- Computer calculation of stationary temperature fields in cooled turbine discs A80-10614
- Applied technology in turbofan engines A80-12003
- AIR DEFENSE**
The Tornado Two takes off --- MRCA aircraft development program in Britain A80-10899
- Radar remoting --- command and control center system for military air operations A80-11164
- Technological trends in electronic warfare --- use of radar equipment for aircraft detection and weapons control accuracy in air defense A80-11172
- Required radar ranges for AEW aircraft A80-11649
- AIR DROP OPERATIONS**
Feasibility tests of use of the tri turbo-3 aircraft for arctic ABFT drops [AD-A073159] N80-11074
- AIR DUCTS**
Aerodynamic efficiency of gas turbine intake duct --- for gas turbine power plants N80-10077
- AIR INTAKES**
Aerodynamic efficiency of gas turbine intake duct --- for gas turbine power plants N80-10077
- AIR JETS**
Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers A80-10619
- AIR POLLUTION**
Pollutant emissions from 'partially' mixed turbulent flames A80-11793
- Emission reduction N80-10207
- AIR TO AIR MISSILES**
The Tornado Two takes off --- MRCA aircraft development program in Britain A80-10899
- AIR TRAFFIC**
IFR aircraft handled forecast by air route traffic control center, fiscal years 1979-1990 [AD-A070786] N80-10153
- An assessment of terminal air traffic control system performance with and without basic metering and spacing automation [AD-A073548] N80-11057

SUBJECT INDEX

AIRCRAFT ENGINES

AIR TRAFFIC CONTROL
 Definition of a system concept study for future air traffic control A80-11652
 Requirements for short instrument runways A80-11653
 The collision avoidance problem requires a mix of partial solutions A80-12930
 Aircrew displays and avionics for application in a future national airspace system [NASA-TM-80095] N80-11052
 An assessment of terminal air traffic control system performance with and without basic metering and spacing automation [AD-A073548] N80-11057
 Voice data entry in air traffic control [AD-A073670] N80-11273
 Evaluation of transponder antenna coverage/ATCRBS during simulated flights of aircraft [AD-A073547] N80-11275

AIR TRANSPORTATION
 IFR aircraft handled forecast by air route traffic control center, fiscal years 1979-1990 [AD-A070786] N80-10153
 AVIONICS: Projections for civil aviation, 1995-2000 [NASA-CR-159035] N80-11079

AIRBORNE EQUIPMENT
 AEW Nimrod system and operation --- for military aircraft communication A80-11167
 The target tracking problem using airborne radar under ECM environment A80-11173
 Avionics software and equipment A80-11354
 Operation of airborne equipment and flight safety --- Russian book A80-11875

AIRBORNE SURVEILLANCE RAD R
 E-3A sentry, airborne early warning and control for Europe A80-11168
 Required radar ranges for AEW aircraft A80-11649

AIRBORNE/SPACEBORNE COMPUTERS
 Numerical computation of neighboring optimum feedback control schemes in real-time A80-10919
 Microprocessors as aircraft fatigue monitors A80-12640
 Design and simulation of a helicopter target hand-off computer A80-12645
 Evaluation of dais technology applied to the integrated navigation system of a tactical transport [AD-A073068] N80-11061

AIRCRAFT ACCIDENT INVESTIGATION
 Aircraft accident report - United Airlines, Inc., McDonnell-Douglas DC-8-61, N8082U, Portland, Oregon, December 28, 1978 [NTSB-ARR-79-7] N80-11051

AIRCRAFT ACCIDENTS
 Fire on board transport aircraft and passenger safety A80-11454
 Aircraft accident report - United Airlines, Inc., McDonnell-Douglas DC-8-61, N8082U, Portland, Oregon, December 28, 1978 [NTSB-ARR-79-7] N80-11051

AIRCRAFT ANTENNAS
 UHF coplanar-slot antenna for aircraft-to-satellite data communications A80-13064
 Hemispherical coverage of four-faced aircraft arrays [AD-A073079] N80-11309

AIRCRAFT APPROACH SPACING
 The collision avoidance problem requires a mix of partial solutions A80-12930

AIRCRAFT COMMUNICATION
 Radar remoting --- command and control center system for military air operations A80-11164
 AEW Nimrod system and operation --- for military aircraft communication A80-11167

E-3A sentry, airborne early warning and control for Europe A80-11168

AIRCRAFT COMPARTMENTS
 Lexicon of aircraft transparency terms [AD-A071319] N80-10200
 Cabin hazards from a large external fuel fire adjacent to an aircraft fuselage [AD-A073494] N80-11050

AIRCRAFT CONFIGURATIONS
 Developing an aircraft configuration using a minicomputer A80-11393
 Multirole cargo aircraft options and configurations --- economic analysis [NASA-TM-80177] N80-11053

AIRCRAFT CONSTRUCTION MATERIALS
 Design and operation of multi-specimen fully reversed fatigue systems for advanced composite materials A80-10206

AIRCRAFT CONTROL
 A singular perturbation analysis of optimal aerodynamic and thrust magnitude control A80-11379
 Flying qualities research for highly augmented aircraft [RE-582] N80-10194
 Aircraft control by propeller cyclic blades [NASA-CR-3212] N80-11031
 Wind shear hazard definition for a wide body jet --- low level wind shear and control simulation [FAA-RD-79-90] N80-11715

AIRCRAFT DESIGN
 The variable-geometry wing A80-10235
 The interrelationships between engineering development simulation and flight simulation --- aircraft design development simulator technology transfer to flight simulator and training program improvements A80-10777
 Aircraft designers follow the birds --- lightweight composite materials and metal joining techniques in aircraft structures A80-11345
 Developing an aircraft configuration using a minicomputer A80-11393
 Wind-tunnel investigation of the validity of a sonic-boom-minimization concept --- Langley Unitary Plan Wind Tunnel tests for supersonic transport design [NASA-TP-1421] N80-10102
 The significance of wing end configuration in airfoil design for civil aviation aircraft [NASA-TM-75711] N80-10104
 Interface concerns of ejector integration in V/STOL aircraft N80-10129
 Design and test of a prototype scale ejector wing N80-10131
 The XFV-12A Thrust-Augmented Wing (TAW), prototype aircraft N80-10133
 Selecting the passenger airplane fuselage N80-11024

AIRCRAFT DETECTION
 Technological trends in electronic warfare --- use of radar equipment for aircraft detection and weapons control accuracy in air defense A80-11172

AIRCRAFT ENGINES
 Computerized systems analysis and optimization of aircraft engine performance, weight, and life cycle costs A80-10035
 Application of the discrete-phase method /DPM/ to the study and control of aircraft turbine engine blade vibrations. I A80-10234
 Review of superalloy powder metallurgy processing for aircraft gas turbine applications A80-10310
 Measurement of liquid pump torque in the starting regime A80-10611
 Lubricants for the aircraft gas turbine A80-10866

AIRCRAFT EQUIPMENT

SUBJECT INDEX

Lubrication of aircraft gas-turbine engines --- Russian book
 A80-11057

Long-lift GTF operation based on technical condition --- fatigue and service life monitoring of turbine blades in aircraft engines
 N80-10027

Basic problem of aircraft gas turbine engine analytic design, part 1
 N80-10042

Pneumatic distributor for turbojet engine control system --- TU-154 aircraft
 N80-10091

Aeropropulsion 1979 --- conferences [NASA-CP-2092]
 N80-10205

Aircraft Energy Efficiency (ACEE) status report
 N80-10206

Emission reduction
 N80-10207

Noise reduction
 N80-10208

Materials and structures technology
 N80-10210

Turbomachinery technology
 N80-10212

Mechanical components
 N80-10213

Effect of time dependent flight loads on JT9D-7 performance deterioration [NASA-CR-159681]
 N80-10515

Statistical diagnostics aircraft engines
 N80-11006

Opportunistic Maintenance Engine Simulation model: OMENS 2 [AD-A072516]
 N80-11088

Development of improved abradable compressor gas path seal [AD-A072171]
 N80-11474

AIRCRAFT EQUIPMENT

Construction of black boxes and mechanical elaboration of electronic units in aviation
 A80-10236

The 'Viggen' multimode radar
 A80-11171

Generating innovation for Navy's F-18
 A80-12312

AIRCRAFT FUELS

An engine fuel chemistry solution to the problem of jet fuel supplies
 A80-10199

The chemical stability of hydro-treated fuels and their stabilization by antioxidants
 A80-10200

Burning sprays of jet A fuel-water emulsions
 A80-11650

The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication --- in aircraft fuel systems [ASLE PREPRINT 79-AM-5E-1]
 A80-12110

Alternative jet aircraft fuels
 N80-10209

Hydrogen as a fuel. Citations from the international aerospace abstracts data base [NTIS/PS-79/0771/0]
 N80-10397

Aircraft fuel. Citations from the International Aerospace Abstracts Data Base [NTIS/PS-79/0764/5]
 N80-10668

AIRCRAFT HAZARDS

Wind shear hazard definition for a wide body jet --- low level wind shear and control simulation [FAA-RD-79-90]
 N80-11715

AIRCRAFT HYDRAULIC SYSTEMS

A hydraulic actuator mechanism to control aircraft spoiler movements through dual input commands [NASA-CASE-LAR-12412-1]
 N80-11065

AIRCRAFT INSTRUMENTS

Electronic instrumentation in civil aviation
 A80-11352

Flight-vehicle equipment --- Russian book
 A80-11869

Operation of airborne equipment and flight safety --- Russian book
 A80-11875

Microprocessors as aircraft fatigue monitors
 A80-12640

Instrumentation for the determination of aircraft performance from dynamic maneuvers
 A80-12647

AIRCRAFT LANDING

Take-off and landing problems of ship based RPVs
 A80-11175

A pulse compression, precision DME system
 A80-11351

Flight through thunderstorm outflows
 A80-11648

A literature search and review of the dynamics of aircraft-surface interaction [AD-A070940]
 N80-10199

AIRCRAFT MAINTENANCE

Operation of airborne equipment and flight safety --- Russian book
 A80-11875

Flaw detection of aircraft components in operation --- Russian book
 A80-11879

AIRCRAFT MANEUVERS

Method for calculating wing loading during maneuvering flight along a three-dimensional curved path
 A80-11647

Instrumentation for the determination of aircraft performance from dynamic maneuvers
 A80-12647

Simulator for air-to-air combat motion system investigation [AD-A072612]
 N80-10237

AIRCRAFT MODELS

Effect of winglets on a first-generation jet transport wing. 6: Stability characteristics for a full-span model at subsonic speeds --- conducted in Langley 8 foot transonic pressure tunnel [NASA-TP-1330]
 N80-10101

Study of a stereo electro-optical tracker system for the measurement of model deformations at the national transonic facility [NASA-CR-159146]
 N80-10476

Fuselage and nozzle pressure distributions on a 1/12-scale F-15 propulsion model at transonic speeds --- conducted in Langley 16 foot transonic tunnel [NASA-TP-1521]
 N80-11036

Wind-tunnel/flight correlation study of large aerodynamic characteristics of a flexible supersonic cruise airplane (CXB-70-1). 1: Wind-tunnel tests of a 0.03-scale model at Mach numbers from 0.6 to 2.53 [NASA-TP-1514]
 N80-11068

AIRCRAFT NOISE

Structural stiffening as an interior noise control technique for light twin-engine aircraft
 N80-10192

Noise of a model helicopter rotor due to ingestion of turbulence [NASA-CR-3213]
 N80-11067

AIRCRAFT PARTS

Flaw detection of aircraft components in operation --- Russian book
 A80-11879

A comparison of the pitching and plunging response of an oscillating airfoil [NASA-CR-3172]
 N80-11030

AIRCRAFT PERFORMANCE

Required radar ranges for AEW aircraft
 A80-11649

Instrumentation for the determination of aircraft performance from dynamic maneuvers
 A80-12647

Manoeuvre limitations of combat aircraft [AGARD-AR-155A]
 N80-10203

A method for evaluating aircraft take-off performance [REPT-1663]
 N80-11076

AIRCRAFT PILOTS

The impact of the limits of simulation in extending the use of simulators in training
 A80-10763

AIRCRAFT PRODUCTION

Organization of automatic control systems for technological processes in aircraft mechanical engineering --- Russian book
 A80-10123

AIRCRAFT SAFETY

Fire on board transport aircraft and passenger safety
 A80-11454

- Definition of a system concept study for future air traffic control
A80-11652
- Cabin hazards from a large external fuel fire adjacent to an aircraft fuselage
[AD-A073494] N80-11050
- Clear air turbulence. Citations from the international aerospace abstracts data base --- bibliography
[NTIS/PS-79/0858/5] N80-11746
- AIRCRAFT SPECIFICATIONS**
The Tornado Two takes off --- MRCA aircraft development program in Britain
A80-10899
- In Soviet service. VII - Mikoyan Foxbat --- Soviet MiG-25 program
A80-10900
- AIRCRAFT STABILITY**
Singular values and feedback - Design examples --- for CH-47 helicopter
A80-12716
- AIRCRAFT STRUCTURES**
Aircraft designers follow the birds --- lightweight composite materials and metal joining techniques in aircraft structures
A80-11345
- Diffusion bonding - Aerospace applications
A80-12081
- A regression model of fatigue crack propagation under flight simulation loading --- for aluminum alloys
A80-12157
- Wind tunnel model deflection system
A80-12620
- Analysis of thin-wall beams by the method of segments
N80-10043
- On the empennage snap-through problem
N80-10047
- A study to develop optimization algorithms for aircraft wing structures
[AD-A072668] N80-10196
- Angular vibration of aircraft. Volume 1: Executive summary
[AD-A071895] N80-10197
- Angular vibration of aircraft. Volume 2: Prediction methods for angular vibration
[AD-A071749] N80-10198
- Swept frequency scattering measurements of aircraft --- target identification
[AD-A071474] N80-10420
- Improved methods for predicting spectrum loading effects, phase 1 report, Volume 1: Results and discussion
[AD-A072386] N80-11071
- AIRCRAFT SURVIVABILITY**
Airblast vulnerability envelopes for supersonic aerospace vehicles
[AD-A072247] N80-10201
- AIRFIELD SURFACE MOVEMENTS**
Surveillance and communication systems using mobile media on the airport surface
[PUB-13-1978] N80-11110
- AIRFOIL PROFILES**
A flight investigation of performance and loads for a helicopter with NLR-1T main-rotor blade sections
[NASA-TM-80165] N80-10136
- AGARD two-dimensional aeroelastic configurations
[AGARD-AR-156] N80-10202
- Design and performance evaluation of supercritical airfoils for axial flow compressors
[AD-A071206] N80-11093
- AIRFOILS**
Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil
A80-11432
- The significance of wing end configuration in airfoil design for civil aviation aircraft
[NASA-TM-75711] N80-10104
- Use of wagner functions in airfoil design optimization
[AD-A072634] N80-10139
- A comparison of the pitching and plunging response of an oscillating airfoil
[NASA-CR-3172] N80-11030
- AIRFRAMES**
Effect of several airframe/nozzle modifications on the drag of a variable-sweep bomber configuration --- conducted in langley 16 foot transonic tunnel
[NASA-TM-80129] N80-10106
- AIRLINE OPERATIONS**
Factors affecting the retirement of commercial transport jet aircraft
[NASA-CR-152308] N80-10148
- Cargo Logistics Airlift Systems Study (CLASS). Volume 4: Future requirements of dedicated freighter aircraft to year 2008
[NASA-CR-158950-VOL-4] N80-10149
- AIRPORT PLANNING**
Definition of a system concept study for future air traffic control
A80-11652
- Requirements for short instrument runways
A80-11653
- AIRPORT SURFACE DETECTION EQUIPMENT**
Surveillance and communication systems using mobile media on the airport surface
[FUE-13-1978] N80-11110
- AIRPORTS**
Method of determining the load classification number, LCN, of a semirigid composite runway surface
A80-10237
- ALGORITHMS**
Algorithms and logic for incorporating ILS NASA TCV B-737 airplane area navigation system
[NASA-TM-80167] N80-10152
- ALTERNATIVES**
Fundamental characterization of alternate fuel effects in continuous combustion systems
[SAN-1543-12] N80-11244
- ALUMINUM ALLOYS**
The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication --- in aircraft fuel systems
[ASLE PREPRINT 79-AM-5E-1] A80-12110
- A regression model of fatigue crack propagation under flight simulation loading --- for aluminum alloys
A80-12157
- ALUMINUM OXIDES**
State-of-the-art of SiAlON materials
A80-13066
- ANALOGS**
Analog modeling in studying supersonic flow around a wing and its governing analog-criteria
N80-10038
- ANGLE OF ATTACK**
Hypersonic viscous shock layer on sweptback wings of infinite span at different angles of attack
A80-11208
- Technical evaluation report on the fluid dynamics panel Symposium on High Angle of attack aerodynamics --- slender wings, bodies of revolution, and body-wing configurations
[AGARD-AR-145] N80-10147
- The analysis of wing-body combinations at moderate angles of attack --- missile bodies
[AD-A074284] N80-11040
- Prediction of lateral aerodynamic loads on fighter aircraft at high angles of attack
[AD-A071893] N80-11073
- ANGULAR ACCELERATION**
Experiments in sensing transient rotational acceleration cues on a flight simulator
[NASA-TP-1537] N80-10193
- Angular vibration of aircraft. Volume 1: Executive summary
[AD-A071895] N80-10197
- Angular vibration of aircraft. Volume 2: Prediction methods for angular vibration
[AD-A071749] N80-10198
- ANNULAR NOZZLES**
Flight effects on the aero/acoustic characteristics of inverted profile conannular nozzles
[NASA-CR-162419] N80-10220
- ANTENNA ARRAYS**
Antennas /Current status and problems/ --- Russian book
A80-11890
- Hemispherical coverage of four-faced aircraft arrays
[AD-A073079] N80-11309

- ANTENNA DESIGN**
Antennas /Current status and problems/ --- Russian book
A80-11890
- ANTENNA RADIATION PATTERNS**
Hemispherical coverage of four-faced aircraft arrays [AD-A073079]
N80-11309
- ANTIOXIDANTS**
The chemical stability of hydro-treated fuels and their stabilization by antioxidants
A80-10200
- APPROACH**
Pilot performance during simulated approaches and landings made with various computer-generated visual glidepath indicators [AD-A066220]
N80-10151
- APPROACH CONTROL**
An assessment of terminal air traffic control system performance with and without basic metering and spacing automation [AD-A073548]
N80-11057
Study for incorporating time-synchronized approach control into the CH-47/VALT digital navigation system [NASA-CR-159151]
N80-11058
- APPROXIMATION**
On a smooth approximation method and its application to mathematical description of wing aerodynamic characteristics
N80-11011
Inequalities and approximation with applications to VSTOL aircraft --- using control theory for optimal control approximations [AD-A071807]
N80-11099
- ARCTIC REGIONS**
Feasibility tests of use of the tri turbo-3 aircraft for arctic AXBT drops [AD-A073159]
N80-11074
- AREA NAVIGATION**
Algorithms and logic for incorporating ILS NASA TCV B-737 airplane area navigation system [NASA-TM-80167]
N80-10152
- ARROW WINGS**
Hypersonic viscous shock layer on sweptback wings of infinite span at different angles of attack
A80-11208
Low-speed wind-tunnel tests of a 1/10-scale model of an advanced arrow-wing supersonic cruise configuration designed for cruise at Mach 2.2 --- Langley Full Scale Wind Tunnel [NASA-TM-80152]
N80-10135
- ASPECT RATIO**
Flow-around small-aspect-ratio delta wing with vortex "bursting"
N80-10060
- ATMOSPHERIC TURBULENCE**
Noise of a model helicopter rotor due to ingestion of turbulence [NASA-CR-3213]
N80-11067
- ATOMIC CLOCKS**
Nova satellite time experiment --- global time synchronization using Cs clock transfer
A80-10268
- AUDITORY PERCEPTION**
Perception and performance in flight simulators: The contribution of vestibular, visual, and auditory information [NASA-CR-162129]
N80-11103
- AUDITORY SIGNALS**
F-4 radar altimeter aural warning [AD-A072870]
N80-11085
- AUTOMATIC CONTROL**
Organization of automatic control systems for technological processes in aircraft mechanical engineering --- Russian book
A80-10123
On modeling sensitivity of a linear system to reduction of its order by the infinitesimal transformation method in the yaw motion control problem
N80-10046
A hydraulic actuator mechanism to control aircraft spoiler movements through dual input commands [NASA-CASE-LAR-12412-1]
N80-11065
- AUTOMATIC FLIGHT CONTROL**
Flight-vehicle equipment --- Russian book
A80-11869
- An assessment of terminal air traffic control system performance with and without basic metering and spacing automation [AD-A073548]
N80-11057
- AUTOMATION**
Organization of automatic control systems for technological processes in aircraft mechanical engineering --- Russian book
A80-10123
- AUTOMOBILE FUELS**
Hydrogen as a fuel. Citations from the international aerospace abstracts data base [NTIS/PS-79/0771/0]
N80-10397
- AVIONICS**
Construction of black boxes and mechanical elaboration of electronic units in aviation
A80-10236
A helmet-mounted sight using C.C.D. technology
A80-10884
The 'Viggen' multimode radar
A80-11171
Electronic instrumentation in civil aviation
A80-11352
Avionics software and equipment
A80-11354
Flight-vehicle equipment --- Russian book
A80-11869
Generating innovation for Navy's F-18
A80-12312
Aircrew displays and avionics for application in a future national airspace system [NASA-TM-80095]
N80-11052
Evaluation of dais technology applied to the integrated navigation system of a tactical transport [AD-A073068]
N80-11061
Inertial navigation and guidance. Citations from the international aerospace abstracts data base [NTIS/PS-79/0825/4]
N80-11064
AVIONICS: Projections for civil aviation, 1995-2000 [NASA-CR-159035]
N80-11079
Avionics master plan data base mechanization architecture [AD-A071545]
N80-11083
- AXIAL FLOW TURBINES**
Nonstationarity of heat transfer in axial turbine blading during engine startup
A80-10633
Nonstationarity of heat transfer in axial turbine blading during engine startup
N80-10089
- AXISYMMETRIC FLOW**
A study of coherent structures in axisymmetric jets using an optical technique [AASU-341]
N80-11399

B

- B-70 AIRCRAFT**
Wind-tunnel/flight correlation study of aerodynamic characteristics of a large flexible supersonic cruise airplane (CXB-70-1). 1: Wind-tunnel tests of a 0.03-scale model at Mach numbers from 0.6 to 2.53 [NASA-TP-1514]
N80-11068
- BEAMS (SUPPORTS)**
Analysis of thin-wall beams by the method of segments
N80-10043
On thin-wall beam effective stiffness
N80-10057
- BEARINGS**
Design criteria for dry lubricated flight control bearings --- wear tests to make design analysis and check equipment specifications [AD-A071322]
N80-10228
- BIBLIOGRAPHIES**
Hydrogen as a fuel. Citations from the international aerospace abstracts data base [NTIS/PS-79/0771/0]
N80-10397
Aircraft fuel. Citations from the International Aerospace Abstracts Data Base [NTIS/PS-79/0764/5]
N80-10668
Inertial navigation and guidance. Citations from the international aerospace abstracts data base [NTIS/PS-79/0825/4]
N80-11064

- Clear air turbulence. Citations from the international aerospace abstracts data base --- bibliography [NTIS/PS-79/0858/5] N80-11746
- BIPLANES**
Extension of Prandtl's biplane theory to wing-tail combinations N80-12599
- BIT SYNCHRONIZATION**
Nova satellite time experiment --- global time synchronization using Cs clock transfer N80-10268
- BLOWDOWN WIND TUNNELS**
Blow-down and sled-run simulation of transonic flow N80-12423
- BO-105 HELICOPTER**
A compilation and analysis of helicopter handling qualities data. Volume 1: Data compilation [NASA-CR-3144] N80-11097
- BODIES OF REVOLUTION**
Technical evaluation report on the fluid dynamics panel Symposium on High Angle of attack aerodynamics --- slender wings, bodies of revolution, and body-wing configurations [AGARD-AR-145] N80-10147
- BODY-WING AND TAIL CONFIGURATIONS**
Extension of Prandtl's biplane theory to wing-tail combinations N80-12599
- BODY-WING CONFIGURATIONS**
Wing-body yawing moment and sideforce derivatives due to sideslip: Nv and Yv [ESDU-79006] N80-10097
Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed [AD-A072098] N80-10143
Technical evaluation report on the fluid dynamics panel Symposium on High Angle of attack aerodynamics --- slender wings, bodies of revolution, and body-wing configurations [AGARD-AR-145] N80-10147
The analysis of wing-body combinations at moderate angles of attack --- missile bodies [AD-A074284] N80-11040
- BOUNDARY LAYER FLOW**
Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed [AD-A072098] N80-10143
Measurements on a three-dimensional swept wing at low speeds. Part 1: The flow around the leading edge [PFA-130-PT-1] N80-11044
Measurements on a three-dimensional swept wing at low speeds. Part 2: The flow in the boundary layer on the main wing [PFA-131-PT-2] N80-11045
- BOUNDARY LUBRICATION**
The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication --- in aircraft fuel systems [ASLE PREPRINT 79-AM-5E-1] N80-12110
- BOXES**
Construction of black boxes and mechanical elaboration of electronic units in aviation N80-10236
- BRITTLENESS**
Brittle materials design, high temperature gas turbine [AD-A071750] N80-11090
- BRONZES**
The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication --- in aircraft fuel systems [ASLE PREPRINT 79-AM-5E-1] N80-12110
- C**
- C-8A AUGMENTOR WING AIRCRAFT**
NASA overview N80-10109
- CALCIUM SILICATES**
Analysis of the response of a thermal barrier coating to sodium and vanadium doped combustion gases [NASA-TM-79205] N80-10344
- CALIBRATING**
Calibration of a low cost strapdown inertial guidance system N80-12642
- CAMERAS**
IR-camera for day and night fire control N80-11180
- CANOPIES**
Lexicon of aircraft transparency terms [AD-A071319] N80-10200
- CARET WINGS**
Overall aerodynamic characteristics of caret and delta wings at supersonic speeds N80-11022
- CARGO AIRCRAFT**
Cargo Logistics Airlift Systems Study (CLASS). Volume 4: Future requirements of dedicated freighter aircraft to year 2008 [NASA-CR-158950-VOL-4] N80-10149
Multirole cargo aircraft options and configurations --- economic analysis [NASA-TM-80177] N80-11053
- CASCADE FLOW**
Nonstationarity of heat transfer in axial turbine blading during engine startup N80-10633
Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade N80-11255
- CATHODE RAY TUBES**
Electronic instrumentation in civil aviation N80-11352
- CERAMICS**
State-of-the-art of SiAlON materials N80-13066
- CH-47 HELICOPTER**
Singular values and feedback - Design examples --- for CH-47 helicopter N80-12716
Training effectiveness of the CH-47 flight simulators [AD-A072317] N80-10236
Study for incorporating time-synchronized approach control into the CH-47/VALT digital navigation system [NASA-CR-159151] N80-11058
- CHANNELS (DATA TRANSMISSION)**
Avionic system architecture investigation (AVSAR II) [AD-A071743] N80-11080
- CHARACTERIZATION**
Analytic representation of turbine characteristics in form convenient for computer calculation of GTE parameters N80-10024
- CHARGE COUPLED DEVICES**
A helmet-mounted sight using C.C.D. technology N80-10884
- CHEMICAL PROPERTIES**
An engine fuel chemistry solution to the problem of jet fuel supplies N80-10199
The chemical stability of hydro-treated fuels and their stabilization by antioxidants N80-10200
- CIVIL AVIATION**
Electronic instrumentation in civil aviation N80-11352
The market for large civil helicopters N80-11398
Operation of airborne equipment and flight safety --- Russian book N80-11875
The significance of wing end configuration in airfoil design for civil aviation aircraft [NASA-TM-75711] N80-10104
Selection of geometric parameters and location of nose flap on swept wing root profile from tunnel test data, 1 N80-11009
AVIONICS: Projections for civil aviation, 1995-2000 [NASA-CR-159035] N80-11079
- CLEAR AIR TURBULENCE**
Clear air turbulence. Citations from the international aerospace abstracts data base --- bibliography [NTIS/PS-79/0858/5] N80-11746

COCKPITS

Cabin hazards from a large external fuel fire adjacent to an aircraft fuselage
[AD-A073494] N80-11050

COLLISION AVOIDANCE

The collision avoidance problem requires a mix of partial solutions
A80-12930

COMBUSTIBLE FLOW

Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
A80-10619

Predictions of the flow field and local gas composition in gas turbine combustors
A80-11773

COMBUSTION CHAMBERS

Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation
A80-10610

Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
A80-10619

An optical technique for the investigation of flow in gas turbine combustors
A80-11769

Predictions of the flow field and local gas composition in gas turbine combustors
A80-11773

Influence of gas turbine engine combustion chambers geometric parameters on mixture formation characteristics
N80-10006

Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation --- of fuel-air parameters
N80-10065

Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
N80-10075

Experimental evaluation of a low emissions high performance duct burner for Variable Cycle Engines (VCE) --- supersonic cruise aircraft research
[NASA-CR-159694] N80-10221

Fundamental characterization of alternate fuel effects in continuous combustion systems
[SAN-1543-12] N80-11244

COMBUSTION EFFICIENCY

Burning sprays of jet A fuel-water emulsions
A80-11650

Dynamics of diesel fuel combustion in turbulent flow
N80-10074

Development of gas turbine fuels and combustion; An overview
[CONF-790337-4] N80-10391

COMBUSTION PRODUCTS

Pollutant emissions from 'partially' mixed turbulent flames
A80-11793

COMBUSTION TEMPERATURE

Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation
A80-10610

COMMAND AND CONTROL

Radar remoting --- command and control center system for military air operations
A80-11164

E-3A sentry, airborne early warning and control for Europe
A80-11168

COMMERCIAL AIRCRAFT

Factors affecting the retirement of commercial transport jet aircraft
[NASA-CR-152308] N80-10148

Aircraft Energy Efficiency (ACEE) status report
N80-10206

New aircraft technology: Report on the Farnborough International Air Show
[PB-298345/0] N80-11078

COMMUNICATION CABLES

A fiber-optic link for high-speed, DDAS-to-computer data transmission --- Digital Data Acquisition System from ramjet engine test cell to base central data processing center
A80-12637

COMMUNICATION EQUIPMENT

Delta multiplex system DX 15-60
A80-11176

COMPONENT RELIABILITY

Flaw detection of aircraft components in operation --- Russian book
A80-11879

COMPOSITE MATERIALS

Design and operation of multi-specimen fully reversed fatigue systems for advanced composite materials
A80-10206

Aircraft designers follow the birds --- lightweight composite materials and metal joining techniques in aircraft structures
A80-11345

Materials and structures technology
N80-10210

COMPOSITE STRUCTURES

Method of determining the load classification number, LCN, of a semirigid composite runway surface
A80-10237

COMPRESSED GAS

Calculation of working process in 'slow-compression' piston-type aerodynamic tube
A80-10607

COMPRESSIBLE FLOW

An efficient user-oriented method for calculating compressible flow in an about three-dimensional inlets --- panel method
[NASA-CR-159578] N80-10134

COMPRESSION LOADS

Impression fatigue --- load level effects on crack propagation
A80-13126

COMPRESSOR BLADES

Applied technology in turbofan engines
A80-12003

Measuring unsteady pressure on rotating compressor blades --- with semiconductor strain gages under gas turbine engine operating conditions
A80-12630

Experimental study of low aspect ratio compressor blading
[NASA-TM-79280] N80-11037

Development of improved abradable compressor gas path seal
[AD-A072171] N80-11474

COMPRESSOR EFFICIENCY

Experimental study of low aspect ratio compressor blading
[NASA-TM-79280] N80-11037

COMPRESSOR ROTORS

Experimental techniques developed at ONERA for advanced compressor testing
[ONERA, TP NO. 1979-129] A80-13060

COMPRESSORS

Experimental techniques developed at ONERA for advanced compressor testing
[ONERA, TP NO. 1979-129] A80-13060

The effect of interblade phase angle and solidity on the time variant aerodynamic response of a compressor stator
[AD-A071878] N80-11092

COMPUTATIONAL FLUID DYNAMICS

Prediction of surge-point in multi-stage axial compressors
A80-10897

Computational fluid mechanics of internal flow
N80-10211

The analysis of wing-body combinations at moderate angles of attack --- missile bodies
[AD-A074284] N80-11040

COMPUTER DESIGN

The array processor AP-120B/190L for simulation applications
A80-11154

COMPUTER GRAPHICS

The capability of CGI in flight simulation --- computer generated imagery
A80-10768

- COMPUTER PROGRAMMING**
Avionics software and equipment A80-11354
- COMPUTER PROGRAMS**
Analytic representation of turbine characteristics in form convenient for computer calculation of GTE parameters N80-10024
An efficient user-oriented method for calculating compressible flow in an about three-dimensional inlets --- panel method [NASA-CR-159578] N80-10134
- COMPUTER SYSTEMS DESIGN**
Real-time data acquisition system for the NASA Langley transonic dynamics tunnel A80-12621
Avionics master plan data base mechanization architecture [AD-A071545] N80-11083
- COMPUTER SYSTEMS PROGRAMS**
Avionics software and equipment A80-11354
- COMPUTER TECHNIQUES**
Pilot performance during simulated approaches and landings made with various computer-generated visual glidepath indicators [AD-A066220] N80-10151
Algorithms and logic for incorporating ILS NASA TCV B-737 airplane area navigation system [NASA-TM-80167] N80-10152
- COMPUTERIZED DESIGN**
Computerized systems analysis and optimization of aircraft engine performance, weight, and life cycle costs A80-10035
Computer calculation of stationary temperature fields in air-cooled turbine rotor blades A80-10612
Computer calculation of stationary temperature fields in cooled turbine discs A80-10614
Developing an aircraft configuration using a minicomputer A80-11393
Multivariable digital control systems [AD-A071662] N80-10226
- COMPUTERIZED SIMULATION**
Flight through thunderstorm outflows A80-11648
Design and simulation of a helicopter target hand-off computer A80-12645
Flying qualities research for highly augmented aircraft [RE-582] N80-10194
A study to develop optimization algorithms for aircraft wing structures [AD-A072668] N80-10196
A literature search and review of the dynamics of aircraft-surface interaction [AD-A070940] N80-10199
Opportunistic Maintenance Engine Simulation model: OMENS 2 [AD-A072516] N80-11088
Evaluation of transponder antenna coverage/ATCRBS during simulated flights of aircraft [AD-A073547] N80-11275
Wind shear hazard definition for a wide body jet --- low level wind shear and control simulation [FAA-RD-79-90] N80-11715
- CONCENTRATORS**
Determination of strain fields near concentrators from strain gage indicators N80-10054
- CONFERENCES**
Workshop on Thrust Augmenting Ejectors [NASA-CP-2093] N80-10107
Aeropropulsion 1979 --- conferences [NASA-CP-2092] N80-10205
- CONGRESSIONAL REPORTS**
Small transport aircraft technology. A report for the committee on commerce, science, and transportation, United States Senate [NASA-TM-80813] N80-11953
- CONSTRUCTION MATERIALS**
Method of determining the load classification number, LCN, of a semirigid composite runway surface A80-10237
- CONTACT POTENTIALS**
Electrical charging of fabric and film materials N80-10048
- CONTOURS**
Use of wagner functions in airfoil design optimization [AD-A072634] N80-10139
- CONTROL**
Manned engineering flight simulation validation, Part 1. Simulation requirements and simulator motion system performance [AD-A071394] N80-10235
- CONTROL CONFIGURED VEHICLES**
Singular values and feedback - Design examples --- for CH-47 helicopter A80-12716
- CONTROL SIMULATION**
Wind shear hazard definition for a wide body jet --- low level wind shear and control simulation [FAA-RD-79-90] N80-11715
- CONTROL STABILITY**
Active flutter control in transonic conditions [ONERA, TP NO. 1979-100] A80-13052
Comparison of stability and control parameters for a light, single-engine, high-winged aircraft using different flight test and parameter estimation techniques [NASA-TM-80163] N80-10225
Aircraft control by propeller cyclic blades [NASA-CR-3212] N80-11031
- CONTROL SURFACES**
Electromechanical flight control actuator [NASA-CR-160348] N80-10224
- CONTROL THEORY**
On modeling sensitivity of a linear system to reduction of its order by the infinitesimal transformation method in the yaw motion control problem N80-10046
Method of conjugate gradients for optimal control problems with state variable constraints [AD-A072258] N80-10227
Inequalities and approximation with applications to VSTOL aircraft --- using control theory for optimal control approximations [AD-A071807] N80-11099
Entropy analysis of feedback flight dynamic control systems [AD-A072259] N80-11100
- CONTROLLERS**
Aircrew displays and avionics for application in a future national airspace system [NASA-TM-80095] N80-11052
- COOLING SYSTEMS**
Experimental and theoretical investigation of the internal-duct hydraulics of stator and rotor blades for a semiclosed-cycle air cooling system A80-12042
Study of combined operation of self-evacuating vortex tube with diffuser N80-10085
- CORNER FLOW**
An investigation of corner separation within a thrust augments having Coanda jets [NADC-76153-30] N80-10122
- COST ANALYSIS**
The use of the Maurer factor for estimating the cost of a turbine engine in the early stages of development [AD-A073018] N80-11095
- COST ESTIMATES**
The use of the Maurer factor for estimating the cost of a turbine engine in the early stages of development [AD-A073018] N80-11095
Economics of hydrogen production and liquefaction updated to 1980 [NASA-CR-159163] N80-11238
- COST REDUCTION**
Calibration of a low cost strapdown inertial guidance system A80-12642
- CRACK PROPAGATION**
A regression model of fatigue crack propagation under flight simulation loading --- for aluminum alloys A80-12157

Impression fatigue --- load level effects on crack propagation A80-13126

Improved methods for predicting spectrum loading effects, phase 1 report. volume 2: Test data [AD-A072387] N80-11070

Improved methods for predicting spectrum loading effects, phase 1 report, Volume 1: Results and discussion [AD-A072386] N80-11071

Effect of multiaxial loading on crack growth. Volume 1: Technical summary [AD-A072122] N80-11513

Flight simulation fatigue crack propagation evaluation of candidate lower wing skin materials with particular consideration of spectrum truncation [NLR-TR-77092-U] N80-11524

CRASH LANDING

Light airplane crash tests at three pitch angles [NASA-TP-1481] N80-11505

CRASHES

Light airplane crash tests at three roll angles [NASA-TP-1477] N80-10512

CROSS FLOW

Influence of gas turbine engine combustion chambers geometric parameters on mixture formation characteristics N80-10006

Cross flow fan experiment development and finite element modeling N80-10098

CRUDE OIL

Alternative jet aircraft fuels N80-10209

CRUISE MISSILES

Advanced missile technology. A review of technology improvement areas for cruise missiles --- including missile design, missile configurations, and aerodynamic characteristics [NASA-CR-3187] N80-10103

CRYOGENIC WIND TUNNELS

Experimental feasibility study of the application of magnetic suspension techniques to large-scale aerodynamic test facilities --- cryogenic traonics wind tunnel [NASA-CR-146761] N80-11102

CYCLIC LOADS

Impression fatigue --- load level effects on crack propagation A80-13126

CYLINDRICAL CHAMBERS

Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber A80-10196

D

DATA ACQUISITION

Real-time data acquisition system for the NASA Langley transonic dynamics tunnel A80-12621

Use of an 'off-the-shelf' data acquisition system for wind tunnel data processing A80-12622

Experimental techniques developed at ONERA for advanced compressor testing [ONERA, TP NO. 1979-129] A80-13060

DATA BASES

Avionics master plan data base mechanization architecture [AD-A071545] N80-11083

DATA LINKS

A fiber-optic link for high-speed, DDAS-to-computer data transmission --- Digital Data Acquisition System from ramjet engine test cell to base central data processing center A80-12637

DATA PROCESSING

Processing noise and vibration data for gas turbine engine development A80-12612

Use of an 'off-the-shelf' data acquisition system for wind tunnel data processing A80-12622

DATA SYSTEMS

Design of a strapdown navigator aided by position measurements A80-11187

DATA TRANSMISSION

A fiber-optic link for high-speed, DDAS-to-computer data transmission --- Digital Data Acquisition System from ramjet engine test cell to base central data processing center A80-12637

UHF coplanar-slot antenna for aircraft-to-satellite data communications A80-13064

DEFLECTION

Influence of wing deformation on trailing-edge flap deflections N80-11012

DELTA MODULATION

Delta multiplex system DX 15-60 A80-11176

DELTA WINGS

On supersonic flow with attached shock waves over delta wings A80-12598

Steady flow over the pressure side of a piecewise-flat delta wing with supersonic leading edges A80-12908

Flow-around small-aspect-ratio delta wing with vortex "bursting" N80-10060

Overall aerodynamic characteristics of caret and delta wings at supersonic speeds N80-11022

Leading edge vortex-flap experiments on a 74 deg delta wing [NASA-CR-159161] N80-11038

DEMAND (ECONOMICS)

Cargo Logistics Airlift Systems Study (CLASS). Volume 4: Future requirements of dedicated freighter aircraft to year 2008 [NASA-CR-158950-VOL-4] N80-10149

DEPOSITION

Mechanism of turbine engine lubricant deposition [AD-A072557] N80-10223

DESIGN ANALYSIS

Singular values and feedback - Design examples --- for CH-47 helicopter A80-12716

A study to develop optimization algorithms for aircraft wing structures [AD-A072668] N80-10196

Design criteria for dry lubricated flight control bearings --- wear tests to make design analysis and check equipment specifications [AD-A071322] N80-10228

DICTIONARIES

Lexicon of aircraft transparency terms [AD-A071319] N80-10200

DIESEL FUELS

Dynamics of diesel fuel combustion in turbulent flow N80-10074

DIFFUSERS

Study of combined operation of self-evacuating vortex tube with diffuser N80-10085

DIFFUSION WELDING

Diffusion bonding as a production process --- Book A80-12076

Diffusion bonding - Aerospace applications A80-12081

DIGITAL DATA

A fiber-optic link for high-speed, DDAS-to-computer data transmission --- Digital Data Acquisition System from ramjet engine test cell to base central data processing center A80-12637

DIGITAL NAVIGATION

Optimal receivers and discrete-signal processors for hyperbolic radar navigation systems A80-12030

Study for incorporating time-synchronized approach control into the CH-47/VALT digital navigation system [NASA-CR-159151] N80-11058

DIGITAL RADAR SYSTEMS

Radar remoting --- command and control center system for military air operations A80-11164

SUBJECT INDEX

EJECTORS

DIGITAL SIMULATION			
The array processor AP-120E/190L for simulation applications			
A method for evaluating aircraft take-off performance [REPT-1663]		A80-11154	
DIGITAL SYSTEMS			
Electronic instrumentation in civil aviation			
Multivariable digital control systems [AD-A071662]		A80-11352	
Evaluation of dais technology applied to the integrated navigation system of a tactical transport [AD-A073068]		N80-11076	
DIGITAL TECHNIQUES			
Avionics software and equipment			
		A80-11354	
DIRECTIONAL SOLIDIFICATION (CRYSTALS)			
Component evaluation and engine demonstration of gamma/gamma-prime-delta E.S. eutectic solid turbine blades			
		A80-10289	
DISPENSERS			
Systems analysis of arctic fuels dispensing equipment [AD-A071815]			
		N80-11106	
DISPERSING			
Study of size distribution of oil drops formed in GTE oil system lines			
		A80-10632	
DISPLAY DEVICES			
The capability of CGI in flight simulation --- computer generated imagery			
		A80-10768	
The 'Viggen' multimode radar			
		A80-11171	
Aircrew displays and avionics for application in a future national airspace system [NASA-TM-80095]			
		N80-11052	
Application of modified profile analysis to function testing of simulated CTOL transport touchdown-performance data [NASA-TP-1541]			
		N80-11069	
Avionic system architecture investigation (AVSAR II) [AD-A071743]			
		N80-11080	
In-flight performance evaluation of experimental information [AD-A071701]			
		N80-11084	
DISTANCE MEASURING EQUIPMENT			
A pulse compression, precision DME system			
		A80-11351	
DISTRIBUTORS			
Pneumatic distributor for turbojet engine control system			
		A80-10635	
Pneumatic distributor for turbojet engine control system --- TU-154 aircraft			
		N80-10091	
DOWNWASH			
Prediction of helicopter rotor downwash in hover and vertical flight [ARL-AERO-REPT-150]			
		N80-11032	
DRAG REDUCTION			
Effect of winglets on a first-generation jet transport wing. 6: Stability characteristics for a full-span model at subsonic speeds --- conducted in Langley 8 foot transonic pressure tunnel [NASA-TP-1330]			
		N80-10101	
Effect of several airframe/nozzle modifications on the drag of a variable-sweep bomber configuration --- conducted in Langley 16 foot transonic tunnel [NASA-TM-80129]			
		N80-10106	
DRONE AIRCRAFT			
Study of the feasibility aspects of flight testing an aeroelastically tailored forward swept research wing on a BQM-34P drone vehicle [NASA-CR-159149]			
		N80-10195	
DROP SIZE			
Study of size distribution of oil drops formed in GTE oil			
		N80-10088	
DROP TRANSFER			
Study of size distribution of oil drops formed in GTE oil system lines			
		A80-10632	
DROPS (LIQUIDS)			
Study of size distribution of oil drops formed in GTE oil system lines			
		A80-10632	
DUCTED FAN ENGINES			
Aero-acoustic tests of duct-burning turbofan exhaust nozzles [NASA-CR-162254]			
		N80-10204	
DUCTED FANS			
Cross flow fan experiment development and finite element modeling			
		N80-10098	
DYNAMIC RESPONSE			
Flying qualities research for highly augmented aircraft [RE-582]			
		N80-10194	
A comparison of the pitching and plunging response of an oscillating airfoil [NASA-CR-3172]			
		N80-11030	
E			
EARLY WARNING SYSTEMS			
AEW Nimrod system and operation --- for military aircraft communication			
		A80-11167	
E-3A sentry, airborne early warning and control for Europe			
		A80-11168	
Required radar ranges for AEW aircraft			
		A80-11649	
ECONOMIC ANALYSIS			
Multirole cargo aircraft options and configurations --- economic analysis [NASA-TM-80177]			
		N80-11053	
Economics of hydrogen production and liquefaction updated to 1980 [NASA-CR-159163]			
		N80-11238	
ECONOMIC FACTORS			
Cargo Logistics Airlift Systems Study (CLASS). Volume 4: Future requirements of dedicated freighter aircraft to year 2008 [NASA-CR-158950-VOL-4]			
		N80-10149	
EFFICIENCY			
Aerodynamic efficiency of gas turbine intake duct --- for gas turbine power plants			
		N80-10077	
EJECTION INJURIES			
Exploratory development of aircrew windblast protection concepts [AD-A072013]			
		N80-11055	
EJECTION SEATS			
Escape system technology			
		A80-10343	
Ejection seat for high G escape [AD-A072444]			
		N80-11054	
Exploratory development of aircrew windblast protection concepts [AD-A072013]			
		N80-11055	
EJECTORS			
Workshop on Thrust Augmenting Ejectors [NASA-CP-2093]			
		N80-10107	
Recent developments in ejector technology in the Air Force: An overview			
		N80-10108	
NASA overview			
		N80-10109	
Integration of ejectors into high-speed aircraft --- forebody effects			
		N80-10119	
Some tests on small-scale rectangular throat ejector --- thrust augmentation for V/STOL aircraft			
		N80-10120	
Augmenting ejector endwall effects --- V/STOL aircraft			
		N80-10121	
Entrainment characteristics of unsteady subsonic jets --- for V/STOL aircraft			
		N80-10124	
A simple apparatus for the experimental study of non-steady flow thrust-augmenter ejector configurations			
		N80-10125	
Considerations of some critical ejector problems --- for the V/STOL aircraft			
		N80-10127	
Interface concerns of ejector integration in V/STOL aircraft			
		N80-10129	

ELASTIC DEFORMATION

Reaction control system augmentation for V/STOL aircraft
N80-10130

Design and test of a prototype scale ejector wing
N80-10131

The external augmentor concept for V/STOL aircraft
N80-10132

The XPV-12A Thrust-Augmented Wing (TAW) prototype aircraft
N80-10133

Evaluation of an ejector powered engine simulator at transonic Mach numbers
[AD-A071607] N80-11094

ELASTIC DEFORMATION
Study of a stereo electro-optical tracker system for the measurement of model deformations at the national transonic facility
[NASA-CR-159146] N80-10476

ELASTIC PROPERTIES
Optimal control of flight vehicle with elastic elements
N80-10037

ELASTODYNAMICS
Application of the design diagram for a layered viscoelastic medium to the evaluation of the stress-strain state of road and runway surfaces for moving loads
A80-12537

ELECTRIC GENERATORS
Generating innovation for Navy's F-18
A80-12312

ELECTRIC POWER PLANTS
Aerodynamic efficiency of gas turbine intake duct --- for gas turbine power plants
N80-10077

ELECTRIC POWER SUPPLIES
Generating innovation for Navy's F-18
A80-12312

ELECTRIC SPARKS
Electrical charging of fabric and film materials
N80-10048

ELECTRICAL RESISTIVITY
Electrical charging of fabric and film materials
N80-10048

ELECTRO-OPTICS
Study of a stereo electro-optical tracker system for the measurement of model deformations at the national transonic facility
[NASA-CR-159146] N80-10476

ELECTROMAGNETIC SCATTERING
Swept frequency scattering measurements of aircraft --- target identification
[AD-A071474] N80-10420

ELECTROMECHANICAL DEVICES
Electromechanical flight control actuator
[NASA-CR-160348] N80-10224

ELECTRONIC COUNTERMEASURES
Technological trends in electronic warfare --- use of radar equipment for aircraft detection and weapons control accuracy in air defense
A80-11172

The target tracking problem using airborne radar under ECM environment
A80-11173

ELECTRONIC EQUIPMENT
Electronic instrumentation in civil aviation
A80-11352

ELECTRONIC MODULES
Construction of black boxes and mechanical elaboration of electronic units in aviation
A80-10236

ELECTRONIC PACKAGING
Construction of black boxes and mechanical elaboration of electronic units in aviation
A80-10236

EMULSIONS
Burning sprays of jet A fuel-water emulsions
A80-11650

ENERGY CONSERVATION
Aircraft Energy Efficiency (ACEE) status report
N80-10206

Aircraft fuel. Citations from the International Aerospace Abstracts Data Base
[NTIS/PS-79/0764/5] N80-10668

ENGINE CONTROL
Identification and dual adaptive control of a turbojet engine
A80-10033

SUBJECT INDEX

Flight-vehicle equipment --- Russian book
A80-11869

Control technology
N80-10215

ENGINE DESIGN
Computerized systems analysis and optimization of aircraft engine performance, weight, and life cycle costs
A80-10035

Computer calculation of stationary temperature fields in air-cooled turbine rotor blades
A80-10612

Selection of optimal parameters of heat-pipe heat exchanger for a gas turbine engine
A80-10613

Computer calculation of stationary temperature fields in cooled turbine discs
A80-10614

Systematization of simple detail parts of regulable nozzle of gas turbine engine
A80-10616

Development of an aircraft-derivative gas turbine with high performance and large output
A80-10823

Basic problem of aircraft gas turbine engine analytic design, part 1
N80-10042

Aeropropulsion 1979 --- conferences
[NASA-CP-2092] N80-10205

VSCF technology definition study
[NASA-CR-159730] N80-10222

Statistical diagnostics aircraft engines
N80-11006

Optimal thermogasdynamic design of gas turbine engines using element prototypes, 1
N80-11007

On the development of The RB 199
[DRIC-TRANS-5429] N80-11096

Fundamental characterization of alternate fuel effects in continuous combustion systems
[SAN-1543-12] N80-11244

ENGINE INLETS
An efficient user-oriented method for calculating compressible flow in an about three-dimensional inlets --- panel method
[NASA-CR-159578] N80-10134

ENGINE NOISE
Noise reduction
N80-10208

ENGINE PARTS
Experimental investigation of the strength of rotor materials in the presence of surface cracks
A80-10482

Systematization of simple detail parts of regulable nozzle of gas turbine engine
A80-10616

Materials and structures technology
N80-10210

ENGINE STARTERS
Measurement of liquid pump torque in the starting regime
A80-10611

ENGINE TESTS
Turbine engine altitude chamber and flight testing with liquid hydrogen
A80-10034

Application of the discrete-phase method /DPM/ to the study and control of aircraft turbine engine blade vibrations. I
A80-10234

Component evaluation and engine demonstration of gamma/gamma-prime-delta D.S. eutectic solid turbine blades
A80-10289

On the influence of short shroud platforms on turbine stage operation
A80-10627

An optical technique for the investigation of flow in gas turbine combustors
A80-11769

Processing noise and vibration data for gas turbine engine development
A80-12612

Parametric method of aircraft engine status diagnostics based on limited information
N80-10003

- Numerical computation of neighboring optimum feedback control schemes in real-time
A80-10919
- A singular perturbation analysis of optimal aerodynamic and thrust magnitude control
A80-11379
- Singular values and feedback - Design examples --- for CH-47 helicopter
A80-12716
- Entropy analysis of feedback flight dynamic control systems
[AD-A072259] N80-11100
- FIBER OPTICS**
A fiber-optic link for high-speed, DDAS-to-computer data transmission --- Digital Data Acquisition System from ramjet engine test cell to base central data processing center
A80-12637
- FIGHTER AIRCRAFT**
In Soviet service. VII - Mikoyan Foxbat --- Soviet MiG-25 program
A80-10900
- The 'Viggen' multimode radar
A80-11171
- Prediction of aerodynamic characteristics of fighter wings at high lift
[AD-A072630] N80-10140
- Experiments in sensing transient rotational acceleration cues on a flight simulator
[NASA-TP-1537] N80-10193
- Manoeuvre limitations of combat aircraft
[AGARD-AR-155A] N80-10203
- High-performance-vehicle technology --- fighter aircraft propulsion
N80-10219
- Prediction of lateral aerodynamic loads on fighter aircraft at high angles of attack
[AD-A071893] N80-11073
- Simulated Mission Endurance Test (SMET) for an aircraft engine to be used in a fighter/attack role
[AD-A071907] N80-11089
- FINITE ELEMENT METHOD**
Analysis of thin-wall beams by the method of segments
N80-10043
- Cross flow fan experiment development and finite element modeling
N80-10098
- FIRE CONTROL**
Improvement of weapon system performance in air to air and air to ground operation with airborne radar
A80-11170
- IR-camera for day and night fire control
A80-11180
- FIRE PREVENTION**
Fire on board transport aircraft and passenger safety
A80-11454
- FIRES**
Cabin hazards from a large external fuel fire adjacent to an aircraft fuselage
[AD-A073494] N80-11050
- Behavior of lightly confined high explosives in a jet-fuel fire
[UCRL-52659] N80-11247
- FLAME SPECTROSCOPY**
An optical technique for the investigation of flow in gas turbine combustors
A80-11769
- FLAMES**
Pollutant emissions from 'partially' mixed turbulent flames
A80-11793
- FLAPS (CONTROL SURFACES)**
Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2
N80-10044
- Selection of geometric parameters and location of nose flap on swept wing root profile from tunnel test data, 1
N80-11009
- Leading edge vortex-flap experiments on a 74 deg delta wing
[NASA-CR-159161] N80-11038
- FLIGHT CHARACTERISTICS**
Instrumentation for the determination of aircraft performance from dynamic maneuvers
A80-12647
- Manoeuvre limitations of combat aircraft
[AGARD-AR-155A] N80-10203
- Dynamic characteristics of flight simulator motion systems
[AGARD-AR-144] N80-10238
- A compilation and analysis of helicopter handling qualities data. Volume 1: Data compilation
[NASA-CR-3144] N80-11097
- FLIGHT CONDITIONS**
Gas curtains in gas turbine engines
A80-10608
- FLIGHT CONTROL**
Numerical computation of neighboring optimum feedback control schemes in real-time
A80-10919
- Technical concept for a strike-RPV flight guidance and weapon delivery system
A80-11174
- Analytic design of regulators for controlling elastic flight vehicle rotation about the longitudinal axis
N80-10035
- Optimal control of flight vehicle with elastic elements
N80-10037
- On modeling sensitivity of a linear system to reduction of its order by the infinitesimal transformation method in the yaw motion control problem
N80-10046
- Electromechanical flight control actuator
[NASA-CR-160348] N80-10224
- Multivariable digital control systems
[AD-A071662] N80-10226
- Method of conjugate gradients for optimal control problems with state variable constraints
[AD-A072258] N80-10227
- Entropy analysis of feedback flight dynamic control systems
[AD-A072259] N80-11100
- FLIGHT CREWS**
Exploratory development of aircrew windblast protection concepts
[AD-A072013] N80-11055
- FLIGHT INSTRUMENTS**
F-4 radar altimeter aural warning
[AD-A072870] N80-11085
- FLIGHT MECHANICS**
Flight through thunderstorm outflows
A80-11648
- FLIGHT PATHS**
Fuel minimal take-off path of jet lift VTOL aircraft, log no. C3558
N80-11066
- FLIGHT SAFETY**
Operation of airborne equipment and flight safety --- Russian book
A80-11875
- FLIGHT SIMULATION**
The impact of the limits of simulation in extending the use of simulators in training
A80-10763
- Recent advances in control loading and motion systems used in simulation
A80-10766
- The capability of CGI in flight simulation --- computer generated imagery
A80-10768
- A regression model of fatigue crack propagation under flight simulation loading --- for aluminum alloys
A80-12157
- Pilot performance during simulated approaches and landings made with various computer-generated visual glidepath indicators
[AD-A066220] N80-10151
- Experiments in sensing transient rotational acceleration cues on a flight simulator
[NASA-TP-1537] N80-10193
- Flight effects on the aero/acoustic characteristics of inverted profile coannular nozzles
[NASA-CR-162419] N80-10220

- Application of modified profile analysis to function testing of simulated CTOL transport touchdown-performance data [NASA-TP-1541] N80-11069
- Manned engineering flight simulation validation, part 2: Software user's guide [AD-A071395] N80-11105
- Evaluation of transponder antenna coverage/ATCRBS during simulated flights of aircraft [AD-A073547] N80-11275
- Flight simulation fatigue crack propagation evaluation of candidate lower wing skin materials with particular consideration of spectrum truncation [NLR-TR-77092-U] N80-11524
- FLIGHT SIMULATORS**
- The impact of the limits of simulation in extending the use of simulators in training A80-10763
- Recent and future engineering developments in flight training simulators A80-10776
- The interrelationships between engineering development simulation and flight simulation --- aircraft design development simulator technology transfer to flight simulator and training program improvements A80-10777
- Advanced simulator for pilot training (ASPT): G-seat optimization [AD-A068475] N80-10233
- Manned engineering flight simulation validation, Part 1. Simulation requirements and simulator motion system performance [AD-A071394] N80-10235
- Training effectiveness of the CH-47 flight simulators [AD-A072317] N80-10236
- Simulator for air-to-air combat motion system investigation [AD-A072612] N80-10237
- Dynamic characteristics of flight simulator motion systems [AGARD-AR-144] N80-10238
- Perception and performance in flight simulators: The contribution of vestibular, visual, and auditory information [NASA-CR-162129] N80-11103
- Manned engineering flight simulation validation, part 2: Software user's guide [AD-A071395] N80-11105
- FLIGHT STABILITY TESTS**
- Comparison of stability and control parameters for a light, single-engine, high-winged aircraft using different flight test and parameter estimation techniques [NASA-TN-80163] N80-10225
- FLIGHT TESTS**
- Microprocessors as aircraft fatigue monitors A80-12640
- Instrumentation for the determination of aircraft performance from dynamic maneuvers A80-12647
- Study of the feasibility aspects of flight an aeroelastically tailored forward swept research wing on a BQM-34F drone vehicle [NASA-CR-159149] N80-10195
- Feasibility tests of use of the tri turbo-3 aircraft for arctic AIBT drops [AD-A073159] N80-11074
- FLIGHT TRAINING**
- Training effectiveness of the CH-47 flight simulators [AD-A072317] N80-10236
- FLIGHT VEHICLES**
- Flight-vehicle equipment --- Russian book A80-11869
- FLOATING POINT ARITHMETIC**
- The array processor AP-120E/190L for simulation applications A80-11154
- FLOW CHARACTERISTICS**
- Parameters of spatial flow past a hydrofoil near the free surface of a ponderable liquid A80-11205
- FLOW DISTORTION**
- On supersonic flow with attached shock waves over delta wings A80-12598
- Solution of linear problems of flow about finite span wing A80-12912
- FLOW DISTRIBUTION**
- Predictions of the flow field and local gas composition in gas turbine combustors A80-11773
- Parametric method of aircraft engine status diagnostics based on limited information N80-10003
- Motion of rectangular wing between parallel walls N80-10050
- Flow-around small-aspect-ratio delta wing with vortex "bursting" N80-10060
- Cross flow fan experiment development and finite element modeling N80-10098
- Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed [AD-A072098] N80-10143
- Height of spray produced by vertical takeoff and landing (VTOL) aircraft [AD-A073099] N80-11075
- FLOW GEOMETRY**
- Determination of turning angle of a jet impinging on a bucket with visor N80-10011
- FLOW MEASUREMENT**
- An optical technique for the investigation of flow in gas turbine combustors A80-11769
- A Laser Doppler Velocimeter system to investigate unsteady flow separation A80-12634
- A survey of laser Doppler velocimeter applications at the Arnold Engineering Development Center A80-12638
- FLOW THEORY**
- Construction of a nonstationary nonlinear propeller theory A80-12911
- FLOW VELOCITY**
- A Laser Doppler Velocimeter system to investigate unsteady flow separation A80-12634
- Pressure and velocity measurements in a three-dimensional wall jet N80-10126
- FLOW VISUALIZATION**
- Experimental techniques developed at ONERA for advanced compressor testing [ONERA, TP NO. 1979-129] A80-13060
- FLUID DYNAMICS**
- Technical evaluation report on the fluid dynamics panel Symposium on High Angle of attack aerodynamics --- slender wings, bodies of revolution, and body-wing configurations [AGARD-AR-145] N80-10147
- FLUID FLOW**
- Parameters of spatial flow past a hydrofoil near the free surface of a ponderable liquid A80-11205
- FLUTTER ANALYSIS**
- Aero-servo-elastic stability analysis [AD-A072797] N80-11101
- FOREBODIES**
- Integration of ejectors into high-speed aircraft --- forebody effects N80-10119
- FRACTURE MECHANICS**
- Improved methods for predicting spectrum loading effects, phase 1 report. volume 2: Test data [AD-A072387] N80-11070
- Effect of multiaxial loading on crack growth. Volume 1: Technical summary [AD-A072122] N80-11513
- FRACTURE STRENGTH**
- Fracture and fatigue properties of 1Cr-Mo-V bainitic turbine rotor steels [EPRI-NP-1023] N80-11201
- FREE BOUNDARIES**
- Parameters of spatial flow past a hydrofoil near the free surface of a ponderable liquid A80-11205

FREQUENCY STANDARDS

SUBJECT INDEX

FREQUENCY STANDARDS

Nova satellite time experiment --- global time synchronization using Cs clock transfer A80-10268

FRICITION DRAG
 A survey of the literature on surface roughness effects on the drag of subsonic aircraft [FFA-AU-1224] N80-11049

FUEL COMBUSTION
 Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation A80-10610
 Burning sprays of jet A fuel-water emulsions A80-11650
 Development of gas turbine fuels and combustion; An overview [CONF-790337-4] N80-10391

FUEL CONSUMPTION
 An engine fuel chemistry solution to the problem of jet fuel supplies A80-10199
 Aircraft Energy Efficiency (ACEE) status report N80-10206
 Fuel minimal take-off path of jet lift VTOL aircraft, log no. C3558 N80-11066

FUEL CORROSION
 The chemical stability of hydro-treated fuels and their stabilization by antioxidants A80-10200

FUEL INJECTION
 Characteristics of afterburning bypass turbojet engine with oxygen injection into the afterburner chamber --- study of fuel injection into thrust chambers for thrust augmentation N80-10029

FUEL OILS
 Study of size distribution of oil drops formed in GTE oil system lines A80-10632

FUEL TESTS
 Systems analysis of arctic fuels dispensing equipment [AD-A071815] N80-11106

FUEL-AIR RATIO
 Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation --- of fuel-air parameters N80-10065

FUELS
 Fundamental characterization of alternate fuel effects in continuous combustion systems [SAM-1543-12] N80-11244

FUNCTIONS (MATHEMATICS)
 Use of wagner functions in airfoil design optimization [AD-A072634] N80-10139

FUSELAGES
 Coupled rotor and fuselage equations of motion [NASA-TM-81153] N80-10516
 Selecting the passenger airplane fuselage N80-11024
 Fuselage and nozzle pressure distributicns on a 1/12-scale F-15 propulsion model at transonic speeds --- conducted in langley 16 foot transonic tunnel [NASA-TP-1521] N80-11036
 Cabin hazards from a large external fuel fire adjacent to an aircraft fuselage [AD-A073494] N80-11050

FV-12A AIRCRAFT
 The XFV-12A Thrust-Augmented Wing (TAW) prototype aircraft N80-10133

G

GAS COMPOSITION
 Predictions of the flow field and local gas composition in gas turbine combustors A80-11773

GAS DYNAMICS
 Calculation of working process in 'slow-compression' piston-type aerodynamic tube A80-10607
 Gas curtains in gas turbine engines A80-10608

Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade A80-11255

Analog modeling in studying supersonic flow around a wing and its governing analog-criteria N80-10038

Gas curtains in gas turbine engines N80-10063

GAS FLOW
 Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber A80-10196
 Gas curtains in gas turbine engines A80-10608
 Selection of optimal parameters of heat-pipe heat exchanger for a gas turbine engine A80-10613
 Hypersonic viscous shock layer on sweptback wings of infinite span at different angles of attack A80-11208
 Development of improved abradable compressor gas path seal [AD-A072171] N80-11474

GAS MIXTURES
 Influence of gas turbine engine combustion chambers geometric parameters on mixture formation characteristics N80-10006

GAS TURBINE ENGINES
 Application of the discrete-phase method /DPM/ to the study and control of aircraft turbine engine blade vibrations. I A80-10234
 Review of superalloy powder metallurgy processing for aircraft gas turbine applications A80-10310
 Gas curtains in gas turbine engines A80-10608
 Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation A80-10610
 Selection of optimal parameters of heat-pipe heat exchanger for a gas turbine engine A80-10613
 Systematization of simple detail parts of regulable nozzle of gas turbine engine A80-10616
 Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers A80-10619
 On the influence of short shroud platforms on turbine stage operation A80-10627
 Study of size distribution of oil drops formed in GTE oil system lines A80-10632
 Development of an aircraft-derivative gas turbine with high performance and large output A80-10823
 Lubricants for the aircraft gas turbine A80-10866
 Lubrication of aircraft gas-turbine engines --- Russian book A80-11057
 An optical technique for the investigation of flow in gas turbine combustors A80-11769
 Pollutant emissions from 'partially' mixed turbulent flames A80-11793
 Processing noise and vibration data for gas turbine engine development A80-12612
 Measuring unsteady pressure on rotating compressor blades --- with semiconductor strain gages under gas turbine engine operating conditions A80-12630
 Influence of gas turbine engine combustion chambers geometric parameters on mixture formation characteristics N80-10006
 Study of heat-pipe heat exchanger in the small gas turbine engine system N80-10022

- Light turbine helicopters to the year 2000 A80-11397
- Singular values and feedback - Design examples ---
for CH-47 helicopter A80-12716
- NASA gear research and its probable effect on
rotorcraft transmission design A80-13068
- Coupled rotor and fuselage equations of motion
[NASA-TM-81153] N80-10516
- Avionic system architecture investigation (AVSAR II)
[AD-A071743] N80-11080
- HELICOPTER PERFORMANCE**
- Large-amplitude fluctuations of velocity and
incidence of an oscillating airfoil A80-11432
- Design and simulation of a helicopter target
hand-off computer A80-12645
- HELICOPTER WAKES**
- Prediction of helicopter rotor downwash in hover
and vertical flight
[ARL-AERO-EPT-150] N80-11032
- HELICOPTERS**
- Mechanical components N80-10213
- Prediction of helicopter rotor downwash in hover
and vertical flight
[ARL-AERO-EPT-150] N80-11032
- New aircraft technology: Report on the
Farnborough International Air Show
[PB-298345/0] N80-11078
- HELMETS**
- A helmet-mounted sight using C.C.D. technology A80-10884
- HIGH ACCELERATION**
- Ejection seat for high G escape
[AD-A072444] N80-11054
- HIGH STRENGTH ALLOYS**
- Review of superalloy powder metallurgy processing
for aircraft gas turbine applications A80-10310
- HIGH TEMPERATURE ENVIRONMENTS**
- Brittle materials design, high temperature gas
turbine
[AD-A071750] N80-11090
- HIGH TEMPERATURE GASES**
- Selection of optimal parameters of heat-pipe heat
exchanger for a gas turbine engine A80-10613
- HIGH TEMPERATURE LUBRICANTS**
- Lubricants for the aircraft gas turbine A80-10866
- HIGH TEMPERATURE TESTS**
- Brittle materials design, high temperature gas
turbine
[AD-A071750] N80-11090
- HIGHWAYS**
- Application of the design diagram for a layered
viscoelastic medium to the evaluation of the
stress-strain state of road and runway surfaces
for moving loads A80-12537
- HILSCH TUBES**
- Study of combined operation of self-evacuating
vortex tube with diffuser N80-10085
- HOVERING**
- Prediction of helicopter rotor downwash in hover
and vertical flight
[ARL-AERO-EPT-150] N80-11032
- HUMAN FACTORS ENGINEERING**
- Recent and future engineering developments in
flight training simulators A80-10776
- The interrelationships between engineering
development simulation and flight simulation ---
aircraft design development simulator technology
transfer to flight simulator and training
program improvements A80-10777
- Ejection seat for high G escape
[AD-A072444] N80-11054
- HYDRAULICS**
- Experimental and theoretical investigation of the
internal-duct hydraulics of stator and rotor
blades for a semiclosed-cycle air cooling system A80-12042
- HYDROCARBON FUELS**
- An engine fuel chemistry solution to the problem
of jet fuel supplies A80-10199
- Fundamental characterization of alternate fuel
effects in continuous combustion systems
[SAN-1543-12] N80-11244
- HYDROGEN FUELS**
- Turbine engine altitude chamber and flight testing
with liquid hydrogen A80-10034
- Hydrogen as a fuel. Citations from the
international aerospace abstracts data base
[NTIS/PS-79/0771/0] N80-10397
- HYDROGEN PRODUCTION**
- Economics of hydrogen production and liquefaction
updated to 1980
[NASA-CR-159163] N80-11238
- HYDROGENATION**
- The chemical stability of hydro-treated fuels and
their stabilization by antioxidants A80-10200
- HYPERBOLIC NAVIGATION**
- Optimal receivers and discrete-signal processors
for hyperbolic radar navigation systems A80-12030
- HYPERSONIC FLIGHT**
- Hyperersonic propulsion --- supersonic combustion
ramjet engines N80-10217
- HYPERSONIC FLOW**
- Hyperersonic viscous shock layer on sweptback wings
of infinite span at different angles of attack A80-11208
- HYPERSONIC WIND TUNNELS**
- Calculation of working process in
'slow-compression' piston-type aerodynamic tube A80-10607
- IDENTIFYING**
- Maximum likelihood identification of linear
discrete stochastic systems --- estimating and
parameter identification in stochastic processes
[AD-A072147] N80-10229
- IMAGE CORRELATORS**
- Design and simulation of a helicopter target
hand-off computer A80-12645
- IMAGE TRANSDUCERS**
- A helmet-mounted sight using C.C.D. technology A80-10884
- IMAGING TECHNIQUES**
- The capability of CGI in flight simulation ---
computer generated imagery A80-10768
- IMPACT TESTS**
- Light airplane crash tests at three roll angles
[NASA-TP-1477] N80-10512
- Light airplane crash tests at three pitch angles
[NASA-TP-1481] N80-11505
- IN-FLIGHT MONITORING**
- Microprocessors as aircraft fatigue monitors A80-12640
- Instrumentation for the determination of aircraft
performance from dynamic maneuvers A80-12647
- Flight-measured afterbody pressure coefficients
from an airplane having twin side-by-side jet
engines for Mach numbers from 0.6 to 1.6
[NASA-TP-1549] N80-11035
- INCOMPRESSIBLE FLOW**
- Analytic formulas for wing profile aerodynamic
characteristics in incompressible flow N80-11010
- Harmonic oscillations of annular wing in steady
ideal fluid flow N80-11019
- INEQUALITIES**
- Inequalities and approximation with applications
to VSTOL aircraft --- using control theory for
optimal control approximations
[AD-A071807] N80-11099
- INERTIAL GUIDANCE**
- Inertial navigation and guidance. Citations from
the international aerospace abstracts data base
[NTIS/PS-79/0825/4] N80-11064

- INERTIAL NAVIGATION**
Integration of GPS with inertial navigation systems
N80-10173
Inertial navigation and guidance. Citations from
the international aerospace abstracts data base
[NTIS/PS-79/0825/4] N80-11064
- INFINITE SPAN WINGS**
Hypersonic viscous shock layer on sweptback wings
of infinite span at different angles of attack
A80-11208
- INFORMATION SYSTEMS**
Evaluation of dais technology applied to the
integrated navigation system of a tactical
transport
[AD-A073068] N80-11061
In-flight performance evaluation of experimental
information
[AD-A071701] N80-11084
- INFRARED DETECTORS**
IR-camera for day and night fire control
A80-11180
- INLET FLOW**
An efficient user-oriented method for calculating
compressible flow in an about three-dimensional
inlets --- panel method
[NASA-CR-159578] N80-10134
Computational fluid mechanics of internal flow
N80-10211
- INPUT/OUTPUT ROUTINES**
Manned engineering flight simulation validation,
part 2: Software user's guide
[AD-A071395] N80-11105
- INSTRUMENT ERRORS**
Calibration of a low cost strapdown inertial
guidance system
A80-12642
- INSTRUMENT FLIGHT RULES**
Requirements for short instrument runways
A80-11653
- INSTRUMENT LANDING SYSTEMS**
Algorithms and logic for incorporating ILS NASA
TCV B-737 airplane area navigation system
[NASA-TM-80167] N80-10152
- INTERNATIONAL COOPERATION**
The Tornado multi-function combat aircraft - An
accomplishment of international collaboration
A80-11453
F-16 co-production - An American point of view
A80-12315
- INVENTORY MANAGEMENT**
Factors affecting the retirement of commercial
transport jet aircraft
[NASA-CR-152308] N80-10148
- ISOTROPIC TURBULENCE**
Noise of a model helicopter rotor due to ingestion
of turbulence
[NASA-CR-2213] N80-11067
- ITERATION**
The analysis of wing-body combinations at moderate
angles of attack --- missile bodies
[AD-A074284] N80-11040
- J**
- JAMMING**
Integration of GPS with inertial navigation systems
N80-10173
- JET AIRCRAFT**
Factors affecting the retirement of commercial
transport jet aircraft
[NASA-CR-152308] N80-10148
Analysis of the response of a thermal barrier
coating to sodium and vanadium doped combustion
gases
[NASA-TM-79205] N80-10344
Evaluation of dais technology applied to the
integrated navigation system of a tactical
transport
[AD-A073068] N80-11061
Wind shear hazard definition for a wide body jet
--- low level wind shear and control simulation
[FAA-RD-79-90] N80-11715
- JET AIRCRAFT NOISE**
A method for predicting the noise levels of
coannular jets with inverted velocity profiles
[NASA-CR-3176] N80-11868
- JET ENGINE FUELS**
An engine fuel chemistry solution to the problem
of jet fuel supplies
A80-10199
The chemical stability of hydro-treated fuels and
their stabilization by antioxidants
A80-10200
Burning sprays of jet A fuel-water emulsions
A80-11650
Alternative jet aircraft fuels
N80-10209
Behavior of lightly confined high explosives in a
jet-fuel fire
[UCRL-52659] N80-11247
- JET ENGINES**
VSCE technology definition study
[NASA-CR-159730] N80-10222
- JET EXHAUST**
Considerations of some critical ejector problems
--- for the V/STOL aircraft
N80-10127
Flight-measured afterbody pressure coefficients
from an airplane having twin side-by-side jet
engines for Mach numbers from 0.6 to 1.6
[NASA-TP-1549] N80-11035
- JET FLAPS**
Predicted jet thickness effects on the lift of an
augmentor wing
A80-12597
- JET FLOW**
Study of mass exchange between primary zone and
secondary air jets in gas turbine engine
combustion chambers
A80-10619
Parametric method of aircraft engine status
diagnostics based on limited information
N80-10003
Determination of turning angle of a jet impinging
on a bucket with visor
N80-10011
Study of mass exchange between primary zone and
secondary air jets in gas turbine engine
combustion chambers
N80-10075
An investigation of corner separation within a
thrust augmentor having Coanda jets
[NADC-76153-30] N80-10122
Pressure and velocity measurements in a
three-dimensional wall jet
N80-10126
Aerodynamic interactions from reaction controls
for lateral control of the M2-F2 lifting-body
entry configuration at transonic and supersonic
and supersonic Mach numbers --- wind tunnel tests
[NASA-TM-78534] N80-11033
A study of coherent structures in axisymmetric
jets using an optical technique
[AASU-341] N80-11399
- JET MIXING FLOW**
Influence of gas turbine engine combustion
chambers geometric parameters on mixture
formation characteristics
N80-10006
- JET THRUST**
Aerodynamic interactions from reaction controls
for lateral control of the M2-F2 lifting-body
entry configuration at transonic and supersonic
and supersonic Mach numbers --- wind tunnel tests
[NASA-TM-78534] N80-11033
- K**
- KALMAN FILTERS**
The target tracking problem using airborne radar
under ECM environment
A80-11173
- KEROSENE**
Dynamics of diesel fuel combustion in turbulent flow
N80-10074
- L**
- LAMINAR BOUNDARY LAYER**
Laminar boundary layer calculation from
experimental pressure distribution
N80-10045

LANDING GEAR

Application of the factor interpolation method in flight vehicle landing gear analytic design
N80-10058

LANDING SIMULATION
Flight through thunderstorm outflows
A80-11648

Pilot performance during simulated approaches and landings made with various computer-generated visual glidepath indicators
[AD-A066220]
N80-10151

LASER APPLICATIONS
A study of coherent structures in axisymmetric jets using an optical technique
[AASU-341]
N80-11399

LASER DOPPLER VELOCIMETERS
A Laser Doppler Velocimeter system to investigate unsteady flow separation
A80-12634

A survey of laser Doppler velocimeter applications at the Arnold Engineering Development Center
A80-12638

LATERAL CONTROL
Flying qualities research for highly augmented aircraft
[RE-582]
N80-10194

Aerodynamic interactions from reaction controls for lateral control of the M2-F2 lifting-body entry configuration at transonic and supersonic and supersonic Mach numbers --- wind tunnel tests
[NASA-TM-78534]
N80-11033

LATERAL STABILITY
Comparison of stability and control parameters for a light, single-engine, high-winged aircraft using different flight test and parameter estimation techniques
[NASA-TM-80163]
N80-10225

LEADING EDGE SWEEP
Steady flow over the pressure side of a piecewise-flat delta wing with supersonic leading edges
A80-12908

LEADING EDGES
Estimation of attainable leading-edge thrust for wings at subsonic and supersonic speeds
[NASA-TP-1500]
N80-10105

Leading edge vortex-flap experiments on a 74 deg delta wing
[NASA-CR-159161]
N80-11038

Measurements on a three-dimensional swept wing at low speeds. Part 1: The flow around the leading edge
[PPA-130-PT-1]
N80-11044

LIPE CYCLE COSTS
Computerized systems analysis and optimization of aircraft engine performance, weight, and life cycle costs
A80-10035

LIPT
A singular perturbation analysis of optimal aerodynamic and thrust magnitude control
A80-11379

Overall aerodynamic characteristics of caret and delta wings at supersonic speeds
N80-11022

LIPT AUGMENTATION
Predicted jet thickness effects on the lift of an augmentor wing
A80-12597

LIPT DRAG RATIO
Overall aerodynamic characteristics of caret and delta wings at supersonic speeds
N80-11022

LIGHT AIRCRAFT
Light turbine helicopters to the year 2000
A80-11397

Structural stiffening as an interior noise control technique for light twin-engine aircraft
N80-10192

Comparison of stability and control parameters for a light, single-engine, high-winged aircraft using different flight test and parameter estimation techniques
[NASA-TM-80163]
N80-10225

New aircraft technology: Report on the Farnborough International Air Show
[PB-298345/0]
N80-11078

Light airplane crash tests at three pitch angles
[NASA-TP-1481]
N80-11505

LINEAR SYSTEMS

Maximum likelihood identification of linear discrete stochastic systems --- estimating and parameter identification in stochastic processes
[AD-A072147]
N80-10229

LINEAR TRANSFORMATIONS

Use of the method of variable directions for numerical study of the temperature states of a turbine disk with blades --- temperature distribution of rotating disk turbine blades using linear transformation
N80-10028

LIQUEFACTION

Economics of hydrogen production and liquefaction updated to 1980
[NASA-CR-159163]
N80-11238

LIQUID FLOW

Measurement of liquid pump torque in the starting regime
A80-10611

LIQUID HYDROGEN

Turbine engine altitude chamber and flight testing with liquid hydrogen
A80-10034

Economics of hydrogen production and liquefaction updated to 1980
[NASA-CR-159163]
N80-11238

LOAD DISTRIBUTION (FORCES)

Extension of Prandtl's biplane theory to wing-tail combinations
A80-12599

LOAD TESTS

Method of determining the load classification number, LCN, of a semirigid composite runway surface
A80-10237

Flight simulation fatigue crack propagation evaluation of candidate lower wing skin materials with particular consideration of spectrum truncation
[NLR-TR-77092-U]
N80-11524

LOADING OPERATIONS

Recent advances in control loading and motion systems used in simulation
A80-10766

LOADING RATE

Impression fatigue --- load level effects on crack propagation
A80-13126

LOADS (FORCES)

On the empennage snap-through problem
N80-10047

A literature search and review of the dynamics of aircraft-surface interaction
[AD-A070940]
N80-10199

LOGIC DESIGN

Algorithms and logic for incorporating ILS NASA TCV B-737 airplane area navigation system
[NASA-TM-80167]
N80-10152

LONGITUDINAL CONTROL

Analytic design of regulators for controlling elastic flight vehicle rotation about the longitudinal axis
N80-10035

LONGITUDINAL STABILITY

Comparison of stability and control parameters for a light, single-engine, high-winged aircraft using different flight test and parameter estimation techniques
[NASA-TM-80163]
N80-10225

LOW ASPECT RATIO

Experimental study of low aspect ratio compressor blading
[NASA-TM-79280]
N80-11037

LOW SPEED

Low-speed wind-tunnel tests of a 1/10-scale model of an advanced arrow-wing supersonic cruise configuration designed for cruise at Mach 2.2 --- Langley Full Scale Wind Tunnel
[NASA-TM-80152]
N80-10135

LOW SPEED WIND TUNNELS

Measurements on a three-dimensional swept wing at low speeds. Part 1: The flow around the leading edge
[PPA-130-PT-1]
N80-11044

Measurements on a three-dimensional swept wing at low speeds. Part 2: The flow in the boundary layer on the main wing
[PPA-131-PT-2]
N80-11045

- LOW TEMPERATURE ENVIRONMENTS**
Systems analysis of arctic fuels dispensing equipment
[AD-A071815] N80-11106
- LOW TEMPERATURE TESTS**
Systems analysis of arctic fuels dispensing equipment
[AD-A071815] N80-11106
- LUBRICANT TESTS**
Mechanism of turbine engine lubricant deposition
[AD-A072557] N80-10223
- LUBRICANTS**
Mechanism of turbine engine lubricant deposition
[AD-A072557] N80-10223
- LUBRICATING OILS**
Lubricants for the aircraft gas turbine
A80-10866
Lubrication of aircraft gas-turbine engines ---
Russian book
A80-11057
Study of size distribution of oil drops formed in GTE oil
N80-10088
- LUBRICATION**
Design criteria for dry lubricated flight control bearings --- wear tests to make design analysis and check equipment specifications
[AD-A071322] N80-10228
- LUBRICATION SYSTEMS**
Lubrication of aircraft gas-turbine engines ---
Russian book
A80-11057
Study of size distribution of oil drops formed in GTE oil
N80-10088
- M**
- M-2F2 LIFTING BODY**
Aerodynamic interactions from reaction controls for lateral control of the M2-F2 lifting-body entry configuration at transonic and supersonic and supersonic Mach numbers --- wind tunnel tests
[NASA-TM-78534] N80-11033
- MACH NUMBER**
Flight-measured afterbody pressure coefficients from an airplane having twin side-by-side jet engines for Mach numbers from 0.6 to 1.6
[NASA-TP-1549] N80-11035
- MAGNETIC LEVITATION VEHICLES**
Blow-down and sled-run simulation of transonic flow
A80-12423
- MAGNETIC SUSPENSION**
Experimental feasibility study of the application of magnetic suspension techniques to large-scale aerodynamic test facilities --- cryogenic traonics wind tunnel
[NASA-CR-146761] N80-11102
- MAINTENANCE**
Opportunistic Maintenance Engine Simulation model: OMENS 2
[AD-A072516] N80-11088
- MANAGEMENT METHODS**
Aircrew displays and avionics for application in a future national airspace system
[NASA-TM-80095] N80-11052
- MANEUVERABILITY**
Manoeuvr limitations of combat aircraft
[AGARD-AR-155A] N80-10203
- MARKET RESEARCH**
The market for large civil helicopters
A80-11398
Cargo Logistics Airlift Systems Study (CLASS). Volume 4: Future requirements of dedicated freighter aircraft to year 2008
[NASA-CR-158950-VOL-4] N80-10149
- MASS TRANSFER**
Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
A80-10619
Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
N80-10075
- MATHEMATICAL MODELS**
Predictions of the flow field and local gas composition in gas turbine combustors
A80-11773
- Parametric method of aircraft engine status diagnostics based on limited information
N80-10003
- Analytic representation of turbine characteristics in form convenient for computer calculation of GTE parameters
N80-10024
- Application of the factor interpolation method in flight vehicle landing gear analytic design
N80-10058
- A study to develop optimization algorithms for aircraft wing structures
[AD-A072668] N80-10196
- Coupled rotor and fuselage equations of motion
[NASA-TM-81153] N80-10516
- MATRICES (CIRCUITS)**
The array processor AP-120B/190I for simulation applications
A80-11154
- MECHANICAL DRIVES**
Mechanical components
N80-10213
- MECHANICAL PROPERTIES**
Experimental investigation of the strength of rotor materials in the presence of surface cracks
A80-10482
- METAL BONDING**
Diffusion bonding - Aerospace applications
A80-12081
- METAL FATIGUE**
A regression model of fatigue crack propagation under flight simulation loading --- for aluminum alloys
A80-12157
Impression fatigue --- load level effects on crack propagation
A80-13126
- METAL SHEETS**
Flight simulation fatigue crack propagation evaluation of candidate lower wing skin materials with particular consideration of spectrum truncation
[NLR-TR-77092-J] N80-11524
- METAL-METAL BONDING**
Diffusion bonding as a production process --- Pook
A80-12076
- METEOROLOGICAL PARAMETERS**
Navigation and meteorological error equations for some aerodynamic parameters
[NASA-TM-80804] N80-10150
- MICROPROCESSORS**
Microprocessors as aircraft fatigue monitors
A80-12640
- MICROWAVE LANDING SYSTEMS**
A pulse compression, precision DME system
A80-11351
- MIG AIRCRAFT**
In Soviet service. VII - Mikoyan Foxbat --- Soviet MiG-25 program
A80-10900
- MILITARY AIRCRAFT**
AEW Nimrod system and operation --- for military aircraft communication
A80-11167
Technical concept for a strike-RPV flight guidance and weapon delivery system
A80-11174
- MILITARY HELICOPTERS**
A flight investigation of performance and loads for a helicopter with NLR-IT main-rotor blade sections
[NASA-TM-80165] N80-10136
- MILITARY OPERATIONS**
Training effectiveness of the CH-47 flight simulators
[AD-A072317] N80-10236
Simulator for air-to-air combat motion system investigation
[AD-A072612] N80-10237
- MILITARY TECHNOLOGY**
Technological trends in electronic warfare --- use of radar equipment for aircraft detection and weapons control accuracy in air defense
A80-11172
Delta multiplex system DX 15-60
A80-11176

- MINICOMPUTERS**
Developing an aircraft configuration using a minicomputer
A80-11393
- MINIMUM DRAG**
Extension of Prandtl's biplane theory to wing-tail combinations
A80-12599
- MISSILE BODIES**
The analysis of wing-body combinations at moderate angles of attack --- missile bodies
[AD-A074284] N80-11040
- MISSILE CONFIGURATIONS**
Advanced missile technology. A review of technology improvement areas for cruise missiles --- including missile design, missile configurations, and aerodynamic characteristics
[NASA-CR-3187] N80-10103
- MISSILE DESIGN**
Advanced missile technology. A review of technology improvement areas for cruise missiles --- including missile design, missile configurations, and aerodynamic characteristics
[NASA-CR-3187] N80-10103
- MISSILE TRACKING**
Design and simulation of a helicopter target hand-off computer
A80-12645
- MODELS**
Opportunistic Maintenance Engine Simulation model: OMENS 2
[AD-A072516] N80-11088
- MOTION PERCEPTION**
Experiments in sensing transient rotational acceleration cues on a flight simulator
[NASA-TP-1537] N80-10193
- MOTION SIMULATORS**
The development and use of large-motion simulator systems in aeronautical research and development
A80-10765
Recent advances in control loading and motion systems used in simulation
A80-10766
Manned engineering flight simulation validation, Part 1. Simulation requirements and simulator motion system performance
[AD-A071394] N80-10235
- MRCA AIRCRAFT**
The Tornado Two takes off --- MRCA aircraft development program in Britain
A80-10899
The Tornado multi-function combat aircraft - An accomplishment of international collaboration
A80-11453
On the development of The RB 199
[DRIC-TRANS-5429] N80-11096
- MULTIPHASE FLOW**
Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
N80-10075
- MULTIPLEXING**
Delta multiplex system DX 15-60
A80-11176
Avionic system architecture investigation (AVSAR II)
[AD-A071743] N80-11080
- MULTIVARIATE STATISTICAL ANALYSIS**
A regression model of fatigue crack propagation under flight simulation loading --- for aluminum alloys
A80-12157
- N**
- NASA PROGRAMS**
Real-time data acquisition system for the NASA Langley transonic dynamics tunnel
A80-12621
NASA gear research and its probable effect on rotorcraft transmission design
A80-13068
NASA overview
N80-10109
Small transport aircraft technology. A report for the committee on commerce, science, and transportation, United States Senate
[NASA-TM-80813] N80-11953
- NAVSTAR**
Angular vibration of aircraft. Volume 1: Executive summary
[AD-A071895] N80-10197
Angular vibration of aircraft. Volume 2: Prediction methods for angular vibration
[AD-A071749] N80-10198
Effect of time dependent flight loads on JT9D-7 performance deterioration
[NASA-CR-159681] N80-10515
- NAVIGATION**
Navigation and meteorological error equations for some aerodynamic parameters
[NASA-TM-80804] N80-10150
- NAVIGATION AIDS**
Algorithms and logic for incorporating ILS NASA TCV B-737 airplane area navigation system
[NASA-TM-80167] N80-10152
Integration of GPS with inertial navigation systems
N80-10173
Inertial navigation and guidance. Citations from the international aerospace abstracts data base
[WTIS/PS-79/0825/4] N80-11064
- NAVIGATION INSTRUMENTS**
Flight-vehicle equipment --- Russian book
A80-11869
Operation of airborne equipment and flight safety --- Russian book
A80-11875
- NAVSTAR SATELLITES**
Civil applications of NAVSTAR GPS
N80-10175
- NICKEL ALLOYS**
Review of superalloy powder metallurgy processing for aircraft gas turbine applications
A80-10310
- NIGHT FLIGHTS (AIRCRAFT)**
In-flight performance evaluation of experimental information
[AD-A071701] N80-11084
- NIGHT VISION**
In-flight performance evaluation of experimental information
[AD-A071701] N80-11084
- NITROGEN OXIDES**
Pollutant emissions from 'partially' mixed turbulent flames
A80-11793
- NOISE MEASUREMENT**
Aero-acoustic tests of duct-burning turbofan exhaust nozzles
[NASA-CR-162254] N80-10204
- NOISE PREDICTION (AIRCRAFT)**
Noise of a model helicopter rotor due to ingestion of turbulence
[NASA-CR-3213] N80-11067
- NOISE REDUCTION**
Structural stiffening as an interior noise control technique for light twin-engine aircraft
N80-10192
Noise reduction
N80-10208
A method for predicting the noise levels of coannular jets with inverted velocity profiles
[NASA-CR-3176] N80-11868
- NOISE SPECTRA**
Processing noise and vibration data for gas turbine engine development
A80-12612
- NONENCLATURES**
Lexicon of aircraft transparency terms
[AD-A071319] N80-10200
- NONDESTRUCTIVE TESTS**
Flaw detection of aircraft components in operation --- Russian book
A80-11879
Reliability of nondestructive inspections
[AD-A072097] N80-10503
- NONUNIFORMITY**
Nonstationarity of heat transfer in axial turbine blading during engine startup
N80-10089
- NOZZLE DESIGN**
Systematization of simple detail parts of regulable nozzle of gas turbine engine
A80-10616
On axial turbine stage rotor blade twist with tangential tilt of the stator vanes
A80-10630

- Systematization of simple detail parts of regulable nozzle of gas turbine engine N80-10071
- Effect of several airframe/nozzle modifications on the drag of a variable-sweep bomber configuration --- conducted in langley 16 foot transonic tunnel [NASA-TM-80129] N80-10106
- NOZZLE FLOW**
- On axial turbine stage rotor blade twist with tangential tilt of the stator vanes A80-10630
- Experimental and theoretical investigation of the internal-duct hydraulics of stator and rotor blades for a semiclosed-cycle air cooling system A80-12042
- Workshop on Thrust Augmenting Ejectors [NASA-CP-2093] N80-10107
- Fuselage and nozzle pressure distributions on a 1/12-scale F-15 propulsion model at transonic speeds --- conducted in langley 16 foot transonic tunnel [NASA-TP-1521] N80-11036
- NOZZLE GEOMETRY**
- Systematization of simple detail parts of regulable nozzle of gas turbine engine N80-10071
- NUCLEAR EXPLOSIONS**
- Airblast vulnerability envelopes for supersonic aerospace vehicles [AD-A072247] N80-10201
- NUMERICAL ANALYSIS**
- On supersonic flow with attached shock waves over delta wings A80-12598
- NUMERICAL CONTROL**
- Organization of automatic control systems for technological processes in aircraft mechanical engineering --- Russian book A80-10123
- O**
- OH-6 HELICOPTER**
- A compilation and analysis of helicopter handling qualities data. Volume 1: Data compilation [NASA-CR-3144] N80-11097
- ONBOARD EQUIPMENT**
- Flight-vehicle equipment --- Russian book A80-11869
- Microprocessors as aircraft fatigue monitors A80-12640
- Instrumentation for the determination of aircraft performance from dynamic maneuvers A80-12647
- OPERATIONAL PROBLEMS**
- Take-off and landing problems of ship based RPVs A80-11175
- OPERATORS (MATHEMATICS)**
- Method of conjugate gradients for optimal control problems with state variable constraints [AD-A072258] N80-10227
- OPTICAL COMMUNICATION**
- A fiber-optic link for high-speed, DDAS-to-computer data transmission --- Digital Data Acquisition System from ramjet engine test cell to base central data processing center A80-12637
- OPTICAL MEASUREMENT**
- An optical technique for the investigation of flow in gas turbine combustors A80-11769
- A study of coherent structures in axisymmetric jets using an optical technique [AASU-341] N80-11399
- OPTICAL TRACKING**
- IR-camera for day and night fire control A80-11180
- OPTIMAL CONTROL**
- Numerical computation of neighboring optimum feedback control schemes in real-time A80-10919
- A singular perturbation analysis of optimal aerodynamic and thrust magnitude control A80-11379
- Optimal receivers and discrete-signal processors for hyperbolic radar navigation systems A80-12030
- Optimal control of flight vehicle with elastic elements N80-10037
- Multivariable digital control systems [AD-A071662] N80-10226
- Method of conjugate gradients for optimal control problems with state variable constraints [AD-A072258] N80-10227
- Inequalities and approximation with applications to VSTOL aircraft --- using control theory for optimal control approximations [AD-A071807] N80-11099
- OPTIMIZATION**
- Wind-tunnel investigation of the validity of a sonic-boom-minimization concept --- Langley Unitary Plan Wind Tunnel tests for supersonic transport design [NASA-TP-1421] N80-10102
- Use of wagner functions in airfoil design optimization [AD-A072634] N80-10139
- A study to develop optimization algorithms for aircraft wing structures [AD-A072668] N80-10196
- Advanced simulator for pilot training (ASPT): G-seat optimization [AD-A068475] N80-10233
- Fuel minimal take-off path of jet lift VTOL aircraft, log no. C3558 N80-11066
- OVERPRESSURE**
- Wind-tunnel investigation of the validity of a sonic-boom-minimization concept --- Langley Unitary Plan Wind Tunnel tests for supersonic transport design [NASA-TP-1421] N80-10102
- OXYGEN**
- Characteristics of afterburning bypass turbojet engine with oxygen injection into the afterburner chamber --- study of fuel injection into thrust chambers for thrust augmentation N80-10029
- P**
- PANELS**
- An efficient user-oriented method for calculating compressible flow in an about three-dimensional inlets --- panel method [NASA-CR-159578] N80-10134
- PARALLEL PROCESSING (COMPUTERS)**
- The array processor AP-120B/190L for simulation applications A80-11154
- PARAMETERIZATION**
- Maximum likelihood identification of linear discrete stochastic systems --- estimating and parameter identification in stochastic processes [AD-A072147] N80-10229
- PARTICLE SIZE DISTRIBUTION**
- Study of size distribution of oil drops formed in GTE oil N80-10088
- PASSENGER AIRCRAFT**
- Fire on board transport aircraft and passenger safety A80-11454
- Selecting the passenger airplane fuselage N80-11024
- Small transport aircraft technology. A report for the committee on commerce, science, and transportation, United States Senate [NASA-TM-80813] N80-11953
- PERFORMANCE**
- Dynamic characteristics of flight simulator motion systems [AGARD-AR-144] N80-10238
- PERFORMANCE PREDICTION**
- Prediction of surge-point in multi-stage axial compressors A80-10897
- Improvement of weapon system performance in air to air and air to ground operation with airborne radar A80-11170
- Effect of time dependent flight loads on JT9D-7 performance deterioration [NASA-CR-159681] N80-10515

PERFORMANCE TESTS

SUBJECT INDEX

Statistical diagnostics aircraft engines N80-11006

PERFORMANCE TESTS

Experimental techniques developed at ONERA for advanced compressor testing [ONERA, TP NO. 1979-129] A80-13060

On the influence of short shroud platforms on turbine stage operation --- performance tests for shrouded rotor blades on gas turbine engines N80-10083

A flight investigation of performance and loads for a helicopter with NLR-1T main-rotor blade sections [NASA-TM-80165] N80-10136

PERTURBATION THEORY

Numerical computation of neighboring optimum feedback control schemes in real-time A80-10919

A singular perturbation analysis of optimal aerodynamic and thrust magnitude control A80-11379

On supersonic flow with attached shock waves over delta wings A80-12598

PHASE TRANSFORMATIONS

State-of-the-art of SiAlCN materials A80-13066

PHASED ARRAYS

Antennas /Current status and problems/ --- Russian book A80-11890

Hemispherical coverage of four-faced aircraft arrays [AD-A073079] N80-11309

PILOT ERROR

Aircraft accident report - United Airlines, Inc., McDonnell-Douglas DC-8-61, N8082U, Portland, Oregon, December 28, 1978 [NTSB-88-79-7] N80-11051

PILOT PERFORMANCE

Pilot performance during simulated approaches and landings made with various computer-generated visual glidepath indicators [AD-A066220] N80-10151

Application of modified profile analysis to function testing of simulated CTOL transport touchdown-performance data [NASA-TP-1541] N80-11069

In-flight performance evaluation of experimental information [AD-A071701] N80-11084

PILOT TRAINING

The impact of the limits of simulation in extending the use of simulators in training A80-10763

The development and use of large-motion simulator systems in aeronautical research and development A80-10765

Recent advances in control loading and motion systems used in simulation A80-10766

The capability of CGI in flight simulation --- computer generated imagery A80-10768

Recent and future engineering developments in flight training simulators A80-10776

Advanced simulator for pilot training (ASPT): G-seat optimization [AD-A068475] N80-10233

PILOTS (PERSONNEL)

Aircrew displays and avionics for application in a future national airspace system [NASA-TM-80095] N80-11052

PIPE FLOW

Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber A80-10196

PISTON THEORY

Calculation of working process in 'slow-compression' piston-type aerodynamic tube A80-10607

PITCH (INCLINATION)

Simulator for air-to-air combat motion system investigation [AD-A072612] N80-10237

A comparison of the pitching and plunging response of an oscillating airfoil [NASA-CR-3172] N80-11030

PNEUMATIC CONTROL

Pneumatic distributor for turbojet engine control system A80-10635

Pneumatic distributor for turbojet engine control system --- TU-154 aircraft N80-10091

Advanced simulator for pilot training (ASPT): G-seat optimization [AD-A068475] N80-10233

POLLUTION CONTROL

Emission reduction N80-10207

Noise reduction N80-10208

POSITION INDICATORS

Algorithms and logic for incorporating ILS NASA TCV B-737 airplane area navigation system [NASA-TM-80167] N80-10152

POTENTIAL FLOW

Motion of rectangular wing between parallel walls N80-10050

POWDER METALLURGY

Review of superalloy powder metallurgy processing for aircraft gas turbine applications A80-10310

POWER CONDITIONING

Generating innovation for Navy's F-18 A80-12312

POWERED LIFT AIRCRAFT

Workshop on Thrust Augmenting Ejectors [NASA-CP-2093] N80-10107

PRANDTL NUMBER

Extension of Prandtl's biplane theory to wing-tail combinations A80-12599

PREDICTION ANALYSIS TECHNIQUES

Predicted jet thickness effects on the lift of an augmentor wing A80-12597

Estimation of attainable leading-edge thrust for wings at subsonic and supersonic speeds [NASA-TP-1500] N80-10105

Prediction of helicopter rotor downwash in hover and vertical flight [ARL-AERO-REPT-150] N80-11032

Improved methods for predicting spectrum loading effects, phase 1 report, volume 2: Test data [AD-A072387] N80-11070

Prediction of lateral aerodynamic loads on fighter aircraft at high angles of attack [AD-A071893] N80-11073

A method for evaluating aircraft take-off performance [REPT-1663] N80-11076

PRESSURE

Pressure and velocity measurements in a three-dimensional wall jet N80-10126

PRESSURE DISTRIBUTION

Laminar boundary layer calculation from experimental pressure distribution N80-10045

Fuselage and nozzle pressure distributions on a 1/12-scale F-15 propulsion model at transonic speeds --- conducted in langley 16 foot transonic tunnel [NASA-TP-1521] N80-11036

PRESSURE MEASUREMENTS

Measurements on a three-dimensional swept wing at low speeds. Part 1: The flow around the leading edge [FFA-130-PT-1] N80-11044

Measurements on a three-dimensional swept wing at low speeds. Part 2: The flow in the boundary layer on the main wing [FFA-131-PT-2] N80-11045

PRESSURE SENSORS

Measuring unsteady pressure on rotating compressor blades --- with semiconductor strain gages under gas turbine engine operating conditions A80-12630

PROCESS CONTROL (INDUSTRY)

Organization of automatic control systems for technological processes in aircraft mechanical engineering --- Russian book A80-10123

- PRODUCT DEVELOPMENT**
The interrelationships between engineering development simulation and flight simulation --- aircraft design development simulator technology transfer to flight simulator and training program improvements
A80-10777
- NASA gear research and its probable effect on rotorcraft transmission design
A80-13068
- PRODUCTION ENGINEERING**
Organization of automatic control systems for technological processes in aircraft mechanical engineering --- Russian book
A80-10123
--- Book
A80-12076
- PRODUCTION MANAGEMENT**
F-16 co-production - An American point of view
A80-12315
- PROFILE METHOD (FORECASTING)**
IPR aircraft handled forecast by air route traffic control center, fiscal years 1979-1990 [AD-A070786]
N80-10153
Application of modified profile analysis to function testing of simulated CTOL transport touchdown-performance data [NASA-TP-1541]
N80-11069
- PROPELLER BLADES**
Construction of a nonstationary nonlinear propeller theory
A80-12911
Aircraft control by propeller cyclic blades [NASA-CR-3212]
N80-11031
- PROPULSION**
Computational fluid mechanics of internal flow
N80-10211
Control technology
N80-10215
- PROPULSION SYSTEM CONFIGURATIONS**
Recent developments in ejector technology in the Air Force: An overview
N80-10108
Supersonic propulsion technology --- variable cycle engines
N80-10216
Hypersonic propulsion --- supersonic combustion ramjet engines
N80-10217
Vertical Takeoff and Landing (VTOL) propulsion technology
N80-10218
High-performance-vehicle technology --- fighter aircraft propulsion
N80-10219
- PROPULSION SYSTEM PERFORMANCE**
Turbine engine altitude chamber and flight testing with liquid hydrogen
A80-10034
Computerized systems analysis and optimization of aircraft engine performance, weight, and life cycle costs
A80-10035
Aeropropulsion 1979 --- conferences [NASA-CP-2092]
N80-10205
Supersonic propulsion technology --- variable cycle engines
N80-10216
Hypersonic propulsion --- supersonic combustion ramjet engines
N80-10217
Vertical Takeoff and Landing (VTOL) propulsion technology
N80-10218
High-performance-vehicle technology --- fighter aircraft propulsion
N80-10219
Effect of time dependent flight loads on JT9D-7 performance deterioration [NASA-CR-159681]
N80-10515
- PROPULSIVE EFFICIENCY**
Recent developments in ejector technology in the Air Force: An overview
N80-10108
NASA overview
N80-10109
- PULSE COMPRESSION**
A pulse compression, precision DME system
A80-11351
- PULSE RADAR**
Use of sign statistics for sequential signal detection in a pulse radar system
A80-12031
- Q**
- QUALITY CONTROL**
Flaw detection of aircraft components in operation --- Russian book
A80-11879
Alternative jet aircraft fuels
N80-10209
- R**
- RADAR BEACONS**
Evaluation of transponder antenna coverage/ATCREs during simulated flights of aircraft [AD-A073547]
N80-11275
- RADAR DETECTION**
Use of sign statistics for sequential signal detection in a pulse radar system
A80-12031
- RADAR EQUIPMENT**
E-3A sentry, airborne early warning and control for Europe
A80-11168
The 'Viggen' multimode radar
A80-11171
- RADAR NAVIGATION**
The collision avoidance problem requires a mix of partial solutions
A80-12930
- RADAR RANGE**
Required radar ranges for AEW aircraft
A80-11649
- RADAR TARGETS**
The target tracking problem using airborne radar under ECM environment
A80-11173
- RADAR TRACKING**
Radar remoting --- command and control center system for military air operations
A80-11164
Technological trends in electronic warfare --- use of radar equipment for aircraft detection and weapons control accuracy in air defense
A80-11172
The target tracking problem using airborne radar under ECM environment
A80-11173
- RADIO ALTIMETERS**
F-4 radar altimeter aural warning [AD-A072870]
N80-11085
- RADIO ANTENNAS**
Antennas /Current status and problems/ --- Russian book
A80-11890
- RADIO RECEIVERS**
Optimal receivers and discrete-signal processors for hyperbolic radar navigation systems
A80-12030
- RANDOM SIGNALS**
Use of sign statistics for sequential signal detection in a pulse radar system
A80-12031
- REAL TIME OPERATION**
Numerical computation of neighboring optimum feedback control schemes in real-time
A80-10919
Real-time data acquisition system for the NASA Langley transonic dynamics tunnel
A80-12621
- RECONNAISSANCE AIRCRAFT**
In Soviet service. VII - Mikoyan Foxbat --- Soviet MiG-25 program
A80-10900
- RECTANGULAR WINGS**
Motion of rectangular wing between parallel walls
N80-10050
- REFRACTORY MATERIALS**
State-of-the-art of SiAlON materials
A80-13066
- REGENERATORS**
Study of heat-pipe heat exchanger in the small gas turbine engine system
N80-10022

REGULATIONS

SUBJECT INDEX

REGULATIONS

- Factors affecting the retirement of commercial transport jet aircraft [NASA-CR-152308] N80-10148
- REINFORCEMENT (STRUCTURES)**
Structural stiffening as an interior noise control technique for light twin-engine aircraft N80-10192
- RELIABILITY ENGINEERING**
Reliability of nondestructive inspections [AD-A072097] N80-10503
- REMOTE CONTROL**
Radar remoting --- command and control center system for military air operations A80-11164
- REMOTE SENSORS**
IR-camera for day and night fire control A80-11180
- REHOTELY PILOTED VEHICLES**
Technical concept for a strike-BPV flight guidance and weapon delivery system A80-11174
Take-off and landing problems of ship based RPVs A80-11175
- RESEARCH AND DEVELOPMENT**
The development and use of large-motion simulator systems in aeronautical research and development A80-10765
- RESOURCES MANAGEMENT**
An engine fuel chemistry solution to the problem of jet fuel supplies A80-10199
- RIGID ROTOR HELICOPTERS**
On the acoustic power emitted by helicopter rotor blades at low tip speeds A80-12375
- ROLL**
Experiments in sensing transient rotational acceleration cues on a flight simulator [NASA-TP-1537] N80-10193
Light airplane crash tests at three roll angles [NASA-TP-1477] N80-10512
- ROTARY WINGS**
Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil A80-11432
A flight investigation of performance and loads for a helicopter with NLR-1T main-rotor blade sections [NASA-TM-80165] N80-10136
Coupled rotor and fuselage equations of motion [NASA-TM-81153] N80-10516
Prediction of helicopter rotor downwash in hover and vertical flight [ARL-AERO-REPT-150] N80-11032
Noise of a model helicopter rotor due to ingestion of turbulence [NASA-CR-3213] N80-11067
- ROTATING DISKS**
Use of the method of variable directions for numerical study of the temperature states of a turbine disk with blades --- temperature distribution of rotating disk turbine blades using linear transformation N80-10028
- ROTOR AERODYNAMICS**
Three-dimensional velocity distribution between stator blades and unsteady force on a blade due to passing wakes A80-10011
Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil A80-11432
Construction of a nonstationary nonlinear propeller theory A80-12911
Characteristics of lightly loaded fan rotor blade wakes [NASA-CR-3188] N80-11034
- ROTOR BLADES**
On the acoustic power emitted by helicopter rotor blades at low tip speeds A80-12375
- ROTOR BLADES (TURBOMACHINERY)**
Long-lift GTE operation based on technical condition --- fatigue and service life monitoring of turbine blades in aircraft engines N80-10027
- On the influence of short shroud platforms on turbine stage operation --- performance tests for shrouded rotor blades on gas turbine engines N80-10083
- Nonstationarity of heat transfer in axial turbine blading during engine startup N80-10089
- Characteristics of lightly loaded fan rotor blade wakes [NASA-CR-3188] N80-11034
- ROTOR SPEED**
Cross flow fan experiment development and finite element modeling N80-10098
- ROTORS**
Transient, nearly periodic rotor oscillations --- Russian book A80-10124
Experimental investigation of the strength of rotor materials in the presence of surface cracks A80-10482
Fracture and fatigue properties of 1Cr-Mo-v bainitic turbine rotor steels [EPRI-NP-1023] N80-11201
- RUNWAY CONDITIONS**
Method of determining the load classification number, LCN, of a semirigid composite runway surface A80-10237
- RUNWAYS**
Requirements for short instrument runways A80-11653
Application of the design diagram for a layered viscoelastic medium to the evaluation of the stress-strain state of road and runway surfaces for moving loads A80-12537
A literature search and review of the dynamics of aircraft-surface interaction [AD-A070940] N80-10199

S

SAFETY DEVICES

- Fire on board transport aircraft and passenger safety A80-11454

SANDWICH STRUCTURES

- Design and operation of multi-specimen fully reversed fatigue systems for advanced composite materials A80-10206

SATELLITE ANTENNAS

- UHF coplanar-slot antenna for aircraft-to-satellite data communications A80-13064

SATELLITE NETWORKS

- UHF coplanar-slot antenna for aircraft-to-satellite data communications A80-13064

SATELLITE TRANSMISSION

- Nova satellite time experiment --- global time synchronization using Cs clock transfer A80-10268

SCALE MODELS

- Low-speed wind-tunnel tests of a 1/10-scale model of an advanced arrow-wing supersonic cruise configuration designed for cruise at Mach 2.2 --- Langley Full Scale Wind Tunnel [NASA-TM-80152] N80-10135

SEALS (STOPPERS)

- Development of improved abradable compressor gas path seal [AD-A072171] N80-11474

SEATS

- Advanced simulator for pilot training (ASPT): G-seat optimization [AD-A068475] N80-10233

SECONDARY FLOW

- Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers N80-10075

SEPARATED FLOW

- A Laser Doppler Velocimeter system to investigate unsteady flow separation A80-12634

- An investigation of corner separation within a thrust augments having Coanda jets [NADC-76153-30] N80-10122
- SEQUENTIAL ANALYSIS**
Use of sign statistics for sequential signal detection in a pulse radar system A80-12031
- SERVICE LIFE**
Long-lift GTE operation based on technical condition --- fatigue and service life monitoring of turbine blades in aircraft engines N80-10027
- Factors affecting the retirement of commercial transport jet aircraft [NASA-CR-152308] N80-10148
- SERVO MECHANISMS**
A hydraulic actuator mechanism to control aircraft spoiler movements through dual input commands [NASA-CASE-LAR-12412-1] N80-11065
- SHALE OIL**
Alternative jet aircraft fuels N80-10209
- SHOCK LAYERS**
Hypersonic viscous shock layer on sweptback wings of infinite span at different angles of attack A80-11208
- SHOCK WAVE PROFILES**
Steady flow over the pressure side of a piecewise-flat delta wing with supersonic leading edges A80-12908
- SHOCK WAVES**
On supersonic flow with attached shock waves over delta wings A80-12598
- SHORT HAUL AIRCRAFT**
Small transport aircraft technology. A report for the committee on commerce, science, and transportation, United States Senate [NASA-TM-80813] N80-11953
- SHORT TAKEOFF AIRCRAFT**
Design and test of a prototype scale ejector wing N80-10131
- Fuel minimal take-off path of jet lift VTOL aircraft, log no. C3558 N80-11066
- New aircraft technology: Report on the Farnborough International Air Show [PB-298345/0] N80-11078
- SHROUDED TURBINES**
On the influence of short shroud platforms on turbine stage operation A80-10627
- SHROUDS**
On the influence of short shroud platforms on turbine stage operation --- performance tests for shrouded rotor blades on gas turbine engines N80-10083
- SIDESLIP**
Wing-body yawing moment and sideforce derivatives due to sideslip: N_y and Y_v [ESDU-79006] N80-10097
- SIGNAL PROCESSING**
Antennas /Current status and problems/ --- Russian book A80-11890
- Optimal receivers and discrete-signal processors for hyperbolic radar navigation systems A80-12030
- SIGNAL TO NOISE RATIOS**
Use of sign statistics for sequential signal detection in a pulse radar system A80-12031
- SILICON NITRIDES**
State-of-the-art of SiAlON materials A80-13066
- SIMULATION**
Simulated Mission Endurance Test (SMET) for an aircraft engine to be used in a fighter/attack role [AD-A071907] N80-11089
- SIZE (DIMENSIONS)**
Study of heat-pipe heat exchanger in the small gas turbine engine system N80-10022
- SLENDER WINGS**
Technical evaluation report on the fluid dynamics panel Symposium on High Angle of attack aerodynamics --- slender wings, bodies of revolution, and body-wing configurations [AGARD-AR-145] N80-10147
- SLOT ANTENNAS**
URF coplanar-slot antenna for aircraft-to-satellite data communications A80-13064
- SODIUM**
Analysis of the response of a thermal barrier coating to sodium and vanadium doped combustion gases [NASA-TM-79205] N80-10344
- SOLID SOLUTIONS**
State-of-the-art of SiAlON materials A80-13066
- SOLID-SOLID INTERFACES**
The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication --- in aircraft fuel systems [ASLE PREPRINT 79-AM-5E-1] A80-12110
- SONIC BOOMS**
Wind-tunnel investigation of the validity of a sonic-boom-minimization concept --- Langley Unitary Plan Wind Tunnel tests for supersonic transport design [NASA-TP-1421] N80-10102
- SOUND TRANSMISSION**
Studies of the acoustic transmission characteristics of coaxial nozzles with inverted velocity profiles, volume 1 --- jet engine noise radiation through coannular exhaust nozzles [NASA-CR-159698] N80-11870
- SPACECRAFT COMMUNICATION**
URF coplanar-slot antenna for aircraft-to-satellite data communications A80-13064
- SPACECRAFT CONSTRUCTION MATERIALS**
Design and operation of multi-specimen fully reversed fatigue systems for advanced composite materials A80-10206
- SPECTRAL RESOLUTION**
Processing noise and vibration data for gas turbine engine development A80-12612
- SPOILERS**
A hydraulic actuator mechanism to control aircraft spoiler movements through dual input commands [NASA-CASE-LAR-12412-1] N80-11065
- SPRAY CHARACTERISTICS**
Burning sprays of jet A fuel-water emulsions A80-11650
- Height of spray produced by vertical takeoff and landing (VTOL) aircraft [AD-A073095] N80-11075
- STAGNATION FLOW**
Gas curtains in gas turbine engines N80-10063
- STATISTICAL ANALYSIS**
Statistical diagnostics aircraft engines N80-11006
- STATOR BLADES**
Three-dimensional velocity distribution between stator blades and unsteady force on a blade due to passing wakes A80-10011
- STATORS**
On axial turbine stage rotor blade twist with tangential tilt of the stator vanes A80-10630
- The effect of interblade phase angle and solidity on the time variant aerodynamic response of a compressor stator [AD-A071878] N80-11092
- STEELS**
The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication --- in aircraft fuel systems [ASLE PREPRINT 79-AM-5E-1] A80-12110
- Fracture and fatigue properties of 1Cr-Mo-V bainitic turbine rotor steels [EPRI-NP-1023] N80-11201

STEP FUNCTIONS

SUBJECT INDEX

STEP FUNCTIONS

Flying qualities research for highly augmented aircraft
[RE-582] N80-10194

STEREOPHOTOGRAPHY
Study of a stereo electro-optical tracker system for the measurement of model deformations at the national transonic facility
[NASA-CR-159146] N80-10476

STIFFNESS
On thin-wall beam effective stiffness N80-10057

STOCHASTIC PROCESSES
Maximum likelihood identification of linear discrete stochastic systems --- estimating and parameter identification in stochastic processes
[AD-A072147] N80-10229

STRAIN GAGES
Measuring unsteady pressure on rotating compressor blades --- with semiconductor strain gages under gas turbine engine operating conditions A80-12630
Determination of strain fields near concentrators from strain gage indicators N80-10054

STRAPDOWN INERTIAL GUIDANCE
Design of a strapdown navigator aided by position measurements A80-11187
Calibration of a low cost strapdown inertial guidance system A80-12642
Instrumentation for the determination of aircraft performance from dynamic maneuvers A80-12647

STRESS CONCENTRATION
Determination of strain fields near concentrators from strain gage indicators N80-10054

STRESS-STRAIN RELATIONSHIPS
Application of the design diagram for a layered viscoelastic medium to the evaluation of the stress-strain state of road and runway surfaces for moving loads A80-12537

STRUCTURAL ANALYSIS
A regression model of fatigue crack propagation under flight simulation loading --- for aluminum alloys A80-12157
Structural analysis of variable-sweep wings N80-10053
Effect of time dependent flight loads on JT9D-7 performance deterioration
[NASA-CR-159681] N80-10515

STRUCTURAL DESIGN
Considerations of some critical ejector problems --- for the V/STOL aircraft N80-10127
Use of wagner functions in airfoil design optimization
[AD-A072634] N80-10139

STRUCTURAL ENGINEERING
Systematization of simple detail parts of regulable nozzle of gas turbine engine N80-10071
Design and performance evaluation of supercritical airfoils for axial flow compressors
[AD-A071206] N80-11093

STRUCTURAL MEMBERS
Structural analysis of variable-sweep wings N80-10053

STRUCTURAL STABILITY
Transient, nearly periodic rotor oscillations --- Russian book A80-10124
Experimental investigation of the strength of rotor materials in the presence of surface cracks A80-10482
On the empennage snap-through problem N80-10047

STRUCTURAL VIBRATION
Transient, nearly periodic rotor oscillations --- Russian book A80-10124
Wind tunnel model deflection system A80-12620

SUBSONIC AIRCRAFT

A survey of the literature on surface roughness effects on the drag of subsonic aircraft
[PPA-AU-1224] N80-11049

SUBSONIC FLOW
Entrainment characteristics of unsteady subsonic jets --- for V/STOL aircraft N80-10124

SUBSONIC SPEED
Effect of winglets on a first-generation jet transport wing. 6: Stability characteristics for a full-span model at subsonic speeds --- conducted in Langley 8 foot transonic pressure tunnel
[NASA-TP-1330] N80-10101
Estimation of attainable leading-edge thrust for wings at subsonic and supersonic speeds
[NASA-TP-1500] N80-10105

SUPERCONDUCTORS
Program for the development of a superconducting generator, phase 2 and 3
[AD-A072093] N80-10439
Experimental feasibility study of the application of magnetic suspension techniques to large-scale aerodynamic test facilities --- cryogenic traonics wind tunnel
[NASA-CR-146761] N80-11102

SUPERCritical WINGS
Design and performance evaluation of supercritical airfoils for axial flow compressors
[AD-A071206] N80-11093

SUPERSONIC AIRCRAFT
Integration of ejectors into high-speed aircraft --- forebody effects N80-10119
Airblast vulnerability envelopes for supersonic aerospace vehicles
[AD-A072247] N80-10201

SUPERSONIC AIRFOILS
Steady flow over the pressure side of a piecewise-flat delta wing with supersonic leading edges A80-12908

SUPERSONIC COMBUSTION RAMJET ENGINES
Supersonic propulsion --- supersonic combustion ramjet engines N80-10217

SUPERSONIC COMMERCIAL AIR TRANSPORT
Supersonic propulsion technology --- variable cycle engines N80-10216

SUPERSONIC CRUISE AIRCRAFT RESEARCH
Low-speed wind-tunnel tests of a 1/10-scale model of an advanced arrow-wing supersonic cruise configuration designed for cruise at Mach 2.2 --- Langley Full Scale Wind Tunnel
[NASA-TM-80152] N80-10135
Experimental evaluation of a low emissions high performance duct burner for Variable Cycle Engines (VCE) --- supersonic cruise aircraft research
[NASA-CR-159694] N80-10221

SUPERSONIC FLOW
Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade A80-11255
On supersonic flow with attached shock waves over delta wings A80-12598
Analog modeling in studying supersonic flow around a wing and its governing analog-criteria N80-10038
Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed
[AD-A072098] N80-10143

SUPERSONIC SPEEDS
Estimation of attainable leading-edge thrust for wings at subsonic and supersonic speeds
[NASA-TP-1500] N80-10105
Overall aerodynamic characteristics of caret and delta wings at supersonic speeds N80-11022

SUPERSONIC TRANSPORTS
 Wind-tunnel investigation of the validity of a sonic-boom-minimization concept --- Langley Unitary Plan Wind Tunnel tests for supersonic transport design [NASA-TP-1421] N80-10102
 VSCE technology definition study [NASA-CR-159730] N80-10222

SUPERSONIC TURBINES
 VSCE technology definition study [NASA-CR-159730] N80-10222

SURFACE CRACKS
 Experimental investigation of the strength of rotor materials in the presence of surface cracks A80-10482

SURFACE LAYERS
 Application of the design diagram for a layered viscoelastic medium to the evaluation of the stress-strain state of road and runway surfaces for moving loads A80-12537

SURFACE ROUGHNESS
 A literature search and review of the dynamics of aircraft-surface interaction [AD-A070940] N80-10199

SURFACE ROUGHNESS EFFECTS
 A survey of the literature on surface roughness effects on the drag of subsonic aircraft [PPA-AU-1224] N80-11049

SURGES
 Prediction of surge-point in multi-stage axial compressors A80-10897

SURVEILLANCE RADAR
 Radar remoting --- command and control center system for military air operations A80-11164
 Surveillance and communication systems using mobile media on the airport surface [FUE-13-1978] N80-11110

SWEEP FREQUENCY
 Swept frequency scattering measurements of aircraft --- target identification [AD-A071474] N80-10420

SWEEP FORWARD WINGS
 Study of the feasibility aspects of flight testing an aeroelastically tailored forward swept research wing on a BQM-34F drone vehicle [NASA-CR-159149] N80-10195

SWEEP WINGS
 Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2 N80-10044

SWEPTBACK WINGS
 Measurements on a three-dimensional swept wing at low speeds. Part 1: The flow around the leading edge [PPA-130-PT-1] N80-11044
 Measurements on a three-dimensional swept wing at low speeds. Part 2: The flow in the boundary layer on the main wing [PPA-131-PT-2] N80-11045

SYNTHETIC FIBERS
 Electrical charging of fabric and film materials N80-10048

SYSTEM EFFECTIVENESS
 Technological trends in electronic warfare --- use of radar equipment for aircraft detection and weapons control accuracy in air defense A80-11172

SYSTEMS ANALYSIS
 Systems analysis of arctic fuels dispensing equipment [AD-A071815] N80-11106

SYSTEMS ENGINEERING
 Technological trends in electronic warfare --- use of radar equipment for aircraft detection and weapons control accuracy in air defense A80-11172
 Design of a strapdown navigator aided by position measurements A80-11187
 Definition of a system concept study for future air traffic control A80-11652
 Multivariable digital control systems [AD-A071662] N80-10226

Manned engineering flight simulation validation, Part 1. Simulation requirements and simulator motion system performance [AD-A071394] N80-10235
 On the development of The RB 199 [DRIC-TRANS-5429] N80-11096

T

TACAN
 Integration of GPS with inertial navigation systems N80-10173
 Simulator for air-to-air combat motion system investigation [AD-A072612] N80-10237

TAKOFF
 A method for evaluating aircraft take-off performance [REPT-1663] N80-11076

TAKOFF RUNS
 Take-off and landing problems of ship based RPVs A80-11175
 A literature search and review of the dynamics of aircraft-surface interaction [AD-A070940] N80-10199

TARGET ACQUISITION
 IR-camera for day and night fire control A80-11180
 Design and simulation of a helicopter target hand-off computer A80-12645

TARGET RECOGNITION
 Swept frequency scattering measurements of aircraft --- target identification [AD-A071474] N80-10420

TECHNOLOGICAL FORECASTING
 Developing large helicopters A80-11395
 Technical challenges in developing the new wave of small and medium helicopters A80-11396
 Cargo Logistics Airlift Systems Study (CLASS). Volume 4: Future requirements of dedicated freighter aircraft to year 2008 [NASA-CR-158950-VOL-4] N80-10149
 Multirole cargo aircraft options and configurations --- economic analysis [NASA-TN-80177] N80-11053

TECHNOLOGY ASSESSMENT
 Recent and future engineering developments in flight training simulators A80-10776
 Advanced missile technology. A review of technology improvement areas for cruise missiles --- including missile design, missile configurations, and aerodynamic characteristics [NASA-CR-3187] N80-10103
 Recent developments in ejector technology in the Air Force: An overview N80-10108
 Turbomachinery technology N80-10212
 Control technology N80-10215
 VSCE technology definition study [NASA-CR-159730] N80-10222
 Small transport aircraft technology. A report for the committee on commerce, science, and transportation, United States Senate [NASA-TN-80813] N80-11953

TECHNOLOGY TRANSFER
 The interrelationships between engineering development simulation and flight simulation --- aircraft design development simulator technology transfer to flight simulator and training program improvements A80-10777
 F-16 co-production - An American point of view A80-12315

TECHNOLOGY UTILIZATION
 A helmet-mounted sight using C.C.D. technology A80-10884
 Applied technology in turbofan engines A80-12003
 Civil applications of NAVSTAR GPS N80-10175

TEETERING

A flight investigation of performance and loads for a helicopter with NLR-1T main-rotor blade sections
[NASA-TM-80165] N80-10136

TEMPERATURE DISTRIBUTION
Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation A80-10610
Computer calculation of stationary temperature fields in air-cooled turbine rotor blades A80-10612
Computer calculation of stationary temperature fields in cooled turbine discs A80-10614
Use of the method of variable directions for numerical study of the temperature states of a turbine disk with blades --- temperature distribution of rotating disk turbine blades using linear transformation N80-10028
Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation --- of fuel-air parameters N80-10065

TEMPERATURE GRADIENTS
Nonstationarity of heat transfer in axial turbine blading during engine startup N80-10089

TERCOM
Design of a strapdown navigator aided by position measurements A80-11187

TERMINAL FACILITIES
Requirements for short instrument runways A80-11653

TEST EQUIPMENT
Application of the discrete-phase method /DPM/ to the study and control of aircraft turbine engine blade vibrations. I A80-10234
Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade A80-11255
Microprocessors as aircraft fatigue monitors A80-12640
Experimental techniques developed at ONERA for advanced compressor testing [ONERA, TP NO. 1979-129] A80-13060
A simple apparatus for the experimental study of non-steady flow thrust-augmenter ejector configurations N80-10125

TEST FACILITIES
A V/STOL ground effects test facility A80-12618
A survey of laser Doppler velocimeter applications at the Arnold Engineering Development Center A80-12638

THERMAL FATIGUE
Component evaluation and engine demonstration of gamma/gamma-prime-delta D.S. eutectic solid turbine blades A80-10289

THERMAL PROTECTION
Analysis of the response of a thermal barrier coating to sodium and vanadium doped combustion gases [NASA-TM-79205] N80-10344

THERMAL STABILITY
Behavior of lightly confined high explosives in a jet-fuel fire [UCRL-52659] N80-11247

THERMODYNAMIC PROPERTIES
Calculation of working process in 'slow-compression' piston-type aerodynamic tube A80-10607
Dynamics of diesel fuel combustion in turbulent flow N80-10074

THERMODYNAMICS
Parametric method of aircraft engine status diagnostics based on limited information N80-10003

THIN WALLS

Analysis of thin-wall beams by the method of segments N80-10043
On thin-wall beam effective stiffness N80-10057

THREE DIMENSIONAL FLOW
Three-dimensional velocity distribution between stator blades and unsteady force on a blade due to passing wakes A80-10011
Parameters of spatial flow past a hydrofoil near the free surface of a ponderable liquid A80-11205
Pressure and velocity measurements in a three-dimensional wall jet N80-10126
An efficient user-oriented method for calculating compressible flow in an about three-dimensional inlets --- panel method [NASA-CR-159578] N80-10134

THREE DIMENSIONAL MOTION
Method for calculating wing loading during maneuvering flight along a three-dimensional curved path A80-11647

THRUST

Estimation of attainable leading-edge thrust for wings at subsonic and supersonic speeds [NASA-TP-1500] N80-10105

THRUST AUGMENTATION
Characteristics of afterburning bypass turbojet engine with oxygen injection into the afterburner chamber --- study of fuel injection into thrust chambers for thrust augmentation N80-10029
Workshop on Thrust Augmenting Ejectors [NASA-CP-2093] N80-10107
Recent developments in ejector technology in the Air Force: An overview N80-10108
NASA overview N80-10109
Some tests on small-scale rectangular throat ejector --- thrust augmentation for V/STOL aircraft N80-10120
Augmenting ejector endwall effects --- V/STOL aircraft N80-10121
An investigation of corner separation within a thrust augmentor having Coanda jets [NADC-76153-30] N80-10122
Entrainment characteristics of unsteady subsonic jets --- for V/STOL aircraft N80-10124
A simple apparatus for the experimental study of non-steady flow thrust-augmenter ejector configurations N80-10125
Pressure and velocity measurements in a three-dimensional wall jet N80-10126
Considerations of some critical ejector problems --- for the V/STOL aircraft N80-10127
Reaction control system augmentation for V/STOL aircraft N80-10130
Design and test of a prototype scale ejector wing N80-10131
The external augmentor concept for V/STOL aircraft N80-10132
The XPV-12A Thrust-Augmented Wing (TAW) prototype aircraft N80-10133

THRUST CHAMBERS
Characteristics of afterburning bypass turbojet engine with oxygen injection into the afterburner chamber --- study of fuel injection into thrust chambers for thrust augmentation N80-10029

THRUST CONTROL
Identification and dual adaptive control of a turbojet engine A80-10033
A singular perturbation analysis of optimal aerodynamic and thrust magnitude control A80-11379

SUBJECT INDEX

TURBINE ENGINES

- Reaction control system augmentation for V/STOL aircraft
N80-10130
- THUNDERSTORMS**
Flight through thunderstorm outflows
A80-11648
- TIME SIGNALS**
Nova satellite time experiment --- global time synchronization using Cs clock transfer
A80-10268
- TIP SPEED**
On the acoustic power emitted by helicopter rotor blades at low tip speeds
A80-12375
- TORQUE**
Measurement of liquid pump torque in the starting regime
A80-10611
- TOUCHDOWN**
Application of modified profile analysis to function testing of simulated CTOL transport touchdown-performance data [NASA-TP-1541]
N80-11069
- TRACKING (POSITION)**
Avionics master plan data base mechanization architecture [AD-A071545]
N80-11083
- TRACKING NETWORKS**
Study of a stereo electro-optical tracker system for the measurement of model deformations at the national transonic facility [NASA-CR-159146]
N80-10476
- TRAILING-EDGE FLAPS**
Predicted jet thickness effects on the lift of an augmentor wing
A80-12597
- Pressure and velocity measurements in a three-dimensional wall jet
N80-10126
- On a smooth approximation method and its application to mathematical description of wing aerodynamic characteristics
N80-11011
- Influence of wing deformation on trailing-edge flap deflections
N80-11012
- TRAINING SIMULATORS**
The development and use of large-motion simulator systems in aeronautical research and development
A80-10765
- Recent advances in control loading and motion systems used in simulation
A80-10766
- The capability of CGI in flight simulation --- computer generated imagery
A80-10768
- TRAJECTORY ANALYSIS**
Method for calculating wing loading during maneuvering flight along a three-dimensional curved path
A80-11647
- TRAJECTORY OPTIMIZATION**
Navigation and meteorological error equations for some aerodynamic parameters [NASA-TN-80804]
N80-10150
- TRANSIENT PRESSURES**
Measuring unsteady pressure on rotating compressor blades --- with semiconductor strain gages under gas turbine engine operating conditions
A80-12630
- TRANSLATIONAL MOTION**
The development and use of large-motion simulator systems in aeronautical research and development
A80-10765
- TRANSMISSIONS (MACHINE ELEMENTS)**
NASA gear research and its probable effect on rotorcraft transmission design
A80-13068
- TRANSONIC COMPRESSORS**
Experimental study of low aspect ratio compressor blading [NASA-TN-79280]
N80-11037
- TRANSONIC FLIGHT**
The variable-geometry wing
A80-10235
- TRANSONIC FLOW**
Blow-down and sled-run simulation of transonic flow
A80-12423
- A survey of laser Doppler velocimeter applications at the Arnold Engineering Development Center
A80-12638
- TRANSONIC FLUTTER**
Active flutter control in transonic conditions [ONERA, TP NO. 1979-100]
A80-13052
- TRANSONIC SPEED**
Evaluation of an ejector powered engine simulator at transonic Mach numbers [AD-A071607]
N80-11094
- TRANSONIC WIND TUNNELS**
Real-time data acquisition system for the NASA Langley transonic dynamics tunnel
A80-12621
- Experimental feasibility study of the application of magnetic suspension techniques to large-scale aerodynamic test facilities --- cryogenic traonics wind tunnel [NASA-CR-146761]
N80-11102
- TRANSPARENCE**
Lexicon of aircraft transparency terms [AD-A071319]
N80-10200
- TRANSPONDERS**
Evaluation of transponder antenna coverage/ATCRBS during simulated flights of aircraft [AD-A073547]
N80-11275
- TRANSPORT AIRCRAFT**
Effect of winglets on a first-generation jet transport wing. 6: Stability characteristics for a full-span model at subsonic speeds --- conducted in Langley 8 foot transonic pressure tunnel [NASA-TP-1330]
N80-10101
- Factors affecting the retirement of commercial transport jet aircraft [NASA-CR-152308]
N80-10148
- Evaluation of dais technology applied to the integrated navigation system of a tactical transport [AD-A073068]
N80-11061
- TU-154 AIRCRAFT**
Pneumatic distributor for turbojet engine control system --- TU-154 aircraft
N80-10091
- TURBINE BLADES**
Application of the discrete-phase method /DPM/ to the study and control of aircraft turbine engine blade vibrations. I
A80-10234
- Component evaluation and engine demonstration of gamma/gamma-prime-delta D.S. eutectic solid turbine blades
A80-10289
- Computer calculation of stationary temperature fields in air-cooled turbine rotor blades
A80-10612
- On the influence of short shroud platforms on turbine stage operation
A80-10627
- On axial turbine stage rotor blade twist with tangential tilt of the stator vanes
A80-10630
- Nonstationarity of heat transfer in axial turbine blading during engine startup
A80-10633
- Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade
A80-11255
- Applied technology in turbofan engines
A80-12003
- Long-lift GTE operation based on technical condition --- fatigue and service life monitoring of turbine blades in aircraft engines
N80-10027
- Use of the method of variable directions for numerical study of the temperature states of a turbine disk with blades --- temperature distribution of rotating disk turbine blades using linear transformation
N80-10028
- TURBINE ENGINES**
Turbine engine altitude chamber and flight testing with liquid hydrogen
A80-10034
- Light turbine helicopters to the year 2000
A80-11397
- Aeropropulsion 1979 --- conferences [NASA-CP-2092]
N80-10205

TURBINE EXHAUST NOZZLES

SUBJECT INDEX

Materials and structures technology N80-10210

Turbomachinery technology N80-10212

Mechanical components N80-10213

Mechanism of turbine engine lubricant deposition [AD-A072557] N80-10223

The use of the Maurer factor for estimating the cost of a turbine engine in the early stages of development [AD-A073018] N80-11095

TURBINE EXHAUST NOZZLES

Systematization of simple detail parts of regulable nozzle of gas turbine engine A80-10616

TURBINE PUMPS

Measurement of liquid pump torque in the starting regime A80-10611

TURBINE WHEELS

Transient, nearly periodic rotor oscillations --- Russian book A80-10124

Computer calculation of stationary temperature fields in cooled turbine discs A80-10614

TURBOCOMPRESSORS

Application of the discrete-phase method /DPM/ to the study and control of aircraft turbine engine blade vibrations. I A80-10234

Prediction of surge-point in multi-stage axial compressors A80-10897

Experimental study of low aspect ratio compressor blading [NASA-TM-79280] N80-11037

Design and performance evaluation of supercritical airfoils for axial flow compressors [AD-A071206] N80-11093

TURBOFAN ENGINES

Applied technology in turbofan engines A80-12003

Experimental evaluation of a low emissions high performance duct burner for Variable Cycle Engines (VCE) --- supersonic cruise aircraft research [NASA-CR-159694] N80-10221

TURBOFANS

Gas curtains in gas turbine engines A80-10608

TURBOJET ENGINES

Identification and dual adaptive control of a turbojet engine A80-10033

Pneumatic distributor for turbojet engine control system A80-10635

Parametric method of aircraft engine status diagnostics based on limited information N80-10003

Characteristics of afterburning bypass turbojet engine with oxygen injection into the afterburner chamber --- study of fuel injection into thrust chambers for thrust augmentation N80-10029

Pneumatic distributor for turbojet engine control system --- TU-154 aircraft N80-10091

Evaluation of an ejector powered engine simulator at transonic Mach numbers [AD-A071607] N80-11094

TURBOMACHINERY

Diffusion bonding - Aerospace applications A80-12081

Turbomachinery technology N80-10212

Fracture and fatigue properties of 1Cr-Mo-V bainitic turbine rotor steels [EPRI-NP-1023] N80-11201

TURBOPROP AIRCRAFT

Feasibility tests of use of the tri turbo-3 aircraft for arctic AXBT drops [AD-A073159] N80-11074

TURBOSHAPTS

Development of an aircraft-derivative gas turbine with high performance and large output A80-10823

TURBULENT FLOW

Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber A80-10196

Dynamics of diesel fuel combustion in turbulent flow N80-10074

A study of coherent structures in axisymmetric jets using an optical technique [AASU-341] N80-11399

TURBULENT MIXING

Pollutant emissions from 'partially' mixed turbulent flames A80-11793

Considerations of some critical ejector problems --- for the V/STOL aircraft N80-10127

TWISTING

On axial turbine stage rotor blade twist with tangential tilt of the stator vanes A80-10630

TWO DIMENSIONAL BODIES

AGARD two-dimensional aeroelastic configurations [AGARD-AR-156] N80-10202

U

UH-1 HELICOPTER

A compilation and analysis of helicopter handling qualities data. Volume 1: Data compilation [NASA-CR-3144] N80-11097

ULTRAHIGH FREQUENCIES

UHF coplanar-slot antenna for aircraft-to-satellite data communications A80-13064

UNSTEADY FLOW

Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade A80-11255

A Laser Doppler Velocimeter system to investigate unsteady flow separation A80-12634

Entrainment characteristics of unsteady subsonic jets --- for V/STOL aircraft N80-10124

A simple apparatus for the experimental study of non-steady flow thrust-augmenter ejector configurations N80-10125

USER MANUALS (COMPUTER PROGRAMS)

Manned engineering flight simulation validation, part 2: Software user's guide [AD-A071395] N80-11105

V

V/STOL AIRCRAFT

A V/STOL ground effects test facility A80-12618

Some tests on small-scale rectangular throat ejector --- thrust augmentation for V/STOL aircraft N80-10120

Augmenting ejector endwall effects --- V/STOL aircraft N80-10121

Entrainment characteristics of unsteady subsonic jets --- for V/STOL aircraft N80-10124

Considerations of some critical ejector problems --- for the V/STOL aircraft N80-10127

Interface concerns of ejector integration in V/STOL aircraft N80-10129

Reaction control system augmentation for V/STOL aircraft N80-10130

The external augmentor concept for V/STOL aircraft N80-10132

Height of spray produced by vertical takeoff and landing (VTOL) aircraft [AD-A073099] N80-11075

Inequalities and approximation with applications to VSTOL aircraft --- using control theory for optimal control approximations [AD-A071807] N80-11099

- VANADIUM**
Analysis of the response of a thermal barrier coating to sodium and vanadium doped combustion gases
[NASA-TM-79205] N80-10344
- VARIABLE CYCLE ENGINES**
Computational fluid mechanics of internal flow
N80-10211
Supersonic propulsion technology --- variable cycle engines
N80-10216
Experimental evaluation of a low emissions high performance duct burner for Variable Cycle Engines (VCE) --- supersonic cruise aircraft research
[NASA-CR-159694] N80-10221
- VARIABLE PITCH PROPELLERS**
Aircraft control by propeller cyclic blades
[NASA-CR-3212] N80-11031
- VARIABLE SWEEP WINGS**
The variable-geometry wing
A80-10235
Structural analysis of variable-sweep wings
N80-10053
Effect of several airframe/nozzle modifications on the drag of a variable-sweep bomber configuration --- conducted in Langley 16 foot transonic tunnel
[NASA-TM-80129] N80-10106
- VELOCITY DISTRIBUTION**
Three-dimensional velocity distribution between stator blades and unsteady force on a blade due to passing wakes
A80-10011
Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil
A80-11432
A method for predicting the noise levels of coannular jets with inverted velocity profiles
[NASA-CR-3176] N80-11868
- VERTICAL LANDING**
Vertical Takeoff and Landing (VTOL) propulsion technology
N80-10218
- VERTICAL TAKEOFF AIRCRAFT**
Vertical Takeoff and Landing (VTOL) propulsion technology
N80-10218
Fuel minimal take-off path of jet lift VTOL aircraft, log no. C3558
N80-11066
- VESTIBULAR TESTS**
Perception and performance in flight simulators: The contribution of vestibular, visual, and auditory information
[NASA-CR-162129] N80-11103
- VIBRATION**
Angular vibration of aircraft. Volume 1: Executive summary
[AD-A071895] N80-10197
Angular vibration of aircraft. Volume 2: Prediction methods for angular vibration
[AD-A071749] N80-10198
The effect of interblade phase angle and solidity on the time variant aerodynamic response of a compressor stator
[AD-A071878] N80-11092
- VIBRATION MEASUREMENT**
Application of the discrete-phase method /DPM/ to the study and control of aircraft turbine engine blade vibrations. I
A80-10234
Processing noise and vibration data for gas turbine engine development
A80-12612
- VIBRATION TESTS**
Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade
A80-11255
- VISCOELASTICITY**
Application of the design diagram for a layered viscoelastic medium to the evaluation of the stress-strain state of road and runway surfaces for moving loads
A80-12537
- VISCOUS FLOW**
Hypersonic viscous shock layer on sweptback wings of infinite span at different angles of attack
A80-11208
- VISUAL FLIGHT**
Pilot performance during simulated approaches and landings made with various computer-generated visual glidepath indicators
[AD-A066220] N80-10151
- VISUAL PERCEPTION**
Perception and performance in flight simulators: The contribution of vestibular, visual, and auditory information
[NASA-CR-162129] N80-11103
- VOICE DATA PROCESSING**
Voice data entry in air traffic control
[AD-A073670] N80-11273
- VORTICES**
Construction of a nonstationary nonlinear propeller theory
A80-12911
Flow-around small-aspect-ratio delta wing with vortex "bursting"
N80-10060
Study of combined operation of self-evacuating vortex tube with diffuser
N80-10085
Leading edge vortex-flap experiments on a 74 deg delta wing
[NASA-CR-159161] N80-11038
- W**
- WAKES**
Three-dimensional velocity distribution between stator blades and unsteady force on a blade due to passing wakes
A80-10011
Characteristics of lightly loaded fan rotor blade wakes
[NASA-CR-3188] N80-11034
- WALL FLOW**
Motion of rectangular wing between parallel walls
N80-10050
Pressure and velocity measurements in a three-dimensional wall jet
N80-10126
- WALL JETS**
Augmenting ejector endwall effects --- V/STOL aircraft
N80-10121
- WARNING SYSTEMS**
The collision avoidance problem requires a mix of partial solutions
A80-12930
F-4 radar altimeter aural warning
[AD-A072870] N80-11085
- WATER**
Burning sprays of jet A fuel-water emulsions
A80-11650
- WEAPON SYSTEMS**
Improvement of weapon system performance in air to air and air to ground operation with airborne radar
A80-11170
- WEAPONS DELIVERY**
Improvement of weapon system performance in air to air and air to ground operation with airborne radar
A80-11170
Technical concept for a strike-RPV flight guidance and weapon delivery system
A80-11174
- WEAR TESTS**
The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication --- in aircraft fuel systems
[ASLE PREPRINT 79-AM-5E-1] A80-12110
Design criteria for dry lubricated flight control bearings --- wear tests to make design analysis and check equipment specifications
[AD-A071322] N80-10228
- WEIGHT (MASS)**
Avionic system architecture investigation (AVSAP II)
[AD-A071743] N80-11080
- WEIGHT REDUCTION**
Computerized systems analysis and optimization of aircraft engine performance, weight, and life cycle costs
A80-10035

WELD TESTS

SUBJECT INDEX

WELD TESTS

Diffusion bonding as a production process --- Book
A80-12076

WIND EFFECTS

Exploratory development of aircrew windblast protection concepts
[AD-A072013] N80-11055

WIND PRESSURE

Exploratory development of aircrew windblast protection concepts
[AD-A072013] N80-11055

WIND SHEAR

Flight through thunderstorm outflows
A80-11648

Wind shear hazard definition for a wide body jet --- low level wind shear and control simulation
[FAA-RD-79-90] N80-11715

WIND TUNNEL APPARATUS

Real-time data acquisition system for the NASA Langley transonic dynamics tunnel
A80-12621

Use of an 'off-the-shelf' data acquisition system for wind tunnel data processing
A80-12622

A survey of laser Doppler velocimeter applications at the Arnold Engineering Development Center
A80-12638

Evaluation of an ejector powered engine simulator at transonic Mach numbers
[AD-A071607] N80-11094

Experimental feasibility study of the application of magnetic suspension techniques to large-scale aerodynamic test facilities --- cryogenic traonics wind tunnel
[NASA-CR-146761] N80-11102

WIND TUNNEL DRIVES

Calculation of working process in 'slow-compression' piston-type aerodynamic tube
A80-10607

WIND TUNNEL MODELS

A V/STOL ground effects test facility
A80-12618

Wind tunnel model deflection system
A80-12620

WIND TUNNEL STABILITY TESTS

Effect of winglets on a first-generation jet transport wing. 6: Stability characteristics for a full-span model at subsonic speeds --- conducted in Langley 8 foot transonic pressure tunnel
[NASA-TP-1330] N80-10101

WIND TUNNEL TESTS

Blow-down and sled-run simulation of transonic flow
A80-12423

A V/STOL ground effects test facility
A80-12618

Wind tunnel model deflection system
A80-12620

Active flutter control in transonic conditions
[ONERA, TP NO. 1979-100] A80-13052

Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2
N80-10044

Wind-tunnel investigation of the validity of a sonic-boom-minimization concept --- Langley Unitary Plan Wind Tunnel tests for supersonic transport design
[NASA-TP-1421] N80-10102

Low-speed wind-tunnel tests of a 1/10-scale model of an advanced arrow-wing supersonic cruise configuration designed for cruise at Mach 2.2 --- Langley Full Scale Wind Tunnel
[NASA-TM-80152] N80-10135

Aerodynamic interactions from reaction controls for lateral control of the M2-F2 lifting-body entry configuration at transonic and supersonic and supersonic Mach numbers --- wind tunnel tests
[NASA-TM-78534] N80-11033

Wind-tunnel/flight correlation study of aerodynamic characteristics of a large flexible supersonic cruise airplane CXE-70-1). 1: Wind-tunnel tests of a 0.03-scale model at Mach numbers from 0.6 to 2.53
[NASA-TP-1514] N80-11058

WIND TUNNEL WALLS

Motion of rectangular wing between parallel walls
N80-10050

Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed
[AD-A072098] N80-10143

WINDSHIELDS

Lexicon of aircraft transparency terms
[AD-A071319] N80-10200

WING FLOW METHOD TESTS

Harmonic oscillations of annular wing in steady ideal fluid flow
N80-11019

WING LOADING

Method for calculating wing loading during maneuvering flight along a three-dimensional curved path
A80-11647

Solution of linear problems of flow about finite span wing
A80-12912

WING OSCILLATIONS

Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil
A80-11432

A comparison of the pitching and plunging response of an oscillating airfoil
[NASA-CR-3172] N80-11030

WING PANELS

Flight simulation fatigue crack propagation evaluation of candidate lower wing skin materials with particular consideration of spectrum truncation
[NLR-TR-77092-U] N80-11524

WING PROFILES

The variable-geometry wing
A80-10235

Predicted jet thickness effects on the lift of an augmentor wing
A80-12597

Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2
N80-10044

Laminar boundary layer calculation from experimental pressure distribution
N80-10045

Analytic formulas for wing profile aerodynamic characteristics in incompressible flow
N80-11010

Harmonic oscillations of annular wing in steady ideal fluid flow
N80-11019

WING ROOTS

Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2
N80-10044

WING SPAN

Steady flow over the pressure side of a piecewise-flat delta wing with supersonic leading edges
A80-12908

Solution of linear problems of flow about finite span wing
A80-12912

WING TIPS

The significance of wing end configuration in airfoil design for civil aviation aircraft
[NASA-TM-75711] N80-10104

WINGLETS

Effect of winglets on a first-generation jet transport wing. 6: Stability characteristics for a full-span model at subsonic speeds --- conducted in Langley 8 foot transonic pressure tunnel
[NASA-TP-1330] N80-10101

WINGS

Parameters of spatial flow past a hydrofoil near the free surface of a ponderable liquid
A80-11205

Analog modeling in studying supersonic flow around a wing and its governing analog-criteria
N80-10038

Effect of winglets on a first-generation jet transport wing. 6: Stability characteristics for a full-span model at subsonic speeds --- conducted in Langley 8 foot transonic pressure tunnel
[NASA-TP-1330] N80-10101

SUBJECT INDEX

ZIRCONIUM OXIDES

Estimation of attainable leading-edge thrust for wings at subsonic and supersonic speeds
[NASA-TP-1500] N80-10105

Prediction of aerodynamic characteristics of fighter wings at high lift
[AD-A072630] N80-10140

A study to develop optimization algorithms for aircraft wing structures
[AD-A072668] N80-10196

On a smooth approximation method and its application to mathematical description of wing aerodynamic characteristics
N80-11011

Influence of wing deformation on trailing-edge flap deflections
N80-11012

Y

YAW

On modeling sensitivity of a linear system to reduction of its order by the infinitesimal transformation method in the yaw motion control problem
N80-10046

YAWING MOMENTS

Wing-body yawing moment and sideforce derivatives due to sideslip: N_y and Y_v
[ESDU-79006] N80-10097

Z

ZIRCONIUM OXIDES

Analysis of the response of a thermal barrier coating to sodium and vanadium doped combustion gases
[NASA-TM-79205] N80-10344

PERSONAL AUTHOR INDEX

AERONAUTICAL ENGINEERING / *A Continuing Bibliography (Suppl. 119)*

FEBRUARY 1980

Typical Personal Author Index Listing



Listings in this index are arranged alphabetically by personal author. The title of the document provides the user with a brief description of the subject matter. The report number helps to indicate the type of document cited (e.g. NASA report, translation, NASA contractor report). The accession number is located beneath and to the right of the title, e.g. N80-11870. Under any one author's name the accession numbers are arranged in sequence with the /AA accession numbers appearing first.

A

ABBOTT, G. W.
A study to develop optimization algorithms for aircraft wing structures [AD-A072668] N80-10196

ABBOTT, J. M.
Vertical Takeoff and Landing (VTOL) propulsion technology N80-10218

ABDRAKHMAMOV, SH. SH.
Computer calculation of stationary temperature fields in air-cooled turbine rotor blades A80-10612

ADACHI, T.
Three-dimensional velocity distribution between stator blades and unsteady force on a blade due to passing wakes A80-10011

ADAMCZYK, J. J.
Computational fluid mechanics of internal flow N80-10211

ADGANOV, E. I.
Organization of automatic control systems for technological processes in aircraft mechanical engineering A80-10123

AGAPONOV, S. A.
Some cases of instability of a gyrohorizon compass A80-11221

AGLIULLIN
Basic problem of aircraft gas turbine engine analytic design, part 1 N80-10042

AGLIULLIN, I. N.
Optimal thermogasdynamic design of gas turbine engines using element prototypes, 1 N80-11007

AHRENS, M. E.
On supersonic flow with attached shock waves over delta wings A80-12598

AHUJA, K. K.
Studies of the acoustic transmission characteristics of coaxial nozzles with inverted velocity profiles, volume 1 [NASA-CR-159698] N80-11870

AKHMEDZIANOV, A. M.
Parametric method of aircraft engine status diagnostics based on limited information N80-10003

ALDEN, R. E.
Design and test of a prototype scale ejector wing N80-10131

ALFARO-BOU, E.
Light airplane crash tests at three roll angles [NASA-TP-1477] N80-10512
Light airplane crash tests at three pitch angles [NASA-TP-1481] N80-11505

ALLAN, E. R.
The effect of interblade phase angle and solidity on the time variant aerodynamic response of a compressor stator [AD-A071878] N80-11092

ALPERIN, H.
Considerations of some critical ejector problems N80-10127

AMELIANCHIK, A. V.
Experimental investigation of the strength of rotor materials in the presence of surface cracks A80-10482

AMIET, R. K.
Noise of a model helicopter rotor due to ingestion of turbulence [NASA-CR-3213] N80-11067

ANDERSON, B. H.
Computational fluid mechanics of internal flow N80-10211

ANDERSON, W. J.
Mechanical components N80-10213

ANIKEEV, G. I.
Transient, nearly periodic rotor oscillations A80-10124

ATKINS, J. F.
Technical challenges in developing the new wave of small and medium helicopters A80-11396

B

BAILEY, R. O.
Aerodynamic interactions from reaction controls for lateral control of the M2-P2 lifting-body entry configuration at transonic and supersonic and supersonic Mach numbers [NASA-TM-78534] N80-11033

BAKER, C. R.
Economics of hydrogen production and liquefaction updated to 1980 [NASA-CR-159163] N80-11238

BAKLYGIN, V. N.
Electrical charging of fabric and film materials N80-10048

BAKULEV, V. I.
Analytic representation of turbine characteristics in form convenient for computer calculation of GTE parameters N80-10024

BALL, I. C.
Pollutant emissions from 'partially' mixed turbulent flames A80-11793

BALOEV, A. A.
Analytic design of regulators for controlling elastic flight vehicle rotation about the longitudinal axis N80-10035

BARCROFT, P. T.
Lubricants for the aircraft gas turbine A80-10866

BARGER, R. L.
Estimation of attainable leading-edge thrust for wings at subsonic and supersonic speeds [NASA-TP-1500] N80-10105

- BARRETT, C. W., JR.
The use of the Maurer factor for estimating the cost of a turbine engine in the early stages of development
[AD-A073018] N80-11095
- BARTON, C. K.
Structural stiffening as an interior noise control technique for light twin-engine aircraft N80-10192
- BARTOS, J. L.
Review of superalloy powder metallurgy processing for aircraft gas turbine applications A80-10310
- BATES, A. G.
Nova satellite time experiment A80-10268
- BEACH, H. L., JR.
Hypersonic propulsion N80-10217
- BEDA, P. I.
Flaw detection of aircraft components in operation A80-11879
- BEHNEN, S.
Evaluation of dais technology applied to the integrated navigation system of a tactical transport
[AD-A073068] N80-11061
- BELOTSEKOVSKII, S. M.
Construction of a nonstationary nonlinear propeller theory A80-12911
- BENNETT, P.
Technological trends in electronic warfare A80-11172
- BEREZOVSKII, A. B.
Calculation of working process in 'slow-compression' piston-type aerodynamic tube A80-10607
- BERGER, M.
Avionics master plan data base mechanization architecture
[AD-A071545] N80-11083
- BERTELRUD, A.
Measurements on a three-dimensional swept wing at low speeds. Part 1: The flow around the leading edge
[PFA-130-PT-1] N80-11044
Measurements on a three-dimensional swept wing at low speeds. Part 2: The flow in the boundary layer on the main wing
[PFA-131-PT-2] N80-11045
A survey of the literature on surface roughness effects on the drag of subsonic aircraft
[PFA-AU-1224] N80-11049
- BEVILACQUA, P. M.
Design and test of a prototype scale ejector wing N80-10131
- BEYER, M.
Radar remoting A80-11164
- BICH, H. M.
Lubrication of aircraft gas-turbine engines A80-11057
- BILL, R. C.
Mechanical components N80-10213
- BIRKLER, J. L.
Simulated Mission Endurance Test (SMET) for an aircraft engine to be used in a fighter/attack role
[AD-A071907] N80-11089
- BLAND, S. R.
AGARD two-dimensional aeroelastic configurations
[AGARD-AR-156] N80-10202
- BLAVY, A.-E.
Fire on board transport aircraft and passenger safety A80-11454
- BLAZOWSKI, W. S.
Fundamental characterization of alternate fuel effects in continuous combustion systems
[SAN-1543-12] N80-11244
- BOLAND, J. S., III
Design and simulation of a helicopter target hand-off computer A80-12645
- BOLTON, M.
Recent and future engineering developments in flight training simulators A80-10776
- BORGON, J.
The variable-geometry wing A80-10235
- BOROVIK, V. O.
Basic problem of aircraft gas turbine engine analytic design, part 1 N80-10042
Optimal thermogasdynamic design of gas turbine engines using element prototypes, 1 N80-11007
- BOUDAREL, R.
Avionics software and equipment A80-11354
- BOUSLEY, R.
Evaluation of dais technology applied to the integrated navigation system of a tactical transport
[AD-A073068] N80-11061
- BOWDITCH, D. H.
Computational fluid mechanics of internal flow N80-10211
- BRACKEN, J.
Required radar ranges for AEW aircraft A80-11649
- BREMHORST, K.
Entrainment characteristics of unsteady subsonic jets N80-10124
- BREUL, H. T.
Flying qualities research for highly augmented aircraft
[RE-582] N80-10194
- BROWN, I.
Design and operation of multi-specimen fully reversed fatigue systems for advanced composite materials A80-10206
- BROWN, L. J., JR.
Cabin hazards from a large external fuel fire adjacent to an aircraft fuselage
[AD-A073494] N80-11050
- BROWNSON, J. J.
Aerodynamic interactions from reaction controls for lateral control of the M2-F2 lifting-body entry configuration at transonic and supersonic and supersonic Mach numbers
[NASA-TM-78534] N80-11033
- BRUSHKOVSKII, A. L.
Determination of strain fields near concentrators from strain gage indicators N80-10054
- BRYKINA, I. G.
Hypersonic viscous shock layer on sweptback wings of infinite span at different angles of attack A80-11208
- BUCK, B. M.
Feasibility tests of use of the tri turbo-3 aircraft for arctic AXBT drops
[AD-A073159] N80-11074
- BURBY, R. J.
Cargo Logistics Airlift Systems Study (CLASS). Volume 4: Future requirements of dedicated freighter aircraft to year 2008
[NASA-CR-158950-VOL-4] N80-10149
- BURDEN, R. T., JR.
In-flight performance evaluation of experimental information
[AD-A071701] N80-11084
- BURYSHV, B. I.
Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade A80-11255

C

- CALISE, A. J.
A singular perturbation analysis of optimal aerodynamic and thrust magnitude control A80-11379
- CAMP, D. W.
Flight through thunderstorm outflows A80-11648

- CAMPBELL, D.
Recent and future engineering developments in flight training simulators
A80-10776
- CAMPBELL, G. M.
Airblast vulnerability envelopes for supersonic aerospace vehicles
[AD-A072247] N80-10201
- CANNADAY, R. L.
Comparison of stability and control parameters for a light, single-engine, high-winged aircraft using different flight test and parameter estimation techniques
[NASA-TM-80163] N80-10225
- CARLSON, R. W.
Estimation of attainable leading-edge thrust for wings at subsonic and supersonic speeds
[NASA-TP-1500] N80-10105
- CARLSON, P. A.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079
- CARTA, F. O.
A comparison of the pitching and plunging response of an oscillating airfoil
[NASA-CR-3172] N80-11030
- CASAROSA, C.
A method for evaluating aircraft take-off performance
[REPT-1663] N80-11076
- CASTLE, C. B.
Light airplane crash tests at three roll angles
[NASA-TP-1477] N80-10512
- CATALANO, G. D.
Pressure and velocity measurements in a three-dimensional wall jet
N80-10126
- CETEL, A. D.
Component evaluation and engine demonstration of gamma/gamma-prime-delta D.S. eutectic solid turbine blades
A80-10289
- CHANG, J. B.
Improved methods for predicting spectrum loading effects, phase 1 report. volume 2: Test data
[AD-A072387] N80-11070
Improved methods for predicting spectrum loading effects, phase 1 report, Volume 1: Results and discussion
[AD-A072386] N80-11071
- CHEREPNUKHIN, G. A.
Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2
N80-10044
Flow-around small-aspect-ratio delta wing with vortex "bursting"
N80-10060
Selection of geometric parameters and location of nose flap on swept wing root profile from tunnel test data, 1
N80-11009
- CHERNIKOV, S. K.
On the empennage snap-through problem
N80-10047
- CHERNOVA, K. S.
An engine fuel chemistry solution to the problem of jet fuel supplies
A80-10199
- CHERVAKOV, V. V.
Measurement of liquid pump torque in the starting regime
A80-10611
- CHISTYAKOV, I. I.
Electrical charging of fabric and film materials
N80-10048
- CHOI, Y. H.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079
- CHU, S. N. G.
Impression fatigue
A80-13126
- CHUMACHENKO, V. G.
Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
A80-10619
- CIEPLUCH, C. C.
Vertical Takeoff and Landing (VTOL) propulsion technology
N80-10218
- CLINE, V. A.
A survey of laser Doppler velocimeter applications at the Arnold Engineering Development Center
A80-12638
- COLE, P. H.
Real-time data acquisition system for the NASA Langley transonic dynamics tunnel
A80-12621
- COLTRIN, R. E.
Supersonic propulsion technology
N80-10216
- COLWELL, S.
New aircraft technology: Report on the Farnborough International Air Show
[PB-298345/0] N80-11078
- CONNOR, D. W.
Multirole cargo aircraft options and configurations
[NASA-TM-80177] N80-11053
- CONNOLLY, D. W.
Voice data entry in air traffic control
[AD-A073670] N80-11273
- CONRAD, E. W.
Turbine engine altitude chamber and flight testing with liquid hydrogen
A80-10034
- COOKSEY, J. M.
A V/STOL ground effects test facility
A80-12618
- CORZANI, T.
Surveillance and communication systems using mobile media on the airport surface
[PUB-13-1978] N80-11110
- COTE, S. M.
Simulated Mission Endurance Test (SMET) for an aircraft engine to be used in a fighter/attack role
[AD-A071907] N80-11089
- COX, D. B., JR.
Integration of GPS with inertial navigation systems
N80-10173
- COX, J. J., JR.
A literature search and review of the dynamics of aircraft-surface interaction
[AD-A070940] N80-10199
- COY, J. J.
NASA gear research and its probable effect on rotorcraft transmission design
A80-13068
Mechanical components
N80-10213
- CRITTENDEN, J. E.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079
- CRONVICH, L. L.
Advanced missile technology. A review of technology improvement areas for cruise missiles
[NASA-CR-3187] N80-10103
- CROSBY, E.
Flight through thunderstorm outflows
A80-11648
- CROSSBY, F. L.
A survey of laser Doppler velocimeter applications at the Arnold Engineering Development Center
A80-12638
- CUELLAR, J. P., JR.
Mechanism of turbine engine lubricant deposition
[AD-A072557] N80-10223
- CUNNINGHAM, R. J.
Exploratory development of aircrew windblast protection concepts
[AD-A072013] N80-11055

D

- DABROWSKA, J.
Construction of black boxes and mechanical elaboration of electronic units in aviation
A80-10236
- DANILIN, V. S.
Optimal receivers and discrete-signal processors for hyperbolic radar navigation systems
A80-12030

- DANILOV, R. E.
Experimental and theoretical investigation of the internal-duct hydraulics of stator and rotor blades for a semiclosed-cycle air cooling system
A80-12042
- DARDEN, C. M.
Wind-tunnel investigation of the validity of a sonic-boom-minimization concept
[NASA-TP-1421] N80-10102
- DAUGHERTY, J., C.
Wind-tunnel/flight correlation study of aerodynamic characteristics of a large flexible supersonic cruise airplane (CXE-70-1). 1: Wind-tunnel tests of a 0.03-scale model at Mach numbers from 0.6 to 2.53
[NASA-TP-1514] N80-11068
- DAVINO, D.
Avionic system architecture investigation (AVSAR II)
[AD-A071743] N80-11080
- DEAN, P. D.
Studies of the acoustic transmission characteristics of coaxial nozzles with inverted velocity profiles, volume 1
[NASA-CR-159698] N80-11870
- DEAN, W. H., JR.
Some tests on small-scale rectangular throat ejector
N80-10120
- DEGTJAREV, G. L.
Optimal control of flight vehicle with elastic elements
N80-10037
- DEGTJAREV, Y. D.
Parametric method of aircraft engine status diagnostics based on limited information
N80-10003
- DENISOV, V. G.
Operation of airborne equipment and flight safety
A80-11875
- DEWEY, D.
Evaluation of dais technology applied to the integrated navigation system of a tactical transport
[AD-A073068] N80-11061
- DEYOUNG, J.
Aircraft control by propeller cyclic blades
[NASA-CR-3212] N80-11031
- DIATLOV, I. N.
Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation
A80-10610
- DIEHL, L. A.
Emission reduction
N80-10207
- DITTMER, D. F.
Effect of multiaxial loading on crack growth. Volume 1: Technical summary
[AD-A072122] N80-11513
- DMITRIEV, S. V.
Organization of automatic control systems for technological processes in aircraft mechanical engineering
A80-10123
- DODD, B. D.
Reliability of nondestructive inspections
[AD-A072097] N80-10503
- DONHAM, R. E.
Reaction control system augmentation for V/STOL aircraft
N80-10130
- DOYLE, J. C.
Singular values and feedback - Design examples
A80-12716
- DOZIER, J. C.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079
- DRSATA, F. E.
Exploratory development of aircrew windblast protection concepts
[AD-A072013] N80-11055
- DUGAN, J. F., JR.
Aircraft Energy Efficiency (ACEE) status report
N80-10206
- DUSTERBERRY, J. C.
The development and use of large-motion simulator systems in aeronautical research and development
A80-10765
- DUTTA, S.
State-of-the-art of SIALON materials
A80-13066
- DUVVURI, T.
Integration of ejectors into high-speed aircraft
N80-10119
- DVORAK, F. A.
Prediction of aerodynamic characteristics of fighter wings at high lift
[AD-A072630] N80-10140

E

- EASTMAN, R. M.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079
- EDELHART, R. B.
Fundamental characterization of alternate fuel effects in continuous combustion systems
[SAN-1543-12] N80-11244
- EGOROV, Y. N.
Selecting the passenger airplane fuselage
N80-11024
- EGOROVA, K. A.
The chemical stability of hydro-treated fuels and their stabilization by antioxidants
A80-10200
- ELLIS, C. W.
The market for large civil helicopters
A80-11398
- ENGLUND, D. E.
Measuring unsteady pressure on rotating compressor blades
A80-12630
- ERICKSON, A. R.
Development of improved abradable compressor gas path seal
[AD-A072171] N80-11474
- ERMAKOVA, T. I.
The chemical stability of hydro-treated fuels and their stabilization by antioxidants
A80-10200
- ERSHOV, N. S.
Measurement of liquid pump torque in the starting regime
A80-10611
- EVANS, T. H.
A V/STOL ground effects test facility
A80-12618
- EVIN, O. A.
Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation
A80-10610
- Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation
N80-10065

F

- FABRI, J.
Experimental techniques developed at CNERA for advanced compressor testing
[ONERA, TP NO. 1979-129] A80-13060
- FAHRUTDINOV, R. D.
Computer calculation of stationary temperature fields in cooled turbine discs
A80-10614
- FALCIASECCA, G.
Surveillance and communication systems using mobile media on the airport surface
[FUB-13-1978] N80-11110
- FARUQI, F. A.
The target tracking problem using airborne radar under ECH environment
A80-11173
- FAVIER, D.
Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil
A80-11432
- FEDOROV, E. Y.
On a smooth approximation method and its application to mathematical description of wing aerodynamic characteristics
N80-11011
- FEILER, C. E.
Noise reduction
N80-10208

- FEJER, A. A.
Development of gas turbine fuels and combustion;
An overview
[CONF-790337-4] N80-10391
- FILIPPOV, V. S.
Antennas /Current status and problems/
A80-11890
- FISHBACH, L. H.
Computerized systems analysis and optimization of
aircraft engine performance, weight, and life
cycle costs
A80-10035
- FISHBEIN, B. D.
Characteristics of afterburning bypass turbojet
engine with oxygen injection into the
afterburner chamber
N80-10029
- FLECHNER, S. G.
Effect of winglets on a first-generation jet
transport wing. 6: Stability characteristics
for a full-span model at subsonic speeds
[NASA-TP-1330] N80-10101
- FLEHING, D.
Mechanical components
N80-10213
- FONG, T. S.
Method of conjugate gradients for optimal control
problems with state variable constraints
[AD-A072258] N80-10227
- FORD, T.
Escape system technology
A80-10343
- FRANCIS, H. S.
A Laser Doppler Velocimeter system to investigate
unsteady flow separation
A80-12634
- FRANKE, M. E.
Some tests on small-scale rectangular throat ejector
N80-10120
- FROST, W.
Flight through thunderstorm outflows
A80-11648
- G**
- GEDDES, J. P.
F-16 co-production - An American point of view
A80-12315
- GELL, H.
Component evaluation and engine demonstration of
gamma/gamma-prime-delta D.S. eutectic solid
turbine blades
A80-10289
- GERSHBEIN, E. A.
Hypersonic viscous shock layer on sweptback wings
of infinite span at different angles of attack
A80-11208
- GIBSON, T.
Evaluation of transponder antenna coverage/ATCRBS
during simulated flights of aircraft
[AD-A073547] N80-11275
- GIBSON, W. C.
Angular vibration of aircraft. Volume 1:
Executive summary
[AD-A074895] N80-10197
- Angular vibration of aircraft. Volume 2:
Prediction methods for angular vibration
[AD-A071749] N80-10198
- GILBERT, E. A., III
Systems analysis of arctic fuels dispensing
equipment
[AD-A074815] N80-11106
- GILBERT, G. A.
Civil applications of NAVSTAR GPS
N80-10175
- GLASGLOW, T. K.
Materials and structures technology
N80-10210
- GLASSMAN, A. J.
Maximum likelihood identification of linear
discrete stochastic systems
[AD-A072147] N80-10229
- GLATZ, J. W.
Component evaluation and engine demonstration of
gamma/gamma-prime-delta D.S. eutectic solid
turbine blades
A80-10289
- GLAZKOV, I. A.
Flaw detection of aircraft components in operation
A80-11879
- GOGOLEV, I. G.
Aerodynamic efficiency of gas turbine intake duct
N80-10077
- GOLLAHALLI, S. R.
Burning sprays of jet A fuel-water emulsions
A80-11650
- GOODWIN, W.
Radar remoting
A80-11164
- GOROZHANKIN, N. A.
Structural analysis of variable-sweep wings
N80-10053
- GOSTIUKHIN, V. L.
Antennas /Current status and problems/
A80-11890
- GRANT, H. P.
Measuring unsteady pressure on rotating compressor
blades
A80-12630
- GRAVANDER, J. W.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079
- GRAVELLE, A.
Active flutter control in transonic conditions
[ONERA, TP NO. 1979-100] A80-13052
- GREEN, D. S.
Workshop on Thrust Augmenting Ejectors
[NASA-CP-2093] N80-10107
- GRIGOREBKO, P. P.
Influence of gas turbine engine combustion
chambers geometric parameters on mixture
formation characteristics
N80-10006
- GRINEV, A. I. U.
Antennas /Current status and problems/
A80-11890
- GRINEVA, K. I.
Antennas /Current status and problems/
A80-11890
- GROBMAN, J.
Alternative jet aircraft fuels
N80-10209
- GRUCENEWEG, J. F.
Noise reduction
N80-10208
- GROTTE, J. H.
Required radar ranges for AEW aircraft
A80-11649
- GUBITOSI, M.
On the development of The RB 199
[DRIC-TRANS-5429] N80-11096
- GUMEROV, K. S.
Parametric method of aircraft engine status
diagnostics based on limited information
N80-10003
- GUNKO, Y. P.
Overall aerodynamic characteristics of caret and
delta wings at supersonic speeds
N80-11022
- H**
- HAAS, J. E.
Turbomachinery technology
N80-10212
- HAGER, W. W.
Inequalities and approximation with applications
to VSTOL aircraft
[AD-A071807] N80-11099
- HALFORD, G. E.
Materials and structures technology
N80-10210
- HAMILTON, J. M.
Reliability of nondestructive inspections
[AD-A072097] N80-10503
- HANNAN, B.
IPR aircraft handled forecast by air route traffic
control center, fiscal years 1979-1990
[AD-A070786] N80-10153
- HARGROVE, A.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079
- HARLOFF, G. J.
Cross flow fan experiment development and finite
element modeling
N80-10098

- HARPER, R. E.
Processing noise and vibration data for gas turbine engine development
A80-12612
- HARRIS, W. L.
On the acoustic power emitted by helicopter rotor blades at low tip speeds
A80-12375
- HARSHA, P. T.
Fundamental characterization of alternate fuel effects in continuous combustion systems [SAN-1543-12]
N80-11244
- HAUSER, C. H.
Turbochemistry technology
N80-10212
- HEATH, B. O.
The Tornado multi-function combat aircraft - An accomplishment of international collaboration
A80-11453
- HEDMAN, S. G.
Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed [AD-A072098]
N80-10143
- HEPFLY, R. K.
A compilation and analysis of helicopter handling qualities data. Volume 1: Data compilation [NASA-CR-3144]
N80-11097
- HENDERSON, K. C.
Experimental feasibility study of the application of magnetic suspension techniques to large-scale aerodynamic test facilities [NASA-CR-146761]
N80-11102
- HENGHOLD, W. H.
A literature search and review of the dynamics of aircraft-surface interaction [AD-A070940]
N80-10199
- HERTEL, R. J.
Study of a stereo electro-optical tracker system for the measurement of model deformations at the national transonic facility [NASA-CR-159146]
N80-10476
- HESS, J. I.
An efficient user-oriented method for calculating compressible flow in an about three-dimensional inlets [NASA-CR-159578]
N80-10134
- HEWISH, H.
Aircraft designers follow the birds
A80-11345
- HOBBS, D. E.
Design and performance evaluation of supercritical airfoils for axial flow compressors [AD-A071206]
N80-11093
- HOPER, K. E., JR.
Design and operation of multi-specimen fully reversed fatigue systems for advanced composite materials
A80-10206
- HOFFMAN, L. G.
Manned engineering flight simulation validation, Part 1. Simulation requirements and simulator motion system performance [AD-A071394]
N80-10235
- HOLMAN, G. L.
Training effectiveness of the CH-47 flight simulators [AD-A072317]
N80-10236
- HOTTNER, T.
Blow-down and sled-run simulation of transonic flow
A80-12423
- HOWLAND, J. S.
Systems analysis of arctic fuels dispensing equipment [AD-A071815]
N80-11106
- HOWLAND, O. E.
Ejection seat for high G escape [AD-A072444]
N80-11054
- HOWLETT, R. A.
VSCE technology definition study [NASA-CR-159730]
N80-10222
- HUI, W. H.
On supersonic flow with attached shock waves over delta wings
A80-12598
- HUMBAD, N. G.
On the acoustic power emitted by helicopter rotor blades at low tip speeds
A80-12375
- HUMPHRIS, R. R.
Experimental feasibility study of the application of magnetic suspension techniques to large-scale aerodynamic test facilities [NASA-CR-146761]
N80-11102
- HUMPHRIS, R. B.
Pressure and velocity measurements in a three-dimensional wall jet
N80-10126
- HUNT, R. B.
VSCE technology definition study [NASA-CR-159730]
N80-10222
- IAKOVLEV, V. P.
On axial turbine stage rotor blade twist with tangential tilt of the stator vanes
A80-10630
- IANKOVSKII, V. M.
Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation
A80-10610
- Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
A80-10619
- IARLYKOV, M. S.
Optimal receivers and discrete-signal processors for hyperbolic radar navigation systems
A80-12030
- INBAR, A.
Improvement of weapon system performance in air to air and air to ground operation with airborne radar
A80-11170
- IRICK, S. C.
A hydraulic actuator mechanism to control aircraft spoiler movements through dual input commands [NASA-CASE-LAR-12412-1]
N80-11065
- ISAEV, V. V.
Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2
N80-10044
- Selection of geometric parameters and location of nose flap on swept wing root profile from tunnel test data, 1
N80-11009
- IURUKOVSKII, M. P.
An engine fuel chemistry solution to the problem of jet fuel supplies
A80-10199
- IVANOV, V. S.
Basic problem of aircraft gas turbine engine analytic design, part 1
N80-10042
- Optimal thermogasdynamics design of gas turbine engines using element prototypes, 1
N80-11007
- IVANSHIN, I. U. N.
Computer calculation of stationary temperature fields in air-cooled turbine rotor blades
A80-10612
- J**
- JAHANI, H.
Burning sprays of jet A fuel-water emulsions
A80-11650
- JARVI, W. P.
Development of improved abradable compressor gas path seal [AD-A072171]
N80-11474
- JARVIS, R. F.
Wind tunnel model deflection system
A80-12620
- JAY, A.
Effect of time dependent flight loads on JT9D-7 performance deterioration [NASA-CR-159681]
N80-10515
- JEWELL, W. F.
A compilation and analysis of helicopter handling qualities data. Volume 1: Data compilation [NASA-CR-3144]
N80-11097

JOHNSON, C. D.
Angular vibration of aircraft. Volume 1:
Executive summary
[AD-A071895] N80-10197

Angular vibration of aircraft. Volume 2:
Prediction methods for angular vibration
[AD-A071749] N80-10198

JONES, E. R.
The interrelationships between engineering
development simulation and flight simulation
880-10777

JONES, R. E.
Emission reduction
N80-10207

JONES, W. P.
Predictions of the flow field and local gas
composition in gas turbine combustors
880-11773

K

KALGHATGI, G. T.
A study of coherent structures in axisymmetric
jets using an optical technique
[AASU-341] N80-11399

KATZ, J.
Method for calculating wing loading during
maneuvering flight along a three-dimensional
curved path
880-11647

KAZMIERCZYK, P.
Method of determining the load classification
number, LCN, of a semirigid composite runway
surface
880-10237

KEATON, A. E.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079

KEESE, J. E.
A Laser Doppler Velocimeter system to investigate
unsteady flow separation
880-12634

KEMMLER, K.
The array processor AP-120E/190L for simulation
applications
880-11154

KENTFIELD, J. A. C.
A simple apparatus for the experimental study of
non-steady flow thrust-augmenter ejector
configurations
N80-10125

KHABIBULLIN, H. G.
Pneumatic distributor for turbojet engine control
system
880-10635

Pneumatic distributor for turbojet engine control
system
N80-10091

KHAMIDULLIN, P. A.
Dynamics of diesel fuel combustion in turbulent flow
N80-10074

KHARE, J. H.
A simple apparatus for the experimental study of
non-steady flow thrust-augmenter ejector
configurations
N80-10125

KIENHOLZ, D. A.
Angular vibration of aircraft. Volume 1:
Executive summary
[AD-A071895] N80-10197

Angular vibration of aircraft. Volume 2:
Prediction methods for angular vibration
[AD-A071749] N80-10198

KIMBALL, K. A.
In-flight performance evaluation of experimental
information
[AD-A071701] N80-11084

KLAUCH, D. H.
Experimental investigation of the strength of
rotor materials in the presence of surface cracks
880-10482

KLOCHAN, I. U.
Use of sign statistics for sequential signal
detection in a pulse radar system
880-12031

KNOX, C. E.
Algorithms and logic for incorporating ILS NASA
TCV B-737 airplane area navigation system
[NASA-TM-80167] N80-10152

KOCHETKOV, V. I.
Flight-vehicle equipment
880-11869

KOENIG, D. G.
Workshop on Thrust Augmenting Ejectors
[NASA-CP-2093] N80-10107

NASA overview
N80-10109

KOENIG, M. J.
The use of the Maurer factor for estimating the
cost of a turbine engine in the early stages of
development
[AD-A073018] N80-11095

KOLCHIN, I. V.
Flight-vehicle equipment
880-11869

KORNOUKHOV, A. A.
Long-lift GTE operation based on technical condition
N80-10027

KOROLEV, P. V.
Aerodynamic efficiency of gas turbine intake duct
N80-10077

KOTLYAR, L. M.
Determination of turning angle of a jet impinging
on a bucket with visor
N80-10011

KOVALEV, A. A.
Long-lift GTE operation based on technical condition
N80-10027

KOZABUK, V. V.
Operation of airborne equipment and flight safety
880-11875

KOZHEVNIKOV, I. U. V.
Organization of automatic control systems for
technological processes in aircraft mechanical
engineering
880-10123

KOZHEVNIKOV, Y. V.
Basic problem of aircraft gas turbine engine
analytic design, part 1
N80-10042

Statistical diagnostics aircraft engines
N80-11006

Optimal thermogasdynamic design of gas turbine
engines using element prototypes, 1
N80-11007

KOZLOWSKI, H.
Aero-acoustic tests of duct-burning turbofan
exhaust nozzles
[NASA-CR-162254] N80-10204

Flight effects on the aero/acoustic
characteristics of inverted profile coannular
nozzles
[NASA-CR-162419] N80-10220

KRETOV, A. S.
Analysis of thin-wall beams by the method of
segments
N80-10043

KRICHAKIN, V. I.
Nonstationarity of heat transfer in axial turbine
blading during engine startup
880-10633

Use of the method of variable directions for
numerical study of the temperature states of a
turbine disk with blades
N80-10028

Nonstationarity of heat transfer in axial turbine
blading during engine startup
N80-10089

KRIECHBAUM, G.
Technical concept for a strike-RPV flight guidance
and weapon delivery system
880-11174

KRIKOBIAN, M. J.
Navigation and meteorological error equations for
some aerodynamic parameters
[NASA-TM-80804] N80-10150

KUDASHEV, Y. D.
Aerodynamic efficiency of gas turbine intake duct
N80-10077

KUHN, B. E.
Height of spray produced by vertical takeoff and
landing (VTOL) aircraft
[AD-A073099] N80-11075

KUNZ, J. J.
Use of an 'off-the-shelf' data acquisition system
for wind tunnel data processing
880-12622

- KURAEV, A. S.
Operation of airborne equipment and flight safety
A80-11875
- KUZIN, A. P.
Dynamics of diesel fuel combustion in turbulent flow
N80-10074
- KUZMICHIEV, B. V.
On the influence of short shroud platforms on
turbine stage operation
A80-10627
On the influence of short shroud platforms on
turbine stage operation
N80-10083
- L**
- LACROIX, B.
Recent advances in control loading and motion
systems used in simulation
A80-10766
- LACZKOWSKI, R.
Application of the discrete-phase method /DPM/ to
the study and control of aircraft turbine engine
blade vibrations. I
A80-10234
- LAITONE, E. V.
Extension of Prandtl's biplane theory to wing-tail
combinations
A80-12599
- LAKSHMINARAYANA, B.
Characteristics of lightly loaded fan rotor blade
wakes
[NASA-CR-3188]
N80-11034
- LANATI, G. A.
Measuring unsteady pressure on rotating compressor
blades
A80-12630
- LEACY, A. C.
AEW Nimrod system and operation
A80-11167
- LEE, D. R.
Advanced simulator for pilot training (ASPT):
G-seat optimization
[AD-A068475]
N80-10233
- LEES, H.
In-flight performance evaluation of experimental
information
[AD-A071701]
N80-11084
- LEHMAN, J. E.
A compilation and analysis of helicopter handling
qualities data. Volume 1: Data compilation
[NASA-CR-3144]
N80-11097
- LEININGER, G.
Identification and dual adaptive control of a
turbojet engine
A80-10033
- LENZ, R.
Design of a strapdown navigator aided by position
measurements
A80-11187
- LEONDES, C. T.
Method of conjugate gradients for optimal control
problems with state variable constraints
[AD-A072258]
N80-10227
Maximum likelihood identification of linear
discrete stochastic systems
[AD-A072147]
N80-10229
Entropy analysis of feedback flight dynamic
control systems
[AD-A072259]
N80-11100
- LEVINE, S. R.
Materials and structures technology
N80-10210
- LEW, H. K.
Generating innovation for Navy's F-18
A80-12312
- LEWIS, B. L.
Effect of time dependent flight loads on JT9D-7
performance deterioration
[NASA-CR-159681]
N80-10515
- LEWIS, E. L.
The XFV-12A Thrust-Augmented Wing (TAW) prototype
aircraft
N80-10133
- LEWIS, H. P.
Pilot performance during simulated approaches and
landings made with various computer-generated
visual glidepath indicators
[AD-A066220]
N80-10151
- LEWIS, W. H.
Reliability of nondestructive inspections
[AD-A072097]
N80-10503
- LI, J. C. H.
Impression fatigue
A80-13126
- LIEPMAN, H. P.
Advanced missile technology. A review of
technology improvement areas for cruise missiles
[NASA-CR-3187]
N80-10103
- LIND, J. H.
A Laser Doppler Velocimeter system to investigate
unsteady flow separation
A80-12634
- LINDSEY, G. H.
Microprocessors as aircraft fatigue monitors
A80-12640
- LITTLE, R. R., JR.
A fiber-optic link for high-speed,
DDAS-to-computer data transmission
A80-12637
- LIU, A. P.
Effect of multiaxial loading on crack growth.
Volume 1: Technical summary
[AD-A072122]
N80-11513
- LOHMAN, R. P.
Experimental evaluation of a low emissions high
performance duct burner for Variable Cycle
Engines (VCE)
[NASA-CR-159694]
N80-10221
- LOKAI, H. V.
Selection of optimal parameters of heat-pipe heat
exchanger for a gas turbine engine
A80-10613
Study of heat-pipe heat exchanger in the small gas
turbine engine system
N80-10022
Selection of optimal parameters of heat-pipe heat
exchanger for a gas turbine engine
N80-10068
- LOKAI, V. I.
Computer calculation of stationary temperature
fields in air-cooled turbine rotor blades
A80-10612
Computer calculation of stationary temperature
fields in cooled turbine discs
A80-10614
- LOKTEV, B. E.
Construction of a nonstationary nonlinear
propeller theory
A80-12911
- LOPEZ, A. E.
Workshop on Thrust Augmenting Ejectors
[NASA-CP-2093]
N80-10107
- LOWRY, R. B.
Interface concerns of ejector integration in
V/STOL aircraft
N80-10129
- LUEG, R. E.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035]
N80-11079
- LUKASHEVICH, A. B.
Parameters of spatial flow past a hydrofoil near
the free surface of a ponderable liquid
A80-11205
- LUTSKO, S. P.
Flaw detection of aircraft components in operation
A80-11879
- M**
- MACK, D. P.
An efficient user-oriented method for calculating
compressible flow in an about three-dimensional
inlets
[NASA-CR-159578]
N80-10134
- MACK, R. J.
Wind-tunnel investigation of the validity of a
sonic-boom-minimization concept
[NASA-TP-1421]
N80-10102
Estimation of attainable leading-edge thrust for
wings at subsonic and supersonic speeds
[NASA-TP-1500]
N80-10105
- MADDEN, J. L.
Opportunistic Maintenance Engine Simulation model:
OMENS 2
[AD-A072516]
N80-11088

MADOB, R. J.
Experimental evaluation of a low emissions high performance duct burner for Variable Cycle Engines (VCE).
[NASA-CR-159694] N80-10221

MAGALA, V. A.
Aerodynamic efficiency of gas turbine intake duct
N80-10077

MAHRENHOLZ, B. G.
A fiber-optic link for high-speed, DDAS-to-computer data transmission
A80-12637

MAILLOUX, R. J.
Hemispherical coverage of four-faced aircraft arrays
[AD-A073079] N80-11309

MAKINNEY, R. L.
Simulator for air-to-air combat motion system investigation
[AD-A072612] N80-10237

MALCOLM, W. W.
Design and simulation of a helicopter target hand-off computer
A80-12645

MALINOVSKII, K. A.
Analytic representation of turbine characteristics in form convenient for computer calculation of GTE parameters
N80-10024

MANCINO, A.
A method for evaluating aircraft take-off performance
[REPT-1663] N80-11076

MANUSHIN, E. A.
Experimental and theoretical investigation of the internal-duct hydraulics of stator and rotor blades for a semiclosed-cycle air cooling system
A80-12042

MAQUIRE, J.
Avionics master plan data base mechanization architecture
[AD-A071545] N80-11083

MARCHMAN, J. P., III
Use of an 'off-the-shelf' data acquisition system for wind tunnel data processing
A80-12622

MARESCA, C.
Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil
A80-11432

MARGULIS, S. G.
Determination of turning angle of a jet impinging on a bucket with visor
N80-10011

MARTIN, E. H.
Civil applications of NAVSTAR GPS
N80-10175

MARTSON, W.
The array processor AP-120E/190L for simulation applications
A80-11154

MASKEW, B.
Prediction of aerodynamic characteristics of fighter wings at high lift
[AD-A072630] N80-10140

MASON, J.
Evaluation of dais technology applied to the integrated navigation system of a tactical transport
[AD-A073068] N80-11061

MATTHEWS, C.
Civil applications of NAVSTAR GPS
N80-10175

MATVEEV, Y. V.
Study of heat-pipe heat exchanger in the small gas turbine engine system
N80-10022

MATYAH, A. I.
Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2
N80-10044

MATYAZH, A. I.
Selection of geometric parameters and location of nose flap on swept wing root profile from tunnel test data, 1
N80-11009

MAUK, S. C.
Inertial navigation and guidance. Citations from the international aerospace abstracts data base
[NTIS/PS-79/0825/4] N80-11064
Clear air turbulence. Citations from the international aerospace abstracts data base
[NTIS/PS-79/0858/5] N80-11746

MAVROIDES, W. G.
Hemispherical coverage of four-faced aircraft arrays
[AD-A073079] N80-11309

MAZHUL, I. I.
Overall aerodynamic characteristics of caret and delta wings at supersonic speeds
N80-11022

MCCABRIA, J. L.
Program for the development of a superconducting generator, phase 2 and 3
[AD-A072093] N80-10439

MCCONNELL, W. J., JR.
Study for incorporating time-synchronized approach control into the CH-47/VALT digital navigation system
[NASA-CR-159151] N80-11058

MCGUIRE, D. C.
Advanced simulator for pilot training (ASPT): G-seat optimization
[AD-A068475] N80-10233

MCKISSICK, B. T.
Application of modified profile analysis to function testing of simulated CTOL transport touchdown-performance data
[NASA-TP-1541] N80-11069

MCLEAN, A. F.
Brittle materials design, high temperature gas turbine
[AD-A071750] N80-11090

MCNALLY, W. D.
Computational fluid mechanics of internal flow
N80-10211

MCNAHARA, R. A., JR.
A study to develop optimization algorithms for aircraft wing structures
[AD-A072668] N80-10196

MCREE, G. J.
AVIONICS: Projections for civil aviation, 1995-2000
[NASA-CR-159035] N80-11079

MEPPERD, L. A.
Design and test of a prototype scale ejector wing
N80-10131

MELUSOV, Y. V.
Basic problem of aircraft gas turbine engine analytic design, part 1
N80-10042

MELUZOV, Y. V.
Optimal thermogasdynamics design of gas turbine engines using element prototypes, 1
N80-11007

MEREDAY, R.
Avionic system architecture investigation (AVSAR II)
[AD-A071743] N80-11080

MERKULOV, A. P.
Study of combined operation of self-evacuating vortex tube with diffuser
N80-10085

MERRILL, W.
Identification and dual adaptive control of a turbojet engine
A80-10033

MERTENS, H. W.
Pilot performance during simulated approaches and landings made with various computer-generated visual glidepath indicators
[AD-A066220] N80-10151

MEYER, D.
An assessment of terminal air traffic control system performance with and without basic metering and spacing automation
[AD-A073548] N80-11057

MIKISHCHEV, B. IA.
Antennas /Current status and problems/
A80-11890

MIKHEICHEV, P. A.
An engine fuel chemistry solution to the problem of jet fuel supplies
A80-10199

MIKKILINENI, R. P.
The analysis of wing-body combinations at moderate angles of attack
[AD-A074284] N80-11040

- MILLER, R. A.
Analysis of the response of a thermal barrier coating to sodium and vanadium doped combustion gases
[NASA-TM-79205] N80-10344
- MINNICH, M.
Avionic system architecture investigation (AVSAR II)
[AD-A071743] N80-11080
- MIROHOV, A. I.
Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber
N80-10196
- MITCHELL, P.
Navigation and meteorological error equations for some aerodynamic parameters
[NASA-TM-80804] N80-10150
- MITIUSHKIN, I. I.
On axial turbine stage rotor blade twist with tangential tilt of the stator vanes
N80-10630
- MOFFATT, D. L.
Swept frequency scattering measurements of aircraft
[AD-A071474] N80-10420
- MONAKHOV, N. M.
Analytic formulas for wing profile aerodynamic characteristics in incompressible flow
N80-11010
- MONTAGANI, P. J.
Noise reduction
N80-10208
- MOORE, R. D.
Vertical Takeoff and Landing (VTOL) propulsion technology
N80-10218
Experimental study of low aspect ratio compressor blading
[NASA-TM-79280] N80-11037
- MORKOVNIKOVA, E. I.
Parametric method of aircraft engine status diagnostics based on limited information
N80-10003
- MORRIS, C. E. K., JR.
A flight investigation of performance and loads for a helicopter with NLR-1T main-rotor blade sections
[NASA-TM-80165] N80-10136
- MORTON, J. B.
Pressure and velocity measurements in a three-dimensional wall jet
N80-10126
- MOSIN, I. I.
Selection of optimal parameters of heat-pipe heat exchanger for a gas turbine engine
A80-10613
Study of heat-pipe heat exchanger in the small gas turbine engine system
N80-10022
Selection of optimal parameters of heat-pipe heat exchanger for a gas turbine engine
N80-10068
- MOTRONI, N.
A method for evaluating aircraft take-off performance
[REPT-1663] N80-11076
- MOUREY, D. J.
Study of the feasibility aspects of flight testing an aeroelastically tailored forward swept research wing on a BQM-34F drone vehicle
[NASA-CR-159149] N80-10195
- MUICK, C. J.
Lexicon of aircraft transparency terms
[AD-A071319] N80-10200
- MUKHIN, A. A.
Long-lift GTE operation based on technical condition
N80-10027
- MULAEZ, E. J.
Emission reduction
N80-10207
- MUNGUR, P.
Studies of the acoustic transmission characteristics of coaxial nozzles with inverted velocity profiles, volume 1
[NASA-CR-159698] N80-11870
- MURAKAMI, Y.
Three-dimensional velocity distribution between stator blades and unsteady force on a blade due to passing wakes
A80-10011
- MURPHY, E.
The XPV-12A Thrust-Augmented Wing (TAW) prototype aircraft
N80-10133
- MURRAY, P.
Recent and future engineering developments in flight training simulators
A80-10776
- MUSOFF, H.
Calibration of a low cost strapdown inertial guidance system
A80-12642
- MUSZYNSKI, P.
Electronic instrumentation in civil aviation
A80-11352
- MYRBE, R. W.
UHF coplanar-slot antenna for aircraft-to-satellite data communications
A80-13064

N

- NAGARAJA, K. S.
Workshop on Thrust Augmenting Ejectors
[NASA-CP-2093] N80-10107
Recent developments in ejector technology in the Air Force: An overview
N80-10108
- NAGY, E. J.
Design criteria for dry lubricated flight control bearings
[AD-A071322] N80-10228
- NATTER, N.
Take-off and landing problems of ship based RPVs
A80-11175
- NAVROTSKII, A. G.
Installation for investigating the effect of non-steady-state supersonic gas flow on the blades of a plane cascade
A80-11255
- NESTEROV, E. D.
Determination of turning angle of a jet impinging on a bucket with visor
N80-10011
- NISHIMURA, H.
Fuel minimal take-off path of jet lift VTOL aircraft, log no. C3558
N80-11066
- NOBLE, R.
Avionic system architecture investigation (AVSAR II)
[AD-A071743] N80-11080
- NOBED, D. L.
Aircraft Energy Efficiency (ACEE) status report
N80-10206
- NOVAK, R. A.
Opportunistic Maintenance Engine Simulation model: OMENS 2
[AD-A072516] N80-11088
- NYBERG, S. G.
Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed
[AD-A072098] N80-10143

O

- OLIVE, G.
Recent and future engineering developments in flight training simulators
A80-10776
- ONO, K.
Fracture and fatigue properties of 1Cr-Mo-V bainitic turbine rotor steels
[EPRI-NP-1023] N80-11201
- OSORGIN, V. D.
Laminar boundary layer calculation from experimental pressure distribution
N80-10045
On a smooth approximation method and its application to mathematical description of wing aerodynamic characteristics
N80-11011
- OVCHINNIKOV, V. A.
On a smooth approximation method and its application to mathematical description of wing aerodynamic characteristics
N80-11011

P

- PACKMAN, A. B.
Aero-acoustic tests of duct-burning turbofan exhaust nozzles
[NASA-CR-162254] N80-10204
Flight effects on the aero/acoustic characteristics of inverted profile conannular nozzles
[NASA-CR-162419] N80-10220
- PAILEN, W.
An assessment of terminal air traffic control system performance with and without basic metering and spacing automation
[AD-A073548] N80-11057
- PALCHIKH, M. I.
Operation of airborne equipment and flight safety A80-11875
- PANFILOVICH, V. B.
Calculation of working process in 'slow-compression' piston-type aerodynamic tube A80-10607
- PARRISH, R. V.
Experiments in sensing transient rotational acceleration cues on a flight simulator
[NASA-TP-1537] N80-10193
Application of modified profile analysis to function testing of simulated CTOL transport touchdown-performance data
[NASA-TP-1541] N80-11069
- PATERSON, R. W.
Noise of a model helicopter rotor due to ingestion of turbulence
[NASA-CR-3213] N80-11067
- PAVLOV, V. A.
On the empennage snap-through problem N80-10047
On thin-wall beam effective stiffness N80-10057
Influence of wing deformation on trailing-edge flap deflections N80-11012
- PAVLOV, V. G.
On modeling sensitivity of a linear system to reduction of its order by the infinitesimal transformation method in the yaw motion control problem N80-10046
On a smooth approximation method and its application to mathematical description of wing aerodynamic characteristics N80-11011
- PAXSON, E. B.
Angular vibration of aircraft. Volume 1: Executive summary
[AD-A071895] N80-10197
Angular vibration of aircraft. Volume 2: Prediction methods for angular vibration
[AD-A071749] N80-10198
- PENDERGRAFT, O. C., JR.
Fuselage and nozzle pressure distributions on a 1/12-scale F-15 propulsion model at transonic speeds
[NASA-TP-1521] N80-11036
- PEREVOZHNIKOV, A. V.
On axial turbine stage rotor blade twist with tangential tilt of the stator vanes A80-10630
- PERKINS, S. C., JR.
Prediction of lateral aerodynamic loads on fighter aircraft at high angles of attack
[AD-A071893] N80-11073
- PERSENSKY, P. A.
Opportunistic Maintenance Engine Simulation model: OMENS 2
[AD-A072516] N80-11088
- PESCH, H. J.
Numerical computation of neighboring optimum feedback control schemes in real-time A80-10919
- PETRASH, D. A.
Emission reduction N80-10207
- PETROV, P. G.
Study of size distribution of oil drops formed in GTE oil system lines A80-10632
- Study of size distribution of oil drops formed in GTE oil N80-10088
- PETROVSKII, V. S.
Nonstationarity of heat transfer in axial turbine blading during engine startup A80-10633
Use of the method of variable directions for numerical study of the temperature states of a turbine disk with blades N80-10028
Nonstationarity of heat transfer in axial turbine blading during engine startup N80-10089
- PIBSON, L. J.
Design and simulation of a helicopter target hand-off computer A80-12645
- PISKUNOV, V. A.
An engine fuel chemistry solution to the problem of jet fuel supplies A80-10199
- PIVKIN, E. Y.
Flow-around small-aspect-ratio delta wing with vortex "bursting" N80-10060
- PLATZER, M. P.
Entrainment characteristics of unsteady subsonic jets N80-10124
- PLUMBLEE, H. E.
Studies of the acoustic transmission characteristics of coaxial nozzles with inverted velocity profiles, volume 1
[NASA-CR-159698] N80-11870
- POLHANS, E. C.
Technical evaluation report on the fluid dynamics panel Symposium on High Angle of attack aerodynamics
[AGARD-AR-145] N80-10147
- POLIAKOV, A. M.
Nonstationarity of heat transfer in axial turbine blading during engine startup A80-10633
- POLYAKOV, A. M.
Use of the method of variable directions for numerical study of the temperature states of a turbine disk with blades N80-10028
Nonstationarity of heat transfer in axial turbine blading during engine startup N80-10089
- PONOMAREV, L. I.
Antennas /Current status and problems/ A80-11890
- POOLE, W.
The role of aluminum segregation in the wear of aluminum/bronze-steel interfaces under conditions of boundary lubrication
[ASLE PREPRINT 79-AM-5E-1] A80-12110
- POPKOV, A. B.
Laminar boundary layer calculation from experimental pressure distribution N80-10045
- POPOV, B. G.
Electrical charging of fabric and film materials N80-10048
- POPOV, V. A.
Selecting the geometric parameters and position of a nose flap on the root profile of a swept wing using tunnel test data, part 2 N80-10044
Selection of geometric parameters and location of nose flap on swept wing root profile from tunnel test data, 1 N80-11009
- PORTER, B.
Multivariable digital control systems
[AD-A071662] N80-10226
- PORTER, J. L.
Augmenting ejector endwall effects N80-10121
- POUWELS, H.
Instrumentation for the determination of aircraft performance from dynamic maneuvers A80-12647

- POVAROV, O. A.
Study of size distribution of oil drops formed in GTE oil system lines
A80-10632
Study of size distribution of oil drops formed in GTE oil
N80-10088
- POVINELLI, L. A.
High-performance-vehicle technology
N80-10219
- POWERS, A. G.
Supersonic propulsion technology
N80-10216
- POWERS, J. M., JR.
Aero-servo-elastic stability analysis [AD-A072797]
N80-11101
- PRIDDIN, C. B.
Predictions of the flow field and local gas composition in gas turbine combustors
A80-11773
- PROSKURIYAKOV, G. V.
On the influence of short shroud platforms on turbine stage operation
A80-10627
- PROSKURIYAKOV, G. V.
On the influence of short shroud platforms on turbine stage operation
N80-10083
- PYATLOV, I. N.
Study of homogeneous combustion chamber temperature field nonuniformity with primary zone parameter variation
N80-10065
- R**
- RADOVSKII, B. S.
Application of the design diagram for a layered viscoelastic medium to the evaluation of the stress-strain state of road and runway surfaces for moving loads
A80-12537
- RALL, H. J.
Delta multiplex system DX 15-60
A80-11176
- RAKHODINA, V. V.
Measurement of liquid pump torque in the starting regime
A80-10611
- RANEY, J. P.
Noise reduction
N80-10208
- RAO, B. M.
Prediction of aerodynamic characteristics of fighter wings at high lift [AD-A072630]
N80-10140
- RAO, D. M.
Leading edge vortex-flap experiments on a 74 deg delta wing [NASA-CR-159161]
N80-11038
- RAU, C. A., JR.
Fracture and fatigue properties of 1Cr-Mo-V bainitic turbine rotor steels [EPRI-NP-1023]
N80-11201
- RAYMER, D. P.
Developing an aircraft configuration using a minicomputer
A80-11393
- RE, R. J.
Effect of several airframe/nozzle modifications on the drag of a variable-sweep bomber configuration [NASA-TM-80129]
N80-10106
- REBONT, J.
Large-amplitude fluctuations of velocity and incidence of an oscillating airfoil
A80-11432
- REDDY, K. R.
Prediction of helicopter rotor downwash in hover and vertical flight [ARL-AERO-FEPT-150]
N80-11032
- REID, L.
Turbomachinery technology
N80-10212
Experimental study of low aspect ratio compressor blading [NASA-TM-79280]
N80-11037
- RETELLE, J. P., JR.
A Laser Doppler Velocimeter system to investigate unsteady flow separation
A80-12634
- REUBUSH, D. E.
Effect of several airframe/nozzle modifications on the drag of a variable-sweep bomber configuration [NASA-TM-80129]
N80-10106
- REYNOLDS, B.
Characteristics of lightly loaded fan rotor blade wakes [NASA-CR-3188]
N80-11034
- RICE, E. J.
Noise reduction
N80-10208
- RICE, J.
Navigation and meteorological error equations for some aerodynamic parameters [NASA-TM-80804]
N80-10150
- RIEDEL, S. A.
Manned engineering flight simulation validation, Part 1. Simulation requirements and simulator motion system performance [AD-A071394]
N80-10235
Manned engineering flight simulation validation, part 2: Software user's guide [AD-A071395]
N80-11105
- RIZZI, A.
Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed [AD-A072098]
N80-10143
- ROBERTS, M.
Recent and future engineering developments in flight training simulators
A80-10776
- ROBINSON, C. E.
Evaluation of an ejector powered engine simulator at transonic Mach numbers [AD-A071607]
N80-11094
- RODDEH, W. P.
Aero-servo-elastic stability analysis [AD-A072797]
N80-11101
- ROMAN, I.
Fracture and fatigue properties of 1Cr-Mo-V bainitic turbine rotor steels [EPRI-NP-1023]
N80-11201
- ROSENFELD, D. B.
Systems analysis of arctic fuels dispensing equipment [AD-A071815]
N80-11106
- ROWLEY, T. W.
The capability of CGI in flight simulation
A80-10768
- ROZHDESTVENSII, K. V.
Motion of rectangular wing between parallel walls
N80-10050
- RUEGER, I. J.
Nova satellite time experiment
A80-10268
- RUSSELL, J. J.
A literature search and review of the dynamics of aircraft-surface interaction [AD-A070940]
N80-10199
- RUSSELL, J. W.
A method for predicting the noise levels of coannular jets with inverted velocity profiles [NASA-CR-3176]
N80-11868
- S**
- SABLINA, Z. A.
The chemical stability of hydro-treated fuels and their stabilization by antioxidants
A80-10200
- SAHAI, V.
Use of wagner functions in airfoil design optimization [AD-A072634]
N80-10139
- SALIKUDDIN, M.
Studies of the acoustic transmission characteristics of coaxial nozzles with inverted velocity profiles, volume 1 [NASA-CR-159698]
N80-11870
- SALMIRS, S.
Aircrew displays and avionics for application in a future national airspace system [NASA-TM-80095]
N80-11052

SAMUELSSON, H.
IR-camera for day and night fire control
A80-11180

SANDERS, H. G.
In-flight performance evaluation of experimental information
[AD-A071701] N80-11084

SAPOZHNIKOV, I. E.
Systematization of simple detail parts of regulable nozzle of gas turbine engine
A80-10616

Systematization of simple detail parts of regulable nozzle of gas turbine engine
N80-10071

SAUNDERS, N. T.
Aircraft Energy Efficiency (ACEE) status report
N80-10206

SCHILLIGER, H.
A pulse compression, precision DME system
A80-11351

SCHLICKENMAIER, H. W.
Wind shear hazard definition for a wide body jet
[FAA-RD-79-90] N80-11715

SCRIBNER, K. J.
Behavior of lightly confined high explosives in a jet-fuel fire
[UCRL-52659] N80-11247

SECORD, J. R.
Brittle materials design, high temperature gas turbine
[AD-A071750] N80-11090

SEEVERS, J. A.
Simulator for air-to-air combat motion system investigation
[AD-A072612] N80-10237

SEILER, M. R.
An investigation of corner separation within a thrust augmentor having Coanda jets
[NADC-76153-30] N80-10122

SELLERS, J. P.
Vertical Takeoff and Landing (VTOL) propulsion technology
N80-10218

SEMERJIAN, H. G.
Pollutant emissions from 'partially' mixed turbulent flames
A80-11793

SHARAFUTDINOV, F. I.
Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber
A80-10196

SHATAEV, V. G.
Analysis of thin-wall beams by the method of segments
N80-10043

SHCHUKIN, V. K.
Effect of flow swirling on heat transfer in the cylindrical part of the prenozzle volume of a model chamber
A80-10196

Study of heat-pipe heat exchanger in the small gas turbine engine system
N80-10022

SHELDON, E. F.
Diffusion bonding - Aerospace applications
A80-12081

SHELIKHOV, G. S.
Flaw detection of aircraft components in operation
A80-11879

SHELOHOV, N. A.
Structural analysis of variable-sweep wings
N80-10053

SHESTERNINA, Z. N.
Harmonic oscillations of annular wing in steady ideal fluid flow
N80-11019

SHIBANOV, G. P.
Organization of automatic control systems for technological processes in aircraft mechanical engineering
A80-10123

SHIFRIN, B. A.
Aerodynamic efficiency of gas turbine intake duct
N80-10077

SHIMURA, Y.
Development of an aircraft-derivative gas turbine with high performance and large output
A80-10823

SHINOZUKA, H.
Improved methods for predicting spectrum loading effects, phase 1 report, Volume 1: Results and discussion
[AD-A072386] N80-11071

SHUBERT, K. A.
Swept frequency scattering measurements of aircraft
[AD-A071474] N80-10420

SHUMACHENKO, V. G.
Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
N80-10075

SIDOROV, O. P.
Laminar boundary layer calculation from experimental pressure distribution
N80-10045

SIDOROVA, S. O.
Laminar boundary layer calculation from experimental pressure distribution
N80-10045

SIGNORELLI, R. A.
Materials and structures technology
N80-10210

SIMMONS, J. H.
Entrainment characteristics of unsteady subsonic jets
N80-10124

SINDEEV, I. M.
Operation of airborne equipment and flight safety
A80-11875

SOKROL, P. H.
Computational fluid mechanics of internal flow
N80-10211

SORENSEN, H.
Investigation of the boundary condition at a wind tunnel test section wall for a lifting wing-body model at low supersonic speed
[AD-A072098] N80-10143

SORENSEN, L.
Avionic system architecture investigation (AVSAR II)
[AD-A071743] N80-11080

SPANGLER, S. B.
Prediction of lateral aerodynamic loads on fighter aircraft at high angles of attack
[AD-A071893] N80-11073

SPARKS, G. W., JR.
A Laser Doppler Velocimeter system to investigate unsteady flow separation
A80-12634

SPEKTOR, A. A.
Use of sign statistics for sequential signal detection in a pulse radar system
A80-12031

SPENCER, P. A.
Factors affecting the retirement of commercial transport jet aircraft
[NASA-CR-152308] N80-10148

SPIRIDONOV, Y. A.
Influence of gas turbine engine combustion chambers geometric parameters on mixture formation characteristics
N80-10006

SPROAT, W. H.
Reliability of nondestructive inspections
[AD-A072097] N80-10503

SQUYERS, R. A.
Augmenting ejector endwall effects
N80-10121

STALANTOV, A. V.
Study of mass exchange between primary zone and secondary air jets in gas turbine engine combustion chambers
N80-10075

STEERS, L. L.
Flight-measured afterbody pressure coefficients from an airplane having twin side-by-side jet engines for Mach numbers from 0.6 to 1.6
[NASA-TP-1549] N80-11035

STEIN, G.
Singular values and feedback - Design examples
A80-12716

STENKIN, E. D.
Systematization of simple detail parts of regulable nozzle of gas turbine engine
A80-10616

Systematization of simple detail parts of regulable nozzle of gas turbine engine
N80-10071

STEPHENS, H. E.
Design and performance evaluation of supercritical
airfoils for axial flow compressors
[AD-A071206] N80-11093

STEPHENSON, M. D.
A helmet-mounted sight using C.C.D. technology
A80-10884

STEPKA, F. S.
Turbomachinery technology
N80-10212

STERLIN, V. A.
Selecting the geometric parameters and position of
a nose flap on the root profile of a swept wing
using tunnel test data, part 2
N80-10044

Selection of geometric parameters and location of
nose flap on swept wing root profile from tunnel
test data, 1
N80-11009

STEVENS, D. D.
A flight investigation of performance and loads
for a helicopter with NLR-1T main-rotor blade
sections
[NASA-TM-80165] N80-10136

STITT, L. E.
Supersonic propulsion technology
N80-10216

STOCKMAN, N. O.
An efficient user-oriented method for calculating
compressible flow in an about three-dimensional
inlets
[NASA-CR-159578] N80-10134

STOLPESTAD, J. H.
Improved methods for predicting spectrum loading
effects, phase 1 report. volume 2: Test data
[AD-A072387] N80-11070

Improved methods for predicting spectrum loading
effects, phase 1 report, Volume 1: Results and
discussion
[AD-A072386] N80-11071

STONE, J. R.
Noise reduction
N80-10208

STREIFF, H. G.
Reaction control system augmentation for V/STOL
aircraft
N80-10130

STROGOV, O. V.
Dynamics of diesel fuel combustion in turbulent flow
N80-10074

STUELPNAGEL, T. R.
Light turbine helicopters to the year 2000
A80-11397

SUIT, W. T.
Comparison of stability and control parameters for
a light, single-engine, high-winged aircraft
using different flight test and parameter
estimation techniques
[NASA-TM-80163] N80-10225

SULLIVAN, J. L.
The role of aluminum segregation in the wear of
aluminum/bronze-steel interfaces under
conditions of boundary lubrication
[ASLE PREPRINT 79-AM-5E-1] A80-12110

SUNDER, R.
A regression model of fatigue crack propagation
under flight simulation loading
A80-12157

SURNOV, D. N.
Lubrication of aircraft gas-turbine engines
A80-11057

SVILIN, A. V.
Application of the factor interpolation method in
flight vehicle landing gear analytic design
N80-10058

SYNES, D.
Civil applications of NAVSTAR GPS
N80-10175

SZUCH, J. R.
Control technology
N80-10215

T

TAIT, D. R.
The impact of the limits of simulation in
extending the use of simulators in training
A80-10763

TAKEO, K.
Development of an aircraft-derivative gas turbine
with high performance and large output
A80-10823

TALANTOV, A. V.
Study of mass exchange between primary zone and
secondary air jets in gas turbine engine
combustion chambers
A80-10619

Influence of gas turbine engine combustion
chambers geometric parameters on mixture
formation characteristics
N80-10006

Dynamics of diesel fuel combustion in turbulent flow
N80-10074

TALYZIN, V. A.
Basic problem of aircraft gas turbine engine
analytic design, part 1
N80-10042

Optimal thermogasdynamic design of gas turbine
engines using element prototypes, 1
N80-11007

TANAKA, G. J.
Behavior of lightly confined high explosives in a
jet-fuel fire
[UCRL-52659] N80-11247

TANG, V. Q.
Predicted jet thickness effects on the lift of an
augmentor wing
A80-12597

TER-MINASIAN, S. H.
Steady flow over the pressure side of a
piecewise-flat delta wing with supersonic
leading edges
A80-12908

TETELMAN, A. S.
Fracture and fatigue properties of 1Cr-Mo-V
bainitic turbine rotor steels
[EPRI-NF-1023] N80-11201

THELANDER, S.-B.
The 'Viggen' multimode radar
A80-11171

TINKLER, J.
Predicted jet thickness effects on the lift of an
augmentor wing
A80-12597

TISHINA, E. A.
The chemical stability of hydro-treated fuels and
their stabilization by antioxidants
A80-10200

TOBIAS, G. J.
Developing large helicopters
A80-11395

TOEPEL, W. O.
Requirements for short instrument runways
A80-11653

TOMASINE, R. L.
A flight investigation of performance and loads
for a helicopter with NLR-1T main-rotor blade
sections
[NASA-TM-80165] N80-10136

TOPPS, J. E. C.
An optical technique for the investigation of flow
in gas turbine combustors
A80-11769

TOWNSEND, D. P.
NASA gear research and its probable effect on
rotorcraft transmission design
A80-13068

TRABOCCO, R. E.
Design and operation of multi-specimen fully
reversed fatigue systems for advanced composite
materials
A80-10206

TROITSKII, Y. V.
Dynamics of diesel fuel combustion in turbulent flow
N80-10074

TRUNEVA, E. A.
Flow-around small-aspect-ratio delta wing with
vortex "bursting"
N80-10060

TSAO, C. P.
Use of wagner functions in airfoil design
optimization
[AD-A072634] N80-10139

TUMANOV, A. V.
Flight-vehicle equipment
A80-11869

- TUNAKOV, A. P.**
Parametric method of aircraft engine status
diagnostics based on limited information N80-10003
- TYMCZYSZYŃ, J. P.**
The collision avoidance problem requires a mix of
partial solutions N80-12930

U

- UCHIYAMA, N.**
The analysis of wing-body combinations at moderate
angles of attack
[AD-A074284] N80-11040
- UGAROV, A. I.**
Flaw detection of aircraft components in operation N80-11879

V

- VAICAITIS, R.**
Improved methods for predicting spectrum loading
effects, phase 1 report, Volume 1: Results and
discussion
[AD-A072386] N80-11071
- VANWINKLE, R. A.**
A compilation and analysis of helicopter handling
qualities data. Volume 1: Data compilation
[NASA-CR-3144] N80-11097
- VARGANOV, I. S.**
Gas curtains in gas turbine engines N80-10608
Gas curtains in gas turbine engines N80-10063
- VASILCHENKO, G. S.**
Experimental investigation of the strength of
rotor materials in the presence of surface cracks N80-10482
- VASIN, V. A.**
Construction of a nonstationary nonlinear
propeller theory N80-12911
- VATOLIN, V. V.**
Optimal control of flight vehicle with elastic
elements N80-10037
- VAUGHAN, J. C., III**
Multirole cargo aircraft options and configurations
[NASA-TN-80177] N80-11053
- VAUGHAN, V. L., JR.**
Light airplane crash tests at three pitch angles
[NASA-TR-1481] N80-11505
- VEINBERG, E. V.**
Lubrication of aircraft gas-turbine engines N80-11057
- VINOGRADOV, R. I.**
Analog modeling in studying supersonic flow around
a wing and its governing analog-criteria N80-10038
- VOLOV, V. T.**
Study of combined operation of self-evacuating
vortex tube with diffuser N80-10085
- VOROBEV, N. P.**
Solution of linear problems of flow about finite
span wing N80-12912
- VOSKRESENSKII, D. I.**
Antennas /Current status and problems/ N80-11890
- VRANOS, A.**
Pollutant emissions from 'partially' mixed
turbulent flames N80-11793

W

- WALSE, B.**
Applied technology in turbofan engines N80-12003
- WANHILL, R. J. B.**
Flight simulation fatigue crack propagation
evaluation of candidate lower wing skin
materials with particular consideration of
spectrum truncation
[NLR-TR-77092-U] N80-11524

- WARING, G.**
Design and operation of multi-specimen fully
reversed fatigue systems for advanced composite
materials A80-10206
- WARHBRODT, W.**
Coupled rotor and fuselage equations of motion
[NASA-TN-81153] N80-10516
- WEBER, R. J.**
Supersonic propulsion technology N80-10216
- WEIDEMANN, H. L.**
Entropy analysis of feedback flight dynamic
control systems
[AD-A072259] N80-11100
- WESTON, R. C.**
Flying qualities research for highly augmented
aircraft
[RE-582] N80-10194
- WHITE, M. D.**
The development and use of large-motion simulator
systems in aeronautical research and development N80-10765
- WHITLOW, J. B., JR.**
Supersonic propulsion technology N80-10216
- WHITELY, D. C.**
The external augmentor concept for V/STOL aircraft N80-10132
- WILLIAMS, H. A.**
E-3A sentry, airborne early warning and control
for Europe N80-11168
- WILLIAMSON, V. L.**
Opportunistic Maintenance Engine Simulation model:
OMENS 2
[AD-A072516] N80-11088
- WINGATE, J. W.**
Inequalities and approximation with applications
to VSTOL aircraft
[AD-A071807] N80-11099
- WINTERHOYER, H. C.**
An assessment of terminal air traffic control
system performance with and without basic
metering and spacing automation
[AD-A073548] N80-11057
- WU, J. J.**
Considerations of some critical ejector problems N80-10127
- WU, J. H.**
The analysis of wing-body combinations at moderate
angles of attack
[AD-A074284] N80-11040

Y

- YAKUSHEV, V. S.**
Analytic representation of turbine characteristics
in form convenient for computer calculation of
GTE parameters N80-10024
- YAMAGUCHI, H.**
Prediction of surge-point in multi-stage axial
compressors N80-10897
- YANKOVSKII, V. M.**
Study of homogeneous combustion chamber
temperature field nonuniformity with primary
zone parameter variation N80-10065
- Study of mass exchange between primary zone and
secondary air jets in gas turbine engine
combustion chambers N80-10075
- YIP, L. P.**
Low-speed wind-tunnel tests of a 1/10-scale model
of an advanced arrow-wing supersonic cruise
configuration designed for cruise at Mach 2.2
[NASA-TN-80152] N80-10135
- YUNUSOV, N. K.**
Optimal control of flight vehicle with elastic
elements N80-10037

Z



- ZAPATA, R. N.
 Experimental feasibility study of the application
 of magnetic suspension techniques to large-scale
 aerodynamic test facilities
 [NASA-CR-146761] N80-11102
- ZARETSKY, E. V.
 NASA gear research and its probable effect on
 rotorcraft transmission design A80-13068
- ZEIPMAN, M. R.
 Aero-servo-elastic stability analysis
 [AD-A072797] N80-11101
- ZHUIKOV, V. V.
 Computer calculation of stationary temperature
 fields in cooled turbine discs A80-10614
- ZIEMIANSKI, J. A.
 Aircraft Energy Efficiency (ACEE) status report
 N80-10206
- ZIMET, H.
 Technological trends in electronic warfare A80-11172
- ZIMMER, H.
 The significance of wing end configuration in
 airfoil design for civil aviation aircraft
 [NASA-TM-75711] N80-10104
- ZOLLARS, G. F.
 Hydrogen as a fuel. Citations from the
 international aerospace abstracts data base
 [NTIS/PS-79/0771/0] N80-10397
 Aircraft fuel. Citations from the International
 Aerospace Abstracts Data Base
 [NTIS/PS-79/0764/5] N80-10668
- ZOREV, N. N.
 Experimental investigation of the strength of
 rotor materials in the presence of surface cracks
 A80-10482
- ZRELOV, V. N.
 An engine fuel chemistry solution to the problem
 of jet fuel supplies A80-10199

CONTRACT NUMBER INDEX

AERONAUTICAL ENGINEERING / *A Continuing Bibliography (Suppl. 119)*

FEBRUARY 1980

Typical Contract Number Index Listing



Listings in this index are arranged alphanumerically by contract number. Under each contract number, the accession numbers denoting documents that have been produced as a result of research done under that contract are arranged in ascending order with the *IAA* accession numbers appearing first. The accession number denotes the number by which the citation is identified in either the *IAA* or *STAR* section.

AF PROJ. 486U	N80-11513	DAAH01-76-C-0396	A80-12645
AF PROJ. 1123	N80-10233	DAAJ02-76-C-0035	N80-10228
	N80-10237	DAAK40-77-C-0156	A80-12645
AF PROJ. 2003	N80-11061	DAAK70-77-D-0024	N80-11106
AF PROJ. 2104	N80-10199	DOT-FA70WAI-175	N80-11275
AF PROJ. 2305	N80-10420	DOT-FA79WAI-012	N80-11057
AF PROJ. 2307	N80-10139	DRB-9550-52	A80-12597
	N80-10143	DTCB-76-98214-00481-7581	A80-11432
	N80-10229	EC-77-C-03-1543	N80-11244
	N80-11092	EF-77-A-01-2593	N80-10344
	N80-11100	EPRI PROJ. 700-1	N80-11201
AF PROJ. 2401	N80-10197	EX-76-C-01-2433	N80-10391
	N80-10198	EY-76-S-02-2296-002	A80-13126
AF PROJ. 2402	N80-11054	FAA PROJ. 181-521-100	N80-11050
AF PROJ. 3048	N80-10223	FAA PROJ. 219-151-100	N80-11273
AF PROJ. 3145	N80-10439	F08635-78-C-0306	A80-12642
AF PROJ. 3207	N80-10227	F19628-77-C-0125	N80-10420
AF PROJ. 4600	N80-11309	F19628-78-C-0006	N80-11275
AF PROJ. 7184	N80-10200	F33615-71-C-1591	N80-10439
AF PROJ. 7231	N80-11055	F33615-76-C-2020	N80-10223
AF PROJ. 7312	N80-11474	F33615-76-C-3121	N80-11513
AF PROJ. 8809	N80-10201	F33615-76-C-5302	N80-11474
AF-AFOSR-3005-76	N80-10226	F33615-77-C-1233	N80-11061
AF-AFOSR-3282-77	N80-10143	F33615-77-C-2065	N80-10235
AF-AFOSR-3543-78	N80-10139	F33615-77-C-3013	N80-10227
ARPA ORDER 1849	N80-11090	F33615-77-C-3050	N80-10197
CNR-76-00442.07	N80-11076	F33615-77-C-3121	N80-11070
CNR-76-01620.07	N80-11076	F33615-77-C-3050	N80-10197
DA PROJ. 1F2-62209-AH-76	N80-10228	F33615-77-C-3050	N80-10198
DA PROJ. 1L1-62202-AH-85	N80-11080	F33615-77-C-3050	N80-10197
DA PROJ. 1L2-62209-AH-76	N80-10136	F33615-77-C-3121	N80-11070
DA PROJ. 2Q2-63743-A-772	N80-10236	F33615-77-C-3050	N80-10197
DA PROJ. 3E7-62773-A-819	N80-11084	F33615-77-C-3050	N80-10197
DAAB07-78-C-2445	N80-11080	F33615-77-C-3050	N80-10197
DAAG29-77-G-0108	N80-11040	F33615-77-C-3050	N80-10197
DAAG46-71-C-0162	N80-11090	F33615-77-C-3050	N80-10197

F41608-76-D-A005	N80-10503
F41608-77-D-A021	N80-10503
F49620-78-C-0070	N80-11092
MIN-DEP/AT/2040/084	N80-11399
NASA ORDER L-75242A	N80-10103
NASW-3199	N80-10104
NAS1-13500	N80-11031
NAS1-14012	N80-11030
NAS1-14238	N80-11058
NAS1-14698	N80-11238
NAS1-14948	N80-10149
NAS1-15094	N80-11067
NAS1-15624	N80-10195
NAS1-15629	N80-10476
NAS2-9344	N80-11097
NAS3-17866	N80-10204
NAS3-20602	N80-10221
NAS3-20632	N80-10515
NAS3-20797	N80-11870
NAS3-21135	N80-10134
NAS3-21389	N80-10222
NAS9-14952	N80-10224
NGR-36-010-024	A80-10033
NGR-47-005-029	N80-11102
NGR-47-005-110	N80-11102
NGR-47-005-112	N80-11102
NGR-47-005-219	N80-10126
NIVR-1806	N80-11524
NRC A-5562	A80-12597
NSF 7522498	N80-10126
NSG-1010	N80-11102
NSG-1315	N80-11038
NSG-2149	N80-10148
NSG-2269	N80-11103
NSG-3012	N80-11034
N00014-74-C-0344	N80-11073
N00014-75-C-0144	A80-12716
N00014-78-C-0128	N80-10140
N00014-79-C-0002	N80-11074
N00019-76-C-0346	N80-11101
N00019-77-C-0121	A80-10289
N00019-77-C-0546	N80-11093
N00167-78-N-2599	N80-11075
N62269-76-C-0303	A80-10289
N62269-76-C-0402	N80-10122
RR0141184	N80-10140
RR0320501	N80-11074
SWEDBTD-75-4494	N80-11049
SWEDBTD-76-4505	N80-11049
W-74 05-ENG-48	N80-11247
505-02-21	N80-10516
505-02-33-02	N80-10512
505-06-54	N80-11035
505-06-63-02	N80-10225
505-09-43-01	N80-10193
505-10-30-01	N80-11033
505-10-31	N80-10107
505-11-13-02	N80-10101
505-31-43-04	N80-11036
505-35-33-01	N80-11069

513-52-13-52	N80-10152
517-53-43-01	N80-10135
517-53-43-03	N80-10102
530-04-13-01	N80-11053
534-04-13-56	N80-11052

1. Report No. NASA SP-7037 (119)	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle AERONAUTICAL ENGINEERING A Continuing Bibliography (Supplement 119)		5. Report Date February 1980	
		6. Performing Organization Code	
7. Author(s)		8. Performing Organization Report No.	
		10. Work Unit No.	
9. Performing Organization Name and Address National Aeronautics and Space Administration Washington, D. C. 20546		11. Contract or Grant No.	
		13. Type of Report and Period Covered	
12. Sponsoring Agency Name and Address		14. Sponsoring Agency Code	
		15. Supplementary Notes	
16. Abstract This bibliography lists 341 reports, articles, and other documents introduced into the NASA scientific and technical information system in January 1980.			
17. Key Words (Suggested by Author(s)) Aerodynamics Aeronautical Engineering Aeronautics Bibliographies		18. Distribution Statement Unclassified - Unlimited	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 112	22. Price* \$5.00 HC

* For sale by the National Technical Information Service, Springfield, Virginia 22161

PUBLIC COLLECTIONS OF NASA DOCUMENTS

DOMESTIC

NASA distributes its technical documents and bibliographic tools to eleven special libraries located in the organizations listed below. Each library is prepared to furnish the public such services as reference assistance, interlibrary loans, photocopy service, and assistance in obtaining copies of NASA documents for retention.

CALIFORNIA

University of California, Berkeley

COLORADO

University of Colorado, Boulder

DISTRICT OF COLUMBIA

Library of Congress

GEORGIA

Georgia Institute of Technology, Atlanta

ILLINOIS

The John Crerar Library, Chicago

MASSACHUSETTS

Massachusetts Institute of Technology, Cambridge

MISSOURI

Linda Hall Library, Kansas City

NEW YORK

Columbia University, New York

OKLAHOMA

University of Oklahoma, Bizzell Library

PENNSYLVANIA

Carnegie Library of Pittsburgh

WASHINGTON

University of Washington, Seattle

NASA publications (those indicated by an "*" following the accession number) are also received by the following public and free libraries:

CALIFORNIA

Los Angeles Public Library

San Diego Public Library

COLORADO

Denver Public Library

CONNECTICUT

Hartford Public Library

MARYLAND

Enoch Pratt Free Library, Baltimore

MASSACHUSETTS

Boston Public Library

MICHIGAN

Detroit Public Library

MINNESOTA

Minneapolis Public Library

MISSOURI

Kansas City Public Library

St. Louis Public Library

NEW JERSEY

Trenton Public Library

NEW YORK

Brooklyn Public Library

Buffalo and Erie County Public Library

Rochester Public Library

New York Public Library

OHIO

Akron Public Library

Cincinnati Public Library

Cleveland Public Library

Dayton Public Library

Toledo Public Library

TENNESSEE

Memphis Public Library

TEXAS

Dallas Public Library

Fort Worth Public Library

WASHINGTON

Seattle Public Library

WISCONSIN

Milwaukee Public Library

An extensive collection of NASA and NASA-sponsored documents and aerospace publications available to the public for reference purposes is maintained by the American Institute of Aeronautics and Astronautics, Technical Information Service, 555 West 57th Street, 12th Floor, New York, New York 10019.

EUROPEAN

An extensive collection of NASA and NASA-sponsored publications is maintained by the British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England. By virtue of arrangements other than with NASA, the British Library Lending Division also has available many of the non-NASA publications cited in *STAR*. European requesters may purchase facsimile copy of microfiche of NASA and NASA-sponsored documents, those identified by both the symbols "#" and "*", from: ESA - Information Retrieval Service, European Space Agency, 8-10 rue Mario-Nikis, 75738 Paris CEDEX 15, France.

National Aeronautics and
Space Administration

Washington, D.C.
20546

Official Business

Penalty for Private Use, \$300

THIRD-CLASS BULK RATE

Postage and Fees Paid
National Aeronautics and
Space Administration
NASA-451



NASA

POSTMASTER: If Undeliverable (Section 158
Postal Manual) Do Not Return

NASA CONTINUING BIBLIOGRAPHY SERIES

NUMBER	TITLE	FREQUENCY
NASA SP-7011	AEROSPACE MEDICINE AND BIOLOGY Aviation medicine, space medicine, and space biology	Monthly
NASA SP-7037	AERONAUTICAL ENGINEERING Engineering, design, and operation of aircraft and aircraft components	Monthly
NASA SP-7039	NASA PATENT ABSTRACTS BIBLIOGRAPHY NASA patents and applications for patent	Semiannually
NASA SP-7041	EARTH RESOURCES Remote sensing of earth resources by aircraft and spacecraft	Quarterly
NASA SP-7043	ENERGY Energy sources, solar energy, energy conversion, transport, and storage	Quarterly
NASA SP-7500	MANAGEMENT Program, contract, and personnel management, and management techniques	Annually

Details on the availability of these publications may be obtained from:

SCIENTIFIC AND TECHNICAL INFORMATION OFFICE

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Washington, D.C. 20546