

(NASA-CR-165623-Vol-3) THERMAL POLLUTION
MATHEMATICAL MODEL. VOLUME 3: USER'S
MANUAL FOR ONE-DIMENSIONAL NUMERICAL MODEL
FOR THE SEASONAL THERMOCLINE Final Report
(Miami Univ.) 56 p HC A04/MF A01 CSCL 13B G3/43

N81-23556

Unclas
23981

**THERMAL POLLUTION MATHEMATICAL
MODEL**

(Volume Three of Seven Volumes)

**USER'S MANUAL FOR ONE-DIMENSIONAL
NUMERICAL MODEL FOR THE
SEASONAL THERMOCLINE**

Volume III

by

**Samuel S. Lee, Subrata Sengupta
and Emmanuel V. Nwadike
Department of Mechanical Engineering
University of Miami
Coral Gables, Florida 33124**



Prepared for

**National Aeronautics and Space Administration
and
Environmental Protection Agency
(NASA Contract NAS 10-9410)**

August 1980

PREFACE

Emphasis continues to be placed on the use of digital computers in solving nonlinear hydrodynamic and thermodynamic equations of fluid flow. This publication of the thermal pollution group at the University of Miami presents the solution of one such problem. This problem deals with the use of a numerical one-dimensional model in predicting the temperature profiles of a deep body of water. Although this model can be applied to most lakes, a specific site (Lake Keowee, S. C.) application has been chosen and described in detail. The programs are written in fortran V and could be modified by the user. Some of these modifications are suggested either in the text or in the specific programs.

A detailed derivation of the equations integrated has been left out; however, to improve readability of the final equations, the meaning of the terms and variables occurring in these equations are included.

This research was performed at the thermal pollution laboratory at the University of Miami. Funding was provided by the National Aeronautics and Space Administration (NASA-KSC) and the Environmental Protection Agency (EPA-RTP).

ABSTRACT

A user's manual for a one-dimensional thermal model is described. The model is essentially a set of partial differential equations which are solved by finite difference methods using a high speed digital computer. The main equations integrated are discussed. The programs are written in fortran V and an example problem is discussed in detail.

CONTENTS

Forward	ii
Preface	iii
Abstract	v
Figures	vi
Symbols	vii
Acknowledgments	
1. Introduction	1
2. Recommendations	3
3. Program Description and Flow Chart	4
Description of program algorithm	4
Background	4
Algorithm	4
Main program and subroutines	6
4. Description of Program Symbols	9
Introduction	9
Description of main variables	10
5. Preparation of Input Data	12
6. Plotting Programs and Execution Elements	13
Plotting programs	13
Input data	13
References	17
Appendices	18
A. Example Problem	18
Site description	18
Problem statement	18
Calculations of parameters and input data	18
B. Fortran Program Listings	27

FIGURES

<u>Number</u>		<u>Page</u>
1	Idealized deep body of water	5
2	Flow chart (calculation)	7
3	Flow chart (plots)	16
4	Lake Keowee	20
5	Sample output - Lake Keowee, 1971	24
6	Sample plots - measured average temperature profiles (Stations 500-506) vs predicted temperature profiles, Lake Keowee, 1971	25
7	Sample plot	26

SYMBOLS

<p>z Vertical coordinate measured upward from deepest point of the lake. As a subscript it marks the vertical components of a vector.</p> <p>h Depth of lake</p> <p>$A(z)$ Horizontal cross-sectional area at height Z</p> <p>$I(z)$ Bottom-surface source of mass per unit area</p> <p>$Q(z)$ Bottom-surface source of heat per unit area</p> <p>T Temperature ($^{\circ}\text{C}$)</p> <p>ρ Density of water</p> <p>V_z Vertical velocity</p> <p>K_z Eddy diffusivity</p> <p>K_{zo} Eddy diffusivity under neutral condition</p> <p>$W^* = (\tau_{s0})^{1/2}$ Friction velocity</p> <p>σ_1 Empirical constant</p> <p>R_i Richardson number</p> <p>α_V Volumetric coefficient of expansion of water</p> <p>τ_s Surface shear stress</p>	<p>C_p Heat capacity</p> <p>$H^p(z)$ Heat source/unit volume</p> <p>A_1 Average value of W^*</p> <p>B_1 Half of the annual variation W^*</p> <p>C_1, C_2, C_3, C_4, C_5 Phase angles</p> <p>ϕ_0 Solar radiation incident on the water surface</p> <p>A_2 Average value of ϕ_0</p> <p>B_2 Half the annual variation of ϕ_0</p> <p>n Extinction coefficient</p> <p>β Absorption coefficient</p> <p>Q_p Volumetric discharge</p> <p>ΔT Condenser temperature change</p> <p>T_D Discharge temperature</p> <p>q_s Surface heat flux</p> <p>K_s Surface heat exchange coefficient</p> <p>T_E Equilibrium temperature</p> <p>A_3 Average value of T_E</p> <p>B_3 Half the annual variation of T_E</p> <p>T_s Surface temperature</p> <p>q_B Bottom surface heat flux</p> <p>R_A Lake surface radius</p> <p>$\frac{dA}{dz}$ Area variation with depth</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

ACKNOWLEDGMENTS

This work was supported by a contract from the National Aeronautics and Space Administration (NASA-KSC) and the Environmental Protection Agency (EPA-RTP).

The authors express their sincere gratitude for the technical and managerial support of Mr. Roy A. Bland, the NASA-KSC project manager of this contract, and the NASA-KSC remote sensing group. Special thanks are also due to Dr. Theodore G. Brna, the EPA-RTP project manager, for his guidance and support of the experiments, and to Mr. S. B. Hager, Chief Engineer, Civil-Environmental Division, and Mr. William J. McCabe, Assistant Design Engineer, both from the Duke Power Company, Charlotte, North Carolina, and their data collection group for data acquisition. The support of Mr. Charles H. Kaplan of EPA was extremely helpful in the planning and reviewing of this project.

SECTION 1

INTRODUCTION

It is important that the thermal behavior of heated discharges and their receiving basins be clearly understood.

A numerical model that can be used for predicting the seasonal thermocline of a deep body of water is very useful in studying the environmental impact of thermal discharges from power plants. This is not only required for existing power plants but also for planned units. Thus, a predictive capability is essential to the licensing procedure. Monitoring programs cannot satisfy these needs, but from time to time, play a vital role in the calibration and verification of mathematical models.

The one-dimensional, thermal numerical model, described in this manual, features the effects of area change with depth, nonlinear interaction of wind-generated turbulence and buoyancy, absorption of radiative heat flux below the surface, thermal discharges and the effects of vertical convection caused by discharge. The main assumption in the formulation of this model is horizontal homogeneity.

This model can be applied to most stratified deep bodies of water. This stratification has a seasonal cycle and is an important natural characteristic of a body of water. The body of water could be divided into any number of slices. The temperature of each slice is predicted by the model. The surface slice exchanges heat with the environment of known climatic conditions while the bottom slice is assumed perfectly insulated. Condenser cooling water is extracted from any one of the slices and heated by the power plant. The discharge is injected into a slice of the same temperature as the discharge.

The main function of the model is the prediction of the temperature profiles in a deep body of water for any number of annual cycles. However, predictions cannot be made on hourly basis - a feature usually handled by a more sensitive three-dimensional model. This is the main limitation of the model.

The procedure used in writing this manual is as follows:

Description and flow chart of the main program are given in Section 3, where the subroutines are also described. In the next section, a list of the variables and dimensions are given. The next three sections

show how a typical run is prepared, executed and plotted. An example case is discussed in Appendix A, while Appendix B gives the fortran source program listings.

SECTION 2

RECOMMENDATIONS

The main disadvantage of a one-dimensional thermal model lies in the fact that resolution is sacrificed for computational speed. Three dimensional models are bulky and time consuming but have much better resolution, however, when long term simulations are necessary, a one-dimensional model is recommended.

The model described here can be modified to include the single effects of the various quantities involved in the surface heat transfer phenomenon rather than using the equilibrium temperature concept. This is particularly recommended for the user who is interested in modeling the long term effects of one (for example, evaporation) of the quantities involved in the surface heat transfer processes.

Furthermore, the model can be easily adapted to handle connected multiple domains. This recommendation is discussed in the text.

SECTION 3

PROGRAM DESCRIPTION AND FLOW CHART

DESCRIPTION OF PROGRAM ALGORITHM

Background

A view of an idealized deep body of water is shown in Figure 1. This basin is divided into eleven slices. The inner nine slices are of equal thickness, DZ , while the top and bottom slices are of thickness $DZ/2$. The thickness, DZ , is determined from the depth of the basin and the number of slices used. The temperature of each slice is as shown in Figure 1; the horizontal lines correspond to the center of each slice.

The condenser cooling water (CCW), if any, could be taken from any slice. In Figure 1, the CCW is extracted from the center of Slice 2 which is at temperature T_2 . The discharge temperature, T_D , is the sum of T_2 and the increase in temperature through the condenser. T_D is injected into a slice of equal temperature or treated as a surface outfall if T_D is greater than the highest temperature of the basin.

The basin also gains or loses heat from the surface as a result of changing climatic conditions which are required as input data. These could vary every time step, daily or monthly.

Algorithm

The problem is an initial value problem, so the values of dependent variables are assumed known initially. The governing and associated equations are discussed in the next section. The governing equation is parabolic and mathematically represents a diffusion process with vertical convection.

The values of the dependent variables at successive time steps are obtained by using a forward-time Dufort-Frankel scheme.

The sequence in which calculations are performed is as follows:
(Refer to Summary of Variables - next section.)

1. The dependent variables, T , K_z , W^* , A_y , ρ , T_E and K_S , are initialized. The area of each slice is calculated and then the time step

$$T_{12} = T_S, A_{12}$$

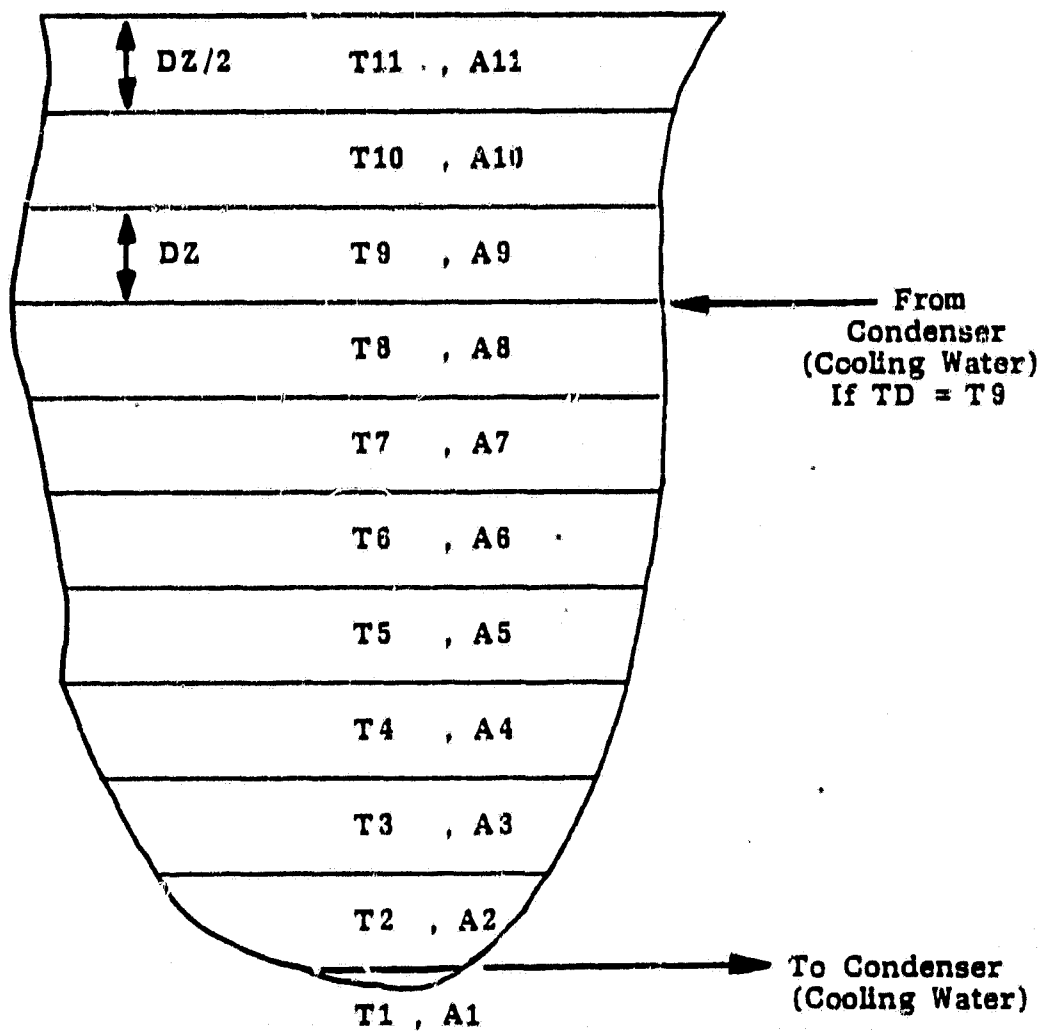


Figure 1. Idealized deep body of water

is calculated. The heading of the beginning year is printed. The values of the variables, K_z , W^* , A_v , ρ , T_E and K_S , are then calculated. The temperatures of the slices are finally calculated. If the temperature profile is unstable, mixing of the unstable portion of the profile is undertaken.

2. During the next time step, the temperatures are updated, and the dependent variables are calculated again.
3. The values of the temperature T , eddy diffusivity K_z , number of days and surface heat transfer coefficient K_S are printed every time step, every day or normally at the end of each month. At the end of the present year, the title of the new year is printed and computations continue as listed above. These steps are shown in a flow chart, Figure 2. The results are stored on a magnetic tape and plotted when necessary.

Description of Main and Subprograms

The fortran calculation programs consist of a main program (NASA) and seven subroutines (YEARS, EQUIL1, STORE, CCW, SMOOTH, MIXIT and AREAS).

1. MAIN: The main program handles the input data, calls the subroutines and does the temperature calculations. Two alternatives are given for handling the input data; these are either read through cards or in-data files or through a block-data arrangement given at the beginning of the main program. For users interested in the block-data package, the following caution is necessary: Whenever a data or set of data is changed, the main program must be recompiled!
2. YEARS: This subroutine prints the year heading. It is called at the beginning of a new year.
3. EQUIL1: This subroutine reads the dewpoint temperature, wind speed and solar radiation. It then computes the surface heat transfer coefficient and the equilibrium temperature. Depending on how the data has been averaged (e.g. days, months or years); it is called as often as needed.
4. STORE: This subroutine stores the calculated data on magnetic tape designated as Unit 8. The stored data could be read by the plotting subroutine called READER. This subroutine and other plot programs are described later.
5. CCW: This subroutine supplies the condenser cooling water data. The data is also converted to the required units by this subroutine.
6. SMOOTH: This subroutine finds the largest value of the eddy dif-

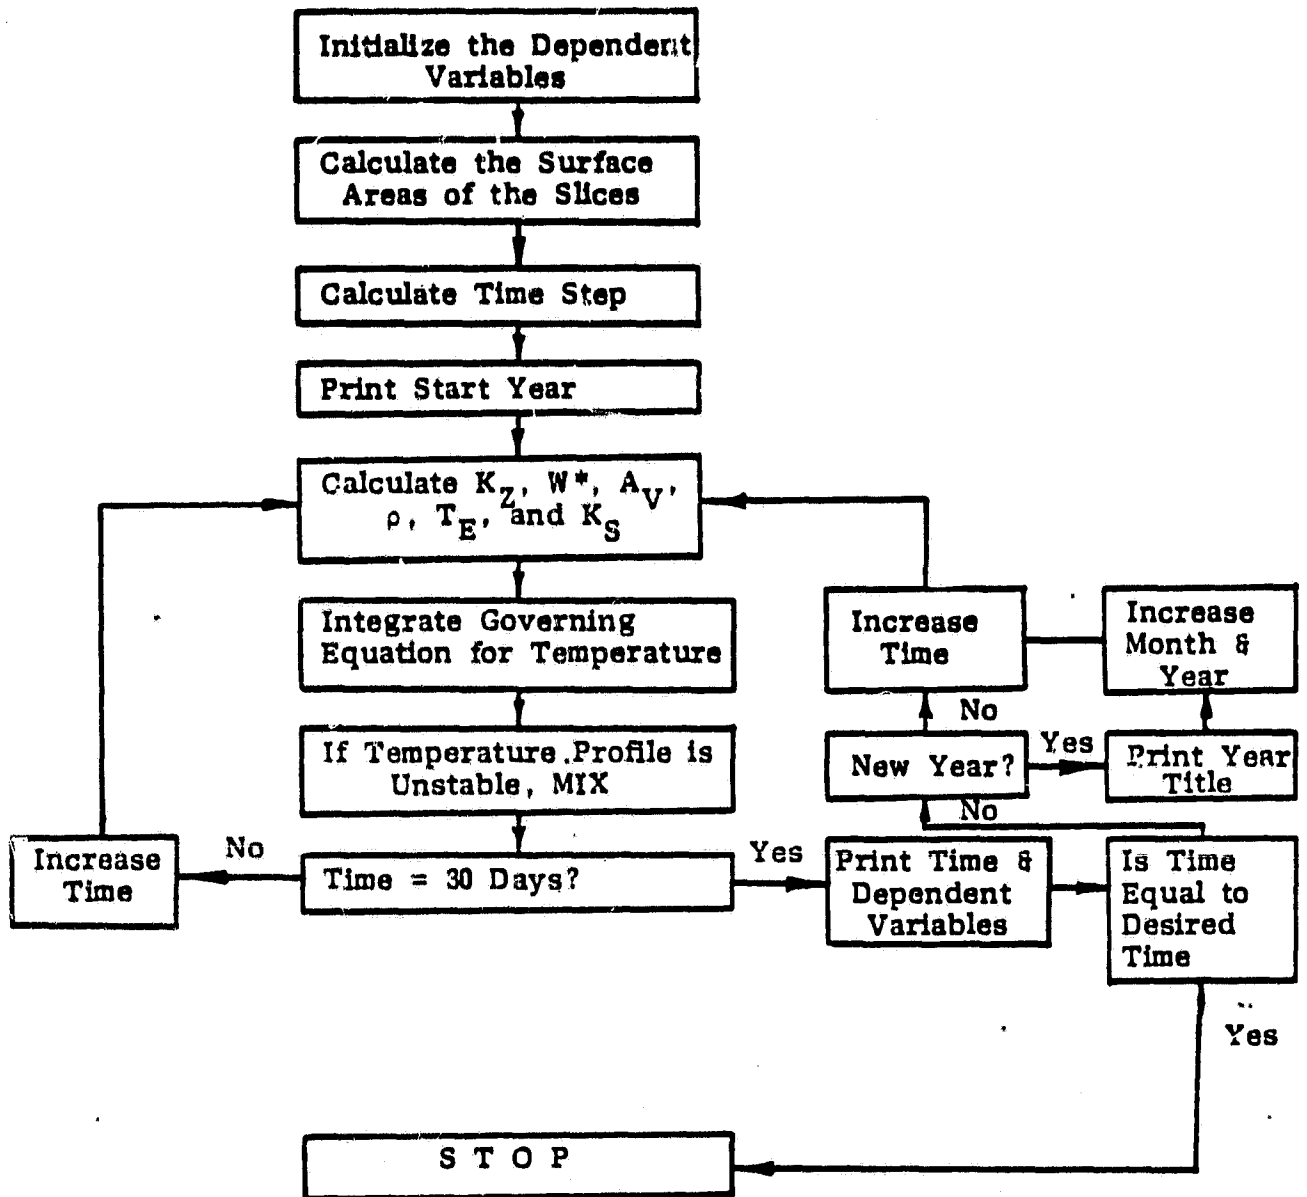


Figure 2. Flow chart (calculation)

fusivity and uses it to calculate the variable time step. It also smoothens the calculated eddy diffusivity for unstable temperature gradients. It is called every time step.

7. **MIXIT:** This subroutine looks for unstable temperature gradients and mixes or stabilizes the temperatures. It is also called every time step.
8. **AREAS:** This subroutine handles the surface areas of each slice and converts the values to the required units. It is called only once at the beginning of the computations.
9. **INPUT:** This is an in-data element containing all input data.

SECTION 4
DESCRIPTION OF PROGRAM SYMBOLS

Introduction

The programs have been written to calculate, as a function of depth, thermal diffusivity and temperature profiles over complete annual cycles. The equation integrated is

$$A(z) \frac{\partial}{\partial t} (\rho C_p T) = \frac{\partial}{\partial z} (\rho C_p A(z) K_z \frac{\partial T}{\partial z}) - \frac{\partial}{\partial z} (\rho C_p A(z) TV_z) + QA' + A(z) H(z) \quad (1)$$

The above equation requires two boundary conditions and one initial condition.

The initial condition is an input quantity supplied by the user and equals the homothermal temperature of the basin. The boundary conditions are:

1. At the surface;

$$K_z \frac{\partial T}{\partial z} \Big|_{z=h} = K_s (T_E - T_s) \quad (2)$$

where Z = vertical coordinate measured from the deepest point

T_E = equilibrium temperature

T_s = surface temperature

K_s = surface heat exchange coefficient

2. At the bottom;

Perfect insulation is assumed,

$$\frac{\partial T}{\partial z} \Big|_{z=0} = 0 \quad (3)$$

Calculations of the temperature profiles are made by numerical integration of Equation (1). Calculations start with the homothermal conditions and a forward explicit scheme is used.

Each time step, the surface temperature, $T_s = T_{12}$, is calculated

and then the temperature of each slice is calculated. Solar radiation is absorbed at the surface slice and the unabsorbed portion is transmitted exponentially to the slices below.

The empirical relations involved in this manual are summarized below. A full discussion is given in the final report, Lee et al. (1980).

Description of Main Variables

1. Density, ρ , fortran variable - ROW:

$$\rho = A_1 + B_1 T + C_1 T^2 \quad (4)$$

where A_1 = density at 0°C
 = 1.02943 gm/cc
 B_1 = constant
 = -0.00002
 C_1 = constant
 = -0.0000048

2. Eddy diffusivity, K_Z , fortran variable = XKZ

$$K_Z = K_{Z0} (1 + \sigma_1 R_i)^{-1} \quad (5)$$

and

$$R_i = \frac{\alpha_V g_Z^2}{W^{*2}} \frac{\partial T}{\partial Z} \quad (6)$$

where R_i = Richardson number
 σ_1 = 0.1, an empirical constant, fortran variable - SIGMA
 g = acceleration due to gravity, fortran variable - G
 W^* = friction velocity, fortran variable - FRVEL
 = (τ_s / ρ)

$$\alpha_V = A_2 + B_2 (T - 4) + C_2 (T - 4)^2 \quad (6a)$$

fortran variable for α_V , AV

where A_2 = 0, volumetric coefficient of expansion at 4°C, fortran variable - A1
 B_2 = constant, fortran variable - A2
 = 1.538×10^{-5}
 C_2 = constant, fortran variable - A3
 = -2.037×10^{-7}

α_V can also be estimated by using Equation (4).

where K_{ZO} = eddy diffusivity under neutral condition (varies with time), fortran variable - XKZO

$$K_{ZO} = A_3 + B_3 \sin\left(\frac{2\pi}{365}t + C_3\right) \quad (t \text{ is in days}) \quad (6b)$$

where A_3 = average value of K_{ZO} , fortran variable - R9
 B_3 = half annual variation of K_{ZO} , fortran variable - R10
 C_3 = phase angle, fortran variable - R8

3. Heat source, H, fortran variable - F6

$$H = \eta(1 - \beta)A_{(Z)}\phi_o \exp(-\eta(Z - h)) \quad (7)$$

where $\beta = 0.5$, fraction of the solar radiation absorbed at the surface
 $\eta = 0.75$, solar radiation absorption coefficient
 ϕ_o = net solar radiation reaching the water surface (input variable), fortran variable - HSOL

SECTION 5

PREPARATION OF INPUT DATA

The input data is stored in an in-data file - INPUT. Alternatively, it could be punched on cards. The input data is read in with an open format. The main variables read are: dewpoint temperature, wind speed and solar radiation. In some cases where the dewpoint temperature is not available, the relative humidity, air temperature and a psychrometric chart are used to find the dewpoint temperature. If this involves a lot of chart reading, subroutine EQUIL1 could be modified and the dewpoint temperature calculated from a known equation supplied by the user. If the latter case is used, then the input data base is enlarged to read air temperature, relative humidity, wind speed and solar radiation. A detailed input list of the constants is given in Appendix A.

SECTION 6

PLOTTING PROGRAMS AND EXECUTION ELEMENTS

DESCRIPTION OF PROGRAMS

The fortran plotting routine consists of one main program (PLOTTER) and one subroutine (READER).

PLOTTER: This program calls the calcomp fortran subroutines (refer to a Calcomp plotting manual for details) and the subroutine (READER) which reads the calculated results from a magnetic tape designated as Unit 8. (See Item A.4.) A flow chart is shown in Figure 3.

READER: Reads the calculated data stored on Unit 8 (magnetic tape).

Execution Elements

Two execution elements are used, one for executing the calculated results and the other for executing the plots.

DO-IT: This element compiles and prints the main program (NASA) and then prepares an entry point table, maps the necessary programs and subprograms, calls the in-data element containing the input data and finally, executes the calculations. This is done as follows for a UNIVAC 1100 computer at the University of Miami.

Only one magnetic tape is necessary.

1. @ ASG, AX FILE.

The 'FILE' is assigned for the run.

2. @ ASG, T 8., 16N, TAPENAME

A magnetic tape file named '8.' is being assigned. The tape is 9-track, and the reel number is 'TAPENAME'. The calculated results are stored on this tape.

3. @ PRT, S FILE.NASA

The main program is printed.

4. @ PACK FILE.

The 'FILE' is packed.

5. @ PREP FILE.

The entry point table is prepared.

6. @ MAP, S

7. IN FILE.NASA

8. LIB FILE.

9. END

10. @ XQT

11. @ ADD FILE.INPUT

12. @ FIN

PLOT-IT: Similar to DO-IT, but handles the plotting executions. For a UNIVAC 1100 computer the following cards are necessary. Two magnetic tapes are necessary.

1. @ ASG, AX FILE.

2. @ ASG, T 8., 16N, TAPENAME

3. @ ASG, T 11., 16, PLOTTAPE

A magnetic tape file named '11.' is being assigned. The tape is 7-track, and the reel number is 'PLOTTAPE'. The plots are stored on this tape.

4. @ PRT, S FILE.PLOTTER

The plot program is printed.

5. @ PACK FILE.

6. @ PREP FILE.

7. @ MAP, S

8. IN FILE.PLOTTER

9. LIB FILE.

10. END

11. 0 XQT
12. 0 ADD FILE.INPUT
13. 0 FIN

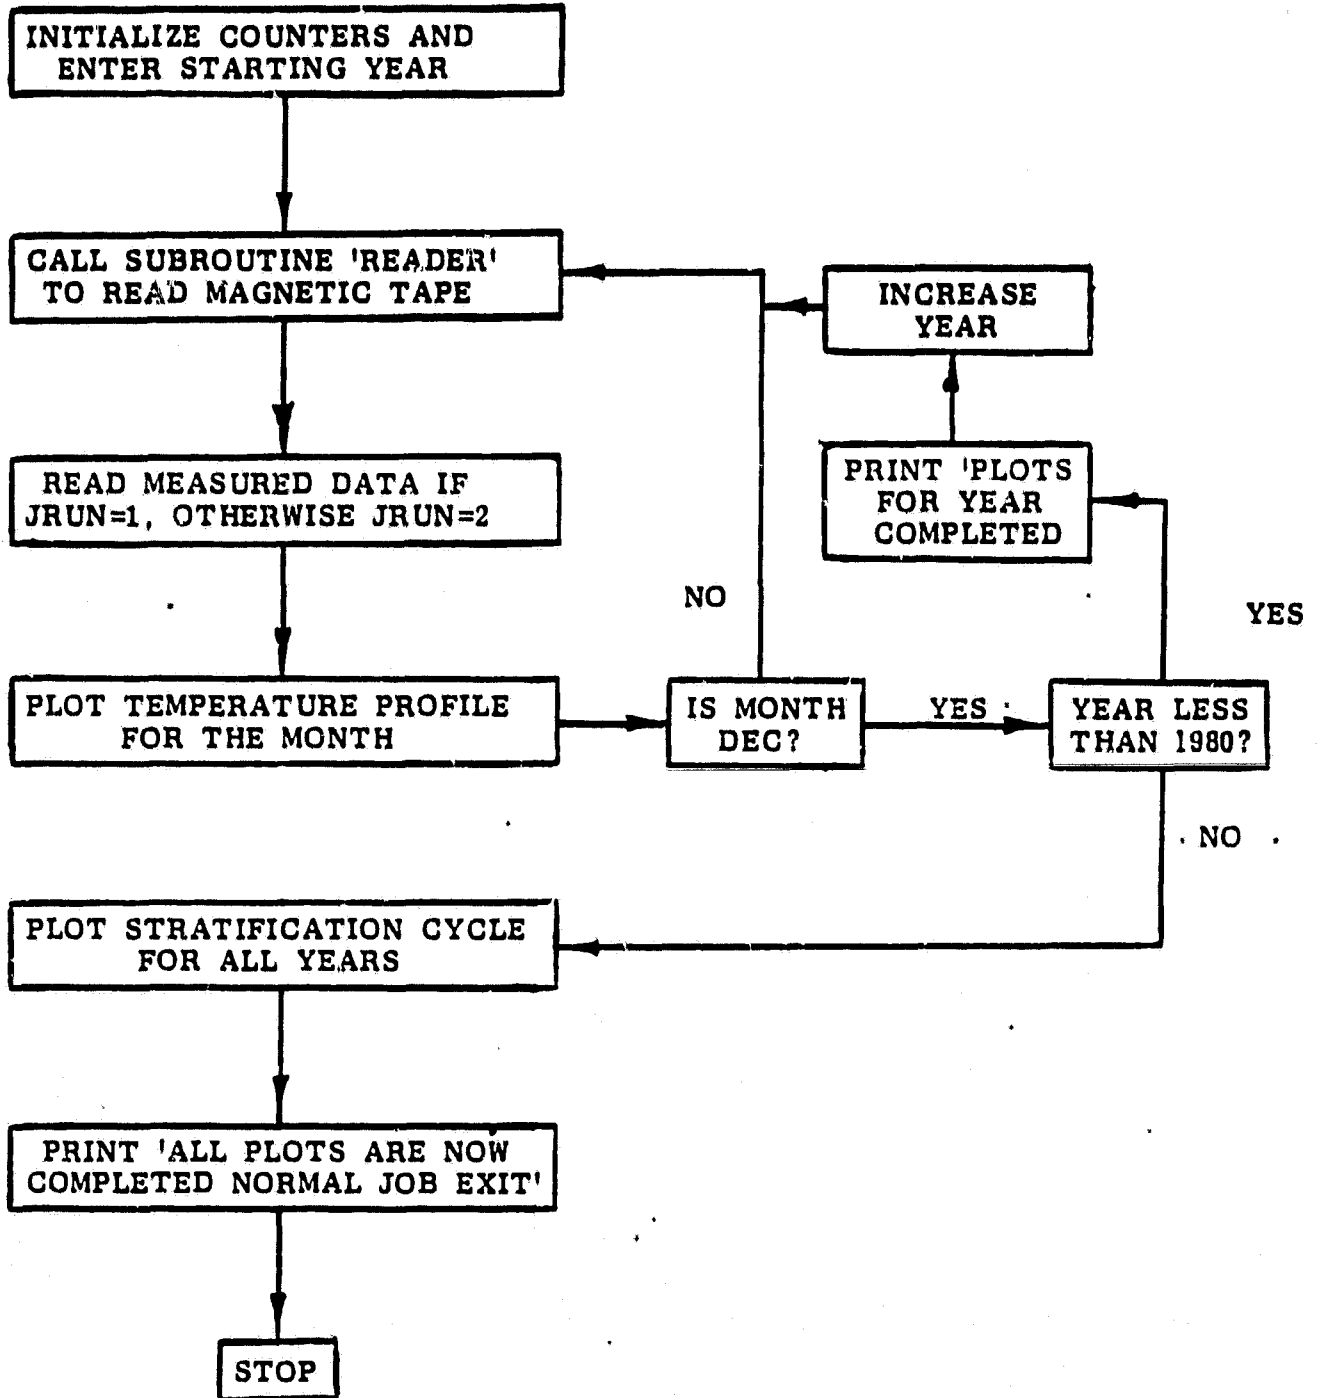


Figure 3. Flow chart (plots)

REFERENCES

- Duke Power Company. Oconee Nuclear Station Environmental Summary Report 1971-1976. Vol. 1. November 1977.
- Sengupta S., Lee S. S. and E. V. Nwadike. A One-Dimensional Variable Cross-Section Model for the Seasonal Thermocline. Proceedings of the Second Conference on Waste Heat Management and Utilization. p. 1X-A-3. December 1978.
- Lee, S. S., Sengupta, S. and E. V. Nwadike. Verification of a One-Dimensional Model for the Seasonal Thermocline at Lake Keowee. NASA Contract NAS 10-9410. 1980.

APPENDIX A

APPENDIX A

EXAMPLE PROBLEM

The model described in this manual was verified using monthly-averaged data supplied by Duke Power Company for Lake Keowee, South Carolina. Accordingly, the data discussed below apply to Lake Keowee.

SITE DESCRIPTION

Lake Keowee is located 40 km west of Greenville, South Carolina. It is the source of cooling water for Oconee Nuclear Station (ONS). It was formed from 1968 through 1971 by damming the Little and Keowee rivers. A connecting canal (maximum depth 30.5 m) joins the two main arms of the lake. Flow out of the lake is through the Keowee Hydro Station. Lake Keowee also exchanges water with Lake Jocassee-pumped storage station. The three-unit ONS with a net capacity of 2580 Mwe started operating in July 1973. ONS operated on annual gross thermal capacity factors of 11, 28, 69 and 59% in the years 1973 through 1976, respectively. From 1977 to 1979 the factors varied from 65 to 75%. A map showing the geometry of the lake is given in Figure 4.

PROBLEM STATEMENT

Calculation of Parameters and Input Data

1. The fortran variable $DM(I, J)$ is a two-dimensional array containing the temperatures at the connecting channel between Lake Keowee and the Jocassee-pumped storage station. The data is averaged monthly. The units are in degrees Celcius ($^{\circ}C$). I is the year counter and J is the month counter. The inputs for the first year are punched on the first card, the next year on the next card, and so on. Accordingly, each card contains twelve inputs in open format (real floating point numbers).
2. The following fortran variables/constants are also read in with open format, five on one card.

IYEAR: starting year - 1971 (could be changed).

DZ: thickness of an inner slice (ft) - (maximum depth of lake)/(10.0).

XKZL: lower limit of the eddy diffusivity (ft^2/day) - corresponds to

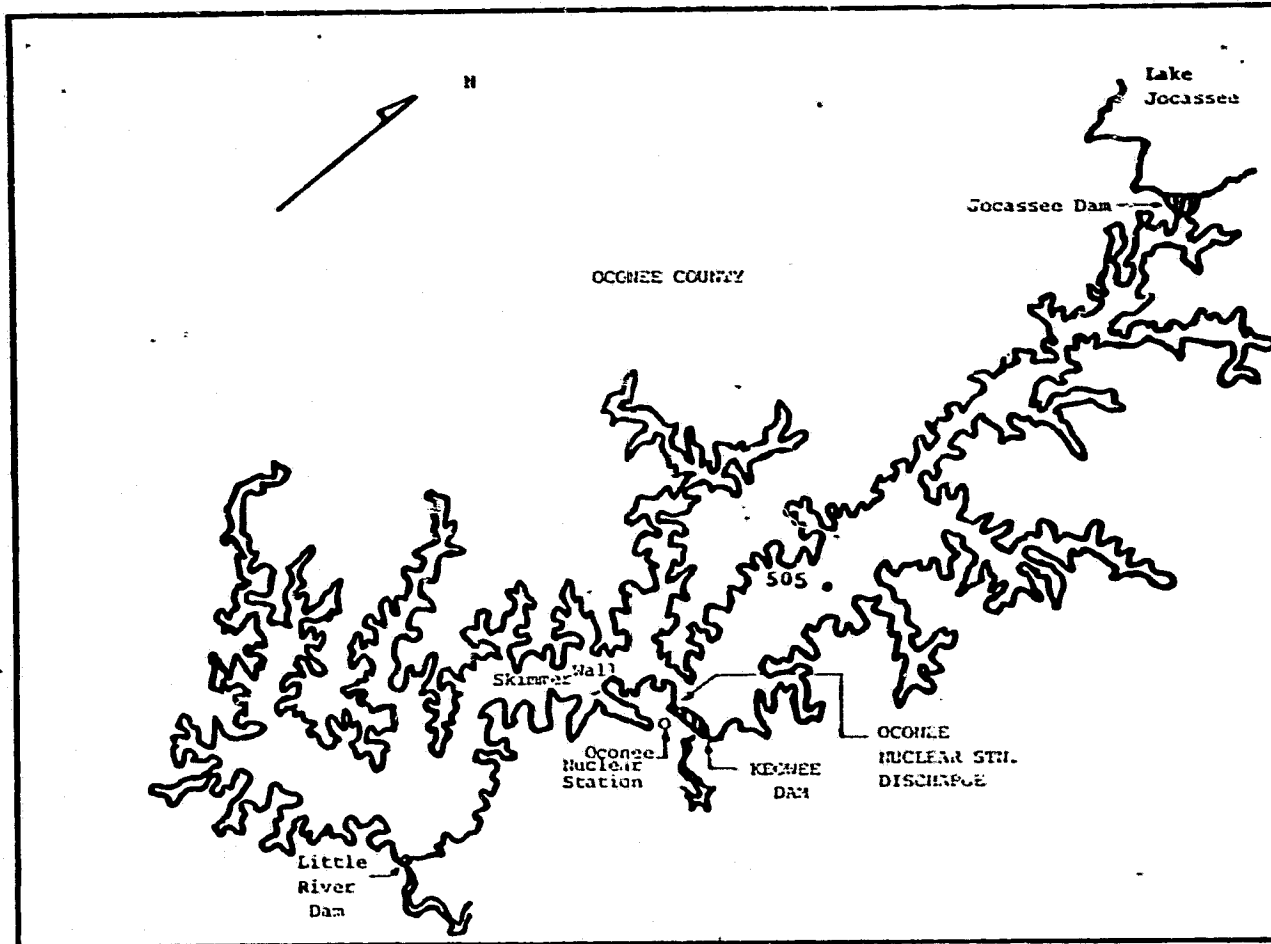


Figure 4. Lake Keowee

the thermal diffusivity of solid water (15 ft²/day).

H: maximum depth of lake, ft (150 ft).

G: acceleration due to gravity (ft/sec²).

PI: $\pi = 3.1415926$.

A1: corresponds to A2 in Equation (6a); $A1 = 0 \text{ } ^\circ\text{C}^{-1}$.

A2: corresponds to B2 in Equation (6a); $A2 = 1.538 \times 10^{-5} \text{ } ^\circ\text{C}$.

A3: corresponds to C2 in Equation (6a); $A3 = -2.037 \times 10^{-7} \text{ } ^\circ\text{C}$.

A4: corresponds to A1 in Equation (4); $A4 = 1.02943 \text{ gm/cc } ^\circ\text{C}$.

A5: corresponds to B1 in Equation (4); $A5 = 0.00002 \text{ gm/cc } ^\circ\text{C}$.

A6: corresponds to C1 in Equation (4); $A6 = -0.0000048 \text{ gm/cc } ^\circ\text{C}^2$.

(NOTE: The units for A4 through A6 are automatically converted to consistent units in the main program.)

TO: homothermal temperature of lake (initial condition); $TO = 7.8 \text{ } ^\circ\text{C}$.

C_p : specific heat; $C_p = 1.8 \text{ BTU/lb } ^\circ\text{C}$.

SIGMA: see Equation (5); $SIGMA = \sigma_1 = 0.1$.

**R6,R7,R8: the friction velocities (τ/ρ) are calculated for the whole period and fitted into a sine curve: (friction velocity OMEGA)

$$W^* = R6 + R7 \sin\left(\frac{2\pi}{365} \text{time} + R8\right)$$

where R6 = average value of W^* , 0.1 ft/sec.

R7 = average value of the half annual variations of W^* , 0.025 ft/sec.

R8 = phase angle, 2.61 radians

TIME is in days, not specified.

R8,R9,R10: correspond to C3, A3, and B3 of Equation (6b) respectively; $R9 = 800 \text{ ft}^2/\text{day}$ and $R10 = 200 \text{ ft}^2/\text{day}$.

DATA1: 0 or 1 (see below).

3. The next set of inputs is the dewpoint temperatures, wind speed and

**Alternatively, friction velocity could be read in as monthly averages. If this alternative is followed, then DATA1 = 1, otherwise DATA1 = 0.

solar radiation. These can either be punched on cards or stored in an in-data element. They are read every month. Each card contains three members. For example: for January-March 1971 (Lake Keowee), the data are

3.0, 6.69, 167.0

0., 9.3, 264.4

6.3, 9.28, 264.4

The first number on each line (each card) is the dewpoint temperature in °C. The second one is the wind speed in ft/sec. The third quantity is the solar radiation in BTU/ft²day. If DATA1 = 1, a fourth number must be included on each line (every card). This fourth quantity is the computed friction velocity for each month.

NOTE: The in-data element described above is called INPUT.. (See Fortran Source Program Listing, Appendix B.)

Sample Output and Sample Plots

.....
 . YEAR = 1971 .

MONTH	IS	JAN.	FEB.	MARCH	APRIL	MAY	JUNE	JULY	AUG.	SEPT.	OCT.	NOV.	DEC.
30	6.28	155.13	7.30	7.30	7.80	7.80	7.80	7.80	7.80	7.80	7.80	7.80	7.80
AC1.70	801.70	801.70	801.70	801.70	801.70	801.70	801.70	801.70	801.70	801.70	801.70	801.70	801.70
6C	12.19	165.52	7.39	7.39	7.39	7.39	7.39	7.39	7.39	7.39	7.39	7.39	7.39
701.57	701.57	701.57	701.57	701.57	701.57	701.57	701.57	701.57	701.57	701.57	701.57	701.57	701.57
90	27.77	154.02	7.60	7.62	7.66	7.77	7.95	8.16	8.34	8.46	8.56	8.65	8.65
627.60	570.60	444.33	270.63	154.76	97.70	73.88	76.81	114.63	221.39	416.15	591.37	627.60	627.60
120	27.02	160.29	7.73	7.80	7.92	8.14	8.55	9.35	10.52	11.22	11.46	11.64	11.64
120	7.71	7.71	7.71	7.71	7.71	7.71	7.71	7.71	7.71	7.71	7.71	7.71	7.71
600.01	18.45	18.45	18.45	18.45	18.45	18.45	18.45	18.45	18.45	18.45	18.45	18.45	18.45
150	28.42	183.08	7.63	7.53	8.12	8.50	9.21	10.59	13.25	17.65	18.43	18.64	18.64
150	7.79	7.79	7.63	7.53	8.12	8.50	9.21	10.59	13.25	17.65	18.43	18.64	18.64
625.90	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
180	27.07	213.15	7.99	6.15	8.47	9.11	10.31	12.50	16.34	22.31	22.89	23.16	23.16
180	7.92	7.92	7.99	6.15	8.47	9.11	10.31	12.50	16.34	22.31	22.89	23.16	23.16
698.61	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
210	27.15	204.74	8.24	8.51	9.03	10.01	11.77	14.71	19.39	23.83	24.17	24.34	24.34
210	8.14	8.14	8.24	8.51	9.03	10.01	11.77	14.71	19.39	23.83	24.17	24.34	24.34
798.29	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
240	24.32	202.42	8.64	9.04	9.77	11.15	13.40	16.53	22.14	24.21	24.46	24.59	24.59
240	8.48	8.48	8.64	9.04	9.77	11.15	13.40	16.53	22.14	24.21	24.46	24.59	24.59
898.42	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
270	18.66	201.52	9.20	9.78	10.73	12.42	15.07	18.54	22.67	22.98	23.07	23.12	23.12
270	8.98	8.98	9.20	9.78	10.73	12.42	15.07	18.54	22.67	22.98	23.07	23.12	23.12
972.39	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
300	8.31	167.98	9.92	10.56	11.76	13.67	16.43	19.45	19.71	19.76	19.77	19.77	19.77
300	9.63	9.63	9.92	10.56	11.76	13.67	16.43	19.45	19.71	19.76	19.77	19.77	19.77
999.99	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
330	8.73	168.76	10.74	11.42	12.74	14.23	14.23	14.23	14.23	14.23	14.23	14.23	14.23
330	10.42	10.42	10.74	11.42	12.74	14.23	14.23	14.23	14.23	14.23	14.23	14.23	14.23
974.11	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
360	3.59	132.35	11.58	11.95	11.96	11.96	11.96	11.96	11.96	11.96	11.96	11.96	11.96
360	11.46	11.47	11.58	11.95	11.96	11.96	11.96	11.96	11.96	11.96	11.96	11.96	11.96
901.40	171.92	92.91	30.78	48.07	716.19	901.40	901.40	901.40	901.40	901.40	901.40	901.40	901.40

24

Figure 5. Sample output - Lake Keowee, 1971

TEMPERATURE PROFILES FOR LAKE KEOWEE 1971.
 (DEPTH IS MEASURED FROM THE DEEPEST POINT OF THE LAKE)
 (STATIONS 500-506)

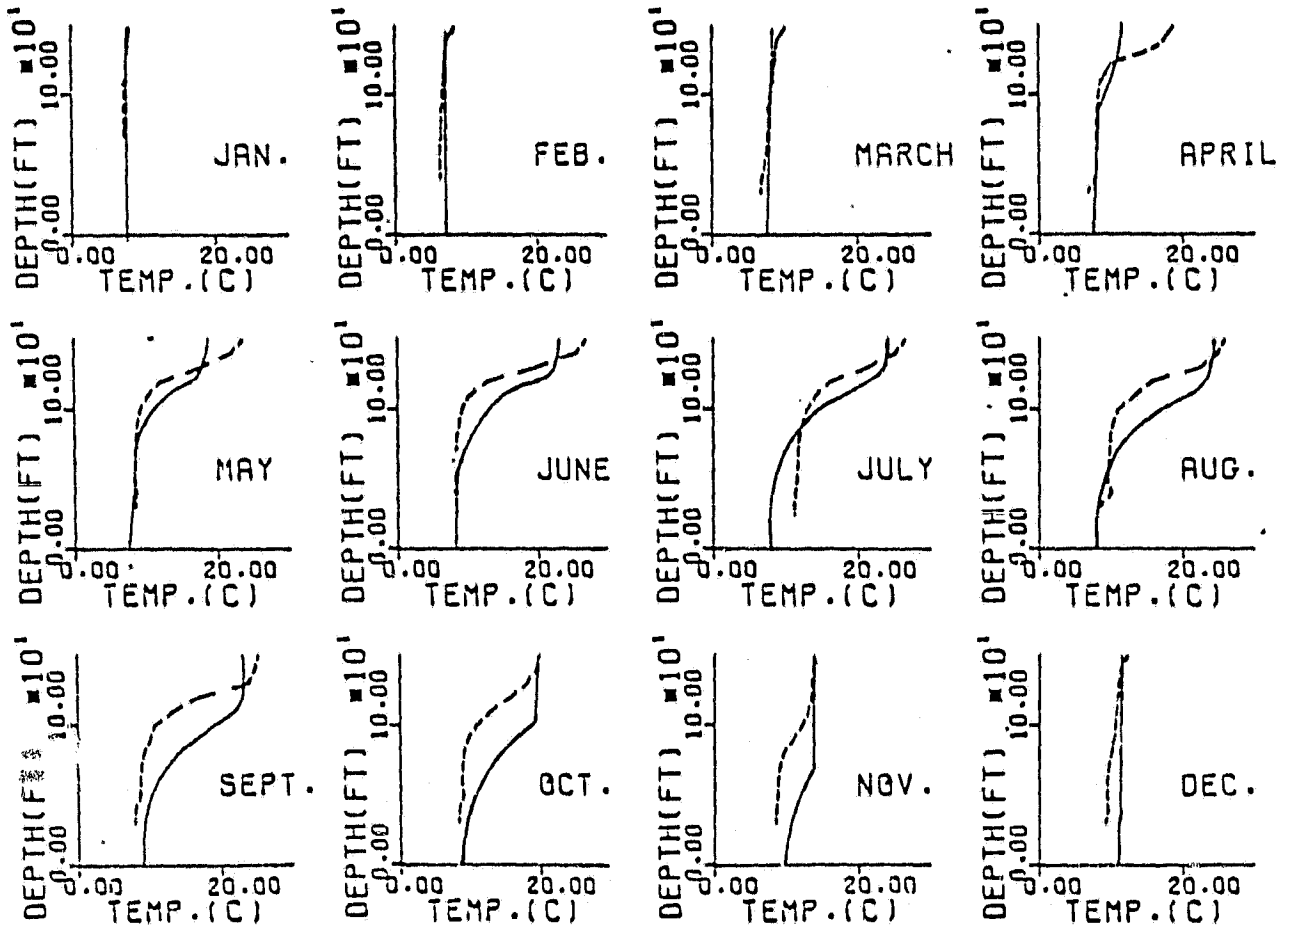


Figure 6. Sample plots - measured average temperature profiles (Stations 500-506) vs predicted temperature profiles, Lake Keowee, 1971

STRATIFICATION CYCLE FOR LAKE KEOWEE 1971-1979

Solid Lines (No Discharge)
Broken Lines (Discharge - Mid-layer Temperatures)

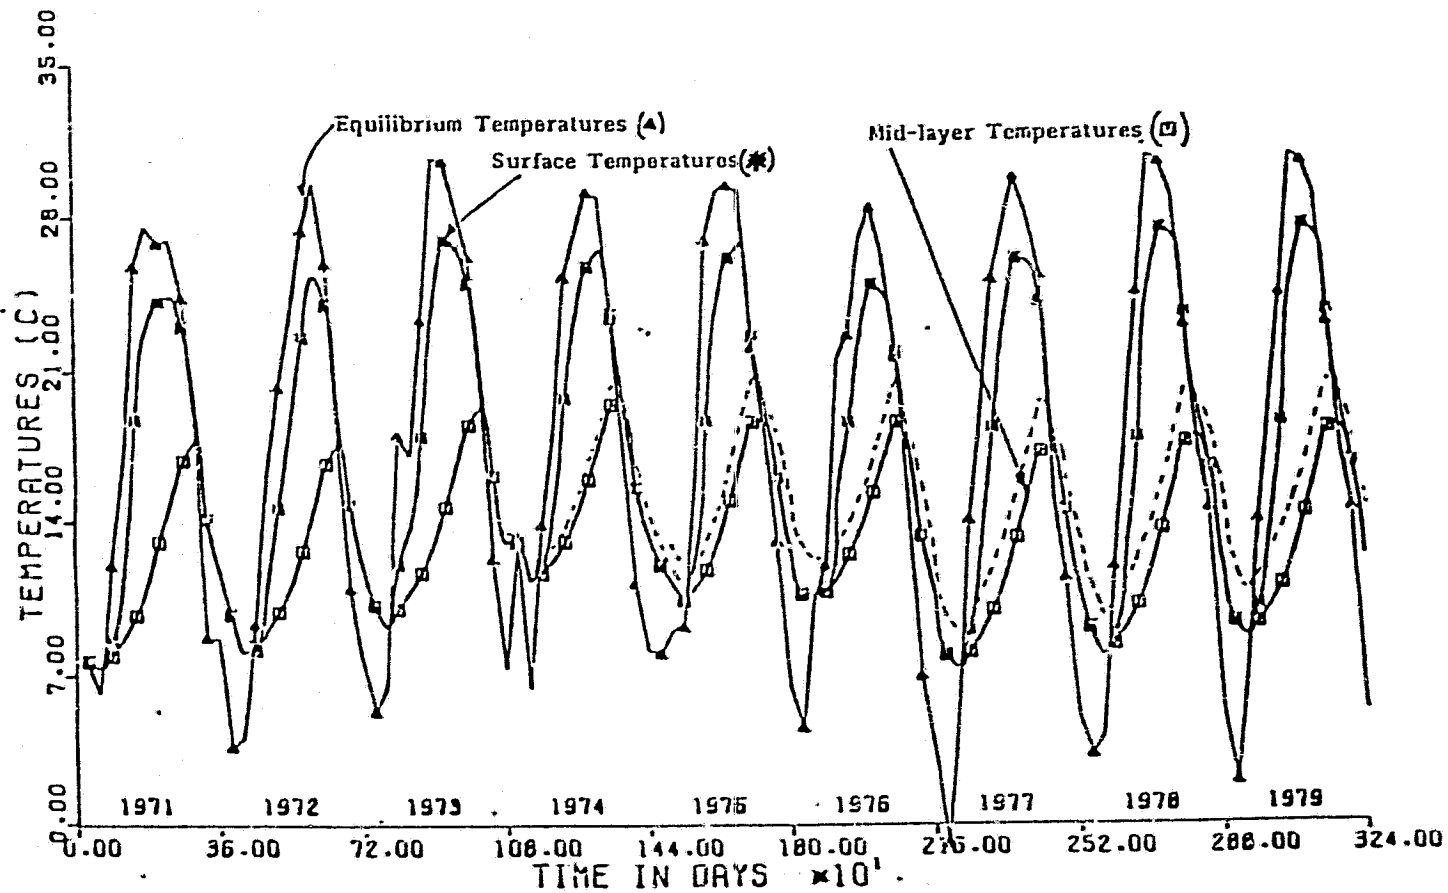


Figure 7. Sample plot

APPENDIX B
FORTRAN PROGRAM LISTING

NASA SYM CREATED ON 12 AUG 80 AT 14:17:05

C ONE DIMENSIONAL MODEL FOR THE SEASONAL THERMOCLINE

C

C
DIMENSION T(20),AV(20),CB(20),Z(20),A(20),XKZ(20),ROW(20),TN(20)
DIMENSION DM(20),T2(20),XTDD(10,360)
DIMENSION GELTEM(12),QP(12)
CHARACTER*6 MONTHS(12)

C

C
DATA(MONTHS(J),J=1,12)/'JAN.','FEB.','MARCH','APRIL','MAY','JUNE',
C'JULY','AUG.','SEPT.','OCT.','NOV.','DEC.'/

C

C

C

IF YOU NEED TO STORE RESULTS ON MAGNETIC TAPE READ JRUN=1
OTHERWISE JRUN=2.

C

READ 1,JRUN
READ 1,IYEAR,DZ,XKZL,H,G
READ 1,PI,A1,A2,A3,A4
READ 1,A5,A6,T0,CP,SIGMA
READ 1,R6,R7,R8,R9,R10

1

FORMAT()
MMI=0
Z(1)=0.
JIM=1
TDD=0.
DVE=0.
CALL AREAS(A)
J=1
JW=1
JJ=0
NDAYS=0
NDAYS1=0
TIME=0.
TIME1=0.
TIME2=0..
TIME3=0.
TIME4=0.
TE=T0
DO 20 I=1,12
T(I)=T0
T2(I)=T0
CONTINUE
DO 22 I=2,11
Z(I)=DZ/2.+(I-2)*DZ

20

```

46      22      CONTINUE
47      Z(12)=H
48      DT=(0.4*DZ**2)/1000.0
49      QP2=574.07383*(60.**2)*24.
50      CALL YEARS(SELTEM,QOP,IYEAR)
51      CALL CCW(QP,DELTEM,IYEAR,DT)
52      N=0
53      OMEGA=2.*PI/360.
54      T(12)=T0
55      T12=T0
56      JTOT=1
57      MJ=1
58      ROW(12)=(A4+A5*T(12)+A6*(T(12)**2)*62.4
59      ROWCP=ROW(12)*CP
60      CALL EQUIL1(IN,TE,ZK,TDEW,IND,HSOL)
61      33      IF (MJ.EQ.1) DELTM2=DM(1)-T(7)
62      FRVEL=(R6+R7*SIN(OMEGA*TIME+R8))**2
63      XKZO=(R9+R10*SIN(OMEGA*TIME+R8))
64      AV(1)=A1+A2*(T(1)-4.)*A3*(T(1)-4. )**2
65      XKZ(1)=XKZO*(1+SIGMA*AV(1)*G*((H-Z(1))**2)*
66      1(3.*T(1)+T(3)-4.*T(2))/(2.*DZ*FRVEL)***(N-1)
67      DO 90 I=2,11
68      AV(I)=A1+A2*(T(I)-4.)*A3*(T(I)-4. )**2
69      XKZ(I)=XKZO*(1+SIGMA*AV(I)*G*((H-Z(I))**2)*
70      1(T(I+1)-T(I-1))/(DZ*FRVEL)***(N-1)
71      ROW(I)=(A4+A5*T(I)+A6*(T(I)**2)*62.4
72      90      CONTINUE
73      ROW(12)=(A4+A5*T(12)+A6*(T(12)**2)*62.4
74      AV(12)=A1+A2*(T(12)-4.)*A3*(T(12)-4. )**2
75      XKZ(12)=XKZO*(1+SIGMA*AV(12)*G*((H-Z(12))**2)*
76      1(3.*T(11)+T(9)-4.*T(10))/(1.5*DZ*FRVEL)***(N-1)
77      ROWCP=ROW(12)*CP
78      CALL SMOOTH(XKZ,XKZO,XKZL,NDAYS1,TN12,T12,T,DT1,DZ)
79      902      DO 989 I=1,12
80      IF (XKZ(I).LT.XKZL) XKZ(I)=XKZL
81      IF (XKZ(I).GT.XKZO) XKZ(I)=XKZO
82      989      CONTINUE
83      DO 91 I=2,11
84      F1=DT/(ROW(I)*CP*A(I))
85      F2=((ROW(I)+ROW(I+1))/2.*(A(I)+A(I+1)))/2.
86      1*(XKZ(I)+XKZ(I+1))/2.*(T(I+1)-T(I))-((ROW(I)
87      2*ROW(I-1))*A(I)+A(I+1))/4.*(XKZ(I)
88      3+XKZ(I-1))/2.*(T(I)-T(I-1)))/(DZ**2)
89      IF (IYEAR.LE.1973) DELTM2=0.0
90      IF (IYEAR.LE.1973) QP2=0.0
91      777      F3=ROW(I)*DELTEM(JW)*CP*QP(JW)
92      F31=ROW(I)*DELTM2*CP*QP2/A(I)
93      F41=(ROW(I)*CP*QP2/(1.5*DZ))*DELTM2*(T(I+1)-T(I-1))
94      F4=(ROW(I)*CP*QP(JW)/(1.5*DZ))*DELTEM(JW)*(T(I+1)-T(I-1))
95      IF (T(I+1).LE.T(I-1)) F4=(ROW(I)*CP*QP(JW)/(1.5*DZ))*DELTEM(JW)

```

```

96 IF (T(I+1).LE.T(I-1))F41=(ROW(I)*CP*QP2/(1.5*DZ))*DELTM2
97 F5=T(I)
98 F6=0.5*(EXP(-0.75*(H-Z(I))))*(HSOL)
99 F7=-0.75*A(I)
100 F8=-F6*F7
101 TD=T(8)+DELTEM(JW)
102 IF(I.LT.8)XAK=0.
103 IF(I.GE.8)XAK=1.
104 IF(T(I).GT.TD)XM=0.
105 IF(T(I).LE.TD)XM=1.
106 TD2=DELTM2*T(5)
107 IF(T(I).GT.TD2)XM1=0.
108 IF(T(I).LE.TD2)XM1=1.
109 IF(I.LE.5)XTK=1.
110 IF(I.GT.5)XTK=1.
111 TN(I)=(F2+F3+XAK*XM*F4+XM1*F41+F31*XTK+F8)*F1+F5
112 91 CONTINUE
113 TN(I)=T(2)
114 TM=(TN(12)+TDEW)/2.0
115 FW=9.2+0.46*(WIND**2)
116 BETA=0.35+0.015*TM+0.0012*(TM**2)
117 XK=(4.5+0.05*TN(12)+BETA*FW+0.47*FW)*4.232*(9./5.)
118 TE=TDEW+HSOL/XK
119 CONS1=(1.5*XK*DZ)/(ROWCP*XKZ(12))
120 TE11=TN(11)
121 TE10=TN(10)
122 SHEAT=(ROWCP*DELTEM(JW)*QP(JW))/(A(12)*XK)
123 IF(TD.GT.TN(12))GO TO 14
124 GO TO 15
125 14 TN(12)=(4.*TN(11)-TN(10)+CONS1*TE+SHEAT*CONS1)/(3.+CONS1)
126 GO TO 16
127 15 TN(12)=(4.*TN(11)-TN(10)+CONS1*TE)/(3.+CONS1)
128 16 TS=TN(12)
129 CALL MIXIT(TN,A)
130 TIME=TIME+DT
131 TIME2=TIME2+DT
132 TIME3=TIME3+DT
133 TIME4=TIME4+DT
134 TIME5=TIME5+DT
135 DO 929 I=1,12
136 T2(I)=TN(I)
137 929 CONTINUE
138 T12=T(12)
139 600 TN12=TN(12)
140 601 DO 92 I=1,12
141 T(I)=TN(I)
142 92 CONTINUE
143 J=J+1
144 TIME1=TIME1+DT
145 IF(IN.DAYS.GE.360)TIME3=TIME3-360.0

```

```

146 IF (NDAYS.GE.360) TIME2=TIME2-360.0
147 IF (NDAYS.GE.360) TIME=TIME-360.0
148 IF (NDAYS.GE.360) TIME4=TIME4-360.0
149 IF (NDAYS.GE.360) TIME5=TIME5-360.0
150 IF (NDAYS.GE.360) JJ=0
151 IF (NDAYS.GE.360) J*=1
152 IF (IYEAR.GT.1979) GO TO 99
153 IF (NDAYS.GE.360) IYEAR=IYEAR+1
154 IF (NDAYS.GE.360) CALL CCW(QP,DELTEM,IYEAR,DT)
155 IF (NDAYS.GE.360) CALL YEARS(SELTEM,QCPP,IYEAR)
156 IF (NDAYS.GE.360) JTOT=JTOT+1
157 IF (NDAYS.GE.360) JIM=JIM+1
158 IF (TIME4.GE.1.0) GO TO 501
159 GO TO 502
160 501 MMI=MMI+1
161 XTDD(JIM,MMI)=TD
162 TIME4=TIME4-1.
163 502 CONTINUE
164 IF (NDAYS.GE.360) NDAYS=0
165 DO 66 I=2,10
166 CB(I)=(T(I+1)-T(I))/15.
167 66 CONTINUE
168 CB(1)=(T(2)-T(1))/7.5
169 CB(11)=(T(12)-T(11))/7.5
170 IF (TIME1.GE.30.) GO TO 98
171 TDD=TD+TD
172 DVE=DVE+1.
173 GO TO 33
174 98 NDAYS=TIME2
175 TDD=TDD/DVE
176 PRINT 988,(QP(JWJ),JWJ=1,12)
177 988 FORMAT(IX,12F10.1)
178 TIME4=0.
179 MMI=C
180 JJ=JJ+1
181 JW=JW+1
182 NDAYS1=TIME3
183 MJ=MJ+1
184 DELTM2=DM(MJ)-T(5)
185 IF (MJ.GE.12) MJ=1
186 313 CONTINUE
187 DO 700 I=1,12
188 700 T(I)=TN(I)
189 IF (JRUN.EQ.2) GO TO 111
190 CALL STORE(IT,AV,CB,Z,A,XKZ,ROW,TN,DM,T2,MONTHS,T2,GP,
191 CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,P2,FREVEL,ROWCP,DT,
192 CXKZ0,TE,NDAYS,IN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,FE,TD,TD2,
193 CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDG,J)

```

```

194      111  CONTINUE
195      CALL EQUIL1(TN,TE,XK,TDEW,WIND,HSOL)
196      PRINT 920,MONTHS(JJ),IYEAR
197      520  FORMAT(2X,'MONTH IS',2X,A6,2X,I4)
198      PRINT 101,NDAYS,TE,XK
199      101  FORMAT(1X,16,2F9.2)
200      WRITE(6,9) NDAYS,(T(I),I=1,12)
201      WRITE(6,7) XKZO,(XKZ(I),I=1,12)
202      IF((IYEAR.EQ.1973.AND.NDAYS.GE.210).OR.(IYEAR.GT.1973))
203      CWRITE(6,18)TDD,DELTEM(JW-1)
204      18   FORMAT(1X,'THE AVERAGE MONTHLY DISCH. TEMP. = ',F5.2,5X,
205      C'DELTA-T = ',F5.2)
206      12   FORMAT(1X,11F10.2)
207      9    FORMAT(1X,16,12F9.2)
208      7    FORMAT(1X,13F9.2)
209      TIME1=TIME1-30.0
210      TDD=0.
211      DVE=0.
212      IF(IYEAR.GT.1979)GO TO 99
213      GO TO 33
214      99   PRINT 921,J
215      921  FORMAT(2X,'TOTAL NUMBER OF COMPUTATIONS =',I15,' X 12')
216      END FILE 8
217      STOP
218      END

```



```

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22

```

APEAS SYM CREATED ON 12 AUG 80 AT 17:05:27
THIS SUBROUTINE CONTAINS 12 AREAS OF
A DOMAIN (LAKE KEOHEE), AT TWELVE
HORIZONTAL CROSS-SECTIONS.

```

SUBROUTINE AREAS(A)
DIMENSION A(20)
ACONS=10.**8
A(1)=0.0325*ACONS
A(2)=0.055*ACONS
A(3)=0.200*ACONS
A(4)=0.550*ACONS
A(5)=1.125*ACONS
A(6)=1.8*ACONS
A(7)=2.575*ACONS
A(8)=3.55*ACONS
A(9)=4.75*ACONS
A(10)=5.825*ACONS
A(11)=7.25*ACONS
A(12)=8.000*ACONS
RETURN
END

```

ORIGINAL PAGE IS
OF POOR QUALITY

CCW SYM CREATED ON 12 AUG 60 AT 13:00:09
 THIS SUBROUTINE CONTAINS THE CCNDEMSER
 COOLING WATER. ASSUMES THAT COMPUTATIONS
 START IN 1971.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67

C
C
C
C
C
C

```

SUBROUTINE CCW(QP,DELTEM,IYEAR,DT)
DIMENSION QP(12),DELTEM(12)
IF(IYEAR.GT.1979)GO TO 11
IYEA=IYEAR-1970
ACOST=10.0
GO TO (1,1,3,4,5,6,7,8,9),IYEA
1  QP(1)=0.0
   DELTEM(1)=0.0
GO TO 11
3  QP(12)=1,6
   QP(1)=0.0
   DELTEM(1)=0.0
12 QP(17)=1890.2*ACOST
   QP(18)=1910.3*ACOST
   QP(19)=2170.7*ACOST
   QP(10)=2232.5*ACOST
   QP(11)=2170.7*ACOST
   QP(12)=3284.6*ACOST
   DELTEM(7)=5.3
   DELTEM(8)=4.6
   DELTEM(9)=5.3
   DELTEM(10)=7.3
   DELTEM(11)=7.7
   DELTEM(12)=4.1
GO TO 11
4  QP(1)=3069.3*ACOST
   QP(2)=3069.4*ACOST
   QP(3)=2976.9*ACOST
   QP(4)=2807.3*ACOST
   QP(5)=2164.6*ACOST
   QP(6)=4171.8*ACOST
   QP(7)=5334.6*ACOST
   QP(8)=4727.1*ACOST
   QP(9)=5961.4*ACOST
   QP(10)=4953.4*ACOST
   QP(11)=4202.1*ACOST
   QP(12)=5225.6*ACOST
   DELTEM(1)=4.2
   DELTEM(2)=7.4
   DELTEM(3)=8.4
   DELTEM(4)=8.0
   DELTEM(5)=2.7
   DELTEM(6)=6.0
   DELTEM(7)=5.0
   DELTEM(8)=4.8
   DELTEM(9)=5.8
   DELTEM(10)=3.5
   DELTEM(11)=7.9
   DELTEM(12)=5.9
GO TO 11
5  QP(1)=4612.4*ACOST
   QP(2)=3694.9*ACOST
   QP(3)=5456.8*ACOST
   QP(4)=5570.8*ACOST
   QP(5)=6494.3*ACOST
   QP(6)=6574.2*ACOST
   QP(7)=7104.2*ACOST
   QP(8)=7510.1*ACOST
   QP(9)=7201.6*ACOST
   QP(10)=6993.4*ACOST

```

68	QP (11) =	7467.1	# ACOST
69	QP (12) =	6850.9	# ACOST
70	DELTEM (1) =	6.3	
71	DELTEM (2) =	4.8	
72	DELTEM (3) =	2.2	
73	DELTEM (4) =	2.3	
74	DELTEM (5) =	6.8	
75	DELTEM (6) =	6.8	
76	DELTEM (7) =	8.3	
77	DELTEM (8) =	7.8	
78	DELTEM (9) =	7.4	
79	DELTEM (10) =	7.7	
80	DELTEM (11) =	6.5	
81	DELTEM (12) =	9.4	
82	GO TO	11	
83	QP (1) =	6069.3	# ACOST
84	QP (2) =	4440.2	# ACOST
85	QP (3) =	4874.3	# ACOST
86	QP (4) =	4272.1	# ACOST
87	QP (5) =	3970.7	# ACOST
88	QP (6) =	5197.6	# ACOST
89	QP (7) =	5230.0	# ACOST
90	QP (8) =	7248.3	# ACOST
91	QP (9) =	6785.4	# ACOST
92	QP (10) =	56337.8	# ACOST
93	QP (11) =	5809.2	# ACOST
94	QP (12) =	4914.8	# ACOST
95	DELTEM (1) =	10.6	
96	DELTEM (2) =	7.3	
97	DELTEM (3) =	7.1	
98	DELTEM (4) =	5.1	
99	DELTEM (5) =	5.8	
100	DELTEM (6) =	9.3	
101	DELTEM (7) =	7.4	
102	DELTEM (8) =	6.5	
103	DELTEM (9) =	8.0	
104	DELTEM (10) =	7.8	
105	DELTEM (11) =	6.7	
106	DELTEM (12) =	8.4	
107	GO TO	11	
108	QP (1) =	5045.8	# ACOST
109	QP (2) =	4985.2	# ACOST
110	QP (3) =	5113.5	# ACOST
111	QP (4) =	6013.6	# ACOST
112	QP (5) =	6302.4	# ACOST
113	QP (6) =	4385.3	# ACOST
114	QP (7) =	5038.6	# ACOST
115	QP (8) =	5708.9	# ACOST
116	QP (9) =	6964.0	# ACOST
117	QP (10) =	6754.7	# ACOST
118	QP (11) =	4697.6	# ACOST
119	QP (12) =	5854.6	# ACOST
120	DELTEM (1) =	12.5	
121	DELTEM (2) =	11.4	
122	DELTEM (3) =	10.4	
123	DELTEM (4) =	11.4	
124	DELTEM (5) =	9.4	
125	DELTEM (6) =	8.4	
126	DELTEM (7) =	7.4	
127	DELTEM (8) =	5.0	
128	DELTEM (9) =	5.0	
129	DELTEM (10) =	3.8	
130	DELTEM (11) =	6.2	
131	DELTEM (12) =	7.9	
132	GO TO	11	
133	QP (1) =	6176.7	# ACOST
134	QP (2) =	6444.6	# ACOST
135	QP (3) =	5195.7	# ACOST
136	QP (4) =	4811.8	# ACOST
137	QP (5) =	4984.2	# ACOST
138	QP (6) =	5659.9	# ACOST
139	QP (7) =	7058.6	# ACOST

6

7

8

140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183

9

11

QP (8) = 7914.9 * ACOST
QP (9) = 6557.3 * ACOST
QP (10) = 7407.4 * ACOST
QP (11) = 6065.1 * ACOST
QP (12) = 6503.5 * ACOST
DELTEM (1) = 9.0
DELTEM (2) = 11.0
DELTEM (3) = 13.2
DELTEM (4) = 9.7
DELTEM (5) = 10.1
DELTEM (6) = 8.1
DELTEM (7) = 7.9
DELTEM (8) = 7.5
DELTEM (9) = 7.6
DELTEM (10) = 6.2
DELTEM (11) = 8.4
DELTEM (12) = 7.2
GO TO 11
QP (1) = 7207.7 * ACOST
QP (2) = 7319.9 * ACOST
QP (3) = 7419.5 * ACOST
QP (4) = 7275.8 * ACOST
QP (5) = 4189.1 * ACOST
QP (6) = 5381.2 * ACOST
QP (7) = 4733.3 * ACOST
QP (8) = 4733.3 * ACOST
QP (9) = 4733.3 * ACOST
QP (10) = 4733.3 * ACOST
QP (11) = 4733.3 * ACOST
QP (12) = 4733.3 * ACOST
DELTEM (1) = 10.3
DELTEM (2) = 10.4
DELTEM (3) = 9.6
DELTEM (4) = 9.9
DELTEM (5) = 8.2
DELTEM (6) = 7.1
DELTEM (7) = 5.0
DELTEM (8) = 5.0
DELTEM (9) = 5.0
DELTEM (10) = 5.0
DELTEM (11) = 5.0
DELTEM (12) = 5.0
RETURN
END

EOJIL1 SYM CREATED ON 11 JUN 80 AT 11:00:00

```
1 SUBROUTINE EQUIL1(TN,TE,XK,TDEW,XTN,XTE,XXK,WIND,HSOL)
2 DIMENSION TN(20),XTN(20)
3 READ(5,1)TDEW,WIND,HSOL
4 1 FORMAT(1)
5 WIND=WIND*0.45
6 HSOL=HSOL*3.6855
7 TM=(TN(12)+TDEW)/2.0
8 FW=9.2+0.46*(WIND**2)
9 BETA=0.35+0.015*TM+0.0012*(TM**2)
10 XK=4.5+0.05*TN(12)+BETA*FW+0.47*FW
11 XK=XK*4.232*(9./5.)
12 TE=TDEW+HSOL/XK
13 XTM=(XTN(12)+TDEW)/2.0
14 XFW=9.2+0.46*(WIND**2)
15 XBETA=0.35+0.015*XTM+0.0012*(XTM**2)
16 XXK=4.5+0.05*XTN(12)+XBETA*XFW+0.47*XFW
17 XXK=XXK*4.232*(9./5.)
18 XTE=TDEW+HSOL/XXK
19 RETURN
20 END
```

INP JT SYM CREATED ON 12 AJG 80 AT 13:01:13

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69

3.0, 6.6, 9.1, 167.0
0.0, 9.3, 22.6, 4.4
6.3, 9.2, 28.1, 264.4
7.5, 8.7, 22.1, 457.4
17.2, 7.5, 5.4, 80.5
18.8, 5.6, 5.4, 478.
20.0, 6.4, 8.8, 409.
19.4, 4.5, .7, 5, 428.2
12.3, 3.5, .7, 7, 329.
13.8, 8.7, .0, 2, 261.3
2.8, 8.7, .5, 3, 247.7
5.5, 2.3, .1, 4, 7.7
1.6, 7.6, 6.9, 178.
-2.2, 2.9, .2, 6, 257.6
1.1, 1.9, .2, 0, 352.5
6.6, 7.8, .7, 2, 448.8
11.1, 1.7, .5, 3, 33.6
13.1, 3.7, .9, 5, 564.3
18.7, 7.6, .6, 4, 493.8
22.2, 2.6, .0, 7, 453.5
18.8, 5.4, .7, 3, 86.3
11.5, 5.7, .1, 7, 298.1
5.9, 7.1, .3, 2, 20.9
4.0, 6.8, .8, 1, 48.
1.1, 7.2, .2, 1, 62.7
-1.1, 7.3, .2, 7, 9.5
1.0, 7.1, .3, 4, 8.5
7.7, 8.4, .4, 4, 49.3
14.3, 6.8, .3, 3, 49.5
20.2, 5.3, .0, 4, 507.7
22.1, 5.3, .2, 2, 496.9
20.0, 6.8, .8, 0, 338.4
13.5, 7.1, .1, 3, 341.7
7.2, 8.1, .4, 2, 47.6
3.2, 5.6, .1, 5, 4.
8.2, 5.8, .1, 9, 1.4
0.0, 5.8, .2, 2, 6.9
6.3, 7.7, .3, 3, 26.1
10.7, 8.7, .3, 3, 397.7
17.2, 6.8, .8, 4, 336.3
17.8, 6.9, .8, 5, 59.3
21.0, 5.2, .4, 5, 9.5
21.0, 5.8, .7, 4, 80.5
17.5, 6.7, .4, 3, 39.2
10.2, 5.7, .3, 0, 2.5
6.0, 7.2, .2, 3, 1.1
3.8, 6.9, .1, 8, 1.9
3.0, 6.3, .3, 3, 191.4
3.5, 7.6, .1, 4, 226.9
2.2, 9.6, .3, 2, 6.1
7.2, 7.6, .3, 9, 7.7
17.5, 4.6, .8, 4, 36.
19.0, 5.8, .2, 5, 59.3
21.0, 5.1, .0, 4, 59.5
21.0, 5.4, .4, 8, 8.8
16.2, 7.3, .3, 3, 39.5
12.4, 7.7, .3, 3, 02.5
7.9, 6.9, .2, 3, 1.1
2.0, 7.2, .1, 8, 1.9
-1.0, 7.4, .2, 2, 09.8
3.2, 8.5, .3, 1, 0.9
3.9, 7.9, .3, 3, 8.6
11.2, 7.6, .4, 4, 56.9
14.0, 7.3, .4, 4, 8.4
18.3, 6.4, .4, 8, 0.2
19.8, 5.9, .4, 8, 8.3
18.0, 6.6, .5, 4, 80.4
15.4, 7.1, .3, 3, 45.1

70	8.2	7.2	1.2	287.5
71	1.0	7.2	2.7	237.5
72	-1.5	8.2	1.9	5.0
73	-6.6	8.0	4.2	5.5
74	-2.7	8.4	3.1	7.6
75	6.0	7.7	3.2	8.5
76	10.2	7.6	4.2	7.3
77	15.4	6.2	4.7	3.3
78	19.7	6.7	5.4	3.3
79	20.2	5.8	5.5	1.8
80	20.7	5.4	4.2	3.9
81	18.7	5.3	3.5	0.7
82	9.2	7.2	2.6	6.6
83	7.0	7.5	1.9	6.2
84	0.4	7.2	1.7	8.2
85	-2.4	7.9	2.2	7.0
86	-5.0	6.8	3.0	8.0
87	1.2	7.6	4.0	8.0
88	9.6	7.6	4.2	9.0
89	14.0	6.7	5.1	3.0
90	19.4	4.7	5.5	9.8
91	20.8	5.7	5.6	8.0
92	20.8	5.1	4.6	1.0
93	15.5	5.7	3.8	5.0
94	9.3	6.6	3.6	9.0
95	9.0	5.8	2.3	2.0
96	0.4	7.3	1.9	1.0
97	-3.3	8.6	2.0	8.0
98	0.0	7.2	2.5	1.0
99	5.0	7.9	3.7	3.0
100	9.2	7.6	4.7	9.0
101	14.0	6.7	5.1	3.0
102	19.4	4.7	5.5	9.8
103	20.8	5.7	5.6	8.0
104	20.8	5.1	4.6	1.0
105	15.5	5.7	3.8	7.0
106	9.3	6.6	3.6	9.0
107	9.0	5.8	2.3	2.0
108	0.4	7.3	1.9	1.0
109	0.4	7.3	1.9	1.0

ORIGINAL PAGE IS
OF POOR QUALITY

PLOTTER SYM CREATED ON 12 AJG 80 AT 12:56:46

```
1 PARAMETER N=14,NN=12,NTIME=12,ND=110
2 DIMENSION IBUF(1000)
3 DIMENSION TEMP(50),DEEP(50),TEMPS(ND),DEEPS(ND),QP(NN),TZ(NN)
4 DIMENSION TIN,AV(N),CB(N),Z(N),XKZ(N),TEQ(ND),THF(ND),TSU(ND)
5 DIMENSION RC(N),TN(N),DM(N),T2(N),A(N),ZEG(ND)
6 DIMENSION E1(50),E2(50),E3(50),E4(50),E6(50),E5(50),
7 CE7(50),ED(50)
8 CHARACTER*6 MONTHS(N)
9 CHARACTER*6 IBCD
10 M=1
11 L=0
12
13 C
14 C
15 C READ JRUN=1 IF YOU DESIRE PLOTS FOR MEASURED DATA
16 C READ JRUN=2 IF YOU DO NOT.
17 C NOTE : IF PLOTS FOR SEVEN STATIONS ARE NOT
18 C AVAILABLE, LINES 35 TO 46 MUST BE MODIFIED
19 100 READ 100,JRUN,JYEAR
20 FORMAT(1)
21 ICOUNT=0
22 XZD=0.
23 5 JO=0
24 CALL PLOTS(IBUF,1000,11)
25 CALL PLOT(0.0,7.0,-3)
26 DO 1 I=1,NTIME
27 CALL READER(T,AV,CB,Z,A,XKZ,ROW,TN,DM,TZ,MONTHS,T2,QP,
28 CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,CP2,FREVEL,ROWCP,DI,
29 CXKZ0,TL,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
30 CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDD,1)
31 ICOUNT=ICOUNT+1
32 IF(ICOUNT.GT.96)GO TO 333
33 IF(JRUN.EQ.2)GO TO 200
34 READ(5,8)(DEEP(INK),TEMP(INK),INK=1,NSTOP)
35 DO 15 KL=1,50
36 READ(5,8) DEEP(KL),E1(KL),E2(KL),E3(KL),E4(KL),E5(KL),
37 CE6(KL),E7(KL)
38 READ(5,6)AE1,BE1,CE1,DE1,EE1,FE1,GE1,HE1,OE1
39 DEEP(KL)=AE1
40 E1(KL)=BE1
41 E2(KL)=CF1
42 E3(KL)=DE1
43 E4(KL)=EE1
44 E5(KL)=FE1
45 E6(KL)=GE1
E7(KL)=HE1
```

```

46      ED(KL)=OE1
47      IF (E3(KL).EQ.0.0)GO TO 16
48      IF (DEEP(KL).EQ.(-1.))GO TO 16
49      TEMP(KL)=(E1(KL)+E2(KL)+E3(KL)+E4(KL)+E5(KL)+E6(KL)+
50      CE7(KL))/ED(KL)
51      TEMP(KL)=E3(KL)
52      15      CONTINUE
53      200     CONTINUE
54      16      NSTOP=KL-1
55      IF (JRUN.EQ.2)GO TO 201
56      DO 222 JIJ=1,50
57      IF (DEEP(KL).EQ.(-1.))GO TO 223
58      READ(5,8)AE1,BE1,CE1,DE1,EE1,FE1,GE1,HE1,OE1
59      IF (AE1.EQ.(-1.))GO TO 223
60      222     CONTINUE
61      223     CONTINUE
62      201     CONTINUE
63      CONS2=1./0.3048
64      IF (JRUN.EQ.2)GO TO 202
65      DO 9   INK=1,NSTOP
66      DEEP(INK)=(CONS2*DEEP(INK)
67      9       DEEP(INK)=150.-DEEP(INK)
68      DEEP(NSTOP+1)=0.0
69      DEEP(NSTOP+2)=2(NN)/1.5
70      TEMP(NSTOP+1)=0.0
71      TEMP(NSTOP+2)=30.0/1.5
72      202     CONTINUE
73      8       FORMAT(1)
74      333     JO=JO+1
75      L=L+1
76      TSJ(L)=T(12)
77      XZD=XZD+30.
78      ZED(L)=XZD
79      TEMPS(L)=TEMP(1)
80      TEQ(L)=TE
81      THF(L)=(T(7)+T(8))/2.
82      IBCD=MONTHS(JO)
83      Z(NN+1)=0.0
84      Z(NN+2)=2(NN)/1.5
85      T(NN+1)=0.0
86      T(NN+2)=30./1.5
87      CALL AXIS(0.0,0.0,8*TEMP.(C),-8,1.5,0.0,T(13),T(14))
88      CALL AXIS(0.0,0.0,9*DEPTH(FT),9,1.5,90.0,Z(13),Z(14))
89      CALL FLINE(T,2,-NN,1,0,0)
90      IF (ICOUNT.GT.96)GO TO 444
91      IF (JRUN.EQ.2)GO TO 203
92      CALL DASHL(TEMP,DEEP,NSTOP,1)
93      203     CONTINUE
94      444     CALL SYMBOL(1.0,0.5,0.14,IBCD,0.0,6)
95      CALL PLOT(2.25,0.0,-3)

```

```

96      IF (JO.EQ.4.OR.JO.EQ.8)GO TO 3
97      GO TO 1
98      3      CALL PLOT(-9.0,-2.25,-3)
99      1      CONTINUE
100     CALL PLOT(-2.25,0.0,-3)
101     CALL SYMBOL(-6.75,0.75,.14,4)HTEMPERATURE PROFILES FOR LAKE KEGWEE
102     C      ,0.0,4)
103     P1=JYEAR
104     MY=JYEAR
105     CALL NUMBER(999.,999.,0.14,P1,0.0,0)
106     CALL SYMBOL(-6.75,6.5,0.1,54H(DEPTH IS MEASURED FROM THE DEEPEST P
107     COINT OF THE LAKE),0.0,54)
108     CALL PLOT(8.0,-9.25,-3)
109     PRINT 2,MY
110     2      FORMAT (1X,'THE PLOTS FOR',I5,' ARE COMPLETE')
111     IF (M.EQ.9)GO TO 6
112     M=M+1
113     JYEAR=JYEAR+1
114     GO TO 5
115     6      CALL PLOT(6.0,0.0,-3)
116     DO 13 I=1,96
117     13     DEEPS(I)=ZED(I)
118     DEEPS(97)=0.0
119     DEEPS(98)=3240.0/9.0
120     TSU(109)=0.0
121     TSU(110)=35.75.
122     TEQ(109)=0.0
123     TEQ(110)=35.75.
124     THF(109)=0.0
125     THF(110)=35.75.
126     TEMPS(97)=0.0
127     TEMPS(98)=35.75.
128     ZED(109)=0.0
129     ZED(110)=3240./9.
130     CALL PLOT(6.0,2.0,-3)
131     CALL AXIS(0.0,0.0,12HTIME IN DAYS,-12,9.0,0.0,ZED(109),ZED(110))
132     CALL AXIS(0.0,0.0,16HTEMPERATURES (C),16,5.0,90.,TSU(109),TSU
133     C(110))
134     CALL FLINE(ZED,TSJ,-108,1,2,11)
135     CALL FLINE(ZED,TEQ,108,1,2,2)
136     CALL FLINE(ZED,THF,-108,1,2,0)
137     IF (JRUN.EQ.2)GO TO 204
138     CALL DASHL (DEEPS,TEMPS,96,1)
139     204    CONTINUE

```

140
141
142
143
144
145
146
147
148
149
150
151
152
153
154

C
C
C
C
C

CHANGE TITLES TO SUIT NEEDS (4 LINES)

CALL SYMBOL(0.0,6.0,0.14,
C46HSTRATIFICATION CYCLE FOR LAKE KEOWEE 1971-1979,0.0,46)
CALL SYMBOL(0.0,0.10,0.10,87H 1971 1972 1973 1974
C 1975 1976 1977 1978 1979,0.0,87)
WRITE(6,7)
7 FORMAT(1X,'ALL PLOTS ARE NOW COMPLETE',//,' NORMAL JOB EXIT')
CALL PLOT(15.0,0.0,-3)
STOP
END

READER SYM CREATED ON 12 AUG 80 AT 13:21:45

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

C
C
C
C
C
C

THIS SUBROUTINE READS THE MAGNETIC TAPE
CONTAINING THE COMPUTED RESULTS.

```

SUBROUTINE READER(T,AV,CB,Z,A,XKZ,ROW,TN,DM,TZ,MONTHS,T2,QP,
CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,CP2,FREVEL,ROWCP,DT,
CXKZ0,TE,NDAYS,IN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TD0,J,NCASE,SF,EDEPT,VOL)
DIMENSION T(20),AV(20),CB(20),Z(20),A(20),XKZ(20),
CROW(20),TN(20),DM(20),TZ(20),T2(20),QP(12)
CHARACTER*6 MONTHS(12)
CONTINUE
1 READ (6,END=1) (T(IJ),IJ=1,12),(AV(IJ),IJ=1,12),
C(CB(IJ),IJ=1,12),(Z(IJ),IJ=1,12),(A(IJ),IJ=1,12),
C(XKZ(IJ),IJ=1,12),(ROW(IJ),IJ=1,12),(TN(IJ),IJ=1,12),
C(DM(IJ),IJ=1,12),(TZ(IJ),IJ=1,12),(MONTHS(IJ),IJ=1,12),
C(T2(IJ),IJ=1,12),
C(QP(IJ),IJ=1,12),
CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,CP2,FREVEL,ROWCP,DT,
CXKZ0,TE,NDAYS,IN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TD0,J,NCASE,SF,EDEPT,VOL
RETURN
END
```

SMOOTH SYM CREATED ON 12 AUG 80 AT 14:34:30

```
1
2 C
3 C THIS SUBROUTINE CORRECTS THE EDDY DIFFUSIVITY
4 C IF VARIABLE TIME STEP IS REQUIRED, 'DT1' SHOULD
5 C BE CHANGED TO 'DT' IN THE CALLING PROGRAM.
6 C
7 SUBROUTINE SMOOTH(XKZ,XKZU,XKZL,NDAYS1,TN12,T12,T,DT1,GZ)
8 DIMENSION XKZ(20),T(20)
9 DO 93 I=1,12
10 IF (XKZ(I).GT.XKZU) XKZ(I)=XKZU
11 IF (XKZ(I).LT.XKZL) XKZ(I)=XKZL
12 CONTINUE
13 NEW=0
14 DO 96 I=2,12
15 IF (XKZ(I).EQ.XKZL) NEW=I
16 CONTINUE
17 IF (NEW.EQ.0) GO TO 77
18 DO 55 I=1,NEW
19 XKZ(I)=XKZL
20 CONTINUE
21 IF (NDAYS1.LE.60.OR.NDAYS1.GT.300) GO TO 29
22 IF (TN12.GE.T12) GO TO 19
23 IF (TN12.LT.T12) GO TO 39
24 19 XMIN=AMIN1(XKZ(1),XKZ(2),XKZ(3),XKZ(4),XKZ(5),XKZ(6),XKZ(7),XKZ
25 1(8),XKZ(9),XKZ(10),XKZ(11),XKZ(12))
26 DO 82 I=1,12
27 IF (XKZ(I).EQ.XMIN) GO TO 81
28 CONTINUE
29 GO TO 29
30 81 IMIN=I
31 DO 70 I=1,IMIN
32 XKZ(I)=XKZ(IMIN)
33 CONTINUE
34 GO TO 29
35 39 XMAX=AMAX1(XKZ(1),XKZ(2),XKZ(3),XKZ(4),XKZ(5),XKZ(6),XKZ(7),XKZ
36 1(8),XKZ(9),XKZ(10),XKZ(11),XKZ(12))
37 DO 62 I=1,12
38 IF (XKZ(I).EQ.XMAX) GO TO 61
39 CONTINUE
40 GO TO 29
41 61 IMAX=I
42 DO 50 I=IMAX,12
43 XKZ(I)=XKZ(IMAX)
44 CONTINUE
45 29 CONTINUE
46 200 XMAX=AMAX1(XKZ(1),XKZ(2),XKZ(3),XKZ(4),XKZ(5),XKZ(6),XKZ(7),XKZ
47 1(8),XKZ(9),XKZ(10),XKZ(11),XKZ(12))
48 DT1=(0.4*GZ**2)/XMAX
49 RETJRN
50 END
```

STORE SYM CREATED ON 12 AJG 80 AT 13:19:47

C
C
C
C
C
C

THIS SUBROUTINE STORES THE COMPUTED RESULTS ON
MAGNETIC TAPE.

```
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26
```

SUBROUTINE STORE(T,AV,CB,Z,A,XKZ,ROW,TN,DM,TZ,MONTHS,T2,QP,
CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,CP2,FREVEL,ROWCP,DT,
CXKZO,TE,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDJ,J,NCASE,SF,EDEPT,VOL)
DIMENSION T(20),AV(20),CB(20),Z(20),A(20),XKZ(20),
CROW(20),TN(20),DM(20),TZ(20),T2(20),
CQP(12)
CHARACTER*6 MONTHS(12)
WRITE(8) (T(IJ),IJ=1,12), (AV(IJ),IJ=1,12),
C(CB(IJ),IJ=1,12), (Z(IJ),IJ=1,12), (A(IJ),IJ=1,12),
C(XKZ(IJ),IJ=1,12), (ROW(IJ),IJ=1,12), (TN(IJ),IJ=1,12),
C(DM(IJ),IJ=1,12), (TZ(IJ),IJ=1,12), (MONTHS(IJ),IJ=1,12),
C(T2(IJ),IJ=1,12),
C(QP(IJ),IJ=1,12),
CCP,SIGMA,R3,R4,R5,R6,R7,R8,R9,R10,CP2,FREVEL,ROWCP,DT,
CXKZO,TE,NDAYS,TN12,T12,F1,F2,F3,F31,F41,F5,F6,F7,F8,TD,TD2,
CNDAYS1,TIME,TIME2,TIME3,IYEAR,MJ,XK,TDJ,J,NCASE,SF,EDEPT,VOL
END FILE 8
RETURN
END

YEARS SYM CREATED ON 12 AUG 80 AT 13:10:03

C
C
C
C

THIS SUBROUTINE PRINTS THE YEAR TITLE.

1
2
3
4
5
6
7
8
9
10
11

```
99      SUBROUTINE YEARS(SZLTEM,QOPP,IYEAR)
        PRINT 99,IYEAR
        FORMAT (59X,17(' '*)),/,59X,'*',15X,'*',/,59X,
C '*',2X,'YEAR = ',I4,2X,'*',/,59X,'*',15X,'*'
C ,/,59X,17(' '*))
        RETURN
        END
```