

NASA Technical Memorandum 82566

**Wind Speed and Direction Shears
With Associated Vertical Motion
During Strong Surface Winds**

Margaret B. Alexander and Dennis W. Camp
George C. Marshall Space Flight Center
Marshall Space Flight Center, Alabama

NASA

National Aeronautics
and Space Administration

**Scientific and Technical
Information Office**

1984

TABLE OF CONTENTS

| | Page |
|-----------------------|------|
| INTRODUCTION | 1 |
| WIND SHEAR | 1 |
| VERTICAL MOTION | 2 |
| DATA ANALYSIS | 2 |
| DESCRIPTIONS | 3 |
| CONCLUSIONS | 4 |
| REFERENCES | 5 |

LIST OF ILLUSTRATIONS

| Figure | Title | Page |
|--------|---|------|
| 1. | NASA's 150-Meter Ground Winds Tower Facility and Launch Complex 39, Kennedy Space Center, Florida | 6 |
| 2. | Placement of Sensors on NASA's 150-Meter Ground Winds Tower Facility at Kennedy Space Center, Florida | 6 |

PRECEDING PAGE BLANK NOT FILMED

LIST OF TABLES

| Table | Title | Page |
|-------|---|------|
| 1. | Percentage Frequency of Occurrence of Significant Events for 5-sec Intervals at 150 to 120 m Layer | 7 |
| 2. | Percentage Frequency of Occurrence of Significant Events for 5-sec Intervals at 120 to 90 m Layer | 8 |
| 3. | Percentage Frequency of Occurrence of Significant Events for 5-sec Intervals at 90 to 60 m Layer | 9 |
| 4. | Percentage Frequency of Occurrence of Significant Events for 5-sec Intervals at 60 to 30 m Layer | 10 |
| 5. | Percentage Frequency of Occurrence of Significant Events for 5-sec Intervals at 30 to 18T m Layer | 11 |
| 6. | Percentage Frequency of Occurrence of Significant Events for 5-sec Intervals at 18S to 3 m Layer | 12 |
| 7. | Percentage Frequency of Occurrence of Significant Events for 5-sec Intervals at 18T to 18S m Distance | 13 |
| 8. | Percentage Frequency of Occurrence of Significant Events by Layers/Distance and 10-min Intervals | 14 |
| 9. | Maximum, Mean, and Standard Deviation of Speed and Direction Shears for 150 to 120 m Layer | 15 |
| 10. | Maximum, Mean, and Standard Deviation of Speed and Direction Shears for 120 to 90 m Layer | 16 |
| 11. | Maximum, Mean, and Standard Deviation of Speed and Direction Shears for 90 to 60 m Layer | 17 |
| 12. | Maximum, Mean, and Standard Deviation of Speed and Direction Shears for 60 to 30 m Layer | 18 |
| 13. | Maximum, Mean, and Standard Deviation of Speed and Direction Shears for 30 to 18T m Layer | 19 |
| 14. | Maximum, Mean, and Standard Deviation of Speed and Direction Shears for 18S to 3 m Layer | 20 |
| 15. | Maximum, Mean, and Standard Deviation of Speed and Direction Shears for 18T to 18S m Distance | 21 |

LIST OF TABLES (Concluded)

| Table | Title | Page |
|-------|--|------|
| 16. | Maximum, Mean, and Standard Deviation of Updrafts and Downdrafts at 150-m Height | 22 |
| 17. | Maximum, Mean, and Standard Deviation of Updrafts and Downdrafts at 60-m Height | 23 |
| 18. | Maximum, Mean, and Standard Deviation of Updrafts and Downdrafts at 18T-m Height | 24 |
| 19. | Maximum, Mean, and Standard Deviation of Updrafts and Downdrafts at 10-m Height | 25 |
| 20. | Maximum, Mean, and Standard Deviation of Horizontal Wind Speeds and Directions at 150-m Height. | 26 |
| 21. | Maximum, Mean, and Standard Deviation of Horizontal Wind Speeds and Directions at 120-m Height. | 27 |
| 22. | Maximum, Mean, and Standard Deviation of Horizontal Wind Speeds and Directions at 90-m Height. | 28 |
| 23. | Maximum, Mean, and Standard Deviation of Horizontal Wind Speeds and Directions at 60-m Height. | 29 |
| 24. | Maximum, Mean, and Standard Deviation of Horizontal Wind Speeds and Directions at 30-m Height. | 30 |
| 25. | Maximum, Mean, and Standard Deviation of Horizontal Wind Speeds and Directions at 18T-m Height | 31 |
| 26. | Maximum, Mean, and Standard Deviation of Horizontal Wind Speeds and Directions at 18S-m Height. | 32 |
| 27. | Maximum, Mean, and Standard Deviation of Horizontal Wind Speeds and Directions at 3-m Height. | 33 |
| 28. | Range of Maximum, Mean, and Standard Deviation Determinations of Shears, Vertical Motion, and Horizontal Winds. | 34 |

ACKNOWLEDGMENTS

The authors thank Dr. George H. Fichtl, Chief, Fluid Dynamics Branch, Atmospheric Science Division for helpful discussions and suggestions and A. Richard Tobiason, Office of Aeronautics and Space Technology, NASA Headquarters, Washington, D.C. for support for this analysis.

TECHNICAL MEMORANDUM

WIND SPEED AND DIRECTION SHEARS WITH ASSOCIATED VERTICAL MOTION DURING STRONG SURFACE WINDS

INTRODUCTION

Low-level flow conditions known to be hazardous to aircraft during takeoff/climbout and approach/landing operations include wind shear and vertical motion. A classic example is the crash of Pan American World Airways Flight 759 at New Orleans on July 9, 1982. Between start of takeoff roll and crash (29 sec), the aircraft experienced a decreasing head wind shear of about 38 kts (19.5 m s^{-1}) and a 7 f s^{-1} (2.1 m s^{-1}) downdraft at 100 ft (30.5 m) above ground level [1].

Wind shear generates eddies between two wind currents of differing velocities. The difference may be in wind speed, wind direction, or in both. Vertical motion, updrafts and downdrafts, can produce an increase or decrease in altitude for an aircraft. From the literature it is evident that information is needed concerning the magnitude of wind speed and direction shears with altitude and along the flight path, as well as intensity of vertical motion and height of maximum occurrences.

Because low wind speeds and subsequent light shears present fewer problems in terminal areas, interest is naturally greatest in high winds, strong shears, and associated vertical motion. This analysis of high resolution wind profile measurements recorded at the NASA 150-Meter Ground Winds Tower Facility at Kennedy Space Center, Florida, presents temporal and spatial shear and vertical motion occurrences during strong or gusty surface winds near a runway.

WIND SHEAR

The meteorological mechanisms that cause strong wind shear are gust fronts formed by severe thunderstorms, fast-moving frontal zones, and low-level temperature inversions [2]. Wind shear, a wind change producing an increase or decrease in the airspeed of an aircraft, may be associated with a wind speed gradient or a wind direction shift at any level in the atmosphere.

The behavior of the wind in the last 100 ft (30 m) of descent, in particular between 100 and 50 ft (30 and 15 m), is most important to a descending aircraft [3]. Wind speed shears greater than 0.1 s^{-1} (6 kts/100 ft or $3 \text{ m s}^{-1}/30 \text{ m}$) are dangerous [4] while large changes in wind direction ($\geq 40 \text{ deg}$) are considered hazardous [5]. From simple calculations, Frost [6] estimates magnitudes of horizontal wind shear of 0.02 s^{-1} (1 kt/100 ft or $0.5 \text{ m s}^{-1}/30 \text{ m}$) to be significant.

This analysis presents vertical speed and direction shears for four 100-ft (30-m) layers below 500 ft (150 m), i.e., 500 to 400 ft or 150 to 120 m, 400 to 300 ft or 120 to 90 m, 300 to 200 ft or 90 to 60 m, and 200 to 100 ft or 60 to 30 m; for two approximately 50-ft (15-m) layers below 100 ft (30 m), i.e., 100 to 60 ft or 30 to 18T* m, and 60 to 10 ft or 18S* to 3 m; and horizontal shears for one distance of 60 ft (18 m) at the 60-ft (18-m) level, i.e., 60T to 60S ft or 18T to 18S m.

*18T and 18S denote the 18-meter level on the tall and short towers, respectively.

VERTICAL MOTION

Horizontal wind speed and direction shears with associated vertical motion effects in the terminal area of operations are critical in terms of aircraft safety. Associated vertical motion, updrafts and down-drafts, is defined to be motion occurring simultaneously with horizontal surface wind speed and direction. While wind shear produces an increase or decrease in the airspeed of an aircraft, vertical motion can produce an increase or decrease in altitude. Some downdrafts, under certain conditions, descend very close to the ground where they spread out violently, i.e., a downburst [7].

This analysis correlates values of updrafts and downdrafts (≥ 2 kts 1.0 m s^{-1}) at four heights (150, 60, 18T and 10 m) with the appropriate layers and distance, i.e., 150 with 150 to 120, 60 with 90 to 60, and 60 to 30, 18T with 30 to 18T and 18T to 18S, and 10 with 18S to 3.

DATA ANALYSIS

The NASA 150-Meter Ground Winds Tower Facility at Kennedy Space Center, Florida, is a unique source of high resolution wind speed, direction and vertical motion profile measurements. The facility, depicted in Figure 1 and described by Kaufman and Keene [8] is located on Merritt Island midway between Launch Complex 39B and the Space Shuttle runway. Placement of the meteorological sensors on the towers is shown in Figure 2. The Automatic Data Acquisition System, described by Traver, et al. [9], samples at the rate of 10 each of speeds, directions, and vertical motion per second, digitally records, and real-time processes the samples for all sensors on the two towers. Mean values follow the World Meteorological Organization (WMO)-recommended practices [10], viz., that wind averaging periods for aviation climatology not exceed 10 min and that gust-measuring periods be at least 5 sec.

Because interest is greatest in strong shears, this analysis consists of twenty 5-sec intervals (one interval every 100 sec) of high (≥ 20 kts 10 m s^{-1}) horizontal winds recorded at the eight tower heights on July 3, 1973, between 1930 and 2200 UT. Specific times of the intervals are the following:

| | | | | | | | |
|-------|-----------|-------|-----------|-------|-----------|-------|-----------|
| 19 31 | 16.0-20.9 | 19 41 | 41.0-45.9 | 20 00 | 06.0-10.9 | 21 43 | 47.0-51.9 |
| 19 33 | 16.0-20.9 | 19 43 | 21.0-25.9 | 20 01 | 51.0-55.9 | 21 45 | 27.0-31.9 |
| 19 34 | 56.0-00.9 | 19 45 | 01.0-05.9 | | | 21 47 | 07.0-11.9 |
| 19 36 | 36.0-40.9 | 19 46 | 41.0-45.9 | | | 21 48 | 47.0-51.9 |
| 19 38 | 16.0-20.9 | 19 48 | 21.0-25.9 | | | 21 50 | 32.0-36.9 |
| 19 39 | 56.0-00.9 | 19 50 | 01.0-05.9 | | | 21 52 | 12.0-16.9 |

Vertical wind shear is the change of wind speed with height and is determined by means of two anemometers mounted at different heights on a single tower. Vertical shear magnitudes are derived by algebraically subtracting the wind speed at the lower level from the speed at the upper and dividing by the distance between levels, i.e.,

$$\frac{WS_U - WS_L}{d_{(U-L)}} = \frac{\Delta WS}{\Delta d} \quad (1)$$

Horizontal wind shear is the change of wind speed with horizontal distance and is determined by two anemometers mounted at the same height on different towers. Wind speed shears for one distance (18 m) between the tall and short towers at the 18-m level are presented. Horizontal shear magnitudes were derived by algebraically subtracting the wind speed at the short tower from the speed at the tall and dividing by the distance between towers, i.e.,

$$\frac{WS_T - WS_S}{d_{(T-S)}} = \frac{\Delta WS}{18} \quad (2)$$

Vertical and horizontal wind direction shears were similarly determined, i.e.,

$$\frac{WD_U - WD_L}{d_{(U-L)}} = \frac{\Delta WD}{\Delta d} \quad (3)$$

and

$$\frac{WD_T - WD_S}{d_{(T-S)}} = \frac{\Delta WD}{18} \quad (4)$$

DESCRIPTIONS

To help further characterize the simultaneous occurrence of shear and vertical motion hazards to aviation in low-level flow conditions [11], graphical (percentage frequency distributions) and mathematical (maximum, mean, standard deviation) descriptions are presented as follows:

Tables 1 through 7 present by layer, distance, and 5-sec intervals, percentage frequency of occurrence of the following:

1) Significant events

Wind speed shear $\geq 0.1 \text{ s}^{-1}$ (3 m s^{-1} /30 m 6 kts/100 ft)

Wind direction shear $\geq 1.0 \text{ deg m}^{-1}$ (30 deg/30 m 30 deg/100 ft)

Updrafts and downdrafts $\geq 1.0 \text{ m s}^{-1}$ (2.0 kts)

2) Simultaneous occurrence of the significant events

Speed and direction shears

Speed shears and updrafts

Speed shears and downdrafts

Direction shears and updrafts

Direction shears and downdrafts

Speed shears, direction shears and updrafts
Speed shears, direction shears and downdrafts.

Table 8 presents by layer, distance, and 10-min intervals percentage frequency of occurrence of items 1 and 2 in Tables 1 through 7.

To provide the wind field associated with shears during strong surface winds, necessary for model construction and flight simulation, determinations of maximum, mean, and standard deviation are presented by layer, distance, and height in

Tables 9 through 15 of speed and direction shears

Tables 16 through 19 of updrafts and downdrafts

Tables 20 through 27 of horizontal wind speeds and directions.

Table 28 presents the range of values in Tables 9 through 27.

CONCLUSIONS

Concerning the characterization of wind shear and vertical motion during high surface winds, conclusions are the following:

1) Below 90 m is the most active area for the occurrence of significant events (wind speed shear $\geq 0.1 \text{ s}^{-1}$, direction shear $\geq 1.0 \text{ deg m}^{-1}$, updrafts and downdrafts $\geq 1.0 \text{ m s}^{-1}$) hazardous to ascending and descending aircraft.

2) Fewer occurrences of vertical motion $\geq 1.0 \text{ m s}^{-1}$ at the 150 and 60-m heights make the area below 30 m critical for the simultaneous occurrence of significant events, i.e., speed and direction shears, speed shear and vertical motion, direction shear and vertical motion, speed and direction shears and vertical motion.

3) Fewer occurrences of horizontal direction shears $\geq 1.0 \text{ deg m}^{-1}$ keep the significant events for the horizontal distance (18T to 18S) from being comparable to the vertical counterparts in the 30 to 18T and 18S to 3 layers.

4) A comparison of simultaneous occurrences of significant events for the (30 to 3) vertical layer, (18T to 18S) horizontal distance, and 18-m height vertical motion should be investigated.

This analysis of tower data during high surface winds will, hopefully, provide magnitude and frequency values of speed and direction shears with altitude and along the flight path, and of associated vertical motion, for information purposes, model development and flight training simulations.

REFERENCES

1. Kozicharow, Eugene: NTSB Cites Wind Shear in New Orleans Accident. Aviation Week and Space Technology, March 28, 1983.
2. Staff: Engineering and Development Program Plan – Wind Shear. FAA-ED-76-103, March 1976.
3. Ramsdell, J. V. and Powell, D. C.: Meteorological Information for V/S. DL Operations in Built-Up Urban Areas – An Analysis. FAA-RD-72-135, 1973.
4. Snyder, C. Thomas: Analog Study of the Longitudinal Response of a Swept-Wing Transport Airplane to Wind Shear and Sustained Gusts During Landing Approach. NASA TN D-4477, 1968.
5. Kalafus, Rudolph M.: Wind Shear Requirements and Their Application to Laser Systems. FAA-RD-77-123, 1978.
6. Frost, Walter: Flight in Low-Level Wind Shear. NASA CR 3678, March 1983.
7. McCarthy, John, Wilson, J., and Fujita, T.: The Joint Airport Weather Studies Project. Bull. Amer. Meteor. Soc., Vol. 63, 1982.
8. Kaufman, John W. and Keene, Lester F.: NASA's 150-Meter Meteorological Tower Located at Kennedy Space Center, Florida. NASA TM X-53699, 1968.
9. Traver, Wilson B., Owen, Thomas E., and Camp, Dennis W.: An Automatic Data Acquisition System for the 150-Meter Ground Winds Tower Facility, Kennedy Space Center. NASA TM X-64708, 1972.
10. Readings, C. J., Rath, R., Singleton, F., and Wieringa, J.: Comments on Workshop on Wind Climate. Bull. Amer. Meteor. Soc., Vol. 63, No. 4, April 1982.
11. Alexander, Margaret B. and Camp, Dennis W.: Significant Events in Low-Level Flow Conditions Hazardous to Aircraft. NASA TM-82522, January 1983

ORIGINAL PAGE 12
OF POOR QUALITY

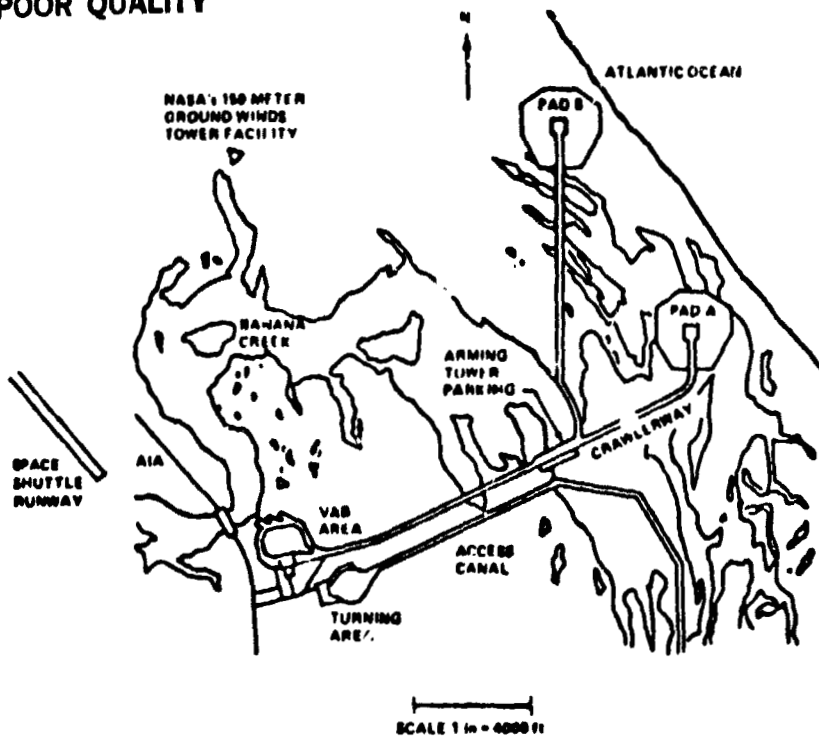


Figure 1. NASA's 150-Meter Ground Winds Tower Facility and Launch Complex 39, Kennedy Space Center, Florida.

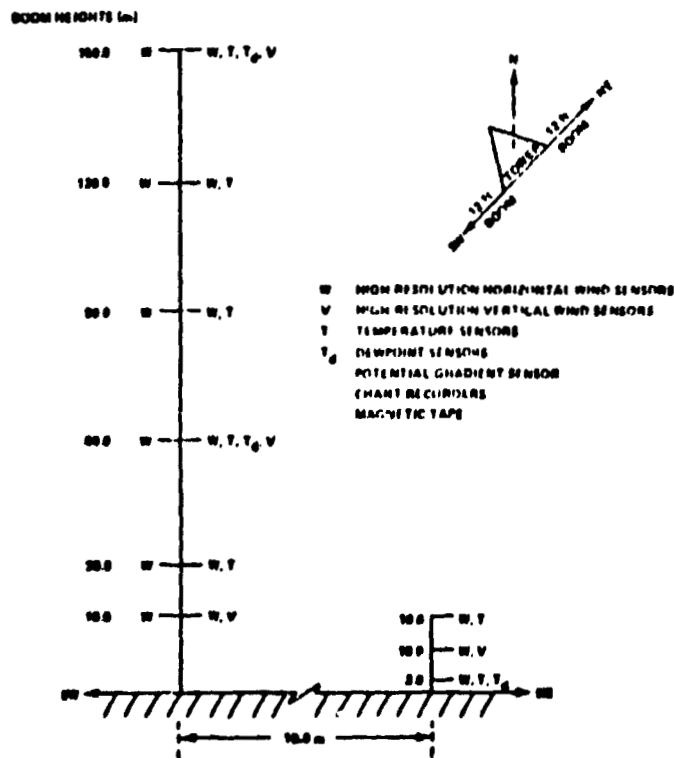


Figure 2. Placement of Sensors on NASA's 150-Meter Ground Winds Tower Facility at Kennedy Space Center, Florida.

TABLE 1. PERCENTAGE FREQUENCY OF OCCURRENCE OF SIGNIFICANT EVENTS FOR
5-sec INTERVALS AT 150 TO 120 m LAYER

| Interval | Shear | | VM | | Shears | | Shear(s) and Vertical Motion | | | | | | | | | | |
|-----------|--|--|---|------|--|-----|--|----|--|----|--|------|----|----|-----|------|---|
| | Sp | Dir | Up | Down | Sp | Dir | Up | Sp | Down | Up | Dir | Down | Up | Sp | Dir | Down | |
| hr min | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 3 \text{ m s}^{-1}/30 \text{ m} \\ 6 \text{ kt}/100 \text{ ft} \end{array} \right\}$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 30 \text{ deg}/30 \text{ m} \\ 30 \text{ deg}/100 \text{ ft} \end{array} \right\}$ | $\left\{ \begin{array}{l} 1.0 \text{ m s}^{-1} \\ 2.0 \text{ kts} \end{array} \right\}$ | | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \end{array} \right\}$ | | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | | | | | | |
| 1931 | 0.00 | 0 | 30.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1933 | 0.00 | 0 | 44.0 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1934 | 0.00 | 0 | 0.00 | 2.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1936 | 60.00 | 0 | 30.00 | 0.00 | 0 | 0 | 18.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1938 | 0.00 | 0 | 2.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1939 | 0.00 | 0 | 96.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1931-1939 | 10.00 | 0 | 33.67 | 0.32 | 0 | 0 | 3.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1941 | 0.00 | 0 | 40.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1943 | 0.00 | 0 | 0.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1945 | 6.00 | 0 | 0.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1946 | 0.00 | 0 | 80.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1948 | 0.00 | 0 | 0.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1950 | 0.00 | 0 | 0.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1941-1950 | 1.00 | 0 | 20.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2000 | 0.00 | 0 | 0.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2001 | 0.00 | 0 | 0.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2000-2001 | 0.00 | 0 | 0.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2143 | 0.00 | 0 | 28.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2145 | 4.00 | 0 | 2.00 | 4.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2147 | 2.00 | 0 | 36.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2148 | 0.00 | 0 | 54.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2150 | 6.00 | 0 | 6.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2152 | 0.00 | 0 | 2.00 | 0.00 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2143-2152 | 2.00 | 0 | 21.33 | 0.67 | 0 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1931-2152 | 3.90 | 0.00 | 22.50 | 0.30 | 0 | 0 | 0.90 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

TABLE 2. PERCENTAGE FREQUENCY OF OCCURRENCE OF SIGNIFICANT EVENTS FOR
5-sec INTERVALS AT 120 TO 90 m LAYER

| Interval | Shear | | VM | | Shears | | Shear(s) and Vertical Motion | | | | |
|-----------|--------|---|---|------|--------|------|------------------------------|-----------------------|------|-------------------------|------|
| | Sp | Dir | Up | Down | Sp | Dir | Sp | Dir | Up | Down | |
| hr min | \geq | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 3 \text{ m s}^{-1}/30 \text{ m} \\ 6 \text{ kt}/100 \text{ ft} \end{array} \right.$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 30 \text{ deg}/30 \text{ m} \\ 30 \text{ deg}/100 \text{ ft} \end{array} \right.$ | Up | Down | Sp | Dir | Up | Down | Up | Down |
| 1931 | | 38.00 | 2.00 | | | 0.00 | | 0.1 s ⁻¹ | | 0.1 s ⁻¹ | |
| 1933 | | 0.00 | 10.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1934 | | 30.00 | 2.00 | | | 2.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1936 | | 4.00 | 0.00 | | | 0.00 | | 0.1 s ⁻¹ | | 0.1 s ⁻¹ | |
| 1938 | | 0.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1939 | | 0.00 | 4.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1931-1939 | | 12.00 | 3.00 | | | 0.33 | | 0.1 s ⁻¹ | | 0.1 s ⁻¹ | |
| 1941 | | 0.00 | 2.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1943 | | 16.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1945 | | 8.00 | 6.00 | | | 2.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1946 | | 0.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1948 | | 0.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1950 | | 26.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1941-1950 | | 8.33 | 1.33 | | | 0.33 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2000 | | 0.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2001 | | 0.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2000-2001 | | 0.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2143 | | 14.00 | 12.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2145 | | 6.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2147 | | 6.00 | 2.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2148 | | 0.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2150 | | 4.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2152 | | 0.00 | 0.00 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 2143-2152 | | 5.00 | 2.33 | | | 0.00 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |
| 1931-2152 | | 7.60 | 2.00 | | | 0.20 | | 1.0 m s ⁻¹ | | 1.0 deg m ⁻¹ | |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 3. PERCENTAGE FREQUENCY OF OCCURRENCE OF SIGNIFICANT EVENTS FOR
5-sec INTERVALS AT 90 TO 60 m LAYER

| Interval | Shear | | VM | | Shears | | Shear(s) and Vertical Motion | | | | |
|-----------|--|--|---|-------|--|--|--|--|-------|-------|------|
| | Sp | Dir | Up | Down | Sp Dir | Up | Down | Sp | Dir | Up | Down |
| hr min > | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 3 \text{ m s}^{-1}/30 \text{ m} \\ 6 \text{ kt}/100 \text{ ft} \end{array} \right\}$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 30 \text{ deg}/30 \text{ m} \\ 30 \text{ deg}/100 \text{ ft} \end{array} \right\}$ | $\left\{ \begin{array}{l} 1.0 \text{ m s}^{-1} \\ 2.0 \text{ kts} \end{array} \right\}$ | | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \end{array} \right\}$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | | | |
| 1931 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1933 | 100.00 | 100.00 | 32.00 | 2.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 32.00 | 2.00 |
| 1934 | 28.00 | 100.00 | 0.00 | 0.00 | 28.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1936 | 2.00 | 100.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1938 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1939 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1931-1939 | 21.67 | 100.00 | 5.33 | 0.33 | 21.67 | 5.33 | 0.00 | 0.00 | 0.33 | 5.33 | 0.33 |
| 1941 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1943 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1945 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1946 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1948 | 6.00 | 100.00 | 0.00 | 0.00 | 6.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1950 | 14.00 | 100.00 | 0.00 | 8.00 | 14.00 | 0.00 | 2.00 | 0.00 | 8.00 | 0.00 | 2.00 |
| 1941-1950 | 3.33 | 100.00 | 0.00 | 1.33 | 3.33 | 0.00 | 0.33 | 0.00 | 1.33 | 0.00 | 0.33 |
| 2000 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2001 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2000-2001 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2143 | 12.00 | 96.00 | 0.00 | 0.00 | 12.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2145 | 32.00 | 38.00 | 12.00 | 0.00 | 10.00 | 6.00 | 0.00 | 0.00 | 8.00 | 2.00 | 0.00 |
| 2147 | 10.00 | 34.00 | 0.00 | 20.00 | 6.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2148 | 28.00 | 70.00 | 0.00 | 14.00 | 6.00 | 0.00 | 12.00 | 0.00 | 4.00 | 0.00 | 2.00 |
| 2150 | 4.00 | 60.00 | 0.00 | 18.00 | 2.00 | 0.00 | 0.00 | 0.00 | 14.00 | 0.00 | 0.00 |
| 2152 | 54.00 | 78.00 | 0.00 | 14.00 | 36.00 | 0.00 | 14.00 | 0.00 | 6.00 | 0.00 | 6.00 |
| 2143-2152 | 23.33 | 62.67 | 2.00 | 11.00 | 12.00 | 1.00 | 4.33 | 1.33 | 4.00 | 0.33 | 1.33 |
| 1931-2152 | 14.50 | 88.80 | 2.20 | 3.80 | 11.10 | 1.90 | 1.40 | 0.40 | 1.70 | 1.70 | 0.60 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 4. PERCENTAGE FREQUENCY OF OCCURRENCE OF SIGNIFICANT EVENTS FOR
5-sec INTERVALS AT 60 TO 30 m LAYER

| Interval | Shear | | VM | | Shears | | Shear(s) and Vertical Motion | | | | | | | | | |
|-----------|--------|--|--|---|--|--|--|--|--|--|------|------|------|------|------|------|
| | Sp | Dir | Up | Down | Sp | Dir | Up | Down | Sp | Down | Up | Down | Sp | Dir | Down | |
| UT | | | | | | | | | | | | | | | | |
| hr min | \geq | $\left[\begin{array}{l} 0.1 \text{ s}^{-1} \\ 3 \text{ m s}^{-1}/30 \text{ m} \\ 6 \text{ kt}/100 \text{ ft} \end{array} \right]$ | $\left[\begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 30 \text{ deg}/30 \text{ m} \\ 30 \text{ deg}/100 \text{ ft} \end{array} \right]$ | $\left[\begin{array}{l} 1.0 \text{ m s}^{-1} \\ 2.0 \text{ kts} \end{array} \right]$ | $\left[\begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \end{array} \right]$ | $\left[\begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right]$ | $\left[\begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right]$ | $\left[\begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right]$ | $\left[\begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right]$ | $\left[\begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right]$ | | | | | | |
| 1931 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1933 | 24.00 | 2.00 | 32.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1934 | 22.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1936 | 66.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1938 | 78.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1939 | 76.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1931-1939 | 44.33 | 0.33 | 5.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1941 | 18.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1943 | 70.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1945 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1946 | 24.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1948 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1950 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 1941-1950 | 18.67 | 0.00 | 0.00 | 1.33 | 0.00 | 1.33 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 2000 | 2.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 2001 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 2000-2001 | 51.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0 | 0 | 0 |
| 2143 | 92.00 | 18.00 | 0.00 | 0.00 | 14.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2145 | 78.00 | 60.00 | 12.00 | 0.00 | 50.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2147 | 86.00 | 24.00 | 0.00 | 20.00 | 24.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2148 | 98.00 | 92.00 | 0.00 | 14.00 | 90.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2150 | 30.00 | 44.00 | 0.00 | 18.00 | 18.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2152 | 44.00 | 66.00 | 0.00 | 14.00 | 34.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2143-2152 | 71.33 | 50.67 | 2.00 | 11.00 | 38.33 | 1.33 | 8.00 | 1.00 | 5.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 4.00 | 4.00 |
| 1931-2152 | 45.40 | 15.30 | 2.20 | 3.80 | 11.60 | 0.40 | 2.50 | 0.30 | 1.50 | 0.30 | 0.30 | 0.30 | 0.30 | 0.30 | 1.20 | 1.20 |

TABLE 5. PERCENTAGE FREQUENCY OF OCCURRENCE OF SIGNIFICANT EVENTS FOR
5-sec INTERVALS AT 30 TO 18T m LAYER

| Interval | Shear | | VM | | Shears | | Shear(s) and Vertical Motion | | | | | | |
|-----------|--------|--|--|--|---|---|---|---|---|---|-------|-------|-------|
| | Sp | Dir | Up | Down | Sp | Dir | Up | Down | Sp | Dir | Up | Down | |
| UT | | | | | | | | | | | | | |
| hr min | \geq | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.2 \text{ m s}^{-1}/12 \text{ m} \\ 2.3 \text{ kt}/40 \text{ ft} \end{array} \right.$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.2 \text{ deg}/12 \text{ m} \\ 1.2 \text{ deg}/40 \text{ ft} \end{array} \right.$ | $\left\{ \begin{array}{l} 1.0 \text{ m s}^{-1} \\ 2.0 \text{ kts} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | | | |
| 1931 | 48.00 | 100.00 | 24.00 | 22.00 | 48.00 | 12.00 | 24.00 | 12.00 | 22.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| 1933 | 20.00 | 100.00 | 92.00 | 0.00 | 20.00 | 16.00 | 92.00 | 0.00 | 0.00 | 0.00 | 16.00 | 0.00 | 16.00 |
| 1934 | 72.00 | 100.00 | 62.00 | 0.00 | 72.00 | 42.00 | 62.00 | 0.00 | 0.00 | 0.00 | 42.00 | 0.00 | 42.00 |
| 1936 | 32.00 | 100.00 | 40.00 | 0.00 | 32.00 | 16.00 | 40.00 | 0.00 | 0.00 | 0.00 | 16.00 | 0.00 | 16.00 |
| 1938 | 36.00 | 100.00 | 86.00 | 0.00 | 36.00 | 36.00 | 86.00 | 0.00 | 0.00 | 0.00 | 36.00 | 0.00 | 36.00 |
| 1939 | 22.00 | 100.00 | 56.00 | 0.00 | 22.00 | 8.00 | 56.00 | 0.00 | 0.00 | 0.00 | 8.00 | 0.00 | 8.00 |
| 1931-1939 | 38.33 | 100.00 | 60.00 | 3.67 | 38.33 | 21.67 | 60.00 | 2.00 | 3.67 | 21.67 | 21.67 | 2.00 | 21.67 |
| 1941 | 50.00 | 100.00 | 18.00 | 0.00 | 50.00 | 16.00 | 18.00 | 0.00 | 0.00 | 16.00 | 16.00 | 0.00 | 16.00 |
| 1943 | 52.00 | 100.00 | 80.00 | 0.00 | 52.00 | 38.00 | 80.00 | 0.00 | 0.00 | 38.00 | 38.00 | 0.00 | 38.00 |
| 1945 | 38.00 | 100.00 | 16.00 | 8.00 | 38.00 | 0.00 | 16.00 | 8.00 | 8.00 | 0.00 | 16.00 | 8.00 | 0.00 |
| 1946 | 84.00 | 100.00 | 44.00 | 0.00 | 84.00 | 34.00 | 44.00 | 0.00 | 0.00 | 34.00 | 44.00 | 0.00 | 34.00 |
| 1948 | 32.00 | 100.00 | 38.00 | 0.00 | 32.00 | 10.00 | 38.00 | 0.00 | 0.00 | 10.00 | 38.00 | 0.00 | 10.00 |
| 1950 | 12.00 | 100.00 | 76.00 | 0.00 | 12.00 | 12.00 | 76.00 | 0.00 | 0.00 | 12.00 | 76.00 | 0.00 | 12.00 |
| 1941-1950 | 44.67 | 100.00 | 45.33 | 1.33 | 44.67 | 18.33 | 45.33 | 1.33 | 1.33 | 18.33 | 45.33 | 1.33 | 18.33 |
| 2000 | 82.00 | 100.00 | 12.00 | 0.00 | 82.00 | 12.00 | 12.00 | 0.00 | 0.00 | 12.00 | 12.00 | 0.00 | 12.00 |
| 2001 | 10.00 | 100.00 | 82.00 | 0.00 | 10.00 | 10.00 | 82.00 | 0.00 | 0.00 | 10.00 | 82.00 | 0.00 | 10.00 |
| 2000-2001 | 46.00 | 100.00 | 47.00 | 0.00 | 46.00 | 11.00 | 47.00 | 0.00 | 0.00 | 11.00 | 47.00 | 0.00 | 11.00 |
| 2143 | 54.00 | 84.00 | 6.00 | 0.00 | 46.00 | 4.00 | 6.00 | 0.00 | 0.00 | 4.00 | 6.00 | 0.00 | 4.00 |
| 2145 | 90.00 | 36.00 | 74.00 | 0.00 | 36.00 | 72.00 | 32.00 | 0.00 | 0.00 | 32.00 | 32.00 | 0.00 | 32.00 |
| 2147 | 56.00 | 56.00 | 0.00 | 4.00 | 38.00 | 0.00 | 0.00 | 0.00 | 4.00 | 0.00 | 0.00 | 4.00 | 0.00 |
| 2148 | 40.00 | 78.00 | 0.00 | 8.00 | 24.00 | 0.00 | 0.00 | 2.00 | 8.00 | 0.00 | 0.00 | 2.00 | 0.00 |
| 2150 | 68.00 | 30.00 | 32.00 | 2.00 | 26.00 | 26.00 | 10.00 | 0.00 | 2.00 | 10.00 | 10.00 | 0.00 | 10.00 |
| 2152 | 58.00 | 94.00 | 0.00 | 24.00 | 52.00 | 0.00 | 0.00 | 16.00 | 24.00 | 0.00 | 0.00 | 16.00 | 0.00 |
| 2143-2152 | 61.00 | 63.00 | 18.67 | 6.33 | 57.00 | 17.00 | 8.00 | 3.00 | 6.00 | 17.00 | 8.00 | 3.00 | 7.00 |
| 1931-2152 | 47.80 | 88.90 | 41.90 | 3.40 | 40.60 | 18.20 | 38.70 | 1.90 | 3.30 | 18.20 | 38.70 | 1.90 | 15.20 |

TABLE 6. PERCENTAGE FREQUENCY OF OCCURRENCE OF SIGNIFICANT EVENTS FOR
5-sec INTERVALS AT 18S TO 3 m LAYER

| Interval | Shear | | VM | | Shears | | Shear(s) and Vertical Motion | | | | | | | | |
|-----------|--------|--|--|--|---|---|---|---|---|---|-------|-------|-------|-------|-------|
| | Sp | Dir | Up | Down | Sp | Dir | Sp | Up | Down | Dir | Up | Down | Sp | Up | Down |
| hr min | \geq | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.5 \text{ m s}^{-1}/15 \text{ m} \\ 3 \text{ kt}/50 \text{ ft} \end{array} \right.$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 15 \text{ deg}/15 \text{ m} \\ 15 \text{ deg}/50 \text{ ft} \end{array} \right.$ | $\left\{ \begin{array}{l} 1.0 \text{ m s}^{-1} \\ 2.0 \text{ kts} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right.$ | | | | | |
| 1931 | 0.00 | 26.00 | 50.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 4.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1933 | 52.00 | 72.00 | 4.00 | 0.00 | 42.00 | 4.00 | 0.00 | 4.00 | 0.00 | 4.00 | 0.00 | 4.00 | 0.00 | 4.00 | 0.00 |
| 1934 | 76.00 | 72.00 | 4.00 | 0.00 | 58.00 | 4.00 | 0.00 | 2.00 | 0.00 | 2.00 | 0.00 | 2.00 | 0.00 | 2.00 | 0.00 |
| 1936 | 84.00 | 50.00 | 4.00 | 0.00 | 48.00 | 30.00 | 0.00 | 30.00 | 0.00 | 8.00 | 0.00 | 8.00 | 0.00 | 8.00 | 0.00 |
| 1938 | 100.00 | 38.00 | 0.00 | 0.00 | 38.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1939 | 40.00 | 100.00 | 0.00 | 0.00 | 40.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1931-1939 | 58.67 | 59.67 | 15.33 | 0.00 | 37.67 | 6.67 | 0.00 | 6.67 | 0.00 | 3.67 | 0.00 | 3.00 | 0.00 | 3.00 | 0.00 |
| 1941 | 58.00 | 38.00 | 24.00 | 0.00 | 22.00 | 14.00 | 0.00 | 14.00 | 0.00 | 4.00 | 0.00 | 4.00 | 0.00 | 4.00 | 0.00 |
| 1943 | 96.00 | 80.00 | 24.00 | 0.00 | 76.00 | 22.00 | 0.00 | 22.00 | 0.00 | 14.00 | 0.00 | 12.00 | 0.00 | 12.00 | 0.00 |
| 1945 | 96.00 | 98.00 | 0.00 | 0.00 | 96.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1946 | 52.00 | 38.00 | 0.00 | 0.00 | 18.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1948 | 100.00 | 50.00 | 4.00 | 4.00 | 50.00 | 4.00 | 4.00 | 4.00 | 4.00 | 2.00 | 2.00 | 2.00 | 4.00 | 2.00 | 4.00 |
| 1950 | 100.00 | 48.00 | 78.00 | 0.00 | 48.00 | 78.00 | 0.00 | 78.00 | 0.00 | 38.00 | 0.00 | 38.00 | 0.00 | 38.00 | 0.00 |
| 1941-1950 | 83.67 | 58.67 | 21.00 | 0.67 | 51.67 | 19.67 | 0.67 | 19.67 | 0.67 | 9.67 | 0.67 | 9.33 | 0.67 | 9.33 | 0.67 |
| 2000 | 62.00 | 78.00 | 0.00 | 0.00 | 40.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2001 | 64.00 | 72.00 | 18.00 | 0.00 | 44.00 | 4.00 | 0.00 | 4.00 | 0.00 | 6.00 | 0.00 | 6.00 | 0.00 | 6.00 | 0.00 |
| 2000-2001 | 63.00 | 75.00 | 9.00 | 0.00 | 42.00 | 2.00 | 0.00 | 2.00 | 0.00 | 3.00 | 0.00 | 3.00 | 0.00 | 3.00 | 0.00 |
| 2143 | 100.00 | 80.00 | 18.00 | 16.00 | 80.00 | 18.00 | 16.00 | 18.00 | 16.00 | 18.00 | 14.00 | 18.00 | 14.00 | 18.00 | 14.00 |
| 2145 | 86.00 | 94.00 | 6.00 | 0.00 | 80.00 | 6.00 | 0.00 | 6.00 | 0.00 | 6.00 | 0.00 | 6.00 | 0.00 | 6.00 | 0.00 |
| 2147 | 100.00 | 66.00 | 2.00 | 6.00 | 66.00 | 2.00 | 6.00 | 2.00 | 6.00 | 2.00 | 0.00 | 2.00 | 0.00 | 2.00 | 0.00 |
| 2148 | 94.00 | 84.00 | 16.00 | 22.00 | 78.00 | 16.00 | 22.00 | 16.00 | 22.00 | 10.00 | 18.00 | 10.00 | 18.00 | 10.00 | 18.00 |
| 2150 | 100.00 | 52.00 | 26.00 | 8.00 | 52.00 | 26.00 | 8.00 | 26.00 | 8.00 | 12.00 | 0.00 | 12.00 | 0.00 | 12.00 | 0.00 |
| 2152 | 100.00 | 50.00 | 0.00 | 16.00 | 50.00 | 0.00 | 16.00 | 0.00 | 16.00 | 0.00 | 8.00 | 0.00 | 8.00 | 0.00 | 8.00 |
| 2143-2152 | 96.67 | 71.00 | 11.33 | 11.33 | 67.67 | 11.33 | 11.33 | 11.33 | 11.33 | 8.00 | 6.67 | 8.00 | 6.67 | 8.00 | 6.67 |
| 1931-2152 | 78.00 | 64.30 | 15.20 | 3.60 | 51.30 | 11.50 | 3.60 | 11.50 | 3.60 | 6.70 | 2.20 | 6.10 | 2.20 | 6.10 | 2.20 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 7. PERCENTAGE FREQUENCY OF OCCURRENCE OF SIGNIFICANT EVENTS FOR
5-sec INTERVALS AT 18T TO 18S m DISTANCE

ORIGINAL PAGE IS
OF POOR QUALITY

| Interval | Shear | | VM | | Shears | | Shear(s) and Vertical Motion | | | | |
|---------------|---|---|---|-------|--|--|--|--|-------------|-----------|------------|
| | Sp | Dir | Up | Down | Sp Dir | Up | Down | Sp Up | Dir Down | Sp Dir | Up Down |
| hr min \geq | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.8 \text{ m s}^{-1}/18 \text{ m} \\ 3.5 \text{ kt}/60 \text{ ft} \end{array} \right\}$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 18 \text{ deg}/18 \text{ m} \\ 18 \text{ deg}/60 \text{ ft} \end{array} \right\}$ | $\left\{ \begin{array}{l} 1.0 \text{ m s}^{-1} \\ 2.0 \text{ kts} \end{array} \right\}$ | | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \end{array} \right\}$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | $\left\{ \begin{array}{l} 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | $\left\{ \begin{array}{l} 0.1 \text{ s}^{-1} \\ 1.0 \text{ deg m}^{-1} \\ 1.0 \text{ m s}^{-1} \end{array} \right\}$ | | | |
| 1931 | 100.00 | 6.00 | 24.00 | 22.00 | 6.00 | 24.00 | 22.00 | 0.00 | 2.00 | 0.00 | 2.00 |
| 1933 | 50.00 | 6.00 | 92.00 | 0.00 | 6.00 | 44.00 | 0.00 | 6.00 | 0.00 | 6.00 | 0.00 |
| 1934 | 40.00 | 10.00 | 62.00 | 0.00 | 0.00 | 28.00 | 0.00 | 6.00 | 0.00 | 0.00 | 0.00 |
| 1936 | 42.00 | 16.00 | 40.00 | 0.00 | 2.00 | 30.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1938 | 12.00 | 8.00 | 86.00 | 0.00 | 0.00 | 10.00 | 0.00 | 8.00 | 0.00 | 0.00 | 0.00 |
| 1939 | 30.00 | 10.00 | 56.00 | 0.00 | 0.00 | 14.00 | 0.00 | 2.00 | 0.00 | 0.00 | 0.00 |
| 1931-1939 | 45.67 | 9.33 | 60.00 | 3.67 | 2.33 | 25.00 | 3.67 | 3.67 | 0.33 | 1.00 | 0.33 |
| 1941 | 74.00 | 6.00 | 18.00 | 0.00 | 6.00 | 12.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1943 | 14.00 | 28.00 | 80.00 | 0.00 | 2.00 | 14.00 | 0.00 | 24.00 | 0.00 | 2.00 | 0.00 |
| 1945 | 16.00 | 12.00 | 16.00 | 8.00 | 0.00 | 0.00 | 2.00 | 8.00 | 0.00 | 0.00 | 0.00 |
| 1946 | 56.00 | 0.00 | 44.00 | 0.00 | 0.00 | 20.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 1948 | 78.00 | 2.00 | 38.00 | 0.00 | 2.00 | 36.00 | 0.00 | 2.00 | 0.00 | 2.00 | 0.00 |
| 1950 | 4.00 | 4.00 | 76.00 | 0.00 | 0.00 | 4.00 | 0.00 | 4.00 | 0.00 | 0.00 | 0.00 |
| 1941-1950 | 40.33 | 8.67 | 45.33 | 1.33 | 1.67 | 14.33 | 0.33 | 6.33 | 0.00 | 0.67 | 0.00 |
| 2000 | 58.00 | 28.00 | 12.00 | 0.00 | 6.00 | 0.00 | 0.00 | 4.00 | 0.00 | 0.00 | 0.00 |
| 2001 | 94.00 | 28.00 | 82.00 | 0.00 | 28.00 | 82.00 | 0.00 | 24.00 | 0.00 | 24.00 | 0.00 |
| 2000-2001 | 76.00 | 28.00 | 47.00 | 0.00 | 17.00 | 41.00 | 0.00 | 14.00 | 0.00 | 12.00 | 0.00 |
| 2143 | 58.00 | 12.00 | 6.00 | 0.00 | 12.00 | 6.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2145 | 56.00 | 36.00 | 74.00 | 0.00 | 22.00 | 46.00 | 0.00 | 26.00 | 0.00 | 20.00 | 0.00 |
| 2147 | 88.00 | 8.00 | 0.00 | 4.00 | 6.00 | 0.00 | 2.00 | 0.00 | 4.00 | 0.00 | 2.00 |
| 2148 | 44.00 | 16.00 | 0.00 | 8.00 | 2.00 | 0.00 | 2.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2150 | 94.00 | 24.00 | 32.00 | 2.00 | 24.00 | 26.00 | 2.00 | 4.00 | 0.00 | 4.00 | 0.00 |
| 2152 | 52.00 | 0.00 | 0.00 | 24.00 | 0.00 | 0.00 | 20.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 2143-2152 | 65.33 | 16.00 | 18.67 | 6.33 | 11.00 | 13.00 | 4.33 | 5.00 | 0.67 | 4.00 | 0.33 |
| 1931-2152 | 53.00 | 13.00 | 41.90 | 3.40 | 6.20 | 19.80 | 2.50 | 5.90 | 0.30 | 2.90 | 0.20 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 8. PERCENTAGE FREQUENCY OF OCCURRENCE OF SIGNIFICANT EVENTS
BY LAYERS/DISTANCE AND 10-min INTERVALS

| Layer/ Distance m | Interval UT | Wind Shear | | Vertical Motion | | Shears | Shear(s) and Vertical Motion | | | | | |
|-------------------------|----------------|--------------------------------|-------------------------------------|----------------------------------|------------------------------------|--|---|------------------------------------|--|------------------------------------|---|------|
| | | Sp ≥ 0.1 s ⁻¹ | Dir ≥ 1.0 deg m ⁻¹ | Up ≥ 1.0 m s ⁻¹ | Down ≥ 1.0 m s ⁻¹ | Sp Dir ≥ 0.1 s ⁻¹ 1.0 deg m ⁻¹ | Sp Up ≥ 0.1 s ⁻¹ 1.0 m s ⁻¹ | Down ≥ 1.0 m s ⁻¹ | Dir Up ≥ 1.0 deg m ⁻¹ 1.0 m s ⁻¹ | Down ≥ 1.0 m s ⁻¹ | Sp Up Dir Down ≥ 0.1 s ⁻¹ 1.0 deg m ⁻¹ 1.0 m s ⁻¹ | |
| 150-120 | 1931-1939 | 10.00 | 0 | 33.67 | 0.33 | 0 | 3.00 | 0 | 0 | 0 | 0 | 0 |
| | 1941-1950 | 1.00 | 0 | 20.00 | 0.00 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 |
| | 2000-2001 | 0.00 | 0 | 0.00 | 0.00 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 |
| | 2143-2152 | 2.00 | 0 | 21.33 | 0.67 | 0 | 0.00 | 0 | 0 | 0 | 0 | 0 |
| | 1931-2152 | 3.90 | 0 | 22.50 | 0.30 | 0 | 0.90 | 0 | 0 | 0 | 0 | 0 |
| 120-90 | 1931-1939 | 12.00 | 3.00 | - | - | 0.33 | - | - | - | - | - | - |
| | 1941-1950 | 8.33 | 1.33 | - | - | 0.33 | - | - | - | - | - | - |
| | 2000-2001 | 0.00 | 0.00 | - | - | 0.00 | - | - | - | - | - | - |
| | 2143-2152 | 5.00 | 2.33 | - | - | 0.00 | - | - | - | - | - | - |
| | 1931-2152 | 7.60 | 2.00 | - | - | 0.20 | - | - | - | - | - | - |
| 90-60 | 1931-1939 | 21.67 | 100.00 | 5.33 | 0.33 | 21.67 | 5.33 | 0.00 | 0.00 | 0.33 | 5.33 | 0.33 |
| | 1941-1950 | 5.33 | 100.00 | 0.00 | 1.33 | 3.33 | 0.00 | 0.33 | 0.00 | 1.33 | 0.00 | 0.33 |
| | 2000-2001 | 0.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 2143-2152 | 23.33 | 62.67 | 2.00 | 11.00 | 12.00 | 1.00 | 4.33 | 1.33 | 4.00 | 0.33 | 1.33 |
| | 1931-2152 | 14.50 | 88.80 | 2.20 | 3.80 | 11.10 | 1.90 | 1.40 | 0.40 | 1.70 | 1.70 | 0.60 |
| 60-30 | 1931-1939 | 44.33 | 0.33 | 5.33 | 0.33 | 0.33 | 0.00 | 0.33 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 1941-1950 | 18.67 | 0.00 | 0.00 | 1.33 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 2000-2001 | 51.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 2143-2152 | 71.33 | 50.67 | 2.00 | 11.00 | 38.33 | 1.33 | 8.00 | 1.00 | 5.00 | 1.00 | 4.00 |
| | 1931-2152 | 45.40 | 15.30 | 2.20 | 3.80 | 11.60 | 0.40 | 2.50 | 0.30 | 1.50 | 0.30 | 1.20 |
| 30-18T | 1931-1939 | 38.33 | 100.00 | 60.00 | 3.67 | 38.33 | 21.67 | 2.00 | 60.00 | 3.67 | 21.67 | 2.00 |
| | 1941-1950 | 44.67 | 100.00 | 45.33 | 1.33 | 44.67 | 18.33 | 1.33 | 45.33 | 1.33 | 18.33 | 1.33 |
| | 2000-2001 | 46.00 | 100.00 | 47.00 | 0.00 | 46.00 | 11.00 | 0.00 | 47.00 | 0.00 | 11.00 | 0.00 |
| | 2143-2152 | 61.00 | 63.00 | 18.67 | 6.33 | 37.00 | 17.00 | 3.00 | 8.00 | 6.00 | 7.00 | 3.00 |
| | 1931-2152 | 47.80 | 88.90 | 41.90 | 3.40 | 40.60 | 18.20 | 1.90 | 38.70 | 3.30 | 15.20 | 1.90 |
| 18S-3 | 1931-1939 | 58.67 | 59.67 | 15.33 | 0.00 | 37.67 | 6.67 | 0.00 | 3.67 | 0.00 | 3.00 | 0.00 |
| | 1941-1950 | 83.67 | 58.67 | 21.00 | 0.67 | 51.67 | 19.67 | 0.67 | 9.67 | 0.67 | 9.33 | 0.67 |
| | 2000-2001 | 63.00 | 75.00 | 9.00 | 0.00 | 42.00 | 2.00 | 0.00 | 3.00 | 0.00 | 0.00 | 0.00 |
| | 2143-2152 | 96.67 | 71.00 | 11.33 | 11.33 | 67.67 | 11.33 | 11.33 | 8.00 | 6.67 | 8.00 | 6.67 |
| | 1931-2152 | 78.00 | 64.30 | 15.20 | 3.60 | 51.30 | 11.50 | 3.60 | 6.70 | 2.20 | 6.10 | 2.20 |
| 18T-18S | 1931-1939 | 45.67 | 9.33 | 60.00 | 3.67 | 2.33 | 25.00 | 3.67 | 3.67 | 0.33 | 1.00 | 0.33 |
| | 1941-1950 | 40.33 | 8.67 | 45.33 | 1.33 | 1.67 | 14.33 | 0.33 | 6.33 | 0.00 | 0.67 | 0.00 |
| | 2000-2001 | 76.00 | 28.00 | 47.00 | 0.00 | 17.00 | 41.00 | 0.00 | 14.00 | 0.00 | 12.00 | 0.00 |
| | 2143-2152 | 65.33 | 16.00 | 18.67 | 6.33 | 11.00 | 13.00 | 4.33 | 5.00 | 0.67 | 4.00 | 0.33 |
| | 1931-2152 | 53.00 | 13.00 | 41.90 | 3.40 | 6.20 | 19.80 | 2.50 | 5.90 | 0.30 | 2.90 | 0.20 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 9. MAXIMUM, MEAN, AND STANDARD DEVIATION OF SPEED AND DIRECTION SHEARS FOR 150 TO 120 m LAYER

| Layer m | Interval UT hr min sec | | Wind Shears | | | | | |
|------------|------------------------------|------------|--|-------|---------|--|-------|---------|
| | | | Speed s ⁻¹ (m s ⁻¹ /30 m or 2 (m s ⁻¹)/100 ft) | | | Direction deg m ⁻¹ (deg/30 m or deg/100 ft) | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 150-120 | 19 31 | 16.0-20.9 | 0.080 | 0.028 | 0.020 | 0.200 | 0.083 | 0.059 |
| | 19 33 | 16.0-20.9 | 0.090 | 0.021 | 0.017 | 0.267 | 0.167 | 0.198 |
| | 19 34 | 56.0-00.9 | 0.070 | 0.034 | 0.022 | 0.367 | 0.199 | 0.085 |
| | 19 36 | 36.0-40.9 | 0.160 | 0.106 | 0.023 | 0.333 | 0.119 | 0.084 |
| | 19 38 | 16.0-20.9 | 0.070 | 0.026 | 0.018 | 0.210 | 0.119 | 0.046 |
| | 19 39 | 56.0-00.9 | 0.080 | 0.024 | 0.022 | 0.333 | 0.091 | 0.083 |
| | 19 41 | 41.0-45.9 | 0.057 | 0.023 | 0.016 | 0.367 | 0.162 | 0.110 |
| | 19 43 | 21.0-25.9 | 0.057 | 0.022 | 0.015 | 0.367 | 0.140 | 0.087 |
| | 19 45 | 01.0-05.9 | 0.130 | 0.037 | 0.031 | 0.233 | 0.092 | 0.061 |
| | 19 46 | 41.0-45.9 | 0.067 | 0.028 | 0.016 | 0.233 | 0.090 | 0.065 |
| | 19 48 | 21.0-25.9 | 0.053 | 0.024 | 0.015 | 0.367 | 0.143 | 0.076 |
| | 19 50 | 01.0-05.9 | 0.070 | 0.019 | 0.017 | 0.367 | 0.141 | 0.107 |
| | 20 00 | 06.0-10.9 | 0.057 | 0.022 | 0.013 | 0.400 | 0.212 | 0.085 |
| | 20 01 | 51.0-55.9 | 0.063 | 0.030 | 0.013 | 0.233 | 0.108 | 0.064 |
| | 21 43 | 47.0-51.9 | 0.070 | 0.028 | 0.017 | 0.333 | 0.139 | 0.088 |
| | 21 45 | 27.0-31.9 | 0.103 | 0.035 | 0.029 | 0.533 | 0.225 | 0.126 |
| | 21 47 | 07.0-11.9 | 0.103 | 0.033 | 0.027 | 0.400 | 0.201 | 0.067 |
| | 21 48 | 47.0-51.9 | 0.063 | 0.019 | 0.016 | 0.333 | 0.233 | 0.041 |
| | 21 50 | 32.0-36.9 | 0.130 | 0.043 | 0.032 | 0.633 | 0.374 | 0.132 |
| | 21 52 | 12.0-16.9 | 0.047 | 0.016 | 0.012 | 0.500 | 0.308 | 0.155 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 150-120 | 1931 16.0 | 19 40 00.9 | 0.160 | 0.040 | 0.020 | 0.367 | 0.130 | 0.093 |
| | 1941 41.0 | 19 50 05.9 | 0.130 | 0.026 | 0.018 | 0.367 | 0.128 | 0.084 |
| | 2000 06.0 | 20 01 55.9 | 0.063 | 0.026 | 0.013 | 0.400 | 0.160 | 0.075 |
| | 2143 47.0 | 21 52 16.9 | 0.130 | 0.029 | 0.022 | 0.633 | 0.247 | 0.102 |
| | 19 31 16.0 | 21 52 16.9 | 0.160 | 0.030 | 0.018 | 0.633 | 0.166 | 0.089 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 10. MAXIMUM, MEAN, AND STANDARD DEVIATION OF SPEED AND DIRECTION SHEARS FOR 120 TO 90 m LAYER

| Layer m | Interval UT | | Wind Shears | | | | | | | |
|------------|----------------|-----------|--|-------|---------|--|-------|---------|-------|-------|
| | | | Speed s ⁻¹ (m s ⁻¹ /30 m or 2 (m s ⁻¹)/100 ft) | | | Direction deg m ⁻¹ (deg/30 m or deg/100 ft) | | | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev | | |
| hr min | sec | | | | | | | | | |
| 120-90 | 19 31 | 16.0-20.9 | 0.173 | 0.086 | 0.047 | 1.000 | 0.669 | 0.217 | | |
| | 19 33 | 16.0-20.9 | 0.047 | 0.015 | 0.011 | 1.200 | 0.823 | 0.126 | | |
| | 19 34 | 56.0-00.9 | 0.140 | 0.078 | 0.032 | 1.100 | 0.503 | 0.199 | | |
| | 19 36 | 36.0-40.9 | 0.123 | 0.045 | 0.030 | 0.933 | 0.641 | 0.118 | | |
| | 19 38 | 16.0-20.9 | 0.040 | 0.017 | 0.011 | 0.867 | 0.770 | 0.048 | | |
| | 19 39 | 56.0-00.9 | 0.043 | 0.013 | 0.011 | 1.033 | 0.828 | 0.102 | | |
| | 19 41 | 41.0-45.9 | 0.093 | 0.02 | 0.022 | 1.033 | 0.773 | 0.099 | | |
| | 19 43 | 21.0-25.9 | 0.110 | 0.080 | 0.020 | 0.900 | 0.707 | 0.094 | | |
| | 19 45 | 01.0-05.9 | 0.110 | 0.058 | 0.028 | 1.133 | 0.726 | 0.225 | | |
| | 19 46 | 41.0-45.9 | 0.077 | 0.026 | 0.020 | 0.833 | 0.615 | 0.093 | | |
| | 19 48 | 21.0-25.9 | 0.080 | 0.044 | 0.015 | 0.767 | 0.637 | 0.068 | | |
| | 19 50 | 01.0-05.9 | 0.123 | 0.080 | 0.024 | 0.800 | 0.645 | 0.097 | | |
| | 20 00 | 06.0-10.9 | 0.057 | 0.019 | 0.010 | 0.833 | 0.627 | 0.081 | | |
| | 20 01 | 51.0-55.9 | 0.070 | 0.023 | 0.019 | 0.767 | 0.579 | 0.106 | | |
| | 21 43 | 47.0-51.9 | 0.133 | 0.066 | 0.031 | 1.067 | 0.763 | 0.185 | | |
| | 21 45 | 27.0-31.9 | 0.127 | 0.045 | 0.033 | 0.867 | 0.737 | 0.680 | | |
| | 21 47 | 07.0-11.9 | 0.117 | 0.050 | 0.030 | 1.067 | 0.712 | 0.115 | | |
| | 21 48 | 47.0-51.9 | 0.057 | 0.026 | 0.015 | 0.833 | 0.716 | 0.072 | | |
| | 21 50 | 32.0-36.9 | 0.113 | 0.033 | 0.027 | 0.967 | 0.671 | 0.143 | | |
| | 21 52 | 12.0-16.9 | 0.083 | 0.020 | 0.021 | 0.083 | 0.695 | 0.076 | | |
| m | hr min | sec | Max | Mean | Std Dev | Max | Mean | Std Dev | | |
| 120-90 | 19 31 | 16.0 | 19 40 | 00.9 | 0.173 | 0.042 | 0.024 | 1.200 | 0.706 | 0.135 |
| | 19 41 | 41.0 | 19 50 | 05.9 | 0.123 | 0.055 | 0.022 | 1.133 | 0.684 | 0.113 |
| | 20 00 | 06.0 | 20 01 | 55.9 | 0.070 | 0.021 | 0.015 | 0.833 | 0.603 | 0.094 |
| | 21 43 | 47.0 | 21 52 | 16.9 | 0.133 | 0.040 | 0.026 | 1.067 | 0.716 | 0.212 |
| | 19 31 | 16.0 | 21 52 | 16.9 | 0.173 | 0.040 | 0.022 | 1.200 | 0.677 | 0.139 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

**TABLE 11. MAXIMUM, MEAN, AND STANDARD DEVIATION OF SPEED AND DIRECTION
SHEARS FOR 90 TO 60 m LAYER**

| Layer m | Interval UT hr min sec | | Wind Shears | | | | | |
|------------|-----------------------------------|------------|--|-------|---------|--|-------|---------|
| | | | Speed s ⁻¹ (m s ⁻¹ /30 m or 2 (m s ⁻¹)/100 ft) | | | Direction deg m ⁻¹ (deg/30 m or deg/100 ft) | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 90-60 | 19 31 | 16.0-20.9 | 0.093 | 0.029 | 0.025 | 2.867 | 2.638 | 0.161 |
| | 19 33 | 16.0-20.9 | 0.327 | 0.217 | 0.047 | 2.800 | 2.541 | 0.135 |
| | 19 34 | 56.0-00.9 | 0.153 | 0.073 | 0.044 | 2.867 | 2.546 | 0.180 |
| | 19 36 | 36.0-40.9 | 0.107 | 0.038 | 0.026 | 3.167 | 2.873 | 0.126 |
| | 19 38 | 16.0-20.9 | 0.070 | 0.031 | 0.020 | 2.833 | 2.685 | 0.064 |
| | 19 39 | 56.0-C | 0.083 | 0.040 | 0.021 | 3.133 | 2.815 | 0.154 |
| | 19 41 | 41.0-45.9 | 0.063 | 0.031 | 0.017 | 2.933 | 2.673 | 0.108 |
| | 19 43 | 21.0-25.9 | 0.057 | 0.021 | 0.015 | 2.967 | 2.642 | 0.115 |
| | 19 45 | 01.0-05.9 | 0.077 | 0.022 | 0.016 | 3.067 | 2.753 | 0.365 |
| | 19 46 | 41.0-45.9 | 0.057 | 0.027 | 0.013 | 2.900 | 2.737 | 0.070 |
| | 19 48 | 21.0-25.9 | 0.103 | 0.044 | 0.028 | 2.633 | 2.327 | 0.160 |
| | 19 50 | 01.0-05.9 | 0.127 | 0.075 | 0.022 | 3.033 | 2.699 | 0.168 |
| | 20 00 | 06.0-10.9 | 0.087 | 0.042 | 0.023 | 2.833 | 2.654 | 0.130 |
| | 20 01 | 51.0-55.9 | 0.043 | 0.014 | 0.010 | 2.867 | 2.711 | 0.062 |
| | 21 43 | 47.0-51.9 | 0.163 | 0.045 | 0.039 | 1.567 | 1.349 | 0.176 |
| | 21 45 | 27.0-31.9 | 0.190 | 0.083 | 0.047 | 1.233 | 0.905 | 0.176 |
| | 21 47 | 07.0-11.9 | 0.130 | 0.054 | 0.033 | 1.400 | 0.928 | 0.220 |
| | 21 48 | 47.0-51.9 | 0.177 | 0.079 | 0.037 | 1.267 | 1.023 | 0.134 |
| | 21 50 | 32.0-36.9 | 0.130 | 0.043 | 0.032 | 1.333 | 1.011 | 0.175 |
| 21 52 | 12.0-16.9 | 0.157 | 0.094 | 0.033 | 1.267 | 1.049 | 0.109 | |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 90-60 | 19 31 16.0 | 19 40 00.9 | 0.327 | 0.071 | 0.031 | 3.167 | 2.683 | 0.137 |
| | 19 41 41.0 | 19 50 05.9 | 0.127 | 0.037 | 0.019 | 3.067 | 2.639 | 0.164 |
| | 20 00 06.0 | 20 01 55.9 | 0.087 | 0.028 | 0.017 | 2.867 | 2.683 | 0.096 |
| | 21 43 47.0 | 21 52 16.9 | 0.190 | 0.066 | 0.037 | 1.567 | 1.044 | 0.165 |
| | 19 31 16.0 | 21 52 16.9 | 0.327 | 0.051 | 0.026 | 3.167 | 2.262 | 0.141 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 12. MAXIMUM, MEAN, AND STANDARD DEVIATION OF SPEED AND DIRECTION
SHEARS FOR 60 TO 30 m LAYER

| Layer m | Interval UT | | Wind Shears | | | | | |
|------------|----------------|------------|--|---------|---------|----------------------------------|---------|---------|
| | | | Speed s ⁻¹ | | | Direction deg m ⁻¹ | | |
| | | | (m s ⁻¹ /30 m or 2 (m s ⁻¹)/100 ft) | | | (deg/30 m or deg/100 ft) | | |
| hr min | sec | Max | Mean | Std Dev | Max | Mean | Std Dev | |
| 60-30 | 19 31 | 16.0-20.9 | 0.063 | 0.029 | 0.016 | 0.833 | 0.419 | 0.208 |
| | 19 33 | 16.0-20.9 | 0.157 | 0.061 | 0.042 | 1.200 | 0.337 | 0.268 |
| | 19 34 | 56.0-00.9 | 0.200 | 0.057 | 0.057 | 0.900 | 0.339 | 0.275 |
| | 19 36 | 36.0-40.9 | 0.210 | 0.113 | 0.065 | 0.467 | 0.150 | 0.123 |
| | 19 38 | 16.0-20.9 | 0.227 | 0.144 | 0.053 | 0.433 | 0.140 | 0.107 |
| | 19 39 | 56.0-00.9 | 0.200 | 0.116 | 0.030 | 0.833 | 0.349 | 0.225 |
| | 19 41 | 41.0-45.9 | 0.160 | 0.056 | 0.044 | 0.900 | 0.214 | 0.203 |
| | 19 43 | 21.0-25.9 | 0.190 | 0.114 | 0.028 | 0.867 | 0.235 | 0.190 |
| | 19 45 | 01.0-05.9 | 0.073 | 0.026 | 0.020 | 0.467 | 0.219 | 0.110 |
| | 19 46 | 41.0-45.9 | 0.143 | 0.064 | 0.040 | 0.500 | 0.148 | 0.108 |
| | 19 48 | 21.0-25.9 | 0.057 | 0.027 | 0.017 | 0.600 | 0.227 | 0.146 |
| | 19 50 | 01.0-05.9 | 0.043 | 0.017 | 0.011 | 0.967 | 0.412 | 0.257 |
| | 20 00 | 06.0-10.9 | 0.103 | 0.038 | 0.032 | 0.567 | 0.255 | 0.154 |
| | 20 01 | 51.0-55.9 | 0.200 | 0.159 | 0.019 | 0.933 | 0.317 | 0.220 |
| | 21 43 | 47.0-51.9 | 0.300 | 0.175 | 0.058 | 1.633 | 0.821 | 0.272 |
| | 21 45 | 27.0-31.9 | 0.247 | 0.139 | 0.049 | 1.933 | 1.097 | 0.435 |
| | 21 47 | 07.0-11.9 | 0.387 | 0.201 | 0.093 | 1.867 | 0.764 | 0.468 |
| | 21 48 | 47.0-51.9 | 0.303 | 0.190 | 0.059 | 1.633 | 1.284 | 0.190 |
| | 21 50 | 32.0-36.9 | 0.307 | 0.092 | 0.081 | 1.933 | 1.007 | 0.278 |
| | 21 52 | 12.0-16.9 | 0.143 | 0.079 | 0.042 | 1.533 | 1.072 | 0.251 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 60-30 | 19 31 16.0 | 19 40 00.9 | 0.227 | 0.087 | 0.044 | 1.200 | 0.289 | 0.201 |
| | 19 41 41.0 | 19 50 05.9 | 0.190 | 0.051 | 0.027 | 0.967 | 0.243 | 0.169 |
| | 20 00 06.0 | 20 01 55.9 | 0.200 | 0.099 | 0.026 | 0.933 | 0.286 | 0.187 |
| | 21 43 47.0 | 21 52 16.9 | 0.387 | 0.146 | 0.064 | 1.933 | 1.008 | 0.316 |
| | 19 31 16.0 | 21 52 16.9 | 0.387 | 0.096 | 0.040 | 1.933 | 0.457 | 0.218 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

**TABLE 13. MAXIMUM, MEAN, AND STANDARD DEVIATION OF SPEED AND DIRECTION
SHEARS FOR 30 TO 18T m LAYER**

| Layer m | Interval UT | | Wind Shears | | | | | |
|------------|----------------|------------|--|---------|---------|---|---------|---------|
| | | | Speed s ⁻¹ (m s ⁻¹ /12 m or 2(m s ⁻¹) for kts/40 ft) | | | Direction deg m ⁻¹ (deg/12 m or deg/40 ft) | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev | |
| 30-18T | 19 31 | 16.0-20.9 | 0.325 | 0.120 | 0.086 | 9.583 | 7.973 | 0.711 |
| | 19 33 | 16.0-20.9 | 0.267 | 0.063 | 0.054 | 8.250 | 6.605 | 0.844 |
| | 19 34 | 56.0-00.9 | 0.642 | 0.241 | 0.172 | 6.833 | 5.660 | 0.469 |
| | 19 36 | 36.0-40.9 | 0.192 | 0.071 | 0.046 | 6.667 | 5.252 | 0.530 |
| | 19 38 | 16.0-20.9 | 0.383 | 0.093 | 0.094 | 7.833 | 6.292 | 0.840 |
| | 19 39 | 56.0-00.9 | 0.208 | 0.069 | 0.052 | 8.417 | 6.505 | 0.723 |
| | 19 41 | 41.0-45.9 | 0.325 | 0.118 | 0.087 | 8.500 | 6.457 | 0.622 |
| | 19 43 | 21.0-25.9 | 0.300 | 0.115 | 0.075 | 6.917 | 5.300 | 0.611 |
| | 19 45 | 01.0-05.9 | 0.333 | 0.115 | 0.092 | 7.167 | 5.987 | 0.421 |
| | 19 46 | 41.0-45.9 | 0.417 | 0.210 | 0.114 | 6.250 | 5.530 | 0.418 |
| | 19 48 | 21.0-25.9 | 0.225 | 0.078 | 0.061 | 5.833 | 5.048 | 0.518 |
| | 19 50 | 01.0-05.9 | 0.192 | 0.060 | 0.046 | 7.667 | 6.522 | 0.599 |
| | 20 00 | 06.0-10.9 | 0.350 | 0.196 | 0.093 | 6.667 | 4.867 | 0.736 |
| | 20 01 | 51.0-55.9 | 0.125 | 0.067 | 0.028 | 9.250 | 7.253 | 1.195 |
| | 21 43 | 47.0-51.9 | 0.300 | 0.122 | 0.091 | 4.000 | 1.712 | 0.848 |
| | 21 45 | 27.0-31.9 | 0.783 | 0.357 | 0.201 | 2.667 | 0.955 | 0.759 |
| | 21 47 | 07.0-11.9 | 0.417 | 0.160 | 0.132 | 3.583 | 1.352 | 0.998 |
| | 21 48 | 47.0-51.9 | 0.550 | 0.107 | 0.105 | 2.417 | 1.422 | 0.551 |
| | 21 50 | 32.0-36.9 | 0.792 | 0.292 | 0.245 | 3.167 | 0.811 | 0.720 |
| | 21 52 | 12.0-16.9 | 0.308 | 0.124 | 0.074 | 3.167 | 1.933 | 0.555 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 30-18T | 19 31 16.0 | 19 40 00.9 | 0.642 | 0.110 | 0.084 | 9.583 | 6.381 | 0.686 |
| | 19 41 41.0 | 19 50 05.9 | 0.417 | 0.116 | 0.079 | 8.500 | 5.807 | 0.532 |
| | 20 00 06.0 | 20 01 55.9 | 0.350 | 0.132 | 0.061 | 9.250 | 6.060 | 0.966 |
| | 21 43 47.0 | 21 52 16.9 | 0.792 | 0.194 | 0.141 | 4.000 | 1.364 | 0.739 |
| | 19 31 16.0 | 21 52 16.9 | 0.792 | 0.138 | 0.091 | 9.583 | 4.903 | 0.731 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

**TABLE 14. MAXIMUM, MEAN, AND STANDARD DEVIATION OF SPEED AND DIRECTION
SHEARS FOR 18S TO 3 m LAYER**

| Layer m | Interval UT hr min sec | | Wind Shears | | | | | |
|------------|------------------------------|------------|---|-------|---------|---|-------|---------|
| | | | Speed s ⁻¹ (m s ⁻¹ /15 m or 2 (m s ⁻¹) kts/50 ft) | | | Direction deg m ⁻¹ (deg/15 m or deg/50 ft) | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 18S-3 | 19 31 | 16.0-20.9 | 0.093 | 0.041 | 0.027 | 2.267 | 0.697 | 0.614 |
| | 19 33 | 16.0-20.9 | 0.327 | 0.121 | 0.098 | 3.867 | 1.486 | 0.881 |
| | 19 34 | 56.0-00.9 | 0.307 | 0.172 | 0.094 | 2.867 | 1.395 | 0.757 |
| | 19 36 | 36.0-40.9 | 0.413 | 0.235 | 0.122 | 2.667 | 1.091 | 0.612 |
| | 19 38 | 16.0-20.9 | 0.533 | 0.399 | 0.122 | 3.267 | 1.127 | 0.910 |
| | 19 39 | 56.0-00.9 | 0.273 | 0.107 | 0.073 | 3.200 | 2.700 | 0.627 |
| | 19 41 | 41.0-45.9 | 0.280 | 0.123 | 0.073 | 2.133 | 0.893 | 0.604 |
| | 19 43 | 21.0-25.9 | 0.293 | 0.190 | 0.057 | 3.400 | 1.589 | 0.845 |
| | 19 45 | 01.0-05.9 | 0.420 | 0.265 | 0.077 | 3.360 | 2.053 | 0.662 |
| | 19 46 | 41.0-45.9 | 0.193 | 0.103 | 0.047 | 1.806 | 0.877 | 0.458 |
| | 19 48 | 21.0-25.9 | 0.440 | 0.326 | 0.075 | 2.933 | 1.192 | 0.703 |
| | 19 50 | 01.0-05.9 | 0.327 | 0.256 | 0.033 | 2.267 | 0.981 | 0.669 |
| | 20 00 | 06.0-10.9 | 0.260 | 0.122 | 0.073 | 2.800 | 1.584 | 0.717 |
| | 20 01 | 51.0-55.9 | 0.300 | 0.143 | 0.090 | 2.933 | 1.373 | 0.645 |
| | 21 43 | 47.0-51.9 | 0.653 | 0.432 | 0.107 | 4.200 | 1.785 | 0.897 |
| | 21 45 | 27.0-31.9 | 0.693 | 0.313 | 0.169 | 5.733 | 2.735 | 1.305 |
| | 21 47 | 07.0-11.9 | 0.713 | 0.498 | 0.101 | 4.400 | 1.507 | 1.087 |
| | 21 48 | 47.0-51.9 | 0.680 | 0.367 | 0.160 | 4.400 | 2.064 | 1.008 |
| | 21 50 | 32.0-36.9 | 0.553 | 0.340 | 0.103 | 2.600 | 1.113 | 0.683 |
| | 21 52 | 12.0-16.9 | 0.640 | 0.366 | 0.126 | 2.667 | 1.006 | 0.683 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 18S-3 | 19 31 16.0 | 19 40 00.9 | 0.533 | 0.179 | 0.086 | 3.867 | 1.333 | 0.734 |
| | 19 41 41.0 | 19 50 05.9 | 0.440 | 0.211 | 0.060 | 3.400 | 1.264 | 0.657 |
| | 20 00 06.0 | 20 01 55.9 | 0.300 | 0.133 | 0.082 | 2.933 | 1.479 | 0.681 |
| | 21 43 47.0 | 21 52 16.9 | 0.713 | 0.386 | 0.128 | 5.733 | 1.702 | 0.944 |
| | 19 31 16.0 | 21 52 16.9 | 0.713 | 0.227 | 0.089 | 5.733 | 1.445 | 0.754 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

**TABLE 15. MAXIMUM, MEAN, AND STANDARD DEVIATION OF SPEED AND DIRECTION
SHEARS FOR 18T TO 18S m DISTANCE**

| Distance m | Interval UT hr min sec | | Wind Shears | | | | | |
|---------------|------------------------------|------------|---|-------|---------|---|-------|---------|
| | | | Speed s ⁻¹ (m s ⁻¹ /18 m or 2 (m s ⁻¹)/60 ft) | | | Direction deg m ⁻¹ (deg/18 m or deg/60 ft) | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 18T-18S | 19 31 | 16.0-20.9 | 0.506 | 0.320 | 0.102 | 1.722 | 0.501 | 0.332 |
| | 19 33 | 16.0-20.9 | 0.161 | 0.087 | 0.049 | 1.389 | 0.358 | 0.313 |
| | 19 34 | 56.0-00.9 | 0.189 | 0.085 | 0.055 | 1.944 | 0.479 | 0.389 |
| | 19 36 | 36.0-40.9 | 0.300 | 0.102 | 0.085 | 1.444 | 0.574 | 0.386 |
| | 19 38 | 16.0-20.9 | 0.167 | 0.048 | 0.040 | 1.444 | 0.510 | 0.327 |
| | 19 39 | 56.0-00.9 | 0.161 | 0.072 | 0.039 | 1.667 | 0.521 | 0.369 |
| | 19 41 | 41.0-45.9 | 0.361 | 0.139 | 0.083 | 1.111 | 0.444 | 0.261 |
| | 19 43 | 21.0-25.9 | 0.133 | 0.049 | 0.034 | 1.611 | 0.692 | 0.421 |
| | 19 45 | 01.0-05.9 | 0.183 | 0.057 | 0.047 | 1.500 | 0.506 | 0.302 |
| | 19 46 | 41.0-45.9 | 0.183 | 0.115 | 0.061 | 0.722 | 0.289 | 0.216 |
| | 19 48 | 21.0-25.9 | 0.261 | 0.153 | 0.073 | 1.056 | 0.369 | 0.253 |
| | 19 50 | 01.0-05.9 | 0.106 | 0.044 | 0.025 | 1.222 | 0.499 | 0.280 |
| | 20 00 | 06.0-10.9 | 0.344 | 0.139 | 0.102 | 1.667 | 0.749 | 0.361 |
| | 20 01 | 51.0-55.9 | 0.228 | 0.171 | 0.039 | 2.000 | 0.721 | 0.442 |
| | 21 43 | 47.0-51.9 | 0.322 | 0.125 | 0.089 | 2.111 | 0.550 | 0.449 |
| | 21 45 | 27.0-31.9 | 0.356 | 0.134 | 0.074 | 3.111 | 0.962 | 0.724 |
| | 21 47 | 07.0-11.9 | 0.333 | 0.159 | 0.072 | 1.667 | 0.452 | 0.349 |
| | 21 48 | 47.0-51.9 | 0.256 | 0.092 | 0.073 | 1.611 | 0.529 | 0.410 |
| | 21 50 | 32.0-36.9 | 0.678 | 0.354 | 0.156 | 1.833 | 0.719 | 0.463 |
| | 21 52 | 12.0-16.9 | 0.183 | 0.094 | 0.049 | 0.889 | 0.335 | 0.222 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 18T-18S | 19 31 16.0 | 19 40 00.9 | 0.506 | 0.119 | 0.062 | 1.944 | 0.491 | 0.353 |
| | 19 41 41.0 | 19 50 05.9 | 0.361 | 0.093 | 0.054 | 1.611 | 0.467 | 0.299 |
| | 20 00 06.0 | 20 01 55.9 | 0.344 | 0.155 | 0.071 | 2.000 | 0.735 | 0.402 |
| | 21 43 47.0 | 21 52 16.9 | 0.678 | 0.160 | 0.091 | 3.111 | 0.591 | 0.436 |
| | 19 31 16.0 | 21 52 16.9 | 0.678 | 0.132 | 0.070 | 3.111 | 0.571 | 0.373 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 16. MAXIMUM, MEAN, AND STANDARD DEVIATION OF UPDRAFTS AND
DOWNDRAFTS AT 150-m HEIGHT

| Height (m) 150 | | Vertical Motion | | | | | | | | | |
|----------------|---------------------------|--|-------|-------|---------|--|------|-------|---------|-------|---------|
| hr | Interval UT min sec | Up $m s^{-1}$ or 2 ($m s^{-1}$) for kts | | | | Down $m s^{-1}$ or 2 ($m s^{-1}$) for kts | | | | | |
| | | f | Max | Mean | Std Dev | f | Max | Mean | Std Dev | | |
| 19 | 31 16.0-20.9 | 48 | 1.34 | 0.751 | 0.386 | 2 | 0.01 | 0.010 | 0.000 | | |
| | 33 16.0-20.9 | 36 | 2.45 | 1.190 | 0.750 | 14 | 0.76 | 0.348 | 0.265 | | |
| | 34 56.0-00.9 | 30 | 0.90 | 0.330 | 0.331 | 20 | 1.01 | 0.151 | 0.302 | | |
| | 36 36.0-40.9 | 42 | 1.34 | 0.690 | 0.483 | 8 | 0.10 | 0.041 | 0.029 | | |
| | 38 16.0-20.9 | 50 | 1.01 | 0.773 | 0.143 | 0 | - | - | - | | |
| | 39 56.0-00.9 | 50 | 2.20 | 1.582 | 0.309 | 0 | - | - | - | | |
| 19 | 41 41.0-45.9 | 44 | 1.90 | 0.900 | 0.457 | 6 | 0.29 | 0.168 | 0.104 | | |
| | 43 21.0-25.9 | 24 | 0.64 | 0.161 | 0.230 | 26 | 0.57 | 0.065 | 0.135 | | |
| | 45 01.0-05.9 | 10 | 0.69 | 0.244 | 0.217 | 40 | 0.71 | 0.409 | 0.214 | | |
| | 46 41.0-45.9 | 50 | 1.66 | 1.191 | 0.237 | 0 | - | - | - | | |
| | 48 21.0-25.9 | 30 | 0.55 | 0.167 | 0.175 | 20 | 0.29 | 0.097 | 0.101 | | |
| | 50 01.0-05.9 | 25 | 0.69 | 0.413 | 0.217 | 25 | 0.48 | 0.247 | 0.169 | | |
| 20 | 00 06.0-10.9 | 9 | 0.08 | 0.033 | 0.019 | 41 | 0.73 | 0.416 | 0.236 | | |
| | 01 51.0-55.9 | 38 | 0.97 | 0.349 | 0.308 | 12 | 0.05 | 0.017 | 0.013 | | |
| 21 | 43 47.0-51.9 | 49 | 1.90 | 0.828 | 0.299 | 1 | 0.08 | 0.080 | 0.000 | | |
| | 45 27.0-31.9 | 23 | 1.06 | 0.426 | 0.314 | 27 | 1.13 | 0.461 | 0.315 | | |
| | 47 07.0-11.9 | 50 | 1.62 | 0.889 | 0.336 | 9 | - | - | - | | |
| | 48 47.0-51.9 | 50 | 1.85 | 1.040 | 0.305 | 0 | - | - | - | | |
| | 50 32.0-36.9 | 25 | 1.17 | 0.448 | 0.316 | 25 | 0.59 | 0.202 | 0.179 | | |
| | 52 12.0-16.9 | 50 | 1.01 | 0.624 | 0.239 | 0 | - | - | - | | |
| | | f | % | Max | Mean | Std Dev | f | % | Max | Mean | Std Dev |
| 19 | 31-19 39 | 256 | 85.33 | 2.45 | 0.886 | 0.400 | 44 | 14.67 | 1.01 | 0.138 | 0.149 |
| 19 | 41-19 50 | 183 | 61.00 | 1.90 | 0.513 | 0.257 | 117 | 39.00 | 0.71 | 0.197 | 0.145 |
| 20 | 00-20 01 | 47 | 47.00 | 0.97 | 0.191 | 0.164 | 53 | 53.00 | 0.73 | 0.217 | 0.125 |
| 21 | 43-21 52 | 247 | 82.33 | 1.90 | 0.709 | 0.302 | 53 | 17.67 | 1.13 | 0.248 | 0.165 |
| 19 | 31-21 52 | 733 | 73.30 | 2.45 | 0.575 | 0.281 | 267 | 26.70 | 1.13 | 0.200 | 0.146 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 17. MAXIMUM, MEAN, AND STANDARD DEVIATION OF UPDRAFTS AND
DOWNDRAFTS AT 60-m HEIGHT

| Height (m) 60 | | Vertical Motion | | | | | | | | | |
|---------------|---------------------------|---|-------|-------|---------|---|------|-------|---------|-------|---------|
| hr | Interval UT min sec | Up m s ⁻¹ or 2 (m s ⁻¹) for kts | | | | Down m s ⁻¹ or 2 (m s ⁻¹) for kts | | | | | |
| | | f | Max | Mean | Std Dev | f | Max | Mean | Std Dev | | |
| 19 | 31 16.0-20.9 | 25 | 0.50 | 0.246 | 0.138 | 25 | 0.52 | 0.170 | 0.165 | | |
| | 33 16.0-20.9 | 31 | 4.04 | 1.582 | 1.296 | 19 | 2.01 | 0.406 | 0.481 | | |
| | 34 56.0-00.9 | 27 | 0.59 | 0.284 | 0.174 | 23 | 0.52 | 0.186 | 0.166 | | |
| | 36 36.0-40.9 | 29 | 0.59 | 0.302 | 0.168 | 21 | 0.55 | 0.283 | 0.204 | | |
| | 38 16.0-20.9 | 26 | 0.64 | 0.353 | 0.215 | 24 | 0.52 | 0.239 | 0.162 | | |
| | 39 56.0-00.9 | 30 | 0.59 | 0.255 | 0.165 | 20 | 0.38 | 0.232 | 0.121 | | |
| 19 | 41 41.0-45.9 | 28 | 0.55 | 0.277 | 0.176 | 22 | 0.41 | 0.195 | 0.128 | | |
| | 43 21.0-25.9 | 31 | 0.55 | 0.262 | 0.177 | 19 | 0.48 | 0.241 | 0.119 | | |
| | 45 01.0-05.9 | 27 | 0.59 | 0.318 | 0.208 | 23 | 0.43 | 0.237 | 0.157 | | |
| | 46 41.0-45.9 | 27 | 0.55 | 0.304 | 0.171 | 23 | 0.41 | 0.207 | 0.126 | | |
| | 48 21.0-25.9 | 29 | 0.59 | 0.231 | 0.169 | 21 | 0.41 | 0.179 | 0.136 | | |
| | 50 01.0-05.9 | 24 | 0.50 | 0.156 | 0.145 | 26 | 1.85 | 0.355 | 0.543 | | |
| 20 | 00 06.0-10.9 | 33 | 0.48 | 0.145 | 0.147 | 17 | 0.73 | 0.416 | 0.236 | | |
| | 01 51.0-55.9 | 28 | 0.50 | 0.274 | 0.161 | 22 | 0.48 | 0.217 | 0.130 | | |
| 21 | 43 47.0-51.9 | 21 | 0.78 | 0.369 | 0.241 | 29 | 0.94 | 0.445 | 0.304 | | |
| | 45 27.0-31.9 | 30 | 1.17 | 0.694 | 0.306 | 20 | 0.94 | 0.451 | 0.265 | | |
| | 47 07.0-11.9 | 9 | 0.41 | 0.167 | 0.129 | 41 | 1.83 | 0.573 | 0.533 | | |
| | 48 47.0-51.9 | 11 | 0.48 | 0.152 | 0.147 | 39 | 1.22 | 0.621 | 0.337 | | |
| | 50 32.0-36.9 | 12 | 0.27 | 0.142 | 0.076 | 38 | 1.50 | 0.656 | 0.456 | | |
| | 52 12.0-16.9 | 0 | - | - | - | 50 | 1.57 | 0.643 | 0.375 | | |
| | | f | % | Max | Mean | Std Dev | f | % | Max | Mean | Std Dev |
| 1931-1939 | | 168 | 56.00 | 4.04 | 0.504 | 0.359 | 132 | 44.00 | 2.01 | 0.253 | 0.216 |
| 1941-1950 | | 166 | 55.33 | 0.59 | 0.258 | 0.174 | 134 | 44.67 | 1.85 | 0.236 | 0.202 |
| 2000-2001 | | 61 | 61.00 | 0.50 | 0.210 | 0.154 | 39 | 39.00 | 0.73 | 0.316 | 0.183 |
| 2143-2152 | | 83 | 27.67 | 1.17 | 0.305 | 0.180 | 217 | 72.33 | 1.83 | 0.565 | 0.378 |
| 1931-2152 | | 478 | 47.80 | 4.04 | 0.319 | 0.217 | 522 | 52.20 | 2.01 | 0.343 | 0.245 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

**TABLE 18. MAXIMUM, MEAN, AND STANDARD DEVIATION OF UPDRAFTS AND
DOWNDRAFTS AT 18T-m HEIGHT**

| Height (m) 18T | | Vertical Motion | | | | | | | | | |
|----------------|---------------------------|---|------------------|-------|---------|---|------|-------|---------|-------|---------|
| hr | Interval UT min sec | Up m s ⁻¹ or 2 (m s ⁻¹) for kts | | | | Down m s ⁻¹ or 2 (m s ⁻¹) for kts | | | | | |
| | | f | Max | Mean | Std Dev | f | Max | Mean | Std Dev | | |
| 19 | 31 16.0-20.9 | 25 | 1.9 ^a | 0.995 | 0.511 | 25 | 1.83 | 0.915 | 0.440 | | |
| | 33 16.0-20.9 | 50 | 2.83 | 1.690 | 0.590 | 0 | - | - | - | | |
| | 34 56.0-00.9 | 48 | 3.15 | 1.306 | 0.698 | 2 | 0.78 | 0.630 | 0.212 | | |
| | 36 36.0-40.9 | 38 | 2.55 | 1.032 | 0.719 | 12 | 0.48 | 0.203 | 0.173 | | |
| | 38 16.0-20.9 | 50 | 3.39 | 1.780 | 0.831 | 0 | - | - | - | | |
| | 39 56.0-00.9 | 47 | 1.80 | 1.056 | 0.537 | 3 | 0.24 | 0.133 | 0.116 | | |
| 19 | 41 41.0-45.9 | 26 | 1.71 | 0.807 | 0.472 | 24 | 0.90 | 0.333 | 0.236 | | |
| | 43 21.0-25.9 | 47 | 2.27 | 1.477 | 0.521 | 3 | 0.15 | 0.087 | 0.071 | | |
| | 45 01.0-05.9 | 25 | 1.41 | 0.706 | 0.412 | 25 | 1.45 | 0.474 | 0.440 | | |
| | 46 41.0-45.9 | 50 | 2.31 | 0.978 | 0.550 | 0 | - | - | - | | |
| | 48 21.0-25.9 | 49 | 2.15 | 0.904 | 0.503 | 1 | 0.10 | 0.10 | 0.000 | | |
| | 50 01.0-05.9 | 50 | 1.52 | 1.112 | 0.242 | 0 | - | - | - | | |
| 20 | 00 06.0-10.9 | 36 | 1.24 | 0.506 | 0.387 | 14 | 0.62 | 0.291 | 0.181 | | |
| | 01 51.0-55.9 | 50 | 2.08 | 1.364 | 0.485 | 0 | - | - | - | | |
| 21 | 43 47.0-51.9 | 20 | 1.43 | 0.631 | 0.419 | 30 | 0.83 | 0.491 | 0.232 | | |
| | 45 27.0-31.9 | 50 | 2.78 | 1.511 | 0.812 | 0 | - | - | - | | |
| | 47 07.0-11.9 | 16 | 0.69 | 0.321 | 0.203 | 34 | 1.34 | 0.459 | 0.346 | | |
| | 48 47.0-51.9 | 10 | 0.55 | 0.171 | 0.166 | 40 | 1.55 | 0.619 | 0.378 | | |
| | 50 32.0-36.9 | 39 | 3.50 | 1.137 | 0.884 | 11 | 1.04 | 0.546 | 0.253 | | |
| | 52 12.0-16.9 | 2 | 0.31 | 0.290 | 0.028 | 48 | 1.59 | 0.665 | 0.405 | | |
| | | f | % | Max | Mean | Std Dev | f | % | Max | Mean | Std Dev |
| | 1931-1939 | 258 | 86.00 | 3.39 | 1.310 | 0.648 | 42 | 14.00 | 1.83 | 0.470 | 0.235 |
| | 1941-1950 | 247 | 82.33 | 2.31 | 0.997 | 0.450 | 53 | 17.67 | 1.45 | 0.248 | 0.187 |
| | 2000-2001 | 86 | 86.00 | 2.08 | 0.935 | 0.436 | 14 | 14.00 | 0.62 | 0.291 | 0.181 |
| | 2143-2152 | 137 | 45.67 | 3.50 | 0.677 | 0.419 | 163 | 54.33 | 1.59 | 0.556 | 0.323 |
| | 1931-2152 | 728 | 72.80 | 3.50 | 0.980 | 0.488 | 272 | 27.20 | 1.83 | 0.391 | 0.232 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 19. MAXIMUM, MEAN, AND STANDARD DEVIATION OF UPDRAFTS AND
DOWNDRAFTS AT 10-m HEIGHT

| Height (m) 10 | | Vertical Motion | | | | | | | | | |
|---------------|---------------------------|--|-------|-------|---------|--|-------|-------|---------|-------|---------|
| hr | Interval UT min sec | Up $m s^{-1}$ or 2 ($m s^{-1}$) for kts | | | | Down $m s^{-1}$ or 2 ($m s^{-1}$) for kts | | | | | |
| | | f | Max | Mean | Std Dev | f | Max | Mean | Std Dev | | |
| 19 | 31 16.0-20.9 | 50 | 1.80 | 1.086 | 0.402 | 0 | - | - | - | | |
| | 33 16.0-20.9 | 44 | 1.04 | 0.631 | 0.274 | 6 | 0.48 | 0.240 | 0.172 | | |
| | 34 56.0-00.9 | 43 | 1.06 | 0.469 | 0.266 | 7 | 0.34 | 0.164 | 0.127 | | |
| | 36 36.0-40.9 | 37 | 1.08 | 0.448 | 0.323 | 13 | 0.29 | 0.155 | 0.104 | | |
| | 38 16.0-20.9 | 45 | 1.78 | 0.883 | 0.357 | 5 | 0.43 | 0.174 | 0.159 | | |
| | 39 56.0-00.9 | 32 | 0.87 | 0.460 | 0.244 | 18 | 0.73 | 0.243 | 0.201 | | |
| | 19 41 41.0-45.9 | 41 | 1.80 | 0.681 | 0.597 | 9 | 0.24 | 0.123 | 0.097 | | |
| 43 31.0-25.9 | 48 | 1.57 | 0.704 | 0.427 | 2 | 0.03 | 0.030 | 0.000 | | | |
| 45 01.0-05.9 | 37 | 1.43 | 0.547 | 0.376 | 13 | 0.71 | 0.306 | 0.234 | | | |
| 46 41.0-45.9 | 16 | 0.41 | 0.134 | 0.114 | 34 | 0.85 | 0.329 | 0.271 | | | |
| 48 21.0-25.9 | 19 | 1.11 | 0.467 | 0.328 | 31 | 1.34 | 0.571 | 0.356 | | | |
| 50 01.0-05.9 | 50 | 1.57 | 1.236 | 0.327 | 0 | - | - | - | | | |
| 20 | 00 06.0-10.9 | 19 | 0.90 | 0.396 | 0.264 | 31 | 0.94 | 0.452 | 0.332 | | |
| | 01 51.0-55.9 | 40 | 1.85 | 0.833 | 0.442 | 10 | 0.38 | 0.184 | 0.123 | | |
| 21 | 43 47.0-51.9 | 28 | 1.38 | 0.630 | 0.456 | 22 | 2.22 | 0.924 | 0.618 | | |
| | 45 27.0-31.9 | 37 | 1.36 | 0.614 | 0.329 | 13 | 0.64 | 0.294 | 0.228 | | |
| | 47 07.0-11.9 | 26 | 1.06 | 0.376 | 0.297 | 24 | 1.59 | 0.430 | 0.459 | | |
| | 48 47.0-51.9 | 17 | 1.92 | 0.945 | 0.600 | 33 | 1.69 | 0.786 | 0.458 | | |
| | 50 32.0-36.9 | 33 | 2.97 | 0.990 | 0.866 | 17 | 2.22 | 0.715 | 0.605 | | |
| | 52 12.0-16.9 | 6 | 0.29 | 0.177 | 0.090 | 44 | 1.43 | 0.690 | 0.351 | | |
| | | f | % | Max | Mean | Std Dev | f | % | Max | Mean | Std Dev |
| | 1931-1939 | 251 | 83.67 | 1.80 | 0.663 | 0.311 | 49 | 16.33 | 0.73 | 0.195 | 0.153 |
| | 1941-1950 | 211 | 70.33 | 1.80 | 0.628 | 0.362 | 89 | 29.67 | 1.34 | 0.272 | 0.192 |
| | 2000-2001 | 59 | 59.00 | 1.85 | 0.614 | 0.353 | 41 | 41.00 | 2.22 | 0.318 | 0.228 |
| | 2143-2152 | 147 | 49.00 | 2.97 | 0.622 | 0.440 | 153 | 51.00 | 0.94 | 0.640 | 0.453 |
| | 1931-2152 | 668 | 66.80 | 2.97 | 0.632 | 0.367 | 332 | 33.20 | 2.22 | 0.356 | 0.257 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 20. MAXIMUM, MEAN, AND STANDARD DEVIATION OF HORIZONTAL WIND SPEEDS AND DIRECTIONS AT 150-m HEIGHT

| Height m | Interval UT hr min sec | | Surface Winds | | | | | |
|-------------|------------------------------|------------|--|-------|---------|------------------|------|---------|
| | | | Speed ms^{-1} 2 (m s^{-1}) for kts | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 150 | 19 31 | 16.0-20.9 | 17.6 | 16.84 | 0.455 | 122 | 118 | 1.721 |
| | 19 33 | 16.0-20.9 | 19.7 | 16.93 | 0.847 | 117 | 111 | 3.978 |
| | 19 34 | 56.0-00.9 | 18.3 | 17.40 | 0.472 | 120 | 115 | 2.849 |
| | 19 36 | 36.0-40.9 | 19.3 | 17.50 | 0.792 | 122 | 118 | 1.693 |
| | 19 38 | 16.0-20.9 | 19.4 | 15.29 | 0.338 | 121 | 119 | 0.746 |
| | 19 39 | 56.0-00.9 | 16.3 | 14.26 | 0.724 | 123 | 117 | 2.508 |
| | 19 41 | 41.0-45.9 | 16.3 | 15.05 | 0.726 | 123 | 118 | 2.452 |
| | 19 43 | 21.0-25.9 | 17.4 | 16.21 | 0.644 | 126 | 120 | 2.944 |
| | 19 45 | 01.0-05.9 | 17.3 | 15.40 | 0.869 | 123 | 120 | 1.827 |
| | 19 46 | 41.0-45.9 | 15.5 | 14.21 | 0.483 | 124 | 119 | 2.075 |
| | 19 48 | 21.0-25.9 | 14.9 | 13.72 | 0.649 | 114 | 112 | 1.379 |
| | 19 50 | 01.0-05.9 | 15.1 | 14.55 | 0.313 | 110 | 107 | 1.296 |
| | 20 00 | 06.0-10.9 | 13.9 | 12.74 | 0.545 | 127 | 123 | 1.692 |
| | 20 01 | 51.0-55.9 | 13.2 | 12.67 | 0.309 | 126 | 123 | 1.415 |
| | 21 43 | 47.0-51.9 | 21.6 | 20.70 | 0.479 | 227 | 224 | 1.852 |
| | 21 45 | 27.0-31.9 | 21.1 | 19.48 | 0.882 | 224 | 218 | 4.292 |
| | 21 47 | 07.0-11.9 | 27.4 | 25.67 | 0.716 | 226 | 223 | 2.628 |
| | 21 48 | 47.0-51.9 | 25.6 | 24.67 | 0.400 | 231 | 227 | 1.360 |
| | 21 50 | 32.0-36.9 | 23.9 | 22.59 | 0.738 | 238 | 232 | 2.287 |
| | 21 52 | 12.0-16.9 | 20.5 | 19.46 | 0.511 | 231 | 224 | 1.741 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 150 | 19 31 16.0 | 19 40 00.9 | 19.7 | 16.87 | 0.605 | 123 | 116 | 2.249 |
| | 19 41 41.0 | 19 50 05.9 | 17.4 | 14.86 | 0.614 | 126 | 116 | 1.996 |
| | 20 00 06.0 | 20 01 55.9 | 13.9 | 12.71 | 0.427 | 127 | 123 | 1.554 |
| | 21 43 47.0 | 21 52 16.9 | 27.4 | 22.09 | 0.621 | 238 | 225 | 2.360 |
| | 19 31 16.0 | 21 52 16.9 | 27.4 | 16.63 | 0.567 | 238 | 145 | 2.040 |

TABLE 21. MAXIMUM, MEAN, AND STANDARD DEVIATION OF HORIZONTAL WIND SPEEDS AND DIRECTIONS AT 120-m HEIGHT

| Height m | Interval UT hr min sec | | Surface Winds | | | | | |
|-------------|------------------------------|------------|--|------------------------------------|---------|------------------|--------------------------|---------|
| | | | Speed ms^{-1} 2 (m s^{-1}) for kts | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 120 | 19 31 | 16.0-20.9 | 17.4 | 16.34 | 0.615 | 122 | 116 | 2.730 |
| | 19 33 | 16.0-20.9 | 17.9 | 16.89 | 0.403 | 112 | 109 | 2.497 |
| | 19 34 | 56.0-00.9 | 19.4 | 18.33 | 0.566 | 112 | 109 | 1.919 |
| | 19 36 | 36.0-40.9 | 15.1 | 14.33 | 0.482 | 126 | 122 | 2.230 |
| | 19 38 | 16.0-20.9 | 18.4 | 17.54 | 0.400 | 117 | 116 | 1.088 |
| | 19 39 | 56.0-00.9 | 14.4 | 13.66 | 0.388 | 119 | 116 | 2.409 |
| | 19 41 | 41.0-45.9 | 16.3 | 14.97 | 0.499 | 118 | 114 | 2.204 |
| | 19 43 | 21.0-25.9 | 17.2 | 16.35 | 0.439 | 122 | 118 | 2.070 |
| | 19 45 | 01.0-05.9 | 15.2 | 14.36 | 0.511 | 128 | 121 | 3.154 |
| | 19 46 | 41.0-45.9 | 15.5 | 13.84 | 0.795 | 124 | 117 | 2.900 |
| | 19 48 | 21.0-25.9 | 13.7 | 13.01 | 0.348 | 110 | 108 | 1.576 |
| | 19 50 | 01.0-05.9 | 14.8 | 14.07 | 0.491 | 108 | 103 | 3.257 |
| | 20 00 | 06.0-10.9 | 13.2 | 12.47 | 0.409 | 122 | 116 | 2.350 |
| | 20 01 | 51.0-55.9 | 12.7 | 11.81 | 0.379 | 125 | 120 | 1.626 |
| | 21 43 | 47.0-51.9 | 20.9 | 19.89 | 0.635 | 226 | 220 | 3.052 |
| | 21 45 | 27.0-31.9 | 22.5 | 19.95 | 0.927 | 228 | 212 | 3.002 |
| | 21 47 | 07.0-11.9 | 26.4 | 24.95 | 0.867 | 222 | 216 | 2.589 |
| | 21 48 | 47.0-51.9 | 26.0 | 24.98 | 0.531 | 223 | 221 | 1.074 |
| 21 50 | 32.0-36.9 | 24.6 | 21.92 | 1.378 | 225 | 220 | 2.548 | |
| 21 52 | 12.0-16.9 | 20.5 | 19.60 | 0.389 | 218 | 216 | 0.718 | |
| m | hr min sec | hr min sec | Max | Speed m s^{-1} Mean | Std Dev | Max | Direction deg Mean | Std Dev |
| 120 | 19 31 16.0 | 19 40 00.9 | 19.4 | 16.18 | 0.476 | 126 | 115 | 2.146 |
| | 19 41 41.0 | 19 50 05.9 | 17.2 | 14.43 | 0.514 | 128 | 114 | 2.527 |
| | 20 00 06.0 | 20 01 55.9 | 13.2 | 12.14 | 0.394 | 125 | 118 | 1.988 |
| | 21 43 47.0 | 21 52 16.9 | 26.4 | 21.88 | 0.788 | 228 | 218 | 2.164 |
| | 19 31 16.0 | 21 52 16.9 | 26.4 | 16.16 | 0.543 | 228 | 141 | 2.206 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 22. MAXIMUM, MEAN, AND STANDARD DEVIATION OF HORIZONTAL WIND SPEEDS AND DIRECTIONS AT 90-m HEIGHT

| Height m | Interval UT hr min sec | | Surface Winds | | | | | |
|-------------|------------------------------|------------|--|-------|---------|------------------|-------|---------|
| | | | Speed ms^{-1} 2 (m s^{-1}) for kts | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 90 | 19 31 | 16.0-20.9 | 15.8 | 13.75 | 1.047 | 145 | 136 | 5.410 |
| | 19 33 | 16.0-20.9 | 17.9 | 17.04 | 0.419 | 139 | 134 | 2.091 |
| | 19 34 | 56.0-00.9 | 17.4 | 15.98 | 0.692 | 134 | 124 | 4.620 |
| | 19 37 | 36.0-40.9 | 17.6 | 15.68 | 0.877 | 150 | 141 | 3.149 |
| | 19 38 | 16.0-20.9 | 18.0 | 17.20 | 0.359 | 141 | 139 | 1.560 |
| | 19 39 | 56.0-00.9 | 13.9 | 13.44 | 0.277 | 147 | 140 | 2.357 |
| | 19 41 | 41.0-45.9 | 14.8 | 13.70 | 0.471 | 143 | 137 | 1.841 |
| | 19 43 | 21.0-25.9 | 14.9 | 13.97 | 0.439 | 143 | 139 | 2.060 |
| | 19 45 | 01.0-05.9 | 14.5 | 12.63 | 0.698 | 150 | 143 | 4.499 |
| | 19 46 | 41.0-45.9 | 14.2 | 13.40 | 0.393 | 139 | 136 | 1.455 |
| | 19 48 | 21.0-25.9 | 12.7 | 11.67 | 0.532 | 134 | 127 | 2.259 |
| | 19 50 | 01.0-05.9 | 12.7 | 11.67 | 0.451 | 127 | 122 | 2.094 |
| | 20 00 | 06.0-10.9 | 12.5 | 12.02 | 0.277 | 142 | 135 | 2.424 |
| | 20 01 | 51.0-55.9 | 11.8 | 11.16 | 0.383 | 142 | 138 | 2.267 |
| | 21 43 | 47.0-51.9 | 19.1 | 17.94 | 0.639 | 250 | 243 | 4.116 |
| | 21 45 | 27.0-31.9 | 20.1 | 18.69 | 0.877 | 237 | 229 | 3.353 |
| | 21 47 | 07.0-11.9 | 26.0 | 23.56 | 1.149 | 245 | 238 | 3.134 |
| | 21 48 | 47.0-51.9 | 25.1 | 24.29 | 0.419 | 245 | 242 | 1.755 |
| 21 50 | 32.0-36.9 | 23.3 | 21.45 | 0.800 | 248 | 240 | 2.893 | |
| 21 52 | 12.0-16.9 | 20.5 | 19.27 | 0.660 | 240 | 237 | 1.750 | |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 90 | 19 31 16.0 | 19 40 00.9 | 18.0 | 15.51 | 0.612 | 150 | 136 | 3.198 |
| | 19 41 41.0 | 19 50 05.9 | 14.9 | 12.84 | 0.497 | 150 | 134 | 2.368 |
| | 20 00 06.0 | 20 01 55.9 | 12.5 | 11.59 | 0.330 | 142 | 136 | 2.346 |
| | 21 43 47.0 | 21 52 16.9 | 26.0 | 20.87 | 0.757 | 250 | 238 | 2.834 |
| | 19 31 16.0 | 21 52 16.9 | 26.0 | 15.20 | 0.549 | 250 | 161 | 2.687 |

TABLE 23. MAXIMUM, MEAN, AND STANDARD DEVIATION OF HORIZONTAL WIND SPEEDS AND DIRECTIONS AT 60-m HEIGHT

| Height m | Interval UT hr min sec | | Surface Winds | | | | | |
|-------------|------------------------------|------------|--|------------------------------------|---------|------------------|--------------------------|---------|
| | | | Speed ms^{-1} 2 (m s^{-1}) for kts | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 60 | 19 31 | 16.0-20.9 | 16.6 | 14.18 | 1.209 | 063 | 057 | 2.976 |
| | 19 33 | 16.0-20.9 | 13.7 | 10.54 | 1.438 | 068 | 057 | 4.813 |
| | 19 34 | 56.0-00.9 | 15.6 | 13.82 | 1.095 | 057 | 048 | 4.121 |
| | 19 36 | 36.0-40.9 | 17.3 | 16.59 | 0.533 | 059 | 055 | 1.505 |
| | 19 38 | 16.0-20.9 | 18.3 | 16.54 | 0.830 | 064 | 058 | 2.393 |
| | 19 39 | 56.0-00.9 | 13.8 | 12.32 | 0.601 | 063 | 056 | 5.299 |
| | 19 41 | 41.0-45.9 | 14.1 | 12.82 | 0.505 | 067 | 057 | 3.010 |
| | 19 43 | 21.0-25.9 | 15.2 | 13.99 | 0.509 | 063 | 060 | 2.922 |
| | 19 45 | 01.0-05.9 | 13.5 | 12.47 | 0.645 | 064 | 059 | 2.160 |
| | 19 46 | 41.0-45.9 | 13.8 | 12.92 | 0.530 | 056 | 054 | 1.432 |
| | 19 48 | 21.0-25.9 | 11.0 | 10.37 | 0.443 | 062 | 057 | 3.356 |
| | 19 50 | 01.0-05.9 | 10.3 | 9.41 | 0.453 | 053 | 041 | 3.707 |
| | 20 00 | 06.0-10.9 | 12.1 | 10.76 | 0.761 | 062 | 055 | 4.729 |
| | 20 01 | 51.0-55.9 | 11.4 | 10.91 | 0.336 | 058 | 056 | 0.922 |
| | 21 43 | 47.0-51.9 | 20.8 | 17.25 | 1.371 | 213 | 203 | 4.174 |
| | 21 45 | 27.0-31.9 | 18.7 | 16.21 | 1.213 | 221 | 202 | 6.664 |
| | 21 47 | 07.0-11.9 | 24.6 | 22.00 | 1.189 | 221 | 210 | 4.577 |
| | 21 48 | 47.0-51.9 | 24.0 | 21.93 | 1.201 | 219 | 211 | 3.610 |
| | 21 50 | 32.0-36.9 | 21.6 | 20.23 | 0.861 | 220 | 210 | 4.444 |
| | 21 52 | 12.0-16.9 | 18.7 | 16.45 | 1.068 | 215 | 206 | 3.166 |
| m | hr min sec | hr min sec | Max | Speed m s^{-1} Mean | Std Dev | Max | Direction deg Mean | Std Dev |
| 60 | 19 31 16.0 | 19 40 00.9 | 18.3 | 14.00 | 0.951 | 068 | 055 | 3.518 |
| | 19 41 41.0 | 19 50 05.9 | 15.2 | 12.00 | 0.514 | 067 | 055 | 2.765 |
| | 20 00 06.0 | 20 01 55.9 | 12.1 | 10.84 | 0.549 | 062 | 056 | 2.826 |
| | 21 43 47.0 | 21 52 11.9 | 24.6 | 19.01 | 1.149 | 221 | 207 | 4.439 |
| | 19 31 16.0 | 21 52 16.9 | 24.6 | 13.96 | 0.791 | 221 | 093 | 3.387 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

**TABLE 24. MAXIMUM, MEAN, AND STANDARD DEVIATION OF HORIZONTAL WIND
SPEEDS AND DIRECTIONS AT 30-m HEIGHT**

| Height m | Interval UT hr min sec | | Surface Winds | | | | | |
|-------------|------------------------------|------------|---|-------|---------|------------------|------|---------|
| | | | Speed ms ⁻¹ 2 (m s ⁻¹) for kts | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 30 | 19 31 | 16.0-20.9 | 17.7 | 14.03 | 1.914 | 052 | 044 | 4.864 |
| | 19 33 | 16.0-20.9 | 10.4 | 9.20 | 0.753 | 066 | 048 | 7.783 |
| | 19 34 | 56.0-00.9 | 18.0 | 14.77 | 1.578 | 069 | 057 | 6.424 |
| | 19 36 | 36.0-40.9 | 17.4 | 13.44 | 2.124 | 067 | 058 | 4.784 |
| | 19 38 | 16.0-20.9 | 14.9 | 12.23 | 1.432 | 064 | 057 | 5.400 |
| | 19 39 | 56.0-00.9 | 10.6 | 8.84 | 0.601 | 059 | 046 | 6.771 |
| | 19 41 | 41.0-45.9 | 14.1 | 11.28 | 1.244 | 060 | 051 | 4.483 |
| | 19 43 | 21.0-25.9 | 11.7 | 10.56 | 0.745 | 063 | 054 | 6.311 |
| | 19 45 | 01.0-05.9 | 14.4 | 12.56 | 0.826 | 060 | 053 | 3.464 |
| | 19 46 | 41.0-45.9 | 12.5 | 11.01 | 0.787 | 070 | 058 | 3.210 |
| | 19 48 | 21.0-25.9 | 11.0 | 9.87 | 0.521 | 069 | 060 | 5.911 |
| | 19 50 | 01.0-05.9 | 10.7 | 9.34 | 0.641 | 066 | 053 | 5.672 |
| | 20 00 | 06.0-10.9 | 12.0 | 9.77 | 1.488 | 077 | 057 | 7.770 |
| | 20 01 | 51.0-55.9 | 6.8 | 6.14 | 0.301 | 056 | 047 | 6.988 |
| | 21 43 | 47.0-51.9 | 13.8 | 11.99 | 0.946 | 242 | 228 | 6.128 |
| | 21 45 | 27.0-31.9 | 14.5 | 12.06 | 1.371 | 259 | 235 | 9.928 |
| | 21 47 | 07.0-11.9 | 20.8 | 15.94 | 2.317 | 262 | 233 | 12.329 |
| | 21 48 | 47.0-51.9 | 19.0 | 16.24 | 1.974 | 264 | 250 | 5.487 |
| | 21 50 | 32.0-36.9 | 21.5 | 17.71 | 2.215 | 265 | 240 | 6.926 |
| | 21 52 | 12.0-16.9 | 16.6 | 14.12 | 1.378 | 250 | 238 | 5.929 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 30 | 19 31 16.0 | 19 40 00.9 | 18.0 | 12.08 | 1.400 | 069 | 052 | 6.004 |
| | 19 41 41.0 | 19 50 05.9 | 14.4 | 10.77 | 0.794 | 070 | 055 | 4.842 |
| | 20 00 06.0 | 20 01 55.9 | 12.0 | 7.95 | 0.895 | 077 | 052 | 7.379 |
| | 21 43 47.0 | 21 52 16.9 | 21.5 | 14.68 | 1.700 | 265 | 237 | 7.788 |
| | 19 31 16.0 | 21 52 16.9 | 21.5 | 11.37 | 1.197 | 265 | 099 | 6.503 |

TABLE 25. MAXIMUM, MEAN, AND STANDARD DEVIATION OF HORIZONTAL WIND SPEEDS AND DIRECTIONS AT 18T-m HEIGHT

| Height m | Interval UT hr min sec | | Surface Winds | | | | | |
|-------------|------------------------------|------------|--|-------|---------|------------------|------|---------|
| | | | Speed ms^{-1} 2 (m s^{-1}) for kts | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 18T | 19 31 | 16.0-20.9 | 16.9 | 13.09 | 2.202 | 156 | 140 | 8.660 |
| | 19 33 | 16.0-20.9 | 10.4 | 8.73 | 0.949 | 138 | 128 | 5.183 |
| | 19 34 | 56.0-00.9 | 14.9 | 12.22 | 1.555 | 134 | 125 | 5.826 |
| | 19 36 | 36.0-40.9 | 17.0 | 12.76 | 2.234 | 128 | 121 | 4.563 |
| | 19 38 | 16.0-20.9 | 14.4 | 12.14 | 1.205 | 149 | 133 | 7.673 |
| | 19 39 | 56.0-00.9 | 10.0 | 8.36 | 0.722 | 145 | 124 | 8.666 |
| | 19 41 | 41.0-45.9 | 14.4 | 11.54 | 1.002 | 142 | 128 | 4.954 |
| | 19 43 | 21.0-25.9 | 10.7 | 9.34 | 0.673 | 131 | 118 | 4.196 |
| | 19 45 | 01.0-05.9 | 13.7 | 11.55 | 0.904 | 133 | 124 | 4.545 |
| | 19 46 | 41.0-45.9 | 10.6 | 8.60 | 0.809 | 132 | 124 | 4.269 |
| | 19 48 | 21.0-25.9 | 10.4 | 9.09 | 0.561 | 131 | 121 | 4.045 |
| | 19 50 | 01.0-05.9 | 10.3 | 8.69 | 0.809 | 143 | 131 | 7.396 |
| | 20 00 | 06.0-10.9 | 9.9 | 7.44 | 1.194 | 139 | 116 | 10.792 |
| | 20 01 | 51.0-55.9 | 6.7 | 5.41 | 0.419 | 152 | 134 | 11.165 |
| | 21 43 | 47.0-51.9 | 15.9 | 12.68 | 1.707 | 236 | 207 | 8.108 |
| | 21 45 | 27.0-31.9 | 11.3 | 7.82 | 2.193 | 259 | 233 | 9.979 |
| | 21 47 | 07.0-11.9 | 18.4 | 16.51 | 1.059 | 228 | 218 | 7.392 |
| | 21 48 | 47.0-51.9 | 20.1 | 16.66 | 2.294 | 249 | 232 | 4.256 |
| | 21 50 | 32.0-36.9 | 20.7 | 14.41 | 3.609 | 243 | 231 | 6.881 |
| | 21 52 | 12.0-16.9 | 14.5 | 13.43 | 0.836 | 221 | 215 | 2.900 |
| m | hr min sec hr min sec | | Speed m s^{-1} | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 18T | 19 31 16.0 | 19 40 00.9 | 17.0 | 11.22 | 1.478 | 156 | 128 | 6.762 |
| | 19 41 41.0 | 19 50 05.9 | 14.4 | 9.80 | 0.793 | 143 | 124 | 4.901 |
| | 20 00 06.0 | 20 01 55.9 | 9.9 | 6.42 | 0.807 | 152 | 125 | 10.979 |
| | 21 43 47.0 | 21 52 16.9 | 20.7 | 13.58 | 1.950 | 259 | 223 | 6.586 |
| | 19 31 16.0 | 21 52 16.9 | 20.7 | 10.26 | 1.257 | 259 | 150 | 7.307 |

**ORIGINAL PAGE 19
OF POOR QUALITY**

TABLE 26. MAXIMUM, MEAN, AND STANDARD DEVIATION OF HORIZONTAL WIND SPEEDS AND DIRECTIONS AT 18S-m HEIGHT

| Height m | Interval UT hr min sec | | Surface Winds | | | | | |
|-------------|------------------------------|------------|---|-------|---------|------------------|------|---------|
| | | | Speed ms ⁻¹ 2 (m s ⁻¹) for kts | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 18S | 19 31 | 16.0-20.9 | 8.9 | 7.33 | 0.666 | 156 | 135 | 9.957 |
| | 19 33 | 16.0-20.9 | 11.0 | 8.53 | 1.074 | 135 | 125 | 5.547 |
| | 19 34 | 56.0-00.9 | 12.3 | 10.99 | 0.744 | 143 | 128 | 8.134 |
| | 19 36 | 36.0-40.9 | 12.5 | 11.07 | 0.899 | 141 | 130 | 6.107 |
| | 19 38 | 16.0-20.9 | 12.7 | 11.52 | 0.745 | 147 | 133 | 7.359 |
| | 19 39 | 56.0-00.9 | 10.9 | 9.66 | 0.638 | 145 | 131 | 5.562 |
| | 19 41 | 41.0-45.9 | 10.4 | 9.04 | 0.632 | 148 | 133 | 8.055 |
| | 19 43 | 21.0-25.9 | 9.5 | 8.47 | 0.501 | 148 | 128 | 8.786 |
| | 19 45 | 01.0-05.9 | 13.7 | 11.72 | 0.675 | 141 | 132 | 5.627 |
| | 19 46 | 41.0-45.9 | 11.3 | 10.46 | 0.390 | 131 | 123 | 4.428 |
| | 19 48 | 21.0-25.9 | 13.0 | 11.85 | 0.864 | 133 | 123 | 5.396 |
| | 19 50 | 01.0-05.9 | 9.0 | 8.45 | 0.363 | 138 | 122 | 8.215 |
| | 20 00 | 06.0-10.9 | 12.0 | 9.59 | 1.241 | 136 | 124 | 4.974 |
| | 20 01 | 51.0-55.9 | 9.5 | 8.51 | 0.659 | 142 | 129 | 5.654 |
| | 21 43 | 47.0-51.9 | 15.1 | 12.48 | 1.654 | 228 | 210 | 8.612 |
| | 21 45 | 27.0-31.9 | 14.8 | 8.66 | 2.739 | 264 | 235 | 16.793 |
| | 21 47 | 07.0-11.9 | 17.2 | 13.80 | 1.397 | 230 | 220 | 6.094 |
| | 21 48 | 47.0-51.9 | 17.6 | 15.09 | 1.596 | 257 | 237 | 9.804 |
| | 21 50 | 32.0-36.9 | 16.6 | 11.35 | 3.241 | 252 | 231 | 11.594 |
| | 21 52 | 12.0-16.9 | 13.4 | 12.00 | 0.722 | 232 | 221 | 3.881 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 18S | 19 31 16.0 | 19 40 00.9 | 12.7 | 9.85 | 0.794 | 156 | 130 | 7.111 |
| | 19 41 41.0 | 19 50 05.9 | 13.7 | 10.00 | 0.571 | 148 | 127 | 6.751 |
| | 20 00 06.0 | 20 01 55.9 | 12.0 | 9.05 | 0.950 | 142 | 126 | 5.314 |
| | 21 43 47.0 | 21 52 16.9 | 17.6 | 12.23 | 1.892 | 264 | 226 | 9.463 |
| | 19 31 16.0 | 21 52 16.9 | 17.6 | 10.28 | 1.052 | 264 | 152 | 7.160 |

ORIGINAL PAGE 19
OF POOR QUALITY

TABLE 27. MAXIMUM, MEAN, AND STANDARD DEVIATION OF HORIZONTAL WIND SPEEDS AND DIRECTIONS AT 3-m HEIGHT

| Height m | Interval UT hr min sec | | Surface Winds | | | | | |
|-------------|------------------------------|------------|--|------|---------|------------------|------|---------|
| | | | Speed ms^{-1} 2 (m s^{-1}) for kts | | | Direction deg | | |
| | | | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 3 | 19 31 | 16.0-20.9 | 8.5 | 7.33 | 0.964 | 136 | 128 | 5.820 |
| | 19 33 | 16.0-20.9 | 8.5 | 6.78 | 0.999 | 130 | 104 | 13.187 |
| | 19 34 | 56.0-00.9 | 10.7 | 8.43 | 1.215 | 126 | 108 | 6.876 |
| | 19 36 | 36.0-40.9 | 10.0 | 7.58 | 1.086 | 131 | 114 | 7.579 |
| | 19 38 | 16.0-20.9 | 7.2 | 5.54 | 0.895 | 137 | 116 | 10.596 |
| | 19 39 | 56.0-00.9 | 10.4 | 8.68 | 1.256 | 112 | 098 | 7.214 |
| | 19 41 | 41.0-45.9 | 8.8 | 7.27 | 1.000 | 133 | 120 | 6.956 |
| | 19 43 | 21.0-25.9 | 6.8 | 5.59 | 0.717 | 128 | 104 | 8.768 |
| | 19 45 | 01.0-05.9 | 9.7 | 7.74 | 0.702 | 122 | 101 | 11.712 |
| | 19 46 | 41.0-45.9 | 10.3 | 8.91 | 0.667 | 130 | 111 | 7.954 |
| | 19 48 | 21.0-25.9 | 8.1 | 7.00 | 0.592 | 126 | 105 | 8.337 |
| | 19 50 | 01.0-05.9 | 5.5 | 4.61 | 0.348 | 130 | 109 | 10.836 |
| | 20 00 | 06.0-10.9 | 10.3 | 7.83 | 1.371 | 117 | 100 | 8.559 |
| | 20 01 | 51.0-55.9 | 8.2 | 6.42 | 0.950 | 119 | 109 | 6.606 |
| | 21 43 | 47.0-51.9 | 7.6 | 5.99 | 1.021 | 235 | 192 | 19.156 |
| | 21 45 | 27.0-31.9 | 5.8 | 4.11 | 0.742 | 227 | 198 | 17.529 |
| | 21 47 | 07.0-11.9 | 10.6 | 6.33 | 1.542 | 233 | 199 | 15.466 |
| | 21 48 | 47.0-51.9 | 13.5 | 9.59 | 1.562 | 225 | 206 | 10.875 |
| | 21 50 | 32.0-36.9 | 9.6 | 6.25 | 2.105 | 238 | 217 | 13.439 |
| | 21 52 | 12.0-16.9 | 8.9 | 6.51 | 1.506 | 250 | 214 | 17.651 |
| m | hr min sec | hr min sec | Max | Mean | Std Dev | Max | Mean | Std Dev |
| 3 | 19 31 16.0 | 19 40 00.9 | 10.7 | 7.39 | 1.069 | 137 | 111 | 8.545 |
| | 19 41 41.0 | 19 50 05.9 | 10.3 | 6.85 | 0.671 | 133 | 108 | 9.103 |
| | 20 00 06.0 | 20 01 55.9 | 10.3 | 7.12 | 1.161 | 119 | 104 | 7.583 |
| | 21 43 47.0 | 21 52 16.9 | 13.5 | 6.46 | 1.413 | 250 | 204 | 15.686 |
| | 19 31 16.0 | 21 52 16.9 | 13.5 | 6.96 | 1.079 | 250 | 132 | 10.229 |

TABLE 28. RANGE OF MAXIMUM, MEAN, AND STANDARD DEVIATION DETERMINATIONS OF SHEARS, VERTICAL MOTION, AND HORIZONTAL WINDS

| Parameter | Layer/ Distance m | Height m | Max s ⁻¹ | Range Mean s ⁻¹ | Std Dev s ⁻¹ |
|---------------------|-------------------------|-------------|--------------------------------------|--------------------------------------|--------------------------------------|
| Shear Speed | 150-120 | | 0.047 - 0.160 | 0.016 - 0.106 | 0.012 - 0.032 |
| | 120-90 | | 0.040 - 0.173 | 0.013 - 0.086 | 0.010 - 0.047 |
| | 90-60 | | 0.043 - 0.327 | 0.014 - 0.217 | 0.010 - 0.047 |
| | 60-30 | | 0.043 - 0.387 | 0.017 - 0.201 | 0.011 - 0.093 |
| | 30-18T | | 0.125 - 0.792 | 0.060 - 0.357 | 0.028 - 0.245 |
| | 18S-3 | | 0.093 - 0.713 | 0.041 - 0.498 | 0.027 - 0.169 |
| | 18T-18S | | 0.106 - 0.678 | 0.044 - 0.354 | 0.025 - 0.156 |
| Direction | 150-120 | | deg m ⁻¹ 0.200 - 0.633 | deg m ⁻¹ 0.083 - 0.374 | deg m ⁻¹ 0.041 - 0.198 |
| | 120-90 | | 0.767 - 1.200 | 0.503 - 0.828 | 0.048 - 0.680 |
| | 90-60 | | 1.233 - 3.167 | 0.905 - 2.873 | 0.062 - 0.365 |
| | 60-30 | | 0.433 - 1.933 | 0.140 - 1.284 | 0.107 - 0.468 |
| | 30-18T | | 2.417 - 9.583 | 0.811 - 7.973 | 0.418 - 1.195 |
| | 18S-3 | | 1.800 - 5.733 | 0.694 - 2.735 | 0.458 - 1.305 |
| | 18T-18S | | 0.722 - 3.111 | 0.289 - 0.962 | 0.216 - 0.724 |
| Vertical Motion | Upward | 150 | m s ⁻¹ 0.08 - 2.45 | m s ⁻¹ 0.033 - 1.582 | m s ⁻¹ 0.019 - 0.750 |
| | | 60 | 0.27 - 4.04 | 0.142 - 1.582 | 0.076 - 1.296 |
| | | 18T | 0.31 - 3.50 | 0.171 - 1.780 | 0.028 - 0.884 |
| | | 10 | 0.29 - 2.97 | 0.134 - 1.236 | 0.090 - 0.866 |
| | Downward | 150 | 0.01 - 1.13 | 0.010 - 0.461 | 0.000 - 0.315 |
| | | 60 | 0.38 - 2.01 | 0.170 - 0.656 | 0.119 - 0.543 |
| | | 18T | 0.10 - 1.83 | 0.087 - 0.915 | 0.000 - 0.440 |
| | | 10 | 0.03 - 2.22 | 0.030 - 0.924 | 0.000 - 0.618 |
| Horizontal Speed | | 150 | m s ⁻¹ 13.2 - 27.4 | m s ⁻¹ 12.67 - 25.67 | m s ⁻¹ 0.309 - 0.882 |
| | | 120 | 12.7 - 26.4 | 11.81 - 24.98 | 0.348 - 1.378 |
| | | 90 | 11.8 - 26.0 | 11.16 - 24.29 | 0.277 - 1.149 |
| | | 60 | 10.3 - 24.6 | 9.41 - 22.00 | 0.336 - 1.438 |
| | | 30 | 6.8 - 21.5 | 6.14 - 17.71 | 0.301 - 2.317 |
| | | 18T | 6.7 - 20.7 | 5.41 - 16.66 | 0.419 - 3.609 |
| | | 18S | 8.9 - 17.6 | 7.33 - 15.09 | 0.363 - 3.241 |
| | | 3 | 5.5 - 13.5 | 4.11 - 9.59 | 0.348 - 2.105 |
| Direction | | 150 | deg 110 - 238 | deg 107 - 232 | deg 0.746 - 4.292 |
| | | 120 | 108 - 228 | 103 - 221 | 0.718 - 3.257 |
| | | 90 | 127 - 250 | 122 - 243 | 1.455 - 5.410 |
| | | 60 | 053 - 221 | 041 - 211 | 0.922 - 6.664 |
| | | 30 | 052 - 265 | 044 - 250 | 3.210 - 12.329 |
| | | 18T | 128 - 259 | 116 - 233 | 2.900 - 11.165 |
| | | 18S | 131 - 264 | 122 - 237 | 3.881 - 16.793 |
| | | 3 | 112 - 250 | 0.98 - 217 | 5.820 - 19.156 |