
Simulator Evaluation of a Remotely Piloted Vehicle Lateral Landing Task Using a Visual Display

Shahan K. Sarrafian

August 1984

LIBRARY COPY

AUG 28 1984

LANGLEY RESEARCH CENTER
LIBRARY, NASA
HAMPTON, VIRGINIA

Simulator Evaluation of a Remotely Piloted Vehicle Lateral Landing Task Using a Visual Display

Shahan K. Sarrafian

Ames Research Center, Dryden Flight Research Facility, Edwards, California 93523

1984



National Aeronautics and
Space Administration

Ames Research Center

Dryden Flight Research Facility
Edwards, California 93523

174-29885 #

SIMULATOR EVALUATION OF A REMOTELY PILOTED VEHICLE
LATERAL LANDING TASK USING A VISUAL DISPLAY

Shahan K. Sarrafian*
NASA Ames Research Center
Dryden Flight Research Facility
Edwards, California

Abstract

A simulator evaluation of a remotely piloted research vehicle was conducted at NASA Ames Research Center's Dryden Flight Research Facility to determine the utility of a visual display when studying the influence of changes in the lateral-stick gearing gains during landing approaches. The test vehicle used in this study was a highly maneuverable aircraft technology (HiMAT) aircraft, which is a 0.44-scale version of an envisioned small, single-seat fighter airplane. Handling qualities ratings and comments obtained from pilots using a simulated visual display of a runway scene and a simulated instrument landing system (ILS) display were compared with the results of actual flight tests. The visual display was found to provide an adequate representation of the test vehicle in a visual landing approach, and it improved the roll response cues provided to the pilot. The handling qualities ratings and comments for flight and simulation visual landing approaches correlated well. The ILS simulation results showed reduced correlation compared with the flight results for ILS approaches. Handling qualities criteria for remotely piloted research vehicles are also discussed in this paper.

Nomenclature

c.g.	center of gravity
DA	differential elevon command, deg
DAP	lateral stick input, cm (in)
HiMAT	highly maneuverable aircraft technology
ILS	instrument landing system
KARI	aileron-rudder interconnect gain, deg/deg
KRD	lateral-stick gearing gain deg/cm (deg/in)
KRP	roll-rate feedback gain, deg/deg/sec
M	Mach number
MAC	mean aerodynamic chord
p	roll rate, deg/sec
PCS	primary control system
PIO	pilot-induced oscillation
PR	pilot rating
\bar{q}	dynamic pressure, N/m ² (lb/ft ²)
RPRV	remotely piloted research vehicle

*Aerospace Engineer.

This paper is declared a work of the U.S. Government and therefore is in the public domain.

V	true velocity, m/sec (ft/sec)
VCAS	calibrated airspeed, m/sec (ft/sec)

Introduction

The remotely piloted research vehicle (RPRV) is a tool that can be used for exploring unproven and advanced technologies without risking the life of a pilot. The flight testing of RPRVs¹ allows programs to be conducted at a low cost, in quick response to demand, or when hazardous testing is required to assure the safety of manned vehicles. Yet this type of testing must be performed by the most versatile system available — the pilot. The pilot has the same responsibilities and tasks as if he were onboard the aircraft; this includes guiding the vehicle to a safe landing. The only difference is that he must accomplish this final task from a ground-based cockpit.

The highly maneuverable aircraft technology (HiMAT) aircraft (Fig. 1) is a remotely piloted research vehicle that has completed flight tests to demonstrate advanced fighter technologies at NASA Ames Research Center's Dryden Flight Research Facility. The HiMAT vehicle is a 0.44-scale version of an envisioned small, single-seat fighter airplane. The mission profile of HiMAT (Fig. 2) included a launch from a B-52 aircraft and the acquisition of flight test data. The vehicle was then flown by a NASA test pilot in a fixed ground-based cockpit to a horizontal landing on the Edwards dry lakebed. The vehicle was flown with cockpit display instruments until the landing approach phase of the flight when the camera aboard the aircraft was activated to provide the pilot with a television display during the approach.

During the operational phase of the HiMAT program, the lateral-stick gearing gain used in the aircraft approach was altered from a variable gain schedule (derived from simulation) to a constant gain schedule. The schedules were changed in response to pilot complaints about oversensitivity in the lateral stick that required high pilot compensation. Before the modified gain schedule was implemented into the primary control system (PCS), it was evaluated in the HiMAT simulator using an instrument landing system (ILS) display; the schedule was found to be satisfactory. Postflight comments from HiMAT pilots indicated that the handling qualities during landing approach were significantly improved as a result of the modified gain schedule.

In a separate development, a visual display that was used for engineering purposes was implemented into the simulator during the latter portion of the flight test program when simulation was no longer required to support the remaining flights. While the addition of a visual display is known to significantly improve the fidelity of a simulation system, the need for such a system

in RPRV simulation at Ames Dryden was felt to be reduced since pilots had an opportunity to conduct proficiency flights with an RPRV Piper Comanche PA-30 aircraft. Nevertheless, when a visual display became available in the simulation laboratory, a decision was made to determine the effectiveness of this type of visual display in the simulation of visual RPRV flight. The RPRV evaluation described in this paper was designed to focus on the utility of a visual display of this type while studying the influence of changes in lateral-stick gearing gains of remotely piloted research vehicle handling qualities during simulated approaches and landings. This study was undertaken to compare evaluations of pilots using a simulated visual display of the runway scene and a simulated ILS display with the results of actual flight tests, using the HiMAT aircraft as a representative remotely piloted research vehicle.

RPRV Visual Landing Approach

The remotely piloted visual landing approach creates a unique set of problems for the pilot. The television system aboard the vehicle does not provide all the visual cues found in the real world. In particular, the peripheral field of view is not available to the RPRV pilot. A pilot first detects large attitude excursions from his peripheral field of view. These attitude excursions are not immediately interpreted in roll as they are in pitch for a two-dimensional RPRV visual display.² Lack of motion feedback to the RPRV pilot prevents him from experiencing the acceleration cues necessary to satisfactorily control the aircraft in turbulence. This increases the possibility of exceeding boundary limitations in the flight envelope. These factors were present during the HiMAT visual landing approach. Because of this, a well-behaved vehicle is required for RPRV flight. The lack of the visual and motion cues, particularly in adverse situations, forced the pilots to fly the HiMAT vehicle in an open-loop fashion.

HiMAT Landing Approach Procedure

Standard procedures for the HiMAT vehicle flight approach included a visual transition by the pilot from the ILS glideslope indicators to the television monitor when the vehicle was 5.6 to 9.3 km (3 to 5 n. mi.) from touchdown. This depended primarily on the sun angle and the viewing range of the camera. Once the television display was activated, it became the primary source of information for the pilot. The desired touchdown conditions are presented in Table 1. The conditions are broadly defined, as the pilot was asked to make a long, straight-in approach on the glideslope to the lakebed. Following the flight, the pilot was asked to give handling qualities ratings and comments for both the ILS and the visual portions of the actual landing approach task.

HiMAT Television Camera and Display

The forward-looking television camera aboard the aircraft was rigidly mounted in the canopy (Fig. 3). The camera was mounted over the fuselage centerline with a 7° depression angle. The camera field of view was approximately 14° in the horizontal plane and 10° in the vertical plane (Fig. 4). It included the noseboom configuration, which the pilots considered useful as an attitude indicator.

The television monitor had a 525-line vertical scan, which is approximately the quality of a standard video monitor.

Simulation Facility

The simulation laboratory at Ames Dryden was used for the evaluation. The HiMAT simulation system³ was essential to the flight qualification of the HiMAT vehicle. The visual display system was integrated into the simulation system after the developmental stages of the HiMAT program were completed.

Simulation Cockpit

The evaluation was conducted in the HiMAT fixed-base simulator shown in Fig. 5. The instrument panel layout was identical to that used during flight. The ILS and glideslope indicators were used to ensure task consistency. The feel system of the control stick that was used in flight was implemented into the simulator.

Simulation Software

The all-digital version of the HiMAT simulation³ was used for the evaluation. This version is implemented completely through software; that is, all flight control system hardware elements were modeled. This version was the principal tool for the final design and development of the primary control system (PCS). The all-digital version was also used for initial pilot evaluations in the flight program.

The portion of the PCS relating to roll control is presented in Fig. 6. The lateral-stick gearing gain (KRD) modifies the lateral stick input (DAP) before routing to both the differential elevator command (DA) and through the aileron-rudder interconnect gain (KARI) to the rudder command. Roll-rate feedback is passed through the roll-rate feedback gain (KRP) to DA. The location of the aircraft's center of gravity (c.g.) was maintained at 5 percent of the mean aerodynamic chord (MAC). This c.g. location resulted in a bare airframe that had an unstable 2- to 3-percent longitudinal static margin.

Visual Display

The simulator was operated with an Evans and Sutherland Picture System⁴ by using a calligraphic monitor. The monitor provided a 28° field of view in the horizontal plane and a 21° field of view in the vertical plane. This field of view was larger than that used in the actual flights; however, the peripheral field of view was still nonexistent. The monitor had a 4094-line scan in the vertical plane. This produced a level of resolution significantly higher than that on the television monitor that was used in flight. The refresh rate was maintained at 60 frames per sec. The 7° depression angle of the camera aboard the aircraft was implemented into the visual display simulation. The noseboom configuration of the test vehicle was included in the visual display.

Test Protocol

The study was structured to evaluate the lateral-stick gearing gain in simulated RPRV approaches and landings. A lateral landing

approach task was used throughout the evaluation to exercise the effect of the lateral-stick gearing gain on the aircraft's lateral-directional characteristics. The test matrix was designed to detect those lateral-stick gearing gains which may or may not be suitable for an RPRV landing approach.

Lateral-Stick Gearing Gain Test Schedules

The lateral-stick gearing gain schedules used in the evaluation consisted of the modified gain used in flight ($KRD = 1.6 \text{ deg/cm}$ (4 deg/in)) and four additional constant gains ($KRD = 3.1$ (8), 4.7 (12), 6.3 (16), 7.9 (20) deg/cm (deg/in)), shown in Fig. 7. The original gain schedule used in flight (for S.I. units, $KRD = 33,931/\bar{q}$; for U.S. units, $KRD = 1800/\bar{q}$) was used solely as a point of interest and had a variable range ($KRD = 3.1$ to 7.1 deg/cm (8 to 18 deg/in)). The original gain schedule was not used in the validation portion of the evaluation because it had been replaced with the modified gain in the actual flight test program. The six gain schedules were presented to the pilot in a blind sequence. This allowed the gains to be evaluated in an objective fashion.

Initial Conditions

The initial conditions of the simulated landing approach are presented in Table 2. The HiMAT aircraft was positioned with a lateral deviation of about 6° to the left of the horizontal glideslope (Fig. 8). An alternative set of conditions, shown in Fig. 9, positioned the aircraft on the glideslope with no lateral deviation, but at a lower altitude (1372 m (4500 ft)). This set of initial conditions allowed a greater number of approaches to be flown within a limited period of time (when time was at a premium). This alternative set of initial conditions did not prevent the pilots from adequately evaluating the roll response characteristics of the aircraft.

The landing approaches were first conducted under ILS conditions and then repeated using the visual display. Each set of conditions was flown in both calm and turbulent air. The calm conditions were representative of actual approaches flown by the HiMAT pilots. The Dryden form of the turbulence spectra provided disturbances of 0.91 m/sec (3 ft/sec) rms in each axis simultaneously. This turbulence created adverse conditions under which a gain schedule could be evaluated. The gusts were washed out 46 m (150 ft) above the runway surface.

Evaluation Pilots

Three NASA test pilots were selected for the evaluation: Pilot 1 had HiMAT flight experience with the modified gain schedule; pilot 2 had HiMAT flight experience with both the original and modified gain schedules; and pilot 3 had no previous HiMAT flight experience, but had extensive handling qualities evaluation experience.

Test Procedure

The pilots were asked to fly the approach to touchdown with a particular lateral-stick gearing gain. Desired touchdown conditions were identical to those used in actual landing approaches. Practice approaches were flown by each pilot to

eliminate any learning curve effects. The pilots were encouraged to fly more than one approach if they felt it necessary to properly evaluate a configuration. Following each approach, the pilots evaluated the lateral-directional handling qualities by using a Cooper-Harper rating scale (Fig. 10). Each pilot was also asked to comment on the roll response and maneuverability of the vehicle. Any overcontrol or lateral pilot-induced oscillation (PIO) tendencies were also noted. Both the flight and simulation approaches were made without rudder inputs.

Results

The constant gain schedules were flown by each pilot under ILS and visual conditions in both calm and turbulent air. The handling qualities results display distinct trends for increasing lateral-stick gearing gains. These results are presented in terms of Cooper-Harper pilot ratings, and performance level ratings in accordance with military-specification (MIL-SPEC) MIL-F-8785C.⁵ A tabulation of the pilot ratings and comments for each approach in the evaluation is located in Ref. 6.

ILS Approaches

The simulation results for the ILS approaches in calm and turbulent air are presented in Figs. 11(a) and 11(b). The trend appears to be consistent for both types of atmospheric conditions. The modified gain schedule ($KRD = 1.6 \text{ deg/cm}$ (4 deg/in)) was found to be sluggish, although desired performance could be achieved most of the time. A KRD value of 4.7 deg/cm (12 deg/in) produced a level I performance for the pilots in most cases. The turbulent conditions did not significantly degrade the pilots' evaluation of the vehicle's handling qualities.

Visual Display Approaches

The simulation results for the visual display approaches in calm and turbulent air are presented in Figs. 11(c) and 11(d). The lower gains in calm air (Fig. 11(c)) were preferred over the ILS approaches flown under identical conditions (Fig. 11(a)). Conversely, higher gains were preferred with the ILS approaches (Fig. 11(a)) than with visual display approaches (Fig. 11(c)). This behavior was attributed to the apparent increase in response when visual display approaches were flown. This increase in response led to improved roll control power with the lower gains and overcontrol tendencies with the higher gains. A KRD gain of 3.1 deg/cm (8 deg/in) yielded consistent level I performance under calm conditions.

The visual display approaches flown in turbulent air (Fig. 11(d)) resulted in degraded performance compared to the calm conditions (Fig. 11(c)). The gusts were enhanced by the visual display and were considered by the pilots to be a factor in the control power of the vehicle. This resulted in solid level II performance and a slight preference for lower gains, although the trend is less clear.

Comparison With Flight Results

The handling qualities ratings and comments for actual HiMAT landing approaches are presented in Table 3. The ratings reflect the improvement in

lateral-directional response provided by the modified gain schedule ($KRD = 1.6 \text{ deg/cm}$ (4 deg/in)). These flight ratings, obtained from the ILS and visual portions of the landing approaches, were averaged and compared with corresponding averaged simulation ratings from the calm-air ILS and visual display approaches which best represented actual flight conditions. These results (for the two pilots with HiMAT flight experience) are shown in Fig. 12. The visual display ratings compare well with the visual flight ratings, indicating the potential of the visual display simulation for obtaining results comparable to those found in flight. The ILS results in Fig. 12 show reduced correlation relative to the visual results. The ILS handling qualities ratings (Figs. 11(a) and 11(b)) indicate that a higher gain is required to satisfactorily correlate with the ILS flight results.

Pilot comments made following the visual HiMAT vehicle flight approaches were consistent with those found in the visual simulation. Pilot 2 said the constant gain ($KRD = 1.6 \text{ deg/cm}$ (4 deg/in)) was insensitive in roll during flight but provided good lateral control; this was consistent with his comments on the visual simulation. Pilot 1 said the aircraft was sluggish in roll in the ILS simulation but acceptable in visual flight. With the use of the visual display simulation, pilot 1 noted improved roll response, although some sluggishness was still present. He felt the visual display provided significantly improved cues for the HiMAT approach, as did pilot 2. Pilot 3 stated that the visual display increased the apparent sensitivity of the gains and amplified large bank-angle excursions when compared with the ILS approaches.

The lateral control activity under ILS and visual conditions for the simulation and flight approaches compared satisfactorily, as indicated in Fig. 13. Conflicting scheduling of simulation prevented the acquisition of data from the same pilot (Fig. 13). Therefore, a comparison of the relative control activity areas is only qualitative.

MIL-SPEC Compliance

The HiMAT simulation roll characteristics were documented at the conclusion of the evaluation. The fidelity of the simulation was considered very good with respect to the aircraft's flight performance. The steady-state roll rate for a maximum lateral step input using the modified gain schedule was 48 deg/sec at 250 knots . A roll-mode time constant of 0.4 sec was measured from the data, which is considered to be level I for class IV, category C aircraft in MIL-SPEC MIL-F-8785C.⁶ It must be emphasized that MIL-F-8785C is a manned-aircraft criterion.

The simulation roll performance results for the five constant gain schedules used in the evaluation are presented in Fig. 14. The MIL-F-8785C handling qualities boundaries (levels I, II, and III) are also shown; however, these boundaries are highly suspect.⁷ There are indications that these boundaries should be reduced by half for military-type remotely piloted vehicles. However, according to the pilot ratings and comments recorded in this evaluation, these boundaries should be relaxed for remotely piloted research vehicles. Under ideal conditions, a research mission is considered to be

less demanding than a combat or military mission. A comparison of the time-to-bank results for the constant gain schedules in Fig. 14 shows roll performance of level I for the higher gains. The roll performance for these gains was rated level II in the evaluation. The original gain schedule is also illustrated in Fig. 14; it displays level I roll performance characteristics based on MIL-F-8785C, but received level II ratings in the evaluation.

The HiMAT simulation maximum roll control force was found to be level II for class IV, category C aircraft in MIL-F-8785C. The allowable breakout force for the lateral stick was level I to II. Again, these comparisons have been made to manned-aircraft criteria. The HiMAT lateral control stick characteristics are presented in Table 4. No specific pilot comments regarding the stick breakout or force gradient were noted.

Discussion

The pilots were able to complete the required task under both nominal and adverse conditions. Determining an optimal range for constant lateral-stick gearing gains became a choice between the pilots' ability to perform small precision corrections and to perform gross maneuvers. The pilots generally found the lower gains satisfactory for precision corrections throughout the task, although the aircraft appeared sluggish or insensitive in roll. This insensitivity became unacceptable in the presence of excessive turbulence or in a situation during an actual approach that would require rapid maneuvering. Extreme conditions of this nature were rarely encountered during the landing approach phase of the flight. The pilots expressed no concern about the controllability of the vehicle with the lower gains. The higher gains provided the maneuverability, but were oscillatory and had a tendency to result in overcontrol or in lateral PIO. The pilots experienced lateral PIO tendencies with the higher gains on the visual display approaches in calm and turbulent air (Figs. 11(c) and 11(d)). The optimal range of constant lateral-stick gearing gain schedules had to provide adequate maneuverability and allow for precision corrections during the simulated HiMAT aircraft visual approach. Considering that the actual HiMAT vehicle landing approaches were flown in well-behaved atmospheric conditions, a slightly higher lateral-stick gearing gain than the modified gain schedule used in flight would provide solid lateral control to the RPRV pilot and allow for some increased maneuvering capability. Values of KRD between 2.4 and 3.1 deg/cm (6 and 8 deg/in) provided such requirements.

The original gain schedule was flown under the simulated flight conditions in the evaluation, and it was found to induce lateral stick sensitivity problems and overcontrol tendencies. It was not included in the evaluation results. Based on actual flight experience, the original gain schedule was undesirable because of its oversensitivity in roll; the higher constant gains evaluated in the study that represented the higher range of the original gain schedule confirmed this result.

Concluding Remarks

A simulator evaluation of a remotely piloted research vehicle (RPRV) was conducted to determine the utility of a visual display when studying the

influence of changes in lateral-stick gearing gains during landing approaches. Handling qualities ratings and comments obtained from the pilots using a simulated visual display of a runway scene and a simulated instrument landing system (ILS) display were compared with the results of actual flight tests. The roll characteristics of the RPRV were also compared to handling qualities criteria in MIL-F-8785C. The highly maneuverable aircraft technology (HiMAT) aircraft was the remotely piloted research vehicle studied in this evaluation. This vehicle is a 0.44-scale version of an envisioned small, single-seat fighter airplane.

The visual display simulation of the RPRV provided an adequate representation of the visual flight landing approach, which improved the validity of the simulator. Improved cues regarding roll response resulted from the use of the visual display. The presence of these cues was essential to the lateral control of the vehicle during landing approaches. The use of a visual display can increase the simulator's effectiveness as a design tool in RPRV flight programs.

The handling qualities results obtained from the visual landing approach simulation compared well with the visual flight results. Handling qualities ratings and comments for a given lateral-stick gearing gain were consistent with those found from actual flight landing approaches. A range of lateral-stick gearing gains was found that provided adequate maneuverability and allowed for precision movements during a simulated visual landing approach. This range of gains was slightly higher than the modified gain that was flown in flight landing approaches.

The ILS simulation results suggested that the modified lateral-stick gearing gain schedule used in flight does not provide desired performance during a flight landing approach. This did not correlate well with the flight results. The ILS simulation results indicated that a lateral-stick gearing gain higher than the optimal range found with the visual simulation produced desired performance under all evaluation conditions.

The roll handling qualities characteristics of the simulated test vehicle were determined during the evaluation. The roll-mode time constant was calculated to be level I and the maximum roll control force was measured and determined to be level I to II according to MIL-F-8785C. The roll performance of the optimal range of lateral-stick gearing gains determined from this evaluation improved the handling qualities ratings by approximately one level over the modified gain that was used in flight. It should be emphasized that manned-aircraft handling qualities criteria for military missions were applied to the results. The roll performance results from this study indicate that the MIL-F-8785C roll performance handling qualities boundaries could be relaxed for remotely piloted research vehicles.

References

- ¹Reed, R. Dale, "RPRVs: The First and Future Flights," *Astronautics & Aeronautics*, vol. 12, no. 4, Apr. 1974, pp. 26-42.
- ²Reed, Lawrence E., "Visual-Proprioceptive Cue Conflicts in the Control of Remotely Piloted Vehicles," *Air Force Human Resources Laboratory*, AFHRL-TR-77-57, 1977.
- ³Evans, Martha B., and Schilling, Lawrence J., "The Role of Simulation in the Development and Flight Test of the HiMAT Vehicle," *NASA TM-84912*, 1984.
- ⁴Mantle, M., and Mortenson, D., "Picture System 2/PDP-11 Reference Manual," Second ed., Evans and Sutherland Corp., E and S 901130-001 A1, 22 Nov. 1977.
- ⁵"Military Specification Flying Qualities of Piloted Airplanes," MIL-F-8785C, Nov. 1980.
- ⁶Sarrafian, Shahan K., "Evaluation of HiMAT Aircraft Landing Approach Lateral Control Gearing Using Simulation and a Visual Display," *NASA TM-84916*, 1984.
- ⁷Prosser, Charles F., and Wiler, Curtiss D., "RPV Flying Qualities Design Criteria," *Air Force Flight Dynamics Laboratory*, AFFDL-TR-76-125, 1976.

Table 1 HiMAT aircraft desired touchdown conditions

Longitudinal touchdown dispersion, km (n. mi.)	±1.9 (±1)
Lateral touchdown dispersion, m (ft)	±46 (±150)
Touchdown speed (indicated), knots	180 to 190
Touchdown altitude rate, m/s (ft/s)	0 to 1.5 (0 to 5)
Touchdown bank angle, deg	±5°

Table 2 Simulated landing approach initial conditions

Altitude, m (ft)	1676 (5500)
Range, km (n. mi.)	16 (8.4)
Lateral deviation, deg	6
Angle of attack, deg	2
Angle of sideslip, deg	2
VCAS, knots	250
\bar{q} , N/m ² (lb/ft ²)	10,007 (209)
M	0.42
c.g., percent of MAC	5
Fuel, percent	50

Table 3 HiMAT aircraft landing approach flight ratings and comments

(5 percent of MAC c.g. configuration; responses
refer to lateral-directional handling qualities)

Pilot	Flight ^a	KRD, deg/cm (deg/in)	Cooper-Harper rating		Comments
			ILS portion	Television portion	
2	H1-10-18	33,931/ \bar{q} (1800/ \bar{q})	6	6	Very prone to pilot over- control of centerline; would have needed to go to backup in turbulent cross- wind (PR = 7)
2	H2-6-8	1.6 (4)	3	4	Much better than previous original gain handling qualities; television por- tion of the approach was insensitive in roll
2	H2-8-8	1.6 (4)	3	3	Low workload; much more fly- able than prior to develop- ment of constant gains
1	H2-10-14	1.6 (4)	4	3	Sluggish in roll on simulator; liked it in roll in flight
1	H2-11-15	1.6 (4)	2	2	Nice control forces and res- ponse

^aEntries refer to vehicle number, launch number, and number of times the vehicle was aloft.

Table 4 HiMAT lateral control stick characteristics
(Maximum lateral stick = ± 10.8 cm (± 4.25 in))

Stick characteristics	Handling qualities level
Force gradient = 8.8 N/cm (5.0 lb/in ²)	Not applicable
Maximum roll control force = 95.0 N (21.3 lb)	II
Breakout force = 11.6 N (1.6 lb)	I to II

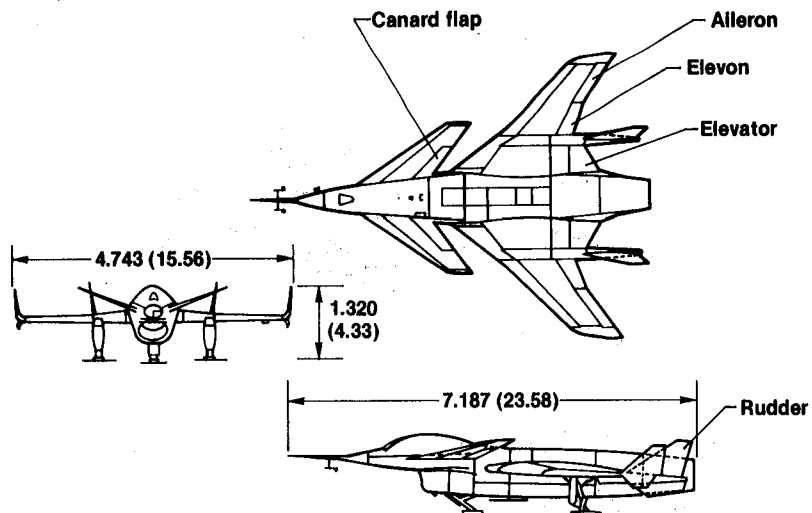


Fig. 1 Three-view of HiMAT vehicle. Dimensions are in m(ft).

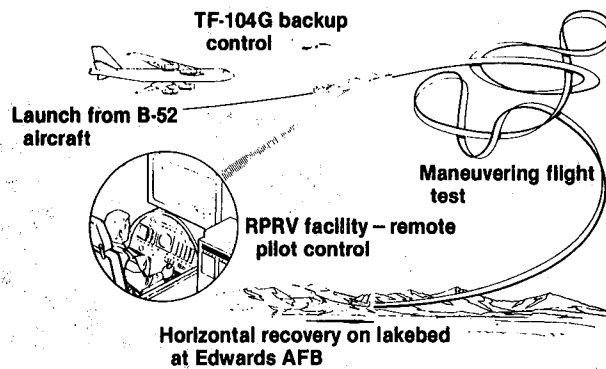


Fig. 2 HiMAT mission profile.

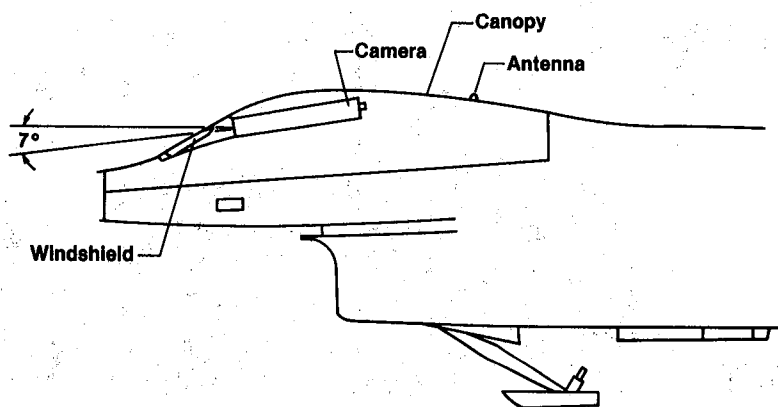


Fig. 3 HiMAT vehicle camera location.


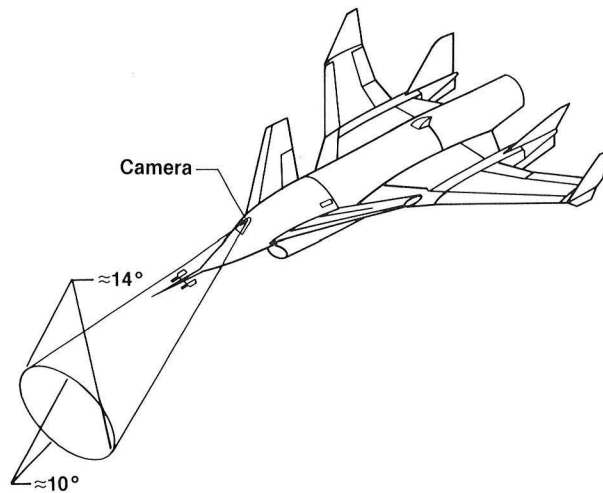


Fig. 4 HiMAT vehicle camera field of view; 14° in the horizontal plane and 10° in the vertical plane.

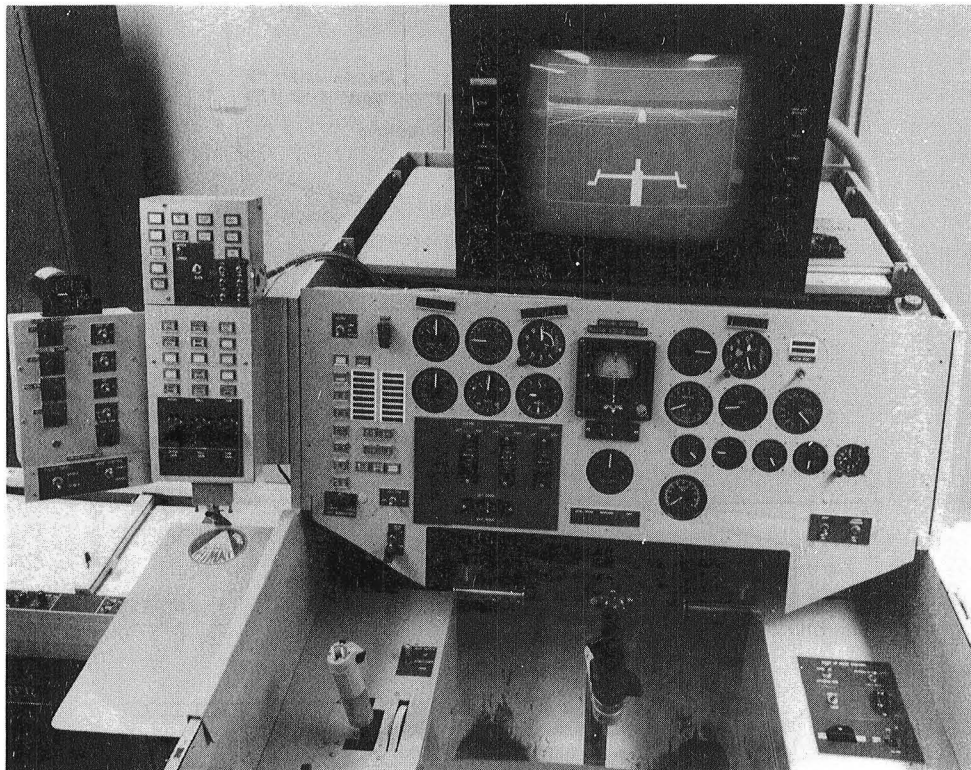

ECN 22757

Fig. 5 HiMAT simulation cockpit.

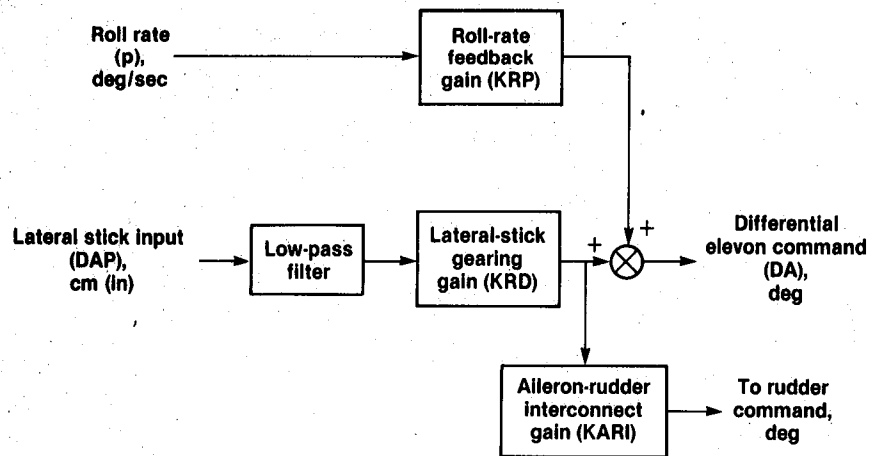


Fig. 6 HiMAT vehicle primary roll control system.



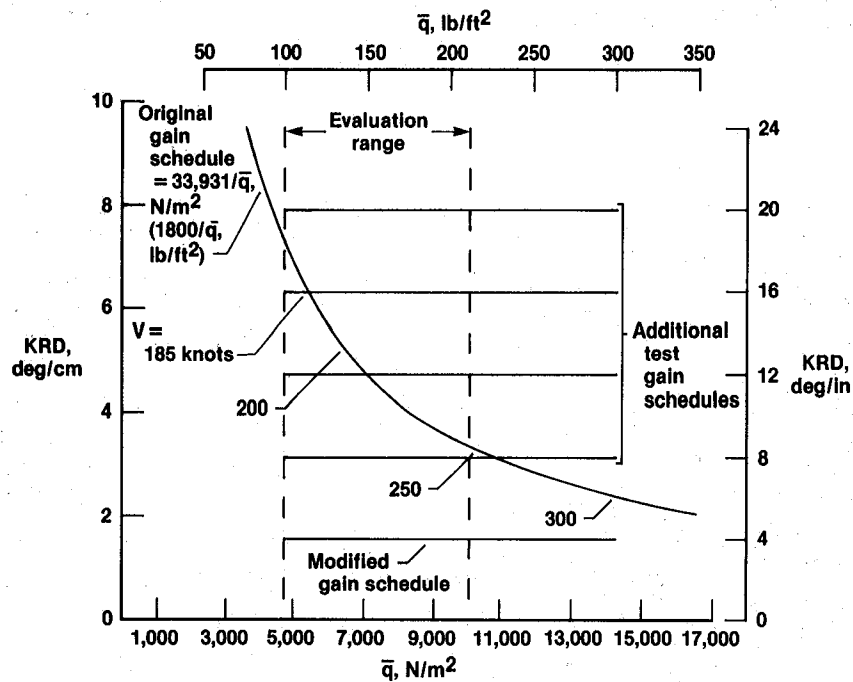


Fig. 7 HiMAT lateral-stick gearing gain schedules. Mach number < 1.0 ; c.g. = 5 percent of MAC; and maximum lateral stick = ± 10.8 cm (± 4.25 in).

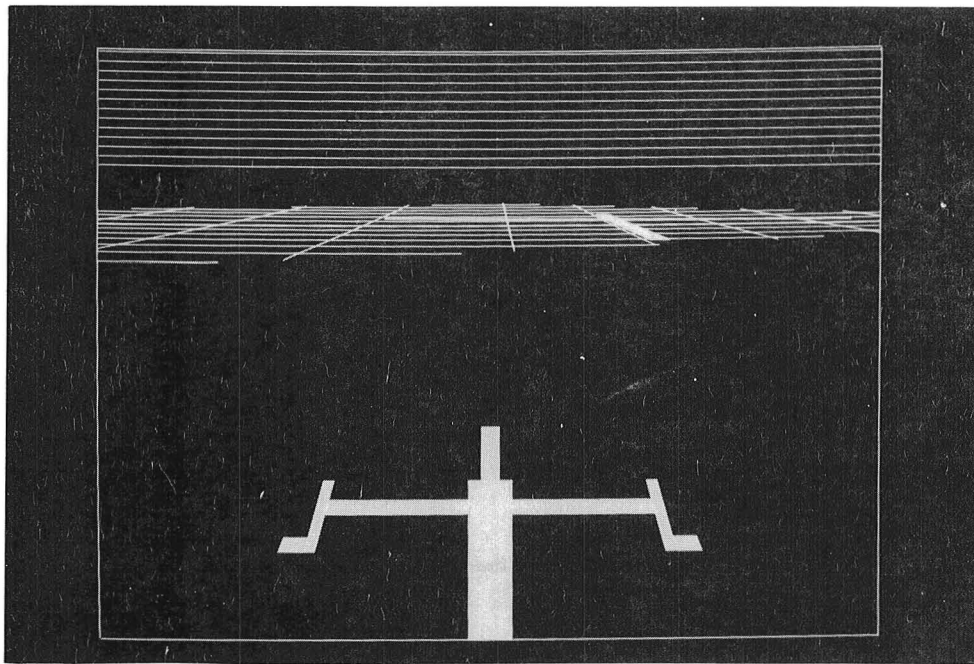

ECN 22755

Fig. 8 Simulated landing approach initial conditions; visual display, lateral offset.

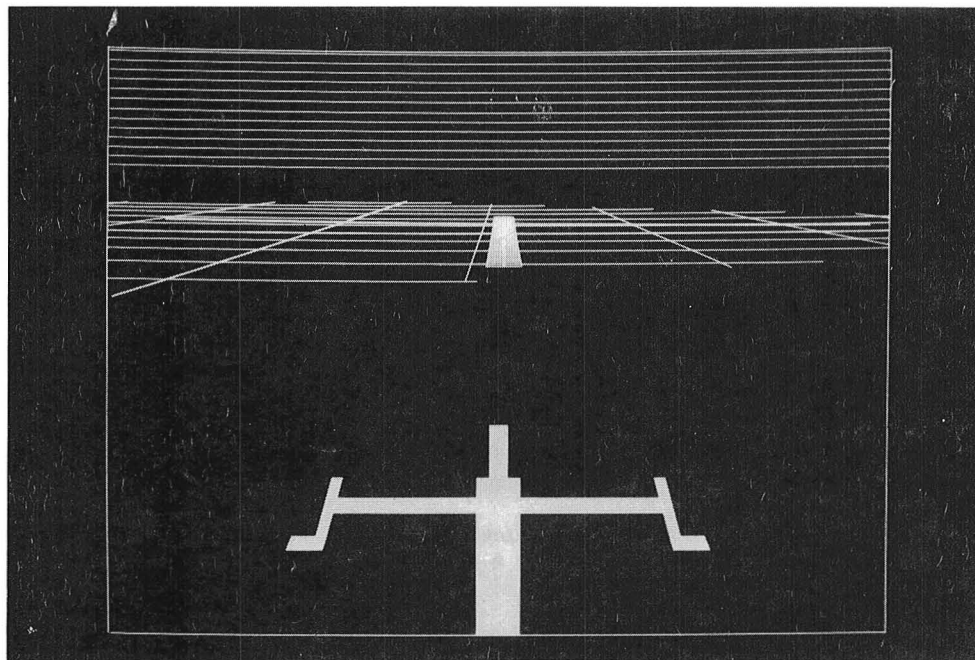

ECN 22756

Fig. 9 Simulated landing approach conditions on glideslope.



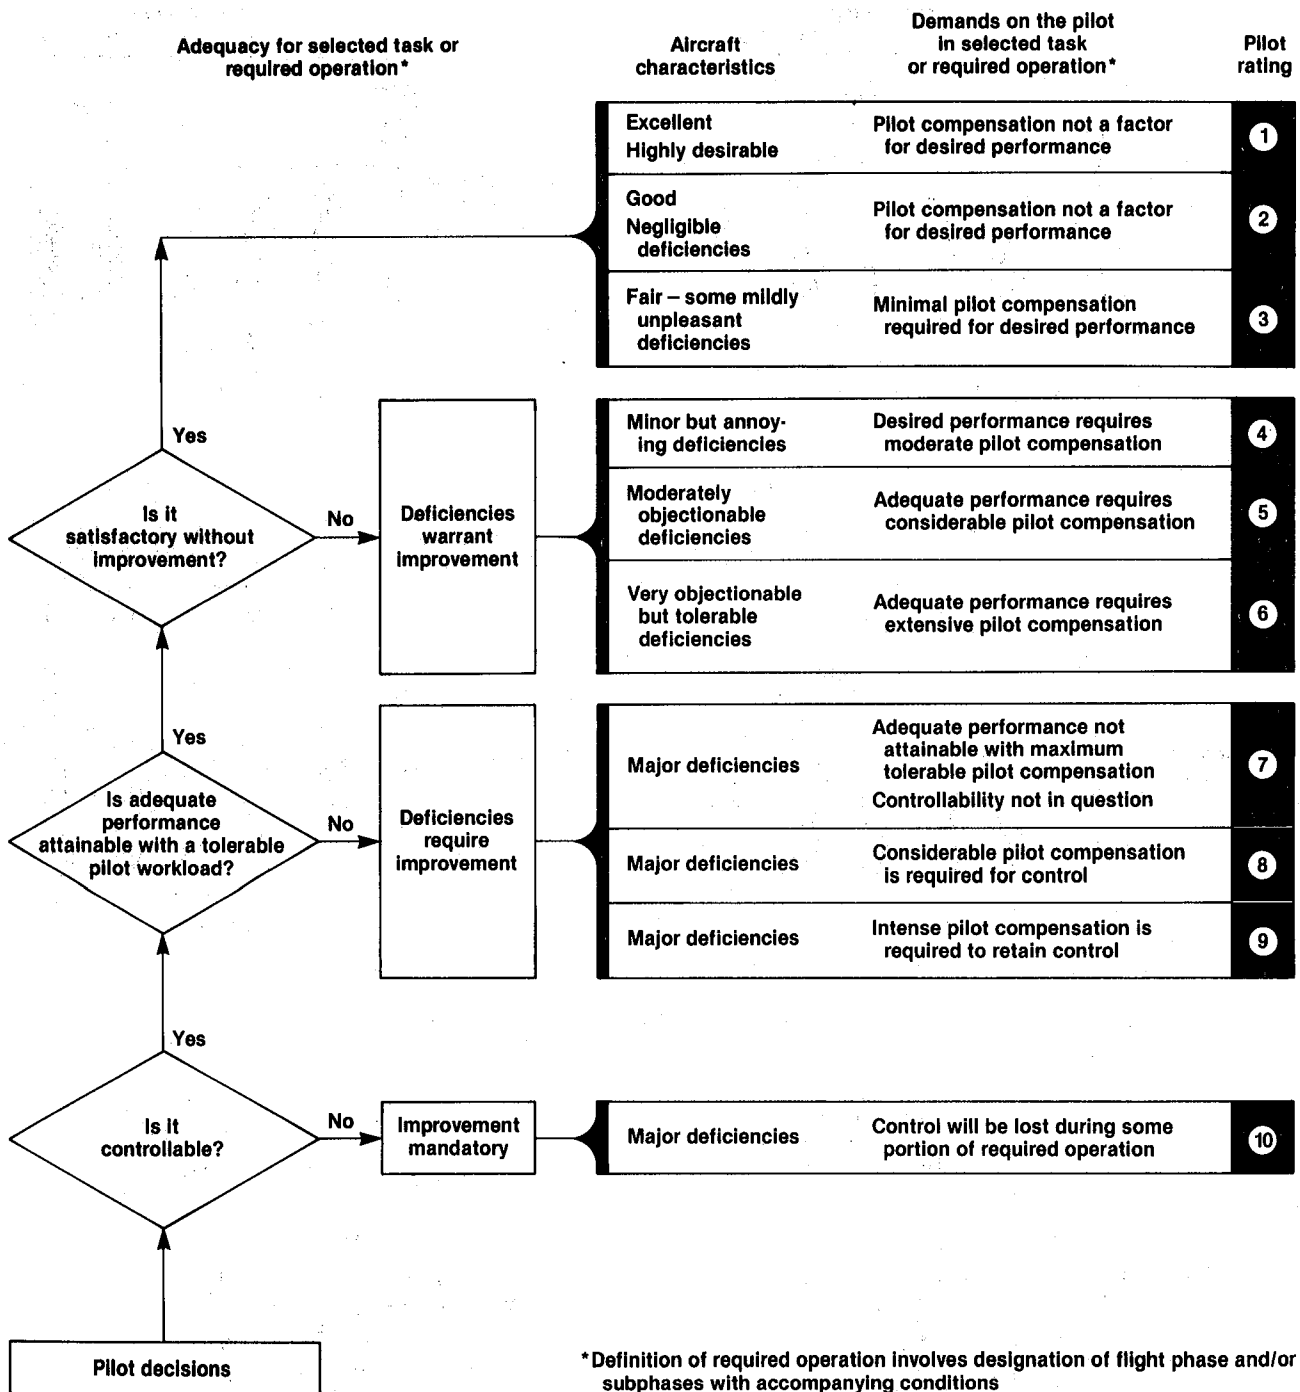



Fig. 10 Cooper-Harper pilot rating scale.

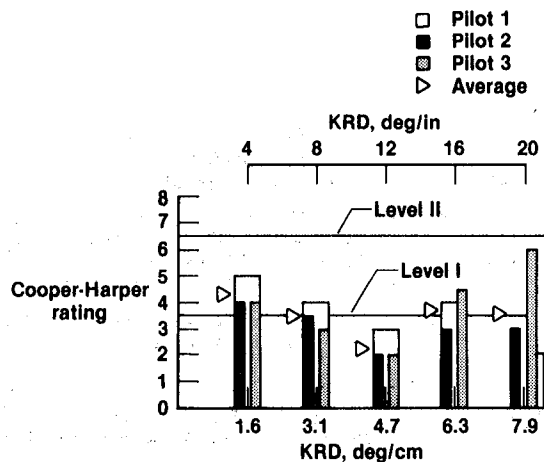


(a) ILS, calm.

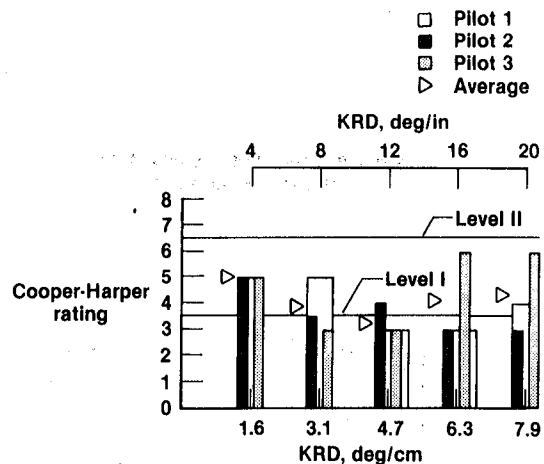

(b) ILS, gusts.

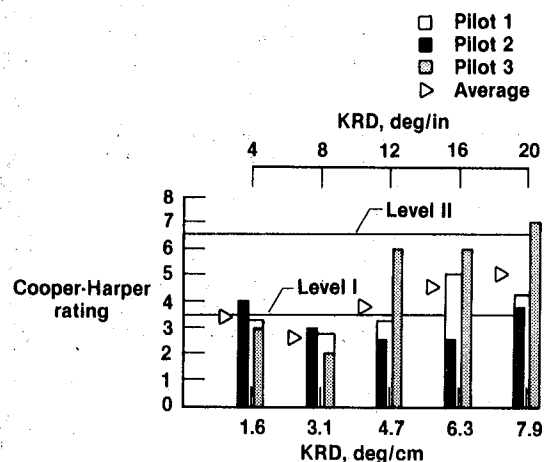


(c) Visual display, calm.

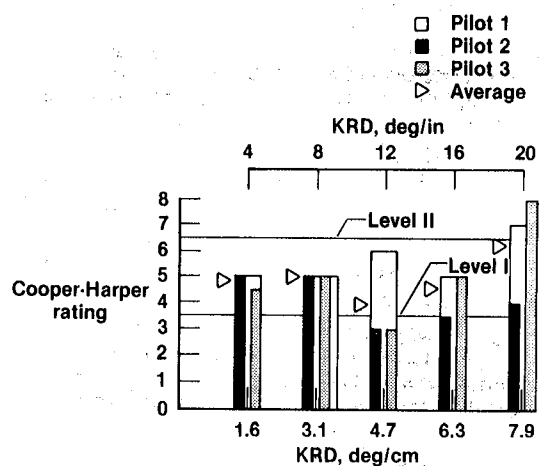


(d) Visual display, gusts.

Fig. 11 Simulation handling qualities results.

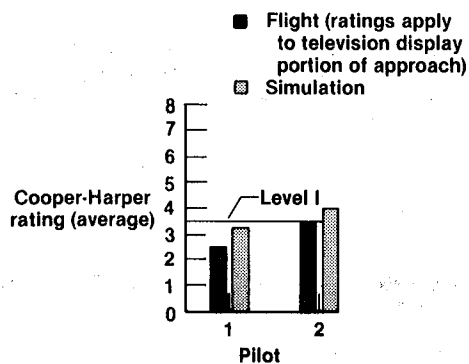

(a) Visual display.

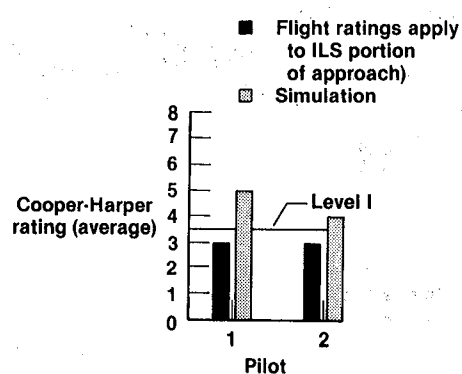

(b) ILS display.

Fig. 12 Comparison of flight and simulation results for HiMAT vehicle approach and landing. KRD = 1.6 deg/cm (4 deg/in); calm air.

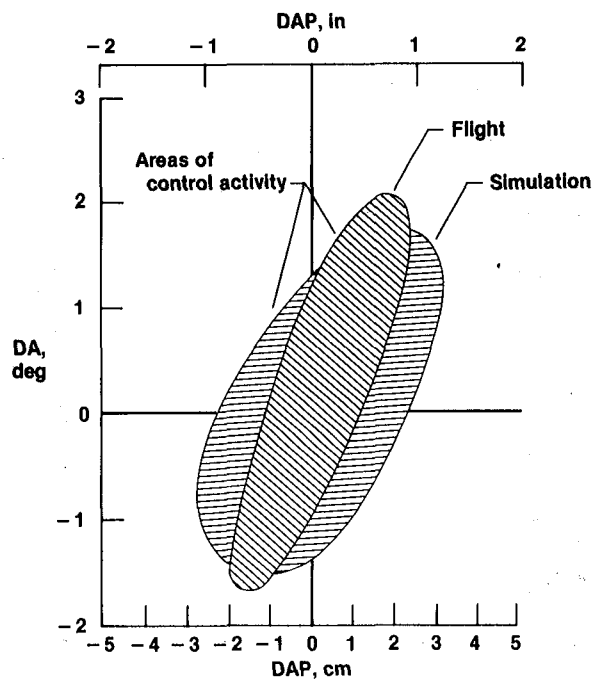


Fig. 13 Comparison of lateral control activity for HiMAT vehicle landing approach.

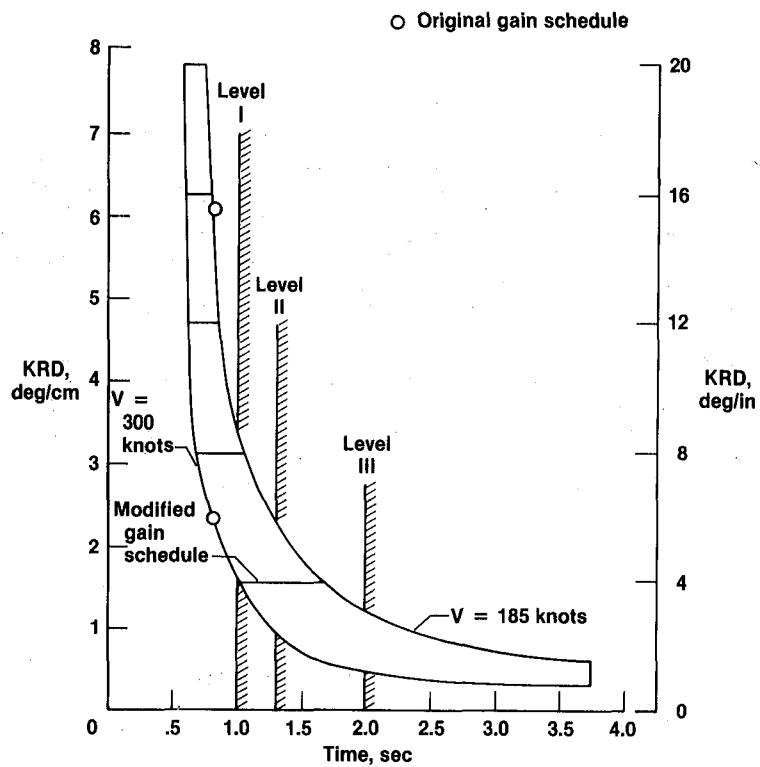


Fig. 14 HiMAT simulation landing approach time to 30° bank. Altitude = 1219 m (4000 ft); maximum lateral stick = ± 10.8 cm (± 4.25 in).

1. Report No. NASA TM-85903		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Simulator Evaluation of a Remotely Piloted Vehicle Lateral Landing Task Using a Visual Display				5. Report Date August 1984	
				6. Performing Organization Code	
7. Author(s) Shahan K. Sarrafian				8. Performing Organization Report No. H-1246	
9. Performing Organization Name and Address NASA Ames Research Center Dryden Flight Research Facility P.O. Box 273 Edwards, CA 93523				10. Work Unit No.	
				11. Contract or Grant No.	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546				13. Type of Report and Period Covered Technical Memorandum	
				14. Sponsoring Agency Code RTOP 533-03-11	
15. Supplementary Notes This paper was prepared as AIAA Paper 84-2095 for the AIAA Atmospheric Flight Mechanics Conference, Seattle, Washington, August 21-23, 1984.					
16. Abstract A simulator evaluation of a remotely piloted research vehicle was conducted at NASA Ames Research Center's Dryden Flight Research Facility to determine the utility of a visual display when studying the influence of changes in the lateral-stick gearing gains during landing approaches. The test vehicle used in this study was a highly maneuverable aircraft technology (HiMAT) aircraft, which is a 0.44-scale version of an envisioned small, single-seat fighter airplane. Handling qualities ratings and comments obtained from pilots using a simulated visual display of a runway scene and a simulated instrument landing system (ILS) display were compared with the results of actual flight tests. The visual display was found to provide an adequate representation of the test vehicle in a visual landing approach, and it improved the roll response cues provided to the pilot. The handling qualities ratings and comments for flight and simulation visual landing approaches correlated well. The ILS simulation results showed reduced correlation compared with the flight results for ILS approaches. Handling qualities criteria for remotely piloted research vehicles are also discussed in this paper.					
17. Key Words (Suggested by Author(s)) Remotely piloted research vehicle (RPRV) Handling qualities Simulation Visual display				18. Distribution Statement Unclassified-Unlimited STAR category 08	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 14	
				22. Price* A02	

*For sale by the National Technical Information Service, Springfield, Virginia 22161.

