

**HELMET-MOUNTED PILOT NIGHT VISION SYSTEMS:
HUMAN FACTORS ISSUES**

Sandra G. Hart
Aerospace Human Factors Research Division

Michael S. Brickner
National Research Council, Research Associate
NASA Ames Research Center
Moffett Field, California

ABSTRACT

Helmet-mounted displays of infrared imagery (forward-looking infrared (FLIR)) allow helicopter pilots to perform low-level missions at night and in low visibility. However, pilots experience high visual and cognitive workload during these missions, and their performance capabilities may be reduced. Human factors problems inherent in existing systems stem from three primary sources: (1) the nature of thermal imagery, (2) the characteristics of specific FLIR systems, and (3) the difficulty of using a FLIR system for flying and/or visually acquiring and tracking objects in the environment. The pilot night vision system (PNVS) in the Apache AH-64 provides a monochrome, 30° by 40° helmet-mounted display of infrared imagery. Thermal imagery is inferior to television imagery in both resolution and contrast ratio. Gray shades represent temperature differences rather than brightness variability, and images undergo significant changes over time. The limited field of view, displacement of the sensor from the pilot's eye position, and monocular presentation of a bright FLIR image (while the other eye remains dark-adapted) are all potential sources of disorientation, limitations in depth and distance estimation, sensations of apparent motion, and difficulties in target and obstacle detection. Insufficient information about human perceptual and performance limitations restrains the ability of human factors specialists to provide significantly improved specifications, training programs, or alternative designs. Additional research is required to determine the most critical problem areas and to propose solutions that consider the human as well as the development of technology.

INTRODUCTION

In most civil and military operations, helicopter pilots rely on visual cues to maintain situational awareness (e.g., estimate the orientation, altitude, speed, and direction of their vehicle; the location of hazards in the environment; and their geographical location). Maintaining visual contact with the environment is particularly important (and difficult) in nap-of-the-earth (NOE) flight, where pilots fly at altitudes between 10 and 30 ft, navigating in and among trees, hills, and buildings. During NOE flight, pilots must keep their eyes "out of the cockpit," rather than focused on displays within the cockpit. There is little margin for error. Existing electronic display systems do not provide adequately detailed information for visual flightpath control, and guidance algorithms do not yet exist for automatic NOE flight.

At night and in low visibility, the problem is more severe. Sufficient visual information about the environment is not available for pilots to navigate safely or identify relevant objects. For this reason, light-intensifying goggles and helmet-mounted displays of infrared imagery have been developed. This paper will focus on the unique visual environment created by the latter, as helmet-mounted displays of infrared imagery (alone or in combination with other sources of visual information) are integral to the design of many advanced helicopters.

Forward-looking infrared (FLIR) systems provide pilots with a monochromatic video image of the outside scene constructed from thermal differences among environmental features. Computer-generated flight symbology may be superimposed on the helmet-mounted display of FLIR imagery. Current FLIR pilot night vision systems (PNVS) can be used at night, in total darkness, or during the day, to allow pilots to "see" through blowing dust, smog, smoke, or concealing foliage.

The FLIR systems used in the Cobra AH-1S and the Apache AH-64 are turret-mounted on the nose of the helicopter. Their movement is slaved to the position of the pilot's helmet, allowing the pilot to move the 30° (vertical) by 40° (horizontal) instantaneous field of view (FOV) through a "field of regard" of $\pm 90^\circ$ in azimuth and 65° in elevation (from $+20^\circ$ to -45°) (fig. 1). The infrared sensor consists of an array of 180 detectors which provides 360 lines of resolution. This information is transformed into a 875-line video image which is displayed on a 1.92-cm combining lens (a monacle) mounted on the helmet immediately in front of the pilot's right eye. (fig. 2)

Given the integral role such systems are playing in advanced rotorcraft, it is surprising how little is known about human factors problems which are related to the use of these complex and highly demanding systems. The problems may be divided into three categories: (1) the unique nature of infrared images, (2) specific characteristics of the PNVS, and (3) problems related to the task of flying a helicopter at low altitudes in low-visibility conditions. This paper will focus on the most critical problem areas and evaluate their effects on pilot perception and performance.

CHARACTERISTICS OF THERMAL IMAGES

Thermal images are a visible representation of radiation in the infrared band (8-14 μm in the PNVS). Thermal radiation is detected by an array of 180 detectors, in current-technology systems, which can create a visual display with approximately 360 lines of horizontal resolution. The output of each detector is preamplified, entered into a scan converter, transformed into a video image, and displayed on a combining lens mounted on the pilot's helmet.

The temperature of an object depends on the properties of its component materials and on its exposure to natural or artificial sources of heat. Its "thermal signature" depends primarily on its heat-emitting characteristics. The quality of a thermal image depends on the thermal signatures of terrain features and objects; the presence of thermal variability in the environment and atmospheric conditions (e.g., ambient temperatures, moisture, dust, and haze); and the sensitivity and size of the detectors. Current systems have a limited bandwidth which acts as a low-pass filter, effectively limiting the detail with which objects can be depicted.

Since FLIR images are transformed into video images and displayed on a cathode ray tube (CRT), they inherently suffer from all of the shortcomings of video imagery (e.g., limited

resolution, restricted contrast sensitivity, and dynamic brightness range). In addition, they are displayed monochromatically and provide a two-dimensional representation of the three-dimensional world. In comparison to video images, the display provided by the PNVIS is also subject to the specific properties of FLIR technology and the unique characteristics of the thermal (as compared to the visual) properties of objects in the environment. Figure 3 depicts an example of a FLIR image with superimposed symbology.

The meaning of "bright" and "dark" in the thermal image is not necessarily equivalent to light and shade in the optical sense. An object may emit little heat because it is shaded, or for a variety of other reasons related to the nature of the material and its "thermal history" (Lloyd, 1975). Thus, in a given image, there may be "shades" which are partly equivalent to real optical shades, or there may be no shading whatsoever. The human eye has been trained to interpret dark spots as shaded areas. These are usually perceived as low spots or valleys in the terrain. Thus, pilots may try (inappropriately) to impose the same perceptual rules on thermal images. Furthermore, the brightness of a displayed object does not provide accurate range information because objects which emit high thermal energy may appear to be closer than they really are. Such misinterpretations of the terrain structure may have severe consequences for helicopter flight at very low altitudes.

The relative temperature of an object changes because of ambient temperature, internal heat production, and its heat-emitting characteristics. Thus, its infrared signature may change dynamically over time. Further, when the temperature of the "foreground" and "background" are near the same value (e.g., the "crossover" point) an object may disappear from the visual display. For example, a truck on a snow-covered field would be quite visible while its engine is running, but virtually invisible after sitting with its engine off for several hours. There are relatively predictable periods during each day when the temperatures of specific substances are very nearly equal. For example, water and vegetation may have two crossover points each day, under some conditions (fig. 4). When crossover occurs, the ability of a FLIR system to discriminate is severely degraded. The net result is very poor image quality (Berry et al., 1984).

During the day or soon after sunset, there may be high thermal contrasts, depending on the terrain and on atmospheric conditions. When this occurs, there are wide temperature gradients, which generate clear and highly detailed images. Later in the night, thermal contrasts gradually diminish and images become less detailed. In addition, the effect of solar thermal radiation on the temperatures of different substances varies and elements of terrain features may cool at different rates during the night. For example, leaves cool more rapidly than branches. Thus, late at night trees may look as if they have shed their leaves because their temperature approaches that of the ambient air temperature. It may be quite confusing for a pilot to pass a grove of fully-leaved trees on the way to a mission and a grove of apparently dormant trees on the way back.

On the other hand, because of the chemical processes, leaves may emit their own heat. Thus, when the polarity of the system is set so that dark shades represent cooler objects, leaves are very bright in contrast to their dark appearance in optical images. These "blonde" trees seem to merge into the background, making it difficult for pilots to spot them from a distance. Such dynamic changes require pilots to use complex rules of thumb to interpret visual images, yet accurate evaluations are critical for pilots flying below treetop level.

Urban areas generate and accumulate considerable heat during the day, but, as they cool during the night, temperatures tend to equalize. This can make it virtually impossible for a pilot to identify a specific object (such as a high building) which would stand out in an optical image.

Human-made sources of thermal radiation, such as engines, fires, and friction, provide small, but significant, sources of infrared radiation. An operating truck, for example, might have a hot spot near the location of the engine and another near the wheels. Thus, the thermal "signature" of the truck is quite different from its optical image. Furthermore, if the truck remains stationary, with its engine off, it may become difficult to discriminate from the surrounding terrain. The changing visual appearance of human-made objects presents a particularly critical problem for military pilots performing target identification and tracking.

Because infrared detectors are sensitive to relative rather than to absolute temperatures, and because most FLIR sensors scan horizontally (parallel to the horizon), the horizon may blend with the ground and sky (Bohm, 1985). The absence of a clear horizon line may have a detrimental effect on spatial orientation and altitude estimation.

Display Polarity

Pilots may elect to assign either light or dark values to "hot" objects in the environment. Depending on the circumstances, they may alternate between the two polarities, selecting the one that provides the clearest image. Unlike the difficulties that people encounter in interpreting negatives of optical images, pilots can often improve their ability to recognize objects and interpret terrain features by switching the polarity of the FLIR display. For example, the sky is usually perceived as a bright area in an optical image, and it is always colder than the terrain. Thus, when the polarity is set to white-cold, the sky will appear to be bright. However, this will coincidentally result in some shaded areas also appearing as bright areas, in contrast to everyday experience. Thus, under a specific set of circumstances, one polarity might provide the most interpretable image for targeting or geographical orientation, while the other might be optimal for pilotage.

Gain and Level

The visual display may, at any given moment, present only a sample of the dynamic temperature range. "Gain" and "level" controls allow the pilot to select the desired range of displayed temperatures. A specific combination of gain and level may or may not be optimal for a particular task. For example, if gain and level are set to be very sensitive to temperature variations within hot target areas, an insufficient number of gray shades might be available to provide a detailed image of the general scene. Some advanced systems offer automatic control over gain and/or level, to provide an optimal presentation of the average range of temperatures, without requiring the pilot to make control adjustments. This solution, while intended to reduce pilot workload, may be suboptimal for detecting a specific object in a given setting.

In summary, thermal images have some unique characteristics that result from the nature of infrared radiation. Human perceptual skills, which provide efficient tools for interpreting the "optical world," may be misleading when applied to thermal images. Research is necessary to (1) determine how the unique characteristics of infrared imagery interact with various aspects of human performance, (2) define the skills that are necessary to use FLIR displays of thermal images, and (3) establish how such skills should be acquired.

SPECIFIC CHARACTERISTICS OF THE PNVS

In addition to the inherent characteristics of infrared imagery, many of the human factors problems identified in current systems are related to specific components and design limitations of the PNVS itself.

Sensor Location

In the Apache, the FLIR sensor is mounted 3.5 m in front and 1.2 m below the pilot's eye position, creating a displaced eyepoint (fig. 5). Thus, objects within the field of regard of the sensor may be physically closer to the sensor than they are to the pilots' natural visual reference (his eyes) (Berry et al., 1984). During training, pilots must learn to adapt to a different visual reference point and adopt slightly different rules of thumb for estimating range and altitude using the PNVS display. In addition, objects abeam the sensor (which are no longer visible on the monocular) might not have passed the pilot's natural visual reference point, creating the possibility of confusion if the object is also visible to the pilots' unaided eye (fig. 6).

Since the sensor is located closer to the ground than are the pilots' eyes, available visual motion cues indicate slightly higher apparent velocities than pilots would estimate with direct vision. Again, during training, they must learn new rules of thumb to estimate their speed using the PNVS display. The displaced eyepoint creates motion parallax problems which are particularly severe when large viewing azimuths are encountered.

Sensor Movement

In the Apache, the FLIR sensor responds to pilot head movements, moving at a rate of approximately 150°/sec. However, the slight delay between movement of the helmet and movement of the sensor can contribute to motion parallax problems. Although pilots learn to limit the frequency and velocity of their head movements to reduce such problems, certain tasks may require both rapid and frequent changes in the orientation of the sensor to a specific location or object within the FOV of the sensor.

Helmet-Mounted Display Unit

In the Honeywell Integrated Helmet and Display Sighting System (IHADSS) used in the Apache and the Cobra "surrogate trainer" (where some pilots are familiarized with the system), infrared imagery is displayed as a rectangular area on a combiner lens incorporated into the helmet-mounted display unit (HDU). The lens is a semitransparent viewing screen that filters light in the red and blue range and reflects the composite video image presented in the green wavelength. The back of the lens is chemically coated to reduce glare, transmitting 50% of the light incident upon it. The lens reflects 80% of the green light rays that exit the HDU toward the pilot's eye. The end result of the filtering, magnifying, collimating, and reflecting processes is a two-dimensional, monochromatic, monocular display with a maximum of 125-150 ft-L of brightness (Berry et al., 1984).

Field of View

The image presented to the pilot by the PNVs/IHADSS represents a rectangular FOV of 30° by 40°. The pilot views an image which is equivalent to a 7-ft television screen viewed from a distance of 10 ft (Berry et al., 1984). This relatively narrow FOV eliminates peripheral information that is critical for visual flightpath control. In visual flight, pilots depend on peripheral motion cues to estimate speed and orientation and to develop a sense of object's structure from visual motion cues. In addition, pilots must maintain their awareness of significant terrain features, the position and identity of stationary objects, and the projected course of moving vehicles that surround them for navigation, tactical decision-making, and obstacle avoidance. However, the field of regard of the sensor limits pilots' abilities to maintain visual contact with objects that are located beside or behind their vehicle.

Surprisingly, little empirical information is available about pilots' FOV requirements for pilotage, navigation, and target acquisition or their performance capabilities with different FOV. Furthermore, the FOV requirements for a helmet-mounted PNVs are even less well-known. A pilot may be faced with the requirement to fly the vehicle while visually tracking a target moving off-axis to the direction of flight using the same helmet-mounted display as the primary source of visual information for both tasks.

Considerable effort is being devoted to providing a wider FOV in more advanced systems (up to 60° or 90°) or providing different sensitivity for the foveal and peripheral elements of such a display. However, it is not clear whether the additional cost will be justified by an improvement in performance. Even a 90° FOV does not provide all of the peripheral cues available to the unaided eye in good visibility. Furthermore, if the FOV is increased without also improving the resolution of the display, the result may be a wide, but inadequately resolved, view of the terrain.

Display Resolution

Pilots have identified display resolution as one of the most critical problems in existing systems (Bennett and Hart, 1987), although the IHADSS provides 875 lines of display resolution. To some extent, the appearance of inadequate display resolution could reflect the fact that the image is presented in close proximity to the pilot's eye. For example, the panel-mounted PNVs display has the same resolution as the helmet-mounted version, but it is viewed from a greater distance. This creates the impression of better resolution.

In fact, the apparent limitations in display resolution reflect the capabilities of the entire system, rather than the quality of the display alone. The effective resolution of the PNVs is less than 360 horizontal scan lines. Thus, in a 30° vertical FOV each scan line covers 5-6 min of visual angle, as compared to the resolving power of the human eye of about 1 min of arc. This is a substantial limitation in the level of detail that is available for presentation by the display system. For example, pilots report having great difficulty in detecting wires or other small targets, unless their thermal contrast with the surrounding environment is very high.

Display Contrast

Advanced infrared detectors are capable of detecting temperature differences of approximately 0.3°C (Haidn, 1985). And a high-quality CRT can display at least 64 shades of gray. However, the PNVS provides only 10 shades of gray (ranging from bright to dark) to represent temperature differences in the environment (Tucker, 1984). This limitation severely restricts the level of detail that can be displayed at any one time and may interact with other limitations (e.g., limited resolution) to produce an unacceptable image quality.

Furthermore, specific gain and level selections, which are intended to enhance contrast in one region of the total range, might limit detail in another. For example, if the system is set to provide maximum contrast between the extremes, discriminations in the midrange will be limited. Conversely, when the display is optimized to provide fine discriminations in the midrange, extreme thermal signatures may not be discriminable. Because of the restricted number of gray shades provided to depict an image, the tolerance for inappropriate gain and level settings is very limited.

Monocular Presentation

At night, the image presented by the PNVS/IHADSS effectively limits peripheral vision in the right eye, because the display is so bright in comparison to the environment. However, a full monocular FOV is still available to the unaided left eye (although visible cues may be limited on a dark night). Certain details and distance judgments may be obtained more accurately with the unaided (left) eye than with the aided (right) eye. Thus, pilots must rely on both sources of visual information. However, under most circumstances, the same object viewed by both eyes cannot be merged into a coherent binocular image, because of the differences in brightness, perceived size, and perceived location (resulting from the displaced eyepoint of the sensor.) To make matters worse, the right eye may be adapted to the bright image provided by the PNVS/IHADSS system, while the left eye might be dark-adapted to the environment. The problem of motion parallax created by the displaced eyepoint provided by the sensor location is particularly great in good visibility (where the unaided eye receives a clear image).

In practice, the use of available visual cues to augment information provided by the sensor may create more of a handicap than a help, because of competition between images presented to the two eyes (binocular rivalry). One consequence of binocular rivalry is that the information available in one eye, by competing for pilot's visual attention, may partially or completely suppress information available to the other eye. Furthermore, since pilots are trained to use both eyes when flying with a PNVS, they must learn how to process disparate visual cues, or shift their attention between their right eye (to use the PNVS) and left eye (to view the terrain or panel instruments.) To some extent, the focus of visual attention is under the pilot's conscious control. However, pilots report increasing difficulty in controlling the focus of visual attention as missions progress. After less than 1 hr of continuous use, some pilots report they must close one eye (to restore the visibility of information in the other eye) or exert significant attentional effort (Bennett and Hart, 1987).

Shifting visual attention from one eye to the other (without closing the unattended eye) is difficult to learn, mentally demanding, and visually fatiguing. Operational experience does not appear to minimize the problem; rather, pilots learn how to minimize its impact on their operational performance. It is not clear whether specific training programs, developed to aid pilots in

developing visual-attention-management skills, would be effective in improving pilot's performance and in reducing visual fatigue.

Depth Perception

Because information is presented monocularly, all stereoscopic depth cues for objects in the immediate environment are lost. Additionally, the difference between the apparent size and location of objects viewed directly or through the sensor can provide conflicting information about the distance of objects in the environment (Roscoe, 1987). Although binocular systems have been proposed by government and industry researchers, the technical problems associated with fusing information from two sensors to provide a natural binocular image have not been solved adequately for operational use. Alternatively, the same image could be presented to both eyes—a biocular display. While this would eliminate the problem of binocular rivalry, it would limit pilots' abilities to gain peripheral cues outside the cockpit, see instruments inside the cockpit, or maintain at least one dark-adapted eye. And, it would still not provide stereoscopic information.

Display Magnification

The displayed information is collimated to optical infinity and magnified to represent a 1:1 mapping with respect to the environment. However, the apparent magnification is not perceived as being 1:1. This creates a problem when precise distance judgments must be made, as during landing or formation flying. Pilots report that objects appear to be closer when viewed through a FLIR than they would with the unaided eye, particularly when the FLIR image is very bright (Bennett and Hart, 1987). Other distance misperceptions may also result from the difference in light and dark adaptation of the aided and unaided eyes (the Pulfrich effect, see Tyler, 1974) and from misaccommodation of the eyes (Roscoe, 1985). Pilots have reported that they minimize this problem by confirming range with their left eye. This forces them to shift their visual attention back and forth between the aided (light-adapted) and unaided (dark-adapted) eyes (Bennett and Hart, 1987).

Summary

Current technology systems provide pilots with a wealth of information that would not otherwise be available at night or in low visibility. Without visual aiding, the range of environments in which low-level missions could be performed would be severely reduced. However, many properties of existing systems (e.g., low resolution; the restricted scale of gray shades; and a limited, monocular field of view) contribute to the creation of images which contain only a small part of the information that is available through direct vision in good visibility. Thus, pilots are deprived of essential information about small obstacles or targets and the detail required to identify larger objects. The adverse effects of degraded image quality may impose significant workload and visual fatigue. However, the effects of these factors seem to be relatively unequivocal and predictable, in comparison with the effects of sensor location, binocular rivalry, and depth perception. These phenomena may appear in different forms during different flight maneuvers and for different pilots. Some individuals may even experience exactly the opposite phenomena than others experience. For example, some pilots tend to overestimate, while others underestimate, size

and distances. Thus, considerable skill and experience is required for NOE flight with the PNVs, and even highly trained pilots consider it to be a highly demanding task.

ISSUES RELATED TO HELICOPTER CONTROL

In addition to all of the human factors problems related to the nature of the thermal image and to the design of the PNVs/IHADSS, one has to bear in mind that the system is installed on a moving, six-degree-of-freedom platform which is designed to perform a variety of demanding operational tasks. Some of the most difficult tasks involve NOE flight, off-axis tracking, and hovering.

To perform each of these tasks well, pilots must learn to distinguish the effects of control inputs (e.g., changes in the direction, speed, or orientation of the helicopter itself) from the effects on the visual display of changes in sensor orientation induced by the pilot's head movement. Disorientation can result from a conflict between vestibular cues (based on vehicle motion) and visual cues (obtained through the sensor). Pilots learn to limit their head movements (to reduce vertigo) and to time them to achieve a stable direction of gaze before changing their direction of flight (to reduce spatial disorientation.) They must balance this requirement for limited head movement against their need to scan the environment (to obtain an acceptable field of regard or to track moving targets) to compensate for the sensor's narrow FOV.

NOE Flight

In NOE flight, pilots must fly at very low altitudes among natural and human-made terrain features. Even in good visibility, this presents a challenging task for which there is a very low tolerance for error. In reduced visibility, the requirement to perform the same mission using visual aids (such as the FLIR/PNVs) is even more difficult. In NOE flight, problems associated with the quality of the visual display, the absence of stereoscopic depth cues, display magnification, and the offset location of the sensor are particularly pronounced and combine to make rapid and accurate range estimates, required to avoid natural and human-made obstacles, very difficult. In addition, it is difficult for pilots to maintain a sense of their general geographical orientation because of the narrow FOV of the sensor and limitations in its range; their view of the world through which they are flying is effectively limited to nearby terrain features. Also, the degraded and dynamically changing quality of the visual representation of objects in the environment make it difficult for pilots to detect and recognize otherwise familiar objects and terrain features. Finally, the narrow FOV of the sensor and limitations in the display of surface texture inhibit pilots' abilities to maintain visual control of speed, heading, and altitude.

These limitations combine to create a flight environment where pilots must fly slower and higher to maintain acceptable margins for safety. Further, performing this task imposes high visual and cognitive demands on pilots and is very fatiguing, thereby limiting the duration of missions and flight hours.

Hovering

In an inherently unstable vehicle, or without stability and control augmentation systems, hovering is extremely difficult and performance is worse when visual information is obtained through a helmet-mounted display (Landis & Aiken, 1982). Even in a relatively stable vehicle, such as the Apache, visual reference points vary whenever the pilot moves his or her head and depth cues are difficult to obtain from the monocular display. Because display resolution is limited, subtle relative motion cues may be difficult to detect. In addition, peripheral visual cues that provide an important source of motion information with direct vision are limited on the PNVIS/IHADSS. Thus, pilots supplement the sensor imagery with information available to the unaided eye (to provide the necessary peripheral motion cues) and with information provided by superimposed symbology.

Off-axis Tracking

Since the sensor is attached to the helicopter, its orientation and position with respect to the environment reflect the forward, lateral, and vertical translation and pitch, roll, and yaw of the vehicle. However, within the boundaries of its range of movement, the azimuth and elevation of the FLIR sensor is independent of the orientation of the helicopter. Spatial disorientation and reduced flightpath control performance may occur when pilots look in a different direction than the vehicle is moving ("off-axis" tracking). Visual motion cues relevant for flightpath control are more difficult to interpret when they are obtained through a sensor that is oriented off-axis to the direction of flight (see fig. 6). Peripheral cues (which could integrate the conflicting sources of information) are limited by the narrow FOV, thereby intensifying the problem.

Pilots appear to trade off flight-control performance for visual tracking performance; visual tracking performance is degraded when it is coupled with the requirement to control the vehicle. In addition, visual tracking of curved vehicle trajectories is degraded (in comparison to straight trajectories) and tracking error is increased as the apparent rate of movement of a target across the pilot's visual field is increased (by changes in the distance of a target, the rate of movement of the target, and/or the velocity of the pilot's vehicle) (Bennett et al., this volume).

Pilots report (Bennett and Hart, 1987) that they are able to perform off-axis tracking for only short periods of time (no more than a few seconds, depending on the flight mode) before they must return the orientation of the sensor to correspond to the direction of flight. Thus, pilots come to a hover (when they must visually track a moving target) or they hand a target off to the copilot. Research is under way at NASA Ames Research Center (Bennett et al., this volume) and elsewhere, to quantify the range of human performance limitations in performing off-axis tracking and to develop display augmentations to improve pilots' performance capabilities.

Superimposed Symbology

Several sources of information are often combined on helmet-mounted displays. In the Apache AH-64 and the Cobra, computer-generated symbology depicting flight-control information is superimposed on the sensor imagery and presented on the HDU. This composite display reduces the need for pilots to look at cockpit instruments during low-level flight.

Flight-control Symbolology- In the Apache, computer-generated graphic and symbolic information about the vehicle's flight and performance status is provided to improve pilots' abilities to perform flightpath control. The computer-generated display is visible on the monocular no matter where the pilot's head points. However, since the symbolology is always oriented in the direction of flight, as it would be in a head-up or panel-mounted display, it may not present the flight-control symbolology in an orientation that is compatible with the direction the pilot is looking (fig. 7).

Up to 14 flight parameters may be displayed to ensure vertical and horizontal orientation. Different subsets of information are presented for different mission segments (e.g., hover, transition to hover) (fig. 8). The sensitivity of some elements of the display changes for different tasks (e.g., sensitivity is increased during hover and for given altitudes). Although such increased sensitivity is essential to allow pilots' to maintain a stable hover, learning how to interpret variations in the movement of symbolic display indicators is difficult during initial training (Bennett and Hart, 1987).

HDU displays of flight symbolology are extremely useful, particularly in NOE flight when pilots are too busy to look at cockpit instruments. However, perceptual problems may be created by the interference between the computer-generated symbolology (which is always oriented in the direction the vehicle is moving) and the video display upon which it is superimposed (which is oriented in the direction the pilot is looking) (see fig. 8). Furthermore, movement of the HDU symbolology may induce a perception of apparent motion in the video display.

Pilots learn to ignore the superimposed indicators (when they do not need the information) to resolve the problem of display clutter. This is analogous to ignoring the dividers between panes of glass in a multipane window when looking outside—one only "sees" the outside scene. However, for windows, there is a difference in accommodation between the two sources of information, facilitating a difference in attentional focus. For the PNVIS/IHADSS, on the other hand, the optical distance of both visual display elements is the same, increasing the difficulty that pilots have in focusing on one source of visual information or the other. Pilots report that they tend to look through the symbolology at the outside scene (at the expense of viewing critical flight data) or vice versa (Bennett and Hart, 1987). When they feel that they do need the information, however, they include it in their scan. One symbol that remains essential is the diamond that represents the "nose" of the helicopter. It was added at the request of the first pilots to fly the PNVIS to orient them to their direction of flight regardless of where the sensor was pointing.

Targeting Information- Weapons selection, aiming, and other targeting information can be superimposed on a display, as well. The Target Acquisition/Designation System (TADS) in the AH-64 provides FLIR, direct-vision optics, and daylight television display options boresighted to a common line of sight. The TADS has narrow and wide FOV alternatives and an electronic "zoom" capability. In the current configuration, the TADS is used by the copilot/gunner. However, in the environment envisioned for more advanced helicopters, such as the LHX, a single pilot might be required to use a helmet-mounted PNVIS for both primary vehicle control and for weapons delivery. The visual display might be provided by one sensor or a fused combination of different sensors. In this situation, it is possible that a pilot might need to look in one direction to maintain vehicle control and in another to track, acquire, and fire at enemy targets. Command information might be displayed to tell pilots where to look if an automatic target recognition system

identified a target in a different direction than they were looking. This could result in a visual display of superimposed visual information from three different spatial orientations: (1) computer-generated symbology oriented in the direction of flight, (2) the display of FLIR information oriented in the direction of the pilot's head, and (3) targeting information.

Effects of Vibration

Normally, the human eye is stabilized so as to maintain visual fixation in moving environments. The vestibular-ocular reflex induces eye movements that oppose those of the head to maintain a stationary point of regard during voluntary head movements. In vibrating environments, however, the eye may not be capable of compensating for the high-frequency components. The detrimental effects of vibration on visual acuity have been well documented (e.g., Griffin, 1977), particularly for panel-mounted displays, where some of the effects of vibration on instrument reading can be compensated for by presenting sufficiently large characters and symbols.

The effects of vibration can be even more severe with helmet-mounted displays, although the range of vibrations in advanced-technology helicopters has been reduced considerably. The sensor, which is slaved to the pilot's head movement, cannot discriminate involuntary, vibration-induced helmet movements from those initiated by the pilot. Relative motion is created between the image on the head-coupled display and the eye, resulting in retinal blurring, increased errors, and longer responses. It has been suggested that such "involuntary" head movements might be sensed by an onboard computer and that this information could be used to provide a stabilized display for the pilot (Velger, Grunwald & Merhav, 1986). Based on a computer simulation of the vibration frequencies of helicopters, an adaptive noise-canceling technique has been developed that minimizes the relative motion between viewed images and the eye by shifting displayed images in the same direction and magnitude as the induced reflexive eye movements. The filter stabilizes the images in space while still allowing low-frequency, voluntary head motions required for aiming accuracy.

The Helmet

The IHADSS apparatus is relatively heavy (4 lb), producing discomfort and fatigue. And most of the weight is in front; counter-balancing weights do not completely eliminate the muscle fatigue induced by maintaining heads-up attention to the visual scene. In addition, to reduce the problems associated with involuntary head motion within the helmet, a snug fit is essential, which may produce "hot spots," further increasing discomfort. However, the pilots' helmets rarely fit perfectly with the consequence that the position of the monacle, which is attached to the helmet, may shift in flight. Furthermore, pilots' head movements within an imperfectly fit helmet may not be directly translated into helmet movements (which actually control the orientation of the sensor), although this does not present a major problem with current systems.

Crew Size

All contemporary military helicopters have a flight crew of at least two. In attack helicopters one crew member is primarily responsible for flying the vehicle, while the other is responsible for navigation, target selection, and weapon control. Recently, the U.S. Army considered the

possibility of fielding a single-pilot helicopter. If a single pilot was required to perform a typical Apache mission, he or she would have to simultaneously control the helicopter during demanding flight maneuvers (e.g., NOE, hover) while detecting, acquiring, and destroying targets. It is well established in the motor-control literature that the concurrent performance of any two nonsynchronized motor tasks is extremely demanding and very difficult (e.g., Keele, 1986). Thus, effective off-axis target tracking seems to be feasible only if manual flightpath control demands are low (as in high-altitude, straight-and-level flight) or if at least one of the tasks can be automated. Since the high-threat battlefield environment requires NOE flight, automated flight and hovering systems may be required to effectively release a single pilot from the control of the platform (to enable the pilot to accomplish the weapons delivery task), or effective automated target recognition/acquisition systems will be required to provide the pilot with reserve capacity to perform manual flightpath control. The successful design of a single-pilot, multipurpose helicopter will rely on the accumulation of a considerable body of human factors data in the areas of human information processing, workload, motor control, perception, and skill acquisition.

Summary

Helmet-mounted pilot night-vision systems do what they are intended to do. They allow pilots to perform NOE missions at night and under low-visibility conditions. They do so at a considerable cost to the pilots, however, and adequate training can provide only a partial solution.

Current PNVS/IHADSS systems provide pilots with a monocular display of monochrome video images with limited resolution. The detector is not sensitive to natural variations in shading in the terrain and provides a narrow FOV from a displaced visual eyepoint. The appearance of thermal images may deviate substantially from optical images, and it changes with environmental conditions. The quality of the displayed image is further affected by (1) the existence of thermal contrasts in the environment; (2) the number of gray shades with which the sensor represents temperatures differences; (3) atmospheric conditions; (4) the selected polarity, gain, and level; and (5) vibration. Finally, there are additional limitations created by the display system itself (e.g., the resolution of the CRT and its monocular format).

These and other characteristics of current technology systems combine to provide pilots with limited visual cues under many circumstances. This, in turn, inhibits their ability to fly as low or as quickly as they might with optimal visual information. Some of the specific perceptual and cognitive problems that might contribute to such limitations in performance are (1) binocular rivalry (due to the monocular mode of presentation); (2) inaccurate range estimation (due to the offset sensor location); (3) loss of peripheral motion cues (due to the narrow FOV); (4) loss of directional orientation during off-axis tracking; (5) difficulty in identifying objects (due to limited display resolution and contrast and the unique properties of thermal images); and (6) loss of geographical orientation (due to the narrow FOV and limitations in the line of sight created by terrain features that obscure forward vision during NOE flight). Fatigue, especially visual fatigue, presents a particularly severe problem. And all of the issues discussed above may limit pilots' confidence in their ability to control their aircraft at low altitudes where misinterpretation of the structure of the terrain may have severe consequences. Finally, in addition to the operational limitations reported by experienced pilots, significant problems have been reported during training.

Although alternative designs have been suggested, there is insufficient information about human perceptual and performance limitations (and their interactions) to provide significantly

improved specifications, training programs, or alternative designs. Additional research is required to determine the most critical problem areas and to propose solutions that consider the human as well as the development of technology. Even though critical human factors problems with night-vision systems have already been identified, relatively little research is currently being conducted.

REFERENCES

- Bennett & Hart (1987) PNVIS related visual problems: Pilots' reflections on visually coupled systems, 1976-1987. Working paper. Moffett Field, CA: NASA Ames Research Center.
- Bennett, C. T. Johnson, W. W., Perrone, J., & Phatak, A. (This volume) Synthetic perspective optical flow: Influence on pilot control tasks. In Proceedings of the Spatial Displays and Spatial Instruments Conference and Workshop. Washington, D. C.: National Aeronautics and Space Administration.
- Berry, J., Dyer, R., Park, R., Sellers, A., & Talton, M. (1984) PNVIS Handbook Fort Rucker, AL: U.S. Army Training and Doctrine Command.
- Bohm, H. O. V. (1985) FLIR, NVG, and HMS/D systems for helicopter operation - Review. In Visual Protection and Enhancement (AGARD CP-379) Neuilly-sur-Seinne, FR: Advisory Group for Aerospace Research and Development, 2-1 - 2-27.
- Griffith (1977) The evaluation of human exposure to helicopter vibration. *Aeronaut. J.*, March, 110-123.
- Haidn, H. (1985) Operational experiences with night vision goggles in helicopter low level flight at night. In Visual Protection and Enhancement (AGARD CP-379) Neuilly-sur-Seinne, FR: Advisory Group for Aerospace Research and Development, 3-1 - 3-8.
- Keele, S. W. (1986) Motor control. In K. Boff, L. Kaufman, and J. Thomas (Eds) *Handbook of Perception and Human Performance*, Vol II. New York: John Wiley and Sons. 30-1 - 30-60.
- Landis, K. H. & Aiken, E. (1982) An assessment of various side-stick controller/stability and control augmentation systems for night nap-of-the-earth flight using pilot simulation. Paper presented to the American Helicopter Society, Palo Alto, CA.
- Lloyd, J. M. (1975) *Thermal Imaging Systems*. New York: Plenum Press.
- Roscoe, S. N. (1985) Bigness is in the eye of the beholder. *Human Factors*, 27(6), 615-636.
- Roscoe, S. N. (1987) The trouble with HUDs and HMDs. *Human Factors Bull.*, July, 1-3.
- Tucker, G. E. (1984) Some thoughts on the implementation of pilot night vision devices for helicopters. Proceedings of the Technical Workshop: Advanced Helicopter Design Concepts. NASA CP-2351.
- Tyler, C. (1974) Stereopsis in dynamic visual noise. *Nature*, 250, 781-782.
- Velger, M., Grunwald, A. & Merhav, S. (1986) Adaptive filtering of biodynamic stick feedthrough in manipulation tasks onboard moving platforms. Technical Paper, AIAA Conference.

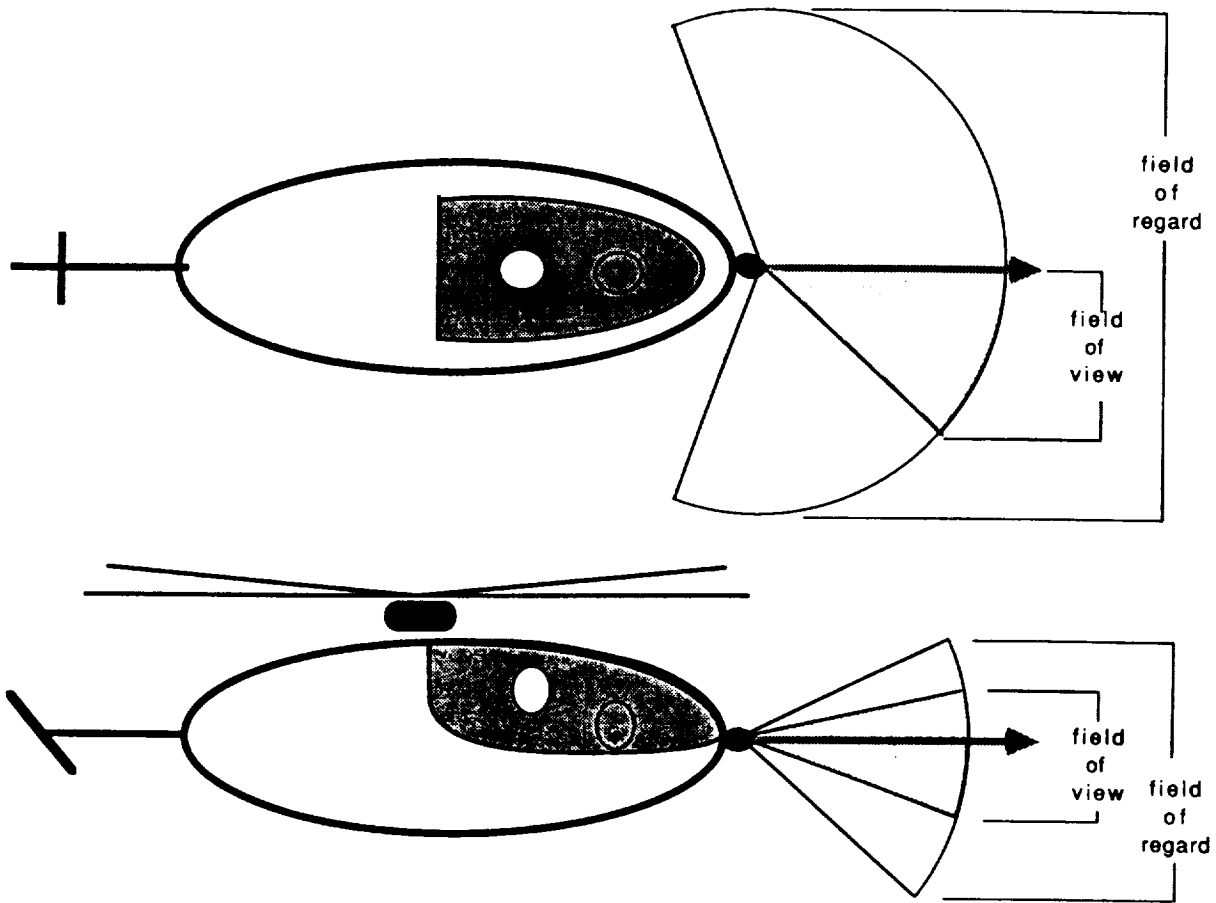


Figure 1.- Diagram of the vertical and horizontal FOV and fields of regard of the FLIR sensor.

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH



Figure 2.- PNVS helmet-mounted display unit .

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

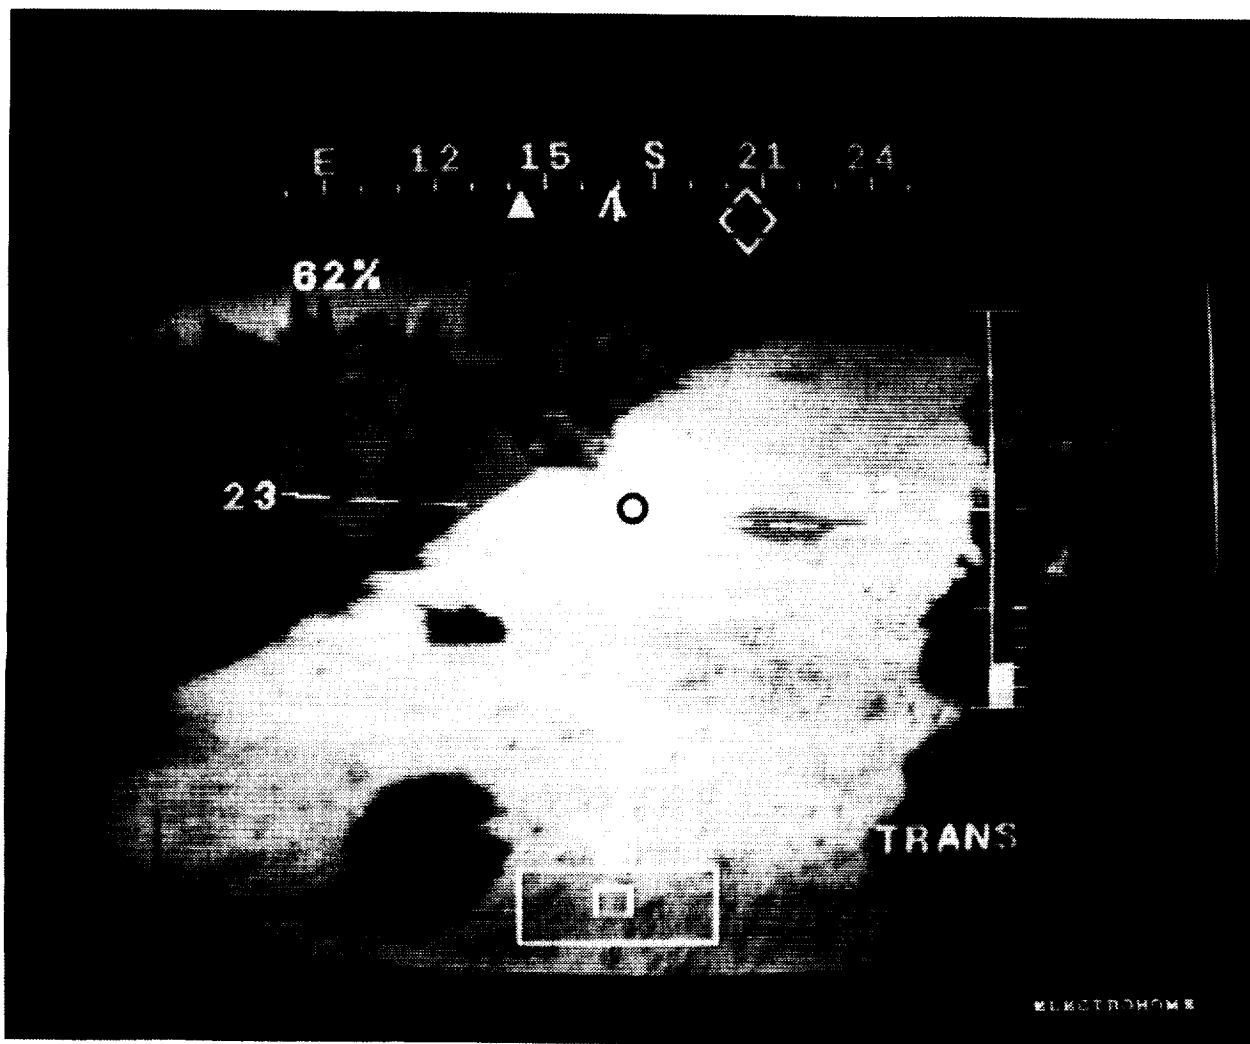


Figure 3.- Thermal display with superimposed flight-control symbology.

ORIGINAL PAGE IS
OF POOR QUALITY

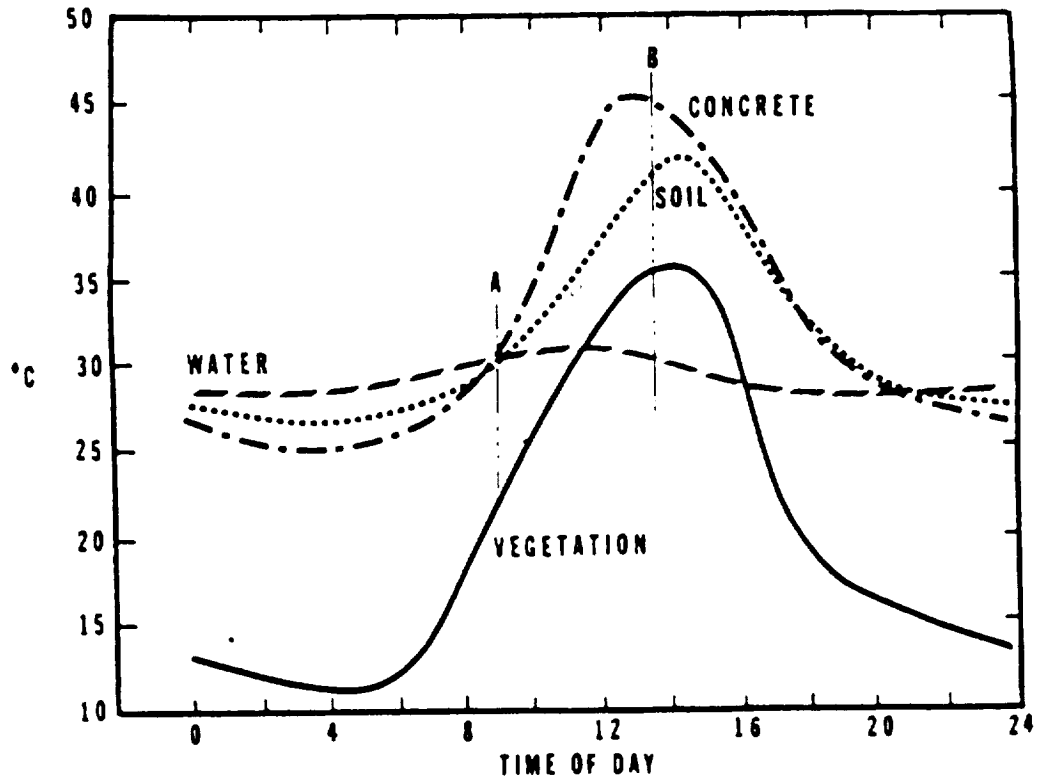


Figure 4.- Temperature distributions of different materials during a 24-hr period ("a" indicates the occurrence of crossover; "b" the time of day when the temperature differences are greatest) (Berry et al., 1984).

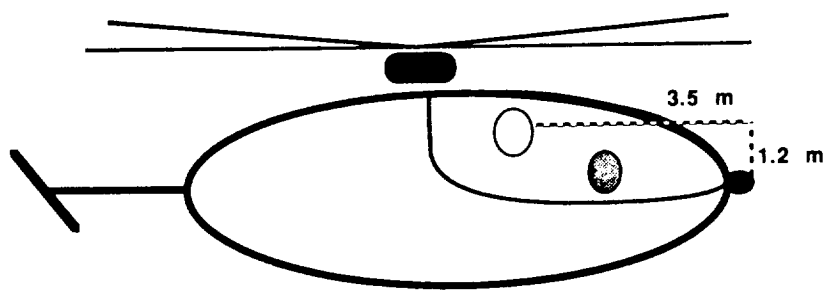


Figure 5.- Sensor offset.


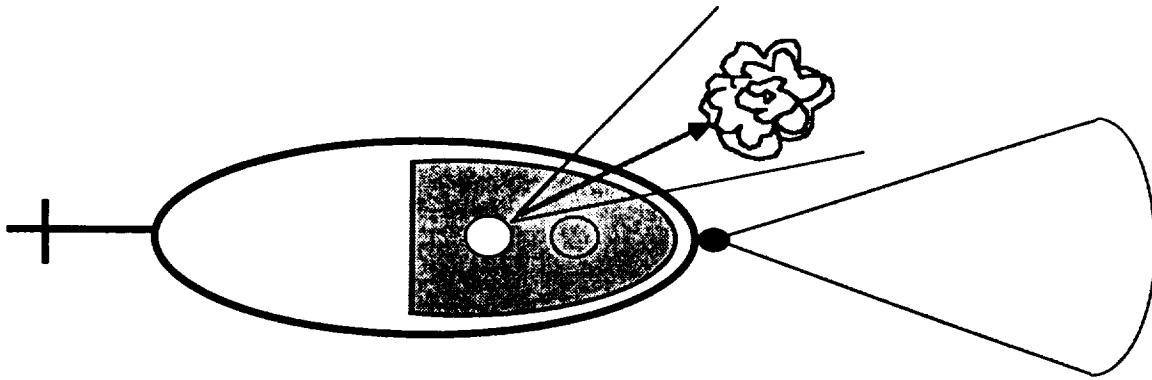


Figure 6.- Example of a situation where an object (a tree) seen by the pilot's unaided eye has passed behind the FOV of the sensor.

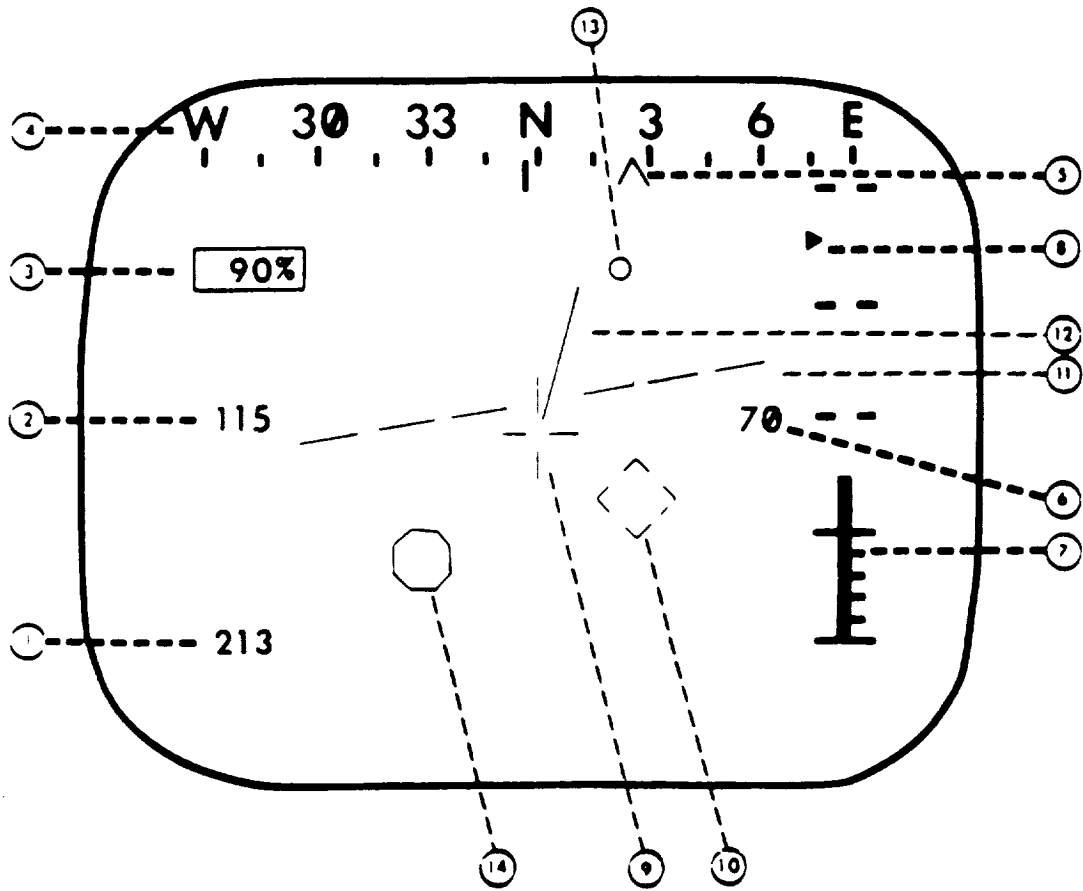

- | | |
|-------------------------------|-----------------------------------|
| 1--Digital ground speed | 6--Digital altitude |
| 2--Digital indicated airspeed | 7--Analog altitude |
| 3--Digital torque | 8--Vertical speed indicator (VSI) |
| 4--Magnetic heading | 9-14--Central symbology |
| 5--Doppler steer indicator | |

Figure 7.- Stylized example of different spatial orientations for FLIR imagery and superimposed computer-generated symbology.

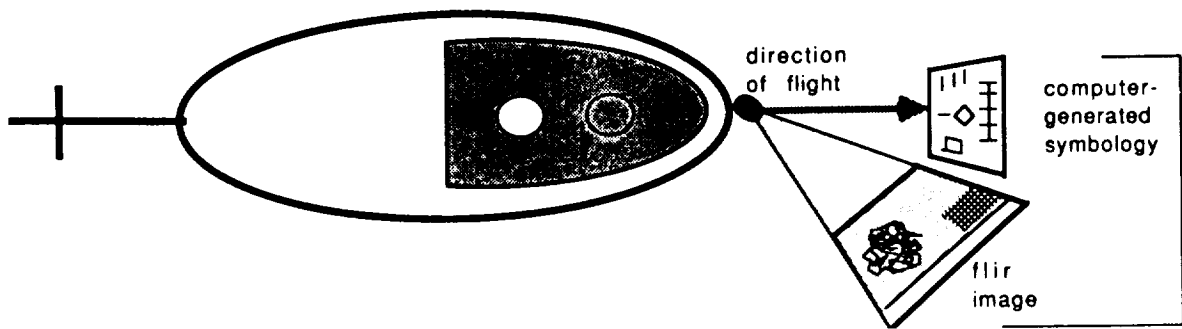


Figure 8.- The complete PNVS symbology set.

