

NASA Technical Memorandum 105256
AIAA-91-3553

1N-20

45759

P-24

The NASA Cryogenic Fluid Management Technology Program Plan

(NASA-TM-105256) THE NASA CRYOGENIC FLUID
MANAGEMENT TECHNOLOGY PROGRAM PLAN (NASA)
24 D CACL 21H

N91-32161

Unclass

G3/20 0045759

James R. Faddoul
Lewis Research Center
Cleveland, Ohio

and

Stanley D. McIntyre
Marshall Space Flight Center
Huntsville, Alabama

Prepared for the
Conference on Advanced Space Exploration Initiative Technologies
cosponsored by AIAA, NASA, and OAI
Cleveland, Ohio, September 4-6, 1991

NASA

THE NASA CRYOGENIC FLUID MANAGEMENT TECHNOLOGY PROGRAM PLAN

JAMES R. FADDOUL
LEWIS RESEARCH CENTER
CLEVELAND, OH

STANLEY D. MCINTYRE
MARSHALL SPACE FLIGHT CENTER
HUNTSVILLE, AL

ABSTRACT

During the past three decades, NASA has been designing and using large quantities of cryogenic fluids for propulsion system propellants, coolants for experiments, and for environmental control systems. As a consequence, an erroneous conclusion has been drawn that the technology exists for using large quantities of cryogens in space for long periods of time. This paper attempts to dispel that myth and to present the technology needs that require development in order to support the NASA programs of the future. A NASA program, developed through the impetus of MSFC and LeRC personnel and supported by all NASA centers is outlined. The current State-of-the-art is discussed along with specific needs for near future missions. Then, using the Space Exploration Initiative mission set, cost/benefit projections are made for development of advanced cryogenic fluid management techniques. Earth based and space based test programs are discussed relative to the technology requirements for liquid storage, supply, and transfer and for fluid transfer and advanced instrumentation.

INTRODUCTION

For more than 30 years, NASA has been pursuing propulsion systems and manned activities which have required the use of

cryogenic liquids. The most common are liquid oxygen, nitrogen, hydrogen and helium. Huge quantities (tons) of oxygen and hydrogen have been used on Saturn vehicles for transporting astronauts to the moon. And, even larger quantities are being used on every shuttle mission to supply the main shuttle engines. Every person in the United States has passed, or been passed by, a trailer full of these cryogenic liquids. Consequently, it seems to be a common misconception that the technology exists to routinely handle these liquids in space - an idea that could not be further from the truth. In fact, while ground handling of these very cold liquids is an everyday practice at NASA facilities, one of the more significant items in causing shuttle delays is the activity dealing with filling the cryogenic tanks.

In the past, the applications of cryogens in space have involved very short time span missions and the high thrust levels of launch. For the few cases where cryogenic liquids have been used after free drift in space, thrusters have been used to accelerate the vehicle and settle the liquids immediately prior to their use. Thus, the only real experience that exists is for applications on the order of hours and at g

levels which cause the liquid to be settled in the tank. Figure 1 provides a contrast of what has been done to what is required. As can be seen, storage times from months to years are required as is the capability to control the liquid under micro-g conditions and the ability to transfer cryogenics from one tank to another without benefit of acceleration forces. The analysis capabilities and design criteria for the future missions simply do not exist. Recognizing this, NASA has, for the past ten years, attempted to establish a program in Cryogenic Fluids Management (CFM) which would address the key technology elements. As a result of several workshops and meetings with scientists and engineers with experience in the field of cryogenics, all the necessary technology needs (32 different items) have been identified and grouped into 5 major areas. The five technology areas, are; 1) Storage, 2) Transfer, 3) Supply, 4) Fluid Handling, and 5) Advanced Instruments. In addition, universal agreement has been reached with respect to both the general technology needs and to the specific needs which will require in space testing to resolve unknowns and reduce design risks for future missions.

Most recently, LeRC and MSFC have conducted a joint effort to review all the planned programs for Cryo Fluid Management and to determine what, if any, duplication existed in the activities of the two centers and what technology areas were not being adequately addressed at either

center. This effort resulted in the streamlining of the overall program and an agreement between the two centers as to which would be responsible for the various required elements of the program. As a result, the proposed program was taken to NASA HQ and recommended for funding. Key elements consist of the following activities.

- 1) LeRC will maintain a base R & T program which will develop the analyses and basic 1g testing fundamental to understanding cryogenic fluid thermal characteristics and dynamic processes. Facilities to support this activity consist of small vacuum chambers and computational equipment.

- 2) Both LeRC and MSFC will conduct large scale ground tests of liquid nitrogen and liquid hydrogen systems. The MSFC activity will be directed, in general, at demonstrating specific system design characteristics and performance. LeRC, on the other hand, will use the large scale test systems to gather the data necessary to validate computer models and to extend the validated range of CFM design parameters.

- 3) Both Centers will conduct applicable small scale flight experiments in the Shuttle or on sounding rockets to extend the understanding of the governing fluid management equations to low-g applications. The majority of these experiments are expected to use non-cryogenic fluids and most will be funded through the Office of Aeronautics and Exploration Technologies (OAET)

In-Space Technology Experiments Program (IN-STEP) process.

4) LeRC will manage a Shuttle experiment using liquid nitrogen to develop pressure control and transfer data under low-g conditions. MSFC personnel will participate in this project and will provide system level testing and test requirements in addition to possibly performing the integration function for the flight hardware. This Shuttle experiment, called The Cryogenic Orbital Nitrogen Experiment (CONE) will provide data directly applicable to life support systems. The physical scale and fluid properties are appropriate to most planned manned systems. In addition, it will provide the first 0g cryogenic data which can be used directly in the design of either LN_2 or LOX systems. This data can also be used to generate the first extrapolations for 0g liquid hydrogen performance.

5) Both centers will work to define the appropriate experiment set to obtain the LH_2 data necessary to eliminate the design risk caused by extrapolating from LN_2 or 1g testing in items 1 through 4 above. This experiment set may consist of some small scale sounding rocket type experiments followed by a Shuttle (or large ELV) LH_2 experiment. Management responsibility for this area has yet to be established but since it will probably not start until after the CONE flight in 1998, an immediate decision is not mandatory.

While this program has basically been defined by the MSFC/LeRC team, other centers,

primarily LaRC, GSFC, and JSC have been helpful in providing consultation and have given full support to the outlined program. The need for this program, including some projected benefits are presented in the following paragraphs as are the specifics of the program at LeRC and MSFC.

REQUIREMENTS & BENEFITS

During the last several years, a concerted effort has been made to develop an architecture for the spacecraft which will be required for America's next Lunar and/or Mars missions. Unfortunately, no single architecture has resulted against which specific technology requirements or benefits can be assessed. However, in the case of cryogenic fluid management, it has been found that the technology requirements are relatively independent of the architecture selected. The overall goals are as shown in Figure 2. As can be seen, many of the goals are an order of magnitude more restrictive than what has been achieved in flight demonstrations to date. Key assumptions that apply to the development of the goals of Figure 2 are a) the vehicles will ultimately require reusability in order to keep life-cycle cost within reason; b) Even for a reusable vehicle, the majority of the Cryo Tankage may be throw-away; c) all missions require significant times in LEO for vehicle build-up; and d) all the mission architectures, including those involving nuclear thermal propulsion, require large quantities of cryogenic fluids.

Once having established a set of goals for the cryogenic technology, it was then necessary to establish their impact on the overall mission cost. Key parameters in this evaluation are the selection of the design criteria that would be used if the new technology were not developed. This can be thought of as defining the current state-of-the-art. While the selection made has been the matter of some controversy, a general consensus within NASA has been reached and the bottom line in cost savings is shown in Fig. 3 to be in excess of \$20B over the life of the Lunar Exploration Program. Changes to the ground rules and assumptions will, of course, affect this number but in any case it would be in the billions of dollars. Consequently, it is readily apparent why it is necessary to pursue the development of cryogenic fluid technology and it was that desire which has brought the NASA centers together to define the best possible program which considered not only technology needs but budgetary constraints. The fundamentals of that program are as follows.

The Cryo Ground Program

To be most effective, the overall ground and flight programs have been coordinated as a single thrust. In other words, the overall technology needs have been evaluated and a total program including 1g and 0g test requirements have been identified. The ground program then consists of the analyses, mathematical modelling, and 1g testing that is required so that, when validated through the necessary flight program,

future vehicle designs can be based on proven methods and empirical design criteria. The ground program is further coordinated between Marshall Space Flight Center and Lewis Research Center. The split of responsibility is, in general, that LeRC pursues development of general analytical model development and technology while MSFC pursues the demonstration of mission specific design applications.

The LeRC ground program

The LeRC ground program consists of an integrated analysis and testing approach. The range of potential cryogenic system applications has been evaluated and the analyses that will be required to support flight hardware system designs has been identified. This activity, which will continue to evolve, has formed the basis for both the analytical modelling plans and proposed testing.

An active analytical model development program is coupled to both small and large scale testing. Tests are planned around the validation and/or empirical generation of the appropriate design criteria. There are three test facilities (and, of course, multiple computational facilities) which support this activity. The smallest, and least complicated test facility is RL-13, Figure 4. This LN₂ test facility is convenient for "quick-look" data in support of analyses of heat exchangers, pump/ mixer configurations, and tank fill processes. In addition, RL-13 can be used for initial testing of instrumentation concepts.

A second facility at LeRC, CCL-7 (Fig. 5), is a somewhat larger facility and is also capable of testing with LH_2 . It is used to develop data on component and subsystem efficiencies and component tests. Technologies being worked in CCL 7 include insulation material performance, Joule-Thompson valve operational characteristics, flow meter accuracy, and cryo dumping (rapid depressurization and outflow).

K-site (Fig. 6), which is a 25' dia. LH_2 rated vacuum chamber at the Plum Brook Facility in Sandusky is used for both component and system level testing. The K-Site chamber can maintain vacuum levels below 10^{-6} ton and has a cold wall which can control temperatures between -320 and +170°F. Technologies being developed with K-site test data include insulation system performance, pressurization system efficiency, active and passive pressure control system performances, and no-vent fill characteristics. K-site is especially valuable in running system level performance tests since it is able to run tests for weeks at a time and can accommodate several large size tanks simultaneously. This enables the gathering of fluid transfer data on real size hardware.

The MSFC ground program

The MSFC ground program emphasizes subsystem development and focuses on developing specific components and integrated systems for specific applications. There are currently two parts to the MSFC Ground Program. The first is

the ongoing baseline test program which extends through 1992 and consists of test programs in five separate areas. Specifically, these are no-vent fill with freon as a simulant for a cryogen; a foam/multi-layer insulation system test program to demonstrate the effectiveness of earth-to-orbit insulation systems; teflon coated and composite plumbing line performance evaluations and design concept development; integrated chill down and no-vent fill process evaluations; and performance of trap-type liquid acquisition devices for potential start basket applications. Following the baseline test program, MSFC will embark on testing in the Multipurpose Hydrogen Test Bed (MHTB). The MHTB will demonstrate the operation of a full-scale, state-of-the-art, spacecraft cryogenic fluid storage system (Insulation System). The components, tank, and integration support for this program have been obtained as part of a NASA Research Announcement which was issued in 1990. Initial testing will start in late 1991. Following the MHTB activities, the MSFC ground test program will focus on system demonstrations related to the Lunar and Mars missions.

MSFC's program is based on the application of an existing 20' dia. and a planned 15' dia. thermal vacuum test facility. Both are liquid hydrogen rated. The 20' facility, as seen in Figure 7, is equipped with LN_2 cold walls and is capable of high vacuum (10^{-6} Torr) vac. testing. The expected heavy demand for this facility has caused MSFC to plan for re-

locating and re-activating an existing 15' dia. test chamber. This activity is planned for completion in 1994 using NASA C of F funding. The first use of this chamber, (which would have capabilities equivalent to the 20' chamber) is to conduct the system verification and performance baseline tests for the Cryogenic Orbital Nitrogen Experiment (CONE), a major flight experiment discussed in detail below. Following the CONE program, the 15' Chamber will be used for development and system level testing in support of the Cryogenic Orbital Hydrogen Experiment (COHE), also discussed below. The 20' chamber will be used to support LTV/LEV and MTV/MEV system demonstrations.

The Flight Program

The CFM flight program consists of a number of elements and has both non-cryogenic and cryogenic activities.

Non-Cryo elements - The first experiment specifically designed to be a part of the Cryo Program was funded via the IN-STEP program and flew in August on the Shuttle Atlantis. This experiment, outlined in Figure 8 and managed by LeRC, was a Tank Pressure Control Experiment (TPCE). It was specifically intended to investigate the low-g fluid mixing and pressure control properties of Freon 113 (a simulant fluid). TPCE was flown as a mixed cargo payload using a Get-Away-Special (GAS) container. The Freon was contained in a plexiglass tank and was heated with resistance heaters to create a pressure rise. The fluid was then mixed

with an axial jet mixer to confirm pressure decay rate predictions. Video, thermal and pressure data were recorded. The final comparisons (predicted versus actual) of mixer performance and pressure rise and decay rates versus time are currently being made and it is expected that a report will be distributed in 1992.

A second experiment, Fluid Acquisition and Resupply Experiment (FARE), managed by MSFC, is shown in Figure 9. FARE is a flight experiment selected to evaluate and compare the performance of a screen-channel and vane type passive liquid acquisition device (LAD). The approach is to use the same basic hardware that flew previously as a Shuttle mid-deck experiment on STS-51-C in Jan. 1985. This previous experiment was known as the Storable Fluid Management Demonstration (SFMD). FARE is fabricated as two modules that mount in place of four lockers in the Shuttle Mid-deck area. The supply tank, located in the lower module has a diaphragm type positive expulsion device and the receiver tank, located in the upper module will contain a screen-channel LAD. If there is general success, a second mission using a vane device as a LAD may be flown. Both the supply and receiver tank are transparent acrylic which permits direct viewing (by video cameras) of the liquid behavior during operations. The test fluid is water with a dye added for better viewing. The filling/venting tests and liquid motion observations will be correlated with previous predictions made with FLOW-3D

(a liquid dynamics analysis program) to assess the ability to predict low-g fluid behavior.

Figure 10 depicts a Subscale Orbital Fluid Transfer Experiment (SOFTE). This is a flight experiment being managed by MSFC and designed to investigate selected low-g fluid management issues related to liquid acquisition and tank filling with and without venting. The experiment will use a nonhazardous test fluid such as Freon 113, at or near saturation temperature and pressure to simulate the behavior of cryogenics. The experiment will be mounted in the Shuttle payload bay in two Get-Away-Special (GAS) canisters. Again, the tanks will be transparent plastic and the data in the form of videotaped fluid motions and recorded temperatures, pressures and fill levels will be collected to enable 1) characterization of liquid/gas interface behavior as a function of inflow parameters, 2) correlation of fill time and final fill fraction with initial conditions, and 3) estimation of interfacial condensation rates. Preflight analytical predictions will be compared with the experimental data to assess the ability to predict low-g fluid behavior

Vented Tank Resupply Experiment (VTRE), Figure 11, is another IN-STEP experiment and is intended to investigate capillary vanes as a low-g fluid management technique for positioning fluids during venting and outflow. VTRE, managed by LeRC, is in the early design stages but will probably use freon as the fluid

and will probably be mounted on a Hitchhiker structure for integration with the Shuttle. As with the other experiments, analysis will be developed to predict performance and subsequent to flight, the data will be compared with the analyses and appropriate conclusions and/or modifications to the analytical procedures will be made.

Other non-cryo experiments are being planned but have not yet been approved for funding. These include investigation of slosh dynamics, liquid retention screens as a start basket, and a mass gaging capability.

Cryo elements -

The cryogenic flight program consists of two major elements.

CRYOGENIC ORBITAL NITROGEN EXPERIMENT (CONE)

CONE, Figure 12, is a large scale liquid nitrogen experiment being managed by LeRC. MSFC is closely allied to this effort and is responsible for test requirements, system level testing and, possibly, launch package integration. As can be seen in Figure 12, The objectives of CONE are to provide validation of the analytical techniques for predicting active pressure control performance and for predicting the fill levels which can be achieved through the no-vent process. A Phase B program has recently been completed and the Phase C/D start is planned for 1993. Currently, CONE is expected to consist of two vacuum jacketed

tanks. Liquid nitrogen will be pumped back and forth to establish fluid transfer characteristics and both active and passive pressure control systems will be activated (not simultaneously) to provide performance data. A number of other components and processes will also be demonstrated. CONE will provide the first low-g data for a significant size cryogenic system. Because of the size and fluid being used, the CONE data can be used as a direct validation of life support system design analysis models (LN_2 & LOX). In addition, the data can be used to help with the understanding of LH_2 systems although some extrapolation and attendant design risk will be necessary. The flight date for CONE is projected for 1998.

CRYOGENIC ORBITAL HYDROGEN EXPERIMENT (COHE)

COHE, Figure 13, is a flight experiment which will be necessary for final validation of LH_2 systems design criteria. The LeRC Cryo Fluids Technology Office worked for several years to define what came to be known as COLD-SAT, a major liquid hydrogen experiment. However, this experiment was determined to cost upwards of \$300M and support for such an undertaking was never generated. Other experiments were evaluated but no inexpensive, practical, solution was found. A large part of the cost problem is that a LH_2 experiment is driven to a large ELV (Delta/Atlas class) because of the risk of flying hazardous cryogenics in the Shuttle and because of the desire to maximize the applicability of the data by providing acceleration environments and

orbit staytimes that are not available within the Shuttle.

Consequently, several alternatives are being investigated and include the use of sounding rockets to obtain some limited Hydrogen data, thus minimizing the experimentation, hence cost, of the final experiment design. In any case, the hydrogen experiment would not be initiated until late in the CONE program and would be able to take maximum advantage of lessons learned from the CONE activity. In addition, the funding profiles would be coordinated so as not to have overlaps of significant peak requirements.

Ground & Flight Integration

As ground and flight data become available, the appropriate analytical models will be validated and a design criteria data base will be established. In all cases, interaction with system designers will be maintained and close scrutiny of their requirements will be maintained. As changes in technology, analytical models, design criteria, or system needs become known, appropriate changes to the Cryogenic Fluid Management program will be made. It is expected that all major technology areas will have been completed by about the year 2005.

Conclusions

Through the evolution of what has become the joint LeRC/MSFC CFM Technology Development Program, there has been a consistent, intense effort to coordinate a plan that would meet the needs of NASA, other

governmental agencies, and industry. The end users of the technology that will be developed through this plan were consulted closely as the plan as formulated, and the needs of end users will continue to drive the program. The current joint LeRC/MSFC CFM Technology Development Program is the best way to deliver the technology necessary to meet the goals and timetables of the Space Exploration Initiative.

A flight experiments program is a vital portion of the LeRC/MSFC program, and major flight experiments need to be started now. Delay in beginning a viable flight experiments program would mean delays in obtaining the data necessary to meet SEI goals.

More importantly, NASA currently has the expertise, teamwork, and facilities on-hand and is prepared to go forward with this technology development plan. This unique capability in NASA could be at risk if there is a delay in full implementation of the LeRC/MSFC program.

Should the goals and timetables of the SEI change, however, the development of this technology in the near future is still justified. The analytical tools and design criteria learned through this technology development plan will still be useful whenever they are required; all aspects of this technology development plan will cost much less now than they will in the future.

Capability	Flight Proven SOA: Saturn/Centaur	Future Requirements
Mission Operations	Ground: Assembly, Propellant Loading Check-out and Launch Space: Short Coast and Engine Restart	Space: Final Assembly, Propellant Loading, Check-out and Entire Mission Operation for Reusable Space-based stage
Mission Duration	Hours	Months (Moon) to Years (Mars)
Fluid Management - Thermal Control	3 Layers MLI	50-200 layers MLI Refrigeration (Lunar surface/Mars)
- Pressure Control	Prop. settling (low-g) & Vent	Thermodynamic Vent (Zero-g) compatible with mission ops.
- Liquid Acquisition	Prop. settling (low-g)	Capillary (Zero-g) compatible with mission operations
- Pressurization	Prop. settling (low-g) & GHe GH ₂ after engine ignition (high-g)	Zero and low-g autogenous (GH ₂ /GO ₂)
- Liquid Transfer	None	Nonvented (Zero-g) preferred; optimized prop. settling (low-g) may be acceptable
- Slosh Control	Baffles for launch and stage separation (accel. dominated)	Space operations (capillary dominated)
- Mass Gauging	One to high-g	Zero to low-g

Fig. 1 State of the Art vs. Future Requirements, System-Level Comparisons

Fluid Management Technology	System Evaluation Criteria	SOA		Technology Program Goal (Lunar/Martian)
		Flight Demo. Saturn/Centaur	Ground Testing ¹	
Thermal Control	Boiloff/mo.	60%	10% (LEO) to 20% (Lunar surface)	< 5% / < 1%
Pressure Control	Thrust (Bo. ²)	Bo = 200 to 500	Bo < 10	Bo < 10
	Mixing Power (F _c ³)	F _c = 134.5 ⁴	F _c = 0.4	F _c = 0.4
Liquid Acquisition	Thrust	Bo = 200 to 500	Bo = 4 to 5	Bo = 4 to 5
Liquid Transfer	Thrust	-	Bo < 10	Bo < 10
	Chilldown Prop.	-	2%	< 1%
	Tank Fill Level	-	95%	97% ± 1%
Slosh Control	Min. ACS Impact	-	Limited Data	TBD
Mass Gaging	Tank Fill Level	± 0.5% (1-3 g's)	No Data	± 2% (0-g)

¹Subscale; 1-g cryogenic testing or noncryogenic drop tower testing

²Bond Number = ratio of acceleration forces to capillary forces

³Flow Characterization Parameter ≈ Power dissipation

⁴Shuttle/Centaur design criteria; not flight proven

Fig. 2. State of the Art vs. Fluid Management Technology Program Goals

ETO mass savings for nominal mission with 30 day lunar stay

\$2.95B	- Thermal control	= 28,700 lbm
	- Pressure control	= 18,500 lbm
	Total mass savings	= 47,200 (10% LEO mass growth)
	Potential cost savings	= \$118 M/mission (at \$2500/lbm ETO cost)

Benefit of adding a 45 day pre-LEO departure contingency

\$.75B	- Thermal control	= 7100 lbm
	- Pressure control	= 4700 lbm
	Total mass savings	= 11800 lbm (2.5% of LEO mass growth)
	Potential cost savings	= \$29.5 M/mission (at \$2500/lbm ETO cost)

Additional benefit for 6 month lunar stay

\$7.8B	- Thermal control	= 58,000 lbm
	- Pressure control	= 52,000 lbm
	- Advanced thermal control	= 14,700 lbm
	Total mass savings	= 124,700 lbm (26% LEO Mass growth)
	Potential cost savings	= \$312M/mission (at \$2500/lbm ETO cost)

Additional Benefit of a tanker/depot (top-off, core & aerobrake tank fueling)

\$1.6B	- For nominal mission with 30 day lunar stay	= 5,600 lbm
	- For 45 day pre-LEO departure contingency	= 18,500 lbm
	- For 180 day lunar stay	= 1,800 lbm
	Total mass savings	= 25,900 lbm (5.4% of LEO mass growth)
	Potential cost savings	= \$64.75M/mission (at \$2500/lbm ETO cost)

Major benefit of transfer technology is enabling of reusable LTS concepts (Life Cycle Cost Savings of approximately **\$10B** estimated by Martin Marietta)

Total Benefit for 25 Lunar Missions = \$23 B

Fig.3 Benefits of Orbital Cryogenic Propellant Resupply for LTV

Purpose: Provide a liquid and vapor flow facility for the collection of engineering and visual data for the development of cryogenic components and processes

Test Capabilities

Fluid Systems:

Test Fluid
Tank Capacities
LN₂ Flow Rates
Vapor Flow Rates
Pressurants

Liquid & Vapor Nitrogen
12 ft³
100-1000 lb/hr
50-500 lb/hr
GN₂ and GHe

Conditioning Systems:

Tank Insulation
Line Insulation
Cold Wall Temperatures
Inlet Vapor Temperatures

6 in. Urethane Foam
Vacuum Jacket or Foam
140-530 °R
140 °R to Ambient

Data Collection:

Data System
Visualization

Escort II (165 Channels)
1 High-Speed Camera
3 Video Cameras

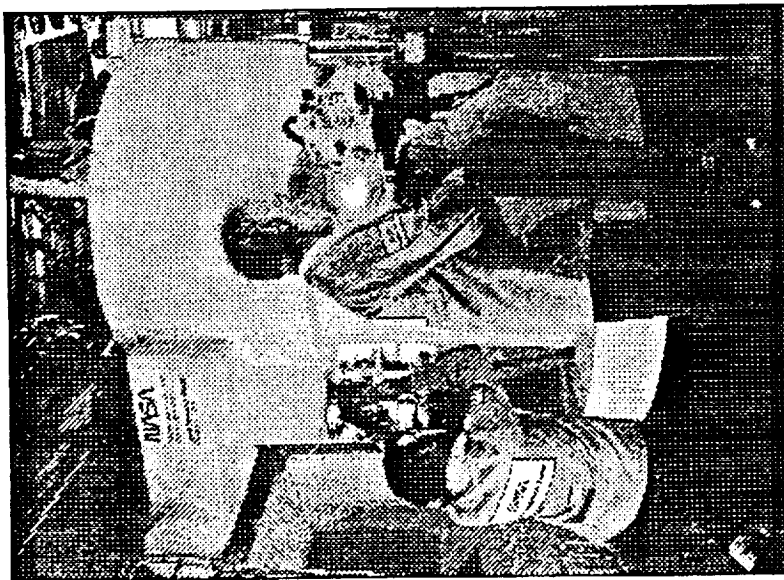


Fig. 4. RL-13: Liquid Nitrogen Flow Facility (NASA LeRC)

Purpose: Provide a liquid hydrogen flow facility for the collection of engineering data for the development of cryogenic components and processes

Test Capabilities

Fluid Systems:

Test Fluid
Dewar Capacities
Tank Operating Pressures
LH₂ Flow Rates
LN₂ Flow Rates
Pressurants

LH₂ or LN₂
18, 5, and 1.7 ft³
2-30 psia
5-100 lb/hr
60-1200 lb/hr
GH₂, GN₂ and GHe

Insulation Systems:

Dewars
Lines

10 layers of MLI
Vacuum Jacket or Foam

Data Collection: Data System

IBM PC-AT
256 Channels


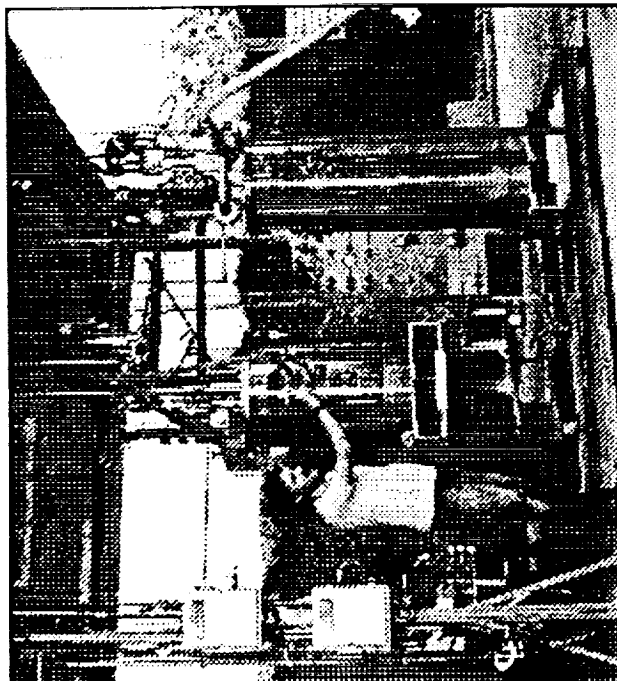


Fig. 5. CCL-7: Portable Cryogenic Research Test Rig (NASA LeRC)

Purpose: Provide ground-based testing of large-scale cryogenic fluid systems for in-space applications using LH ₂ in simulated thermal and vacuum environments

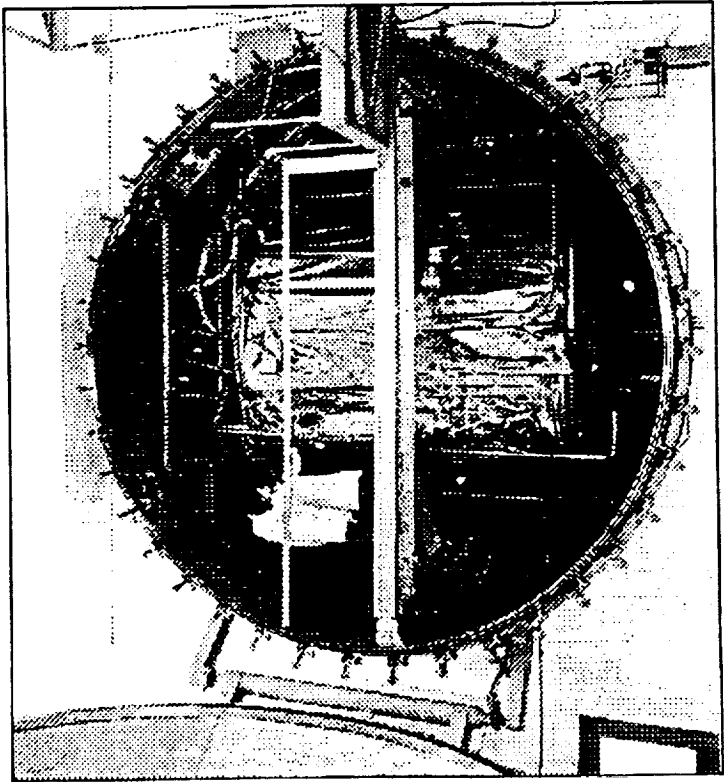

Test Capabilities

Tank Fluid	Liquid Hydrogen
Tank Operating Pressures	1-60 psia
LH ₂ Flow Rates	100-2000 lb/hr
Pressurants	GH ₂ and GHe

Facility Capabilities

Vacuum	5x10 ⁻⁷ torr
- with LH ₂ Cryoshroud	5x10 ⁻⁸ torr
LH ₂ /LN ₂ Cryoshroud Temp.	-423 °F/-320 °F
LH ₂ Capacity	26,000 gal
Max. Test Package Weight	16,000 lb
Data System	Escort D
	512 Channels

Fig. 6. K-Site: Cryogenic Propellant Tank Research Facility (NASA LeRC/Plum Brook Station)

- THREE PRIMARY CFM TEST POSITIONS

- TP 302: 20' BY 35' THERMAL VAC. CHAMBER
- TP 303: 4' BY 6' AMBIENT
- TP 304: 12' BY 15.4 FT VACUUM CHAMBER

- UTILITIES

- GN₂ SUPPLY: 4200 PSIG
- GH₂ SUPPLY: 4400 PSIG
- GHE SUPPLY: 4000 PSIG
- LH₂: 8000 GALLONS

- INSTRUMENTATION AND CONTROL

- 500 DATA CHANNELS CONDITIONED AND DIGITIZED
- 26 COAX CHANNELS

- HISTORY

- ORIGINAL TEST POSITION: 1964
- 20' THERMAL VAC. CHAMBER (TP302): 1969; MODIFIED 1981


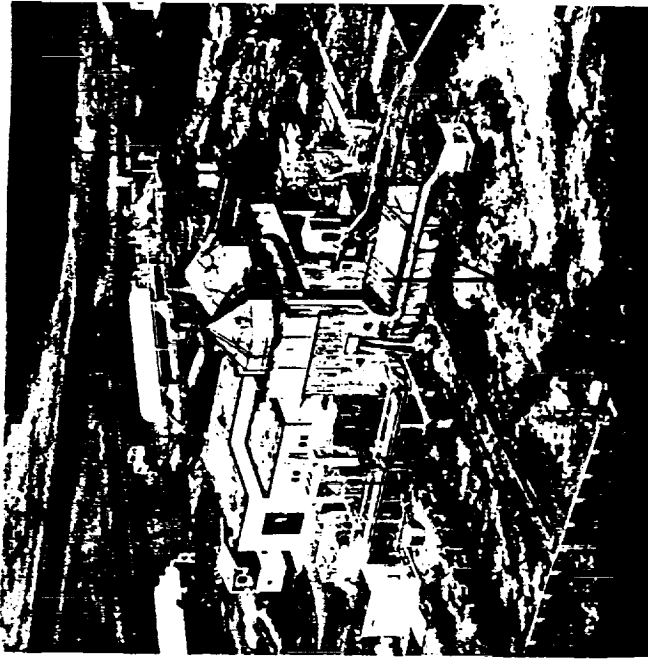


FIG. 7. MSFC CRYOGENIC FLUID MANAGEMENT TEST FACILITIES, TEST STAND 300

DESCRIPTION	
●	Low-g fluid mixing experiment on STS
●	Freon in a plexiglass tank is thermally stratified by heaters and then mixed by an axial jet mixer
●	Temperature, pressure, and video data

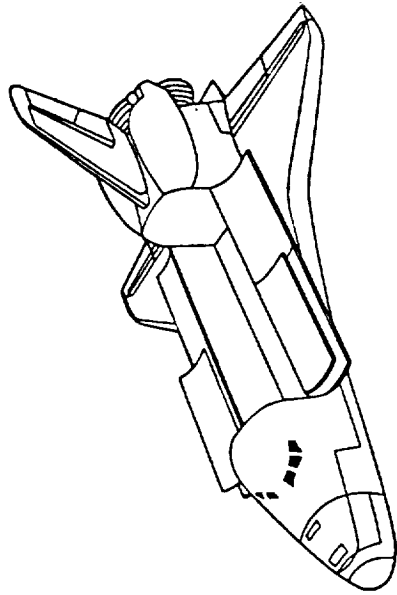

OBJECTIVES	
●	Investigate fluid dynamics and thermodynamics of jet mixing as a means of pressure control for future for future space cryogenic
●	Obtain data for comparison with ground-based empirical models and computer codes

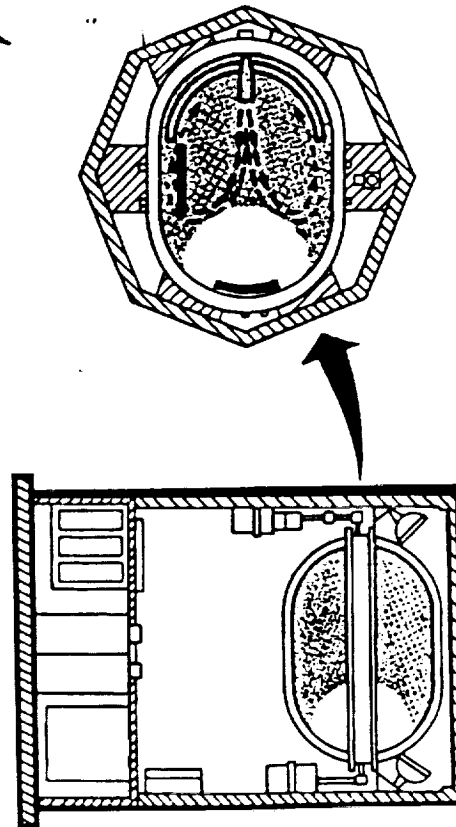



Fig. 8. Tank Pressure Control Experiment (TPCE)

MARSHALL SPACE FLIGHT CENTER SCIENCE & ENGINEERING PROPULSION LABORATORY

FLUID ACQUISITION AND RESUPPLY EXPERIMENT

DESCRIPTION

- SHUTTLE MID-DECK EXPERIMENT
- EMPLOYS PREVIOUSLY FLOWN SFMD FACILITY
- VISUAL DATA USING WATER IN PLEXIGLASS TANK

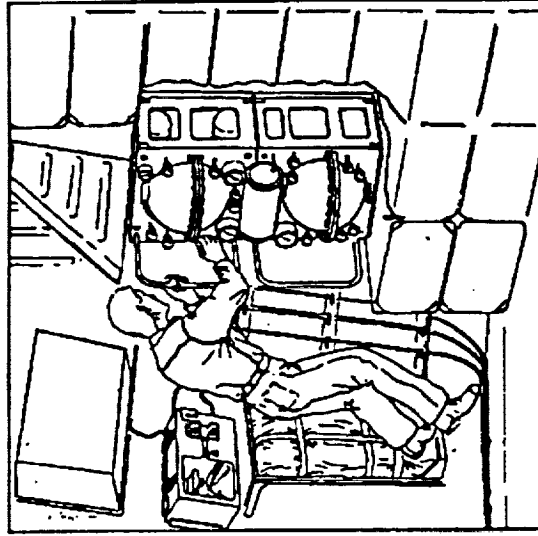

OBJECTIVES

- EVALUATE PERFORMANCE OF SCREEN CHANNEL AND VANE LIQUID ACQUISITION DEVICES (LAD's)
- ASSESS PERFORMANCE DURING TANK DRAIN
- EVALUATE REFILL PERFORMANCE

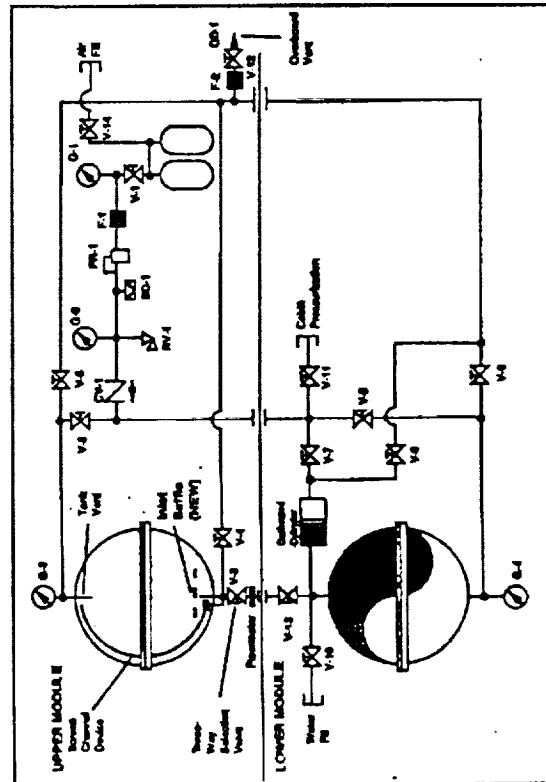




FIG. 9. FLUID ACQUISITION AND RESUPPLY EXPERIMENT

MARSHALL SPACE FLIGHT CENTER SCIENCE & ENGINEERING PROPULSION LABORATORY

SUBSCALE ORBITAL FLUID TRANSFER EXPERIMENT

DESCRIPTION

- STS SECONDARY PAYLOAD
- VIDEOTAPED FLUID MOTION IN PLEXIGLAS TANKS
- AUTONOMOUS OPERATIONS-NO USE OF SHUTTLE RESOURCES
- USES FREON-113 TEST FLUID

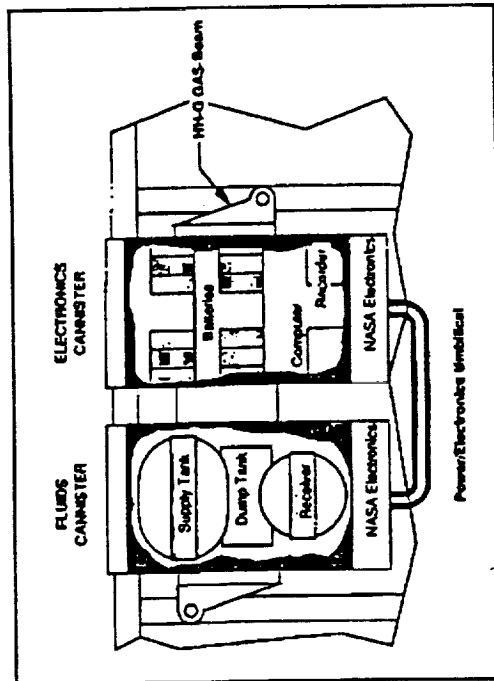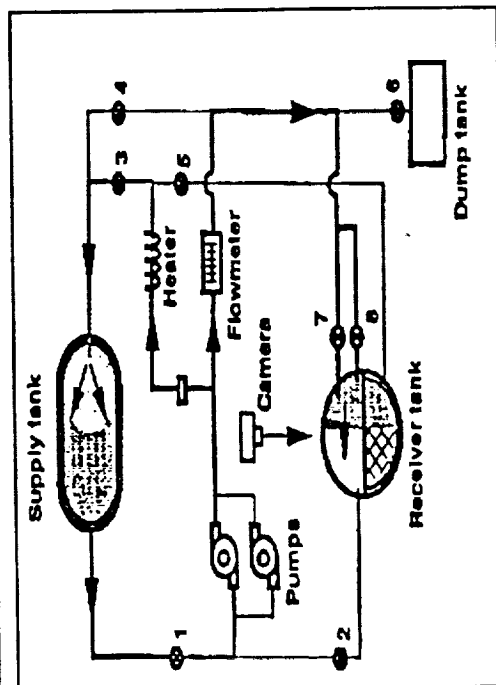

OBJECTIVES

- TANK FILLING & LIQUID ACQUISITION IN LOW-G
- EVALUATE NO-VENT FILL
- MODEL AND EXAMINE LOW-RATE VENTED FILL
- EVALUATE PERFORMANCE OF LAD

FIG. 10. SUBSCALE ORBITAL FLUID TRANSFER EXPERIMENT


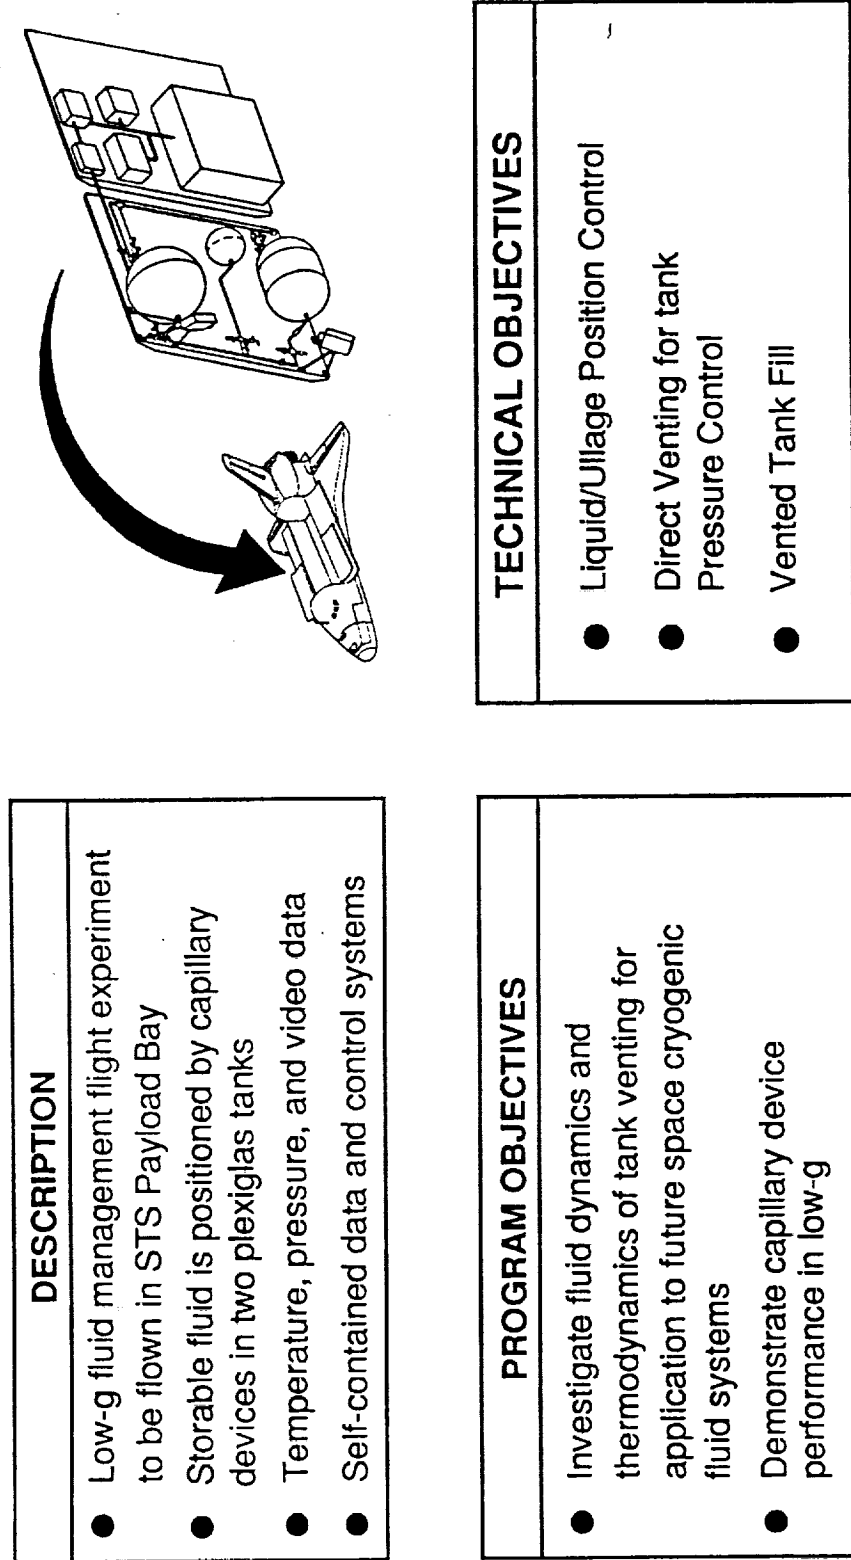


Fig. 11. Vented Tank Resupply Experiment (VTRE)

DESCRIPTION
<ul style="list-style-type: none"> ● Subcritical liquid nitrogen experiment to be flown in STS cargo bay ● Currently designed for Hitchhiker-M carrier ● Temperature, pressure, and flow rate data

PROGRAM OBJECTIVES
<ul style="list-style-type: none"> ● Provide experimental data and component demonstration for the operation of a subscale cryogenic fluid management system in space ● Apply results to design of future LOX/LN₂ space systems

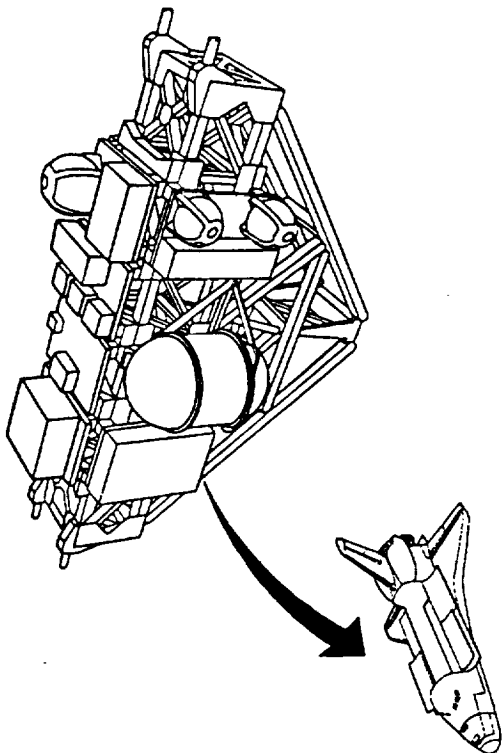


TECHNICAL OBJECTIVES
<ul style="list-style-type: none"> ● Experiments for partial model validation <ul style="list-style-type: none"> - Active TVS - Nonvented Transfer* ● Critical component and process demonstrations: <ul style="list-style-type: none"> - Passive TVS - Thermal Subcooling - LAD Expulsion - Fluid Dumping - LAD Fill - Pressurant Generation - Autogenous Pressurization
* Addition of nonvented fluid transfer experiment will occur at beginning of Phase C/D

Fig. 12. Cryogenic Orbital Nitrogen Experiment (CONE)

DESCRIPTION
<ul style="list-style-type: none"> • Subcritical liquid hydrogen flight experiment • Preferred carrier: ELV • Temperature, pressure, and flow rate data

PROGRAM OBJECTIVES
<ul style="list-style-type: none"> • Provide experimental data and component demonstration for the operation of a subscale cryogenic fluid management system in space • Validate design equations and generate design criteria for large cryogenic fluid systems • Apply results to design of future LH₂ space systems

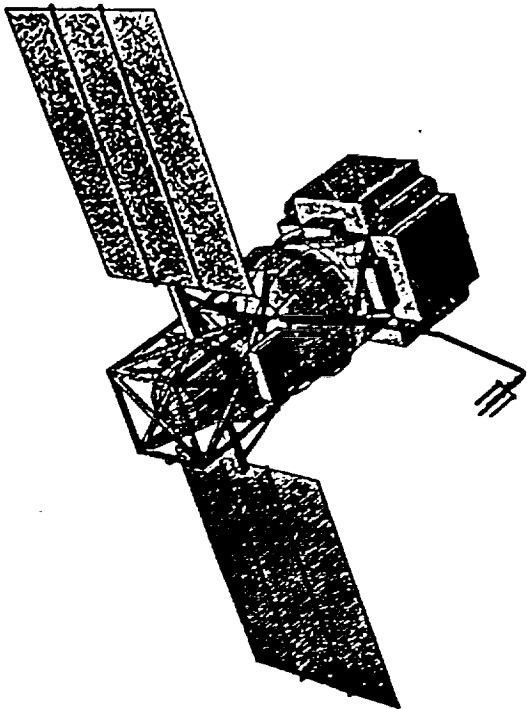

Sample Concept

TECHNICAL OBJECTIVES
<ul style="list-style-type: none"> • Experimentation for analytical model validation <ul style="list-style-type: none"> - Active TVS - Nonvented transfer - Autogenous pressurization • Critical component and process demonstrations: <ul style="list-style-type: none"> - Passive TVS - Thermal subcooling - LAD expulsion - Fluid dumping - LAD fill - Pressurant generation

Fig. 13. Cryogenic Orbital Hydrogen Experiment (COHE)

PAGE 1 INTERNATIONAL BUREAU

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 1991		3. REPORT TYPE AND DATES COVERED Technical Memorandum
4. TITLE AND SUBTITLE The NASA Cryogenic Fluid Management Technology Program Plan			5. FUNDING NUMBERS WU-506-42-73	
6. AUTHOR(S) James R. Faddoul and Stanley D. McIntyre				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-6586	
9. SPONSORING/MONITORING AGENCY NAMES(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, D.C. 20546-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-105256 AIAA-91-3553	
11. SUPPLEMENTARY NOTES Prepared for the Conference on Advanced Space Exploration Initiative Technologies cosponsored by AIAA, NASA, and OAI, Cleveland, Ohio, September 4-6, 1991. James R. Faddoul, NASA Lewis Research Center; Stanley D. McIntyre, NASA Marshall Space Flight Center, Huntsville, Alabama. Responsible person, James R. Faddoul, (216) 433-6322.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Categories 34 and 20			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) During the past three decades, NASA has been designing and using large quantities of cryogenic fluids for propulsion system propellants, coolants for experiments, and for environmental control systems. As a consequence, an erroneous conclusion has been drawn that the technology exists for using large quantities of cryogenics in space for long periods of time. This paper attempts to dispel that myth and to present the technology needs that require development in order to support the NASA programs of the future. A NASA program, developed through the impetus of MSFC and LeRC personnel and supported by all NASA centers is outlined. The current State-of-the-art is discussed along with specific needs for near future missions. Then, using the Space Exploration Initiative mission set, cost/benefit projections are made for development of advanced cryogenic fluid management techniques. Earth based and space based test programs are discussed relative to the technology requirements for liquid storage, supply, and transfer and for fluid transfer and advanced instrumentation.				
14. SUBJECT TERMS Cryogenics; Liquid hydrogen; Cryogenic technology; Liquid nitrogen; Liquid oxygen			15. NUMBER OF PAGES 24	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	