

NASA Technical Memorandum 104112

111-11
116480

P.37

Advanced Subsonic Transport Approach Noise— The Relative Contribution of Airframe Noise

William L. Willshire, Jr., and Donald P. Garber

June 1992



National Aeronautics and
Space Administration

Langley Research Center
Hampton, Virginia 23665

(NASA-TM-104112) ADVANCED SUBSONIC
TRANSPORT APPROACH NOISE: THE
RELATIVE CONTRIBUTION OF AIRFRAME
NOISE (NASA) 37 p

N92-34148

Unclas

G3/71 0116480

INTRODUCTION

With current engine technology, airframe noise is a contributing source for large commercial aircraft on approach, but not the major contributor. With the promise of much quieter jet engines with the planned new generation of high-bypass turbofan engines, airframe noise has become a topic of interest in the advanced subsonic transport research program. Questions being raised include: Will airframe noise be the dominant noise source on approach? How well can it be predicted? Is airframe noise an absolute noise floor to which other noise sources should be reduced, or can airframe noise be reduced? The concerns raised in these questions ultimately are connected to the noise acceptability of the aircraft.

The objective of this paper is to assess the contribution of airframe noise relative to the other aircraft noise sources on approach. The assessment will be made for a current technology large commercial transport aircraft and for an envisioned advanced technology aircraft. NASA's Aircraft Noise Prediction Program (ANOPP) will be used to make total aircraft noise predictions for these two aircraft types. Predicted noise levels and areas of noise contours will be used to determine the relative importance of the contributing approach noise sources. The actual set-up decks used to make the ANOPP runs for the two aircraft types are included in appendixes.

AIRFRAME NOISE

Background

Airframe noise arises from the interactions of unsteady air flow with the aircraft structure exposed to the flow. The unsteadiness of the air flow is a consequence of flight, for instance the turbulent boundary layer of a wing or the impingement of a turbulent wake of an up-stream aircraft component on a down-stream aircraft component. The primary airframe noise sources are usually considered to be trailing edges, landing gear, cavities, flaps, and slats. These sources are not, in general, independent and may interact. The air flow around an aircraft is highly energized and dynamic, making airframe noise a significant and complex aircraft noise source. Airframe noise is expected to contribute the most to overall aircraft noise during approach when the engines are throttled and the aircraft is in a dirty (high lift devices and landing gear deployed) configuration.

Much airframe noise research has been done. Both experimental and theoretical investigations have been extensive, much of the work being performed over a decade ago. Experimental investigations have included full scale flight experiments, complete model and component wind tunnel testing, and free flight glider and model experiments. Theoretical investigations have been concerned with the fundamental physics of individual airframe noise sources. Many excellent summaries of airframe noise research are available (refs. 1-4).

Initially, airframe noise modelling was aimed at whole aircraft Overall Sound Pressure Level (OASPL) prediction which was empirically based with pertinent parameters identified from analytical insight. These methods soon were extended to predict 1/3 octave band spectra. These empirical methods worked reasonably well when applied to the same or similar class of aircraft. Whole aircraft airframe noise prediction was soon surpassed by component noise prediction models in which the airframe noise of particular aircraft

components is predicted. One method of component prediction is very similar to the whole aircraft models in that the individual component prediction models are largely empirical; however, much greater use of analytical insight, where available, was used.

Fundamental principle aerodynamic and aeroacoustic models were developed for some airframe noise sources. In particular, models for predicting trailing edge noise are well founded and complete for many flow environments (ref. 4). Another airframe noise component which in principle is well understood is that due to landing gear.

During approach, dominant airframe noise sources other than landing gear are those caused by the deployment of high lift devices, such as flaps and slats. The increase in airframe noise with flap and slat deployment over that of a clean wing is on the order of 10 EPNdB (ref. 1). Flap and slat airframe noise is associated with the physical gaps or slots between slat and wing, or wing and flap, and with the edges of the flaps.

Continued analytical work is needed so that new airframe noise sources can be incorporated in future component prediction schemes either by parametrically correct empirical methods or by first principle methods. First principle methods are preferred over empirical methods; however, it is often difficult to obtain sufficient input to use the first principle methods. This is the case for both trailing edge and landing gear airframe noise prediction for complete aircraft. The air flow around a complete aircraft is in general not known sufficiently to predict either of these two airframe noise sources from analytical expressions. Parametrically correct empirical prediction methods are then the next best methods to predict airframe noise for complete aircraft.

Predicted Total Aircraft Noise

The Fink component method is recommended in reference 1 to make whole aircraft airframe noise predictions, and was used to make the airframe noise predictions in this paper. NASA Langley Research Center's Aircraft Noise Prediction Program, ANOPP, (ref. 5) was used to make the total aircraft noise predictions. The Fink airframe noise method is incorporated in ANOPP. The airframe noise prediction method in ANOPP was validated in reference 6 with a variety of measured data not incorporated into the Fink method. The result of the validation showed that the Fink method agreed within ± 2 EPNdB to the measured results.

ANOPP, and programs similar to it, requires detailed information in order to make an aircraft noise prediction. For example, one of the needed categories of information is engine operating parameters, often referred to as the engine operating deck. The engine data are critical to the prediction of the fan, core, turbine, and jet noise. It typically is very difficult to obtain the required engine parameters, particularly for an engine in the current fleet or an engine in development. The required input to make airframe noise predictions is relatively easily obtained from published descriptions (ref. 7). One of the early ANOPP validation studies involved a DC-10 (ref. 8). The ANOPP input parameters listed in reference 8, although somewhat different from the current required input, were used as the basis to make ANOPP predictions for a DC-10 on approach. These predictions were used to verify the numbers being predicted by ANOPP 15 years after the DC-10 validation and to serve as a baseline for comparison to the projected advanced subsonic transport noise predictions. Noise sources included in the total aircraft ANOPP predictions are fan inlet, fan discharge, core, turbine, and jet; along with main landing gear, flap, slat, nose landing gear, wing, horizontal tail, and vertical tail airframe noise sources.

Another important category of input to ANOPP which is difficult to obtain is the amount of suppression to apply to the fan and turbine noise sources. ANOPP does not predict the noise suppression to be applied to the fan and turbine noise sources. Noise suppression is supplied by the user of ANOPP. Noise suppression technology is very competitive sensitive. To make the baseline current technology DC-10 noise predictions with ANOPP, the following values of noise suppression 0, 10, and 10 dB were applied to the fan inlet, fan discharge, and turbine noise sources, respectively. These values of suppression were selected based on available published information (refs. 24-25), engineering insight into known suppression technology, and known behavior of the noise sources of current technology transports on approach. Suppression of fan and turbine noise is achieved by the placement of absorbing material (liners) in and the design of the fan and turbine ducts. The selection process for the noise suppression amounts to a calibration of ANOPP necessitated by a lack of detailed information for current technology engines.

An example of the result of the noise prediction process is given in figure 1 for the baseline DC-10 in the form of an Effective Perceived Noise Level (EPNL) contour plot of the total aircraft noise. The rectangular array of points on the plot represents observer positions used to generate the contours. The actual set-up deck used as input to make the current technology total aircraft noise predictions with ANOPP are given in Appendix A. The ANOPP input parameters are included in this paper to document how ANOPP was used to make the predictions given in this report. The results in Figure 1 and all the results to be given are for an aircraft flying an approach consisting of a 3 degree glideslope. The maximum approach EPNL value is given in the upper right portion of the plot for the approach position. The approach position is the one specified in the FAR 36 (ref. 9) noise certification regulations which is 1.25 miles (2.0 km) from the end of the runway. The 3-degree approach glideslope results in the aircraft passing approximately 120 m above the approach position. In figure 1, the circle symbol underneath the flight track is the location of the approach position. Similar noise contour results were predicted for individual noise sources. All noise predictions were made for a microphone positioned 1.2 m above the ground. The results for the baseline DC-10 ANOPP noise predictions are summarized in Table 1 in the form of approach EPNL values and areas of the 103 EPNL noise contours. In Table 1, results are given for the total aircraft noise, and the noise contributions of fan discharge, fan inlet, turbine, airframe, core, and jet noise sources.

The total aircraft noise approach EPNL value which corresponds to the FAA approach certification position is compatible with published values for a DC-10-40 powered with JT9D-59A engines. The predicted total level of 107 dB is one EPNdB above the largest reported certification level in reference 23 for a DC-10. One decibel is within the accuracy of the predictions which is believed to be on the order of 2 EPNdB. The contributions of each of the predicted noise sources are presented in Table 1 in increasing order of importance. The largest contributor to the total noise on approach is fan noise with airframe noise, on the basis of approach EPNL values, the fourth largest contributor, 10 EPNdB less than fan noise.

The frequency content of the various noise sources is given in figure 2 for the sound emitted when the aircraft was over the approach centerline microphone position. At frequencies less than 600 Hz, airframe and jet noise sources are comparable in level and dominate. Turbine noise dominates in the frequency range of 600 Hz to 1500 Hz. At frequencies greater than 1600 Hz, the turbine and fan discharge noise levels are similar and dominate.

To make total aircraft noise predictions for an advanced subsonic transport, the engines on the baseline DC-10 were replaced with engines having a by-pass-ratio (BPR) of 10 and an additional 5 dB of suppression was applied to both the fan (inlet and discharge) and turbine

noise sources. This 'rubber' engine was obtained by using the Navy/NASA Engine Program, NNEP, (ref. 10) to extrapolate the engine deck of a smaller (approximately 40,000 lbs thrust), BPR 6 engine. The authors wish to acknowledge Karl A. Geiselhart of Lockheed Engineering and Sciences Company for setting up and running the Navy/NASA Engine Program (NNEP), and providing ANOPP compatible engine state tables for a 10:1 BPR engine concept. The resulting engine generated 53,000 lbs of thrust at full (100%) throttle. The same airframe and approach flight profile were used in ANOPP to make the noise predictions. A BPR of 10 and an additional 5 dB suppression represent modest assumptions for an advanced subsonic transport. BPRs in the range of 20 and additional fan noise suppression in the range of 10 dB have been discussed as goals for advanced subsonic transports. The additional suppression would be obtained through the use of advanced technology liners which might include bulk absorbers, multi-layered honeycomb reactive liners, and possibly, active noise control.

The noise prediction results for the advanced technology transport are summarized in Table 2 in the form of approach EPNL values and areas of the 103 EPNL noise contours. The ANOPP set-up deck used to make the advanced technology transport noise predictions is given in Appendix B. Results in Table 2 are given for the total aircraft noise, the fan inlet, the fan discharge, the airframe, turbine, and core noise sources. The predicted jet noise was so small that it is not presented in Table 2. The higher BPR engines have resulted in less jet noise and the additional noise suppression is evident in the results. For this realization of an advanced technology transport, the airframe noise is the second largest (tied with fan discharge noise) noise contributor on the basis of approach microphone EPNL levels behind fan inlet noise. The airframe noise is 2 EPNdB less than the largest contributor to the total aircraft noise predicted for the advanced technology transport.

For the advanced technology transport, a large reduction in total noise impact is evident when comparing the size of the noise contours for the current technology (Table 1) and the advanced technology (Table 2) transports. An approximate nine-fold reduction is observed in the area of the total aircraft noise 103 EPNdB noise contour area for the two transports.

The spectra of the various noise sources for the advanced technology transport are given in figure 3 for the noise emitted when the aircraft was above the approach centerline microphone. At frequencies less than 200 Hz, airframe noise is the dominant noise source. From approximately 200 Hz to 800 Hz, airframe and combustor noise are dominant. From 800 Hz to 4 kHz, fan discharge noise is dominant. Above 4 kHz, turbine noise becomes dominant. Jet noise is seen to be very low and not a contributing noise source.

Within the accuracy of the noise predictions, on the order of 2 EPNdB, the contribution of airframe noise in terms of EPNL is comparable to the contribution of fan noise to the total noise of this advanced technology transport. Additional reductions in fan noise alone will ultimately result in airframe noise becoming the dominant noise source on approach. From a noise impact point of view, as measured by the area of the 103 EPNL noise contour, fan inlet noise of the advanced technology transport has an impact over four times that of airframe noise. Further reductions in fan noise need to be done with consideration of airframe noise. However, the higher frequency content of fan noise over that of airframe noise and the larger noise impact (larger contour area) make reductions in fan noise more attractive to further increase the noise acceptability of the next generation of transport aircraft.

The airframe noise predictions were the same for both the baseline and the advanced technology transport due to the fact that the same airframe and approach flight path were used to make the noise predictions. The approach noise levels and the area of the 103 EPNL noise contours are given for the major airframe noise sources in Table 3. A finer

grid was used to generate the individual airframe noise source contours. The total airframe noise contour area in Table 3 is slightly different and more accurate than the total airframe noise contour area given previously. On the basis of approach EPNL, main landing gear noise is the largest contributor, followed by trailing edge flap noise and slat edge noise. The approach EPNL levels of these three airframe noise sources are comparable, falling in the range of 85 to 87 EPNdB. On the basis of noise impact, as measured by the area of the 103 EPNL noise contour, main landing gear and trailing edge flap noise are comparable, having a little less than twice the noise impact of leading edge slat noise.

Airframe noise should not be considered an absolute noise floor. Many ideas to reduce airframe noise have been published (ref. 1). Lower approach speeds would lessen airframe noise, but great reductions in landing speed are not likely. A move toward simpler high lift systems with fewer slat and flap segments with thought given to downstream wake impingement would tend to minimize airframe noise. Porous, serrated, swept, sucking, and blowing leading and trailing edges have been proposed to reduce the intensity of the interaction between the unsteady flow and trailing edges. In the case of flap edge noise, the above listed surface changes or an edge plate might be used to reduce the noise. Interactions between airframe noise components have been shown to be either adverse, causing an increase in airframe noise or favorable, causing a decrease in total airframe noise. In a model experiment involving an Advanced Supersonic Transport (ref. 11), the airframe noise with the flaps and main landing gear deployed was greater than the sum of the noise from each component deployed individually. In another model study (ref. 12) the total noise of a wing with a particular combination of deployed slats and flaps was less than the sum of the noise generated separately by each component. These results indicate that the interactions between airframe noise components are complex but once understood should be able to be exploited to yield lower airframe noise aircraft designs. Poor designs can increase airframe noise; good designs can reduce airframe noise. Further systematic research is needed to identify ways to reduce airframe noise.

Summary

Total aircraft noise, including airframe noise, for approach was predicted for a current technology large transport and for an envisioned advanced technology transport. An objective of the research was to assess the relative importance of airframe noise to the other noise sources on approach for the two aircraft types. Airframe noise for the current technology transport was 10 EPNdB less than the more dominant fan and turbine noise sources. The advanced technology transport was modelled as having engines with a BPR of 10 with an additional 5 dB suppression on fan and turbine noise. On approach, the airframe noise for this envisioned aircraft was 2 EPNdB below the largest contributing noise source, the fan inlet. This level difference was within the prediction accuracy; therefore, a conclusion is that airframe noise is comparable in amplitude to fan noise sources on approach for the studied advanced technology transport. The noise impact of fan noise, as measured by noise contour area, was greater by more than a factor of four over airframe noise. Further reduction in fan noise needs to be done with consideration of airframe noise. Airframe noise should not, however, be considered an absolute noise floor. Airframe noise can be reduced by good design practice. Many airframe noise reduction ideas have been identified and need to be validated.

REFERENCES

1. Crighton, David G.: Airframe Noise. Aeroacoustics of Flight Vehicles: Theory and Practice, Volume 1: Noise Sources, Harvey H. Hubbard, ed., NASA RP-1258, WRDC TR 90-3052, 1991.
2. Heller, H. H.; and Dobrzynski, W. M.: A Comprehensive Review of Airframe Noise Research. Proceedings of the 11th ICAS Conference, Lisbon, Portugal, September 10-16, 1978, Vol. 1, p. 42-60.
3. Hardin, J. C.: Airframe Noise/A Design and Operating Problem, NASA SP-416, October 1976.
4. Howe, M. S.: A Review of the Theory of Trailing Edge Noise, Journal of Sound and Vibration, (1978), 61(3), 437-465.
5. Aircraft Noise Prediction Program Theoretical Manual, NASA TM 83199, Part I, Part II, February 1982.
6. Block, P. J. W.: Assessment of Airframe Noise, J. Aircraft, Vol. 16, No. 12, p. 834-841.
7. DC-10 Design Features, Report DAC 61556E, October 1979.
8. Kapper, C. Y.: Validation of Aircraft Noise Prediction Program, DC 10-Validation, NASA CR 159047, June 1979.
9. Noise Standards: Aircraft Type and Airworthiness Certification. Federal Aviation Regulations, Pt. 36, FAA, June 1974.
10. Fishbach, Laurence H.; and Caddy, Michael J.: NNEP - The Navy NASA Engine Program. NASA TM-X-71857, December 1975.
11. Preisser, J. S.: Airframe Noise Measurements on a Supersonic Transport Small-Scale Model; J. Aircraft, Vol. 17, No. 11, November 1980, pp 795-801.
12. Fink, M. R.; and Schlinker, R. H.: Airframe Noise Component Interaction Studies, AIAA 5th Aeroacoustics Conference, Paper 79-0668, Seattle, Wa., March 12-14, 1979.

Table 1. Noise Predictions for Baseline DC-10

<u>Noise Source</u>	<u>EPNL, dB</u>	<u>Contour Area,</u> <u>mi² (km²)</u>
Core	86	—
Jet	91	.003 (.008)
Airframe	92	.003 (.008)
Turbine	100	.064 (.166)
Fan Inlet	101	.134 (.347)
Fan Discharge	102	.108 (.280)
Total	107	.531 (1.375)

Table 2. Noise Predictions for Advanced Technology Transport

<u>Noise Source</u>	<u>EPNL, dB</u>	<u>Contour Area,</u> <u>mi² (km²)</u>
Core	86	—
Turbine	91	.001 (.003)
Airframe	92	.003 (.008)
Fan Discharge	92	.003 (.008)
Fan Inlet	94	.014 (.036)
Total	99	.060 (.155)

Table 3. Airframe Noise Pr

<u>Noise Source</u>	<u>EPNL, dB</u>
Nose Landing Gear	76
Leading Edge Slat	85
Trailing Edge Flap	86
Main Landing Gear	87
Total	92

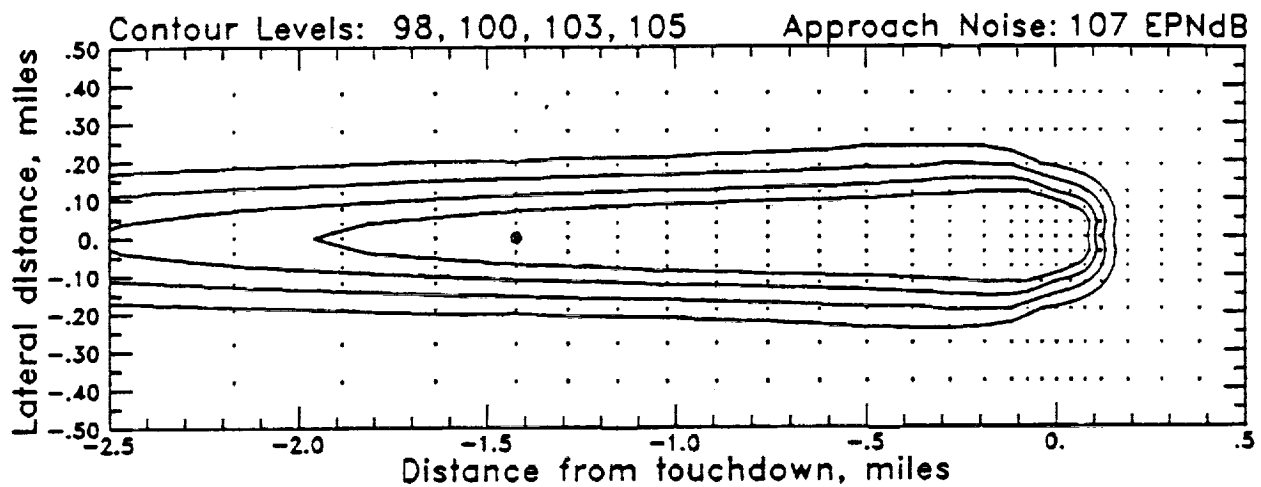


Figure 1. EPNL noise contour for current technology total landing noise.

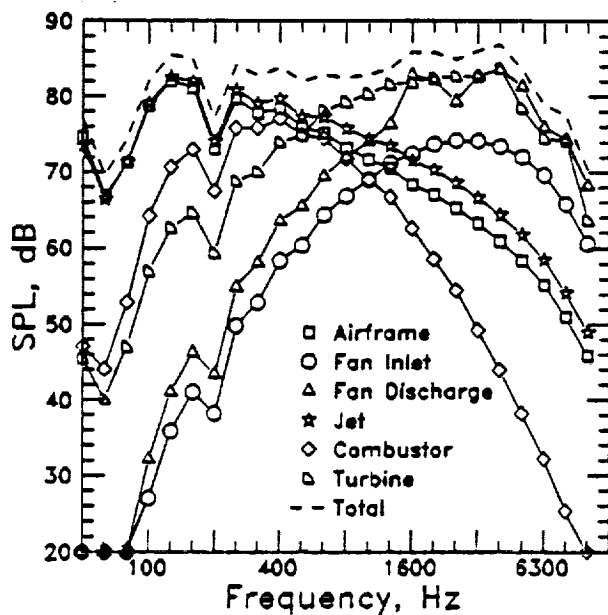


Figure 2. Current technology overhead noise source spectra.

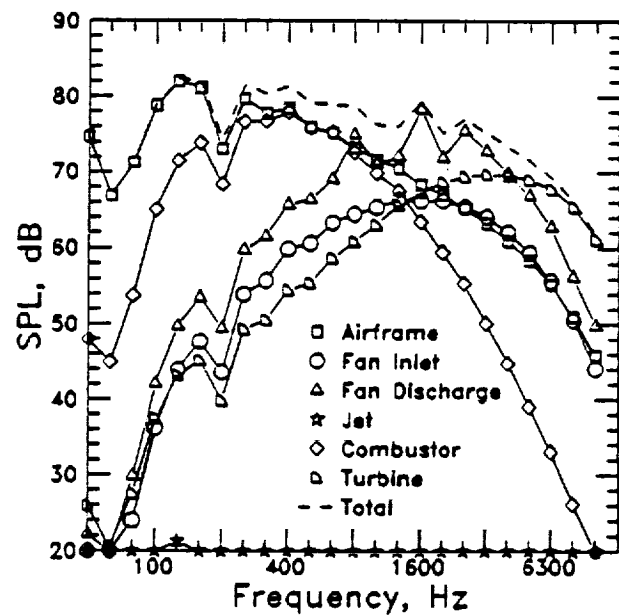


Figure 3. Advanced technology overhead noise source spectra.

Appendix A: Conventional Transport ANOPP Command File

Contained herein is the ANOPP command file used to calculate EPNL values for the approach to landing of a conventionally powered commercial transport. For brevity's sake the majority of observer positions (for the Geometry Module GEO) and suppression factors (for the General Suppression Module GENSUP) were omitted. Except for those omissions the command file is sufficient to reproduce the results presented in this paper.

```

ANOPP ACCOUNT=.FALSE., JECHO=.TRUE., JLOG=.FALSE., LENG1=12000,
MAXCARDS=10000, NAETD=100, NAEUD=100, NLPPM=48, NOGO=.FALSE. $
$
STARTCS $
$
$ LOAD LIBRARYS
$
LOAD /LIBRARY/ PROCLIB, STNTBL $
$
$=====
$
$ ATM PARAMETERS
$
PARAM DELH = 100. $ ALTITUDE INCREMENT FOR OUTPUT
PARAM H1 = 0. $ GROUND LEVEL ALTITUDE, FT
PARAM IUNITS = 7HENGLISH $ INPUT UNITS
PARAM NHO = 22 $ NUMBER OF ALTITUDE INCREMENTS
PARAM P1 = 2116.224 $ ATMOSPHERIC PRESSURE AT GROUND, LBF/SQFT
PARAM IPRINT = 2 $ PRINT OUTPUT
$
$ ATM MEMBER ATM(IN)
$
UPDATE NEWU=ATM, SOURCE=* $
-ADDR OLDLM=*, NEWLM=IN, FORMAT=4H3RS$, MNR=22 $
    0.0, 518.670, 70.0 $
    100.0, 518.313, 70.0 $
    200.0, 517.957, 70.0 $
    300.0, 517.600, 70.0 $
    400.0, 517.244, 70.0 $
    500.0, 516.887, 70.0 $
    600.0, 516.530, 70.0 $
    700.0, 516.174, 70.0 $
    800.0, 515.817, 70.0 $
    900.0, 515.461, 70.0 $
    1000.0, 515.104, 70.0 $
    1100.0, 514.747, 70.0 $
    1200.0, 514.391, 70.0 $
    1300.0, 514.034, 70.0 $
    1400.0, 513.678, 70.0 $
    1500.0, 513.321, 70.0 $
    1600.0, 512.965, 70.0 $
    1700.0, 512.608, 70.0 $
    1800.0, 512.251, 70.0 $
    1900.0, 511.895, 70.0 $
    2000.0, 511.538, 70.0 $
    2100.0, 511.182, 70.0 $
END* $
$
$ EXECUTE ATM, GENERATE ATM(TMOD)
$
EXECUTE ATM $
$
$=====
$
$ ABS PARAMETERS
$
PARAM IUNITS = 7HENGLISH $ INPUT UNITS
PARAM ABSINT = 5 $ NUMBER OF INTEGRATION STEPS
PARAM IPRINT = 2 $ PRINT OUTPUT
PARAM SAE = .TRUE. $ SAE METHOD
$
$ ABS MEMBER SFIELD(FREQ) AND DIRECTIVITY MEMBERS SFIELD(THETA) AND SFIELD(PHI)
$
UPDATE NEWU=SFIELD, SOURCE=* $
-ADDR OLDLM=*, NEWLM=FREQ, FORMAT=4H*RS$, MNR=1 $
    50.0, 63.0, 80.0, 100.0, 125.0, 160.0, 200.0,
    250.0, 315.0, 400.0, 500.0, 630.0, 800.0, 1000.0,
    1250.0, 1600.0, 2000.0, 2500.0, 3150.0, 4000.0, 5000.0,
    6300.0, 8000.0, 10000.0, 12500.0 $
-ADDR OLDLM=*, NEWLM=PHI, FORMAT=4H*RS$, MNR=1 $
    0., 5., 10., 15., 20., 25., 30., 35., 40.,
    45., 50., 55., 60., 65., 70., 75., 80., 85. $
-ADDR OLDLM=*, NEWLM=THETA, FORMAT=4H*RS$, MNR=1 $

```

```

    5., 10., 15., 20., 25., 30., 35., 40., 45., 50.,
    55., 60., 65., 70., 75., 80., 85., 90., 95., 100.,
    105., 110., 115., 120., 125., 130., 135., 140., 145., 150.,
    155., 160., 165., 170., 175. $
END* $

$
$ EXECUTE ABS, GENERATE ATM(AAC)
$
    EXECUTE ABS $
$
$ =====
$
$ SFO PARAMETERS
$
PARAM IUNITS = 7HENGLISH $ INPUT UNITS
PARAM NJO = 0 $ NUMBER OF TIME STEPS COMPLETED
PARAM IPRINT = 0 $ PRINT NOTHING
PARAM IOUT = 1 $ OUTPUT OPTION
PARAM J = 1 $ INITIAL STEP NUMBER
PARAM TSTEP = 0.5 $ TIME STEP INTERVAL, SEC
PARAM Z1 = 0. $ ALTITUDE AT BRAKE RELEASE, FT
PARAM ENGNAM = 3HEN1 $ ENGINE IDENTIFIER NAME
PARAM TT = 0. $ INITIAL TIME, SEC
PARAM VA = 233. $ AIRCRAFT VELOCITY, FT/SEC
PARAM XA = -38162. $ INITIAL DISTANCE FROM ORIGIN, FT
PARAM YA = 0. $ LATERAL DISTANCE FROM ORIGIN, FT
PARAM ZA = 2010. $ INITIAL ALTITUDE, FT
PARAM THW = -3.0 $ INCLINATION OF FLIGHT VECTOR WRT HOR, DEG
PARAM PLG = 4HDOWN $ INITIAL LANDING GEAR POSITION
PARAM TLG = 0. $ LANDING GEAR RETRACTION TIME, SEC
PARAM JF = 1000 $ INTEGRATION STEP NUMBER
PARAM TF = 200. $ TIME LIMIT, SEC
PARAM XF = 10000. $ DISTANCE LIMIT, FT
PARAM ZF = 10. $ ALTITUDE LIMIT, FT
PARAM ALPHA = 6.5 $ ANGLE-OF-ATTACK, DEG
PARAM DELTA = 50. $ FLAP SETTING, DEG
PARAM THROT = .1880 $ POWER SETTING

$
$ EXECUTE SFO, GENERATE FLI(PATH) AND FLI(FLIEN1)
$
    EXECUTE SFO $
$
$ =====
$
$ GEO PARAMETERS
$
PARAM AW = 3648. $ WING AREA, SQFT
PARAM CTK = .1 $ CHARACTERISTIC TIME CONSTANT, SEC
PARAM DELDB = 20. $ LIMITING NOISE LEVEL DOWN FROM PEAK
PARAM MASSAC = 12526. $ REFERENCE MASS OF AIRCRAFT, SLUG
PARAM START = 0. $ INITIAL FLIGHT TIME TO BE CONSIDERED, SEC
PARAM STOP = 9999. $ FINAL FLIGHT TIME TO BE CONSIDERED, SEC
PARAM DTIME = 0.5 $ RECEPTION TIME INCREMENT, SEC
PARAM DELTH = 10. $ MAXIMUM DIRECTIVITY ANGLE LIMIT, DEG
PARAM ICOORD = 3 $ BOTH BODY AND WIND AXES OUTPUT
PARAM DIRECT = .FALSE. $ CALCULATION OPTION
PARAM IPRINT = 0 $ PRINT NOTHING
PARAM IUNITS = 7HENGLISH $ INPUT UNITS

$
$ GEO MEMBER OBSERV(COORD)
$
    UPDATE NEWU=OBSERV, SOURCE=* $
    -ADDR OLDM=*, NEWM=COORD, FORMAT=4H*RS$, MNR=208 $
    -13200., 0., 4. $
    -11460., 0., 4. $
    . total of ( 26 * 8 ) = 208 observer locations
    2640., 2640., 4. $
    END* $

$
$ EXECUTE GEO, GENERATE GEO(BODY) AND GEO(WIND)
$
    EXECUTE GEO $

```

```

$
$-----
$
$ SELECTED APM OUTPUT
$
$     AMU          DYNAMIC VISCOSITY
$     CA           SPEED OF SOUND
$     HUMID        HUMIDITY
$     PRES         PRESSURE
$     RHOA         DENSITY
$     TA           TEMPERATURE
$
$ APM PARAMETERS
$
$     PARAM IPRINT = 2          $ PRINT LOCAL ATMOSPHERIC PROPERTIES
$     PARAM IUNITS = 7HENGLISH $ INPUT UNITS
$     PARAM      Z = 2010.      $ ALTITUDE, FT
$
$ EXECUTE APM, GENERATE ATMOSPHERIC PARAMETERS
$
$     EXECUTE APM $
$
$-----
$
$ FNKAFM PARAMETERS
$
$     PARAM      AF = 667.      $ FLAP AREA, SQFT
$     PARAM      AH = 1090.     $ HORIZONTAL TAIL AREA, SQFT
$     PARAM      AV = 605.      $ VERTICAL TAIL AREA, SQFT
$     PARAM      AW = 3648.     $ WING AREA, SQFT
$     PARAM      BF = 68.       $ FLAP SPAN, FT
$     PARAM      BH = 70.9      $ HORIZONTAL TAIL SPAN, FT
$     PARAM      BV = 24.       $ VERTICAL TAIL SPAN, FT
$     PARAM      BW = 165.      $ WING SPAN, FT
$     PARAM      DELTAF = 50.    $ FLAP SETTING, DEG
$     PARAM      DMG = 4.33     $ TIRE DIAMETER OF MAIN LANDING GEAR, FT
$     PARAM      DNG = 3.33     $ TIRE DIAMETER OF NOSE LANDING GEAR, FT
$     PARAM      LMG = 8.31     $ MAIN LANDING GEAR STRUT LENGTH, FT
$     PARAM      LNG = 5.96     $ NOSE LANDING GEAR STRUT LENGTH, FT
$     PARAM      CA = 0.        $ VALUE FROM APM
$     PARAM      RHOA = 0.      $ VALUE FROM APM
$     PARAM      MUA = AMU      $ VALUE FROM APM
$     PARAM      RS = 1.        $ OBSERVER DISTANCE, FT
$     EVALUATE    MA = VA / CA  $ FLIGHT MACH NUMBER
$     PARAM      STIME = 0.     $ DEFAULT SOURCE TIME, SEC
$     PARAM      NWMG = 4       $ NUMBER OF WHEELS PER MAIN LANDING GEAR
$     PARAM      NWNW = 2       $ NUMBER OF WHEELS PER NOSE LANDING GEAR
$     PARAM      NMG = 3        $ NUMBER OF MAIN LANDING GEAR
$     PARAM      NNG = 1        $ NUMBER OF NOSE LANDING GEAR
$     PARAM      NS = 1         $ NUMBER OF SLOTS FOR TRAILING EDGE FLAPS
$     PARAM      IPRINT = 0     $ PRINT NOTHING
$     PARAM      IOUT = 0       $ NO PRINT
$     PARAM      SCRNNN = 001    $ SOURCE PREDICTION NUMBER
$     PARAM      DYNCLN = .TRUE. $ AERODYNAMICALLY CLEAN AIRCRAFT
$     PARAM      DELTAW = .TRUE. $ DELTA WING PLANFORM
$     PARAM      LANDG = 4HDOWN  $ LANDING GEAR POSITION
$     PARAM      SCRXXX = 3HEN1  $ CODE USED TO FORM MEMBER NAME
$     PARAM      IUNITS = 7HENGLISH $ INPUT UNITS
$     PARAM      TEWN = .TRUE.   $ WING TRAILING EDGE NOISE
$     PARAM      TEHTN = .TRUE.  $ HORIZONTAL TAIL TRAILING EDGE NOISE
$     PARAM      TEVTN = .TRUE.  $ VERTICAL TAIL TRAILING EDGE NOISE
$     PARAM      TEFN = .TRUE.   $ TRAILING EDGE FLAP NOISE
$     PARAM      LESN = .TRUE.   $ LEADING EDGE SLAT NOISE
$     PARAM      MLGN = .TRUE.   $ MAIN LANDING GEAR NOISE
$     PARAM      NLGN = .TRUE.   $ NOSE LANDING GEAR NOISE
$
$ EXECUTE FNKAFM, GENERATE FNKAFM(EN1001)
$
$     EXECUTE FNKAFM $
$
$-----
$
$ GECOR PARAMETERS
$

```

```

PARAM      AE = 46.3      $ ENGINE REFERENCE AREA, SQFT
PARAM      CEA = 1.0      $ COMBUSTOR ENTRANCE AREA, SQFT
EVALUATE    A = CEA / AE  $ NORMALIZED ENTRANCE AREA
PARAM      NENG = 3       $ NUMBER OF ENGINES
PARAM      RS = 1.        $ OBSERVER DISTANCE, FT
PARAM      CEMFR = 5.221  $ COMB ENTRANCE MASS FLOWRATE, SLUG/SEC
EVALUATE    MDOT = CEMFR / ( RHOA * CA * AE ) $ NORMALIZED MASS FLOWRATE
EVALUATE    MA = VA / CA  $ FLIGHT MACH NUMBER
PARAM      CETP = 18821.1 $ COMBUSTOR ENTRANCE TOT PRESSURE, LBF/SQFT
EVALUATE    PI = CETP / PRES $ NORMALIZED TOTAL PRESSURE
PARAM      CETT = 1191.6  $ COMBUSTOR ENTRANCE TOTAL TEMP, DEG R
EVALUATE    TI = CETT / TA $ NORMALIZED ENTRANCE TEMPERATURE
PARAM      CXTT = 2126.3  $ COMBUSTOR EXIT TOTAL TEMPERATURE, DEG R
EVALUATE    TCJ = CXTT / TA $ NORMALIZED EXIT TEMPERATURE
PARAM      DTTR = 1310.   $ DESIGN TURBINE TEMP EXTRACTION, DEG R
EVALUATE    TDDELTA = DTTR / TA $ NORMALIZED TEMPERATURE EXTRACTION
$          CA = 0.        $ VALUE FROM APM
$          RHOA = 0.       $ VALUE FROM APM
$          STIME = 0.      $ DEFAULT SOURCE TIME, SEC
PARAM      ICAO78 = .FALSE. $ REGULAR SPECTRAL DISTRIBUTION
PARAM      SCRXXX = 3HEN1  $ CODE USED TO FORM MEMBER NAME
PARAM      SCRNNN = 001    $ SOURCE PREDICTION NUMBER
PARAM      IOUT = 0        $ NO PRINT
PARAM      IPRINT = 0      $ PRINT NOTHING
PARAM      IUNITS = 7HENGLISH $ INPUT UNITS

```

```

$ EXECUTE GECOR, GENERATE GECOR(EN1001)
$

```

```

EXECUTE GECOR $

```

```

$ GETUR PARAMETERS
$

```

```

PARAM      AE = 46.3      $ ENGINE REFERENCE AREA, SQFT
PARAM      NENG = 3       $ NUMBER OF ENGINES
PARAM      RS = 1.        $ OBSERVER DISTANCE, FT
$          STIME = 0.      $ DEFAULT SOURCE TIME, SEC
PARAM      TICSX = 1.68   $ TURBINE INLET X-SECT AREA, SQFT
EVALUATE    AREA = TICSX / AE $ NORMALIZED INLET AREA
PARAM      F = .0140      $ FUEL TO AIR RATIO
PARAM      HA = HUMID     $ ABSOLUTE HUMIDITY FROM APM
PARAM      NBLADE = 102   $ NUMBER OF ROTOR BLADES
PARAM      TRD = 3.9472   $ TURBINE ROTOR DIAMETER, FT
EVALUATE    D = TRD / SQRT ( AE ) $ NORMALIZED ROTOR DIAMETER
EVALUATE    MA = VA / CA  $ FLIGHT MACH NUMBER
PARAM      ROSPD = 39.67  $ ROTATIONAL SPEED, REV/SEC
EVALUATE    ROTSPD = ROSPD / ( CA / TRD ) $ NORMALIZED ROTATIONAL SPEED
PARAM      TETT = 2126.3  $ TURBINE ENTRANCE TOT TEMP, DEG R
EVALUATE    TTI = TETT / TA $ NORMALIZED TOTAL TEMPERATURE
PARAM      TXST = 1390.3  $ TURBINE EXIT STAT TEMP, DEG R
EVALUATE    TSJ = TXST / TA $ NORMALIZED STATIC TEMPERATURE
$          CA = 0.        $ VALUE FROM APM
$          RHOA = 0.       $ VALUE FROM APM
PARAM      SCRXXX = 3HEN1  $ CODE USED TO FORM MEMBER NAME
PARAM      SCRNNN = 001    $ SOURCE PREDICTION NUMBER
PARAM      BROAD = .TRUE.  $ BROADBAND SPECTRA
PARAM      PURE = .TRUE.   $ PURE TONE SPECTRA
PARAM      IOUT = 0        $ NO PRINT
PARAM      IPRINT = 0      $ PRINT NOTHING
PARAM      IUNITS = 7HENGLISH $ INPUT UNITS

```

```

$ EXECUTE GETUR, GENERATE GETUR(EN1001)
$

```

```

EXECUTE GETUR $

```

```

$ HDNFAN PARAMETERS (DISCHARGE)
$

```

```

PARAM      AE = 46.3      $ ENGINE REFERENCE AREA, SQFT
PARAM      RS = 1.        $ OBSERVER DISTANCE, FT
PARAM      AAF = 18.7     $ FAN INLET AREA, SQFT
EVALUATE    AFAN = AAF / AE $ NORMALIZED FAN INLET AREA

```

```

PARAM    DIAFR = 4.89          $ FAN ROTOR DIAMETER, FT
EVALUATE DIAM = DIAFR / SQRT(AE) $ NORMALIZED FAN ROTOR DIAMETER
PARAM    MD = 1.36            $ FAN TIP MACH NUMBER AT DESIGN
PARAM    RSS = 0.26           $ ROTOR-STATOR SPACING
PARAM    MDOTA = 29.71        $ MASS FLOW RATE, SLUG/SEC
EVALUATE MDOT = MDOTA / ( RHOA * CA * AE ) $ NORMALIZED MASS FLOW RATE
EVALUATE MA = VA / CA        $ FLIGHT MACH NUMBER
PARAM    RPS = 39.67          $ ROTATIONAL SPEED, REV/SEC
EVALUATE N = RPS / ( CA / DIAFR ) $ NORMALIZED ROTATIONAL SPEED
PARAM    DELTAA = 44.         $ TEMP RISE ACROSS FAN, DEG R
EVALUATE DELTAT = DELTAA / TA $ NORMALIZED TEMP RISE ACROSS FAN
$ PARAM    CA = 0.            $ VALUE FROM APM
$ PARAM    RHOA = 0.          $ VALUE FROM APM
PARAM    NBANDS = 0           $ 1/3 OCTAVE BANDS FOR FREQ SHIFT
PARAM    NENG = 3             $ NUMBER OF ENGINES
PARAM    NB = 46              $ NUMBER OF ROTOR BLADES
PARAM    NV = 96              $ NUMBER OF STATOR VANES
PARAM    IGV = 1              $ INLET GUIDE VANE INDEX
PARAM    DIS = 1              $ INLET DISTORTION INDEX
$ PARAM    STIME = 0.         $ DEFAULT SOURCE TIME, SEC
PARAM    IOUT = 0             $ NO PRINT
PARAM    IPRINT = 0           $ PRINT NOTHING
PARAM    SCRNNN = 001         $ SOURCE PREDICTION NUMBER
PARAM    SCRXXX = 3HEN1       $ CODE USED TO FORM MEMBER NAME
PARAM    IUNITS = 7HENGLISH   $ INPUT UNITS
PARAM    INRS = .FALSE.       $ INLET ROTOR-STATOR INTERACTION
PARAM    INCT = .FALSE.       $ COMBINATION TONES
PARAM    INDIS = .FALSE.      $ INLET DISTORTION TONES
PARAM    IDBB = .TRUE.        $ DISCHARGE BROADBAND NOISE
PARAM    IDRS = .TRUE.        $ DISCHARGE ROTOR-STATOR INTERACTION
PARAM    INBB = .FALSE.       $ INLET BROADBAND NOISE
$
$ EXECUTE HDNFAN, GENERATE HDNFND(EN1001)
$
$ EXECUTE HDNFAN HDNFAN=HDNFND $
$
$ =====
$ HDNFAN PARAMETERS (INLET)
$
PARAM    AE = 46.3            $ ENGINE REFERENCE AREA, SQFT
PARAM    RS = 1.              $ OBSERVER DISTANCE, FT
PARAM    AAF = 46.3           $ FAN INLET AREA, SQFT
EVALUATE AFAN = AAF / AE      $ NORMALIZED FAN INLET AREA
PARAM    DIAFR = 7.68         $ FAN ROTOR DIAMETER, FT
EVALUATE DIAM = DIAFR / SQRT(AE) $ NORMALIZED FAN ROTOR DIAMETER
PARAM    MD = 1.36            $ FAN TIP MACH NUMBER AT DESIGN
PARAM    RSS = 0.26           $ ROTOR-STATOR SPACING
PARAM    MDOTA = 34.94        $ MASS FLOW RATE, SLUG/SEC
EVALUATE MDOT = MDOTA / ( RHOA * CA * AE ) $ NORMALIZED MASS FLOW RATE
EVALUATE MA = VA / CA        $ FLIGHT MACH NUMBER
PARAM    RPS = 39.67          $ ROTATIONAL SPEED, REV/SEC
EVALUATE N = RPS / ( CA / DIAFR ) $ NORMALIZED ROTATIONAL SPEED
PARAM    DELTAA = 44.         $ TEMP RISE ACROSS FAN, DEG R
EVALUATE DELTAT = DELTAA / TA $ NORMALIZED TEMP RISE ACROSS FAN
$ PARAM    CA = 0.            $ VALUE FROM APM
$ PARAM    RHOA = 0.          $ VALUE FROM APM
PARAM    NBANDS = 0           $ 1/3 OCTAVE BANDS FOR FREQ SHIFT
PARAM    NENG = 3             $ NUMBER OF ENGINES
PARAM    NB = 46              $ NUMBER OF ROTOR BLADES
PARAM    NV = 96              $ NUMBER OF STATOR VANES
PARAM    IGV = 1              $ INLET GUIDE VANE INDEX
PARAM    DIS = 1              $ INLET DISTORTION INDEX
$ PARAM    STIME = 0.         $ DEFAULT SOURCE TIME, SEC
PARAM    IOUT = 0             $ NO PRINT
PARAM    IPRINT = 0           $ PRINT NOTHING
PARAM    SCRNNN = 001         $ SOURCE PREDICTION NUMBER
PARAM    SCRXXX = 3HEN1       $ CODE USED TO FORM MEMBER NAME
PARAM    IUNITS = 7HENGLISH   $ INPUT UNITS
PARAM    INRS = .FALSE.       $ INLET ROTOR-STATOR INTERACTION
PARAM    INCT = .TRUE.        $ COMBINATION TONES
PARAM    INDIS = .FALSE.      $ INLET DISTORTION TONES
PARAM    IDBB = .FALSE.       $ DISCHARGE BROADBAND NOISE
PARAM    IDRS = .FALSE.       $ DISCHARGE ROTOR-STATOR INTERACTION

```

```

PARAM      INBB = .TRUE.                $ INLET BROADBAND NOISE
$
$ EXECUTE HDNFAN, GENERATE HDNFNI(EN1001)
$
EXECUTE HDNFAN HDNFAN=HDNFNI $
$
$ =====
$
$ STNJET PARAMETERS
$
$   PARAM      CA = 0.                $ VALUE FROM APM
$   PARAM      RHOA = 0.              $ VALUE FROM APM
$   EVALUATE    MA = VA / CA          $ FLIGHT MACH NUMBER
$   PARAM      RS = 1.                $ OBSERVER DISTANCE, FT
$   PARAM      AE = 46.3              $ ENGINE REFERENCE AREA, SQFT
$   PARAM      FEJA = 6.27            $ FULLY EXPANDED JET AREA, SQFT
$   EVALUATE    A1 = FEJA / AE        $ NORMALIZED FULLY EXPANDED JET AREA
$   PARAM      ETANG = 0.             $ ENGINE TILT ANGLE, DEG
$   EVALUATE    DELTA = ALPHA + ETANG $ ANGLE BETWEEN FLIGHT AND ENGINE, DEG
$   PARAM      PSED = 2.82            $ PRIMARY STREAM EQUIV DIAMETER, FT
$   EVALUATE    DE1 = PSED / SQRT(AE) $ NORMALIZED EQUIV DIAMETER
$   PARAM      PSJD = 2.82            $ PRIMARY STREAM HYDR DIAMETER, FT
$   EVALUATE    DH1 = PSJD / SQRT(AE) $ NORMALIZED HYDR DIAMETER
$   PARAM      PSJV = 870.4           $ PRIMARY STREAM JET VELOCITY, FT/SEC
$   EVALUATE    V1 = PSJV / CA        $ NORMALIZED JET VELOCITY
$   PARAM      PSJD = .000962         $ PRIMARY STREAM JET DENSITY, SLUG/CUFT
$   EVALUATE    RHO1 = PSJD / RHOA    $ NORMALIZED JET DENSITY
$   PARAM      PSTT = 1340.           $ PRIMARY STREAM TOTAL TEMP, DEG R
$   EVALUATE    T1 = PSTT / TA        $ NORMALIZED TOTAL TEMPERATURE
$   PARAM      M1 = 0.5027            $ PRIMARY STREAM MACH NUMBER
$   PARAM      SFEJA = 19.32          $ SECONDARY FULLY EXP JET AREA, SQFT
$   EVALUATE    A2 = SFEJA / AE       $ NORMALIZED FULLY EXPANDED JET AREA
$   PARAM      SSJV = 695.0           $ SECONDARY STREAM JET VELOCITY, FT/SEC
$   EVALUATE    V2 = SSJV / CA        $ NORMALIZED JET VELOCITY
$   PARAM      SSJD = .002317         $ SECONDARY STREAM JET DENS, SLUG/CUFT
$   EVALUATE    RHO2 = SSJD / RHOA    $ NORMALIZED JET DENSITY
$   PARAM      SSTT = 568.1           $ SECONDARY STREAM TOTAL TEMP, DEG R
$   EVALUATE    T2 = SSTT / TA        $ NORMALIZED TOTAL TEMPERATURE
$   PARAM      M2 = 0.6235            $ SECONDARY STREAM MACH NUMBER
$   PARAM      STIME = 0.              $ DEFAULT SOURCE TIME, SEC
$   PARAM      NENG = 3                $ NUMBER OF ENGINES
$   PARAM      SCRNNN = 001           $ SOURCE PREDICTION NUMBER
$   PARAM      SCRXXX = 3HEN1         $ CODE USED TO FORM MEMBER NAME
$   PARAM      IUNITS = 7HENGLISH     $ INPUT UNITS
$   PARAM      PLUG = .TRUE.          $ PLUG
$   PARAM      CIRCLE = .TRUE.        $ COAXIAL NOZZLE
$   PARAM      SUPER = .FALSE.        $ NO PRIMARY STREAM SHOCK NOISE
$   PARAM      IOUT = 0                $ NO PRINT
$   PARAM      IPRINT = 0             $ PRINT NOTHING
$
$ EXECUTE STNJET, GENERATE STNJET(EN1001)
$
EXECUTE STNJET $
$
$ =====
$
$ GENSUP TABLE SUPPREST(FACTOR), 10 DB SUPPRESSION
$
TABLE SUPPREST(FACTOR) 1 SOURCE=* $
INT= 1 2
IND1= RS 25 2 2
50.0, 63.0, 80.0, 100.0, 125.0, 160.0, 200.0,
250.0, 315.0, 400.0, 500.0, 630.0, 800.0, 1000.0,
1250.0, 1600.0, 2000.0, 2500.0, 3150.0, 4000.0, 5000.0,
6300.0, 8000.0, 10000.0, 12500.0
IND2= RS 35 2 2
5., 10., 15., 20., 25., 30., 35., 40., 45., 50.,
55., 60., 65., 70., 75., 80., 85., 90., 95., 100.,
105., 110., 115., 120., 125., 130., 135., 140., 145., 150.,
155., 160., 165., 170., 175.
IND3= RS 18 2 2
0., 5., 10., 15., 20., 25., 30., 35., 40.,
45., 50., 55., 60., 65., 70., 75., 80., 85.
DEP= RS

```

```

.1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1,
.1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1,
. total of ( 25 * 35 * 18 ) = 15750 suppression values
.1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1, .1,
END* $
$
$-----$
$
$ GENSUP PARAMETERS
$
PARAM SCRXXX = 3HEN1      $ CODE USED TO FORM MEMBER NAME
PARAM SCRNNN = 001       $ SOURCE PREDICTION NUMBER
PARAM IPRINT = 0         $ PRINT NOTHING
PARAM RHOA = 0.          $ VALUE FROM APM
PARAM CA = 0.            $ VALUE FROM APM
PARAM IOUT = 0           $ NO PRINT
PARAM IUNITS = 7HENGLISH $ INPUT UNITS
$
$ APPLY 10 DB SUPPRESSION TO TURBINE NOISE, GENERATE GETURS(EN1001)
$
EXECUTE GENSUP NOISE=GETUR SUPPRESS=SUPPREST $
$
$ APPLY 10 DB SUPPRESSION TO FAN DISCHARGE NOISE, GENERATE HDNFNDS(EN1001)
$
EXECUTE GENSUP NOISE=HDNFND SUPPRESS=SUPPREST $
$
$-----$
$
$ PRO PARAMETERS COMMON TO ALL
$
PARAM IPRINT = 0          $ PRINT NOTHING
PARAM IOUT = 1            $ DB OUTPUT
PARAM SIGMA = 485.        $ DEFAULT GROUND FLOW RESIST, SLUG/SEC-CUFT
PARAM IUNITS = 7HENGLISH $ INPUT UNITS
PARAM NBAND = 1           $ NUMBER OF SUBBANDS PER 1/3 OCTAVE
PARAM RS = 1.             $ OBSERVER DISTANCE, FT
PARAM SURFACE = 4HSOFT    $ SURFACE TYPE OPTION
PARAM COH = .01           $ DEFAULT INCOHERENCE COEFFICIENT
PARAM ABSORP = .TRUE.     $ ATMOSPHERIC ABSORPTION OPTION
PARAM GROUND = .TRUE.     $ GROUND EFFECTS OPTION
PARAM PROTIME = 3HEN1     $ CODE USED TO FORM MEMBER NAME
$
$ PRO PARAMETER FOR AIRFRAME, EXECUTE PRO
$
PARAM PROSUM1 = 6HFNKAFM      $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM1, GEOM=WIND, PRO=PRO1 $ GENERATE PRO1(PRES)
$
$ PRO PARAMETER FOR CORE, EXECUTE PRO
$
PARAM PROSUM2 = 5HGECOR      $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM2, GEOM=BODY, PRO=PRO2 $ GENERATE PRO2(PRES)
$
$ PRO PARAMETER FOR TURBINE, EXECUTE PRO
$
PARAM PROSUM3 = 5HGETUR      $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM3, GEOM=BODY, PRO=PRO3 $ GENERATE PRO3(PRES)
$
$ PRO PARAMETER FOR FAN DISCHARGE, EXECUTE PRO
$
PARAM PROSUM4 = 6HHDNFND     $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM4, GEOM=BODY, PRO=PRO4 $ GENERATE PRO4(PRES)
$
$ PRO PARAMETER FOR FAN INLET, EXECUTE PRO
$
PARAM PROSUM5 = 6HHDNFNI     $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM5, GEOM=BODY, PRO=PRO5 $ GENERATE PRO5(PRES)
$
$ PRO PARAMETER FOR JET, EXECUTE PRO
$
PARAM PROSUM6 = 6HSTNJET     $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM6, GEOM=BODY, PRO=PRO6 $ GENERATE PRO6(PRES)
$

```

```

$ PRO PARAMETER FOR SUPPRESSED TURBINE, EXECUTE PRO
$
  PARAM PROSUM7 = 6HGETURS          $ NAME OF NOISE UNIT
  EXECUTE PRO PROSUM=PROSUM7, GEOM=BODY, PRO=PRO7 $ GENERATE PRO7(PRES)
$
$ PRO PARAMETER FOR SUPPRESSED FAN DISCHARGE, EXECUTE PRO
$
  PARAM PROSUM8 = 7HHDNFNDS        $ NAME OF NOISE UNIT
  EXECUTE PRO PROSUM=PROSUM8, GEOM=BODY, PRO=PRO8 $ GENERATE PRO8(PRES)
$
$ -----
$
$ LEV PARAMETERS COMMON TO ALL
$
  PARAM   IAWT = .FALSE.    $ A-WEIGHTED LEVEL OPTION
  PARAM   IDWT = .FALSE.    $ D-WEIGHTED LEVEL OPTION
  PARAM   IOSPL = .FALSE.   $ OASPL OPTION
  PARAM   IOUT = 1          $ DB OUTPUT
  PARAM   IPNL = .FALSE.    $ PNL OPTION
  PARAM   IPNLT = .TRUE.    $ PNLT OPTION
  PARAM   NAWT = .FALSE.    $ NO NARROW BAND DATA
  PARAM   NDWT = .FALSE.    $ NO NARROW BAND DATA
  PARAM   NOSPL = .FALSE.   $ NO NARROW BAND DATA
$
$ EFF PARAMETERS COMMON TO ALL
$
  PARAM   DTIME = .5        $ RECEPTION TIME INCREMENT, SEC
$
$ CNT PARAMETERS COMMON TO ALL
$
  PARAM   ISYM = .FALSE.    $ NON-SYMMETRICAL OUTPUT
  PARAM   IOPT = 1          $ EPNL PLOT OUTPUT
$
$ PRINT PARAMETERS COMMON TO ALL MODULES
$
  PARAM   IPRINT = 0        $ PRINT NOTHING
$
$ LEV AND CNT PARAMETERS FOR AIRFRAME, EXECUTE LEV, EFF, AND CNT
$
  PARAM MEMSUM = 6HPRO1 , 6HPRES    $ LEV UNIT NAME AND MEMBER NAME
  PARAM FILNAME = 8HFRAMCBPR        $ CNT FILE NAME
  EXECUTE LEV                        $ GENERATE LEV(PNLT)
  EXECUTE EFF                        $ GENERATE EFF(EPNL)
  EXECUTE CNT                        $ GENERATE DATA FILE FRAMCBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR CORE, EXECUTE LEV, EFF, AND CNT
$
  PARAM MEMSUM = 6HPRO2 , 6HPRES    $ LEV UNIT NAME AND MEMBER NAME
  PARAM FILNAME = 8HCORECBPR        $ CNT FILE NAME
  EXECUTE LEV                        $ GENERATE LEV(PNLT)
  EXECUTE EFF                        $ GENERATE EFF(EPNL)
  EXECUTE CNT                        $ GENERATE DATA FILE CORECBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR TURBINE, EXECUTE LEV, EFF, AND CNT
$
  PARAM MEMSUM = 6HPRO3 , 6HPRES    $ LEV UNIT NAME AND MEMBER NAME
  PARAM FILNAME = 8HTURBCBPR        $ CNT FILE NAME
  EXECUTE LEV                        $ GENERATE LEV(PNLT)
  EXECUTE EFF                        $ GENERATE EFF(EPNL)
  EXECUTE CNT                        $ GENERATE DATA FILE TURBCBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR FAN DISCHARGE, EXECUTE LEV, EFF, AND CNT
$
  PARAM MEMSUM = 6HPRO4 , 6HPRES    $ LEV UNIT NAME AND MEMBER NAME
  PARAM FILNAME = 8HFANDCBPR        $ CNT FILE NAME
  EXECUTE LEV                        $ GENERATE LEV(PNLT)
  EXECUTE EFF                        $ GENERATE EFF(EPNL)
  EXECUTE CNT                        $ GENERATE DATA FILE FANDCBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR FAN INLET, EXECUTE LEV, EFF, AND CNT
$
  PARAM MEMSUM = 6HPRO5 , 6HPRES    $ LEV UNIT NAME AND MEMBER NAME
  PARAM FILNAME = 8HFANICBPR        $ CNT FILE NAME
  EXECUTE LEV                        $ GENERATE LEV(PNLT)

```

```

EXECUTE EFF                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE FANICBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR JET, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO6 , 6HPRES             $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HJETNCBPR                 $ CNT FILE NAME
EXECUTE LEV                                $ GENERATE LEV(PNLT)
EXECUTE EFF                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE JETNCBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR SUPPRESSED TURBINE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO7 , 6HPRES             $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HTURSCBPR                 $ CNT FILE NAME
EXECUTE LEV                                $ GENERATE LEV(PNLT)
EXECUTE EFF                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE TURSCBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR SUPPRESSED FAN DISCHARGE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO8 , 6HPRES             $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HFADSCBPR                 $ CNT FILE NAME
EXECUTE LEV                                $ GENERATE LEV(PNLT)
EXECUTE EFF                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE FADSCBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR AIRFRAME AND ENGINE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO1 , 6HPRES , 6HPRO2 , 6HPRES ,
              6HPRO3 , 6HPRES , 6HPRO4 , 6HPRES ,
              6HPRO5 , 6HPRES , 6HPRO6 , 6HPRES
PARAM FILNAME = 8HLOUDCBPR                 $ LEV UNIT NAMES AND MEMBER NAMES
EXECUTE LEV                                $ CNT FILE NAME
EXECUTE EFF                                $ GENERATE LEV(PNLT)
EXECUTE CNT                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE LOUDCBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR AIRFRAME & ENGINE WITH SUPPRESSED FAN AND TURBINE,
$ EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO1 , 6HPRES , 6HPRO2 , 6HPRES ,
              6HPRO5 , 6HPRES , 6HPRO6 , 6HPRES ,
              6HPRO7 , 6HPRES , 6HPRO8 , 6HPRES
PARAM FILNAME = 8HHUSHCBPR                 $ LEV UNIT NAMES AND MEMBER NAMES
EXECUTE LEV                                $ CNT FILE NAME
EXECUTE EFF                                $ GENERATE LEV(PNLT)
EXECUTE CNT                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE HUSHCBPR.OUT
$
$ -----
$
$ FINEM RESPICE
$
ENDCS $

```

Appendix B: Advanced Transport ANOPP Command File

Contained herein is the ANOPP command file used to calculate EPNL values for the approach to landing of a commercial transport powered by a 10:1 by-pass ratio turbofan engine. For brevity's sake the majority of observer positions (for the Geometry Module GEO) and suppression factors (for the General Suppression Module GENSUP) were omitted. Except for those omissions the command file is sufficient to reproduce the results presented in this paper.

```

ANOPP ACCOUNT=.FALSE., JECHO=.TRUE., JLOG=.FALSE., LENG1=12000,
MAXCARDS=10000, NAETD=100, NAEUD=100, NLPPM=48, NOGO=.FALSE. $
$
STARTCS $
$
LOAD LIBRARYS
$
LOAD /LIBRARY/ PROCLIB, STNTBL $
$
=====
$
ATM PARAMETERS
$
PARAM DELH = 100. $ ALTITUDE INCREMENT FOR OUTPUT
PARAM H1 = 0. $ GROUND LEVEL ALTITUDE, FT
PARAM IUNITS = 7HENGLISH $ INPUT UNITS
PARAM NHO = 22 $ NUMBER OF ALTITUDE INCREMENTS
PARAM P1 = 2116.224 $ ATMOSPHERIC PRESSURE AT GROUND, LBF/SQFT
PARAM IPRINT = 2 $ PRINT OUTPUT
$
ATM MEMBER ATM(IN)
$
UPDATE NEWU=ATM, SOURCE=* $
-ADDR OLDLM=*, NEWM=IN, FORMAT=4H3RS$, MNR=22 $
    0.0, 518.670, 70.0 $
    100.0, 518.313, 70.0 $
    200.0, 517.957, 70.0 $
    300.0, 517.600, 70.0 $
    400.0, 517.244, 70.0 $
    500.0, 516.887, 70.0 $
    600.0, 516.530, 70.0 $
    700.0, 516.174, 70.0 $
    800.0, 515.817, 70.0 $
    900.0, 515.461, 70.0 $
    1000.0, 515.104, 70.0 $
    1100.0, 514.747, 70.0 $
    1200.0, 514.391, 70.0 $
    1300.0, 514.034, 70.0 $
    1400.0, 513.678, 70.0 $
    1500.0, 513.321, 70.0 $
    1600.0, 512.965, 70.0 $
    1700.0, 512.608, 70.0 $
    1800.0, 512.251, 70.0 $
    1900.0, 511.895, 70.0 $
    2000.0, 511.538, 70.0 $
    2100.0, 511.182, 70.0 $
END* $
$
EXECUTE ATM, GENERATE ATM(TMOD)
$
EXECUTE ATM $
$
=====
$
ABS PARAMETERS
$
PARAM IUNITS = 7HENGLISH $ INPUT UNITS
PARAM ABSINT = 5 $ NUMBER OF INTEGRATION STEPS
PARAM IPRINT = 2 $ PRINT OUTPUT
PARAM SAE = .TRUE. $ SAE METHOD
$
ABS MEMBER SFIELD(FREQ) AND DIRECTIVITY MEMBERS SFIELD(THETA) AND SFIELD(PHI)
$
UPDATE NEWU=SFIELD, SOURCE=* $
-ADDR OLDLM=*, NEWM=FREQ, FORMAT=4H*RS$, MNR=1 $
    50.0, 63.0, 80.0, 100.0, 125.0, 160.0, 200.0,
    250.0, 315.0, 400.0, 500.0, 630.0, 800.0, 1000.0,
    1250.0, 1600.0, 2000.0, 2500.0, 3150.0, 4000.0, 5000.0,
    6300.0, 8000.0, 10000.0, 12500.0 $
-ADDR OLDLM=*, NEWM=PHI, FORMAT=4H*RS$, MNR=1 $
    0., 5., 10., 15., 20., 25., 30., 35., 40.,
    45., 50., 55., 60., 65., 70., 75., 80., 85. $
-ADDR OLDLM=*, NEWM=THETA, FORMAT=4H*RS$, MNR=1 $

```

```

      5., 10., 15., 20., 25., 30., 35., 40., 45., 50.,
      55., 60., 65., 70., 75., 80., 85., 90., 95., 100.,
      105., 110., 115., 120., 125., 130., 135., 140., 145., 150.,
      155., 160., 165., 170., 175. $
END* $

$
$ EXECUTE ABS, GENERATE ATM(AAC)
$
      EXECUTE ABS $
$
$-----
$
$ SFO PARAMETERS
$
      PARAM IUNITS = 7HENGLISH $ INPUT UNITS
      PARAM NJO = 0 $ NUMBER OF TIME STEPS COMPLETED
      PARAM IPRINT = 0 $ PRINT NOTHING
      PARAM IOUT = 1 $ OUTPUT OPTION
      PARAM J = 1 $ INITIAL STEP NUMBER
      PARAM TSTEP = 0.5 $ TIME STEP INTERVAL ,SEC
      PARAM Z1 = 0. $ ALTITUDE AT BRAKE RELEASE, FT
      PARAM ENGNAM = 3HEN1 $ ENGINE IDENTIFIER NAME
      PARAM TT = 0. $ INITIAL TIME, SEC
      PARAM VA = 233. $ AIRCRAFT VELOCITY, FT/SEC
      PARAM XA = -38162. $ INITIAL DISTANCE FROM ORIGIN, FT
      PARAM YA = 0. $ LATERAL DISTANCE FROM ORIGIN, FT
      PARAM ZA = 2010. $ INITIAL ALTITUDE, FT
      PARAM THW = -3.0 $ INCLINATION OF FLIGHT VECTOR WRT HOR, DEG
      PARAM PLG = 4HDOWN $ INITIAL LANDING GEAR POSITION
      PARAM TLG = 0. $ LANDING GEAR RETRACTION TIME, SEC
      PARAM JF = 1000 $ INTEGRATION STEP NUMBER
      PARAM TF = 200. $ TIME LIMIT, SEC
      PARAM XF = 10000. $ DISTANCE LIMIT, FT
      PARAM ZF = 10. $ ALTITUDE LIMIT, FT
      PARAM ALPHA = 6.5 $ ANGLE-OF-ATTACK, DEG
      PARAM DELTA = 50. $ FLAP SETTING, DEG
      PARAM THROT = .2445 $ POWER SETTING
$
$ EXECUTE SFO, GENERATE FLI(PATH) AND FLI(FLIEN1)
$
      EXECUTE SFO $
$
$-----
$
$ GEO PARAMETERS
$
      PARAM AW = 3648. $ WING AREA, SQFT
      PARAM CTK = .1 $ CHARACTERISTIC TIME CONSTANT, SEC
      PARAM DELDB = 20. $ LIMITING NOISE LEVEL DOWN FROM PEAK
      PARAM MASSAC = 12526. $ REFERENCE MASS OF AIRCRAFT, SLUG
      PARAM START = 0. $ INITIAL FLIGHT TIME TO BE CONSIDERED, SEC
      PARAM STOP = 9999. $ FINAL FLIGHT TIME TO BE CONSIDERED, SEC
      PARAM DTIME = 0.5 $ RECEPTION TIME INCREMENT, SEC
      PARAM DELTH = 10. $ MAXIMUM DIRECTIVITY ANGLE LIMIT, DEG
      PARAM ICOORD = 3 $ BOTH BODY AND WIND AXES OUTPUT
      PARAM DIRECT = .FALSE. $ CALCULATION OPTION
      PARAM IPRINT = 0 $ PRINT NOTHING
      PARAM IUNITS = 7HENGLISH $ INPUT UNITS
$
$ GEO MEMBER OBSERV(COORD)
$
      UPDATE NEWU=OBSERV, SOURCE=* $
      -ADDR OLDM=*, NEWM=COORD, FORMAT=4H*RS$, MNR=208 $
      -13200., 0., 4. $
      -11460., 0., 4. $
      . total of ( 26 * 8 ) = 208 observer locations
      2640., 2640., 4. $
END* $
$
$ EXECUTE GEO, GENERATE GEO(BODY) AND GEO(WIND)
$
      EXECUTE GEO $

```

```

$
$-----
$
$ SELECTED APM OUTPUT
$
$      CA          SPEED OF SOUND
$      RHOA        DENSITY
$      TA          TEMPERATURE
$
$ APM PARAMETERS
$
$      PARAM IPRINT = 2          $ PRINT LOCAL ATMOSPHERIC PROPERTIES
$      PARAM IUNITS = 7HENGLISH $ INPUT UNITS
$      PARAM      Z = 2010.      $ ALTITUDE, FT
$
$ EXECUTE APM, GENERATE ATMOSPHERIC PARAMETERS
$
$ EXECUTE APM $
$-----
$
$ ENGINE STATE TABLES
$
TABLE ENG (FAN1 ) 1 SOURCE=* $
INT= 0 1
IND1= RS 10 2 2
1.0, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1
IND2= RS 7 2 0
0.0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6
IND3= 0 6 0 0
DEP= RS
1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0,
1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0,
1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0,
1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0,
1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0,
1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0, 1.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.2680, 0.2548, 0.2407, 0.2254, 0.2090, 0.1912, 0.1714,
0.1489, 0.1222, 0.0872, 0.2706, 0.2583, 0.2452, 0.2311,
0.2159, 0.1994, 0.1811, 0.1604, 0.1359, 0.1114, 0.2780,
0.2667, 0.2546, 0.2415, 0.2274, 0.2122, 0.1955, 0.1767,
0.1546, 0.1326, 0.2901, 0.2796, 0.2684, 0.2564, 0.2435,
0.2295, 0.2144, 0.1974, 0.1779, 0.1585, 0.3064, 0.2968,
0.2865, 0.2754, 0.2636, 0.2509, 0.2371, 0.2220, 0.2050,
0.1879, 0.3267, 0.3178, 0.3083, 0.2981, 0.2873, 0.2757,
0.2633, 0.2499, 0.2349, 0.2200, 0.3506, 0.3424, 0.3336,
0.3243, 0.3143, 0.3038, 0.2925, 0.2804, 0.2672, 0.2540,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0070, 1.0070, 1.0070, 1.0070,
1.0070, 1.0070, 1.0070, 1.0070, 1.0070, 1.0070, 1.0283,
1.0283, 1.0283, 1.0283, 1.0283, 1.0283, 1.0283, 1.0283,
1.0283, 1.0283, 1.0646, 1.0646, 1.0646, 1.0646, 1.0646,
1.0646, 1.0646, 1.0646, 1.0646, 1.0646, 1.1168, 1.1168,
1.1168, 1.1168, 1.1168, 1.1168, 1.1168, 1.1168, 1.1168,
1.1168, 1.1867, 1.1867, 1.1867, 1.1867, 1.1867, 1.1867,
1.1867, 1.1867, 1.1867, 1.1867, 1.2762, 1.2762, 1.2762,
1.2762, 1.2762, 1.2762, 1.2762, 1.2762, 1.2762, 1.2762,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0020, 1.0020, 1.0020, 1.0020,
1.0020, 1.0020, 1.0020, 1.0020, 1.0020, 1.0020, 1.0080,
1.0080, 1.0080, 1.0080, 1.0080, 1.0080, 1.0080, 1.0080,
1.0080, 1.0080, 1.0180, 1.0180, 1.0180, 1.0180, 1.0180,
1.0180, 1.0180, 1.0180, 1.0180, 1.0180, 1.0320, 1.0320,
1.0320, 1.0320, 1.0320, 1.0320, 1.0320, 1.0320, 1.0320,
1.0320, 1.0500, 1.0500, 1.0500, 1.0500, 1.0500, 1.0500,
1.0500, 1.0500, 1.0500, 1.0500, 1.0720, 1.0720, 1.0720,

```

\$

```
INT=      0 1
IND1= RS  10 2 2
      1.0, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1
IND2= RS   7 2 0
      0.0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6
IND3= 0    6 0 0
DEP= RS
```

23

```

0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0
END* $
$
TABLE ENG (CORE1 ) 1 SOURCE=* $
INT= 0 1
IND1= RS 10 2 2
1.0, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1
IND2= RS 7 2 0
0.0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6
IND3= 0 6 0 0
DEP= RS
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.02046, 0.01957, 0.01854, 0.01738, 0.01620, 0.01498, 0.01349,
0.01195, 0.01050, 0.00906, 0.02053, 0.01970, 0.01873, 0.01763,
0.01649, 0.01536, 0.01395, 0.01242, 0.01091, 0.00940, 0.02077,
0.01995, 0.01901, 0.01794, 0.01681, 0.01571, 0.01436, 0.01282,
0.01124, 0.00967, 0.02117, 0.02036, 0.01942, 0.01835, 0.01723,
0.01613, 0.01484, 0.01330, 0.01169, 0.01008, 0.02178, 0.02096,
0.02001, 0.01894, 0.01782, 0.01671, 0.01548, 0.01397, 0.01236,
0.01075, 0.02263, 0.02179, 0.02083, 0.01975, 0.01864, 0.01753,
0.01634, 0.01490, 0.01331, 0.01172, 0.02376, 0.02290, 0.02193,
0.02085, 0.01974, 0.01864, 0.01746, 0.01611, 0.01456, 0.01301,
39.024, 36.412, 33.674, 30.828, 28.006, 25.008, 21.665,
18.362, 15.271, 12.258, 39.169, 36.708, 34.122, 31.416,
28.706, 25.905, 22.677, 19.364, 16.140, 12.917, 39.622,
37.240, 34.721, 32.079, 29.412, 26.703, 23.545, 20.184,
16.810, 13.435, 40.410, 38.052, 35.549, 32.924, 30.268,
27.600, 24.526, 21.130, 17.662, 14.193, 41.591, 39.229,
36.714, 34.083, 31.425, 28.778, 25.818, 22.425, 18.927,
15.430, 43.246, 40.857, 38.317, 35.666, 32.999, 30.349,
27.519, 24.205, 20.727, 17.249, 45.469, 43.043, 40.468,
37.783, 35.087, 32.414, 29.660, 26.536, 23.073, 19.609,
3.2701, 3.1934, 3.1200, 3.0490, 2.9689, 2.8409, 2.6828,
2.5116, 2.3304, 2.1226, 3.2705, 3.1985, 3.1291, 3.0610,
2.9906, 2.8798, 2.7297, 2.5642, 2.3821, 2.1999, 3.2724,
3.2036, 3.1370, 3.0718, 3.0056, 2.9086, 2.7650, 2.6017,
2.4159, 2.2302, 3.2763, 3.2102, 3.1456, 3.0826, 3.0183,
2.9346, 2.8008, 2.6395, 2.4547, 2.2699, 3.2834, 3.2201,
3.1568, 3.0953, 3.0321, 2.9603, 2.8438, 2.6874, 2.5100,
2.3326, 3.2946, 3.2344, 3.1724, 3.1120, 3.0509, 2.9842,
2.8932, 2.7494, 2.5846, 2.4198, 3.3106, 3.2536, 3.1943,
3.1344, 3.0734, 3.0094, 2.9378, 2.8241, 2.6709, 2.5176,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0
END* $
$

```

```

TABLE ENG (CORE2 ) 1 SOURCE=* $
INT= 0 1
IND1= RS 10 2 2
1.0, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1
IND2= RS 7 2 0
0.0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6
IND3= 0 6 0 0
DEP= RS
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,

```


0.01422, 0.01246, 0.01074, 0.02686, 0.02527, 0.02360, 0.02184,
 0.02009, 0.01836, 0.01657, 0.01477, 0.01296, 0.01115, 0.02716,
 0.02563, 0.02400, 0.02228, 0.02055, 0.01885, 0.01706, 0.01524,
 0.01336, 0.01149, 0.02769, 0.02617, 0.02455, 0.02284, 0.02112,
 0.01943, 0.01764, 0.01580, 0.01390, 0.01200, 0.02848, 0.02696,
 0.02533, 0.02362, 0.02190, 0.02021, 0.01844, 0.01659, 0.01470,
 0.01281, 0.02959, 0.02805, 0.02641, 0.02468, 0.02295, 0.02126,
 0.01952, 0.01769, 0.01582, 0.01396, 0.03107, 0.02951, 0.02785,
 0.02610, 0.02436, 0.02265, 0.02092, 0.01913, 0.01729, 0.01545,
 7.7782, 7.0084, 6.2274, 5.4556, 4.7438, 4.1559, 3.6012,
 3.0587, 2.5336, 2.0307, 7.8124, 7.0876, 6.3484, 5.6121,
 4.9054, 4.3153, 3.7658, 3.2245, 2.6819, 2.1394, 7.9186,
 7.2204, 6.5022, 5.7793, 5.0746, 4.4632, 3.9077, 3.3580,
 2.7939, 2.2297, 8.1036, 7.4161, 6.7065, 5.9873, 5.2808,
 4.6363, 4.0689, 3.5109, 2.9355, 2.3601, 8.3815, 7.6937,
 6.9883, 6.2692, 5.5590, 4.8784, 4.2838, 3.7195, 3.1450,
 2.5705, 8.7733, 8.0763, 7.3691, 6.6479, 5.9286, 5.2291,
 4.5791, 4.0058, 3.4393, 2.8728, 9.3047, 8.5909, 7.8701,
 7.1448, 6.4205, 5.7052, 5.0017, 4.3838, 3.8164, 3.2490,
 3.8798, 3.7004, 3.5292, 3.3662, 3.1905, 2.9725, 2.7385,
 2.4854, 2.2109, 1.8910, 3.8804, 3.7123, 3.5509, 3.3958,
 3.2352, 3.0345, 2.8073, 2.5654, 2.2923, 2.0193, 3.8822,
 3.7236, 3.5701, 3.4222, 3.2699, 3.0827, 2.8598, 2.6218,
 2.3446, 2.0673, 3.8854, 3.7347, 3.5882, 3.4466, 3.2995,
 3.1251, 2.9097, 2.6731, 2.3972, 2.1213, 3.8902, 3.7469,
 3.6066, 3.4705, 3.3277, 3.1653, 2.9642, 2.7306, 2.4662,
 2.2019, 3.8969, 3.7609, 3.6264, 3.4953, 3.3573, 3.2032,
 3.0226, 2.8001, 2.5557, 2.3113, 3.9059, 3.7768, 3.6484,
 3.5213, 3.3872, 3.2398, 3.0771, 2.8810, 2.6499, 2.4188,
 0.6192, 0.5920, 0.5629, 0.5324, 0.5005, 0.4662, 0.4280,
 0.3848, 0.3346, 0.2763, 0.6188, 0.5932, 0.5658, 0.5370,
 0.5066, 0.4740, 0.4377, 0.3958, 0.3460, 0.2961, 0.6177,
 0.5932, 0.5668, 0.5388, 0.5093, 0.4773, 0.4414, 0.3995,
 0.3489, 0.2982, 0.6166, 0.5927, 0.5670, 0.5397, 0.5106,
 0.4790, 0.4436, 0.4024, 0.3529, 0.3033, 0.6160, 0.5928,
 0.5677, 0.5411, 0.5128, 0.4818, 0.4475, 0.4081, 0.3618,
 0.3156, 0.6166, 0.5941, 0.5699, 0.5442, 0.5168, 0.4871,
 0.4543, 0.4176, 0.3756, 0.3336, 0.6191, 0.5973, 0.5740,
 0.5494, 0.5233, 0.4952, 0.4644, 0.4307, 0.3934, 0.3561
 END* \$

\$

TABLE ENG (TURBINE2) 1 SOURCE=* \$

INT= 0 1
 IND1= RS 10 2 2
 1.0, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1
 IND2= RS 7 2 0
 0.0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6
 IND3= 0 6 0 0
 DEP= RS
 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133,
 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133,
 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133,
 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133,
 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133,
 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133,
 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133,
 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133, 0.03133,
 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140,
 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140,
 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140,
 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140,
 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140,
 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140,
 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140,
 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140, 0.0140,
 0.02676, 0.02508, 0.02330, 0.02146, 0.01964, 0.01785, 0.01601,
 0.01422, 0.01246, 0.01074, 0.02685, 0.02527, 0.02360, 0.02184,
 0.02009, 0.01836, 0.01657, 0.01477, 0.01296, 0.01115, 0.02716,
 0.02563, 0.02400, 0.02228, 0.02055, 0.01885, 0.01706, 0.01524,
 0.01336, 0.01149, 0.02769, 0.02617, 0.02455, 0.02284, 0.02112,

1.0591, 1.0464, 1.0351, 1.0253, 1.0154, 1.1449, 1.1262,
 1.1086, 1.0923, 1.0775, 1.0642, 1.0510, 1.0390, 1.0286,
 1.0181, 1.1555, 1.1361, 1.1176, 1.1005, 1.0850, 1.0710,
 1.0576, 1.0448, 1.0337, 1.0225, 1.1706, 1.1499, 1.1302,
 1.1119, 1.0952, 1.0802, 1.0663, 1.0531, 1.0407, 1.0284,
 2.5328, 2.4508, 2.3806, 2.3219, 2.2552, 2.1497, 2.0384,
 1.9210, 1.7972, 1.6349, 2.5311, 2.4542, 2.3874, 2.3304,
 2.2732, 2.1799, 2.0685, 1.9573, 1.8335, 1.7097, 2.5260,
 2.4535, 2.3900, 2.3358, 2.2829, 2.2006, 2.0897, 1.9803,
 1.8517, 1.7231, 2.5174, 2.4488, 2.3883, 2.3367, 2.2858,
 2.2144, 2.1084, 1.9964, 1.8652, 1.7340, 2.5054, 2.4406,
 2.3822, 2.3322, 2.2820, 2.2205, 2.1261, 2.0107, 1.8830,
 1.7553, 2.4896, 2.4286, 2.3721, 2.3229, 2.2736, 2.2162,
 2.1400, 2.0282, 1.9104, 1.7926, 2.4706, 2.4127, 2.3585,
 2.3091, 2.2588, 2.2033, 2.1409, 2.0504, 1.9333, 1.8162,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0

END* \$

\$

TABLE ENG (SEC) 1 SOURCE=* \$

INT= 0 1
 IND1= RS 10 2 2
 1.0, 0.9, 0.8, 0.7, 0.6, 0.5, 0.4, 0.3, 0.2, 0.1
 IND2= RS 7 2 0
 0.0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6
 IND3= 0 6 0 0
 DEP= RS
 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060,
 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060,
 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060,
 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060,
 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060,
 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060,
 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060,
 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060, 0.3060,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.2416, 0.2301, 0.2176, 0.2042, 0.1895, 0.1734, 0.1555,
 0.1347, 0.1097, 0.0764, 0.2441, 0.2334, 0.2219, 0.2095,
 0.1959, 0.1811, 0.1646, 0.1457, 0.1229, 0.1002, 0.2512,
 0.2414, 0.2309, 0.2195, 0.2071, 0.1935, 0.1786, 0.1615,
 0.1413, 0.1211, 0.2628, 0.2538, 0.2442, 0.2338, 0.2225,
 0.2102, 0.1968, 0.1816, 0.1640, 0.1464, 0.2784, 0.2702,
 0.2614, 0.2520, 0.2419, 0.2308, 0.2188, 0.2055, 0.1903,
 0.1751, 0.2975, 0.2901, 0.2822, 0.2737, 0.2646, 0.2547,
 0.2440, 0.2323, 0.2191, 0.2060, 0.3200, 0.3133, 0.3061,
 0.2985, 0.2902, 0.2813, 0.2717, 0.2614, 0.2500, 0.2386,
 1.3655, 1.3273, 1.2893, 1.2515, 1.2141, 1.1772, 1.1406,
 1.1043, 1.0683, 1.0327, 1.3736, 1.3376, 1.3017, 1.2658,
 1.2299, 1.1942, 1.1585, 1.1225, 1.0861, 1.0497, 1.3984,
 1.3637, 1.3290, 1.2940, 1.2588, 1.2234, 1.1880, 1.1518,
 1.1146, 1.0775, 1.4405, 1.4065, 1.3722, 1.3375, 1.3024,
 1.2669, 1.2311, 1.1944, 1.1565, 1.1185, 1.5018, 1.4679,
 1.4336, 1.3987, 1.3632, 1.3271, 1.2906, 1.2532, 1.2144,
 1.1756, 1.5852, 1.5509, 1.5160, 1.4805, 1.4441, 1.4071,
 1.3694, 1.3311, 1.2912, 1.2514, 1.6945, 1.6593, 1.6234,
 1.5867, 1.5492, 1.5107, 1.4714, 1.4314, 1.3902, 1.3491,
 1.1172, 1.1064, 1.0956, 1.0852, 1.0749, 1.0647, 1.0544,
 1.0439, 1.0333, 1.0232, 1.1188, 1.1086, 1.0985, 1.0885,
 1.0786, 1.0688, 1.0587, 1.0482, 1.0372, 1.0263, 1.1239,
 1.1141, 1.1043, 1.0946, 1.0849, 1.0751, 1.0650, 1.0544,
 1.0430, 1.0317, 1.1326, 1.1231, 1.1136, 1.1040, 1.0944,

1.0847, 1.0746, 1.0641, 1.0529, 1.0417, 1.1454, 1.1362,
 1.1269, 1.1175, 1.1081, 1.0984, 1.0886, 1.0784, 1.0677,
 1.0570, 1.1627, 1.1537, 1.1446, 1.1355, 1.1263, 1.1169,
 1.1073, 1.0976, 1.0875, 1.0775, 1.1848, 1.1760, 1.1672,
 1.1584, 1.1494, 1.1403, 1.1311, 1.1218, 1.1124, 1.1030,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0,
 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0, 0.0

END* \$

\$
 \$
 \$
 \$ TFNKAFM PARAMETERS
 \$

PARAM	AF = 667.	\$ FLAP AREA, SQFT
PARAM	AH = 1090.	\$ HORIZONTAL TAIL AREA, SQFT
PARAM	AV = 605.	\$ VERTICAL TAIL AREA, SQFT
PARAM	AW = 3648.	\$ WING AREA, SQFT
PARAM	BF = 68.	\$ FLAP SPAN, FT
PARAM	BH = 70.9	\$ HORIZONTAL TAIL SPAN, FT
PARAM	BV = 24.	\$ VERTICAL TAIL SPAN, FT
PARAM	BW = 165.	\$ WING SPAN, FT
PARAM	DMG = 4.33	\$ TIRE DIAMETER OF MAIN LANDING GEAR, FT
PARAM	DNG = 3.33	\$ TIRE DIAMETER OF NOSE LANDING GEAR, FT
PARAM	LMG = 8.31	\$ MAIN LANDING GEAR STRUT LENGTH, FT
PARAM	LNG = 5.96	\$ NOSE LANDING GEAR STRUT LENGTH, FT
PARAM	RS = 1.	\$ OBSERVER DISTANCE, FT
PARAM	NWMG = 4	\$ NUMBER OF WHEELS PER MAIN LANDING GEAR
PARAM	NWNG = 2	\$ NUMBER OF WHEELS PER NOSE LANDING GEAR
PARAM	NMG = 3	\$ NUMBER OF MAIN LANDING GEAR
PARAM	NNG = 1	\$ NUMBER OF NOSE LANDING GEAR
PARAM	NS = 1	\$ NUMBER OF SLOTS FOR TRAILING EDGE FLAPS
PARAM	PREPRT = 2	\$ PRINT FOR PREAFM MODULE
PARAM	IOUT = 0	\$ NO PRINT
PARAM	IPRINT = 0	\$ PRINT NOTHING
PARAM	SCRXXX = 3HEN1	\$ CODE USED TO FORM MEMBER NAME
PARAM	DYNCLN = .TRUE.	\$ AERODYNAMICALLY CLEAN AIRCRAFT
PARAM	DELTAW = .TRUE.	\$ DELTA WING PLANFORM
PARAM	IUNITS = 7HENGLISH	\$ INPUT UNITS
PARAM	TEWN = .TRUE.	\$ WING TRAILING EDGE NOISE
PARAM	TEHTN = .TRUE.	\$ HORIZONTAL TAIL TRAILING EDGE NOISE
PARAM	TEVTN = .TRUE.	\$ VERTICAL TAIL TRAILING EDGE NOISE
PARAM	TEFN = .TRUE.	\$ TRAILING EDGE FLAP NOISE
PARAM	LESN = .TRUE.	\$ LEADING EDGE SLAT NOISE
PARAM	MLGN = .TRUE.	\$ MAIN LANDING GEAR NOISE
PARAM	NLGN = .TRUE.	\$ NOSE LANDING GEAR NOISE
PARAM	LANDG = 4HDOWN	\$ LANDING GEAR POSITION

\$
 \$ EXECUTE TFNKAFM, GENERATE FNKAFM(EN1001)
 \$

CALL PROCLIB(TFNKAFM) \$

\$
 \$
 \$
 \$ TGEOR PARAMETERS
 \$

PARAM	AE = 115.911	\$ ENGINE REFERENCE AREA, SQFT
PARAM	CEA = 11.5911	\$ COMBUSTOR ENTRANCE AREA, SQFT
EVALUATE	A = CEA / AE	\$ NORMALIZED ENTRANCE AREA
PARAM	PREPRT = 2	\$ PRINT FOR PRECOR MODULE
PARAM	IUNITS = 7HENGLISH	\$ INPUT UNITS
PARAM	ITYPE = 1	\$ LINEAR INTERPOLATION
PARAM	RS = 1.	\$ OBSERVER DISTANCE, FT
PARAM	NENG = 3	\$ NUMBER OF ENGINES
PARAM	SCRXXX = 3HEN1	\$ CODE USED TO FORM MEMBER NAME
PARAM	IOUT = 0	\$ NO PRINT
PARAM	IPRINT = 0	\$ PRINT NOTHING
PARAM	DTTR = 1310.	\$ DESIGN TURBINE TEMPERATURE EXTRACTION, DEG R
EVALUATE	TDDELT = DTTR / TA	\$ NORMALIZED TEMPERATURE EXTRACTION

\$

```

$ EXECUTE TGEOR, GENERATE GECOR(EN1001)
$
$ CALL PROCLIB(TGEOR) $
$
$ -----
$
$ TGETUR PARAMETERS
$
PARAM      AE = 115.911      $ ENGINE REFERENCE AREA, SQFT
PARAM      NENG = 3          $ NUMBER OF ENGINES
PARAM      RS = 1.           $ OBSERVER DISTANCE, FT
PARAM      TICS = 1.477      $ TURBINE INLET X-SECTIONAL AREA, SQFT
EVALUATE   AREA = TICS / AE  $ NORMALIZED INLET AREA
PARAM      NBLADE = 102      $ NUMBER OF ROTOR BLADES
PARAM      TRD = 3.78        $ TURBINE ROTOR DIAMETER, FT
EVALUATE   D = TRD / SQRT( AE ) $ NORMALIZED ROTOR DIAMETER
PARAM      SCRXXX = 3HEN1    $ CODE USED TO FORM MEMBER NAME
PARAM      BROAD = .TRUE.    $ BROADBAND SPECTRA
PARAM      PURE = .TRUE.     $ PURE TONE SPECTRA
PARAM      IOUT = 0          $ NO PRINT
PARAM      IPRINT = 0        $ PRINT NOTHING
PARAM      IUNITS = 7HENGLISH $ INPUT UNITS
PARAM      ITYPE = 1         $ LINEAR INTERPOLATION
PARAM      IRATIO = 8HCONSTANT $ SPECIFIC HEAT OPTION
PARAM      PREPRT = 2        $ PRINT FOR PRETUR MODULE

$ EXECUTE TGETUR, GENERATE GETUR(EN1001)
$
$ CALL PROCLIB(TGETUR) $
$
$ -----
$
$ THDNFAN PARAMETERS (DISCHARGE)
$
PARAM      PREPRT = 2          $ PRINT FOR PREFAN MODULE
PARAM      IUNITS = 7HENGLISH  $ INPUT UNITS
PARAM      ITYPE = 1          $ LINEAR INTERPOLATION
PARAM      AE = 115.911       $ ENGINE REFERENCE AREA, SQFT
PARAM      RS = 1.           $ OBSERVER DISTANCE, FT
PARAM      AAF = 115.911      $ FAN INLET AREA, SQFT
EVALUATE   AFAN = AAF / AE    $ NORMALIZED FAN INLET AREA
PARAM      DIAFR = 12.148     $ FAN ROTOR DIAMETER, FT
EVALUATE   DIAM = DIAFR / SQRT(AE) $ NORMALIZED FAN ROTOR DIAMETER
PARAM      MD = 1.50          $ FAN TIP MACH NUMBER AT DESIGN
PARAM      RSS = 0.26         $ ROTOR-STATOR SPACING
PARAM      NBANDS = 0         $ 1/3 OCTAVE BANDS FOR FREQ SHIFT
PARAM      NENG = 3           $ NUMBER OF ENGINES
PARAM      NB = 36            $ NUMBER OF ROTOR BLADES
PARAM      NV = 76            $ NUMBER OF STATOR VANES
PARAM      IGV = 1            $ INLET GUIDE VANE INDEX
PARAM      DIS = 1            $ INLET DISTORTION INDEX
PARAM      IOUT = 0           $ NO PRINT
PARAM      IPRINT = 0         $ PRINT NOTHING
PARAM      SCRXXX = 3HEN1     $ CODE USED TO FORM MEMBER NAME
PARAM      INRS = .FALSE.     $ INLET ROTOR-STATOR INTERACTION TONES
PARAM      INCT = .FALSE.     $ COMBINATION TONES
PARAM      INDIS = .FALSE.    $ INLET DISTORTION TONES
PARAM      INBB = .FALSE.     $ INLET BROADBAND NOISE
PARAM      IDRS = .TRUE.      $ DISCHARGE ROTOR-STATOR INTERACTION
PARAM      IDBB = .TRUE.      $ DISCHARGE BROADBAND NOISE

$ EXECUTE THDNFAN, GENERATE HDNFND(EN1001)
$
$ CALL PROCLIB(THDNFAN) HDNFAN=HDNFND $
$
$ -----
$
$ THDNFAN PARAMETERS (INLET)
$
PARAM      PREPRT = 2          $ PRINT FOR PREFAN MODULE
PARAM      IUNITS = 7HENGLISH  $ INPUT UNITS
PARAM      ITYPE = 1          $ LINEAR INTERPOLATION
PARAM      AE = 115.911       $ ENGINE REFERENCE AREA, SQFT
PARAM      RS = 1.           $ OBSERVER DISTANCE, FT

```

```

PARAM      AAF = 115.911          $ FAN INLET AREA, SQFT
EVALUATE   AFAN = AAF / AE        $ NORMALIZED FAN INLET AREA
PARAM      DIAFR = 12.148         $ FAN ROTOR DIAMETER, FT
EVALUATE   DIAM = DIAFR / SQRT(AE) $ NORMALIZED FAN ROTOR DIAMETER
PARAM      MD = 1.50              $ FAN TIP MACH NUMBER AT DESIGN
PARAM      RSS = 0.26             $ ROTOR-STATOR SPACING
PARAM      NBANDS = 0             $ 1/3 OCTAVE BANDS FOR FREQ SHIFT
PARAM      NENG = 3               $ NUMBER OF ENGINES
PARAM      NB = 36                $ NUMBER OF ROTOR BLADES
PARAM      NV = 76                $ NUMBER OF STATOR VANES
PARAM      IGV = 1                $ INLET GUIDE VANE INDEX
PARAM      DIS = 1                $ INLET DISTORTION INDEX
PARAM      IOUT = 0               $ NO PRINT
PARAM      IPRINT = 0             $ PRINT NOTHING
PARAM      SCRXXX = 3HEN1         $ CODE USED TO FORM MEMBER NAME
PARAM      INRS = .FALSE.         $ INLET ROTOR-STATOR INTERACTION TONES
PARAM      INCT = .TRUE.          $ COMBINATION TONES
PARAM      INDIS = .FALSE.        $ INLET DISTORTION TONES
PARAM      INBB = .TRUE.          $ INLET BROADBAND NOISE
PARAM      IDRS = .FALSE.         $ DISCHARGE ROTOR-STATOR INTERACTION
PARAM      IDBB = .FALSE.         $ DISCHARGE BROADBAND NOISE

$
$ EXECUTE THDNFAN, GENERATE HDNFNI(EN1001)
$
$ CALL PROCLIB(THDNFAN) HDNFAN=HDNFNI $
$
$ =====
$
$ TSTNJET PARAMETERS
$
PARAM      AE = 115.911          $ ENGINE REFERENCE AREA, SQFT
PARAM      APLUG = 0.            $ PRIMARY NOZZLE PLUG AREA, SQFT
EVALUATE   AP = APLUG / AE       $ NORMALIZED NOZZLE PLUG AREA
PARAM      IRATIO = 8HCONSTANT   $ SPECIFIC HEAT OPTION
PARAM      ITYPE = 1             $ LINEAR INTERPOLATION
PARAM      IUNITS = 7HENGLISH    $ INPUT UNITS
PARAM      PREPRT = 2            $ PRINT FOR PREJET MODULE
PARAM      RS = 1.               $ OBSERVER DISTANCE, FT
PARAM      ETANG = 0.            $ ENGINE TILT ANGLE, DEG
EVALUATE   DELTA = ALPHA + ETANG $ ANGLE BETWEEN FLIGHT AND ENGINE, DEG
PARAM      NENG = 3              $ NUMBER OF ENGINES
PARAM      SCRXXX = 3HEN1        $ CODE USED TO FORM MEMBER NAME
PARAM      IOUT = 0              $ NO PRINT
PARAM      IPRINT = 0            $ PRINT NOTHING
PARAM      PLUG = .TRUE.         $ PLUG
PARAM      CIRCLE = .TRUE.       $ COAXIAL NOZZLE
PARAM      SUPER = .FALSE.       $ NO PRIMARY STREAM SHOCK NOISE

$
$ EXECUTE TSTNJET, GENERATE STNJET(EN1001)
$
$ CALL PROCLIB(TSTNJET) $
$
$ =====
$
$ GENSUP TABLE SUPPRES5(FACTOR), 5 DB SUPPRESSION
$
TABLE SUPPRES5(FACTOR ) 1 SOURCE=* $
INT= 1 2
IND1= RS 25 2 2
50.0, 63.0, 80.0, 100.0, 125.0, 160.0, 200.0,
250.0, 315.0, 400.0, 500.0, 630.0, 800.0, 1000.0,
1250.0, 1600.0, 2000.0, 2500.0, 3150.0, 4000.0, 5000.0,
6300.0, 8000.0, 10000.0, 12500.0
IND2= RS 35 2 2
5., 10., 15., 20., 25., 30., 35., 40., 45., 50.,
55., 60., 65., 70., 75., 80., 85., 90., 95., 100.,
105., 110., 115., 120., 125., 130., 135., 140., 145., 150.,
155., 160., 165., 170., 175.
IND3= RS 18 2 2
0., 5., 10., 15., 20., 25., 30., 35., 40.,
45., 50., 55., 60., 65., 70., 75., 80., 85.
DEP= RS
0.316228, 0.316228, 0.316228, 0.316228, 0.316228, 0.316228, 0.316228,
0.316228, 0.316228, 0.316228, 0.316228, 0.316228, 0.316228, 0.316228,

```

```

      . total of ( 25 * 35 * 18 ) = 15750 suppression values
      0.316228, 0.316228, 0.316228, 0.316228, 0.316228, 0.316228, 0.316228
END* $

$-----$
$ GENSUP TABLE SUPPRESF(FACTOR), 15 DB SUPPRESSION
$
TABLE SUPPRESF(FACTOR ) 1 SOURCE=* $
INT= 1 2
IND1= RS 25 2 2
      50.0,      63.0,      80.0,      100.0,      125.0,      160.0,      200.0,
      250.0,      315.0,      400.0,      500.0,      630.0,      800.0,      1000.0,
      1250.0,      1600.0,      2000.0,      2500.0,      3150.0,      4000.0,      5000.0,
      6300.0,      8000.0,      10000.0,      12500.0
IND2= RS 35 2 2
      5.,      10.,      15.,      20.,      25.,      30.,      35.,      40.,      45.,      50.,
      55.,      60.,      65.,      70.,      75.,      80.,      85.,      90.,      95.,      100.,
      105.,      110.,      115.,      120.,      125.,      130.,      135.,      140.,      145.,      150.,
      155.,      160.,      165.,      170.,      175.
IND3= RS 18 2 2
      0.,      5.,      10.,      15.,      20.,      25.,      30.,      35.,      40.,
      45.,      50.,      55.,      60.,      65.,      70.,      75.,      80.,      85.
DEP= RS
      0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623,
      0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623,
      . total of ( 25 * 35 * 18 ) = 15750 suppression values
      0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623, 0.031623
END* $

$-----$
$ GENSUP PARAMETERS
$
PARAM SCRXXX = 3HEN1      $ CODE USED TO FORM MEMBER NAME
PARAM IPRINT = 0          $ PRINT NOTHING
PARAM RHOA = 0.           $ VALUE FROM APM
PARAM CA = 0.             $ VALUE FROM APM
PARAM IOUT = 0            $ NO PRINT
PARAM IUNITS = 7HENGLISH $ INPUT UNITS

$
$ APPLY 15 DB SUPPRESSION TO TURBINE NOISE, GENERATE GETURS(EN1001)
$
PARAM MAX = SCRNNN      $
PARAM I = 1             $
LAB1 CONTINUE           $
PARAM SCRNNN = I        $
EXECUTE GENSUP NOISE=GETUR SUPPRESS=SUPPRESF $
IF (I .EQ. MAX) GOTO LAB2 $
EVALUATE I = I + 1      $
GOTO LAB1               $
LAB2 CONTINUE           $

$
$ APPLY 15 DB SUPPRESSION TO FAN DISCHARGE NOISE, GENERATE HDNFNDS(EN1001)
$
PARAM MAX = SCRNNN      $
PARAM I = 1             $
LAB3 CONTINUE           $
PARAM SCRNNN = I        $
EXECUTE GENSUP NOISE=HDNFND SUPPRESS=SUPPRESF $
IF (I .EQ. MAX) GOTO LAB4 $
EVALUATE I = I + 1      $
GOTO LAB3               $
LAB4 CONTINUE           $

$
$ APPLY 5 DB SUPPRESSION TO FAN INLET NOISE, GENERATE HDNFNIS(EN1001)
$
PARAM MAX = SCRNNN      $
PARAM I = 1             $
LAB5 CONTINUE           $

```

```

PARAM  SCRRNN = I                                $
EXECUTE GENSUP NOISE=HDFNFI SUPPRESS=SUPPRES5 $
IF (I .EQ. MAX) GOTO LAB6                        $
EVALUATE I = I + 1                                $
GOTO LAB5                                         $
LAB6 CONTINUE                                     $
$
$=====
$
$ PRO PARAMETERS COMMON TO ALL
$
PARAM  IPRINT = 0                                $ PRINT NOTHING
PARAM  IOUT = 1                                  $ DB OUTPUT
$ PARAM  SIGMA = 485.                            $ DEFAULT GROUND FLOW RESIST, SLUG/SEC-CUFT
PARAM  IUNITS = 7HENGLISH                        $ INPUT UNITS
PARAM  NBAND = 1                                 $ NUMBER OF SUBBANDS PER 1/3 OCTAVE
PARAM  RS = 1.                                   $ OBSERVER DISTANCE, FT
PARAM  SURFACE = 4HSOFT                          $ SURFACE TYPE OPTION
$ PARAM  COH = .01                               $ DEFAULT INCOHERENCE COEFFICIENT
PARAM  ABSORP = .TRUE.                          $ ATMOSPHERIC ABSORPTION OPTION
PARAM  GROUND = .TRUE.                          $ GROUND EFFECTS OPTION
PARAM  PROTIME = 3HEN1                          $ CODE USED TO FORM MEMBER NAME
$
$ PRO PARAMETER FOR AIRFRAME, EXECUTE PRO
$
PARAM PROSUM1 = 6HFNKAFM                        $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM1, GEOM=WIND, PRO=PRO1 $ GENERATE PRO1(PRES)
$
$ PRO PARAMETER FOR CORE, EXECUTE PRO
$
PARAM PROSUM2 = 5HGECOR                        $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM2, GEOM=BODY, PRO=PRO2 $ GENERATE PRO2(PRES)
$
$ PRO PARAMETER FOR TURBINE, EXECUTE PRO
$
PARAM PROSUM3 = 5HGETUR                        $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM3, GEOM=BODY, PRO=PRO3 $ GENERATE PRO3(PRES)
$
$ PRO PARAMETER FOR FAN DISCHARGE, EXECUTE PRO
$
PARAM PROSUM4 = 6HHDNFND                      $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM4, GEOM=BODY, PRO=PRO4 $ GENERATE PRO4(PRES)
$
$ PRO PARAMETER FOR FAN INLET, EXECUTE PRO
$
PARAM PROSUM5 = 6HHDNFNI                      $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM5, GEOM=BODY, PRO=PRO5 $ GENERATE PRO5(PRES)
$
$ PRO PARAMETER FOR JET, EXECUTE PRO
$
PARAM PROSUM6 = 6HSTNJET                      $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM6, GEOM=BODY, PRO=PRO6 $ GENERATE PRO6(PRES)
$
$ PRO PARAMETER FOR SUPPRESSED TURBINE, EXECUTE PRO
$
PARAM PROSUM7 = 6HGETURS                      $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM7, GEOM=BODY, PRO=PRO7 $ GENERATE PRO7(PRES)
$
$ PRO PARAMETER FOR SUPPRESSED FAN DISCHARGE, EXECUTE PRO
$
PARAM PROSUM8 = 7HHDNFNDS                    $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM8, GEOM=BODY, PRO=PRO8 $ GENERATE PRO8(PRES)
$
$ PRO PARAMETER FOR SUPPRESSED FAN INLET, EXECUTE PRO
$
PARAM PROSUM9 = 7HHDNFNIS                    $ NAME OF NOISE UNIT
EXECUTE PRO PROSUM=PROSUM9, GEOM=BODY, PRO=PRO9 $ GENERATE PRO9(PRES)
$
$=====
$
$ LEV PARAMETERS COMMON TO ALL
$
PARAM  IAWT = .FALSE.                          $ A-WEIGHTED LEVEL OPTION
PARAM  IDWT = .FALSE.                          $ D-WEIGHTED LEVEL OPTION

```

```

PARAM   IOSPL = .FALSE.    $ OASPL OPTION
PARAM   IOUT  = 1          $ DB OUTPUT
PARAM   IPNL  = .FALSE.    $ PNL OPTION
PARAM   IPNLT = .TRUE.     $ PNLT OPTION
PARAM   NAWT  = .FALSE.    $ NO NARROW BAND DATA
PARAM   NDWT  = .FALSE.    $ NO NARROW BAND DATA
PARAM   NOSPL = .FALSE.    $ NO NARROW BAND DATA

$
$ EFF PARAMETERS COMMON TO ALL
$
PARAM   DTIME = .5          $ RECEPTION TIME INCREMENT, SEC
$
$ CNT PARAMETERS COMMON TO ALL
$
PARAM   ISYM = .FALSE.     $ NON-SYMMETRICAL OUTPUT
PARAM   IOPT = 1           $ EPNL PLOT
$
$ PRINT PARAMETER COMMON TO ALL MODULES
$
PARAM   IPRINT = 0          $ PRINT NOTHING
$
$ LEV AND CNT PARAMETERS FOR AIRFRAME, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO1 , 6HPRES $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HFRAMHBPR     $ CNT FILE NAME
EXECUTE LEV                     $ GENERATE LEV(PNLT)
EXECUTE EFF                     $ GENERATE EFF(EPNL)
EXECUTE CNT                     $ GENERATE DATA FILE FRAMHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR CORE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO2 , 6HPRES $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HCOREHBPR     $ CNT FILE NAME
EXECUTE LEV                     $ GENERATE LEV(PNLT)
EXECUTE EFF                     $ GENERATE EFF(EPNL)
EXECUTE CNT                     $ GENERATE DATA FILE COREHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR TURBINE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO3 , 6HPRES $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HTURBHBPR     $ CNT FILE NAME
EXECUTE LEV                     $ GENERATE LEV(PNLT)
EXECUTE EFF                     $ GENERATE EFF(EPNL)
EXECUTE CNT                     $ GENERATE DATA FILE TURBHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR FAN DISCHARGE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO4 , 6HPRES $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HFANDHBPR     $ CNT FILE NAME
EXECUTE LEV                     $ GENERATE LEV(PNLT)
EXECUTE EFF                     $ GENERATE EFF(EPNL)
EXECUTE CNT                     $ GENERATE DATA FILE FANDHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR FAN INLET, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO5 , 6HPRES $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HFANIHBPR     $ CNT FILE NAME
EXECUTE LEV                     $ GENERATE LEV(PNLT)
EXECUTE EFF                     $ GENERATE EFF(EPNL)
EXECUTE CNT                     $ GENERATE DATA FILE FANIHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR JET, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO6 , 6HPRES $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HJETNBPR     $ CNT FILE NAME
EXECUTE LEV                     $ GENERATE LEV(PNLT)
EXECUTE EFF                     $ GENERATE EFF(EPNL)
EXECUTE CNT                     $ GENERATE DATA FILE JETNBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR SUPPRESSED TURBINE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO7 , 6HPRES $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HTURSHBPR     $ CNT FILE NAME
EXECUTE LEV                     $ GENERATE LEV(PNLT)

```

```

EXECUTE EFF                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE TURSHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR SUPPRESSED FAN DISCHARGE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO8 , 6HPRES             $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HFADSHBPR                 $ CNT FILE NAME
EXECUTE LEV                                $ GENERATE LEV(PNLT)
EXECUTE EFF                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE FADSHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR SUPPRESSED FAN INLET, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO9 , 6HPRES             $ LEV UNIT NAME AND MEMBER NAME
PARAM FILNAME = 8HFAISHBPR                 $ CNT FILE NAME
EXECUTE LEV                                $ GENERATE LEV(PNLT)
EXECUTE EFF                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE FAISHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR AIRFRAME AND ENGINE, EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO1 , 6HPRES , 6HPRO2 , 6HPRES ,
                      6HPRO3 , 6HPRES , 6HPRO4 , 6HPRES ,
                      6HPRO5 , 6HPRES , 6HPRO6 , 6HPRES
PARAM FILNAME = 8HLOUDHBPR                 $ LEV UNIT NAMES AND MEMBER NAMES
EXECUTE LEV                                $ CNT FILE NAME
EXECUTE EFF                                $ GENERATE LEV(PNLT)
EXECUTE CNT                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE LOUDHBPR.OUT
$
$ LEV AND CNT PARAMETERS FOR AIRFRAME & ENGINE WITH SUPPRESSED FAN AND TURBINE,
$ EXECUTE LEV, EFF, AND CNT
$
PARAM MEMSUM = 6HPRO1 , 6HPRES , 6HPRO2 , 6HPRES ,
                      6HPRO6 , 6HPRES , 6HPRO7 , 6HPRES ,
                      6HPRO8 , 6HPRES , 6HPRO9 , 6HPRES
PARAM FILNAME = 8HHUSHHBPR                 $ LEV UNIT NAMES AND MEMBER NAMES
EXECUTE LEV                                $ CNT FILE NAME
EXECUTE EFF                                $ GENERATE LEV(PNLT)
EXECUTE EFF                                $ GENERATE EFF(EPNL)
EXECUTE CNT                                $ GENERATE DATA FILE HUSHHBPR.OUT
$
$ =====
$
$ FINEM RESPICE
$
ENDCS $

```

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE June 1992		3. REPORT TYPE AND DATES COVERED Technical Memorandum	
4. TITLE AND SUBTITLE Advanced Subsonic Transport Approach Noise- The Relative Contribution of Airframe Noise				5. FUNDING NUMBERS WU 537-03-21-04	
6. AUTHOR(S) William L. Willshire, Jr. and Donald P. Garber					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) NASA Langley Research Center Hampton, VA 23665-5225				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001				10. SPONSORING / MONITORING AGENCY REPORT NUMBER NASA TM-104112	
11. SUPPLEMENTARY NOTES Willshire: Langley Research Center, Hampton, VA; Garber: Lockheed Engineering & Sciences Company, Hampton, VA.					
12a. DISTRIBUTION / AVAILABILITY STATEMENT Unclassified-Unlimited Subject Category 71				12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) With current engine technology, airframe noise is not a major contributor to the overall noise from a large commercial aircraft during landing approach. Much quieter engines are likely due to the advent of much higher bypass turbofans. This has led to a concern that airframe noise may become a major factor during approach. This study was performed to assess the effect of propulsion noise reduction on perceived noise levels on the ground. NASA's Aircraft Noise Prediction Program (ANOPP) was used to make noise predictions for a current large commercial transport aircraft and for a candidate advanced technology aircraft. Individual predictions of various propulsion and airframe noise components were made for each case. Predicted noise contour areas as well as noise levels predicted for the FAA prescribed measuring point were used to determine the relative importance of source components. The reduction in propulsion noise predicted for the advanced technology aircraft caused airframe noise to be the second largest contributor to landing approach noise after the fan inlet component. These predictions indicate that further reductions in propulsion noise beyond those identified in this paper would not significantly reduce landing noise without a corresponding reduction in airframe noise.					
14. SUBJECT TERMS Aircraft noise; Aeroacoustics; Airframe noise				15. NUMBER OF PAGES 36	
				16. PRICE CODE A03	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT		