


**CONFIDENTIAL**

Copy  
RM L9F29a

NACA R.M. L9F 29a

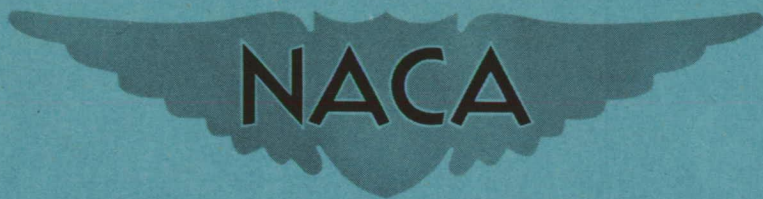

# RESEARCH MEMORANDUM

LATERAL-CONTROL INVESTIGATION OF FLAP-TYPE CONTROLS ON A  
WING WITH QUARTER-CHORD LINE SWEPT BACK 45°, ASPECT  
RATIO 4, TAPER RATIO 0.6, AND NACA 65A006 AIRFOIL SECTION

TRANSONIC-BUMP METHOD

By

Raymond D. Vogler

Langley Aeronautical Laboratory  
Langley Air Force Base, Va.

CLASSIFICATION CHANGED TO

CLASSIFIED DOCUMENT

UNCLASSIFIED

DATE 8-18-54

This document contains classified information affecting the National Defense of the United States within the meaning of the Espionage Act, USC 50:31 and 32. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law. Information so classified may be imparted only to persons in the military and naval services of the United States, appropriate civilian officers and employees of the Federal Government who have a legitimate interest therein, and to United States citizens of known loyalty and discretion who of necessity must be informed thereof.

AUTHORITY J.W.CROWLEY

CHANGE # 2447

W.H.L.

## NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON

August 15, 1949

**CONFIDENTIAL**

## NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

## RESEARCH MEMORANDUM

LATERAL-CONTROL INVESTIGATION OF FLAP-TYPE CONTROLS ON A  
WING WITH QUARTER-CHORD LINE SWEEP BACK  $45^\circ$ , ASPECT  
RATIO 4, TAPER RATIO 0.6, AND NACA 65A006 AIRFOIL SECTION

## TRANSONIC-BUMP METHOD

By Raymond D. Vogler

## SUMMARY

As part of an NACA research program, an investigation by the transonic-bump method through a Mach range of 0.6 to 1.2 has been made in the Langley high-speed 7- by 10-foot tunnel to determine the lateral control characteristics of 30-percent-chord flap-type controls of various spans. The wing of the semispan fuselage-wing combination had  $45^\circ$  of sweepback of the quarter-chord line, a taper ratio of 0.6, an aspect ratio of 4.0, and an NACA 65A006 airfoil section parallel to the free air stream.

Rolling and pitching moments and lift were obtained through a small range of control deflections. The majority of the data are presented as control-effectiveness parameters to show their variation with Mach number. In the Mach number region of 0.85 to 1.0, the results showed a decided decrease in the lift- and rolling-effectiveness parameters and a relatively smaller decrease in the negative values of the pitching-effectiveness parameters.

## INTRODUCTION

The urgent need for aerodynamic data in the transonic speed range and the paucity thereof have led to the establishment of an integrated program for transonic research. As part of the NACA transonic research program, a series of wing-fuselage configurations having wing plan

form as the chief variable are being investigated in the Langley high-speed 7- by 10-foot tunnel by using the transonic-bump test method.

This paper presents the results of a lateral-control investigation of a semispan wing-fuselage model employing a wing with the quarter-chord line swept back  $45^\circ$ , an aspect ratio of 4, a taper ratio of 0.6, and an NACA 65A006 airfoil section. The purpose of this investigation was to obtain lateral-control data with flap-type controls of 30-percent chord and various spans. The results of a previous investigation of the same wing fuselage without controls, giving additional aerodynamic data, may be found in reference 1.

#### MODEL AND APPARATUS

The semispan wing had  $45^\circ$  of sweepback at the quarter-chord line, a taper ratio of 0.6, an aspect ratio of 4.0, and an NACA 65A006 airfoil section (reference 2) parallel to the free air stream (fig. 1). The wing was made of beryllium copper and the fuselage was made of brass with all surfaces polished. The wing was mounted in the center of the fuselage vertically and had no dihedral or incidence. The fuselage, which was semicircular in cross section and in conformity with the ordinates of figure 2, was bent to the contour of the bump. For the purpose of determining the effect of fuselage shape on control characteristics, a few tests were made with the wing mounted on a cylindrical body with an ogive nose in anticipation of such a fuselage being used in free-flight tests of the wing. The drawing and the ordinates of the cylindrical body and the location of the quarter chord of the mean aerodynamic chord are also given in figure 2.

The controls (aileron or flap) were made integral with the wing by cutting grooves 0.03-inch wide along the 70-percent-chord line on the upper and lower surfaces of the wing (fig. 3). After setting the control at the desired deflection by bending the metal along the grooves, the grooves were filled with wax, thus giving a close approach to a 30-percent-chord sealed plain flap-type control surface. The entire control from fuselage surface to wing tip was divided into four equal spanwise segments. (See fig. 3.)

The model was mounted on an electrical strain-gage balance wired to calibrated galvanometers in order to measure the aerodynamic forces and moments. The balance was mounted in a chamber within the bump, and the chamber was sealed except for a small rectangular hole through

which an extension of the wing passed. This hole was covered by the fuselage end plate which was approximately 0.03 inch above the bump surface.

## COEFFICIENTS AND SYMBOLS

$C_L$	lift coefficient $\left( \frac{\text{Twice lift of semispan model}}{qS} \right)$
$C_l$	rolling-moment coefficient at plane of symmetry $\left( \frac{\text{Rolling moment of semispan model}}{qSb} \right)$
$C_{l_a}$	rolling-moment coefficient produced by the control (rolling-moment coefficient with control deflected minus rolling-moment coefficient without deflection)
$C_m$	pitching-moment coefficient referred to $0.25\bar{c}$ $\left( \frac{\text{Twice pitching moment of semispan model}}{qS\bar{c}} \right)$
$q$	effective dynamic pressure over span of model, pounds per square foot $\left( \frac{1}{2}\rho V^2 \right)$
$S$	twice wing area of semispan model, 0.125 square foot
$b$	twice span of semispan model, 0.707 foot
$\bar{c}$	mean aerodynamic chord of wing, 0.180 foot $\left( \frac{2}{S} \int_0^{b/2} c^2 dy \right)$
$c$	local wing chord, feet
$y$	spanwise distance from plane of symmetry
$y_i$	spanwise distance from plane of symmetry to inboard end of control

$\rho$	mass density of air, slugs per cubic foot
$V$	free-stream air velocity, feet per second
$M$	effective Mach number over span of model
$M_a$	average chordwise local Mach number
$M_l$	local Mach number
$R$	Reynolds number of wing based on $\bar{c}$
$\alpha$	angle of attack, degrees
$\delta$	control deflection relative to wing-chord plane, measured perpendicular to control hinge axis (positive when trailing edge is down), degrees
$b_a$	control span measured perpendicular to plane of symmetry

$$C_{L\delta} = \left( \frac{\partial C_L}{\partial \delta} \right)_{\alpha}$$

$$C_{l\delta} = \left( \frac{\partial C_l}{\partial \delta} \right)_{\alpha}$$

$$C_{m\delta} = \left( \frac{\partial C_m}{\partial \delta} \right)_{\alpha}$$

The subscript  $\alpha$  indicates the factor held constant.

#### CORRECTIONS

The rolling-effectiveness parameters presented herein represent the aerodynamic effects on a complete wing produced by the deflection of the control on only one semispan of the complete wing. Reflection-plane corrections have been applied to the data throughout the Mach range tested. The correction factors which were applied to the parameters are given in figure 4. The values of the correction factors given in figure 4 were obtained from unpublished experimental low-speed data and theoretical considerations. Although the corrections were based on low-speed considerations and are valid for the low Mach numbers only, it was believed that the results obtained by applying the corrections would give a better representation of true conditions than uncorrected data.

The lift- and pitching-effectiveness parameters represent the aerodynamic effects of deflection in the same direction of the controls on both semispans of the complete wing, and hence no reflection-plane corrections are necessary for the lift and pitching-moment data.

No corrections were applied for any twisting or deflection of the wing caused by the air load. These effects were believed to be small, however.

### TEST TECHNIQUE

The tests were made in the Langley high-speed 7- by 10-foot tunnel using an adaptation of the NACA wing-flow technique for obtaining transonic speeds. The technique used involves placing the model in the high-velocity flow field generated over the curved surface of a bump on the tunnel floor (reference 3). Typical contours of local Mach number in the vicinity of the model location on the bump with model removed are shown in figure 5. The contours indicate that there is a Mach number variation of about 0.04 over the wing semispan at low Mach numbers and about 0.07 at high Mach numbers. The chordwise Mach number variation is generally less than 0.01. The effective Mach number over the wing semispan is estimated to be 0.02 higher than the effective Mach number where 50-percent-span outboard ailerons normally would be located. No attempt has been made to evaluate the effects of this chordwise and spanwise Mach number variation. The long-dash lines near the root of the wing in figure 5 indicate a local Mach number 5 percent below the maximum value and represent the estimated extent of the bump boundary layer. The effective test Mach number was obtained from contour charts similar to those presented in figure 5 by using the relationship

$$M = \frac{2}{5} \int_0^{b/2} cM_a dy$$

The variation of the mean test Reynolds number with Mach number is shown in figure 6. The boundaries on the figure are an indication of the probable range in Reynolds number caused by variations in test conditions during the course of the investigation.

Force and moment data were obtained with controls of various spans through a Mach number range of 0.60 to 1.20, an angle-of-attack range of  $-6^\circ$  to  $6^\circ$ , and a control-deflection range of  $0^\circ$  to  $10^\circ$ , plus

some data on the 43-percent-span outboard control up to a deflection of  $30^\circ$ . Some additional tests were made with the cylindrical body in place of the transonic-research fuselage.

## RESULTS AND DISCUSSION

The data presented were obtained using the wing-fuselage combination except in figure 15 where the cylindrical body is used. In figures 7, 8, and 9 are curves of lift, rolling-, and pitching-moment coefficients plotted against control deflection up to  $30^\circ$  for the outboard 43-percent-span control at a wing angle of attack of  $2^\circ$ . In all other configurations the maximum control deflection was  $10^\circ$ . Inasmuch as the wing was symmetrical, data obtained at negative angles of attack and positive control deflections were considered, with appropriate regard to signs, to be equivalent to data that would be obtained at positive angles of attack and negative control deflections and were plotted as such. The curves of figures 7 to 9 are typical of the curves of each of the other control configurations tested.

Control-effectiveness parameters.— The control-effectiveness parameters presented in figures 10 to 12 were obtained from figures 7 to 9 and similar plots of the test data for the various control configurations. The control effectiveness for all configurations had a linear variation with control deflection for the deflection range of  $\pm 10^\circ$ , and it was within this range that the slopes were measured.

A marked decrease in rolling and lift effectiveness occurs between Mach numbers of 0.85 and 1.0, and a relatively smaller decrease in the negative values of the pitching-effectiveness parameter occurs in the same Mach number region (figs. 10 to 12).

The effectiveness of controls of various spans starting at the tip (fig. 13) indicates that the outboard 21-percent-span control gives very low rolling effectiveness. Although there are considerable differences in rolling effectiveness for a given span control with increasing Mach number, the general shape of the curves remains the same. This would indicate that the relative effectiveness of a partial-span control to a full-span control is little affected by Mach number. On the other hand, the pitching-effectiveness data (fig. 13) indicate greater relative loss in effectiveness at supersonic Mach numbers for controls near the wing tip than for controls near the root.

A comparison of the values of  $C_{l\delta}$  obtained at low Mach numbers in this investigation with those estimated by the method of reference 4 shows fair agreement (fig. 14).


Effect of fuselage shape.-- A comparison of the rolling-moment coefficients resulting from a  $5^\circ$  deflection of both a 43-percent-span and 86-percent-span outboard control on the wing with the regular transonic-research fuselage and with the cylindrical body of figure 2 shows little effect of fuselage shape. (See fig. 15.) A decrease in effectiveness of the 86-percent-span control can be noted for angles of attack from  $4^\circ$  to  $-6^\circ$  when the cylindrical body is used, otherwise the differences are small and within the experimental accuracy of the tests.

Langley Aeronautical Laboratory  
National Advisory Committee for Aeronautics  
Langley Air Force Base, Va.

#### REFERENCES

1. Weil, Joseph, and Goodson, Kenneth W.: Aerodynamic Characteristics of a Wing with Quarter-Chord Line Swept Back  $45^\circ$ , Aspect Ratio 4, Taper Ratio 0.6, and NACA 65A006 Airfoil Section. Transonic-Bump Method. NACA RM L9A21, 1949.
2. Loftin, Laurence K., Jr.: Theoretical and Experimental Data for a Number of NACA 6A-Series Airfoil Sections. NACA TN 1368, 1947.
3. Schneider, Leslie E., and Ziff, Howard L.: Preliminary Investigation of Spoiler Lateral Control on a  $42^\circ$  Sweptback Wing at Transonic Speeds. NACA RM L7F19, 1947.
4. Lowry, John G., and Schneider, Leslie E.: Estimation of Effectiveness of Flap-Type Controls on Sweptback Wings. NACA TN 1674, 1948.



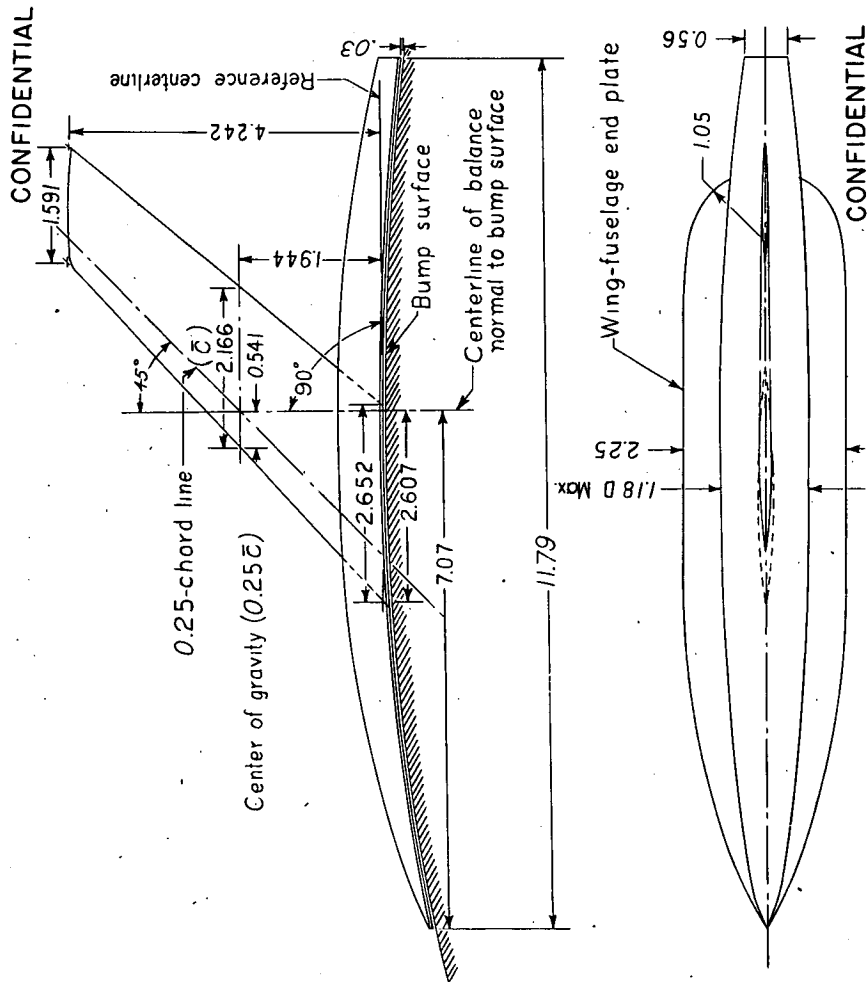

TABULATED DATA

Wing	0.125 sq ft
Twice semispan area	4.0
Aspect ratio	0.60
Taper ratio	0.180 ft
Mean aerodynamic chord	0°
Incidence	0°
Dihedral	
Airfoil section parallel to free airstream	NACA 65A006






Figure 1.-- General arrangement of model with 45° sweptback wing, aspect ratio 4, taper ratio 0.6, and NACA 65A006 airfoil.

**CONFIDENTIAL**  
**Transonic-research fuselage and end plate**

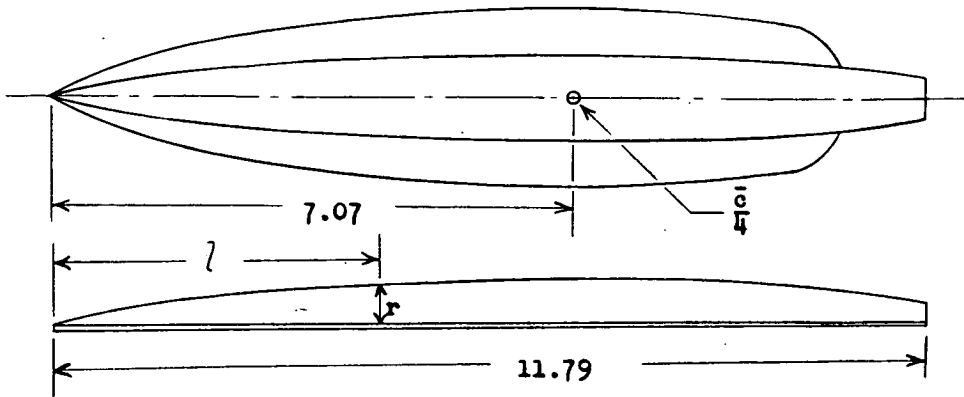

**Cylindrical body and end plate**

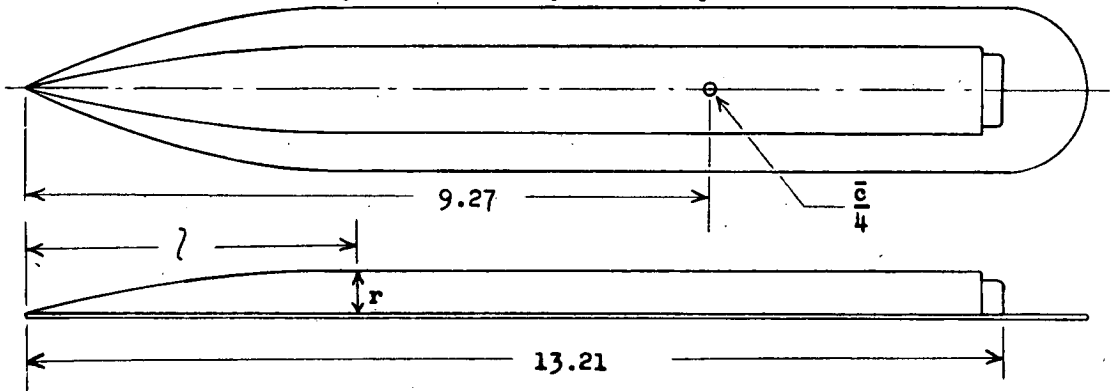

**Transonic-research fuselage**

Ordinates, inches			
$z$	$r$	$z$	$r$
0	0	5.657	.575
.071	.033	6.364	.586
.106	.042	7.071	.589
.177	.060	7.778	.584
.354	.102	8.485	.569
.707	.170	9.192	.543
1.061	.228	9.899	.504
1.414	.279	10.606	.442
2.121	.367	11.314	.357
2.828	.437	11.792	.283
3.535	.490		
4.243	.529		
4.950	.556		

**Cylindrical body**

Ordinates, inches	
$z$	$r$
0	0
.59	.144
1.18	.271
1.77	.372
2.36	.462
2.95	.533
3.54	.575
4.13	.589
4.72	.589
5.31	.589
5.90	.589
6.49	.589
7.08	.589
7.67	.589
8.26	.589
8.85	.589
9.44	.589
10.03	.589
10.62	.589
11.21	.589
11.80	.589
12.39	.589
12.98	.589
13.57	.589
14.16	.589
14.75	.589
15.34	.589
15.93	.589
16.52	.589
17.11	.589
17.70	.589
18.29	.589
18.88	.589
19.47	.589
20.06	.589
20.65	.589
21.24	.589
21.83	.589
22.42	.589
23.01	.589
23.60	.589
24.19	.589
24.78	.589
25.37	.589
25.96	.589
26.55	.589
27.14	.589
27.73	.589
28.32	.589
28.91	.589
29.50	.589
30.09	.589
30.68	.589
31.27	.589
31.86	.589
32.45	.589
33.04	.589
33.63	.589
34.22	.589
34.81	.589
35.40	.589
35.99	.589
36.58	.589
37.17	.589
37.76	.589
38.35	.589
38.94	.589
39.53	.589
40.12	.589
40.71	.589
41.30	.589
41.89	.589
42.48	.589
43.07	.589
43.66	.589
44.25	.589
44.84	.589
45.43	.589
46.02	.589
46.61	.589
47.20	.589
47.79	.589
48.38	.589
48.97	.589
49.56	.589
50.15	.589
50.74	.589
51.33	.589
51.92	.589
52.51	.589
53.10	.589
53.69	.589
54.28	.589
54.87	.589
55.46	.589
56.05	.589
56.64	.589
57.23	.589
57.82	.589
58.41	.589
59.00	.589
59.59	.589
60.18	.589
60.77	.589
61.36	.589
61.95	.589
62.54	.589
63.13	.589
63.72	.589
64.31	.589
64.90	.589
65.49	.589
66.08	.589
66.67	.589
67.26	.589
67.85	.589
68.44	.589
69.03	.589
69.62	.589
70.21	.589
70.80	.589
71.39	.589
71.98	.589
72.57	.589
73.16	.589
73.75	.589
74.34	.589
74.93	.589
75.52	.589
76.11	.589
76.70	.589
77.29	.589
77.88	.589
78.47	.589
79.06	.589
79.65	.589
80.24	.589
80.83	.589
81.42	.589
82.01	.589
82.60	.589
83.19	.589
83.78	.589
84.37	.589
84.96	.589
85.55	.589
86.14	.589
86.73	.589
87.32	.589
87.91	.589
88.50	.589
89.09	.589
89.68	.589
90.27	.589
90.86	.589
91.45	.589
92.04	.589
92.63	.589
93.22	.589
93.81	.589
94.40	.589
94.99	.589
95.58	.589
96.17	.589
96.76	.589
97.35	.589
97.94	.589
98.53	.589
99.12	.589
99.71	.589
100.30	.589
100.89	.589
101.48	.589
102.07	.589
102.66	.589
103.25	.589
103.84	.589
104.43	.589
105.02	.589
105.61	.589
106.20	.589
106.79	.589
107.38	.589
107.97	.589
108.56	.589
109.15	.589
109.74	.589
110.33	.589
110.92	.589
111.51	.589
112.10	.589
112.69	.589
113.28	.589
113.87	.589
114.46	.589
115.05	.589
115.64	.589
116.23	.589
116.82	.589
117.41	.589
118.00	.589
118.59	.589
119.18	.589
119.77	.589
120.36	.589
120.95	.589
121.54	.589
122.13	.589
122.72	.589
123.31	.589
123.90	.589
124.49	.589
125.08	.589
125.67	.589
126.26	.589
126.85	.589
127.44	.589
128.03	.589
128.62	.589
129.21	.589
129.80	.589
130.39	.589
130.98	.589
131.57	.589
132.16	.589
132.75	.589
133.34	.589
133.93	.589
134.52	.589
135.11	.589
135.70	.589
136.29	.589
136.88	.589
137.47	.589
138.06	.589
138.65	.589
139.24	.589
139.83	.589
140.42	.589
141.01	.589
141.60	.589
142.19	.589
142.78	.589
143.37	.589
143.96	.589
144.55	.589
145.14	.589
145.73	.589
146.32	.589
146.91	.589
147.50	.589
148.09	.589
148.68	.589
149.27	.589
149.86	.589
150.45	.589
151.04	.589
151.63	.589
152.22	.589
152.81	.589
153.40	.589
153.99	.589
154.58	.589
155.17	.589
155.76	.589
156.35	.589
156.94	.589
157.53	.589
158.12	.589
158.71	.589
159.30	.589
159.89	.589
160.48	.589
161.07	.589
161.66	.589
162.25	.589
162.84	.589
163.43	.589
164.02	.589
164.61	.589
165.20	.589
165.79	.589
166.38	.589
166.97	.589
167.56	.589
168.15	.589
168.74	.589
169.33	.589
169.92	.589
170.51	.589
171.10	.589
171.69	.589
172.28	.589
172.87	.589
173.46	.589
174.05	.589
174.64	.589
175.23	.589
175.82	.589
176.41	.589
177.00	.589
177.59	.589
178.18	.589
178.77	.589
179.36	.589
179.95	.589
180.54	.589
181.13	.589
181.72	.589
182.31	.589
182.90	.589
183.49	.589
184.08	.589
184.67	.589
185.26	.589
185.85	.589
186.44	.589
187.03	.589
187.62	.589
188.21	.589
188.80	.589
189.39	.589
189.98	.589
190.57	.589
191.16	.589
191.75	.589
192.34	.589
192.93	.589
193.52	.589
194.11	.589
194.70	.589
195.29	.589
195.88	.589
196.47	.589
197.06	.589
197.65	.589
198.24	.589
198.83	.589
199.42	.589
200.01	.589
200.60	.589
201.19	.589
201.78	.589
202.37	.589
202.96	.589
203.55	.589
204.14	.589
204.73	.589
205.32	.589
205.91	.589
206.50	.589
207.09	.589
207.68	.589
208.27	.589
208.86	.589
209.45	.589
210.04	.589
210.63	.589
211.22	.589
211.81	.589
212.40	.589
212.99	.589
213.58	.589
214.17	.589
214.76	.589
215.35	.589
215.94	.589
216.53	.589
217.12	.589
217.71	.589
218.30	.589
218.89	.589
219.48	.589
220.07	.589
220.66	.589
221.25	.589
221.84	.589
222.43	.589
223.02	.589
223.61	.589
224.20	.589
224.79	.589
225.38	.589
225.97	.589
226.56	.589
227.15	.589
227.74	.589
228.33	.589
228.92	.589
229.51	.589
230.10	.589
230.69	.589
231.28	.589
231.87	.589
232.46	.589
233.05	.589
233.64	.589
234.23	.589
234.82	.589
235.41	.589
236.00	.589
236.59	.589
237.18	.589
237.77	.589
238.36	.589
238.95	.589
239.54	.589
240.13	.589
240.72	.589
241.31	.589
241.90	.589
242.49	.589
243.08	.589
243.67	.589
244.26	.589
244.85	.589
245.44	.589
246.03	.589
246.62	.589
247.21	.589
247.80	.589
248.39	.589
248.98	.589
249.57	.589
250.16	.589
250.75	.589
251.34	.589
251.93	.589
252.52	.589
253.11	.589
253.70	.589
254.29	.589
254.88	.589
255.47	.589
256.06	.589
256.65	.589
257.24	.589
257.83	.589
258.42	.589
259.01	.589
259.60	.589
260.19	.589
260.78	.589
261.37	.589
261.96	.589
262.55	.589
263.14	.589
263.73	.589
264.32	.589
264.91	.589
265.50	.589
266.09	.589
266.68	.589
267.27	.589
267.86	.589
268.45	.589
269.04	.589
269.63	.589
270.22	.589
270.81	.589
271.40	.589
271.99	.589
272.58	.589
273.17	.589
273.76	.589
274.35	.589
274.94	.589
275.53	.589
276.12	.589

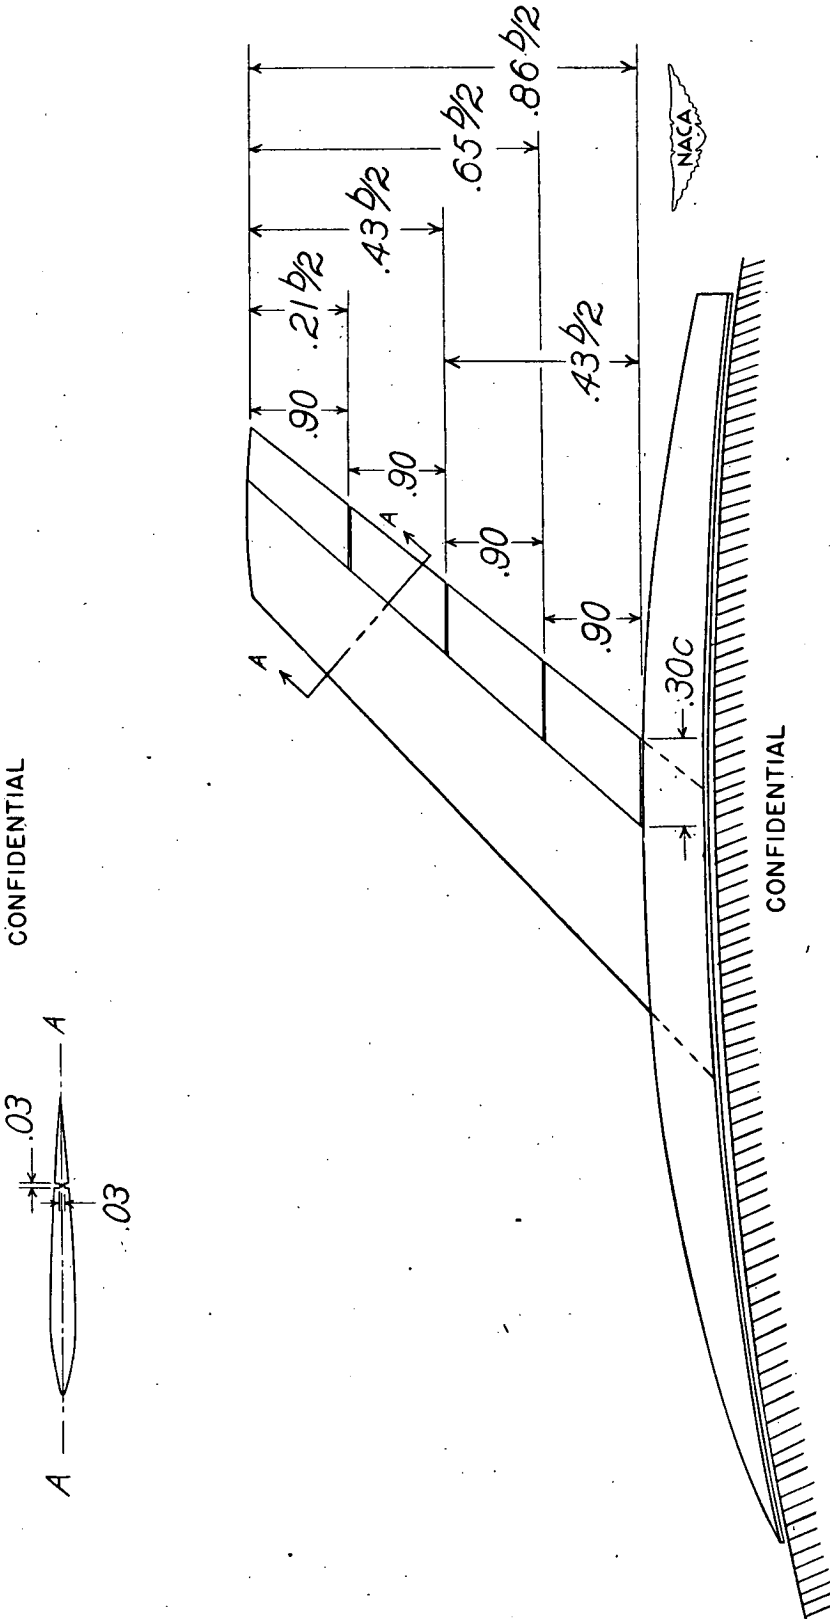


Figure 3.— Details of controls tested.

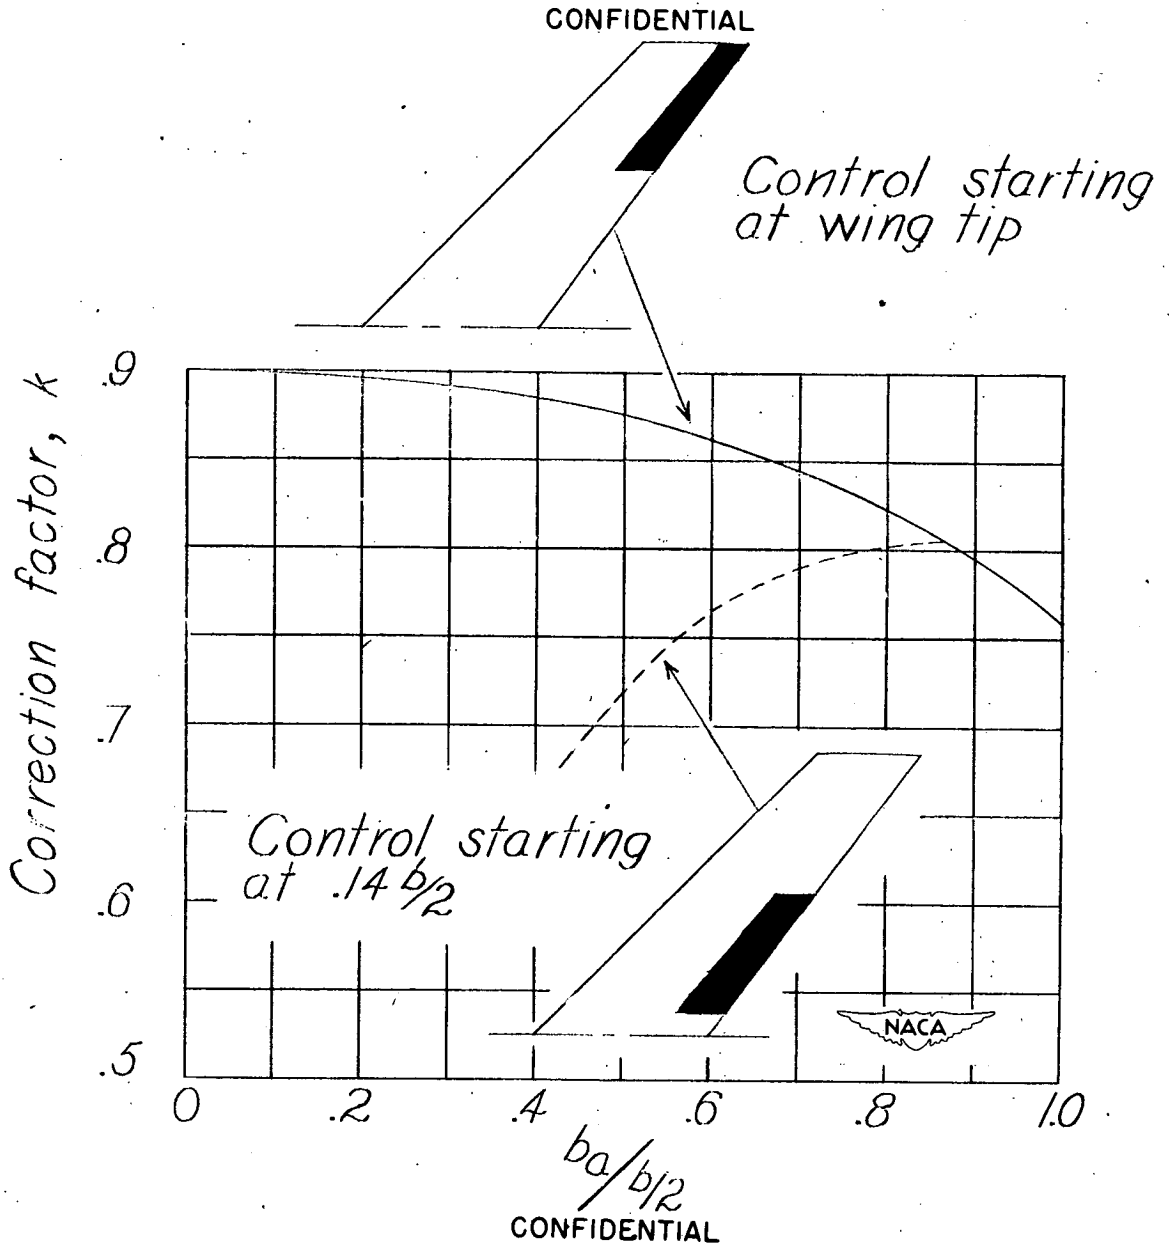


Figure 4.- Reflection-plane correction factors for inboard and outboard controls of various spans for a wing of  $45^\circ$  of sweepback, aspect ratio 4, and taper ratio of 0.6.

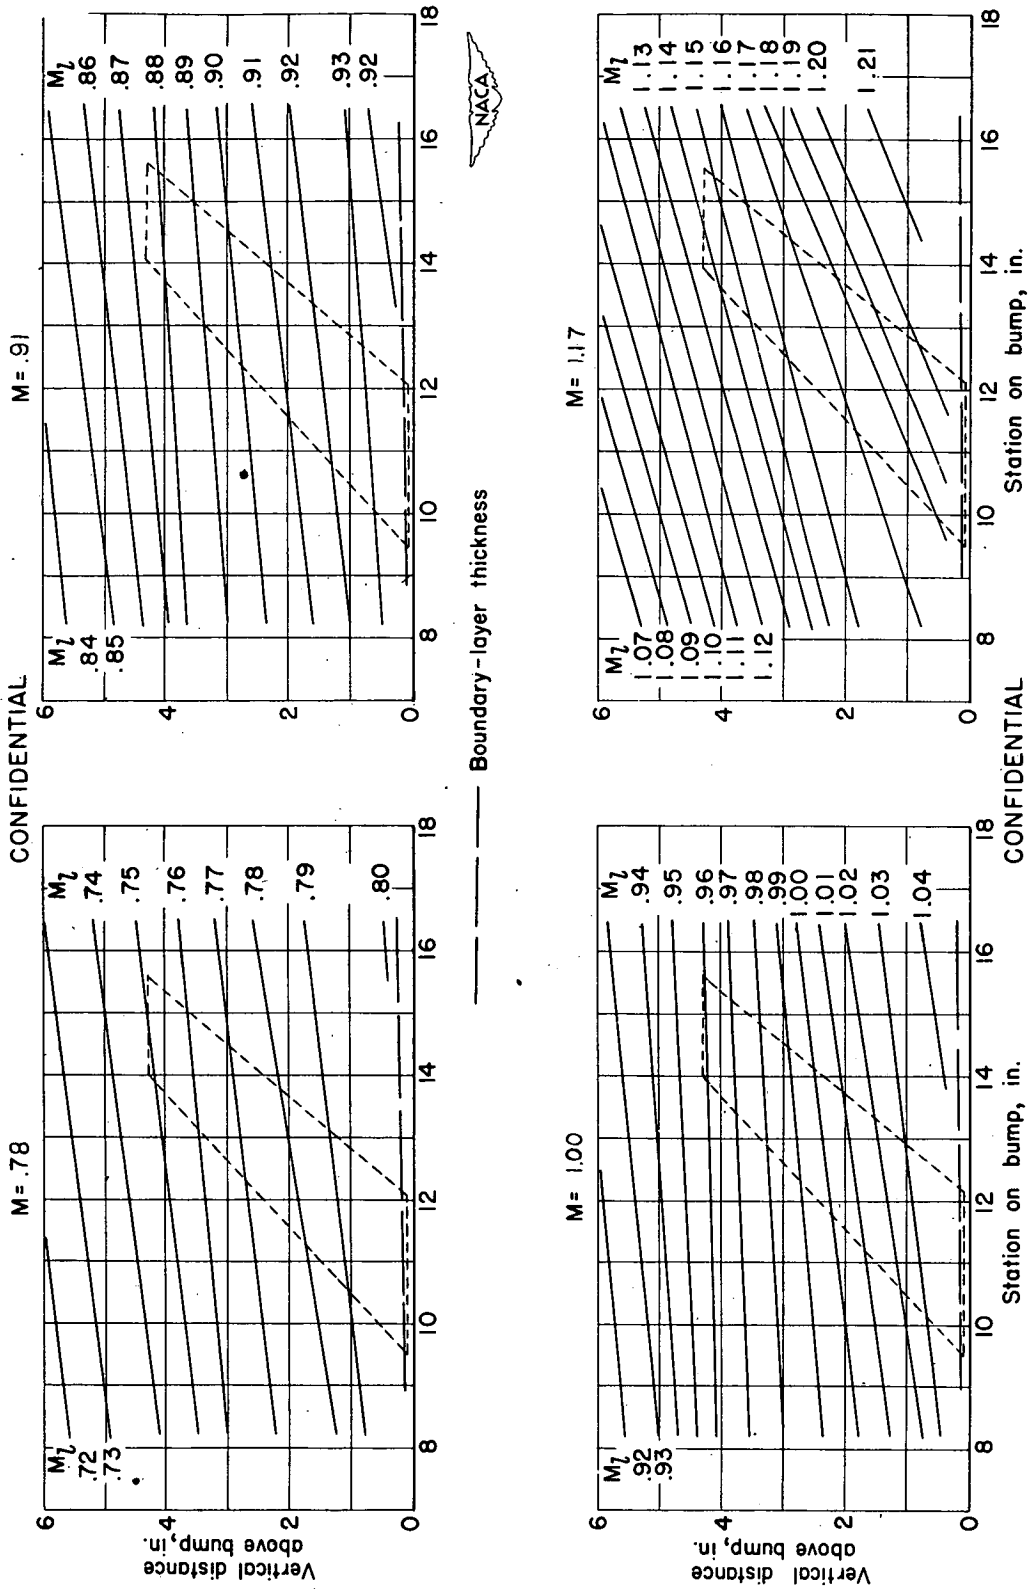


Figure 5.— Typical Mach number contours over transonic bump in region of model location.

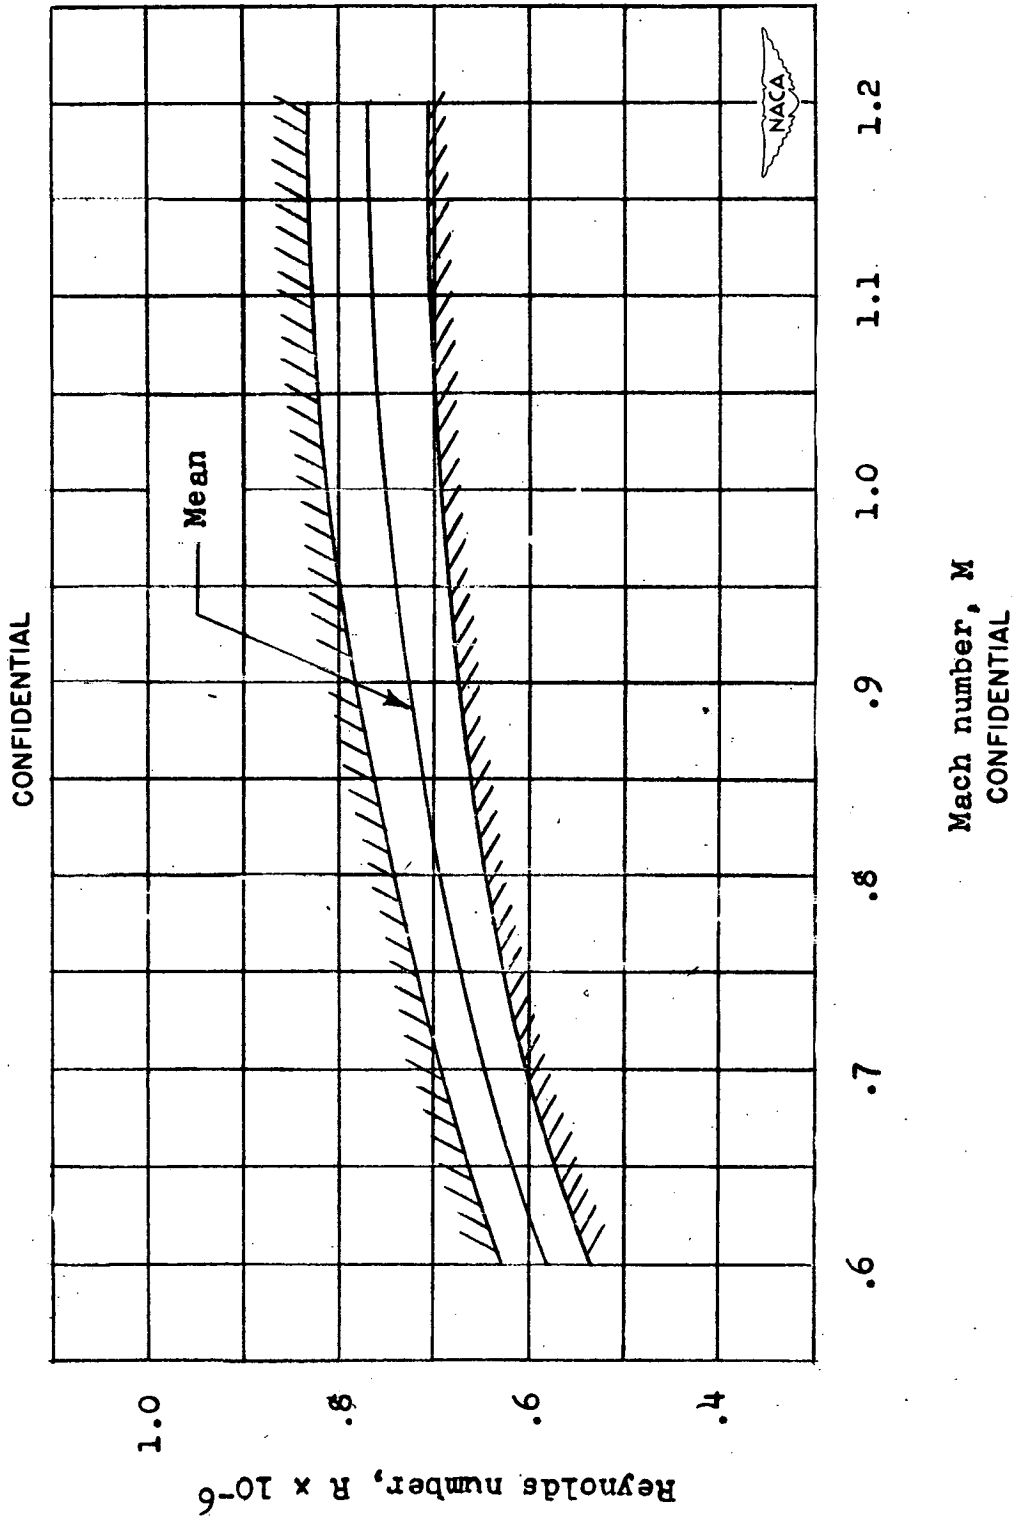


Figure 6.— Variation of test Reynolds number with Mach number for model with 45° sweptback wing, aspect ratio 4, taper ratio 0.6, and NACA 65A006 airfoil.

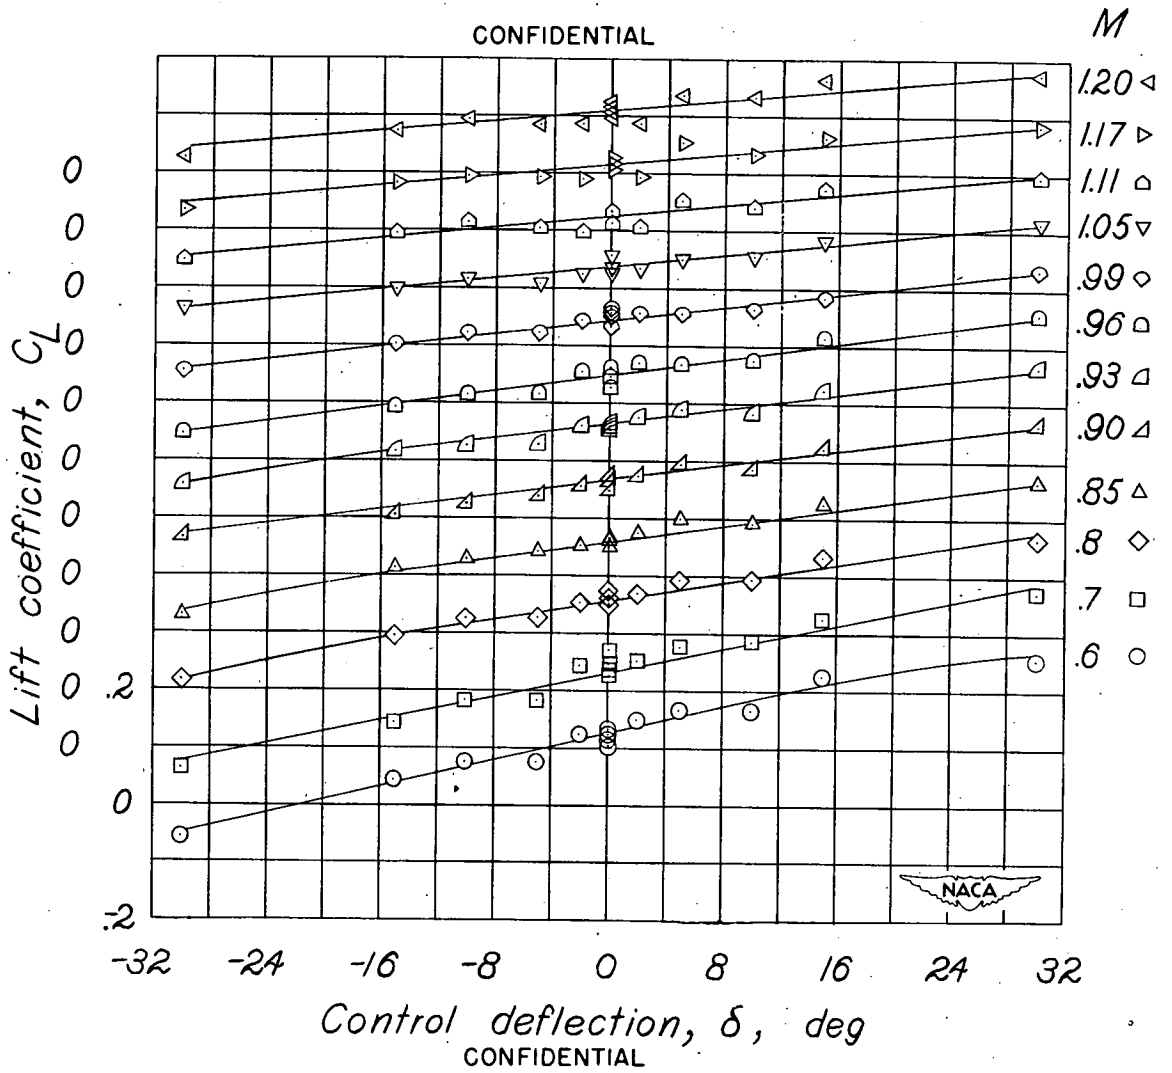


Figure 7.— Variation of lift coefficient with control deflection for various Mach numbers.  $b_a = 0.43 \frac{b}{2}$ , outboard;  $\alpha = 2^\circ$ .

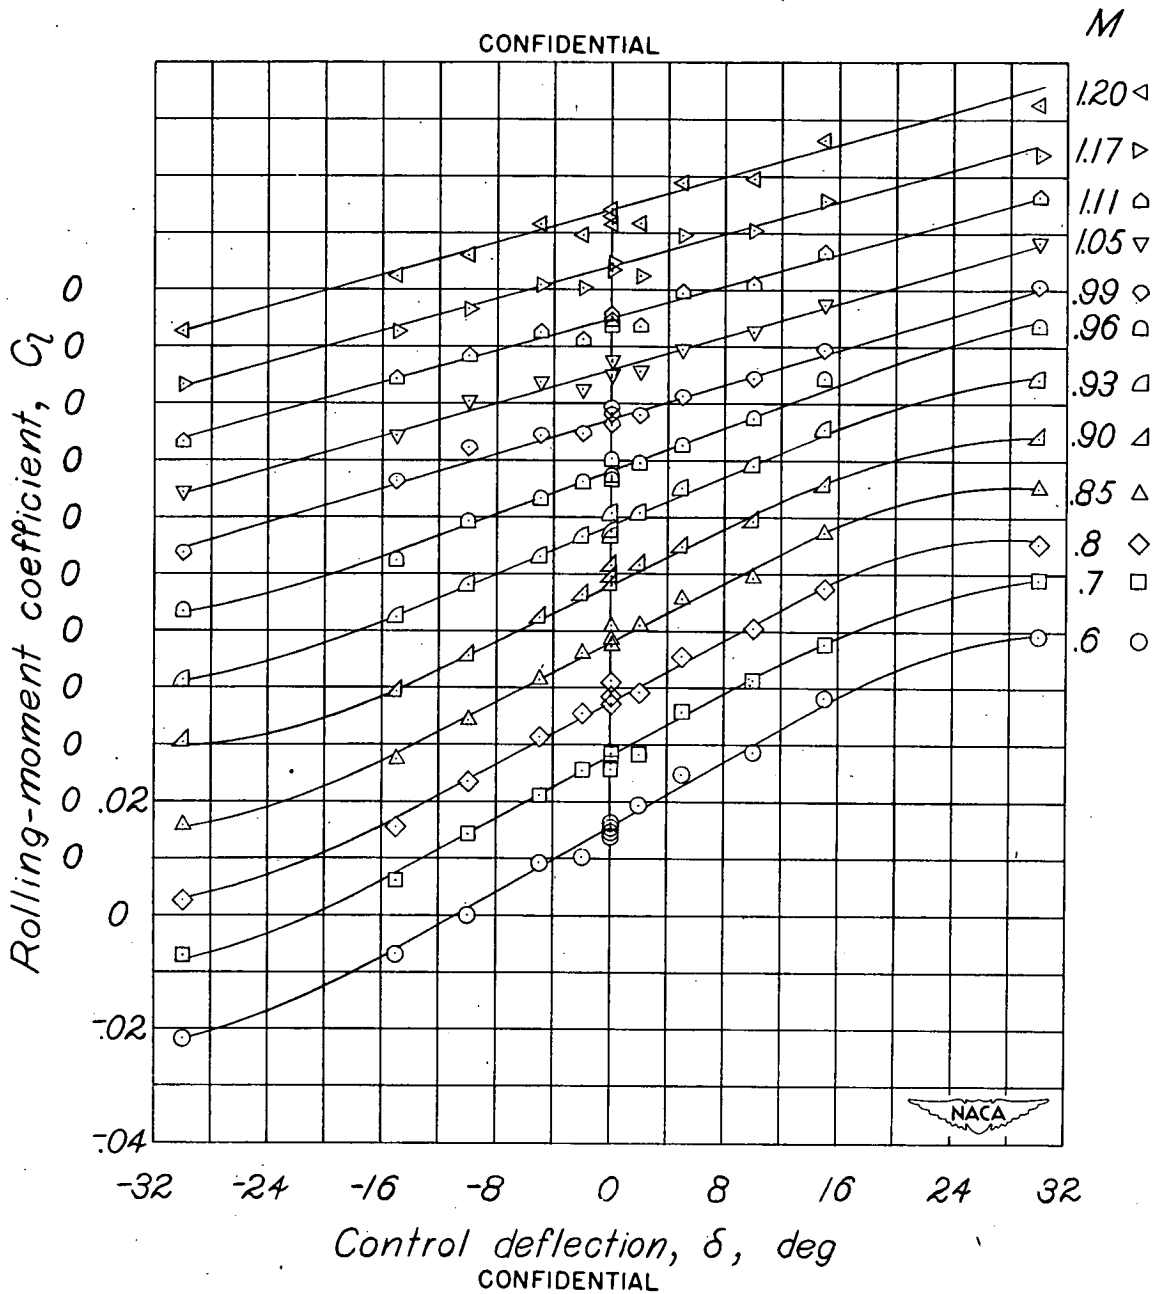


Figure 8.— Variation of rolling-moment coefficient with control deflection for various Mach numbers.  $b_a = 0.43 \frac{b}{2}$ , outboard;  $\alpha = 2^\circ$ .




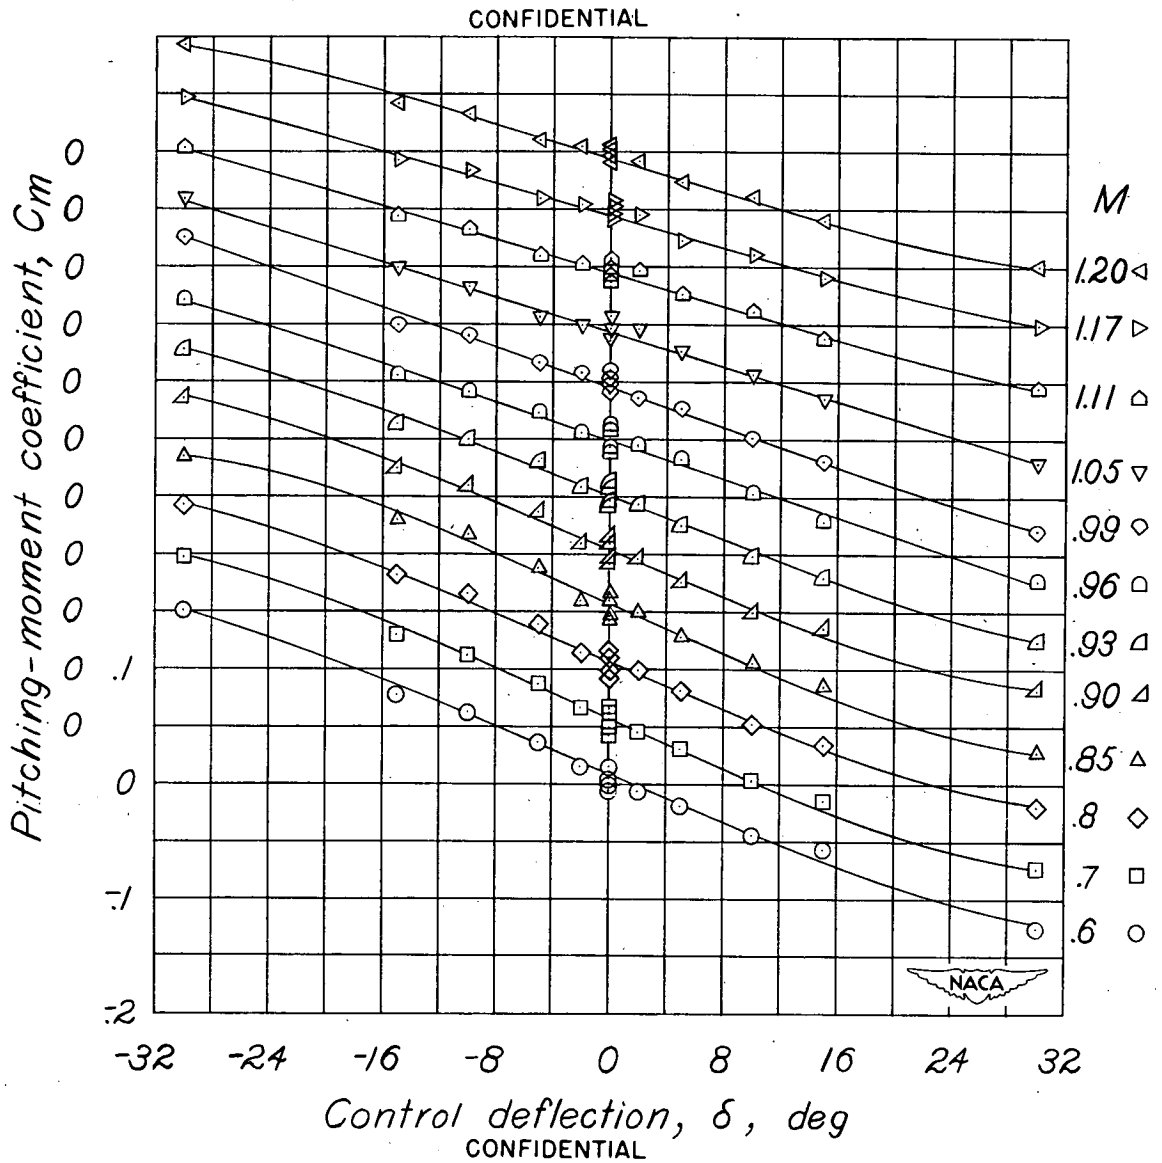


Figure 9.- Variation of pitching-moment coefficient with control deflection for various Mach numbers.  $b_a = 0.43 \frac{b}{2}$ , outboard;  $\alpha = 2^\circ$ .



CONFIDENTIAL

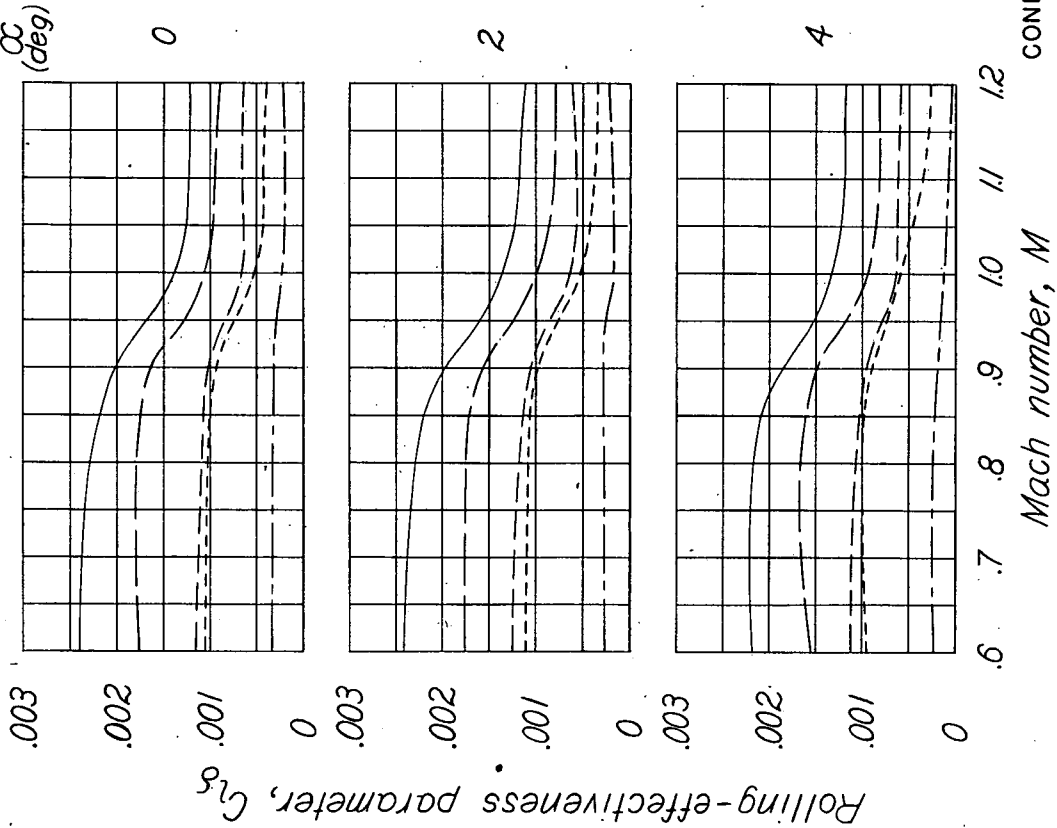

$b a / b^2$	Category
0.86	Outboard
.65	
.43	
.21	
.43	Inboard

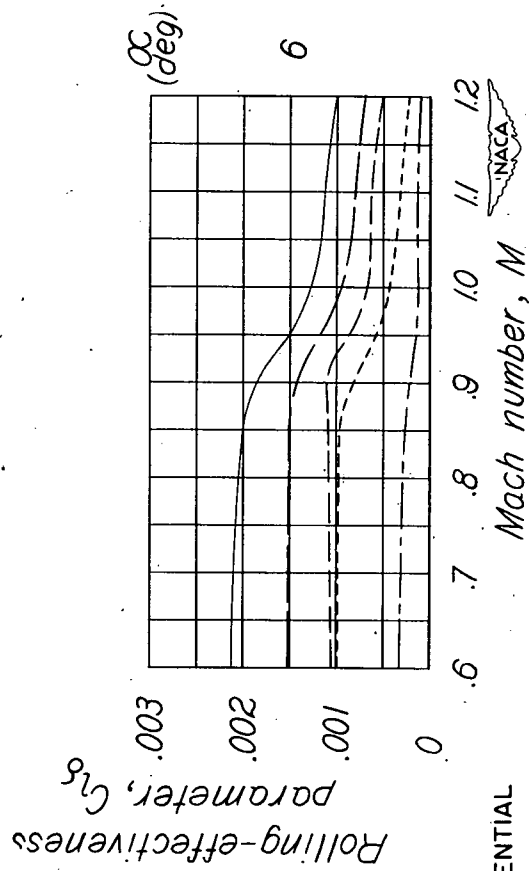


Figure 11.— Variation of rolling-effectiveness parameter with Mach number.


CONFIDENTIAL

CONFIDENTIAL

$b_a/b_2$

\_\_\_\_\_ 0.86 } Outboard  
 \_\_\_\_\_ 0.65 }  
 \_\_\_\_\_ 0.43 }  
 \_\_\_\_\_ 0.21 }  
 - - - - - 0.43 } Inboard

Pitching-effectiveness parameter,  $Cm\delta$

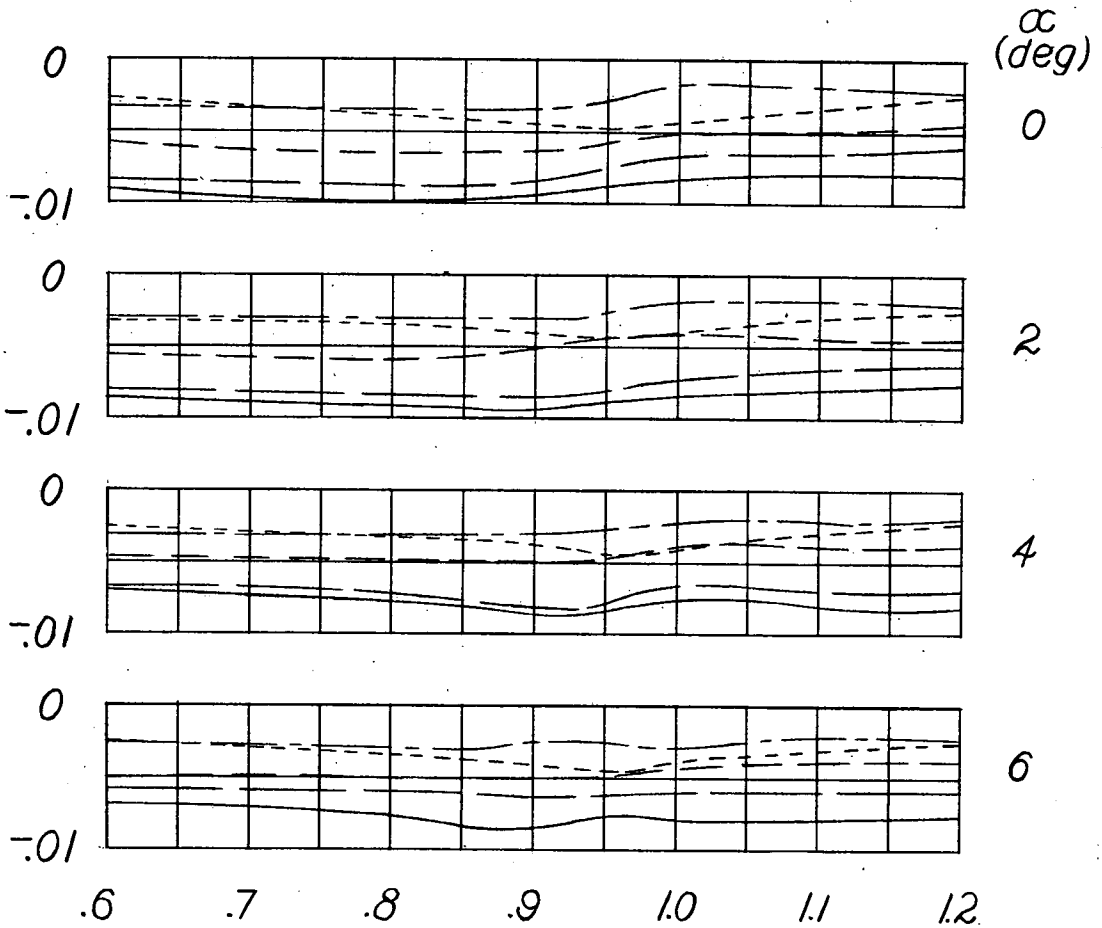

Mach number,  $M$



CONFIDENTIAL

Figure 12.- Variation of pitching-effectiveness parameter with Mach number.

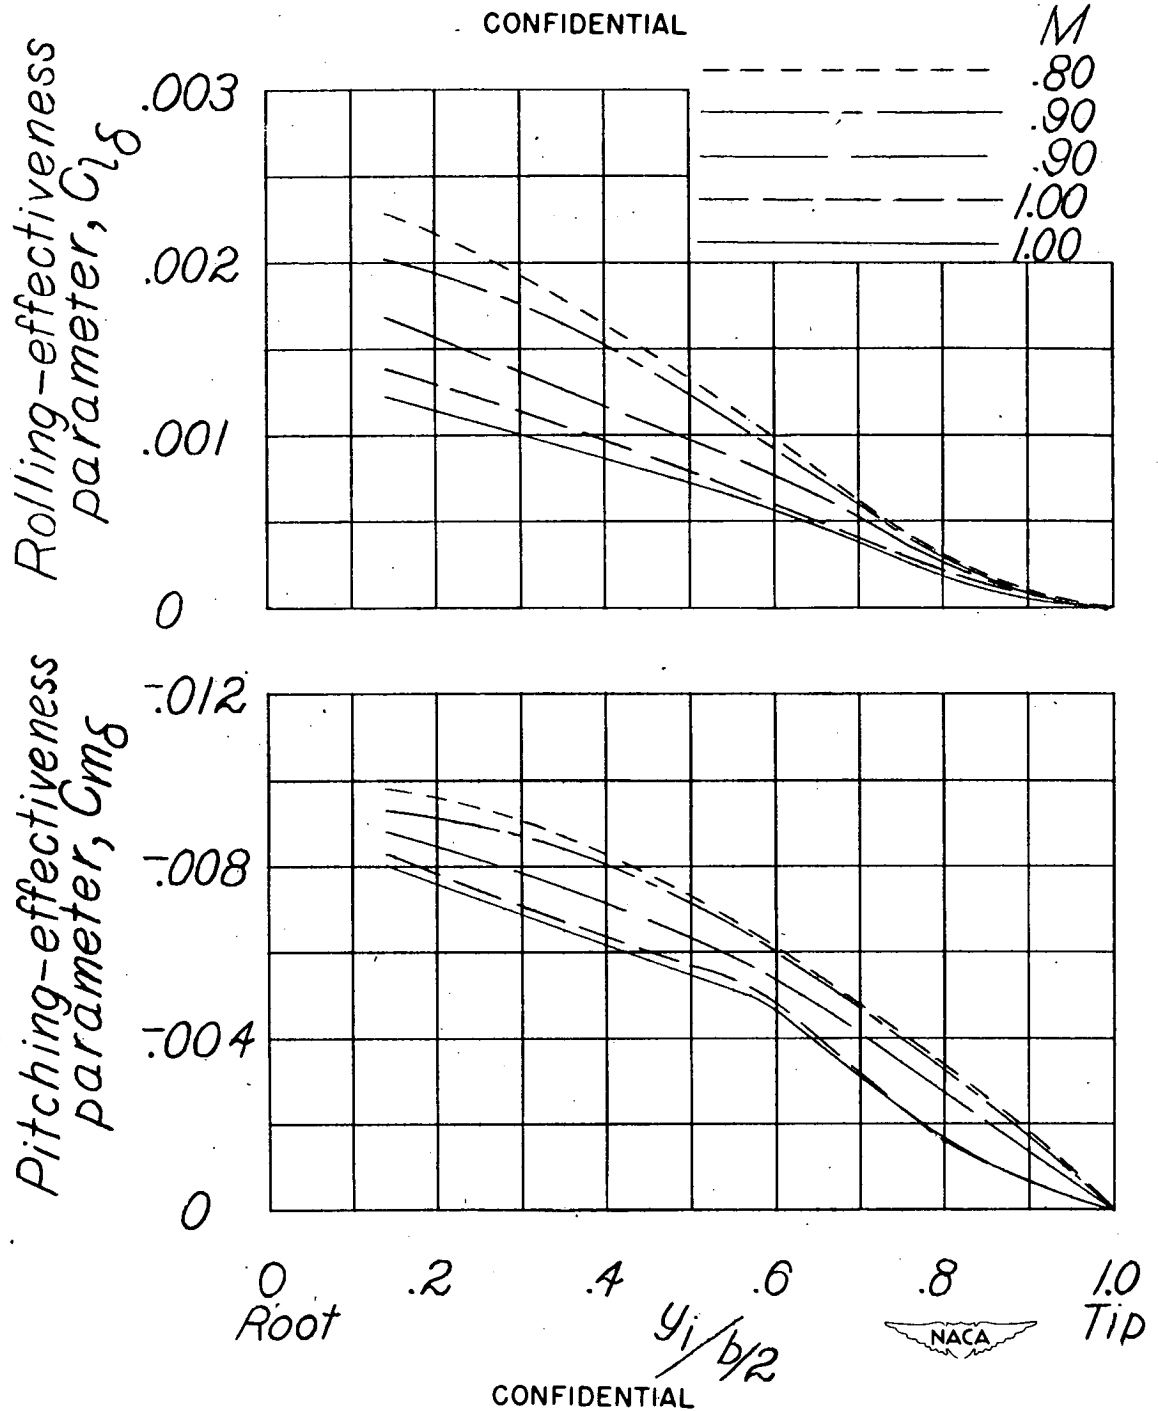


Figure 13.- Variation of control-effectiveness parameters with control span for various Mach numbers.  $\alpha = 0^\circ$ .