




The X-33 Extended Flight Test Range

*Dale A. Mackall
Dryden Flight Research Center
Edwards, California*

*Robert Sakahara
Air Force Flight Test Center
Edwards, California*

*Steven E. Kremer
Goddard Space Flight Center
Wallops Island, Virginia*

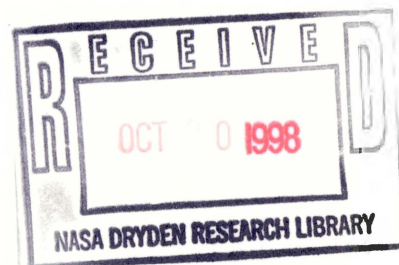

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the lead center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and mission, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076-1320



The X-33 Extended Flight Test Range

Dale A. Mackall
Dryden Flight Research Center
Edwards, California

Robert Sakahara
Air Force Flight Test Center
Edwards, California

Steven E. Kremer
Goddard Space Flight Center
Wallops Island, Virginia

National Aeronautics and
Space Administration

Dryden Flight Research Center
Edwards, California 93523-0273

NOTICE

Use of trade names or names of manufacturers in this document does not constitute an official endorsement of such products or manufacturers, either expressed or implied, by the National Aeronautics and Space Administration.

Available from the following:

NASA Center for AeroSpace Information (CASI)
7121 Standard Drive
Hanover, MD 21076-1320
(301) 621-0390

National Technical Information Service (NTIS)
5285 Port Royal Road
Springfield, VA 22161-2171
(703) 487-4650

THE X-33 EXTENDED FLIGHT TEST RANGE

Dale A. Mackall

**National Aeronautics and Space Administration
Dryden Flight Research Center
Edwards, California**

Robert Sakahara

**Air Force Flight Test Center
Edwards Air Force Base,
Edwards, California**

Steven E. Kremer

**National Aeronautics and Space Administration
Goddard Space Flight Center
Wallops Flight Facility
Wallops Island, Virginia**

ABSTRACT

Development of an extended test range, with range instrumentation providing continuous vehicle communications, is required to flight-test the X-33, a scaled version of a reusable launch vehicle. The extended test range provides vehicle communications coverage from California to landing at Montana or Utah. This paper provides an overview of the approaches used to meet X-33 program requirements, including using multiple ground stations, and methods to reduce problems caused by reentry plasma radio frequency blackout. The advances used to develop the extended test range show other hypersonic and access-to-space programs can benefit from the development of the extended test range.

KEY WORDS

X-33, Reusable Launch Vehicle, Extended test range, Radio frequency communications, Reentry plasma blackout.

NOMENCLATURE

AFB	Air Force Base
AFFTC	Air Force Flight Test Center
CFD	computational fluid dynamics
DET2	Detachment 2, deployables of the Space and Missiles Systems Center
DGSA	Dynamic Ground Station Analysis
DoD	Department of Defense
ExTRA	Extended Test Range Alliance
FTS	flight termination system
GPS/INS	global positioning system/inertial navigation system
MOF	Mobile Operations Facility
NASA	National Aeronautics and Space Administration
RIR	Range Instrumentation Radar
TTR	Tonopah Test Range
UHF	ultrahigh frequency
U. S.	United States
UTTR	Utah Test and Training Range
WFF	Wallops Flight Facility

INTRODUCTION

On July 1, 1996, the National Aeronautics and Space Administration (NASA) signed a cooperative agreement, number NCC8-115, with Lockheed Martin Skunk Works (Palmdale, California) to develop and flight-test the autonomous X-33 vehicle, a scaled version of the next-generation single-stage-to-orbit reusable launch vehicle. This cooperative agreement approach gives Lockheed Martin primary responsibility for the X-33 program. When additional government help was required, Lockheed Martin "subcontracted" to NASA centers and the United States (U. S.) Department of Defense (DoD) for specific work. Through this mechanism, NASA Dryden Flight Research Center (Edwards, California) became responsible for the extended test range.

This paper describes the management approach to accomplishing the X-33 objectives, mainly the formation of the Extended Test Range Alliance (ExTRA), a unique team of government and industry personnel and range assets established to resolve design issues and accomplish the X-33 extended test range and support other programs as required. Extended test range requirements, derived from range safety and the X-33 program, are also detailed.

The range safety requirements were the most challenging to define and meet. The X-33 vehicle is an autonomous vehicle that launches like a rocket, reenters the atmosphere, and lands horizontally like an


aircraft. Historically, rockets have been launched over the oceans to allow failed rockets to be destroyed using explosive devices. The X-33 vehicle will fly over scarcely populated areas and use remote lakebeds for emergency landings.

Numerous range requirements come from the X-33 program for interface definitions with the vehicle communication subsystems and the need for multiple ground stations to provide continuous coverage of the flight. Another area that can affect communications coverage, the reentry plasma shield that causes a "blackout" of radio frequency signals such as range safety commands, will also be discussed. A cooperative team of experts from across the country has analyzed and modeled the blackout problem.

ESTABLISHING THE EXTENDED TEST RANGE ALLIANCE

The X-33 vehicle behaves like a vertical launch vehicle for the first few minutes of flight, then becomes a reentry vehicle, and finally lands like an aircraft. Developing a team with expertise in all three areas was essential. Soon after the X-33 cooperative agreement was signed, NASA Dryden began gathering the expertise to accomplish the extended test range effort, including using other agencies and contractors. A recent agreement to share capabilities between the U. S. Air Force Flight Test Center (AFFTC) at Edwards Air Force Base (AFB) (California) and NASA Dryden led to the use of AFFTC range engineers. The AFFTC engineers have considerable expertise in telemetry systems, range safety systems, and data communications. With this agreement, the ExTRA first began.

Unfortunately, the ExTRA still lacked launch vehicle and reentry expertise. To cover the launch vehicle arena, the team identified and assigned a chief engineer from the NASA Goddard Space Flight Center (Greenbelt, Maryland) Wallops Flight Facility (WFF) (Wallops Island, Virginia). The WFF is experienced in launch support of suborbital sounding rockets and orbital launch vehicles, and NASA Goddard is providing support of reentry analysis and data communication network services. The ExTRA team (fig. 1) was now ready to build the X-33 extended flight test range in order to perform the range tracking and command and telemetry data acquisition for the X-33 program.

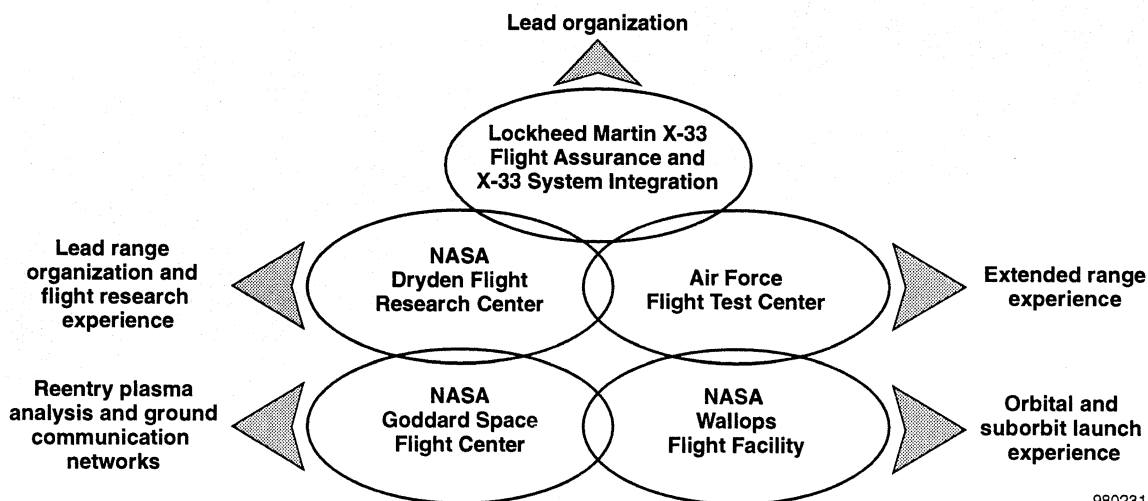

980231

Figure 1. The extended test range alliance for the X-33 program.

X-33 EXTENDED TEST RANGE REQUIREMENTS

The X-33 range requirements originate from numerous program documents and government organizations, such as the Range Commanders Council. Figure 2 shows the flow of program requirements that determined the range requirements. These documents cover topics such as range safety, ground support system automation and information, vehicle-to-ground radio frequency interfaces, vehicle flight test plans, operational television plans, operational intercom plans, meteorological plans, site operations plans, flight assurance plans, "launch commit" criteria, flight rules, and more (refs. 1–3).

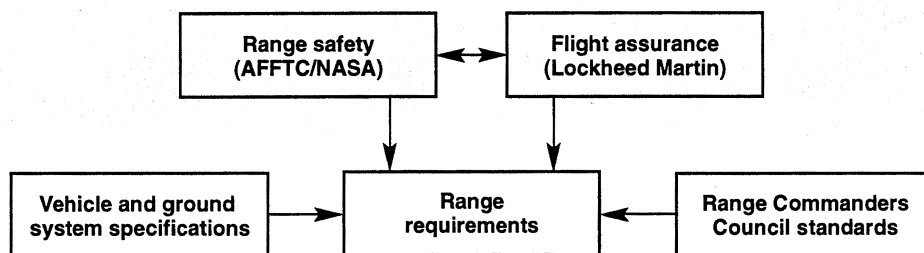


Figure 2. Requirements flow down.

The X-33 vehicle presents unique tracking requirements because of the need to continuously track the vehicle from California to Montana through the atmospheric reentry flight profile (fig. 3). The vehicle will reach a maximum altitude of 300,000 ft and fly at speeds approaching Mach 15. In order to provide the ground tracking coverage, the range team identified sites at the AFFTC, the U. S. Army Dugway Proving Grounds at the U. S. Air Force Utah Test and Training Range (UTTR) (Utah), Mountain Home AFB (Idaho), and Malmstrom AFB (Montana). As is evident by the number of sites, a diverse range network is being implemented to successfully meet the program requirements.

The primary high-level requirement that the range is to meet comes from Lockheed Martin proprietary documents: "The X-33 operations and support shall provide the capability to uplink commands and receive downlink telemetry data during vehicle test and flight operations."* To ensure the requirement is met, the range is implementing a system that will provide complete command uplink and telemetry coverage from launch through wheel stop for all test and flight operations. Range systems will be placed at strategic locations throughout the flightpath of the vehicle to allow overlapping coverage with a maximum range of 235 nmi for each site. The range system will include a communications link from the range operations center (detailed by Karla Shy and Cynthia Norman in the report "The X-33 Range Operations Control Center") at NASA Dryden to all launch, overflight, and landing sites for uplink commands and downlink telemetry data.

Several high-level requirements originate from the AFFTC Range Safety Requirements Document, (ref. 1):

...all reasonable precautions shall be taken to minimize these risks with respect to life, health, and property.

*Lockheed Martin Skunk Works, "X-33 Systems Requirements Document," 604D007 (Revision), Sept. 1996.

All range critical systems shall be designed to ensure that no single point of failure, including software, will deny the capability to monitor and terminate, or result in the inadvertent termination, of the X-33 vehicle.

The overall tracking systems shall be robust, highly fault tolerant, allow for catastrophic failure in a single system without loss of tracking data, and provide for graceful degradation of the system under multiple component failures.

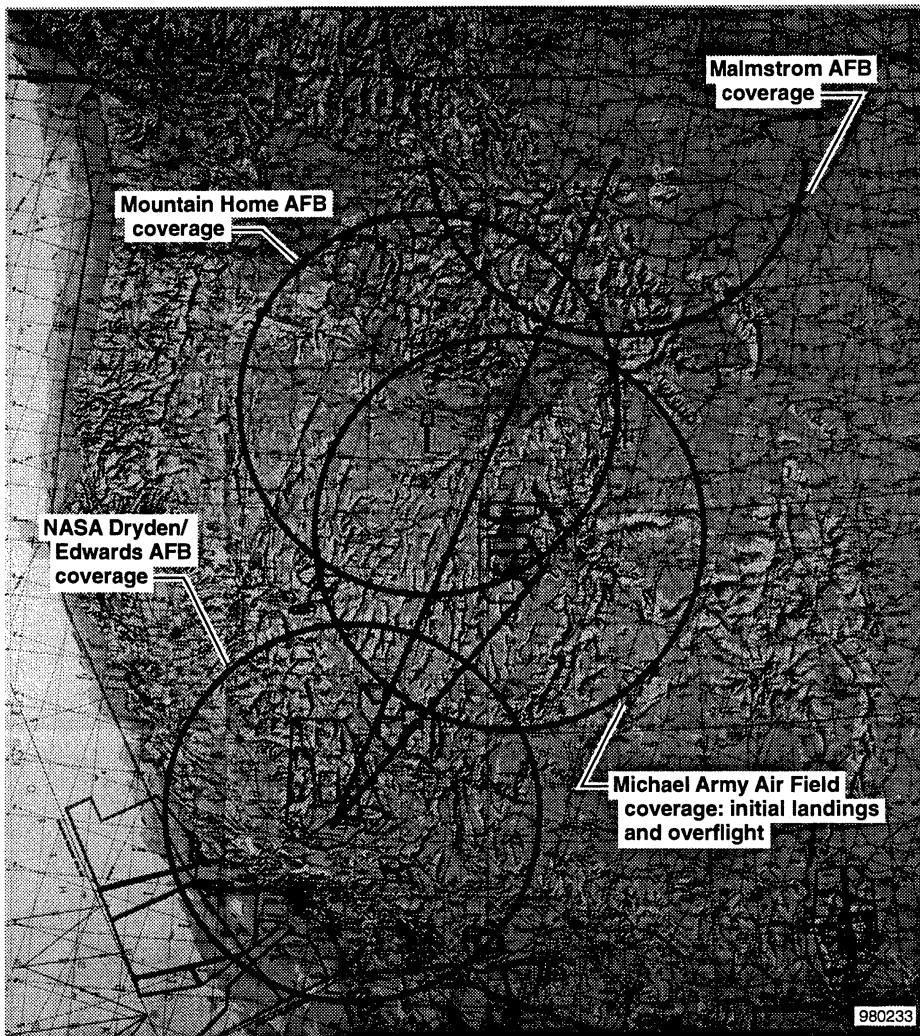


Figure 3. Range coverage circles.

The extended range has arranged for the use of numerous mobile and fixed systems from other ranges throughout the country. Table 1 shows the systems to be used in flights to the Dugway Proving Grounds. Systems, antenna type, and antenna diameter that will provide coverage at the launch site and during downrange flight and landing are given. Table 2 shows the same information for flights to Malmstrom AFB and describes overflight sites. These systems have proven reliability, and the flight termination systems (FTSes) are fully redundant. The range systems chosen are currently used to support NASA, DoD, and commercial suborbital and orbital programs.

Table 1. Ground systems and sites for Dugway Proving Grounds flights.

System	Coverage	
	Edwards AFB	UTTR
Radar	Transponder test set (LSC)	WFF system (L)
	NASA Dryden RIR no. 1; 16 ft (FC)	
Telemetry	AFFTC 8 ft (LSC)	NASA Dryden 30 ft (L)
	NASA Dryden triplex; 23 ft (FC)	MOF no. 1; 6 ft (L)
Uplink	Omni antenna (LSC)	NASA Dryden 30 ft (L)
	NASA Dryden triplex; 23 ft (FC)	MOF no. 1; 6 ft (L)
FTS	NASA Dryden directional antenna; 15 ft (FC)	WFF FTS no. 1 (L)

Key: FC Flight coverage
L Landing
LSC Launch site coverage

Table 2. Ground systems and sites for Malmstrom AFB flights.

System	Coverage			
	Edwards AFB	UTTR	Mountain Home AFB	Malmstrom AFB
Radar	Transponder test set (LSC)	UTTR TPQ-39 (O)	TTR mobile (O)	WFF system (L)
	NASA Dryden RIR no. 1; 16 ft (FC)			
Telemetry	AFFTC 8 ft (LSC)	NASA Dryden 30 ft (O)	DET2; 23 ft (O)	WFF 18 ft (L)
	NASA Dryden triplex; 23 ft (FC)			MOF no. 1; 6 ft (L)
Uplink	Omni antenna (LSC)	NASA Dryden 30 ft (O)	DET2; 23 ft (O)	WFF 10 ft (L)
	NASA Dryden triplex; 23 ft (FC)			MOF no. 1; 6 ft (L)
FTS	NASA Dryden directional antenna; 15 ft (FC)	UTTR system (O)	WFF FTS no. 2 (O)	WFF FTS no. 1 (L)

Key: FC Flight coverage
L Landing
LSC Launch site coverage
O Overflight

The range has implemented a fully independent communications path for the two sources of tracking data used by the range safety officer. The two sources are the global positioning system/inertial navigation system (GPS/INS) data and radar tracking data. A range safety officer will be at each tracking site to provide local assessment of vehicle safety in the event of a range-wide communications failure. The range systems will also be positioned to allow for spatial diversity to facilitate an additional means of redundancy throughout the range. Completely redundant systems will be used at launch and landing sites to meet the single-system catastrophic failure requirement. The sites will also include redundant power sources that allow for instantaneous switchover and graceful degradation, as required.

Continuous Coverage and Public Safety

An experimental flight test vehicle flying over populated land areas is an important range safety concern. Maximizing the flight vehicle tracking coverage is an important aspect of minimizing flight safety risks. Public safety is the top priority for the X-33 program, and the range systems are designed with this task in mind. Steps taken to minimize the risk to public safety include redundant ground hardware subsystems within each tracking and command system, completely redundant tracking and command antennas at the launch and landing tracking sites, and geographically located tracking sites that allow for ideal overlap of coverage with other sites (fig. 3).

Independent Data Communication Paths

In addition to having overlapping coverage and redundant tracking systems, the range data communications network was designed to allow for independent paths of critical vehicle position data. These critical vehicle position data are being generated by two sources: the ground radar systems tracking the X-33 vehicle; and the GPS/INS data that are embedded in the telemetry downlink. These two sources of vehicle position data are independently routed to the range safety officers throughout the range. The report "Extended Range Communications Support for the X-33" by Brian Eslinger and Reynaldo Garza describes the redundant data communications network in detail.

Approach and Results of the Reentry Plasma Blackout Analysis

Because of a lack of new reentry vehicle designs, little work had been performed on evaluating reentry plasma blackout of radio frequencies since the early days of the Space Shuttle program. Fortunately, NASA Goddard and the NASA Langley Research Center (Hampton, Virginia) had personnel able to perform such analysis. Because communications with the X-33 vehicle for monitoring and control are essential to the success of the flight test program, understanding the level of attenuation and the associated time period for loss of signal is critical.

The approach to the plasma analysis was to first look at Space Shuttle flight data and use the data as a truth model against the analysis techniques. Figure 4 shows an overview of the approach used. First, old Shuttle computational fluid dynamics (CFD) data were recovered, and the resultant CFD data were used in the NASA Goddard and NASA Langley attenuation calculations. The results of the models were then compared to the small amount of Space Shuttle flight data available from the tracking ground stations. Initial NASA Goddard analysis resulted in lower attenuation levels than flight and was adjusted to match. The NASA Langley analysis techniques generally resulted in larger attenuation levels than flight. These data established a "bracket of results" defining best- and worst-case conditions for the attenuation levels.

The results of the two different analysis methods were most evident in the L-band case. The NASA Langley results indicated a maximum attenuation of 114 dB; NASA Goddard results indicated a value of 10 dB. Range safety requires that worst-case results be used when making program decisions.

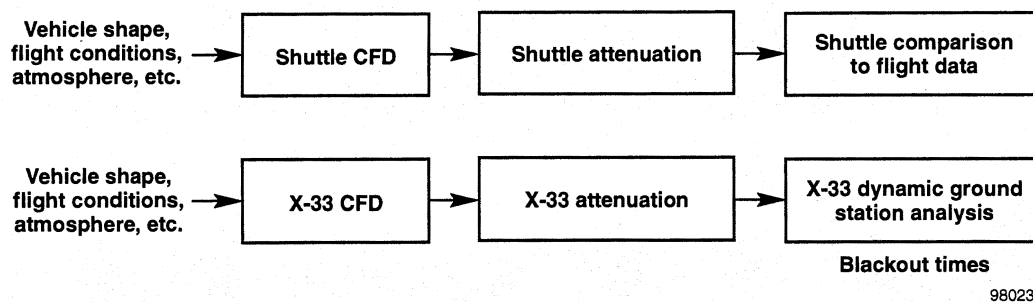


Figure 4. Approach to X-33 plasma analysis.

Both analysis methods provide an attenuation level perpendicular to the vehicle antenna. Because the communication signal vector is usually at an acute angle and continuously changing, a model that includes angular dependencies is required. Using ray tracing methods through the plasma field, NASA Goddard developed an algorithm to calculate attenuation as a function of altitude and communication vector angles. Figure 5 shows a command signal penetrating the dense plasma at the vehicle nose, having a high attenuation level, and a signal penetrating through a thinner plasma region at the rear of the vehicle. The NASA Goddard and NASA Langley normal attenuation values were adjusted using the function for the communication vector angles.

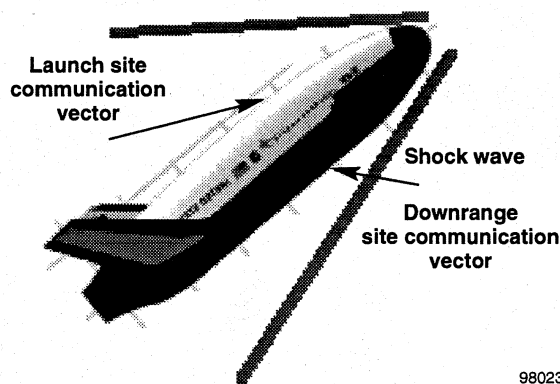


Figure 5. Communication vectors and plasma.

Both plasma models were integrated into an existing Dynamic Ground Station Analysis (DGSA) program developed at NASA Goddard. The program previously included all attenuation factors affecting vehicle communication, except plasma. Some of the factors included were frequency, polarization, path loss (distance), transmitter and receiver characteristics, and physical location of the ground stations. The DGSA program uses vehicle trajectory and attitude data, and provides signal attenuation for all frequencies and from all ground stations. The blackout time period was then calculated for each signal path.

Figure 6 shows the blackout time period for the NASA Goddard and NASA Langley attenuation values. The range safety signal in the ultrahigh frequency (UHF) frequency band is completely lost for 74 sec in both cases. The command uplink signal in the L-band range is completely attenuated for 30 sec, but only when using the NASA Langley attenuation model. A program decision was made to use the L-band communication to provide flight termination capability, thereby shortening the command blackout time from the UHF FTS (see the discussion below). The telemetry S-band signal is completely attenuated at all ground stations for 6 sec when using the NASA Langley values.

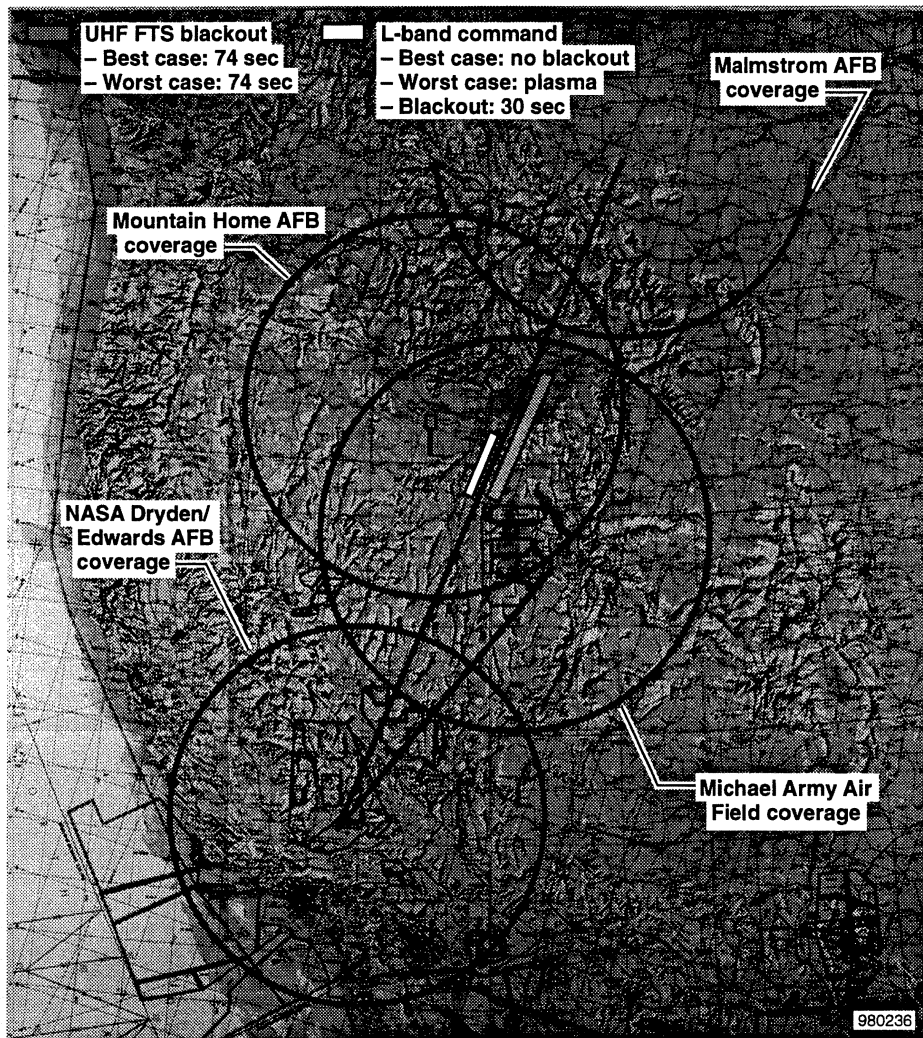


Figure 6. Blackout time periods.

Independent L-Band Flight Termination Capability

As described earlier, when the X-33 vehicle reenters Earth atmosphere, the vehicle will encounter extreme plasma heating conditions. During these periods of extreme heating, radio frequency attenuation levels will increase dramatically. To minimize the time period of radio frequency blackout, high-gain

antennas are required. The current flight profiles define the maximum blackout period to be over the Dugway Proving Grounds and the Mountain Home AFB tracking sites. Placing systems with higher gain antennas at these locations will minimize the radio frequency blackout period. In addition, because of the drastic blackout occurring at UHF frequencies for flight termination, the program proposed a design that would allow the L-band command uplink path to the vehicle to be used as a range safety flight termination medium.

X-33 EXTENDED TEST RANGE ADVANCES

Historically, NASA Dryden and the DoD have used flight corridors from California to Utah for missile testing, and in the 1960's, the X-15 vehicle flew from Northern Utah to Edwards AFB. Yet, the X-33 program poses new challenges because of the vehicle and range safety requirements of an autonomous vehicle. Continuous coverage of the vehicle from launch to landing requires the use of multiple range sites. This concept is not new, but the manner of implementation will ensure that the data are reliably transmitted and received by the customer.

The telemetry stream downlinked from the vehicle will be received by multiple telemetry antennas to ensure the continuous coverage. These multiple streams will be processed by a programmable telemetry processor to automatically select the best telemetry source. Darryl Burkes discusses the approach taken to ensure that the correct stream is chosen in the report, "X-33 Telemetry Best Source Selection, Processing, Display, and Simulation Model Comparison."

Advances in analysis methods were required to determine placement of antenna systems in locations that would ensure required coverage of the vehicle during flight. A software package from NASA Goddard, the DGSA software, was improved using the comprehensive plasma model to provide information. Given the vehicle trajectory and the location of antenna systems, link margins can be calculated to ensure coverage. Ashley Sharma discusses DGSA and the range simulation in the report, "X-33 Integrated Test Facility, Extended Range Simulation."

Another advance is the use of various NASA and DoD mobile and fixed range systems. Telemetry, radar, uplink, flight termination, and differential GPSes from different organizations were evaluated to determine if the systems could meet X-33 requirements. In addition to meeting technical requirements, system availability and cost were also factors used in selecting the systems. Because these systems have different missions and use different data formats, their integration is challenging. The challenge was met by having an integration period allowing identification of potential problems at Edwards AFB before deploying the systems to remote sites.

CONCLUSION

The range requirements to safely perform flight test of the X-33 vehicle over the western United States have been presented. The formation of a unique alliance of national experts to meet the challenges of the X-33 range include United States Department of Defense and NASA personnel and assets. The technical challenges of the X-33 range were accomplished using advanced communication and range system designs, as well as complex plasma blackout analysis methods, previously undeveloped.

REFERENCES

1. Air Force Flight Test Center and NASA Dryden Flight Research Center, "X-33 Range Safety Requirements Document," Feb. 1998.
2. Range Commanders Council, Telemetry Group, "Telemetry Standards," IRIG Standard 106-93, Jan. 1993.
3. Range Commanders Council, Range Safety Group, "Flight Termination Systems Commonality Standard," Standard 319-92, Aug. 1992.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE October 1998		3. REPORT TYPE AND DATES COVERED Technical Memorandum
4. TITLE AND SUBTITLE The X-33 Extended Flight Test Range			5. FUNDING NUMBERS WU 242-33-02-00-23-00-TA9	
6. AUTHOR(S) Dale A. Mackall, Robert Sakahara, and Steven E. Kremer				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) NASA Dryden Flight Research Center P.O. Box 273 Edwards, California 93523-0273			8. PERFORMING ORGANIZATION REPORT NUMBER H-2261	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA/TM-1998-206557	
11. SUPPLEMENTARY NOTES Presented at the 39th International Telemetry Conference, San Diego, California, October 26-29, 1980. Dale Mackall, NASA Dryden, Edwards, California; Robert Sakahara, Air Force Flight Test Center, Edwards, California; Steven Kremer, NASA Goddard, Wallops Island, Virginia.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified—Unlimited Subject Category 17			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Development of an extended test range, with range instrumentation providing continuous vehicle communications, is required to flight-test the X-33, a scaled version of a reusable launch vehicle. The extended test range provides vehicle communications coverage from California to landing at Montana or Utah. This paper provides an overview of the approaches used to meet X-33 program requirements, including using multiple ground stations, and methods to reduce problems caused by reentry plasma radio frequency blackout. The advances used to develop the extended test range show other hypersonic and access-to-space programs can benefit from the development of the extended test range.				
14. SUBJECT TERMS Extended test range, Radio frequency communications, Reentry plasma blackout, Reusable Launch Vehicle, X-33			15. NUMBER OF PAGES 17	
			16. PRICE CODE A03	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT Unlimited	

National Aeronautics and
Space Administration
Code JTT
Washington, D.C. 20546-0001
USA

Official Business
Penalty for Private Use, \$300

SPECIAL FOURTH-CLASS RATE
POSTAGE AND FEES PAID
NASA
PERMIT No G27



POSTMASTER: If Undeliverable (Section 158
Postal manual) Do Not Return
