

along or on top of a dielectric waveguide forms an effective radiator [7-9]. This antenna is easy to fabricate and there is a good background of microstrip type antenna design information in the literature. This paper reports the development of the first frequency scanning antenna fed by a LRDW.

FABRICATION OF LRDW

The materials which are used for the LDRW and the dimensions of the lines are dependant on the desired frequency of operation. For the microwave region and the lower portion of the millimeter wave region, $f < 100$ GHz, the dimensions of the lines permit the use of teflon based soft substrates such as RT/Duroid. The advantage of these substrates is that they are low loss, inexpensive, can be purchased in a wide range of permittivities, and are easy to form into circuits. The LRDW is shown in Figure 1. The first step in the fabrication procedure is to bond a sheet of RT/Duroid 6010, $\epsilon_r = 10.8$, and a sheet of RT/Duroid 5880, $\epsilon_r = 2.2$, together using 3001 bonding film from Rogers Corp. The bonding film is sandwiched between the two substrates which are then placed between two stainless steel plates. The assembly is then placed in an oven at 220 C for 60 minutes. After the boards have been bonded, another sheet of bonding film is melted onto the low permittivity board. The LRDW circuit is then cut out using either a knife, milling machine, or a punch. Finally, the ridge circuit is placed onto a sheet of RT/Duroid 6010, $\epsilon_r = 10.8$, and bonded in place using the same procedure as before. It is important that light pressure be used in the last bonding operation or the previously bonded boards will slide apart when the bonding film melts.

LAYERED RIDGE DIELECTRIC WAVEGUIDE ANTENNA

A schematic of a LRDW periodically loaded array is shown in Figure 2. Although an exact field solution is required for the metal strip loaded LRDW to theoretically predict the radiation pattern for the array, the direction of the main beam may be determined easily by:

$$\sin(\theta_r) = (\beta_o + 2\pi m/d) / k_o \leq 1 \quad (1)$$

where m covers the range of all integers. β_o is the propagation constant of the loaded transmission line although it may be approximated by the unloaded β if the line is lightly loaded [10]. This should be the case for the LRDW since the fields are primarily confined in the low permittivity guiding layer [6].

Figure 3 shows the direction of the main beam as a function of frequency for the LRDW antenna shown in Figure 2. The propagation constant, β/k_o , was determined using the EDC method [3]. Also shown in Figure 3 are three experimental points. The experimental points are in good agreement with the theory which validates the use of the unloaded β in Equation 1. The radiation

pattern for this antenna at 29 GHz is shown in Figure 4. The main beam is symmetric and the side lobes are at -16 dB which is in good agreement with dielectric waveguide fed strip arrays [7,8]. A measure of the efficiency of the antenna is the ratio of the insertion loss of the loaded LRDW to the unloaded LRDW. For this antenna, the excess insertion loss is 25 dB. The excess insertion loss is a function of the number of radiators and the antenna may therefore be made more efficient by increasing the number of strips.

CONCLUSIONS

A frequency scanning antenna has been fabricated and tested at Ka-Band using a layered ridge dielectric waveguide feed to an array of radiating strips. The antenna is easy to fabricate from low cost microwave teflon substrates.

REFERENCES

- [1] R. E. Collin, Foundations for Microwave Engineering, McGraw-Hill Book Co., New York, 1966.
- [2] M. Dydyk, "Image guide: a promising medium for EHF circuits," Microwaves, April, 1981, pp. 71-80.
- [3] W. V. McLevige, T. Itoh, and R. Mittra, "New waveguide structures for millimeter-wave and optical integrated circuits," IEEE Trans. Microwave Theory Tech., Oct., 1975, pp. 788-794.
- [4] T. Itoh and B. Adelseck, "Trapped image guide for millimeter-wave circuits," IEEE Trans. Microwave Theory Tech., Dec., 1980, pp. 1433-1436.
- [5] T. Wang and S. E. Schwarz, "Design of dielectric ridge waveguides for millimeter-wave integrated circuits," IEEE Trans. Microwave Theory Tech., Feb., 1983, pp. 128-134.
- [6] A. G. Engel, Jr. and L. P. B. Katehi, "Low-loss monolithic transmission lines for submillimeter and terahertz frequency applications," IEEE Trans. Microwave Theory Tech., Nov., 1991, pp. 1847-1854.
- [7] M. T. Birand and N. Williams, "Printed dipole millimeter-wave array using an insular guide feeder," IEE Proc., Vol. 131, Pt. H, No. 2, April 1984, pp. 107-113.
- [8] A. Henderson, E. England, and J. R. James, "New low-loss millimetre-wave hybrid microstrip antenna array," 11 th European Microwave Conf. Digest, Sept. 7-10, 1981, pp. 825-830.
- [9] T. Rozzi, A. Morini, and G. Gerini, "Analysis and applications of 'microstrip-loaded inset dielectric waveguide'," IEEE Trans. Microwave Theory Tech., Feb., 1992, pp. 272-278.
- [10] A. Hessel, "General characteristics of travelling-wave antennas," in R. E. Collin and F. J. Zucker (Eds.) Antenna Theory (part 2), McGraw-Hill, New York, 1969.

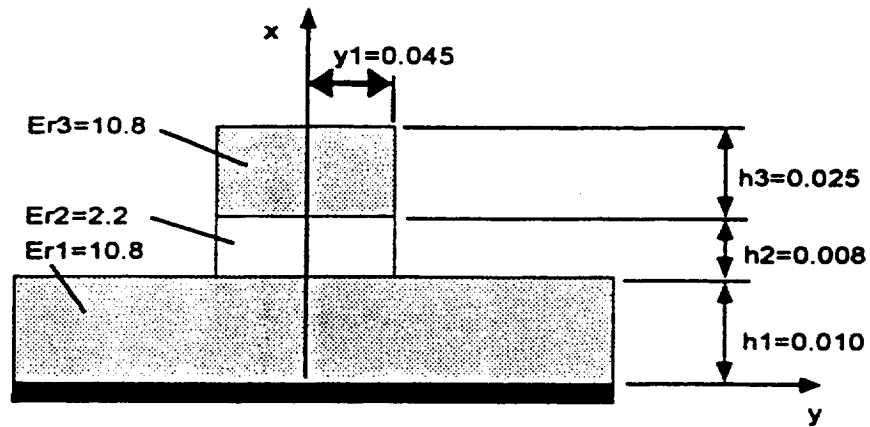


Figure 1: Layered ridge dielectric waveguide

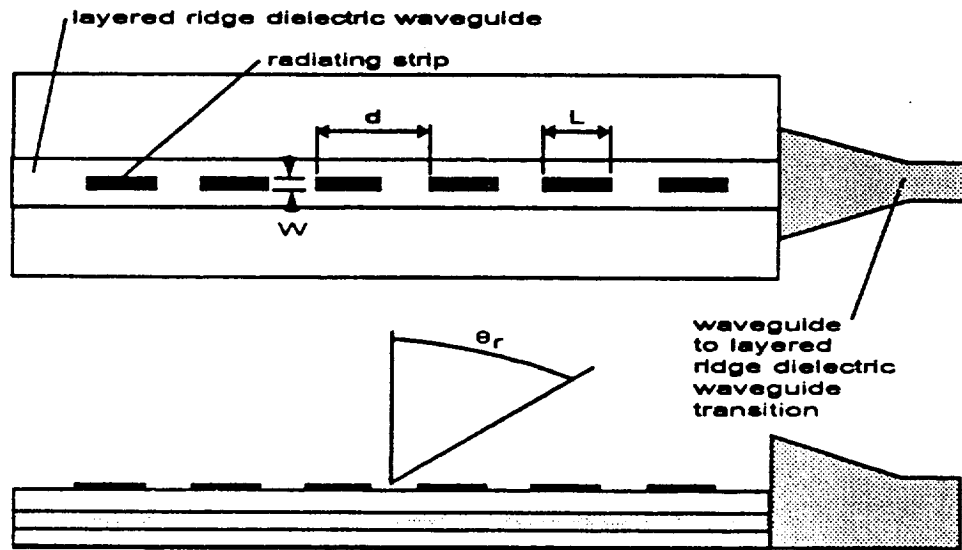


Figure 2: Layered ridge dielectric waveguide antenna comprised of an array of conducting strips on top of the ridge (six strips, $d=0.588$ cm, $L=0.196$ cm, $W=0.068$ cm)

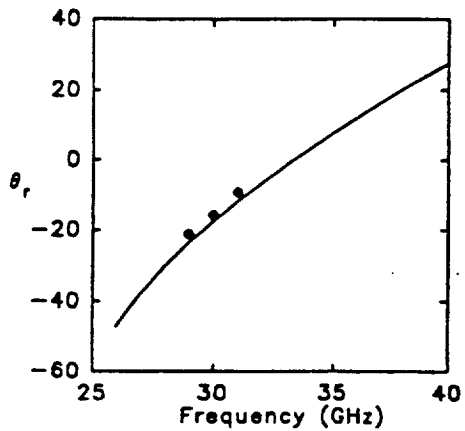


Figure 3: Scan angle versus frequency

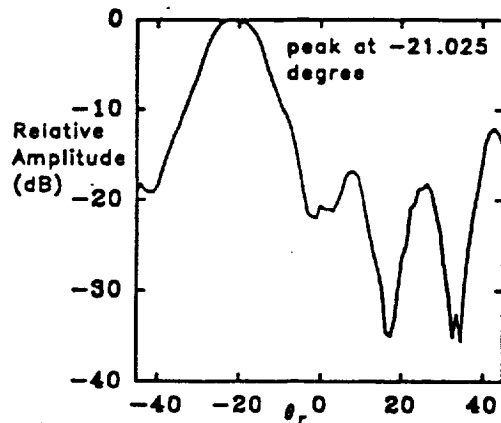


Figure 4: Radiation pattern for LRDW at 29 GHz