



A Comparison of Measured Tone Modes for Two Low Noise Propulsion Fans

Laurence J. Heidelberg and David M. Elliott
Glenn Research Center, Cleveland, Ohio

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



A Comparison of Measured Tone Modes for Two Low Noise Propulsion Fans

Laurence J. Heidelberg and David M. Elliott
Glenn Research Center, Cleveland, Ohio

Prepared for the
6th Aeroacoustics Conference and Exhibit
cosponsored by the American Institute of Aeronautics and Astronautics and
the Confederation of European Aerospace Societies
Lahaina, Hawaii, June 12-14, 2000

National Aeronautics and
Space Administration

Glenn Research Center

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076
Price Code: A03

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100
Price Code: A03

A Comparison of Measured Tone Modes for Two Low Noise Propulsion Fans

Laurence J. Heidelberg* and David M. Elliott**
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, OH 44135

ABSTRACT

The acoustic modes for two low tip speed propulsion fans were measured to examine the effects of fan tip speed, at constant pressure ratio. A continuously rotating microphone method was used that provided the complete modal structure (circumferential and radial order) at the fundamental and second harmonic of the blade passing tone as well as most of the third harmonic modes. The fans are compared in terms of their rotor/stator interaction modal power, and total tone power. It was hoped that the lower tip speed might produce less noise. This was not the case. The higher tip speed fan, at both takeoff and cutback speeds, had lower tone and interaction levels. This could be an indication that the higher aerodynamic loading required to produce the same pressure ratio for the lower tip speed fan resulted in a greater velocity deficit in the blade wakes and thus more noise. Results consistent with expected rotor transmission effects were noted in the inlet modal structures of both fans.

INTRODUCTION

The goal of the NASA Noise Reduction Element of the Advanced Subsonic Technology Program is to reduce the noise level of aircraft by a cumulative 30 dB relative to 1992 technology, by the end of the decade. This requires a 10 dB reduction in each of the three certification points where noise is measured (takeoff, sideline, and approach).

As part of this effort, two, low noise fans, designed with very low tip speeds, were tested in the NASA, Glenn 9' x 15' Low Speed Wind Tunnel. Both farfield and in duct acoustic data were obtained. Only the in duct tone mode measurements will be presented in this paper. The farfield results are presented in references 1, and 2. The 22-inch diameter fans tested were designed by Pratt & Whitney Division of United Technologies. The fan designated Fan 1 has a tip speed of 840 ft/sec at takeoff while Fan 2 has a still lower speed of 756 ft/sec. Both fans were designed to have the same pressure ratio (1.284)

at these conditions. One of the objectives in testing these fans was to determine if a design tip speed as low as Fan 2 could produce further noise reduction.

APPARATUS AND PROCEDURE

Fan Models

One of the design intents for these fans is to evaluate the potential for fan noise reduction by lowering tip speed. Both Fan 1, and Fan 2 are 22 inches in diameter and have 18 rotor blades. Both have stator vane counts that cutoff the Blade Passing Frequency (BPF) tone interactions. The fan stage designs for Fan 1 and Fan 2 can be found in references 3 and 4, respectively. Table 1 shows the fan design parameters for both fans. The most important difference between the fans is the tip speed. At takeoff, both fans have the same pressure ratio but Fan 2 has a 10 percent lower tip speed. This lower speed results in a higher blade aerodynamic loading for Fan 2. In addition, Fan 2 has a higher vane number than Fan 1. This, when combined with the lower speed results in a cutoff 2BPF tone at approach for Fan 2.

Mode Measurements

A continuously rotating microphone technique described in Refs. 5 and 6 was used. A photograph of the rotating rake system installed on the fan inlet is shown in figure 1. The same system installed in the fan exhaust is shown in figure 2. This rotating measuring system turns at exactly 1/200 of the fan speed as if it were geared to the fan shaft. In the rotating frame of reference, each spinning order (circumferential order) is Doppler shifted inversely proportional to its spin rate. Thus, each circumferential order is separated by 0.005 shaft orders in frequency. The radial order is determined by a least squares curve fit of to the Bessel pressure profiles of all cuton radial orders plus the first cutoff order to the measured complex radial profile. In order to resolve the highest radial order that can propagate in the inlet, 12 radial measurements were used, while only 8 were needed in the

* Senior Research Engineer, Senior Member AIAA

** Research Engineer, Member AIAA.

Copyright ©2000 by the American Institute of Aeronautics and Astronautics, Inc. No copyright is asserted in the United States under Title 17, U.S. Code. The U.S. Government has a royalty-free license to exercise all rights under the copyright claimed herein for Governmental purposes. All other rights are reserved by the copyright owner.

exhaust. These microphone signals are brought across the rotating frame by FM telemetry.

Several improvements in this mode measurement technique have been made since its first implementation reported in Refs. 7 and 8. These improvements were developed during tests on a large low speed fan rig (Active Noise Control Fan - ANCF). One of these improvements was the installation of windscreens over the microphones to lower self-noise, thus improving signal to noise ratio. A 10 dB lowering of the noise floor was observed in the inlet of ANCF using a windscreen. These screens are made of an open cell aluminum foam that has negligible acoustic attenuation at frequencies below 15 kHz. Another improvement was the installation of additional foam shields on the exhaust rake to attenuate the effects of the rotor wakes and their interactions with the vanes (vortical waves) on the microphones. The inlet rake and windscreen is shown in figure 3 and the exhaust rake and screens are shown in figure 4. The idea behind the side shields on either side of the microphone rake is to reduce the effect of the rotor wakes and their interactions on the microphones. This is necessary since these non-acoustic waves have the same circumferential order as the acoustic waves. Since the microphones act as dynamic total pressure probes, they can sense these non-acoustic waves resulting in contamination of the acoustic signals.

Test Conditions

Both fans were operated at six different speeds that include the approach, cutback, and takeoff conditions. The fan models were run in the NASA, Glenn 9' x 15' Low Speed Wind Tunnel at a Mach Number of 0.1. Fan 2 was tested at a Mach Number of 0.2 during exhaust mode measurements to better compensate for the change in fan operating line caused by rake blockage. In addition, both fans used a slightly larger nozzle exit area to compensate for rake blockage. Both fans were tested in the hard wall (no acoustic treatment) configuration. The nacelle and flow path for both fans was the same, and is shown in figure 5. Although the blade stagger angle for these fans is adjustable, the fans were run at the takeoff setting for all testing.

The locations of the mode measurement planes are also shown in figure 5. The inlet measurements were taken at the throat (minimum diameter). The exhaust measurements were taken just inside the nozzle exit.

RESULTS AND DISCUSSION

The complete modal structure (circumferential and radial orders) for BPF and 2BPF as well as selected 3BPF modes were measured for Fan 1 and Fan 2. Both Inlet and exhaust duct modes are presented in terms of PWL referenced to 10^{-12} watts. The 2BPF modes will be discussed first and in more detail since the BPF, rotor/stator interaction is cutoff for both fans.

Modal Structure

Figure 6 shows this structure for Fan 1 and 2 at 2BPF at approach power. This figure portrays the modes in the form of a 3-D bar graph, with the mode power plotted against both circumferential (m) and radial (n) orders. The back row sums all the radials in each m order. The inlet and exhaust are dominated by the expected (Tyler-Sofrin) rotor/stator interaction order, $m=-9$ for Fan 1. The exhaust interaction is more than 12 dB higher than the inlet. The two radial orders of the $m=-9$ have similar levels in both the inlet and exhaust. The levels of modes extraneous to the rotor/stator interaction are very low, particularly in the exhaust. This is an indication that the fan installation is very clean (low inlet distortion, uniform tip clearance, etc.). The modal structure for Fan 2, shown on the right side of figure 6, shows no interaction modes. The interaction m order is cutoff at approach power. This is a result of the absolute value of the m order being high, $m=-15$ and the lower rotor speed of Fan 2. All the modes for fan 2 are extraneous and are roughly similar in level to the extraneous modes of Fan 1. Included in the figure are the total tone PWL, for each fan and measuring location. The tone PWL is calculated by summing of the PWL for each mode. Fan 2 is quieter than Fan 1 by 6dB in the inlet and almost 20 dB in the exhaust, mostly due to the interaction order being cutoff.

Figure 7 compares the modal structure for Fans 1 and 2 at 2BPF at takeoff power. Here the modal structure is dominated by the rotor/stator interaction with the exception of Fan 1 in the inlet. Although the inlet of Fan 1 has an interaction m order that is the single largest order, the extraneous modes control the total tone PWL. The Fan 2 interaction of $m=-15$ that was cutoff at approach power is now cuton and higher than the interaction of Fan 1. This results in Fan 1 being quieter than Fan 2 in terms of tone PWL by 9.4 dB in the Inlet and 3.4 dB in the exhaust. Differences in the extraneous modes between the two fans are not so different as to make interference with the comparison between fans, but differences in extraneous modes between the inlet and exhaust show trends that are more significant. There are larger and more numerous positive modes (co-rotating) in the inlet while the exhaust is more balanced. This may be a result of the negative (counter-rotating) modes suffering transmission loss through the rotor. Designers take advantage of this rotor transmission effect by selecting a stator vane count that results in negative interaction m orders, to reduced inlet levels. Another feature observed in the data is the low levels of radial order 0 ($n=0$) in the inlet for both fans. Generally, it has been observed that radial order zero has some of the highest levels and where there are a large number of radials cuton as in figure 7 (takeoff), the highest radials have low levels. Radial orders above five usually have levels near or below the noise floor of the data. This has been observed in this paper, in unpublished data, and reference 5. Here again, the low levels of radial order 0 in the inlet may be related to rotor transmission effects. These fans have high blade passage Mach

numbers at takeoff and the Mach Number increases with radius up to about 80 percent of span. Almost all radial modes of order 0 carry their maximum pressure at outer wall (blade tip). This might lead to these modes suffering higher transmission loss than other modes.

The BPF m order results for Fans 1 and 2 are shown in figure 8. For brevity, this figure shows only the PWL in the m order, the sum of the radial modes in each m order. There are no interaction orders present for either fan at BPF; thus, all modes are extraneous. These modes can be caused by rotor / inlet distortion, variations in rotor tip clearance, etc. and are usually generated by the rotor. The BPF levels are generally lower than 2BPF (previous two figures) due to this lack of interaction modes. One exception to this is Fan 2, at approach in the exhaust, where they are the same, 95.7 dB. It should be remembered that Fan 2 has no 2BPF interaction at approach. Fan 2 appears to have lower BPF levels than Fan 1 especially at takeoff in the exhaust. This might indicate a better fit of parts in the inlet and more uniform tip clearance for Fan 2. There is no trend for the positive modes to predominate as in the 2BPF modes. This may be due to the rotor being the noise source and thus rotor transmission is not an issue.

Variation of Interaction and total tone power with speed

The 2BPF interaction and total tone power level, as a function of speed, for Fans 1 and 2 is shown in figure 9. Both the inlet and exhaust power for Fan 1 are shown in figure 9a). The exhaust power is much higher than the inlet. Fan 1 exhaust total power is controlled by the interaction, $m = -9$, as is evident by the total power being only slightly higher than the interaction power. The inlet is controlled by the extraneous modes except at approach speed. The exhaust power increases with speed as would be expected. The inlet power does not change much with speed and actually decreases with speed above the takeoff. This type of behavior of inlet power has been observed in unpublished data for another fan. A possible explanation for flat or decreasing power with speed is a high rotor transmission loss at the high Mach numbers in the rotor blade passages corresponding to takeoff power.

Fan 2, shown in figure 9b) has no interaction power at approach speed because this mode is cutoff and thus the tone PWL is lower than Fan 1 in both the inlet and exhaust. Once the interaction mode is cuton, the exhaust power is much higher than the inlet. As in Fan 1, Fan 2 shows the exhaust totally controlled by the interaction mode, $m = -15$ at speeds above cuton. Unlike Fan 1, the inlet of Fan 2 is controlled by the interaction mode at speeds above cuton. This is primarily due to the higher level of the interaction mode in Fan 2.

A summary comparison of both fans is shown in figure 10. Here the levels of the 2BPF total tone power and the interaction mode power are shown for the rating conditions. Fan 2 shows lower tone levels only at approach speed and at all other conditions has higher tone levels than Fan 1. Although Fan 2 only has an advantage over Fan 1 at approach, it is dramatic one in the exhaust

where the difference is 19 dB. Figure 10 b) shows a comparison of the exhaust power levels including the farfield power for the 2BPF tone from 70° to 158° from the inlet axis. Exhaust power levels for 2BPF are much higher than in the inlet. In one case (Fan 1 interaction), the difference is 25 dB. These highly dominant exhaust levels result in much of the farfield angles, that would normally be controlled by the inlet, to instead be exhaust controlled. This makes the exhaust comparisons more important than inlet comparisons. The farfield power was added to this figure just to see if the same trends observed in-duct is seen in the farfield. The farfield power should be compared to the total tone power in duct since it represents all modes. Both in-duct and farfield power show the same trends when comparing Fans 1 and 2, with the farfield averaging about 3 dB lower. There are many possible reasons for differences between in-duct and farfield power, a few of which are: the farfield power not integrated over the full range of emission angles, variations in azimuthal directivity, and duct termination reflections.

The 3BPF interaction modes for both Fans 1 and 2 are shown in figure 11 as a function of speed. The total tone powers are not available here because the number of radial measuring stations is insufficient to resolve the high number of radial modes cuton at these frequencies. Fan 1 has 2 m orders cuton, $m = 9$ and -36 . Where $m = -36$ is above the noise floor it is shown. In the exhaust, the sum of both modes is shown. Fan 2 has only one m order cut on, $m = 3$. Fan 2 is quieter at approach especially in the exhaust, while both fans have similar levels at takeoff. An interesting observation for Fan 1 is that the 3BPF levels are higher than 2BPF in the inlet for most of the speed range (see fig.9).

CONCLUDING REMARKS

Fan 1, the higher tip speed design appears to be quieter for the 2 and 3BPF interaction tones and total tone power at speeds of cut back and above. This may indicate that a limit has been reached in lowering fan speed, at constant pressure ratio, to achieve low noise. The very high aerodynamic loading on the Fan 2 blades, to achieve the same pressure ratio as Fan 1, may have caused their wake velocity deficits to increase disproportional to the benefit of the lower tip speed. This begs the questions: 1) Does interaction noises inherently increase at tip speeds below those of Fan 1? 2) Is there something unique in the Fan 2 design that is responsible for an increase in noise? The second question is posed because a boundary layer instability (location of transition to turbulent flow) was noticed during performance testing of Fan 2. An examination of blade wake data for Fans 1 and 2 might help answer these questions, as well as running Fan 2 with the same vane count as Fan 1, but this is beyond the scope of this investigation.

The mode data in the inlet may indicate that rotor transmission plays an important role. The difficulty of counter-rotating spinning orders passing through the rotor,

as well as high rotor blade passage Mach number at takeoff power may strongly influence inlet noise.

REFERENCES

1. Dittmar, J.H., Elliott, D.M. and Bock, L.A., "Some Acoustic Results from the Pratt & Whitney Advanced Ducted Propulsor—Fan 1," NASA TM—1999-209049.
2. Elliott, D.M., Dittmar, J.H., "Some Acoustic Results from the Pratt and Whitney Advanced Ducted Propulsor—Fan 1 Advanced Liner and Fan 2," AIAA Paper 2000-0351, January 2000.
3. Hobbs, D.E., et al., "Low Noise Research Fan Stage Design," NASA CR-195382, 1995.
4. Neubert, R., et al., "Advanced Low-Noise Research Fan Stage Design," NASA CR 97-206308, 1997.
5. Heidelberg, L.J. and Hall, D.G., "Acoustic Mode Measurement in the Inlet of a Model Turbofan Using a Continuously Rotating Rake," *Journal of Aircraft*, Vol. 32, No. 4, 1995, pp. 761-767.
6. Hall, D., et al., "Acoustic Mode Measurement in the Inlet of a Model Turbofan Using a Continuously Rotating Rake: Data Collection/Analysis Techniques," AIAA-93-0599 (NASA TM-105936), January 1993.
7. Heidelberg, L.J., et al., "A Unique Ducted Fan Test Bed for Active Noise Control and Aeroacoustics Research," AIAA Paper 96-1740, May 1996; also NASA TM-107213.
8. Sutliff, D.L., Nallasamy, M., Heidelberg, L.H., Elliott, D.M., "Baseline Acoustic Levels of the NASA Active Noise Control Fan Rig," AIAA Paper-961745, May 1996; also NASA TM-107214.

Table 1. Fan Design Parameters

Fan Parameter	Fan 1	Fan 2
<u>Pressure Ratio</u>		
Takeoff	1.284	1.284
Cutback	1.209	1.209
Approach	1.077	1.077
<u>Corrected Tip Speed (ft/sec)</u>		
Takeoff	840	756
Cutback	723	667
Approach	480	425
<u>Corrected rpm</u>		
Takeoff	8750	7875
Cutback	7525	6950
Approach	5425	4425
<u>Bypass Ratio - Cruise</u>	13.3	13.3
<u>Blade Number</u>	18	18
<u>Vane Number</u>	45	51
<u>2BPF Interaction m order</u>	-9	-15
<u>Hub/ Tip</u>	0.426	0.426
<u>Diameter (in)</u>	22.0	22.0

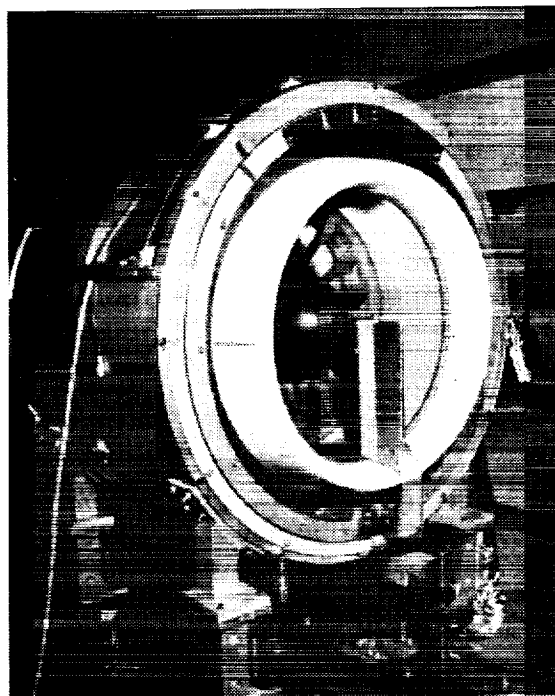


Figure 1. Photo of the rotating rake system installed on the inlet of Fan 1.

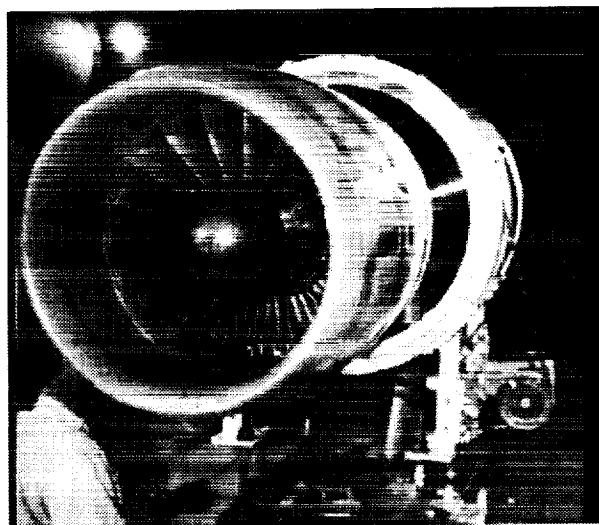


Figure 2. Photo of the rotating rake system installed on the exhaust of Fan 2.

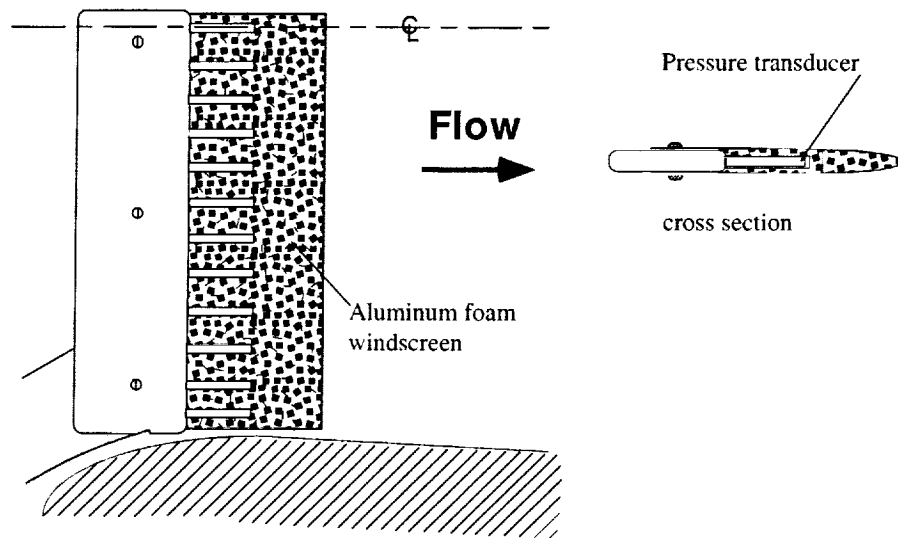


Figure 3. Inlet rotating rake and windscreen for 22'' fans

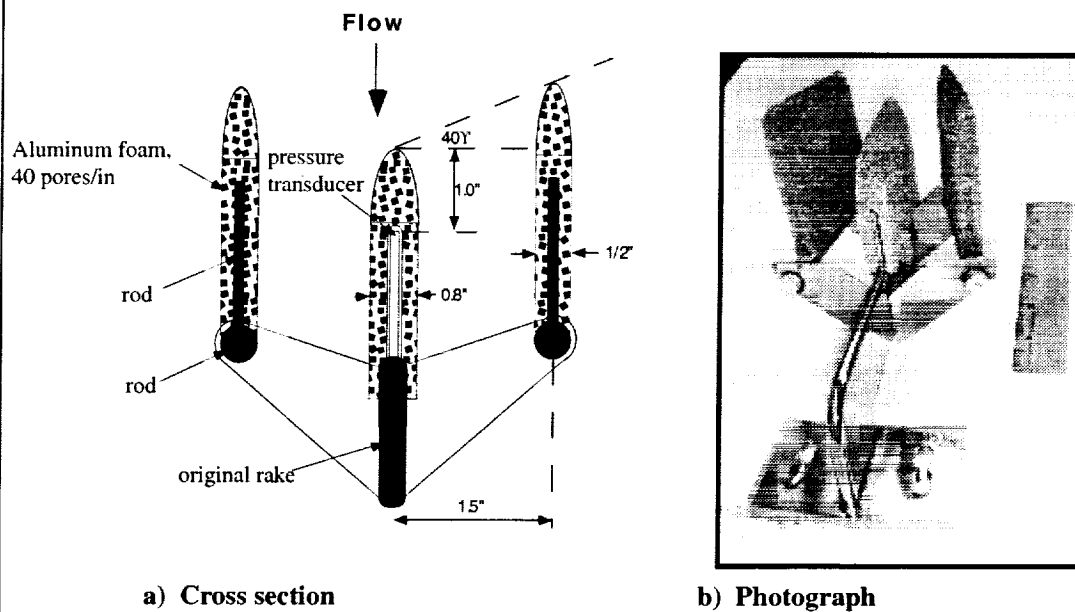


Figure 4. Exhaust rake and windscreens for 22'' fans

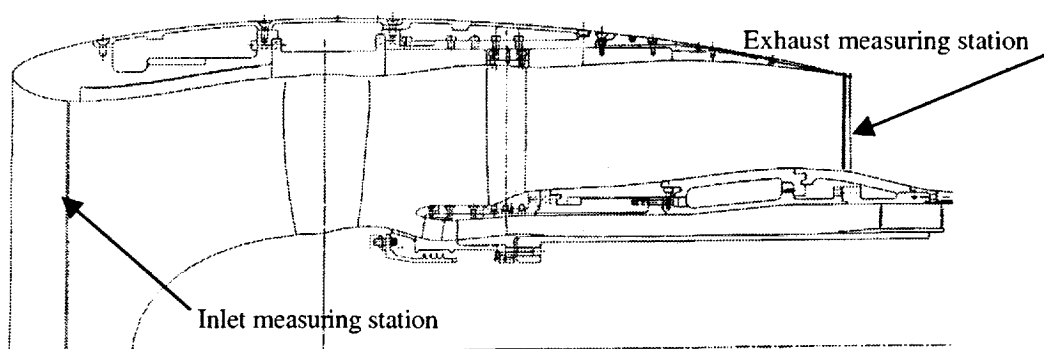


Figure 5. Sketch of fan showing mode measuring stations

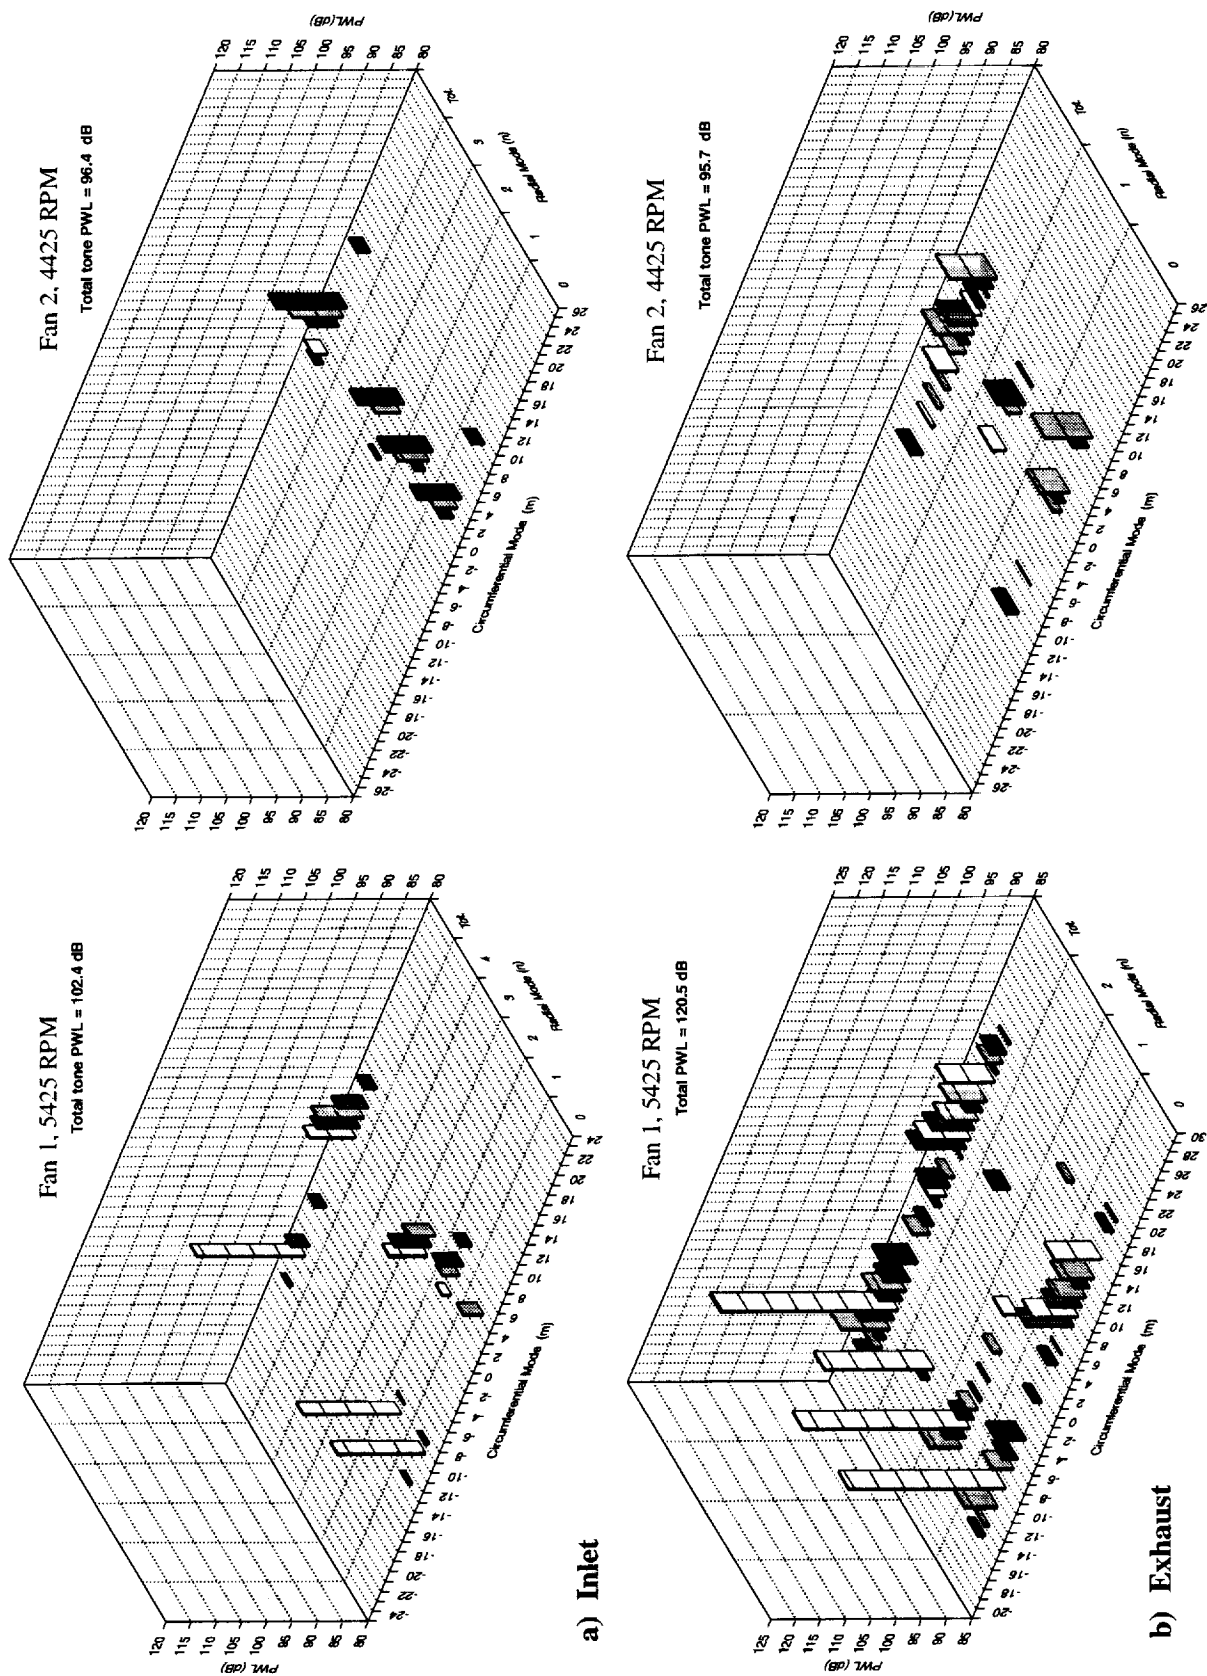


Figure 6. Comparison of the 2BPF modal structure of Fans 1 and 2 at approach power

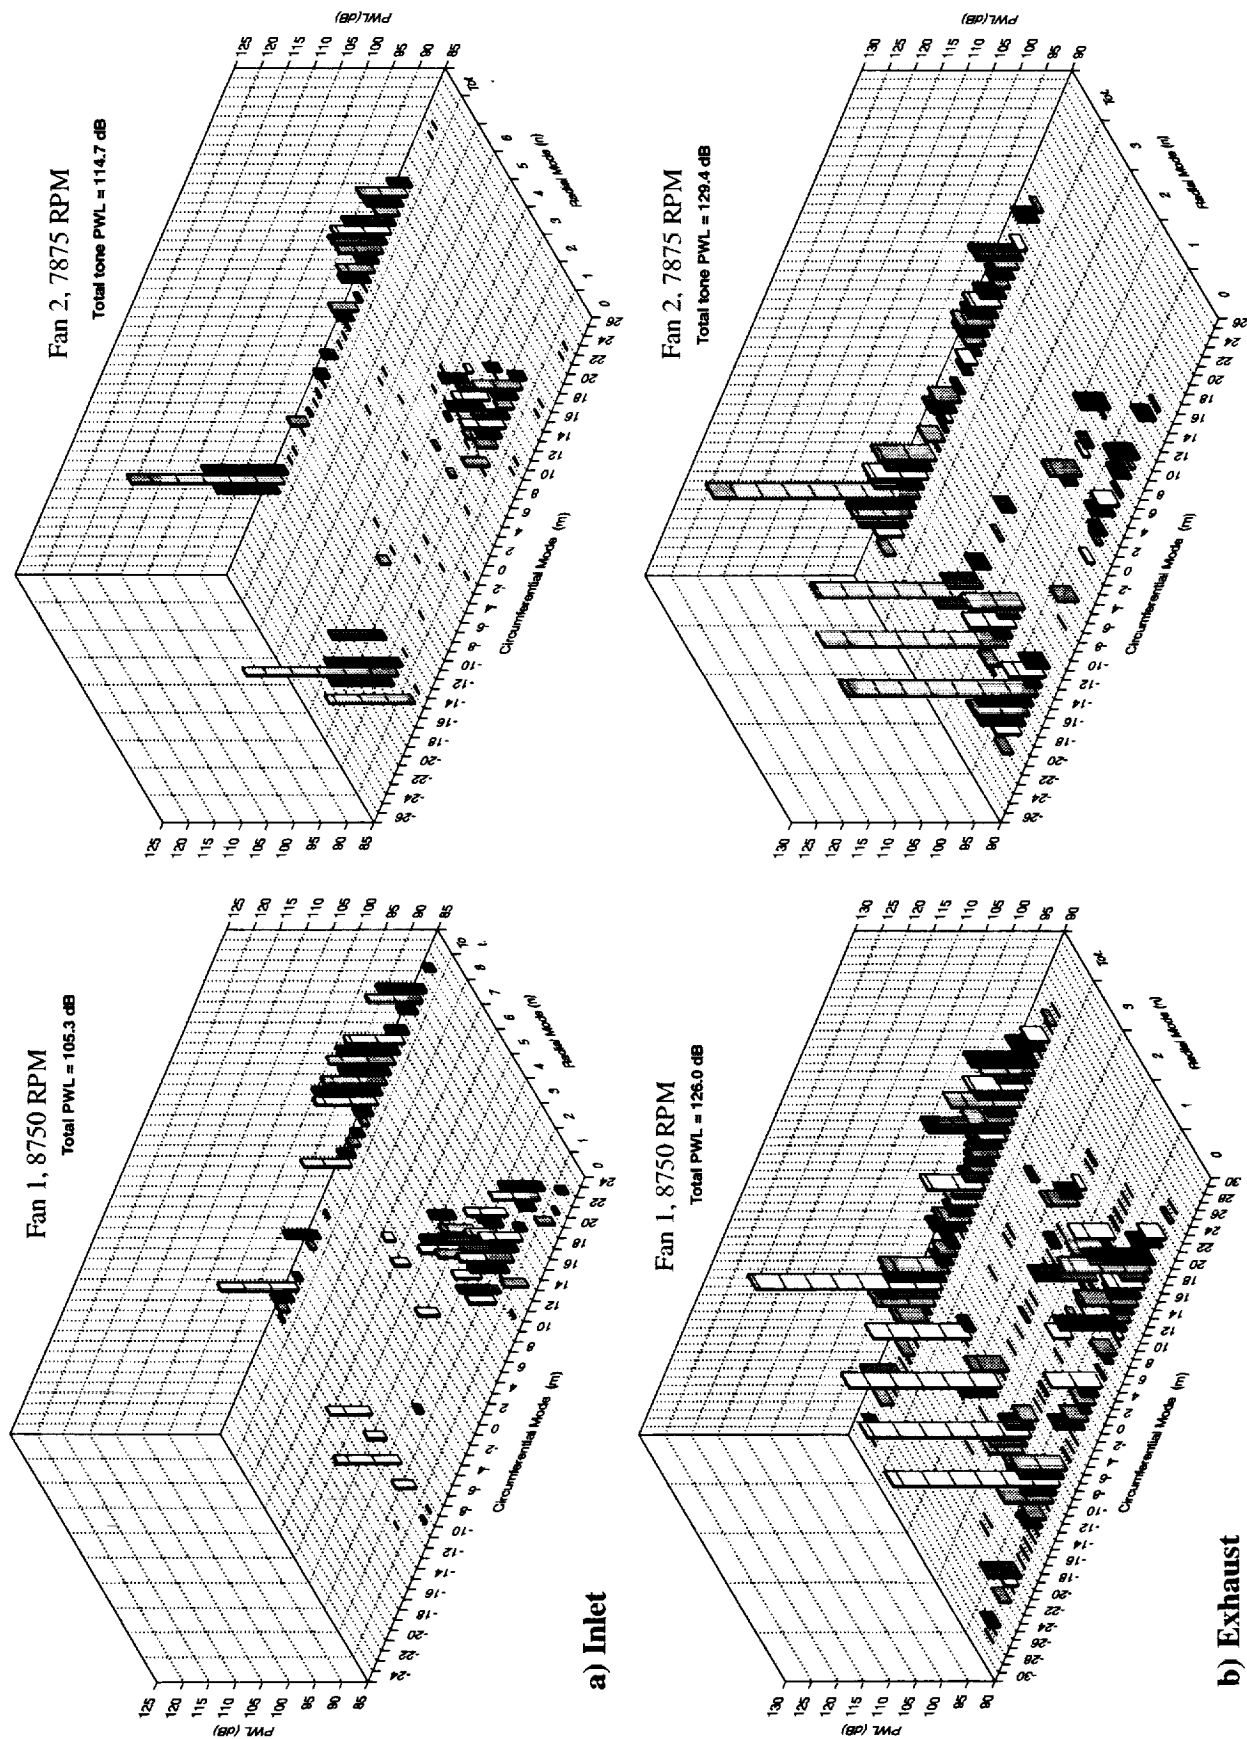


Figure 7. Comparison of the 2BPF modal structure of Fans 1 and 2 at takeoff power

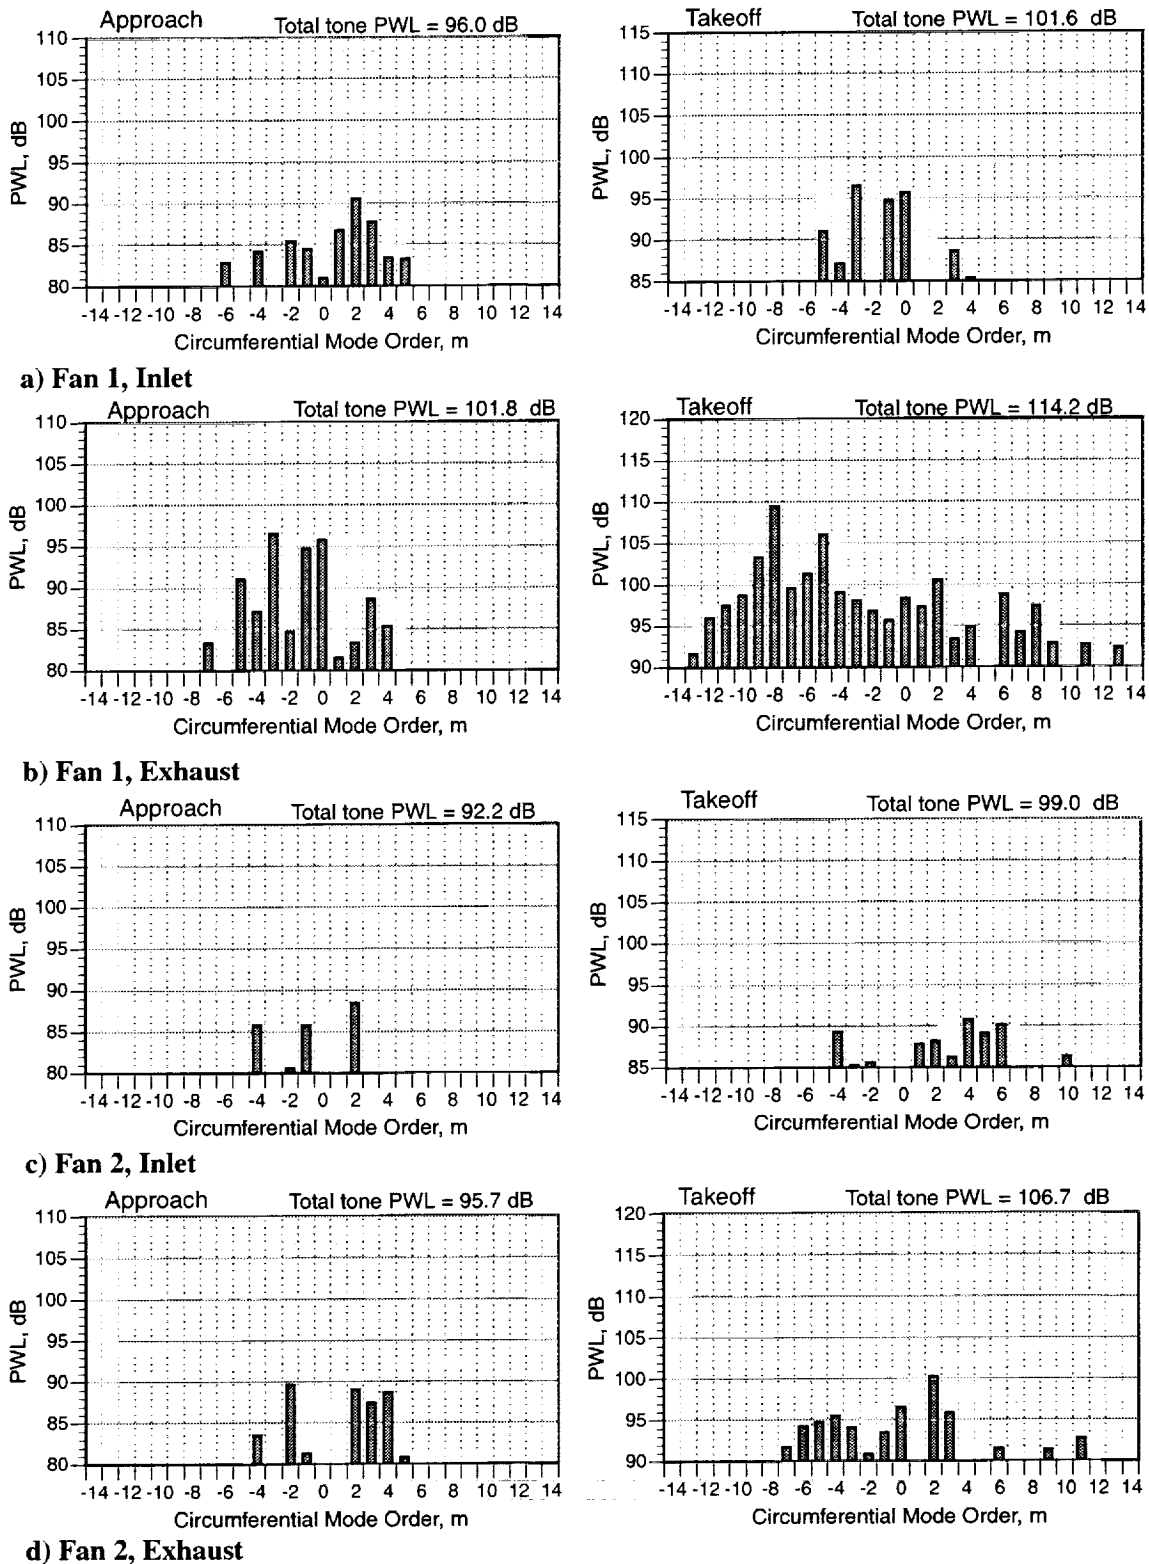


Figure 8. BPF circumferential mode power for Fans 1 and 2




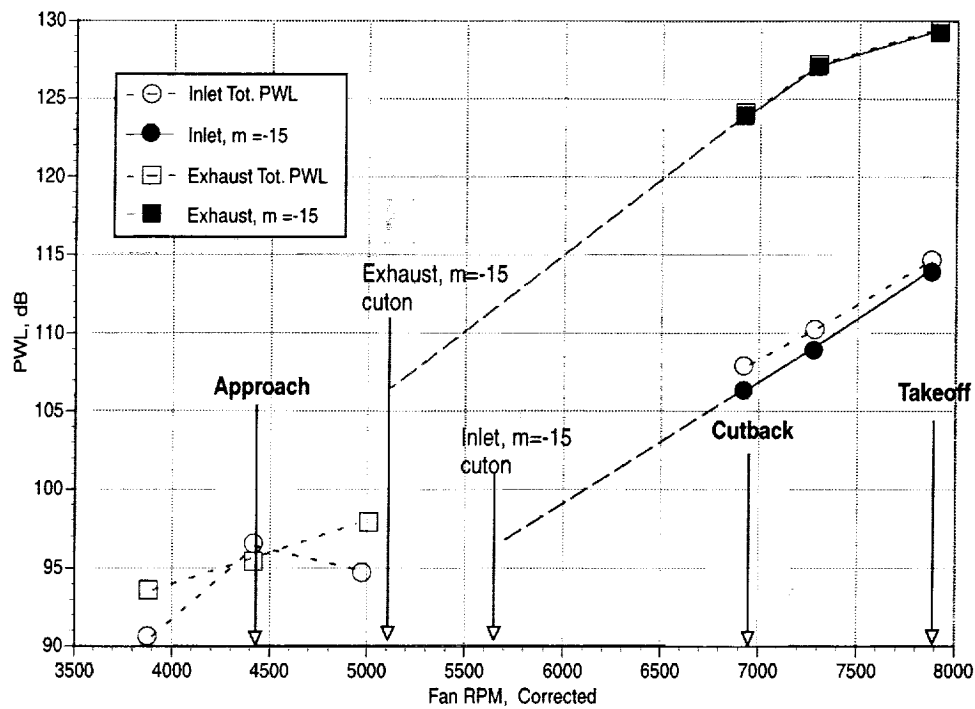


Figure 9. 2BPF interaction mode and total tone power as a function of fan speed for Fans 1 and 2

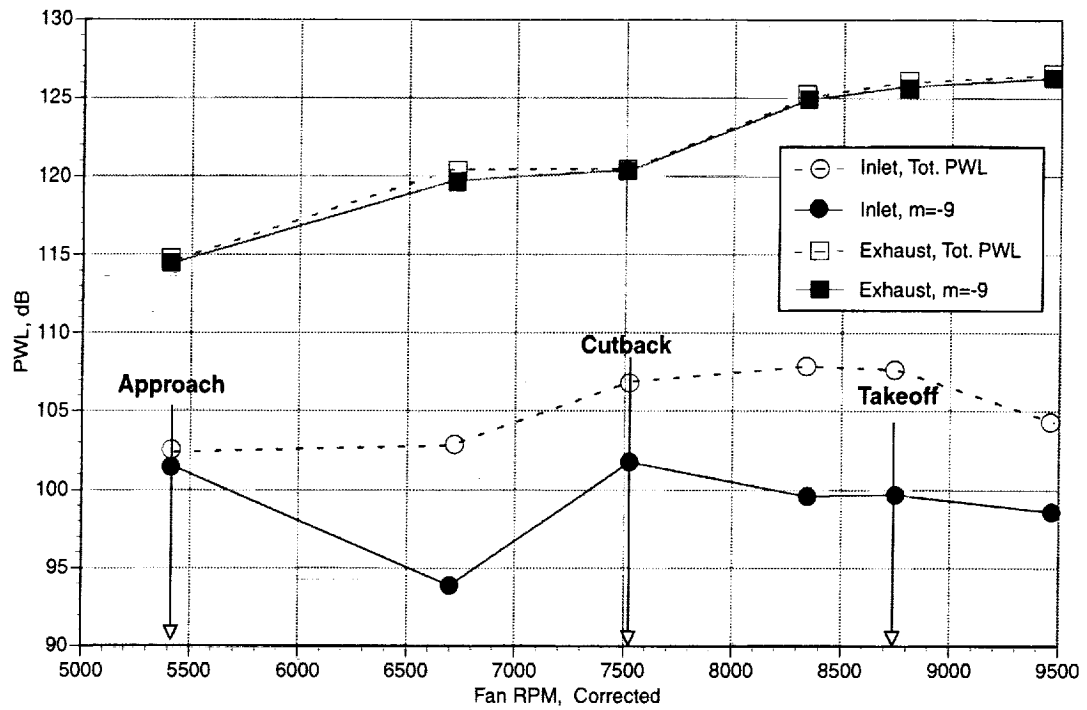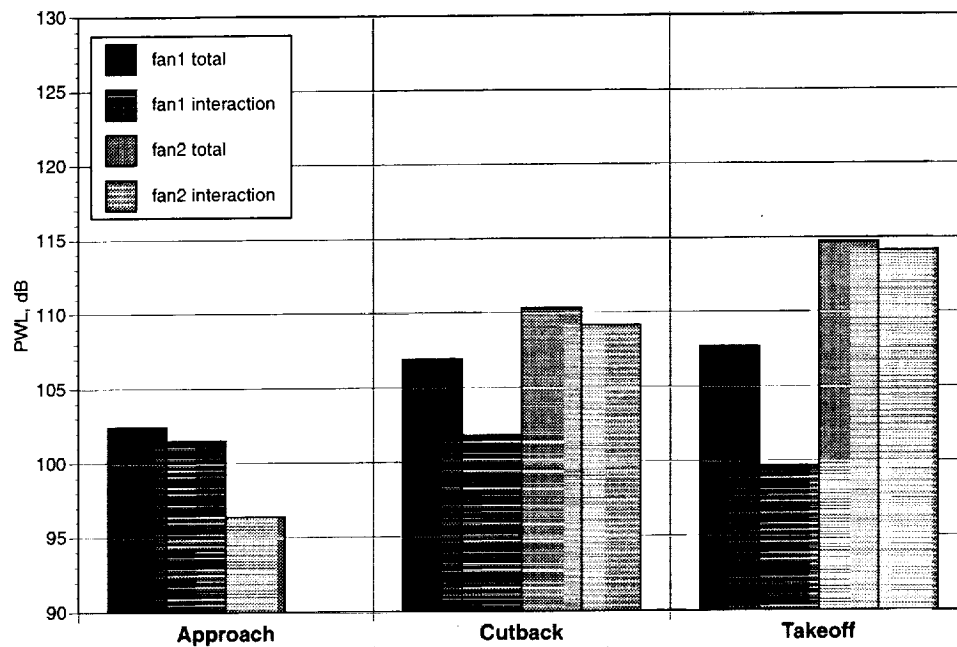


a) Inlet

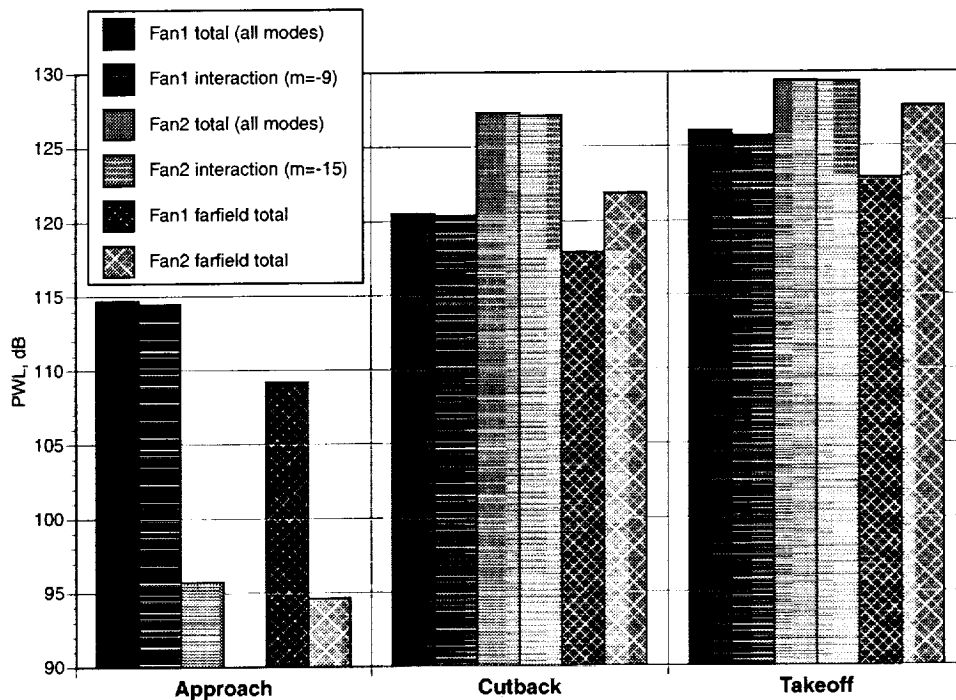


b) Exhaust

Figure 10. Comparison of 2BPF interaction and total tone power for Fans 1 and 2

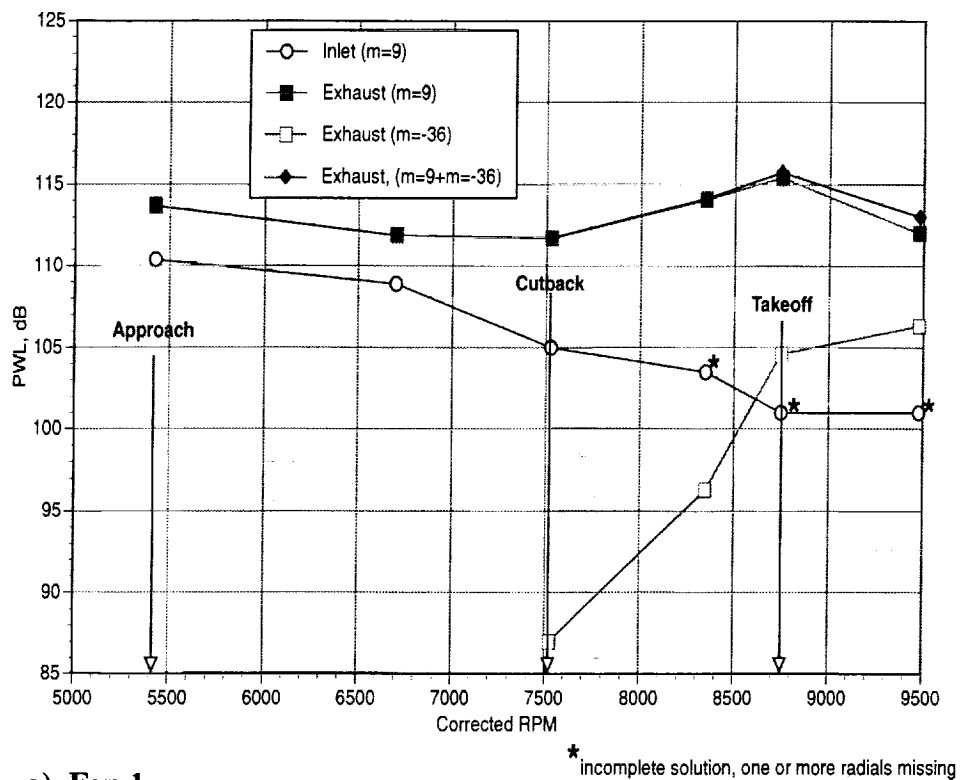

a) Fan 1

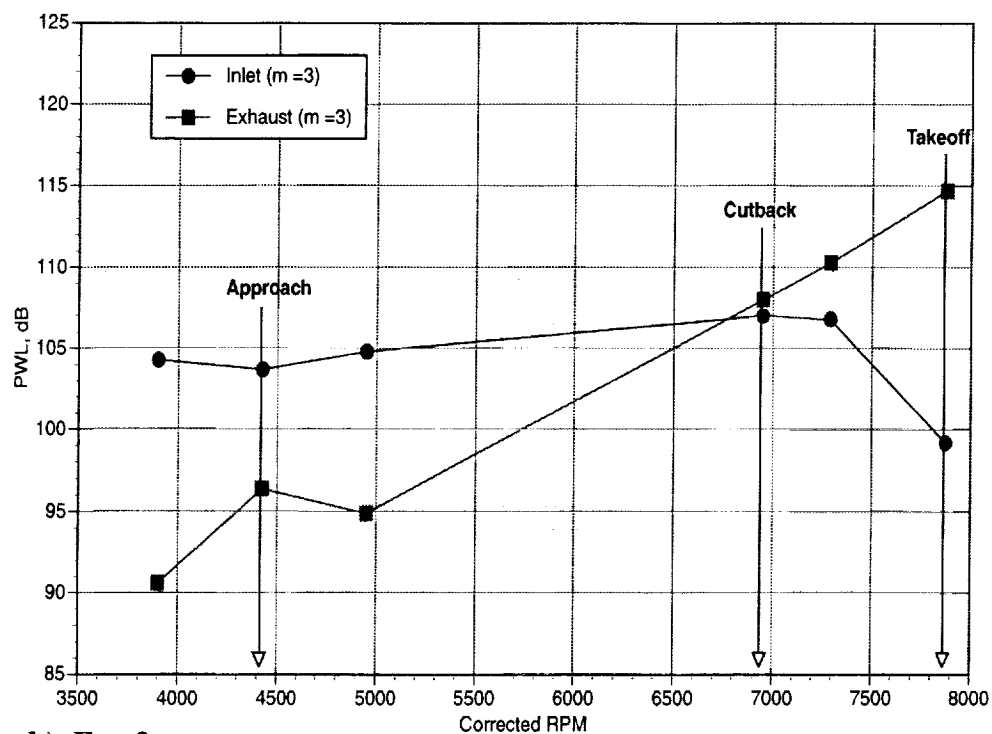

b) Fan 2

Figure 11. 3BPF interaction modes for Fans 1 and 2

REPORT DOCUMENTATION PAGEForm Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE

June 2000

3. REPORT TYPE AND DATES COVERED

Technical Memorandum

4. TITLE AND SUBTITLE

A Comparison of Measured Tone Modes for Two Low Noise Propulsion Fans

5. FUNDING NUMBERS

WU-522-81-11-00

6. AUTHOR(S)

Laurence J. Heidelberg and David M. Elliott

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

National Aeronautics and Space Administration
John H. Glenn Research Center at Lewis Field
Cleveland, Ohio 44135-31918. PERFORMING ORGANIZATION
REPORT NUMBER

E-12351

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

National Aeronautics and Space Administration
Washington, DC 20546-000110. SPONSORING/MONITORING
AGENCY REPORT NUMBERNASA TM-2000-210231
AIAA-2000-1989

11. SUPPLEMENTARY NOTES

Prepared for the 6th Aerocoustics Conference and Exhibit cosponsored by the American Institute of Aeronautics and Astronautics and the Confederation of European Aerospace Societies, Lahaina, Hawaii, June 12-14, 2000. Responsible person, Laurence J. Heidelberg, organization code 5940, (216) 433-3859.

12a. DISTRIBUTION/AVAILABILITY STATEMENT

Unclassified - Unlimited

Subject Categories: 07 and 71

Distribution: Nonstandard

This publication is available from the NASA Center for AeroSpace Information, (301) 621-0390.

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

The acoustic modes for two low tip speed propulsion fans were measured to examine the effects of fan tip speed, at constant pressure ratio. A continuously rotating microphone method was used that provided the complete modal structure (circumferential and radial order) at the fundamental and second harmonic of the blade passing tone as well as most of the third harmonic modes. The fans are compared in terms of their rotor/stator interaction modal power, and total tone power. It was hoped that the lower tip speed might produce less noise. This was not the case. The higher tip speed fan, at both takeoff and cutback speeds, had lower tone and interaction levels. This could be an indication that the higher aerodynamic loading required to produce the same pressure ratio for the lower tip speed fan resulted in a greater velocity deficit in the blade wakes and thus more noise. Results consistent with expected rotor transmission effects were noted in the inlet modal structures of both fans.

14. SUBJECT TERMS

Ducted fans; Engine noise; Acoustic modes; Aeroacoustics

15. NUMBER OF PAGES

18

16. PRICE CODE

A03

17. SECURITY CLASSIFICATION
OF REPORT

Unclassified

18. SECURITY CLASSIFICATION
OF THIS PAGE

Unclassified

19. SECURITY CLASSIFICATION
OF ABSTRACT

Unclassified

20. LIMITATION OF ABSTRACT