

NASA/TM—2001-209984/VOL. 2



**GEOSAT Follow-On (GFO) Altimeter  
Document Series**

**Volume 2  
GFO On-Orbit Altimeter Noise Assessment**

*Mavis L. Driscoll  
Richard V. Sailor*

*NASA Contract #S-05106-G*

## The NASA STI Program Office ... in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the lead center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and mission, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov/STI-homepage.html>
- E-mail your question via the Internet to [help@sti.nasa.gov](mailto:help@sti.nasa.gov)
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:  
NASA Access Help Desk  
NASA Center for AeroSpace Information  
7121 Standard Drive  
Hanover, MD 21076-1320

NASA/TM—2001-209984/VOL. 2



## **GEOSAT Follow-On (GFO) Altimeter Document Series**

### **Volume 2**

## **GFO On-Orbit Altimeter Noise Assessment**

Mavis L. Driscoll  
Richard V. Sailor  
*Litton/TASC*  
*Reading, MA 01867*

NASA Contract #S-05106-G

National Aeronautics and  
Space Administration

**Goddard Space Flight Center**  
Greenbelt, Maryland 20771

---

March 2001

---

Available from:

NASA Center for AeroSpace Information  
7121 Standard Drive  
Hanover, MD 21076-1320  
Price Code: A17

National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161  
Price Code: A10

## TABLE OF CONTENTS

	<b>Page</b>
1. <u>INTRODUCTION</u> .....	1
2. <u>REPEAT-TRACK ANALYSIS</u> .....	3
3. <u>FILTERING ANALYSIS</u> .....	6
4. <u>SUMMARY AND CONCLUSIONS</u> .....	10
<u>APPENDIX A GFO DATA ANALYSIS RESULTS</u> .....	11
<u>REFERENCES</u> .....	21

## LIST OF FIGURES

<u>Figure 1-1 GFO track pairs used in the repeat track analysis.</u> .....	2
<u>Figure 2-1 Estimates of GFO white noise level versus significant wave height.</u> .....	4
<u>Figure 3-1 Highpass filtering estimates of GFO noise level.</u> .....	7
<u>Figure 3-2 EAF estimate of RMS white noise level in GFO data.</u> .....	9

## LIST OF TABLES

<u>Table 2-1 RMS white noise level computed from GFO repeat track pairs</u> .....	5
<u>Table 3-1 RMS White noise level computed using a highpass filter.</u> .....	8



# 1.

## INTRODUCTION

The purpose of this report is to present the results of an analysis of the *white noise level* in Geosat Follow-On (GFO) altimeter data. The Repeat-Track Method was used to determine noise level. This approach was developed at TASC and has been used to quantify noise levels of all previous satellite altimeter missions (Refs. 1-6). The GFO altimeter was designed to have an RMS white noise level of less than 3.5 centimeters for significant wave height less than 2 meters. *The results of the analysis presented here show that the GFO altimeter meets this specification.*

NASA/WFF provided the 26 track pairs of 1-Hz GFO altimeter data used in this analysis. The track locations are shown on the map in Fig. 1-1. Significant wave height (SWH) along these tracks ranges from approximately 1 meter to 6 meters, providing a good sampling of calm to rough sea surface conditions. Using the Repeat Track Method, we computed noise levels for each of the 26 track pairs. These results are tabulated and plotted. In addition to using the Repeat-Track Method, we analyzed each track individually using a variation on a filtering algorithm previously developed by TASC (Refs. 7-8). The previous approach, called Equalize and Filter (EAF, Ref. 7), was originally developed for 10-Hz data, along single (not repeat) tracks. The *new approach*, developed in this work, is a simplified version of EAF that is applied to individual tracks of 1-Hz data, and involves only high-pass filtering (without the prior "equalization" filter). Noise-level estimates obtained by the new filtering approach agree very well with the results from the more difficult to implement Repeat-Track Method. We also applied the original EAF procedure to a single track of 10-Hz GFO data, and the computed white noise level also agrees with the repeat-track analysis.

Our new results using high-pass filtering of 1-Hz data are particularly encouraging. We have demonstrated the robust nature of this simplified, single-track analysis approach that avoids the need to compute power spectra. A potential application of our new algorithm is to monitor altimeter noise on single tracks, since this could be applied in near real time and would not require environmental corrections to the raw altimeter data.






## 2.

## REPEAT-TRACK ANALYSIS

Sea surface height data corrected for instrumental and environmental effects were used in this analysis. The data are provided at a sample spacing of approximately 1 sample-per-second. Each pair of repeat tracks is aligned by finding the closest pair of measurement points, then the two time series are differenced. (Sea surface heights are not interpolated to a common reference track to avoid the smoothing associated with interpolation). Height differences that exceed three times the standard deviation are removed, and small gaps in the time series are filled by linear interpolation. The resulting difference time series contains time-varying signals caused by mesoscale oceanography, long-wavelength orbit errors, and uncorrelated noise. A power spectral density (PSD) of the height differences is computed and divided by 2 to obtain the noise PSD. The white noise power spectral density level is estimated by averaging the PSD at frequencies between 0.3 and 0.5 Hz. The RMS white noise level for 1 Hz data is then obtained by integrating the estimated noise PSD level between 0 and 0.5 Hz (Ref. 6). See Appendix A for plots of the GFO data, the repeat track differences, and the noise PSDs with the RMS white noise levels identified.

The results of the repeat-track analysis are listed in Table 2-1. Values of RMS noise level range from 1.9 to 5.0 cm. The noise level is sensitive to significant wave height (SWH), with larger noise values associated with larger significant wave heights. This relationship is illustrated in a plot of noise level versus SWH (Fig. 2-1). Data from three different time spans are indicated by different colored symbols. The most recent data (most up-to-date GFO GDR processing) are plotted with red asterisks, but these are indistinguishable from the earlier noise estimates. The best-fit line to the 26 noise estimates is also plotted. These results show that the GFO noise level is less than 2.7 cm for significant wave heights less than 2 meters, thereby meeting the system design specifications.

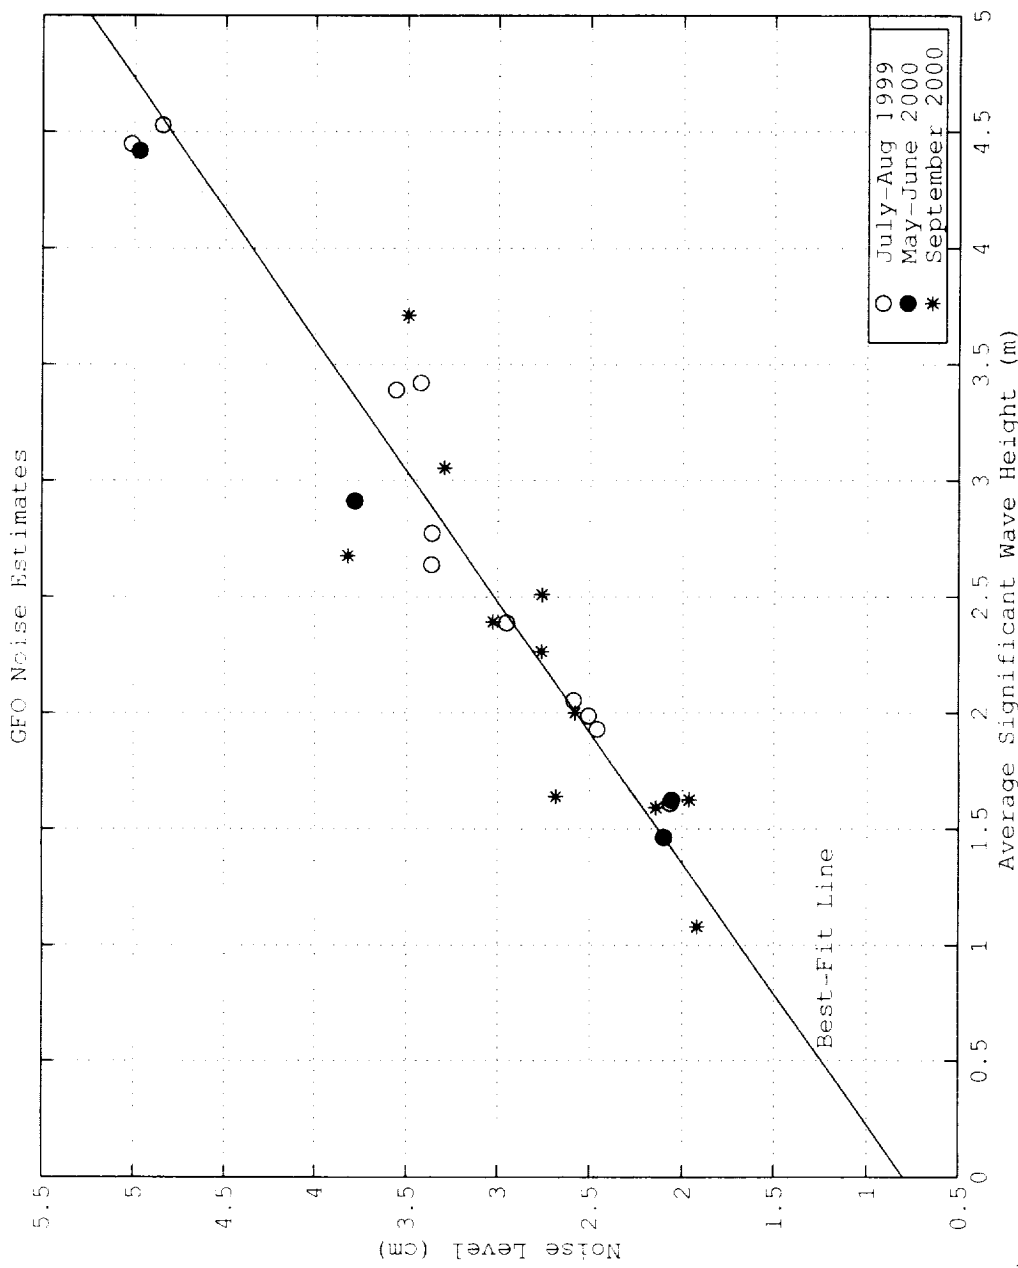

**Figure 2-1** Repeat-track estimates of GFO white noise level plotted versus significant wave height. GFO data from different time periods are indicated by different symbols.

Track1	Track2	# Outliers	Samples in Pair	Average SWH (m)	Noise level (cm)
99204a	99221a	0	337	1.93	2.46
99204c	99221c	1	328	2.77	3.36
99204f	99221f	0	429	3.39	3.56
99204h	99221h	0	367	2.05	2.59
99204j	99221j	0	285	4.53	4.85
99204m	99221m	0	429	2.64	3.36
99204n	99221n	0	269	1.61	2.07
99205a	99223a	3	551	1.99	2.51
99205b	99223b	3	612	3.42	3.43
99206d	99223d	2	825	4.45	5.02
99206e	99223e	1	408	2.39	2.95
00130a	00164a	0	381	4.42	4.97
00130a	00147a	0	353	2.91	3.78
00130c	00164c	73	718	1.46	2.10
00130c	00147c	2	690	1.62	2.06
00246a	00263a	1	270	3.71	3.49
00246b	00263b	2	305	1.08	1.92
00248a	00265a	0	407	2.51	2.76
00248b	00265b	0	303	2.39	3.03
00248c	00265c	0	404	3.06	3.29
00248e	00265e	1	235	2.68	3.82
00248f	00265f	1	537	1.59	2.14
00255f	00272f	0	183	1.63	1.96
00259b	00276b	0	820	2.00	2.58
00259c	00276c	1	713	2.26	2.77
00259d	00276d	0	613	1.64	2.69

**Table 2-1** RMS white noise level computed from GFO repeat track pairs

### 3.

## FILTERING ANALYSIS

TASC has been investigating algorithms that can provide noise level estimates that are comparable to the Repeat-Track Method, but that are simpler to implement. The Repeat-Track Method has several disadvantages (Ref. 7), one of which is the need for fairly long, continuous time series to compute the PSD. The purpose of the repeat track pair is to remove the geoid signal so that the time series of time-varying noise is revealed. Experience has shown that *white noise* dominates the altimeter time series at the shortest wavelengths. This suggests an alternative noise measurement algorithm that can be applied to single tracks of data. Previously TASC developed the Equalize and Filter (EAF) algorithm (Ref. 7) that works by highpass filtering 10-Hz data. We now have demonstrated a new and simpler filtering algorithm that works with 1-Hz data.




**New Method Using 1-Hz Data:** The 1-Hz data analyzed with the Repeat-Track Method were also analyzed using this new and simpler filter method, outlined in the following steps.

1. Highpass filter 1-Hz time series using a 5<sup>th</sup>-order Butterworth filter (removes the geoid and all long-wavelength environmental effects). The output is highpassed white noise. The RMS of this noise is *proportional* to the RMS of the white noise floor in the original data.
2. Edit to remove outliers and filter startup transients.
3. Compute the RMS value of the resulting time series.
4. Scale the RMS result to compute the inferred RMS white noise level for 1-Hz data. The scale factor is dependent on the filter. For the 5<sup>th</sup>-order Butterworth filter, scale factors are 1.574, 1.807, and 2.200 for cutoff frequencies of 0.3, 0.35, and 0.4 Hz<sup>1</sup>. The scaled value is comparable to the traditional value derived from repeat-track analysis.

The results of the filtering analysis are shown in Fig. 3-1 for three different cutoff frequencies. The results from the repeat-track analysis are also plotted. There is very close agreement between the two methods, and there is little difference in the results for the three selected frequency cutoffs. These results of the filtering analysis are also listed in Table 3-1. Comparing the values in the third and fourth columns shows how well the two methods agree.

---

<sup>1</sup> The scale factors are determined numerically by computing the square root of the reciprocal of the integrated Power Gain Function of the Butterworth highpass filter. This is equivalent to the ratio of the standard deviations of an input time series (white noise) and the highpass filtered time series.

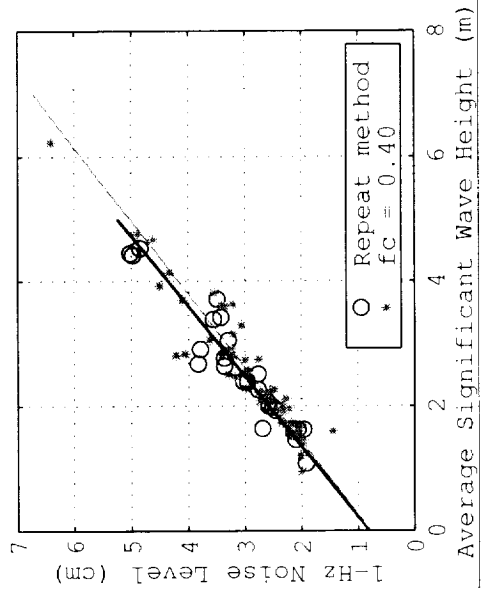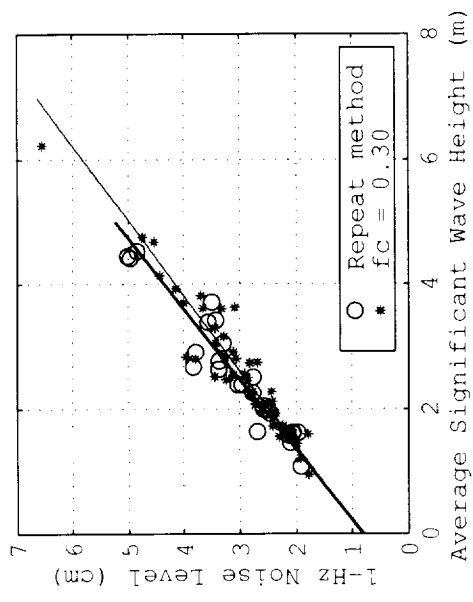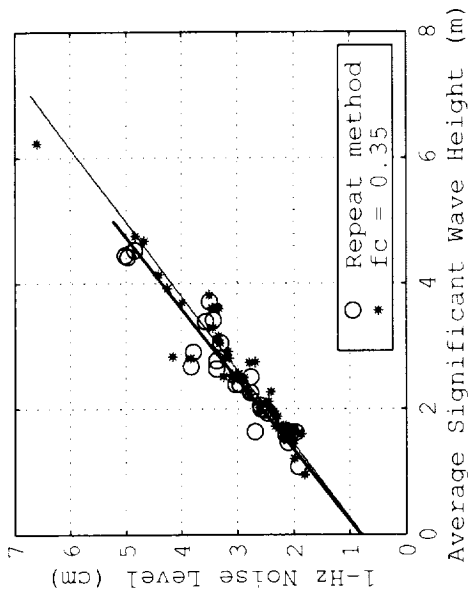


**Figure 3-1** Highpass filtering estimates of GFO RMS white noise level for three values of the filter cutoff frequency, 0.3, 0.35, and 0.4 Hz. Repeat-track estimates of RMS white noise level are plotted for comparison. Straight lines are the best fits to the sets of estimates.

GFO Track	SWH (m)	Noise level (cm) Highpass Filter (fc = 0.3 Hz)	Noise level (cm) Repeat-Track Method	Average SWH (m)	Samples in Pair
99204a	2.12	2.42	2.46	1.93	337
99221a	1.74	2.24			
99204c	2.74	2.82	3.36	2.77	328
99221c	2.81	3.78			
99204f	3.16	3.28	3.56	3.39	429
99221f	3.62	3.65			
99204h	2.03	2.60	2.59	2.05	367
99221h	2.08	2.72			
99204j	2.82	3.26	4.85	4.53	285
99221j	6.23	6.54			
99204m	3.06	3.43	3.36	2.64	429
99221m	2.22	2.81			
99204n	1.67	2.07	2.07	1.61	269
99221n	1.56	2.06			
99205a	2.47	3.24	2.51	1.99	551
99223a	1.50	2.05			
99205b	2.92	3.11	3.43	3.42	612
99223b	3.92	4.14			
99206d	4.76	4.75	5.02	4.45	825
99223d	4.14	4.43			
99206e	2.55	3.11	2.95	2.39	408
99223e	2.23	2.78			
00130a	3.70	3.99	4.97	4.42	381
00164a	4.68	4.54			
00130a	3.70	3.99	3.78	2.91	353
00147a	3.63	3.09			
00130c	1.52	2.14	2.10	1.46	718
00164c	1.72	2.41			
00130c	1.52	2.14	2.06	1.62	690
00147c	1.88	2.38			
00246a	3.60	3.32	3.49	3.71	270
00263a	3.82	3.69			
00246b	1.21	1.93	1.92	1.08	305
00263b	0.95	1.78			
00248a	2.27	2.44	2.76	2.51	407
00265a	2.75	2.68			
00248b	2.50	2.85	3.03	2.39	303
00265b	2.28	2.77			
00248c	2.81	3.06	3.29	3.06	404
00265c	3.30	3.43			
00248e	2.84	3.95	3.82	2.68	235
00265e	2.52	3.44			
00248f	1.44	1.98	2.14	1.59	537
00265f	1.74	2.32			
00255f	1.60	1.79	1.96	1.63	183
00272f	1.66	2.09			
00259b	2.07	2.57	2.58	2.00	820
00276b	1.93	2.37			
00259c	1.96	2.40	2.77	2.26	713
00276c	2.56	2.91			
00259d	1.56	2.30	2.69	1.64	613
00276d	1.72	2.24			

**Table 3-1** RMS White noise level for GFO track segments computed using a highpass filter, compared to RMS white noise level computed using Repeat-Track Method on track pairs.

**Original EAF Algorithm:** We had available to us a single track of 10-Hz GFO sea surface height data, provided by Bruce Lunde of the Naval Oceanographic Office. The data are from day 207, year 1999, with about 3700 usable data points. The data were produced prior to February 2000 and, therefore, do not represent the latest GFO GDR data processing (but this should not affect our results since EAF looks at only the highest frequencies). The sea surface heights were analyzed with the original EAF algorithm using a cutoff frequency of 0.5 Hz. The resulting white noise level for this track is 2 cm, and the average significant wave height is 1.2 m. This single EAF result is added to the previous plot showing the results obtained with the Repeat-Track Method, and the 1-Hz filtering method (Fig. 3-2). The RMS white noise level obtained from the EAF algorithm is in agreement with the previous results.

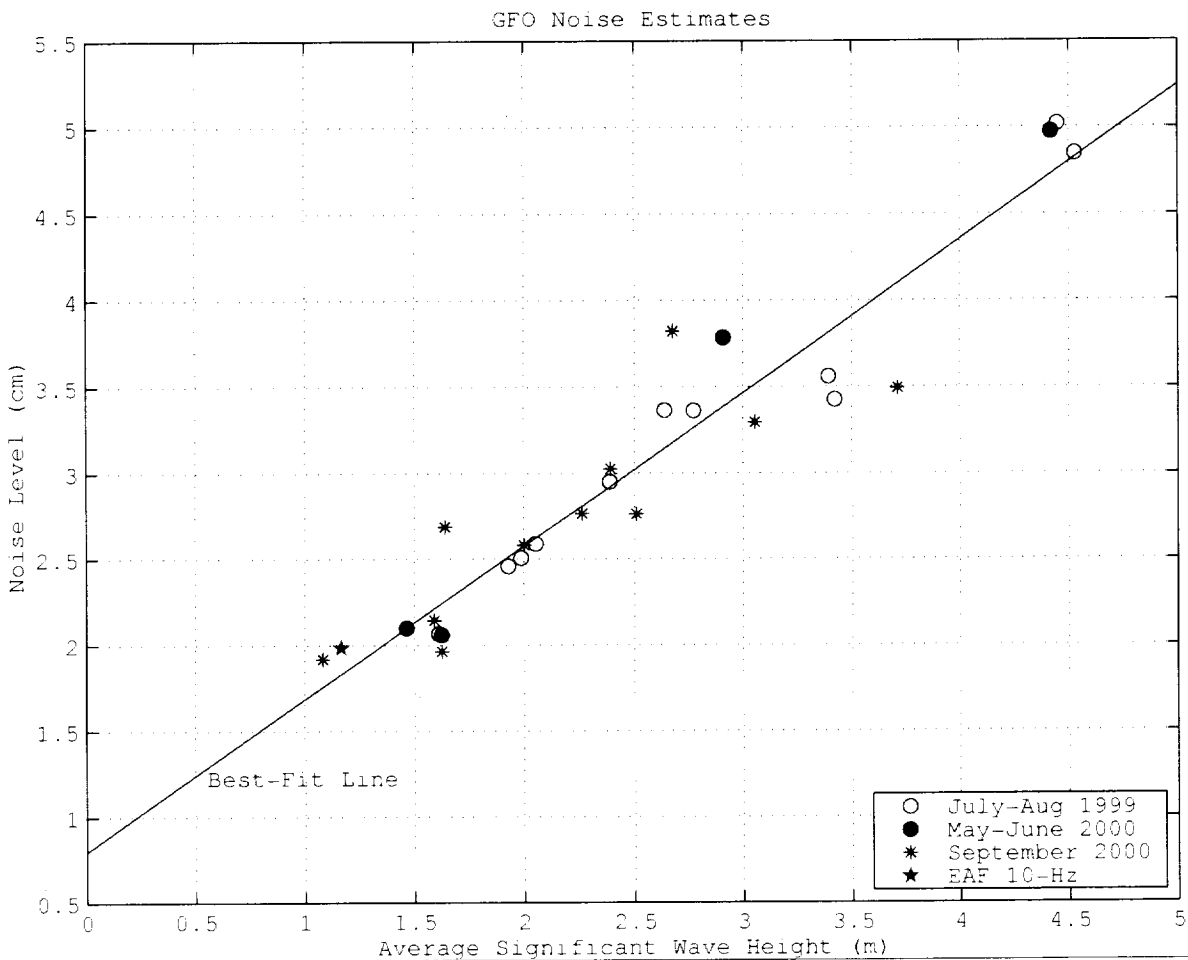

**Figure 3-2** EAF estimate of RMS white noise level in GFO data (green star). Repeat-track estimates of RMS white noise level are plotted for comparison.

#### **4. SUMMARY AND CONCLUSIONS**

RMS white noise levels for 26 GFO track pairs have been computed using the standard Repeat-Track Method. The noise level increases linearly with increasing significant wave height. For values of significant wave height less than 2.0 m, the maximum observed noise level is 2.7 cm.


RMS white noise levels have also been determined from the 1-Hz GFO data using a simple highpass filtering algorithm, and from a single track of 10-Hz data using TASC's original EAF filtering algorithm. Both of these results closely agree with those obtained from the Repeat-Track Method. This agreement indicates that either of these algorithms may be a good candidate for monitoring altimeter noise levels. The value of the filtering techniques is that they can operate on single tracks of altimeter data, without applying environmental corrections.

A topic that could not be extensively studied is the sensitivity of the filtering algorithms to high-amplitude, short-wavelength geoid signals such as those observed across the mid-Atlantic Ridge. The cutoff wavelength for the highpass filter must be short enough to remove the entire geoid signal, yet long enough to permit a robust estimate of the white noise level. Thus, the highest feasible cutoff frequency for the filter remains to be determined. We may find the EAF algorithm to be the more robust of the two filtering algorithms because the bandwidth of 10-Hz data is larger than that for 1-Hz data, permitting shorter cutoff wavelengths to be used.









## APPENDIX A GFO DATA ANALYSIS RESULTS













Plots of the GFO data used in the repeat-track analysis, and the noise process power spectral density (PSD) for each of the 26 track pairs are presented in this appendix. For each track pair, the aligned sea surface heights, corrected for environmental effects, are plotted as shown in Fig. A-1. Beneath this, the difference time series (minus a constant) is plotted, followed by plots of the significant wave height for each track. Presented next is a plot of the noise PSD, and the calculated white noise level (Fig. A-2), and for comparison, PSDs of the sea surface height for each track. This set of plots is presented for each track pair, in the same order listed in Table 2-1.






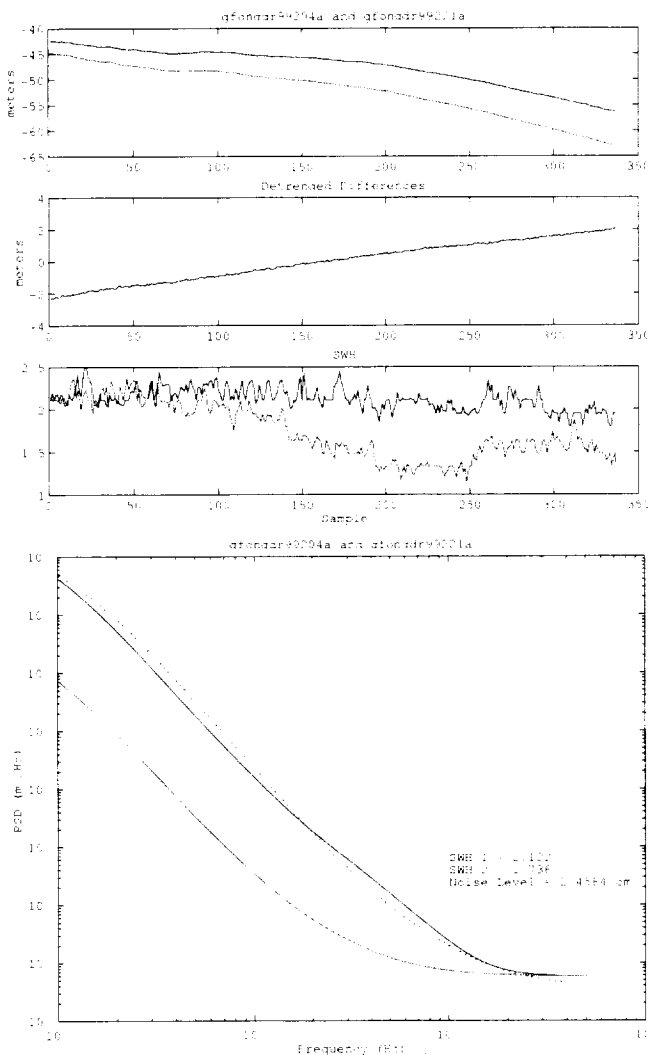








**Figure A-1** Sea surface heights for GFO track 99204, segment a (blue), and GFO track 99221, segment a (green), aligned and corrected for environmental effects, detrended differences (only a mean is removed), and significant wave height.







**Figure A-2** Power spectral density plot of the noise process and the white noise floor (red), and sea surface height PSDs for tracks 99204, segment a, and GFO track 99221, segment a (blue and dotted green).

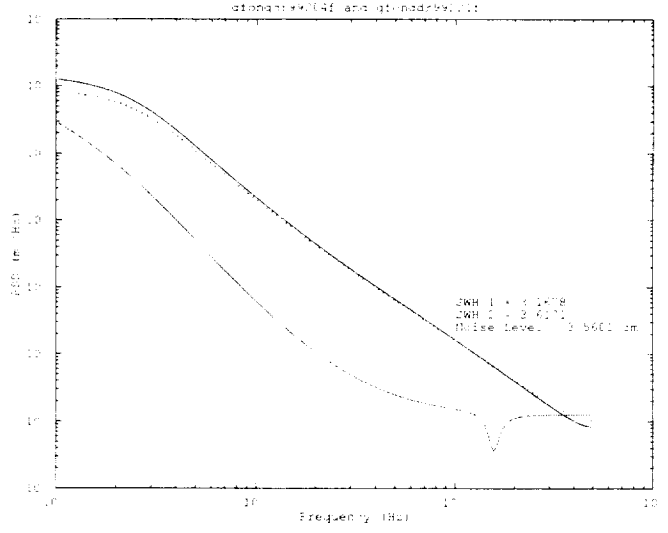
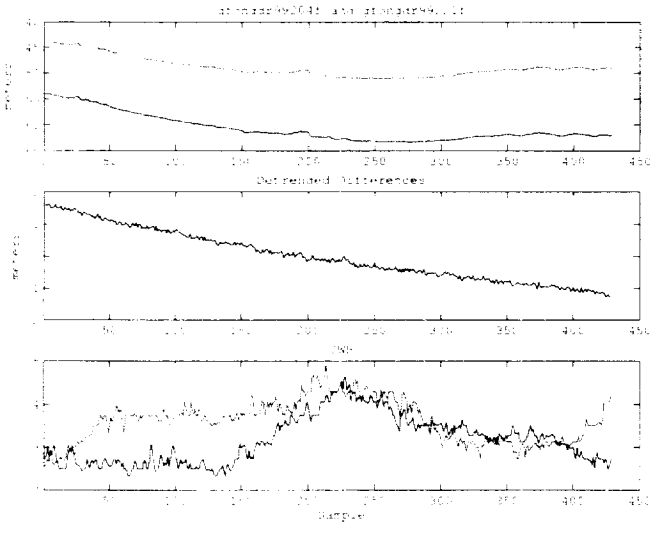
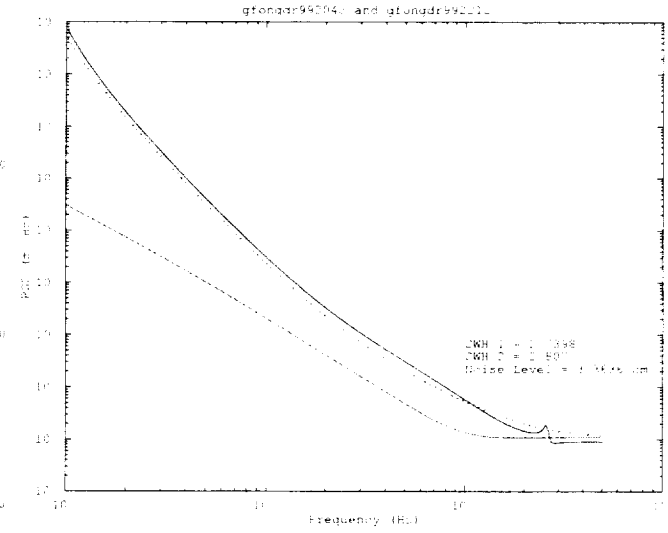
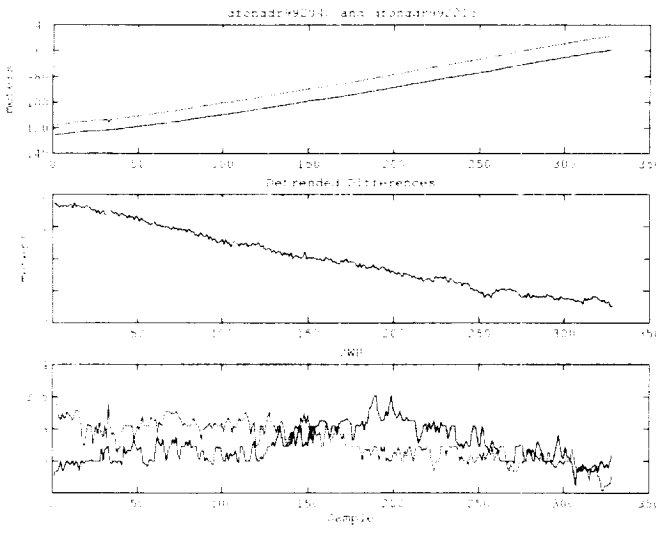
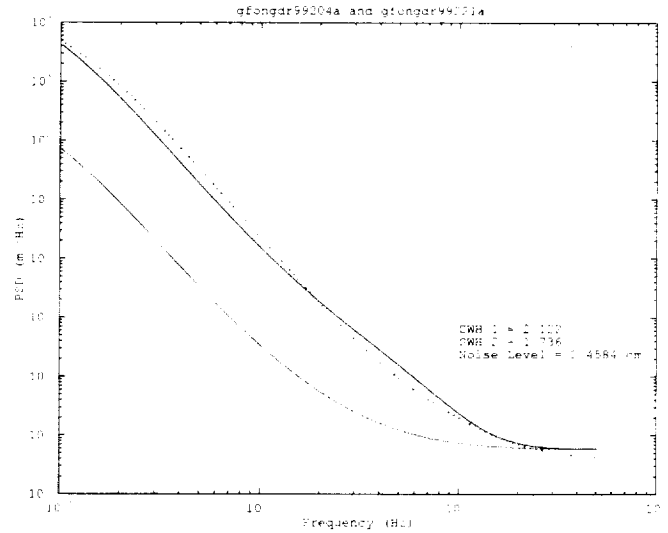
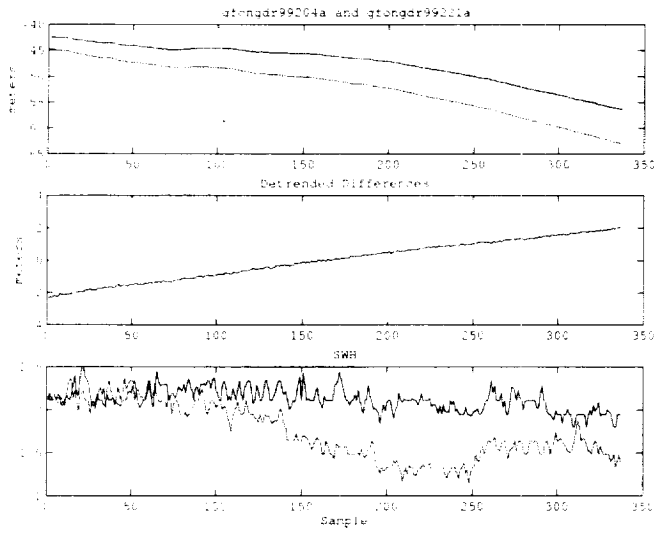


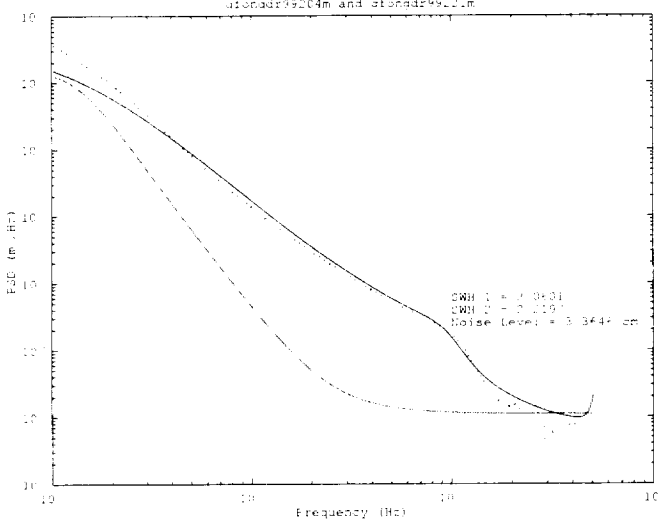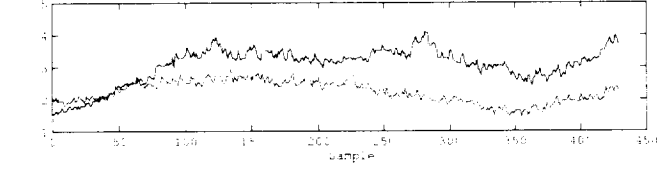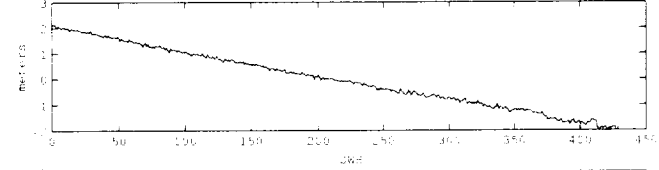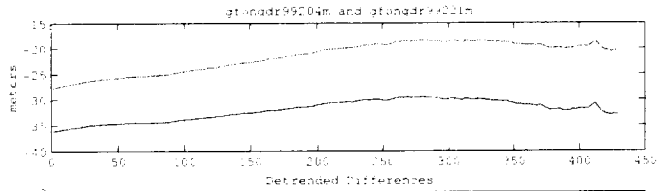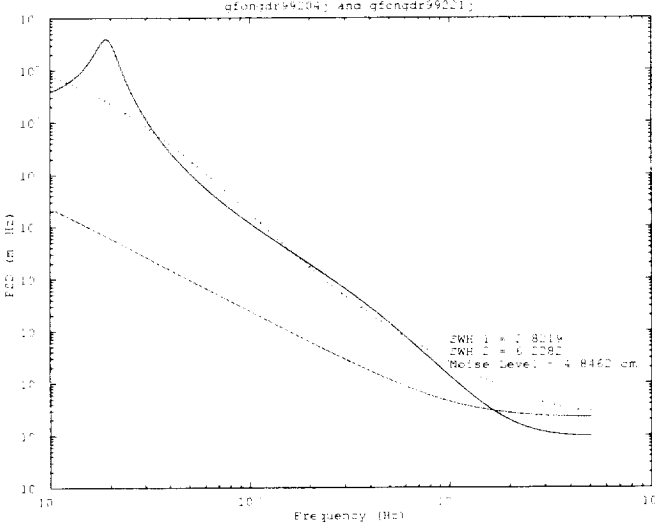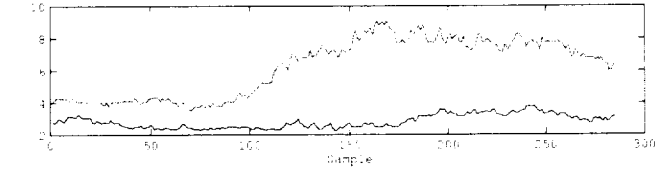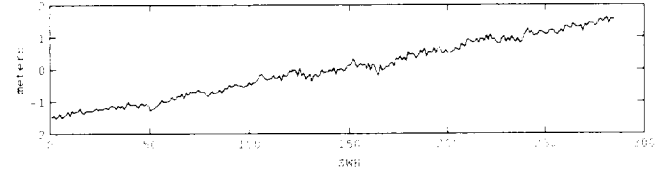
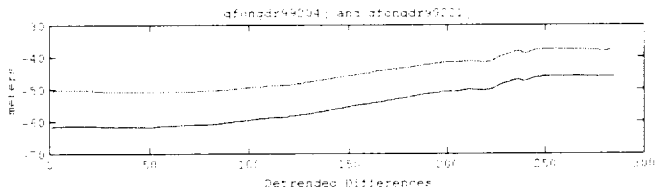
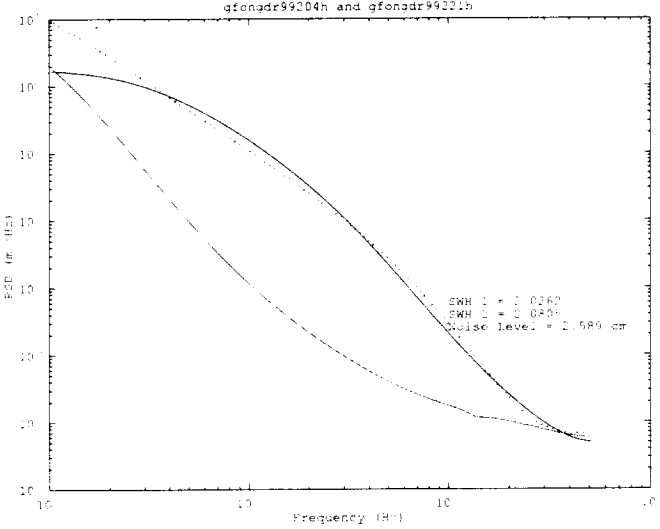
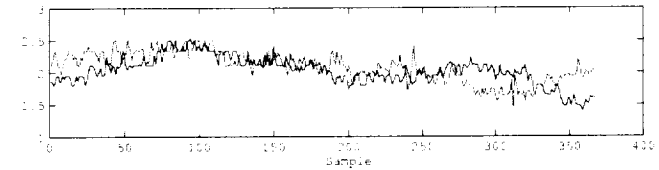
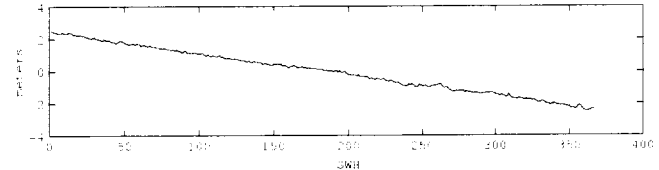
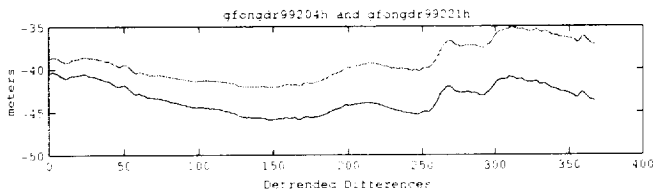


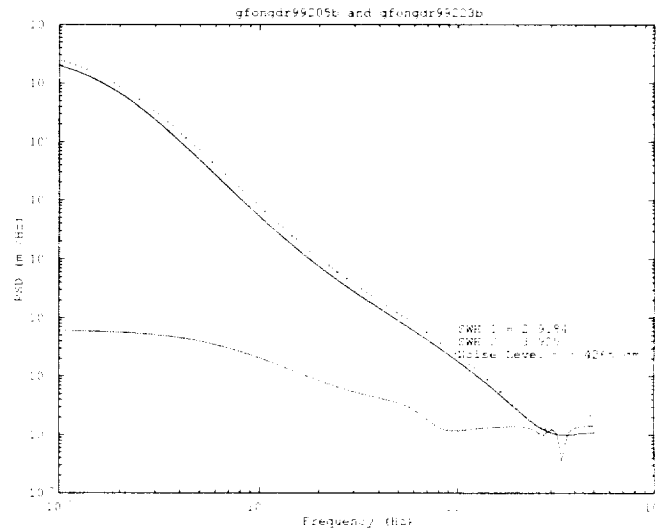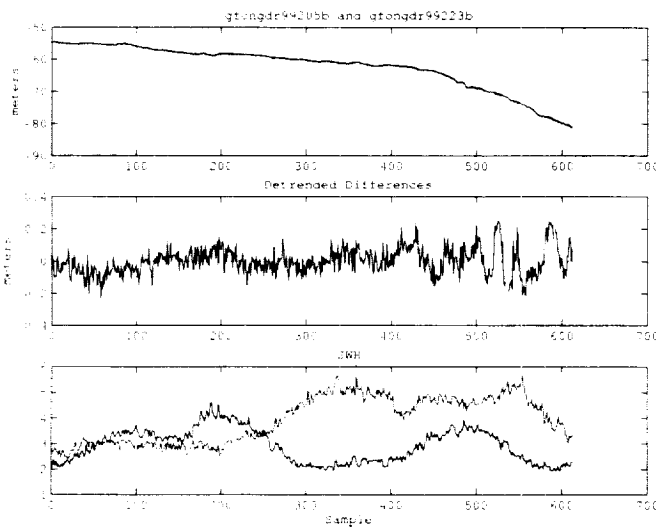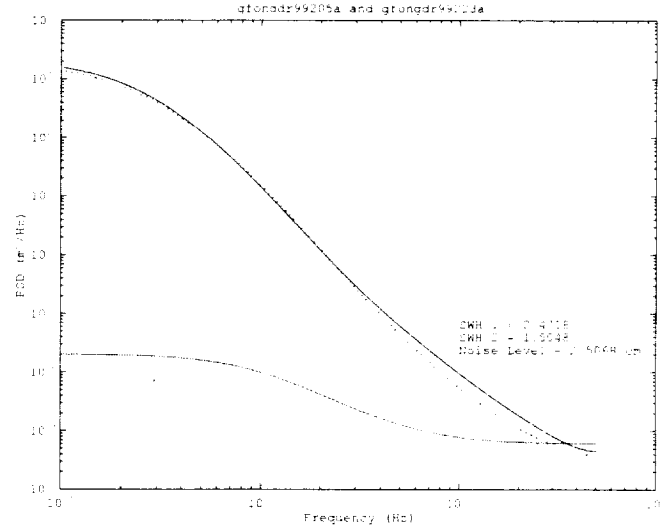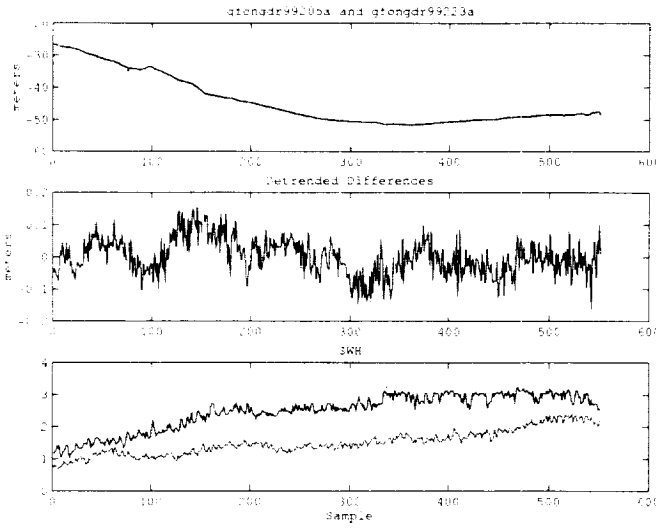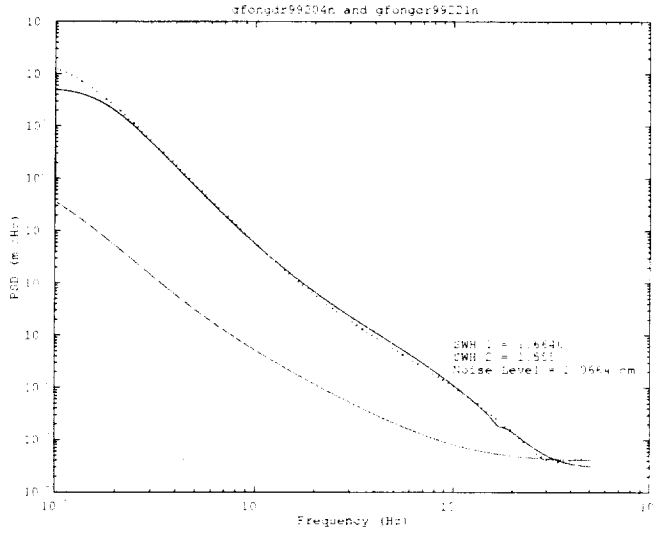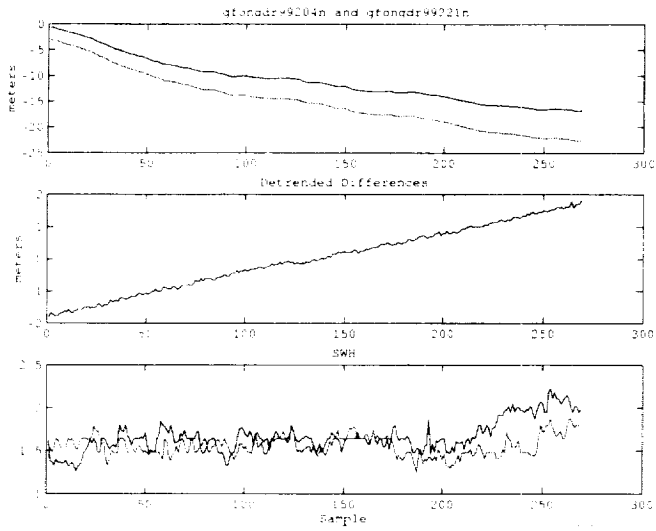

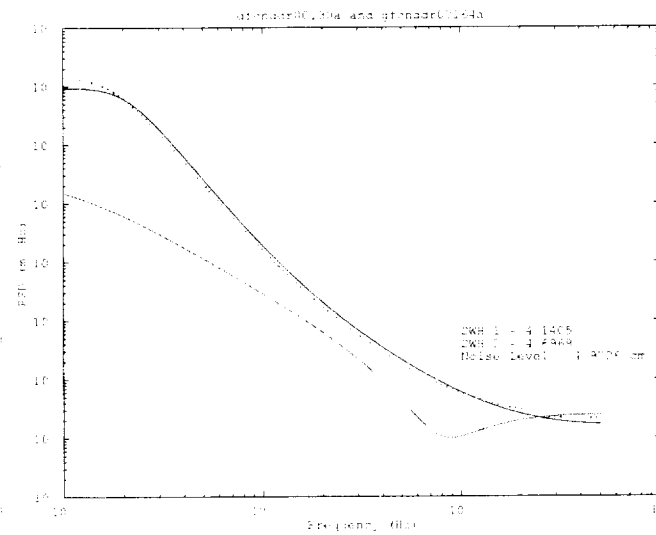
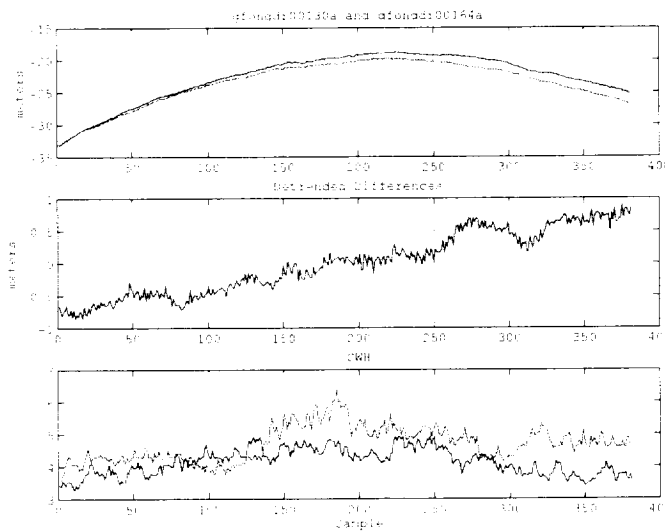
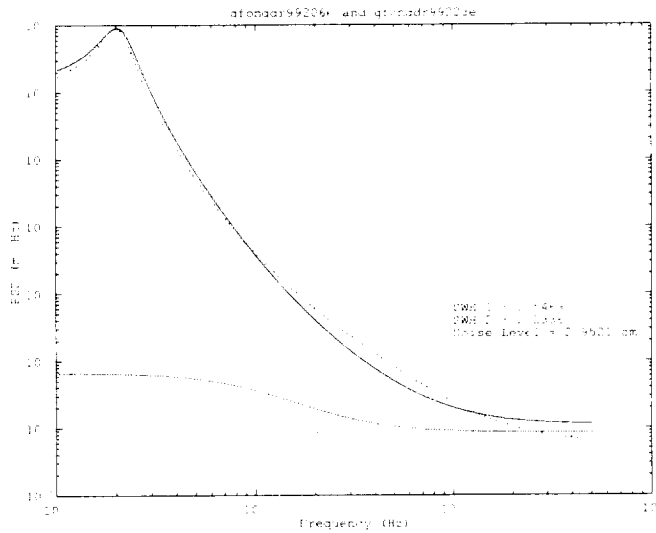
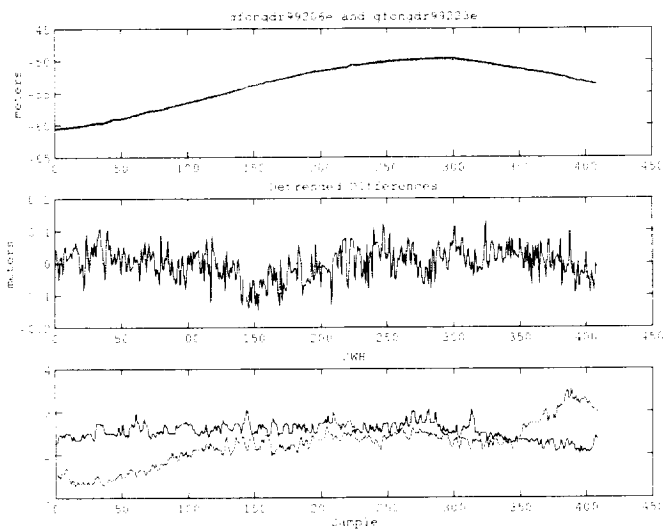
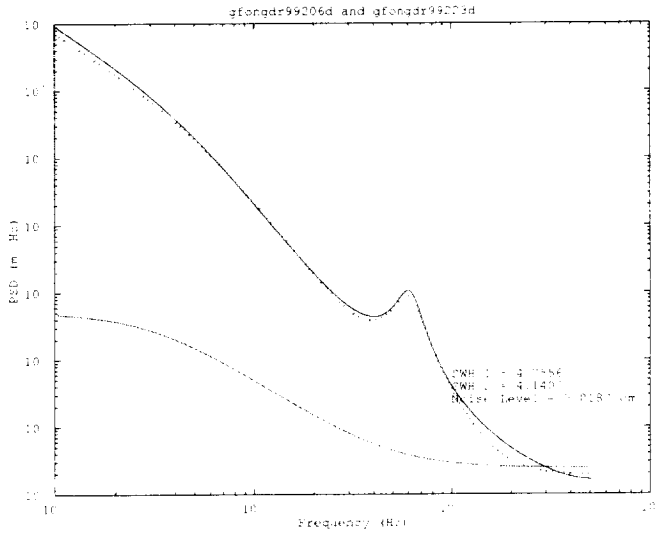
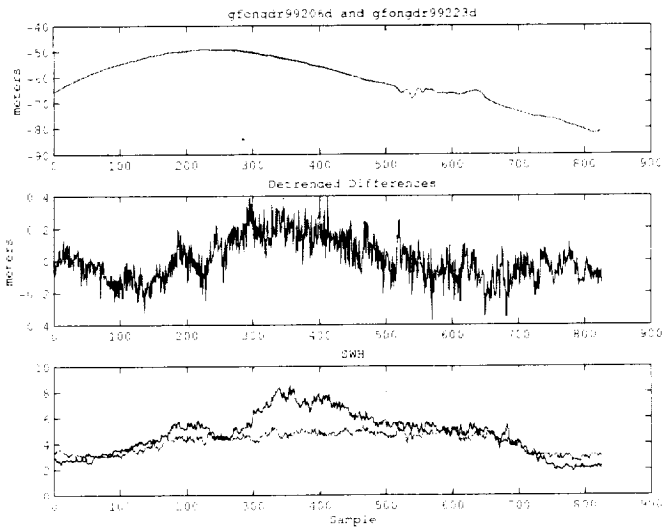


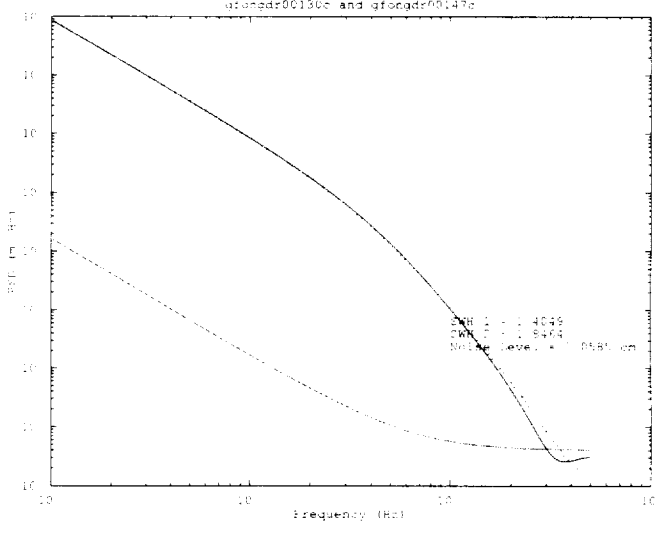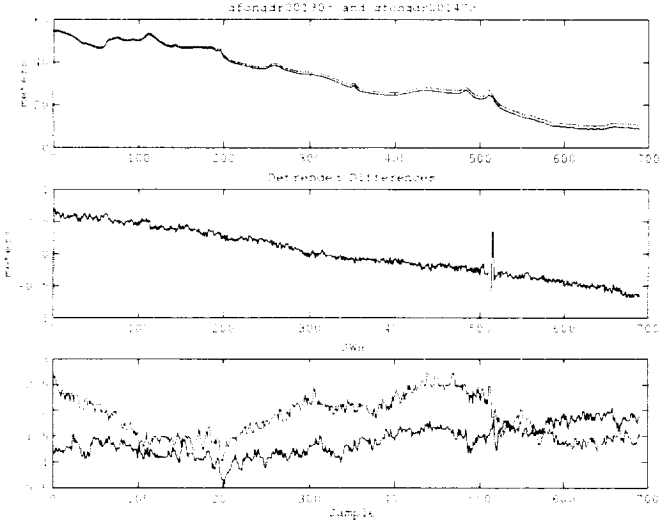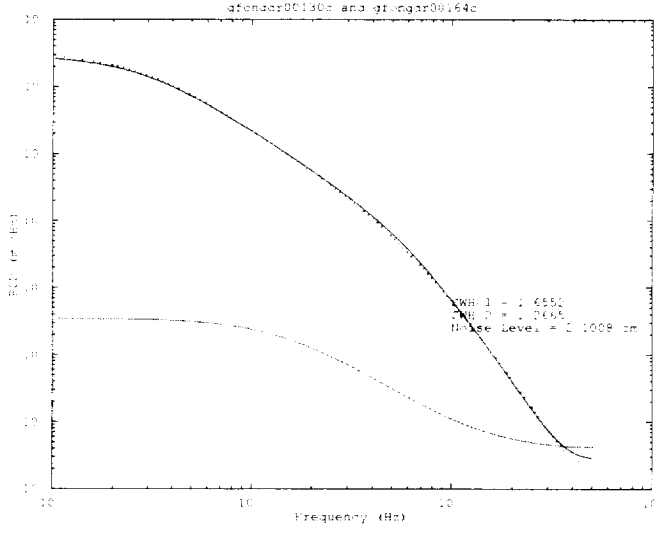
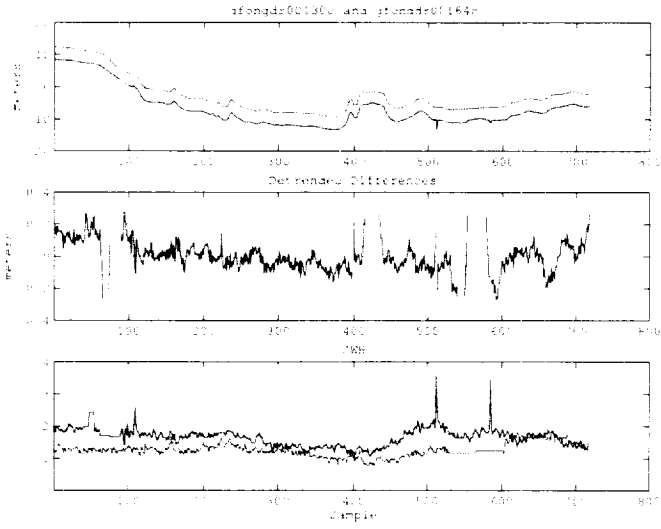
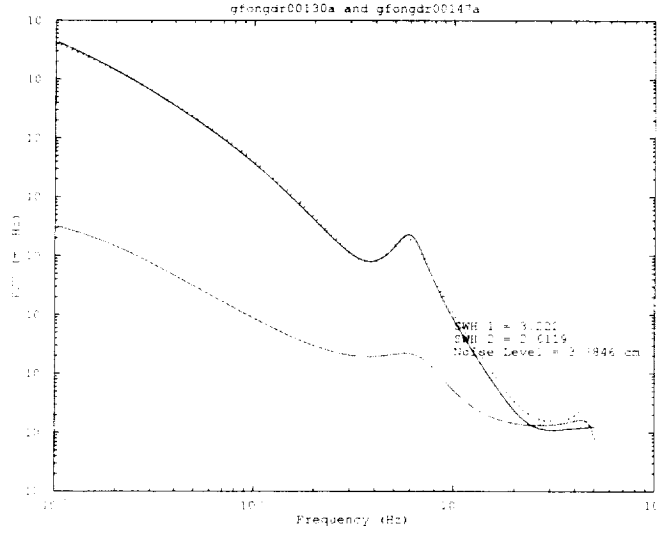
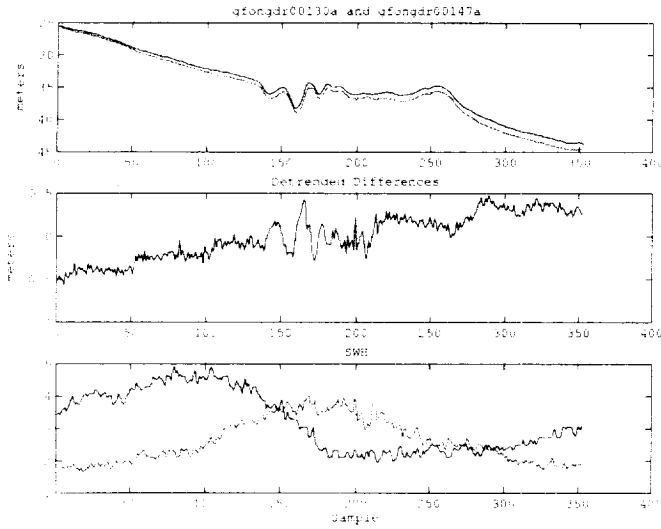


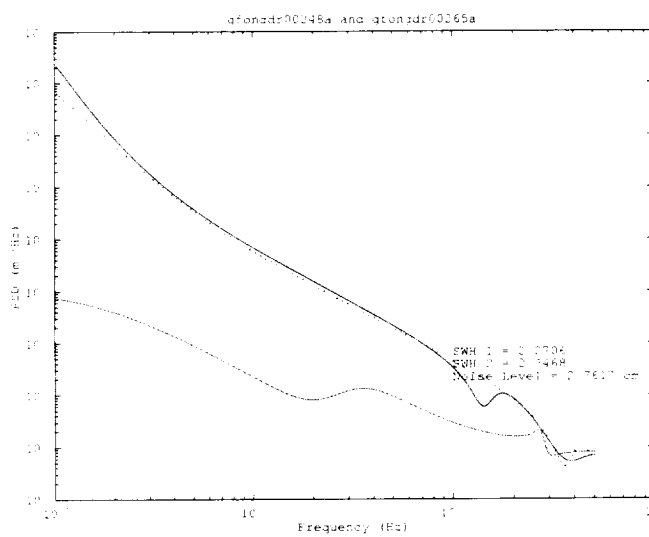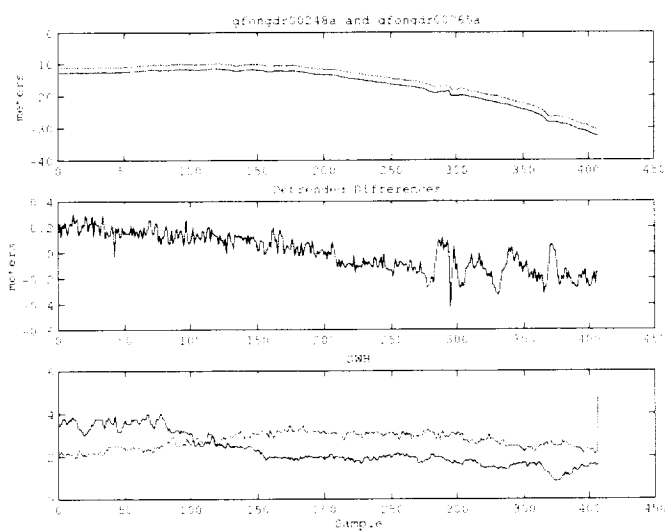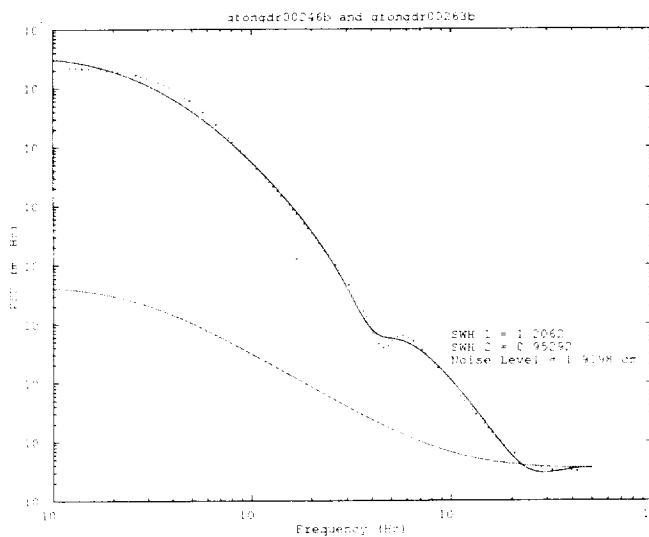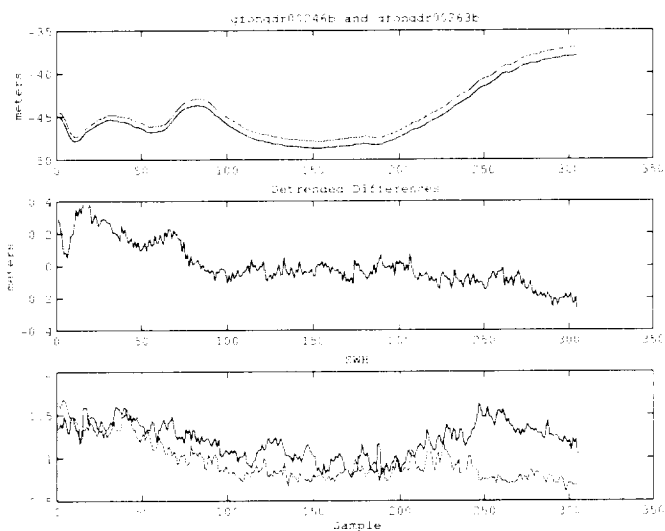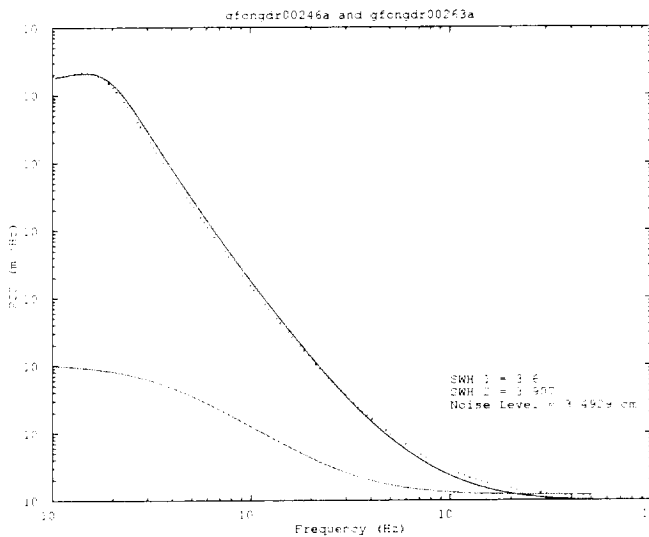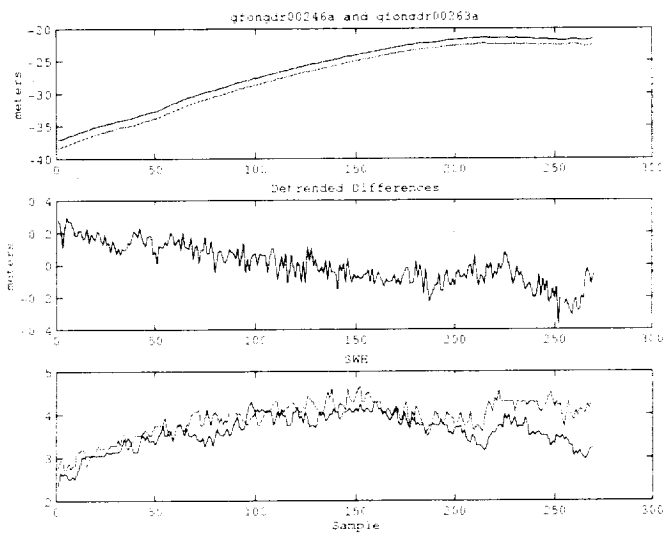

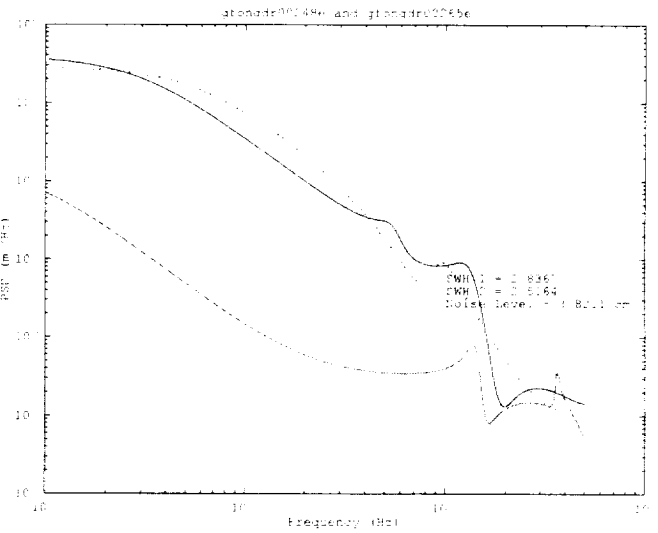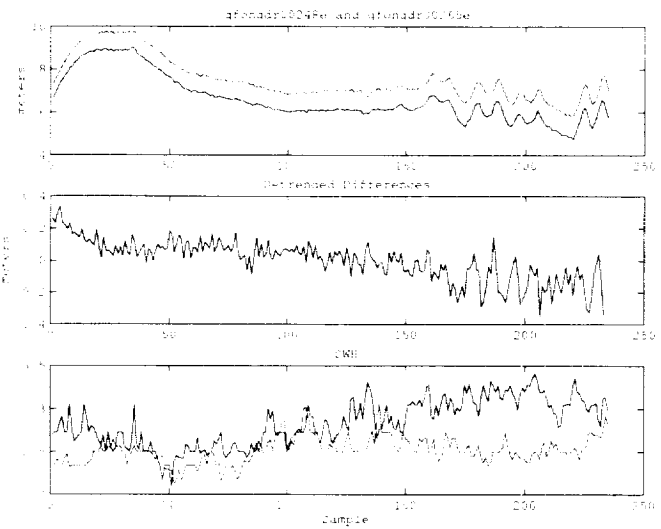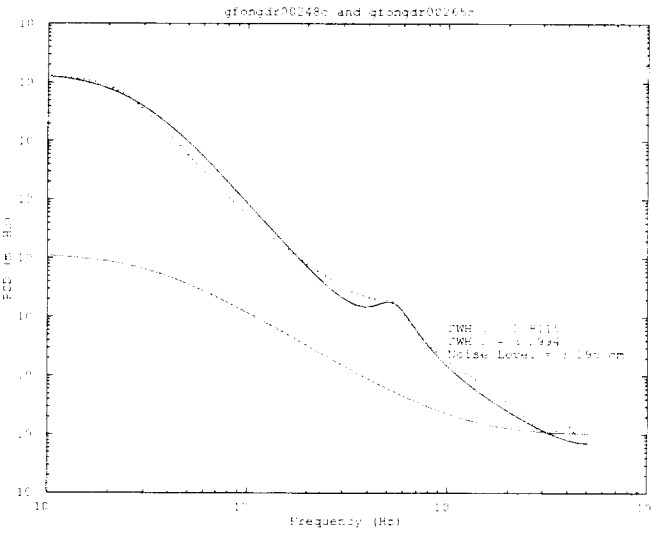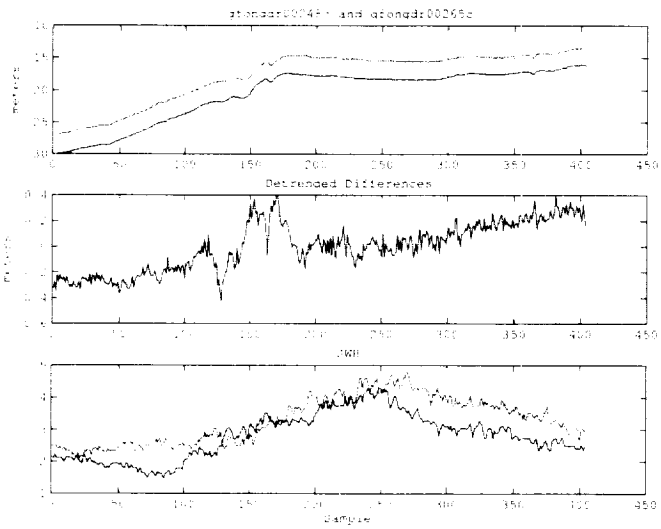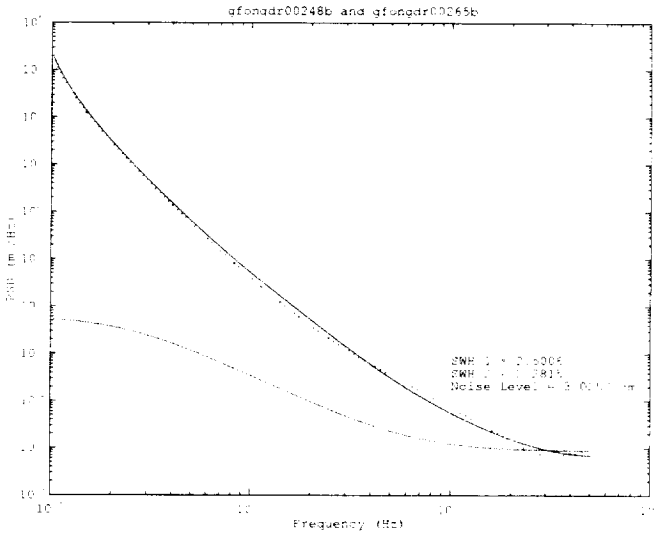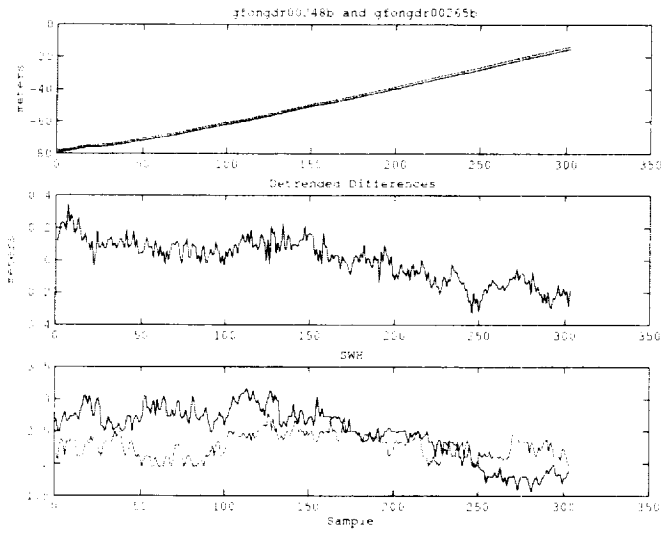



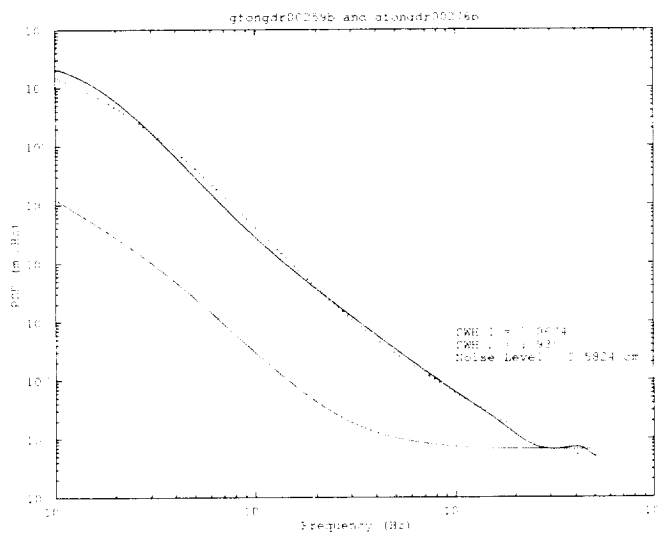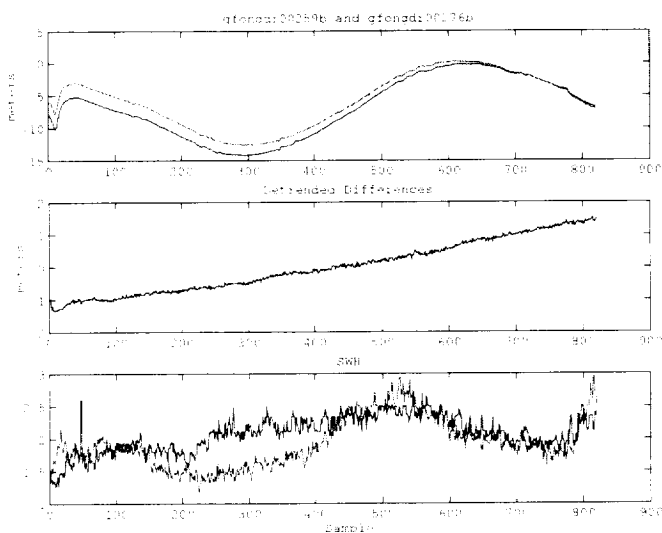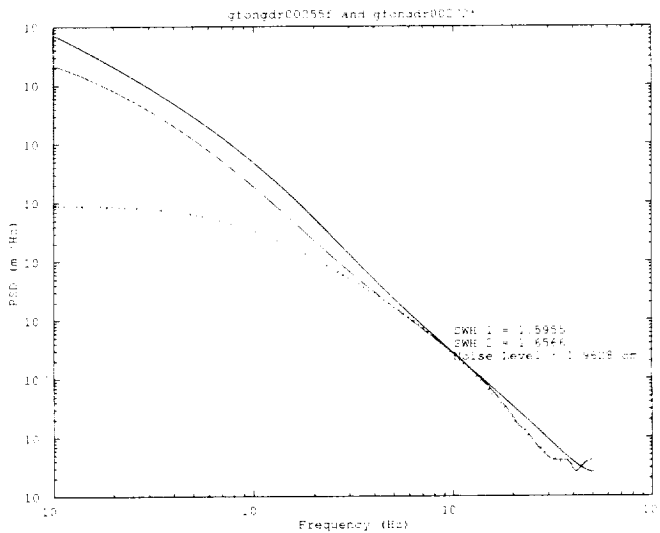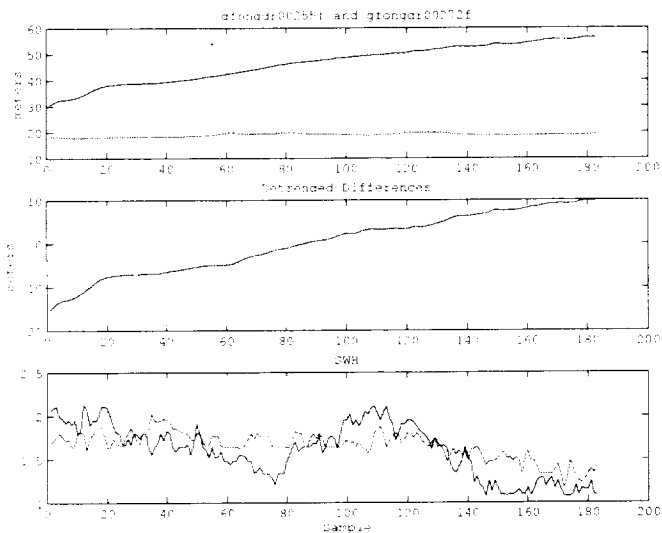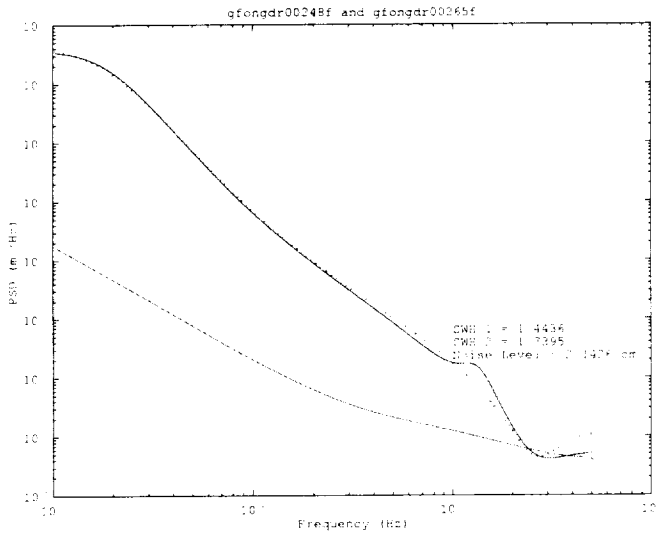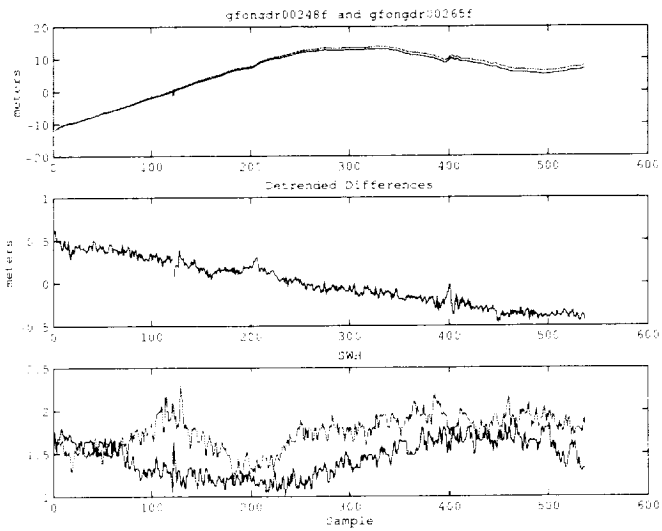

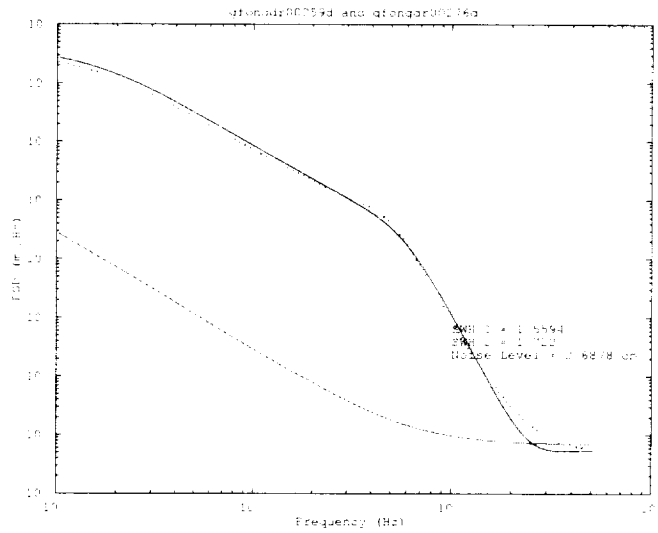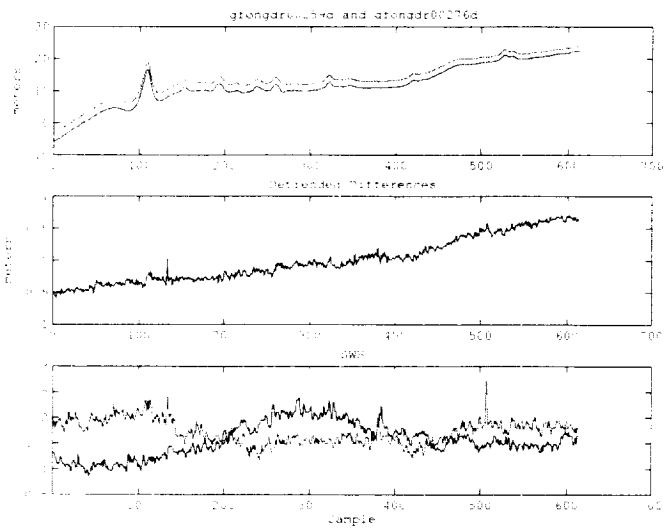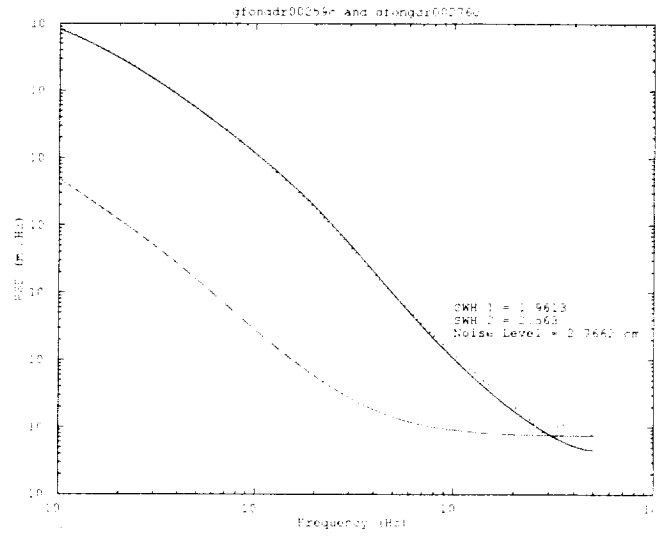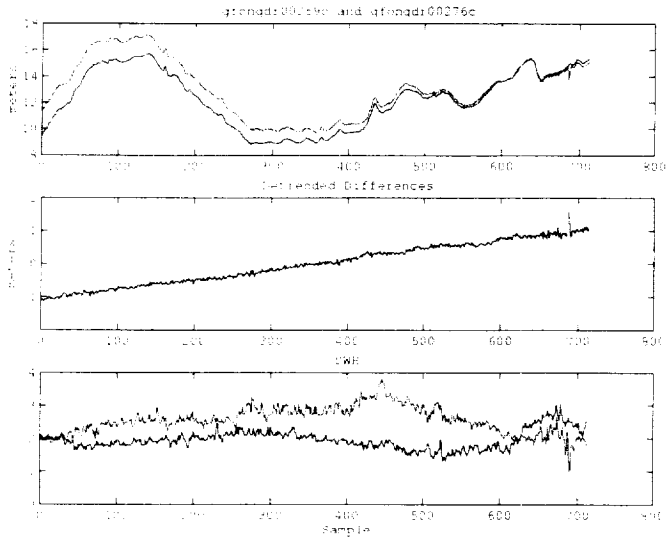

## REFERENCES

1. Brammer, R.F. and R.V. Sailor, Preliminary estimates of the resolution capability of the SEASAT radar altimeter, *Geophys. Res. Lett.*, vol. 7, 1980, p. 193.
2. Sailor, R.V. and K.M. Marks, Comparison of GEOS-3 and Seasat Resolution Capabilities, *Geophys. Res. Lett.*, vol. 13, July 1986, pp. 697-700.
3. Sailor, R.V. and A.R. LeSchack, Preliminary Determination of the Geosat Radar Altimeter Noise Spectrum, *Johns Hopkins APL Technical Digest*, vol. 8, no. 2, 1987, pp. 182-183.
4. LeSchack, A.R. and R.V. Sailor, A Preliminary Model for Geosat Altimeter Data Errors, *Geophys. Res. Lett.*, vol. 15, 1988, pp. 1203-1206.
5. Sailor, R.V. and M.L. Driscoll, Comparison of Noise Models and Resolution Capabilities for Satellite Radar Altimeters, *Proceedings Oceans 92 Conference*, Newport, RI, Oct. 1992, pp. 249-253.
6. Sailor, R.V., Signal Processing Techniques, Ch 8, pp. 147-185, in Vanicek, P. and Christou, N. (Eds.), *Geoid and its Geophysical Interpretation*, CRC Press, Boca Raton, FL, 1993.
7. White, J.V., Driscoll, M.L., and Sailor, R.V., A New Algorithm for Determining White Noise Levels in Satellite Altimeter Data, *EOS, Trans. Am. Geophys. Un.*, Vol. 77, November 1996, p. F17.
8. White, J.V., Driscoll, M.L., and Sailor, R.V., Validation of the EAF Algorithm for Determining White Noise Levels in Satellite Altimeter Data, *EOS, Trans. Am. Geophys. Un.*, Vol. 78, April 1997, p. S102.





# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

<b>1. AGENCY USE ONLY (Leave blank)</b>		<b>2. REPORT DATE</b> March 2001	<b>3. REPORT TYPE AND DATES COVERED</b> Technical Memorandum	
<b>4. TITLE AND SUBTITLE</b> GEOSAT Follow-on (GFO) Altimeter Document Series Vol. 2: GFO On-Orbit Altimeter Noise Assessment			<b>5. FUNDING NUMBERS</b> Code 972 972-622-47-36-78 NASA Ctr. #S-05106-G	
<b>6. AUTHOR(S)</b> Mavis L. Driscoll and Richard V. Sailor				
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS (ES)</b> Litton/TASC 55 Walkers Brook Drive Reading, MA 01867			<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b>  2001-02000-0	
<b>9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS (ES)</b> National Aeronautics and Space Administration Washington, DC 20546-0001			<b>10. SPONSORING / MONITORING AGENCY REPORT NUMBER</b> TM-2001-209984/Vol.2	
<b>11. SUPPLEMENTARY NOTES</b> Work supported under NASA Customer Contract #S-05106-G				
<b>12a. DISTRIBUTION / AVAILABILITY STATEMENT</b> Unclassified-Unlimited Subject Category: 61 Report available from the NASA Center for AeroSpace Information, 7121 Standard Drive, Hanover, MD 21076-1320. (301) 621-0390.			<b>12b. DISTRIBUTION CODE</b>	
<b>13. ABSTRACT (Maximum 200 words)</b>  The purpose of this report is to present the results of an analysis of the white noise in Geosat Follow-On (GFO) altimeter data. The Repeat-Track Method was used to determine noise level. This approach was developed at TASC and has been used to quantify noise levels of all previous satellite altimeter missions. The GFO altimeter was designed to have an RMS white noise level of less than 3.5 centimeters for significant wave height less than 2 meters. The results of the analysis presented here show that the GFO altimeter meets this specification.				
<b>14. SUBJECT TERMS</b> Geosat Follow-On, White Noise, Repeat-Track Method			<b>15. NUMBER OF PAGES</b> 21	
			<b>16. PRICE CODE</b>	
<b>17. SECURITY CLASSIFICATION OF REPORT</b> Unclassified	<b>18. SECURITY CLASSIFICATION OF THIS PAGE</b> Unclassified	<b>19. SECURITY CLASSIFICATION OF ABSTRACT</b> Unclassified	<b>20. LIMITATION OF ABSTRACT</b> UL	



