

ROUGH DRAFT – NOT FOR PUBLICATION

Swift Gamma-Ray Burst Explorer: Mission Design for Rapid, Accurate Location of Gamma-ray Bursts

David J. Bundas
Space Missions Branch, Code 594
NASA/Goddard Space Flight Center
Greenbelt, MD 20771
301-286-5573
David.J.Bundas@NASA.gov

TABLE of CONTENTS

Overview of the Swift Mission	1
Description of GRBs	3
Driving Requirements	3
Requirement Flowdown and Verification	4
X-ray GRB Position Requirement Flowdown and Verification	4
Burst Alert Message Timing Flowdown and Verification	4
Conclusion	7
References	8

SWIFT GAMMA-RAY BURST EXPLORER: MISSION DESIGN FOR RAPID, ACCURATE LOCATION OF GAMMA-RAY BURSTS

Abstract: The Swift Gamma-ray Burst Explorer is a NASA Mid-sized Explorer (MIDEX) with the primary mission of determining the origins of Gamma-Ray Bursts (GRBs). It will be the first mission to autonomously respond to newly-discovered GRBs and provide immediate follow-up with narrow field instruments capable of multi-wavelength (UV, Optical, X-ray) observations. The characteristics of GRBs that are the key mission design drivers, are their non-repeating and brief duration bursts of multi-wavelength photons. In addition, rapid notification of the location and characteristics of the GRBs to ground-and-space-based observatories drive the end-to-end data analysis and distribution requirements.

1.0 OVERVIEW OF THE SWIFT MISSION

Swift [1] was selected as a NASA MIDEX mission under the Explorer Program in October, 1999. The driving requirements on the mission include:

- Rapid ground notification of newly discovered GRBs (seconds from burst trigger to ground notification),
- Accurate GRB positions (arc minute to sub-arc second), and
- Multi-wavelength observations.

These requirements led to an autonomous observatory that is able to rapidly locate a GRB with the BAT instrument's large field-of-view, and slew the spacecraft to the GRB to bring the narrow field instruments onto the target. This autonomy required an on-orbit decision-making process that was captured in the Figure-of-Merit (FOM) software, which takes input from the instruments and spacecraft, and decides whether a newly discovered GRB warrants an interruption of the current observation. The FOM can then request a slew from the spacecraft, which calculates a safe slew path (avoiding Sun, Moon, and Earth), and rapidly re-points the observatory.

The GRB location accuracy requirements drove instrument and spacecraft design, as well as the design of the Optical Bench (OB), which maintains the co-alignment of the three instruments with respect to the attitude control system reference.

Organization: The Swift mission is managed by the GSFC, and includes an international team with key contributions from the UK and Italy. The spacecraft bus, provided by General

Dynamics C4 Systems (formerly Spectrum Astro, Inc.) was procured through a Rapid Spacecraft Development Office (RSDO) contract by the GSFC. There are three instruments: the Burst Alert Telescope (BAT) provided by the GSFC; the X-Ray Telescope (XRT) provided by a team led by the Pennsylvania State University (PSU); and the Ultra-Violet/Optical Telescope (UVOT), again managed by PSU. The Mission Operations Center (MOC) was developed by Omitron, Inc. under the direction of PSU. Science archiving and data analysis centers are located at the GSFC, in the UK and in Italy.

Observatory Overview: The Swift observatory consists of a spacecraft bus and a payload module, which includes 3 instruments mounted on a high stability optical bench. See Figure 1.0(a). The BAT instrument monitors 1/6 of the sky for GRBs, while the narrow field XRT and UVOT instruments carry out planned science observations. When BAT detects a burst the spacecraft slews the narrow field instruments (NFIs) onto the burst, so that they can collect data on the GRB afterglow immediately (within ~1 minute) after the burst. This rapid response is one of the key features of the Swift observatory, which will greatly enhance the information available on GRBs.

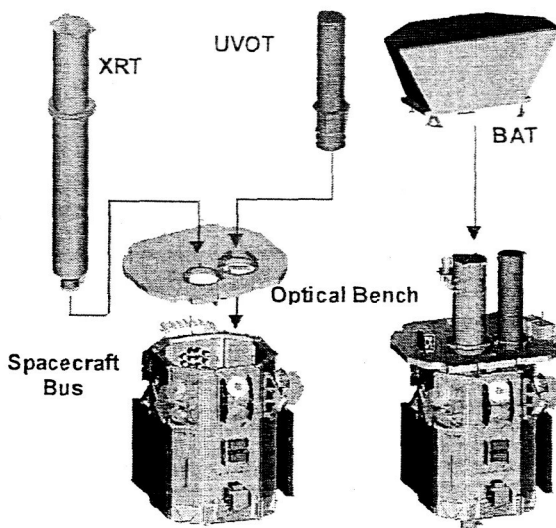


Figure 1.0(a): The Swift observatory was designed to allow parallel development paths for the spacecraft

Spacecraft Bus: The Swift S/C bus was based on Spectrum Astro's NASA RSDO Catalog SA-200 S/C series and provides a highly

SWIFT GAMMA-RAY BURST EXPLORER: MISSION DESIGN FOR RAPID, ACCURATE LOCATION OF GAMMA-RAY BURSTS

accurate and maneuverable platform for science observations.

The spacecraft bus consists of an 8 sided structure with electronics boxes mounted to the exterior. The interior of the structure is left open to accommodate the two NFIs. The payload module is mated to the spacecraft bus through 3 titanium flexures, providing a relatively stress free interface to the instrument module. Power is provided by two solar array wings which generate 2100 Watts, and an 80A-hr NiH₂ battery. Power is distributed unregulated to the payload. Omni-directional antenna coverage is provided by 2 antennas located on the instrument module sunshade, and 2 antennas mounted to deployable booms at the aft end of the spacecraft. Science data is stored during the orbit and downloaded over the ground station at Malindi, Kenya (2.2 Mbps). The burst alert messages as well as spacecraft emergency messages are relayed through the TDRSS Demand Access System (DAS), which allows continuous coverage for spacecraft events.

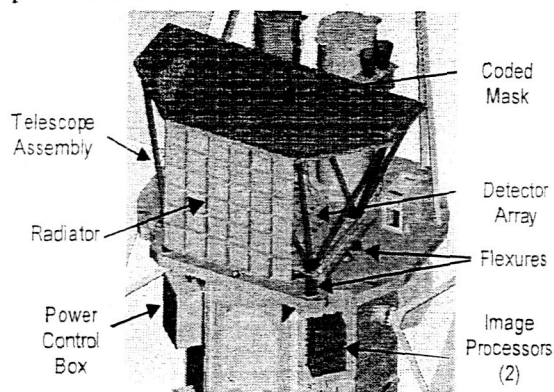


Figure 1.0(b): The BAT telescope assembly shown mounted on the spacecraft bus.

Burst Alert Telescope (BAT): The BAT [2] is a coded mask imager with a detector array comprised of 32,768 individual Cadmium-Zinc-Telluride detectors, each with a separate measurement chain. See Figure 1.0(b). Imaging is enabled by providing a mask of lead tiles forming a pseudo-random pattern in the field-of-view of the detectors. When the detector counts exceed a threshold level, image processing on board determines the burst location

by a Fourier transform imaging technique. Key instrument parameters are listed in Table 1.0(a).

Table 1.0(a): BAT parameters

Aperture: Coded Mask
Detecting Area: 5200 cm ²
Detector: CdZnTe
Detector Operation: Photon Counting
Field of View: 2.0 sr (partially coded)
Detection Elements: 256 modules of 128 elements
Detector Size: 4mm x 4mm x 2mm
Telescope PSF: 17 arcminutes
Location Accuracy: 1-4 arcminutes
Energy Range: 15-150 keV

X-ray Telescope (XRT): The XRT [3] is a 3.5m focal length Wolter-type X-ray telescope capable of centroiding to about an arc second over the range 0.2 to 10 keV. See Figure 1.0(c). A list of instrument parameters is given in Table 1.0(b). Managed by PSU, the instrument is a collaboration between PSU, University of Leicester (UL), and the Osservatorio Astronomico di Brera (OAB), Milano, Italy. UL was responsible for the focal plane camera assembly, and OAB provided the nested grazing incidence mirrors.

Ultra-Violet/Optical Telescope (UVOT): The UVOT provides the highest resolution images of the GRB afterglow. It is based on the XMM/OM instrument, and consists of a 30 cm aperture, Ritchey-Chretien optical system, a six-element filter wheel, and an image intensified CCD. See Figure 1.0(d). The system is capable of detecting objects as dim as magnitude 24. Internal sta-

Table 1.0(b): XRT Parameters

X-Ray Telescope
Telescope: Wolter I
Detector: XMM EPIC CCD
Effective Area: 135 cm ² at 1.5 keV
Detector Operation: Photon Counting, Integrated Imaging, and Rapid Timing
Field of View: 23.6 x 23.6 arcminutes
Detection Element: 600 x 600 pixels
Pixel Scale: 2.36 arcsec/pixel
Telescope PSF: 18 arcsec HPD at 1.5 keV
Location Accuracy: 3-5 arcseconds
Energy Range: 0.2-10 keV
Sensitivity: 2 x 10 ⁻¹⁴ ergs cm ⁻² s ⁻¹ in 104 sec

SWIFT GAMMA-RAY BURST EXPLORER: MISSION DESIGN FOR RAPID, ACCURATE LOCATION OF GAMMA-RAY BURSTS

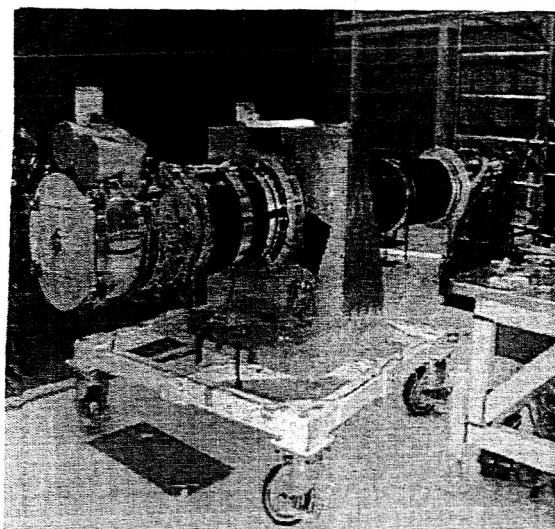


Figure 1.0(c): The XRT instrument shown during I&T at the GSFC. Note the Star Tracker simulators attached to the forward tube.

bility is provided by an iso-thermal design that provides a constant environment for the heater controlled optical metering structure. A listing of key instrument parameters is given in Table 1.0(c). UVOT was managed by PSU, and the telescope module was built by Mullard Space Science Laboratory (MSSL) of University College, London in the UK.

1.1 Description of GRBs

GRBs were detected by the Vela4 satellite in 1967[x], although the announcement of their discovery did not occur until 1973. With this discovery, some of the basic characteristics of

Table 1.0(c): UVOT Parameters

Ultraviolet/Optical Telescope
Telescope: Modified Ritchey-Chretien
Aperture: 30 cm diameter
F-number: 12.7
Detector: Intensified CCD
Detector Operation: Photon Counting
Field of View: 17 x 17 arcminutes
Detection Element: 2048 x 2048 pixels
Telescope PSF: 0.9 arcsec at 350 nm
Location Accuracy: 0.3 arcseconds
Wavelength Range: 170 nm - 650 nm
Colors: 6
Spectral Resolution (Grisms): $I/DI \sim 200$ at 400 nm
Sensitivity: $B = 24$ in white light in 1000 sec
Pixel Scale: 0.48 srseconds
Bright Limit: $mv = 7$ mag

GRBs were revealed. First, was their short-lived nature, producing gamma-ray flashes that last for only seconds before decaying into the background. Another characteristic is their random distribution in the sky, indicating great distances and extremely powerful explosions. In recent years it has been discovered that the brief, initial burst of gamma rays is followed by a multi-wavelength afterglow that may be detectable for weeks afterward.

1.2 Driving Requirements

The Swift challenge of studying these GRBs is to provide for the rapid detection and localiza-

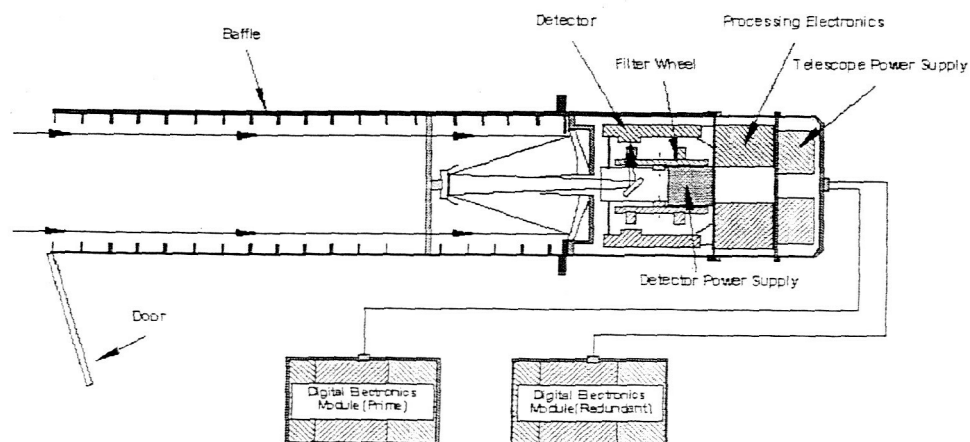


Figure 1.0(d): UVOT block diagram

SWIFT GAMMA-RAY BURST EXPLORER: MISSION DESIGN FOR RAPID, ACCURATE LOCATION OF GAMMA-RAY BURSTS

tion of the GRB, followed up with multi-wave-length observations of the afterglow. Figure 1.2(b) describes the flowdown of key science objectives into system requirements. The driving requirements on the system design are to:


- Report coarse GRB position within 10 arcmin in 30 seconds
- Report X-ray GRB position within 5 arc seconds within 100 seconds
- Report UV/Optical position within 0.3 arc seconds within 270 seconds

1.2.1 Requirement Flowdown and Verification.

The initial burst detection by BAT must be accurate enough to allow the burst to fall within the field of view of the NFIs after a slew of up to 100 degrees. The coarse GRB position requirement error budget is shown in Figure . The first tier of the error budget covers BAT internal alignment stability and centroiding capability, as well as spacecraft alignment stability and attitude knowledge accuracy. BAT internal alignment stability was verified by a combination of tests and analyses, and was within the allocations. Figure 1.2(a) gives the original allocation as well as the predictions for on-orbit performance. Vibration and thermal testing verified the ability of the BAT structure

to survive the launch and orbital environments without suffering untoward alignment shifts.

One time alignment shifts due to launch and ground handling events will be calibrated out of the system on-orbit. This was backed up with a structural/thermal analysis [ref: analysis report] that showed alignment was maintained through the predicted orbital thermal environments. The BAT centroiding error was both tested and simulated to verify that it meets requirements. A radioactive source was suspended above the BAT instrument and the resulting image's point spread function was determined to be less than an arc minute. A complete simulation of the BAT instrument was developed to provide a way to test the software that converts detector counts into images of the sky. This simulation was run with a 1000 simulated bursts covering the expected intensities and energy distributions expected on orbit. The results showed that 998 bursts were located to within 4 arc minutes. More than half of the simulated bursts were located to within 1.2 arc minutes accuracy. ACS accuracy and platform stability requirements are driven by the much tighter NFI requirements, and therefore, easily meet the coarse GRB position error budget allocations.

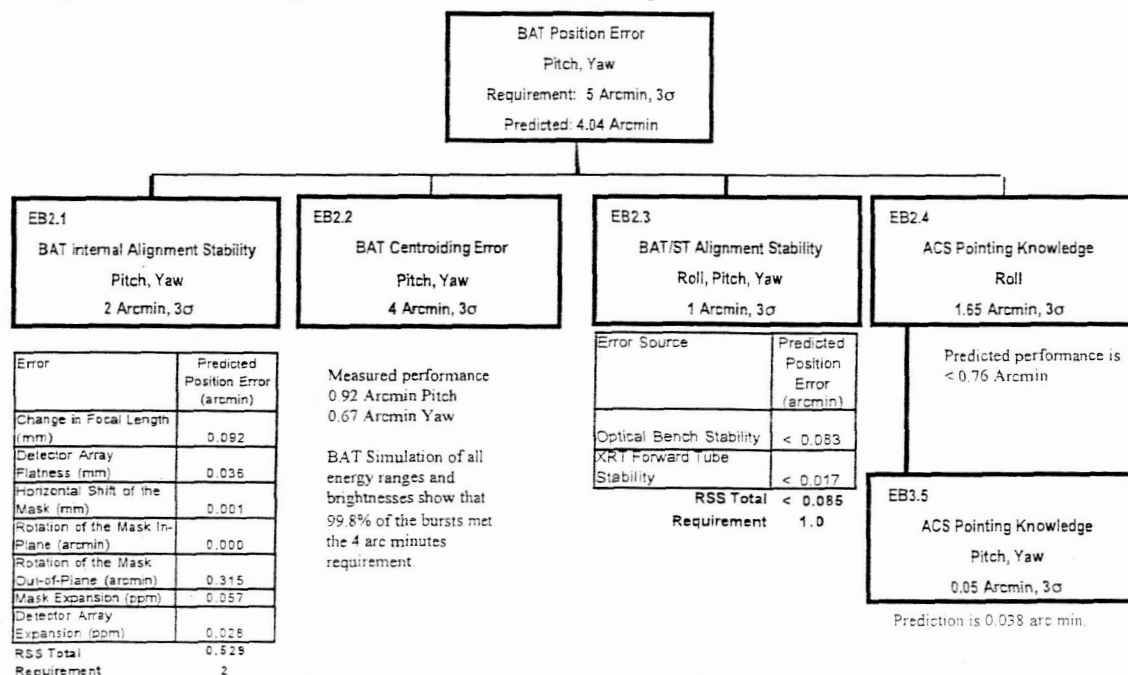

*On-orbit Calibration Removes Ground Alignment, Launch Errors

Figure 1.2(a): BAT GRB Position Error Budget

SWIFT GAMMA-RAY BURST EXPLORER: MISSION DESIGN FOR RAPID, ACCURATE LOCATION OF GAMMA-RAY BURSTS

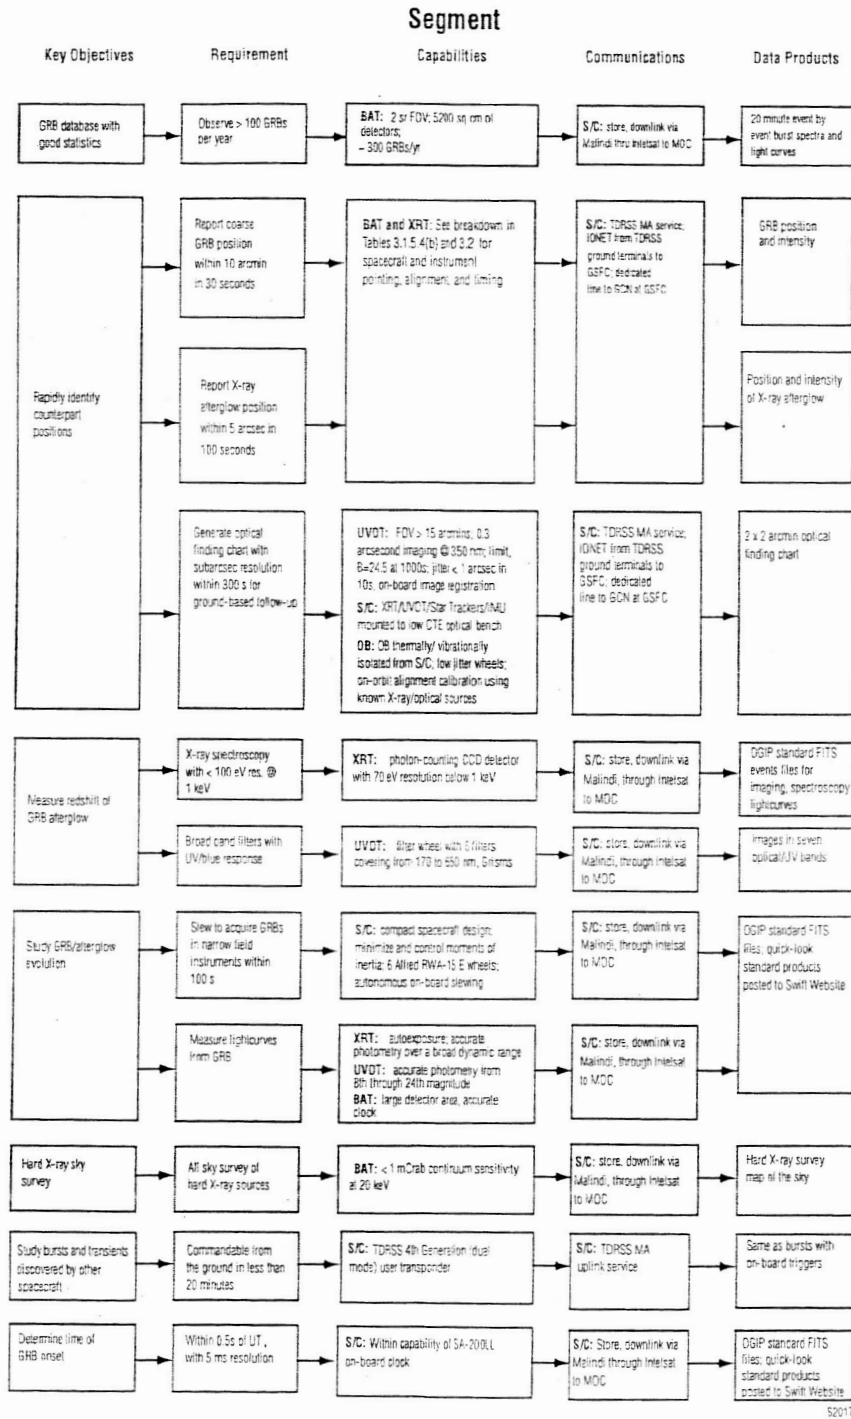


Figure 1.2(b): GRB MIIDEX

SWIFT GAMMA-RAY BURST EXPLORER: MISSION DESIGN FOR RAPID, ACCURATE LOCATION OF GAMMA-RAY BURSTS

1.2.2 X-ray GRB Position Requirement Flowdown and Verification.

The XRT must return a GRB position that is accurate to within 5 arc seconds for follow-up by ground observers. The requirement flows into allocations for XRT centroiding error, XRT and platform mechanical stability, and ACS pointing accuracy, as shown in Figure 1.2(c). The XRT design includes an active thermal control system and a low CTE graphic epoxy tube that forms the metering structure between the grazing incidence mirror and the cooled CCD. XRT Centroiding error was evaluated during instrument calibration testing at the Panter X-ray X-ray beam facility in Germany, in the fall of 2003.

The spacecraft ACS system provides accurate attitude knowledge to the instruments once settled on target.

On-orbit boresight calibration between the XRT and the Star Trackers will make use of the most benign on-orbit conditions, and a higher data rate from the star trackers.

An additional feature of the XRT system design is the telescope alignment monitor, which can measure the misalignment between the focal plane, the instrument interface, and the star tracker baseplate. The last element of the error budget was introduced because the

design of the telescope includes a heat pipe, harnessing, and thermal blanket closeouts that could affect pointing. These items introduce loads into the unsupported aft end of the telescope, and each one was treated carefully to ensure minimal impact. The heat pipe design included flexure mounts that prevent lateral loading. A mockup of the flight harness was used to test its compliance to relative motion between the telescope and the harness support plate on the spacecraft. Thermal blankets were carefully closed out by overlapping sections such that the blankets could not constrain motion of the telescope. The final results of the pointing performance will require the completion of on-orbit calibration between the boresight of XRT and the star trackers. This is planned during the early orbit checkout period.

1.2.3 Burst Alert Message Timing Flowdown and Verification.

The rapid notification of the science community upon discovery of new GRBs is a critical science requirement. The BAT, XRT, and UVOT GRB position notices must be available at the Gamma ray burst Coordinates Network (GCN) within 30, 100, and 270 seconds, respectively of the initial BAT-detected GRB. What distinguishes Swift from other observato-

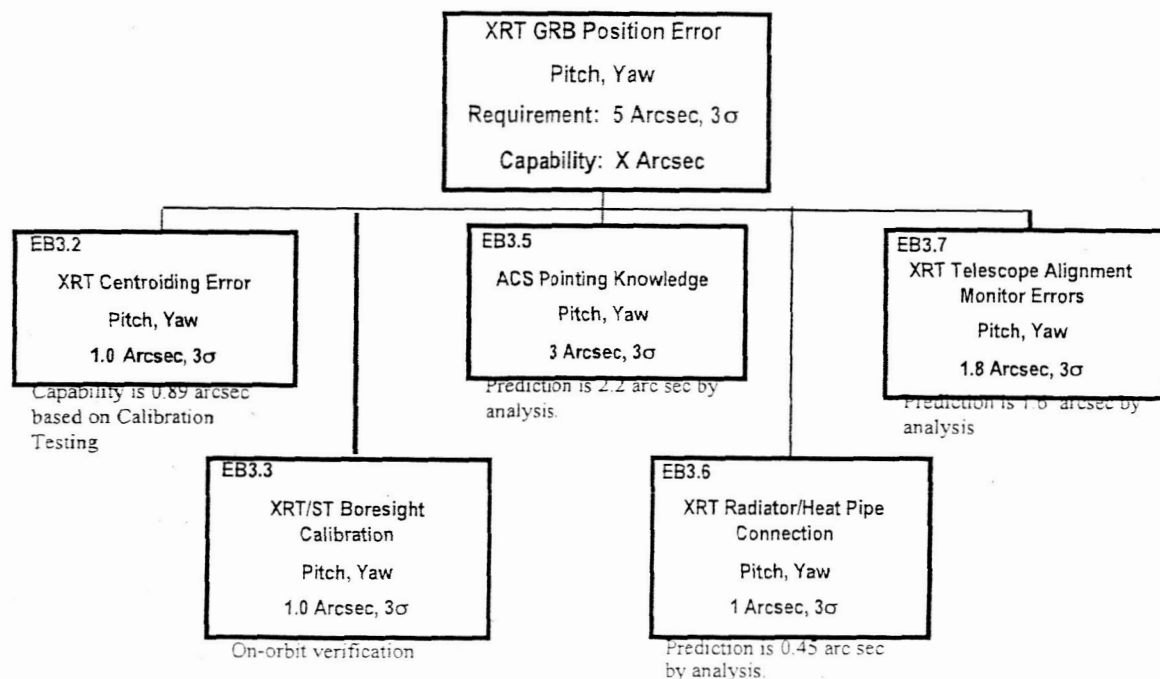


Figure 1.2(c): XRT GRB Position Error Budget

SWIFT GAMMA-RAY BURST EXPLORER: MISSION DESIGN FOR RAPID, ACCURATE LOCATION OF GAMMA-RAY BURSTS

ries is its ability to autonomously re-target based on in-orbit discoveries. Current missions take hours or days to re-point, much too long to capture the dying GRB afterglow. Table 1.2(a) gives the allocation of these timing requirements to the various Swift elements. Across the top of the table are the burst alert messages that are transmitted by Swift on discovery of a GRB. The rows of the table correspond to the individual delays in getting the burst alert message to the ground. These include instrument and FOM processing time, slewing time, and communications delays. Each of the time requirements starts with the burst being detected by the BAT instrument, and ends with a message leaving the GCN notifying other ground and orbiting observatories that a GRB has been discovered. A breakdown of the timing requirements is presented in Table, showing how each of the steps in the GRB detection and notification process was broken down to the level where it could be allocated to a single mission element.

To achieve these rapid X-ray and UV/Optical afterglow observations requires a highly autonomous observatory that has to evaluate whether a burst is scientifically interesting; plan a slew which avoids the earth, sun, and moon; rapidly and accurately settle on the newly-discovered

burst; and provide the ground with information on the bursts so that follow-up observations are possible. Two key aspects of the autonomous design were its simple interfaces and observatory safety handled by the spacecraft command and data handling system. The simple interface allows messaging and calculations to be kept to a minimum, and permits subsystem level testing to verify interfaces. The other key to the design is that the spacecraft is responsible for maintaining the safety of the observatory. The NFIs could be damaged by slews across bright objects, so this drove the requirement for on-board bright object avoidance during slews. Several issues were resolved satisfactorily during the development process, including slew speed limitations to give enough time to recover from a C&DH reboot, impact of mass growth on slew speed, and added slew time to account for additional roll for slews when crossing the ecliptic plane.

1.3 Conclusions

The driving requirements and design of the Swift mission have been described. The flow-down of requirements into the elements of the mission through the pointing and message timing error budgets defined the challenge for the team. The end-to-end verification process employed gives the team confidence that the mission will

Table 1.2(a): Message Timing Budget

SRD source	GRB Alert	BAT Position	FoM Will/Will Not Observe	S/C Will/Will Not Observe	XRT Position	BAT Light-curve	UVOT Finding Chart	XRT Spectrum	XRT Image	Flowdown
Data Product =>										
Message Size (in Bytes)	≤ 38	≤ 92	≤ 58	≤ 68	≤ 60	≤ 2130	≤ 2000	≤ 2200	≤ 680	Instruments
Estimated No. of Telemetry Packets	1	1	1	1	1	3	3	3	1	(info only)
Estimated No. of Telemetry Frames	1	1	1	1	1	21	19	21	7	(info only)
All Time Based Off Burst Trigger										
BAT GRB Location/FoM Slew Request (s)		6.0	6.2	6.2	6.2	6.2	6.2	6.2	6.2	BAT/FoM
BAT/FoM to C&DH, ACS Slew Check & Request to Safe UVOT (s)	0.4	0.4	0.4	0.8	1.0	1.0	1.0	1.0	1.0	S/C
UVOT Safing (s)					1.0	1.0	1.0	1.0	1.0	UVOT
UVOT Reply to C&DH (s)					0.4	0.4	0.4	0.4	0.4	S/C
Spacecraft slew/settle (s)					75.0		75.0	75.0	75.0	S/C
Instrument Processing (s)			2.0	2.0	5.0	115.0	150.0	200.0	7.0	Instruments
Instrument to C&DH (s)					0.3	0.5	1.4	0.8	0.4	S/C
C&DH to Transponder (s)	0.4	0.4	0.4	0.4	0.4	0.8	0.8	0.8	0.5	S/C
S/C to TDRSS Initial Delay (s)	9.0	4.0	3.0	4.0	0.0	0.0	0.0	0.0	0.0	S/C
Swift to WSC @ 1 kbps (s)	2.3	2.3	2.3	2.3	2.3	22.8	20.8	22.8	8.5	S/C
WSC processing (s)	3	3	3	3	3	3	3	3	3	Ground Systems
WSC to GCN (s)	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	Ground Systems
GCN Processing (s)	0.1	0.1	0.1	0.1	0.1	0.2	0.5	0.5	0.5	GCN
Allocated Total Times (s)	15.5	16.5	17.7	19.1	95.0	151.2	260.4	311.8	103.8	
End-to-End Timing Requirement (s)	20	20	70	70	100	200	270	1200	1200	
Margin (Time)	4.5	3.5	52.3	50.9	3.0	48.8	9.6	888.2	1096.2	
Margin (%)	29%	21%	295%	266%	3%	32%	4%	285%	1056%	

SWIFT GAMMA-RAY BURST EXPLORER: MISSION DESIGN FOR RAPID,
ACCURATE LOCATION OF GAMMA-RAY BURSTS

meet its requirements and science objectives as defined at the outset of the program.

1.4 References

- ¹ Neil Gehrels, "The Swift g-ray burst mission", *New Astronomy Review*, v48:431-435, 2004 April
- ² Scott Barthelmy, "Burst Alert Telescope (BAT) on the Swift MIDEX mission", *Proc. SPIE Vol. 4140*, p. 50-63, X-Ray and Gamma-Ray Instrumentation for Astronomy XI, Kathryn A. Flanagan; Oswald H. Siegmund; Eds., 2000 December
- ³ D. N. Burrows, "The Swift X-ray Telescope: Catching X-ray afterglows of GRBs on the fly!", *American Astronomical Society Meeting*, v202, 2003 May
- ⁴ P. W. A. Roming, S. D. Hunsberger, J. A. Nousek, K. O. Mason, and A. A. Breeveld, "The Swift Ultra-Violet/Optical Telescope", *American Astronomical Society Meeting*, v202, 2003 May
- ⁵ John C. Ong and Mike Rackley, "AUTONOMOUS OPERATIONS FOR THE SWIFT MISSION", *SpaceOps 2002 in Houston, TX*, October 9-12, 2002