

MicroPPT-Based Secondary/Backup ACS for a 160-m, 450-kg Solar Sail Spacecraft

Bong Wie*

Arizona State University, Tempe, AZ 85287

and

David Murphy†

ATK Space Systems, Goleta, CA 93117

Solar sail tip-mounted, lightweight pulsed plasma thrusters (PPTs) are proposed for a secondary (or backup) attitude control system (ACS) of a 160-m, 450-kg solar sail spacecraft of the Solar Polar Imager (SPI) mission. A propellantless primary ACS of the SPI sailcraft employs trim control masses running along mast lanyards for pitch/yaw control together with roll stabilizer bars at the mast tips for quadrant tilt (roll) control. The robustness of such a propellantless primary ACS would be further enhanced by a secondary ACS utilizing tip-mounted, lightweight PPTs. The microPPT-based ACS is intended mainly for attitude recovery maneuvers from various off-nominal conditions that cannot be reliably handled by the propellantless primary ACS. However, it can also be employed for: i) the checkout or standby mode prior to and during sail deployment, ii) the post-deployment transition mode (prior to the propellantless primary ACS mode operation), iii) the solar sailing cruise mode of a "trimmed" sailcraft, and iv) the spin-stabilized, sun-pointing, safe mode. Although a conventional bus ACS is required for the SPI mission as the sail is jettisoned at the start of its science mission phase, the microPPT-based ACS option promises greater redundancy and robustness for the SPI mission. For other sailing missions, where the sail is never jettisoned, this secondary ACS provides a lower-cost, lower-mass propulsion for deployment control and greater redundancy than any traditional reaction-jet control system. This paper presents an overview of the state-of-the-art microPPT technology, the design requirements of microPPTs for solar sail attitude control, and the preliminary ACS design and simulation results.

I. Introduction

Solar sails are envisioned as a propellantless, high-energy propulsion system for future space exploration missions. NASA's Sun-Earth Connections (SEC) solar sail roadmap missions¹⁻³ include the Solar Polar Imager (SPI) mission, L1-Diamond, Particle Acceleration Solar Orbiter (PASO), and Interstellar Probe. In particular, the SPI mission is currently being further explored by NASA/JPL, and it is now called the SPI Vision mission.⁴ Our current understanding of the Sun is limited by a lack of observations of its polar regions. The SPI mission utilizes a large solar sail to place a spacecraft in a 0.48-AU circular orbit with an inclination of 75 deg. Viewing of the polar regions of the Sun provides a unique opportunity to more fully investigate the structure and dynamics of its interior, the generation of solar magnetic fields, the origin of the solar cycle, the causes of solar activity, and the structure and dynamics of the corona.

The proposed SPI mission scenario consists of the initial cruise phase (1.6 yr) to a 0.48-AU circular orbit, the cranking orbit phase (5 yr), and the science mission phase (2 yr). A 160-m, 450-kg solar sail spacecraft is considered for such a solar sailing mission.⁴ A Delta II launch vehicle is able to inject the 450-kg SPI spacecraft into an earth escaping orbit with $C_3 = 0.25 \text{ km}^2/\text{s}^2$, and then the sail is to be deployed. The SPI

*Professor, Dept. of Mechanical & Aerospace Engineering, bong.wie@asu.edu, (480) 965-8674, Fax (480) 965-1384. Associate Fellow AIAA.

†Chief Research Engineer, 600 Pine Ave, dave.murphy@atk.com, (805) 690-2439, Fax (805) 685-1369. Member AIAA.

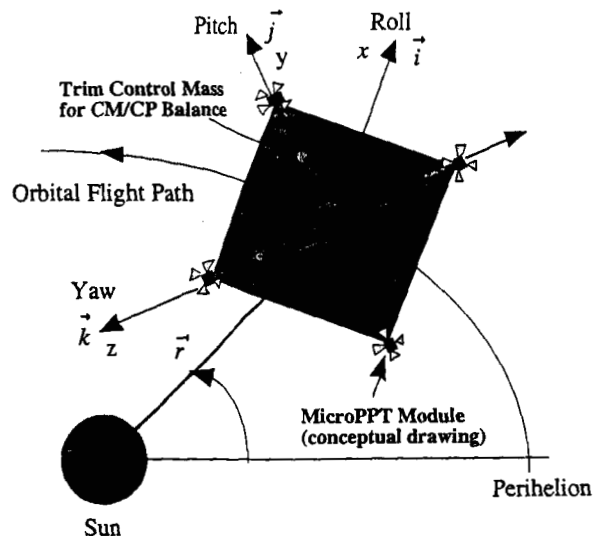


Figure 1. A solar sail spacecraft equipped with a propellantless primary ACS and a microPPT-based secondary (or backup) ACS.

sailcraft first spirals inwards from 1 AU to a heliocentric circular orbit at 0.48 AU, then the cranking orbit phase begins with the end result of a 75-deg inclination. The solar sail will be jettisoned after achieving the science mission orbit, and the total sailing time is 6.6 yr. A reference SPI sailcraft consists of a 160-m, 150-kg solar sail, a 250-kg spacecraft bus, and 50-kg science payloads. This 160-m reference sailcraft is characterized by a nominal solar thrust force of 160 mN (at 1 AU), an uncertain center-of-mass/center-of-pressure offset of ± 0.4 m, and a characteristic acceleration of 0.35 mm/s^2 .

An attitude control system (ACS), consisting of a propellantless primary ACS and a secondary/backup ACS, is proposed for a 160-m reference sailcraft of the SPI mission,⁵ as illustrated in Fig. 1. The primary ACS employs trim control masses (TCMs) running along mast lanyards for pitch/yaw control together with roll stabilizer bars (RSBs) at the mast tips for quadrant tilt control, as illustrated in Fig. 2. The robustness of such a propellantless primary ACS would be further enhanced by a secondary ACS utilizing tip-mounted, lightweight pulsed plasma thrusters (PPTs). Although a conventional bus ACS is required for the SPI mission as the sail is jettisoned at the start of its science mission phase, the microPPT-based ACS option promises greater redundancy and robustness for the SPI mission. A similar ACS architecture was previously studied for a 40-m sailcraft of a near-term solar sail flight validation mission in Refs. 6 and 7. A potential control-structure interaction caused by the significant torsion and bending of flexible masts of a large sailcraft is discussed in Ref. 8.

In this paper, the secondary (or backup) ACS employing tip-mounted microPPTs is presented. Such a microPPT-based ACS provides reliable capability for recovery of attitude given any off-nominal conditions, including tumbling, that cannot be reliably handled by either the propellantless primary ACS or by the conventional spacecraft ACS. A microPPT-based ACS is also useful for 3-axis stabilization of the sailcraft after release from the launch vehicle, and (most critically) during deployment, and also during pre-flight sail checkout operations as well. Alternately, these "secondary" functions can in general be performed by the conventional spacecraft ACS; however, such systems would be significantly more massive. But the control offered by standard size conventional ACS during sail deployment would not be robust to variations in symmetry during deployment. MicroPPT technology enables a tremendous gain in sailcraft performance, most critically in the areas of agility, mass, and redundancy. Such a microPPT-based ACS significantly increases the overall system reliability and robustness. Experimental study results for developing a 2-kg microPPT module (with an impulse bit of $150 \text{ } \mu\text{N}\cdot\text{s}$) for solar sail attitude control can be found in Refs. 9 and 10.

The remainder of this paper presents a brief description of an integrated attitude and orbit control system (AOCS) architecture proposed for the SPI sailcraft, an overview of the state-of-the-art microPPT

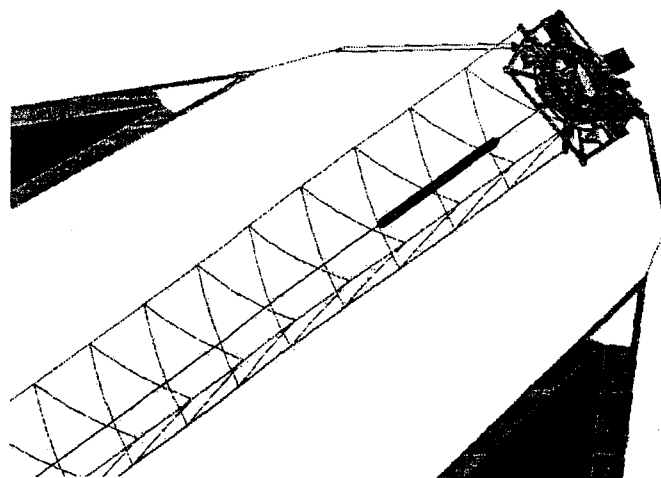


Figure 2. A solar sail mast with a control trim mass (running along a lanyard tape), tip-mounted roll stabilizer bars attached to sail panels, and a tip-mounted microPPT module.

technology, the design requirements of microPPTs for solar sail attitude control, and the preliminary design and simulation results of a microPPT-based ACS.

II. An Integrated AOCS Architecture of the SPI Sailcraft

An AOCS architecture, proposed for the robust, reliable thrust vector control of the SPI sailcraft, is illustrated in Fig. 3. The attitude determination subsystem (ADS) is a critical subsystem of most spacecraft AOCS. An ADS of particular interest for solar sail applications is the Inertial Stellar Compass (ISC) recently developed by Draper Laboratory for a New Millennium Program (NMP) ST6 flight validation experiment. The ISC is a miniature, low-power ADS developed for use with low-cost microsatellites. It is suitable for a wide range of future solar sail missions because of its low-mass, low-power, and low-volume design and its self-initializing, autonomous operational capability. The ISC is composed of a wide field-of-view active-pixel star camera and microgyros, with associated data processing and power electronics.¹¹ It has a total mass of 2.5 kg, a power requirement of 3.5 W, and an accuracy of 0.1 deg (1σ). It is planned to be flight validated within few years. Some recent advances in microsatellite technologies, including the ISC, need to be exploited to complete an integrated low-cost, low-risk, low-mass, low-power, and low-volume AOCS for sailcraft. Detailed analysis and design of this baseline AOCS architecture, as applied to a flight validation mission of a 40-m solar sail in a dawn-dusk sunsynchronous orbit, can be found in Refs. 7 and 8.

The proposed AOCS architecture, consisting of a propellantless primary ACS and a microPPT-based secondary ACS, will be applicable with minimal modifications to a wide range of future solar sail flight missions with varying requirements and mission complexity, including a solar sailing mission requiring 160-m sailcraft for intercepting, impacting, and deflecting near-Earth asteroids.¹² Although a conventional bus ACS is required for the SPI mission as the sail is jettisoned at the start of its science mission phase, the microPPT-based ACS option promises greater redundancy and robustness for the SPI mission. For other sailing missions, where the sail is never jettisoned, this secondary ACS provides a lower-cost, lower-mass propulsion for deployment control and greater redundancy than any traditional reaction-jet control system. Other solar sail ACS options employing a control boom or control vanes can be found in Ref. 13.

III. Recent Advances in MicroPPT Technology

The purposes of this section are to provide a brief overview of the recent advances in microPPT technology applicable to solar sail attitude control and to establish the foundation for developing the microPPT design requirements for solar sails.

A variety of microthrusters for stationkeeping and attitude control of microsatellites are currently under

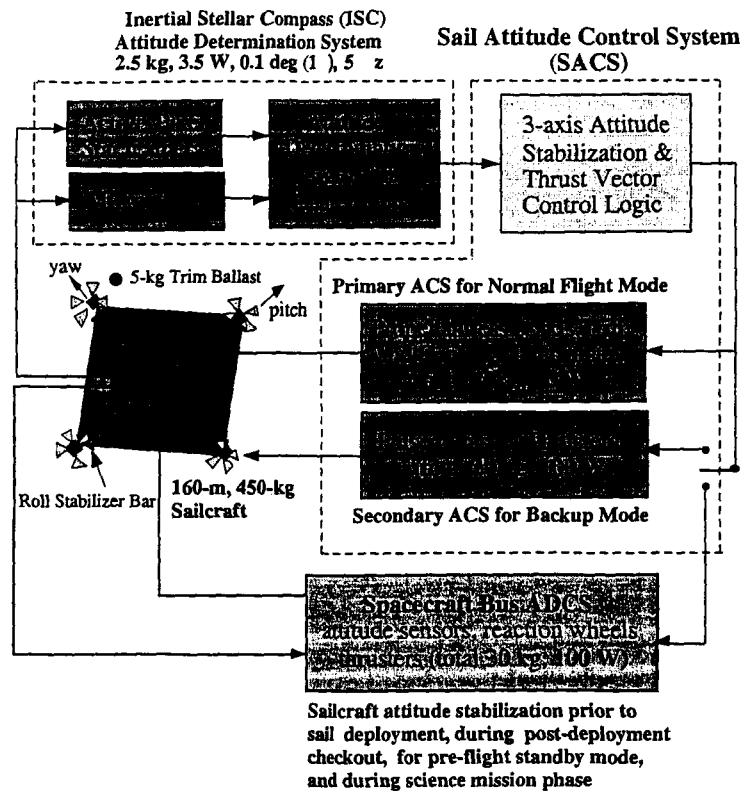


Figure 3. An integrated attitude and orbit control system (AOCS) architecture proposed for the 160-m, 450-kg SPI sailcraft.

significant rapid development by NASA Glenn Research Center, Air Force Research Laboratory (AFRL), Jet Propulsion Laboratory, and industry.¹⁴ They include: the vaporizing liquid microthruster, the micron-sized cold-gas thruster, the micro Hall thruster, the micro ion engine, the microPPTs, the free molecule microresistojet, and the digital microthruster array. Most of these microthrusters have an inherent problem of low specific impulse and low efficiency. However, such a low-Isp and/or low-efficiency drawback of microthrusters may not be of significant importance for solar sail attitude control applications, whereas other factors such as low thrust, low power, low mass, low volume, low voltage, and low impulse bit are more important. Among these microthrusters, a microPPT is judged most suitable for solar sail attitude control applications because of its inherent simplicity (not requiring propellant tanks, micromachined valves, and complex feed systems) and its use of a solid Teflon propellant.¹⁴⁻¹⁸ However, the selection of a particular type of attitude-control propulsion system for a given mission is in general a complex problem, and it is strongly mission dependent.

The PPT, perhaps the simplest electromagnetic propulsion device, uses electric power to ionize and electromagnetically accelerate a plasma to high exhaust velocities. As illustrated schematically in Fig. 4, the PPT consists of a Teflon fuel bar, a negator spring, a power processing unit (PPU), capacitors, electrodes, a spark plug, and a trigger circuit. The main discharge, ignited by the spark plug, ablates and ionizes a small amount of Teflon from the face of the fuel bar into a plasma slug. The plasma is then accelerated to high exhaust velocities by the Lorentz force. The interaction of the current and the self-imposed magnetic field generates the $\vec{j} \times \vec{B}$ Lorentz force.

The PPT technology has a long history of reliable space flight operation; for example, Russian Zond-2 Mars Probe in 1964, LES-6 spacecraft (by MIT Lincoln Laboratory) in 1968, LES-8/9 satellites, and NOVA satellites in early 1980s.¹⁴ Recently, several miniaturized PPTs have been developed for a variety of satellite applications. For example, the EO-1 PPT by Primex Aerospace (now Aerojet-Redmond) was flight validated on the EO-1 New Millennium Program mission.¹⁵ A precision pitch attitude pointing capability of a PPT-based ACS was demonstrated for the EO-1 spacecraft while meeting stringent electromagnetic and contamination constraints. A 112- μ N PPT module was also recently developed for the 15-kg Dawgstar

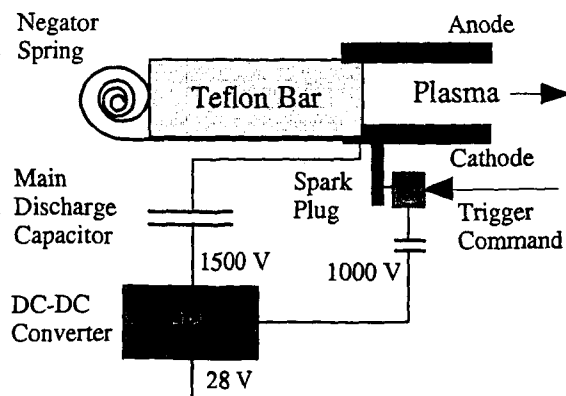


Figure 4. Schematic of a pulsed plasma thruster (PPT).

microsatellite.^{16,17} Although the Dawgstar satellite did not become part of an actual flight program, a flight-qualified unit has been developed for use in microsatellites.¹⁷ A much smaller 10- μ N PPT unit was developed by the AFRL.¹⁸ The 10- μ N microPPTs by the AFRL were originally planned to fly on the TechSat21 mission as a technology demonstration, but they were never flown due to program cancellation of the TechSat21 mission. Such a significant miniaturization was made possible by using a self-igniting discharge, thus eliminating the separate igniter circuit from a standard PPT.¹⁸

Busek Corporation has taken over commercial development of the microPPT design from the AFRL and is providing microPPTs for the FalconSat3 program at the U.S. Air Force Academy. FalconSat3 is a 50-kg, 0.46-m cube microsatellite scheduled for launch in 2006 using the EELV/ESPA. Among its other mission objectives, FalconSat3 will demonstrate a micro-propulsion attitude control system (MPACS) technology. A microPPT module is also installed at the end of a gravity-gradient boom. Each module of a total mass of 1.6 kg includes three thrusters, a shared main capacitor, and individual triggering units for each thruster with an impulse bit of 100 μ N-s.

The overall characteristics of these recently developed microPPTs are compared in Table 1.

Table 1. Comparison of recently developed microPPT modules

Parameter	EO-1	Dawgstar	AFRL- μ PPT	FalconSat3
Thrust, ^a μ N	90 - 860	120	10	100
Thrusters per module	2	2	1	3
Pulsing freq. (max), Hz	1	2	1	2
Impulse bit, μ N-s	90 - 860	60	10	50
Pulse energy, J	8.5 - 56	5	6.6	2
Total module mass, kg	4.9	1	0.1	1.6
Power, W	70	15	1	8
Isp, sec	650 - 1350	242	-	-
Efficiency, ^b %	9.8	1.8	-	-
Total impulse, ^c N-s	925	140	-	-
Propellant, ^c kg	0.07	0.03	-	-

^aMaximum steady thrust at maximum pulsing frequency.

^bThruster efficiency, not including the PPU efficiency.

^cPer thruster.

IV. PPT Sizing Requirements for Solar Sails

The microPPT-based ACS is intended mainly for attitude recovery maneuvers from various off-nominal conditions that cannot be reliably handled by the propellantless primary ACS. However, it can also be employed for: i) the checkout or standby mode prior to and during sail deployment, ii) the post-deployment transition mode (prior to the propellantless primary ACS mode operation), iii) the solar sailing cruise mode of a trimmed sailcraft, and iv) the spin-stabilized, sun-pointing mode.

Table 2 summarizes various physical parameters of the three different sizes of solar sails currently under development by ATK Space Systems. A 40-m solar sail is being considered for a near-term solar sail flight validation mission, and a 80-m solar sail will be required for the Geostorm mission.¹⁻³ The SPI mission requires a 160-m solar sail.⁴ The center-of-mass/center-of-pressure offset listed in Table 2 was based on a 0.25% of each sail size. Such unintentional cm/cp offset is caused by the "nominally worst" asymmetry of solar sails. An abnormal asymmetry caused by a sail deployment failure is not treated as the "nominally worst" asymmetry of solar sails for sizing the microPPT-based ACS.

As can be seen in Table 2, the impulse bit size of each microPPT module was selected to provide a control torque with sufficient margins for counteracting the "nominally worst" solar disturbance torque. The maximum pulsing frequency of each PPT module was assumed as 1 Hz for various practical reasons, although the impulse bit can be reduced if the maximum pulsing frequency increases.

A 2-kg, PPT-150 module with an impulse bit of 150 $\mu\text{N}\cdot\text{s}$ is suggested for a 40-m untrimmed sailcraft with sufficient control torque margins. A pair of thrusters can also be employed to further increase control torque margins, if necessary. It can be noticed that the EO-1 PPT module with a total mass of 4.9 kg is too heavy and that the thrust level of AFRL's μPPT is too low to be employed for a 40-m solar sail. The Dawgstar PPT module with a total mass less than 1 kg has a thrust level of 112 μN , but its current design has a total impulse of only 140 N·s (per thruster), which is too small for solar sail attitude control applications. Consequently, a prototype lightweight PPT module, named PPT-150,^{9,10} is currently being developed for use in solar sail attitude control by employing the design methodology of the flight-proven EO-1 PPT module. As shown in Fig. 6, the PPT-150 module has four thruster units in a cross configuration to be mounted at the tip of a solar sail boom. A mast tip-mounted PPT-150 of a maximum steady thrust level of 150 μN (@ 1 Hz pulsing frequency) provides a maximum control torque of 4.2 mN·m for a 40-m sailcraft (using a single thruster). A set of four PPT-150 modules, each module with four PPT units of four selectable thrust directions can provide full three-axis control with redundancy. The three PPT units of each module share the main discharge capacitor and the main PPU. The preliminary design characteristics of the PPT-150 module are summarized in Table 3.

A baseline PPT-150 module is being developed to be scalable for larger solar sails, as can be seen in Table 2. Because of the extremely large solar disturbance torque acting on a 160-m SPI solar sail, especially at 0.5 AU from the sun, a PPT-1200 module with 12 thruster units, shown in Fig. 5(c), is considered for the 160-m SPI sailcraft. A set of four PPT-1200 modules, each module with 12 thrusters can provide three-axis control torques with sufficient torque margins and redundancy.

V. MicroPPT-Based ACS Design and Simulation


Similar to mounting control vanes at the mast tips, four PPT modules are mounted at the mast tips, as illustrated in Figs. 1 and 2, to utilize the largest moment arm length. A pitch-axis dynamic model with tip-mounted microPPTs and a trim control mass are also illustrated in Fig. 7.

A single-axis control loop of a typical reaction-jet control system applicable to the microPPT-based ACS is shown in Fig. 8. The pulse width modulator (PWM) shown in Fig. 8 differs from other modulators, such as a pulse width and pulse frequency (PWPF) modulator, that it is essentially a discrete-time device. The output of a PWM is not a thruster firing state; instead, the PWM output is thruster pulse width, as illustrated in Fig. 8. Pulse modulation represents the common control logic behind most reaction-jet control systems of spacecraft. Unlike other actuators, such as reaction wheels, thruster output consists of two values: on or off. Proportional thrusters, whose fuel valves open a distance proportional to the commanded thrust level, are not often employed in practice. Mechanical considerations prohibit proportional valve operation largely because of dirt particles which prevent complete closure for small valve openings; fuel leakage through the valves consequently produces opposing thruster firings. In general, pulse modulators produce a pulse command sequence to the thruster valves by adjusting the pulse width and/or pulse frequency.^{19,20}


Table 2. Solar sail parameters and PPT module characteristics

Sail Size	40	80	160	m
Geometry				
Mast length	28	56	113	m
Mast diameter	0.4	0.4	0.6	m
Bending EI	82,441	82,441	438,847	N-m ²
Torsional GJ	197	197	453	N-m ²
Scallop factor	75	75	75	%
Sail area	1,200	4,800	19,200	m ²
Solar thrust	10	40	160	mN
cm/cp offset	0.1	0.2	0.4	m
Mass				
Sails	6	19	77	kg
Masts	7	14	68	kg
Tip mass (total)	1	2	3	kg
Central assembly	8	10	15	kg
Sail propulsion subsystem	22	45	163	kg
Sail primary ACS	4	6	10	kg
Sail secondary ACS	8	12	20	kg
Bus	150	200	200	kg
Payload	16	37	57	kg
Total (sailcraft)	200	300	450	kg
Acceleration (at 1 AU)	0.05	0.13	0.35	mm/s ²
Inertia				
I _x (roll)	4,340	40,262	642,876	kg-m ²
I _y (pitch)	2,171	20,136	321,490	kg-m ²
I _z (yaw)	2,171	20,136	321,490	kg-m ²
Solar disturbance torque				
Roll (at 1 AU) ^a	0.5	4	32	mN-m
Pitch/yaw (at 1 AU)	1	8	64	mN-m
Pitch/yaw (at 0.5 AU)			256	mN-m
MicroPPT-based ACS				
PPT module name	PPT-150	PPT-300	PPT-1200	
Impulse bit	150	300	1200	μN-s
Control thrust	150 ^b	300 ^c	3600 ^d	μN
Control torque	4.2	16.8	407	mN-m
Thrusters per module	4	8	12	
Module mass (desired)	2	3	5	kg


^a50% of pitch/yaw disturbance^busing a single thruster with an impulse bit of 150 μN-s (@ 1 Hz)^cusing a single thruster with an impulse bit of 300 μN-s (@ 1 Hz)^dusing 3 thrusters with an impulse bit of 1200 μN-s (@ 1 Hz)

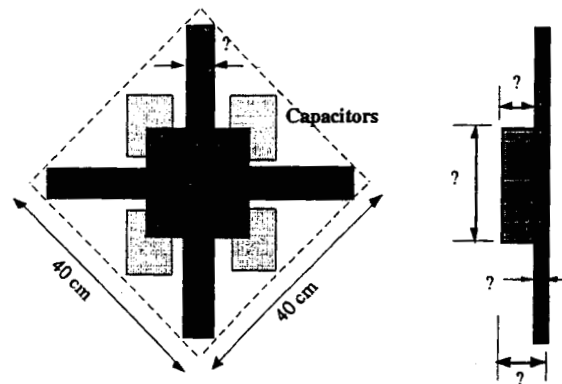

(a) A 2-kg Module with 4 Thrusters

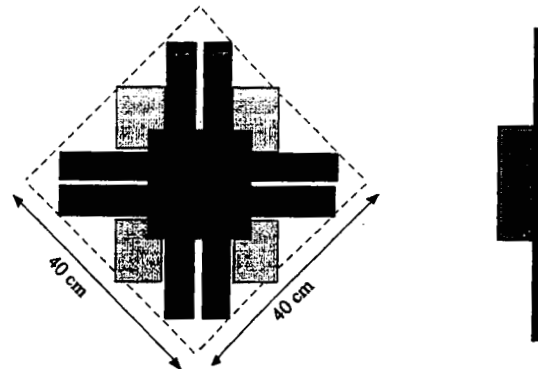

(b) A 3-kg Module with 8 Thrusters

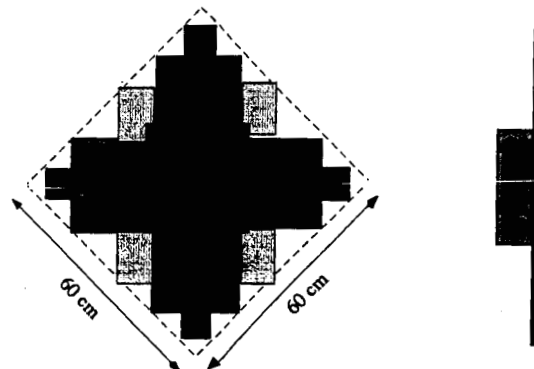

(c) A 5-kg Module with 12 Thrusters

Figure 5. Solar sail μ PPT module configurations: (a) a 2-kg module with 4 thrusters, (b) a 3-kg module with 8 thrusters, and (c) a 5-kg module with 12 thrusters.

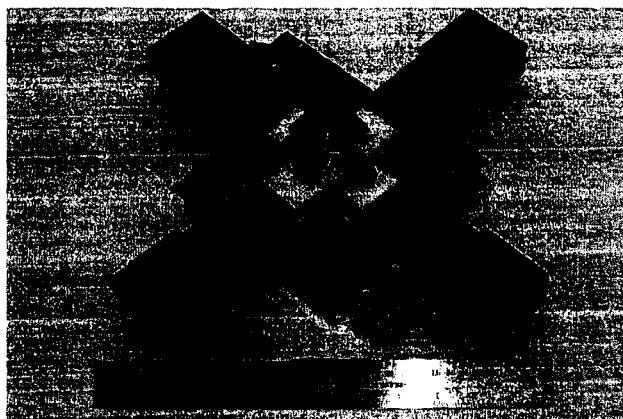


Figure 6. An experimental, low-cost, lightweight PPT-150 module in a cross configuration currently under development (pre-assembled for an illustration purpose).^{9,10}

Table 3. Characteristics of the PPT-150 module of a 40-m solar sail.

Parameter	Value
Module mass	2 kg
Thrusters	4
Impulse bit	150 $\mu\text{N}\cdot\text{s}$
Pulse frequency (max)	1 Hz
Average thrust (max) ^a	150 μN
Pulse energy	13 J
Power ^a	16 W
Specific impulse	> 500 sec (desired)
Efficiency	> 5 % (desired)
Total impulse ^a	1500 N-s
Total firings ^a	10 millions
Teflon mass ^a	0.2 kg

^aPer a single thruster unit.

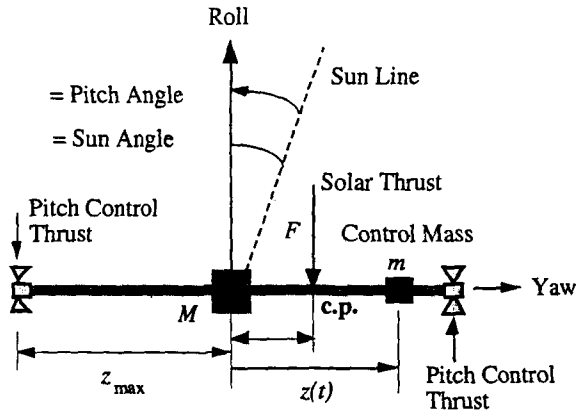


Figure 7. Pitch-axis dynamic model with tip-mounted microPPTs and a trim control mass.

Fig. 8, the value d_1 represents the minimum pulse width of the system; this deadzone is directly proportional to the attitude deadband. The value d_2 represents the maximum pulse width of the RCS; it is often chosen to be the digital control sampling period. The delay in the feedback loop introduces damping to the system; maximum damping occurs when the feedback signal is smaller than the PWM input. If the input signal is not greater than the feedback signal, the modulator may limit cycle itself. This criterion enables the designer to determine the feedback gain, K_2 . The feedforward gain, K_1 , is selected as result of the minimum pulse width and the attitude deadband. More details of pulse modulation techniques as applied to spacecraft attitude control systems design can be found in Refs. 19 and 20.

As illustrated in Fig. 8, the pulse control logic of employing a variable limiter is given by²⁰

$$u = - \left\{ \frac{\text{sat}(e)}{L} + K_r \dot{\theta} \right\} \quad (1)$$

where

$$e = \theta - \theta_c \quad (2)$$

$$L = K_r \min \left\{ \sqrt{2a|e|}, \omega_{\max} \right\} \quad (3)$$

and θ is the pitch attitude angle, θ_c is the commanded pitch angle, ω_{\max} is the desired maximum slew rate, a is the maximum control angular acceleration.

For a PPT with a fixed impulse bit (I_{bit}) and a maximum pulsing frequency of 1 Hz, as illustrated in Fig. 9, we choose $K_1 = 1$, $K_2 = 0$, and $d_1 = d_2$. A single pulse firing is commanded if $|u| > d_1$ where d_1 is the desired attitude deadband. Preliminary design values of the PPT-based ACS are provided in Table 4.

The robustness of a propellantless primary ACS described in Refs. 5-8 can be further enhanced by the microPPT-based ACS. A three-axis attitude recovery capability of the microPPT-based ACS is illustrated in Fig. 10 in the presence of a cm/cp offset of 0.4 m at 0.48 AU. After achieving steady-state, near-zero attitude errors at $t = 1.5$ hrs, a propellantless primary ACS (with a trim control mass moving at a maximum speed of 5 cm/s) is activated to trim the sailcraft with 0.25% residual disturbances, resulting in less frequent thruster firings.

VI. Conclusion

A secondary (or backup) attitude control system (ACS) of utilizing tip-mounted, lightweight PPTs was presented in this paper. Such a microPPT-based ACS provides reliable capability for recovery of attitude given off-nominal conditions, including tumbling, that cannot be handled by either the propellantless primary ACS or by conventional ACS within the sail carrier spacecraft. MicroPPT-based ACS is also useful for 3-axis stabilization of the sailcraft after release from the launch vehicle, and (most critically) during deployment, and also during pre-flight sail checkout operations as well.

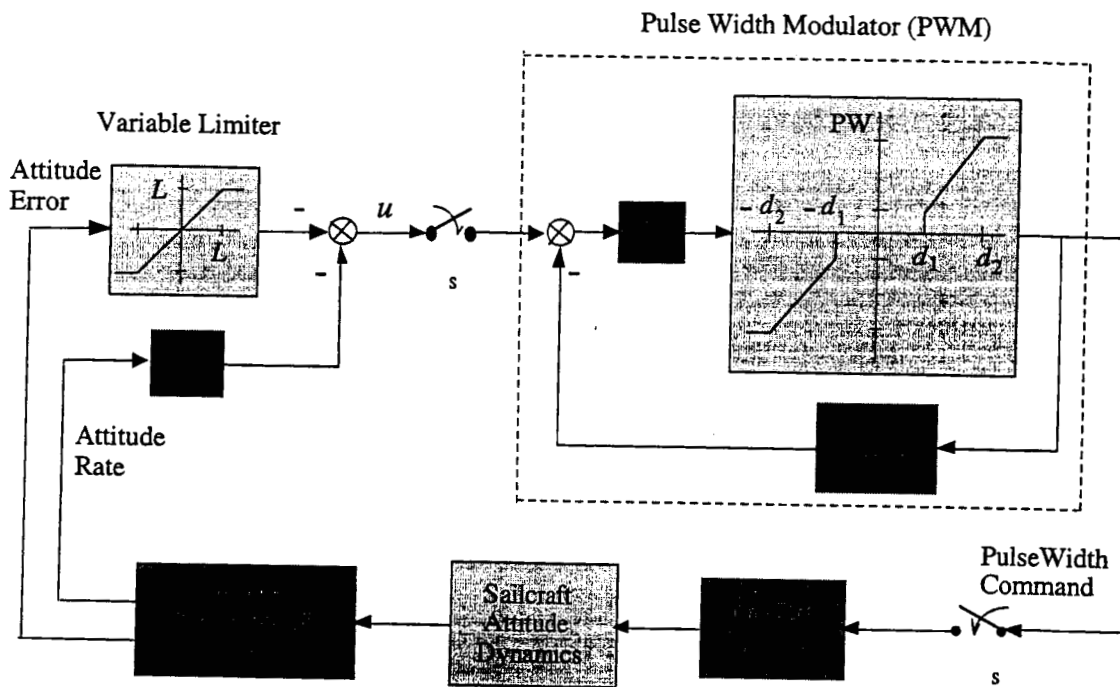


Figure 8. Single-axis control loop model of a microPPT-based ACS.

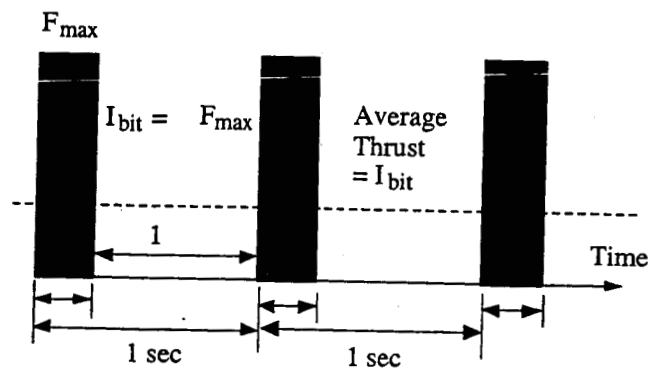


Figure 9. Steady-state pulse firings of a PPT at 1-Hz pulse frequency.

Table 4. PPT-1200 parameters and control simulation model for the 160-m, 450-kg SPI sailcraft at 0.5 AU

Parameter	Value
PPT-1200 module mass (with 12 thrusters)	5 kg
Total PPT system mass (4 modules)	20 kg
Impulse bit	1200 $\mu\text{N}\cdot\text{s}$
Pulsing frequency (max)	1 Hz
Pulse energy	70 J
Power ^a	100 W
Specific impulse	> 500 sec
Efficiency	> 5 %
Total impulse ^a	1500 N-s
Total firings ^a	3.75 millions
Teflon mass ^a	0.2 kg
Δ	10 μs
F_{max}	1200 N
Total thrust with 3 thrusters at 1 Hz (max)	3600 μN
Moment arm	113 m
Control torque with 3 thrusters (max)	407 mN-m
d_1	0.002 rad
d_2	0.002 rad
Attitude deadband	± 0.1 deg
K_1	1
K_2	0.1
K_r	200 rad^{-1}

^aPer a single thruster unit.

Acknowledgments

The work described in this paper was funded in whole or in part by the In-Space Propulsion Technology Program, which is managed by NASA's Science Mission Directorate in Washington, D.C., and implemented by the In-Space Propulsion Technology Office at Marshall Space Flight Center in Huntsville, Alabama. The program objective is to develop in-space propulsion technologies that can enable or benefit near and mid-term NASA space science missions by significantly reducing cost, mass or travel times. The author would like to thank E. Montgomery, G. Garbe, J. Presson, A. Heaton, and M. Whorton at NASA Marshall Space Flight Center for their financial and technical support.

References

- ¹Garbe, G. and Montgomery, E., "An Overview of NASA's Solar Sail Propulsion Project," AIAA-2003-4662, *39th AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit*, Huntsville, AL, July 20-23, 2003.
- ²Montgomery, E. and Johnson, L., "Development of Solar Sail Propulsion for Inner Solar System NASA Science Missions," AIAA-2004-3992, *40th AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit*, Fort Lauderdale, FL, July 11-14, 2004.
- ³Montgomery, E., "Technology Advancement for Solar Sail Propulsion (SSP) for NASA Science Missions to the Inner Solar System," *Solar Sail Technologies and Applications Conference*, NASA GSFC, Sept. 28-29, 2004. (http://lws.gsfc.nasa.gov/solar_sails_conf/Montgomery.pdf)
- ⁴Murphy, N., "Solar Polar Imager Vision Mission Overview," *Solar Sail Technologies and Applications Conference*, NASA GSFC, Sept. 28-29, 2004. (http://lws.gsfc.nasa.gov/solar_sails_conf/NMurphy.pdf)
- ⁵Wie, B., Thomas, S., Paluszek, M., and Murphy, D., "Propellantless AOCS Design for a 160-m, 450-kg Solar

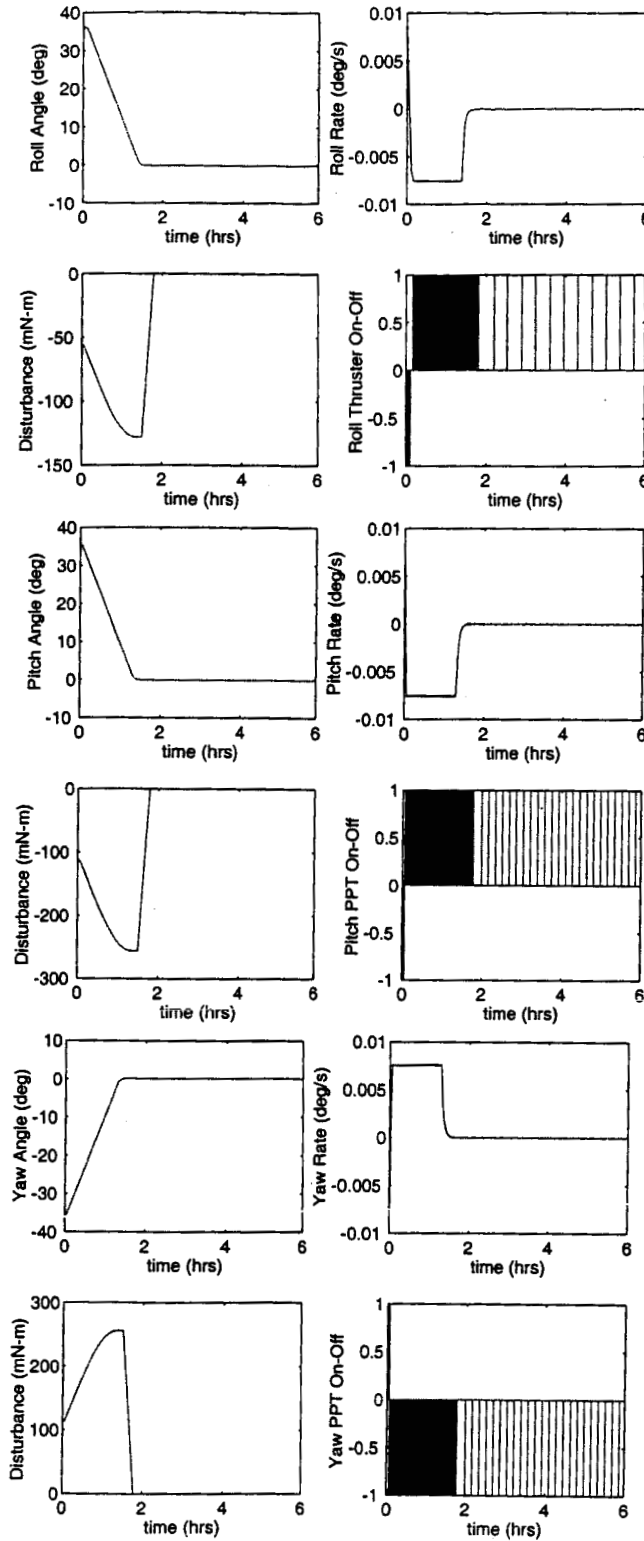


Figure 10. An attitude recovery maneuver using the microPPT-based secondary ACS in the presence of a cm/cp offset of 0.4 m at 0.48 AU. After achieving steady-state, near-zero attitude errors at $t = 1.5$ hrs, a propellantless primary ACS (with a trim control mass speed of 5 cm/s) is activated to trim the sailcraft with 0.25% residual disturbances.

Sail Spacecraft of the Solar Polar Imager Mission," AIAA 2005-3928, *AIAA Joint Propulsion Conference and Exhibit*, Tucson, AZ, July 10-13, 2005.

⁶Murphy, D. and Wie, B., "Robust Thrust Control Authority for a Scalable Sailcraft," AAS-04-285, *14th AAS/AIAA Space Flight Mechanics Conference*, Maui, Hawaii, Feb. 8-12, 2004.

⁷Wie, B., Murphy, D., Thomas, S., and Paluszek, M., "Robust Attitude Control Systems Design for Solar Sail Spacecraft: Parts One and Two," AIAA-2004-5010 and AIAA-2004-5011, *AIAA Guidance, Navigation, and Control Conference*, Providence, RI, August 16-19, 2004.

⁸Thomas, S., Paluszek, M., Wie, B., and Murphy, D., "AOCS Performance and Stability Validation for a 160-m Solar Sail with Control-Structure Interactions," AIAA-2005-3926, *41st AIAA Joint Propulsion Conference and Exhibit*, Tucson, AZ, July 10-13, 2005.

⁹Pryor, K., Wie, B., and Mikellides, P., "Development of a Lightweight Pulsed Plasma Thruster Module for Solar Sail Attitude Control," Paper SSC04-XI-4, *18th Annual AIAA/USU Conference on Small Satellites*, Logan, Utah, August 9-12, 2004.

¹⁰Salem, J. and Wie, B., "Experimental Development and Validation of a 2-kg MicroPPT Module for Solar Sail Attitude Control," under preparation.

¹¹Brady, T., Tillier, C., Brown, R., Jimenez, A., and Kourepenis, A., "The Inertial Stellar Compass: A New Direction in Spacecraft Attitude Determination," SSC02-II-1, *16th Annual AIAA/USU Conference on Small Satellites*, Logan, Utah, August 2002.

¹²Wie, B., "Solar Sailing Kinetic Energy Interceptor Mission for Impacting and Deflecting Near-Earth Asteroids," AIAA-2005-3725, *41st AIAA Joint Propulsion Conference and Exhibit*, Tucson, AZ, July 10-13, 2005.

¹³Wie, B., "Solar Sail Attitude Control and Dynamics: Parts 1 and 2," *Journal of Guidance, Control, and Dynamics*, Vol. 27, No. 4, pp. 526-535, 2004, pp. 536-544.

¹⁴Micci, M. and Ketsdever, A. (ed.), *Micropropulsion for Small Spacecraft, Progress in Astronautics and Aeronautics*, Volume 187, AIAA, Washington, DC, 2000, Chapter 3.

¹⁵Benson, S., Arrington, L., Hoskins, A., and Meckel, N., "Development of a PPT for the EO-1 Spacecraft," AIAA-99-2276, *35th AIAA Joint Propulsion Conference and Exhibit*, Los Angeles, CA, June 20-24, 1999.

¹⁶Cassady, R., Hoskins, A., Campbell, M., and Rayburn, C., "A Micro Pulsed Plasma Thruster (PPT) for the Dawgstar Spacecraft," *Proceedings of the 2000 IEEE Aerospace Conference*, Big Sky, Montana, 2000.

¹⁷Rayburn, C., Campbell, M., and Mattick, A., "Pulsed Plasma Thruster System for Microsatellites," *Journal of Spacecraft and Rockets*, Vol. 42, No. 1, 2005, pp. 161-170.

¹⁸Spanjers, G., Bromaghin, D., Lake, J., Dulligan, M., White, D., Schilling J., Bushman, S., Antonsen, E., Burton, R., Keidar, M., and Boyd, I., "AFRL MicroPPT Development for Small Spacecraft Propulsion," AIAA-2002-3974, *28th AIAA Joint Propulsion Conference and Exhibit*, Indianapolis, IN, July 2002.

¹⁹Anthony, T., Wie, B. and Carroll, S., "Pulse-Modulated Controller Synthesis for a Flexible Spacecraft," *Journal of Guidance, Control, and Dynamics*, Vol. 13, No. 6, 1990, pp. 1014-1022.

²⁰Wie, B., *Space Vehicle Dynamics and Control*, AIAA Education Series, AIAA, 1998, Chapters 7 and 9.