

A First Approach to Global Runoff Simulation using Satellite Rainfall Estimation

Yang Hong (2, 1), Robert F. Adler (1), Faisal Hossain (3), Scott Curtis (4), and George J. Huffman (1, 5)

¹NASA Goddard Space Flight Center, Laboratory for Atmospheres, Greenbelt, MD 20771

²Goddard Earth Science Technology Center/University of Maryland Baltimore County, Baltimore, MD 21228

³Department of Civil and Environmental Engineering, Tennessee Technological University, Cookeville, TN 38505

⁴Department of Geography, East Carolina University, Greenville, NC 27858

⁵Science Systems and Applications, Inc., Lanham, Maryland 20706

Popular Summary:

Many hydrological models have been introduced in the hydrological literature to predict runoff but few of these have become common planning or decision-making tools, either because the data requirements are substantial or because the modeling processes are too complicated for operational application. On the other hand, progress in regional or global rainfall-runoff simulation has been constrained by the difficulty of measuring spatiotemporal variability of the primary causative factor, i.e. rainfall fluxes, continuously over space and time. Building on progress in remote sensing technology, researchers have improved the accuracy, coverage, and resolution of rainfall estimates by combining imagery from infrared, passive microwave, and space-borne radar sensors.

Motivated by the recent increasing availability of global remote sensing data for estimating precipitation and describing land surface characteristics, this note reports a ballpark assessment of quasi-global runoff computed by incorporating satellite rainfall data and other remote sensing products in a relatively simple rainfall-runoff simulation approach: the Natural Resources Conservation Service (NRCS) runoff Curve Number (CN) method. Using an Antecedent Precipitation Index (API) as a proxy of antecedent moisture conditions, this note estimates time-varying NRCS-CN values determined by the 5-day normalized API. Driven by multi-year (1998-2006) Tropical Rainfall Measuring Mission (TRMM) Multi-satellite Precipitation Analysis, quasi-global runoff was retrospectively simulated with the NRCS-CN method and compared to Global Runoff Data Centre data at global and catchment scales. Results demonstrated the potential for using this simple method when diagnosing runoff values from satellite rainfall for the globe and for medium to large river basins. This work was done with the simple NRCS-CN method as a first-cut approach to understanding the challenges that lie ahead in advancing the satellite-based inference of global runoff. We expect that the successes and limitations revealed in this study will lay the basis for applying more advanced methods to capture the dynamic variability of the global hydrologic process for global runoff monitoring in real time. The essential ingredient in this work is the use of global satellite-based rainfall estimation.

Key words: Rainfall-Runoff Modeling, Remote Sensing Precipitation, TRMM

Acknowledgement: This work is supported by NASA's Applied Science Program under Stephen Ambrose of NASA Headquarters.

Submittal to AGU Water Resources Researches (WRR)

Corresponding Author: Dr. Yang Hong

Mailing: NASA Goddard Space Flight Center, Mail code 613.1, Greenbelt, MD 20771;

Phone: 1-301-614-6232; Fax: 1-301-614-5492; Email: yanghong@agnes.gsfc.nasa.gov

A First Approach to Global Runoff Simulation using Satellite Rainfall Estimation

Yang Hong^{1,2}, Robert F. Adler¹, Faisal Hossain³, Scott Curtis⁴, and George J. Huffman^{1,5}*

¹NASA Goddard Space Flight Center, Laboratory for Atmospheres, Greenbelt, MD 20771

²Goddard Earth Science Technology Center/University of Maryland Baltimore County, Baltimore, MD 21228

³Department of Civil and Environmental Engineering, Tennessee Technological University, Cookeville, TN 38505

⁴Department of Geography, East Carolina University, Greenville, NC 27858

⁵Science Systems and Applications, Inc., Lanham, Maryland 20706

Submittal to WRR as Technique Note

*Corresponding Author: Dr. Yang Hong

Mailing: NASA Goddard Space Flight Center, Mail code 613.1, Greenbelt, MD 20771;

Phone: 1-301-614-6232; Fax: 1-301-614-5492; Email: yanghong@agnes.gsfc.nasa.gov

Abstract

Motivated by the recent increasing availability of global remote sensing data for estimating precipitation and describing land surface characteristics, this note reports a ballpark assessment of quasi-global runoff computed by incorporating satellite rainfall data and other remote sensing products in a relatively simple rainfall-runoff simulation approach: the Natural Resources Conservation Service (NRCS) runoff Curve Number (CN) method. Using an Antecedent Precipitation Index (API) as a proxy of antecedent moisture conditions, this note estimates time-varying NRCS-CN values determined by the 5-day normalized API. Driven by multi-year (1998-2006) Tropical Rainfall Measuring Mission (TRMM) Multi-satellite Precipitation Analysis, quasi-global runoff was retrospectively simulated with the NRCS-CN method and compared to Global Runoff Data Centre data at global and catchment scales. Results demonstrated the potential for using this simple method when diagnosing runoff values from satellite rainfall for the globe and for medium to large river basins. This work was done with the simple NRCS-CN method as a first-cut approach to understanding the challenges that lie ahead in advancing the satellite-based inference of global runoff. We expect that the successes and limitations revealed in this study will lay the basis for applying more advanced methods to capture the dynamic variability of the global hydrologic process for global runoff monitoring in real time. The essential ingredient in this work is the use of global satellite-based rainfall estimation.

Key words: Rainfall-Runoff Modeling, Remote Sensing Precipitation, TRMM

1. Introduction

Many hydrological models have been introduced in the hydrological literature to predict runoff (Singh, 1995) but few of these have become common planning or decision-making tools (Choi et al., 2002), either because the data requirements are substantial or because the modeling processes are too complicated for operational application. On the other hand, progress in regional or global rainfall-runoff simulation has been constrained by the difficulty of measuring spatiotemporal variability of the primary causative factor, i.e. rainfall fluxes, continuously over space and time. Building on progress in remote sensing technology, researchers have improved the accuracy, coverage, and resolution of rainfall estimates by combining imagery from infrared, passive microwave, and space-borne radar sensors (Adler et al., 2003). Today, remote sensing imagery acquired and processed in real time can provide near-real-time rainfall at hydrologically relevant spatiotemporal scales (tens of kilometers and sub-daily; Hong et al., 2005; Huffman et al., 2007; Joyce et al., 2004; Sorooshian et al., 2000; Turk and Miller 2005). Over much of the globe, remote sensing precipitation estimates is the only available source of rainfall information, particularly in real time. Correspondingly, remote sensing has increasingly become a viable data source to augment the conventional hydrological rainfall-runoff simulation, especially for inaccessible regions or complex terrains, because remotely sensed imageries are able to monitor precipitation and identify land surface characteristics such as topography, stream network, land cover, vegetation etc. Artan et al. (2007) demonstrated the improved performance of remotely sensed precipitation data in hydrologic modeling when the hydrologic model was recalibrated with satellite data rather than gauge rainfall over four subbasins of the Nile and Mekong Rivers.

Motivated by the recent increasing availability of global remote sensing data for estimating precipitation and describing land surface characteristics, this note attempts to obtain a ballpark assessment of global runoff by incorporating satellite rainfall data and other remote sensing products through a relative simple rainfall-runoff simulation approach: the United States Natural Resources

Conservation Service (NRCS) runoff Curve Number (CN) method (USDA, 1986; Burges et al., 1998). Its simplicity is especially critical for the vast un-gauged regions and geopolitically trans-boundary basins of the world. Our effort is a first approach to understanding a challenging problem that lies ahead in advancing satellite-based global runoff monitoring. Thus, the use of NRCS-CN should not be construed as a call for replacement of other more advanced methods for rainfall-runoff simulation. We expect that the successes and limitations revealed in this study will lay the basis for applying more advanced methods to capture the dynamic variability of the hydrologic process for global runoff monitoring in real time. The essential ingredient in this work is the use of global satellite-based rainfall estimation.

Although Ponce and Hawkins (1996) indicated that the NRCS-CN method is widely used in the USA and other countries, they also criticized it as a simplistic methodology to simulate the sophisticated hydrological system. As an example, this method is imprecise for the monsoon type climate in Ethiopia (Mohammed et al., 2004). Taylor et al. (2006) also show that the annual runoff in the Volta river basin is a linear function of cumulative rainfall during the wet season when more than approximately 700 mm of rain has fallen. In a literature review, Choi et al. (2002) concluded that NRCS-CN has useful skill because it responds to major runoff-generating properties including soil type, land/use/treatment, and soil moisture conditions. They point out that it has been successfully applied to situations that include simple runoff calculation (Heaney et al., 2001), assessment of long-term hydrological impact on land use change (Harbor, 1994) for tens of years, stream-flow estimation for watersheds with no stream flow records (Bhaduri et al., 2000), and comprehensive hydrologic/water quality simulation (Srinivasan and Arnold, 1994; Engel, 1997; Burges et al., 1998; Rietz and Hawkins, 2000). Recently, Curtis et al. (2007) used satellite remote sensing rainfall and gauged runoff data to estimate CN for basins in eastern North Carolina. Harris and Hossain (2007) found that simpler approaches such as the NRCS-CN method to be more robust than more complicated schemes for the levels of uncertainty that exist in current satellite rainfall data products. On the other

hand, we note the risks of implementing this, or any other method without fully understanding its associated ‘uncertainty’. As such, we adopt the NRCS-CN method to estimate a first-cut global runoff by taking advantage of the first 9 years of rainfall estimates from the Tropical Rainfall Measuring Mission (TRMM) Multi-satellite Precipitation Analysis (TMPA; Huffman et al., 2007).

In this note we first develop spatially distributed and time-variant CN maps for the global land surface. Driven by multi-year remote sensing rainfall, the NRCS-CN method is then used to compute the surface runoff for each grid independently and subsequently route the surface runoff to the watershed outlet through downstream cells (USACE, 2000). Finally, simulated quasi-global runoff is evaluated with Global Runoff Data Center (GRDC) observed runoff (Fekete et al. 2000) and Water-Balance-Model simulated runoff (Thorntwaite and Mather 1955; Steenhuis et al., 1986; Vorosmarty et al. 1998).

2. Mapping NRCS-CN

2.1 Data

The data sets (i.e., precipitation, soil information, and land cover) required by the NRCS-CN runoff generation scheme are all available globally with a well-established record in Earth system analysis (Fekete et al., 2000). Information on soil properties is obtained from the Digital Soil of the World published in 2003 by Food and Agriculture Organization of the United Nations (<http://www.fao.org/AG/agl/agll/dsmw.htm>). The Moderate Resolution Imaging Spectroradiometer (MODIS) land classification map is used as a surrogate for land use/cover, with 17 classes of land cover according to the International Geosphere-Biosphere Programme classification (Fridel et al., 2002). Routing information is taken from the HYDRO1k (<http://lpdaac.usgs.gov/gtopo30/hydro/>), which provides global coverage of topography such as elevation, slope, and flow direction etc. These geo-referenced datasets are of value for users who need to run hydrologic models on both regional and global scales. The rainfall data used in this study are from the NASA TMPA (Huffman et al., 2007;

<http://trmm.gsfc.nasa.gov>) and the runoff data are from GRDC/University of New Hemisphere
(<http://www.grdc.sr.unh.edu/>).

2.2 Mapping NRCS-CN

The NRCS-CN estimates surface runoff as a function of precipitation, soil type, land cover, and antecedent moisture conditions. The latter three factors are usually approximated by one parameter, the CN (USDA, 1986). In this case, the set of Equations (1-2) is used to partition rainfall into runoff and infiltration.

$$Q = \frac{(P - IA)^2}{(P - IA + PR)} \quad (1)$$

$$PR = \frac{25,400}{CN} - 254 \quad (2)$$

where P is rainfall accumulation (mm/day); IA is initial abstraction; Q is runoff generated by P ; PR is potential retention; CN is the runoff curve number, with higher CN associated with higher runoff potential; and IA was approximated by $0.2PR$.

CN values are approximated from the area's hydrologic soil group (HSG), land use/cover, and hydrologic condition, the two former factors being of greatest importance in determining its value (USDA, 1986). First, following the USDA (1986) handbook, a global HSG map is derived from the digital soil classification which includes 13 textural classes, an important indicator for infiltration rate (Table 1). Given “fair” moisture condition (defined below), the MODIS land cover classification and the HSG map are used to estimate CN by indexing into the standard lookup tables in USDA (1986) and NEH-4 (1997). Figure 1 shows the estimated climatological global CN map for fair moisture conditions, with higher value associated with larger runoff potential. Thus, for a watershed on a coarse grid, a composite CN can be calculated as:

$$CN_{com} = \frac{\sum A_i CN_i}{\sum A_i} \quad (3)$$

in which CN_{com} is the composite CN used for runoff volume computations; i = the index of subgrids or watershed subdivisions. A_i = the drainage area of area i . The composite CN values for several watersheds are listed in Table 2.

3. Time-variant NRCS-CN and Runoff Simulation

3.1 Time-variant NRCS-CN

Note that the CN values displayed in Fig. 1 are for the “fair” hydrologic condition from standard lookup tables, which are used primarily for design applications. However, for the same rainfall amount there will be more runoff under wet conditions than under dry. In practice, lower and upper enveloping curves can be computed to determine the range of CN according to the Antecedent Moisture Conditions (AMC):

$$CN_i^I = \frac{CN_i^{II}}{2.281 - 0.01281 CN_i^{II}} \quad (4)$$

$$CN_i^{III} = \frac{CN_i^{II}}{0.427 + 0.00573 CN_i^{II}} \quad (5)$$

where upper subscripts indicates the AMC, I being dry, II normal (average), and III wet (Hawkins 1993). The change of AMC is closely related to antecedent precipitation (NEH-4, 1997). We apply the concept of an Antecedent Precipitation Index (API) to provide guidance on how to estimate the variation of CN values under dry or wet antecedent precipitation conditions. Kohler and Linsley (1951) define API as:

$$API = \sum_{t=-1}^{-T} P_t k^{-t} \quad (6)$$

where T is the number of antecedent days, k is the decay constant, and P is the precipitation during day t. The model is also known as “retained rainfall” (Singh 1989). Decay constant k is the antilog of the slope on a semi-log plot of soil moisture and time (Heggen, 2001). API practice suggests that k is generally between 0.80 and 0.98 (Viessman and Lewis 1996). Here we use decay constant k as 0.85 for demonstration purpose. API generally includes moisture conditions for the previous five days (or pentad; NEH-4, 1997). In order to obtain time-variant CN, the site-specified API is first normalized as:

$$NAPI = \frac{\sum_{t=-1}^{-T} P_t k^{-t}}{\bar{P} \sum_{t=-1}^{-T} k^{-t}} \quad (7)$$

where T=5 for pentads, the numerator is API, and the denominator is a normalizing operator with two components: average daily precipitation \bar{P} and the $\sum k^{-t}$ series. The “dry” condition is defined as $NAPI < 0.33$, the “wet” condition is defined as $NAPI > 3$, and the intermediate range 0.33~3 is the “fair” hydrological condition. By definition, the surface moisture conditions are delineated as dry (or wet) if any pentad API is less than one third (or larger than three times) of the climatologically averaged pentad API, and fair conditions for all others. Summarizing, the CN can be converted to dry, fair, or wet condition using Equations 4-7 according to the moisture conditions approximated by the pentad NAPI.

Using the multi-year (1998-2006) satellite-based precipitation dataset from NASA TRMM, the 9-year climatological pentad API is shown in Figure 2a. Thus, given any date, the pentad NAPI can be determined and thus CN can be updated with Equations (4-7). For example, on Aug. 25th, 2005, the pentad rainfall accumulation, pentad NAPI, resulting hydrological conditions (dry, fair, or wet), and the updated CN on the same date are shown in Figures 2b-e, respectively.

3.2 Runoff Simulation

Using the concept of NAPI and the NRCS-CN method (NEH-4, 1997), the TRMM-simulated runoff (TRMM-CN) can be calculated and compared with three sets of GRDC annual climatological runoff fields: observed (OBS), Water Balance Model (WBM)-simulated, and composite (CMP) from the OBS and WBM (Fekete et al, 2000). The WBM used the water-balance model of Thornthwaite and Mather (1955) with a modified potential evaporation scheme from Vorosmarty et al. (1998), driven by input monthly air temperature and precipitation from Legates and Willmott (1990ab). Note that the three GRDC runoff climatologies span the period 1950-1979 with incomplete data records, while the TRMM-CN runoff is simulated for 9 years (1998-2006) of satellite rainfall with complete spatiotemporal coverage. One assumption here is that the change of rainfall between the two time periods is small enough so that the resulted runoff climatology is spatially consistent. Table 3 shows that TRMM-CN runoff corresponds more closely with WBM, having a relatively high correlation and low error. An intercomparison with the GRDC runoff observation demonstrates that the WBM has a moderate advantage over the TRMM-CN runoff: the correlation and root-mean-square-difference (rmsd) between GRDC OBS and WBM are 0.81 and 159.7 mm/year (or 0.437mm/day), respectively, which is slightly better than for the TRMM-CN case (Table 3).

Figure 3a shows the annual mean runoff (mm/year) driven by TRMM daily precipitation for the same 9-year period, in comparison with the GRDC observed runoff climatology (Fig. 3b). Note that the gray areas indicate no data or water surface in figures 3a-b. By averaging areas covered by both TRMM-CN and GRDC runoff data, Figure 3c shows the TRMM-CN runoff zonal mean profile, against the OBS, WBM, and CMP. In general, the TRMM-CN zonal mean runoff more closely follows the three GRDC runoff profiles in the northern hemisphere than in the southern. We believe that this difference is the result of having many more samples in the northern hemisphere, as well as more-accurate GRDC data. Considering the TRMM-CN runoff difference as a function of basin area shows the TRMM-CN performance deviates more for basins smaller than 10,000 km², with significantly better agreement for larger basins (Figure 4).

4. Summary and Discussion

Given the increasing availability of global geospatial data describing land surface characteristics, this note estimated a global CN map primarily based on soil property and land use/cover information under the “fair” moisture condition. Then using API as a proxy of AMC, this note further estimated time-variant CN values bounded by dry and wet AMC approximated by pentad normalized API. Finally, driven by satellite-based TMPA precipitation estimates, quasi-global runoff was simulated with the NRCS-CN method and was compared with GRDC runoff measurements for climatology and at the basin scale.

Although we were able to demonstrate the potential for using the NRCS-CN runoff model when predicting ball-park runoff values from satellite rainfall for the globe and medium to large river basins, there remain several unanswered questions: **First**, among many methods to estimate CN values, Hawkins (1993) recognized that remote sensing data may not be adequate to define the “true” value of a CN. Thus, field surveys of basin characteristics should be conducted where feasible in order to obtain “true” soil and land cover data. **Second**, while this study recognized the uncertainty of the estimates of actual CN values and assumed that they likely fall within the enveloping wet (upper) and dry (lower) conditions approximated by the 5-day Normalized API, it may be possible to adjust the CN more precisely to account for local or regional information. **Finally**, one major unaddressed hydrological concern for rainfall-runoff applications of remotely sensed precipitation is the thorough evaluation of satellite-based rainfall estimation error and its nonlinear influence on rainfall-runoff modeling uncertainty in varying landscapes and climate regimes (Hong et al., 2006; Hossain and Anagnostou, 2006; Villarini and Krajewski, 2007). Thus, while we conclude that this simple approach seems to provide a reliable tool when both the scale and estimation error of satellite data are large, we also urge similar studies using more sophisticated hydrological models, particularly seeking to serve the vast ungauged regions and geopolitically trans-boundary basins of the world (Hossain et al., 2007).

1

2 **Acknowledgement:** This research is carried out with support from NASA's Applied Sciences program
3 under Stephen Ambrose of NASA Headquarters. The authors thank Tammo Steenhuis and the two
4 anonymous reviewers for constructive comments. The Editor-in-Chief Marc Parlange is also thanked
5 for his encouragement.

REFERENCE

- Adler, R. F., G.J. Huffman, A. Chang, R. Ferraro, P. Xie,, J. Janowiak, B. Rudolf, U. Schneider, S. Curtis, D. Bolvin, A. Gruber, J. Susskind, P. Arkin, and E. Nelkin, 2003, The version-2 Global Precipitation Climatology Project (GPCP) monthly precipitation analysis (1979-Present), *J. Hydrometeor.*, 4, 1147-1167.
- Artan, G, H. Gadain, J. Smith, K. Asante, C. Bandaragoda, and J. Verdin, 2007, Adequacy of Satellite Derived Rainfall Data for Streamflow Modeling, *Journal of Natural Hazards* (Special Issue). (in press).
- Bhaduri, B., J. Harbor, B. Engel, and M. Grove, 2000, Assessing watershed-scale, long-term hydrological impacts of land-use change using a GIS-NPS model, *Environmental Management*, 26 (6): 643-658
- Burges, S. J., Wigmosta, M. S., and Meena, J. M., 1998, Hydrological Effects of Land-Use Change in a Zero-Order Catchment, *J. Hydraulic Engineering, ASCE*, 3(2), 86-97
- Choi, J.Y., B.A. Engel, and H.W. Chung, 2002, Daily streamflow modeling and assessment based on the curve-number technique, *Hydrological Processes*, 16, 313-3150
- Curtis, S., T.W. Crawford, and S.A. Lecce, 2007, A Comparison of TRMM to Other Basin-Scale Estimates of Rainfall during the 1999 Hurricane Floyd Flood, *Journal of Natural Hazards* (Special Issue). (in press).
- Engel, B. A. 1997, GIS-based CN Runoff Estimation, Agricultural and Biological Engineering Departmental Report, Purdue University
- Fekete, B.M., C.J. Vorosmarty, and W. Grabs, 2000, Global Composite Runoff Data Set (v1.0), Complex Systems Research Center, University of New Hampshire, Durham, New Hampshire, U.S.A. Available online at [<http://www.grdc.sr.unh.edu/>].
- Friedl, M.A. , McIver, D.K. , Hodges, J.C.F., Zhang, X.Y., Muchoney, D., Strahler, A.H., Woodcock, C.E., Gopal, S., Schneider, A., Cooper, A., Baccini, A., Gao, F., and Schaaf, C., 2002, Global Land Cover Mapping from MODIS: Algorithms and Early Results, *Remote Sensing of Environment* 83(1-2):287-302.

- 1 Harbor, J.M., 1994, A practical method for estimating the impact of land-use change on surface runoff,
2 groundwater recharge and wetland hydrology, *J. of the American Planning Assoc.* **60**(1): 95-108
- 3 Harris, A., and F. Hossain, 2007, Investigating the Optimal Configuration of Conceptual Hydrologic
4 Models for Satellite Rainfall-based Flood Prediction in the Upper Cumberland River, *Journal of*
5 *Hydrometeorology* (In review).
- 6 Hawkins, R.H. 1993. Asymptotic determination of runoff curve numbers from data, *Journal of*
7 *Irrigation and Drainage Engineering*, **119**(2):334-345.
- 8 Heaney, J.P., D. Sample, L. Wright, 2001, Geophysical Information System, Decision Support System,
9 and Urban Stormwater Management, US Environmental Protection Agency: Edison NJ.
- 10 Heggen, R. J, 2001, Normalized Antecedent Precipitation Index, *J. Hydrologic Engrg.*, **6**(5), 377-381.
- 11 Hong, Y, K.L. Hsu, S. Sorooshian, and X. Gao, 2005, Self-organizing nonlinear output (SONO): A neural network
12 suitable for cloud patch-based rainfall estimation from satellite imagery at small scales, *Water Resources*
13 *Research*, 41, W03008, doi:10.1029/2004WR003142.
- 14 Hong, Y, K-L Hsu, H. Moradkhani, S. Sorooshian, 2006: Uncertainty quantification of satellite
15 precipitation estimation and Monte Carlo assessment of the error propagation into hydrologic
16 response, *Water Resources Research.*, **42**(8), W08421, 10.1029/2005WR004398
- 17 Hossain, F. and E.N. Anagnostou, 2006, A Two-Dimensional Satellite Rainfall Error Model, *IEEE-*
18 *Trans. Geosci and Remote Sens.*, **44**(6), pp. 1511-1522, doi: 10.1109/TGRS.2005.863866
- 19 Hossain, F., N. Katiyar, Y. Hong, and A. Wolf, 2007, The Emerging role of Satellite Rainfall Data in
20 Improving the Hydro-political Situation of Flood Monitoring in the Under-developed Regions of
21 the World, *Natural Hazards* (Special Issue). (In press)
- 22 Huffman, G.J., R.F. Adler, D.T. Bolvin, G. Gu, E.J. Nelkin, K.P. Bowman, Y. Hong, E.F. Stocker, D.B.
23 Wolff, 2007, The TRMM Multi-satellite Precipitation Analysis: Quasi-Global, Multi-Year,
24 Combined-Sensor Precipitation Estimates at Fine Scale. *J. of Hydrometeorology*, **8**(1), 38-55

Joyce, R.J., J.E. Janowiak, P.A. Arkin and P. Xie, 2004, CMORPH: A method that produces global precipitation estimates from passive microwave and infrared data at high spatial and temporal resolution. *J. Hydrometeor.*, **5**, 487–503.

Kohler, M.A. and R.K. Linsley, 1951, Predicting runoff from storm rainfall, U.S. Weather Bureau, Research Paper 34

Legates, D.R. and C.J. Willmott, 1990a, Mean seasonal and spatial variability in gauge-corrected, global precipitation, *Journal of Climatology*, **10**:111-127

Legates, D.R. and C.J. Willmott, 1990b, Mean seasonal and spatial variability in global air temperature, *Theoretical Applied Climatology*, **41**:11-21

Mohammed, A., F. Yohannes, G. Zeleke, 2004, Validation of agricultural non-point source (AGNPS) pollution model in Kori watershed, South Wollo, Ethiopia, *International Journal of Applied Earth Observation and Geoinformation*, **6**: 97-109

NEH-4 (National Engineering Handbook Section 4 Hydrology Part 630), 1997, U.S. Department of Agriculture Natural Resources Conservation Service, Washington, D.C

Ponce, V. M. and R. H. Hawkins, 1996, Runoff curve number: Has it reached maturity? *Journal of Hydrologic Engineering* **1**(1):11-19.

Rietz, P.D. and R.H. Hawkins, 2000, Effects of land use on runoff curve numbers, Watershed Management 2000, Am. Soc. Civil Engineers (CD ROM).

Singh, A., 1989. Digital change detection techniques using remotely-sensed data: *Int. J. Remote Sensing*, **10**(6), 989-1003.

Singh, V.P., 1995, Computer models of watershed hydrology, Water Resources Publication: St. Joseph, Michigan

Sorooshian, S., K-L. Hsu, X. Gao, H.V. Gupta, B. Imam, and D. Braithwaite, 2000, Evaluation of PERSIANN System Satellite-Based Estimates of Tropical Rainfall, *Bull. Amer. Met. Soc.*, **81**, 2035-2046.

- 1 Srinivasan, R. and Arnold, J. G., 1994, Integration of a basin-scale water quality model with GIS,
2 *Water Resources Bulletin*, **30**(3), 453-462.
- 3 Steenhuis, T.S. and W.H. Van der Molen, 1986, The Thornthwaite-Mather procedure as a simple
4 engineering method to predict recharge. *J. Hydrol.* **84**:221-229.
- 5 Taylor, J.C., N. van de Giesen, T.S. Steenhuis, 2006, West Africa: Volta discharge data quality
6 assessment and use, JOURNAL OF THE AMERICAN WATER RESOURCES ASSOCIATION
7 **42** (4): 1113-1126
- 8 Thornthwaite, C.W. and J.R. Mather, 1955, The water balance, *Publication in Climatology*, **8**:1-104
- 9 Turk, F.J., and S.D. Miller, 2005: Toward improving estimates of remotely-sensed precipitation with
10 MODIS/AMSR-E blended data techniques. *IEEE Trans. Geosci. Rem.Sensing*, **43**, 1059-1069.
- 11 USACE (US Army Corps of Engineers), 2000, HEC-HMS Technical Reference Manual, Hydrologic
12 Engineering Center, Davis, CA; <http://www.hec.usace.army.mil/software/hec-hms/>
- 13 USDA (United States Department of Agriculture Natural Resources Conservation Service), 1986,
14 Urban Hydrology for Small Watersheds, Technical Release 55, 2nd ed., NTIS PB87-101580,
15 Springfield, Virginia, also available on the web in PDF format at
16 ftp://ftp.wcc.scs.usda.gov/downloads/hydrology_hydraulics/tr55/tr55.pdf
- 17 Villarini, G. and W. F. Krajewski, 2007, Evaluation of the research version TMPA three-hourly 0.25° x
18 0.25° rainfall estimates over Oklahoma, *Geophys. Res. Lett.*, **34**, L05402,
19 doi:10.1029/2006GL029147
- 20 Vorosmarty, C.J., C.A. Federer, and A.L. Schloss, 1998, Potential evaporation functions compared on
21 US watersheds: Possible implications for global-scale water balance and terrestrial ecosystem
22 modeling, *Journal of Hydrology*, **207**: 147-169
- 23 Viessman, W. and G. L. Lewis, 1996, Introduction to Hydrology, fourth edition, HarperCollins
24 College Publishers, NY.

Table 1 Hydrological Soil Group (HSG) derived from soil property

HSG	USDA SOIL TEXTURE CLASS	SOIL CONTENTS	% OF EARTH'S SURFACE	PROPERTY
A	1,2,3	sand, loamy sand or sandy loam types of soils	4.69	Low runoff potential and high infiltration rates even when thoroughly wetted; chiefly of deep, well to excessively drained sands or gravels
B	4,5,6	silt loam, loam, or silt	8.41	moderate infiltration rate and consists soils chiefly with moderately fine to moderately coarse textures
C	7	sandy clay loam	3.98	low infiltration rates when thoroughly wetted and consist chiefly of soils with moderately fine to fine structure.
D	8,9,10,11,12	clay loam, silty clay loam, sandy clay, silty clay or clay	5.78	highest runoff potential, very low infiltration rates when thoroughly wetted and consist chiefly of clay soils
0	0	Water bodies	65.55	N/A
-1	13	Permanent ice/snow	11.59	N/A

Table 2 The composite CN for several watersheds for “fair” hydrological conditions.

Watershed	Amazon	Mississippi	Yangtze	Colorado	Mekong	Uruguay	Sacramento	Albany
Composite CN	75.484	73.165	81.787	78.621	62.355	83.7	77.425	54.702
Basin length(km)	4327	4184	4734	1807	3977	1424	926	951
Area (km ²)	5,853,804	3,202,958	1,794,242	807,573	773,737	355,505	192,563	132,799

Global surface-averaged CN=72.803

Table 3 TRMM-CN runoff climatology in the latitude band 50°S-50°N) compared to GRDC observed (OBS), Water Balance Model (WBM), and the later two composite runoff (CMP).

	GRDC Runoff Climatology		
Statistics	OBS	WBM	CMP
Corr. Coef.	0.75089	0.79906	0.78944
Bias ratio	1.2799	1.1174	1.1187
Rmsd	0.56mm/day	0.48mm/day	0.51mm/day

Figure Captions

Figure 1. Global NRCS runoff Curve Number map derived from USDA Hydrological Soil Groups and Land Cover Classification for fair hydrological conditions.

Figure 2. (a) Climatological pentad Antecedent Precipitation Index (API) averaged over 9 years (1998-2006); (b) pentad antecedent rainfall accumulation (mm) ending on August 25, 2005; (c) pentad Normalized API (NAPI) on August 25, 2005; (d) hydrological condition, with -1, 0, 1, 2 corresponding to no data, dry, fair, wet conditions, determined by NAPI as of August 25, 2005; and (e) the updated CN on August 25, 2005.

Figure 3. (a) The annual mean runoff (mm/year) simulated using NRCS-CN methods from TMPA estimates for the period 1998-2006; (b) the GRDC observed runoff (mm/year); and (c) runoff zonal mean profiles comparing TMPA precipitation (green) and simulated runoff (red) to GRDC runoff (blue) from the observed (left), WBGS (center), and composite (right) data sets.. Note: the gray areas in (a) and (b) indicate no data or water surface.

Figure 4. TRMM-CN runoff difference distribution (a) and root-mean-square difference (b) as a function of basin area.

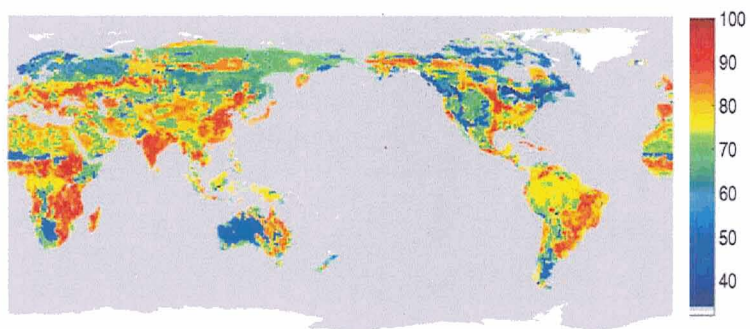


Figure 1. Global NRCS runoff Curve Number map derived from USDA Hydrological Soil Groups and land cover/use classification for fair hydrological conditions.



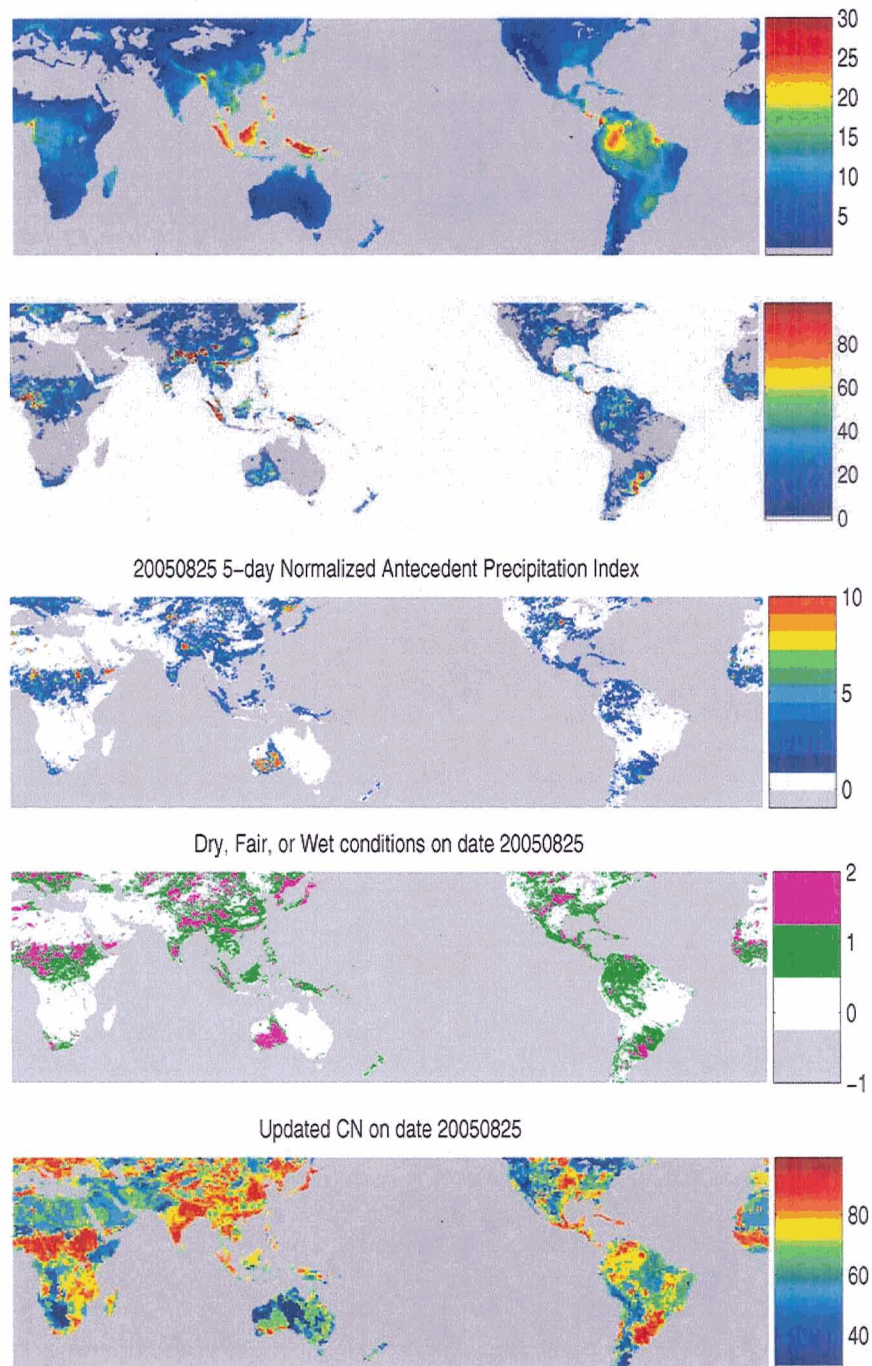


Figure 2. (a) Climatological pentad Antecedent Precipitation Index (API) averaged over 9-year (1998-2006); (b) pentad antecedent rainfall accumulation (mm) ending on August 25, 2005; (c) pentad Normalized API (NAPI) on Aug 25, 2005; (d) hydrological condition, with -1, 0, 1,2 corresponding to no data, dry, fair, wet conditions, determined by NAPI as of August 25, 2005; and (e) the updated CN on date August 25, 2005.

(a) TRMM Rainfall derived Runoff Climatology

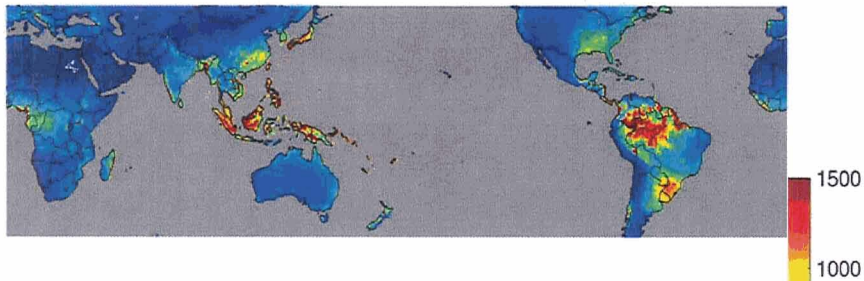

(b) GRDC Observed Runoff Climatology (mm/yr)

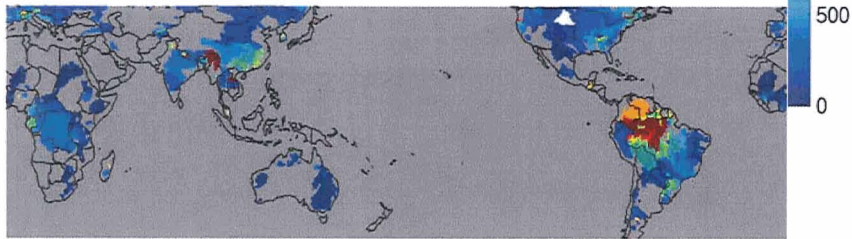

(c) Runoff Zonal Mean Comparison (mm/yr)

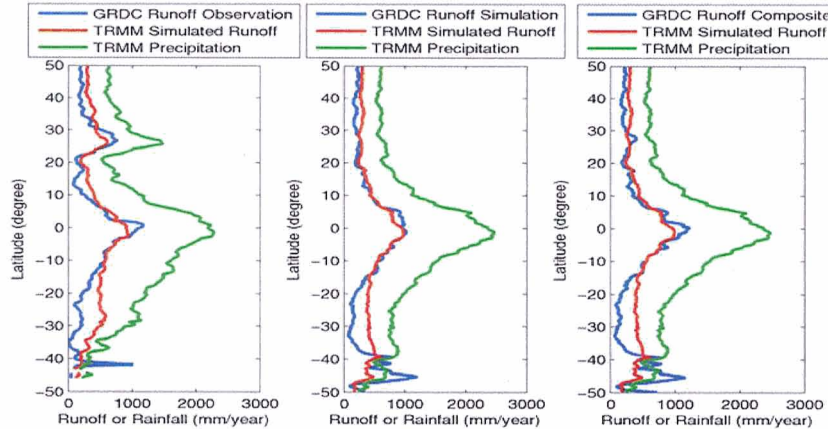


Figure 3. (a) The annual mean runoff (mm/year) simulated using NRCS-CN methods from TMPA estimates for the period 1998-2006; (b) the GRDC observed runoff (mm/year); and (c) runoff zonal mean profiles comparing TMPA precipitation (green) and simulated runoff (red) to GRDC runoff (blue) from the observed (left), WBGs (center), and composite (right) data sets. Note: the gray areas in (a) and (b) indicate no data or water surface.

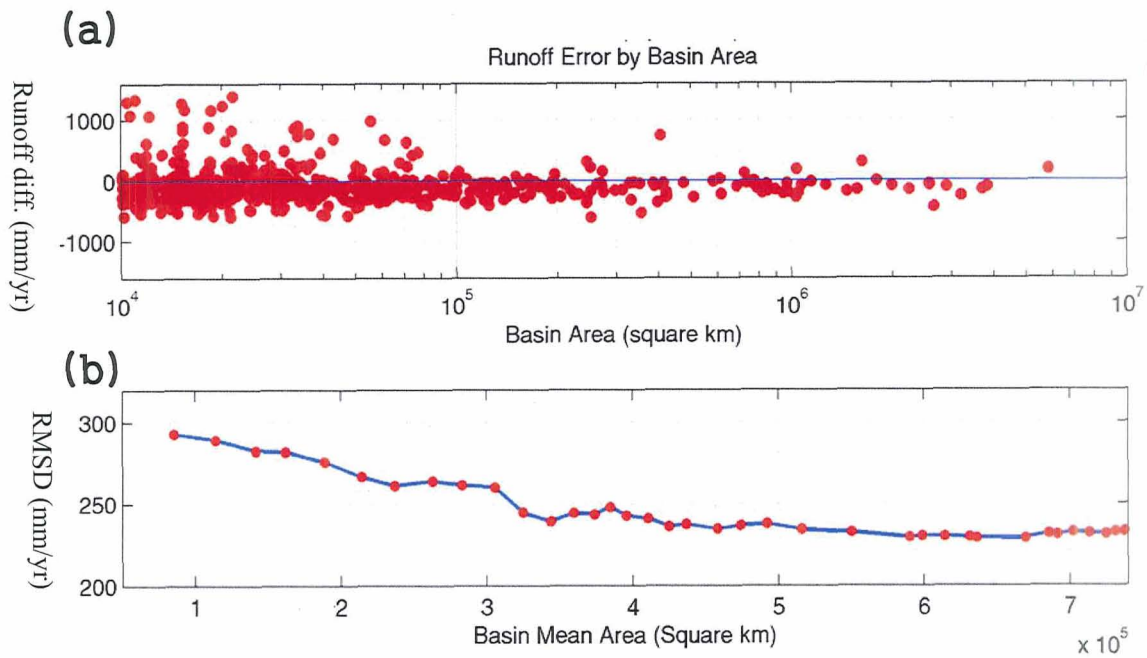


Figure 4. TRMM-CN runoff difference distribution (a) and root-mean-square difference as a function of basin area.