



Nanomaterials for space exploration applications


NanoMaterials Group
NASA Johnson Space Center
ES4/Materials and Processes Branch

E-Mail: padraig.g.moloney@nasa.gov

Phone: 281-244-5917




NASA's Strategic Vision

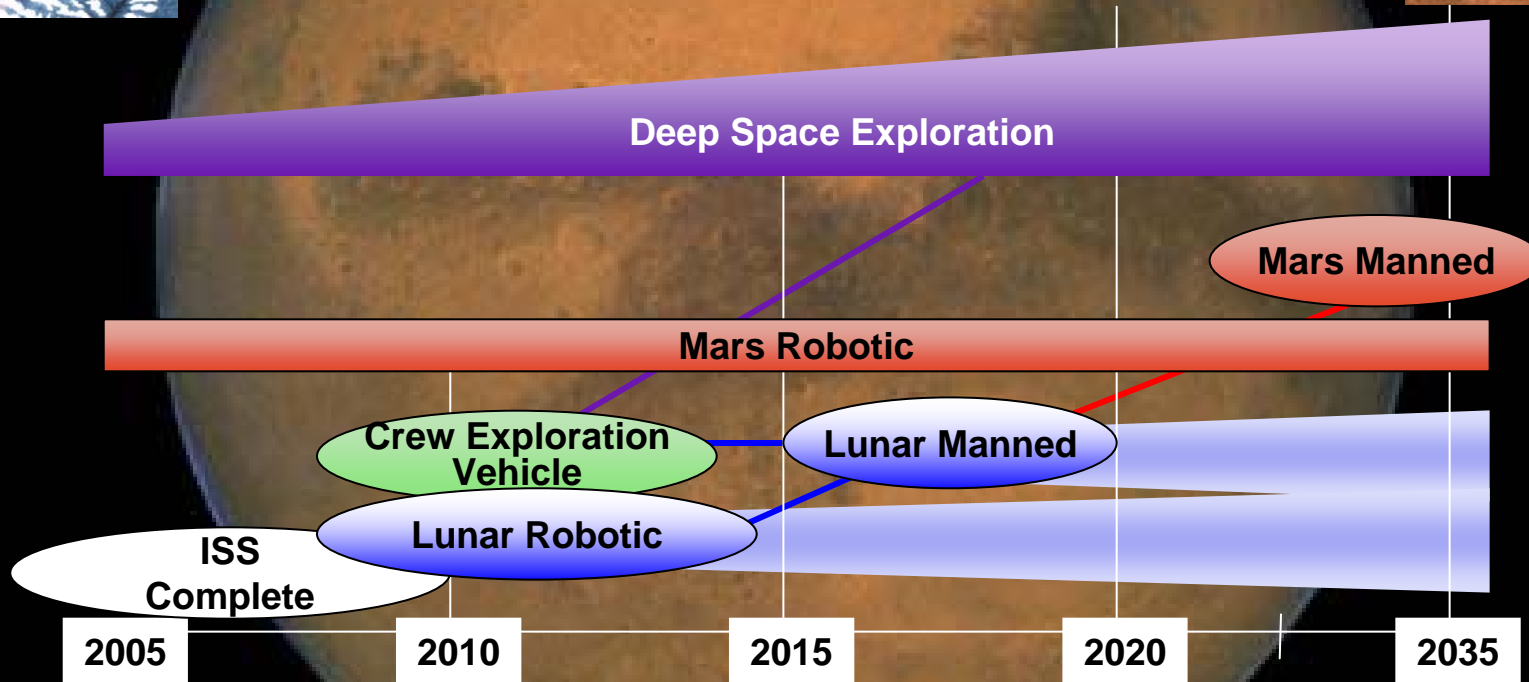



Technology Readiness Levels (TRL)

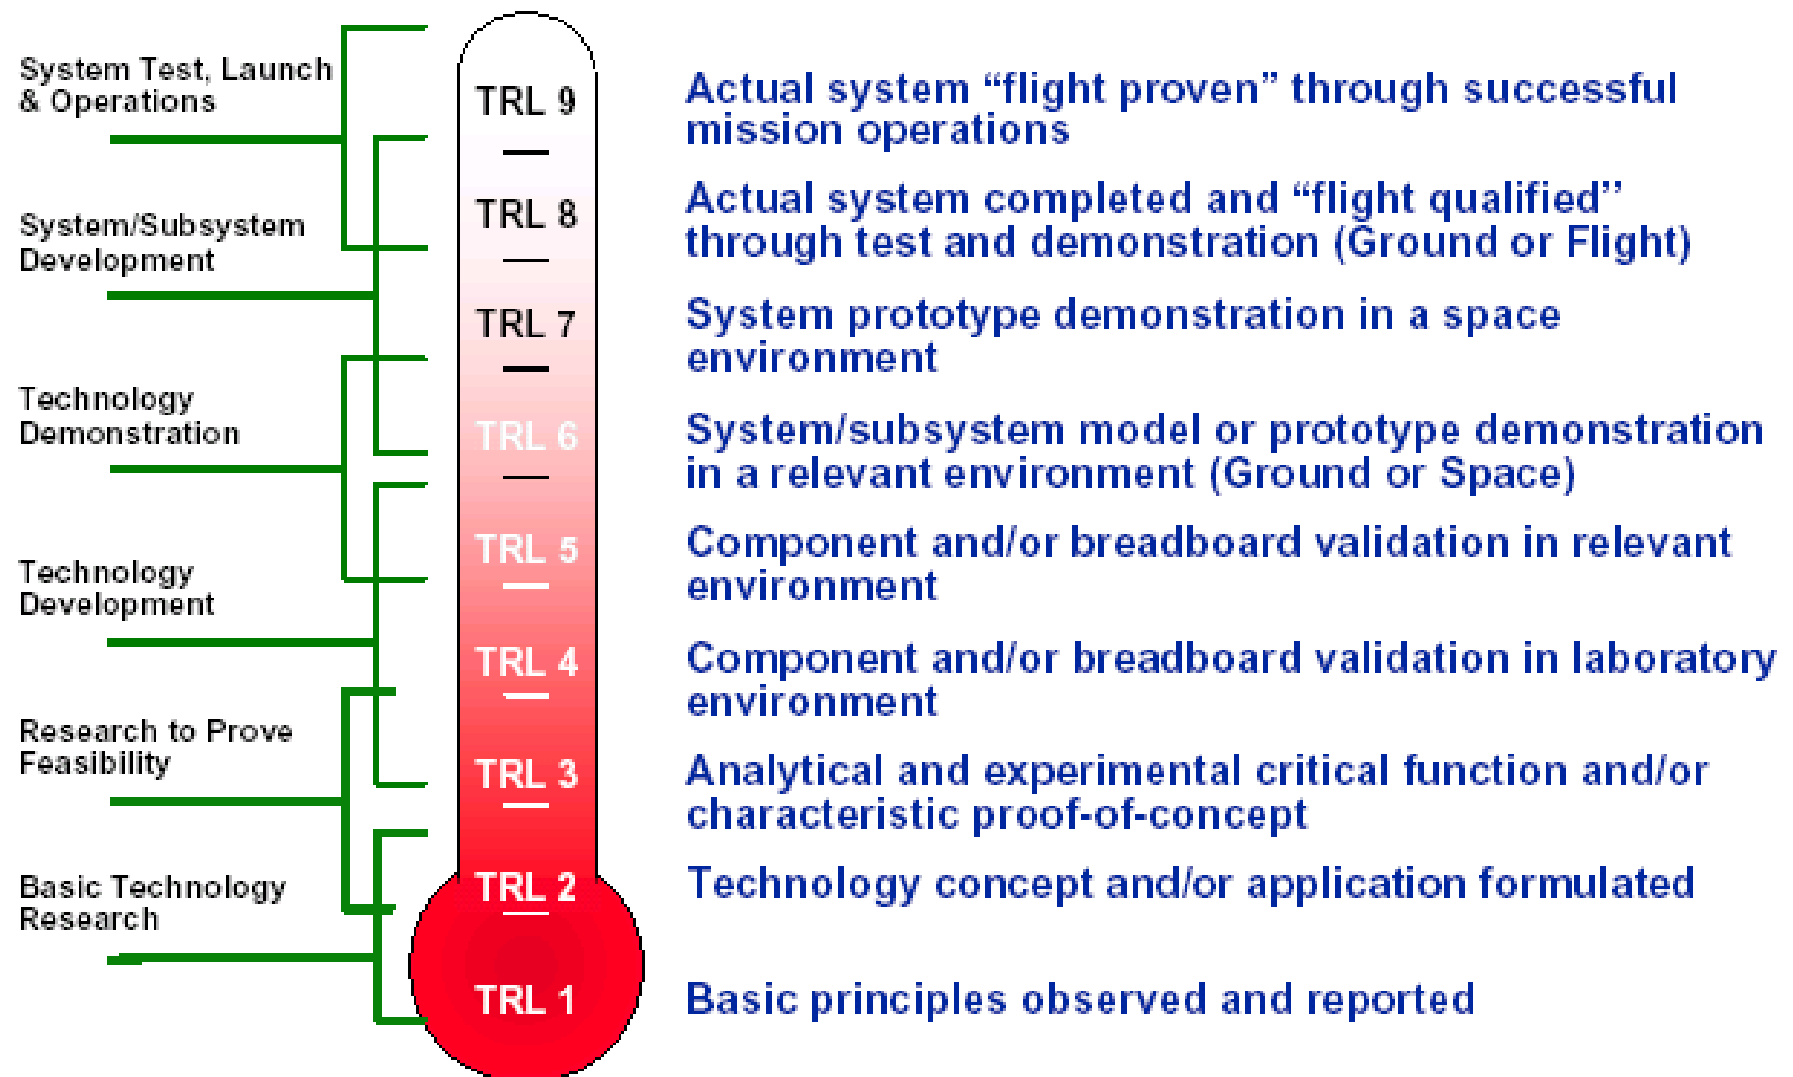



Nanomaterials: Fundamentals to Applications



Growth/Production

Laser and HiPco
Production and
Diagnostics

Characterization

Purity, Dispersion, Consistency, Type
SWCNT Load Transfer
Single Fiber Diffusivity


Processing

Purification
Functionalization
Dispersion
Alignment


Collaboration

Academia, Industry, Government

Applications For Human Spaceflight

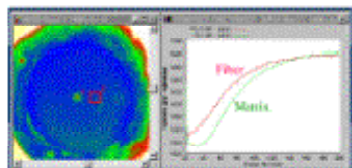


Single Fiber Thermal Diffusivity



Fuel Cells




Ultracapacitors (SAFER)



Nanofiltration

APPLICATION	PARTNERS	TRL				
		1	2	3	4	5
Ultracapacitors	EP, Glenn, Industry	X	X	X	X	
Proton Exchange Membrane – PEM - Fuel Cells	EP, Glenn, Industry	X	X			
RCRS - Regenerable CO ₂ Removal System	EC, Ames, Industry	X	X			
Active / Passive Thermal Management Materials	EC, Rice, ORNL, Industry	X	X			
Nanofiltration for Water Recovery	EC, Industry	X	X			
Electromagnetic Shielding Materials (ESD/EMI)	EV, Rice, LaRC, Industry	X	X	X		
Advanced Nanostructured Materials for Thermal Protection and Control	ES3, Ames, Goddard, Industry	X	X			
Radiation Dosimeter	NX, Rice, PV, LaRC, Ames	X				
Nanotube-Based Structural Composites	ES, Rice, UH, LaRC	X	X			

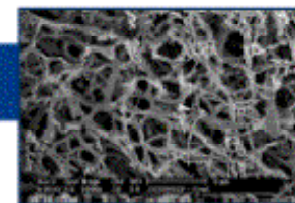

Ceramic Nanofibers (TPS)



High Thermal Conductivity Fabrics



CO₂ Removal



Electromagnetic Shielding

JSC Nanomaterials Group Collaborations



Government

National Institute of Standards and Technology
• Development of nanoscale measurement standards (Friedman)

NASA Langley Research Center
• Production / purification (JSC) for use in SWNT composites (Slocht, Park, Smith)

Central Intelligence Agency
• Nanotube characterization (Carr)

Oak Ridge National Lab.
• CNT production, purification and characterization (Gehegan)
• Thermal characterization (Wang)

NASA Ames Research Center
• Nanotubes (JSC) for sensors / modeling of HPco (Meyyappan, Srivastava)

National Renewable Energy Lab
• CNT Purification (Heben, Dillon)

NASA Glenn Research Center
• Functionalization, purification, high temp. mat's (Meador, Gray)

Air Force Research Lab.
• Composites, characterization, purification (Maruyama, Strong)

NASA Marshall Space Flight Center
• Nanotubes, MMCs (Gil, Hudson)

Naval Research Lab.
• Composites (Imam, Pehrsson)

Los Alamos National Lab
• Purification (O'Connell)

National Institute for Occupational Safety and Health
• Nanotube toxicology studies (Shvedova)

Academia

NASA-URETI: Texas A&M, Rice, UT Arlington, TSU, PrairieView A&M and UH
• Nanotube characterization
• Radiation protection
• Mechanics / composites

Rice University
• Advanced Nanotechnology Mat's and Applications (Smalley, Tour, Barrera)
• Computational Mat's Sci. (Yakobson)
• Nanoshells (Halas)

Michigan Tech
• Summer Faculty Fellow - Composites (Caneba)

University of Houston
• GSRP, year 3 of 3 - Polymer chemistry, dispersion, composites (Mitchell, Krishnamoorti)

UC Riverside
• Purification / characterization (Haddon)

Georgia Tech
• Nanotube composite films (Ready)

University of Paris 13
• Arc process (Faihal)

University of Pennsylvania
• CDDE - Thermal Mgmt. Mat's (Fischer)
• Composites (Luzzi, Winey)

University of Florida
• Isolated SWNTs (Rinzler)

University of Tennessee, Knoxville
• Nanoindentation (Perumadu)

Northwestern
• Nanomechanics (Ruoff)

University of Oklahoma
• Thermal stability of nanotubes (Resasco)

LeTourneau University
• Summer Faculty Fellow
• Nanotube growth process (DeBoer)

University of California - Davis
• Nanocrystalline Ceramics (Mukherjee)

Penn State
• Purification / characterization (Eklund)

University of Texas - Tyler
• Summer Faculty Fellow - CFD of Laser process (Greendyke)

GB Tech
• Fuel cells / CO₂ scrubber (Huffman)

Wake Forest
• Characterization of nanotubes (Carroll)

Industry

Carbon Nanotechnologies, Inc.
• Production, purification, applications (Smith)

SouthWest NanoTechnologies, Inc.
• SBIR - Nanotube production (Resasco)

Zyvex
• SBIR - Dispersion (Randall)

NanoTechnologies of Texas, Inc.
• SBIR - Conductive fabrics (Chibante)

Isotron
• EMI shielding

Hamilton-Sundstrand
• CO₂ Scrubber (Papale)

Resolution Performance Products
• Epoxy / nanotube composites (Stark)

Inorganic Specialists
• SBIR - Electrochemical capacitors (Firsich)

Ionwerks
• Mass spectrometry (Schultz)

Nantero, Inc.
• NanoRAM development (Siegel)

ReyTech
• SBIR - Ultracapacitors (Reynolds)

COI Ceramics
• RTF - Ceramic / nanotube composites (Riedell)


Honda
• Magnetic characterization (Harutyunyan)

Nanospectra
• Thermal control coatings (Watkins)

Eikos
• EMI Shielding (Gladkowski)

Materials and Electrochemical Research
• SBIR - Nanotube production (Loutfy)






Nanomaterials: Single Wall Carbon Nanotubes



Unique Properties


- Exceptional strength
- Interesting electrical properties (metallic, semi-conducting, semi-metal)
- High thermal conductivity
- Large aspect ratios
- Large surface areas



Possible Applications

- High-strength, light-weight fibers and composites
- Nano-electronics, sensors, and field emission displays
- Radiation shielding and monitoring
- Fuel cells, energy storage, capacitors
- Biotechnology
- Advanced life support materials
- Electromagnetic shielding and electrostatic discharge materials
- Multifunctional materials
- Thermal management materials

Size Comparison – C_{60} , Nanotubes, and Atoms

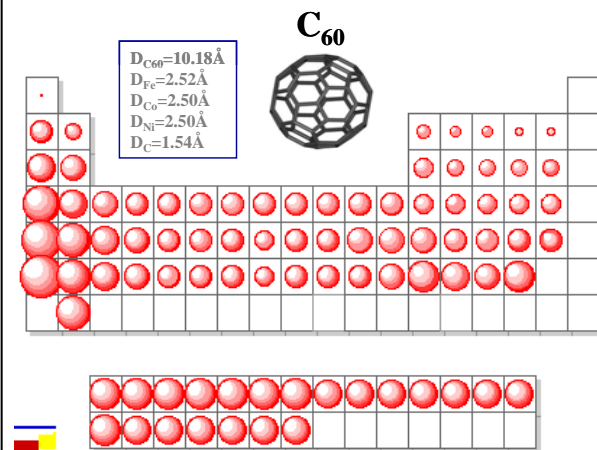

Single Wall
Carbon Nanotube

Current Limitations

- High cost for bulk production
- Inability to produce high quality, pure, type specific SWCNTs
- Variations in material from batch to batch
- Growth mechanisms not thoroughly understood
- Characterization tools, techniques and protocols not well developed



Growth, Modeling, Diagnostics and Production




Objective: Ensure a reliable source of single wall carbon nanotubes with tailored properties (length, diameter, purity, chirality)

High Pressure CO (HiPco)



- Continuous process
- 10-100's g/day
- Small diameters (0.9nm)
- Company spin-off (CNI)


Rice Univ. & NASA → Carbon Nanotechnologies, Inc.

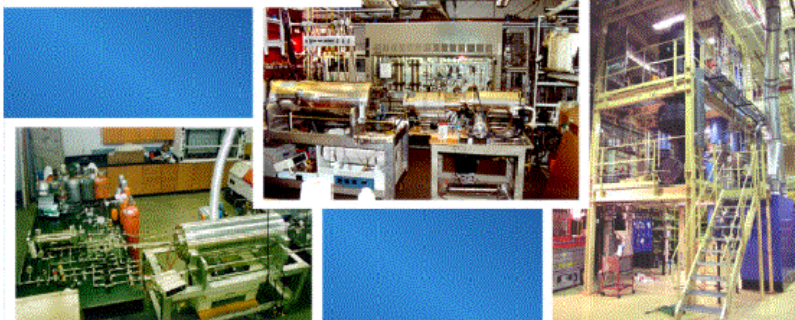



Laser Ablation



- Batch process
- ~1g/day
- Large diameters (~1.4nm)


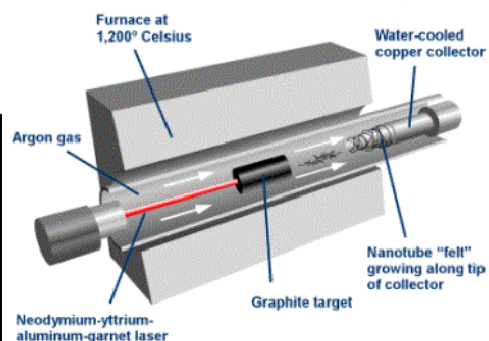


Modeling, Diagnostics, and Parametric Studies

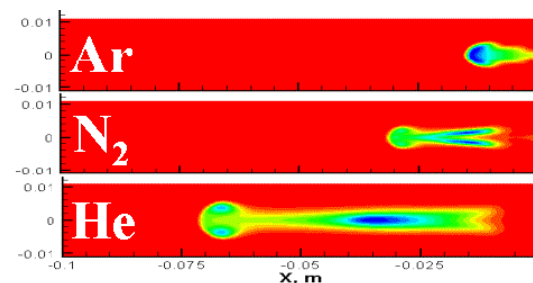



Growth, Modeling, Diagnostics and Production

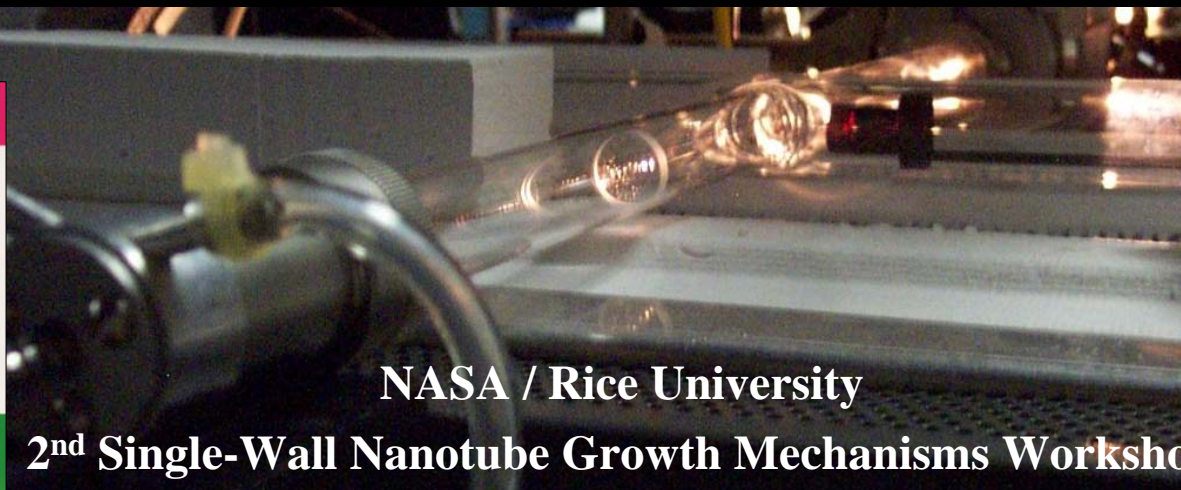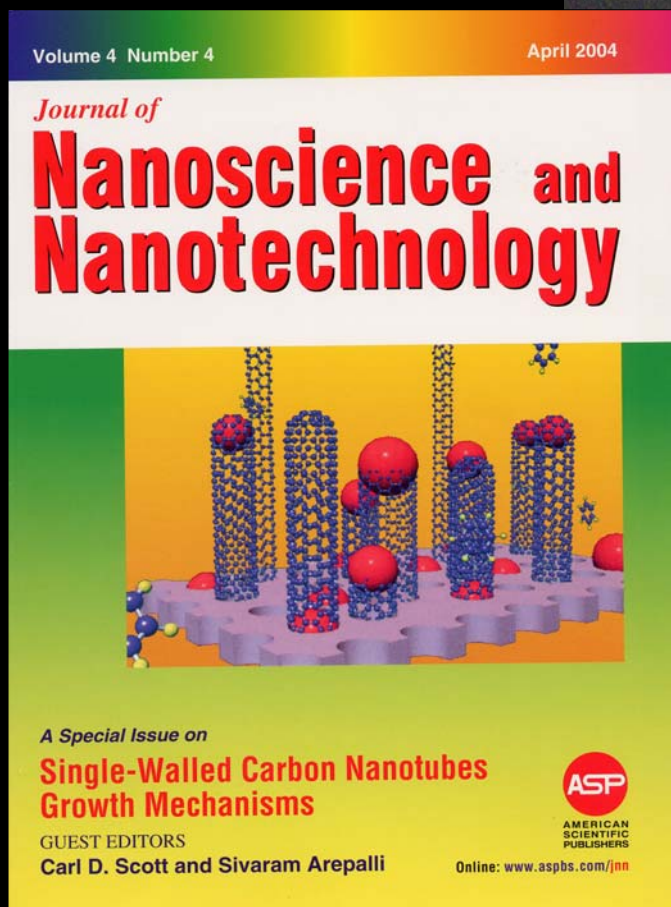

NASA / Rice University

2nd Single-Wall Nanotube Growth Mechanisms Workshop

April 2005

Guadalupe River Ranch, Texas











Characterization: Purity, Dispersion & Consistency





Standard Nanotube Characterization Protocol

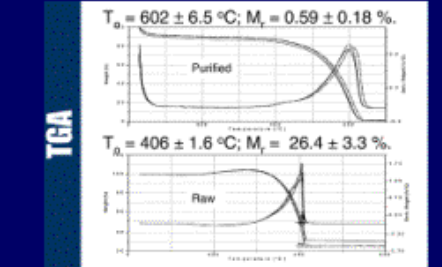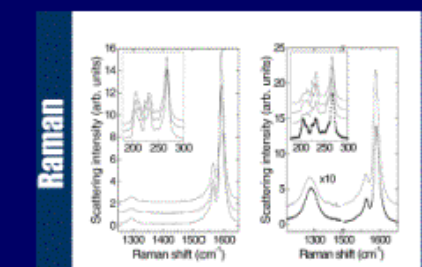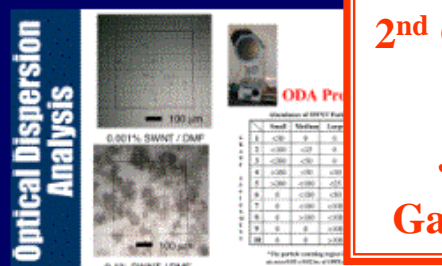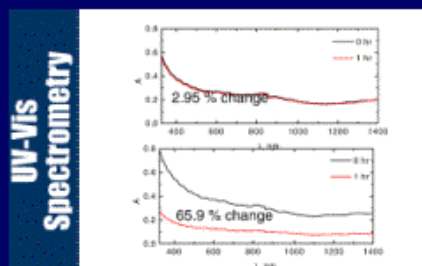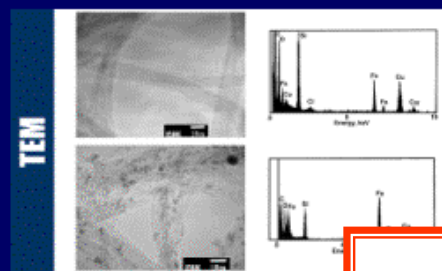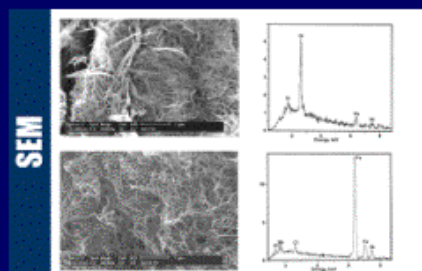


**NASA/NIST
2nd Characterization
Workshop
January 2005
Gaithersburg, MD**

New Purity Reference Standard

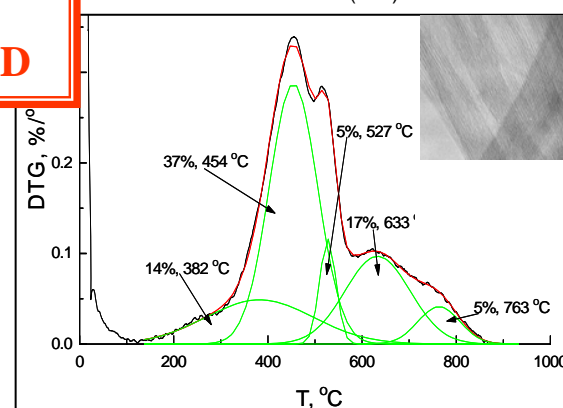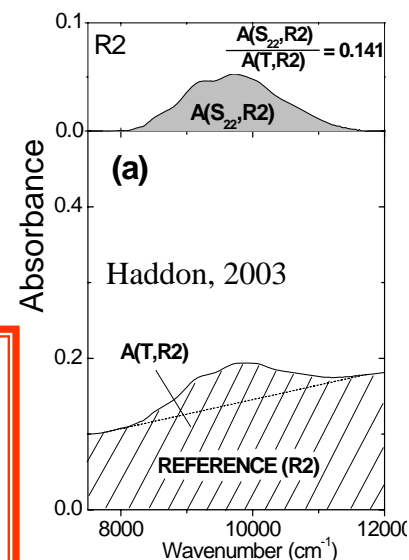

Arepalli, et al., Carbon, 2004



Applications for Human Space Exploration



Power / Energy Storage Materials



- Proton Exchange Membrane (PEM) Fuel Cells
- Supercapacitors / batteries

Advanced Life Support



- Regenerable CO₂ Removal
- Water recovery

Multi-functional / Structural Materials

- Primary structure (airframe)
- Inflatables

Thermal Management and Protection


- Ceramic nanofibers for advanced reentry materials
- Passive / active thermal management (spacesuit fabric, avionics)

Electromagnetic / Radiation Shielding and Monitoring


- ESD/EMI coatings
- Radiation monitoring


Nano-Biotechnology

- Health monitoring (assays)
- Countermeasures



Electrical Power / Energy Storage Systems

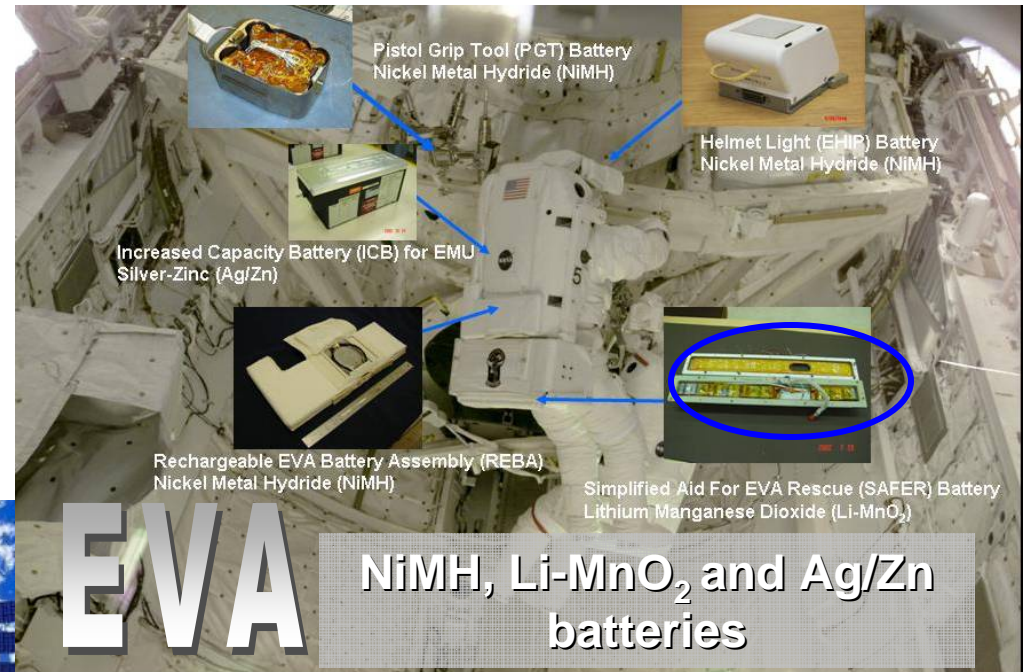




Advanced Power Generation: Hybrid Systems



Fuel Cell

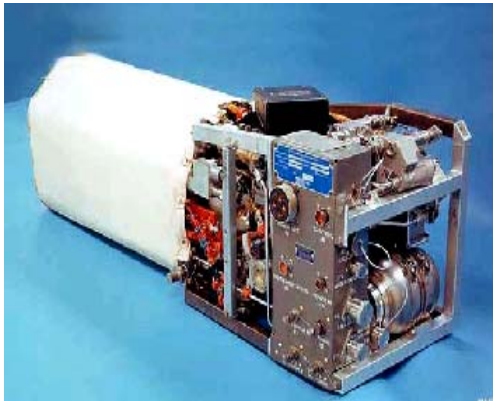

- Continuous energy supply
- High energy density
- Low power density

Battery





- Smaller, lighter, longer life with hybrid
- Intermediate power density
- Intermediate energy density

Supercapacitor



- Pulse power source
- Fast charge/discharge
- Very high power density
- Virtually unlimited cycle life

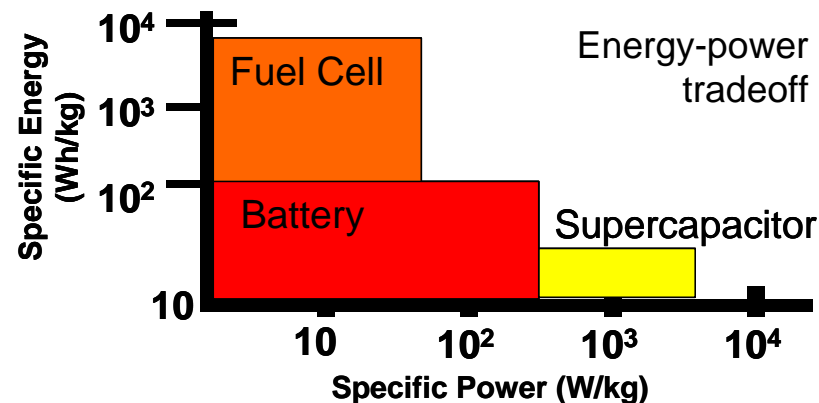





Advanced PEM Fuel Cells – Nanotube Electrodes



- Carbon nanotube electrode assemblies for proton exchange membrane (PEM) fuel cells
- Membrane Electrode Assembly (MEA) formed from a Nafion™ membrane sandwiched between nanotube electrodes with Pt catalyst

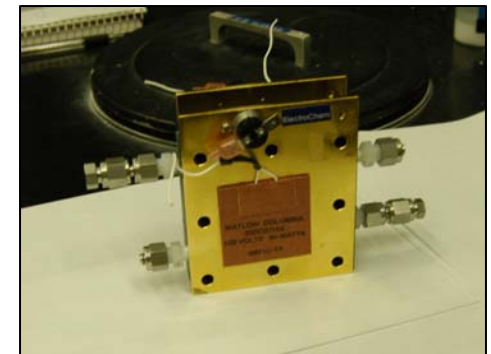

- Increased surface area of the electrodes
- Enhanced thermal management
- Reduce Ohmic losses – increase efficiency
- Higher power density
- Small diameter HiPco tubes may enhance H_2 dissociation – optimized porosity
- More uniform current density

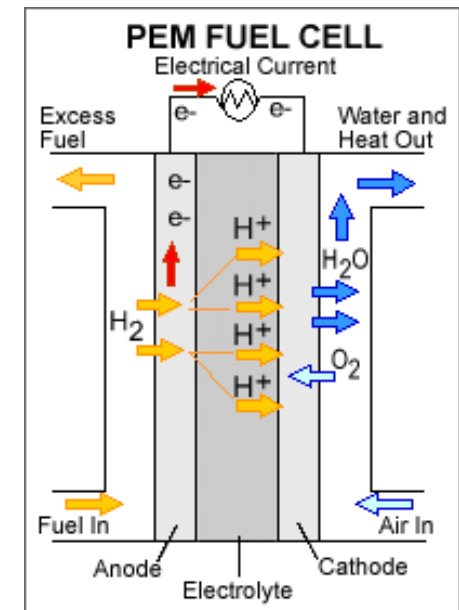

Source: www.eere.energy.gov



Advanced PEM Fuel Cells - Characterization



Characteristic	Technique/ Instrument	Destructive	When	Results
Amount of Pt, Fe, Co, Ni	X Ray Photoelectron/Fluorescence Spectroscopy	no	After BP is baked (Part 5);	Quan
Platinum Dispersion	Scanning Electron Microscopy (SEM)	yes	After BP is baked (Part 5)	Qual
Platinum Dispersion	Transmission Electron Microscopy (TEM)	yes	After BP is baked (Part 5)	Qual
Electrical Conductivity	Probe Meter	no	After MEA is made (Part 7)	Qual
Surface Area & Porosity	Brunauer, Emmett, and Teller Analysis (BET)	yes	After BP is (1) made and (2) baked (Part 4 and Part 5)	Quan

Characteristic	Technique/ Instrument	Destructive	When	Results
Mass	Scale	no	After BP is (1) made and (2) baked (Part 3 and Part 5)	Quan
Thickness	Randall&Stickney Dial Gauge	no	After BP is (1) made and (2) baked (Part 3 and Part 5)	Quan
Interface and Thickness	Freeze Fracture then SEM	yes	After MEA is made (Part 7)	Qual/Quan
Interface	Flash IR Thermography	no	After MEA is made (Part 7)	Qual
Interface	Current Voltage Curve	no	During Fuel Cell Testing	Quan




Advanced PEM Fuel Cells - Characterization



Prototype Membrane Electrode Assembly

Carbon Fiber
Gas Diffusion
Layer
(GDL)

Single Wall
Carbon
Nanotube
(SWCNT)
Electrode

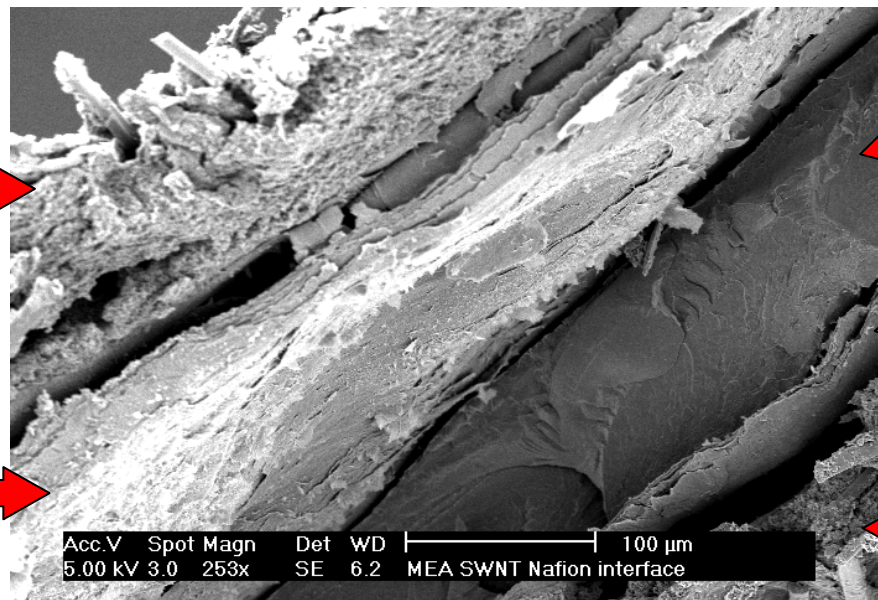

Nafion™
Membrane


SWCNT
Electrode


Carbon Fiber
(GDL)

SWCNT
interface
in MEA



Nafion™
interface
in MEA

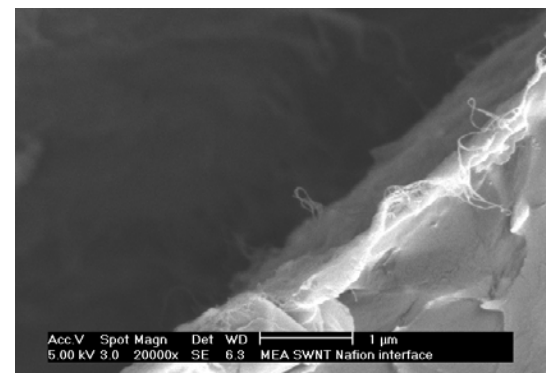






Characterization PEMFC: TEM of Electrodes Made with Purified SWCNTs



TEM provides particle size distribution and EDX Shows elemental composition.

- EDX data does not indicate the presence of Fe (would show up at about 6.4 keV).
- EDX does indicate the presence of Pt, therefore we presume that the visible nanoparticles are composed of Pt.
- TEM shows a range of Pt particle sizes between 2nm and 10nm.
- XPS data indicates that Pt is metallic. This indicates complete decomposition of the precursor.


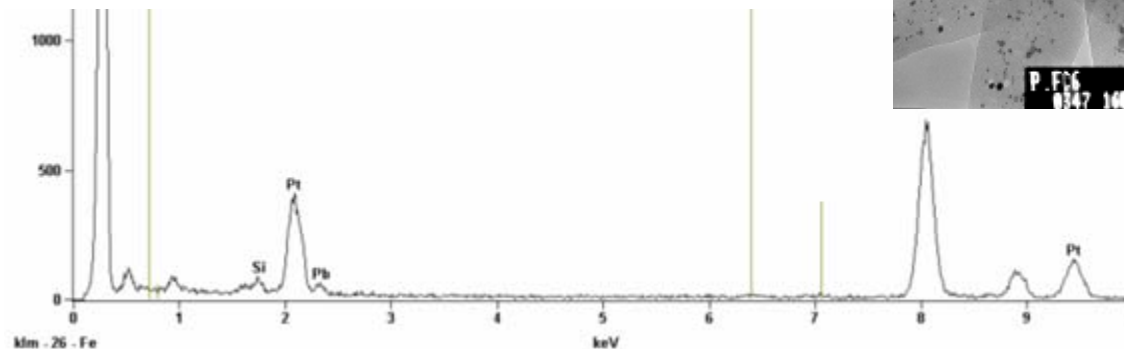
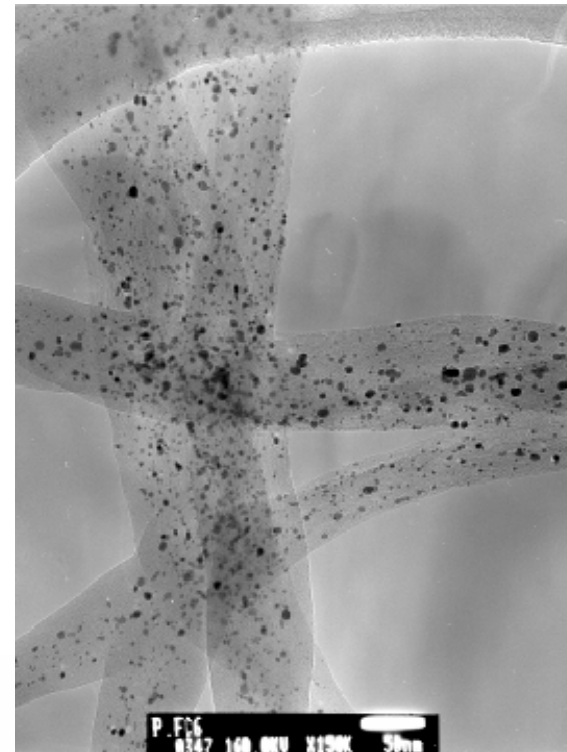




Characterization PEMFC: TEM of Electrodes Ultramicrotomy



TEM Ultramicrotomy Study to characterization interface between GDL, electrodes and Nafion

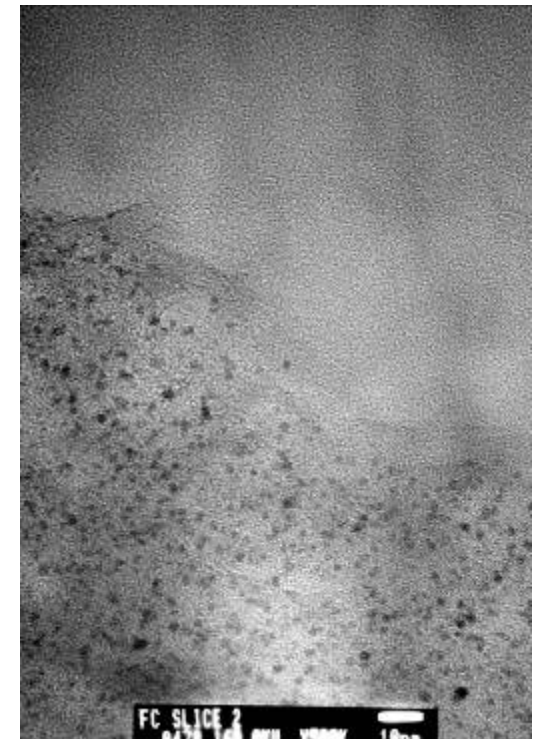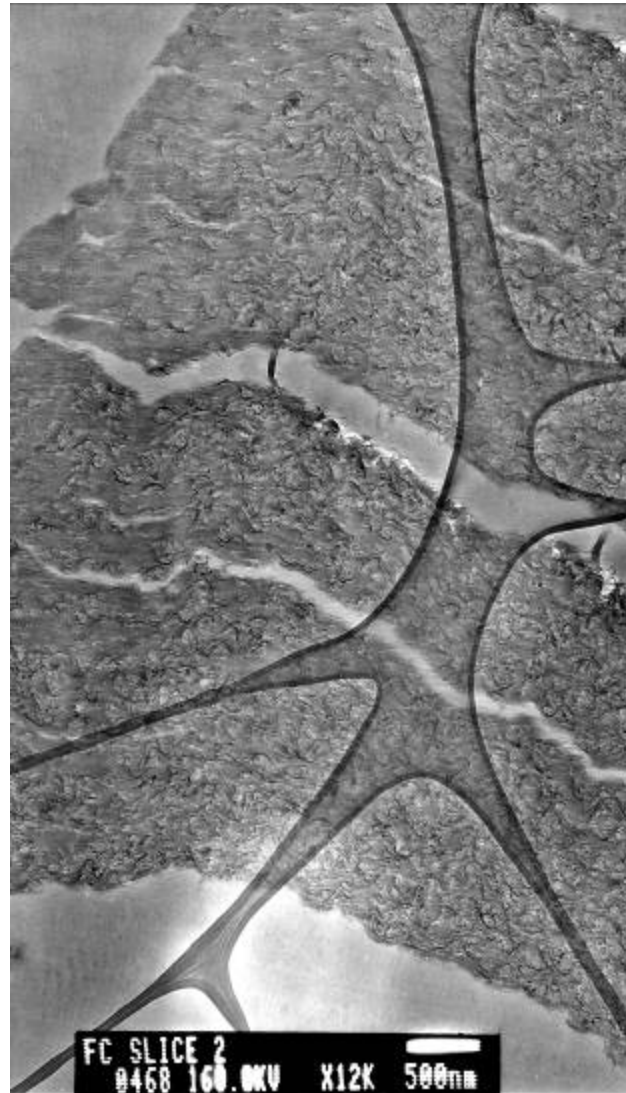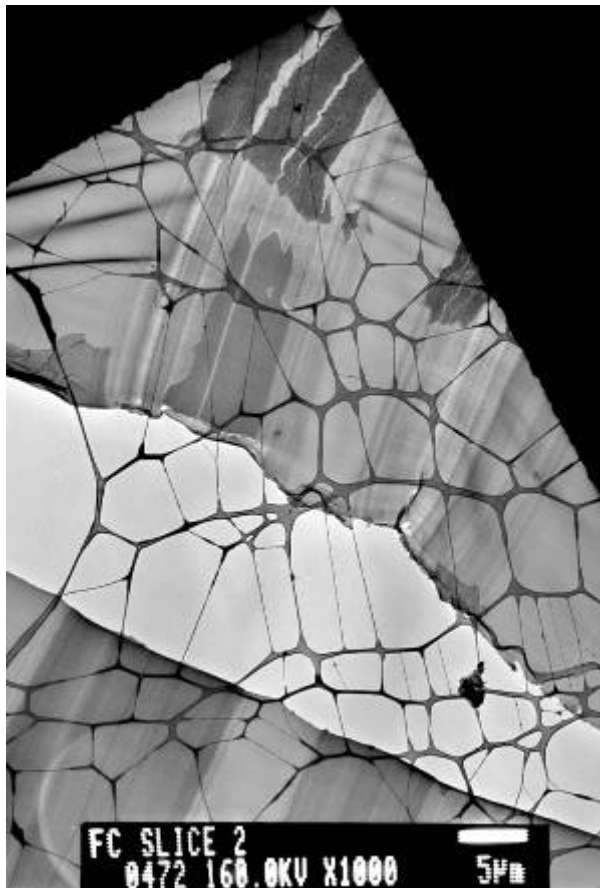




PEMFC




- Developed Characterization protocol
- Test capability at NASA JSC
- Achieving catalyst size and performance
- Higher performance at lower current loading – increased PEMFC kinetics



Water Purification

- NASA JSC Structural Engineering and Crew & Thermal Systems Divisions
- Use light induced production of singlet oxygen by fullerenes to destroy harmful microbes in water supplies
- Developing process for attaching fullerenes to fiber optic cables
- CDDF 2005 – Report Due December 2005

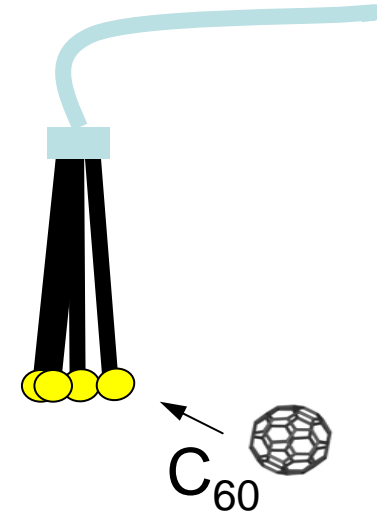





Air Revitalization: CO₂ Removal



- Remove CO₂ from cabin air in order to extend the use of cabin air supplies
- Only a small amount of CO₂ can contaminate a large amount of cabin air

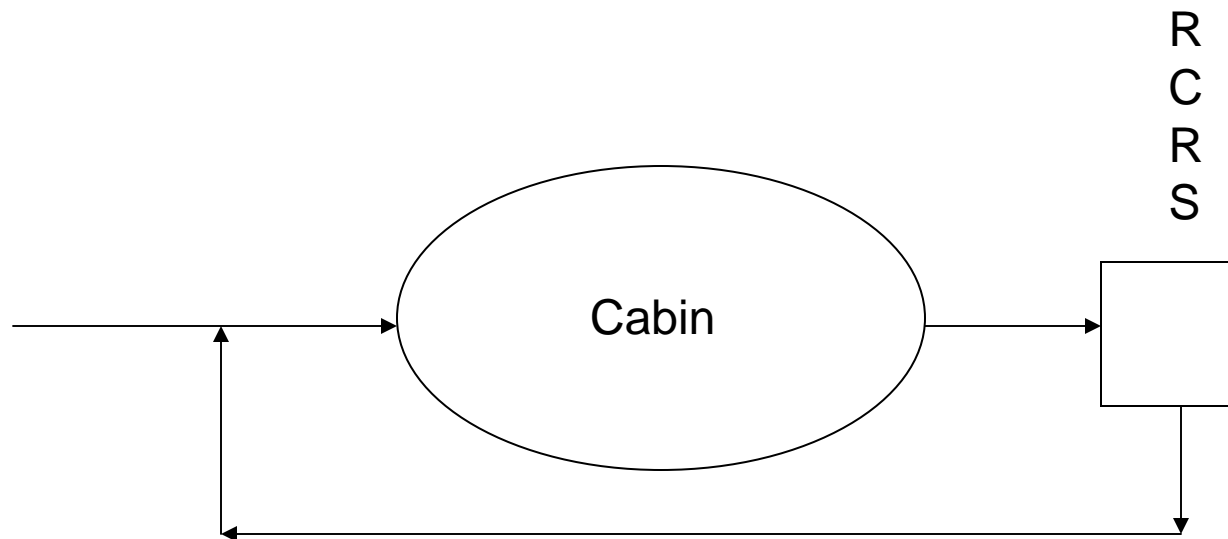




Air Revitalization: Some Current Technologies




Lithium Hydroxide: Not suited for long duration missions since it is non regenerable



$$\Delta H^\circ = + 3.8 \text{ kcal/mol LiOH,}$$


Zeolite 5A: Physisorption of CO_2


- Requires 200C to renew the adsorbent – high power consumption
- Lower surface area to volume ratio
- Non selective







MetOx – Metal Oxide (AgO) reacts with CO_2 to form a carbonate.

- Large system mass – not optimal for PLSS
- Also requires high temperature





Supported Amines for Air Revitalization

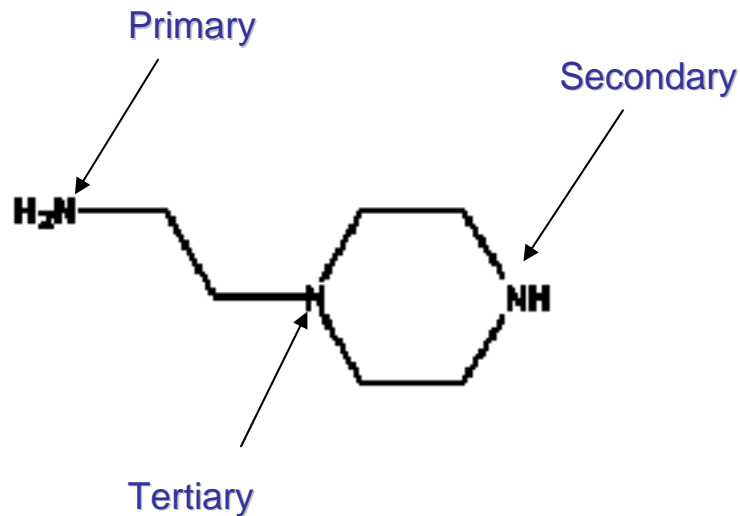


N-aminoethylpiperazine

Catalyzed by moisture

Depending on their bonding amines have varying degrees of affinity for CO₂ capture and desorption

Primary binds CO₂ tightly, thus inhibiting desorption while tertiary amines bind CO₂ poorly

Secondary amines are preferred for pressure swing





The State of the Art in Amine Systems



Advanced solid amine bed system flown in mid-1990's (pressure swing)


- Volume constraints, thermally inefficient, amine volatility
- Not suited for planetary use (need temperature swing)
- Surface area $\sim 100 \text{ m}^2/\text{g}$

Need for new material: high surface area, high thermal conductivity, ability to be coated with amine system

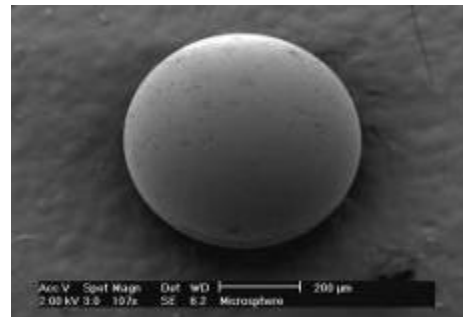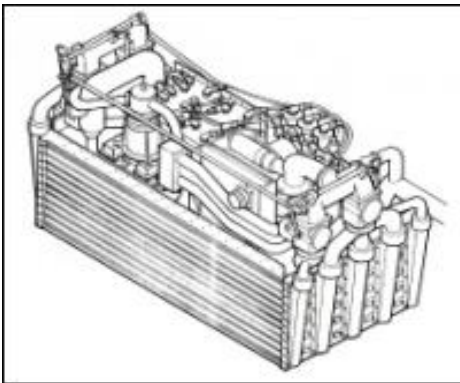

Polymer Bead and Aluminum Structure

Carbon nanotubes may offer a thermally conductive high surface area light weight support material for this application








Initial Results and Technology Assessment



Results

- Carbon Nanotubes have high surface area: bucky pearls, fibers, bucky paper
- TGA experiment: the amine is reactive with the CO₂ gas stream
- Poor adherence to nanotube surface - requires a specific pore size and shape
- We need a better way to integrate the support phase with the amine

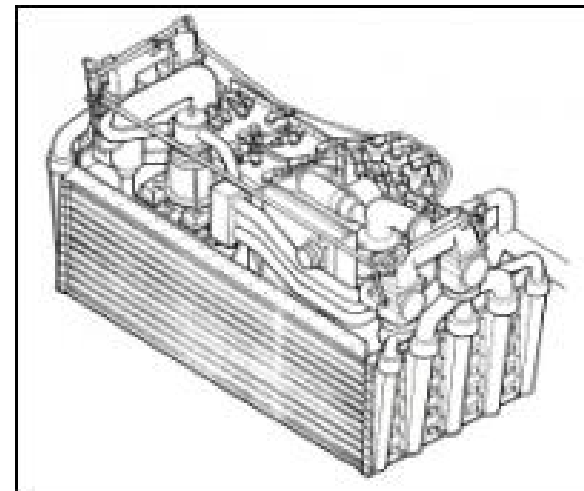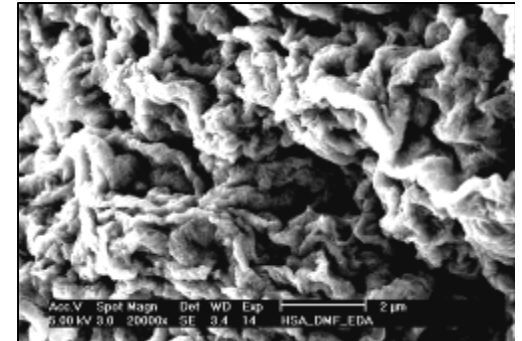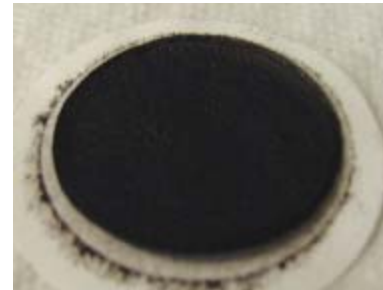





Materials Development and Testing



- Collaborations for functionalization of SWCNTs
- Dr. W. E. Billups group (Rice University)
- Dr. J. Tour group (Rice University)

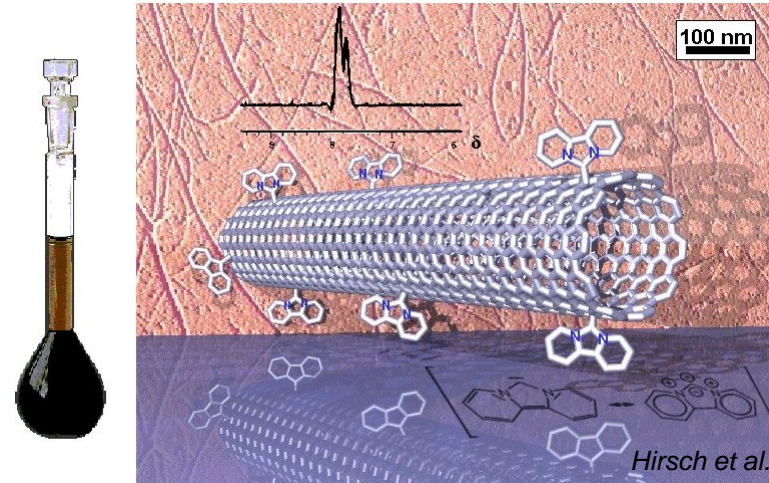

- Collaboration with Dr. T. Filburn (University of Hartford)
 - Determine the types of amines that would be suitable for spaceflight needs
 - Testing methods for equilibrium adsorption and desorption and well as cyclic behavior

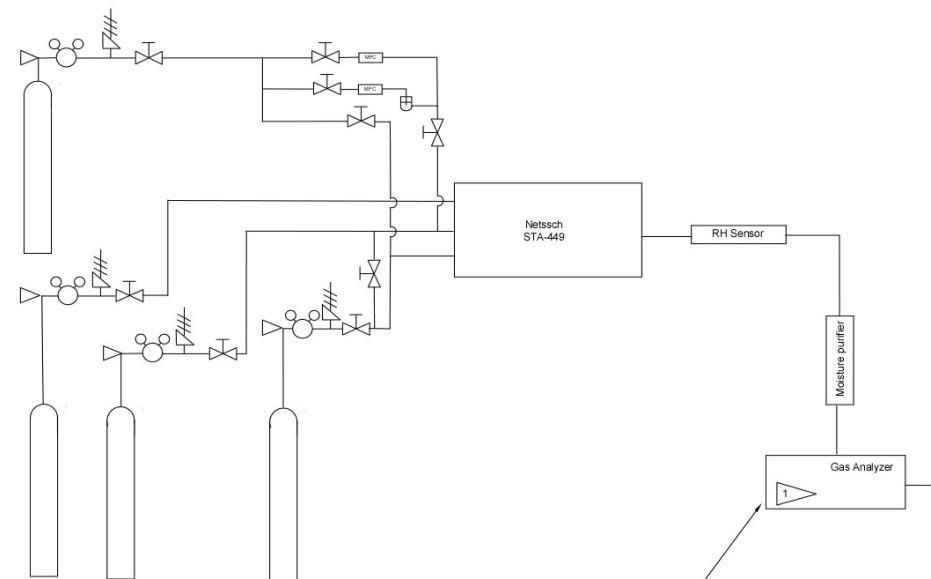





Functionalization of SWCNTs with Amine Groups



- Since amines are volatile the coating would be prone to degradation during repeated thermal or vacuum driven renewal of the adsorbent.
- Chemically bonding of the amine to the support phase was a solution to this problem

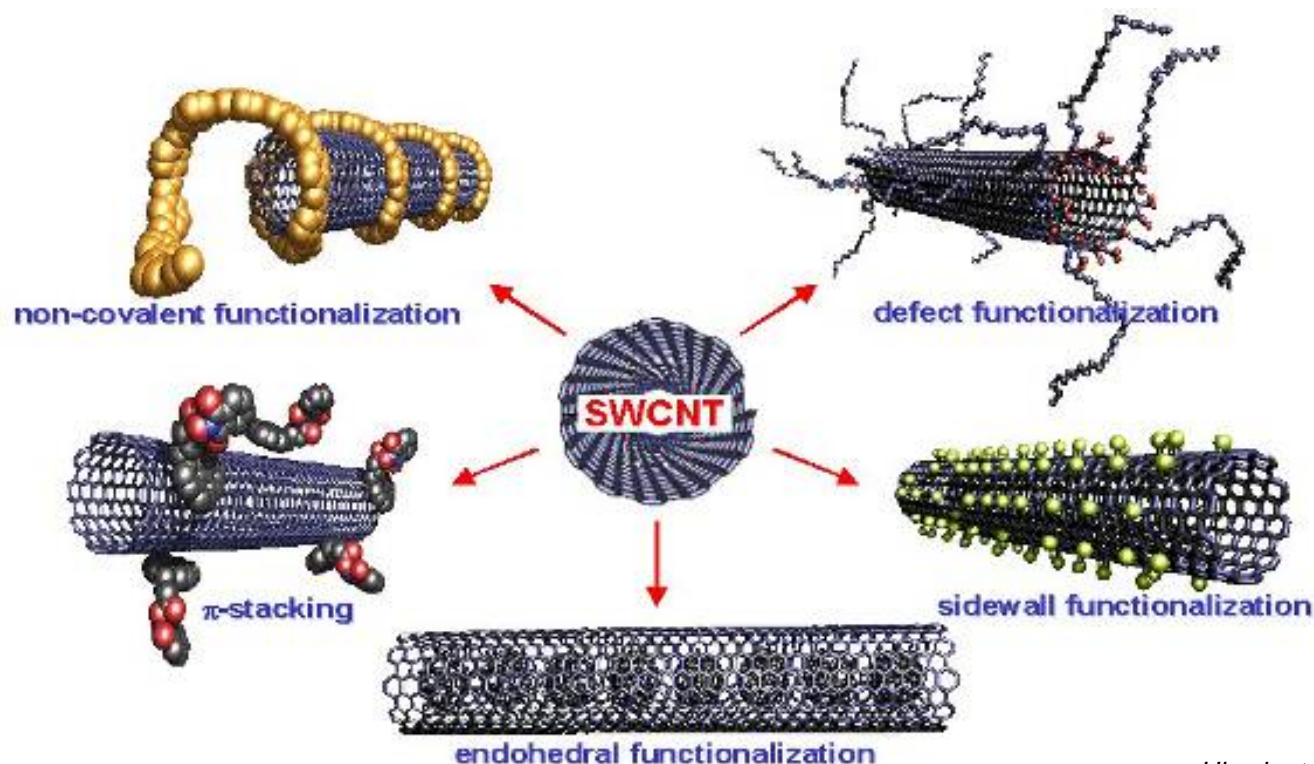

Hirsch et al.



The argument for functionalization




- Amenable to repeated cycling
 - Materials are thermally stable up to 100 C. (Thermal desorption takes place at 50 – 60 C)
 - Chemical bonding of the amine to the support ensures these materials will be amenable to repeated vacuum desorption
- We have the tools and capability to manufacture materials
 - Collaborators at Rice (Tour and Billups) are experts in the area of nanotube functionalization
 - Chemistry is repeatable and reliable.
 - High amine loadings are possible especially with long branched amine polymers





Active / Passive Thermal Management Materials




- SWNT thermal properties are extremely anisotropic; SWNT axial conductivity is comparable to that of diamond (2150 W/m-K)
- Nylon Spandex/SWNT fabric improves crew member's thermal comfort and increases heat transfer rate to EMU sublimator (SBIR)
- Active heat acquisition and transport applications in concept stage (advanced coldplate, interface, fluids)
- New single-fiber thermal diffusivity tool developed by JSC Nano Team and ORNL

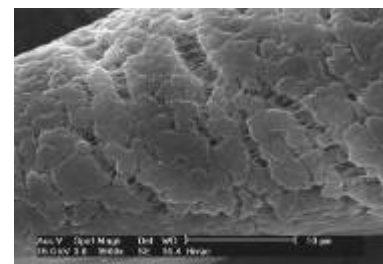

Nylon Spandex/SWNT Fabric for Spacesuits

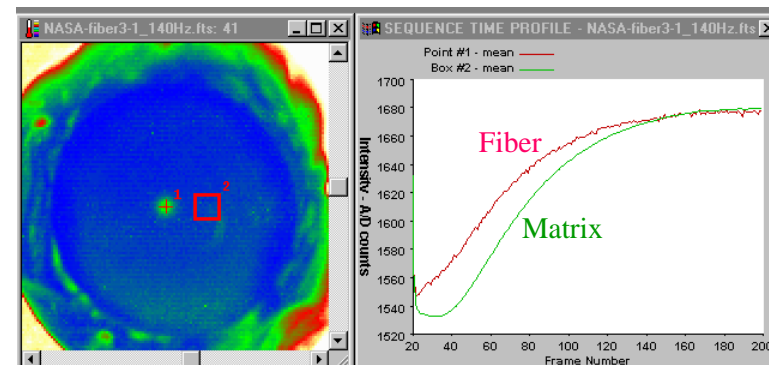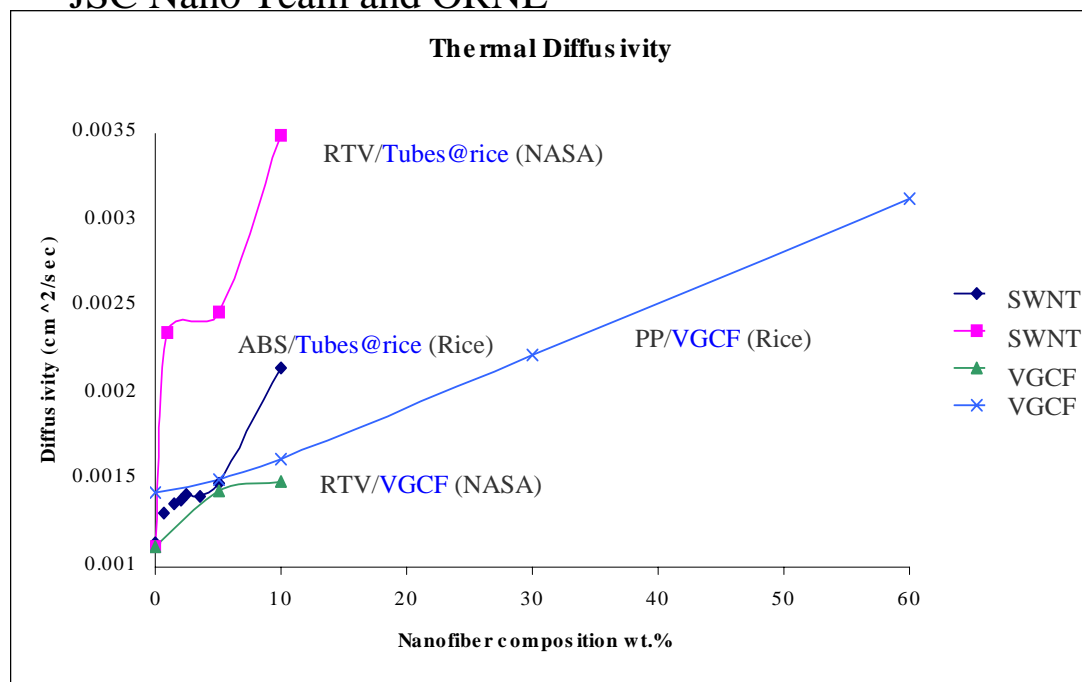

Single Fiber Thermal Diffusivity (JSC and ORNL)




ESD and EMI Materials with Nanotubes




• Application

- SWNTs in a polymer at low concentrations to shield electronics from electromagnetic interference (EMI) and for electrostatic discharge (ESD) protection of sensitive electronics components.
- Advantages – lightweight, humidity independent, flexible, ideal for coatings

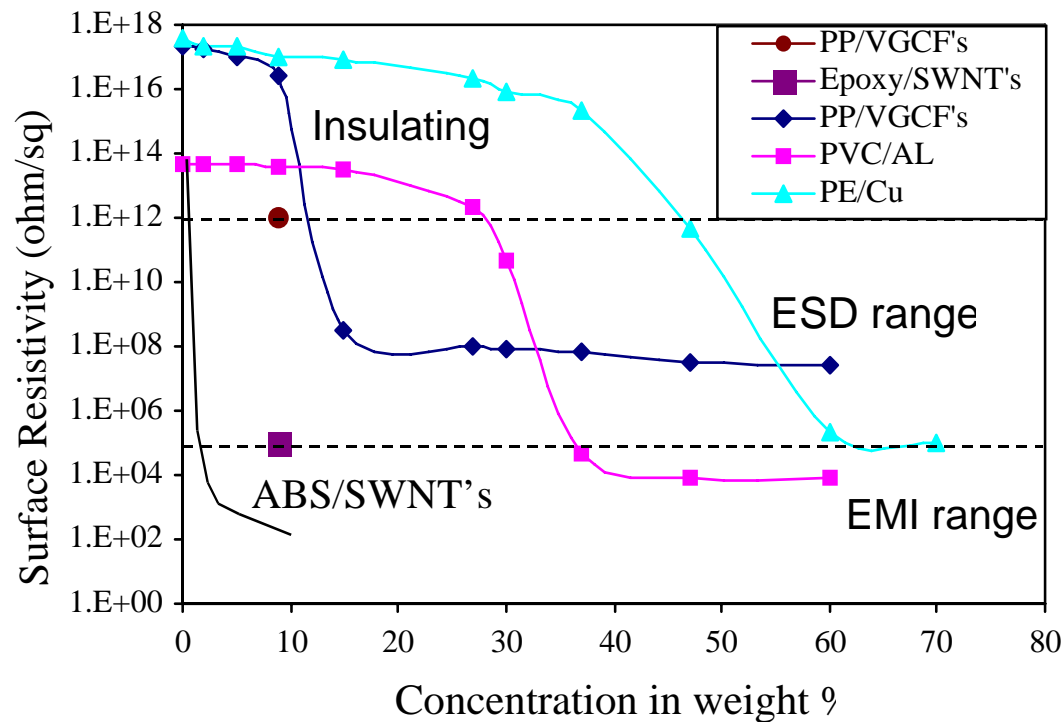

- Testing plan in work with EV (EMI)
- Industry-produced composites tested in RITF (ESD)




Carbon Nanotube Radiation Dosimeter



Compelling need to directly measure the radiation environment of spacecraft and compare to models for safety to humans for EVA and future space travel

- SWNTs respond at the particle level—radiation particle bombardment may be quantitatively detectable
- Fly initially as a passive experiment to gather real-time radiation dose on orbit
- Applicable for commercial usage by Medical, Nuclear industries




Summary



- Overview of NASA JSC NanoMaterials Project
 - Need
 - NanoMaterials Growth
 - NanoMaterials Characterization
 - NanoMaterials Processing
 - NanoMaterials Application
- NanoMaterials for PEMFC
- Presented work for developing solid-supported amine adsorbents based on carbon nanotube materials
 - Materials testing
 - Functionalization of SWCNTs
- Briefly: Other Application areas


Nanomaterials for space exploration applications

Questions?

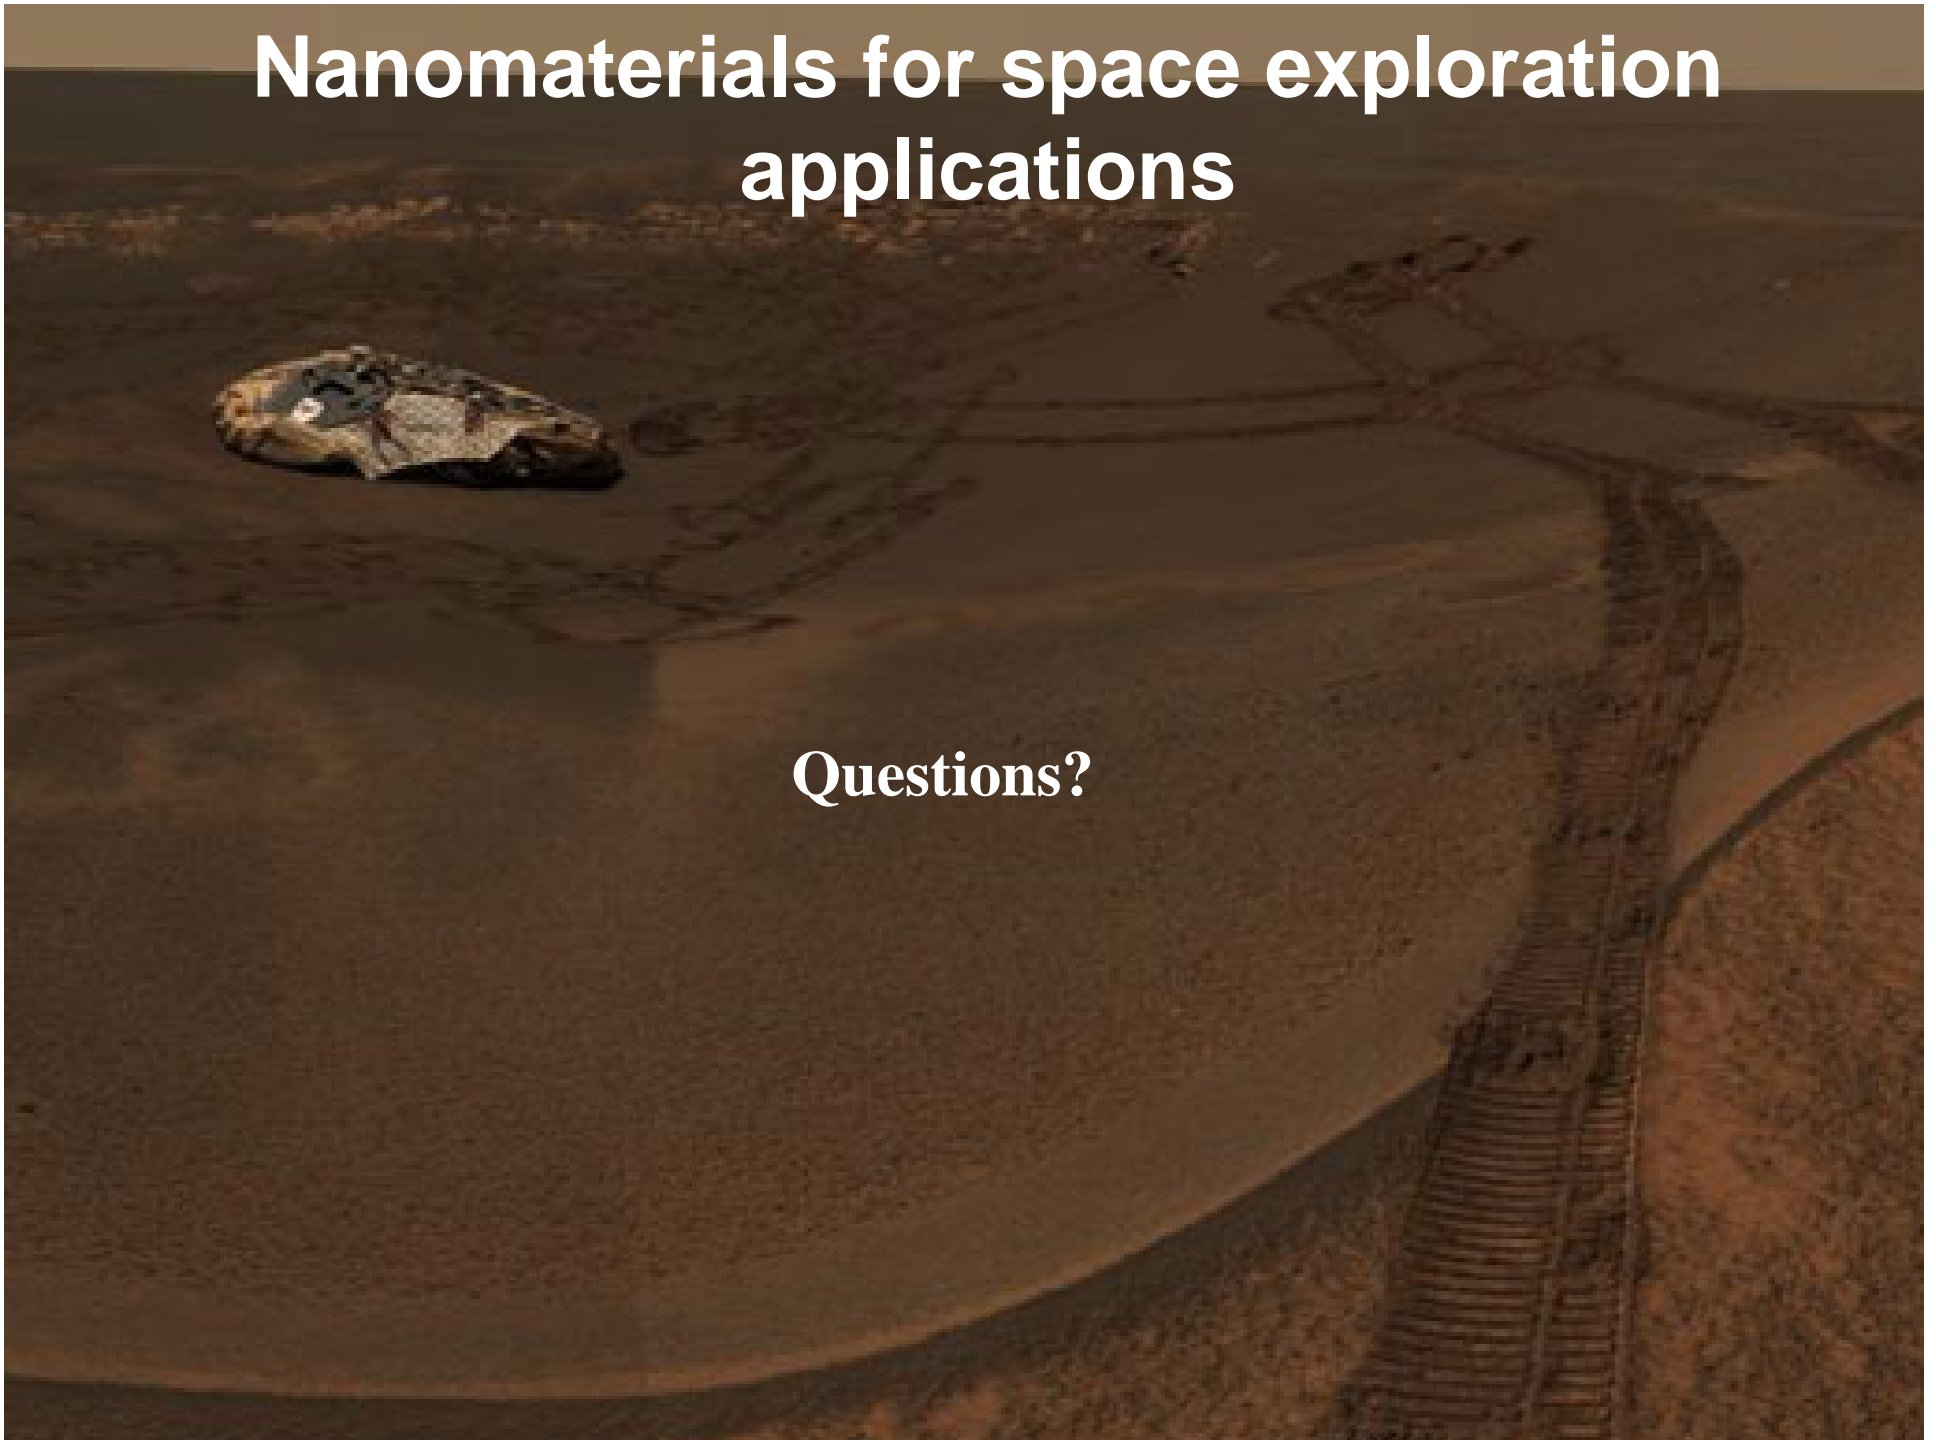




Microscale Testing of Equilibrium CO₂ Capture

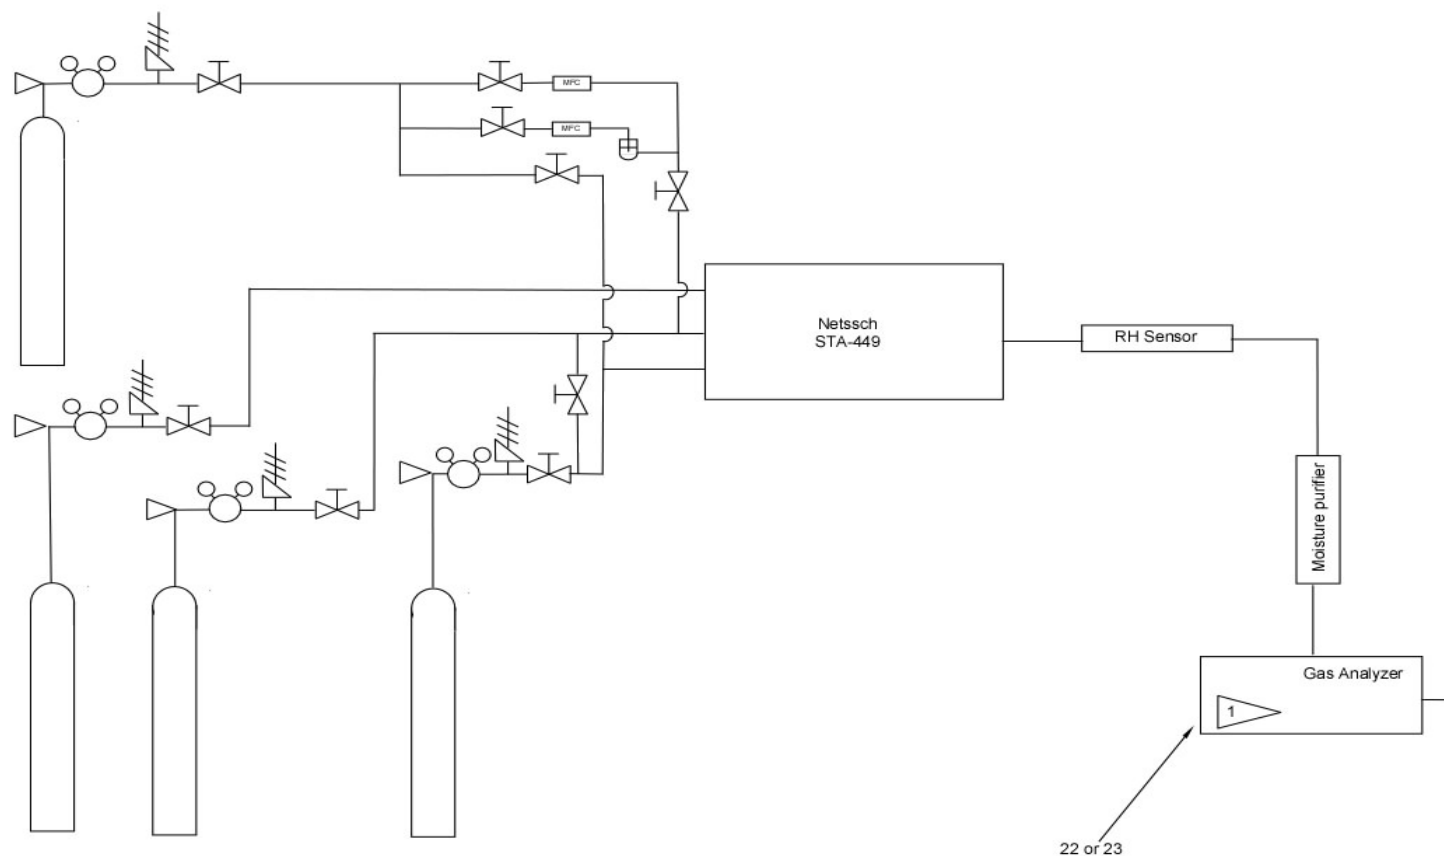


- TGA/DSC experiment: Measure the weight change of a sample upon exposure to CO₂ + H₂O stream – DSC shows heat flow indicative of amine/ CO₂ reaction
- Recent upgrade: Residual gas analyzer measures the change in CO₂ concentration




Characterization of Functionalized SWCNTs

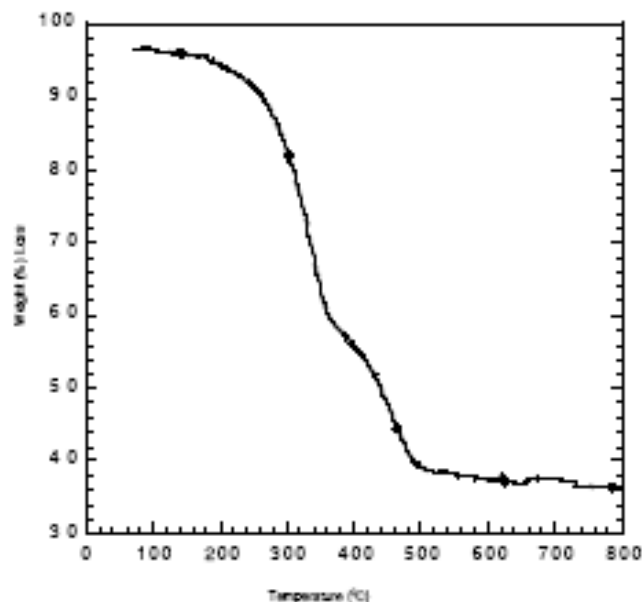

TGA for PEI functionalized SWCNTs

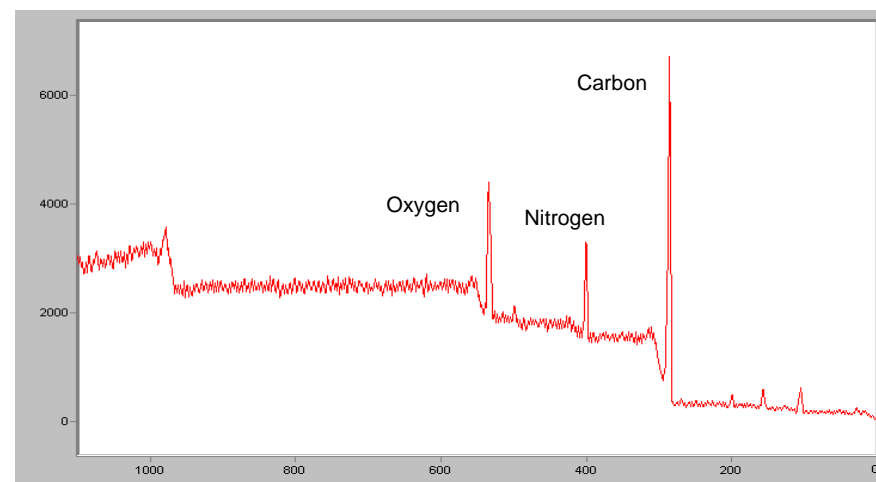

XPS Spectrum of L-PEI functionalized SWCNTs

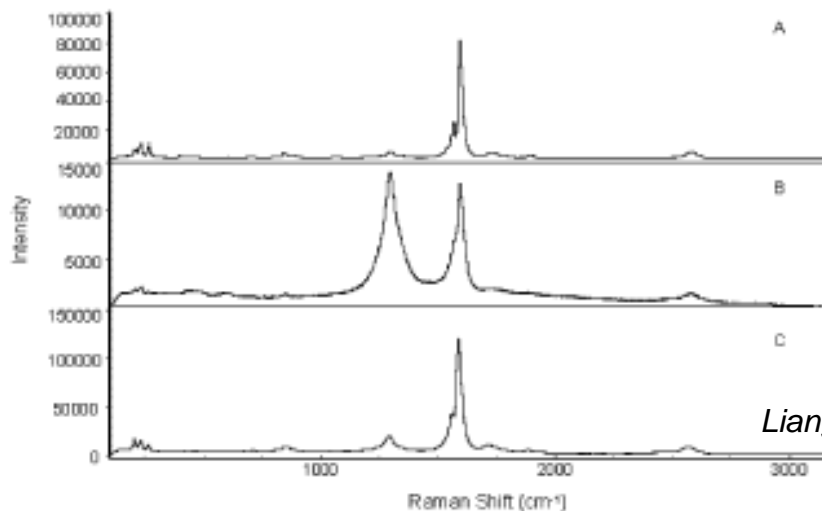

Liang et al. 2004

Raman Spectrum (780 nm) of:

- a) Purified SWCNTs
- b) Dodecylated SWCNTs as synthesized
- c) Dodecylated SWCNTs after heating – the groups have been removed




TGA/XPS Study of the Thermal Stability of Functionalized SWCNTs




TGA/XPS study of removal of functional groups


- Heat samples to various temperature and observe weight loss
- Examine XPS peaks characteristic of groups of interest
- Correlate weight loss to loss of functional group

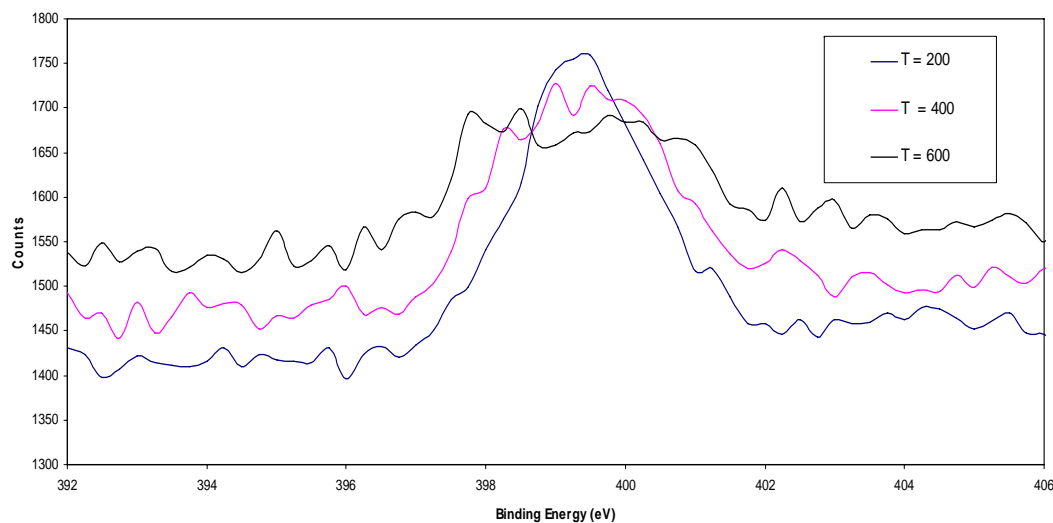

XPS Data Spectra at 200C,400C and 600C

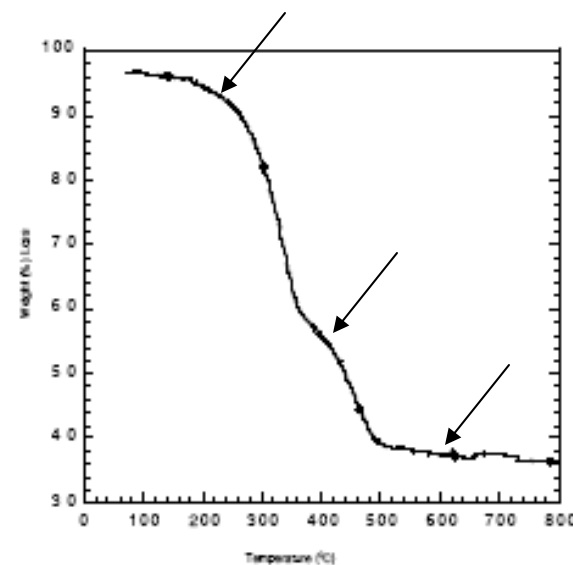

TGA Weight Loss

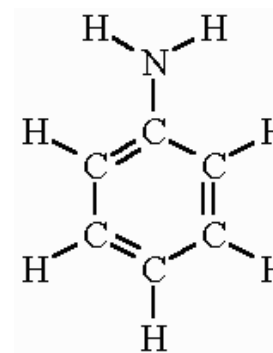


Aniline

Active / Passive Thermal Management Materials for Space




- SWNT thermal properties are extremely anisotropic; SWNT axial conductivity is comparable to that of diamond (2150 W/m-K)
- Nylon Spandex/SWNT fabric improves crew member's thermal comfort and increases heat transfer rate to EMU sublimator (SBIR)
- Active heat acquisition and transport applications in concept stage (advanced coldplate, interface, fluids)
- New single-fiber thermal diffusivity tool developed by JSC Nano Team and ORNL



Nylon Spandex/SWNT Fabric for Spacesuits

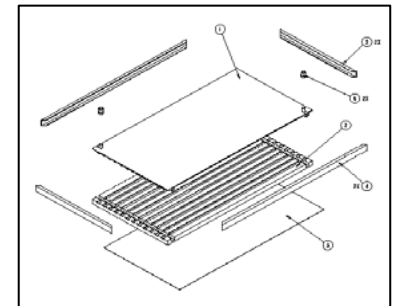

Heat Acquisition
Heat Transport

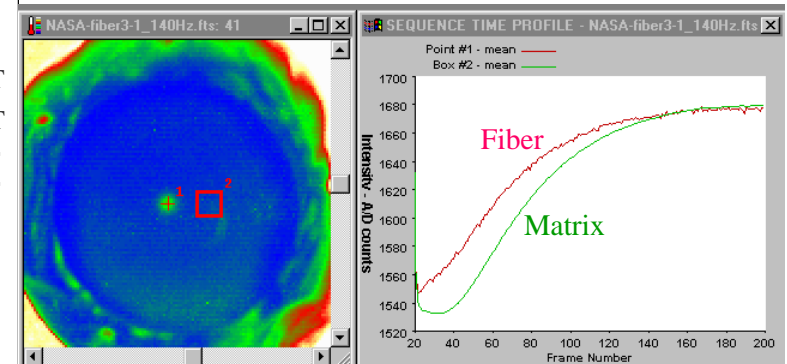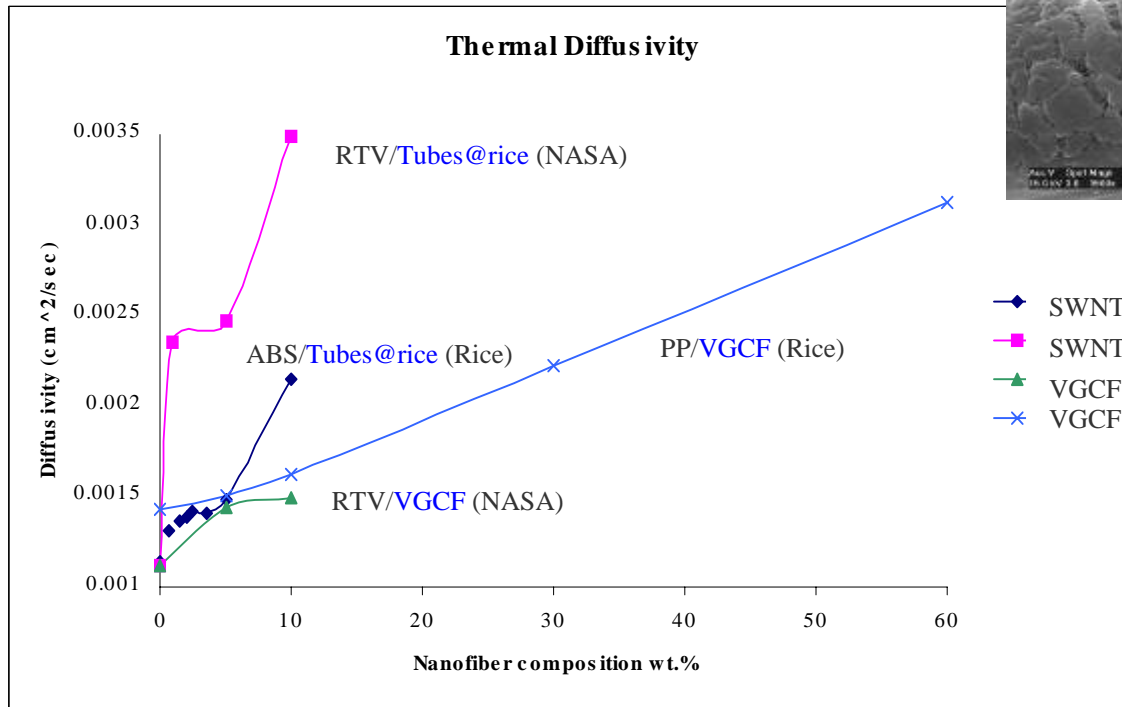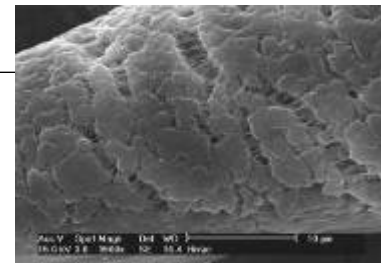


Single Fiber Thermal Diffusivity
(JSC and ORNL)

ESD and EMI Materials with Nanotubes

- Application

- SWNTs in a polymer at low concentrations to shield electronics from electromagnetic interference (EMI) and for electrostatic discharge (ESD) protection of sensitive electronics components.
- Advantages – lightweight, humidity independent, flexible, ideal for coatings

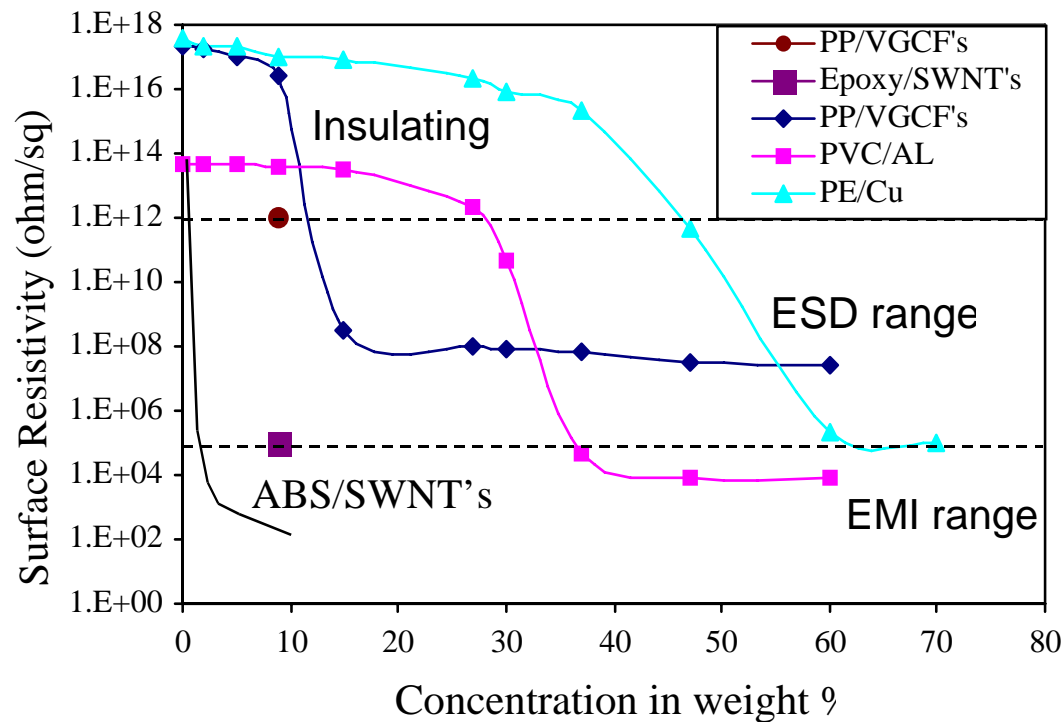


E.V. Barrera et al., Rice University




- Testing plan in work with EV (EMI)
- Industry-produced composites tested in RITF (ESD)

Nanoshells for Thermal Control Coatings

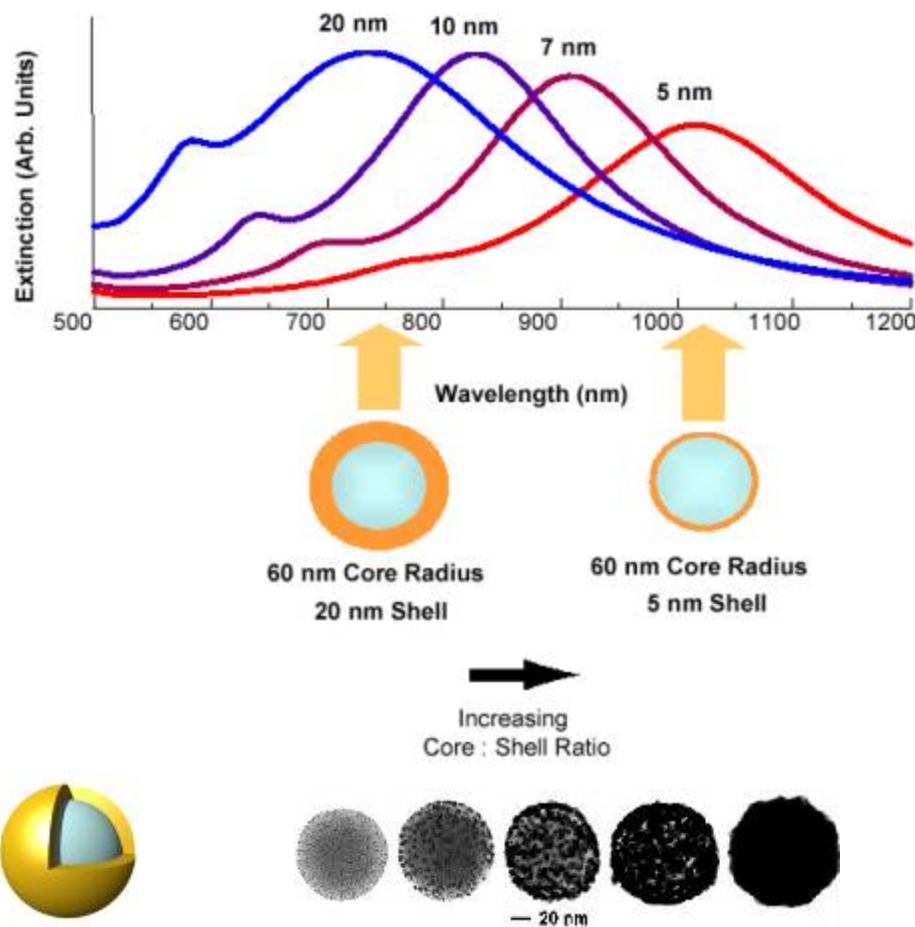

- Nanoshells offer possibility of *designing* thermal control coatings
- Thermo-optical properties manipulated by nanoshell geometry
 - ratio of silica core to shell thickness
 - independent of overall organization of nanoshells
- Interested in nanoshell design with low solar absorptivity and high emittance

TMJ Coating With Varying Nanoshell Concentrations

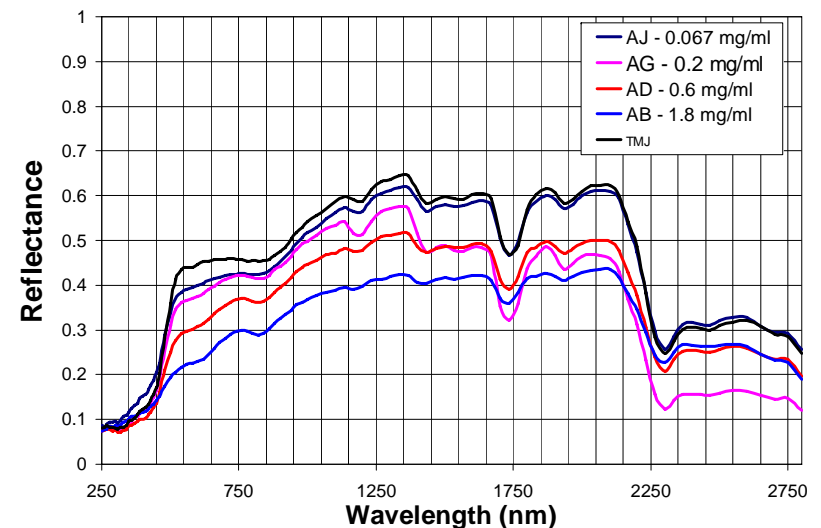

Carbon Nanotube Dosimeter

Compelling need to directly measure the radiation environment of spacecraft and compare to models for safety to humans for ISS and future space travel

- SWNTs respond at the particle level—radiation particle bombardment may be quantitatively detectable
- Fly initially as a passive experiment to gather real-time radiation dose on orbit
- Applicable for commercial usage by Medical, Nuclear industries





Nanotechnology & Human Spaceflight



Key Enabler to Human & Robotic Exploration

Nano-Engineered Materials

- Truly multi-functional materials
- Best known mechanical, thermal, and electrical properties exist now at the nanoscale
- Highest possible surface area

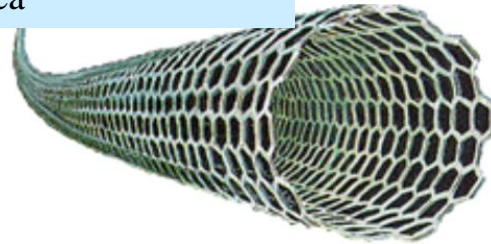

Human Spaceflight applications will drive unique advances in...

- Safety and Toxicology
- Reliability and Durability

Technology Needs for Long-Duration Human Spaceflight

- Reduced mass / volume
- Greater reliability of materials/systems
- System health monitoring & repair
- Air revitalization
- Water recovery
- Human health diagnosis & treatment
- Radiation protection & detection
- In-space manufacturing

Current Nanoscale R&D on Human Spaceflight Applications

- Electromagnetic Shielding Materials
- Proton Exchange Membrane – PEM - Fuel Cells
- Nanotube-Based Structural Composites
- RCRS - Regenerable CO₂ Removal System
- Ceramic Nanofibers for Thermal Protection Materials
- High Thermal Conductivity Fabric for Spacesuits
- Radiation Resistance/Protection
- Passive Radiation Dosimeter
- Active Thermal Control Systems for Space
- Nanoshells for Thermal Control Coatings