

UNCLASSIFIED

RM No. E6L05

Source of Acquisition  
CASI Acquired

NACA

TECHNICAL LIBRARY  
AERONAUTICAL ENGINEERING CO.  
8851 SEST AERONAUTICAL BLVD.  
INGLEWOOD,  
CALIFORNIA

# RESEARCH MEMORANDUM

for the

CANCELLED

Classification

Air Materiel Command, Army Air Forces

CHANGED TO

By authority of NACA RN #122 12-3-57 and the

Changed by hrc Date 6-27-64  
Bureau of Aeronautics, Navy Department

APR 25 1947

PERFORMANCE INVESTIGATION OF TG-180 COMBUSTOR

I - INSTRUMENTATION, ALTITUDE OPERATIONAL LIMITS

AND COMBUSTION EFFICIENCY

By Eugene V. Zettle and William P. Cook

Aircraft Engine Research Laboratory  
Cleveland, Ohio

This document contains classified information affecting the National Defense of the United States within the meaning of the Espionage Laws of the United States and the Government is prohibited from disclosing the same to any person, firm, or corporation, or to any foreign government, without the express written approval of the Government. This document is to be controlled and its distribution limited to those persons to whom it is specifically directed.

Restriction/Classification  
Cancelled

TECHNICAL  
EDITING  
WAIVED

NATIONAL ADVISORY COMMITTEE  
FOR AERONAUTICS

WASHINGTON

JANUARY 13 1947

UNCLASSIFIED

Restriction/Classification  
Cancelled

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

for the

Air Materiel Command, Army Air Forces

and the

Bureau of Aeronautics, Navy Department

PERFORMANCE INVESTIGATION OF TG-180 COMBUSTOR

I - INSTRUMENTATION, ALTITUDE OPERATIONAL LIMITS

AND COMBUSTION EFFICIENCY

By Eugene V. Zettle and William P. Cook

SUMMARY

A brief investigation has been made of the performance of a single combustor of the TG-180 turbojet engine to determine (a) the altitude operational limits of the engine for two fuels (AN-F-32 and AN-F-28), (b) combustion efficiencies at various simulated conditions of altitude and engine speeds, (c) combustor-outlet temperature distribution for several altitudes at constant engine speed, and (d) the combustor total pressure drop.

The limits with AN-F-32 fuel were found to be approximately 60,000 feet for an engine speed of 6000 rpm and approximately 38,000 feet for an engine speed of 4000 rpm. The results indicated that the altitude operational limits with AN-F-32 fuel are higher over the largest part of the engine-speed range than with AN-F-28 fuel. A combustion efficiency of 92 percent was obtained at rated engine speed (7600 rpm) and an altitude of 20,000 feet with AN-F-32 fuel. A change in altitude from 20,000 to 60,000 feet showed a 20-percent decrease in combustion efficiency while the engine was operating at 7600 rpm; whereas, at an engine speed of 4000 rpm a change of altitude from 10,000 to 40,000 feet showed a 52-percent decrease in combustion efficiency.

Restriction/Classification Cancelled

## INTRODUCTION

A performance investigation is being conducted at the NACA Cleveland laboratory on a single combustor of the TG-180 turbojet engine. This report describes the arrangement of the apparatus and instrumentation and also presents the altitude operational limits of the combustor for two fuels (AN-F-32 and AN-F-28), combustion efficiencies at various simulated conditions of altitude and engine speed, combustor-outlet temperature-distribution plots for several altitudes at constant engine speed, and a combustor pressure-drop correlation.

## APPARATUS AND INSTRUMENTATION

The combustion chamber of a TG-180 turbojet engine was connected to the laboratory-air supply, as diagrammatically shown in figure 1. Air quantity and pressure were regulated by remote-control valves upstream and downstream of the combustion chamber. The desired inlet-air temperature was obtained by the use of an electric air preheater, which was automatically regulated to maintain a constant inlet-air temperature.

The combustor-inlet section and the combustor itself were furnished by the manufacturer. The combustor-outlet section, which was fabricated at the Cleveland laboratory, duplicates that of the engine. Two observation windows located axially along the combustor made possible the visual observation of combustion characteristics.

The number and location of instruments at the instrumentation planes shown in figure 1 are tabulated as follows:

| Type of instrument                 | Number of instruments |     |     |     |
|------------------------------------|-----------------------|-----|-----|-----|
|                                    | Instrumentation plane |     |     |     |
|                                    | A                     | B   | C   | D   |
| One-thermocouple rake              | 2                     | --- | --- | 3   |
| Three-tube total-pressure rake     | 3                     | --- | --- | --- |
| Five-tube total-pressure rake      | ---                   | --- | 7   | --- |
| Five-thermocouple rake             | ---                   | 7   | --- | --- |
| Static-pressure orifice connection | 1                     | 1   | 1   | 1   |

All measurements were taken at the center of equal areas. Locations of the points of measurement at the respective instrumentation planes are shown in figure 2 and the instrumentation details are shown

in figure 3. Temperatures were indicated by self-balancing potentiometers; air flow was measured by A.S.M.E. square-edge orifices and fuel flow by a rotameter. All instruments were calibrated. No attempt was made to correct the thermocouple readings for stagnation effects. A photograph of the combustor and instrumentation is shown in figure 4.

#### METHODS

Tests were conducted on the combustor covering a range of simulated altitudes from 10,000 to 60,000 feet and simulated engine speeds from 3500 to 7600 rpm. Combustor inlet-air conditions were maintained for each altitude and engine-speed point selected at values determined from the engine-performance investigation made in the Cleveland altitude wind tunnel at zero ram conditions (reference 1). The required operating conditions from reference 1, the actual test conditions, and the results obtained are listed in table I. At each altitude and engine-speed point investigated, an attempt was made to obtain an average combustor-outlet temperature equal to or greater than that required for normal engine operation at that point. For each simulated engine-speed point there was an altitude above which the required combustor-outlet-gas temperature could not be obtained. The altitude operational limits were determined for both AN-F-28 and AN-F-32 fuels. The combustion efficiencies over the range of engine operational speeds and altitudes were determined with AN-F-32 fuel.

#### RESULTS

The altitude operational limits obtained using AN-F-28 and AN-F-32 fuels, respectively, are shown in figures 5 and 6 where altitude is plotted against engine speed. The solid curves separate the region where the combustor-outlet temperatures obtainable were sufficient for normal operation of the TG-180 combustor from the region where either the combustor-outlet temperatures obtainable were insufficient for operation of the engine or where burner blow-out occurred. Figure 6(b) includes lines of constant combustion efficiency. The constant temperature-rise efficiency lines were obtained by interpolating between the data points. The altitude operational limits using AN-F-32 fuel were found to be approximately 60,000 feet for an engine speed of 6000 rpm and approximately 38,000 feet for an engine speed of 4000 rpm (fig. 6). The results indicate that the altitude operational limits with AN-F-32 fuel are higher over the largest part of the engine-speed range than with

AN-F-28 fuel. The maximum difference reaches 10,000 feet; however, as the rated engine speed (7600 rpm) is approached the difference in limits between the two fuels is nearly eliminated.

The variation of the combustion efficiency with altitude for engine speeds of 4000 and 7600 rpm using AN-F-32 fuel is shown in figure 7. Combustion efficiency is defined as the ratio of the measured total-temperature rise across the combustor to the theoretical total-

temperature rise across the combustor  $\frac{\Delta T_m(A - B)}{\Delta T_t}$  (reference 2). A

combustion efficiency of 92 percent was obtained at rated engine speed (7600 rpm) and an altitude of 20,000 feet. A change of altitude from 20,000 to 60,000 feet showed a 20-percent decrease in combustion efficiency while the engine was operating at a speed of 7600 rpm; whereas, at an engine speed of 4000 rpm a change of altitude from 10,000 to 40,000 feet showed a 52-percent decrease in combustion efficiency.

The effect of the variation of fuel-air ratio on combustor performance at an operating point chosen near the dead-band for AN-F-28 fuel is shown in figure 8.

The temperature distribution at instrumentation plane B-B (fig. 1) for a simulated engine speed of 7600 rpm and representing two simulated altitudes (50,000 and 55,000 ft) using AN-F-32 fuel is shown in figure 9. Three temperature-distribution patterns taken at simulated altitudes of 20,000, 50,000, and 55,000 feet and at a simulated speed of 7600 rpm using AN-F-28 fuel are presented in figure 10.

It can be shown from the momentum equation for a constant cross-sectional-area combustor that the total-pressure drop across the combustor expressed as a fraction of impact pressure is a linear function of the ratio of inlet-to-outlet gas densities. The impact pressure was calculated at the inlet to the combustor assuming that the inlet area was equal to the maximum cross-sectional area of the combustor. When the pressure drop is related to the maximum cross-sectional area of the combustor, useful comparisons can be made with the pressure drop in other combustors of different geometry. Figure 11 shows total-pressure drop expressed as a fraction of impact pressure  $\Delta P/q$  plotted against inlet-to-outlet density ratio  $\rho_A/\rho_B$ .

#### SUMMARY OF RESULTS

From an investigation of the performance characteristics of a TG-180 combustor the following results were obtained:

1. The altitude operational limits with AN-F-32 fuel were found to be approximately 60,000 feet for an engine speed of 6000 rpm and approximately 38,000 feet for an engine speed of 4000 rpm. The results indicated that the altitude operational limits with AN-F-32 fuel are higher over the largest part of the engine-speed range than with AN-F-28 fuel.

2. A combustion efficiency of 92 percent was obtained at rated engine speed (7600 rpm) and an altitude of 20,000 feet with AN-F-32 fuel. A change of altitude from 20,000 to 60,000 feet showed a 20-percent decrease in combustion efficiency while the engine was operating at 7600 rpm; whereas, at an engine speed of 4000 rpm a change of altitude from 10,000 to 40,000 feet showed a 52-percent decrease in combustion efficiency.

Aircraft Engine Research Laboratory,  
National Advisory Committee for Aeronautics,  
Cleveland, Ohio.

*Eugene V. Zettle*  
Eugene V. Zettle,  
Mechanical Engineer.

*William P. Cook*  
William P. Cook,  
Mechanical Engineer.

Approved:

Walter T. Olson,  
Chemist.

Benjamin Pinkel,  
Physicist.

vab

#### REFERENCES

1. Fleming, William A.: Altitude-Wind-Tunnel Tests of the General Electric TG-180 Jet-Propulsion Engine. I - Performance and Windmilling Drag Characteristics. NACA MR No. E5J14, Army Air Forces, 1945.
2. Turner, L. Richard, and Lord, Albert M.: Thermodynamic Charts for the Computation of Combustion and Mixture Temperatures at Constant Pressure. NACA TN No. 1086, 1946.



579

TABLE I - SUMMARY OF STATIC PERFORMANCE DATA FOR TG-180 COMBUSTOR

| Run<br>(1)                                  | Simulated conditions |               | Required operating conditions <sup>2</sup> |   |   |  | Actual test conditions and results |   |   |                |  |                               |                                       |
|---|----------------------|---------------|--|---|---|--|------------------------------------|---|---|----------------|--|-------------------------------|---------------------------------------|
|   | Engine speed (rpm)   | Altitude (ft) | Mass flow (lb/sec)                         | Inlet static pressure (in. Hg absolute) | Combustor-outlet average temperature (°F) | Combustor-inlet average temperature (°F) | Mass flow (lb/sec)                 | Inlet static pressure (in. Hg absolute) | Combustor-outlet average temperature (°F) | Fuel-air ratio | Combustor-inlet average temperature (°F) | Average temperature rise (°F) | Temperature-rise efficiency (percent) |
| NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS |                      |               |  |   |   |  |                                    |   |   |                |  |                               |                                       |
| 1   | 4500                 | 40,000        | 1.12                                       | 10.5                                    | 620                                       | 39                                       | 1.11                               | 10.4                                    | 420                                       | 0.0152         | 35                                       | 385                           | 0.35                                  |
| 2   | 5000                 | 40,000        | 1.29                                       | 12.4                                    | 670                                       | 68                                       | 1.30                               | 12.4                                    | 627                                       | .0107          | 66                                       | 561                           | .72                                   |
| 3   | 5000                 | 45,000        | 1.04                                       | 10.0                                    | 670                                       | 67                                       | 1.00                               | 9.7                                     | 616                                       | .0117          | 67                                       | 549                           | .65                                   |
| 4   | 5500                 | 45,000        | 1.20                                       | 11.8                                    | 750                                       | 97                                       | 1.24                               | 11.7                                    | 897                                       | .0194          | 90                                       | 807                           | .63                                   |
| 5   | 5000                 | 50,000        | .82  | 7.7                                     | 670                                       | 68                                       | .82                                | 7.5                                     | 579                                       | .0112          | 67                                       | 512                           | .63                                   |
| 6   | 5500                 | 50,000        | .95  | 8.9                                     | 750                                       | 97                                       | .96                                | 8.8                                     |   | .0158          |  |                               |                                       |
| 7   | 6000                 | 50,000        | 1.05                                       | 10.9                                    | 860                                       | 130                                      | 1.05                               | 10.7                                    | 965                                       | .0219          | 120                                      | 845                           | .57                                   |
| 8   | 6500                 | 50,000        | 1.13                                       | 11.4                                    | 1010                                      | 162                                      | 1.14                               | 11.4                                    | 1137                                      | .0212          | 160                                      | 977                           | .68                                   |
| 9   | 7600                 | 50,000        | 1.26                                       | 16.9                                    | 1465                                      | 240                                      | 1.27                               | 16.9                                    | 1464                                      | .0237          | 238                                      | 1226                          | .78                                   |
| 10  | 5000                 | 55,000        | .67  | 6.4                                     | 670                                       | 67                                       | .68                                | 6.3                                     | 558                                       | .0107          | 67                                       | 491                           | .63                                   |
| 11  | 6000                 | 55,000        | .86  | 8.5                                     | 860                                       | 129                                      | .86                                | 8.3                                     | 780                                       | .0170          | 132                                      | 648                           | .54                                   |
| 12  | 6500                 | 55,000        | .93  | 9.7                                     | 1010                                      | 162                                      | .93                                | 9.9                                     | 1145                                      | .0223          | 162                                      | 983                           | .65                                   |
| 13  | 7000                 | 55,000        | .97  | 11.0                                    | 1180                                      | 196                                      | .98                                | 10.6                                    | 1111                                      | .0210          | 196                                      | 915                           | .64                                   |
| 14  | 7600                 | 55,000        | 1.01                                       | 12.5                                    | 1465                                      | 239                                      | 1.04                               | 12.2                                    | 1317                                      | .0246          | 240                                      | 1077                          | .66                                   |
| 15  | 6000                 | 60,000        | .66  | 6.8                                     | 860                                       | 130                                      | .68                                | 6.8                                     | 586                                       | .0126          | 136                                      | 450                           | .50                                   |
| 16  | 6500                 | 60,000        | .71  | 7.9                                     | 1010                                      | 162                                      | .71                                | 7.7                                     | 982                                       | .0187          | 164                                      | 818                           | .63                                   |
| 17  | 7000                 | 60,000        | .75  | 9.1                                     | 1182                                      | 198                                      | .76                                | 9.1                                     | 1068                                      | .0232          | 198                                      | 870                           | .56                                   |
| 18  | 4000                 | 30,000        | 1.45                                       | 14.1                                    | 650                                       | 34                                       | 1.43                               | 13.9                                    | 767                                       | .0166          | 35                                       | 732                           | .62                                   |
| 19  | 4500                 | 35,000        | 1.37                                       | 13.2                                    | 625                                       | 40                                       | 1.38                               | 13.1                                    | 755                                       | .0167          | 39                                       | 716                           | .60                                   |
| 20  | 7600                 | 30,000        | 3.17                                       | 42.1                                    | 1440                                      | 262                                      | 3.12                               | 40.0                                    | 1636                                      | .0225          | 251                                      | 1385                          | .93                                   |
| 21  | 7000                 | 30,000        | 2.98                                       | 36.0                                    | 1200                                      | 218                                      | 3.04                               | 35.8                                    | 1741                                      | .0249          | 223                                      | 1518                          | .93                                   |
| 22  | 6000                 | 30,000        | 2.56                                       | 26.9                                    | 900                                       | 150                                      | 2.56                               | 27.0                                    | 1620                                      | .0250          | 148                                      | 1472                          | .89                                   |
| 23  | 5000                 | 30,000        | 1.96                                       | 19.1                                    | 710                                       | 87                                       | 1.98                               | 19.3                                    | 1306                                      | .0222          | 87                                       | 1219                          | .81                                   |
| 24  | 4000                 | 30,000        | 1.45                                       | 14.1                                    | 650                                       | 34                                       | 1.45                               | 14.2                                    | 703                                       | .0140          | 34                                       | 669                           | .67                                   |
| 25  | 4000                 | 35,000        | 1.20                                       | 11.5                                    | 600                                       | 14                                       | 1.20                               | 11.5                                    | 669                                       | .0139          | 14                                       | 655                           | .66                                   |
| 26  | 7600                 | 40,000        | 2.04                                       | 27.3                                    | 1465                                      | 240                                      | 1.98                               | 26.9                                    | 1540                                      | .0223          | 242                                      | 1298                          | .87                                   |
| 27  | 7000                 | 40,000        | 1.94                                       | 23.6                                    | 1180                                      | 198                                      | 1.96                               | 23.6                                    | 1581                                      | .0234          | 194                                      | 1387                          | .88                                   |
| 28  | 6000                 | 40,000        | 1.69                                       | 17.6                                    | 860                                       | 130                                      | 1.66                               | 17.4                                    | 1303                                      | .0214          | 129                                      | 1174                          | .81                                   |
| 29  | 5000                 | 40,000        | 1.29                                       | 12.4                                    | 670                                       | 68                                       | 1.30                               | 12.4                                    | 1115                                      | .0219          | 64                                       | 1051                          | .70                                   |
| 30  | 4500                 | 40,000        | 1.12                                       | 10.5                                    | 625                                       | 39                                       | 1.12                               | 10.4                                    | 611                                       | .0124          | 28                                       | 583                           | .65                                   |
| 31  | 4000                 | 40,000        | .95  | 9.0                                     | 600                                       | 14                                       | .95                                |   |   | .0208          | 14                                       |                               |                                       |
| 32  | 5000                 | 45,000        | 1.04                                       | 10.0                                    | 670                                       | 67                                       | 1.06                               | 9.9                                     | 656                                       | .0131          | 64                                       | 592                           | .64                                   |

CONFIDENTIAL

CONFIDENTIAL

NACA RM NO. E6L05

|    |      |        |      |      |      |     |      |      |      |        |     |      |      |
|----|------|--------|------|------|------|-----|------|------|------|--------|-----|------|------|
| 33 | 4500 | 45,000 | 0.90 | 8.5  | 625  | 39  | 0.91 | 8.6  | 753  | 0.0181 | 44  | 709  | 0.56 |
| 34 | 7600 | 50,000 | 1.26 | 16.9 | 1465 | 240 | 1.26 | 16.9 | 1559 | .0268  | 240 | 1319 | .76  |
| 35 | 7000 | 50,000 | 1.20 | 14.6 | 1180 | 198 | 1.18 | 14.4 | 1172 | .0203  | 203 | 969  | .71  |
| 36 | 6000 | 50,000 | 1.05 | 10.9 | 860  | 130 | 1.00 | 9.9  | 1177 | .0236  | 125 | 1052 | .67  |
| 37 | 5000 | 50,000 | .82  | 7.7  | 670  | 68  | .83  | 7.6  | 794  | .0208  | 68  | 726  | .52  |
| 38 | 4500 | 50,000 | .69  | 6.6  | 625  | 39  | .69  | 6.6  |      |        | 39  |      |      |
| 39 | 5000 | 55,000 | .67  | 6.4  | 670  | 67  | .67  | 6.2  | 627  | .0193  | 68  | 553  | .42  |
| 40 | 7600 | 60,000 | .76  | 10.5 | 1465 | 240 | .76  | 10.5 | 1333 | .0260  | 240 | 1093 | .65  |
| 41 | 7000 | 60,000 | .75  | 9.1  | 1180 | 198 | .75  | 9.2  | 1139 | .0248  | 195 | 944  | .58  |
| 42 | 6000 | 60,000 | .66  | 6.8  | 860  | 130 | .66  | 6.9  | 1005 | .0239  | 130 | 875  | .55  |
| 43 | 5000 | 60,000 | .50  | 4.8  | 670  | 68  | .51  | 4.8  | 612  | .0218  | 76  | 536  | .36  |
| 44 | 4000 | 20,000 | 2.02 | 21.0 | 740  | 67  | 2.02 | 20.7 | 779  | .0132  | 76  | 703  | .76  |
| 45 | 3000 | 20,000 | 1.46 | 17.1 | 750  | 28  | 1.46 | 16.9 | 777  | .0146  | 22  | 755  | .72  |
| 46 | 5500 | 60,000 | .59  | 5.7  | 750  | 97  | .60  | 5.7  |      | .0119  | 102 |      |      |
| 47 | 5500 | 55,000 | .80  | 7.3  | 750  | 97  | .80  | 7.3  | 692  | .0174  | 100 | 592  | .49  |
| 48 | 7000 | 55,000 | .97  | 11.0 | 1180 | 197 | .98  | 10.9 | 1133 | .0220  | 198 | 1035 | .71  |
| 49 | 7600 | 55,000 | 1.04 | 12.6 | 1465 | 239 | 1.05 | 12.6 | 1375 | .0259  | 243 | 1132 | .67  |
| 50 | 4000 | 25,000 | 1.76 | 17.4 | 700  | 50  | 1.77 | 17.3 | 690  | .0129  | 49  | 641  | .70  |
| 51 | 4000 | 15,000 | 2.38 | 24.9 | 780  | 83  | 2.39 | 24.8 | 752  | .0113  | 82  | 670  | .83  |
| 52 | 4000 | 10,000 | 2.78 | 29.1 | 840  | 99  | 2.79 | 29.1 | 837  | .0119  | 94  | 743  | .88  |
| 53 | 4000 | 40,000 | .95  | 9.0  | 600  | 14  | .98  | 8.7  | 495  | .0168  | 14  | 481  | .41  |
| 54 | 4000 | 35,000 | 1.18 | 11.6 | 600  | 14  | 1.18 | 11.5 | 614  | .0162  | 13  | 601  | .52  |
| 55 | 4000 | 30,000 | 1.45 | 14.1 | 650  | 34  | 1.44 | 13.9 | 679  | .0154  | 34  | 645  | .59  |
| 56 | 4000 | 20,000 | 2.02 | 21.0 | 740  | 67  | 2.03 | 20.9 | 778  | .0121  | 68  | 710  | .82  |
| 57 | 7600 | 60,000 | .76  | 10.5 | 1465 | 240 | .77  | 10.4 | 1412 | .0234  | 242 | 1170 | .76  |
| 58 | 7600 | 55,000 | 1.00 | 12.4 | 1465 | 240 | 1.00 | 12.5 | 1500 | .0265  | 240 | 1260 | .73  |
| 59 | 7600 | 50,000 | 1.26 | 16.9 | 1465 | 240 | 1.27 | 16.8 | 1490 | .0242  | 238 | 1252 | .79  |
| 60 | 7600 | 45,000 | 1.63 | 20.7 | 1465 | 240 | 1.64 | 20.8 | 1506 | .0235  | 238 | 1268 | .82  |
| 61 | 7600 | 40,000 | 2.04 | 27.3 | 1465 | 240 | 2.05 | 27.1 | 1476 | .0209  | 239 | 1237 | .88  |
| 62 | 7600 | 35,000 | 2.59 | 34.6 | 1465 | 240 | 2.60 | 34.7 | 1489 | .0207  | 242 | 1247 | .90  |
| 63 | 7600 | 30,000 | 3.17 | 42.1 | 1440 | 262 | 3.15 | 42.0 | 1383 | .0191  | 260 | 1123 | .87  |
| 64 | 7600 | 25,000 | 3.86 | 51.2 | 1460 | 278 | 3.89 | 50.5 | 1433 | .0195  | 279 | 1154 | .88  |
| 65 | 7600 | 20,000 | 4.57 | 60.6 | 1475 | 299 | 4.57 | 60.4 | 1454 | .0180  | 299 | 1155 | .95  |
| 66 | 6000 | 50,000 | 1.05 | 10.9 | 860  | 130 | 1.06 | 10.9 | 920  | .0159  | 131 | 789  | .70  |
| 67 | 6000 | 50,000 | 1.05 | 10.9 | 860  | 130 | 1.07 | 11.0 | 997  | .0191  | 131 | 866  | .65  |
| 68 | 6000 | 50,000 | 1.05 | 10.9 | 860  | 130 | 1.05 | 10.9 | 1097 | .0232  | 132 | 965  | .61  |
| 69 | 6000 | 50,000 | 1.05 | 10.9 | 860  | 130 | 1.06 | 10.7 | 1176 | .0252  | 130 | 1046 | .62  |
| 70 | 6000 | 50,000 | 1.05 | 10.9 | 860  | 130 | 1.05 | 10.9 |      | .0263  | 130 |      |      |
| 71 | 3500 | 30,000 | 1.11 | 8.0  | 650  | 11  | 1.11 | 8.0  | 437  | .0189  | 12  | 1125 | .32  |
| 72 | 6500 | 60,000 | .71  | 7.9  | 1010 | 162 | .73  | 7.8  | 1096 | .0220  | 163 | 933  | .64  |
| 73 | 6000 | 50,000 | 1.06 | 10.9 | 860  | 131 | 1.06 | 11.0 | 586  | .0095  | 131 | 455  | .66  |
| 74 | 6000 | 50,000 | 1.06 | 10.9 | 860  | 132 | 1.06 | 11.0 | 796  | .0122  | 132 | 664  | .75  |

<sup>1</sup>Runs 1-19, 66-70, 73, and 74 with AN-F-28 fuel; other runs with AN-F-32 fuel.

<sup>2</sup>From reference 1.

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS





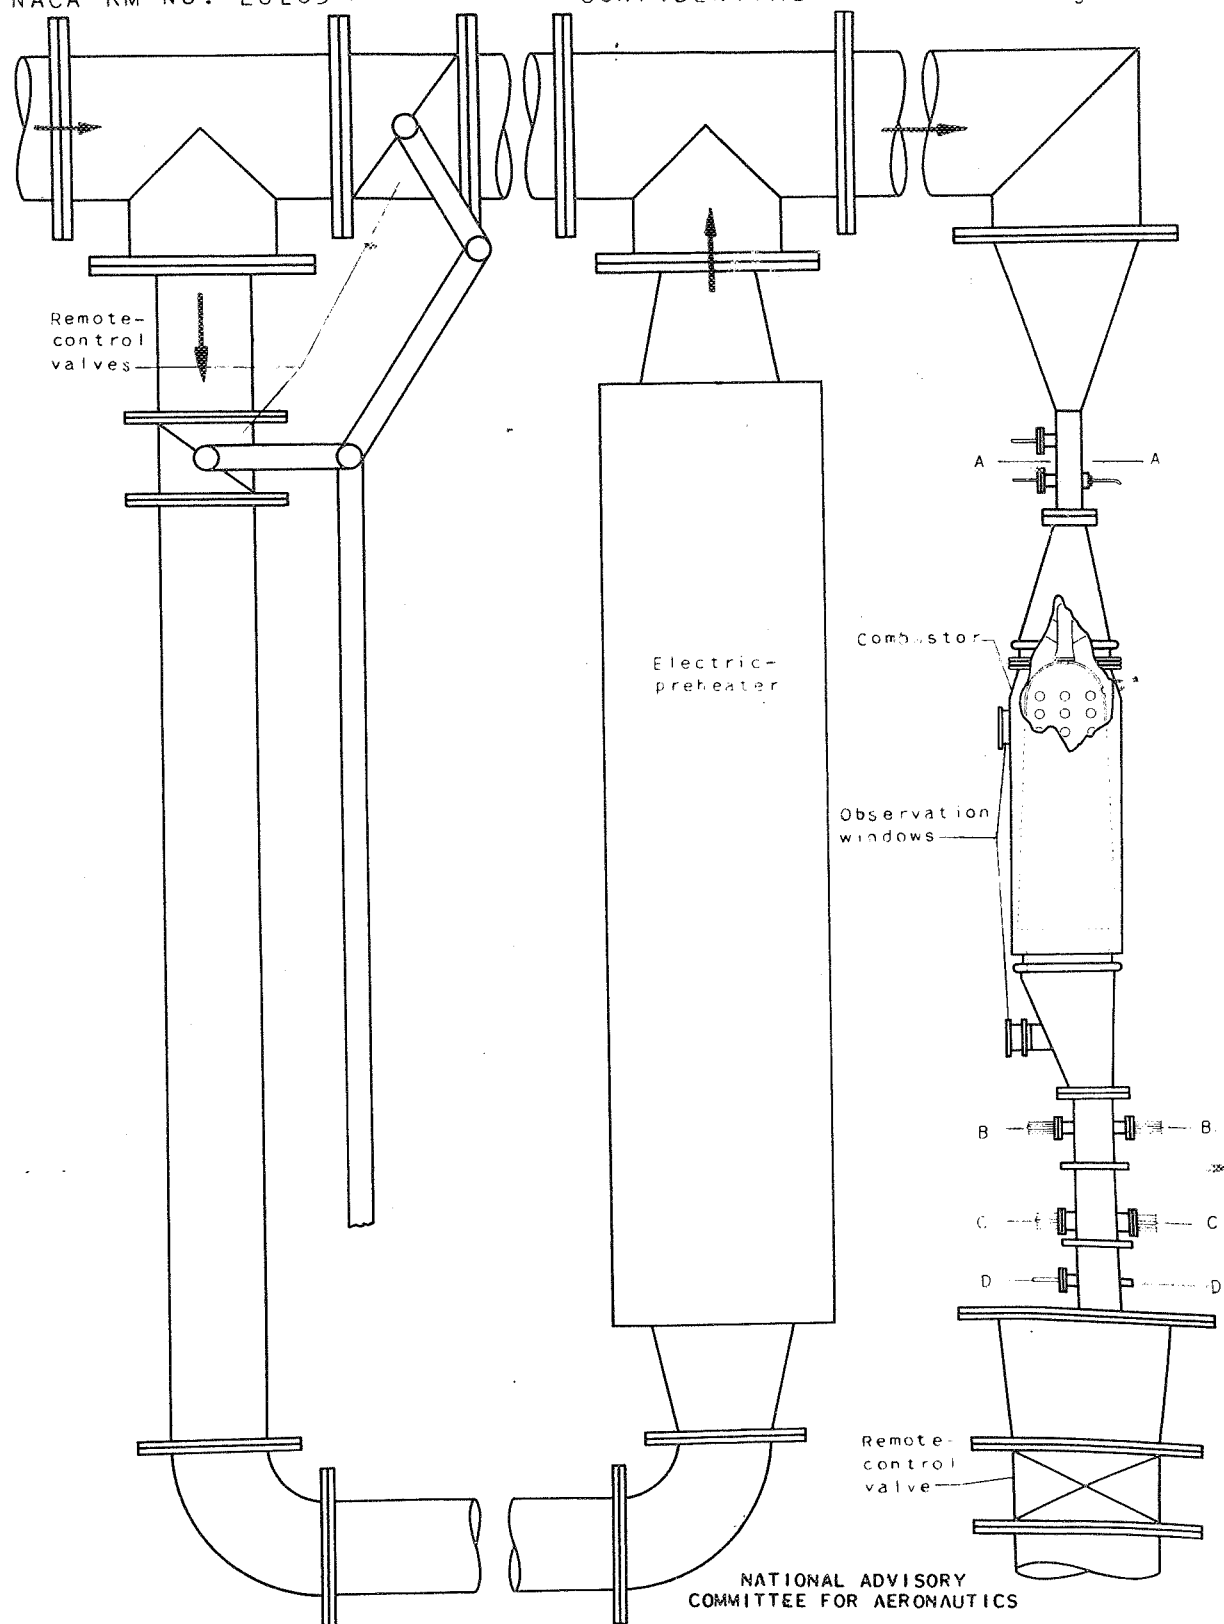



Figure 1. - Schematic diagram showing test rig and instrumentation positions used in investigation of TG-180 combustor.

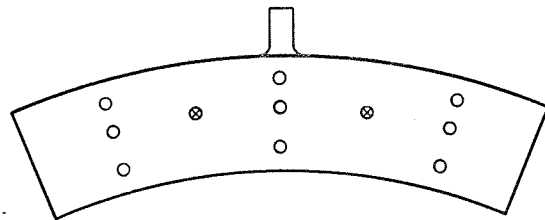


Plane A-A

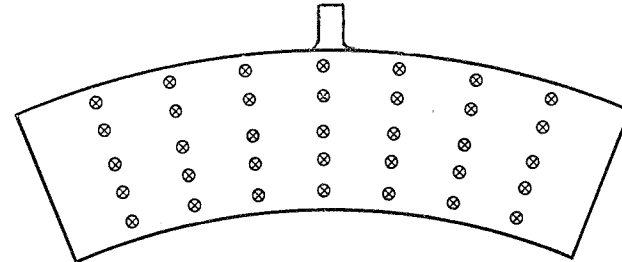

Plane B-B

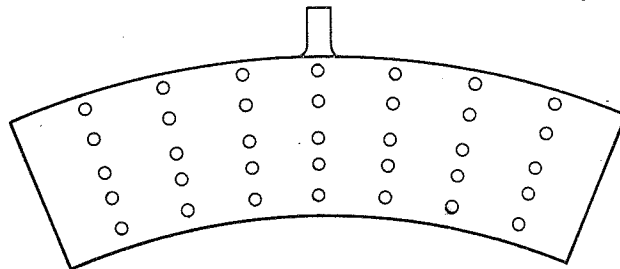

Plane C-C

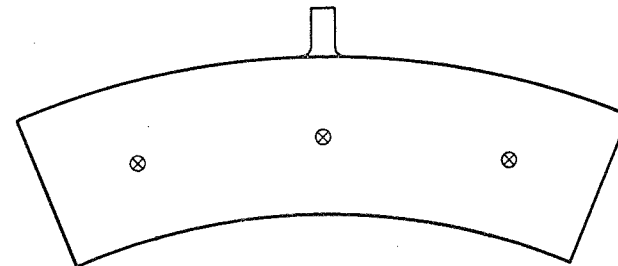


Plane D-D


- Total-pressure orifice
- ⊗ Thermocouple
- ┌ Static-pressure orifice

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS


Figure 2. - Location of instruments at several instrumentation planes.

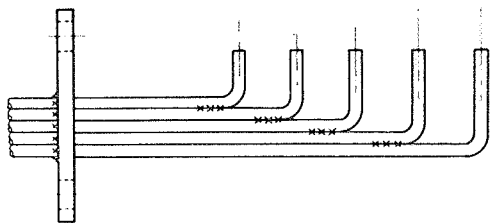


Five-tube total-pressure rake

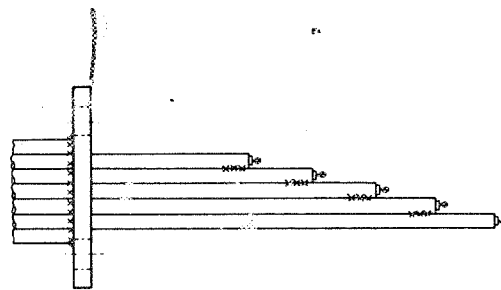


Five-thermocouple rake

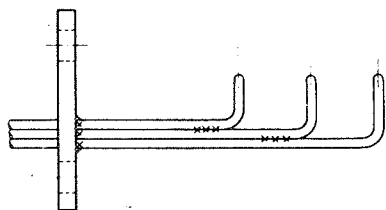

Three-tube total-pressure rake

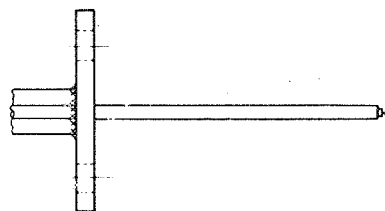

One-thermocouple rake



Static-pressure connection

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

Figure 3. - Instrumentation details.

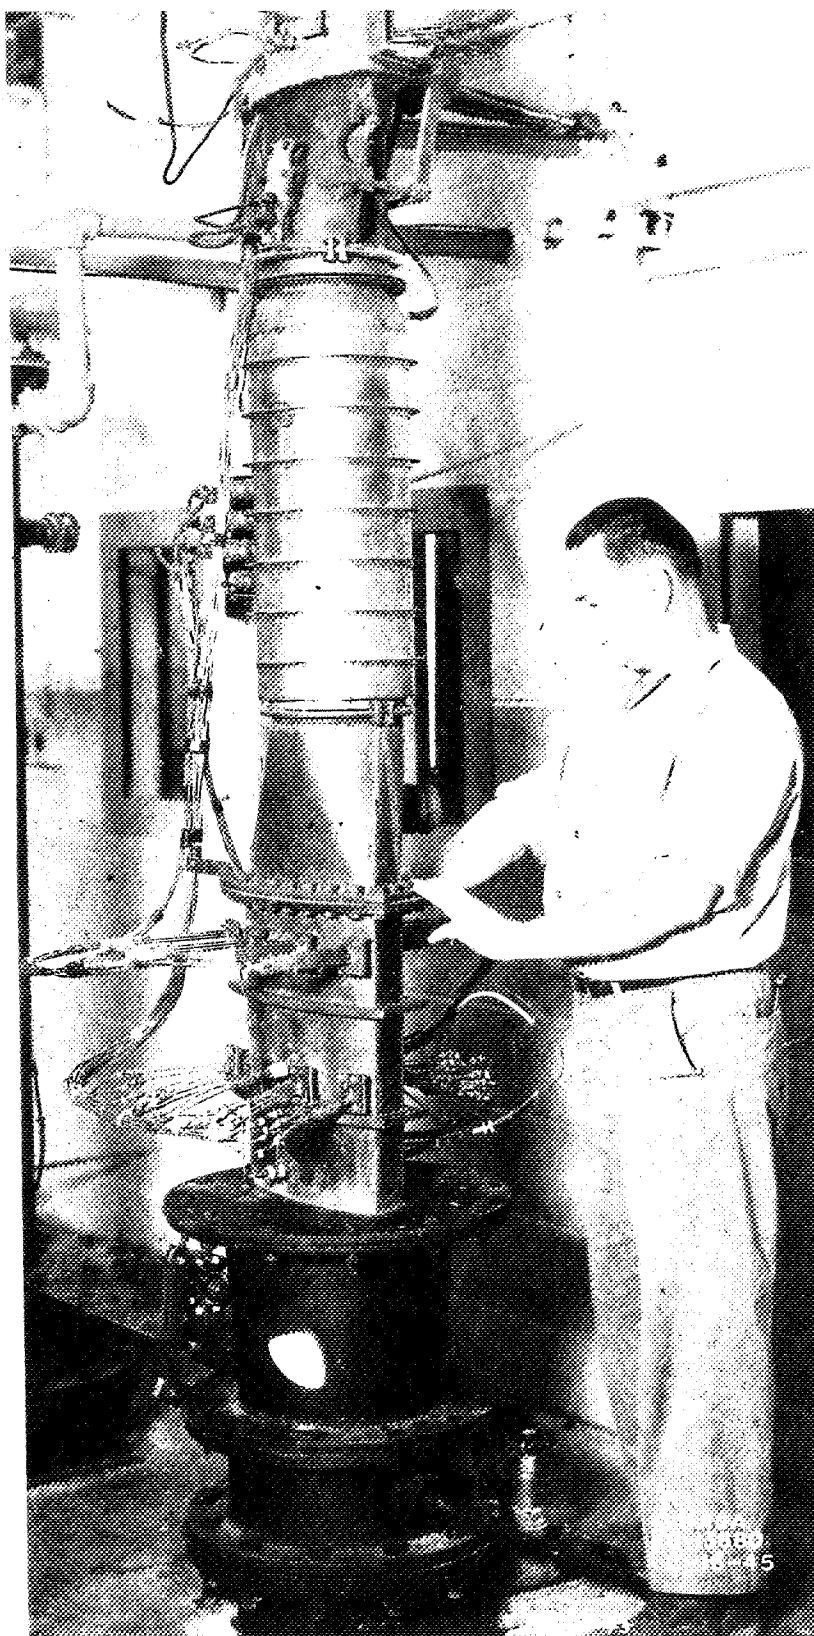


Figure 4. - Photograph of test rig, showing instrumentation positions.


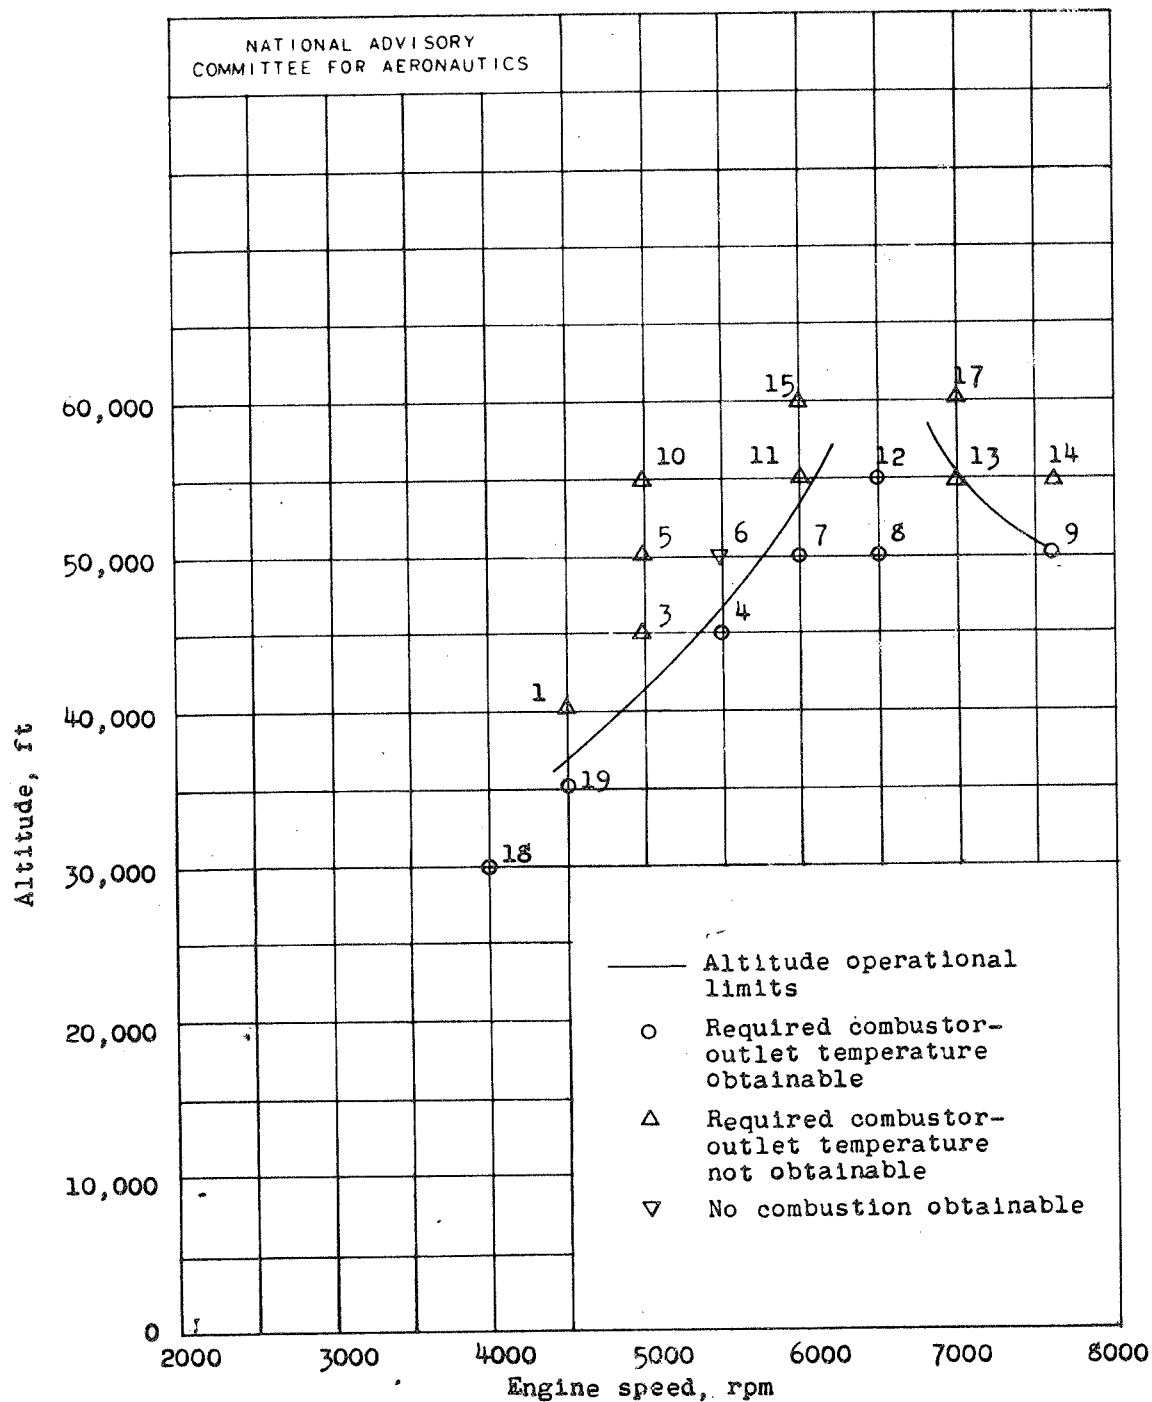



Figure 5: - Altitude operational limits for TG-180 combustor using AN-F-28 fuel. Zero ram. (Numbers refer to run numbers in table I.)



(a) Runs. (Numbers refer to run numbers in table I.)

Figure 6. - Altitude operational limits for TG-180 combustor using AN-F-32 fuel. Zero ram.

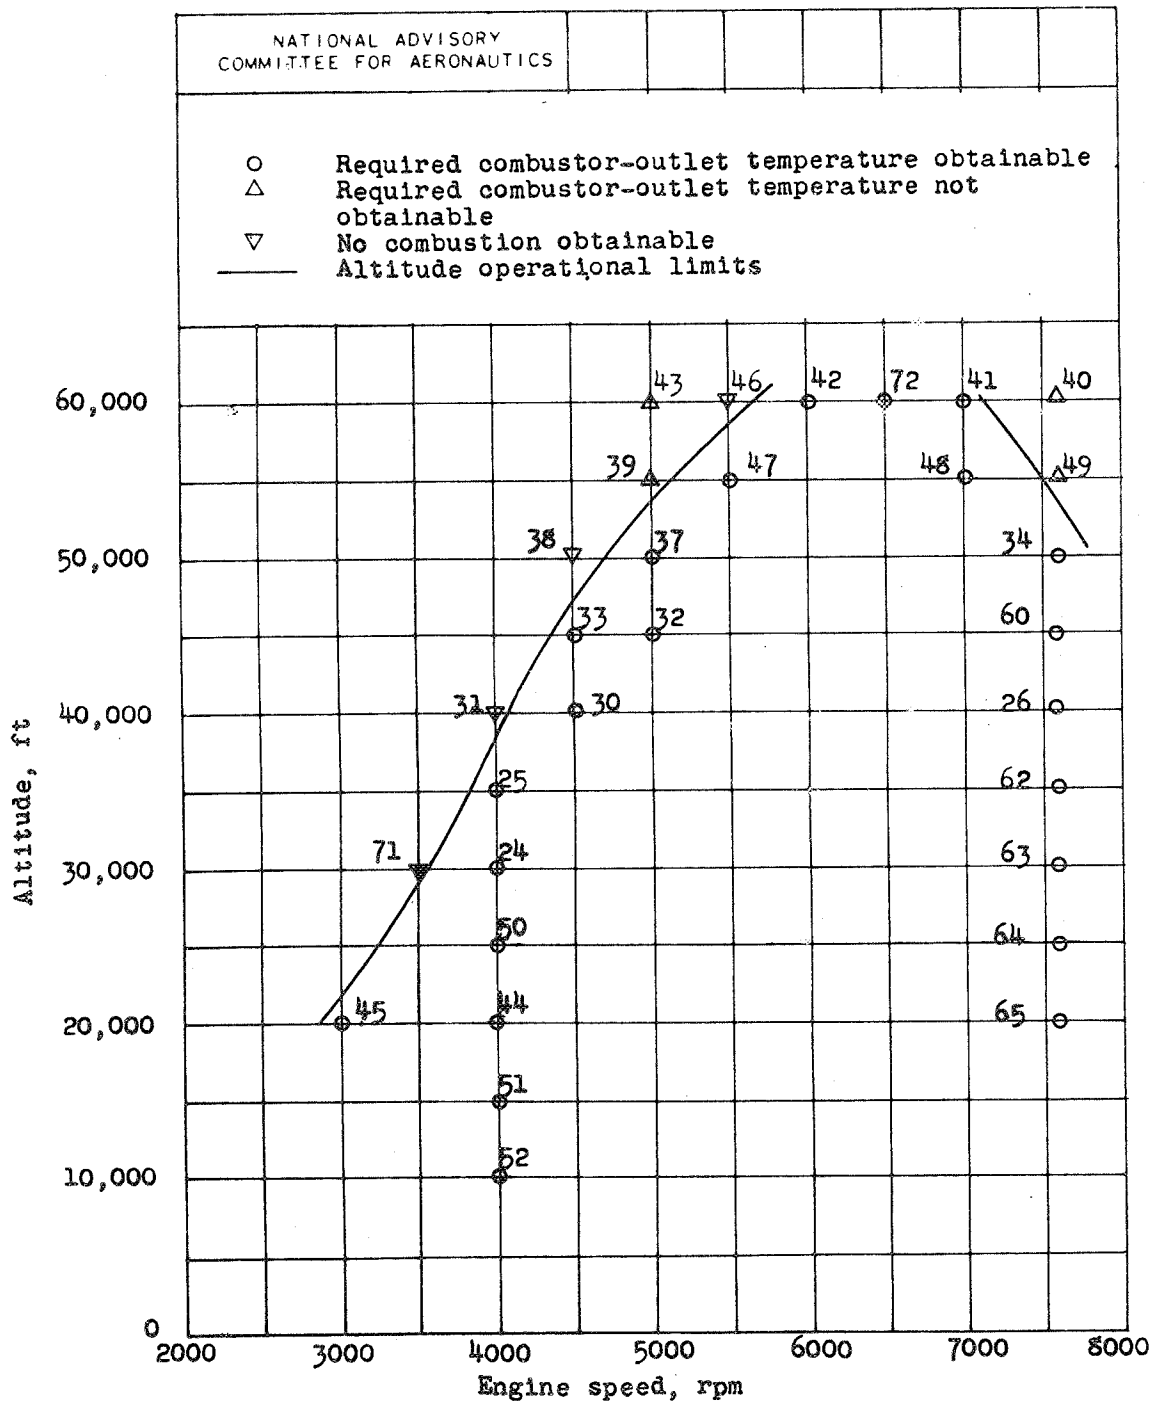

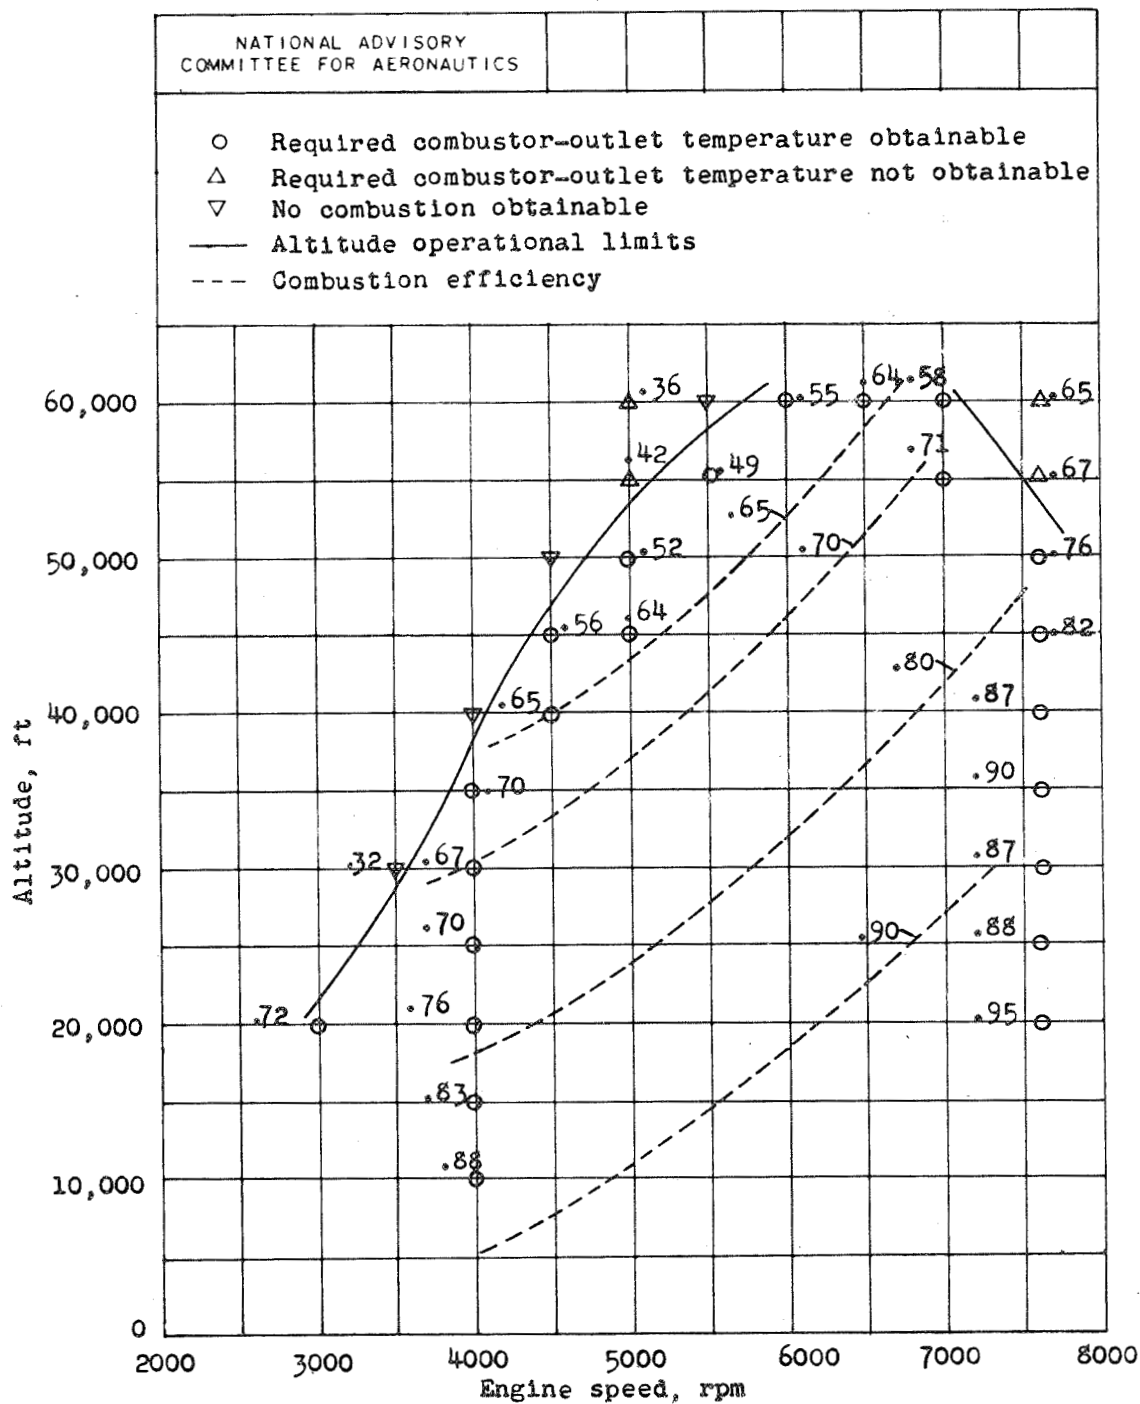

(b) Combustion efficiencies. (Numbers refer to combustion efficiencies.)

Figure 6. - Concluded. Altitude operational limits for TG-180 combustor using AN-F-32 fuel. Zero ram.

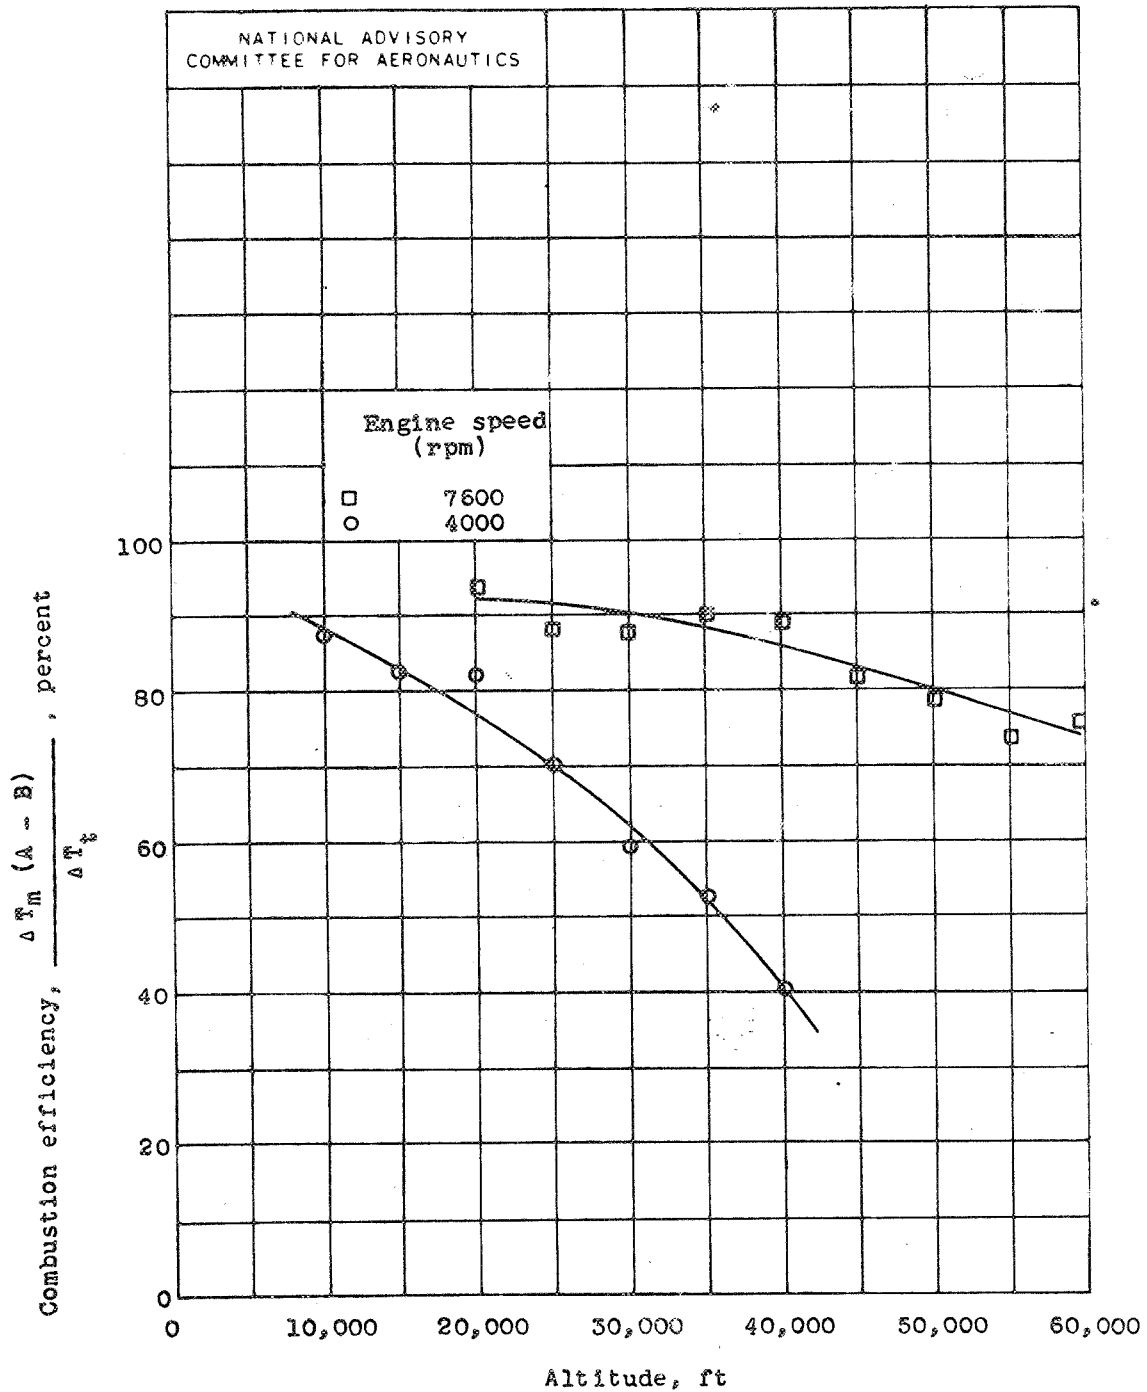


Figure 7. - Effect of variation of altitude on combustion efficiency in TG-180 combustor using AN-P-32 fuel. Zero ram.



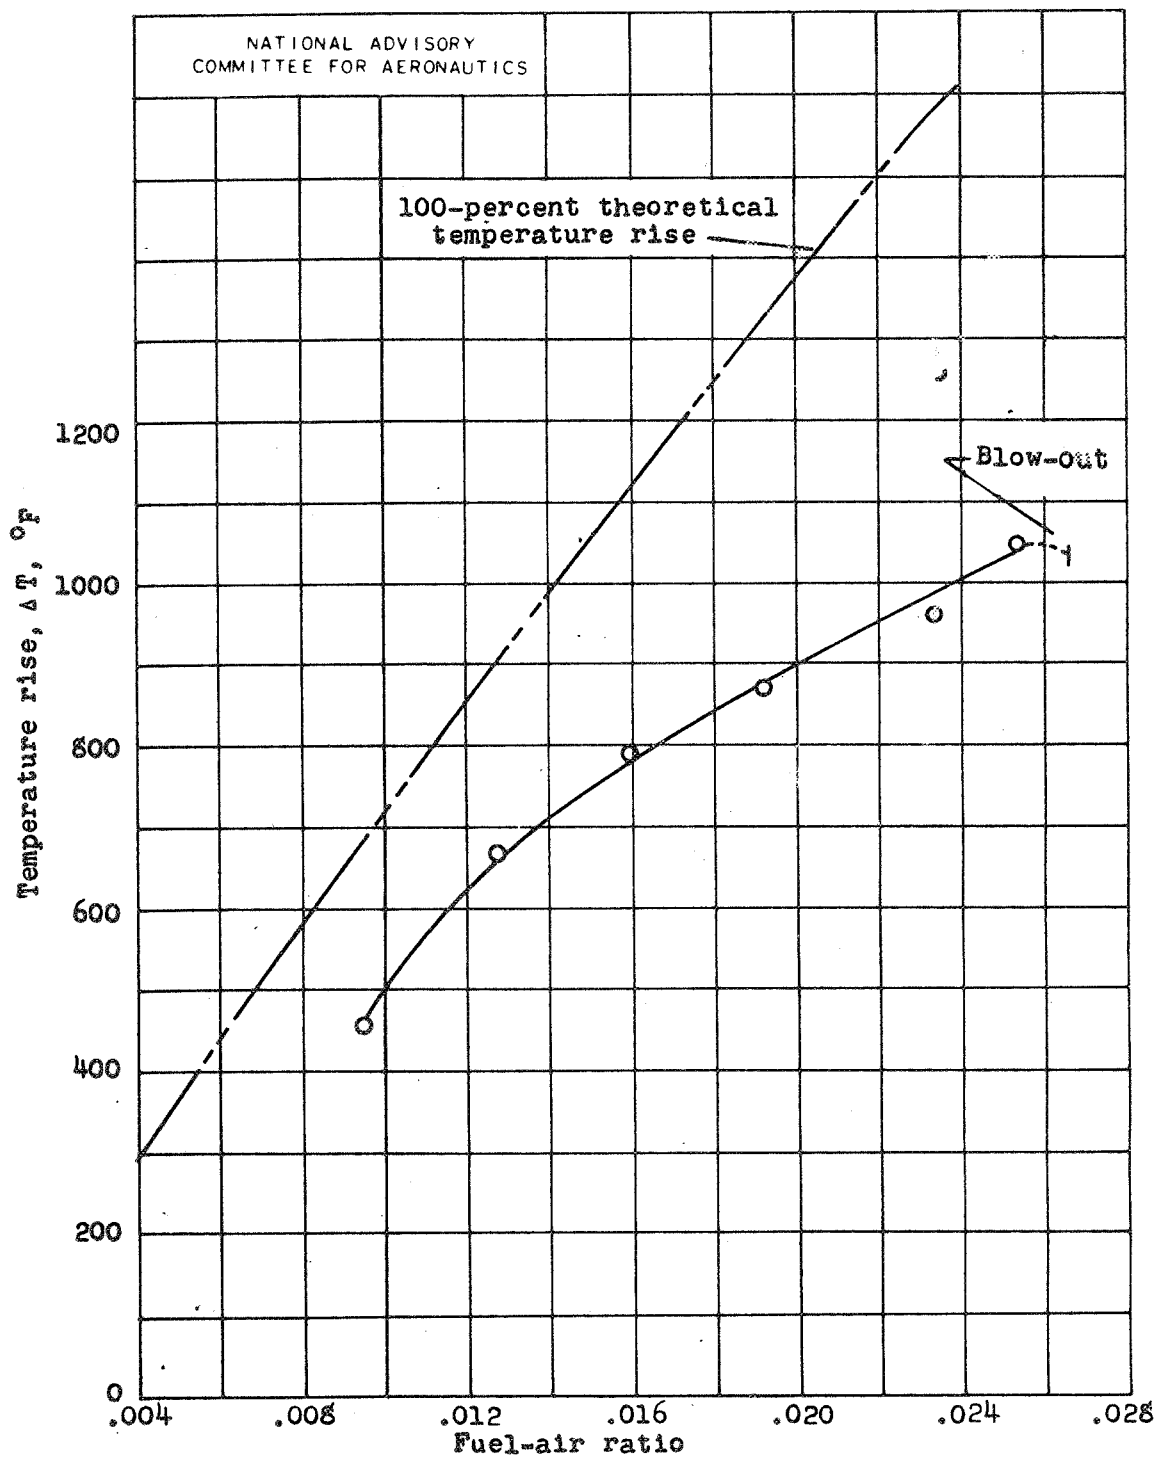


Figure 8. - Effect of variation of fuel-air ratio on temperature rise at operating conditions near dead-band in TG-180 combustor. Fuel, AN-F-28, engine speed, 6000 rpm; simulated altitude, 50,000 feet.

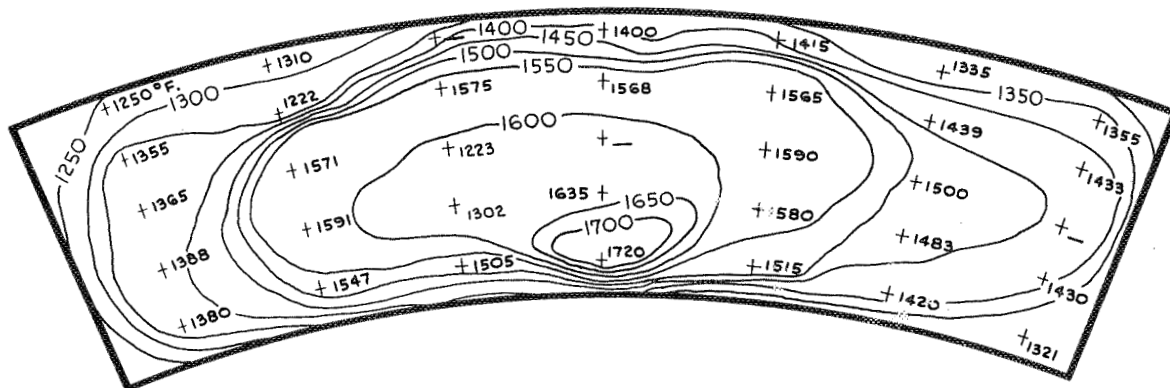


(a) Simulated altitude, 55,000 feet.

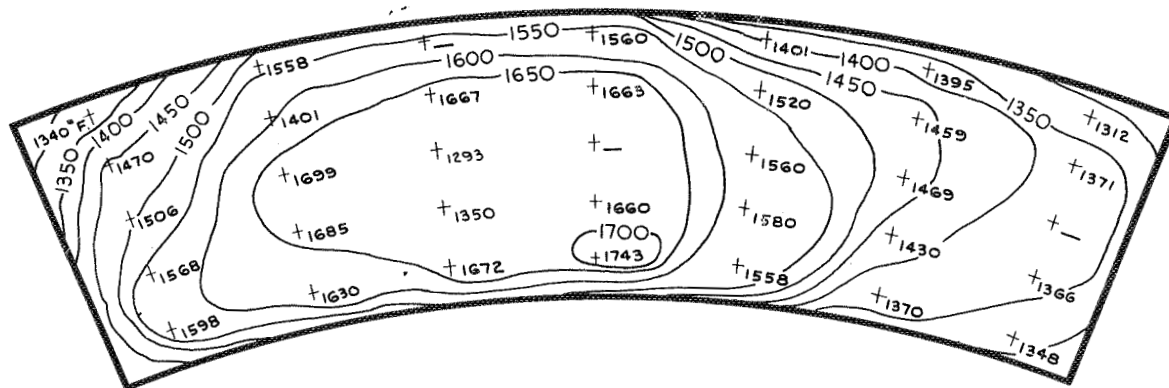


(b) Simulated altitude, 50,000 feet.

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS


Figure 9. - Temperature-distribution pattern at instrumentation plane B-B in TG-180 combustor using AN-F-32 fuel. Engine speed, 7600 rpm.

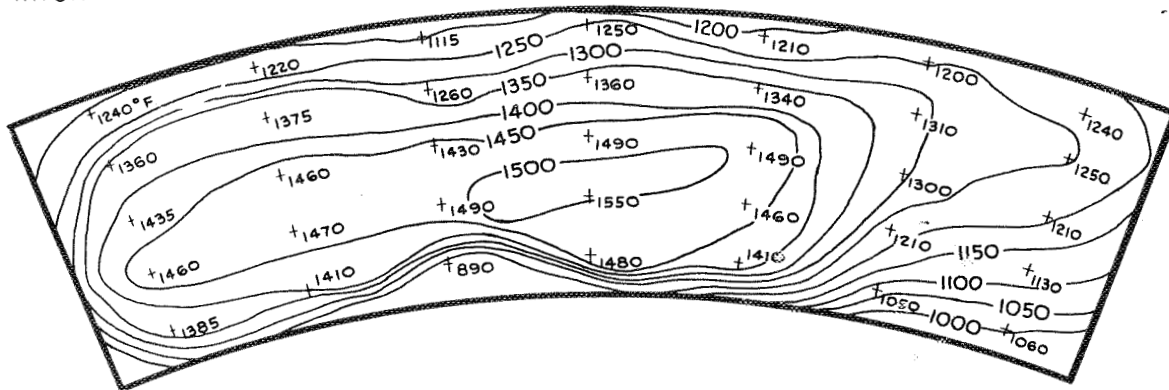

(a) Simulated altitude, 55,000 feet.

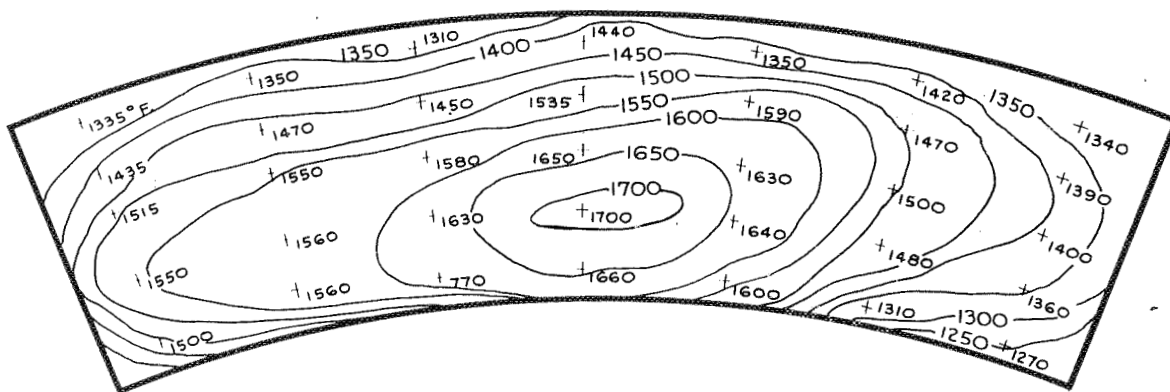

(b) Simulated altitude, 50,000 feet.

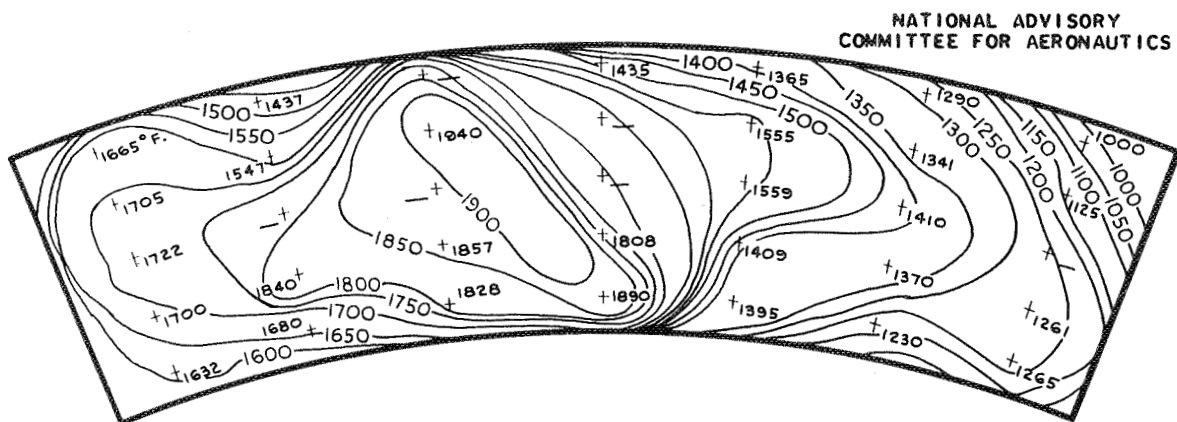

(c) Simulated altitude, 20,000 feet.

Figure 10. - Temperature-distribution pattern at instrumentation plane B-B in TG-180 combustor using AN-F-28 fuel. Engine speed, 7600 rpm.

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

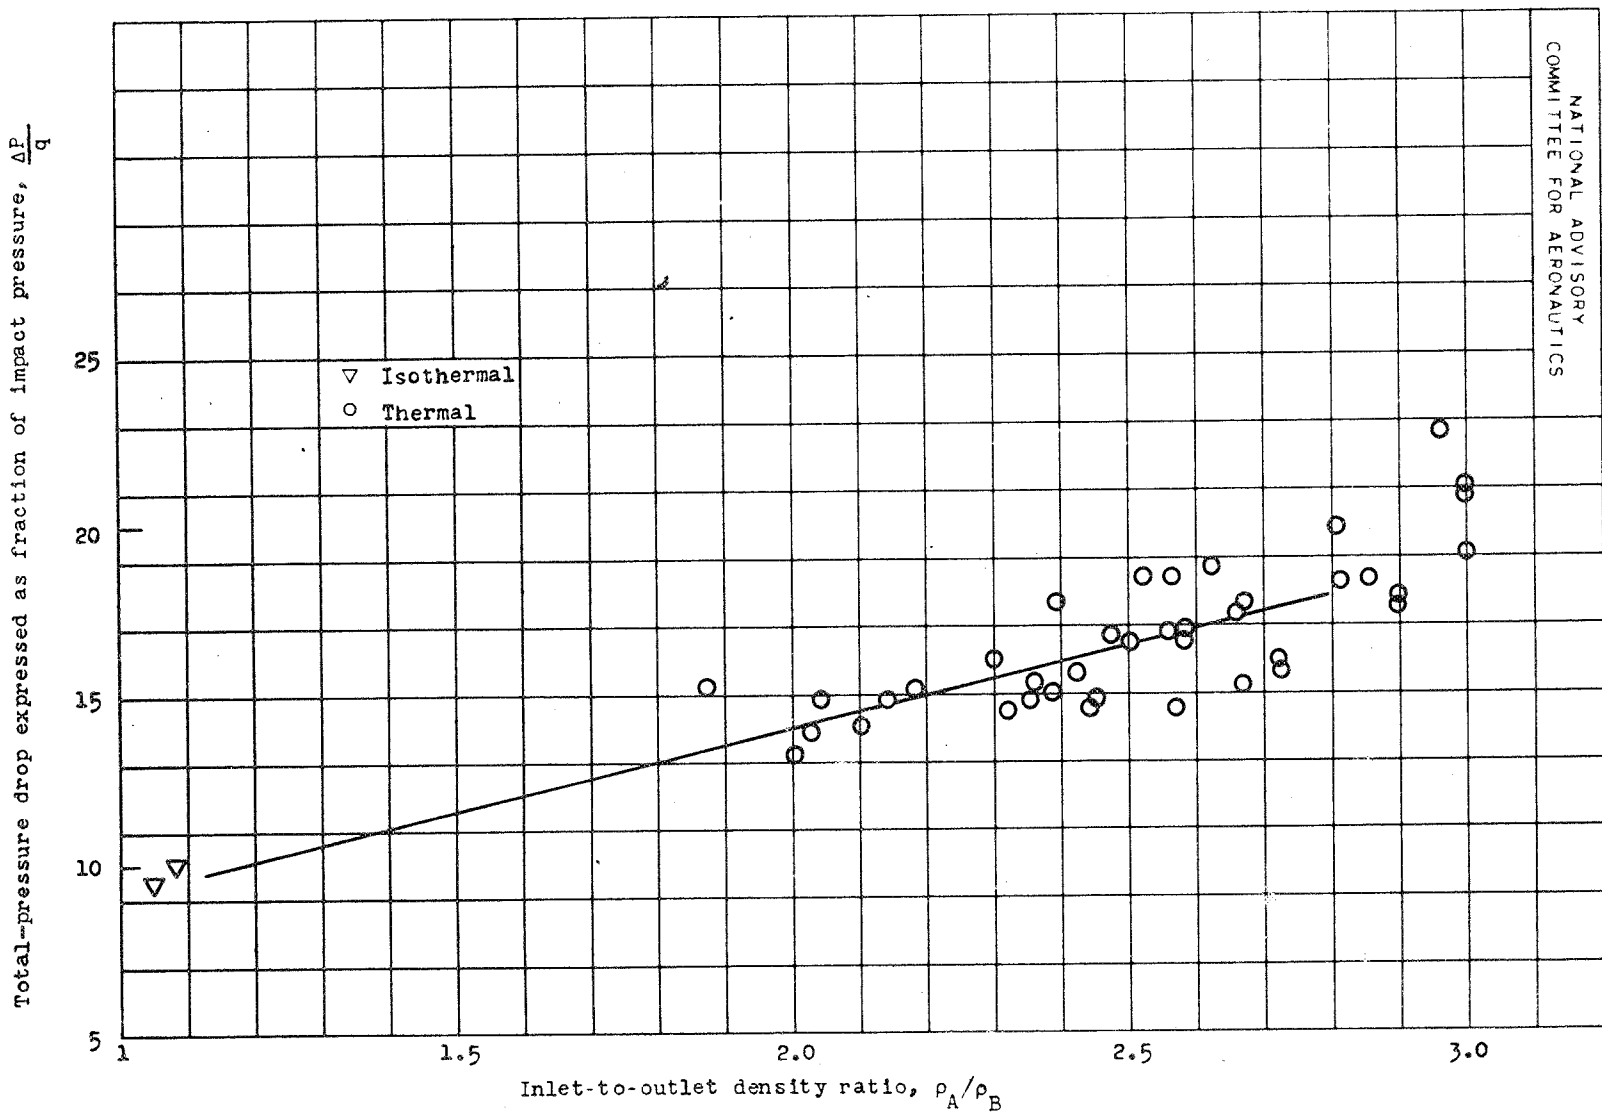


Figure 11. - Total-pressure drop across TG-180 combustor expressed as fraction of impact pressure plotted against inlet-to-outlet density ratio.



UNCLASSIFIED

UNCLASSIFIED