



## Creep Forming of Carbon-Reinforced Ceramic-Matrix Composites

Langley Research Center, Hampton, Virginia

A set of lecture slides describes an investigation of creep forming as a means of imparting desired curvatures to initially flat stock plates of carbon-reinforced ceramic-matrix composite (C-CMC) materials. The investigation is apparently part of a continuing effort to develop improved means of applying small C-CMC repair patches to reinforced carbon-carbon leading edges of aerospace vehicles (e.g., space shuttles) prior to re-entry into the atmosphere of the Earth.

According to one of the slides, creep forming would be an intermediate step in a process that would yield a fully densified, finished C-CMC part having a desired size and shape (the other steps would include preliminary machining, finish machining, densification by chemical vapor infiltration, and final coating). The investigation included experiments in which C-CMC disks were creep-formed by heating them to unspecified high temperatures for time intervals of the order of 1 hour while they were clamped into single- and double-

curvature graphite molds. The creep-formed disks were coated with an oxidation-protection material, then subjected to arc-jet tests, in which the disks exhibited no deterioration after exposure to high-temperature test conditions lasting 490 seconds.

*This work was done by Wallace L. Vaughn and Stephan J. Scotti of Langley Research Center, Melissa P. Ashe of Swales Aerospace, and Liz Connolly of General Electric Co. Further information is contained in a TSP (see page 1). LAR-17289-1*

## Dog-Bone Horns for Piezoelectric Ultrasonic/Sonic Actuators

Relative to other shapes, the dog-bone shape offers better performance.

NASA's Jet Propulsion Laboratory, Pasadena, California

A shape reminiscent of a dog bone has been found to be superior to other shapes for mechanical-amplification horns that are components of piezoelectrically driven actuators used in a series of related devices denoted generally as ultrasonic/sonic drill/corers (USDCs). The first of these devices was reported in "Ultrasonic/Sonic Drill/Corers With Integrated Sensors" (NPO-20856), *NASA Tech Briefs*, Vol. 25, No. 1 (January 2001), page 38. The dog-bone shape was conceived especially for use in a more recent device in the series, denoted an ultrasonic/sonic gopher, that was described in "Ultrasonic/Sonic Mechanisms for Drilling and Coring" (NPO-30291), *NASA Tech Briefs*, Vol. 27, No. 9 (September 2003), page 65. The figure shows an example of a dog-bone-shaped horn and other components of an ultrasonic gopher.


Prerequisite to a meaningful description of this development is an unavoidably lengthy recapitulation of the principle of operation of a USDC and, more specifically, of the ultrasonic/sonic gopher as described previously in *NASA Tech Briefs*. The ultrasonic actuator includes a stack of piezoelectric rings, the horn, a metal backing, and a bolt that

connects the aforementioned parts and provides compressive pre-strain to the piezoelectric stack to prevent breakage of the rings during extension. The stack of piezoelectric rings is excited at the resonance frequency of the overall ultrasonic actuator. Through mechanical amplification by the horn, the displacement in the ultrasonic vibration reaches tens of microns at the tip of the horn.

The horn hammers an object that is denoted the free mass because it is free to move longitudinally over a limited distance between hard stops: The free mass

bounces back and forth between the ultrasonic horn and a tool bit (a drill bit or a corer). Because the longitudinal speed of the free mass is smaller than the longitudinal speed of vibration of the tip of the horn, contact between the free mass and the horn tip usually occurs at a phase of the vibration favorable to transfer of momentum from the horn to the free mass. Therefore, the free mass picks up momentum and is accelerated back to the tool bit. Upon impact of the free mass on the tool bit, momentum is transferred to the tool bit. The impacts of the free mass on the tool bit repeat at a sonic frequency that can range from tens of hertz to about 1 kHz. The shock waves caused by the impacts of the free mass propagate to the interface between the tool bit and the medium (typically, rock, ice, or other brittle material) to be drilled or cored. The medium becomes fractured when its ultimate strain is exceeded at the medium/tool-bit interface. This concludes the description of the principle of operation.

The performances of several ultrasonic/sonic gophers containing horns of different shapes were analyzed in a computational-simulation study. The computational simulation was based on

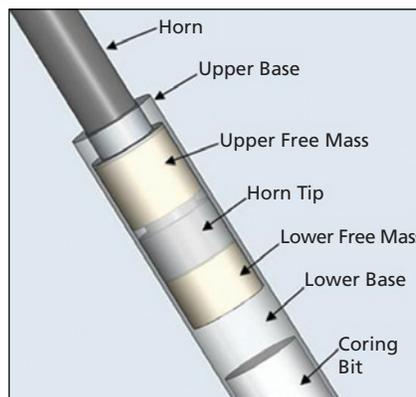

These Components of an Ultrasonic/Sonic Gopher include an ultrasonic horn shaped as a rod with widened ends — a "dog-bone" shape.